

FCC TEST REPORT

Product Name: ANDROID SET TOP BOX
Trade Mark: LSP.mini , GIEC
Model No.: LSPs912-G1-1703
Report Number: 170329002RFC-2
Test Standards: FCC 47 CFR Part 15 Subpart C
FCC ID: 2AF98-LSPMINIS912
Test Result: PASS
Date of Issue: May 31, 2017


Prepared for:

LIFE STYLE PANEL PTY LTD
7 7Logistics Place,Larapinta,Queensland,Australia


Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F, Block A, Building 6, Baoneng Science and Technology Park,
Qingxiang Road No.1, Longhua New District, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Tested by:


Kevin Liang
Senior Engineer

Reviewed by:


Jim Long
Senior Engineer

Approved by:


Billy Li
Technical Director

Date:

May 31, 2017

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com


* Certified *
[Http://www.uttlab.com](http://www.uttlab.com)

Version

Version No.	Date	Description
V1.0	May 31, 2017	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China
Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES.....	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 OTHER INFORMATION.....	5
1.5 DESCRIPTION OF SUPPORT UNITS	5
1.6 TEST LOCATION.....	6
1.7 TEST FACILITY.....	6
1.8 DEVIATION FROM STANDARDS	6
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	6
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
1.11 MEASUREMENT UNCERTAINTY	7
2. TEST SUMMARY	8
3. EQUIPMENT LIST	9
4. TEST CONFIGURATION	10
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	10
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	10
4.1.2 RECORD OF NORMAL ENVIRONMENT.....	10
4.2 TEST CHANNELS	10
4.3 EUT TEST STATUS	10
4.4 TEST SETUP	11
4.4.1 FOR RADIATED EMISSIONS TEST SETUP.....	11
4.4.2 FOR CONDUCTED EMISSIONS TEST SETUP	11
4.4.3 FOR CONDUCTED RF TEST SETUP	12
4.5 SYSTEM TEST CONFIGURATION	12
4.6 DUTY CYCLE	13
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	14
5.1 REFERENCE DOCUMENTS FOR TESTING	14
5.2 ANTENNA REQUIREMENT	14
5.3 CONDUCTED PEAK OUTPUT POWER.....	15
5.4 6 dB BANDWIDTH	16
5.5 POWER SPECTRAL DENSITY	19
5.6 CONDUCTED OUT OF BAND EMISSION	22
5.7 RADIATED SPURIOUS EMISSIONS.....	24
5.8 BAND EDGE MEASUREMENTS (RADIATED).....	28
5.9 CONDUCTED EMISSION	31
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	34
APPENDIX 2 PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	34

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	LIFE STYLE PANEL PTY LTD
Address of Applicant:	7 7Logistics Place,Larapinta,Queensland,Australia
Manufacturer:	SHENZHEN GIEC DIGITAL CO., LTD
Address of Manufacturer:	No.1 Building,Factory,No.7 District,Dayang Development Areas,FuYongStreet,Baoan,Shenzhen,Guangdong,China

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	ANDROID SET TOP BOX		
Model No.:	LSPs912-G1-1703		
Add. Model No.:	GK-MP1125, GK-MP1129 (see note 1)		
Trade Mark:	LSP.mini , GIEC		
DUT Stage:	Production Unit		
EUT Supports Function:	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth: V4.1	
	5 GHz U-NII Bands:	5 180 MHz to 5 240 MHz	IEEE 802.11a/n/ac
		5 260 MHz to 5 320 MHz	IEEE 802.11a/n/ac
		5 500 MHz to 5 700 MHz	IEEE 802.11a/n/ac
		5 745 MHz to 5 805 MHz	IEEE 802.11a/n/ac
Software Version:	V1.0.1.20161201		
Hardware Version:	RM-MPEG-172G VER1.0-1		
Sample Received Date:	March 30, 2017		
Sample Tested Date:	April 1, 2017 to May 4, 2017		

Note 1: Following are the differences of these three models. After evaluation, the differences between these models have no influence for RF test.

Model name	Trade name	Description
GK-MP1125	GIEC	
LSPs912-G1-1703	LSP.mini	All three models are with the same circuit and PCB layout. Color, silk screen and trademark of these three models are different. Model LSPs912-G1-1703 has no AV interface, and model GK-MP1129 has different shell with that of the other two models.
GK-MP1129	GIEC	

1.2.2 Description of Accessories

Adapter	
Trade Mark:	LSP.
Model No.:	TY0500420A1mn
Input:	100-240 V~50/60 Hz 0.8 A
Output:	5.0 V == 4.2 A
AC Cable:	N/A
DC Cable:	1.50 Meter, Unshielded without ferrite

Cable	
Trade Mark:	N/A
Model No.:	N/A
Description:	HDMI Cable
Cable Type:	Shielded without ferrite
Length:	1.50 Meter

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Range:	2402 MHz to 2480 MHz
Bluetooth Version:	Bluetooth LE
Type of Modulation:	GFSK
Number of Channels:	40
Channel Separation:	2 MHz
Antenna Type:	Integral Antenna
Antenna Gain:	2 dBi
Maximum Peak Power:	8.02 dBm
Normal Test Voltage:	120V~60 Hz

1.4 OTHER INFORMATION

Operation Frequency Each of Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402 MHz	10	2422 MHz	20	2442 MHz	30	2462 MHz
1	2404 MHz	11	2424 MHz	21	2444 MHz	31	2464 MHz
2	2406 MHz	12	2426 MHz	22	2446 MHz	32	2466 MHz
3	2408 MHz	13	2428 MHz	23	2448 MHz	33	2468 MHz
4	2410 MHz	14	2430 MHz	24	2450 MHz	34	2470 MHz
5	2412 MHz	15	2432 MHz	25	2452 MHz	35	2472 MHz
6	2414 MHz	16	2434 MHz	26	2454 MHz	36	2474 MHz
7	2416 MHz	17	2436 MHz	27	2456 MHz	37	2476 MHz
8	2418 MHz	18	2438 MHz	28	2458 MHz	38	2478 MHz
9	2420 MHz	19	2440 MHz	29	2460 MHz	39	2480 MHz

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
LCD monitor	DELL	P2416Db	CN-ONDY73-74261-5C9-OLVS	UnionTrust
--	--	--	--	--

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.30 Meter	UnionTrust
--	--	--	--	--

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

Tests were sub-contracted.

Compliance Certification Services (Shenzhen) Inc.

Address: No.10-1 Mingkeda Logistics Park, No.18 Huanguan South RD. Guan Ian Town, Baoan Distr, Shenzhen, Guangdong, China.

Telephone: +86 (0) 755 28055000 Fax: +86 (0) 755 29055221

1.7 TEST FACILITY

Shenzhen UnionTrust Quality and Technology Co., Ltd.

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

IC-Registration No.: 21600-1

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

Compliance Certification Services (Shenzhen) Inc.

FCC Registration Number is 441872.

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.2878 dB
2	Conducted emission 150KHz-30MHz	±3.2878 dB
3	Radiated emission 30MHz-200Hz	±3.8928 dB
4	Radiated emission 200MHz-1GHz	±3.8753 dB
5	Radiated emission 1GHz-8GHz	±5.3112 dB
6	Radiated emission Above 8GHz	±5.3493 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS*
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)	KDB 558074 D01 v03r05, Section 9.1.2	PASS
6dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)	KDB 558074 D01 v03r05, Section 8.1	PASS
Power Spectral Density	FCC 47 CFR Part 15 Subpart C Section 15.247 (e)	KDB 558074 D01 v03r05, Section 10.2	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d)	KDB 558074 D01 v03r05, Section 11	PASS
Radiated Spurious Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	KDB 558074 D01 v03r05, Section 12.1	PASS*
Band Edge Measurements (Radiated)	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	KDB 558074 D01 v03r05, Section 12.1	PASS*

Note:

- 1) N/A: In this whole report not application.
- 2) **: In this whole report ** means tests were sub-contracted Item.

3. EQUIPMENT LIST

Radiated Emission Test Equipment List 966(1)						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	Amplifier	HP	8447D	2944A08999	Feb. 12, 2017	Feb. 11, 2018
<input checked="" type="checkbox"/>	Antenna	SCHAFFNER	CBL6143	5082	Feb. 12, 2017	Feb. 11, 2018
<input checked="" type="checkbox"/>	Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ROHDE&SCHW ARZ	ESPI	101026	Feb. 12, 2017	Feb. 11, 2018
<input checked="" type="checkbox"/>	Temp. / Humidity Meter	Anymetre	JR913	N/A	Feb. 15, 2017	Feb. 14, 2018
<input checked="" type="checkbox"/>	Test S/W	FARAD	EZ-EMC/ CCS-03A1			

Radiated Emission Test Equipment List 966(2)						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	Feb. 17, 2017	Feb. 16, 2018
<input checked="" type="checkbox"/>	High Noise Amplifier	Agilent	8449B	3008A01838	Feb. 11, 2017	Feb. 10, 2018
<input checked="" type="checkbox"/>	Horn Antenna	SCHWARZBEC K	BBHA9120	D286	Feb. 12, 2017	Feb. 11, 2018
<input checked="" type="checkbox"/>	Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	Feb. 11, 2017	Feb. 10, 2018
<input checked="" type="checkbox"/>	Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
<input checked="" type="checkbox"/>	Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
<input checked="" type="checkbox"/>	Controller	CT	N/A	N/A	N.C.R	N.C.R
<input checked="" type="checkbox"/>	Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
<input checked="" type="checkbox"/>	Temp. / Humidity Meter	Anymetre	JR913	N/A	Feb. 15, 2017	Feb. 14, 2018
<input checked="" type="checkbox"/>	Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ROHDE&SCHW ARZ	ESCI	100783	Feb. 11, 2017	Feb. 10, 2018
<input checked="" type="checkbox"/>	LISN(EUT)	ROHDE&SCHW ARZ	ENV216	101543-WX	Feb. 11, 2017	Feb. 10, 2018
<input checked="" type="checkbox"/>	LISN	EMCO	3825/2	8901-1459	Feb. 12, 2017	Feb. 11, 2018
<input checked="" type="checkbox"/>	Temp. / Humidity Meter	VICTOR	HTC-1	N/A	Feb. 15, 2017	Feb. 14, 2018
<input checked="" type="checkbox"/>	Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Dec. 22, 2016	Dec. 22, 2017
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	Dec. 22, 2016	Dec. 22, 2017
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430023	Dec. 22, 2016	Dec. 22, 2017
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07 -101181-K3	Dec. 22, 2016	Dec. 22, 2017

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter		Selected Values During Tests		
Test Condition	Ambient			Relative Humidity (%)
	Temperature (°C)	Voltage (V)	Relative Humidity (%)	
NT/NV	+15 to +35	120V~60 Hz		20 to 75

Remark:
1) NV: Normal Voltage; NT: Normal Temperature

4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (Kpa)	Tested by
AC Power Line Conducted Emission	23.6	54	100.2	Tiny You
Conducted Peak Output Power	25.2	62	99.8	Tiny You
6dB Bandwidth	24.6	55	99.9	Tiny You
Power Spectral Density	24.6	55	99.9	Tiny You
Conducted Out of Band Emission	24.6	55	99.9	Tiny You
Radiated Spurious Emissions	24.8	59	99.8	Tiny You
Band Edge Measurements (Radiated)	24.8	59	99.8	Tiny You

4.2 TEST CHANNELS

Type of Modulation	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
GFSK	2402 MHz to 2480 MHz	Channel 0	Channel 19	Channel 39
		2402 MHz	2440 MHz	2480 MHz

4.3 EUT TEST STATUS

Type of Modulation	Tx/Rx Function	Description
GFSK	1Tx/1Rx	1. Keep the EUT in continuously transmitting or receiving with modulation test single.

4.4 TEST SETUP

4.4.1 For Radiated Emissions test setup

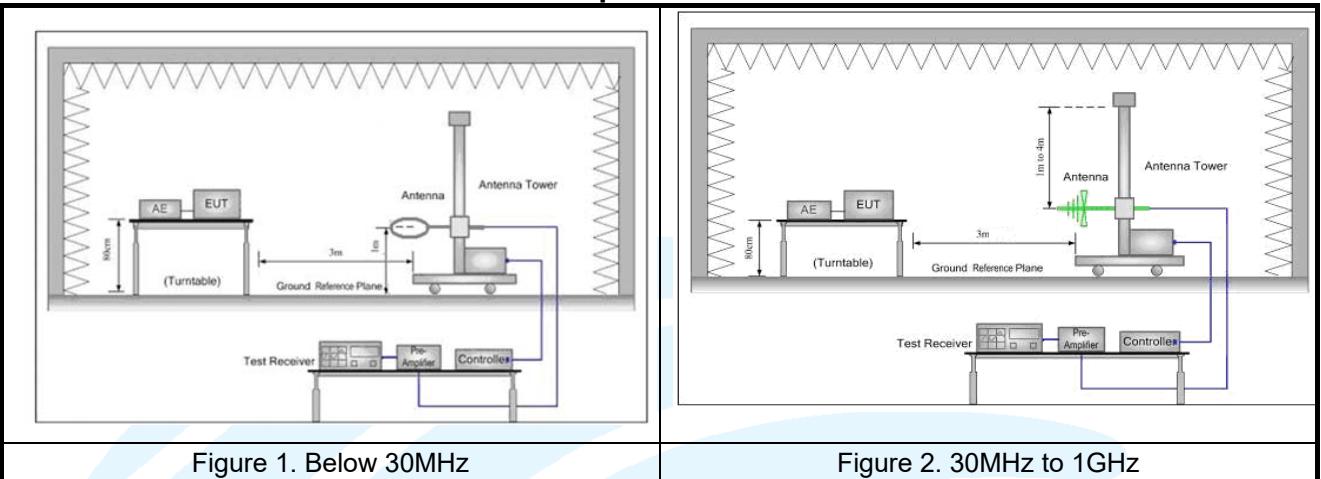


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz


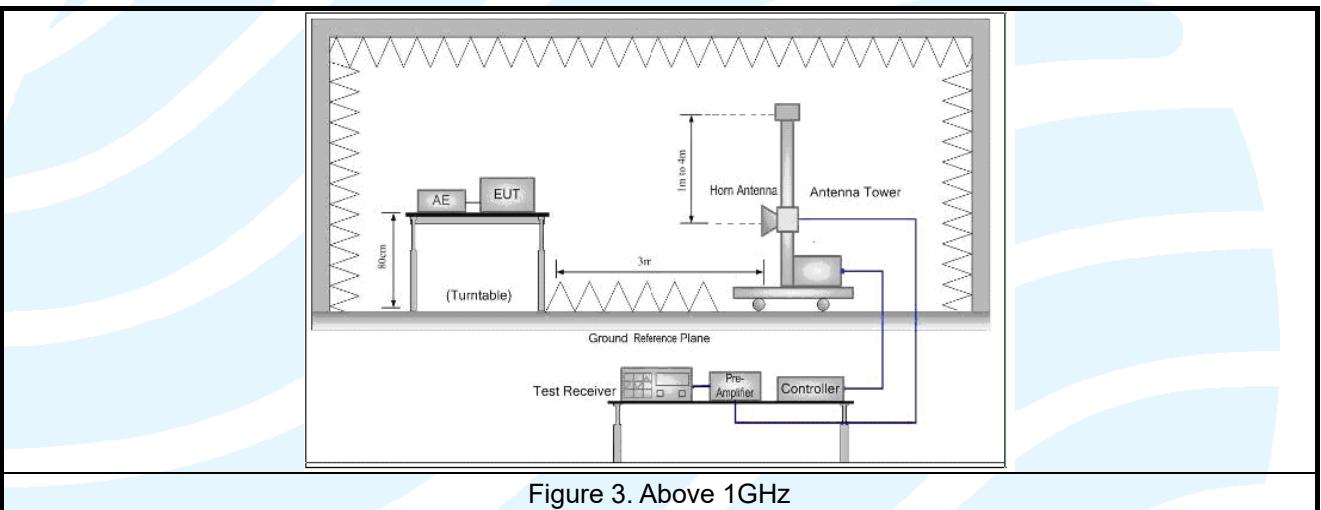



Figure 3. Above 1GHz

4.4.2 For Conducted Emissions test setup

Figure 3. Conducted Emissions setup

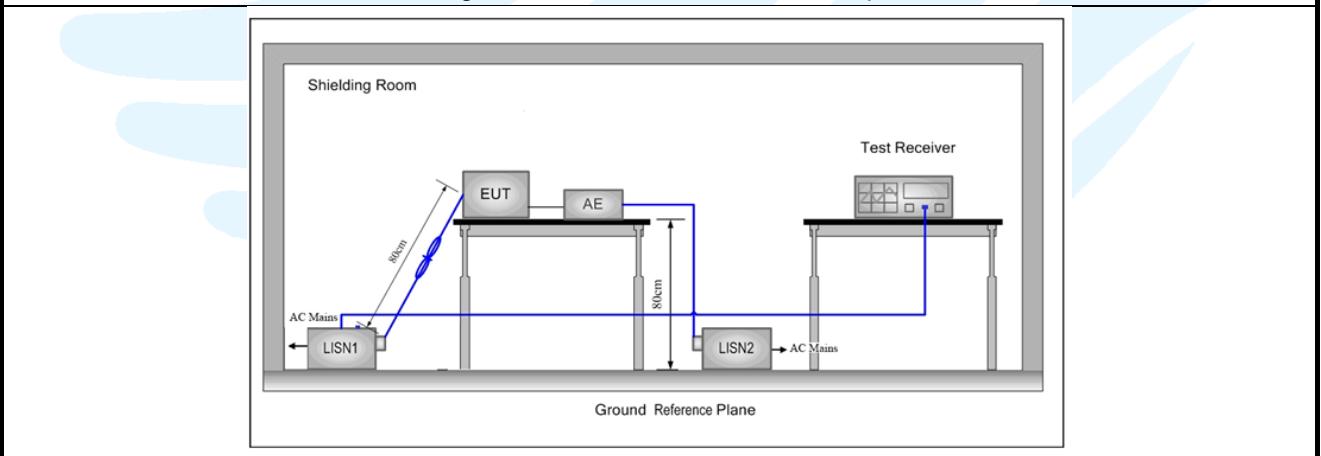

4.4.3 For Conducted RF test setup

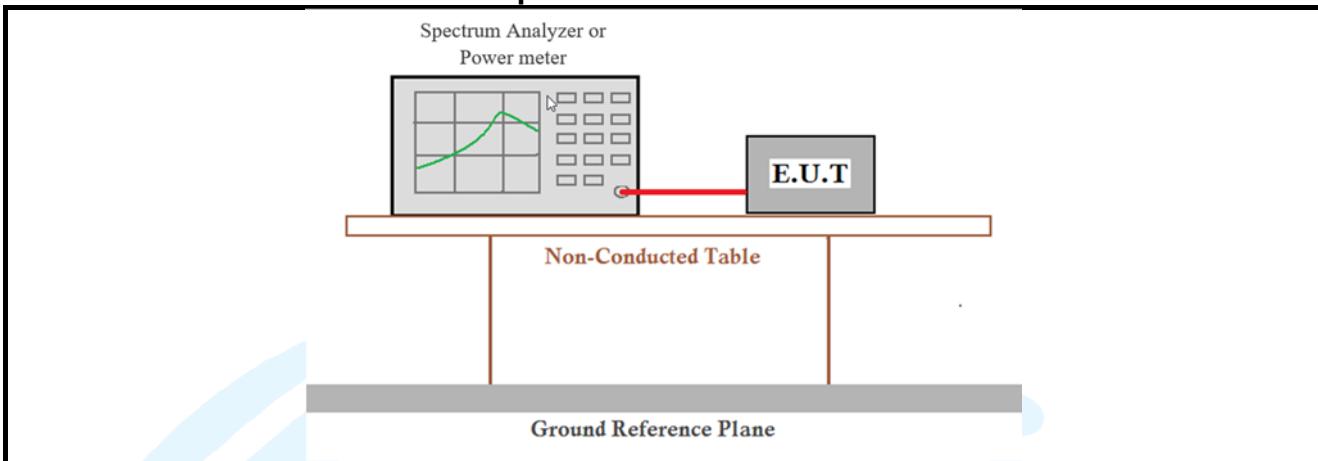

4.5 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 120V~60Hz. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency	Mode	Antenna Port	Worst-case axis positioning
Above 1GHz	1TX	Chain 0	Z axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.


4.6 DUTY CYCLE

Type of Modulation	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
GFSK	0.3913	0.6261	0.62	62.50	2.04	2.56	-4.08

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
- 3) Average factor = $20 \log_{10} \text{Duty Cycle}$.

The test plot as follows

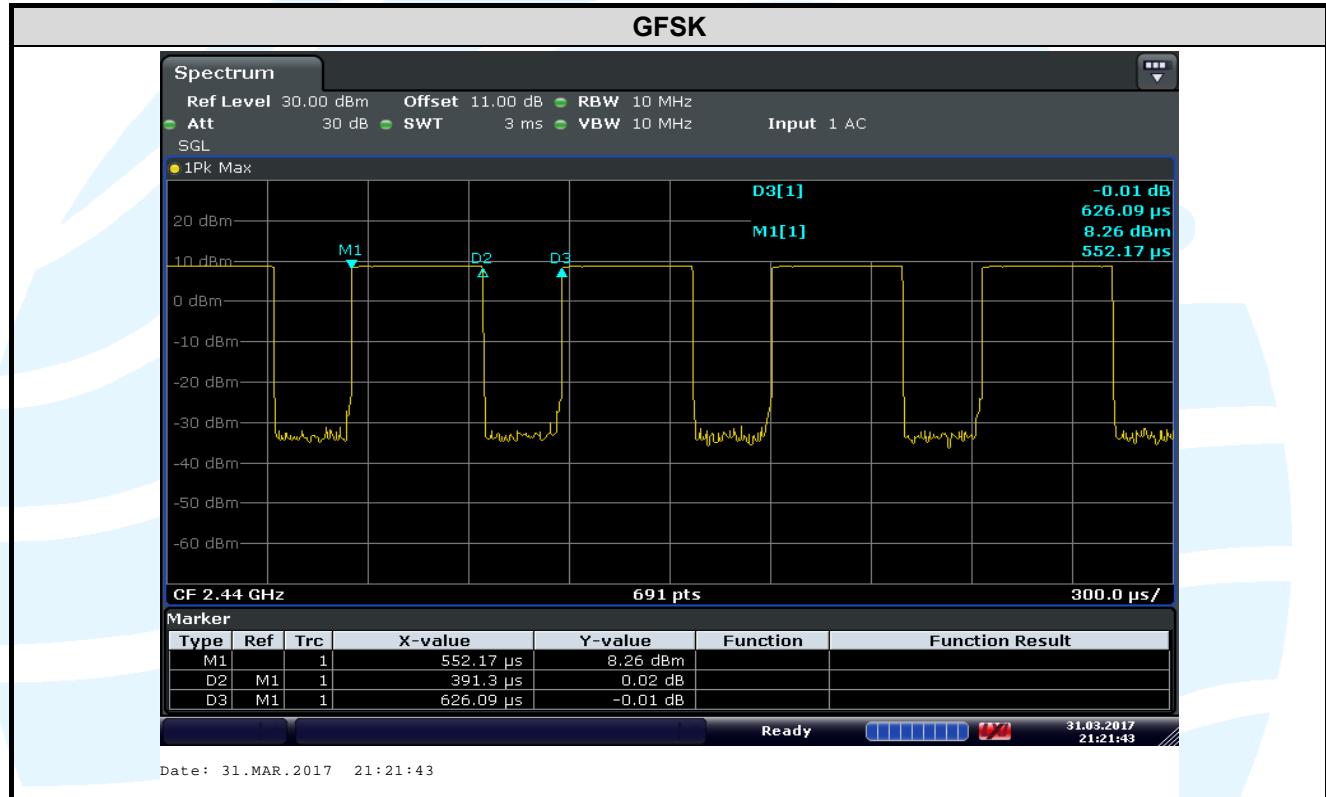

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 DTS Meas Guidance v03r05	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
EUT Antenna: Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 2 dBi.

5.3 CONDUCTED PEAK OUTPUT POWER

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)

Test Method: KDB 558074 D01 v03r05, Section 9.1.2

Limit: For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
2. Measure out each test modes' peak or average output power, record the power level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.4.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Transmitter mode

Test Results: Pass

Test Data:

Type of Modulation	Channel	Frequency (MHz)	Maximum Conducted Peak Power (dBm)	Maximum Conducted Peak Power (mW)
GFSK	0	2402	7.64	5.81
	19	2440	7.87	6.12
	39	2480	8.02	6.34

Note: The antenna gain of 2 dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.

5.4.6 DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)

Test Method: KDB 558074 D01 v03r05, Section 8.1

Limit:

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.

g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.4.3 for details.

Instruments Used: Refer to section 3 for details


Test Mode: Transmitter mode

Test Results: Pass

Test Data:

Type of Modulation	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limit	Pass / Fail
GFSK	0	2402	0.6291	1.0604	> 500 kHz	Pass
	19	2440	0.6291	1.0611	> 500 kHz	Pass
	39	2480	0.6313	1.0625	> 500 kHz	Pass

The test plot as follows:

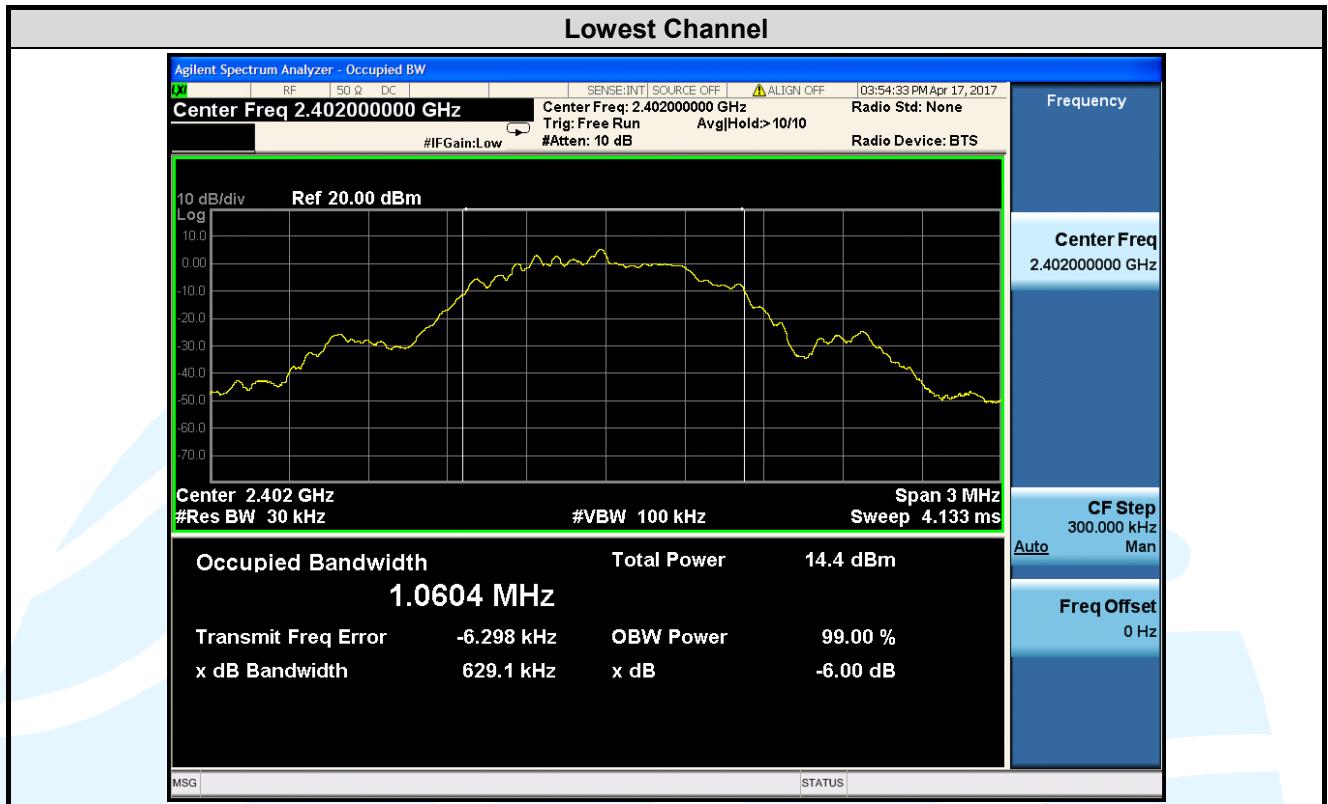



5.5 POWER SPECTRAL DENSITY

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (e)

Test Method: KDB 558074 D01 v03r05, Section 10.2

Limit:

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.4.3 for details.

Instruments Used: Refer to section 3 for details



Test Mode: Transmitter mode


Test Results: Pass

Test Data:

Type of Modulation	Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Result (Pass / Fail)
GFSK	0	2402	-6.136	8	Pass
	19	2440	-5.798	8	Pass
	39	2480	-6.009	8	Pass

The test plot as follows:

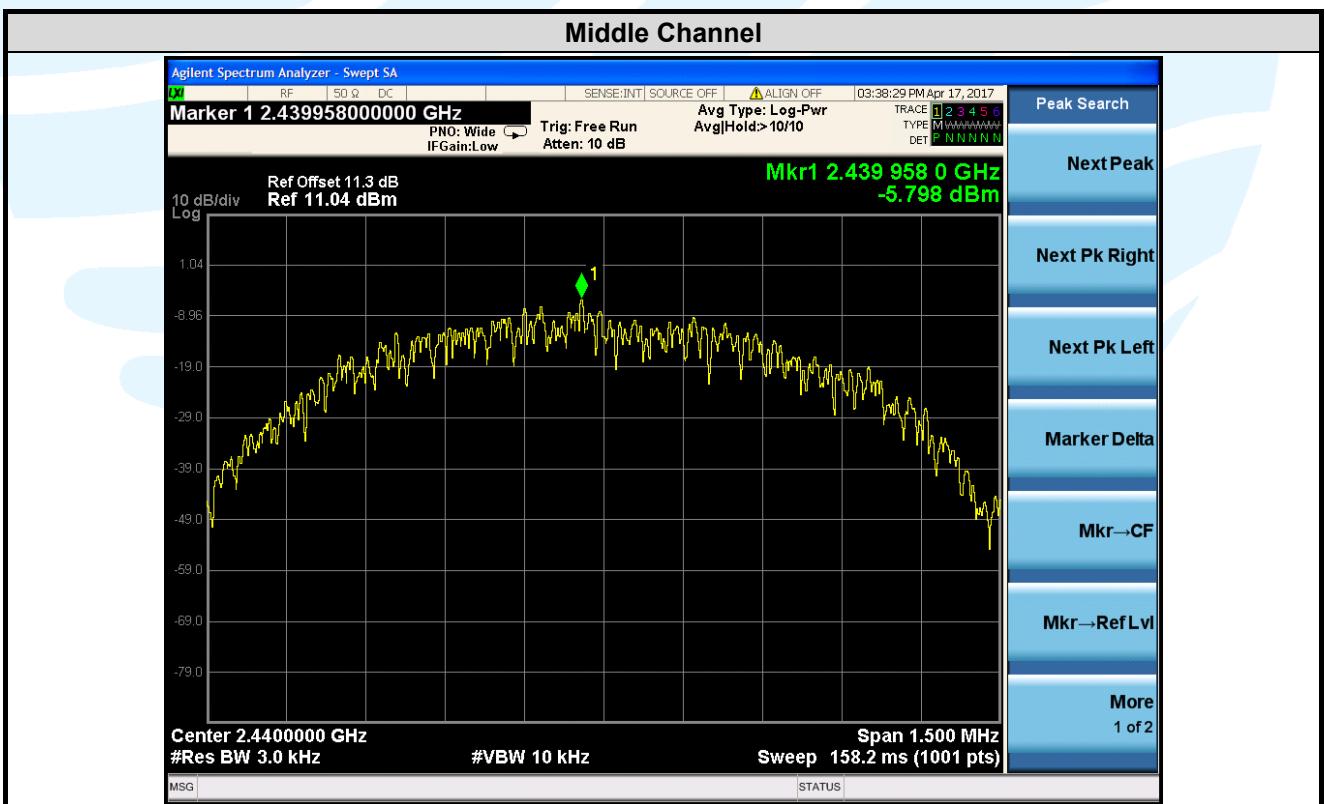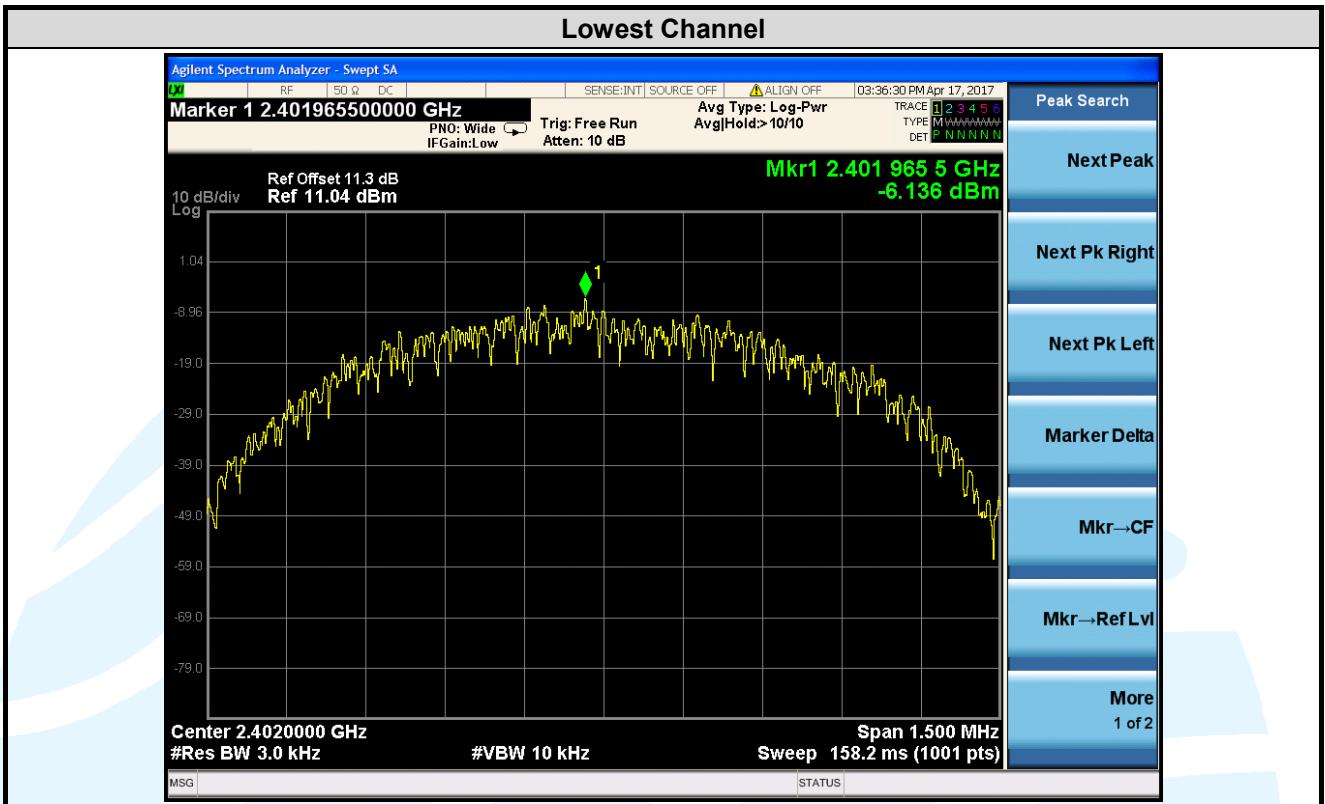

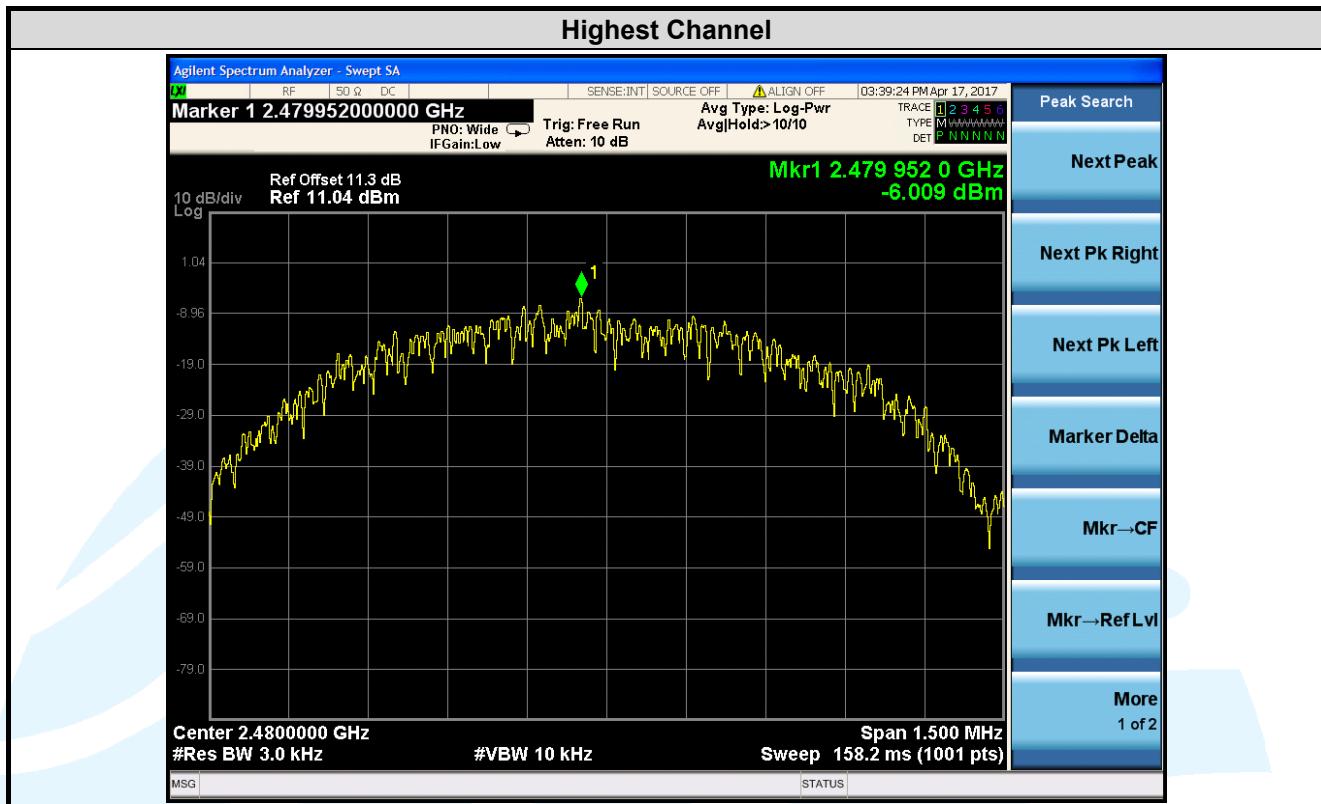

5.6 CONDUCTED OUT OF BAND EMISSION

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247(d)

Test Method: KDB 558074 D01 v03r05, Section 11

Limit:

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

Step 1:Measurement Procedure REF

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to \geq 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW \geq 3 x RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.
- j) Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Step 2:Measurement Procedure OOB

- a) Set RBW = 100 kHz.
- b) Set VBW \geq 300 kHz.
- c) Detector = peak.
- d) Sweep = auto couple.
- e) Trace Mode = max hold.
- f) Allow trace to fully stabilize.
- g) Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.4.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Transmitter mode

Test Results: Pass

Test Data:

The test plot as follows:



5.7 RADIATED SPURIOUS EMISSIONS

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

Test Method: KDB 558074 D01 v03r05, Section 12.1

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009 MHz-0.090 MHz	Peak	10 kHz	30 KHz	Peak
0.009 MHz-0.090 MHz	Average	10 kHz	30 KHz	Average
0.090 MHz-0.110 MHz	Quasi-peak	10 kHz	30 KHz	Quasi-peak
0.110 MHz-0.490 MHz	Peak	10 kHz	30 KHz	Peak
0.110 MHz-0.490 MHz	Average	10 kHz	30 KHz	Average
0.490 MHz -30 MHz	Quasi-peak	10 kHz	30 kHz	Quasi-peak
30 MHz-1 GHz	Quasi-peak	100 kHz	300 KHz	Quasi-peak
Above 1 GHz	Peak	1 MHz	3 MHz	Peak
	Peak	1 MHz	10 Hz or 1/T	Average

Limits:

Spurious Emissions

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Remark:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.4.1 for details.

Test Procedures:

1. From 30 MHz to 1GHz test procedure as below:

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

2. Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- 2) Test the EUT in the lowest channel ,middle channel, the Highest channel
- 3) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the Z axis positioning which it is worse case.
- 4) Repeat above procedures until all frequencies measured was complete.

Equipment Used: Refer to section 3 for details.

Test Result: Pass


The measurement data as follows:

Radiated Emission Test Data (9 KHz ~ 30 MHz):


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

Radiated Emission Worst Test Data _Lowest Channel (30 MHz ~ 1 GHz):

Horizontal

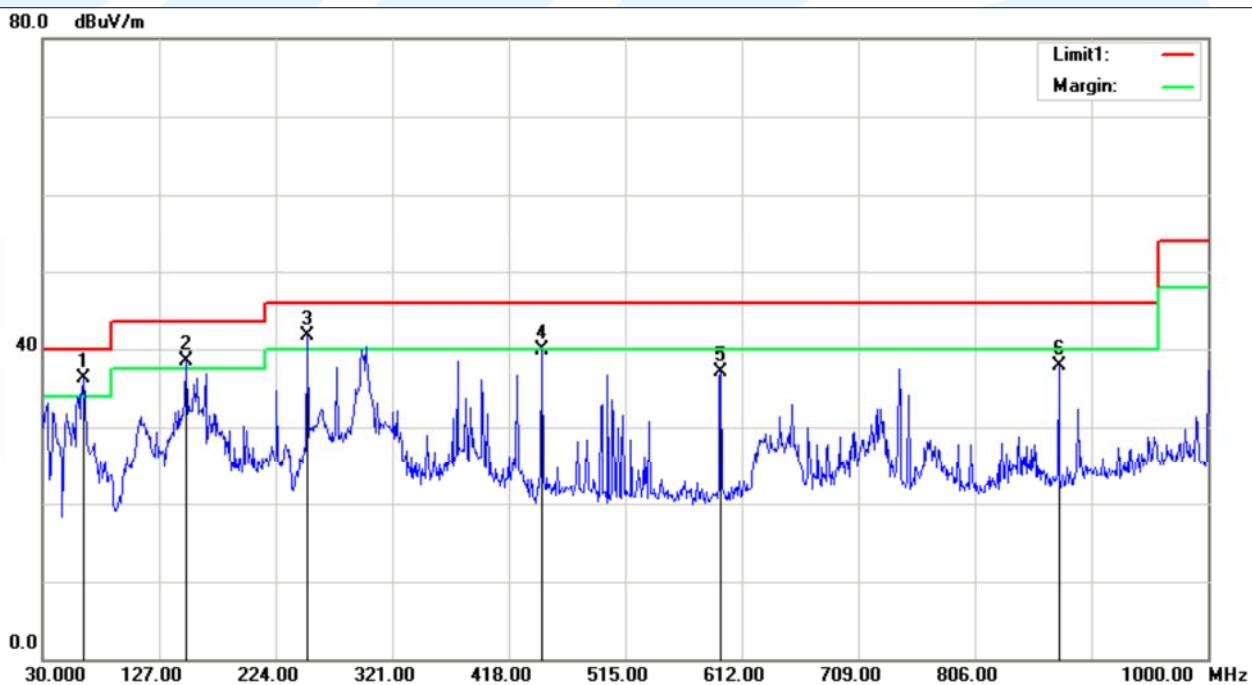

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	63.9500	50.12	-13.84	36.28	40.00	-3.72	QP
2!	149.3100	50.38	-11.87	38.51	43.50	-4.99	QP
3!	250.1900	52.45	-10.79	41.66	46.00	-4.34	QP
4	446.1300	48.84	-8.89	39.95	46.00	-6.05	QP
5	594.5400	43.21	-6.03	37.18	46.00	-8.82	QP
6	875.8400	40.35	-2.45	37.90	46.00	-8.10	QP

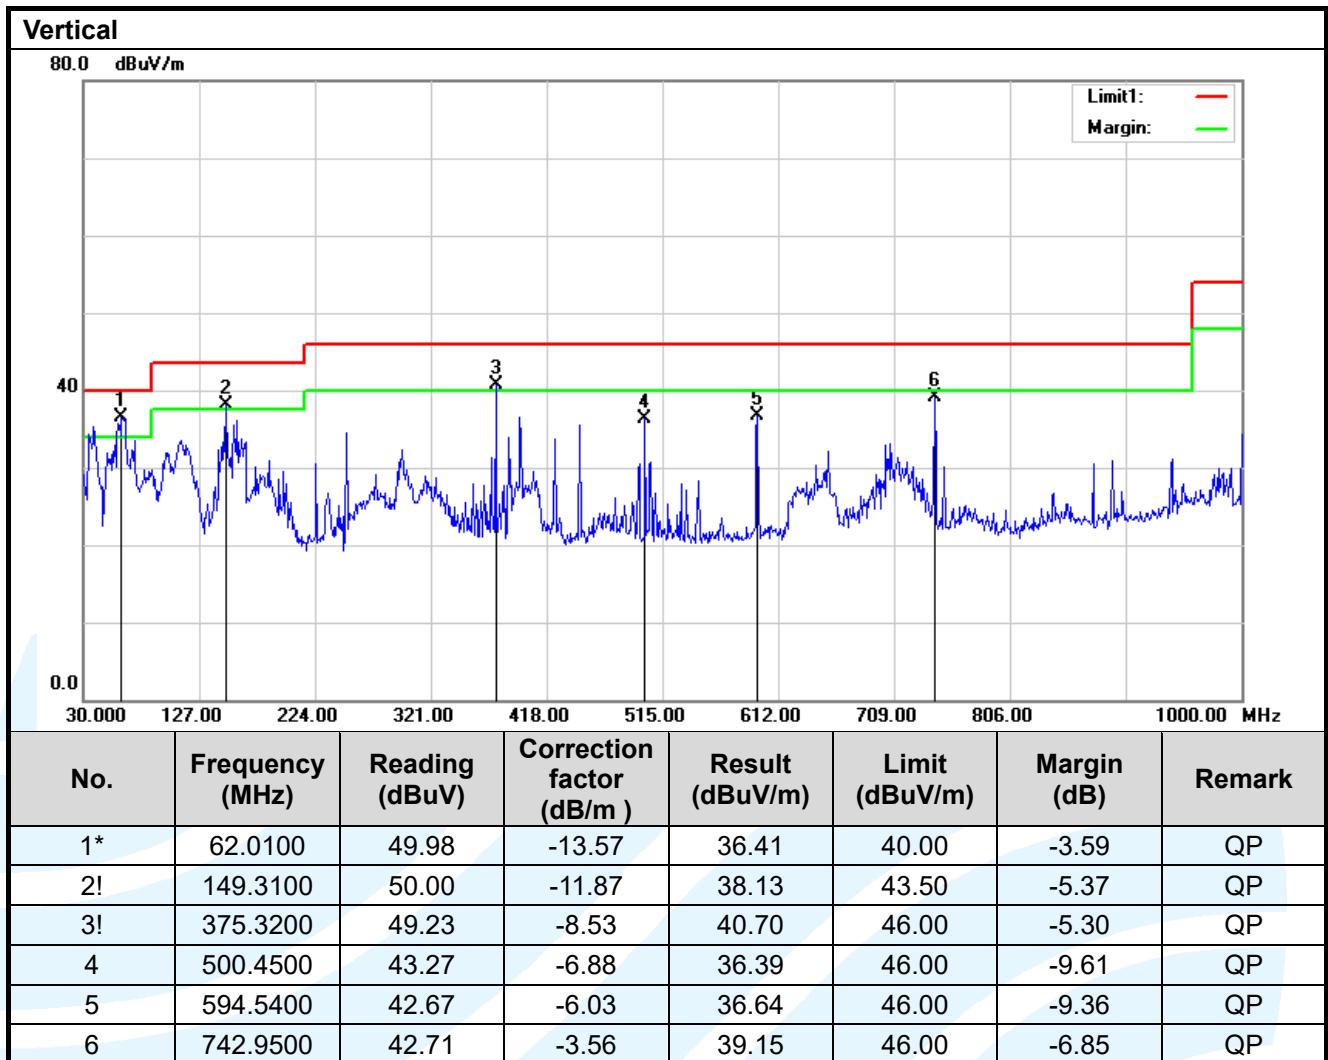

Radiated Emission Test Data (Above 1 GHz):						
Lowest Channel:						
No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polaxis	Remark
1	4804.00	48.57	74.00	-25.43	Peak	Horizontal
2	4804.00	37.92	54.00	-16.08	Average	Horizontal
3	7206.00	48.31	74.00	-25.69	Peak	Horizontal
4	7206.00	37.83	54.00	-16.17	Average	Horizontal
5	4804.00	49.42	74.00	-24.58	Peak	Vertical
6	4804.00	38.62	54.00	-15.38	Average	Vertical
7	7206.00	47.94	74.00	-26.06	Peak	Vertical
8	7206.00	38.52	54.00	-15.48	Average	Vertical

Middle Channel:						
No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polaxis	Remark
1	4880.00	48.32	74.00	-25.68	Peak	Horizontal
2	4880.00	37.85	54.00	-16.15	Average	Horizontal
3	7320.00	48.03	74.00	-25.97	Peak	Horizontal
4	7320.00	37.79	54.00	-16.21	Average	Horizontal
5	4880.00	48.85	74.00	-25.15	Peak	Vertical
6	4880.00	38.38	54.00	-15.62	Average	Vertical
7	7320.00	47.83	74.00	-26.17	Peak	Vertical
8	7320.00	38.23	54.00	-15.77	Average	Vertical

Highest Channel:						
No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polaxis	Remark
1	4960.00	48.06	74.00	-25.94	Peak	Horizontal
2	4960.00	37.91	54.00	-16.09	Average	Horizontal
3	7440.00	47.86	74.00	-26.14	Peak	Horizontal
4	7440.00	37.84	54.00	-16.16	Average	Horizontal
5	4960.00	49.03	74.00	-24.97	Peak	Vertical
6	4960.00	38.46	54.00	-15.54	Average	Vertical
7	7440.00	47.59	74.00	-26.41	Peak	Vertical
8	7440.00	37.94	54.00	-16.06	Average	Vertical

5.8 BAND EDGE MEASUREMENTS (RADIATED)

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

Test Method: KDB 558074 D01 v03r05, Section 12.1

Limits:

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Frequency	Limit (dB μ V/m @3m)	Remark
30 MHz-88 MHz	40.0	Quasi-peak Value
88 MHz-216 MHz	43.5	Quasi-peak Value
216 MHz-960 MHz	46.0	Quasi-peak Value
960 MHz-1 GHz	54.0	Quasi-peak Value
Above 1 GHz	54.0	Average Value
	74.0	Peak Value

Test Setup: Refer to section 4.4.1 for details.

Test Procedures:



Radiated band edge measurements at 2390 MHz and 2483.5 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 1 MHz, video bandwidth (VBW) = 3 MHz for peak levels and RBW = 1 MHz and VBW = 10 Hz or 1/T for average levels).



1. Use radiated spurious emission test procedure described in clause 5.10. The transmitter output (antenna port) was connected to the test receiver.
2. Set the PK and AV limit line.
3. Record the fundamental emission and emissions out of the band-edge.
4. Determine band-edge compliance as required.



Equipment Used: Refer to section 3 for details.


Test Result: Pass

The measurement data as follows:

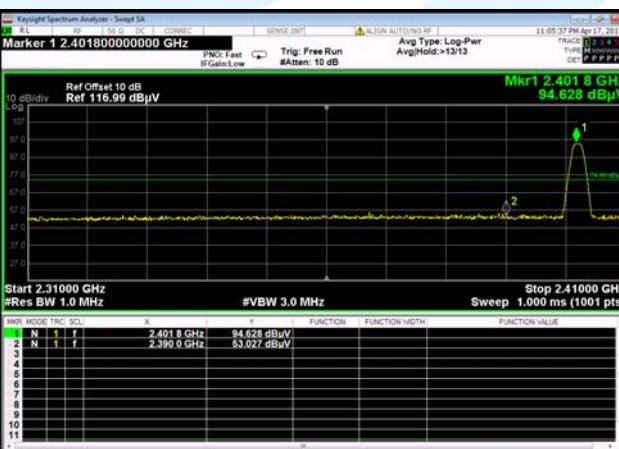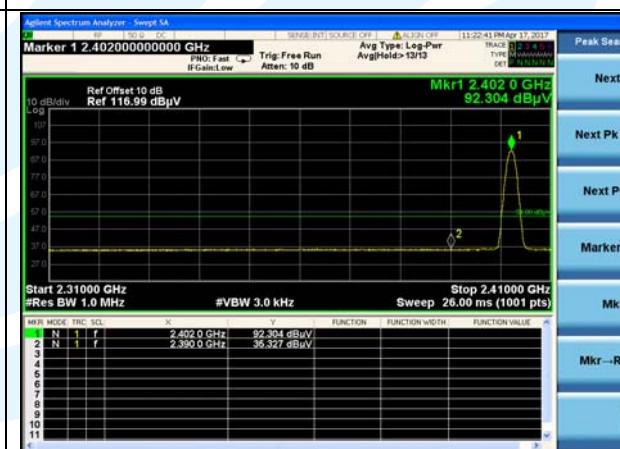Test Channel:	Lowest Channel	Ant. Polar. :	Horizontal
Detector: Peak			Detector: AV
			
Frequency (MHz)	Peak level (dB μ V/m)	Peak Limit (dB μ V/m)	AV level (dB μ V/m)
2390	53.027	74	35.327
			54
			Pass

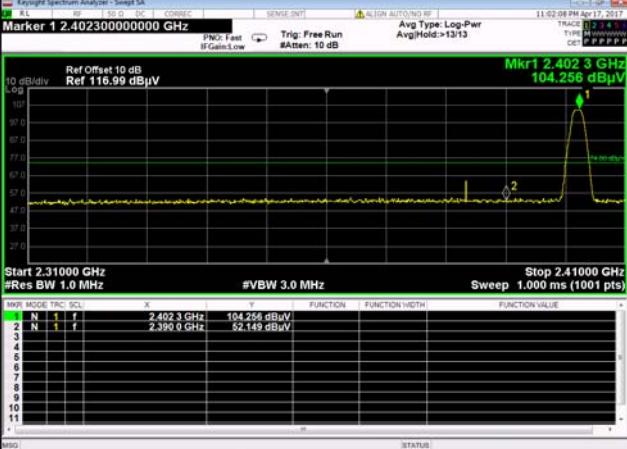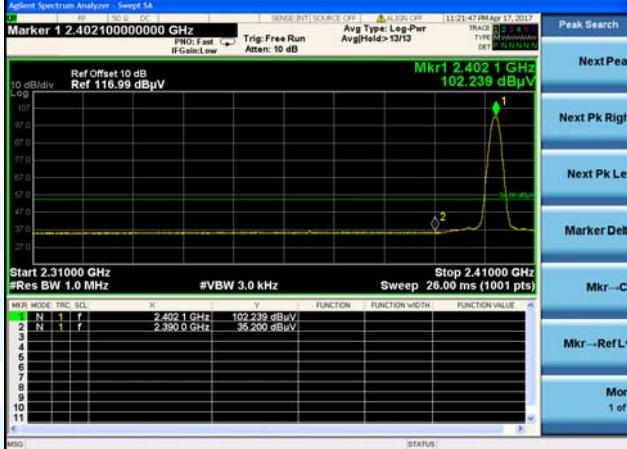Test Channel:	Lowest Channel	Ant. Polar. :	Vertical
Detector: Peak		Detector: AV	
 <p>Marker 1 2.402300000000 GHz PNC: Fast IFGain:Low Trig: Free Run #Atten: 10 dB Avg Type: Log-Pwr Avg/Hold:>1313</p> <p>Mkr1 2.402 3 GHz 104.256 dBμV</p> <p>Start 2.31000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 2.41000 GHz Sweep 1.000 ms (1001 pts)</p> <p>Marker 1 N 1 f 2.402 3 GHz 104.256 dBμV Marker 2 N 1 f 2.390 0 GHz 52.149 dBμV</p>		 <p>Marker 1 2.402100000000 GHz PNC: Fast IFGain:Low Trig: Free Run #Atten: 10 dB Avg Type: Log-Pwr Avg/Hold:>2013</p> <p>Mkr1 2.402 1 GHz 102.239 dBμV</p> <p>Start 2.31000 GHz #Res BW 1.0 MHz #VBW 3.0 kHz Stop 2.41000 GHz Sweep 26.00 ms (1001 pts)</p> <p>Marker 1 N 1 f 2.402 1 GHz 102.239 dBμV Marker 2 N 1 f 2.390 1 GHz 35.200 dBμV</p>	
Frequency (MHz)	Peak level (dB μ V/m)	Peak Limit (dB μ V/m)	Conclusion
2390	52.149	74	35.200 54 Pass

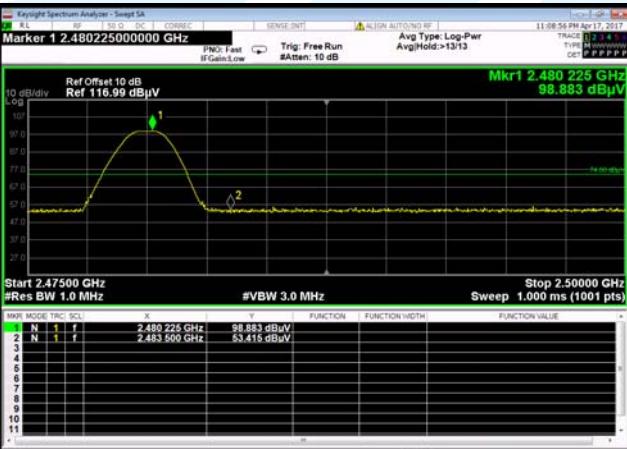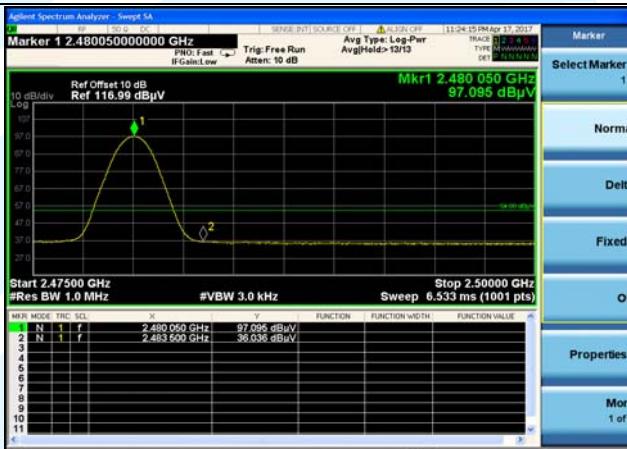Test Channel:	Highest Channel	Ant. Polar. :	Horizontal
Detector: Peak		Detector: AV	
 <p>Marker 1 2.480225000000 GHz PNC: Fast IFGain:Low Trig: Free Run #Atten: 10 dB Avg Type: Log-Pwr Avg/Hold:>1313</p> <p>Mkr1 2.480 225 GHz 98.883 dBμV</p> <p>Start 2.47500 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 2.50000 GHz Sweep 1.000 ms (1001 pts)</p> <p>Marker 1 N 1 f 2.480 225 GHz 98.883 dBμV Marker 2 N 1 f 2.483 500 GHz 53.415 dBμV</p>		 <p>Marker 1 2.480050000000 GHz PNC: Fast IFGain:Low Trig: Free Run #Atten: 10 dB Avg Type: Log-Pwr Avg/Hold:>1313</p> <p>Mkr1 2.480 050 GHz 97.095 dBμV</p> <p>Start 2.47500 GHz #Res BW 1.0 MHz #VBW 3.0 kHz Stop 2.50000 GHz Sweep 6.533 ms (1001 pts)</p> <p>Marker 1 N 1 f 2.480 050 GHz 97.095 dBμV Marker 2 N 1 f 2.483 500 GHz 36.036 dBμV</p>	
Frequency (MHz)	Peak level (dB μ V/m)	Peak Limit (dB μ V/m)	Conclusion
2390	53.415	74	35.036 54 Pass

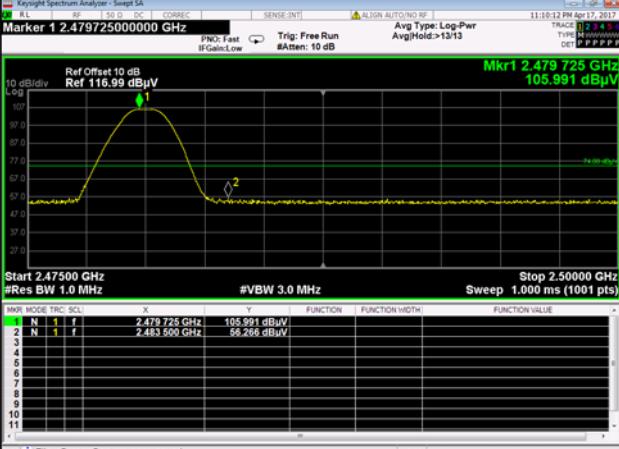Test Channel:	Highest Channel	Ant. Polar. :	Vertical
Detector: Peak		Detector: AV	
 <p>Marker 1 2.479725000000 GHz PNO: Fast (IFGain:Low) Trig: Free Run Avg Type: Log-Per Avg Hold>13/13 Ref Offset 10 dB Ref 116.99 dB_uV Mkr1 2.479 725 GHz 105.991 dB_uV</p> <p>Start 2.47500 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 2.50000 GHz Sweep 1.000 ms (1001 pts)</p> <p>Marker 2 2.480050000000 GHz PNO: Fast (IFGain:Low) Trig: Free Run Avg Type: Log-Per Avg Hold>13/13 Ref Offset 10 dB Ref 116.99 dB_uV Mkr1 2.480 050 GHz 103.692 dB_uV</p> <p>Start 2.47500 GHz #Res BW 1.0 MHz #VBW 3.0 kHz Stop 2.50000 GHz Sweep 6.533 ms (1001 pts)</p>		 <p>Marker 1 2.480050000000 GHz PNO: Fast (IFGain:Low) Trig: Free Run Avg Type: Log-Per Avg Hold>13/13 Ref Offset 10 dB Ref 116.99 dB_uV Mkr1 2.480 050 GHz 103.692 dB_uV</p> <p>Start 2.47500 GHz #Res BW 1.0 MHz #VBW 3.0 kHz Stop 2.50000 GHz Sweep 6.533 ms (1001 pts)</p>	
Frequency (MHz)	Peak level (dB _u v/m)	Peak Limit (dB _u v/m)	AV level (dB _u v/m)
2390	56.266	74	38.380
			Conclusion
			Pass

5.9 CONDUCTED EMISSION

Test Requirement: 47 CFR Part 15C Section 15.207

Test Method: ANSI C63.10-2013

Limits:

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.4.2 for details.

Test Procedures:

Test frequency range :150KHz-30MHz

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The measurement data as follows:


Quasi Peak:

Live Line

80.0 dBuV

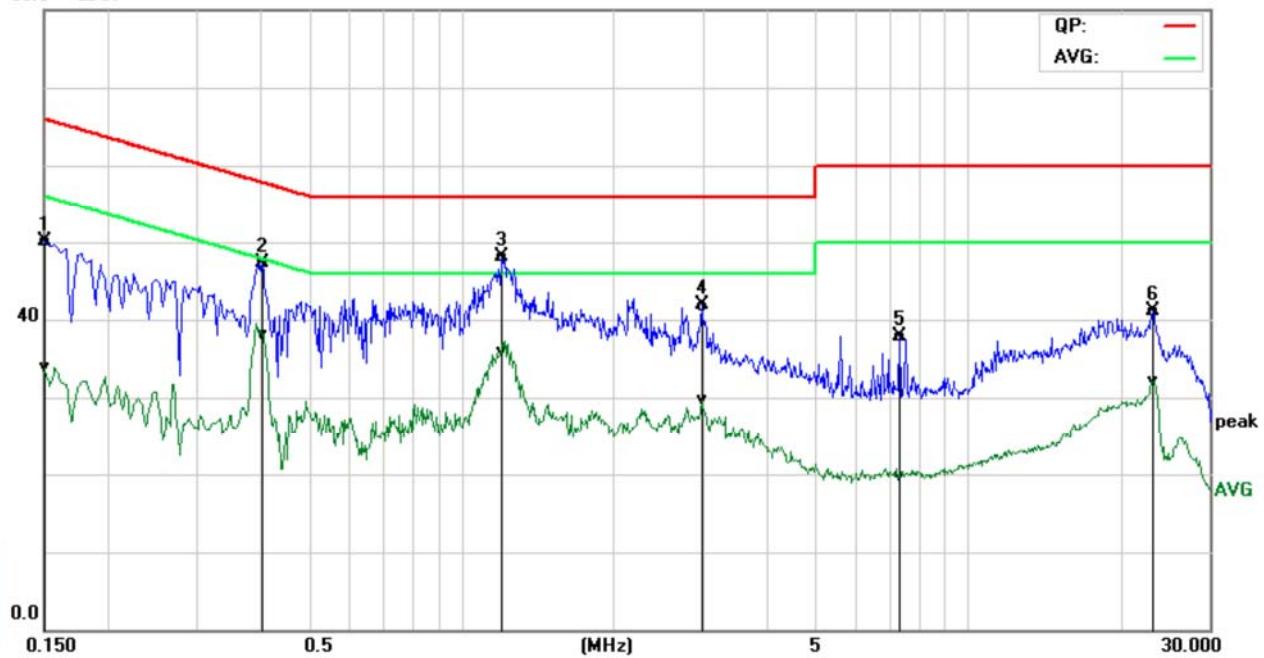

No.	Frequency (MHz)	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
		(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1P	0.1500	30.47	14.28	19.62	50.09	33.90	65.99	56.00	-15.90	-22.10	Pass
2P	0.4060	27.81	18.64	19.56	47.37	38.20	57.73	47.73	-10.36	-9.53	Pass
3*	1.2059	28.56	16.24	19.58	48.14	35.82	56.00	46.00	-7.86	-10.18	Pass
4P	2.9860	22.08	9.92	19.72	41.80	29.64	56.00	46.00	-14.20	-16.36	Pass
5P	7.3300	18.07	-0.08	19.87	37.94	19.79	60.00	50.00	-22.06	-30.21	Pass
6P	23.1860	20.64	11.65	20.39	41.03	32.04	60.00	50.00	-18.97	-17.96	Pass

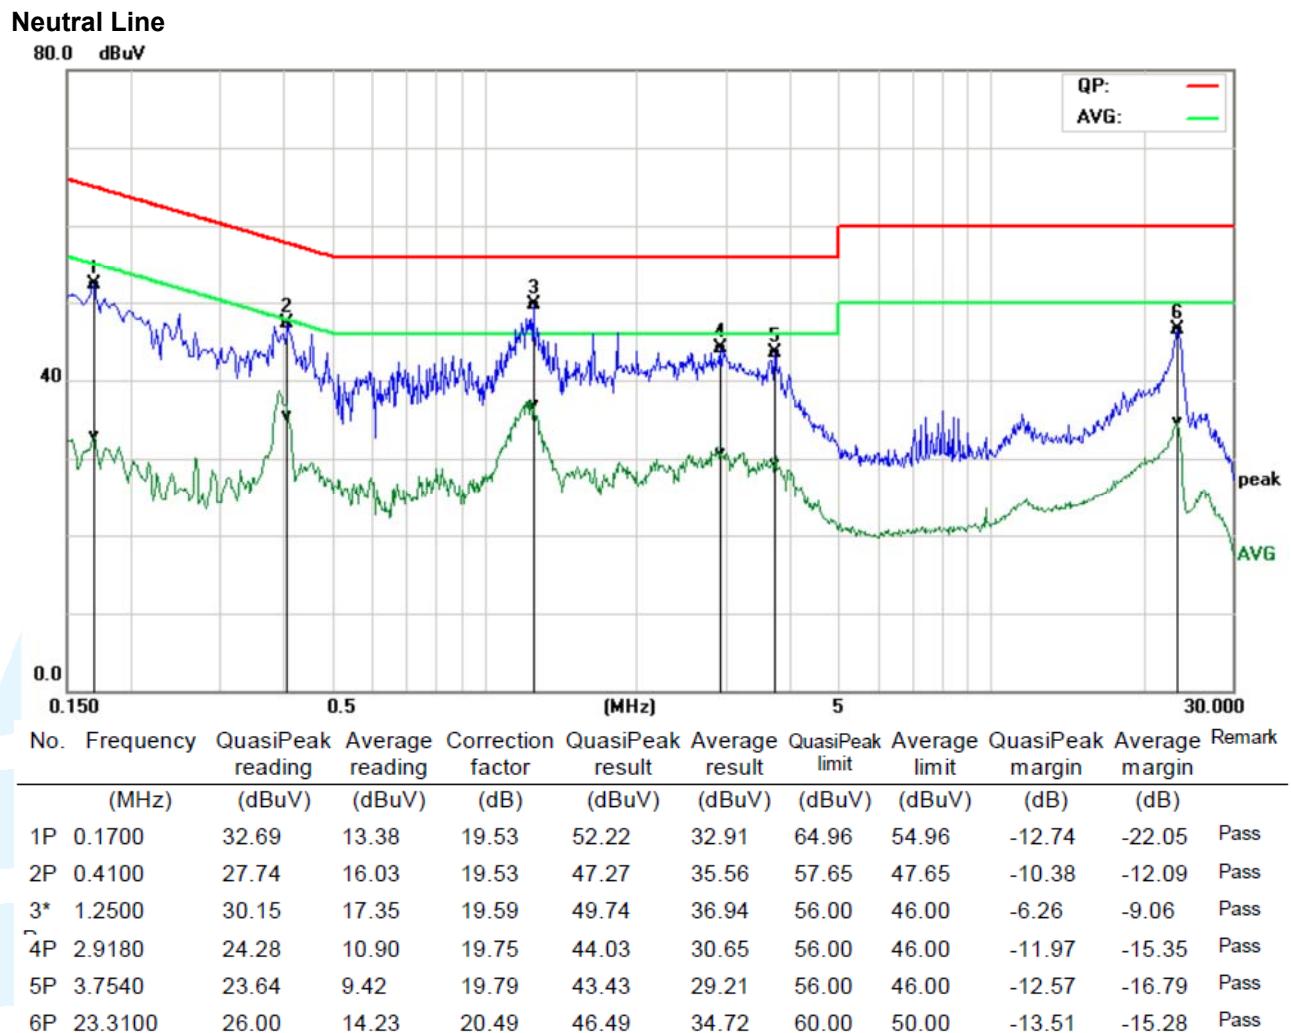

Remark:

1. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

See test photographs attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photographs.

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.