



FCC RADIO TEST REPORT

FCC ID: 2AF9S-G3S2TX

Product : gamesir game controllers

Trade Name : N/A

Model Name : Gamesir-G3s

Addition Model : Gamesir-G3, Gamesir-G3f, Gamesir-G3v, Gamesir-G3u, Gamesir-G3w

Prepared for

Guangzhou Chicken Run Network Technology Co., Ltd.
Room 101D, No. 68, Huacui Street, Jianye Road, Tianhe District
Guangzhou City, Guangdong Province

Prepared by

Dongguan Yaxu (AiT) Technology Limited
No. 22, Jinqianling Third Street, Jitigang, Huangjiang, Dongguan,
Guangdong, China



TEST RESULT CERTIFICATION

Manufacture's Name : Shenzhen Targetever Technology Co.,Ltd

Address : Floor 11-12,Building 8,LianHua Industrial Park,LongYuan Road,
LongHua New District,ShenZhen, China

Product description

Product name : gamesir game controllers

Model and/or type reference : Gamesir-G3s,Gamesir-G3,Gamesir-G3f,Gamesir-G3v,Gam
esir-G3u,Gamesir-G3w

Rating(s) : DC 3.7V

Standards : FCC Part15.249

Test procedure ANSI C63.10-2013

This device described above has been tested by AiT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of AiT, this document may be altered or revised by AiT, personal only, and shall be noted in the revision of the document.

Date of Test :

Date (s) of performance of tests : Jul. 01 2017 ~Jun. 10 2017

Date of Issue : Jul. 11 2017

Test Result : **Pass**

Reviewed by: Seal-Chen


Approved by: 

Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	9
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3 . ANTENNA REQUIREMENT	12
3.1 STANDARD REQUIREMENT	12
3.2 EUT ANTENNA	12
3.3 CONDUCTED EMISSION MEASUREMENT	13
3.3.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.3.2 TEST PROCEDURE	14
3.3.3 DEVIATION FROM TEST STANDARD	14
3.3.4 TEST SETUP	14
3.2.5 TEST RESULT	15
3.4 RADIATED EMISSION MEASUREMENT	17
3.4.1 RADIATED EMISSION LIMITS	17
3.4.2 TEST PROCEDURE	18
3.4.3 DEVIATION FROM TEST STANDARD	18
3.4.4 TEST SETUP	19
3.4.5 TEST RESULTS (BELOW 30MHZ)	22
3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)	23
3.4.7 TEST RESULTS (ABOVE 1000 MHZ)	25
4 . BANDWIDTH TEST	31
4.1 TEST PROCEDURE	31
4.2 DEVIATION FROM STANDARD	31
4.3 TEST SETUP	31
4.4 TEST RESULTS	32
5 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	34
5.1 DEVIATION FROM STANDARD	34
5.2 TEST SETUP	34
5.3 EUT OPERATION CONDITIONS	34
5.4 TEST RESULTS	35



Table of Contents	Page
6 . EUT TEST PHOTO APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	37

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Test	Test Requirement	Standard Paragraph	Result
Field Strength of Fundamental	FCC PART 15 C section 15.249 (a)	ANSI C63.10: Clause 6.6	PASS
Field Strength of Unwanted Emissions	FCC PART 15 C section 15.249 (a) section 15.249 (d)	ANSI C63.10: Clause 6.4, 6.6 and 6.7	PASS
Band Edges	FCC PART 15 C section 15.249 (d)	ANSI C63.10: Clause 6.9.2	PASS
Occupied Bandwidth	FCC PART 15 C section 15.215(c)	ANSI C63.10: Clause 6.9.1	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	PASS
Antenna Requirement	FCC PART 15 C section 15.203	FCC PART 15 C section 15.203	PASS

1.1 TEST FACILITY

The test facility is recognized, certified or accredited by the following organizations:

.CNAS- Registration No: L6177

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2005 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on Apr. 18, 2013

.FCC- Registration No: 248337

The 3m Semi-Anechoic Chamber, 3m/10m Open Area Test Site and Shielding Room of Dongguan Yaxu (AiT) Technology Limited have been registered by Federal Communications Commission (FCC) on Aug.29, 2014.

.Industry Canada(IC)-Registration No: IC6819A-1

The 3m Semi-Anechoic Chamber and 3m of Dongguan Yaxu (AiT) Technology Limited have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing on Oct. 01, 2014.

.VCCI- Registration No: 2705

The 3m/10m Open Area Test Site, Shielding Room and 3m Chamber of Dongguan Yaxu (AiT) Technology Limited have been registered by Voluntary Control Council for Interference on Nov. 21, 2012. The Telecommunication Ports Conducted Disturbance Measurement of Dongguan Yaxu (AiT) Technology Limited have been registered by Voluntary Control Council for Interference on May. 13, 2013.

.TUV NORD

Dongguan Yaxu (AiT) Technology Limited has been assessed on Jun. 13, 2013 that it can carry out EMC tests by order and under supervision of TUV NORD.

.ITS- Registration No: TMPSHA031

Dongguan Yaxu (AiT) Technology Limited has been assessed and included in Intertek Shanghai TMP Program regarding Laboratory facilities and test equipment on Jul.22, 2012.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

EUT Name:	gamesir game controllers
Model No.:	Gamesir-G3s
Addition Model:	Gamesir-G3, Gamesir-G3f, Gamesir-G3v, Gamesir-G3u, Gamesir-G3w
Brand Name:	N/A
Model Differences:	All models are identical except model name and colors.
Operation frequency:	2405 MHz to 2470 MHz
Number of channel:	3 channels
Modulation Type:	GFSK
Antenna Type:	PCB antenna
Antenna Gain:	0 dBi
Power Supply Range:	DC 3.7V by adapter
Adapter:	M/N: HS05001000ES INPUT: AC100-240V 50/60Hz 0.3A Max OUTPUT: DC 5.0V, 1.0A NOTE: The power adapter provide by test lab.
Battery:	DC 3.7V, 600mAh
H/W No.:	V4.0
S/W No.:	V4.1

Description of Channel:					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2405				
02	2430				
03	2470				

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
CH1	CH1
Mode 2	CH2
Mode 3	CH3
Mode 4	Link

For Conducted Emission	
Final Test Mode	Description
Mode 4	Link

For Radiated Emission	
Final Test Mode	Description
CH1	CH1
Mode 2	CH2
Mode 3	CH3
Mode 4	Link

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels. The EUT use full-charge battery.
- (2) Measurements are performed according to C63.10.
- (3) The relevant RF Conducted Measurement is performed by a temporary antenna connector, please refer to the Equipment List for the detail
- (4) Test perform on all mode, only records worse cases in the test report.
- (5) The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitter signals.

Example:


2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters.


Test software Version	Test program:HID_TOOL_1203		
Frequency	2405 MHz	2430 MHz	2470 MHz
Parameters	DEF	DEF	DEF

2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Spurious Emission Test

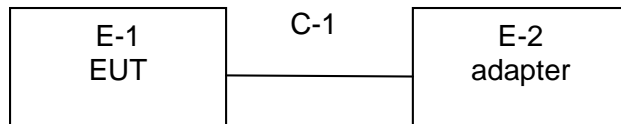

2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	gamesir game controllers	N/A	Gamesir-G3s	N/A	EUT
E-2	Adapter	N/A	M05001000US	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	100	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Equipment No.	Instrument	Manufacturer	Model Name	Serial Number	Specification	Cal. Data
1	Semi-anechoic chamber	Changzhou Chengyu	EC3088	N/A	9*6*6m	10/25/2016
2	Loop Antenna	TESEQ	HLA6120	35779	9kHz-30MHz	06/05/2017
3	Broadband antenna	R&S	VULB 9160	VULB91 60-516	30MHz-1500 MHz	10/25/2016
4	Horn antenna	R&S	BBHA 9120D	10087	1GHz-18GH z	06/05/2017
5	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	15GHz-26.5GH z	06/05/2017
6	Test receiver	R&S	ESCI	101686	9KHz-3GHz	10/25/2016
7	EMI Measuring Receiver	R&S	ESR	101660	9KHz-40GHz	10/25/2016
8	Multi-device controller	MF	MF-7868	MF78680 8762	N/A	10/25/2016
9	Amplifier	EM	EM-30180	060538	1GHz-18GH z	10/25/2016
10	Amplifier	Schwarzbeck	BBV 9475	BBV 9475-663	1GHz-18GH z	06/05/2012
11	Spectrum Analyzer	agilent	E4440B	US44300368	1GHz-26.5GH z	06/05/2017
12	Test receiver	R&S	ESCI	101689	9KHz-3GHz	10/25/2016
13	LISN	R&S	NSLK81 26	8126466	9k-30MHz	10/25/2016
14	LISN	Narda	L2-16B	5589756	9k-30MHz	10/25/2016
15	Radiated Cable 1#	FUJIKURA	5D-2W	01	30MHz-1GHz	10/25/2016
16	Radiated Cable 2#	FUJIKURA	10D2W	02	1GHz -25GHz	10/25/2016
17	Conducted Cable 1#	FUJIKURA	1D-2W	01	9KHz-30MHz	10/25/2016
18	SMA Antenna connector	Dosin	Dosin-SMA	N/A	N/A	10/25/2016

Note: The SMA antenna connector is soldered on the PCB board in order to perform conducted tests and this SMA antenna connector is listed in the equipment list.
The Cal.Interval was one year

3. ANTENNA REQUIREMENT

3.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.2 EUT ANTENNA

The EUT antenna is PCB Antenna with 0dBi gain. It comply with the standard requirement.

3.3 CONDUCTED EMISSION MEASUREMENT

3.3.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	(dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.3.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

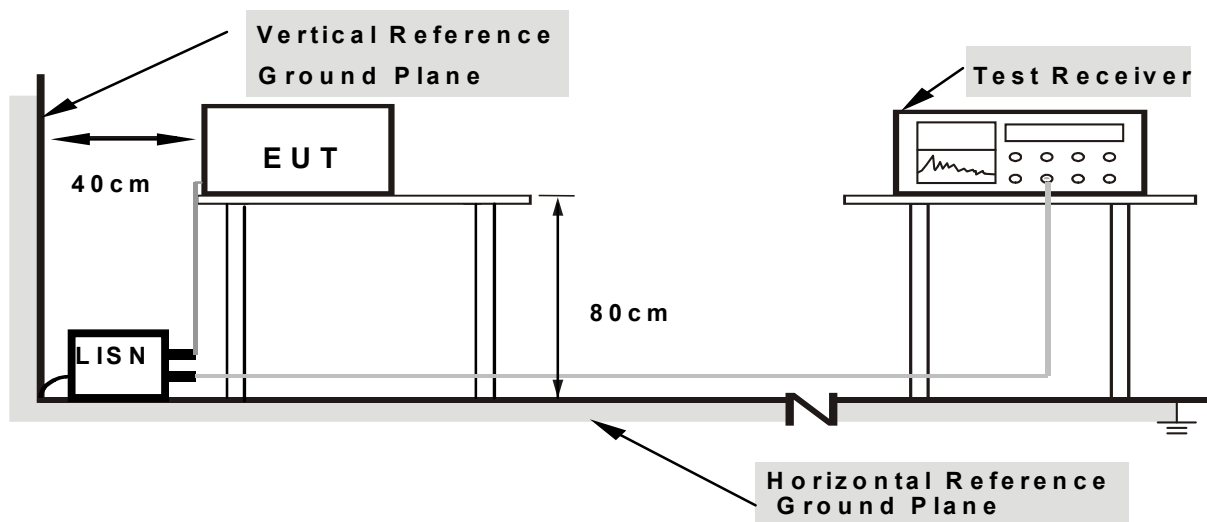

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


3.2.5 TEST RESULT

EUT :	gamesir game controllers	Model Name. :	Gamesir-G3s
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2017-07-02
Test Mode :	Link	Phase :	L
Test Voltage :	DC 5V from charger AC 120V/60Hz		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1539	39.17	11.84	51.01	65.78	-14.77	QP	
2		0.1580	25.45	11.75	37.20	55.56	-18.36	AVG	
3		0.3540	27.53	10.17	37.70	58.87	-21.17	QP	
4		0.3540	15.43	10.17	25.60	48.87	-23.27	AVG	
5	*	1.8580	31.91	9.99	41.90	56.00	-14.10	QP	
6		1.9700	21.47	9.99	31.46	46.00	-14.54	AVG	

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. N/A means All Data have pass Limit

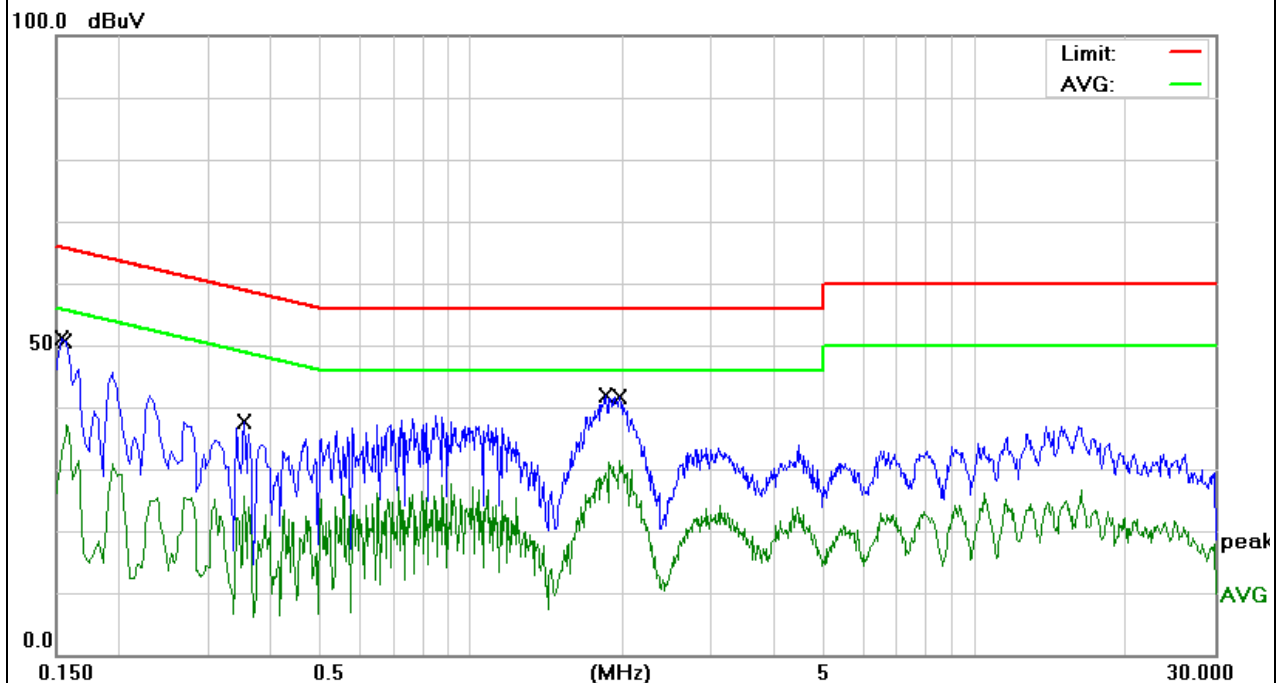


EUT :	gamesir game controllers	Model Name. :	Gamesir-G3s
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2017-07-02
Test Mode :	Link	Phase :	N
Test Voltage :	DC 5V from charger AC 120V/60Hz		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1580	37.83	11.75	49.58	65.56	-15.98	QP	
2		0.1580	24.21	11.75	35.96	55.56	-19.60	AVG	
3	*	1.8060	20.52	9.98	30.50	46.00	-15.50	AVG	
4		1.9660	30.00	9.99	39.99	56.00	-16.01	QP	
5		11.3139	13.88	10.30	24.18	50.00	-25.82	AVG	
6		13.7900	35.07	1.37	36.44	60.00	-23.56	QP	

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. N/A means All Data have pass Limit

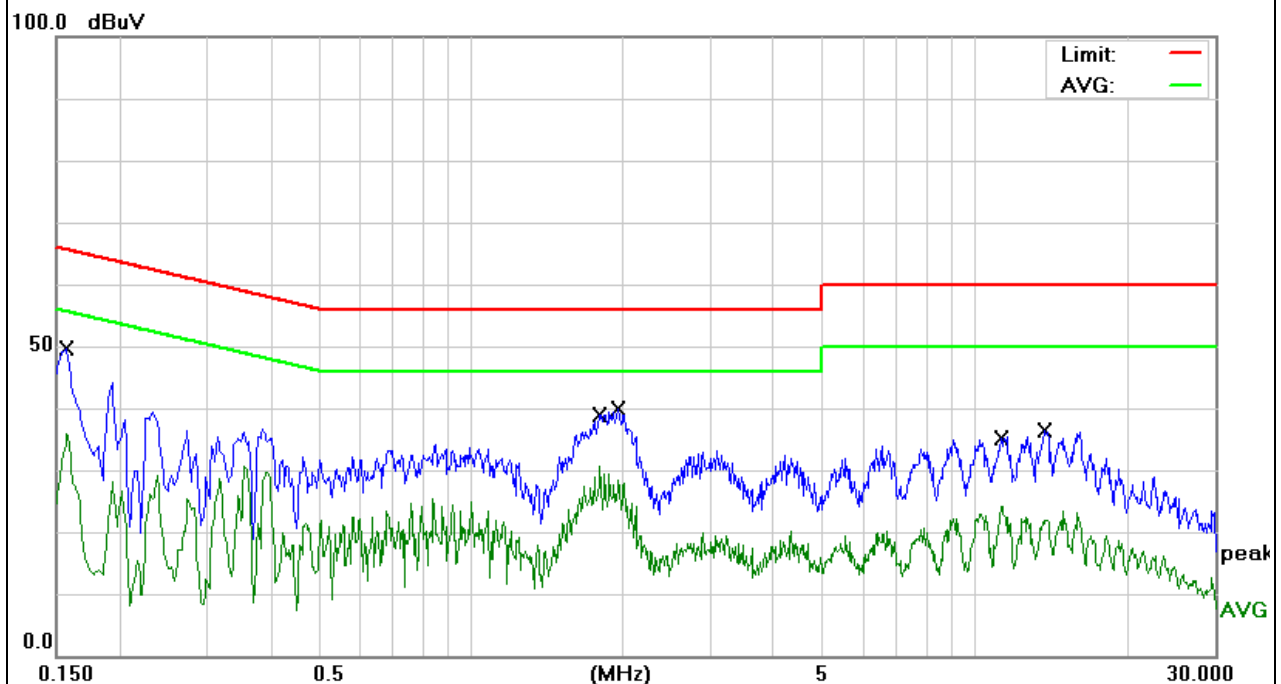

3.4 RADIATED EMISSION MEASUREMENT

3.4.1 Radiated Emission Limits (FCC 15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.249)

Frequency of Emission (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
2400 - 2483.5	50	500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.4.2 TEST PROCEDURE

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3) 1 GHz to 25 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.

For testing performed with the horn antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scan between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.4.3 DEVIATION FROM TEST STANDARD


No deviation

3.4.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

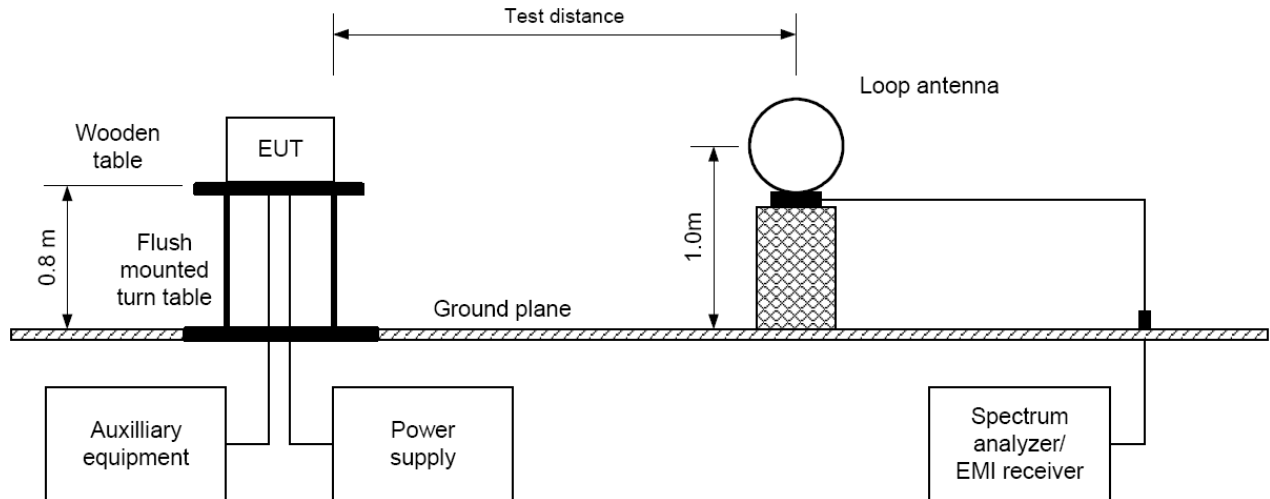

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

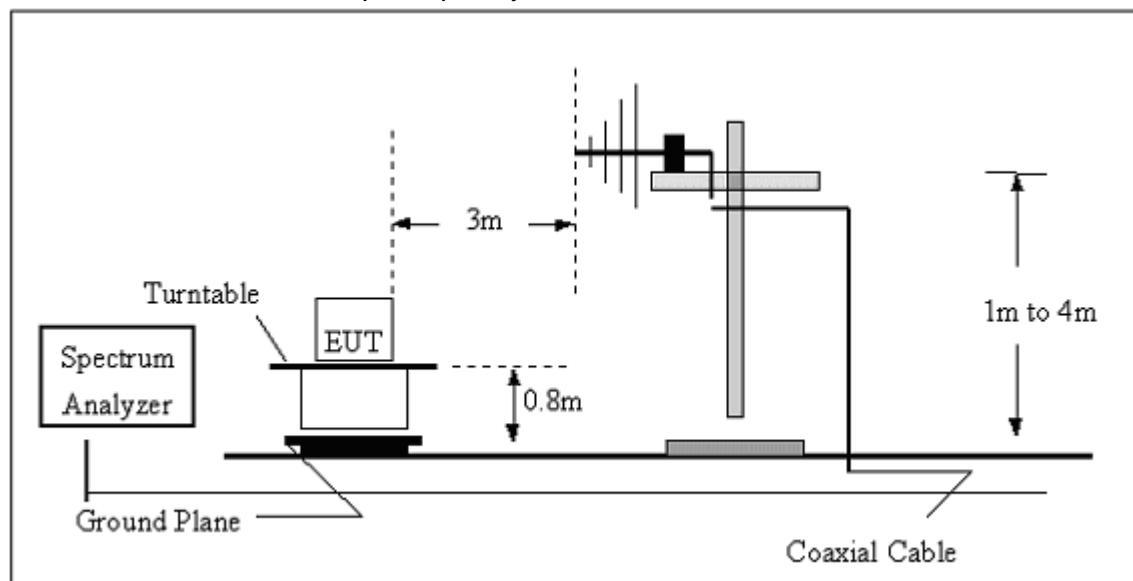

(C) Radiated Emission Test-Up Frequency Above 1GHz

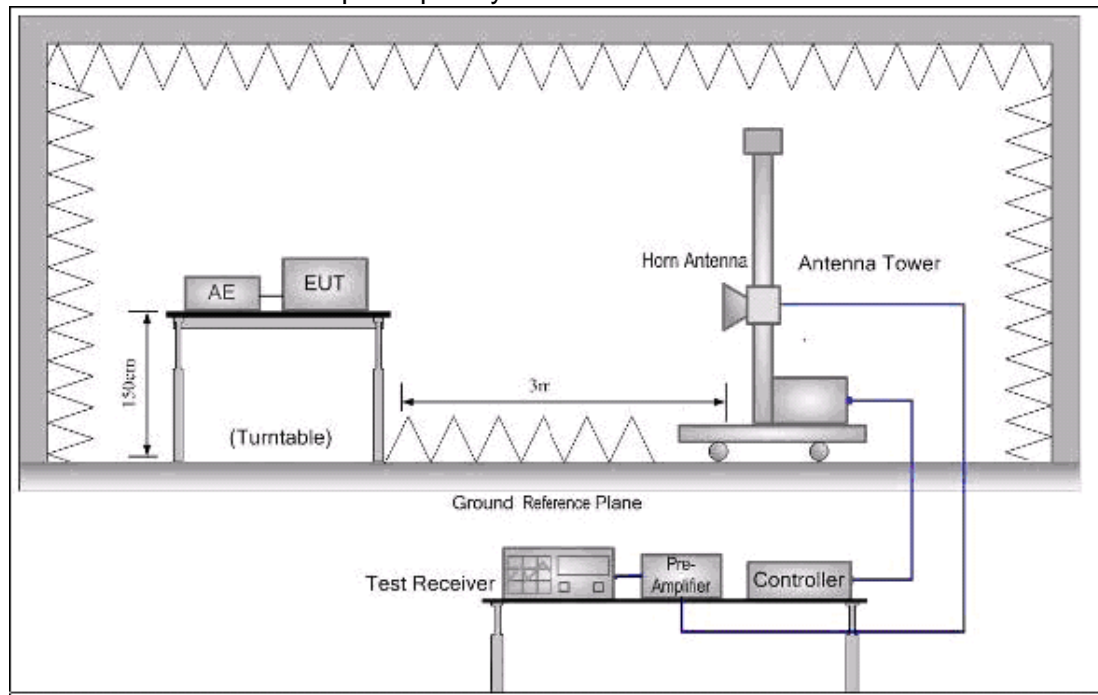

Field Strength of Fundamental

Frequency (MHz)	Emission PK/AV (dBuV/m)	Horizontal /Vertical	Detector type	Limits PK/AV (dBuV/m)	Margin (dB)
2400	42.78	H	Peak	74	-29.83
2400	30.15	H	AVG	54	-20.31
2405	88.74	H	Peak	114	-21.54
2405	76.69	H	AVG	94	-13.88
2430	89.54	H	Peak	114	-24.28
2430	78.45	H	AVG	94	-14.34
2470	89.61	H	Peak	114	-23.63
2470	78.44	H	AVG	94	-14.15
2483.5	44.11	H	Peak	74	-31.84
2483.5	33.69	H	AVG	54	-22.42
2400	45.12	V	Peak	74	-30.63
2400	33.65	V	AVG	54	-21.06
2405	90.68	V	Peak	114	-21.53
2405	79.41	V	AVG	94	-12.84
2430	89.67	V	Peak	114	-23.67
2430	76.55	V	AVG	94	-15.14
2470	89.66	V	Peak	114	-22.88
2470	77.84	V	AVG	94	-5.04
2483.5	43.51	H	Peak	74	-31.33
2483.5	32.65	H	AVG	54	-22.88

Spurious Emissions

3.4.5 TEST RESULTS (BELOW 30MHz)

EUT :	gamesir game controllers	Model Name. :	Gamesir-G3s
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $20 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)

EUT :	gamesir game controllers	Model Name :	Gamesir-G3s
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1	Polarization :	Horizontal

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		55.6093	51.29	-20.99	30.30	40.00	-9.70	QP		
2	*	60.4918	52.43	-21.73	30.70	40.00	-9.30	QP		
3		81.2117	47.57	-19.47	28.10	40.00	-11.90	QP		
4		188.4124	47.25	-18.05	29.20	43.50	-14.30	QP		
5		349.2499	43.15	-11.05	32.10	46.00	-13.90	QP		
6		724.2610	37.46	-3.46	34.00	46.00	-12.00	QP		

Remark:

Factor = Antenna Factor + Cable Loss.

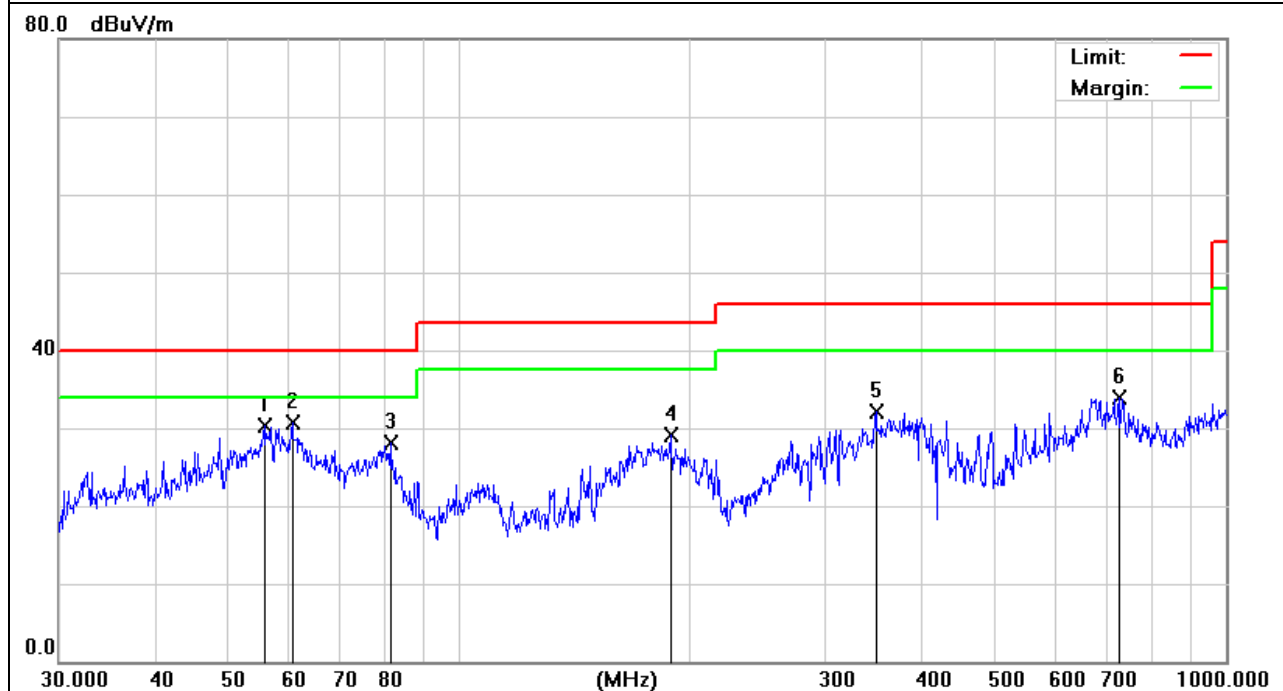


EUT :	gamesir game controllers	Model Name :	Gamesir-G3s
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1	Polarization :	Vertical

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	47.1598	42.78	-17.48	25.30	40.00	-14.70	QP		
2		96.7749	42.74	-17.14	25.60	43.50	-17.90	QP		
3		183.2005	43.94	-17.34	26.60	43.50	-16.90	QP		
4		325.5958	37.89	-11.59	26.30	46.00	-19.70	QP		
5		441.7425	33.78	-9.58	24.20	46.00	-21.80	QP		
6		750.1082	28.02	-3.22	24.80	46.00	-21.20	QP		

Remark:

Factor = Antenna Factor + Cable Loss.

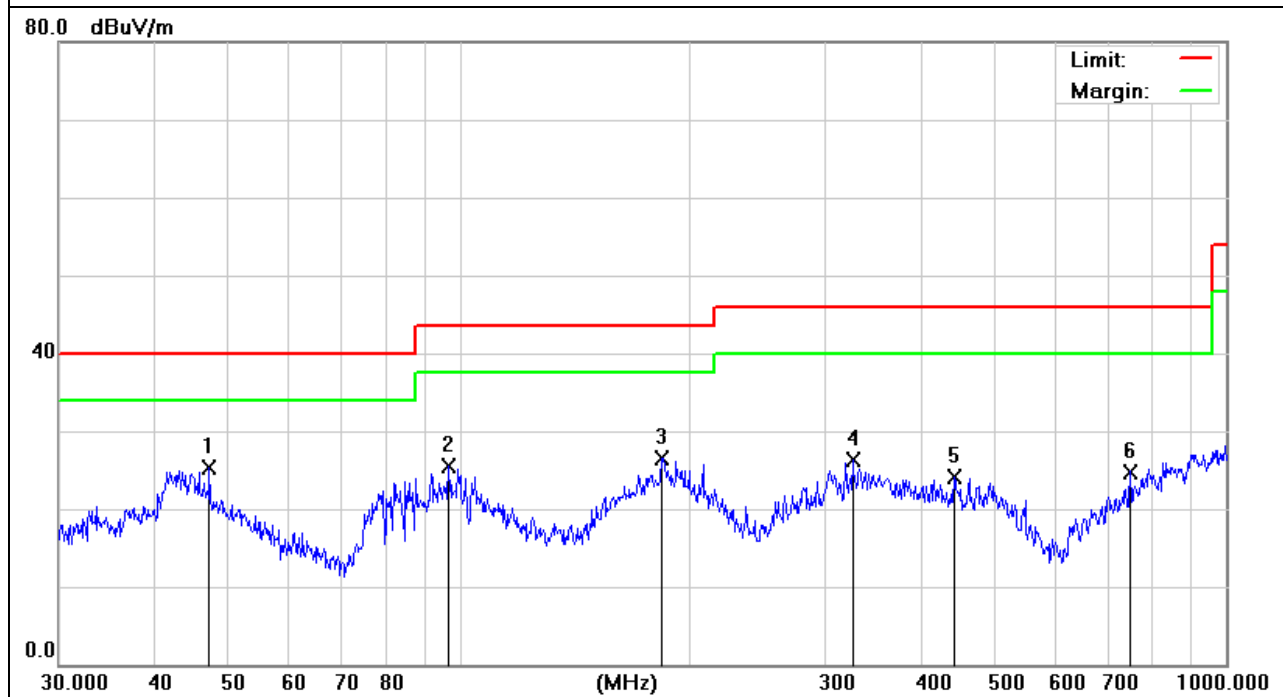

Note: test performed on &EDR, the worst mode and has been reported.

3.4.7 TEST RESULTS (ABOVE 1000 MHZ)


GFSK

EUT :	gamesir game controllers	Model Name :	Gamesir-G3s
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1	Polarization :	Horizontal

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	4810.000	32.08	8.12	40.20	74.00	-33.80	QP			
2	4810.000	21.44	8.12	29.56	54.00	-24.44	AVG			
3	7215.000	29.17	11.63	40.80	74.00	-33.20	QP			
4	7215.000	16.93	11.63	28.56	54.00	-25.44	AVG			
5	9620.000	23.55	17.55	41.10	74.00	-32.90	QP			
6 *	9620.000	12.88	17.55	30.43	54.00	-23.57	AVG			

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

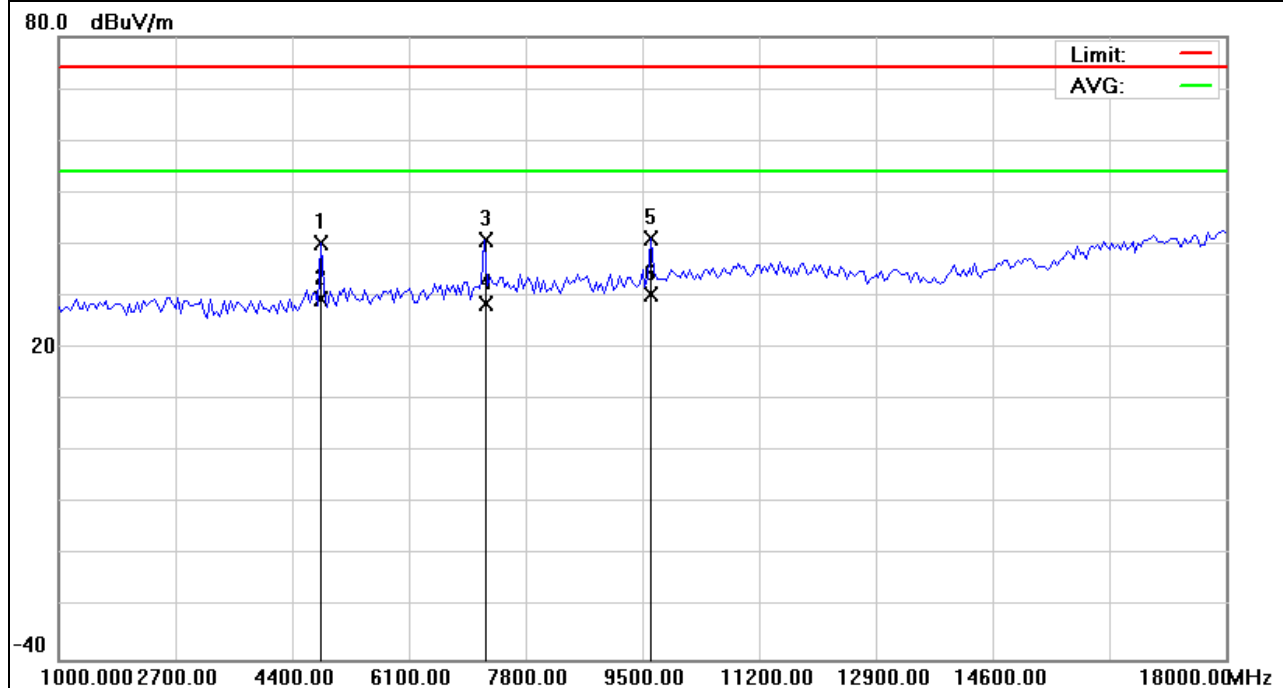


NOTE: No detected above 18GHz

EUT :	gamesir game controllers	Model Name :	Gamesir-G3s
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1	Polarization :	Vertical

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		4810.000	31.78	8.12	39.90	74.00	-34.10	QP		
2		4810.000	20.52	8.12	28.64	54.00	-25.36	AVG		
3		7215.000	30.87	11.63	42.50	74.00	-31.50	QP		
4	*	7215.000	19.84	11.63	31.47	54.00	-22.53	AVG		
5		9620.000	22.95	17.55	40.50	74.00	-33.50	QP		
6		9620.000	11.21	17.55	28.76	54.00	-25.24	AVG		

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

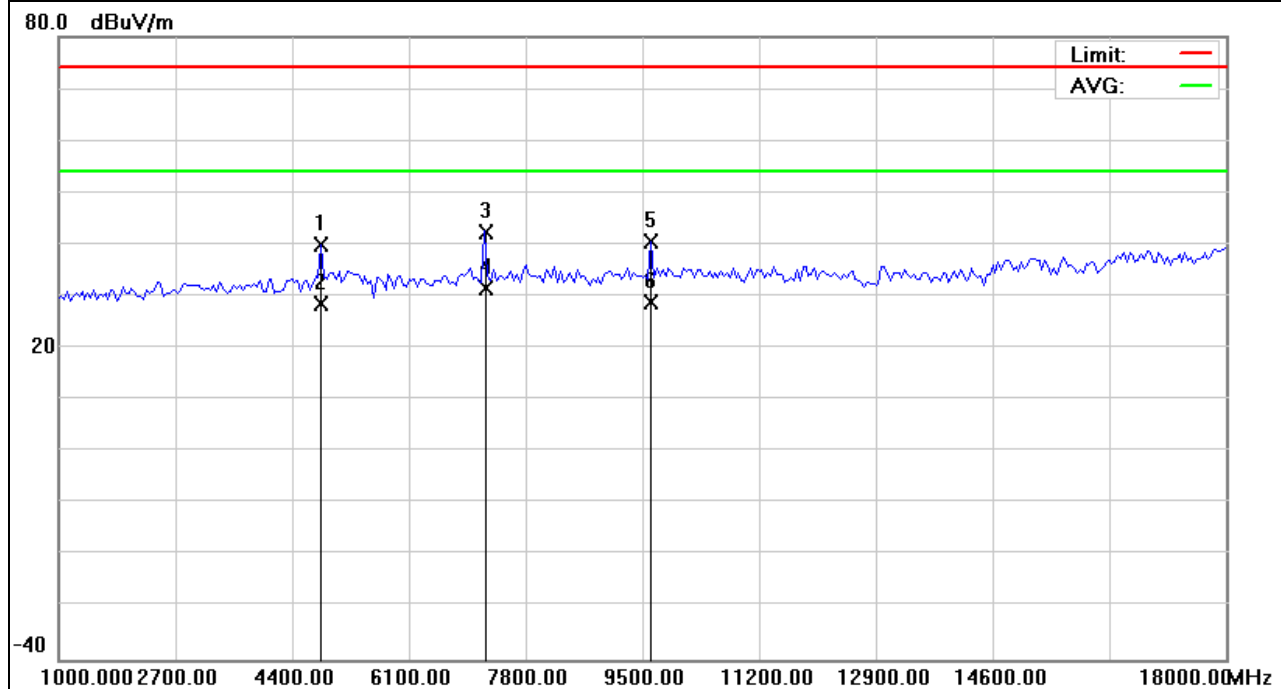


NOTE: No detected above 18GHz



EUT :	gamesir game controllers	Model Name :	Gamesir-G3s
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH2	Polarization :	Horizontal

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4860.000	33.54	8.16	41.70	74.00	-32.30	QP		
2		4860.000	21.38	8.16	29.54	54.00	-24.46	AVG		
3		7290.000	29.63	11.97	41.60	74.00	-32.40	QP		
4		7290.000	16.67	11.97	28.64	54.00	-25.36	AVG		
5		9720.000	25.94	18.06	44.00	74.00	-30.00	QP		
6	*	9720.000	13.70	18.06	31.76	54.00	-22.24	AVG		

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

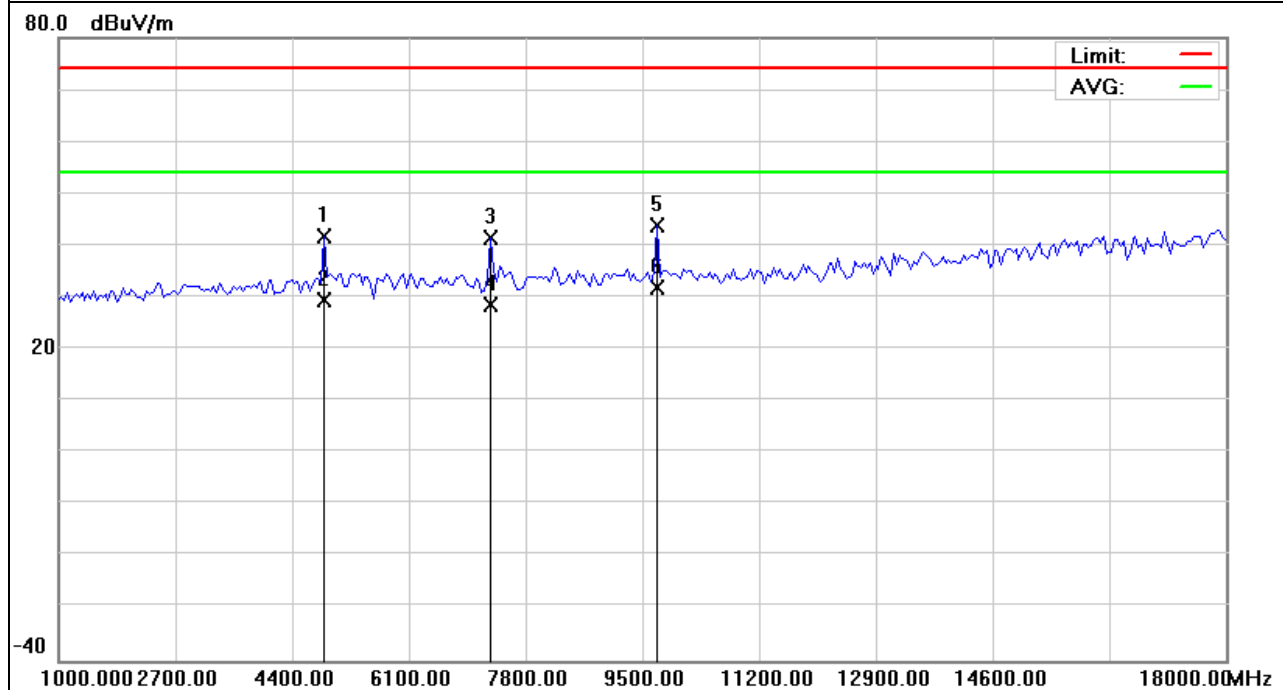


NOTE: No detected above 18GHz

EUT :	gamesir game controllers	Model Name :	Gamesir-G3s
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH2	Polarization :	Vertical

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	4860.000	33.54	8.16	41.70	74.00	-32.30	QP		
2	4860.000	21.38	8.16	29.54	54.00	-24.46	AVG		
3	7290.000	29.63	11.97	41.60	74.00	-32.40	QP		
4	7290.000	16.67	11.97	28.64	54.00	-25.36	AVG		
5	9720.000	25.94	18.06	44.00	74.00	-30.00	QP		
6 *	9720.000	13.70	18.06	31.76	54.00	-22.24	AVG		

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

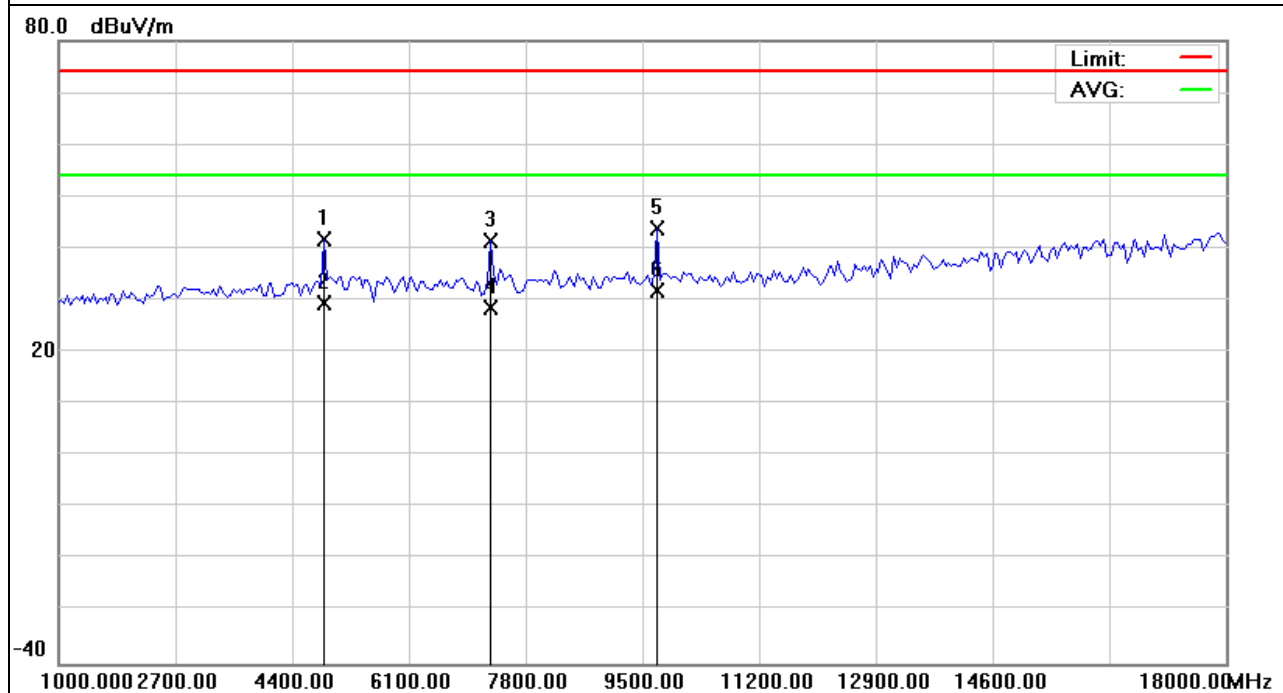


NOTE: No detected above 18GHz

EUT :	gamesir game controllers	Model Name :	Gamesir-G3s
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH3	Polarization :	Horizontal

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4940.000	29.29	8.21	37.50	74.00	-36.50	QP		
2		4940.000	17.43	8.21	25.64	54.00	-28.36	AVG		
3		7410.000	28.29	12.51	40.80	74.00	-33.20	QP		
4	*	7410.000	16.12	12.51	28.63	54.00	-25.37	AVG		
5		9880.000	19.23	18.87	38.10	74.00	-35.90	QP		
6		9880.000	7.56	18.87	26.43	54.00	-27.57	AVG		

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

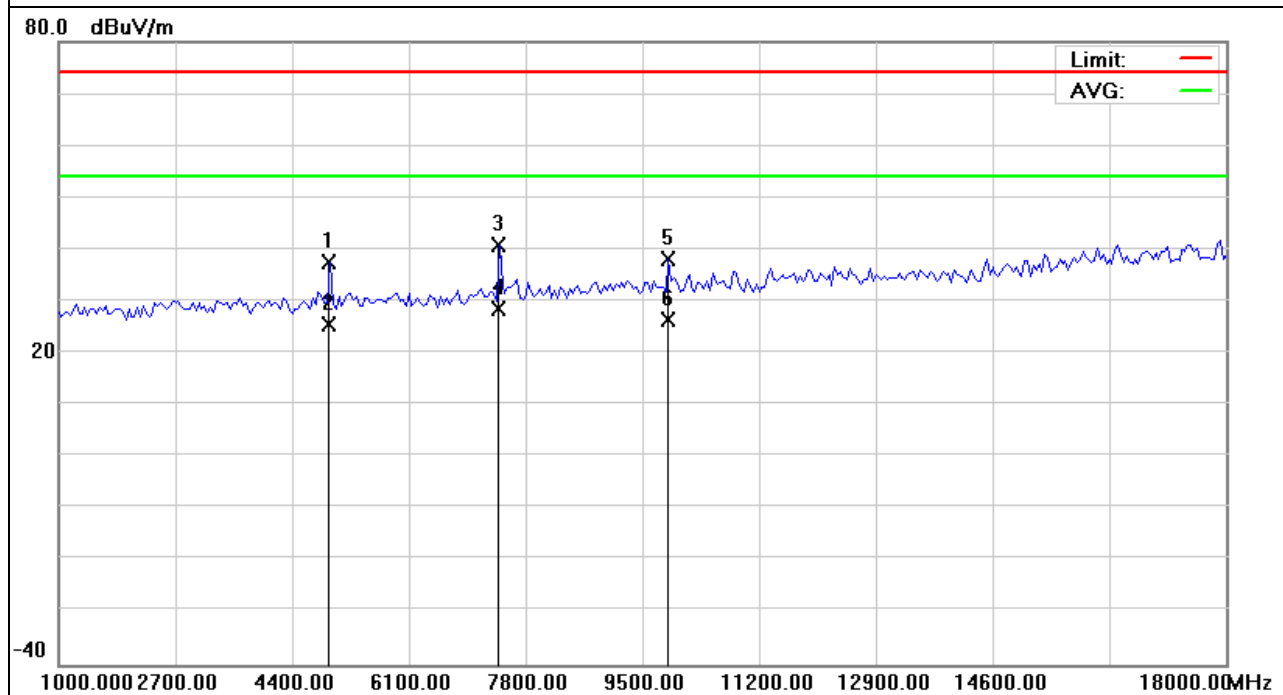


NOTE: No detected above 18GHz

EUT :	gamesir game controllers	Model Name :	Gamesir-G3s
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH3	Polarization :	Vertical

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4940.000	29.29	8.21	37.50	74.00	-36.50	QP		
2		4940.000	17.43	8.21	25.64	54.00	-28.36	AVG		
3		7410.000	28.29	12.51	40.80	74.00	-33.20	QP		
4	*	7410.000	16.12	12.51	28.63	54.00	-25.37	AVG		
5		9880.000	19.23	18.87	38.10	74.00	-35.90	QP		
6		9880.000	7.56	18.87	26.43	54.00	-27.57	AVG		

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

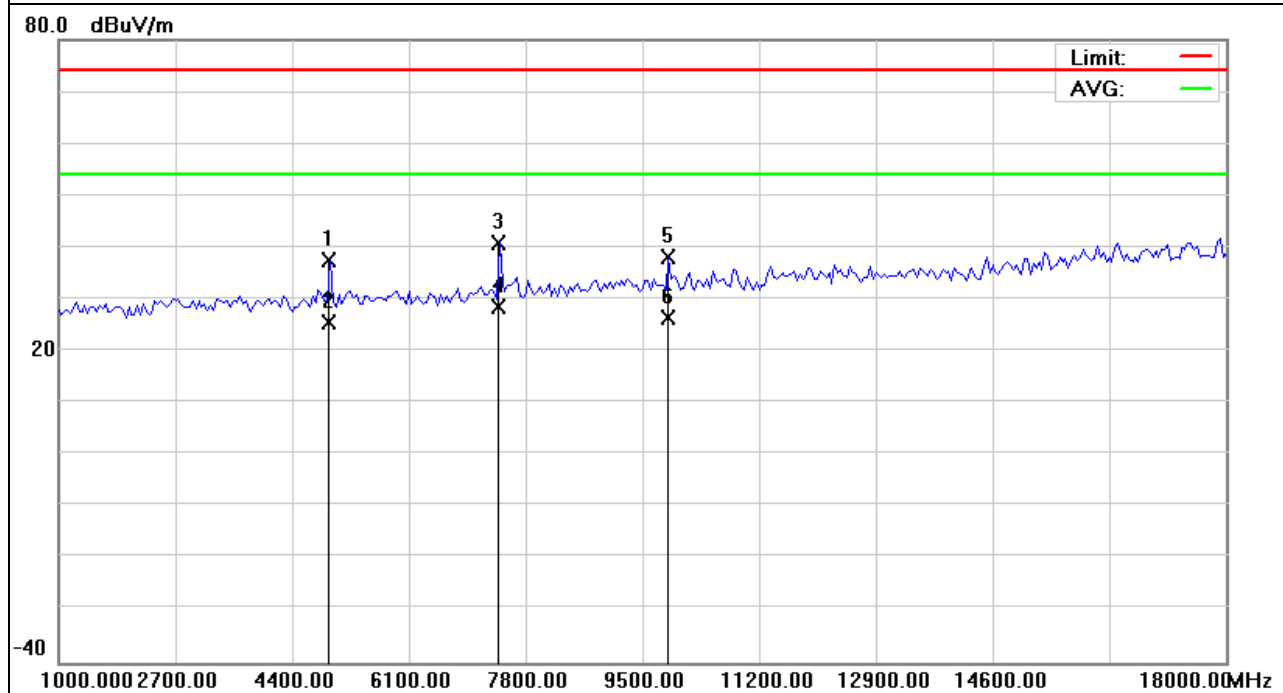

NOTE: No detected above 18GHz

4. BANDWIDTH TEST

4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- b. Spectrum Setting : RBW= 100KHz, VBW \geq RBW, Sweep time = Auto.

4.2 DEVIATION FROM STANDARD

No deviation.


4.3 TEST SETUP




4.4 TEST RESULTS

EUT :	gamesir game controllers	Model Name :	Gamesir-G3s
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH1 / CH2 /CH3		


Frequency	20dB Bandwidth (MHz)	Result
2405 MHz	5.8697	PASS
2430MHz	5.2041	PASS
2470 MHz	5.1644	PASS

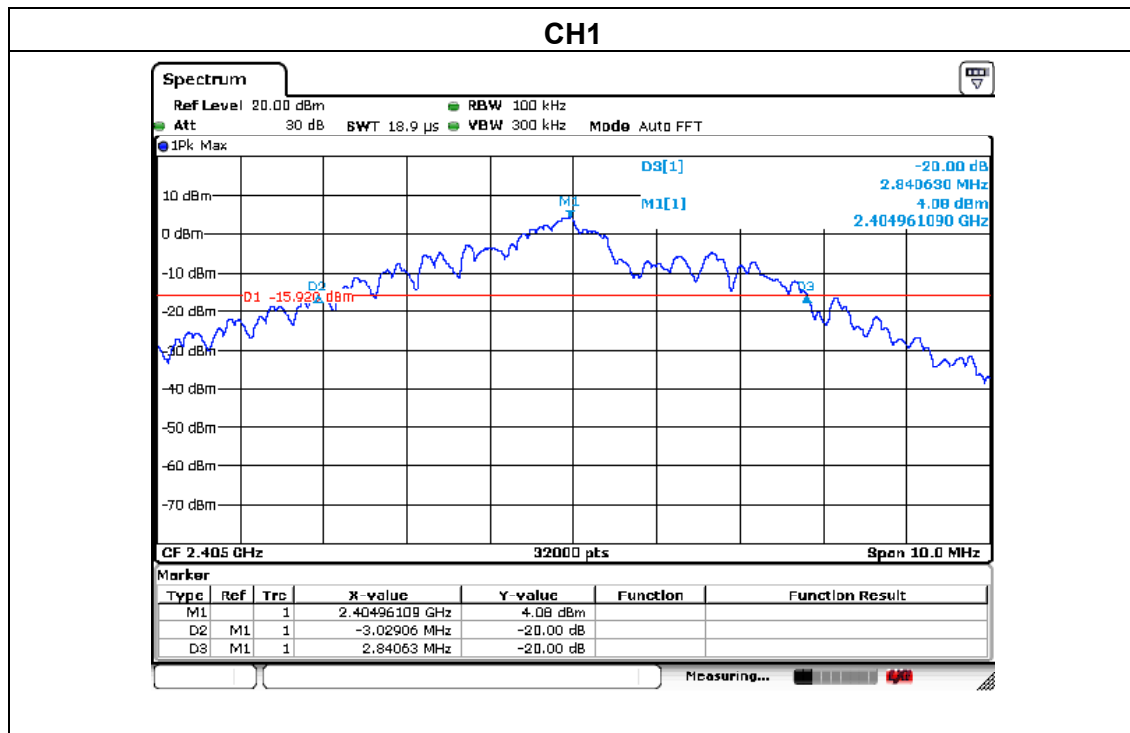

CH2

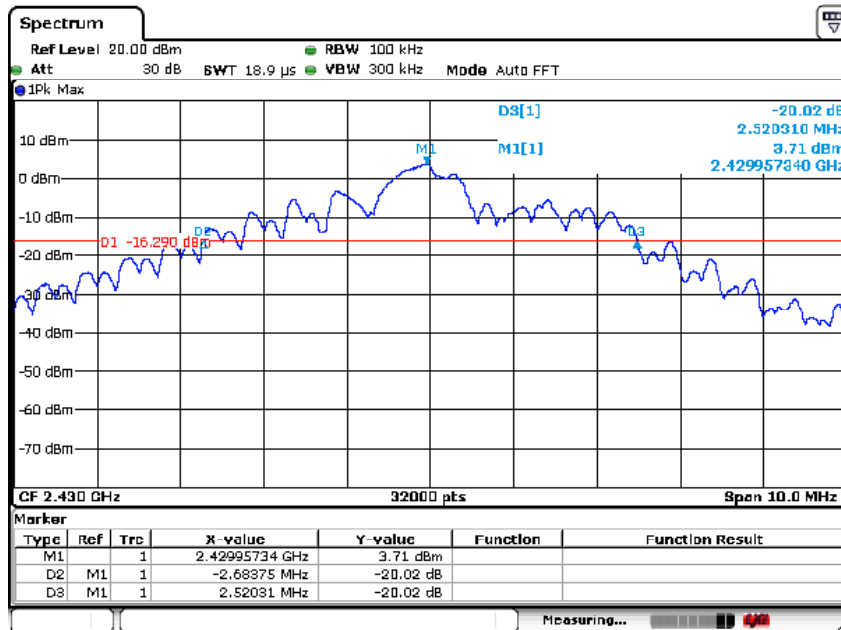

CH3

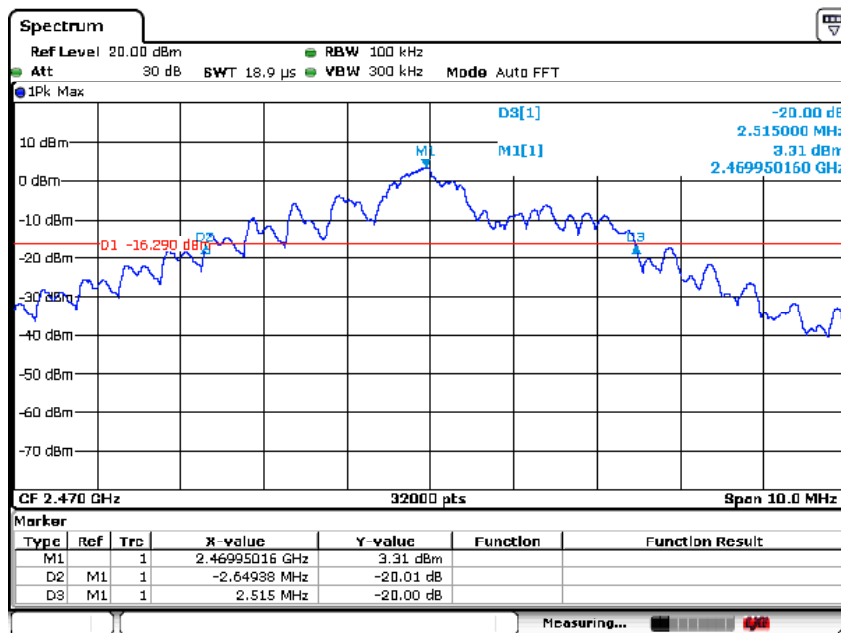

5. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a)&A1.1 is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a)&A8.5, must also comply with the radiated emission limits specified in §15.209(a) &A1.1 (see §15.205(c)) &A8.5.


TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- Repeat above procedures until all measured frequencies were complete.

5.1 DEVIATION FROM STANDARD

No deviation.

5.2 TEST SETUP

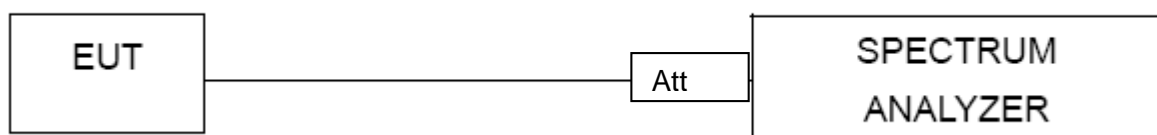

5.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.4 TEST RESULTS

EUT :	gamesir game controllers	Model Name :	Gamesir-G3s
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V

Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
2390.00	58.79	20	Pass
2483.50	61.47	20	Pass


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
2390	44.19	1.05	45.24	74	-28.76	peak	Vertical
2390	47.65	1.05	48.7	74	-25.3	peak	Horizontal
2483.5	45.88	1.29	47.17	74	-26.83	peak	Vertical
2483.5	44.75	1.29	46.04	74	-27.96	peak	Horizontal

Note: Test method to see chapter 3.2 . When PK value is lower than the Average value limit, average not record.




GFSK MODE

Band Edge, Left Side

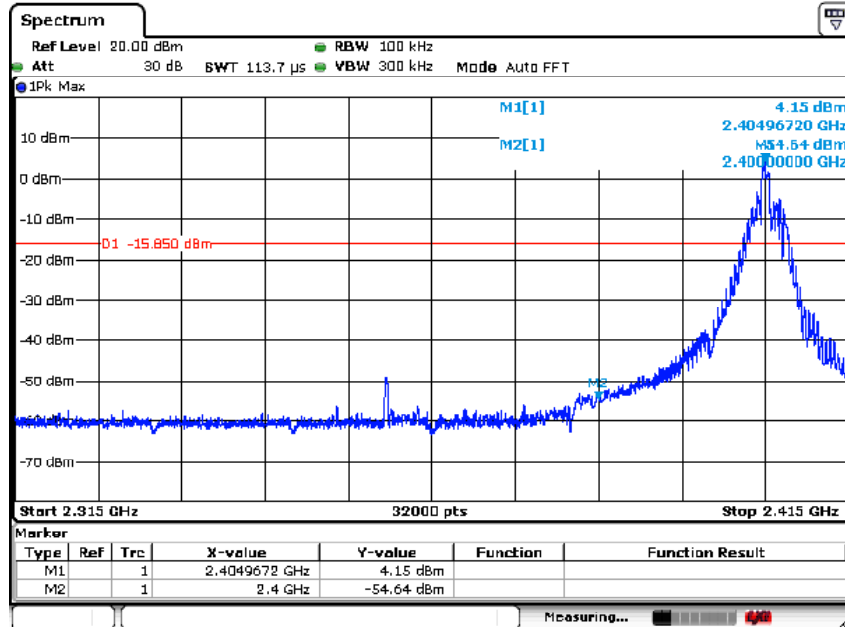

Band Edge, Right Side

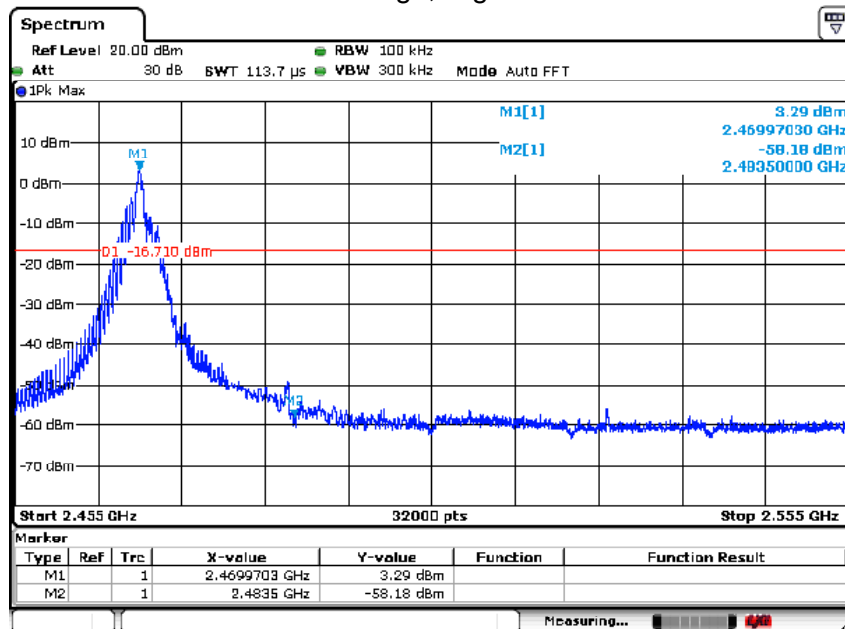

6. EUT TEST PHOTO

Radiated Measurement Photos 30-1000MHz



Above 1GHz



Conducted Measurement Photos
0.15-30MHz




External photo















Internal photo


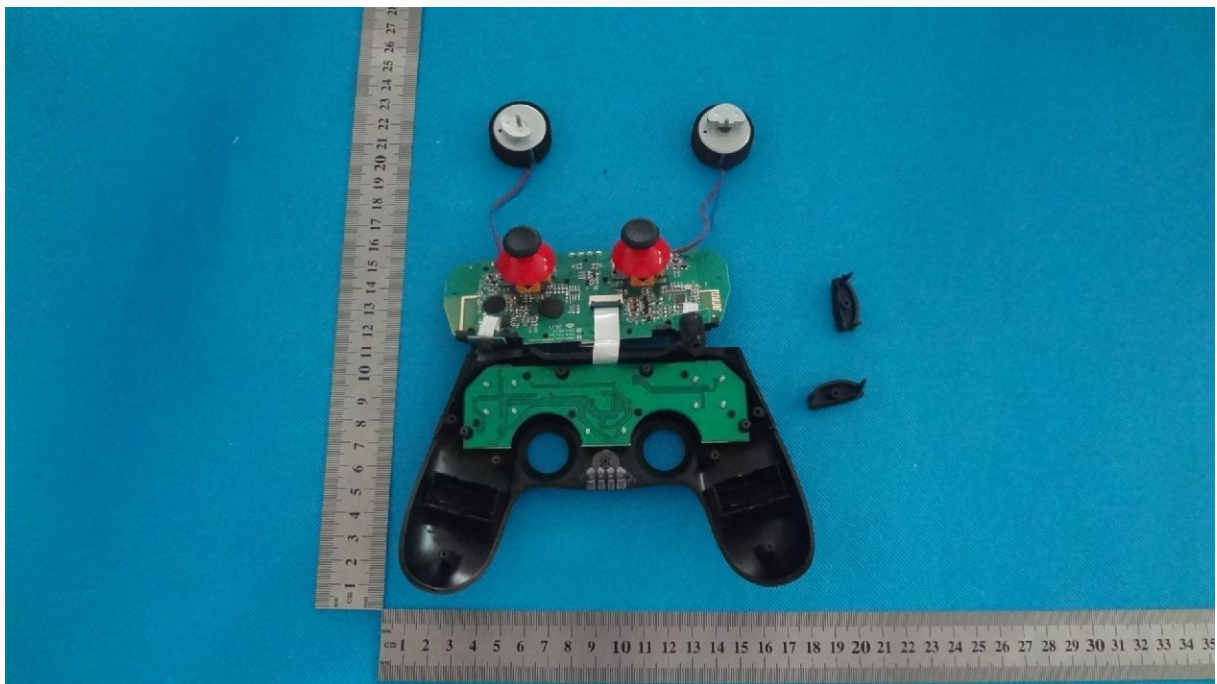


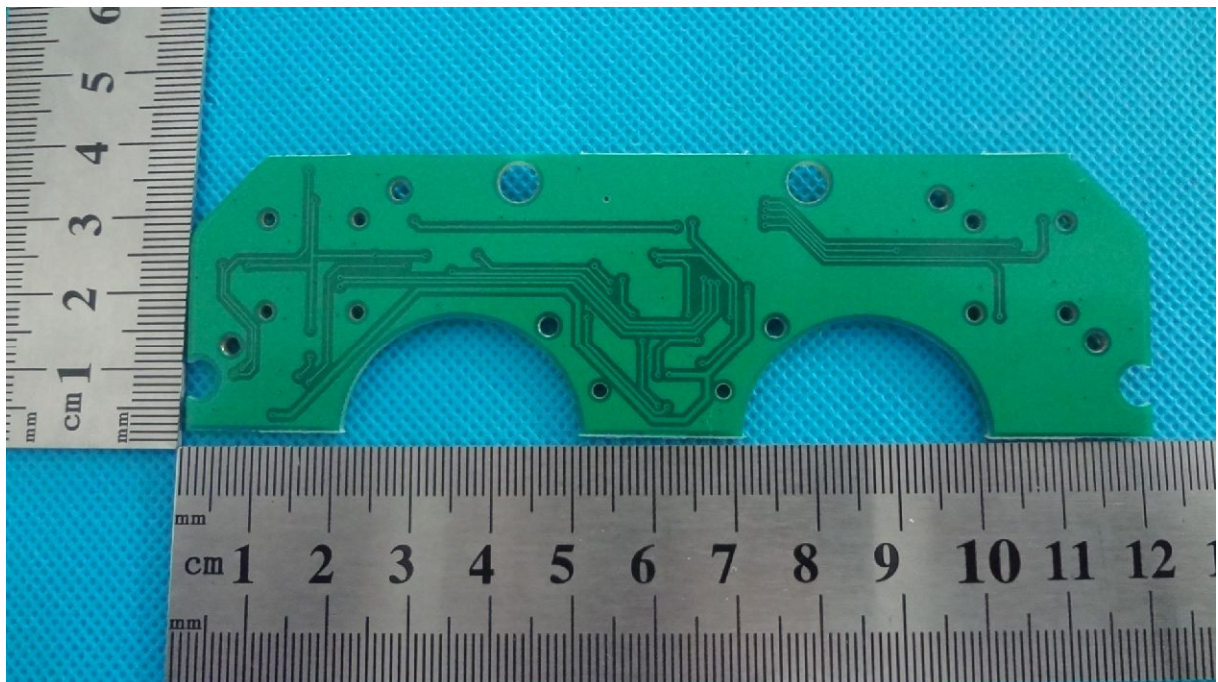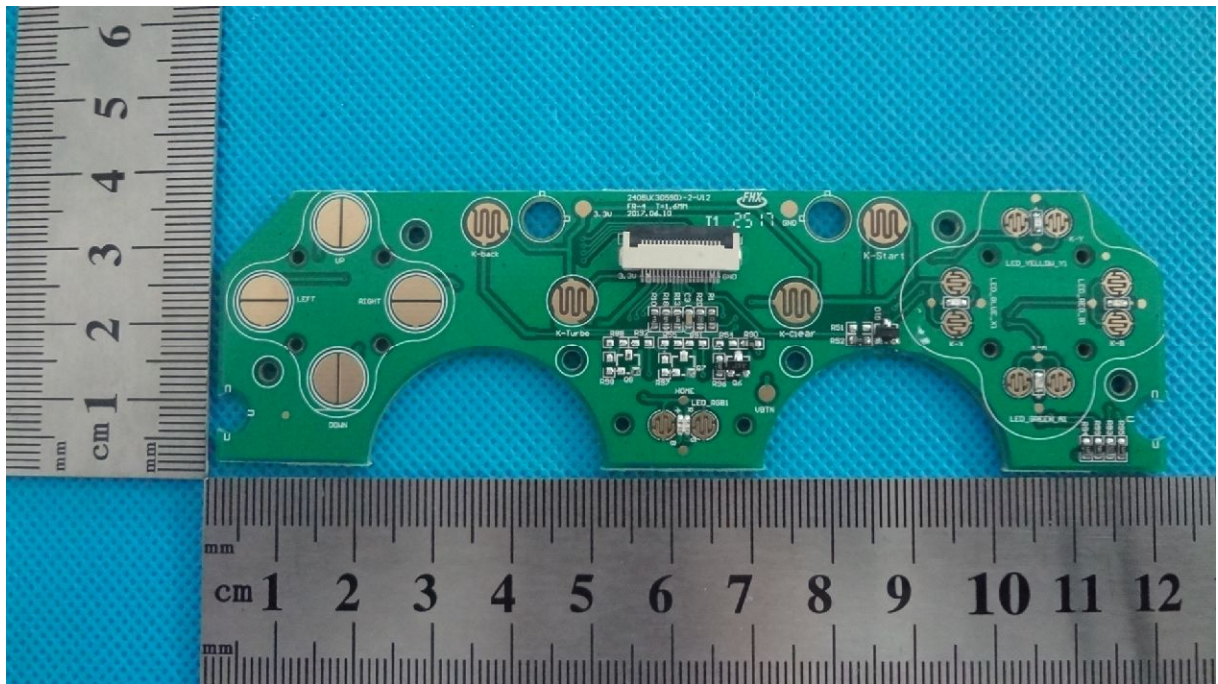


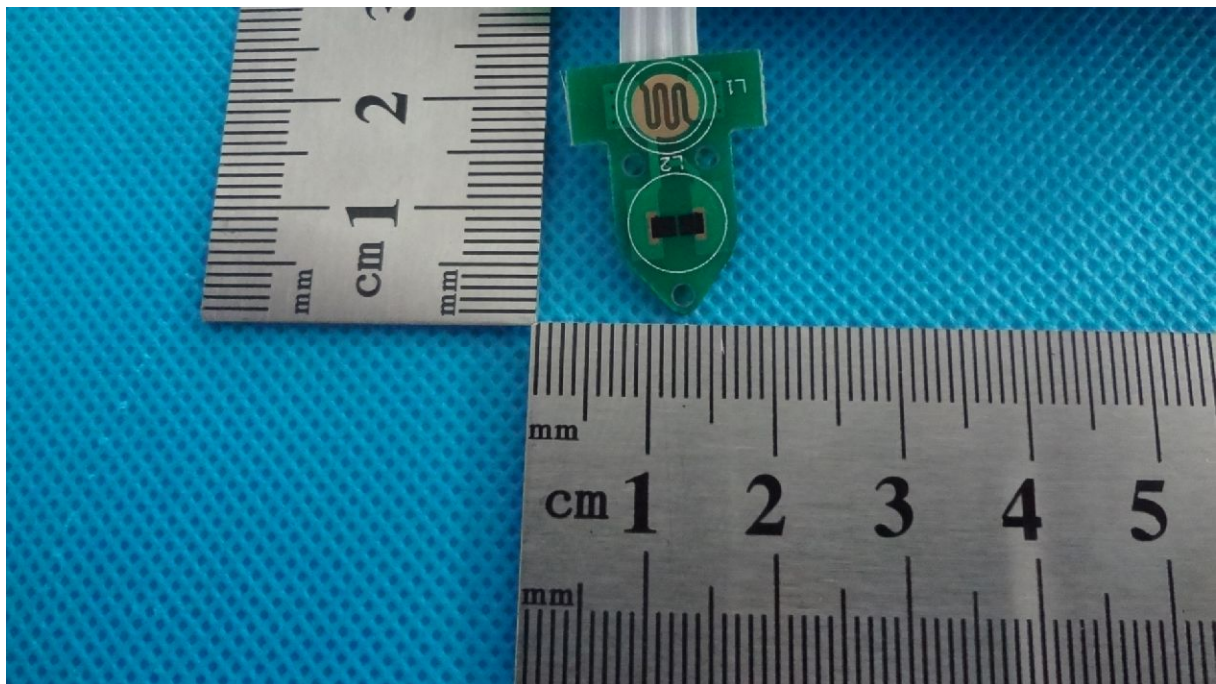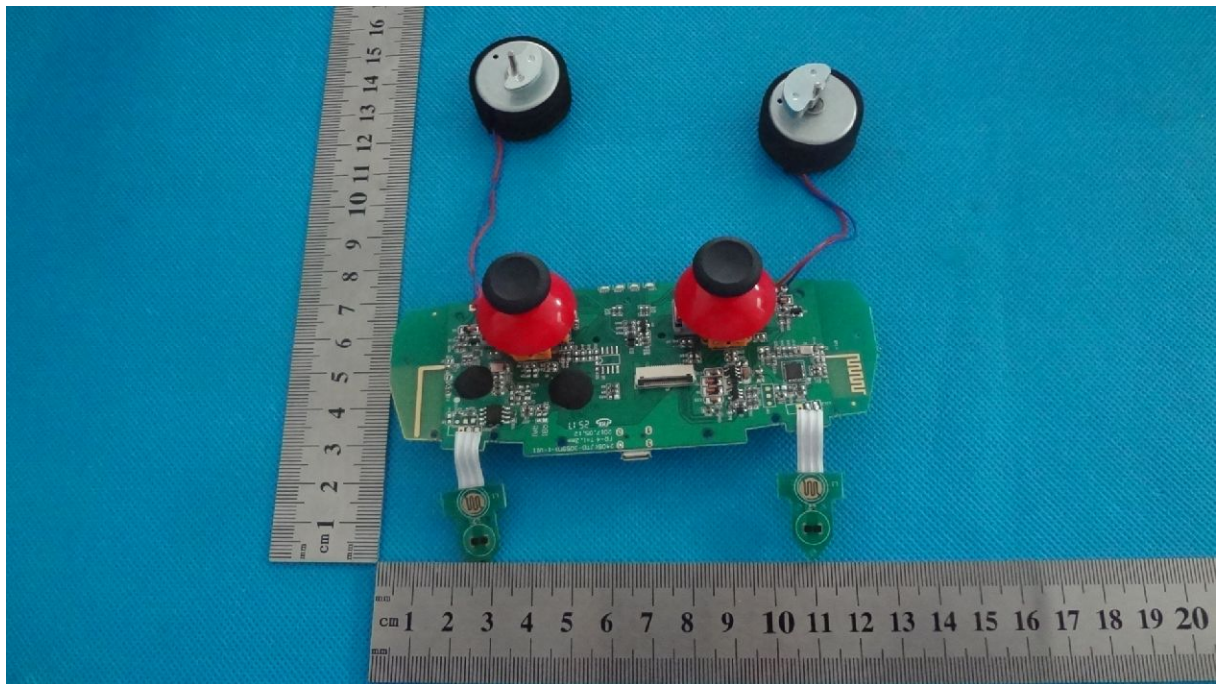

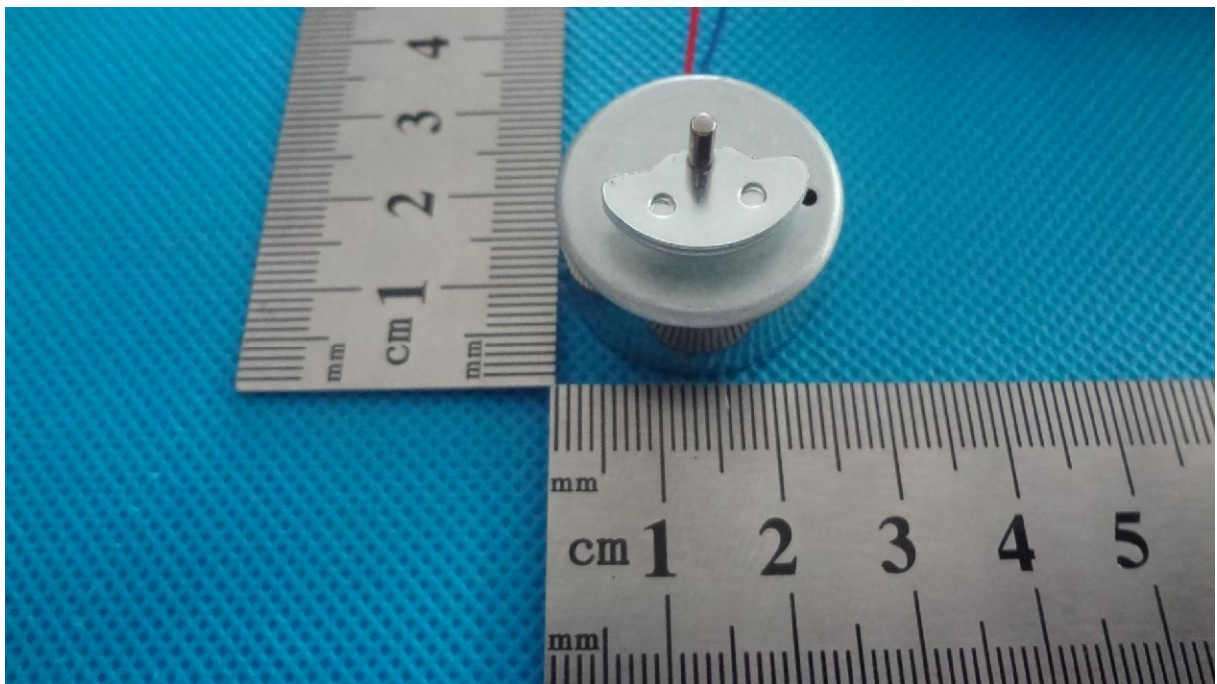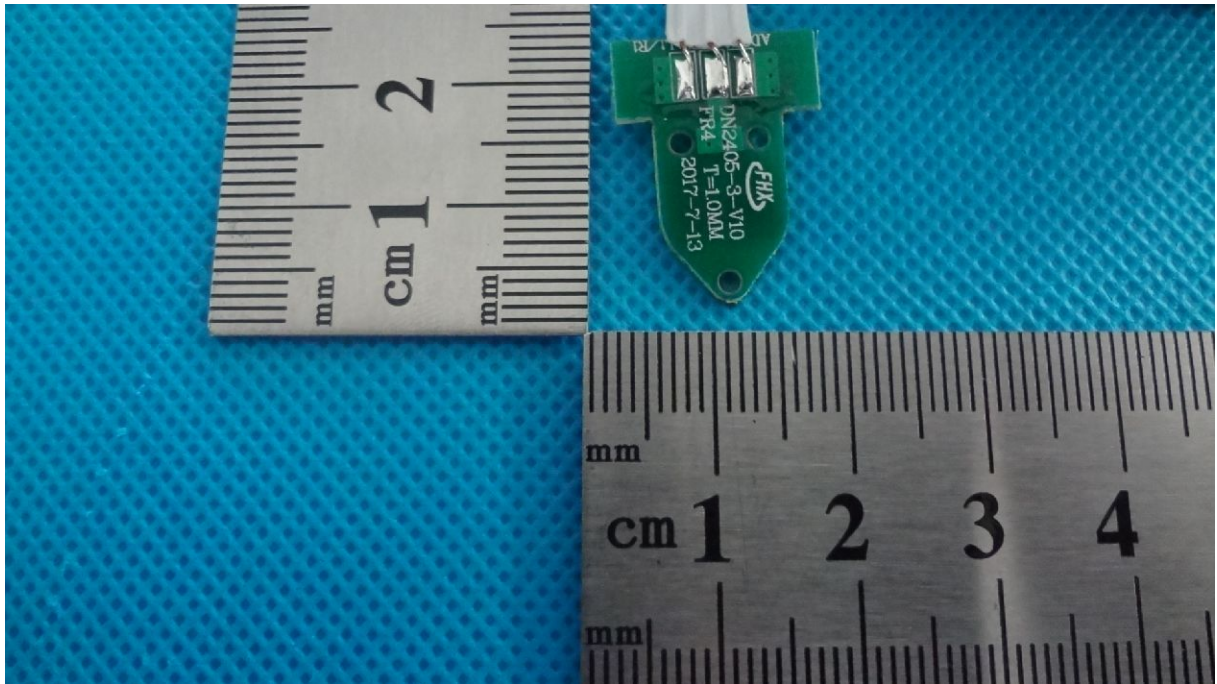

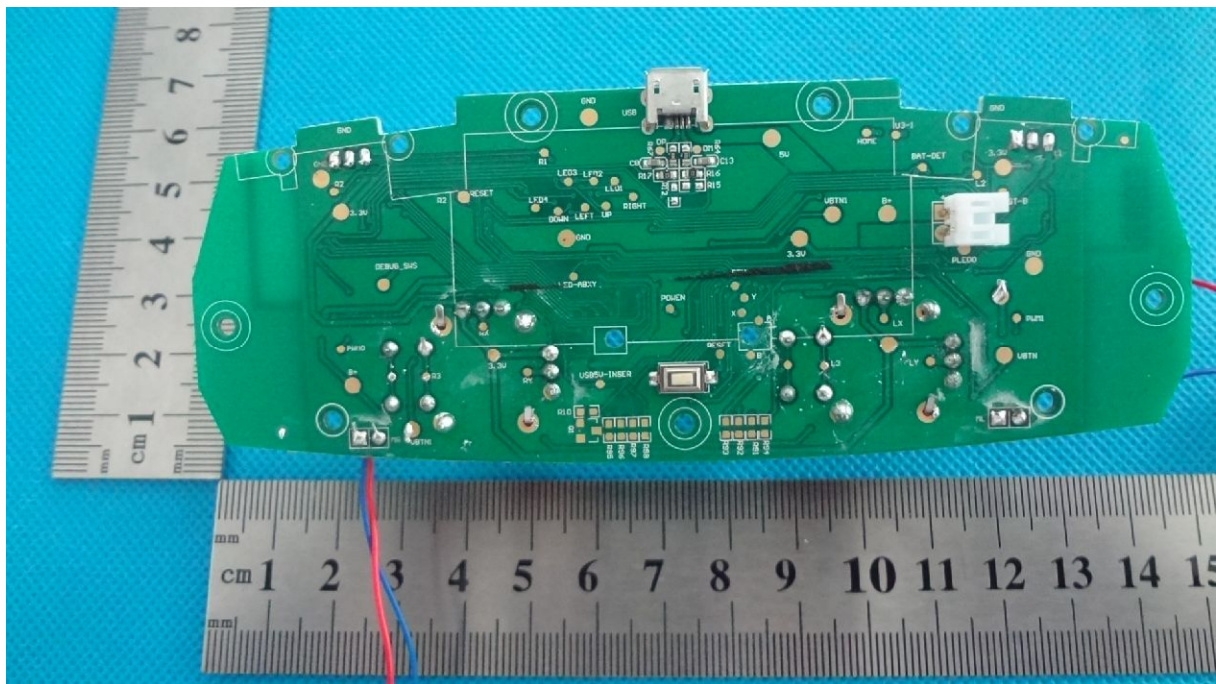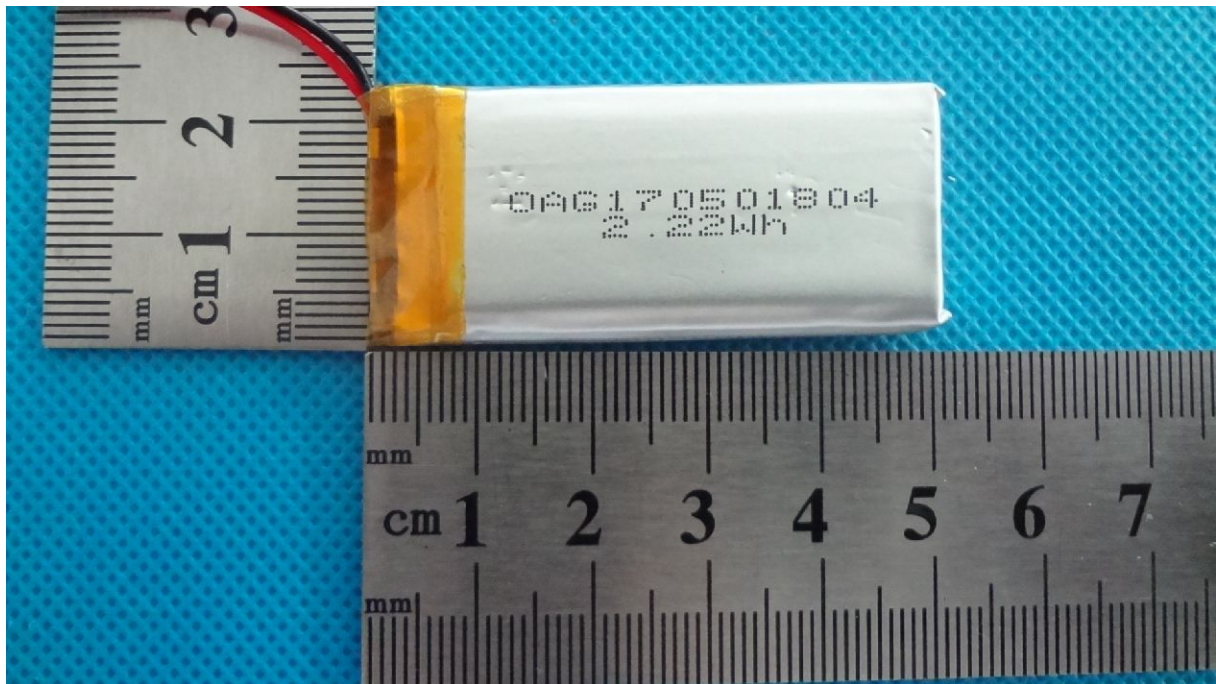

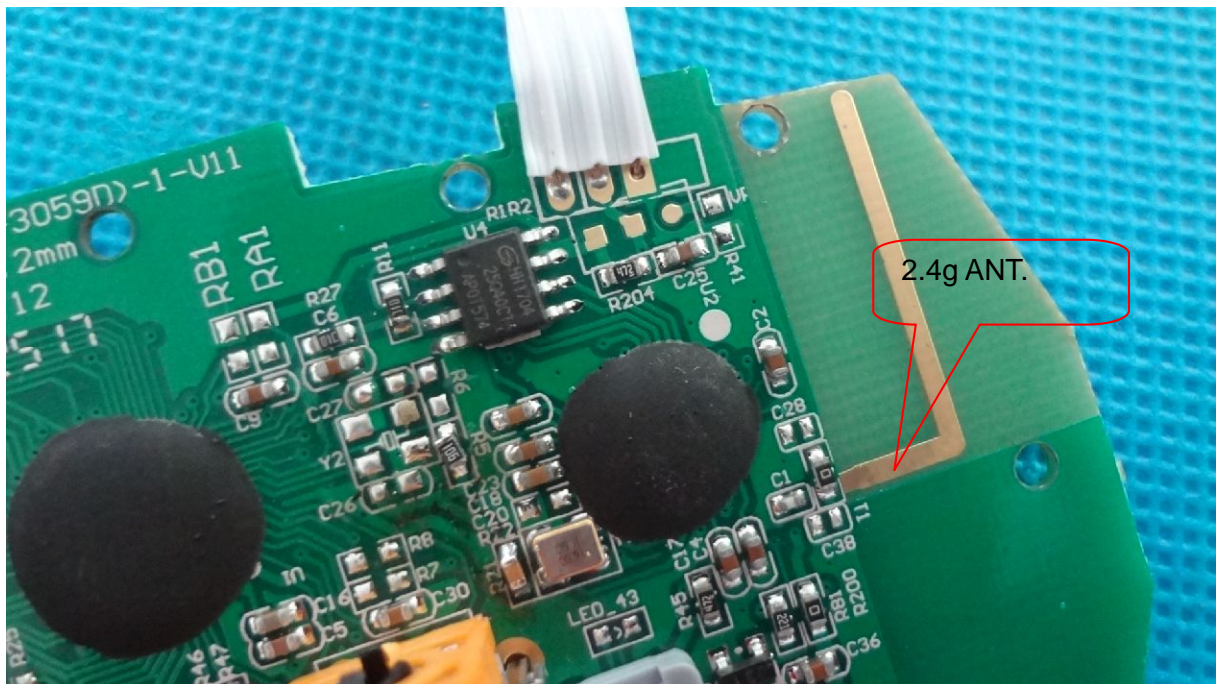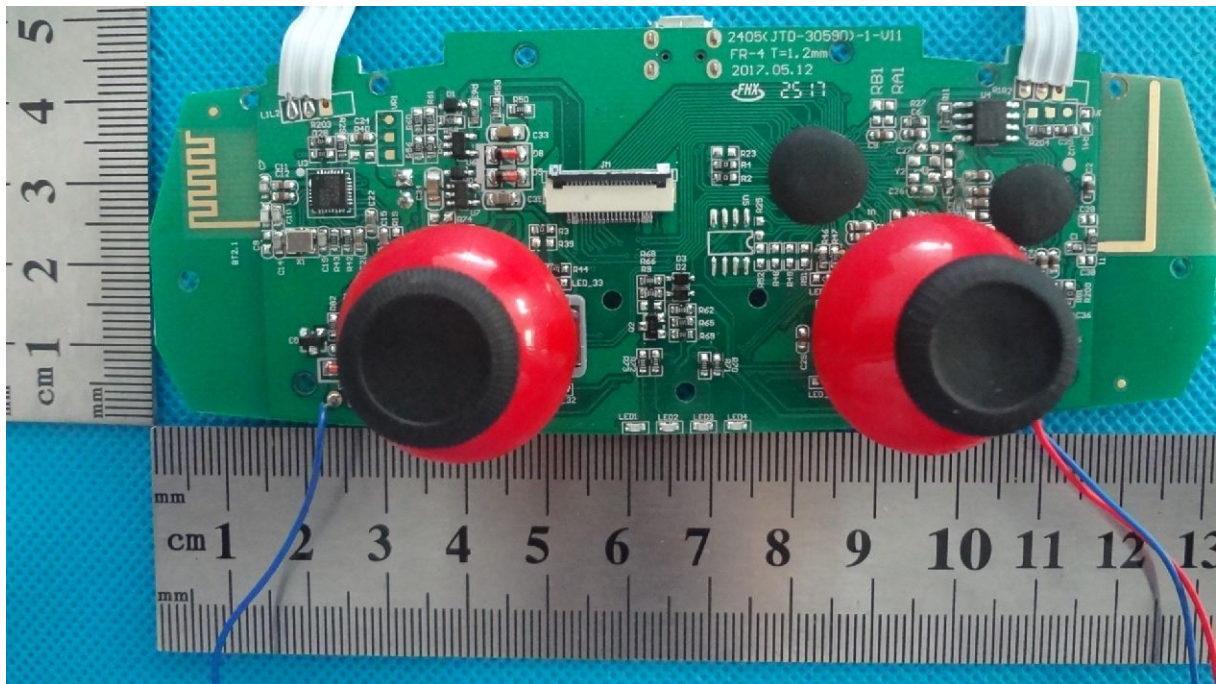

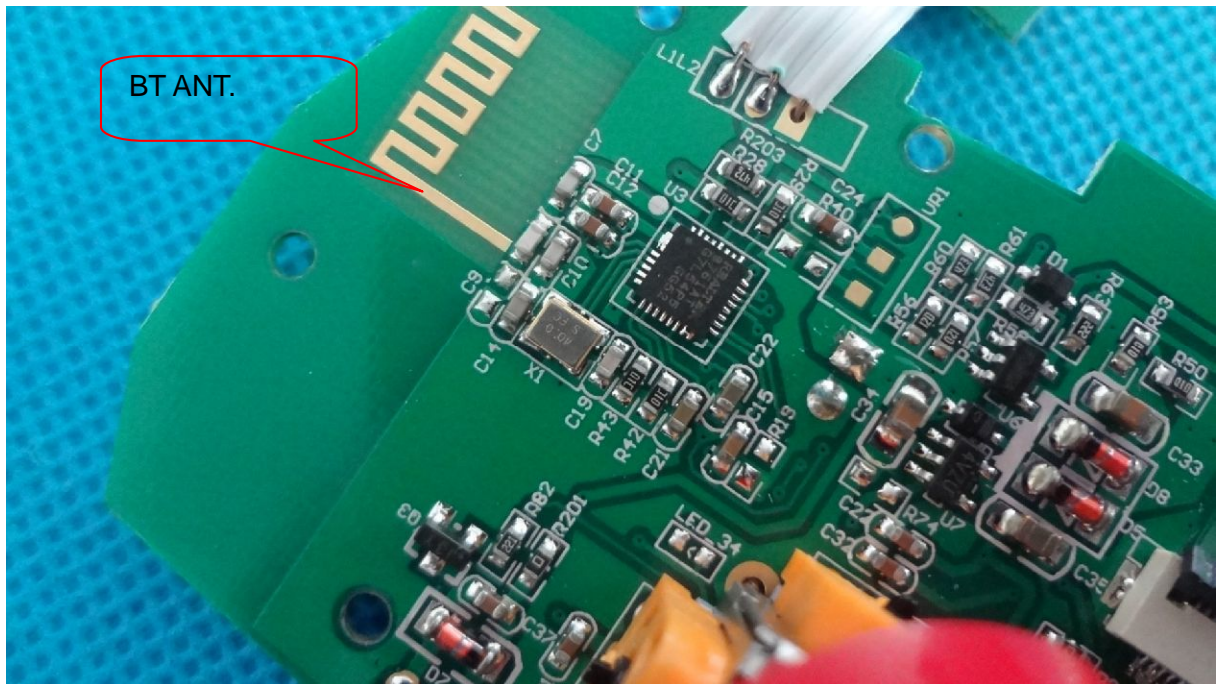

END OF REPORT