

TEST REPORT

Reference No. : WTF18F10127072W
FCC ID : 2AFAZ-CT72
Applicant : Kizone Information Inc.
Address : 7F., No.20, L.609, Sec.5, Chongxin Rd., Sanchong, New Taipei, Taiwan.
Manufacturer : Kizone Information Inc.
Address : 7F., No.20, L.609, Sec.5, Chongxin Rd., Sanchong, New Taipei, Taiwan.
Product Name : Time recorder
Model No. : PX2000, PX2500, CT70, CT72
Standards : FCC CFR47 Part 15 Subpart C (Section 15.247): 2017
Date of Receipt sample : 2018-10-24
Date of Test : 2019-02-26
Date of Issue : 2019-02-28
Test Result : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Foshan) Co., Ltd.

Address: No.13-19, 2/F., 2nd Building, Sunlink International Machinery City,
Chencun, Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398 Fax:+86-757-23811381 E-mail:info@waltek.com.cn

Tested by:

Approved by:



Roy Hong / Project Engineer



Yellow Huang / Manager



1 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	Pass
Conducted Emissions	15.207(a)	Pass
6dB Bandwidth	15.247(a)(2)	Pass
Maximum Peak Output Power	15.247(b)(3),(4)	Pass
Power Spectral Density	15.247(e)	Pass
Band Edge	15.247(d)	Pass
Antenna Requirement	15.203	Pass
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	Pass

Remark:

Pass	Test item meets the requirement
Fail	Test item does not meet the requirement
N/A	Test case does not apply to the test object

2 Contents

	Page
1 TEST SUMMARY	2
2 CONTENTS	3
3 REVISION HISTORY	5
4 GENERAL INFORMATION	6
4.1 GENERAL DESCRIPTION OF E.U.T.	6
4.2 DETAILS OF E.U.T.	6
4.3 CHANNEL LIST	6
4.4 TEST MODE	7
4.5 TEST FACILITY	8
5 EQUIPMENT USED DURING TEST	9
5.1 EQUIPMENTS LIST	9
5.2 MEASUREMENT UNCERTAINTY	10
6 CONDUCTED EMISSION	13
6.1 E.U.T. OPERATION	13
6.2 EUT SETUP	13
6.3 MEASUREMENT DESCRIPTION	14
6.4 CORRECTED FACTOR & MARGIN CALCULATION	14
6.5 CONDUCTED EMISSION TEST RESULT	15
7 RADIATED EMISSIONS	17
7.1 EUT OPERATION	17
7.2 TEST SETUP	18
7.3 SPECTRUM ANALYZER SETUP	19
7.4 TEST PROCEDURE	20
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	20
7.6 SUMMARY OF TEST RESULTS	20
8 BAND EDGE MEASUREMENT	27
8.1 TEST PROCEDURE	27
8.2 TEST RESULT	28
9 6 DB BANDWIDTH MEASUREMENT	32
9.1 TEST PROCEDURE	32
9.2 TEST RESULT	32
10 MAXIMUM PEAK OUTPUT POWER	39
10.1 TEST PROCEDURE	39
10.2 TEST RESULT	39
11 POWER SPECTRAL DENSITY	46
11.1 TEST PROCEDURE	46
11.2 TEST RESULT	46
12 ANTENNA REQUIREMENT	53
13 RF EXPOSURE	54
13.1 REQUIREMENTS	54
13.2 THE PROCEDURES / LIMIT	54
13.3 MPE CALCULATION METHOD	55
14 PHOTOGRAPHS - TEST SETUP	56
14.1 PHOTOGRAPHS - RADIATED EMISSION	56
14.2 PHOTOGRAPHS - CONDUCTED EMISSION	57



15	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	58
15.1	EUT – EXTERNAL PHOTOS.....	58
15.2	EUT – INTERNAL PHOTOS.....	62



3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTF18F10127072W	2018-10-24	2019-02-26	2019-02-28	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product Name	Time recorder
Model No.	PX2000, PX2500, CT70, CT72
Model Description	All models have same electric circuit and wireless model, only their function is different. Therefore the full tests were performed on model CT72.
Operation Frequency	802.11b/g/n20: 2412MHz ~ 2462MHz, total 11 channels 802.11n40:2422MHz~2452MHz, total 7 channels
Modulation Type	CCK/OFDM/DBPSK/DAPSK
Antenna Type	Wire Antenna
The Lowest Oscillator	26KHz
Antenna Gain	0.2dBi

4.2 Details of E.U.T.

Technical Data	DC 12V, 1.25A Adapter input: AC 100-240V, 50/60Hz, Max.0.7A; output: DC 12V, 1.25A
-----------------------------	---

4.3 Channel List

For 802.11b/g/n20:

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

For 802.11n40:

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	-	2	-	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	-	11	-	12	-

4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n20	108 Mbps	1/6/11	TX
	802.11n40	150Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n20	108 Mbps	1/6/11	TX
	802.11n40	150Mbps	3/6/9	TX
Band Edge	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n20	108 Mbps	1/11	TX
	802.11n40	150Mbps	3/9	TX
6dB Bandwidth	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n20	108 Mbps	1/6/11	TX
	802.11n40	150Mbps	3/6/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n20	108 Mbps	1/11	TX
	802.11n40	150Mbps	3/9	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .



4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 21895-1**

Waltek Services (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration IC number:21895-1, Nov. 14, 2016.

- **FCC – Registration No.: 820106**

Waltek Services (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106, August 16, 2018

- **FCC – Designation No.: CN5034**

Waltek Services (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation No. CN5034.

- **NVLAP – Lab Code: 600191-0**

Waltek Services (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal Due Date
1.	EMI Test Receiver	RS	ESCI	101178	2019-01-18	2020-01-17
2.	LISN	RS	ENV216	101215	2019-01-10	2020-01-09
3.	Cable	HUBER+SUHNER	CBL2-NN-3M	223NN322	2019-01-10	2020-01-09
4.	Test Software	FARATRONIC	EZ-EMC	EMEC-3AA	-	-
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer	Agilent	N9020A	MY48011796	2019-01-26	2020-01-25
2.	Active Loop Antenna	SCHWARZBECK	FMZB1519B	00004	2018-03-05	2019-03-04
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	2019-01-26	2020-01-25
4.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	01561	2018-05-05	2019-05-04
5.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2018-10-25	2019-10-24
6.	Amplifier	Lunar E M	LNA1G18-40	20160501002	2018-04-26	2019-04-25
7.	Coaxial Cable (below 1GHz)	H+S	CBL3-NN-12+3 m	214NN320	2019-01-10	2020-01-09
8.	Coaxial Cable (above 1GHz)	Times-Microwave	CBL5-NN	-	2019-01-10	2020-01-09
9.	Test Software	FARATRONIC	EZ-EMC	EMEC-3AA	-	-
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	Agilent	N9020A	MY48011796	2019-01-26	2020-01-25
2.	Spectrum Analyzer	R&S	FSP40	100501	2018-11-13	2019-11-12
3.	Vector Signal Generator	Agilent	N5182A	MY50141533	2018-03-05	2019-03-04
4.	Analog Signal Generator	Agilent	N5181A	MY48180720	2019-01-26	2020-01-26
5.	Environmental Chamber	KSON	THS-D4C-100	5244K	2019-01-26	2020-01-26
6.	Test Software	FARATRONIC	EZ-EMC	EMEC-3AA	-	-

5.2 Measurement Uncertainty

Conducted Emission (150kHz-30MHz)

Input quantity	X_i	Uncertainty of x_i		$u(X_i)$	C_i	$C_i u(X_i)$ (dB)
		dB	Probability distribution function			
Receiver reading	V_r	± 0.36	K=2	0.18	1	0.18
Attenuation: AMN-receiver	a_c	± 0.20	K=2	0.10	1	0.10
AMN voltage division factor	F_{AMN}	± 0.20	K=2	0.10	1	0.10
Receiver corrections:						
Sine wave voltage	δV_{sw}	± 1.0	K=2	0.50	1	0.50
Pulse amplitude response	δV_{pa}	± 0.0		0.00	1	0.00
Pulse repetition rate response	δV_{pr}	± 0.0		0.00	1	0.00
Noise floor proximity	δV_{nf}	± 0.05		0.00	1	0.00
Mismatch: AMN-receiver	δM	+0.7/-0.8	U-shaped	0.53	1	0.53
AMN impedance	δZ	+2.6/-2.7	Triangular	1.08	1	1.08
Note: $V = V_r + a_c + F_{AMN} + \delta F_{AMN} + \delta V_{sw} + \delta V_{pa} + \delta V_{pr} + \delta V_{nf} + \delta M + \delta Z$ $U(V) = 2u_c(V) = \mathbf{2.66dB}$						

Radiated Emission (30MHz-1GHz)

Input quantity	X_i	Uncertainty of x_i		$u(X_i)$	C_i	$C_i u(X_i)$ (dB)
		dB	Probability distribution function			
Receiver reading	V_r	± 0.36	K=2	0.18	1	0.18
Attenuation: antenna-receiver	a_c	± 0.10	K=2	0.05	1	0.05
Antenna facotr	F_a	± 1.6	K=2	0.8	1	0.8
Receiver corrections:						
Sine wave voltage	δV_{sw}	± 1.0	K=2	0.5	1	0.5
Pulse amplitude response	δV_{pa}	± 0.6	Rectangular	0.35	1	0.35
Pulse repetition rate response	δV_{pr}	± 1.5	Rectangular	0.87	1	0.87
Noise floor proximity	δV_{nf}	± 0.5	K=2	0.25	1	0.25
Mismatch: antenna-receiver	δM	+0.9/-1.0	U-shaped	0.67	1	0.67
Antenna corrections:						
AF frequency interpolation	δF_{af}	± 0.3	Rectangular	0.17	1	0.17
AF variation due to FAR influence	δF_{ah}	± 0.5	Rectangular	0.29	1	0.29
Directivity difference	δF_{adir}	± 0.0		0.00	1	0.00
Phase centre location	δF_{aph}	± 0.0		0.00	1	0.00
Cross-polarization	δF_{acp}	± 0.0		0.00	1	0.00
Balance	δF_{abal}	± 0.3	Rectangular	0.17	1	0.17
Site corrections:						
Site imperfections	δA_N	± 4.0	Triangular	1.63	1	1.63
Separation distance	δd	± 0.3	Rectangular	0.17	1	0.17
Table height	δh	± 0.1	K=2	0.05	1	0.05
Note: $E = V_r + a_c + F_a + \delta V_{sw} + \delta V_{pa} + \delta V_{pr} + \delta V_{nf} + \delta M + \delta F_{af} + \delta F_{ah} + \delta F_{adir} + \delta F_{aph} + \delta F_{acp} + \delta F_{abal} + \delta A_N + \delta d + \delta h$ $U(E) = 2u_c(E) = 4.56dB$						

Radiated Spurious Emissions (25MHz-1GHz)

Input quantity	X_i	Uncertainty of x_i		$u(x_i)$ dB	c_i	$c_i u(x_i)$ dB
		dB	Probability distribution function			
Receiver reading	V_r	± 0.4	k=2	0.20	1	0.20
Attenuation: antenna-receiver	a_c	± 0.5	k=2	0.25	1	0.25
Cable loss and correction	L_{ac}	± 1.6	k=2	0.80	1	0.80
Receiver corrections:						
Sine wave voltage	δV_{sw}	± 0.9	k=2	0.45	1	0.45
Pulse amplitude response	δV_{pa}	± 0.6	Rectangular	0.35	1	0.35
Pulse repetition rate response	δV_{pr}	± 0.6	Rectangular	0.35	1	0.35
Noise floor proximity	δV_{nf}	+1.0/0.0	U-shaped	0.58	1	0.58
Mismatch: antenna-receiver	δM	+0.9/-1.0	U-shaped	0.67	1	0.67
Site imperfections	δMD	± 3.0	Triangular	1.14	1	1.23
Reproducibility of measurement operation	δp	± 0.60	k=2	0.30	1	0.30
Separation distance	δd	± 0.3	Rectangular	0.17	1	0.17
Table height	δh	± 0.1	k=2	0.05	1	0.05
Note: $E = V_r + a_c + L_{ac} + \delta V_{sw} + \delta V_{pa} + \delta V_{pr} + \delta V_{nf} + \delta M + \delta MD + \delta p + \delta d + \delta h$						
$U(E) = 2u_c(E) = 3.80\text{dB}$						

Radiated Spurious Emissions (1GHz-18GHz)

Input quantity	X_i	Uncertainty of x_i		$u(x_i)$ dB	c_i	$c_i u(x_i)$ dB
		dB	Probability distribution function			
Receiver reading	V_r	± 0.40	k=2	0.20	1	0.20
Attenuation: antenna-receiver	a_c	± 0.80	k=2	0.40	1	0.40
Cable loss and correction	L_{ac}	± 2.40	k=2	1.20	1	1.20
Mismatch: Preamplifiers - Signal Analyzers	δM_{ps}	+1.2/-1.4	U-shaped	0.92	1	0.92
Mismatch: antenna-receiver	δM_{ac}	+1.3/-1.5	U-shaped	1.00	1	1.00
Receiver corrections:						
Sine wave voltage	δV_{sw}	± 0.9	k=2	0.45	1	0.45
Pulse amplitude response	δV_{pa}	± 0.6	Rectangular	0.35	1	0.35
Pulse repetition rate response	δV_{pr}	± 0.6	Rectangular	0.35	1	0.35
Noise floor proximity	δV_{nf}	+1.0/0.0	U-shaped	0.58	1	0.58
Site imperfections	δS_{vswr}	± 3.0	Triangular	1.22	1	1.22
Effect of setup table material	δANT	± 1.0	Rectangular	0.58	1	0.58
Reproducibility of measurement operation	δp	± 0.60	k=2	0.30	1	0.30
Note: $E = V_r + a_c + L_{ac} + \delta M_{ps} + \delta M_{ac} + \delta V_{sw} + \delta V_{pa} + \delta V_{pr} + \delta V_{nf} + \delta S_{vswr} + \delta ANT + \delta p$						
$U(E) = 2u_c(E) = 4.97\text{dB}$						

6 Conducted Emission

- Test Requirement** : FCC CFR 47 Part 15 Section 15.207
- Test Method** : ANSI C63.10:2013
- Test Result** : PASS
- Frequency Range** : 150kHz to 30MHz
- Class/Severity** : Class B
- Limit** : 66-56 dB μ V between 0.15MHz & 0.5MHz
 56 dB μ V between 0.5MHz & 5MHz
 60 dB μ V between 5MHz & 30MHz
- Detector** : Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation

Operating Environment:


- Temperature** : 25 °C
- Humidity** : 60 % RH
- Atmospheric Pressure** : 101.2kPa

EUT Operation:

The test was performed in Transmitting mode, the test data were shown in the report.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

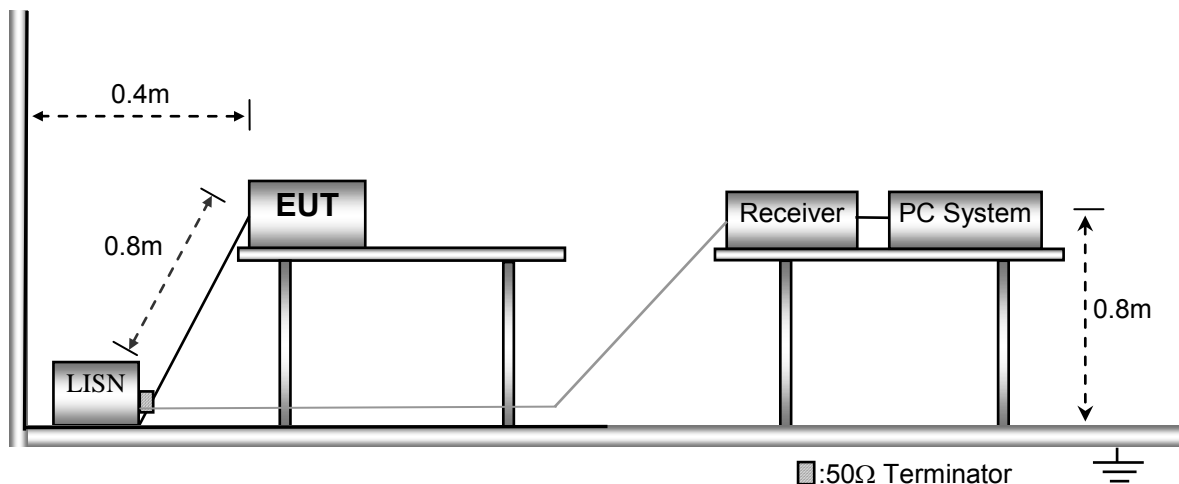



6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.4 Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF(Voltage Division Facotr), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Measurement}=\text{Reading Level}+\text{Correct Factor}$$

$$\text{Correct Facotor}=\text{LISN VDF}+\text{Cable Loss}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin}=\text{Limit}-\text{Measurement}$$



6.5 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Live Line :

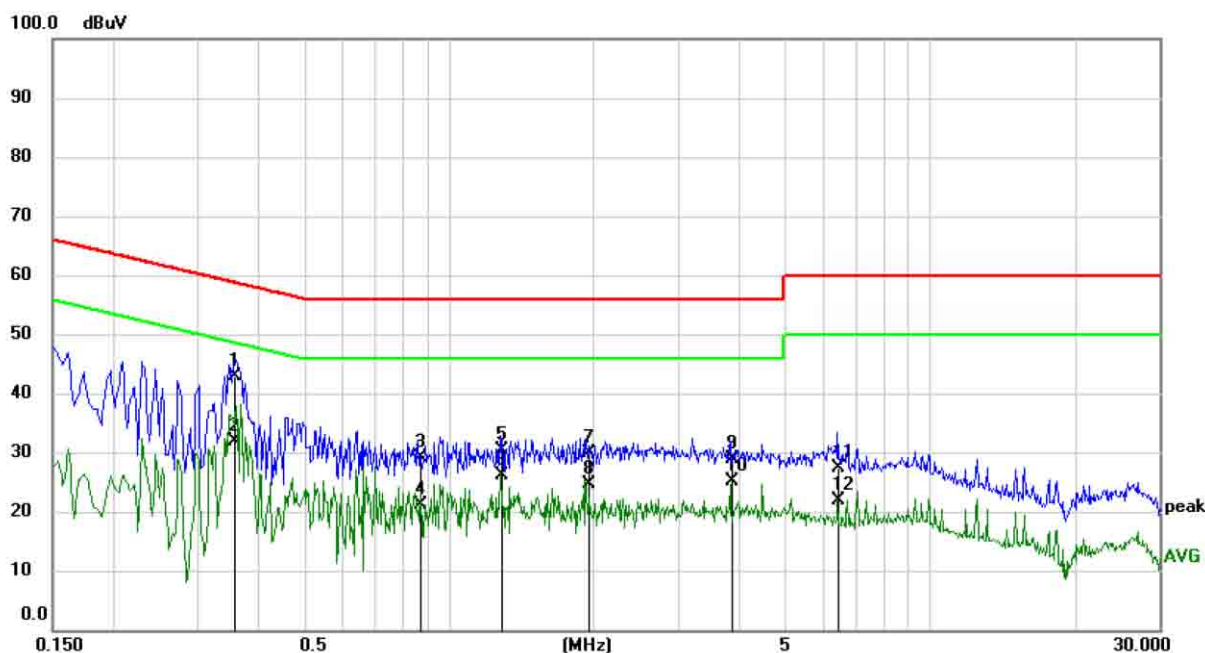

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.3580	33.32	9.68	43.00	58.77	-15.77	QP	
2		0.3580	22.16	9.68	31.84	48.77	-16.93	AVG	
3		0.8701	19.52	9.70	29.22	56.00	-26.78	QP	
4		0.8701	11.49	9.70	21.19	46.00	-24.81	AVG	
5		1.2860	20.75	9.70	30.45	56.00	-25.55	QP	
6		1.2860	16.32	9.70	26.02	46.00	-19.98	AVG	
7		1.9400	20.11	9.71	29.82	56.00	-26.18	QP	
8		1.9400	15.01	9.71	24.72	46.00	-21.28	AVG	
9		3.8710	19.08	9.77	28.85	56.00	-27.15	QP	
10		3.8710	15.41	9.77	25.18	46.00	-20.82	AVG	
11		6.4530	17.59	9.85	27.44	60.00	-32.56	QP	
12		6.4530	12.13	9.85	21.98	50.00	-28.02	AVG	



Neutral Line :

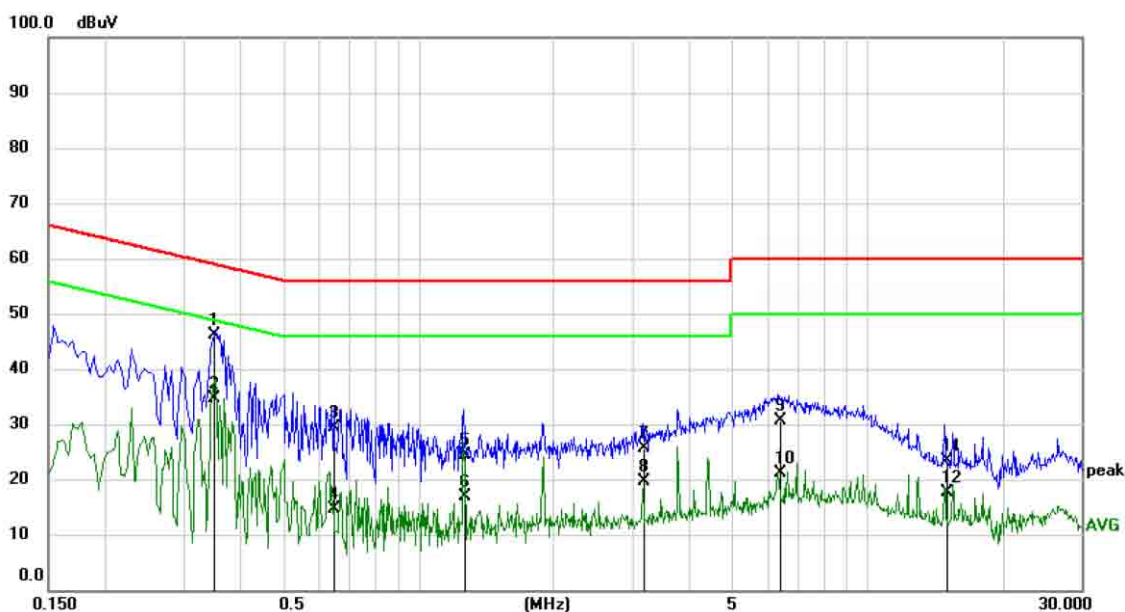

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.3500	36.48	9.68	46.16	58.96	-12.80	QP	
2		0.3500	24.89	9.68	34.57	48.96	-14.39	AVG	
3		0.6500	19.68	9.68	29.36	56.00	-26.64	QP	
4		0.6500	4.98	9.68	14.66	46.00	-31.34	AVG	
5		1.2660	14.57	9.70	24.27	56.00	-31.73	QP	
6		1.2660	7.11	9.70	16.81	46.00	-29.19	AVG	
7		3.1870	15.82	9.75	25.57	56.00	-30.43	QP	
8		3.1870	9.76	9.75	19.51	46.00	-26.49	AVG	
9		6.3800	20.72	9.85	30.57	60.00	-29.43	QP	
10		6.3800	11.40	9.85	21.25	50.00	-28.75	AVG	
11		15.0500	13.29	10.02	23.31	60.00	-36.69	QP	
12		15.0500	7.51	10.02	17.53	50.00	-32.47	AVG	

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

7.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation:

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10:2013.


The test setup for emission measurement below 30MHz.

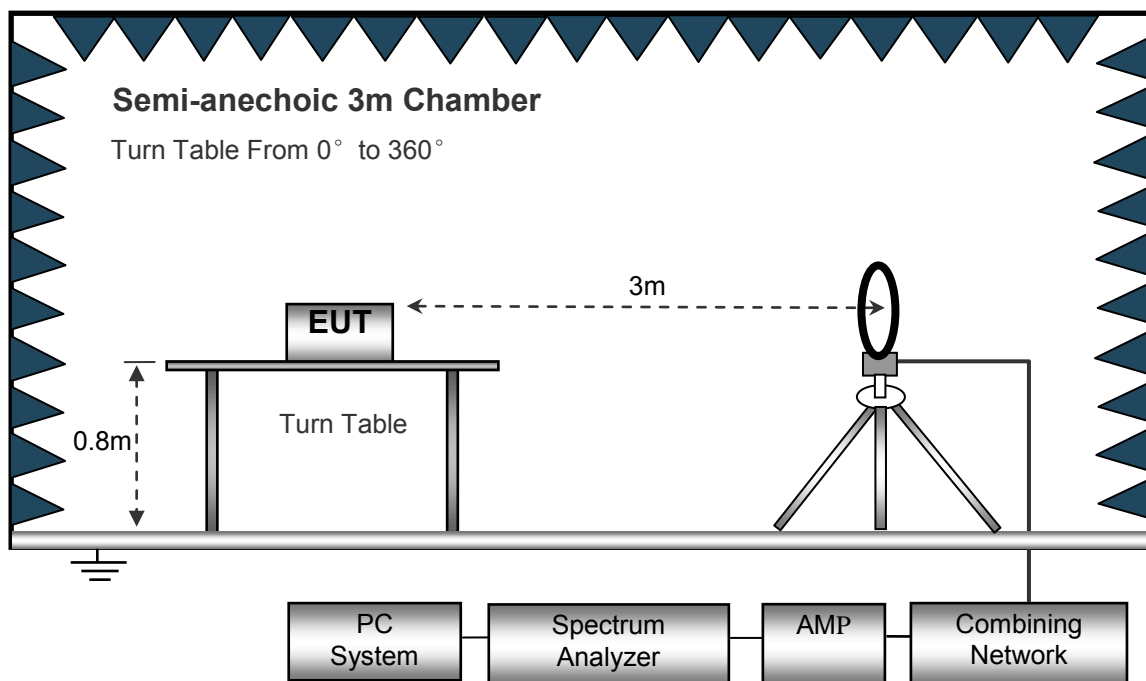

The test setup for emission measurement from 30 MHz to 1 GHz.

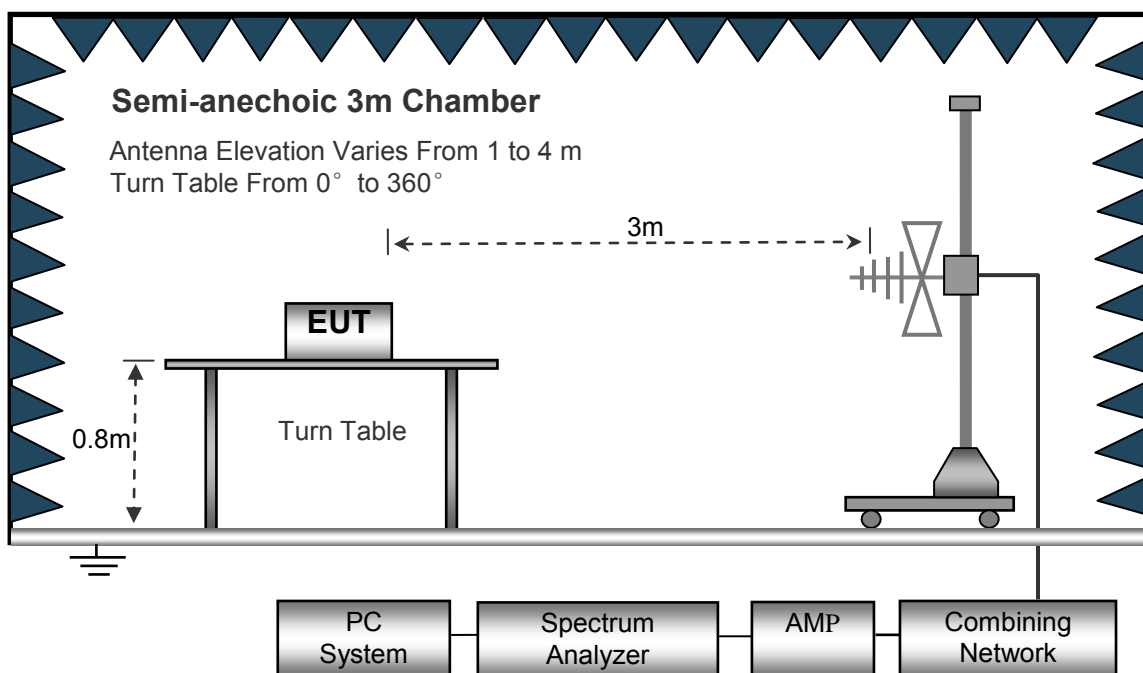

The test setup for emission measurement above 1 GHz.

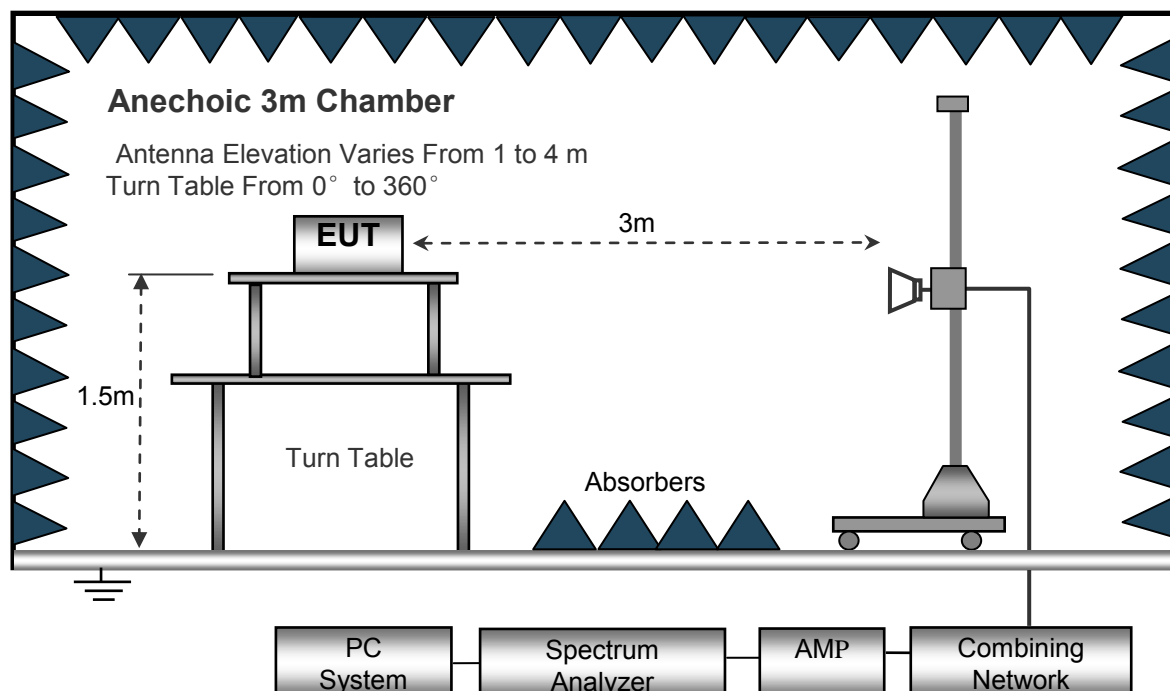

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed : Auto
 IF Bandwidth : 10kHz
 Video Bandwidth : 10kHz
 Resolution Bandwidth : 10kHz

30MHz ~ 1GHz

Sweep Speed : Auto
 Detector : PK
 Resolution Bandwidth : 100kHz
 Video Bandwidth : 300kHz

Above 1GHz

Sweep Speed : Auto
 Detector : PK
 Resolution Bandwidth : 1MHz
 Video Bandwidth : 3MHz
 Detector : Ave.
 Resolution Bandwidth : 1MHz
 Video Bandwidth : 10Hz

7.4 Test Procedure

- 1) The EUT is placed on a turntable, which is above ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
- 4) Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5) And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6) Repeat above procedures until the measurements for all frequencies are complete.
- 7) The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
- 8) A 2.4GHz high –pass filter is used druing radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency : 26KHz to 30MHz

The measurements were more than 20 dB below the limit and not reported.



Test Frequency : 30MHz ~ 18GHz

Frequency (MHz)	Receiver Reading (dB μ V/m)	Detector (PK/QP/AVG)	Turn table Angle (°)	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247	
				Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
802.11b_Low Channel_2412MHz									
222.17	28.16	QP	137.78	1.22	V	11.56	39.72	46	-17.84
222.17	29.23	QP	124.95	1.05	H	11.82	41.05	46	-16.77
1255.00	9.97	PK	139.10	1.90	H	28.19	38.16	74	-35.84
1255.00	2.09	AVG	126.08	1.92	H	28.19	30.28	54	-23.72
1680.00	9.58	PK	145.57	1.43	V	29.42	39.00	74	-35.00
1680.00	1.00	AVG	130.77	1.23	V	29.42	30.42	54	-23.58
3430.00	11.73	PK	148.16	1.84	V	34.60	46.33	74	-27.67
3430.00	3.77	AVG	132.29	1.71	V	34.60	38.37	54	-15.63
4400.00	13.02	PK	151.46	1.54	H	37.82	50.84	74	-23.16
4400.00	2.45	AVG	134.49	1.51	H	37.82	40.27	54	-13.73
4890.00	12.59	PK	153.00	1.00	V	39.78	52.37	74	-21.63
4890.00	4.45	AVG	135.63	1.37	V	39.78	44.23	54	-9.77

Frequency (MHz)	Receiver Reading (dB μ V/m)	Detector (PK/QP/AVG)	Turn table Angle (°)	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247	
				Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
802.11b_Middle Channel_2437MHz									
222.17	26.67	QP	138.22	1.35	V	11.56	38.23	46	-19.33
222.17	29.44	QP	126.25	1.75	H	11.82	41.26	46	-16.56
1010.00	10.75	PK	138.83	1.11	V	27.47	38.22	74	-35.78
1010.00	-1.22	AVG	125.89	1.86	V	27.47	26.25	54	-27.75
1615.00	11.00	PK	144.14	1.23	H	29.07	40.07	74	-33.93
1615.00	-3.05	AVG	130.15	1.26	H	29.07	26.02	54	-27.98
3040.00	10.35	PK	147.78	1.22	V	33.79	44.14	74	-29.86
3040.00	-3.64	AVG	131.90	1.15	V	33.79	30.15	54	-23.85
3805.00	11.94	PK	150.85	1.92	V	35.84	47.78	74	-26.22
3805.00	-3.94	AVG	134.08	1.18	V	35.84	31.90	54	-22.10
4355.00	13.17	PK	151.78	1.71	H	37.68	50.85	74	-23.15
4355.00	-0.58	AVG	135.29	1.89	H	37.68	35.03	54	-18.97



Frequency (MHz)	Receiver Reading (dB μ V/m)	Detector (PK/QP/AVG)	Turn table Angle (°)	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247	
				Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
802.11b_High Channel_2462MHz									
222.17	26.82	QP	137.63	1.37	V	11.56	38.38	46	-19.18
222.17	29.2	QP	129.38	1.62	H	11.82	41.02	46	-16.80
1005.00	11.25	PK	139.00	1.00	V	27.28	38.51	74	-35.49
1005.00	-0.99	AVG	130.42	1.58	V	27.28	26.27	54	-27.73
1670.00	9.70	PK	146.33	1.67	H	29.40	39.10	74	-34.90
1670.00	-3.32	AVG	138.37	1.63	H	29.40	26.08	54	-27.92
3265.00	11.30	PK	150.84	1.16	V	34.27	45.57	74	-28.43
3265.00	-3.50	AVG	140.27	1.73	V	34.27	30.77	54	-23.23
3945.00	11.80	PK	152.37	1.63	H	36.36	48.16	74	-25.84
3945.00	-4.07	AVG	144.23	1.77	H	36.36	32.29	54	-21.71
4660.00	12.65	PK	154.11	1.89	V	38.81	51.46	74	-22.54
4660.00	-4.32	AVG	146.80	1.20	V	38.81	34.49	54	-19.51

Frequency (MHz)	Receiver Reading (dB μ V/m)	Detector (PK/QP/AVG)	Turn table Angle (°)	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247	
				Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
802.11g_Low Channel_2412MHz									
222.17	26.94	QP	148.26	1.22	V	11.56	38.50	46	-19.06
222.17	28.89	QP	135.44	1.12	H	11.82	40.71	46	-17.11
1605.00	9.98	PK	138.78	1.83	V	29.29	39.27	74	-34.73
1605.00	-3.31	AVG	125.88	1.42	V	29.29	25.98	54	-28.02
2710.00	11.67	PK	142.17	1.25	V	32.87	44.54	74	-29.46
2710.00	-3.77	AVG	126.58	1.51	V	32.87	29.10	54	-24.90
3675.00	11.46	PK	144.75	1.28	H	35.38	46.84	74	-27.16
3675.00	-3.76	AVG	131.49	1.82	H	35.38	31.62	54	-22.38
4505.00	12.36	PK	145.75	1.74	V	38.17	50.53	74	-23.47
4505.00	-3.87	AVG	133.18	1.54	V	38.17	34.30	54	-19.70
4855.00	12.39	PK	148.26	1.25	H	39.64	52.03	74	-21.97
4855.00	-4.23	AVG	135.46	1.18	H	39.64	35.41	54	-18.59



Frequency (MHz)	Receiver Reading (dB μ V/m)	Detector (PK/QP/AVG)	Turn table Angle (°)	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247	
				Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
802.11g_Middle Channel_2437MHz									
222.17	26.69	QP	135.37	1.37	V	11.56	38.25	46	-19.31
222.17	28.32	QP	151.82	1.62	H	11.82	40.14	46	-17.68
1350.00	9.58	PK	137.34	1.00	H	28.54	38.12	74	-35.88
1350.00	-3.14	AVG	125.09	1.58	H	28.54	25.40	54	-28.60
2145.00	12.68	PK	137.63	1.67	V	30.63	43.31	74	-30.69
2145.00	-3.98	AVG	129.38	1.63	V	30.63	26.65	54	-27.35
2710.00	11.26	PK	139.00	1.16	V	32.87	44.13	74	-29.87
2710.00	-3.77	AVG	130.42	1.73	V	32.87	29.10	54	-24.90
3495.00	12.00	PK	138.37	1.63	H	34.74	46.74	74	-27.26
3495.00	-3.38	AVG	150.84	1.99	H	34.74	31.36	54	-22.64
4200.00	12.37	PK	140.27	1.77	V	37.19	49.56	74	-24.44
4200.00	-3.91	AVG	144.23	1.20	V	37.19	33.28	54	-20.72

Frequency (MHz)	Receiver Reading (dB μ V/m)	Detector (PK/QP/AVG)	Turn table Angle (°)	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247	
				Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
802.11g_High Channel_2462MHz									
222.17	28.00	QP	137.91	1.09	V	11.56	39.56	46	-18.00
222.17	29.31	QP	125.16	1.84	H	11.82	41.13	46	-16.69
1505.00	9.68	PK	140.07	1.93	H	29.10	38.78	74	-35.22
1505.00	-3.22	AVG	126.02	1.98	H	29.10	25.88	54	-28.12
2575.00	12.04	PK	143.36	1.64	V	32.46	44.50	74	-29.50
2575.00	-3.84	AVG	130.43	1.57	V	32.46	28.65	54	-25.35
3580.00	11.41	PK	144.38	1.62	V	35.04	46.45	74	-27.55
3580.00	-3.49	AVG	131.87	1.13	V	35.04	31.55	54	-22.45
4450.00	12.52	PK	147.68	1.32	H	37.98	50.50	74	-23.50
4450.00	-3.56	AVG	135.03	1.97	H	37.98	34.42	54	-19.58
4860.00	12.46	PK	149.04	1.96	V	35.80	48.26	74	-25.74
4860.00	-0.34	AVG	135.40	1.60	V	35.80	35.46	54	-18.54



Frequency (MHz)	Receiver Reading (dB μ V/m)	Detector (PK/QP/AVG)	Turn table Angle (°)	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247	
				Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
802.11n20_Low Channel_2412MHz									
222.17	28.16	QP	136.12	1.37	V	11.56	39.72	46	-17.84
222.17	28.67	QP	128.57	1.25	H	11.82	40.49	46	-17.33
1375.00	9.89	PK	134.89	1.39	H	28.63	38.52	74	-35.48
1375.00	-3.19	AVG	127.97	1.11	H	28.63	25.44	54	-28.56
2130.00	15.05	PK	130.58	1.26	V	30.57	45.62	74	-28.38
2130.00	-3.98	AVG	123.36	1.03	V	30.57	26.59	54	-27.41
3635.00	11.20	PK	128.79	1.64	V	35.23	46.43	74	-27.57
3535.00	-3.79	AVG	122.13	1.45	V	35.23	31.44	54	-22.56
4130.00	12.48	PK	125.96	1.21	H	36.97	49.45	74	-24.55
4130.00	-4.05	AVG	118.86	1.31	H	36.97	32.92	54	-21.08
4870.00	12.60	PK	125.70	1.87	V	39.69	52.29	74	-21.71
4870.00	-3.79	AVG	118.06	1.35	V	39.69	35.90	54	-18.10

Frequency (MHz)	Receiver Reading (dB μ V/m)	Detector (PK/QP/AVG)	Turn table Angle (°)	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247	
				Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
802.11n20_Middle Channel_2437MHz									
222.17	26.62	QP	134.73	1.27	V	11.56	38.18	46	-19.38
222.17	29.11	QP	128.02	1.25	H	11.82	40.93	46	-16.89
1580.00	9.90	PK	129.46	1.98	H	29.24	39.14	74	-34.86
1580.00	-3.33	AVG	124.90	1.44	H	29.24	25.91	54	-28.09
3335.00	12.00	PK	127.16	1.29	V	34.41	46.41	74	-27.59
3335.00	-3.49	AVG	122.38	1.46	V	34.41	30.92	54	-23.08
3990.00	11.01	PK	123.47	1.31	V	36.51	47.52	74	-26.48
3990.00	-4.18	AVG	119.70	1.50	V	36.51	32.33	54	-21.67
4390.00	12.80	PK	121.97	1.53	H	37.79	50.59	74	-23.41
4390.00	-3.51	AVG	118.59	1.33	H	37.79	34.28	54	-19.72
5245.00	12.50	PK	119.59	1.41	V	40.29	52.79	74	-21.21
5245.00	-4.77	AVG	116.58	1.37	V	40.29	35.52	54	-18.48



Frequency (MHz)	Receiver Reading (dB μ V/m)	Detector (PK/QP/AVG)	Turn table Angle (°)	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247	
				Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
802.11n20_High Channel_2462MHz									
222.17	27.15	QP	135.80	1.87	V	11.56	38.71	46	-18.85
222.17	28.33	QP	133.32	1.01	H	11.82	40.15	46	-17.67
1440.00	9.43	PK	196.80	1.19	H	28.88	38.31	74	-35.69
1440.00	-3.27	AVG	143.00	1.52	H	28.88	25.61	54	-28.39
2615.00	11.82	PK	158.77	1.97	V	32.59	44.41	74	-29.59
2615.00	-3.89	AVG	115.77	1.29	V	32.59	28.70	54	-25.30
3565.00	11.40	PK	122.16	1.22	H	34.99	46.39	74	-27.61
3565.00	-3.46	AVG	131.84	1.56	H	34.99	31.53	54	-22.47
4435.00	12.21	PK	116.93	1.26	V	37.93	50.14	74	-23.86
4435.00	-3.67	AVG	148.77	1.78	V	37.93	34.26	54	-19.74
5235.00	12.62	PK	187.01	1.35	H	40.29	52.91	74	-21.09
5235.00	-4.83	AVG	119.52	1.80	H	40.29	35.46	54	-18.54

Frequency (MHz)	Receiver Reading (dB μ V/m)	Detector (PK/QP/AVG)	Turn table Angle (°)	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247	
				Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
802.11n40_Low Channel_2422MHz									
222.17	26.81	QP	136.19	1.37	V	11.56	38.37	46	-19.19
222.17	30.14	QP	128.80	1.25	H	11.82	41.96	46	-15.86
1335.00	9.34	PK	131.31	1.42	V	28.55	37.89	74	-36.11
1335.00	-3.16	AVG	124.72	1.29	V	28.55	25.39	54	-28.61
2980.00	11.07	PK	129.62	1.44	H	33.65	44.72	74	-29.28
2980.00	-3.76	AVG	121.69	1.32	H	33.65	29.89	54	-24.11
3805.00	11.63	PK	126.36	1.47	H	35.84	47.47	74	-26.53
3805.00	-3.90	AVG	119.54	1.34	H	35.84	31.94	54	-22.06
4405.00	12.41	PK	126.16	1.46	V	37.84	52.25	74	-21.75
4405.00	-3.60	AVG	118.65	1.64	V	37.84	34.24	54	-19.76
5220.00	12.07	PK	123.45	1.84	H	40.29	52.36	74	-21.64
5220.00	-4.91	AVG	115.70	1.35	H	40.29	35.38	54	-18.62



Frequency (MHz)	Receiver Reading (dB μ V/m)	Detector (PK/QP/AVG)	Turn table Angle (°)	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247	
				Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
802.11n40_Middle Channel_2437MHz									
222.17	27.05	QP	198.19	1.33	V	11.56	38.61	46	-18.95
222.17	30.66	QP	120.11	1.32	H	11.82	42.48	46	-15.34
1435.00	10.19	PK	128.60	1.25	H	38.85	39.04	74	-34.96
1435.00	-3.28	AVG	120.75	1.18	H	38.85	25.57	54	-28.43
3085.00	10.68	PK	197.00	1.97	V	33.89	44.57	74	-29.43
3085.00	-3.60	AVG	130.45	1.87	V	33.89	30.59	54	-23.41
3700.00	11.12	PK	156.25	1.21	V	35.47	46.59	74	-27.41
3700.00	-3.76	AVG	155.12	1.35	V	35.47	31.71	54	-22.29
4070.00	11.63	PK	186.01	1.27	H	36.77	48.40	74	-25.60
4070.00	-4.25	AVG	163.29	1.98	H	36.77	32.52	54	-21.48
4920.00	12.45	PK	126.03	1.61	V	35.95	48.40	74	-25.60
4920.00	-0.55	AVG	146.19	1.55	V	35.95	35.40	54	-18.60

Frequency (MHz)	Receiver Reading (dB μ V/m)	Detector (PK/QP/AVG)	Turn table Angle (°)	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247	
				Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
802.11n40_High Channel_2452MHz									
222.17	28.09	QP	136.00	1.12	V	11.56	39.65	46	-17.91
222.17	31.05	QP	148.10	1.39	H	11.82	42.87	46	-14.95
1485.00	9.96	PK	124.89	1.26	H	29.04	39.00	74	-35.00
1485.00	-3.19	AVG	119.64	1.34	H	29.04	25.85	54	-28.15
2765.00	12.18	PK	104.98	1.31	V	33.03	45.21	74	-28.79
2765.00	-3.70	AVG	107.11	1.19	V	33.03	29.33	54	-24.67
3680.00	11.29	PK	115.82	1.56	H	35.40	46.69	74	-27.31
3680.00	-3.75	AVG	146.16	1.43	H	35.40	31.65	54	-22.35
4305.00	12.36	PK	134.57	1.46	V	37.52	49.88	74	-24.12
4305.00	-3.56	AVG	114.66	1.26	V	37.52	33.96	54	-20.04
4890.00	12.77	PK	124.27	1.29	H	39.98	52.25	74	-21.75
4890.00	-4.22	AVG	116.81	1.43	H	39.98	35.56	54	-18.44

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

8 Band Edge Measurement

Test Requirement	FCC CFR47 Part 15 Section 15.247
Test Method	558074 D01 DTS Meas Guidance v03r05
Test Result	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode	Transmitting


8.1 Test Produce

- 1) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5) Repeat above procedures until all measured frequencies were complete.


8.2 Test Result

Test result plots as follows:

TX 11b: Band edge-left side

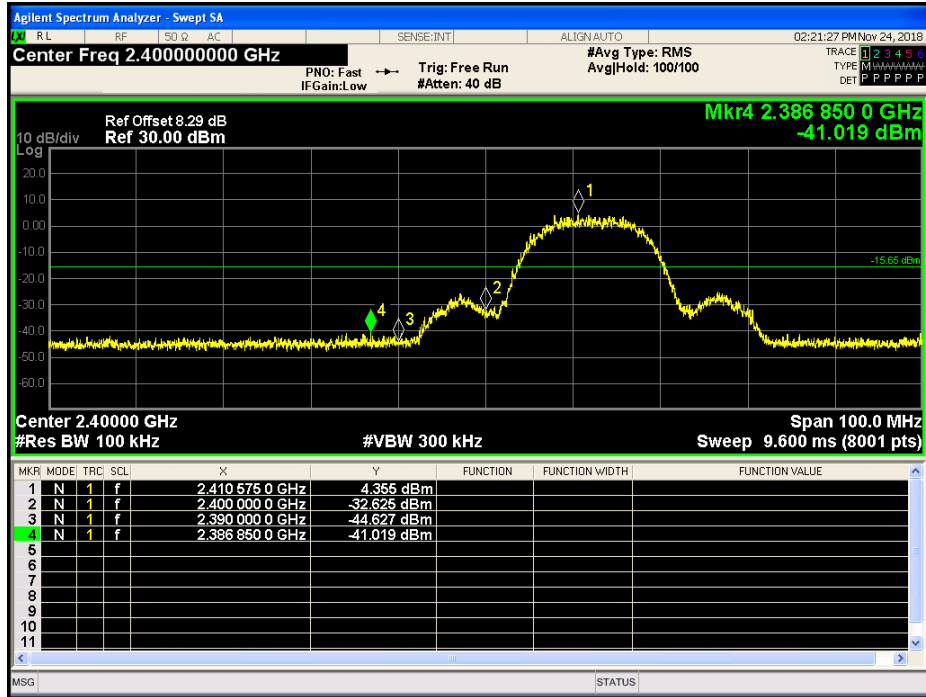


TX 11b: Band edge-right side

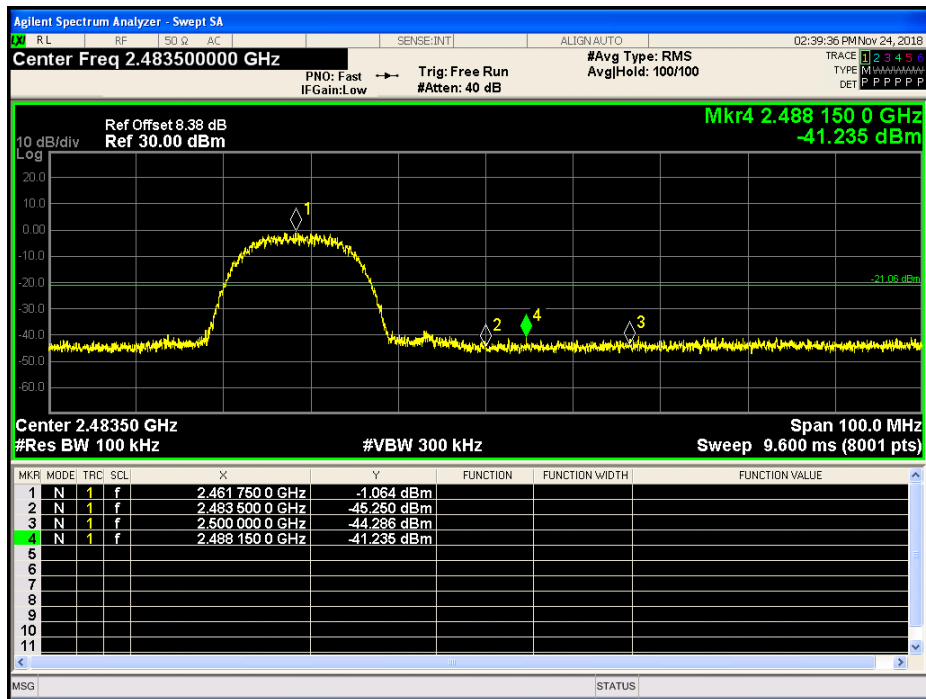




TX 11g: Band edge-left side

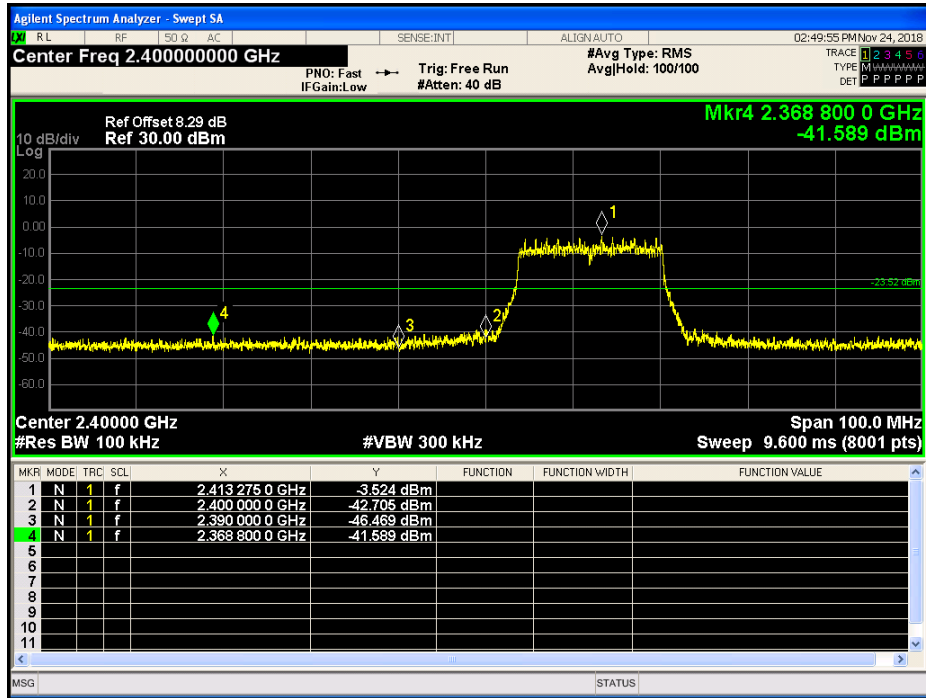


TX 11g: Band edge-right side

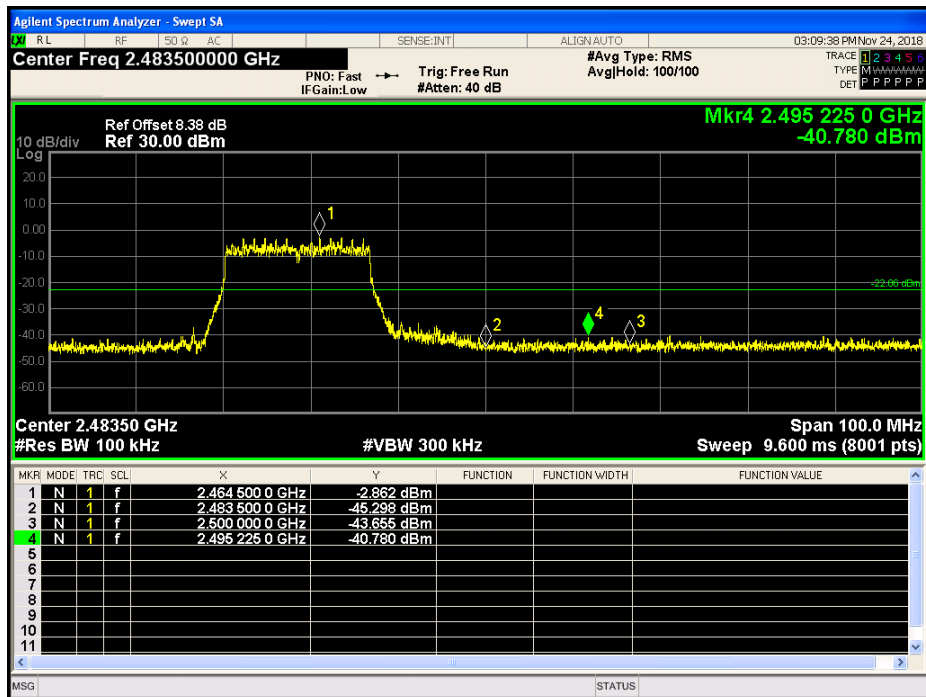




TX 11n20: Band edge-left side

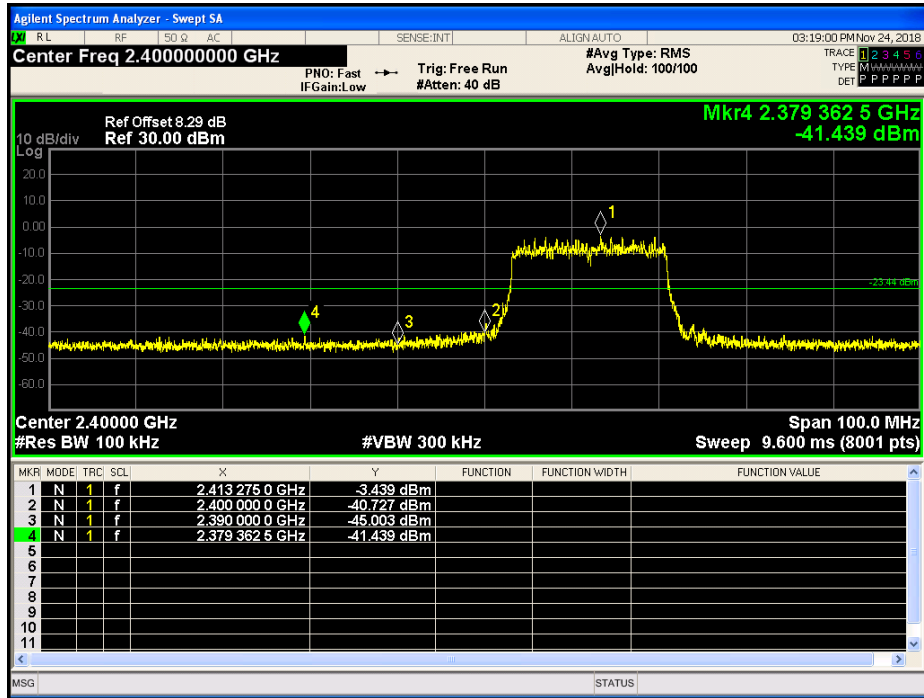


TX 11n20: Band edge-right side

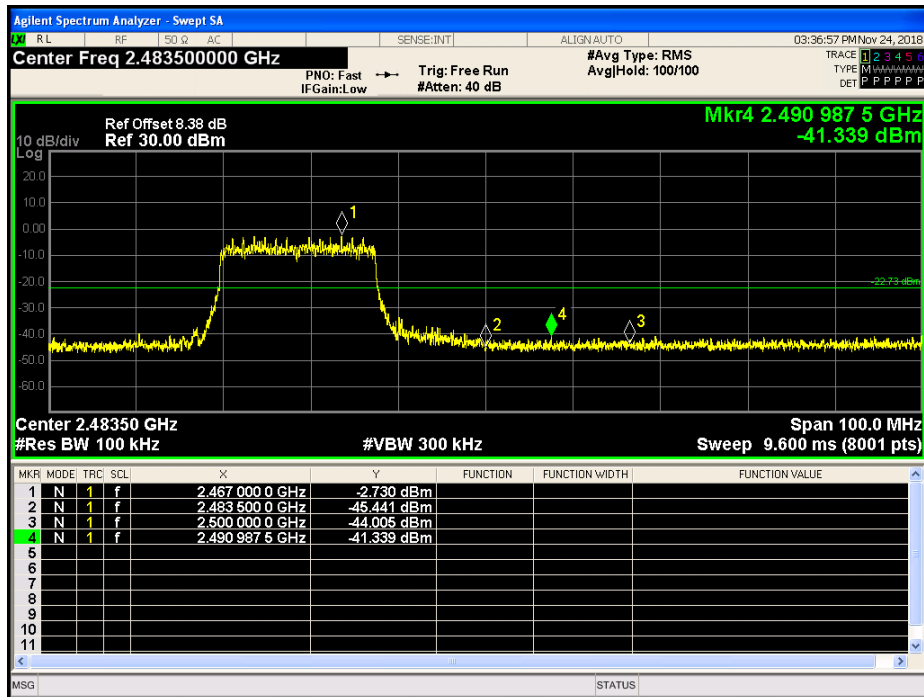




TX 11n40: Band edge-left side

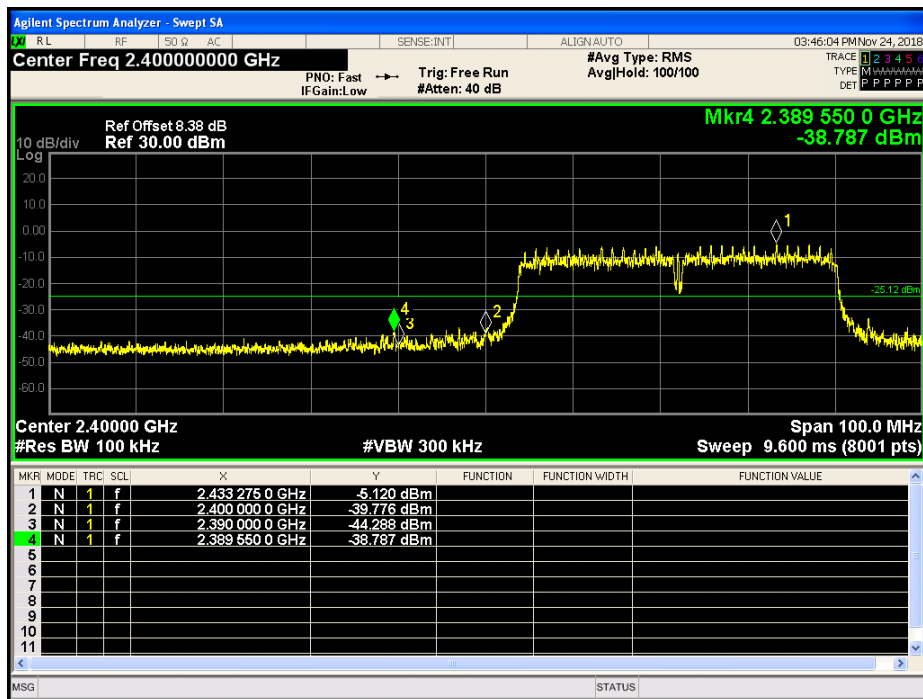

TX 11n40: Band edge-right side

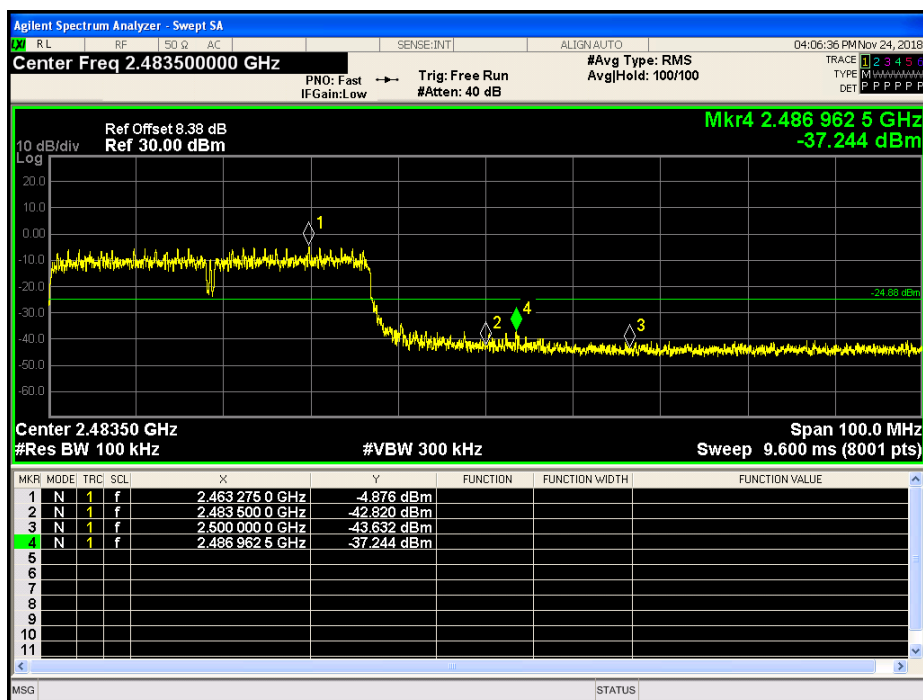

9 6 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance v03r05

9.1 Test Procedure

- 1) Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
- 2) Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


9.2 Test Result

Operation mode	Bandwidth (MHz)		
	Channel 1	Channel 6	Channel 11
TX 11b	Channel 1	Channel 6	Channel 11
	10.14	12.03	11.99
TX 11g	Channel 1	Channel 6	Channel 11
	16.43	16.46	16.41
TX 11n20	Channel 1	Channel 6	Channel 11
	17.63	17.58	17.56
TX 11n40	Channel 1	Channel 6	Channel 11
	35.36	35.44	35.40




Test result plot as follows:

Mode: TX 11b channel 1

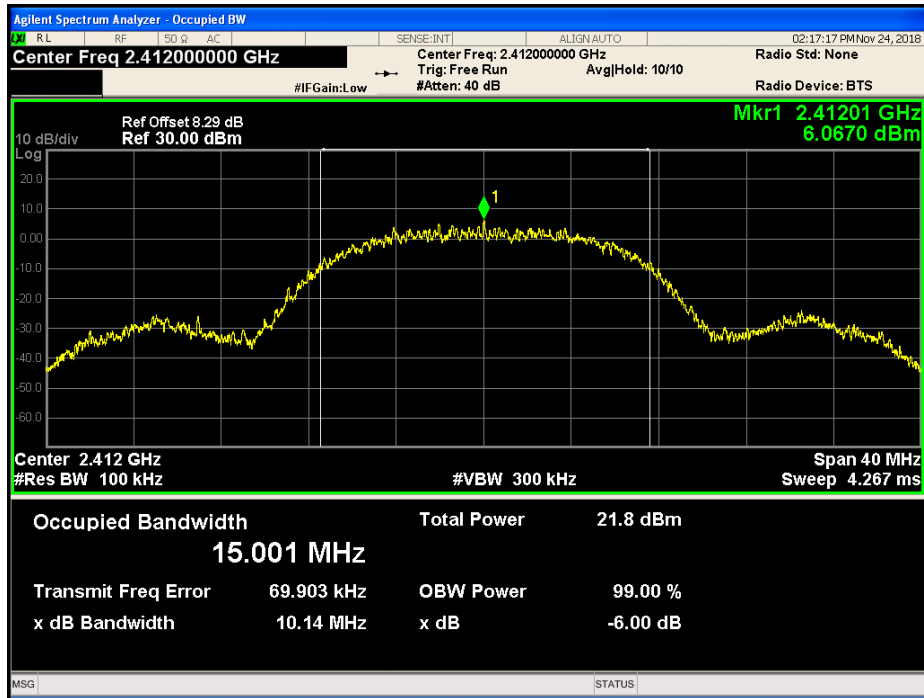


Mode: TX 11b channel 6

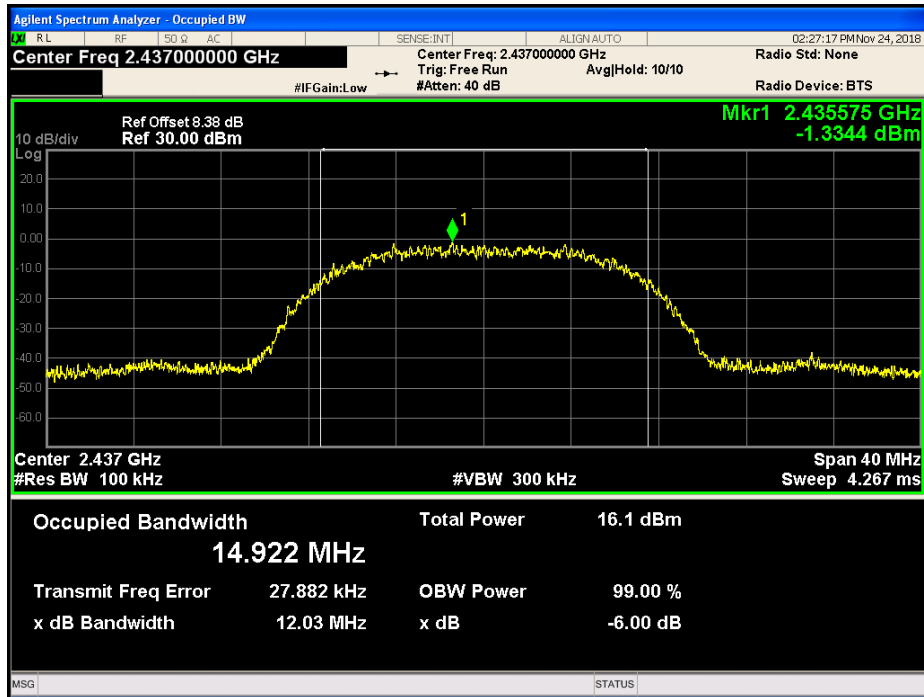




Mode: TX 11b channel 11

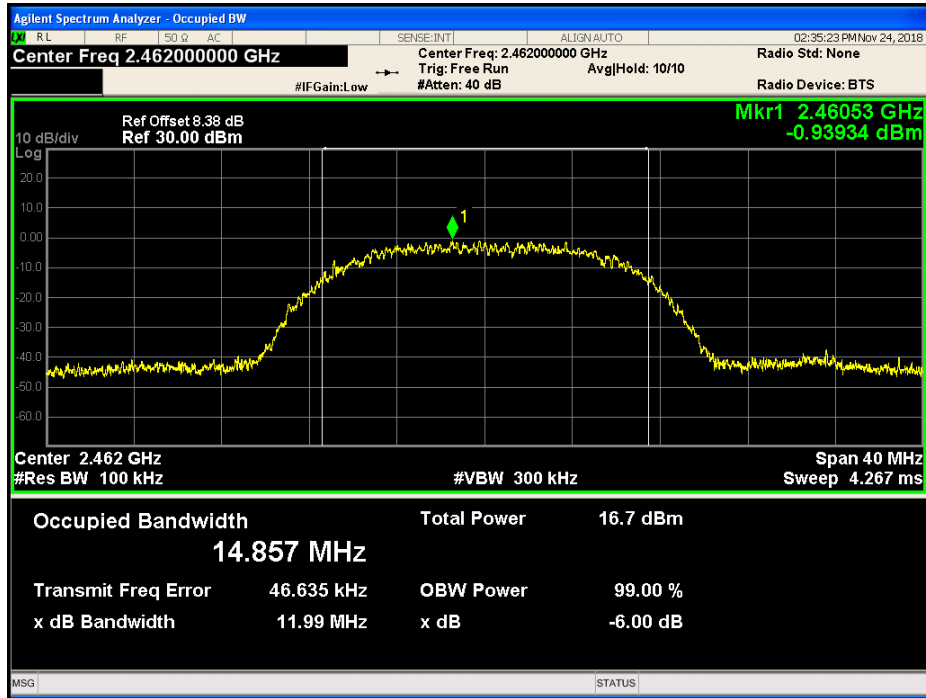


Mode: TX 11g channel 1

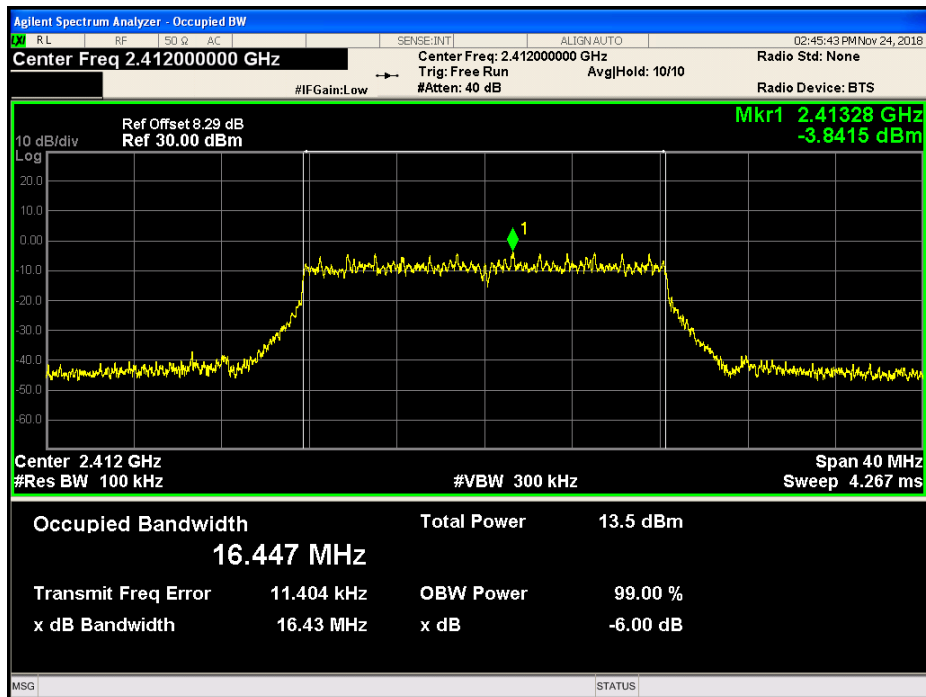




Mode: TX 11g channel 6

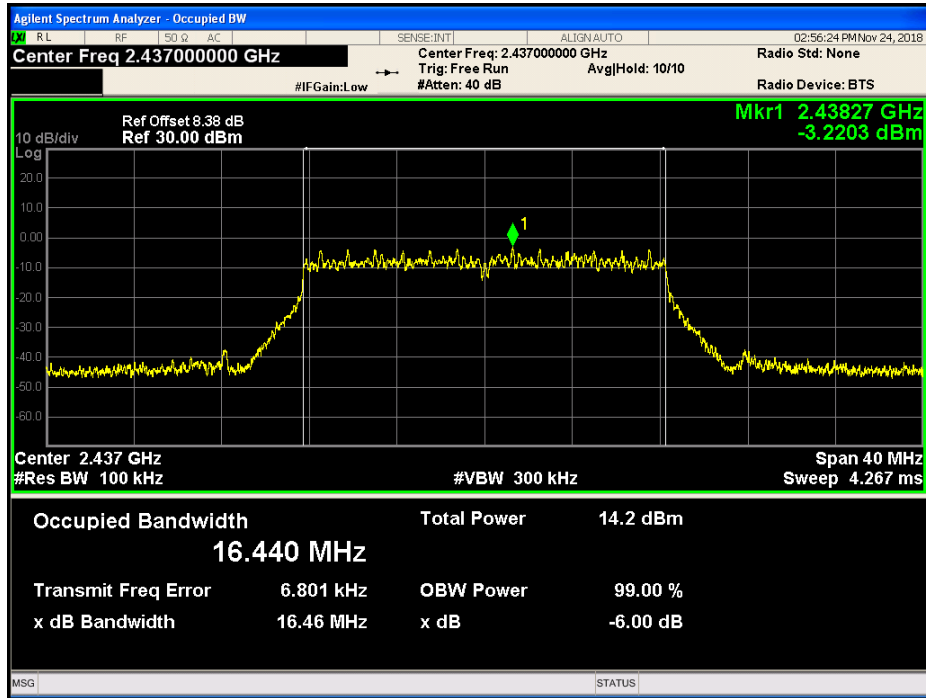


Mode: TX 11g channel 11

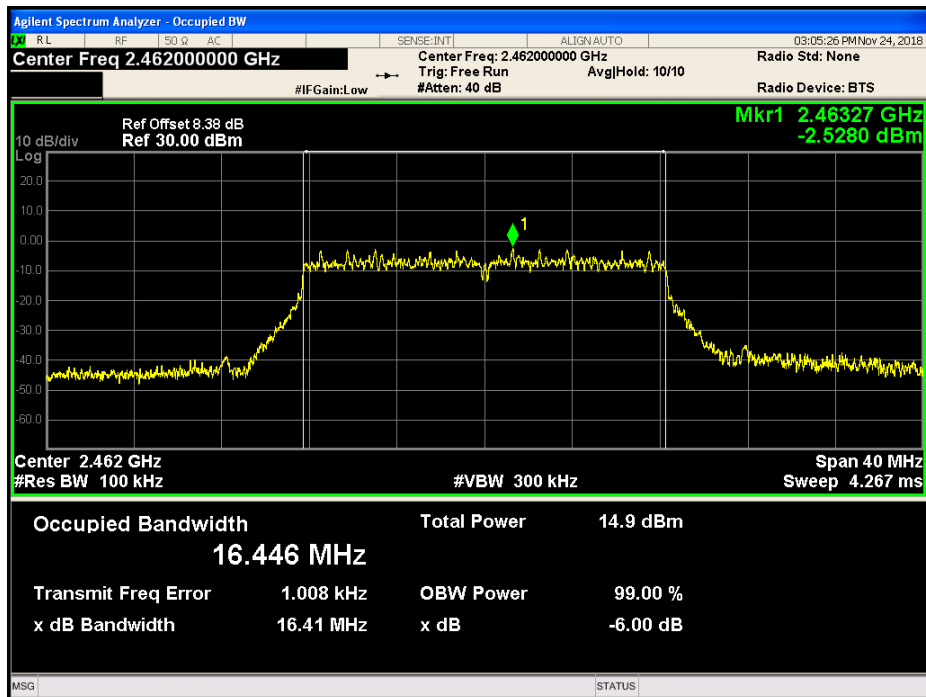




Mode: TX 11n20 channel 1

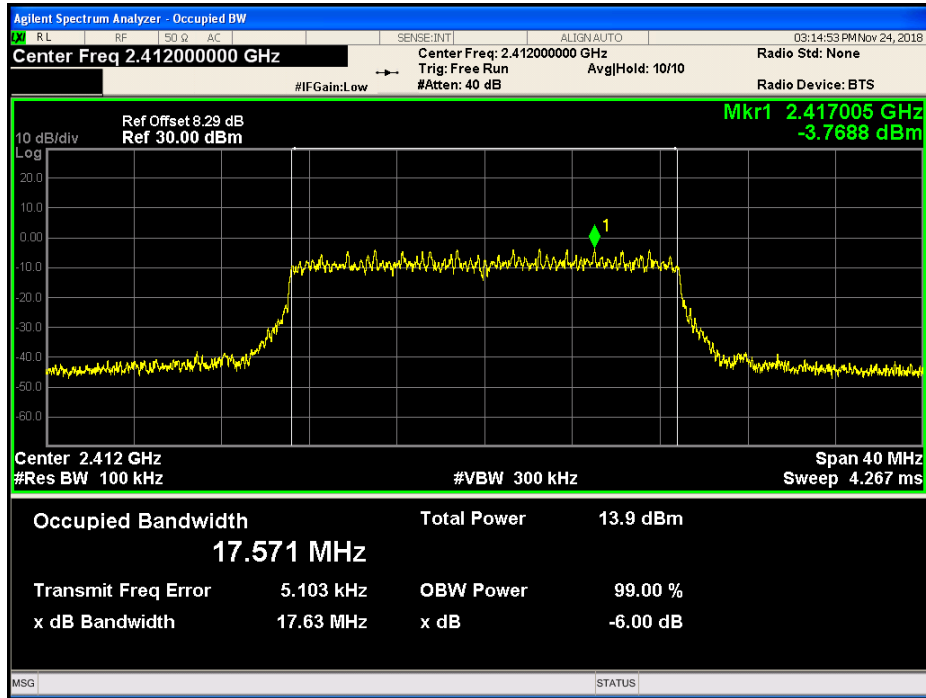


Mode: TX 11n20 channel 6

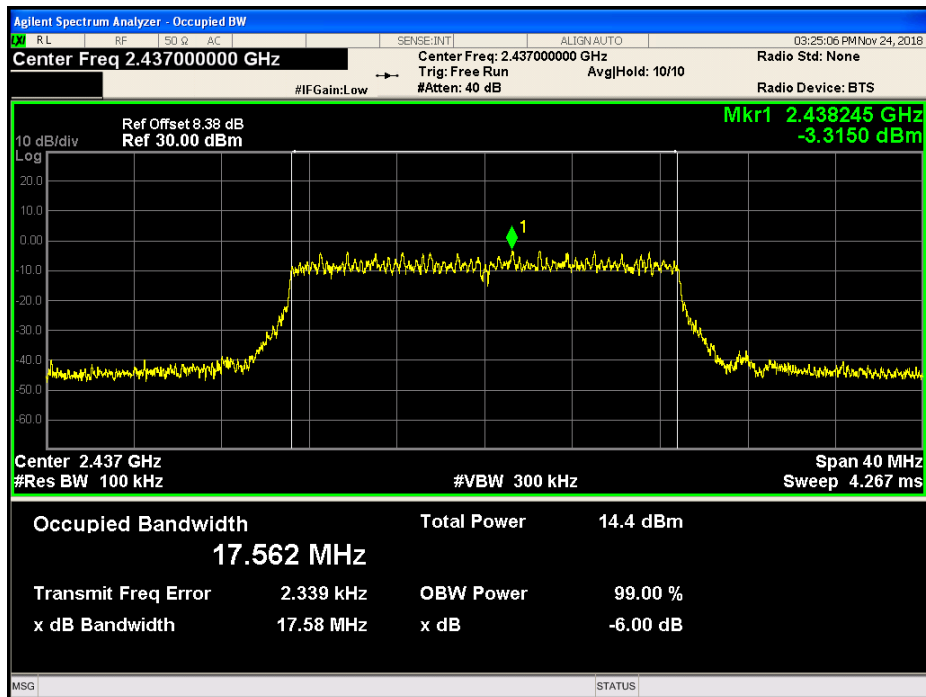




Mode: TX 11n20 channel 11

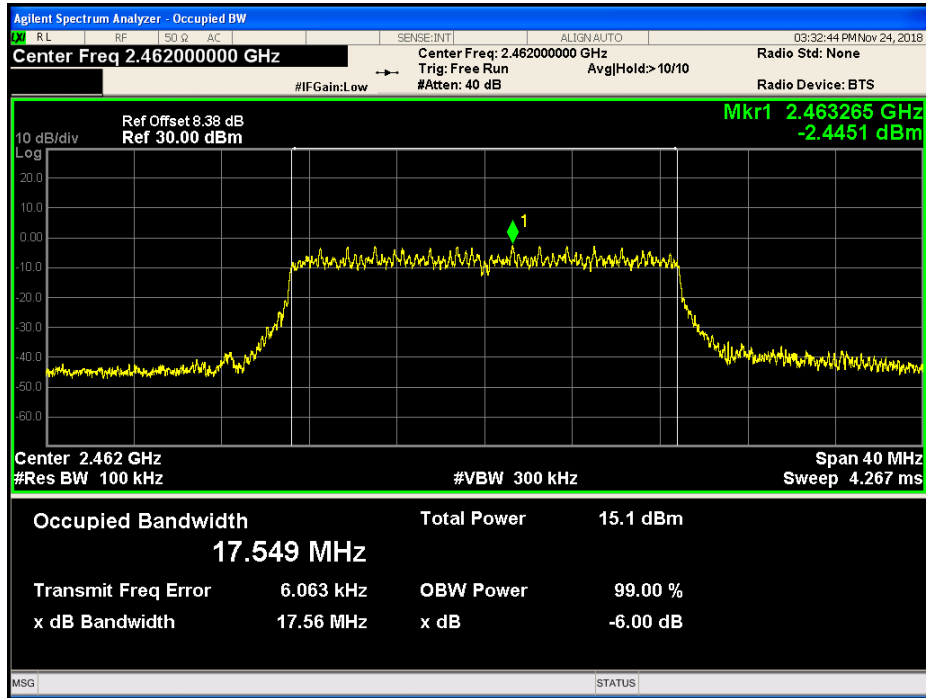


Mode: TX 11n40 channel 3

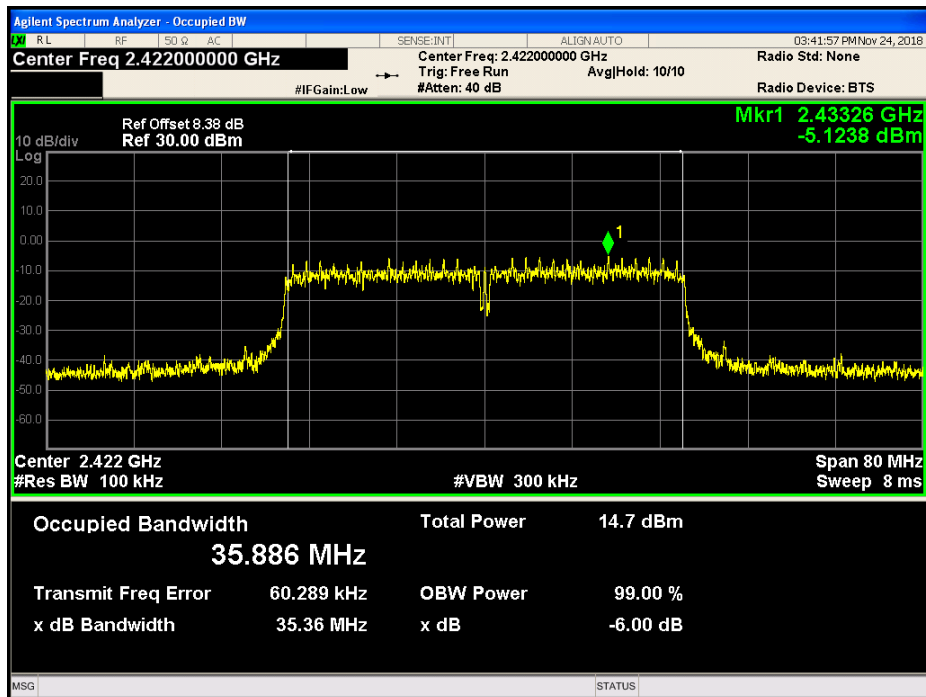




Mode: TX 11n40 channel 6

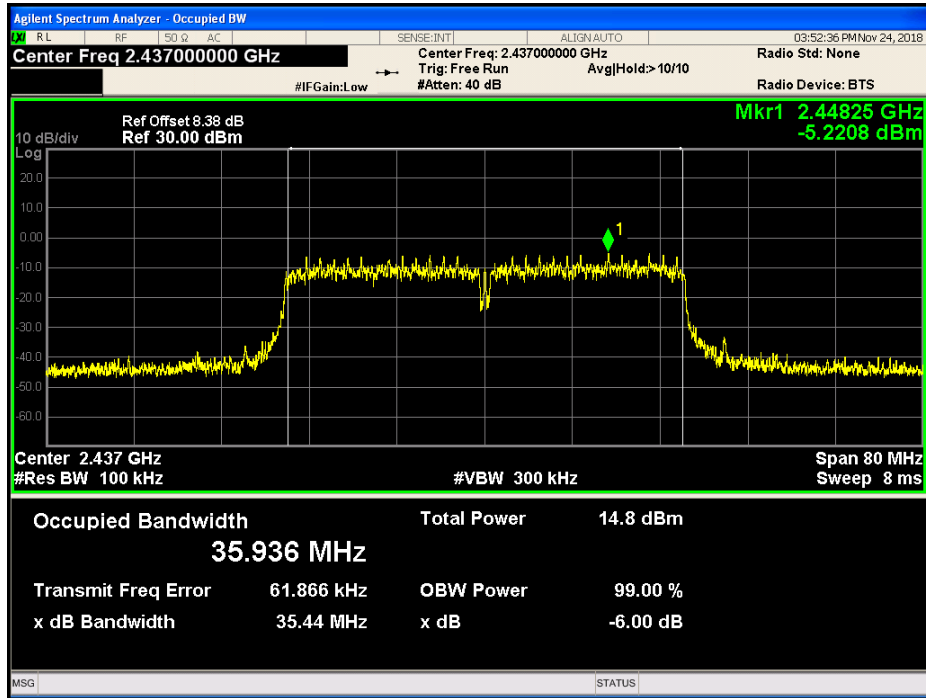

Mode: TX 11n40 channel 9

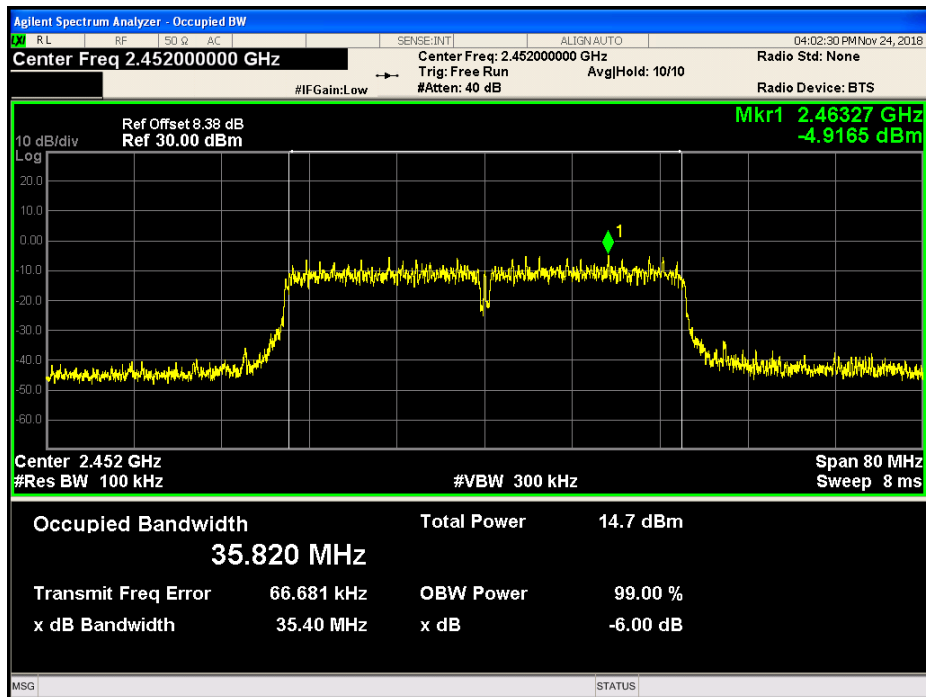

10 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance v03r05

10.1 Test Procedure

558074 D01 DTS Meas Guidance v03r05 section 9.1.2

- 1) Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2) Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
- 3) Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


10.2 Test Result

Test mode	Maximum Peak Output Power (dBm)			Limit
	Channel 1	Channel 6	Channel 11	
TX 11b	Channel 1	Channel 6	Channel 11	1W/30dBm
	15.59	15.31	16.43	
TX 11g	Channel 1	Channel 6	Channel 11	1W/30dBm
	14.54	14.49	15.85	
TX 11n20	Channel 1	Channel 6	Channel 11	1W/30dBm
	14.31	14.41	15.53	
TX 11n40	Channel 3	Channel 6	Channel 9	1W/30dBm
	14.62	14.48	14.98	




Test result plot as follows:

Mode: TX 11b channel 1

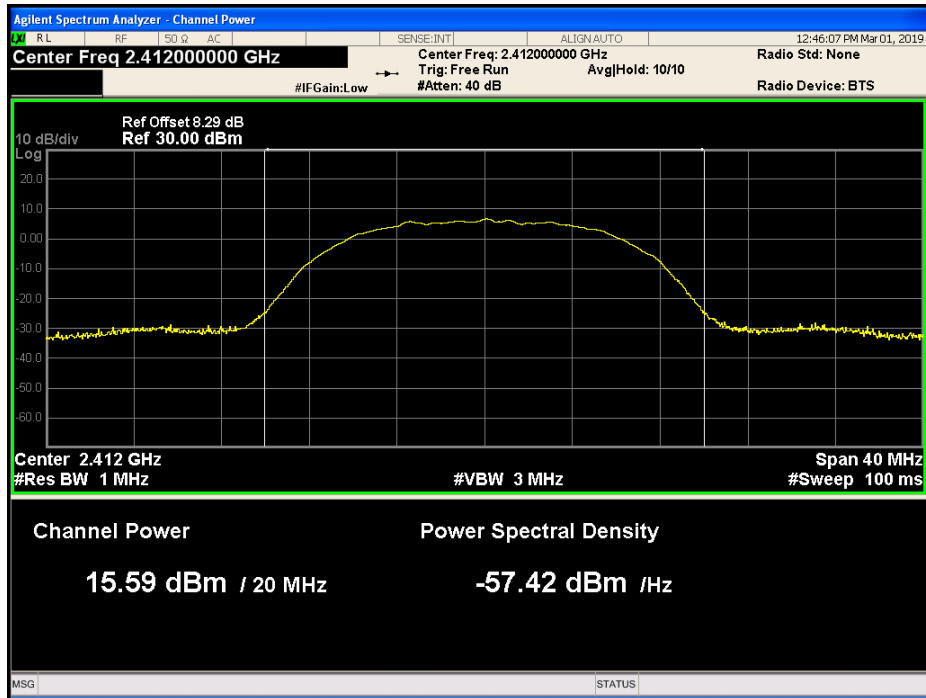


Mode: TX 11b channel 6

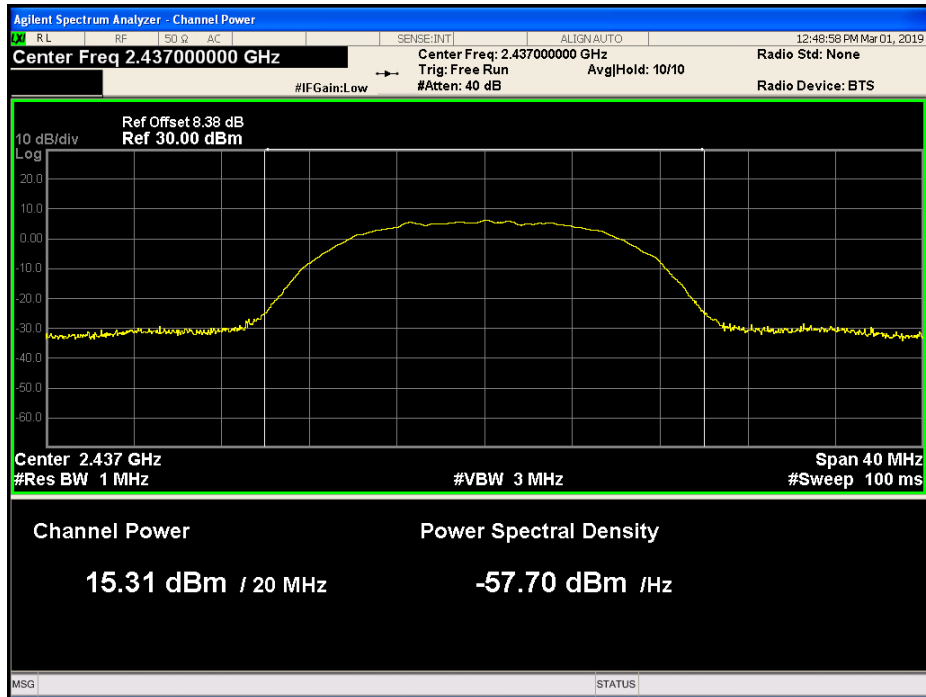




Mode: TX 11b channel 11

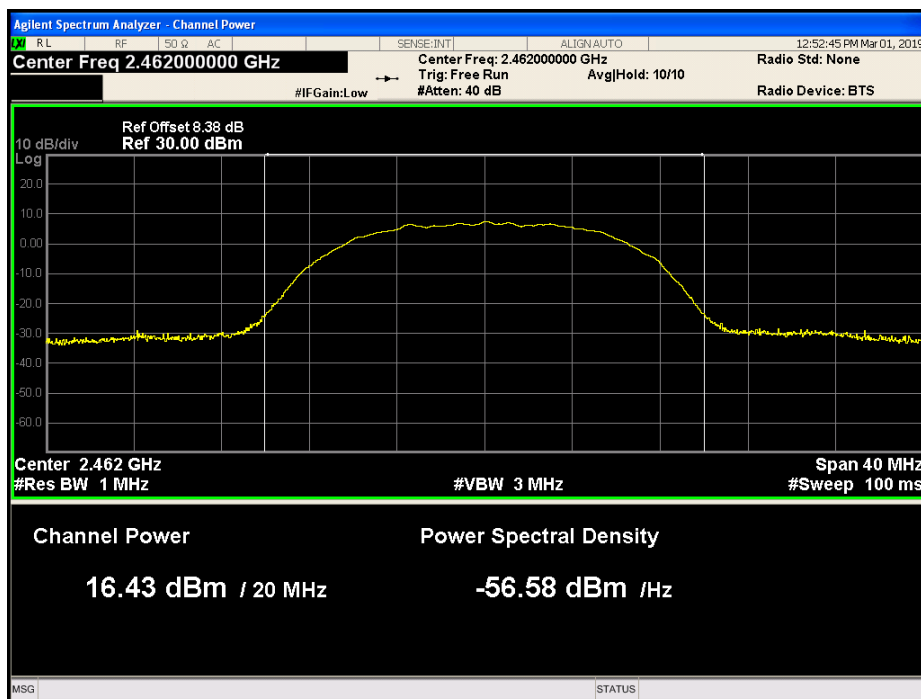


Mode :TX 11g channel 1

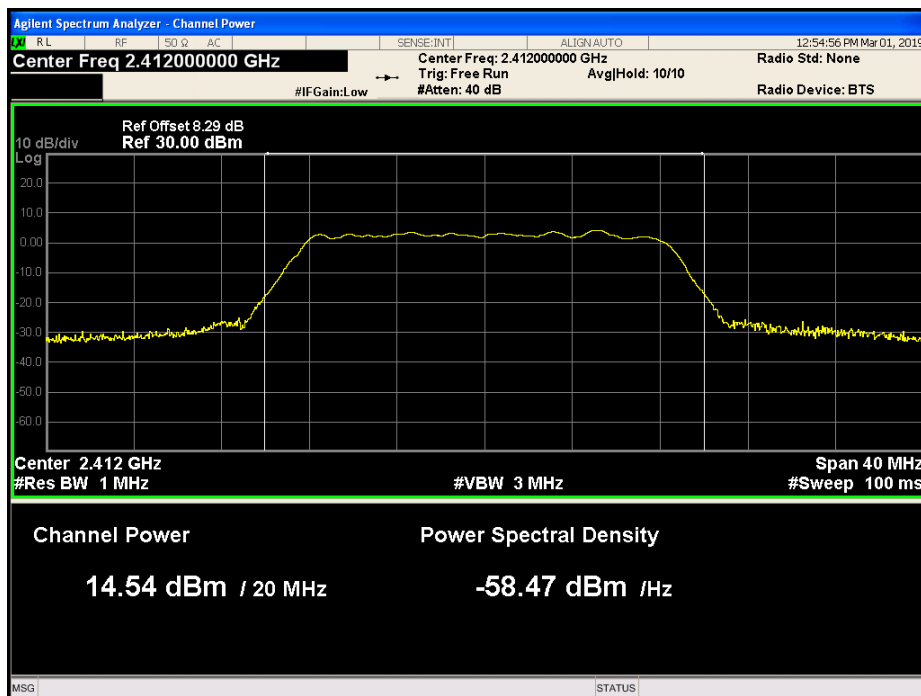




Mode :TX 11g channel 6

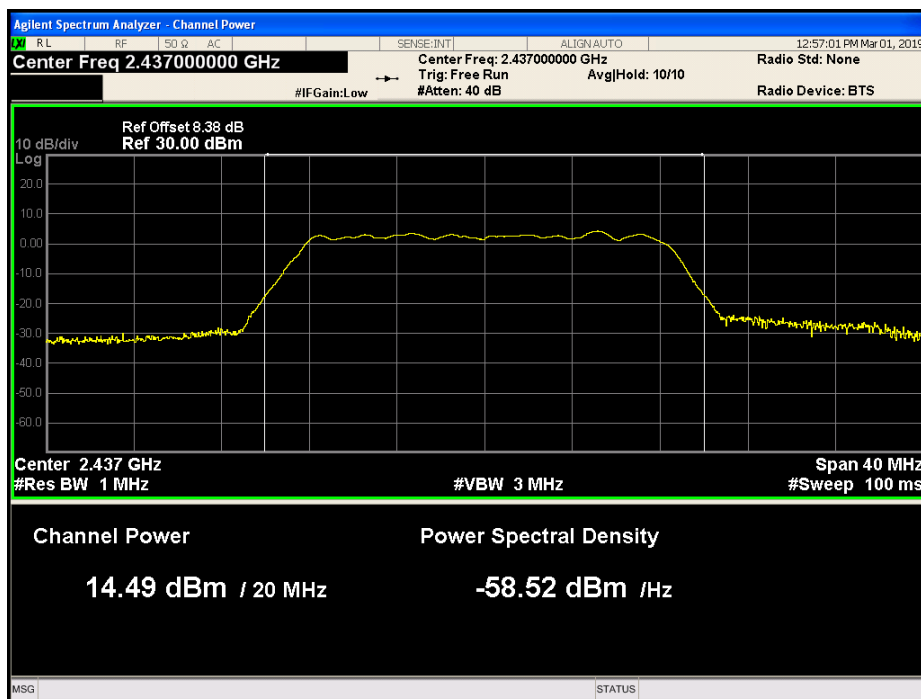


Mode :TX 11g channel 11

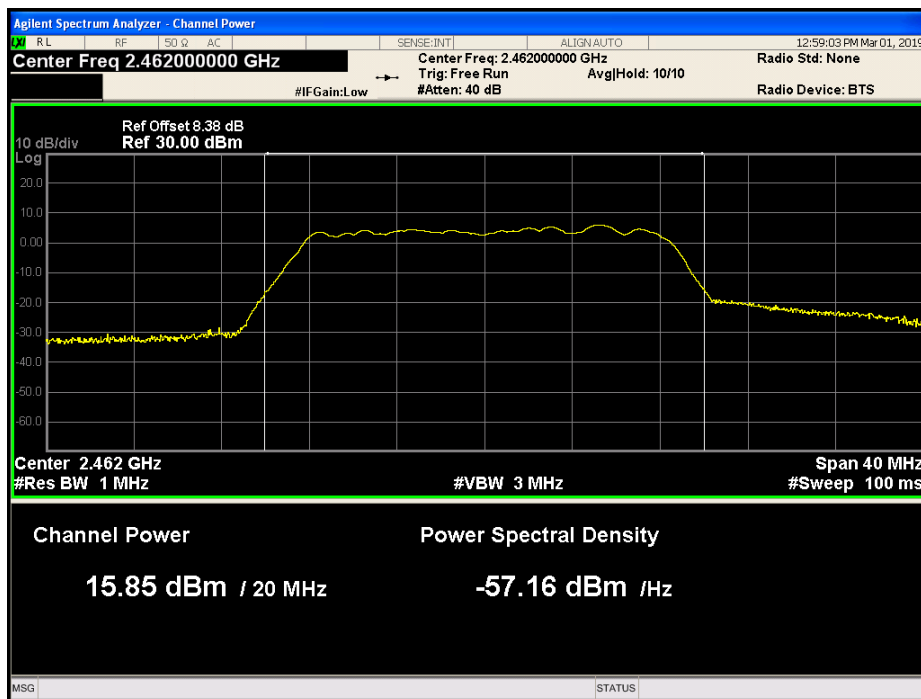




Mode: TX 11n20 channel 1

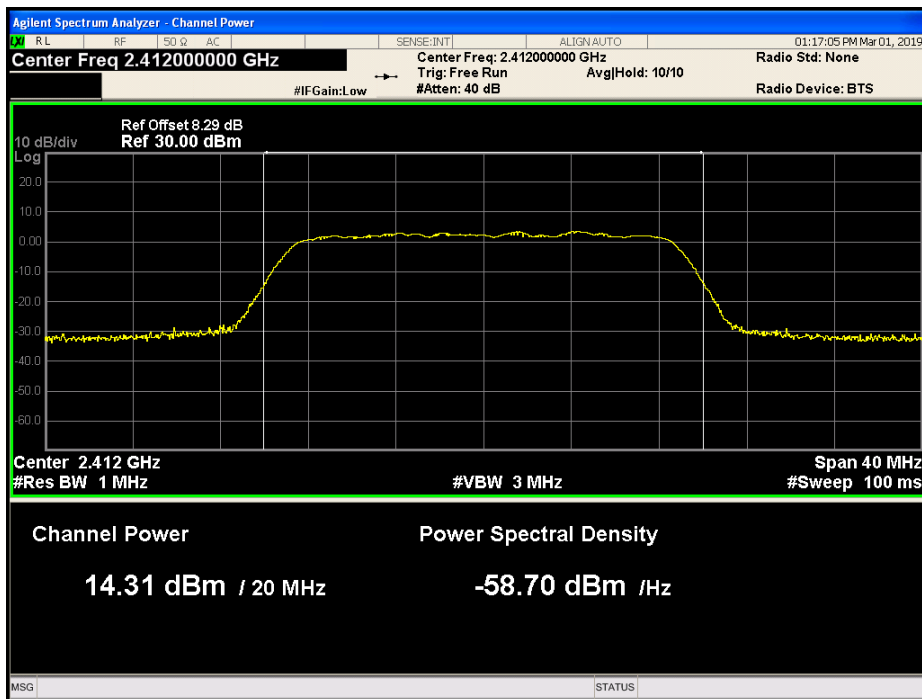


Mode: TX 11n20 channel 6

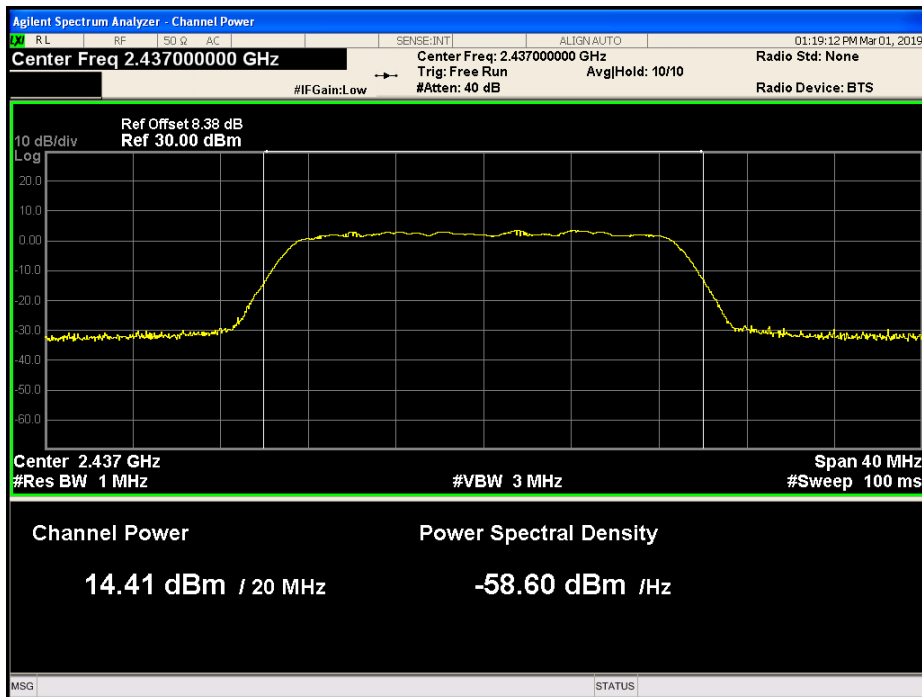




Mode: TX 11n20 channel 11

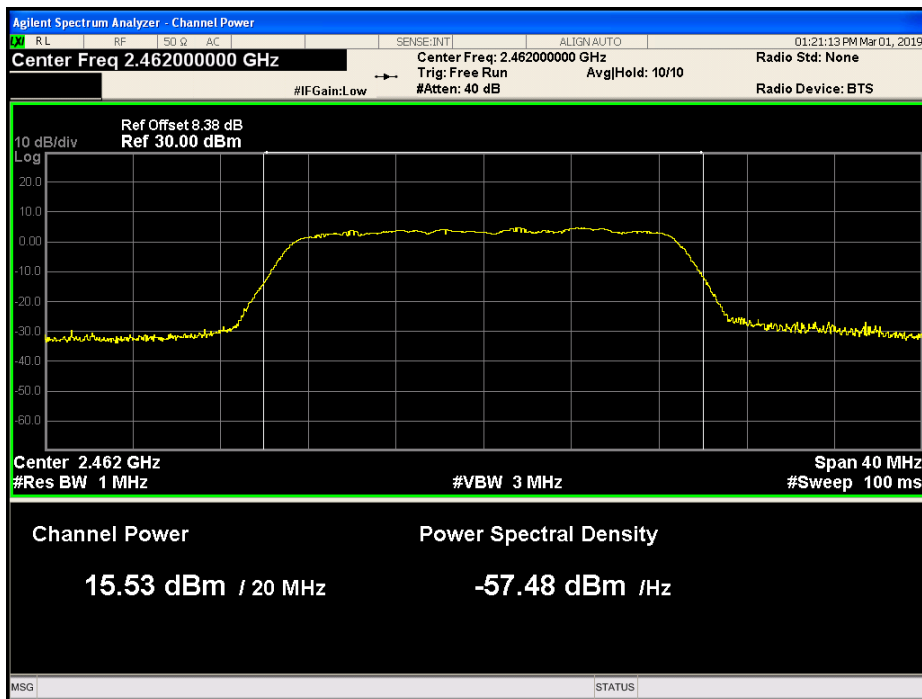


Mode: TX 11n40 channel 3

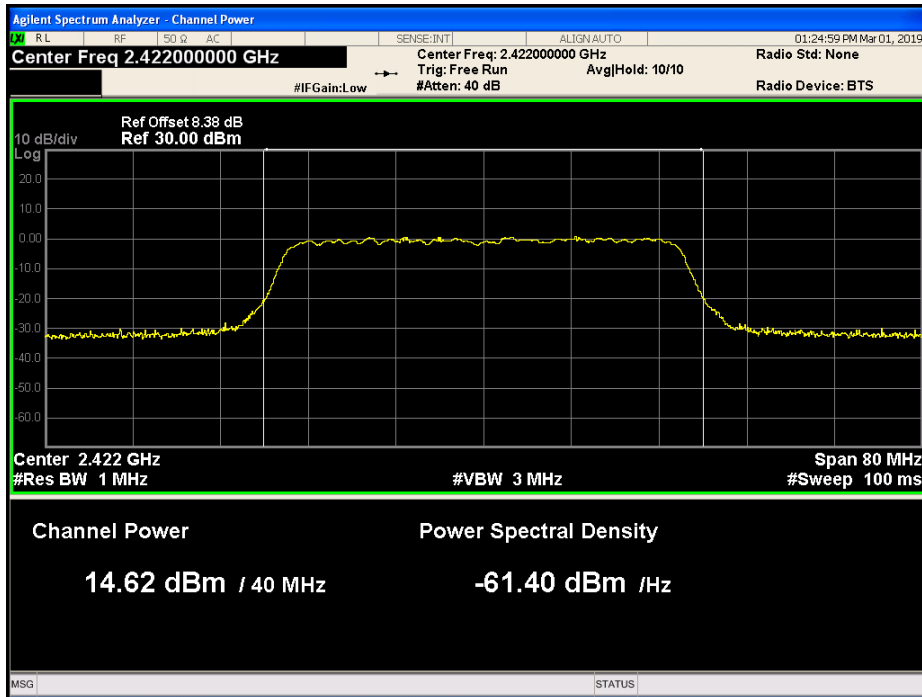




Mode: TX 11n40 channel 6

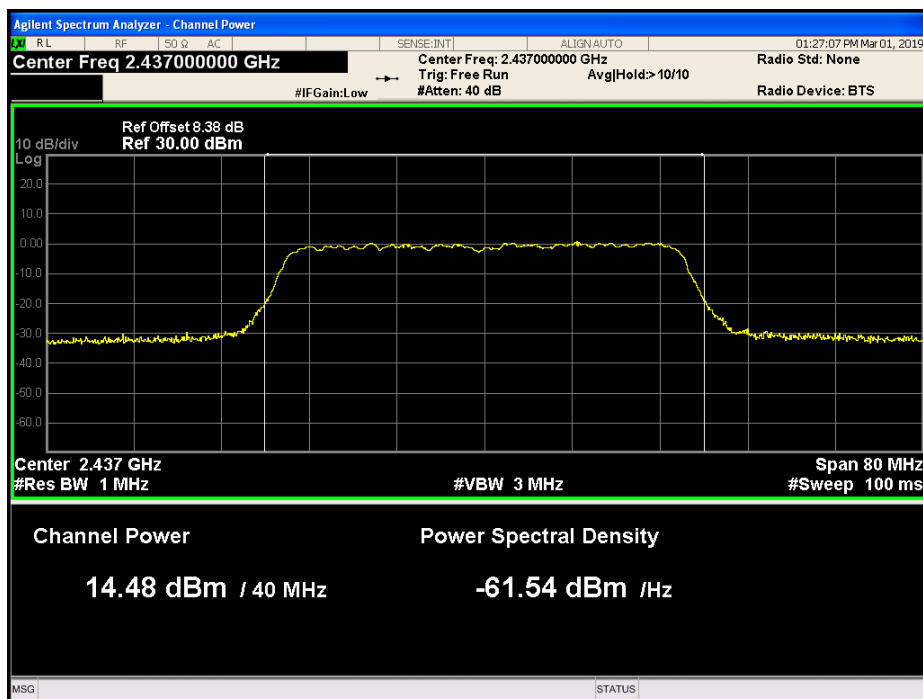

Mode: TX 11n40 channel 9

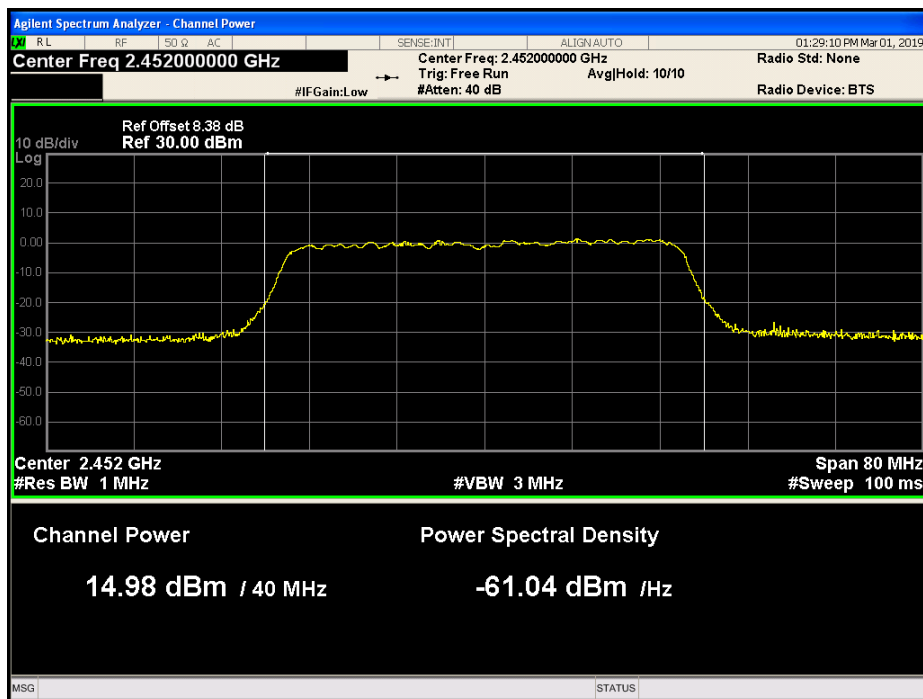

11 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance v03r05

11.1 Test Procedure

558074 D01 DTS Meas Guidance v03r05 section 10.2

- 1) Remove the antenna from the EUT and then connect a low RF cable from the antenna port
- 2) to the spectrum.
- 3) Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
- 4) Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.2 Test Result

Test mode	Power Spectral (dBm per 3kHz)			Limit
	Channel 1	Channel 6	Channel 11	
TX 11b	Channel 1	Channel 6	Channel 11	8dBm per 3kHz
	-5.311	-6.019	-5.194	
TX 11g	Channel 1	Channel 6	Channel 11	8dBm per 3kHz
	-10.567	-10.696	-9.766	
TX 11n20	Channel 1	Channel 6	Channel 11	8dBm per 3kHz
	-10.755	-10.767	-9.438	
TX 11n40	Channel 3	Channel 6	Channel 9	8dBm per 3kHz
	-11.760	-12.899	-12.024	




Test result plot as follows:

Mode: TX 11b channel 1




Mode: TX 11b channel 6

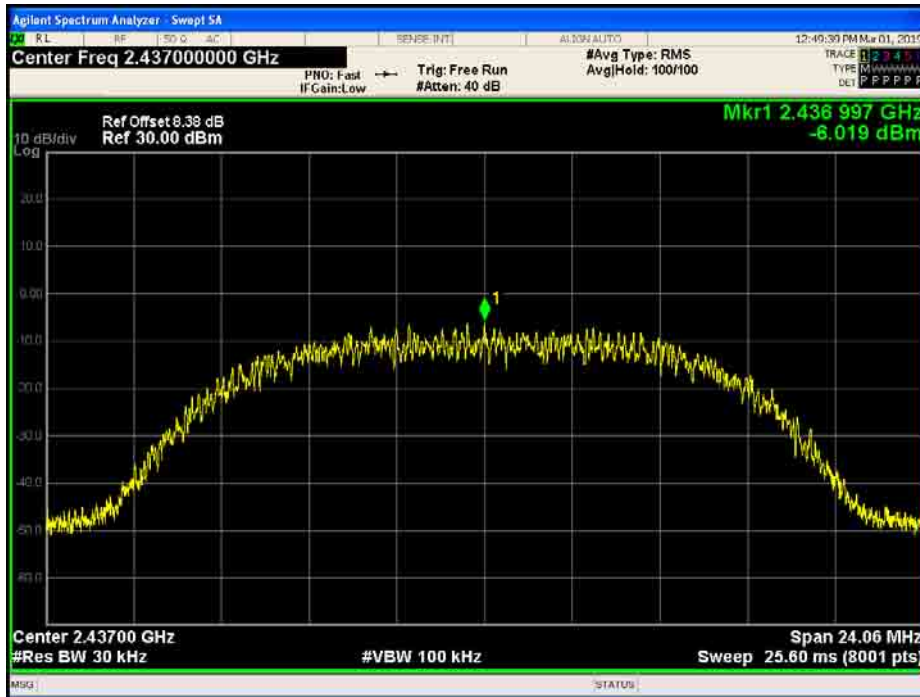




Mode: TX 11b channel 11

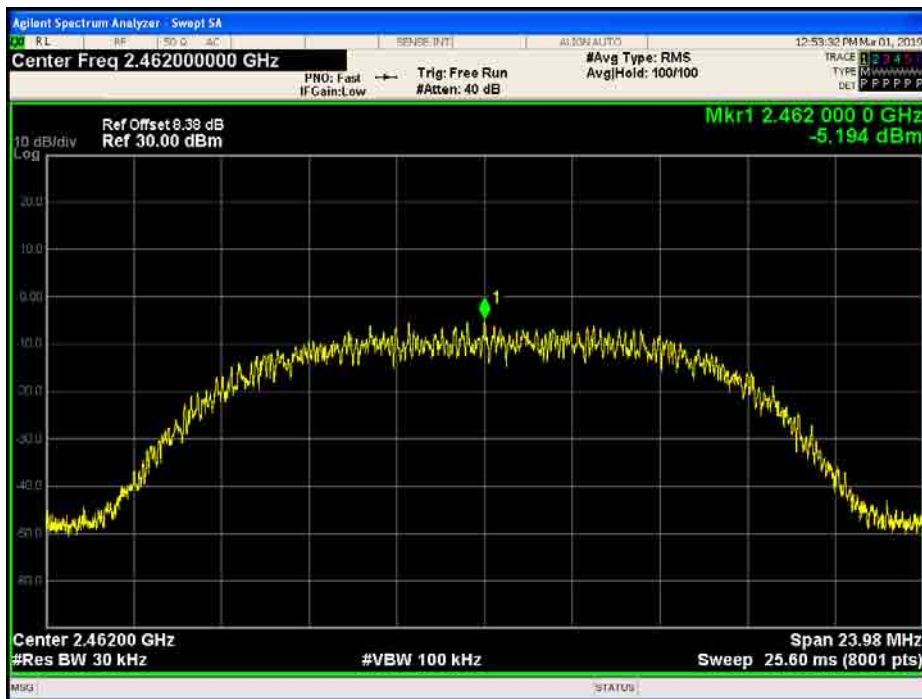

Mode :TX 11g channel 1

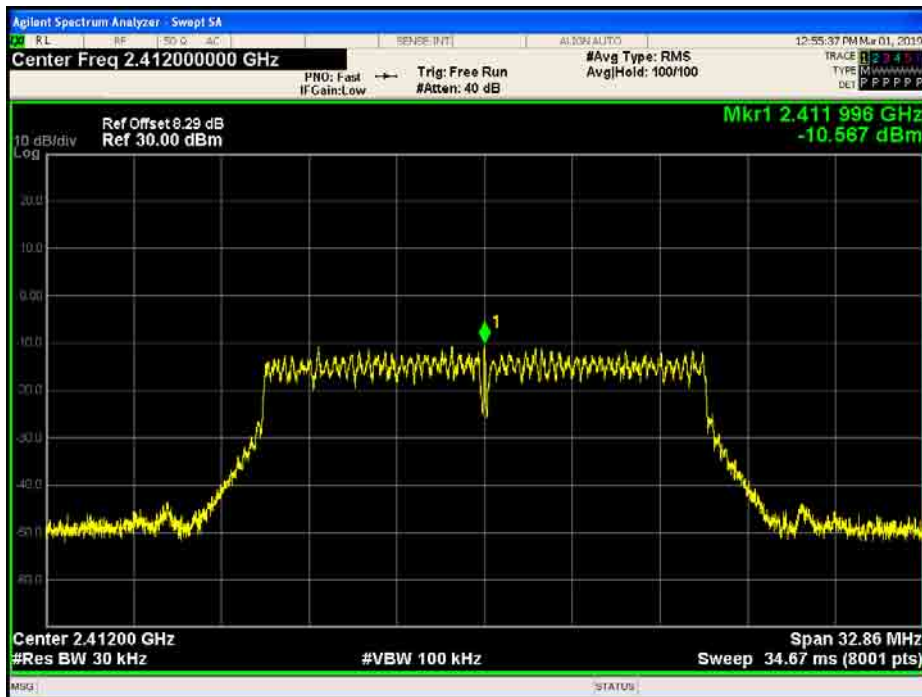

Mode :TX 11g channel 6




Mode :TX 11g channel 11






Mode: TX 11n20 channel 1

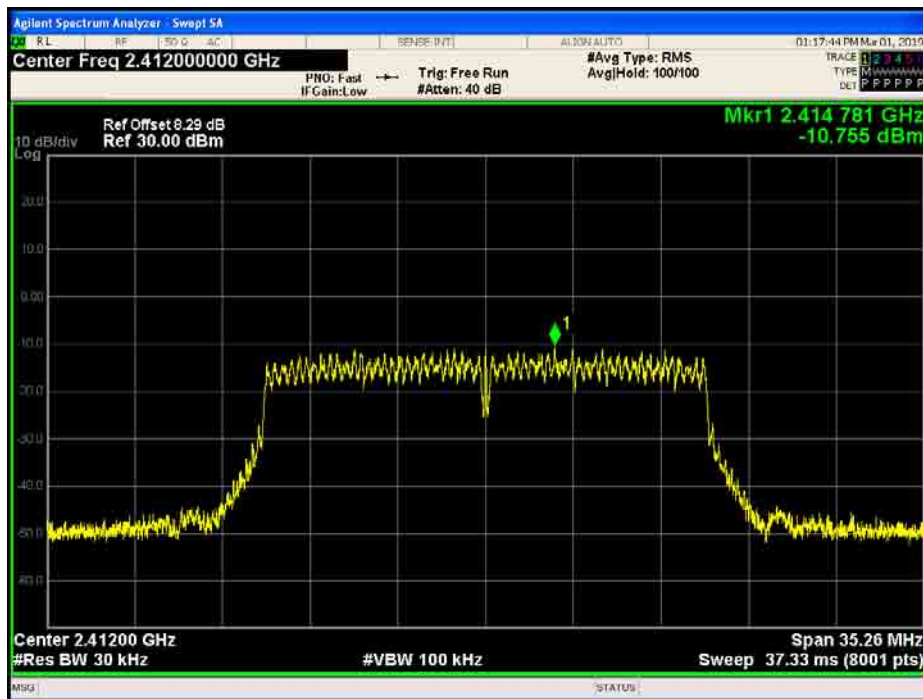

Mode: TX 11n20 channel 6

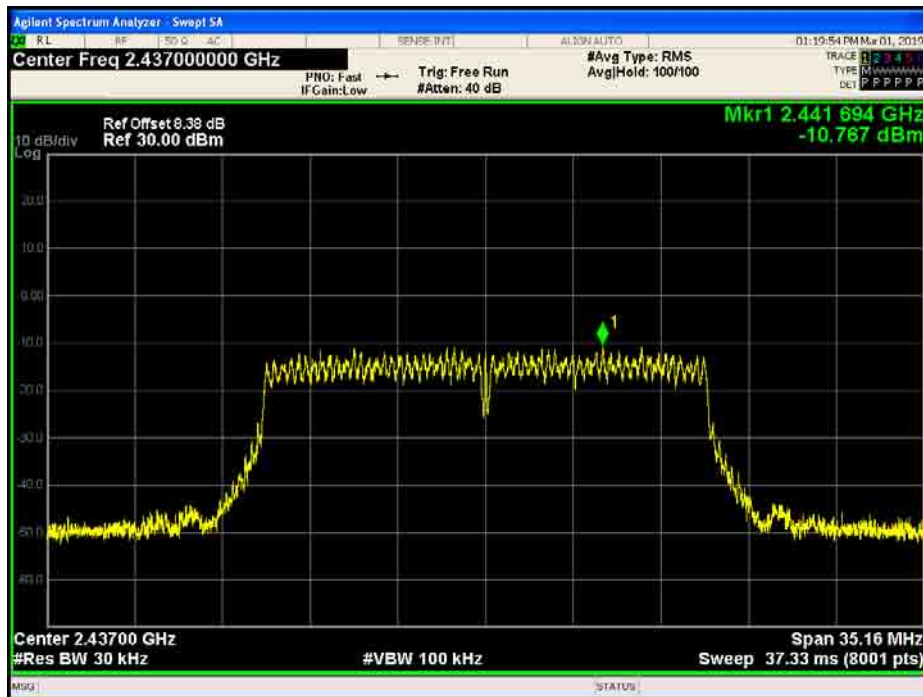




Mode: TX 11n20 channel 11




Mode: TX 11n40 channel 3

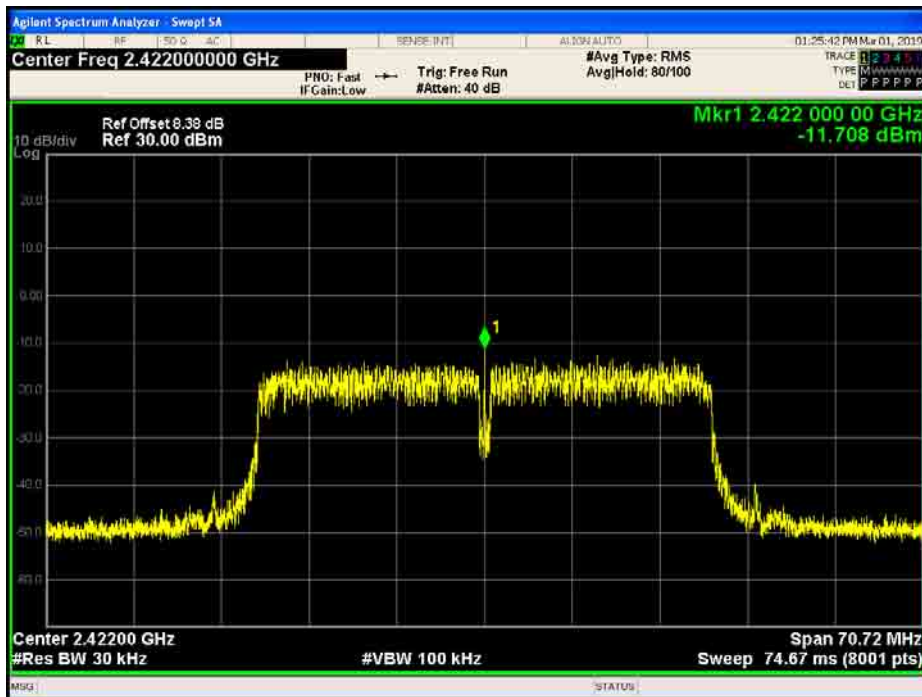



Mode: TX 11n40 channel 6

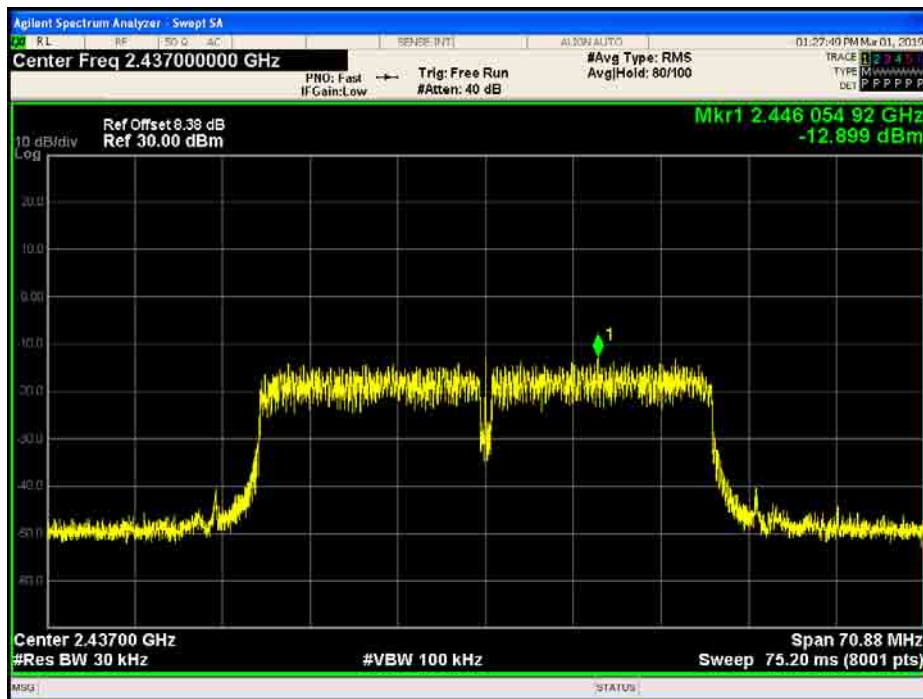


Mode: TX 11n40 channel 9



12 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a Internal integrated PCB printed Antenna fulfill the requirement of this section.

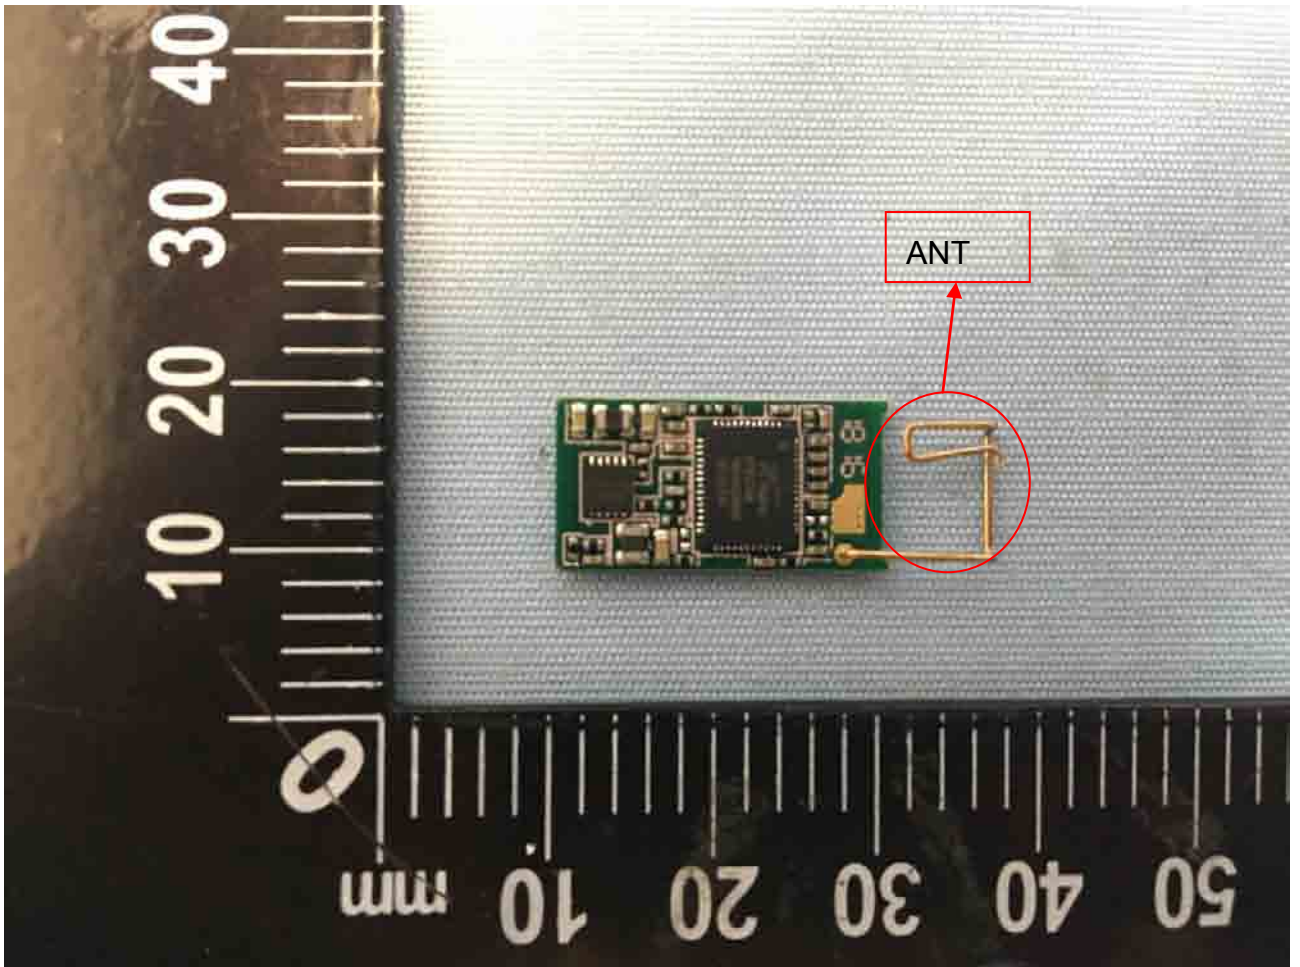

13 RF Exposure

Test Requirement: FCC Part 1.1307

Test Method: FCC Part 2.1091

13.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

13.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	F/300	6
1500-100,000	/	/	5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	F/1500	30
1500-100,000	/	/	1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

13.3 MPE Calculation Method

$$S = \frac{P \times G}{4 \times \pi \times R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = output power to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

From the peak EUT RF output power, the minimum mobile separation distance, R=20cm, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
0.20	1.047	16.43	43.95	0.00916	1

14 Photographs - Test Setup

14.1 Photographs - Radiated Emission

Test frequency from 30MHz to 1GHz



Test frequency above 1GHz



14.2 Photographs - Conducted Emission




15 Photographs - Constructional Details

15.1 EUT – External Photos











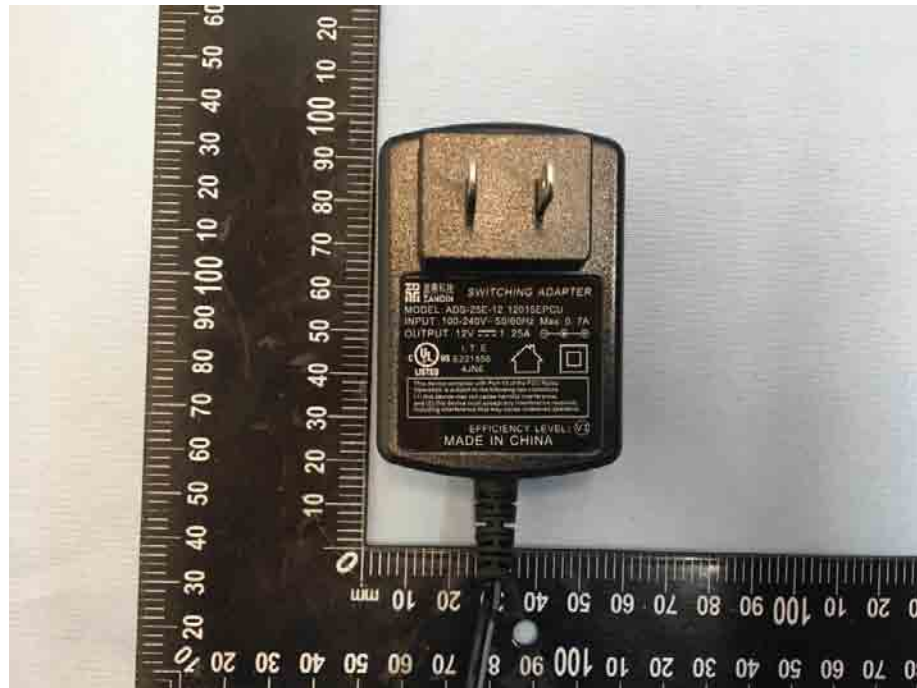



15.2 EUT – Internal Photos


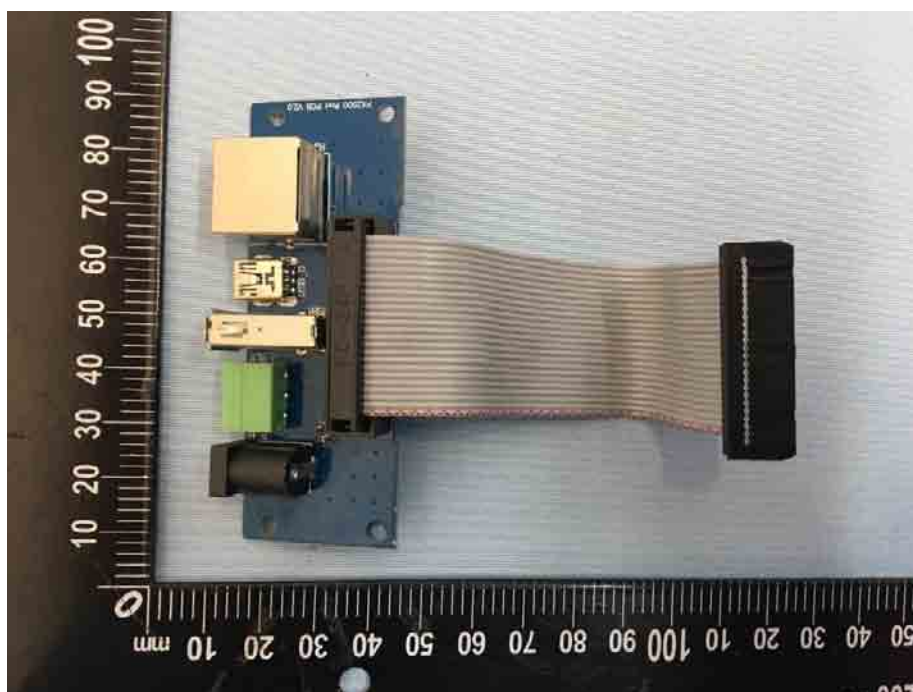


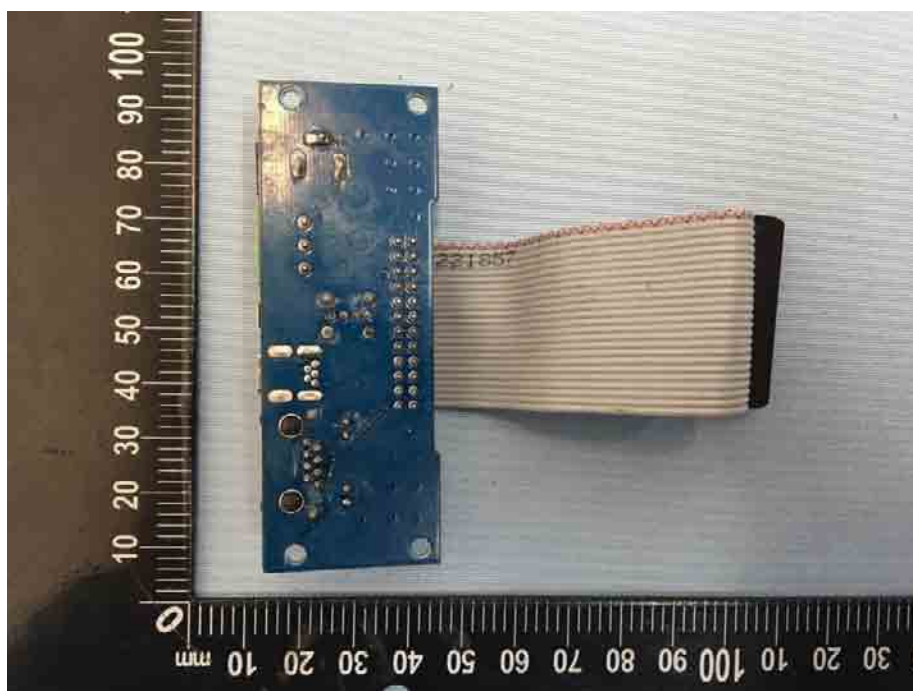


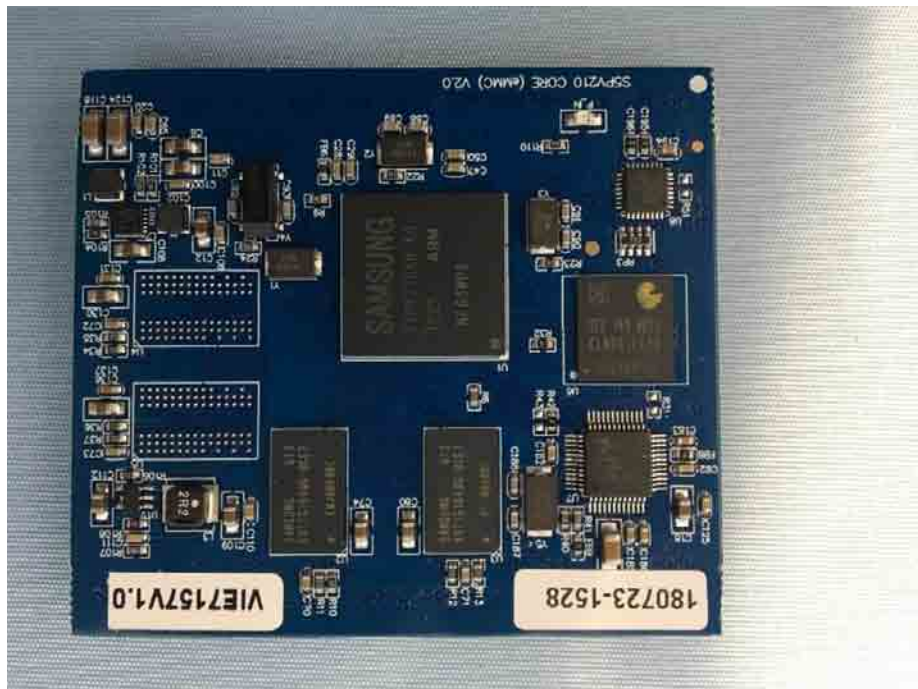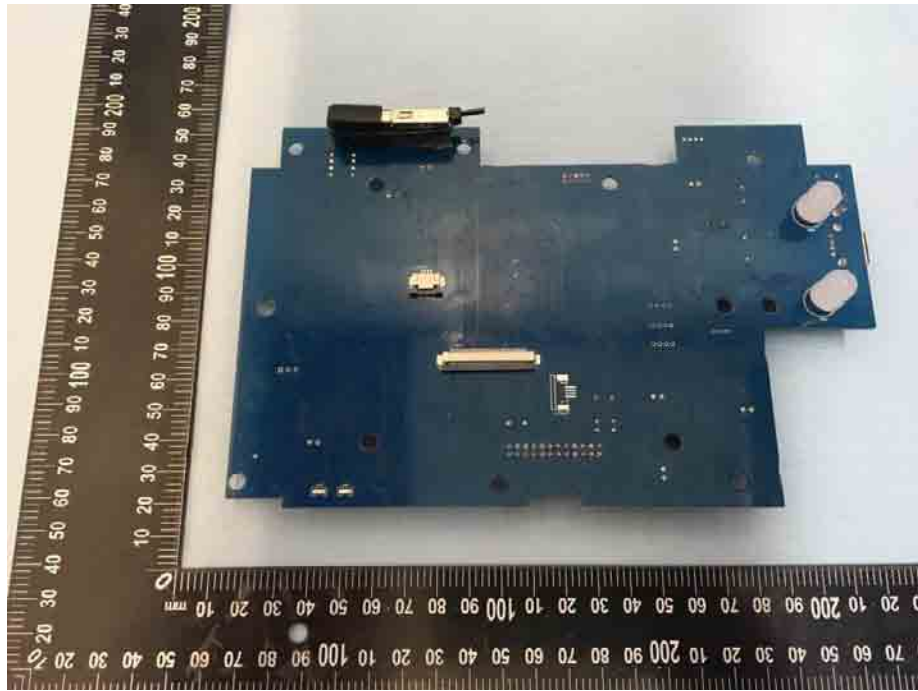

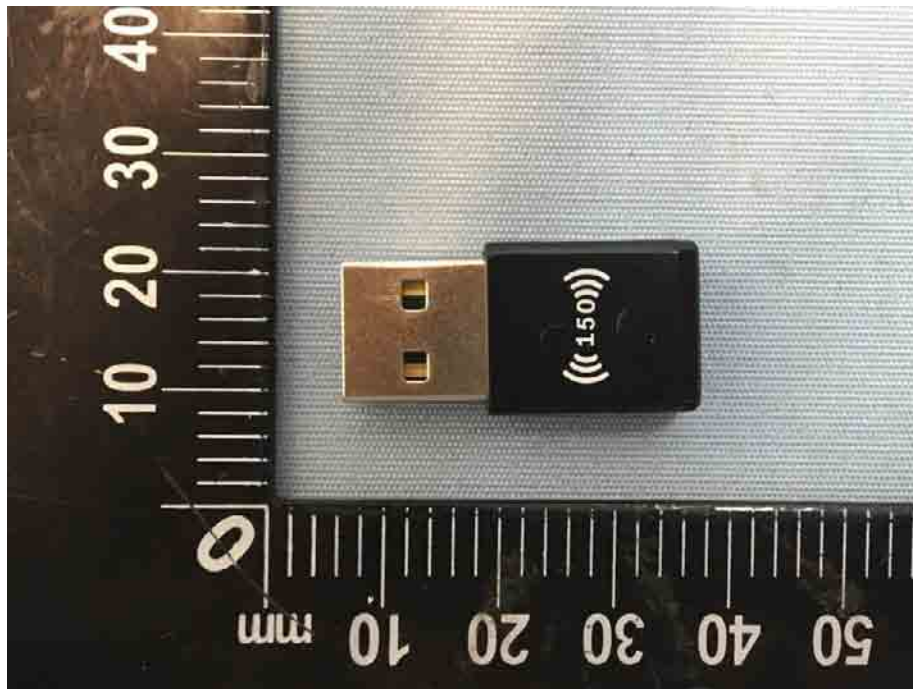

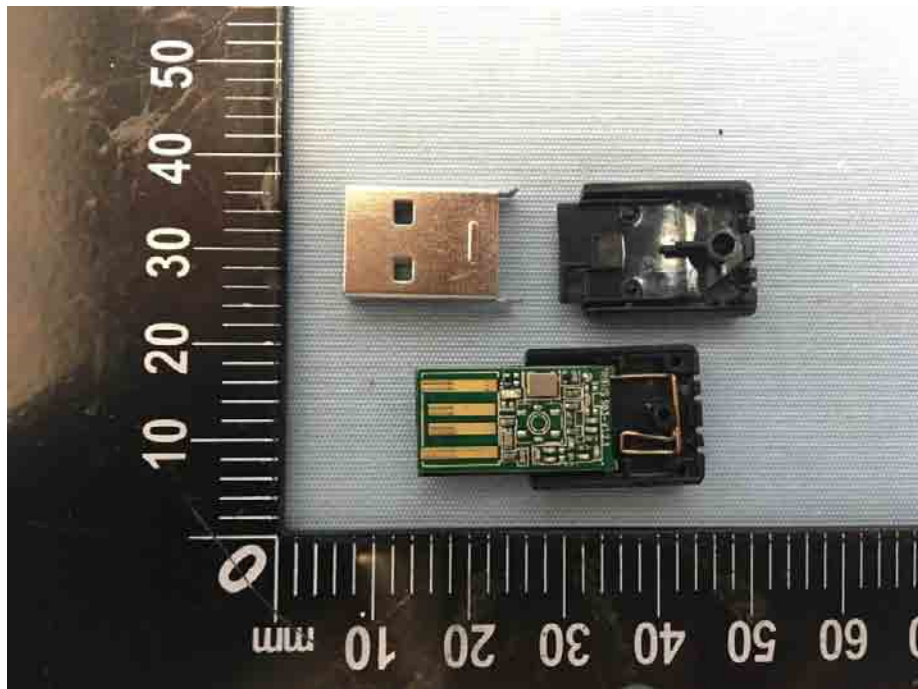

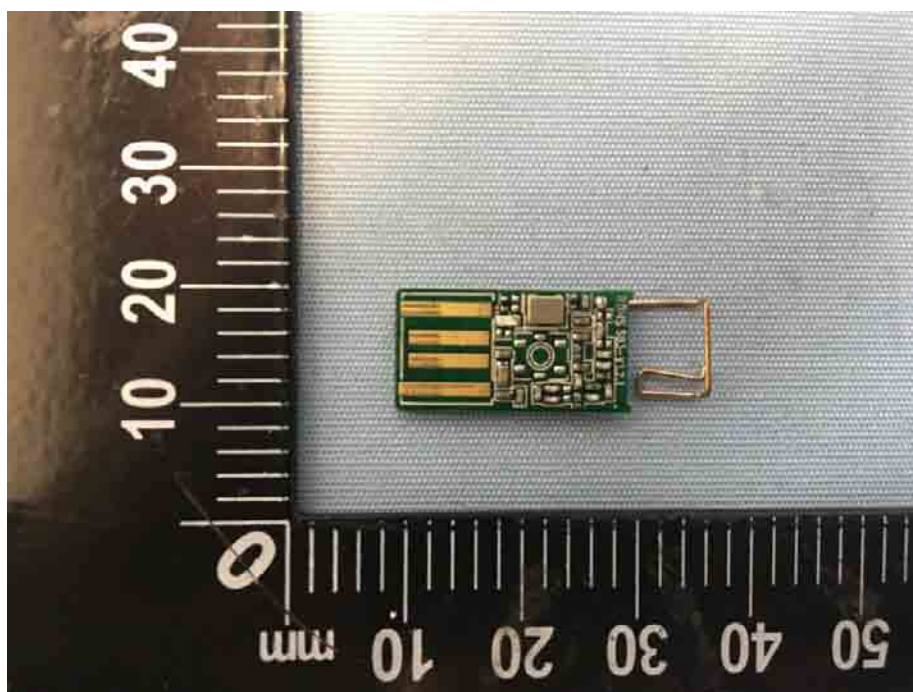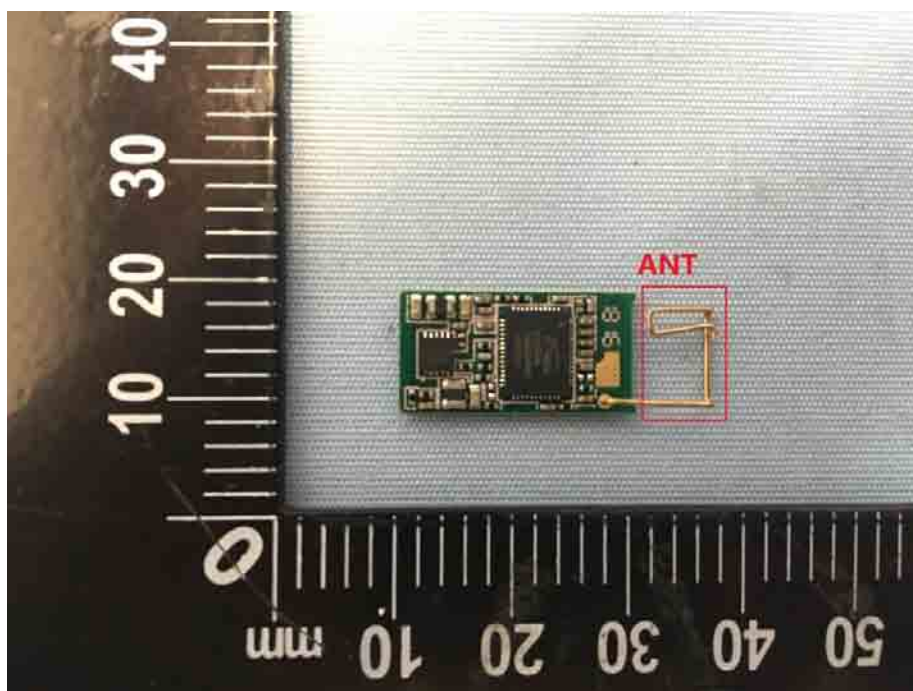

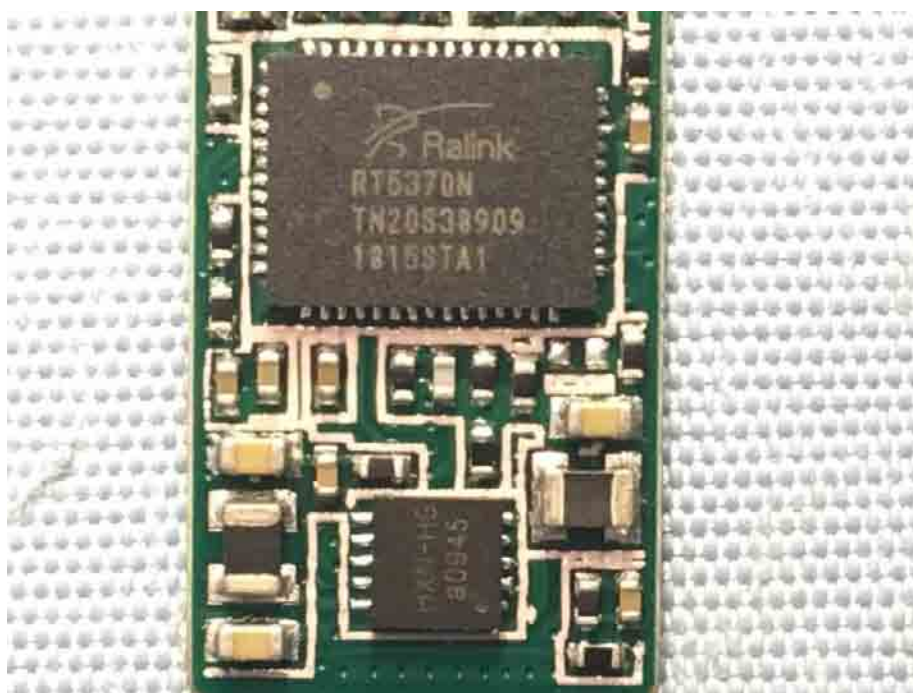

====End of Report====