



## 9.5. Radiated Spurious Emission

### Requirements

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

### **Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



## **Test Procedures**

[For 9 kHz ~ 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 30MHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

[For above 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

## **Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



Note:

- a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- b. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.

Configuration	Average	
	RBW	VBW
802.11b	1MHz	10 Hz
802.11g		1 kHz
802.11n (HT20)		1 kHz
802.11n (HT40)		2 kHz

Note: Refer to section 6.6 for duty cycle.

- d. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948


Doc No: 17-EM-F0876 / 5.0

### Test Setup

<Frequency Range 9 kHz ~ 30 MHz>

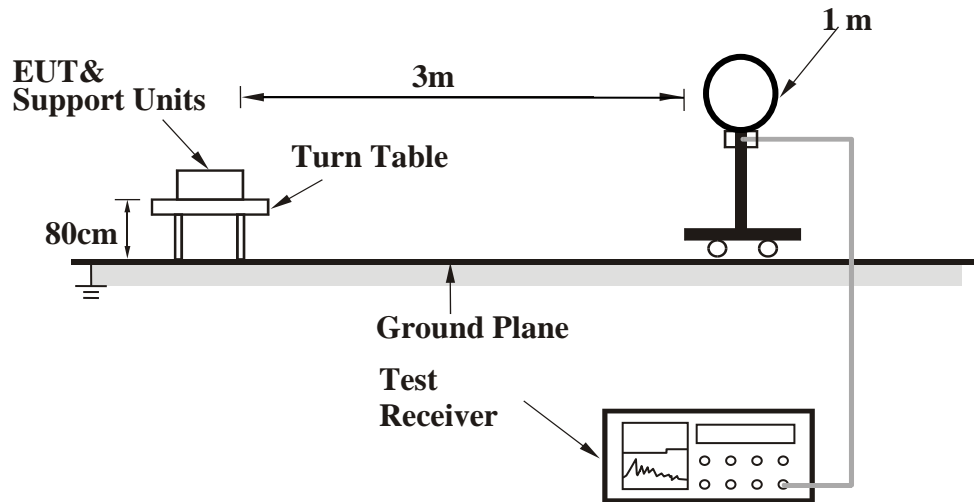


<Frequency Range 30 MHz ~ 1 GHz >

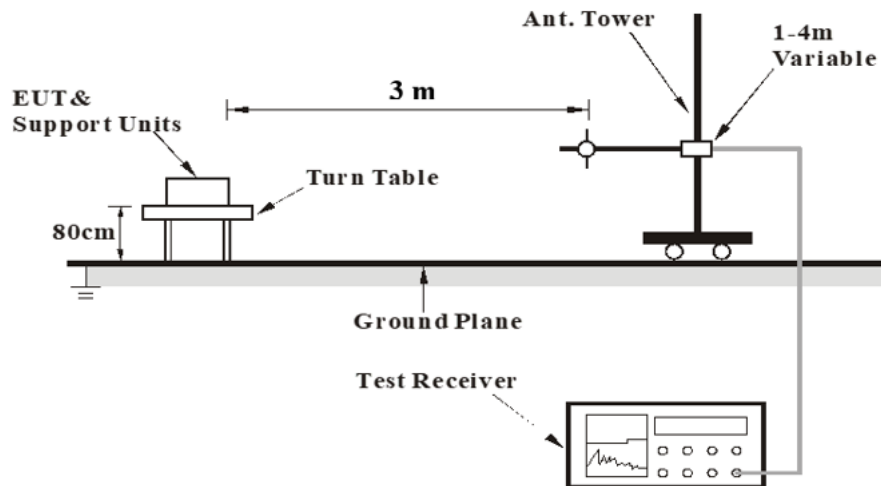



<Frequency Range above 1 GHz>

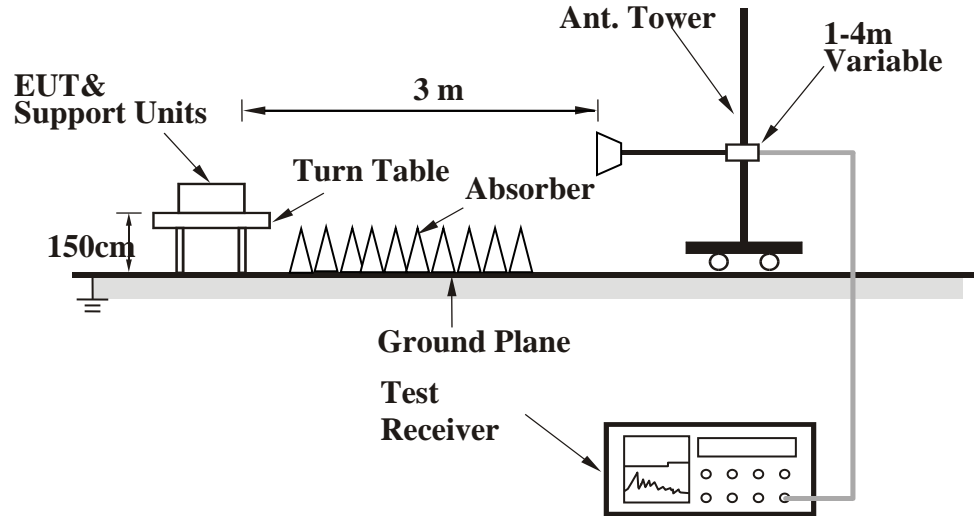

For the actual test configuration, please refer to the Setup Configurations.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



## Test Data

### Above 1GHz Data

#### 802.11b

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	1 GHz ~ 26.5 GHz

Antenna Polarity & Test Distance: Horizontal at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2326.2	40.56	6.74	47.3	74	-26.7	Peak
@	2412	94.16	6.68	100.84	-	-	Peak
-	2388.4	28.65	6.73	35.38	54	-18.62	Average
@	2412	91.21	6.68	97.89	-	-	Average
*	4824	35.39	3.53	38.92	74	-35.08	Peak
Antenna Polarity & Test Distance: Vertical at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2331.2	40.88	6.74	47.62	74	-26.38	Peak
@	2412	89.12	6.68	95.8	-	-	Peak
-	2342.8	28.69	6.73	35.42	54	-18.58	Average
@	2412	86.3	6.68	92.98	-	-	Average
*	4824	36.39	3.53	39.92	74	-34.08	Peak

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "\* \* ": The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

### Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan  
Telephone :+886-2-7737-3000  
Facsimile (FAX ) :+886-3-583-7948



EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 26.5 GHz

Antenna Polarity & Test Distance: Horizontal at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2316.2	40.23	6.73	46.96	74	-27.04	Peak
@	2437	93.73	6.59	100.32	-	-	Peak
-	2491	41.06	6.53	47.59	74	-26.41	Peak
-	2335.2	28.61	6.74	35.35	54	-18.65	Average
@	2437	90.69	6.59	97.28	-	-	Average
-	2484.4	28.76	6.53	35.29	54	-18.71	Average
*	4874	35.2	3.63	38.83	74	-35.17	Peak
Antenna Polarity & Test Distance: Vertical at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2324.2	40.59	6.73	47.32	74	-26.68	Peak
@	2437	89.37	6.59	95.96	-	-	Peak
-	2499.4	40.82	6.53	47.35	74	-26.65	Peak
-	2361.8	28.61	6.73	35.34	54	-18.66	Average
@	2437	86.34	6.59	92.93	-	-	Average
-	2495.2	29.14	6.53	35.67	54	-18.33	Average
*	4874	35.15	3.63	38.78	74	-35.22	Peak

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "\*": The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

### Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



EUT Test Condition		Measurement Detail	
Channel	Channel 11	Frequency Range	1 GHz ~ 26.5 GHz

Antenna Polarity & Test Distance: Horizontal at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
@	2462	92.86	6.54	99.4	-	-	Peak
-	2489	40.57	6.53	47.1	74	-26.9	Peak
@	2462	89.6	6.54	96.14	-	-	Average
-	2487.8	29.12	6.52	35.64	54	-18.36	Average
*	4924	36.18	3.69	39.87	74	-34.13	Peak
Antenna Polarity & Test Distance: Vertical at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
@	2462	87.97	6.54	94.51	-	-	Peak
-	2496.2	40.15	6.53	46.68	74	-27.32	Peak
@	2462	85.11	6.54	91.65	-	-	Average
-	2495	28.68	6.53	35.21	54	-18.79	Average
*	4924	35.86	3.69	39.55	74	-34.45	Peak

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "\* \* ": The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0





802.11g

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	1 GHz ~ 26.5 GHz

Antenna Polarity & Test Distance: Horizontal at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
@	2329.2	41.03	6.73	47.76	74	-26.24	Peak
-	2412	94.51	6.68	101.19	-	-	Peak
@	2390	31.01	6.74	37.75	54	-16.25	Average
-	2412	86.1	6.68	92.78	-	-	Average
*	4824	35.32	3.53	38.85	74	-35.15	Peak
Antenna Polarity & Test Distance: Vertical at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
@	2384.4	40.67	6.73	47.4	74	-26.6	Peak
-	2412	90.73	6.68	97.41	-	-	Peak
@	2389	29.04	6.73	35.77	54	-18.23	Average
-	2412	82.25	6.68	88.93	-	-	Average
*	4824	36.53	3.53	40.06	74	-33.94	Peak

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "\* \* ": The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan  
Telephone :+886-2-7737-3000  
Facsimile (FAX ) :+886-3-583-7948



EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 26.5 GHz

Antenna Polarity & Test Distance: Horizontal at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2315.4	41.08	6.73	47.81	74	-26.19	Peak
@	2437	93.91	6.59	100.5	-	-	Peak
-	2490	40.34	6.53	46.87	74	-27.13	Peak
-	2390	29.78	6.74	36.52	54	-17.48	Average
@	2437	85.85	6.59	92.44	-	-	Average
-	2484	29.8	6.53	36.33	54	-17.67	Average
*	4874	34.74	3.63	38.37	74	-35.63	Peak
Antenna Polarity & Test Distance: Vertical at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2318.8	40.57	6.73	47.3	74	-26.7	Peak
@	2437	89.82	6.59	96.41	-	-	Peak
-	2492.8	40.36	6.53	46.89	74	-27.11	Peak
-	2384.8	28.67	6.73	35.4	54	-18.6	Average
@	2437	81.8	6.59	88.39	-	-	Average
-	2490.8	28.79	6.53	35.32	54	-18.68	Average
*	4874	35.6	3.63	39.23	74	-34.77	Peak

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "\*": The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

### Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



EUT Test Condition		Measurement Detail	
Channel	Channel 11	Frequency Range	1 GHz ~ 26.5 GHz

Antenna Polarity & Test Distance: Horizontal at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
@	2462	93.63	6.54	100.17	-	-	Peak
-	2488.6	45.77	6.53	52.3	74	-21.7	Peak
@	2462	84.54	6.54	91.08	-	-	Average
-	2483.6	32.93	6.53	39.46	54	-14.54	Average
*	4924	35.04	3.69	38.73	74	-35.27	Peak
Antenna Polarity & Test Distance: Vertical at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
@	2462	88.35	6.54	94.89	-	-	Peak
-	2494.2	41	6.53	47.53	74	-26.47	Peak
@	2462	79.82	6.54	86.36	-	-	Average
-	2483.6	30.33	6.53	36.86	54	-17.14	Average
*	4924	35.61	3.69	39.3	74	-34.7	Peak

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "\*": The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



**802.11n (HT20)**

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	1 GHz ~ 26.5 GHz

Antenna Polarity & Test Distance: Horizontal at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2388	44.87	6.73	51.6	74	-22.4	Peak
@	2412	97.88	6.68	104.56	-	-	Peak
-	2390	34.93	6.74	41.67	54	-12.33	Average
@	2412	90.32	6.68	97	-	-	Average
*	4824	36.58	3.53	40.11	74	-33.89	Peak
Antenna Polarity & Test Distance: Vertical at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2316.2	41.66	6.73	48.39	74	-25.61	Peak
@	2412	93.95	6.68	100.63	-	-	Peak
-	2390	30.73	6.74	37.47	54	-16.53	Average
@	2412	86.66	6.68	93.34	-	-	Average
*	4824	36.25	3.53	39.78	74	-34.22	Peak

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "\* \*": The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 26.5 GHz

Antenna Polarity & Test Distance: Horizontal at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2384.2	40.46	6.73	47.19	74	-26.81	Peak
@	2437	97.37	6.59	103.96	-	-	Peak
-	2484.4	41.43	6.53	47.96	74	-26.04	Peak
-	2390	31.17	6.74	37.91	54	-16.09	Average
@	2437	90.63	6.59	97.22	-	-	Average
-	2484.2	30.66	6.53	37.19	54	-16.81	Average
*	4874	35.39	3.63	39.02	74	-34.98	Peak
Antenna Polarity & Test Distance: Vertical at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2372.2	41.23	6.74	47.97	74	-26.03	Peak
@	2437	95.82	6.59	102.41	-	-	Peak
-	2484.8	40.86	6.53	47.39	74	-26.61	Peak
-	2388.2	29.33	6.73	36.06	54	-17.94	Average
@	2437	86.7	6.59	93.29	-	-	Average
-	2483.6	30	6.53	36.53	54	-17.47	Average
*	4874	35.22	3.63	38.85	74	-35.15	Peak

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "\*": The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

### Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



EUT Test Condition		Measurement Detail	
Channel	Channel 11	Frequency Range	1 GHz ~ 26.5 GHz

Antenna Polarity & Test Distance: Horizontal at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
@	2462	97.55	6.54	104.09	-	-	Peak
-	2485	49.53	6.53	56.06	74	-17.94	Peak
@	2462	89.21	6.54	95.75	-	-	Average
-	2483.8	36.88	6.53	43.41	54	-10.59	Average
*	4924	35.65	3.69	39.34	74	-34.66	Peak
Antenna Polarity & Test Distance: Vertical at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
@	2462	93.91	6.54	100.45	-	-	Peak
-	2485	42.6	6.53	49.13	74	-24.87	Peak
@	2462	86.17	6.54	92.71	-	-	Average
-	2483.8	33.67	6.53	40.2	54	-13.8	Average
*	4924	35.8	3.69	39.49	74	-34.51	Peak

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "\*": The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



**802.11n (HT40)**

EUT Test Condition		Measurement Detail	
Channel	Channel 3	Frequency Range	1 GHz ~ 26.5 GHz

Antenna Polarity & Test Distance: Horizontal at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2386.6	49.48	6.74	56.22	74	-17.78	Peak
@	2422	95.2	6.65	101.85	-	-	Peak
-	2388.8	40.97	6.73	47.7	54	-6.3	Average
@	2422	87	6.65	93.65	-	-	Average
*	4844	35.4	3.6	39	74	-35	Peak
Antenna Polarity & Test Distance: Vertical at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2390	44.76	6.74	51.5	74	-22.5	Peak
@	2422	93.43	6.65	100.08	-	-	Peak
-	2389.8	34.12	6.74	40.86	54	-13.14	Average
@	2422	84.73	6.65	91.38	-	-	Average
*	4844	36.18	3.6	39.78	74	-34.22	Peak

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "\* \* ": The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan  
 Telephone :+886-2-7737-3000  
 Facsimile (FAX ) :+886-3-583-7948



EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 26.5 GHz

Antenna Polarity & Test Distance: Horizontal at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2390	45.62	6.74	52.36	74	-21.64	Peak
@	2437	95.96	6.59	102.55	-	-	Peak
-	2485.2	41.38	6.53	47.91	74	-26.09	Peak
-	2390	32.32	6.74	39.06	54	-14.94	Average
@	2437	89.44	6.59	96.03	-	-	Average
-	2484.2	32.3	6.53	38.83	54	-15.17	Average
*	4874	35.13	3.63	38.76	74	-35.24	Peak
Antenna Polarity & Test Distance: Vertical at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
-	2321.8	40.72	6.74	47.46	74	-26.54	Peak
@	2437	93.91	6.59	100.5	-	-	Peak
-	2487.8	41.47	6.52	47.99	74	-26.01	Peak
-	2389.4	30.28	6.73	37.01	54	-16.99	Average
@	2437	85.87	6.59	92.46	-	-	Average
-	2484.6	31.04	6.53	37.57	54	-16.43	Average
*	4874	35.41	3.63	39.04	74	-34.96	Peak

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "\*": The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0





EUT Test Condition		Measurement Detail	
Channel	Channel 9	Frequency Range	1 GHz ~ 26.5 GHz

Antenna Polarity & Test Distance: Horizontal at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
@	2452	94.73	6.54	101.27	-	-	Peak
-	2484.6	47.34	6.53	53.87	74	-20.13	Peak
@	2452	87.32	6.54	93.86	-	-	Average
-	2484.6	39.95	6.53	46.48	54	-7.52	Average
*	4904	37.55	3.67	41.22	74	-32.78	Peak
Antenna Polarity & Test Distance: Vertical at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
@	2452	93.79	6.54	100.33	-	-	Peak
-	2484.4	43.59	6.53	50.12	74	-23.88	Peak
@	2452	85.95	6.54	92.49	-	-	Average
-	2484.8	36.48	6.53	43.01	54	-10.99	Average
*	4904	36.6	3.67	40.27	74	-33.73	Peak

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "\* \* ": The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



### 9 kHz ~ 30 MHz Data:

For 9 kHz to 30 MHz radiated emission have performed all modes of operation were investigated. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

No non-compliance noted:

### **KDB 414788 D01 OATS and Chamber Correlation Justification**

- Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

- OATs and chamber correlation testing had been performed and chamber measured test results is the worst case test result.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

### **Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0




### 30 MHz ~ 1 GHz Data


### 802.11g

EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	30 MHz ~ 1 GHz

### Horizontal

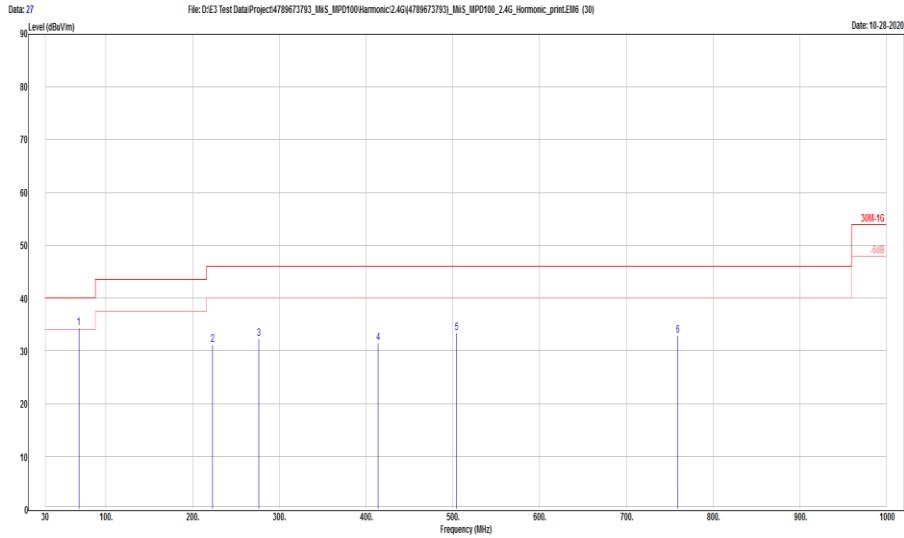

### Vertical

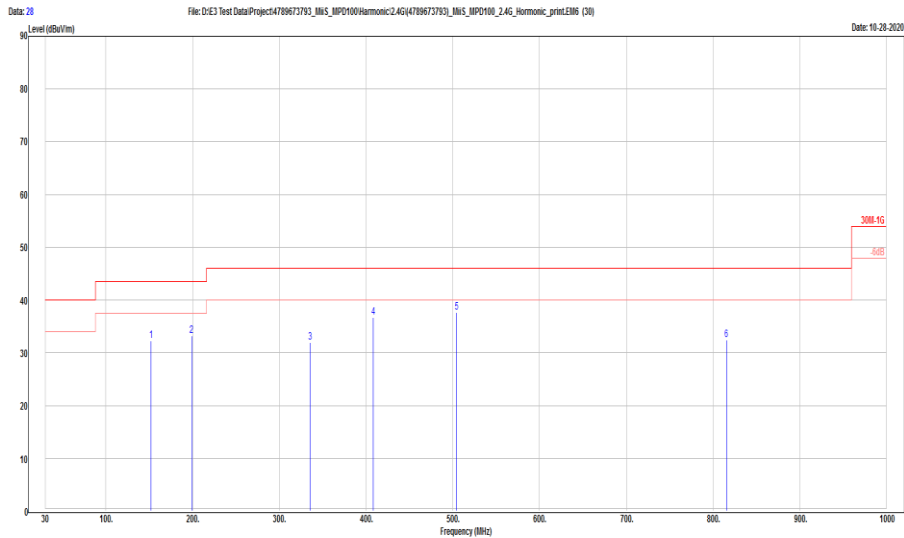

### Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



Antenna Polarity & Test Distance: Horizontal at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	68.8	48.06	-13.77	34.29	40	-5.71	Peak
2	223.03	44.47	-13.33	31.14	46	-14.86	Peak
3	276.38	42.88	-10.54	32.34	46	-13.66	Peak
4	414.12	38.26	-6.76	31.5	46	-14.5	Peak
5	504.33	37.9	-4.47	33.43	46	-12.57	Peak
6	759.44	31.99	0.96	32.95	46	-13.05	Peak

Antenna Polarity & Test Distance: Vertical at 3 m							
Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	152.22	43.83	-11.58	32.25	43.5	-11.25	Peak
2	198.78	46.97	-13.73	33.24	43.5	-10.26	Peak
3	335.55	40.84	-8.95	31.89	46	-14.11	Peak
4	408.3	43.67	-6.91	36.76	46	-9.24	Peak
5	504.33	42.17	-4.47	37.7	46	-8.3	Peak
6	815.7	31.26	1.16	32.42	46	-13.58	Peak

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. The peak result complies with QP limit, QP result is deemed to comply with QP limit.
5. The other emission levels were very low against the limit.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



## 9.6. AC Power Line Conducted Emission

### Requirements

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

### **Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



## Test Setup

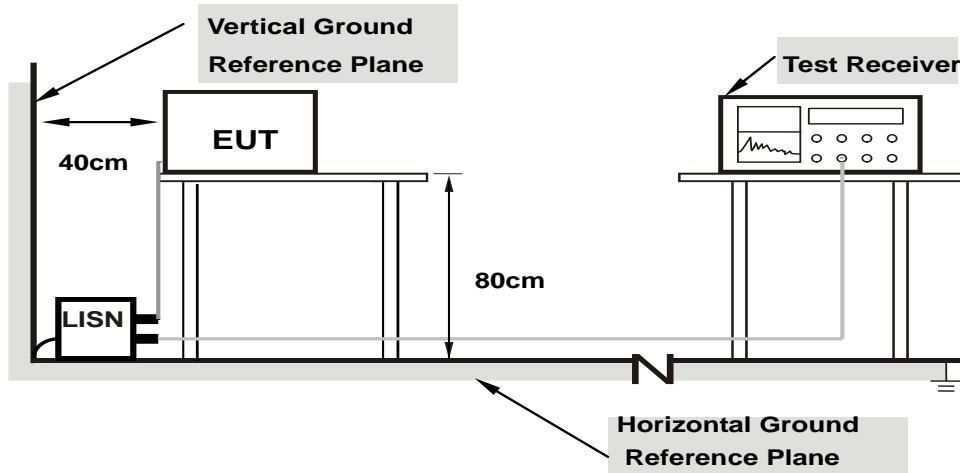

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the Setup Configurations.

### **Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0




## Test Data

NB mode

802.11g

EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	150 kHz ~ 30 MHz

### Phase of Power : Line (L)

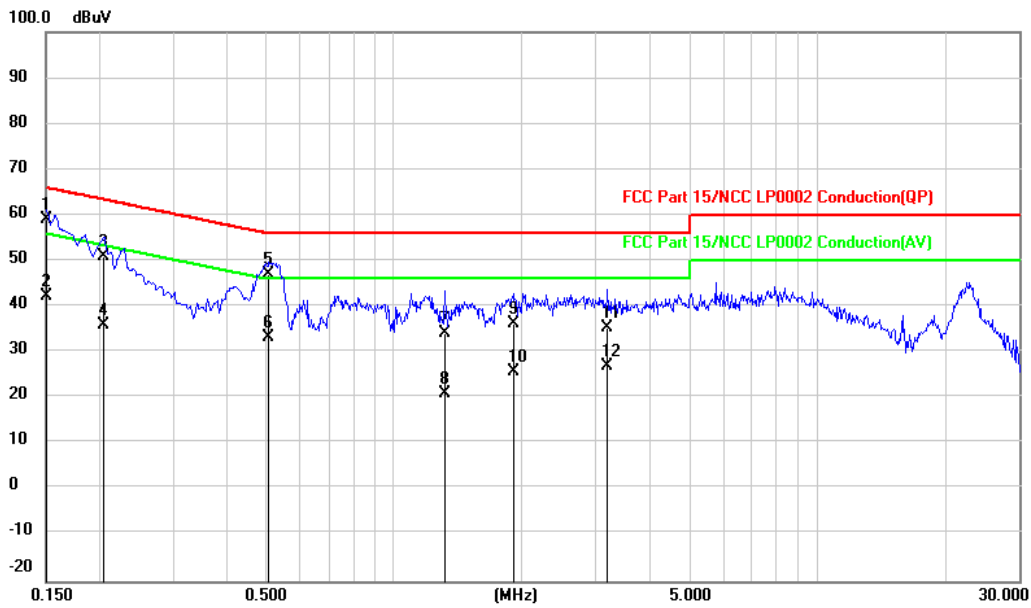

## Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



No.	Frequency (MHz)	Reading (dBuV)	Correct dB	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	39.44	19.54	58.98	66.00	-7.02	QP
2	0.1500	22.81	19.54	42.35	56.00	-13.65	AVG
3	0.2060	31.44	19.53	50.97	63.37	-12.40	QP
4	0.2060	16.38	19.53	35.91	53.37	-17.46	AVG
5	0.5060	27.67	19.51	47.18	56.00	-8.82	QP
6	0.5060	13.89	19.51	33.40	46.00	-12.60	AVG
7	1.3220	14.68	19.54	34.22	56.00	-21.78	QP
8	1.3220	1.31	19.54	20.85	46.00	-25.15	AVG
9	1.9100	16.62	19.55	36.17	56.00	-19.83	QP
10	1.9100	6.11	19.55	25.66	46.00	-20.34	AVG
11	3.1940	15.91	19.57	35.48	56.00	-20.52	QP
12	3.1940	7.25	19.57	26.82	46.00	-19.18	AVG

Remarks:

1. Result value (dBuV) = Reading value (dBuV) + Correction Factor (dB)
2. Margin(dB) = Result value (dBuV) - Limit value (dBuV)
3. Correction Factor(dB) = Insertion loss(dB) + Cable loss(dB)
4. The other emission levels were very low against the limit.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000


Facsimile (FAX ) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0





### Phase of Power : Neutral (N)

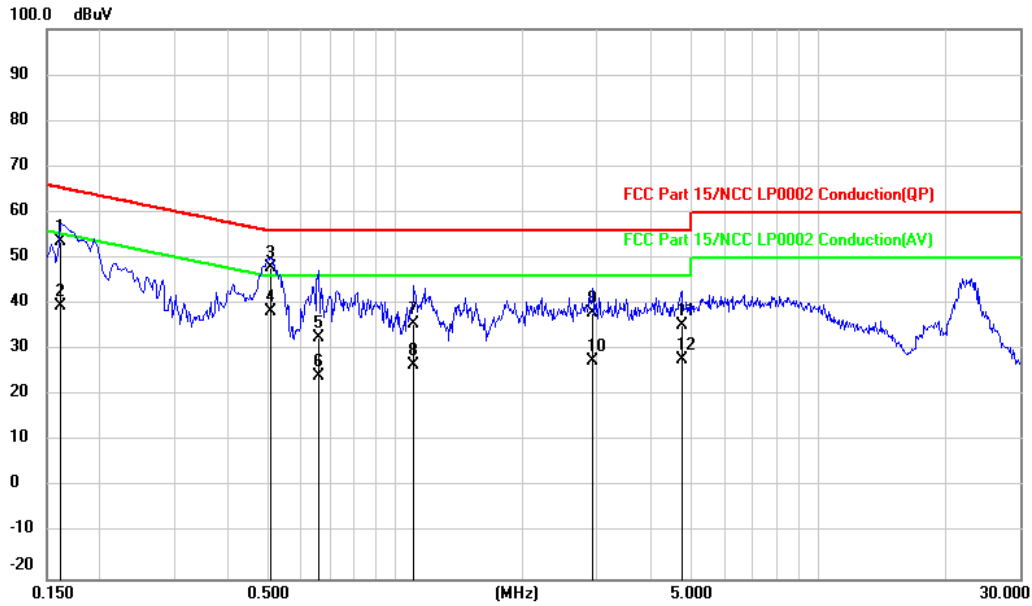

### Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



No.	Frequency (MHz)	Reading (dBuV)	Correct dB	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1620	34.26	19.54	53.80	65.36	-11.56	QP
2	0.1620	19.92	19.54	39.46	55.36	-15.90	AVG
3	0.5100	28.46	19.52	47.98	56.00	-8.02	QP
4	0.5100	18.93	19.52	38.45	46.00	-7.55	AVG
5	0.6580	13.14	19.52	32.66	56.00	-23.34	QP
6	0.6580	4.86	19.52	24.38	46.00	-21.62	AVG
7	1.1100	16.02	19.53	35.55	56.00	-20.45	QP
8	1.1100	7.14	19.53	26.67	46.00	-19.33	AVG
9	2.9420	18.49	19.56	38.05	56.00	-17.95	QP
10	2.9420	7.97	19.56	27.53	46.00	-18.47	AVG
11	4.7619	15.75	19.60	35.35	56.00	-20.65	QP
12	4.7619	8.32	19.60	27.92	46.00	-18.08	AVG

Remarks:

1. Result value (dBuV) = Reading value (dBuV) + Correction Factor (dB)
2. Margin(dB) = Result value (dBuV) - Limit value (dBuV)
3. Correction Factor(dB) = Insertion loss(dB) + Cable loss(dB)
4. The other emission levels were very low against the limit.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0




Adapter mode

802.11g

EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	150 kHz ~ 30 MHz

Phase of Power : Line (L)

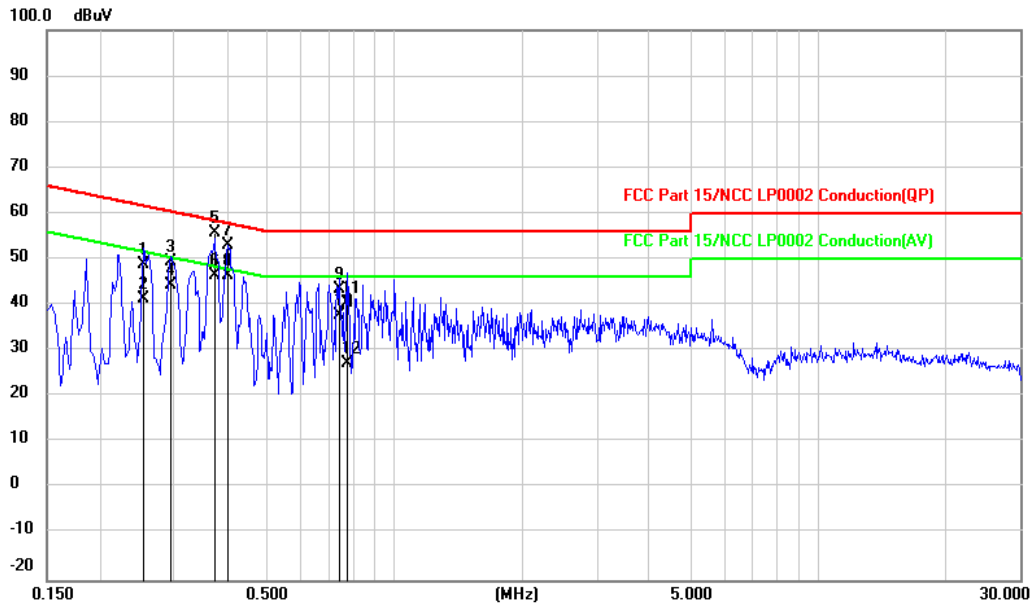

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



No.	Frequency (MHz)	Reading (dBuV)	Correct dB	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2540	29.21	19.53	48.74	61.63	-12.89	QP
2	0.2540	21.85	19.53	41.38	51.63	-10.25	AVG
3	0.2940	30.00	19.53	49.53	60.41	-10.88	QP
4	0.2940	24.80	19.53	44.33	50.41	-6.08	AVG
5	0.3740	36.16	19.51	55.67	58.41	-2.74	QP
6	0.3740	26.92	19.51	46.43	48.41	-1.98	AVG
7	0.4020	33.51	19.51	53.02	57.81	-4.79	QP
8	0.4020	26.81	19.51	46.32	47.81	-1.49	AVG
9	0.7380	23.94	19.53	43.47	56.00	-12.53	QP
10	0.7380	18.18	19.53	37.71	46.00	-8.29	AVG
11	0.7700	20.77	19.54	40.31	56.00	-15.69	QP
12	0.7700	7.72	19.54	27.26	46.00	-18.74	AVG

Remarks:

1. Result value (dBuV) = Reading value (dBuV) + Correction Factor (dB)
2. Margin(dB) = Result value (dBuV) - Limit value (dBuV)
3. Correction Factor(dB) = Insertion loss(dB) + Cable loss(dB)
4. The other emission levels were very low against the limit.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



### Phase of Power : Neutral (N)

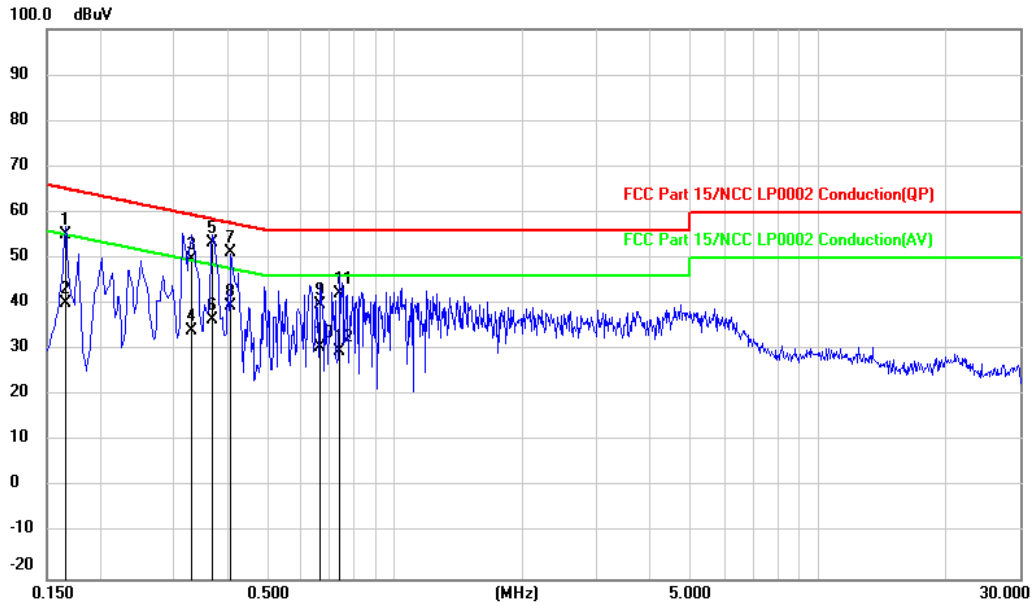

### Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 5.0



No.	Frequency (MHz)	Reading (dBuV)	Correct dB	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1660	35.61	19.54	55.15	65.16	-10.01	QP
2	0.1660	20.59	19.54	40.13	55.16	-15.03	AVG
3	0.3300	30.24	19.51	49.75	59.45	-9.70	QP
4	0.3300	14.54	19.51	34.05	49.45	-15.40	AVG
5	0.3700	33.80	19.51	53.31	58.50	-5.19	QP
6	0.3700	16.92	19.51	36.43	48.50	-12.07	AVG
7	0.4100	31.63	19.51	51.14	57.65	-6.51	QP
8	0.4100	19.94	19.51	39.45	47.65	-8.20	AVG
9	0.6660	20.22	19.52	39.74	56.00	-16.26	QP
10	0.6660	11.05	19.52	30.57	46.00	-15.43	AVG
11	0.7420	22.64	19.52	42.16	56.00	-13.84	QP
12	0.7420	10.15	19.52	29.67	46.00	-16.33	AVG

Remarks:

1. Result value (dBuV) = Reading value (dBuV) + Correction Factor (dB)
2. Margin(dB) = Result value (dBuV) - Limit value (dBuV)
3. Correction Factor(dB) = Insertion loss(dB) + Cable loss(dB)
4. The other emission levels were very low against the limit.

**Underwriters Laboratories Taiwan Co., Ltd.**

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX ) :+886-3-583-7948


Doc No: 17-EM-F0876 / 5.0



## Appendix I Radiated Band Edge Measurement


### 802.11b

#### Peak

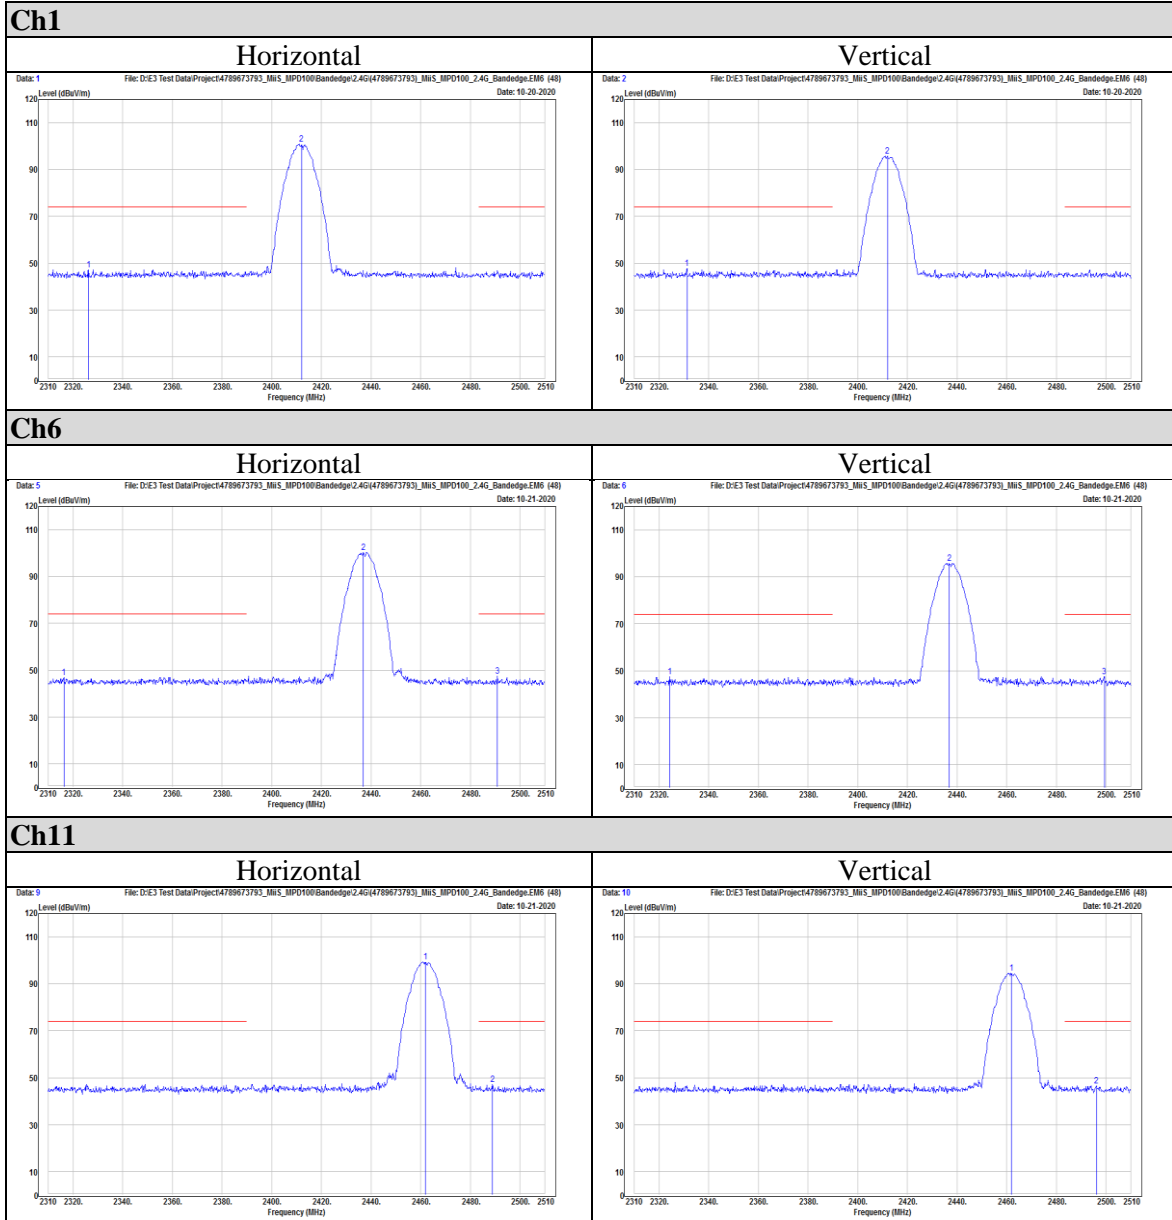



Average

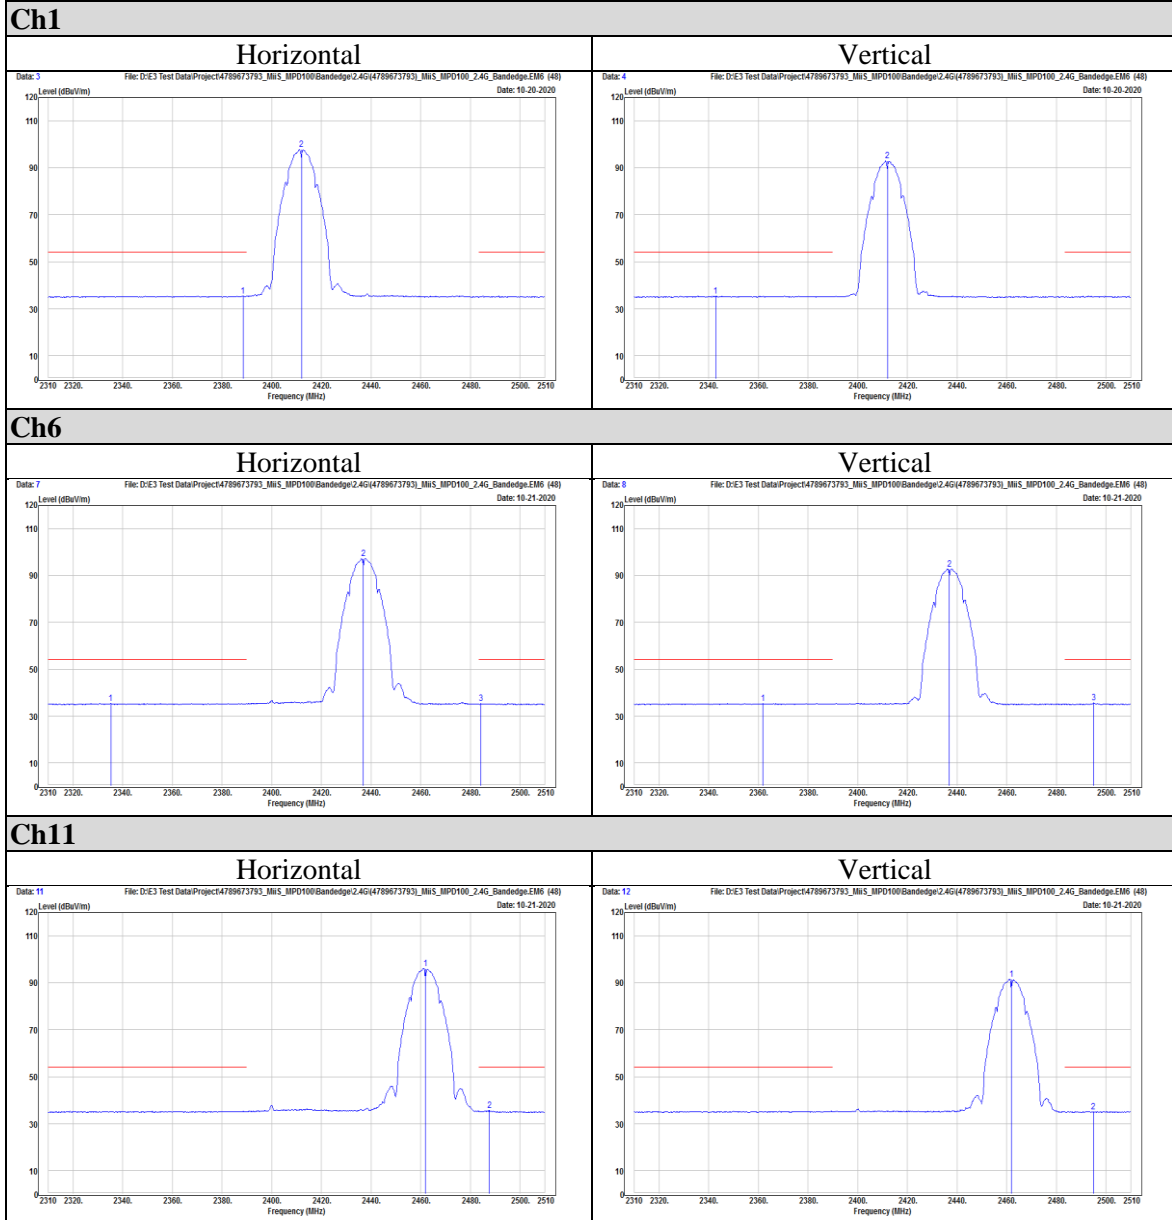







802.11g

Peak

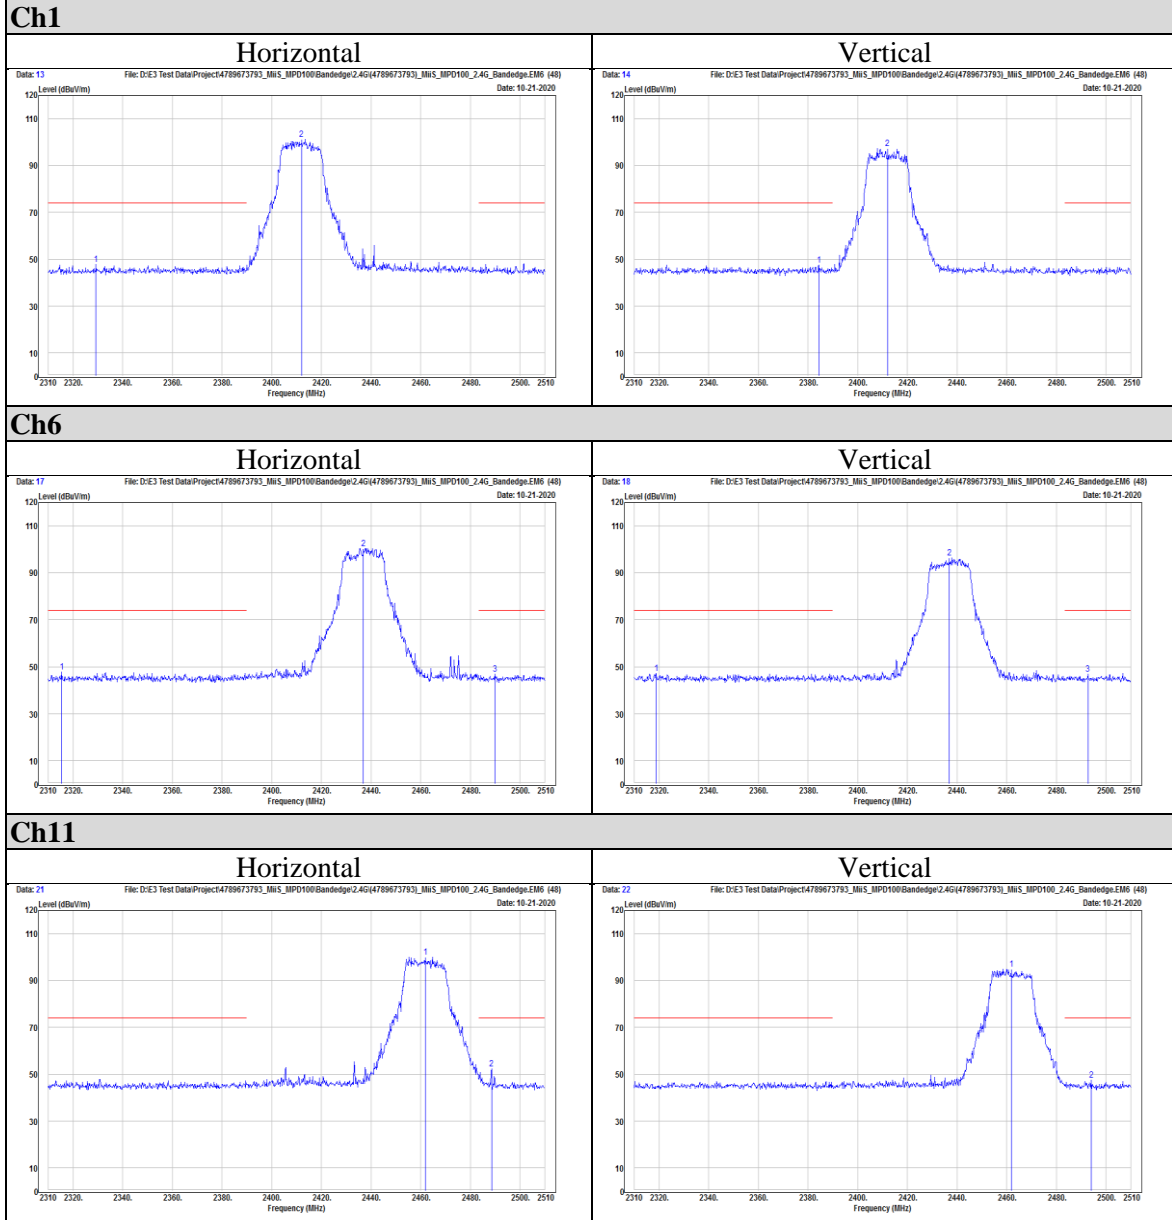




### Average

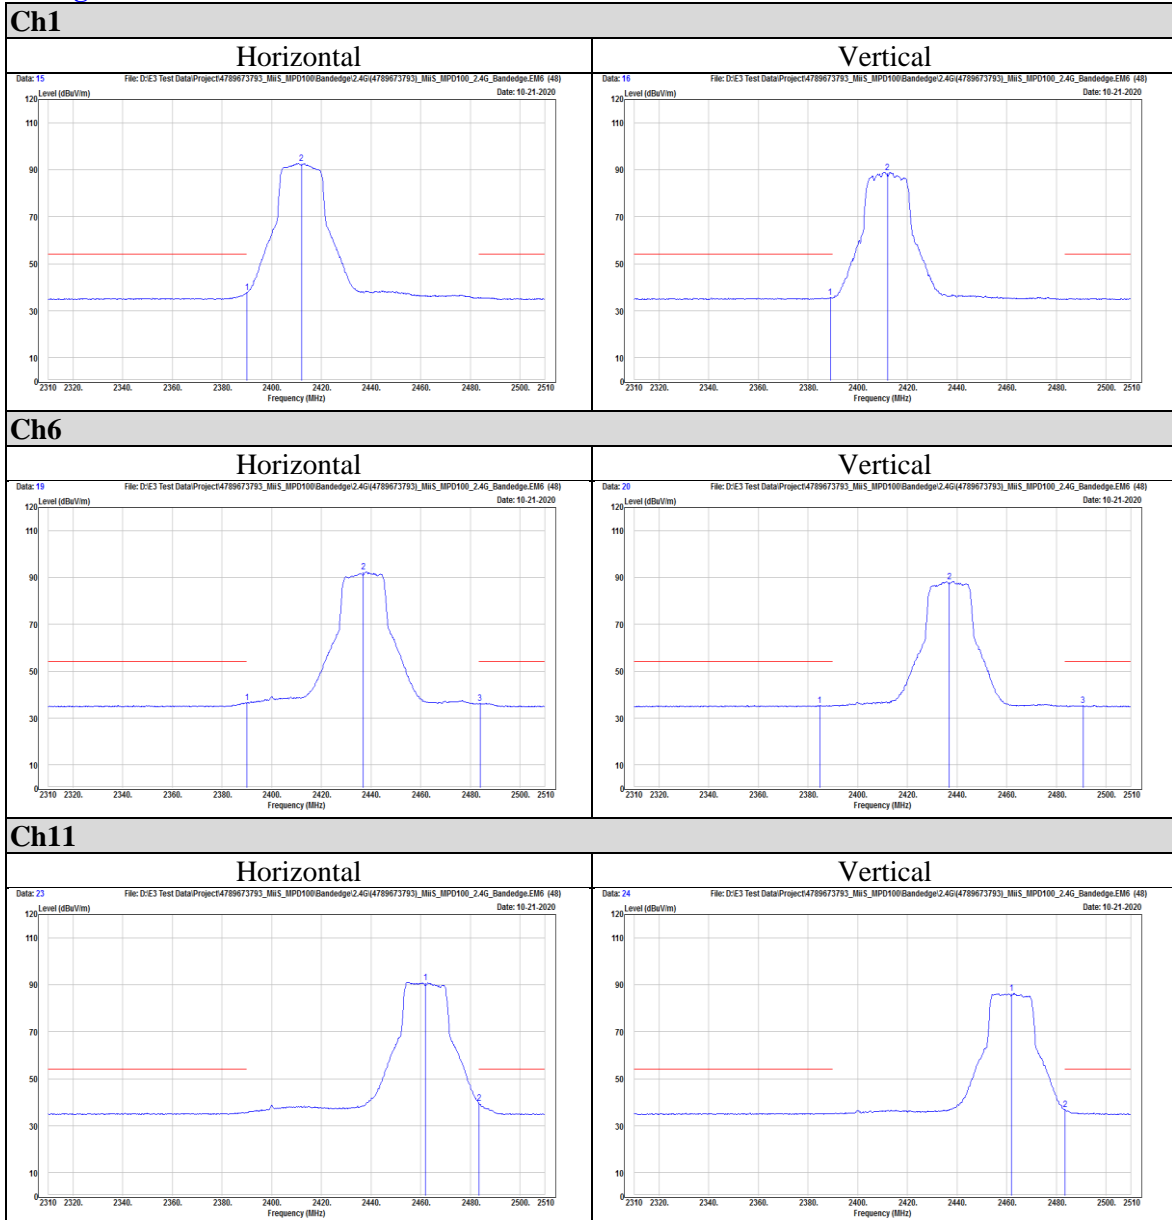




### 802.11n (HT20)

#### Peak

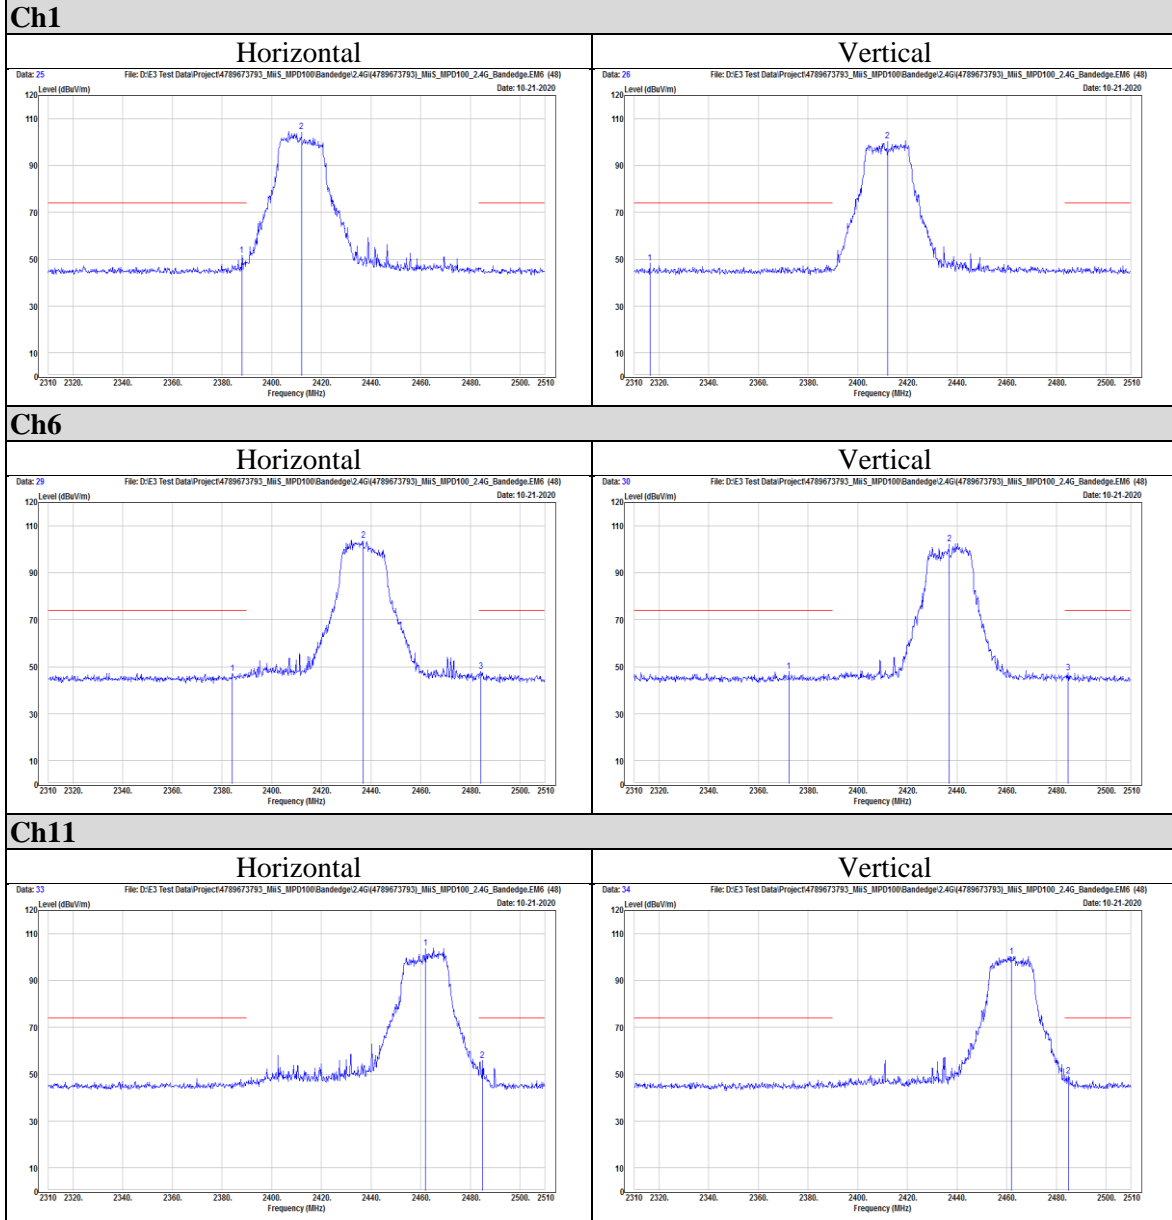




Average

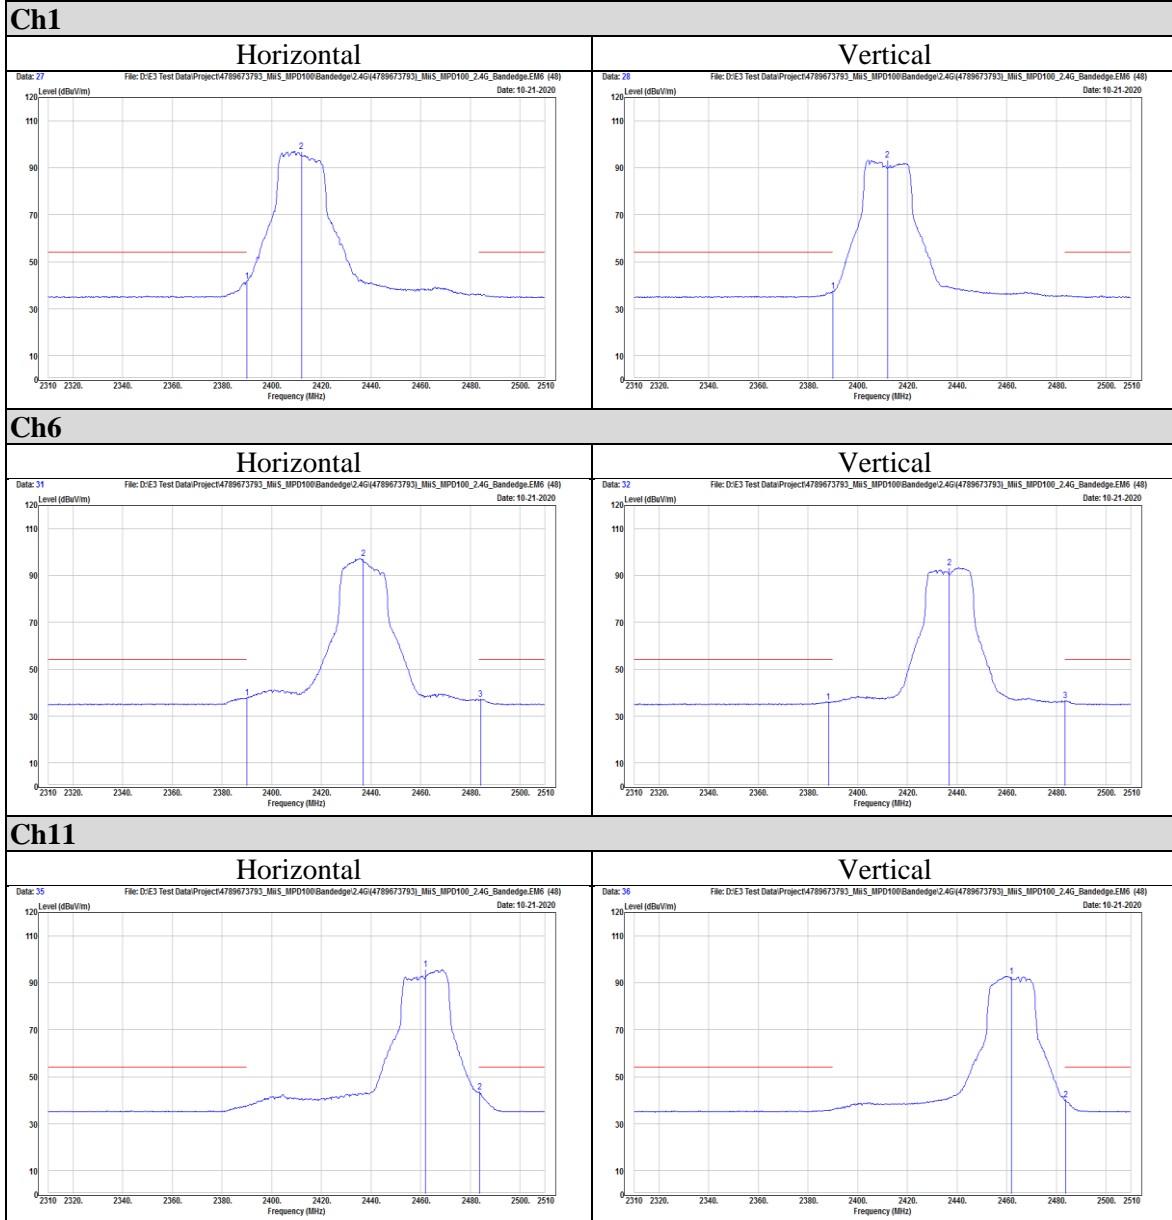




802.11n (HT40)

Peak

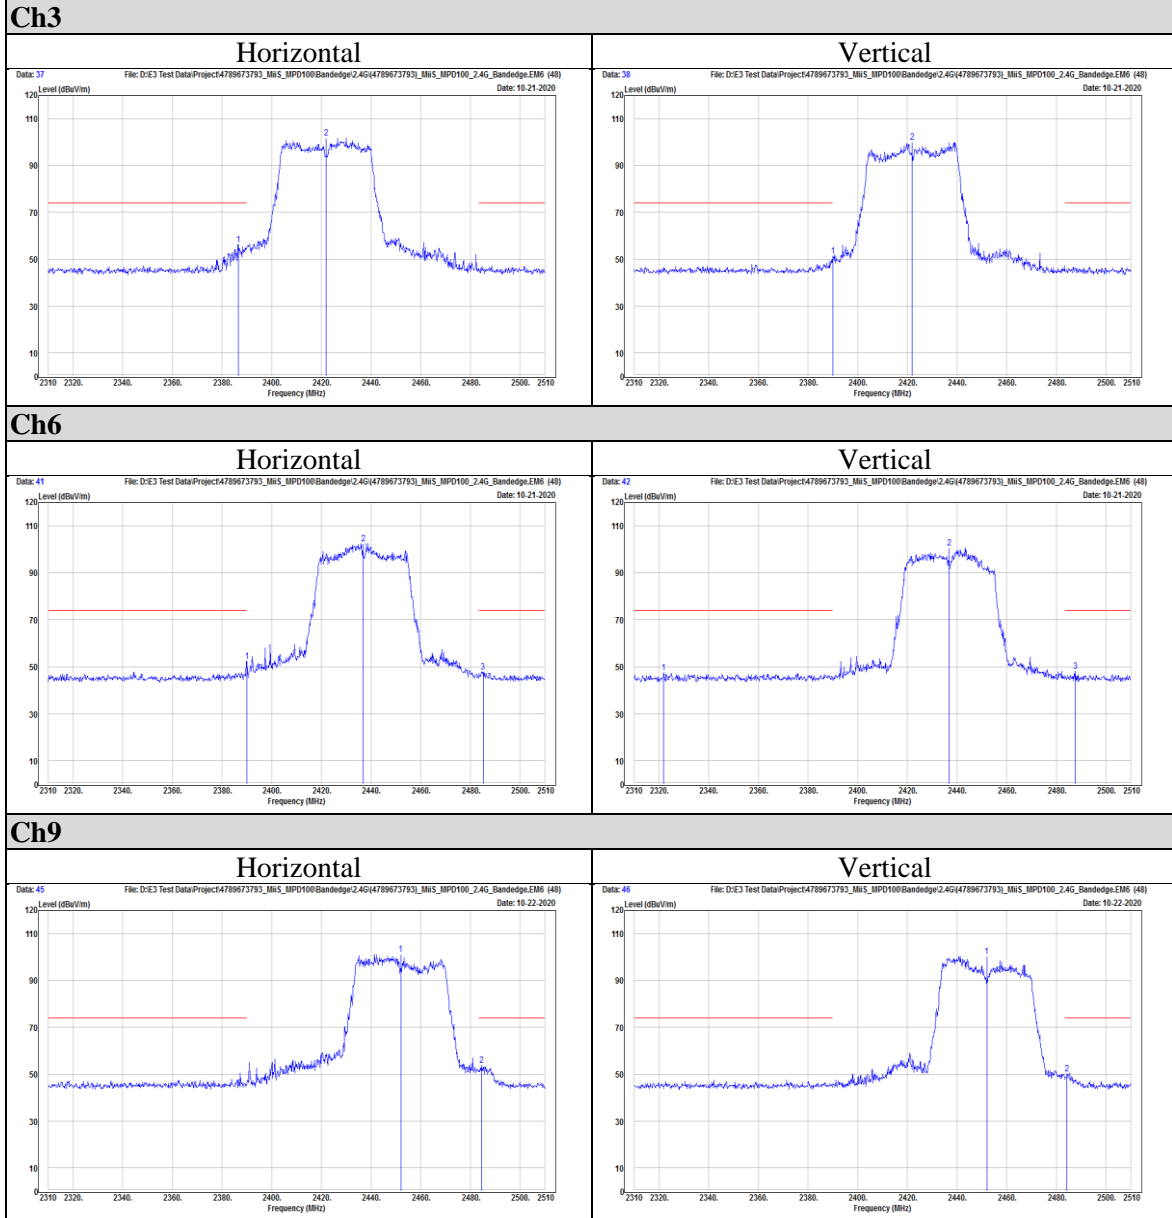




Average

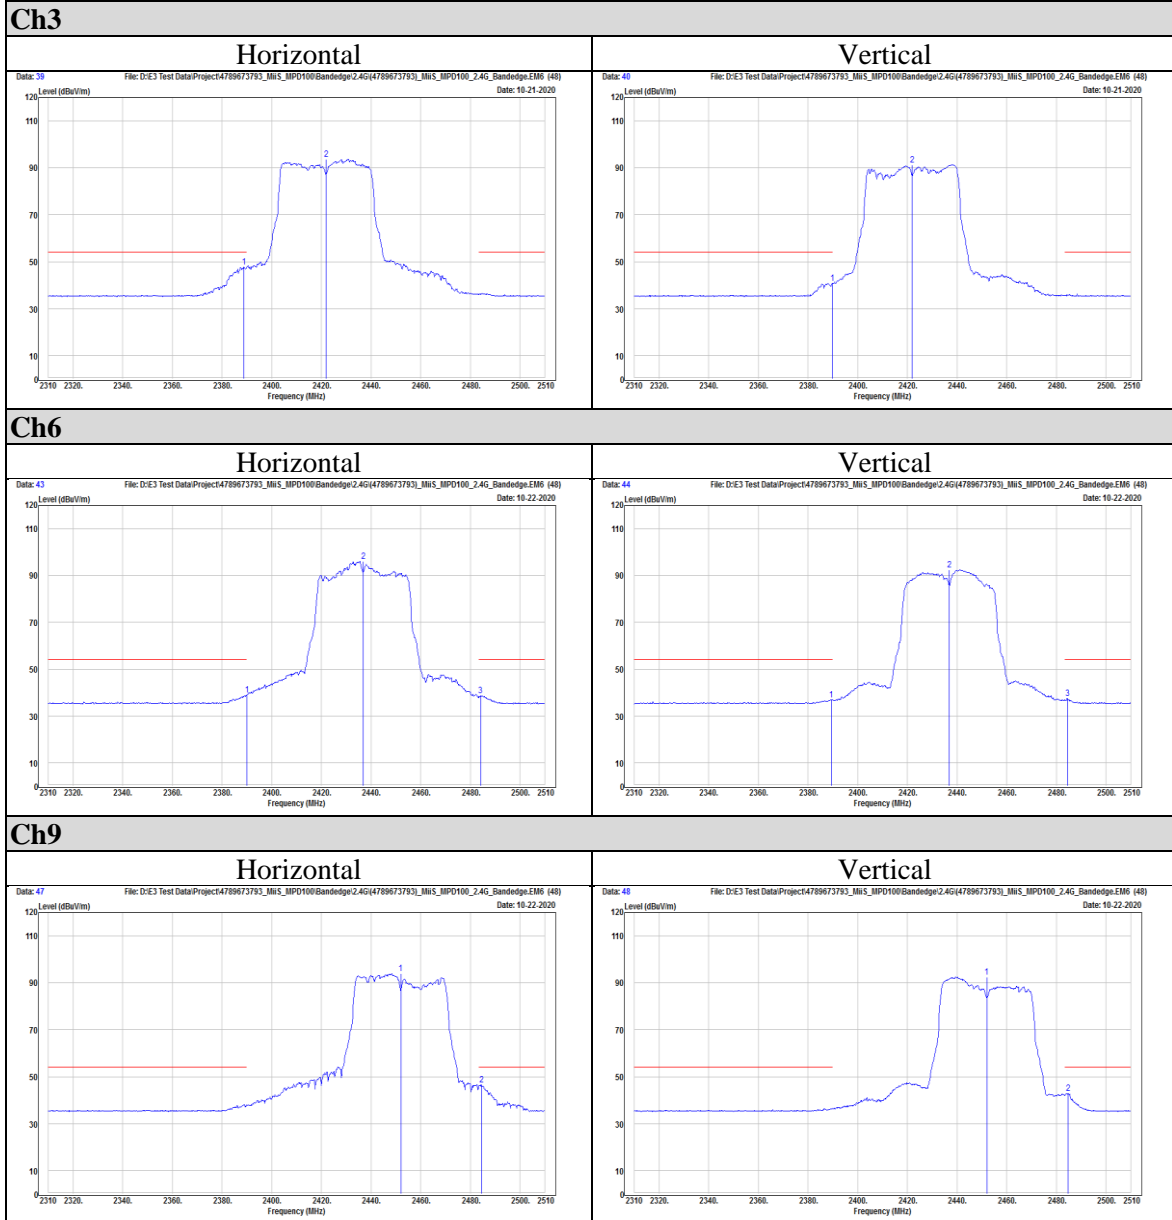




## Appendix II Radiated Spurious Emission Measurement

### 802.11b

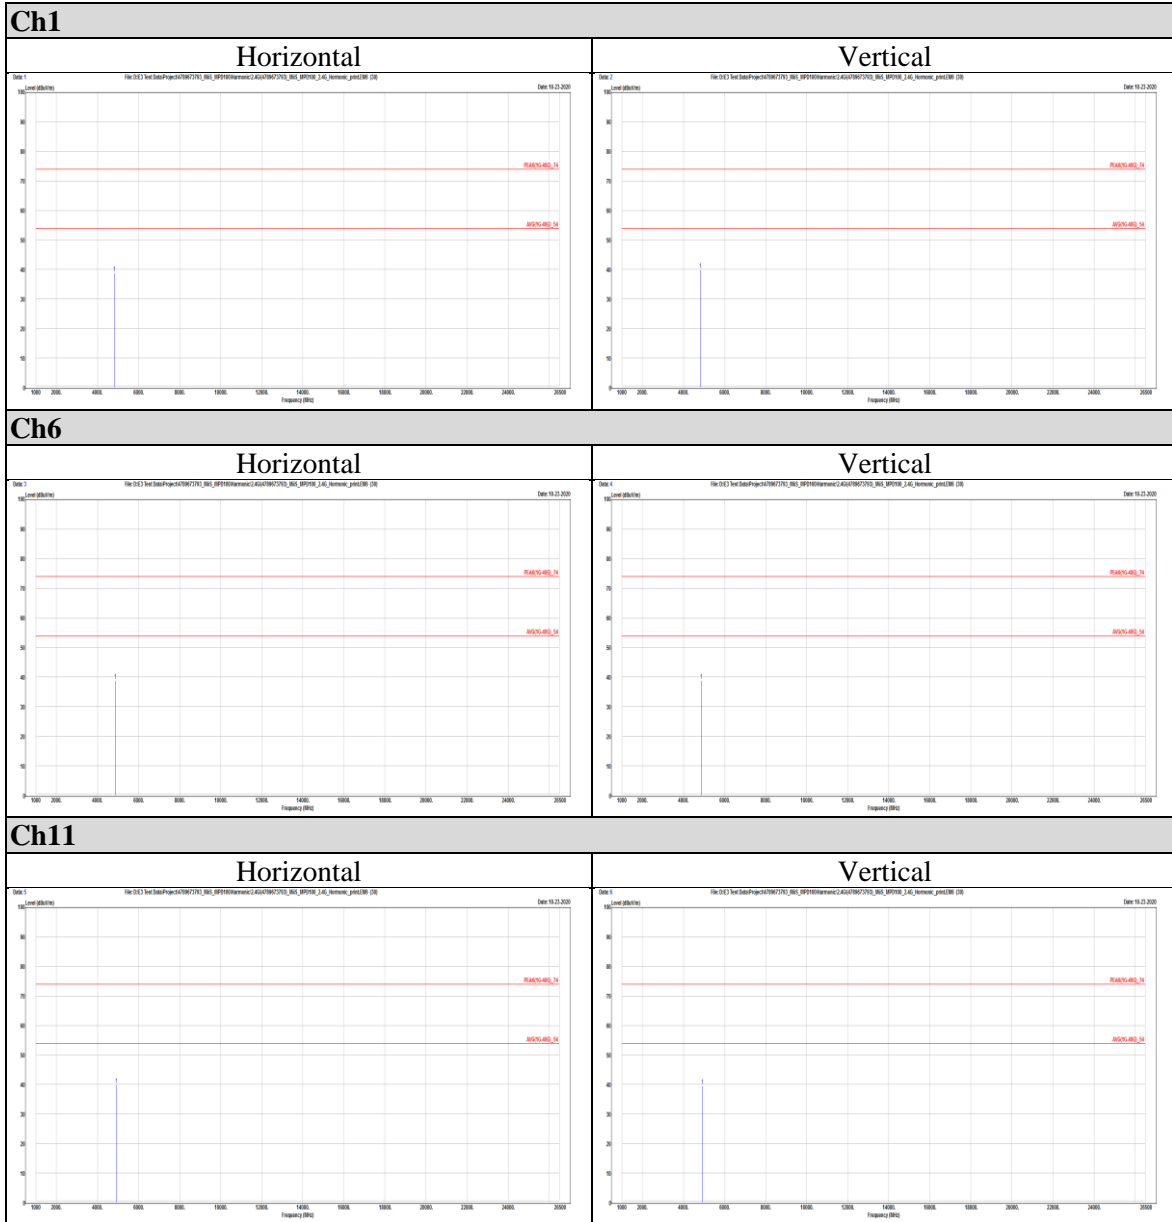




802.11g

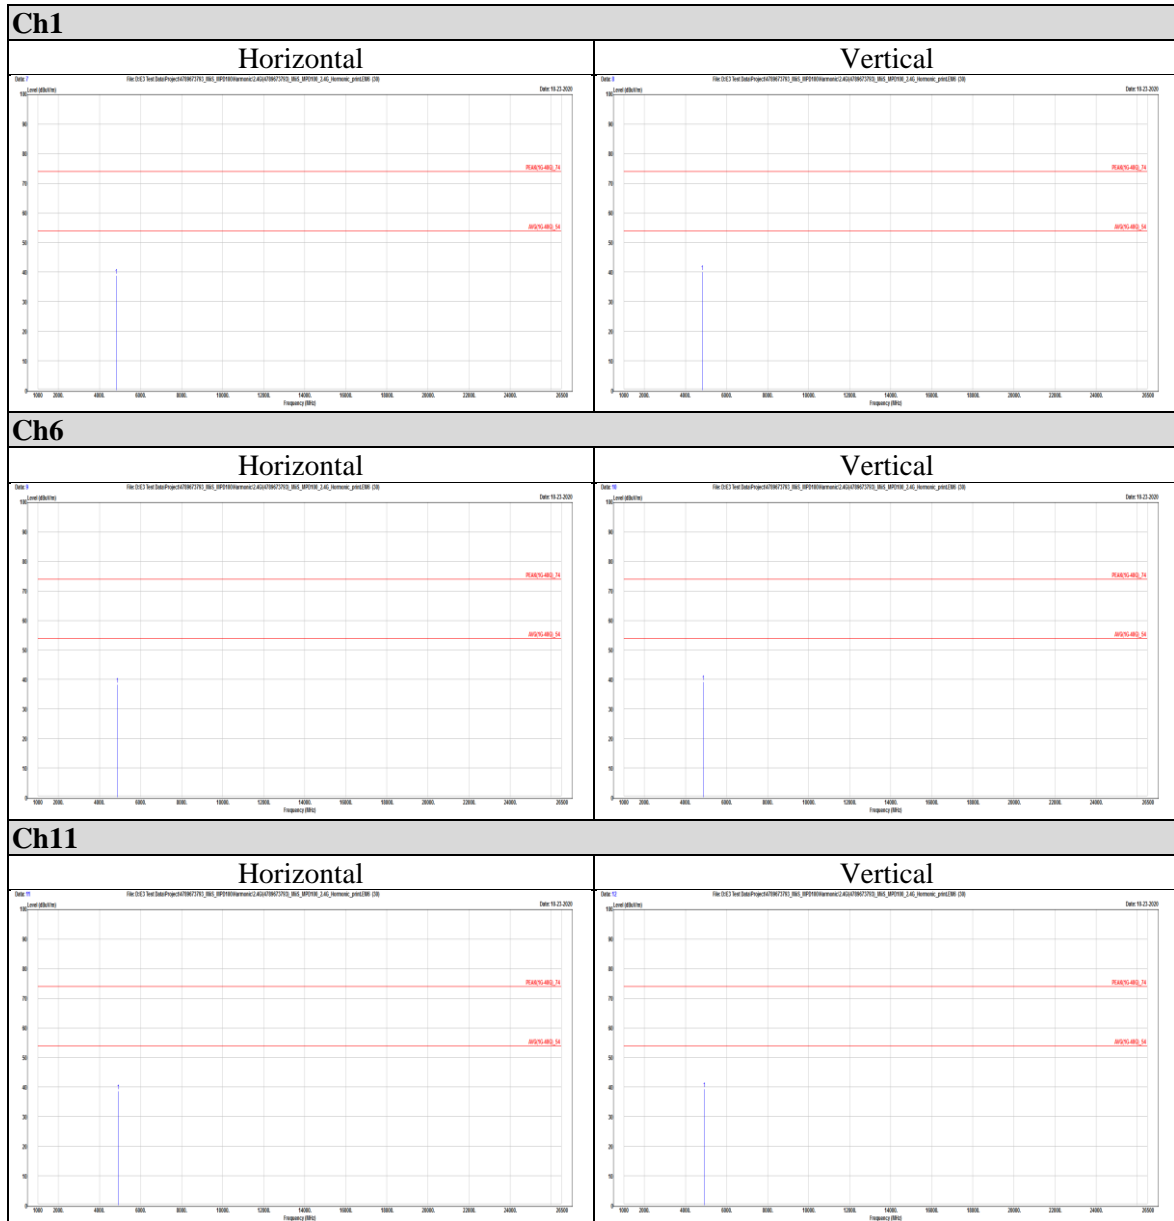





802.11n (HT20)

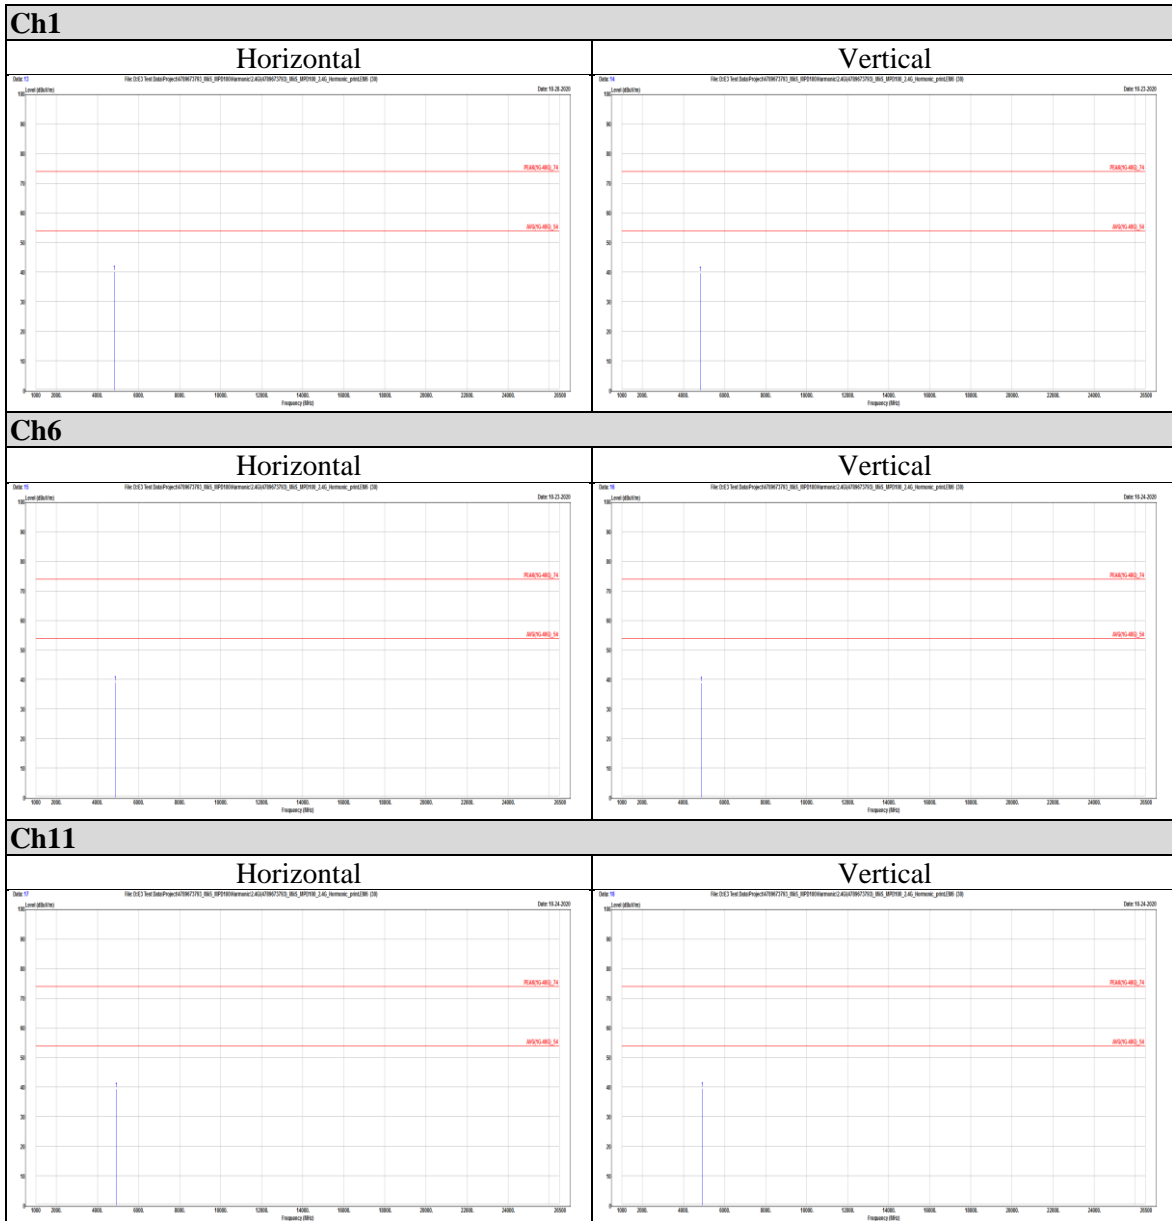



802.11n (HT40)

