

Emissions Test Report

EUT Name: Smart Power Cord

Model No.: CS-SC-01

CFR 47 Part 15.247: 2020 and RSS 247: 2017

Prepared for:

Grid Connect
1630 W Diehl Rd
Naperville, IL, 60563

Prepared by:

TUV Rheinland of North America, Inc.
5015 Brandin Ct.
Fremont, CA 94538
Tel: (925) 249-9123
Fax: (925) 249-9124
<http://www.tuv.com/>

Report/Issue Date: December 10, 2020
Job # 234111406
Report Number: 31964649.001

Revisions

Revision No.	Date MM/DD/YYYY	Reason for Change	Author
0	10/23/19	Original Document	OC
1	12/10/20	Updated to current date for IC fillings	OC

Note: Latest revision report will replace all previous reports.

Statement of Compliance

Manufacturer: Grid Connect
1630 W Diehl Rd
Naperville, IL, 60563
Requester / Applicant: Grid Connect
Name of Equipment: Smart Power Cord
Model No. CS-SC-01
Type of Equipment: Intentional Radiator
Application of Regulations: CFR 47 Part 15.247: 2020 and RSS 247: 2017
Test Dates: October 7th, 2019 to October 10th, 2019

Guidance Documents:

Emissions: ANSI C63.10-2013, KDB 558074 D01 DTS Measurement Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

Test Methods:

Emissions: ANSI C63.10-2013, KDB 558074 D01 DTS Measurement Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.

Osvaldo Casorla

Test Engineer

Date December 10, 2020

Rachana Khanduri

A2LA Signatory

Date December 10, 2020



Industry
Canada

Industrie
Canada

Testing Cert #3331.02

US1131

2932D

Table of Contents

1	Executive Summary	7
1.1	Scope	7
1.2	Purpose	7
1.3	Summary of Test Results	8
1.4	Special Accessories	8
1.5	Equipment Modifications	8
2	Laboratory Information	9
2.1	Accreditations & Endorsements	9
2.1.1	US Federal Communications Commission	9
2.1.2	NIST / A2LA	9
2.1.3	Canada – Industry Canada	9
2.1.4	Japan – VCCI	9
2.1.5	Acceptance by Mutual Recognition Arrangement	10
2.2	Test Facilities	10
2.2.1	Emission Test Facility	10
2.3	Measurement Uncertainty	10
2.3.1	Sample Calculation – radiated & conducted emissions	11
2.3.2	Measurement Uncertainty	11
2.3.3	Measurement Uncertainty Immunity	12
2.4	Calibration Traceability	12
3	Product Information	13
3.1	Product Description	13
3.2	Equipment Configuration	13
3.3	Operating Mode	13
3.4	Unique Antenna Connector	14
3.4.1	Results	14
3.5	Worst Case Test Modes	14
3.5.1	Worse Case Chain	14
3.5.2	Worse Case Modulation	15
4	Emissions	15
4.1	Output Power Requirements	15
4.1.1	Test Method	15
4.1.2	Results	17
4.2	DTS Bandwidth (6dB) and Occupied Bandwidth	20
4.2.1	Test Method	20
4.2.2	Results	20
4.3	Peak Power Spectral Density	27
4.3.1	Test Method	27
4.3.2	Results	27

Table of Contents

4.4	Out of Band Emissions: Non-Restricted Bands	35
4.4.1	Test Method	35
4.4.2	Results	36
4.5	Out of Band Emissions: Restricted Band Edge	47
4.5.1	Test Method	47
4.5.2	Test Results	48
4.6	Transmitter Spurious Emissions	53
4.6.1	Test Methodology	53
4.6.2	Test Setup:	54
4.6.3	Transmitter Spurious Emission Limit	55
4.6.4	Test Results	55
4.7	AC Conducted Emissions	68
4.7.1	Test Methodology	68
4.7.2	Test Results	68
5	Test Equipment List	73
5.1	Equipment List	73
6	EMC Test Plan	74
6.1	Introduction	74
6.2	Customer	74
6.3	Equipment Under Test (EUT)	74
6.4	Product Specifications	75
Table 14: Accessory Equipment		76
6.5	Test Specifications	77

Index of Tables

Table 1: Summary of Test Results	8
Table 2: RF Output Power at the Antenna Port – Test Results	17
Table 3: Occupied Bandwidth – Test Results	21
Table 4: Peak Power Spectral Density – Test Results	28
Table 5: Emissions at the Band-Edge – Test Results	36
Table 6: Emissions at the Band-Edge – Test Results	48
Table 7: AC Conducted Emissions – Test Results	68
Table 8: Customer Information	74
Table 9: Technical Contact Information	74
Table 10: EUT Designation.....	74
Table 11: EUT Specifications	75
Table 12: Antenna Information	76
Table 13: Interface Specifications	76
Table 14: Accessory Equipment.....	76
Table 15: Ancillary Equipment (used for test purposes only).....	76
Table 16: Description of Sample used for Testing	77
Table 17: Description of Test Configuration used for Radiated Measurement.....	77
Table 18: Test Specifications	77

1 Executive Summary

1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.247: 2020 and RSS 247: 2017 based on the results of testing performed on October 7th, 2019 to October 10th, 2019 on the Smart Power Cord Model CS-SC-01 manufactured by Grid Connect. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report. The 2412 MHz to 2462 MHz frequency band for WiFi are covered in this document.

1.3 Summary of Test Results

Table 1: Summary of Test Results

Test	Test Method ANSI C 63.10 & C63.4	Worse Case (Measured)	Result
Maximum Output Power	CFR47 15.247 (b), RSS 247 Sect. 5.4 (d)	17.46 dBm RMS (802.11n HT40 MCS0)	Complied
DTS Bandwidth (6dB)	CFR47 15.247 (a)(2), RSS 247 Sect. 5.2 (a)	9.08 MHz (802.11b 1Mbps Channel 1)	Complied
Peak Power Spectral Density	CFR47 15.247 (e), RSS 247 Sect. 5.2 (b)	-13.46 dBm/3KHz (802.11b 1Mbps Channel 11)	Complied
Out of Band Emissions: Non-Restricted	CFR47 15.247 (d), RSS 247 Sect.5.5	-34.10 dBc @ 2400MHz (802.11n HT40 MCS0 Channel 3)	Complied
Out of Band Emissions: Restricted	CFR47 15.247 (d), RSS 247 Sect.5.5	4.06 dB Margin @ 2389.994 MHz, Average (802.11n HT40 MCS0 Channel 3)	Complied
Transmitter Spurious Emissions	CFR47 15.247 (d), RSS 247 Sect.5.5	4.76 dB margin @ 3282.68MHz, Average (802.11b Mode 1Mbps Channel 11)	Complied
AC Power Conducted Emission	CFR47 15.207, RSS-GEN Sect.8.8	Class B	Complied

Note 1: This test report covers 2400 MHz to 2483.5 MHz band. * = summed power, if applicable.

Note 2: Class B limits were applied where applicable.

1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

1.5 Equipment Modifications

None

2 Laboratory Information

2.1 Accreditations & Endorsements

2.1.1 US Federal Communications Commission



TUV Rheinland of North America EMC test facilities located at 1279 Quarry Lane, Ste. A, Pleasanton, CA, 94566, and 5015 Brandin Ct, Fremont, CA 94538, are recognized by the Commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No. US1131). The laboratory Scopes of Accreditation include Title 47 CFR Parts 15, 18 and 90. The accreditations are updated every three years.

2.1.2 NIST / A2LA



TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:2017. The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 Canada – Industry Canada



Industry
Canada Industrie
Canada

The Pleasanton 5-meter Semi-Anechoic Chamber, Registration No. 2932M-1, has been accepted by Industry Canada to perform testing to 3 and 5 meters based on the test procedures described in ANSI C63.4-2014. The Fremont 10-meter Semi-Anechoic Chamber, Registration No. 2932D-1, has been accepted by Industry Canada to perform testing to 3 and 10 meters based on the test procedures described in ANSI C63.4-2014.

2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America EMC test facilities located at 1279 Quarry Lane, Ste. A, Pleasanton, CA, 94566, and 5015 Brandin Ct, Fremont, CA 94538, have been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0326

VCCI Registration No. for Fremont: A-0327

2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member

country.

2.2 Test Facilities

Test facilities are located at 5015 Brandin Ct, Fremont, California, 94538, USA and 1279 Quarry Lane, Pleasanton, California 94566, USA (Fremont is the Pleasanton Annex).

2.2.1 Emission Test Facility

The Semi-Anechoic Chambers and AC Line Conducted measurement facilities used to collect radiated and conducted emissions data have been constructed in accordance with ANSI C63.7:1992. The Fremont 10 meter semi-anechoic chamber has been measured in accordance with and verified to comply with the theoretical volumetric normalized site attenuation of ANSI C63.4:2014 and SVSWR requirements of CISPR 16-1-4 Consol. Ed. 3.0 (2010-04), at test distances of 3 and 10 meters. This site has been described in reports dated November 1st, 2006, submitted to the FCC, and accepted by letter dated November 28, 2006. The site is listed with the FCC and accredited by A2LA (Testing Certificate #3331.02). The Pleasanton 5 meter semi-anechoic chamber has been verified to comply with the theoretical volumetric normalized site attenuation of ANSI C63.4:2009 and SVSWR requirements of CISPR 16-1-4 Consol. Ed. 3.0 (2010-04) at a test distance of 3 meters. This site has been described in reports dated November 1st, 2006, submitted to the FCC, and accepted by letter dated November 28, 2006. The site is listed with the FCC and accredited by A2LA (Testing Certificate #3331.02).

2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1st Edition, 1995.

The Combined Standard Uncertainty is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

The Expanded Uncertainty defines an interval about the result of a measurement that may be expected to encompass a large fraction of the distribution of values that could reasonably be attributed to the measurement and the fraction may be viewed as the coverage probability or level of confidence of the interval.

2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dB μ V/m)

$$25 \text{ dB}\mu\text{V/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dB}\mu\text{V/m}$$

2.3.2 Measurement Uncertainty

Per CISPR 16-4-2	U _{lab}	U _{cispr}
Radiated Disturbance @ 10 meters		
30 – 1,000 MHz	2.25 dB	4.51 dB
Radiated Disturbance @ 3 meters		
30 – 1,000 MHz	2.26 dB	4.52 dB
1 – 6 GHz	2.12 dB	4.25 dB
6 – 18 GHz	2.47 dB	4.93 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	1.09 dB	2.18 dB
Disturbance Power		
30 MHz – 300 MHz	3.92 dB	4.3 dB

Voltech PM6000A

The estimated combined standard uncertainty for harmonic current and flicker measurements is $\pm 5.0\%$.

Per CISPR 16-4-2
Methods

2.3.3 Measurement Uncertainty Immunity

The estimated combined standard uncertainty for ESD immunity measurements is $\pm 8.2\%$.	Per IEC 61000-4-2
The estimated combined standard uncertainty for radiated immunity measurements is ± 4.10 dB.	Per IEC 61000-4-3
The estimated combined standard uncertainty for conducted immunity measurements with CDN is ± 3.66 dB	Per IEC 61000-4-6
The estimated combined standard uncertainty for power frequency magnetic field immunity is $\pm 2.9\%$.	Per IEC 61000-4-8

Thermo KeyTek EMC Pro

The estimated combined standard uncertainty for EFT fast transient immunity measurements is $\pm 2.6\%$.
The estimated combined standard uncertainty for surge immunity measurements is $\pm 2.6\%$.
The estimated combined standard uncertainty for voltage variation and interruption measurements is $\pm 1.74\%$.

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2017. Equipment calibration records are kept on file at the test facility.

3 Product Information

3.1 Product Description

The Model CS-SC-01, is a Smart Power Cord utilizing 2.4 GHz WiFi. The EUT will be in compliance with regulatory standards of regions it will be operating in.

3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of an EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of an EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

The final operating mode was selected to produce the worst case radiation for emissions testing.

3.4 Unique Antenna Connector

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

3.4.1 Results

The Smart Power Cord has PCB trace antenna that have maximum gain of – 9.67 dBi. They are connected via RF connectors that are not easily accessible to the end user.

Refer to Table 12 for additional antenna information.

3.5 Worst Case Test Modes

3.5.1 Worse Case Chain

Not applicable, SISO only.

3.5.2 Worse Case Modulation

The Chain(s) measured per ANSI C63.10-2013 section 11.9.2.3.2 and section 14.3.2.2. Worse case modulations/Data rates are recorded below:

Mode	Modulation	Data Rate (Mbps)	Power Setting	Power Measured (dBm)
802.11b CCK	BPSK	1	20	17.00
802.11g No HT	BPSK	6	20	16.93
802.11n HT20	BPSK (MCS0)	6.5	20	17.17
802.11n HT40	BPSK (MCS0)	13.5	20	17.46

4 Emissions

Testing was performed in accordance with CFR 47 Part 15.247: 2020 and RSS 247: 2017. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

4.1 Output Power Requirements

The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.

The maximum output power and harmonics shall not exceed CFR47 Part 15.247 (b) and RSS 247 5.4 (d).


The maximum transmitted power in the band 2400-2483.5 MHz: 1 W

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.1.1 Test Method

Conducted method was used to measure the channel power output. The preliminary investigation was performed at different data rate / chain to determine the highest power output for each mode. The worst findings were conducted on 3 channels in each operating range per CFR47 Part 15.247(b) and RSS 247 Sect. 5.4(d); 2400 MHz to 2483.5 MHz. The worst mode results indicated below.

Test Setup:

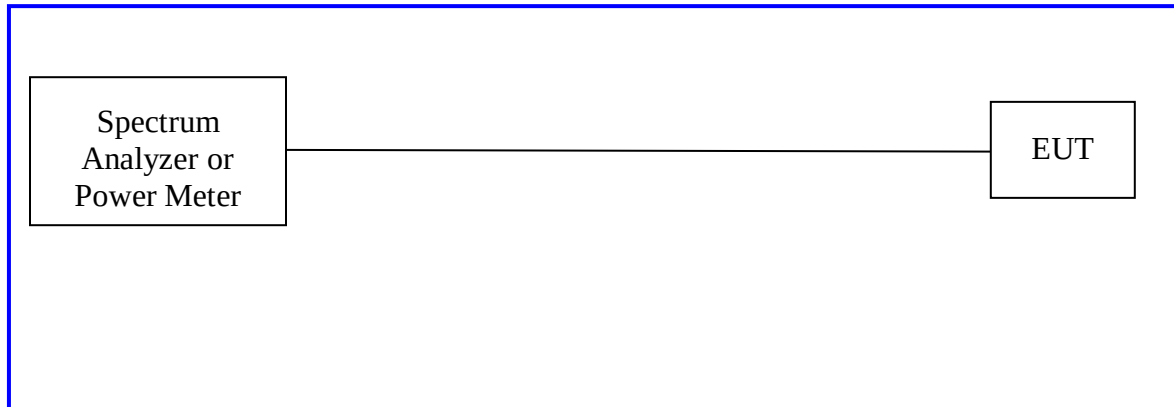

4.1.2 Results


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s). Worse case data for each mode reported below. Plots of highest power included. Total Power refers to chain(s) summed and corrected for duty cycle if necessary.

Each chain was measured individually using a Spectrum Analyzer channel power per 11.9.2.2.4 Method and then summed per ANSI 63.10 section 14.3.1.

Table 2: RF Output Power at the Antenna Port – Test Results

Test Conditions: Conducted Measurement, Normal Temperature						
Antenna Type: PCB trace antenna						
Max. Antenna Gain: -9.67 dBi						
802.11b (CCK)						
Operating Channel (MHz)	Limit [dBm]	Power Settings	Chain 0 [dBm]	Chain 1 [dBm]	Total Power (RMS) [dBm]	Margin [dB]
2412.00	30.00	20	16.18	-	16.18	-13.82
2437.00	30.00	20	16.71	-	16.71	-13.29
2462.00	30.00	20	17.00	-	17.00	-13.00
802.11g (No HT)						
Operating Channel (MHz)	Limit [dBm]	Power Settings	Chain 0 [dBm]	Chain 1 [dBm]	Total Power (RMS) [dBm]	Margin [dB]
2412.00	30.00	20	16.05	-	16.05	-13.95
2437.00	30.00	20	16.60	-	16.60	-13.40
2462.00	30.00	20	16.93	-	16.93	-13.07

802.11n (HT20)						
Operating Channel (MHz)	Limit [dBm]	Power Settings	Chain 0 [dBm]	Chain 1 [dBm]	Total Power (RMS) [dBm]	Margin [dB]
2412.00	30.00	20	16.35	-	16.35	-13.65
2437.00	30.00	20	16.88	-	16.88	-13.12
2462.00	30.00	20	17.17	-	17.17	-12.83
802.11n (HT40)						
Operating Channel (MHz)	Limit [dBm]	Power Settings	Chain 0 [dBm]	Chain 1 [dBm]	Total Power (RMS) [dBm]	Margin [dB]
2422.00	30.00	20	17.12	-	17.12	-12.88
2437.00	30.00	20	17.45	-	17.45	-12.55
2452.00	30.00	20	17.46	-	17.46	-12.54

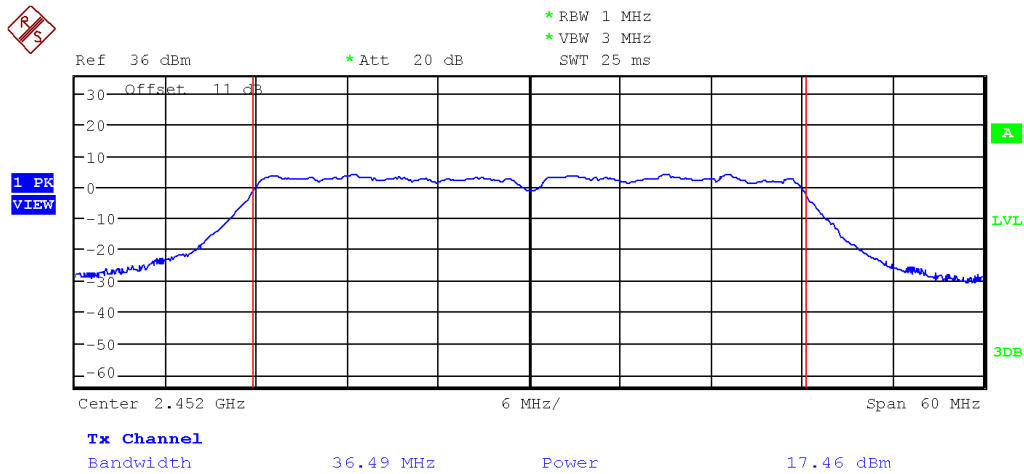

Plot 1. Maximum Conducted Power, 802.11n HT40 (MCS0) 13.5Mbps

4.2 DTS Bandwidth (6dB) and Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.

The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.


The minimum 6 dB bandwidth shall be at least 500 kHz.

4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth according to ANSI C63.10:2013 Section 11.8. The measurement was performed with modulation per CFR47 15.247 (a) (2) and RSS Gen Sect. 6.6. Measurements were performed on the low, middle and high channels of the operating frequency range; 2400 MHz to 2483.5 MHz.

Chain 0 was tested as worse case (Section 3.5.1).

Test Setup:

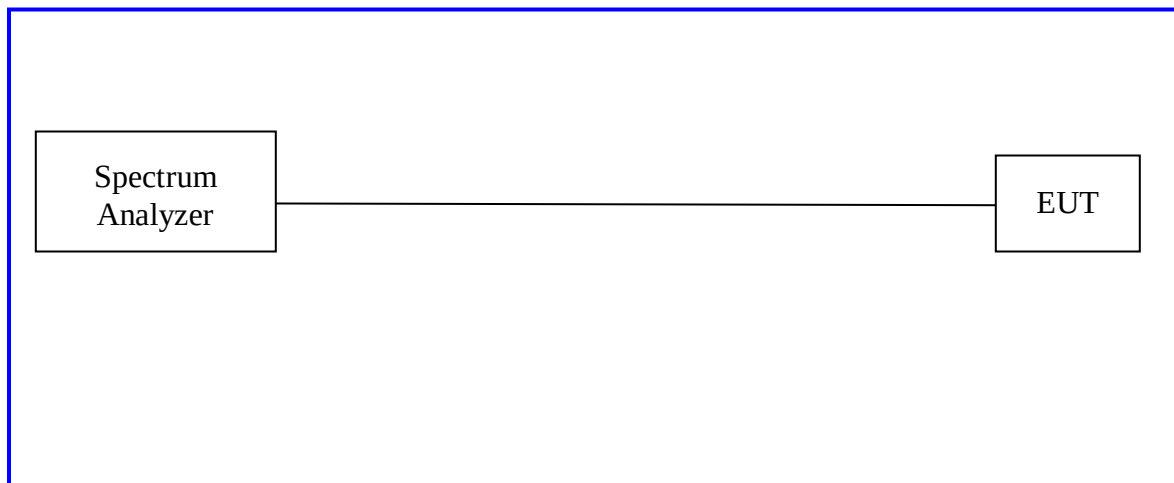

4.2.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 3: Occupied Bandwidth – Test Results

Test Conditions: Conducted Measurement, Normal Temperature


Bandwidth (MHz) for 802.11b		
Freq. (MHz)	99% Bandwidth (MHz)	6dB Bandwidth (MHz)
	Chain 0	Chain 0
2412	N/A (See Note 2)	9.08
2437	13.22	9.09
2462	N/A (See Note 2)	9.13
Note: 1. The bandwidth was measured at CCK 1MBps Note: 2. Reduction in testing permitted as stated in ANSI C63.10-2013 Section 5.6.2.1		

Bandwidth (MHz) for 802.11g		
Freq. (MHz)	99% Bandwidth (MHz)	6dB Bandwidth (MHz)
	Chain 0	Chain 0
2422	N/A (See Note 2)	16.45
2437	16.61	16.46
2452	N/A (See Note 2)	16.47
Note: 1. The bandwidth was measured at No HT 6MBps Note: 2. Reduction in testing permitted as stated in ANSI C63.10-2013 Section 5.6.2.1		


Bandwidth (MHz) for 802.11n – 20MHz		
Freq. (MHz)	99% Bandwidth (MHz)	6dB Bandwidth (MHz)
	Chain 0	Chain 0
2412	N/A (See Note 2)	17.62
2437	17.58	17.47
2462	N/A (See Note 2)	17.68
Note: 1. The bandwidth was measured at HT20 MCS0 Note: 2. Reduction in testing permitted as stated in ANSI C63.10-2013 Section 5.6.2.1		

Bandwidth (MHz) for 802.11n – 40MHz		
Freq. (MHz)	99% Bandwidth (MHz)	6dB Bandwidth (MHz)
	Chain 0	Chain 0
2422	N/A (See Note 2)	36.46
2437	36.37	36.45
2452	N/A (See Note 2)	36.49


Note: 1. The bandwidth was measured at HT40 MCS0
Note: 2. Reduction in testing permitted as stated in ANSI C63.10-2013 Section 5.6.2.1

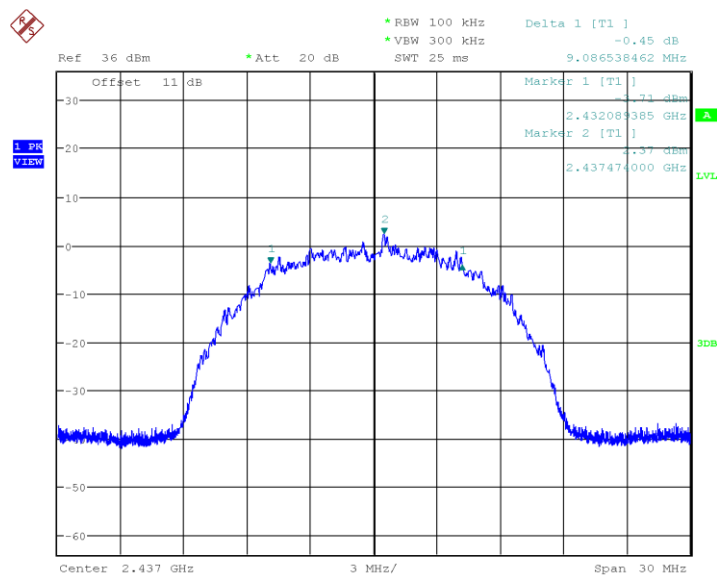


Plot 3. 802.11b(CCK), 2437MHz, 6dB Bandwidth

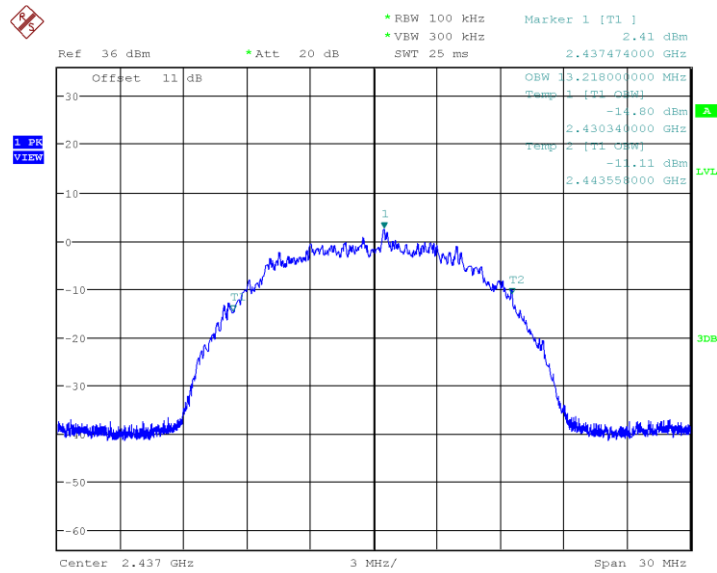


Plot 4. 802.11b(CCK), 2437MHz, 99% Bandwidth

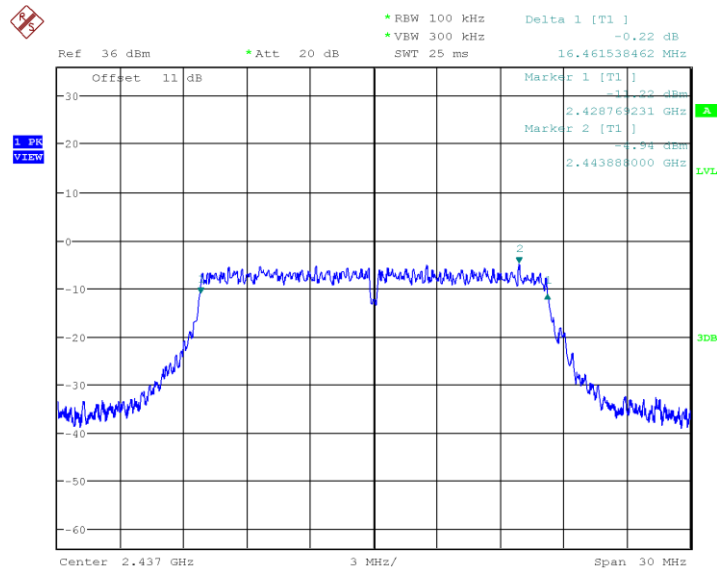


Plot 5. 802.11g(No HT), 2437MHz, 6dB Bandwidth

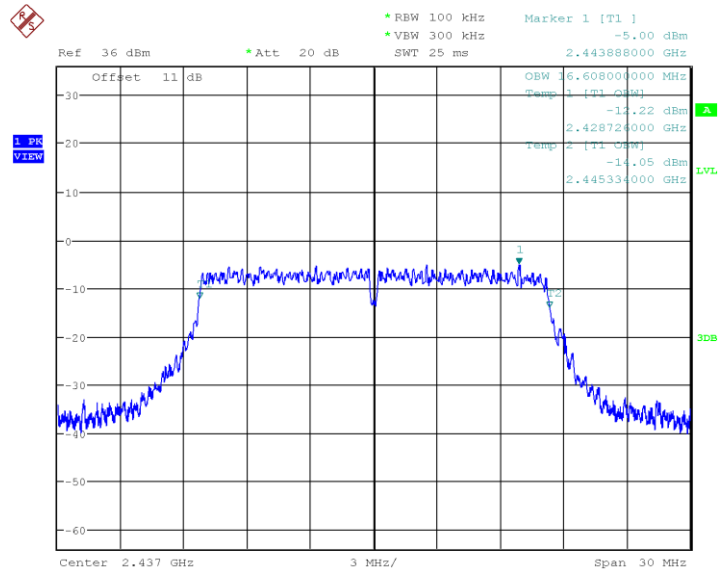


Plot 6. 802.11g(No HT), 2437MHz, 99% Bandwidth

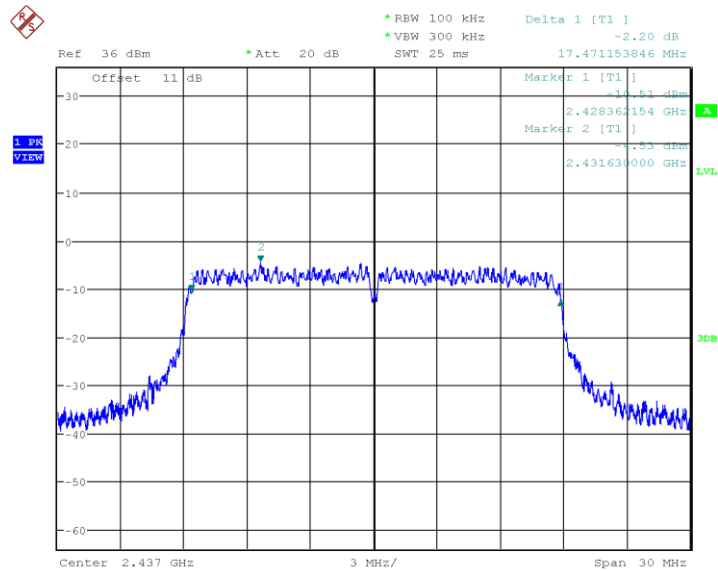


Plot 7. 802.11n(HT20), 2437MHz, 6dB Bandwidth

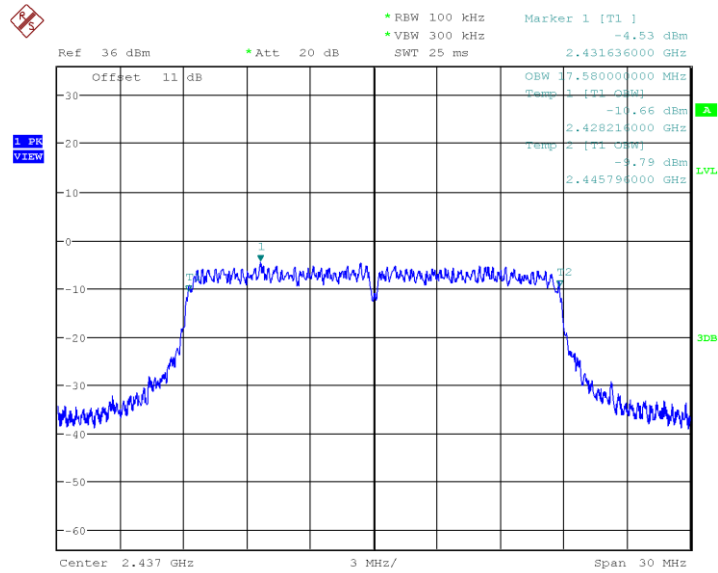

Plot 8. 802.11n(HT20), 2437MHz, 99% Bandwidth

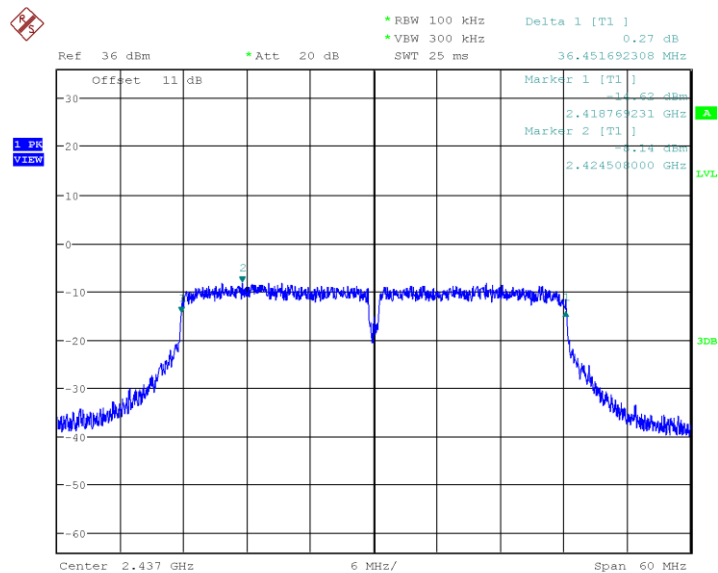

Plot 9. 802.11n(HT40), 2437MHz, 6dB Bandwidth

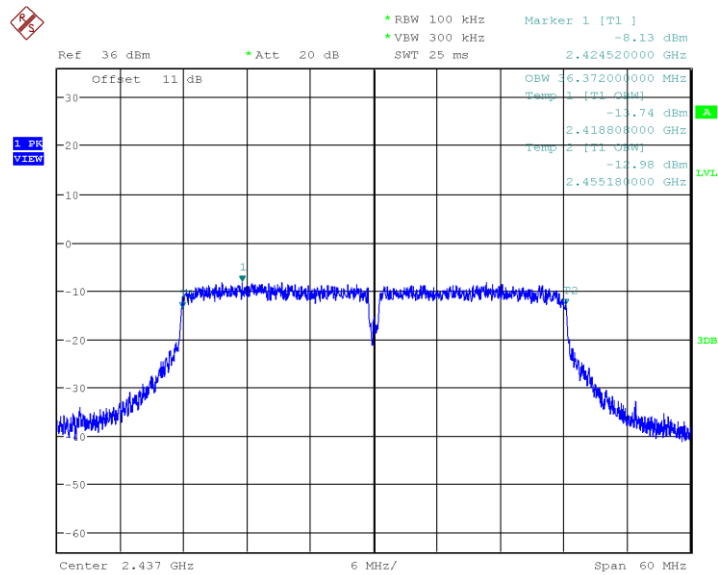

Plot 10. 802.11n(HT40), 2437MHz, 99% Bandwidth


4.3 Peak Power Spectral Density

According to the CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b), the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.1 Test Method

The conducted method was used to measure the channel power output per ANSI C63.10-2013 Section 11.10.2. The measurement was performed with modulation per CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b). A pre-evaluation was performed to find the worst case chains (Section 3.5.1) and modes (Section 3.5.2). The worst findings were conducted on 3 channels in each operating frequency range of 2400 MHz to 2483.5 MHz. Total PSD was computed by summing both chains and applying a duty cycle correction factor if necessary.

Test Setup:

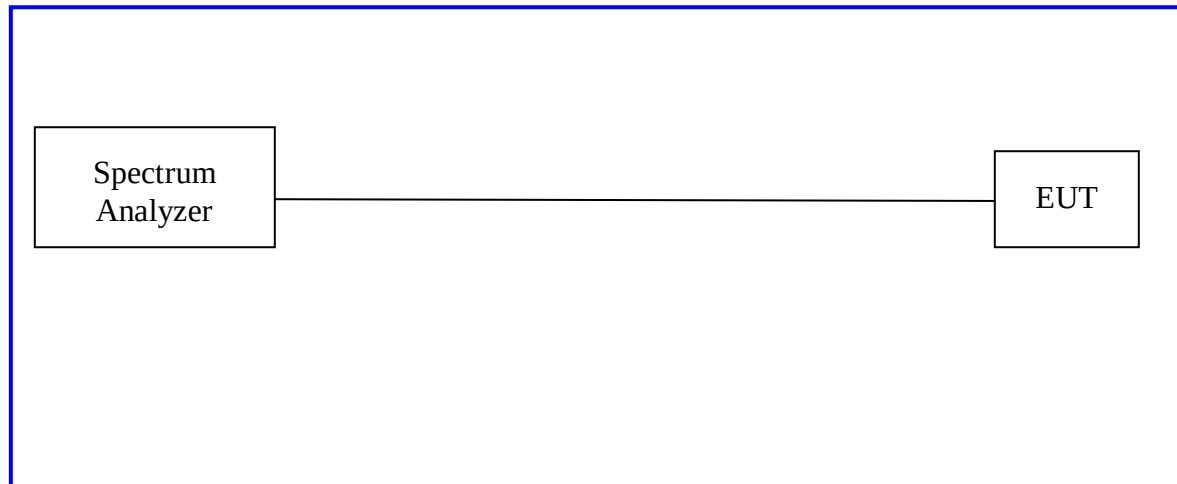


Method PKPSD of “KDB 558074 – DTS Measurement Guidance v04” was used.

4.3.2 Results


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 4: Peak Power Spectral Density – Test Results


Test Conditions: Conducted Measurement, Normal Temperature			
Peak Power Spectral Density			
802.11b CCK			
Freq. (MHz)	Total PSD [dBm]	Limit [dBm/ 3 kHz]	Margin [dB]
2412	-14.14	8.0	-22.14
2437	-13.55	8.0	-21.55
2462	-13.49	8.0	-21.49
Note: 1. The highest peak output power was observed at CCK 1MBps.			
802.11g No HT			
Freq. (MHz)	Total PSD [dBm]	Limit [dBm/ 3 kHz]	Margin [dB]
2412	-20.1	8.0	-28.1
2437	-19.49	8.0	-27.49
2462	-19.32	8.0	-27.32
Note: 1. The highest peak output power was observed at No HT 6MBps			
802.11n HT20			
Freq. (MHz)	Total PSD [dBm]	Limit [dBm/ 3 kHz]	Margin [dB]
2412	-19.94	8.0	-27.94
2437	-19.4	8.0	-27.4
2462	-19.07	8.0	-27.07
Note: 1. The highest peak output power was observed at HT20 MCS0			
802.11n HT40			
Freq. (MHz)	Total PSD [dBm]	Limit [dBm/ 3 kHz]	Margin [dB]
2422	-21.81	8.0	-29.81
2437	-22.13	8.0	-30.13
2452	-20.84	8.0	-28.84
Note: 1. The highest peak output power was observed at HT40 MCS0			

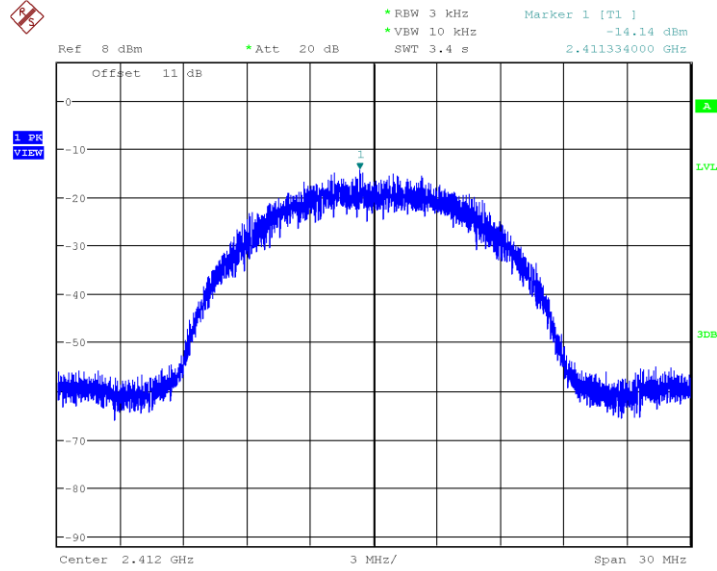


Plot 11. 802.11b CCK, 2412MHz PSD

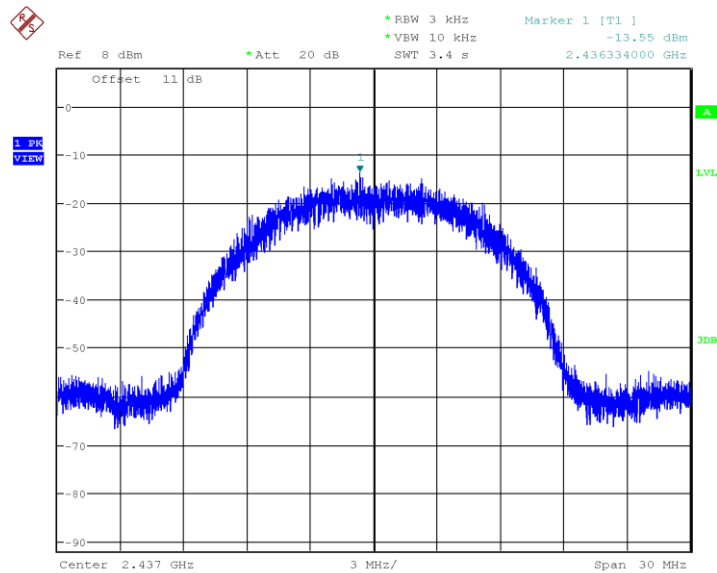


Plot 13. 802.11b CCK, 2437MHz PSD

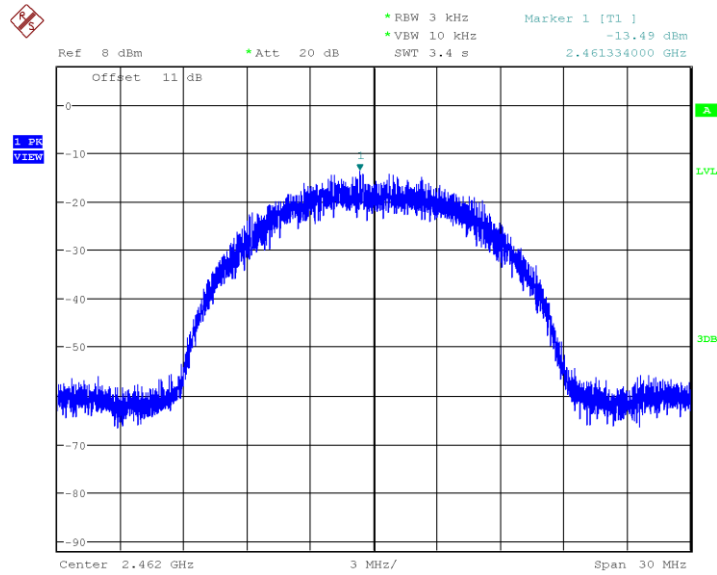


Plot 15. 802.11b CCK, 2462MHz PSD

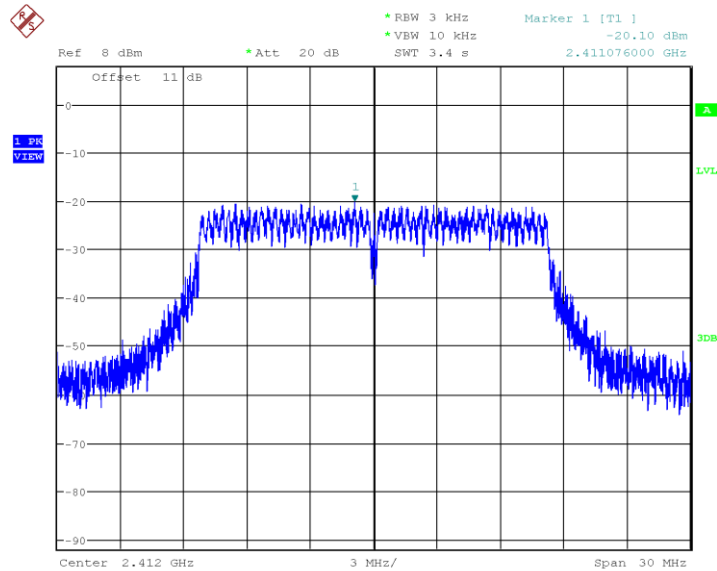


Plot 17. 802.11g No HT, 2412MHz PSD

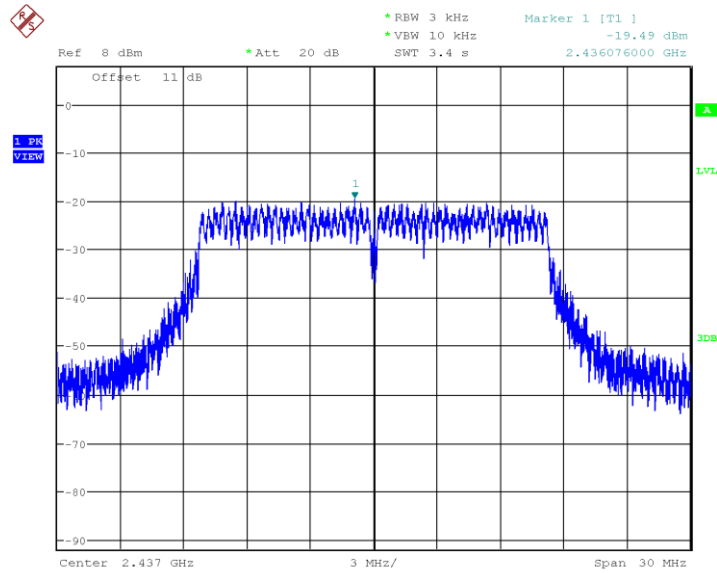


Plot 19. 802.11g No HT, 2437MHz PSD

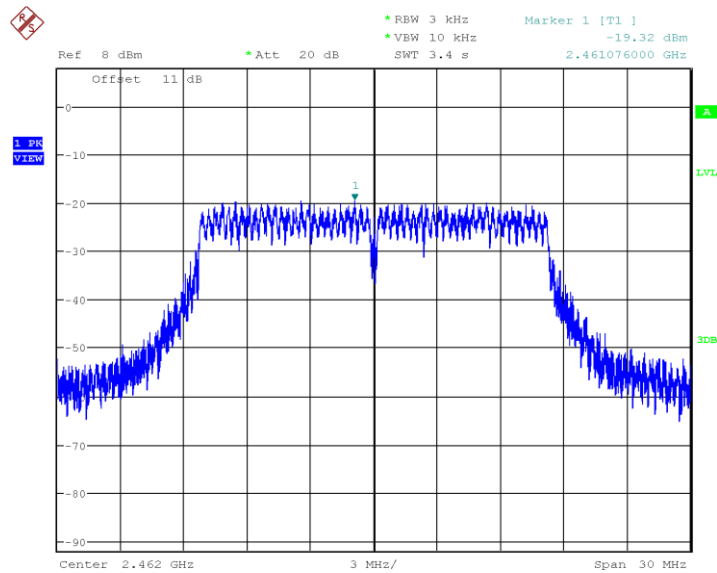


Plot 21. 802.11g No HT, 2462MHz PSD

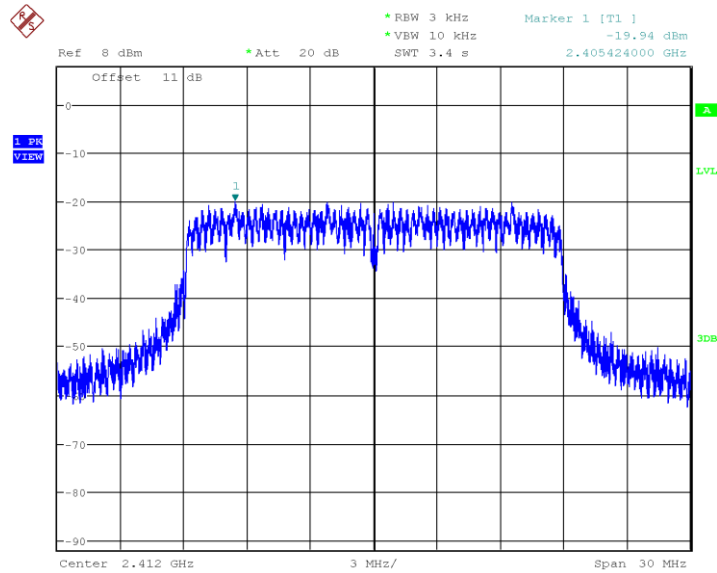


Plot 23. 802.11n HT20, 2412MHz PSD

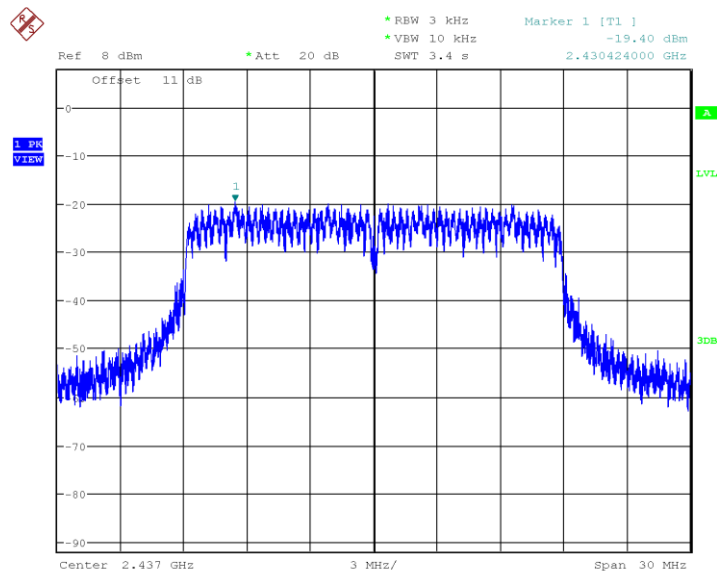


Plot 25. 802.11n HT20, 2437MHz PSD

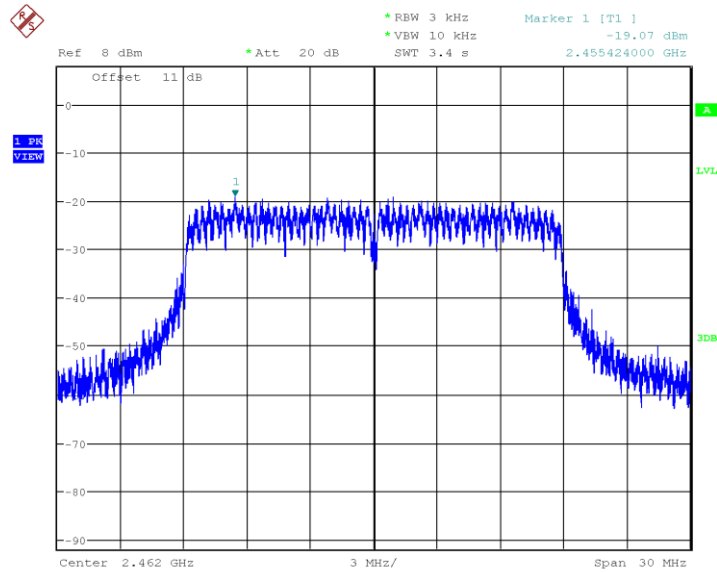


Plot 27. 802.11n HT20, 2462MHz PSD

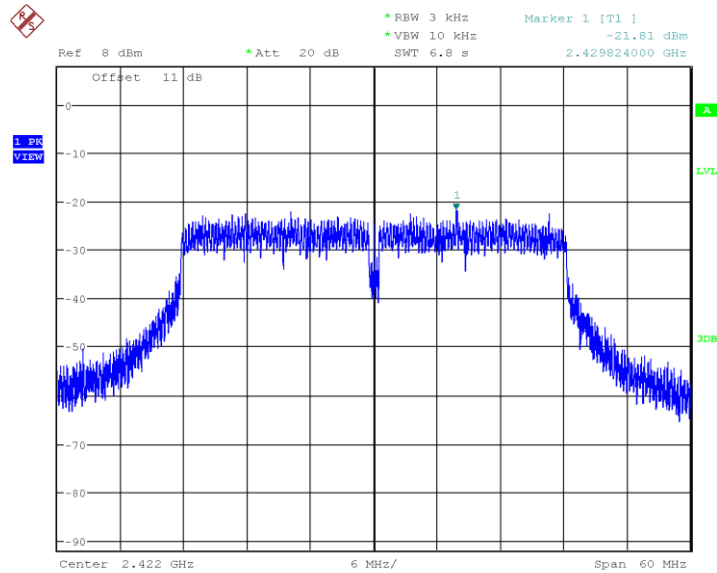

Plot 29. 802.11n HT40, 2422MHz PSD

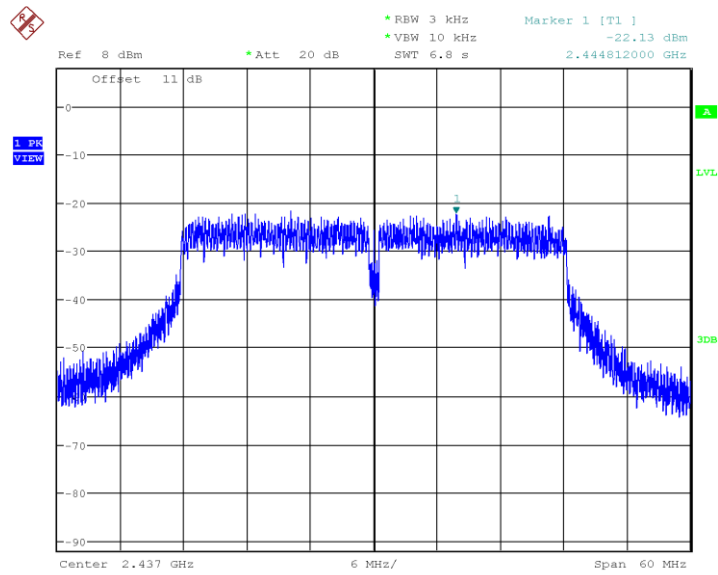

Plot 31. 802.11n HT40, 2437MHz PSD

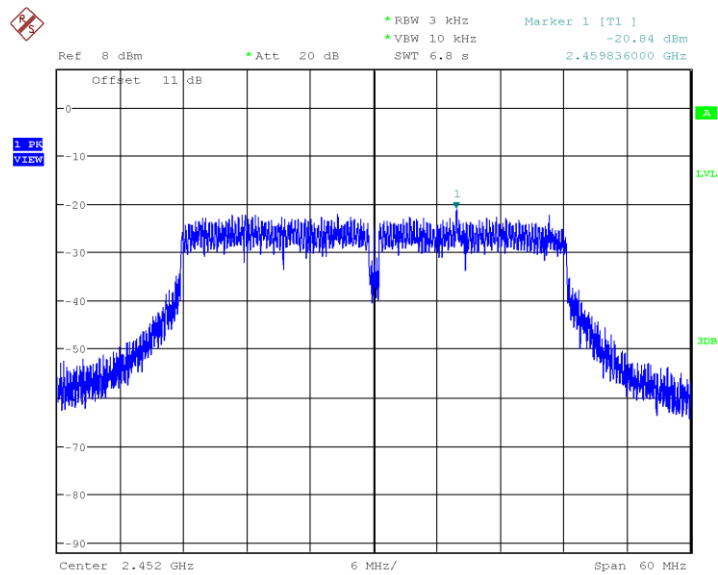

Plot 33. 802.11n HT40, 2462MHz PSD


4.4 Out of Band Emissions: Non-Restricted Bands

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS-247 Sect. 5.5, RSS-GEN Sect. 8.9 and 8.10.

4.4.1 Test Method

Conducted measurements per ANSI C63.10-2013 Sections 6.10, 11.11, 14.3.3 were used to measure the undesirable emission requirement in non-restricted bands. The measurement was performed with modulation. The measurement was conducted from 30MHz to 26.5GHz on 3 channels in each mode on the EUT. Band edge tests were conducted on the low and high channel of each mode. The worst case measurement of each mode and chain is recorded in this report.

Test Setup:

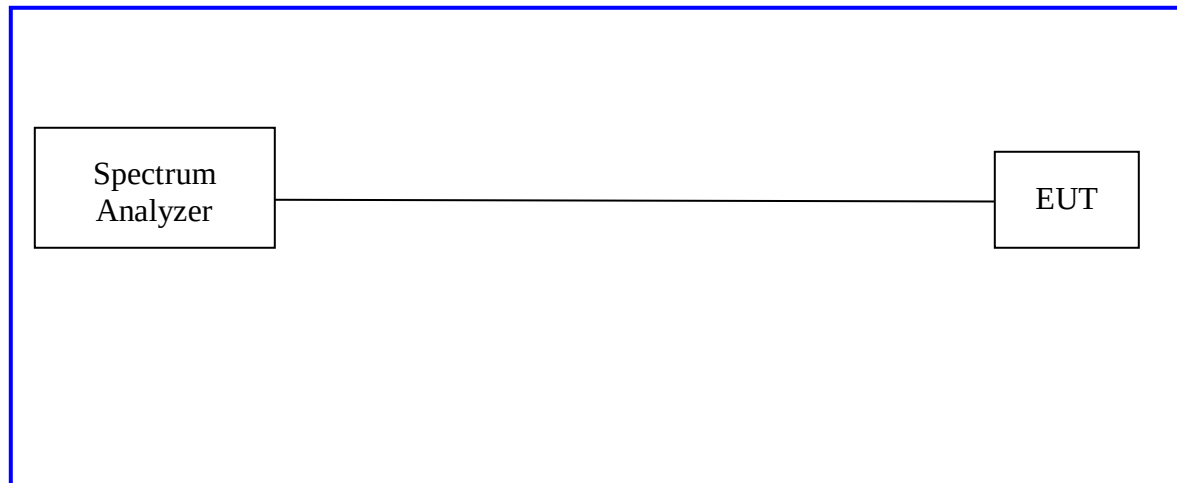


4.4.2 Results


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 5: Emissions at the Band-Edge – Test Results


Test Conditions: Conducted Measurement, Normal Temperature and Voltage only						
Non-Restricted Frequency Band Edge Emissions – Worse Case						
Band Edge	Mode	Chain	Measured (dBc)	Limit (dBc)	Freq (MHz)	Results
Low	802.11b CCK 1MBps	0	-39.56	20	2398.02	Pass
High	802.11b CCK 1MBps	0	-45.38	20	2489.20	Pass
Low	802.11g No HT 6MBps	0	-34.96	20	2400.00	Pass
High	802.11g No HT 6MBps	0	-42.99	20	2502.01	Pass
Low	802.11n HT20 MCS0	0	-36.18	20	2397.04	Pass
High	802.11n HT20 MCS0	0	-41.84	20	2484.08	Pass
Low	802.11n HT40 MCS0	0	-34.10	20	2400.00	Pass
High	802.11n HT40 MCS0	0	-40.23	20	2485.74	Pass
Note: 1. Worst Chain reported in table above, all values in plots below						

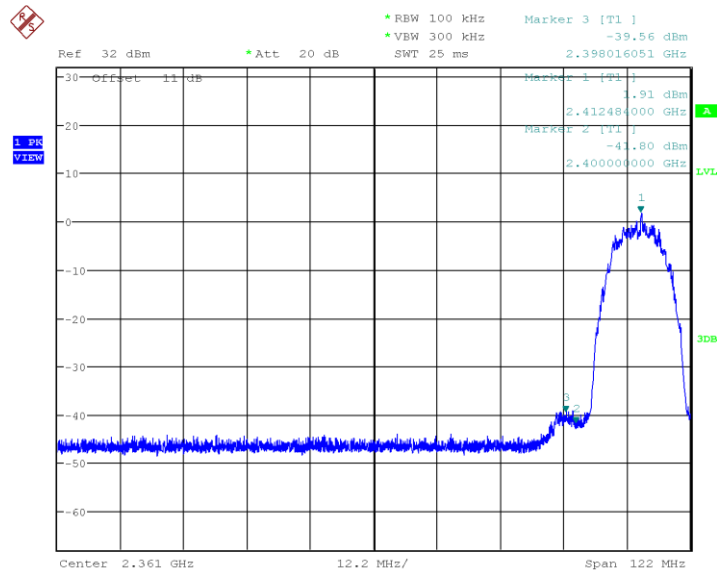


Plot 35. 802.11b CCK, 2412MHz Lower Band Edge

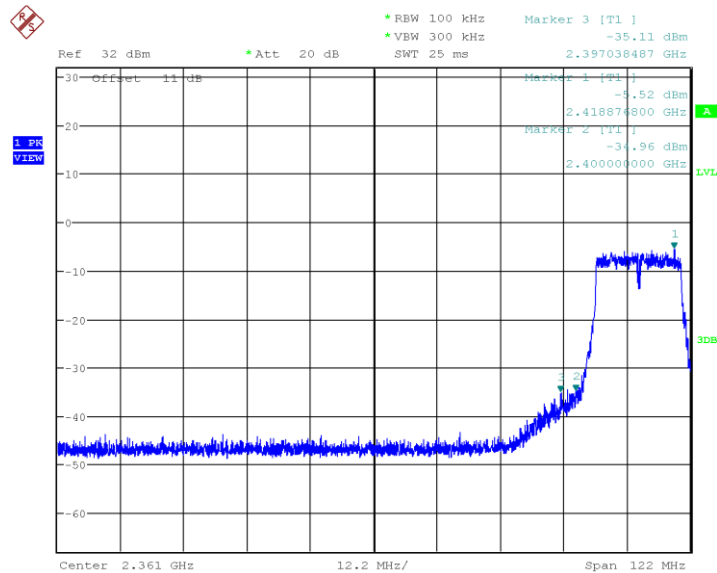


Plot 37. 802.11g No HT, 2412MHz Lower Band Edge

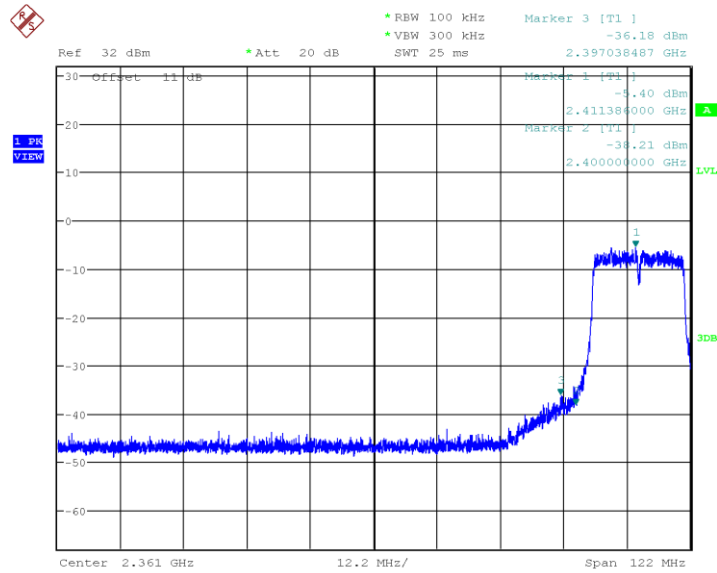


Plot 39. 802.11n HT20, 2412MHz Lower Band Edge

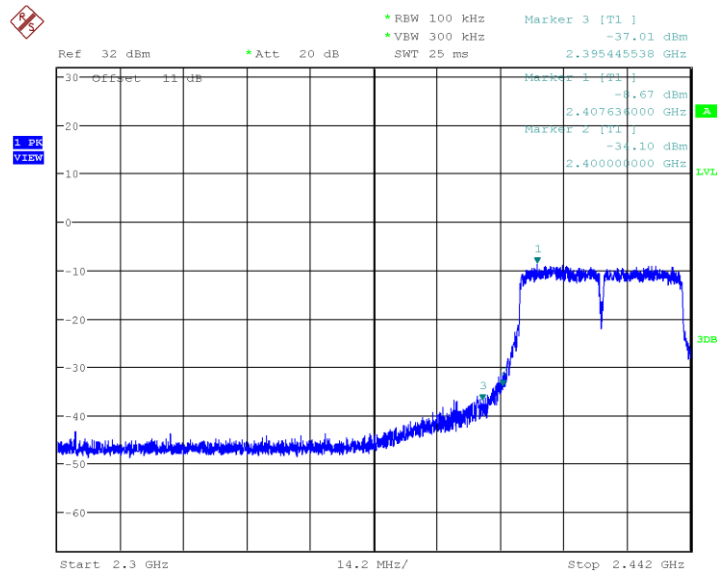


Plot 41. 802.11n HT40, 2422MHz Lower Band Edge

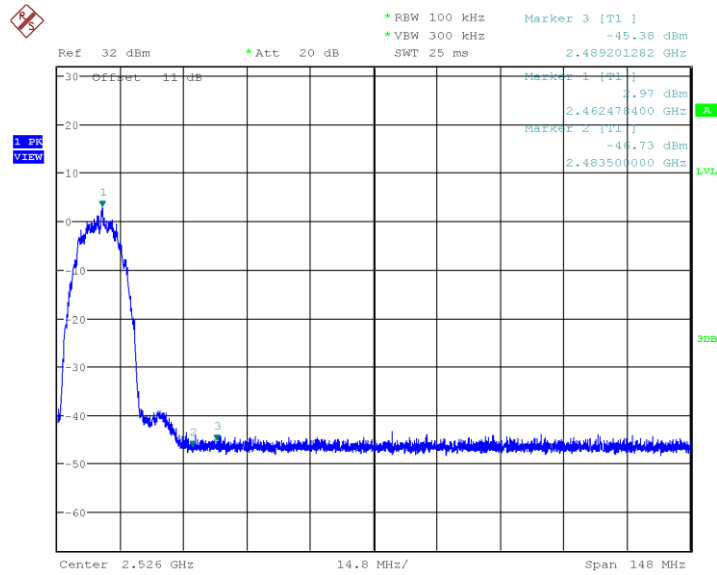


Plot 43. 802.11b CCK, 2462MHz Upper Band Edge

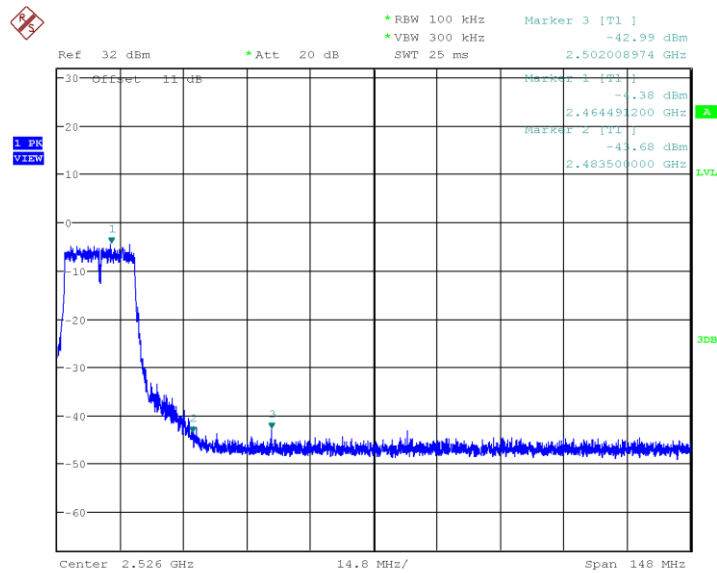


Plot 45. 802.11g No HT, 2462MHz Upper Band Edge

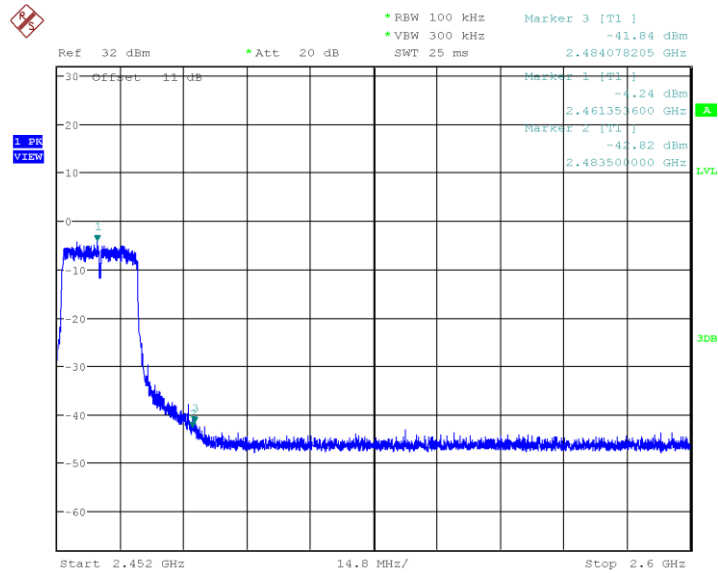


Plot 47. 802.11n HT20, 2462MHz Upper Band Edge

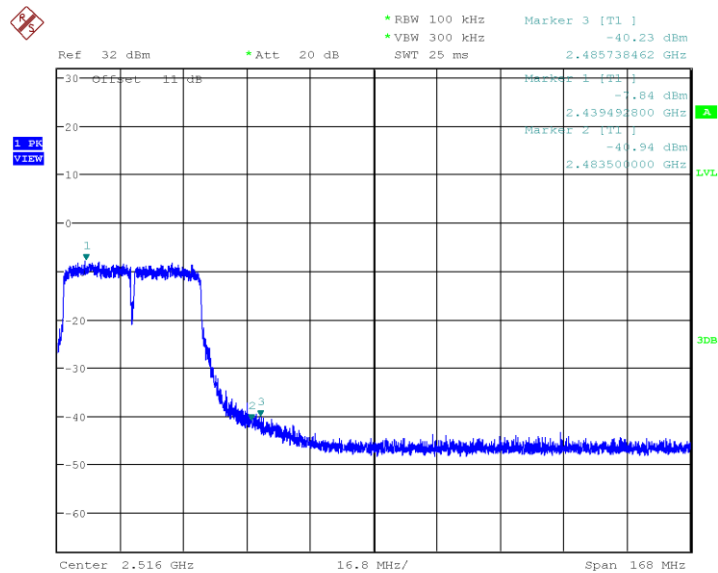


Plot 49. 802.11n HT40, 2452MHz Upper Band Edge

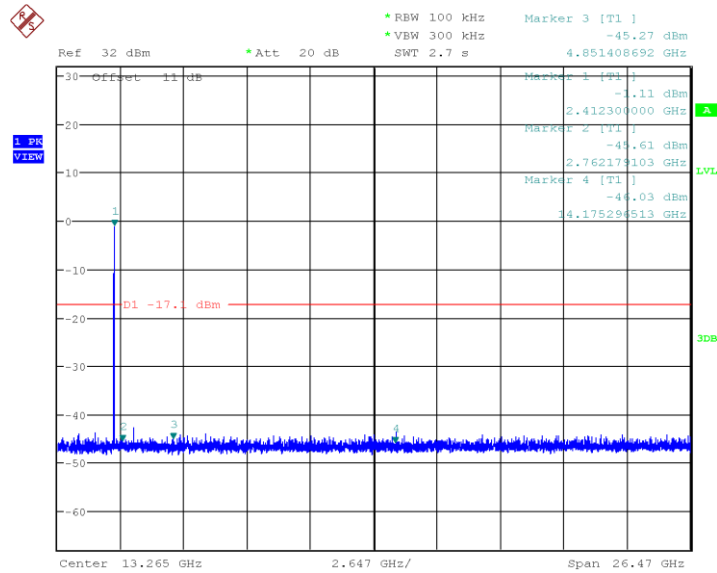


Plot 51. 802.11b CCK, 2412MHz, 30MHz-26.5GHz Non-restricted Out of Band

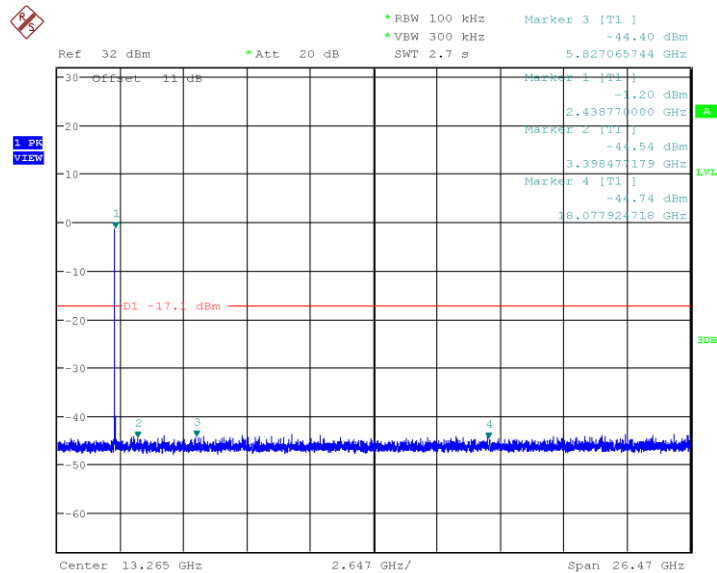


Plot 53. 802.11b CCK, 2437MHz, 30MHz-26.5GHz Non-restricted Out of Band

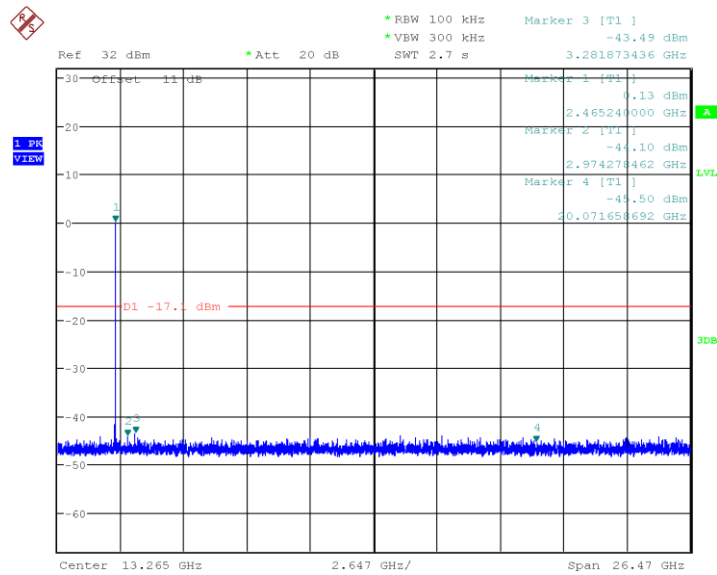


Plot 55. 802.11b CCK, 2462MHz, 30MHz-26.5GHz Non-restricted Out of Band

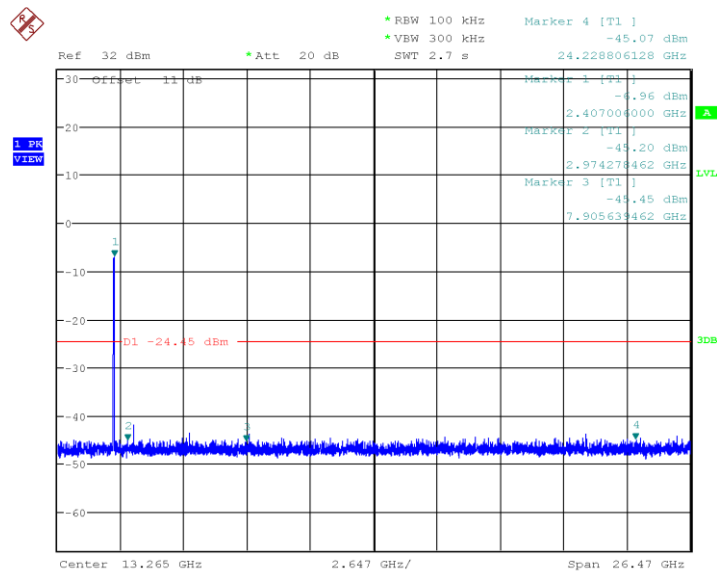


Plot 57. 802.11g No HT, 2412MHz, 30MHz-26.5GHz Non-restricted Out of Band

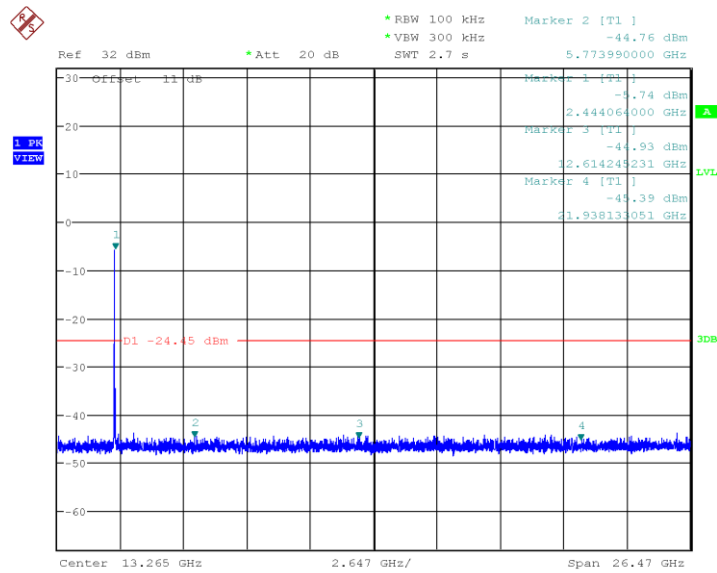


Plot 59. 802.11g No HT, 2437MHz, 30MHz-26.5GHz Non-restricted Out of Band

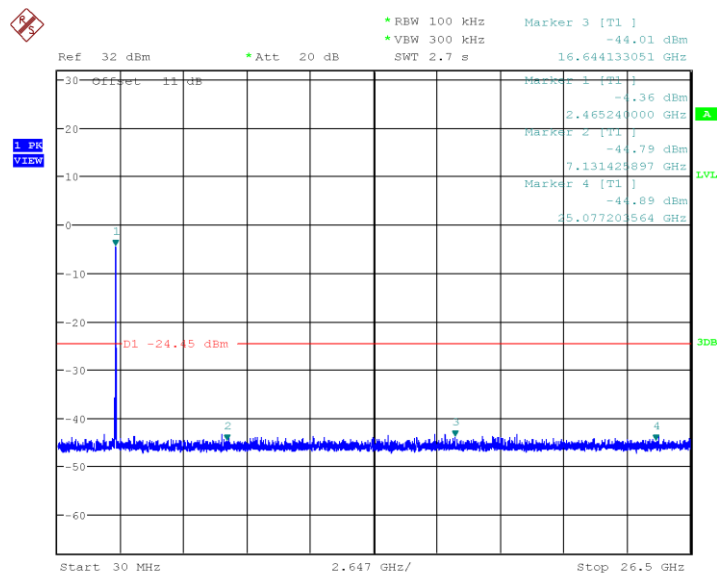


Plot 61. 802.11g No HT, 2462MHz, 30MHz-26.5GHz Non-restricted Out of Band

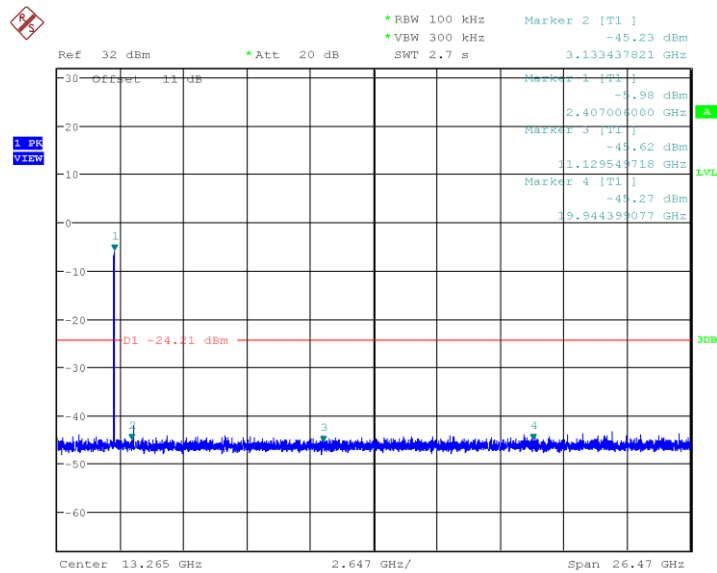


Plot 63. 802.11n HT20, 2412MHz, 30MHz-26.5GHz Non-restricted Out of Band

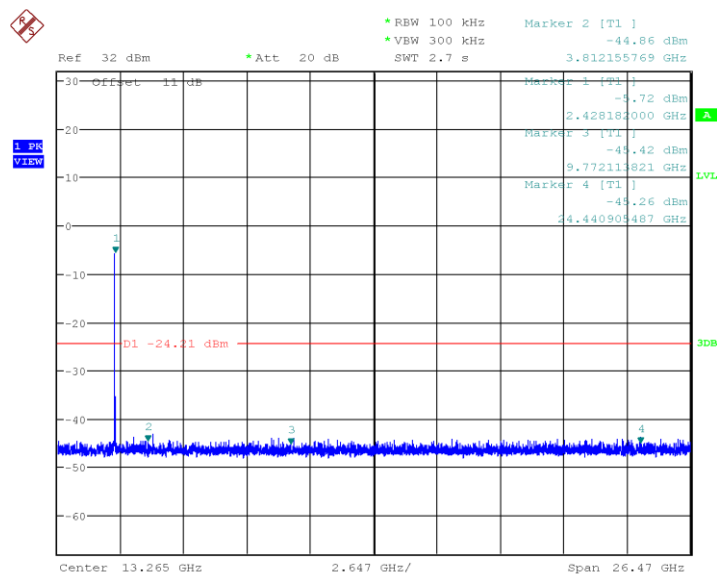


Plot 65. 802.11n HT20, 2437MHz, 30MHz-26.5GHz Non-restricted Out of Band

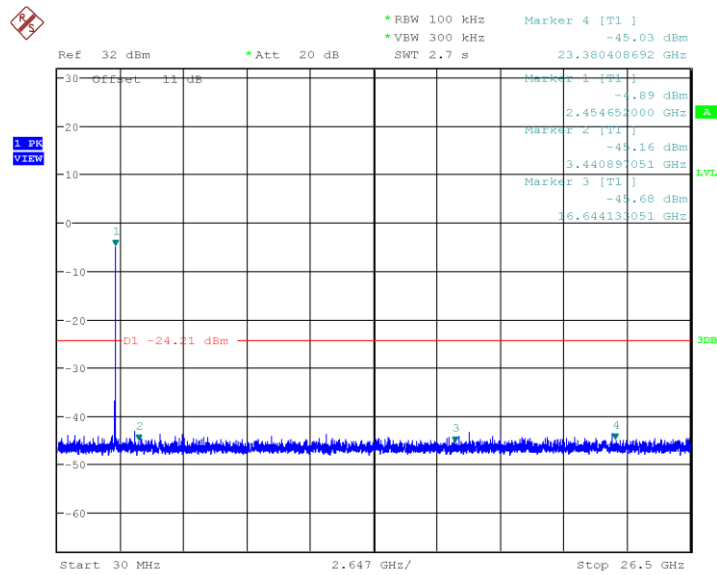


Plot 67. 802.11n HT20, 2462MHz, 30MHz-26.5GHz Non-restricted Out of Band

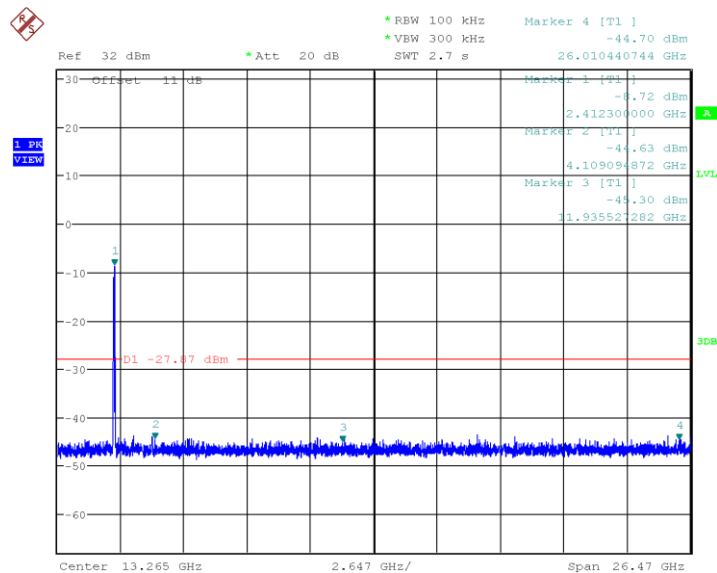

Plot 69. 802.11n HT40, 2422MHz, 30MHz-26.5GHz Non-restricted Out of Band

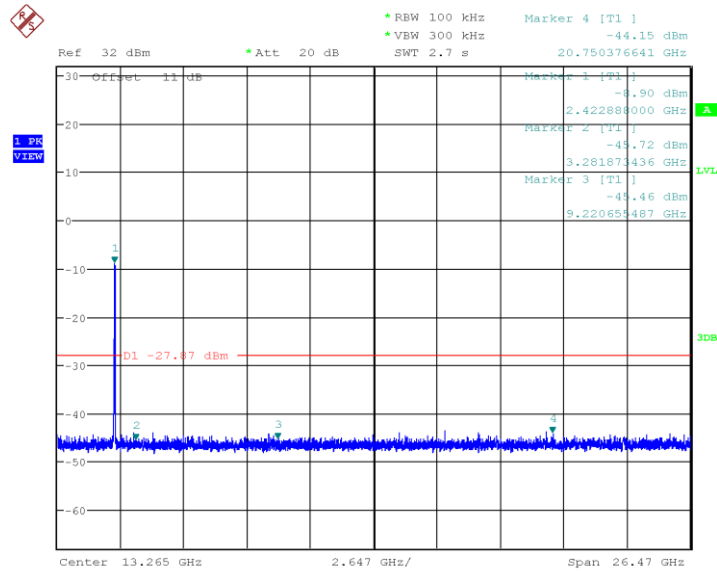

Plot 71. 802.11n HT40, 2437MHz, 30MHz-26.5GHz Non-restricted Out of Band

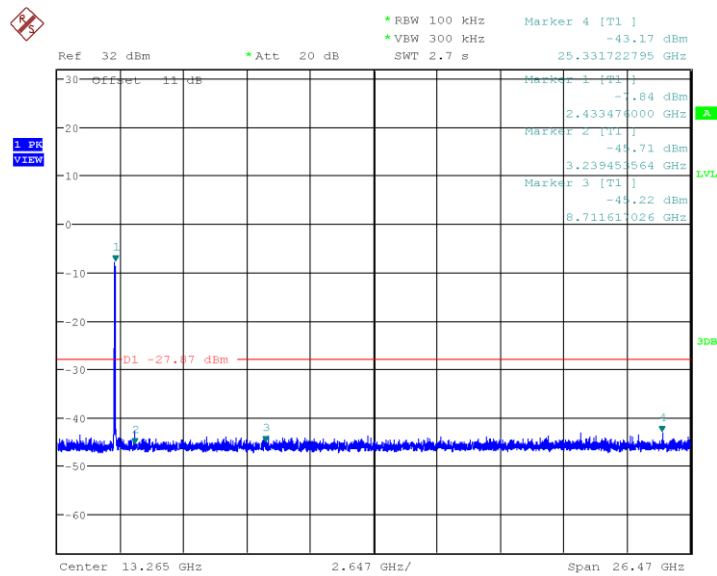

Plot 73. 802.11n HT40, 2452MHz, 30MHz-26.5GHz Non-restricted Out of Band


4.5 Out of Band Emissions: Restricted Band Edge

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS-247 Sect. 5.5, RSS-GEN Sect. 8.9 and 8.10.

4.5.1 Test Method

Radiated measurements per ANSI C63.10-2013 Section 6.10.5 were used to measure the undesirable emission requirement in restricted bands. Peak points were found and RMS Average was taken for each point found. The measurement was performed with modulation. This test was conducted on 3 channels in each mode on the EUT. The worst case measurement of each channel is recorded in this report. All modes were tested in 1x1 configuration since all antenna configurations use the same power settings as 1x1 SISO mode.

Test Setup

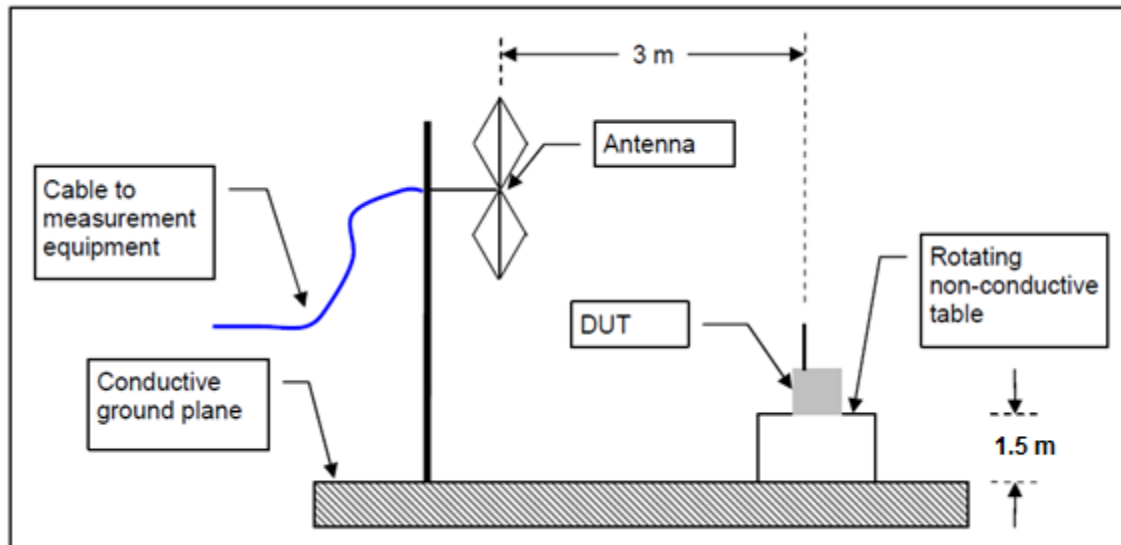


The DUT was stimulated by manufacturer provided test software that is not available to the end user.

4.5.2 Test Results


Table 6: Emissions at the Band-Edge – Test Results

Test Conditions: Radiated Measurement, Normal Temperature and Voltage							
Lower Restricted Band Edge							
Freq. (MHz)	Mode	Channel	Detector (Average/Peak)	Measured (dBuV/m)	Limit (dBuV/m)	Margin	Results
2381.557	802.11b CCK 1Mbps	1	Average	34.49	54	-19.51	Pass
2381.557	802.11b CCK 1Mbps	1	Peak	47.51	74	-26.49	Pass
2389.358	802.11g NoHT 6Mbps	1	Average	46.13	54	-7.87	Pass
2389.083	802.11g NoHT 6Mbps	1	Peak	59.35	74	-14.65	Pass
2389.931	802.11n HT20 MCS0	1	Average	43.48	54	-10.52	Pass
2389.994	802.11n HT20 MCS0	1	Peak	57.42	74	-16.58	Pass
2389.994	802.11n HT40 MCS0	3	Average	49.94	54	-4.06	Pass
2384.949	802.11n HT40 MCS0	3	Peak	61.69	74	-12.31	Pass
Upper Restricted Band Edge							
Freq. (MHz)	Mode	Channel	Detector (Average/Peak)	Measured (dBuV/m)	Limit (dBuV/m)	Margin	Results
2483.600	802.11b CCK 1Mbps	11	Average	34.17	54	-19.83	Pass
2483.715	802.11b CCK 1Mbps	11	Peak	46.38	74	-27.62	Pass
2483.830	802.11g NoHT 6Mbps	11	Average	41.29	54	-12.71	Pass
2484.061	802.11g NoHT 6Mbps	11	Peak	55.39	74	-18.61	Pass
2483.542	802.11n HT20 MCS0	11	Average	45.23	54	-8.77	Pass
2483.658	802.11n HT20 MCS0	11	Peak	58.22	74	-15.78	Pass
2483.542	802.11n HT40 MCS0	9	Average	48.04	54	-5.96	Pass
2483.600	802.11n HT40 MCS0	9	Peak	59.41	74	-14.59	Pass
Note: 1. The DCCF (Average Detector) is included in this table, the following plots are of peak values							


Note: Peak detector in the plots is used to find the azimuth.

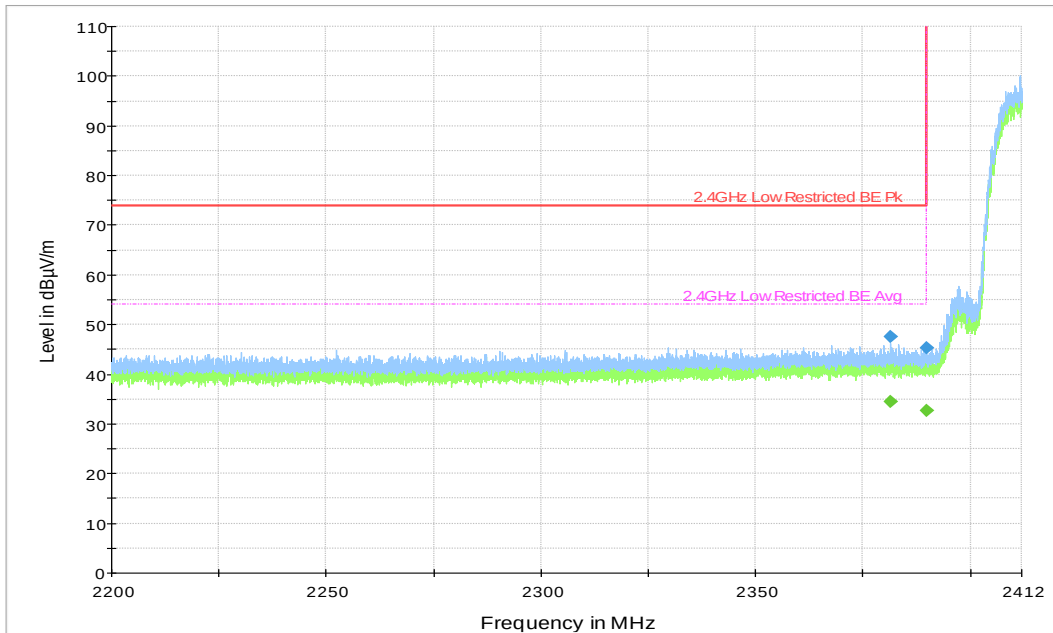


Plot 75. 802.11b CCK, 2412MHz, Lower Band Edge, Restricted

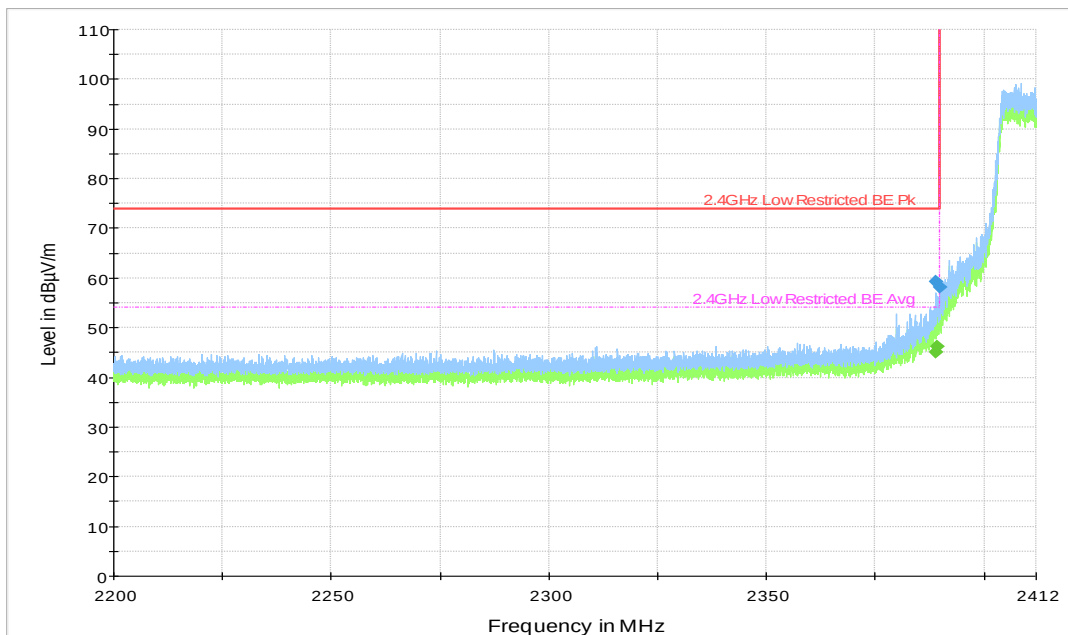


Plot 76. 802.11g No HT, 2412MHz, Lower Band Edge, Restricted

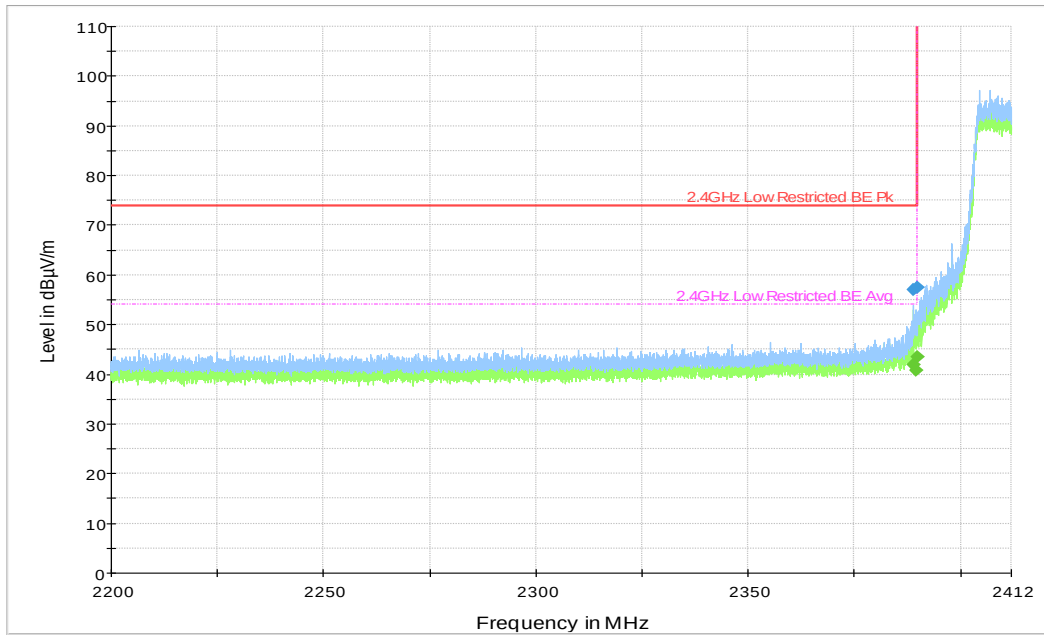


Plot 77. 802.11n HT20, 2412MHz, Lower Band Edge, Restricted

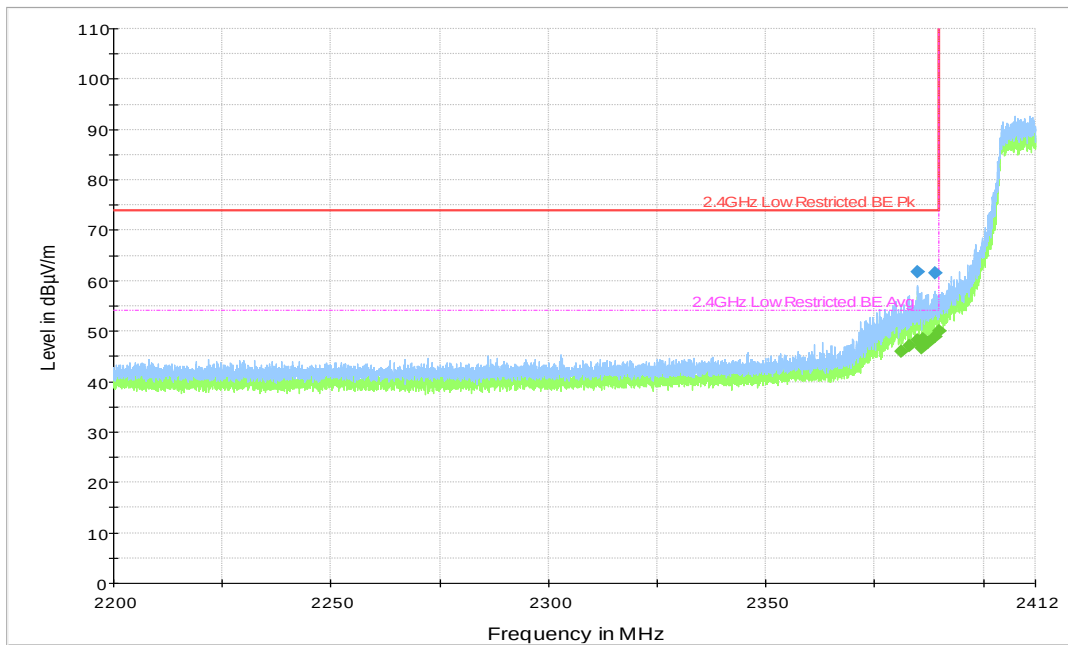


Plot 78. 802.11n HT40, 2422MHz, Lower Band Edge, Restricted

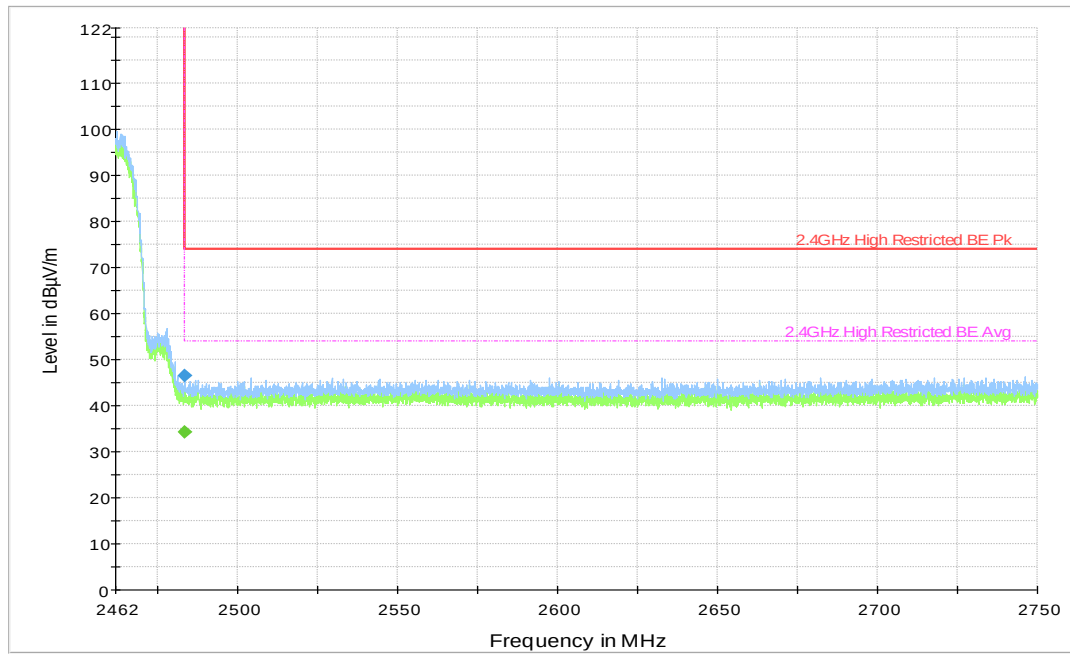


Plot 79. 802.11b CCK, 2462MHz, Upper Band Edge, Restricted

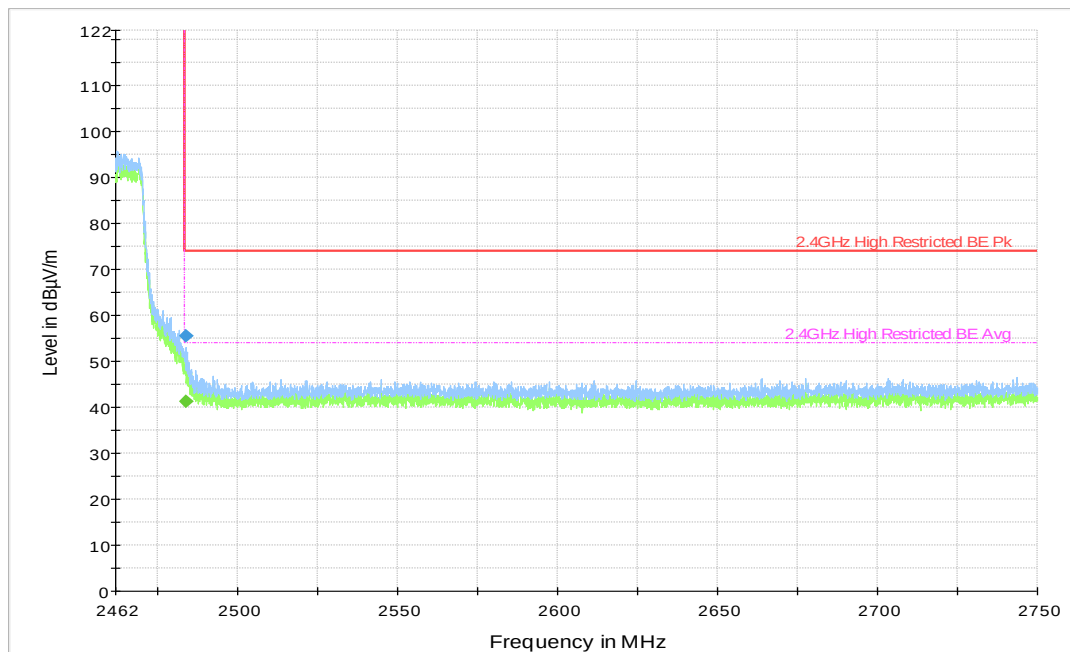

Plot 80. 802.11g No HT, 2462MHz, Upper Band Edge, Restricted

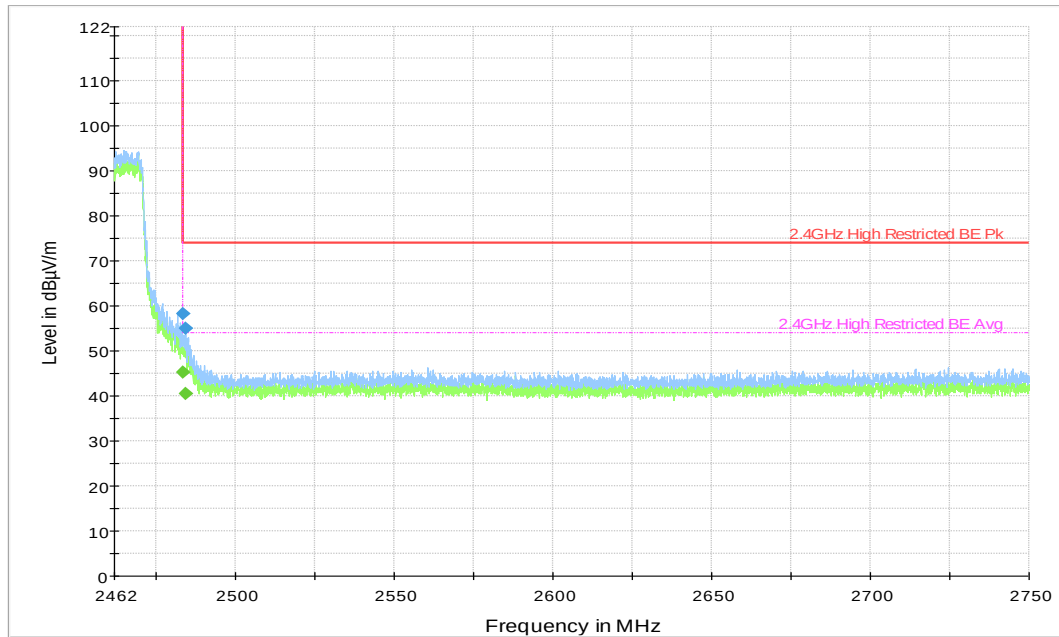

Plot 81. 802.11n HT20, 2462MHz, Upper Band Edge, Restricted

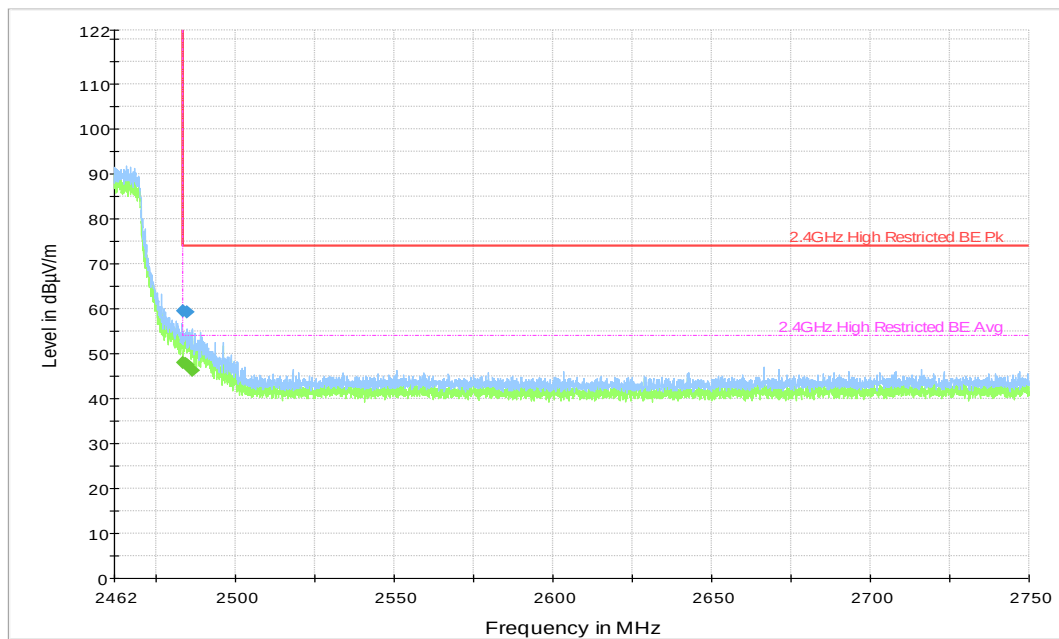

Plot 82. 802.11n HT40, 2452MHz, Upper Band Edge, Restricted

4.6 Transmitter Spurious Emissions

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS 247 Sect.5.5, RSS-GEN Sect. 8.9 and 8.10.

4.6.1 Test Methodology

4.6.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

Pre-scans were performed to determine the worst data rate / chains.

4.6.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

4.6.1.3 Deviations

None.


4.6.2 Test Setup:

All modes were tested in 1x1 configuration since all antenna configurations use the same power settings as 1x1 SISO mode.


4.6.2.1 CDD Mode

The DUT was stimulated by manufacturer provided test software that is not available to the end user.

30MHz-1GHz

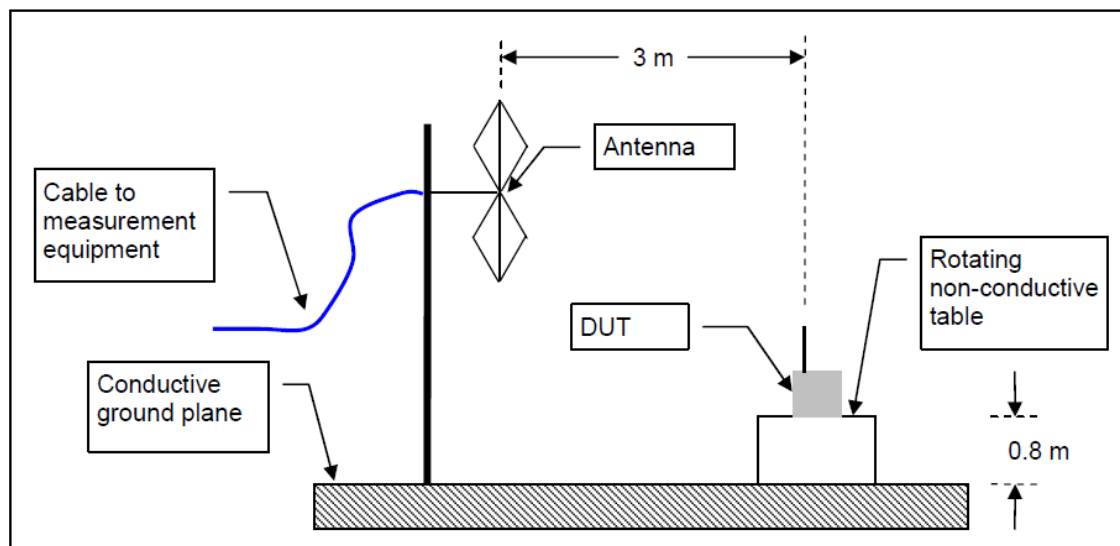

1-26GHz

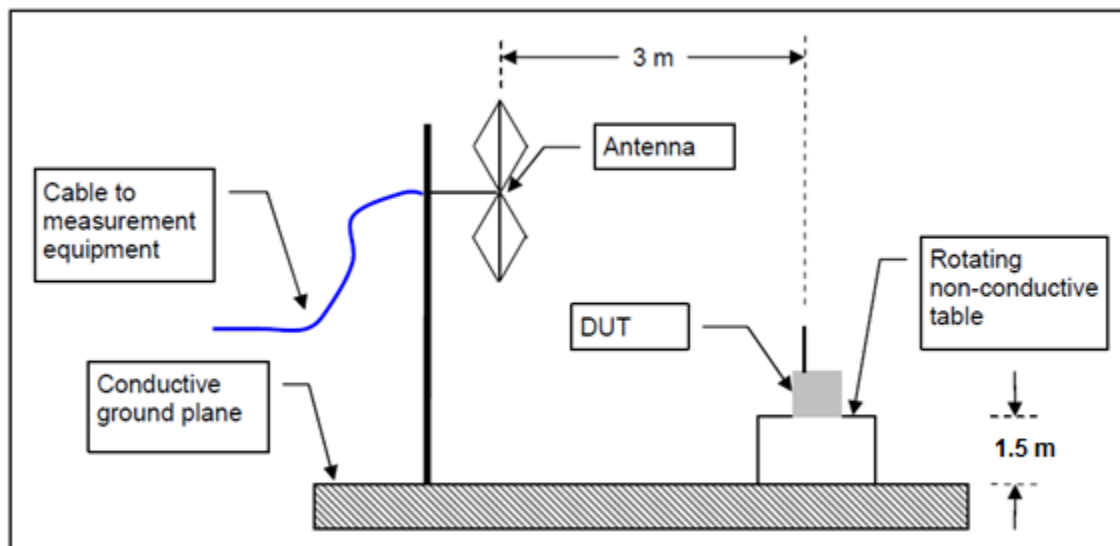

4.6.3 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2015 and RSS Gen Sect. 8.9 and 8.10: 2014.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490.....	2400/F (kHz)	300
0.490-1.705.....	24000/F (kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

.

4.6.4 Test Results

The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and test plan.


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Note: Below 30 MHz was investigated and no emissions was found above noise floor.

Note: The 2.4 GHz notch filter was used to protect the front end of the pre-amp.


4.6.4.1 Plots

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
37.36	19.23	---	40.00	20.77	1000.00	120.00	300.00	V	-99.00	-11.00	
37.36	---	24.98	---	---	1000.00	120.00	300.00	V	-99.00	-11.00	
80.00	---	17.59	---	---	1000.00	120.00	300.00	V	118.00	-18.80	
80.00	13.95	---	40.00	26.06	1000.00	120.00	300.00	V	118.00	-18.80	
100.33	---	22.68	---	---	1000.00	120.00	102.00	V	-14.00	-16.00	
100.33	20.08	---	43.52	23.44	1000.00	120.00	102.00	V	-14.00	-16.00	
198.02	15.53	---	43.50	27.98	1000.00	120.00	102.00	V	-1.00	-12.70	
198.02	---	21.74	---	---	1000.00	120.00	102.00	V	-1.00	-12.70	
247.02	---	17.21	---	---	1000.00	120.00	202.00	V	125.00	-13.30	
247.02	9.48	---	46.00	36.52	1000.00	120.00	202.00	V	125.00	-13.30	
296.84	---	18.59	---	---	1000.00	120.00	228.00	V	163.00	-11.50	
296.84	13.34	---	46.00	32.66	1000.00	120.00	228.00	V	163.00	-11.50	

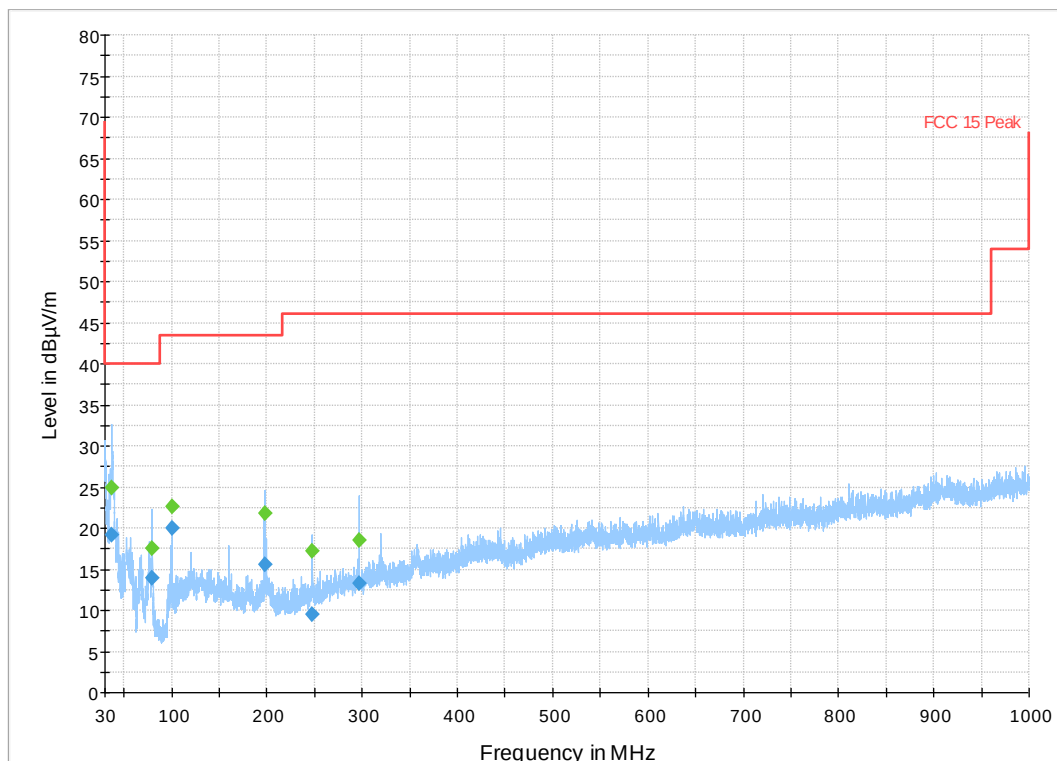


Plot 83. 30MHz-1GHz 802.11b Mode, Channel 1

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
30.48	---	33.00	---	---	1000.00	120.00	308.00	V	42.00	-5.60	
30.48	26.99	---	40.00	13.01	1000.00	120.00	308.00	V	42.00	-5.60	
37.22	17.64	---	40.00	22.36	1000.00	120.00	300.00	V	38.00	-10.90	
37.22	---	24.85	---	---	1000.00	120.00	300.00	V	38.00	-10.90	
80.01	---	15.73	---	---	1000.00	120.00	300.00	V	96.00	-18.80	
80.01	12.33	---	40.00	27.67	1000.00	120.00	300.00	V	96.00	-18.80	
100.31	19.42	---	43.52	24.09	1000.00	120.00	100.00	V	-77.00	-16.00	
100.31	---	21.96	---	---	1000.00	120.00	100.00	V	-77.00	-16.00	
197.91	17.86	---	43.50	25.64	1000.00	120.00	100.00	V	-180.00	-12.70	
197.91	---	22.59	---	---	1000.00	120.00	100.00	V	-180.00	-12.70	
319.99	18.58	---	46.00	27.42	1000.00	120.00	100.00	H	-53.00	-10.60	
319.99	---	22.07	---	---	1000.00	120.00	100.00	H	-53.00	-10.60	

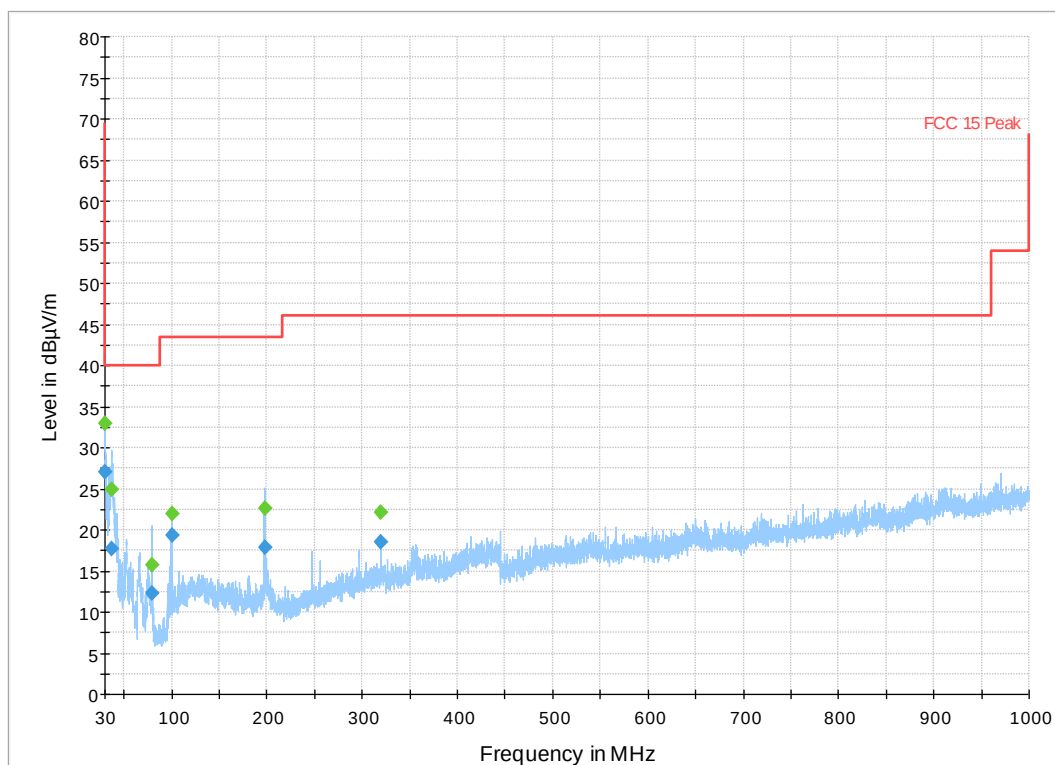


Plot 83. 30MHz-1GHz 802.11b Mode, Channel 6

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
30.65	---	34.75	---	---	1000.00	120.00	306.00	V	160.00	-5.70	
30.65	30.68	---	40.00	9.32	1000.00	120.00	306.00	V	160.00	-5.70	
36.84	---	25.67	---	---	1000.00	120.00	300.00	V	57.00	-10.60	
36.84	20.49	---	40.00	19.51	1000.00	120.00	300.00	V	57.00	-10.60	
52.62	---	19.96	---	---	1000.00	120.00	200.00	V	129.00	-18.60	
52.62	14.70	---	40.00	25.30	1000.00	120.00	200.00	V	129.00	-18.60	
80.02	13.77	---	40.00	26.23	1000.00	120.00	300.00	V	-10.00	-18.80	
80.02	---	17.32	---	---	1000.00	120.00	300.00	V	-10.00	-18.80	
98.69	---	17.06	---	---	1000.00	120.00	100.00	V	-67.00	-16.40	
98.69	9.89	---	43.52	33.63	1000.00	120.00	100.00	V	-67.00	-16.40	
197.29	11.94	---	43.50	31.56	1000.00	120.00	100.00	V	119.00	-12.80	
197.29	---	18.32	---	---	1000.00	120.00	100.00	V	119.00	-12.80	

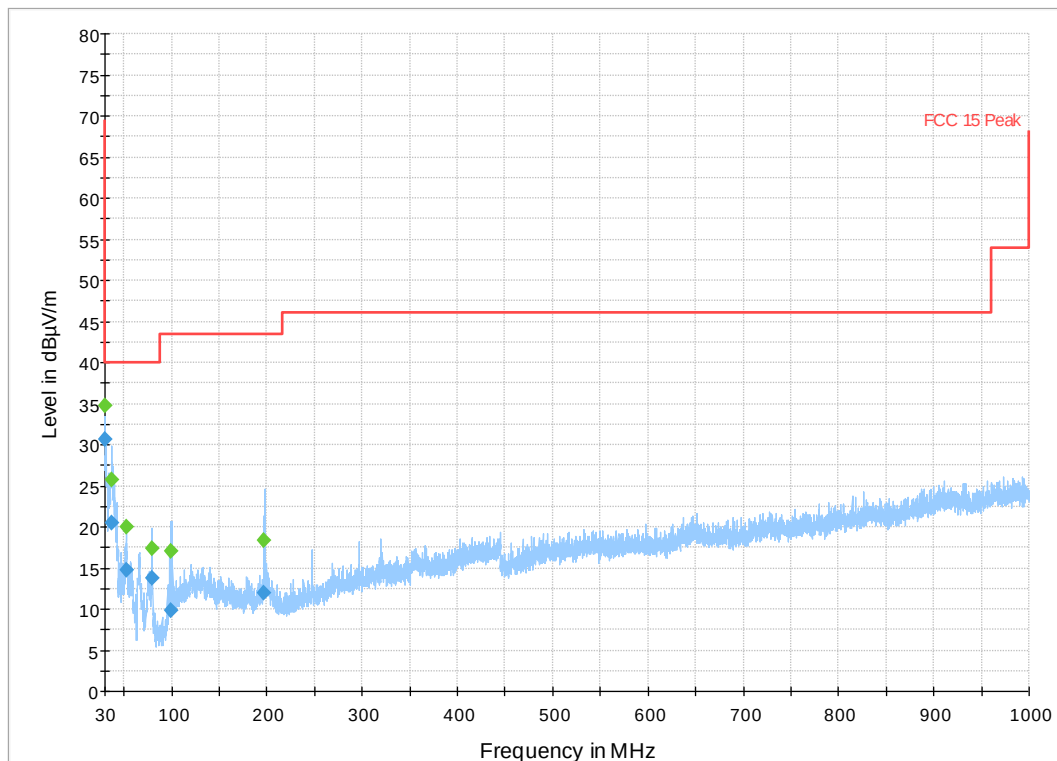


Plot 83. 30MHz-1GHz 802.11b Mode, Channel 11

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
30.21	---	31.90	---	---	1000.00	120.00	308.00	V	95.00	-5.40	
30.21	26.52	---	40.00	13.48	1000.00	120.00	308.00	V	95.00	-5.40	
37.16	---	25.72	---	---	1000.00	120.00	300.00	V	-43.00	-10.80	
37.16	19.85	---	40.00	20.15	1000.00	120.00	300.00	V	-43.00	-10.80	
80.00	17.45	---	40.00	22.55	1000.00	120.00	300.00	V	71.00	-18.80	
80.00	---	20.74	---	---	1000.00	120.00	300.00	V	71.00	-18.80	
100.30	---	23.09	---	---	1000.00	120.00	100.00	V	-70.00	-16.00	
100.30	20.46	---	43.52	23.06	1000.00	120.00	100.00	V	-70.00	-16.00	
197.98	---	23.56	---	---	1000.00	120.00	100.00	V	73.00	-12.70	
197.98	18.35	---	43.50	25.16	1000.00	120.00	100.00	V	73.00	-12.70	
296.71	19.22	---	46.00	26.78	1000.00	120.00	154.00	V	129.00	-11.50	
296.71	---	24.59	---	---	1000.00	120.00	154.00	V	129.00	-11.50	

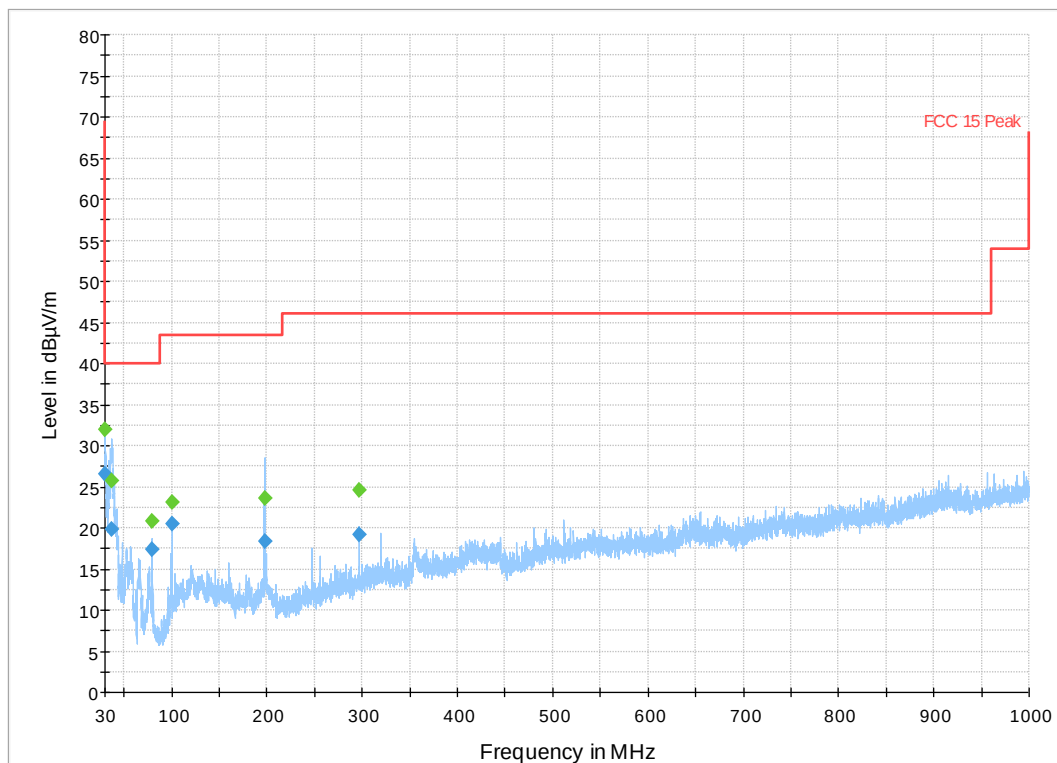


Plot 83. 30MHz-1GHz 802.11n HT40 Mode, Channel 3

(MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
3216.03	50.83	---	74.00	23.17	1000.00	1000.00	178.00	V	156.00	-27.20	
3216.03	---	49.11	54.00	4.89	1000.00	1000.00	178.00	V	156.00	-27.20	
4822.92	---	42.13	54.00	11.87	1000.00	1000.00	219.00	V	-16.00	-24.10	
4822.92	50.78	---	74.00	23.22	1000.00	1000.00	219.00	V	-16.00	-24.10	
17930.74	54.13	---	74.00	19.87	1000.00	1000.00	204.00	V	-74.00	-7.00	
17930.74	---	41.28	54.00	12.72	1000.00	1000.00	204.00	V	-74.00	-7.00	

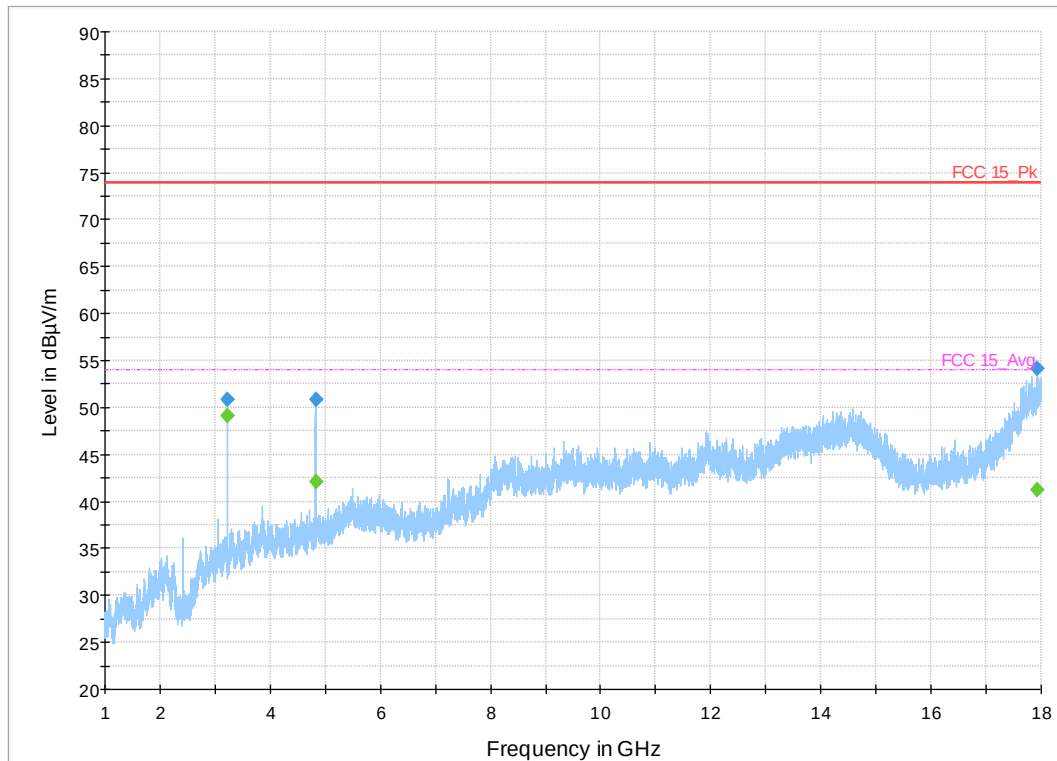


Plot 84. 1-18GHz 802.11b Mode, Channel 1

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
3249.35	48.72	---	74.00	25.28	1000.00	1000.00	204.00	V	145.00	-27.20	
3249.35	---	46.77	54.00	7.23	1000.00	1000.00	204.00	V	145.00	-27.20	
4873.93	53.37	---	74.00	20.63	1000.00	1000.00	206.00	V	-22.00	-24.00	
4873.93	---	43.55	54.00	10.45	1000.00	1000.00	206.00	V	-22.00	-24.00	
17972.66	---	40.56	54.00	13.44	1000.00	1000.00	200.00	V	-153.00	-6.70	
17972.66	53.60	---	74.00	20.40	1000.00	1000.00	200.00	V	-153.00	-6.70	

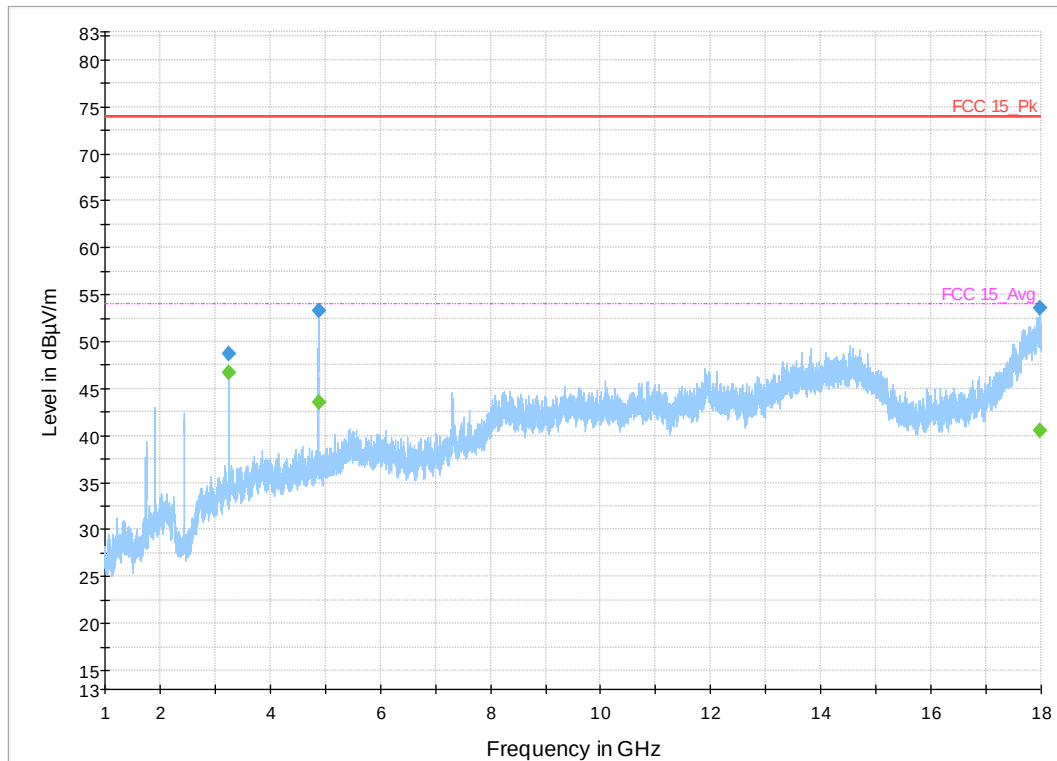


Plot 85. 1-18GHz 802.11b Mode, Channel 6

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
3282.68	51.10	---	74.00	22.90	1000.00	1000.00	191.00	V	147.00	-27.10	
3282.68	---	49.24	54.00	4.76	1000.00	1000.00	191.00	V	147.00	-27.10	
4923.98	52.26	---	74.00	21.74	1000.00	1000.00	178.00	H	-31.00	-24.00	
4923.98	---	42.09	54.00	11.91	1000.00	1000.00	178.00	H	-31.00	-24.00	
17966.63	---	40.50	54.00	13.50	1000.00	1000.00	250.00	V	179.00	-6.80	
17966.63	53.31	---	74.00	20.69	1000.00	1000.00	250.00	V	179.00	-6.80	

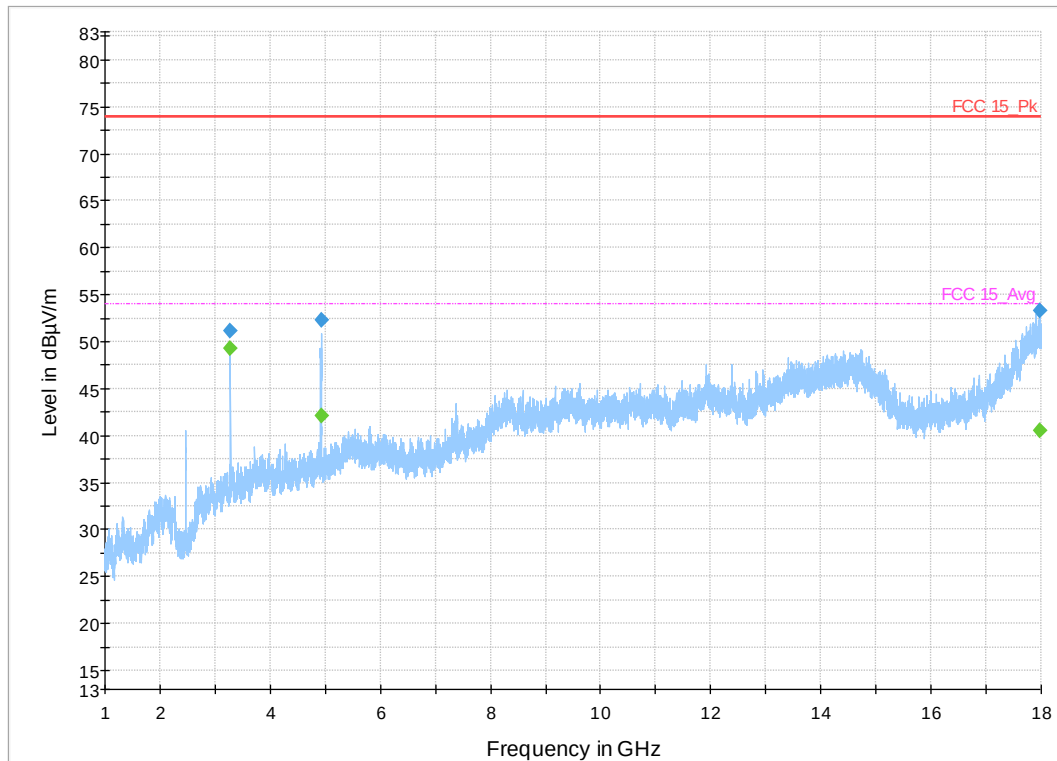


Plot 86. 1-18GHz 802.11b Mode, Channel 11

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
3229.38	49.72	---	74.00	24.28	1000.00	1000.00	219.00	V	163.00	-27.20	
3229.38	---	47.86	54.00	6.14	1000.00	1000.00	219.00	V	163.00	-27.20	
4834.98	---	33.51	54.00	20.49	1000.00	1000.00	217.00	V	-17.00	-24.00	
4834.98	46.14	---	74.00	27.86	1000.00	1000.00	217.00	V	-17.00	-24.00	
17958.60	54.00	---	74.00	20.00	1000.00	1000.00	230.00	V	-145.00	-6.80	
17958.60	---	41.11	54.00	12.89	1000.00	1000.00	230.00	V	-145.00	-6.80	

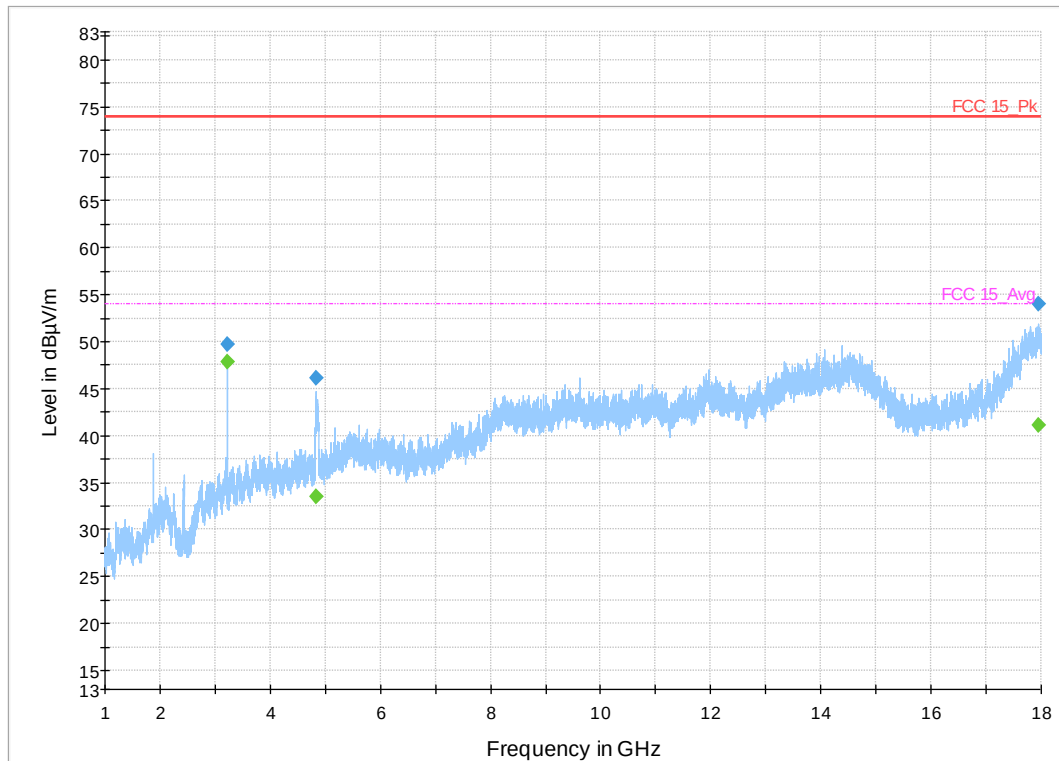


Plot 83. 1GHz-18GHz 802.11n HT40 Mode, Channel 3

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
26352.82	---	35.47	54.00	18.53	1000.00	1000.00	245.00	H	-148.00	13.80	
26352.82	48.43	---	74.00	25.57	1000.00	1000.00	245.00	H	-148.00	13.80	

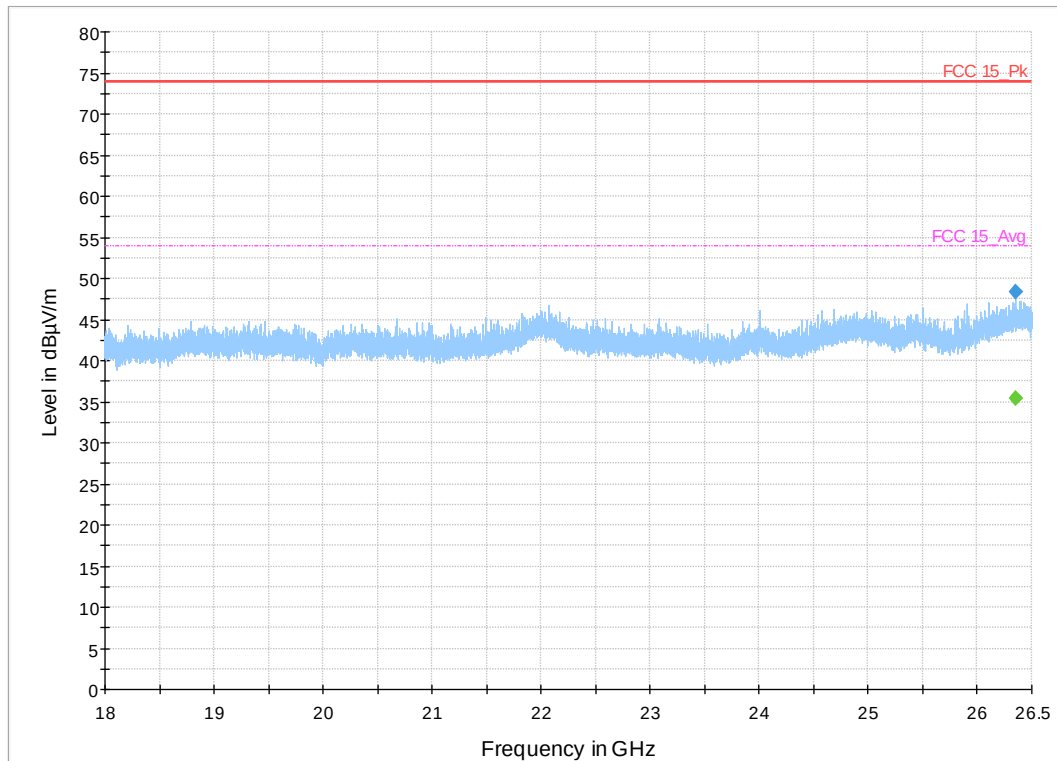


Plot 87. 18-26GHz 802.11b Mode, Channel 1

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
26087.34	---	34.48	54.00	19.52	1000.00	1000.00	245.00	V	180.00	13.40	
26087.34	47.58	---	74.00	26.42	1000.00	1000.00	245.00	V	180.00	13.40	

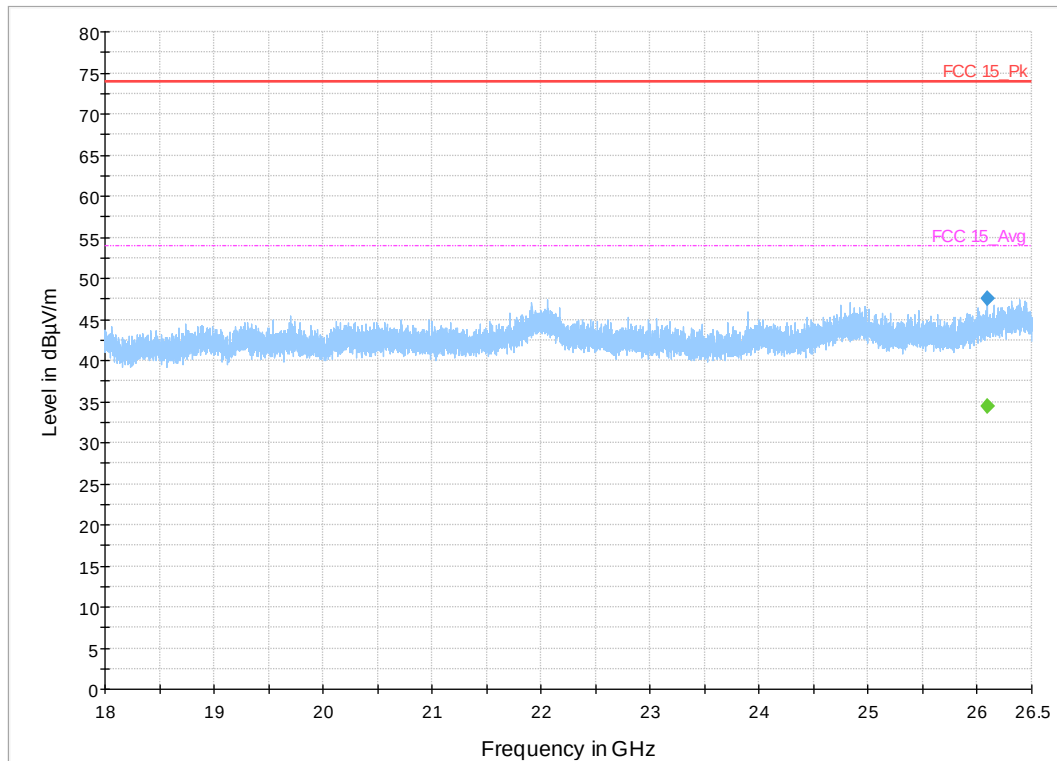


Plot 88. 18-26GHz 802.11b Mode, Channel 6

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
26252.72	---	34.73	54.00	19.27	1000.00	1000.00	245.00	H	-111.00	13.60	
26252.72	47.65	---	74.00	26.35	1000.00	1000.00	245.00	H	-111.00	13.60	

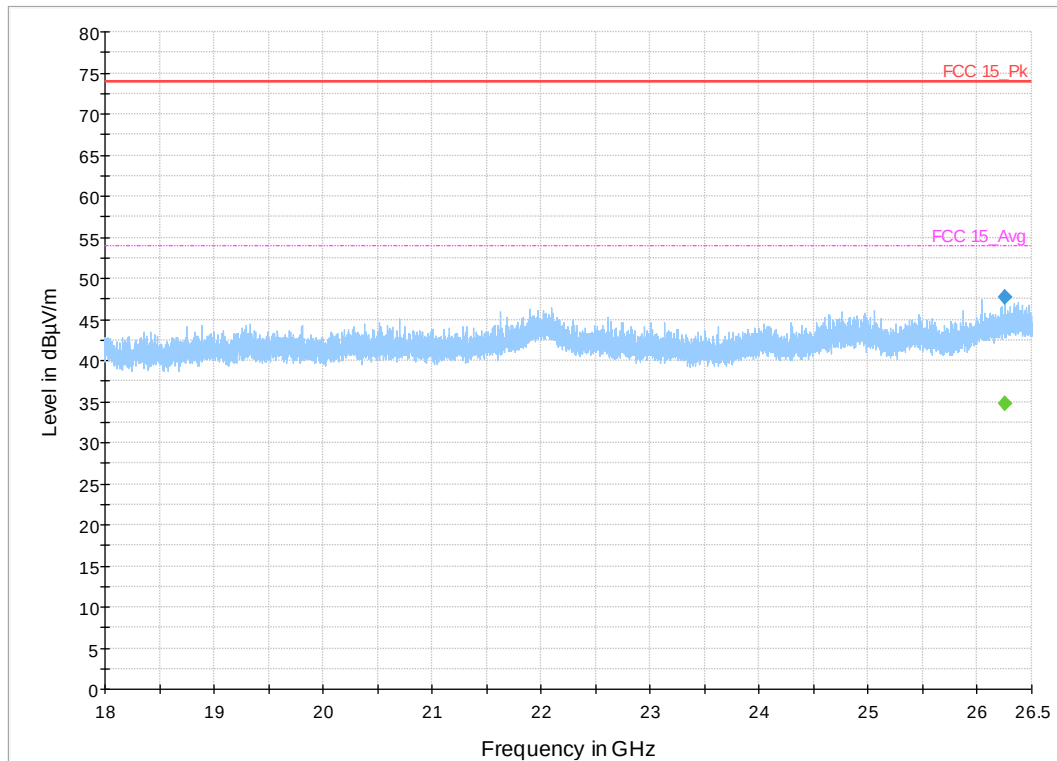

Plot 89. 18-26GHz 802.11b Mode, Channel 11

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
26445.56	---	34.80	54.00	19.20	1000.00	1000.00	196.00	H	76.00	13.90	
26445.56	47.46	---	74.00	26.54	1000.00	1000.00	196.00	H	76.00	13.90	

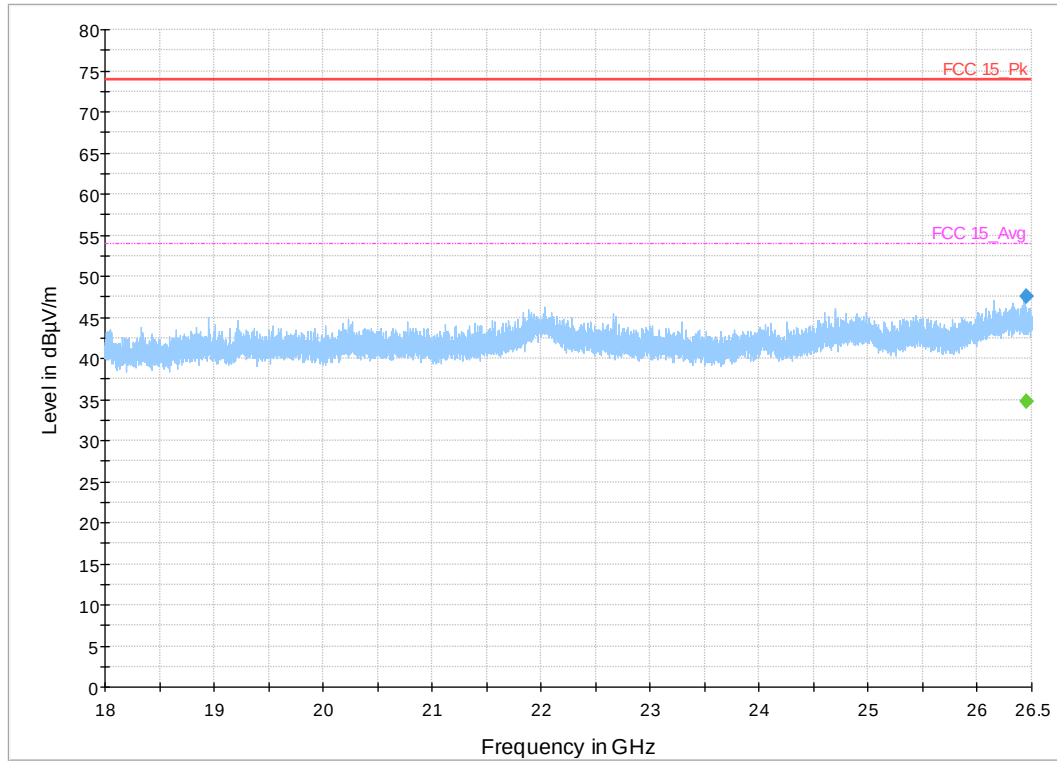

Plot 90. 18-26GHz 802.11n HT40 Mode, Channel 3

4.7 AC Conducted Emissions

Testing was performed in accordance with ANSI C63.4: 2014. These test methods are listed under the laboratory's A2LA Scope of Accreditation.

This test measures the levels emanating from the EUT's AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207 and RSS-GEN. Sect. 8.8.

4.7.1 Test Methodology

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50 μ H / 50 Ω LISNs.

Testing is performed in Lab1. The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

4.7.1.1 Deviations

There were no deviations from this test methodology.


4.7.2 Test Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 7: AC Conducted Emissions – Test Results


Test Conditions: Conducted Measurement at Normal Conditions only		
Antenna Type: PCB trace antenna		Power Level: See Section 4.1.4.1
AC Power: 120 Vac/60 Hz		Configuration: Tabletop
Configuration	Frequency Range	Test Result
Line 1 (Live)	0.15 to 30 MHz	Pass
Line 2 (Neutral)	0.15 to 30 MHz	Pass

4.7.2.1 Live Line

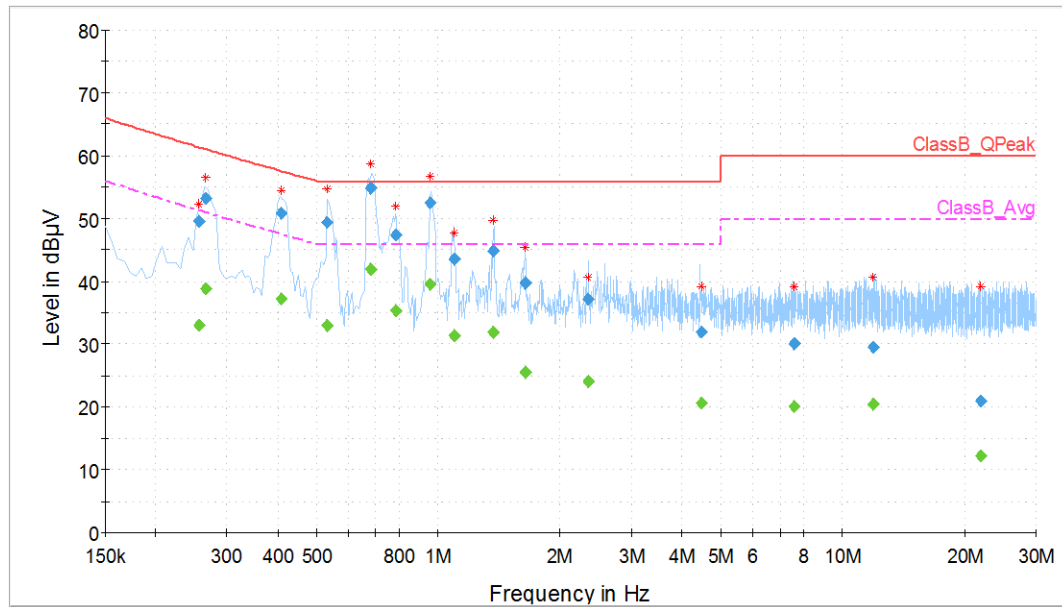

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)	Comment
0.26	---	32.96	51.32	18.36	1000.00	10.00	L1	GND	9.80	
0.26	49.56	---	61.36	11.80	1000.00	10.00	L1	GND	9.80	
0.27	---	38.79	50.98	12.18	1000.00	10.00	L1	GND	9.80	
0.27	53.22	---	61.02	7.79	1000.00	10.00	L1	GND	9.80	
0.41	---	37.24	47.55	10.31	1000.00	10.00	L1	GND	9.70	
0.41	50.88	---	57.57	6.69	1000.00	10.00	L1	GND	9.70	
0.53	---	32.91	46.00	13.09	1000.00	10.00	L1	GND	9.70	
0.53	49.41	---	56.00	6.59	1000.00	10.00	L1	GND	9.70	
0.68	---	41.94	46.00	4.06	1000.00	10.00	L1	GND	9.70	
0.68	54.85	---	56.00	1.15	1000.00	10.00	L1	GND	9.70	
0.78	---	35.37	46.00	10.63	1000.00	10.00	L1	GND	9.70	
0.78	47.41	---	56.00	8.59	1000.00	10.00	L1	GND	9.70	
0.96	---	39.55	46.00	6.45	1000.00	10.00	L1	GND	9.70	
0.96	52.51	---	56.00	3.49	1000.00	10.00	L1	GND	9.70	
1.09	---	31.32	46.00	14.68	1000.00	10.00	L1	GND	9.70	
1.09	43.51	---	56.00	12.49	1000.00	10.00	L1	GND	9.70	
1.37	---	31.95	46.00	14.05	1000.00	10.00	L1	GND	9.70	
1.37	44.89	---	56.00	11.11	1000.00	10.00	L1	GND	9.70	
1.64	---	25.45	46.00	20.55	1000.00	10.00	L1	GND	9.70	
1.64	39.64	---	56.00	16.36	1000.00	10.00	L1	GND	9.70	
2.34	---	24.04	46.00	21.96	1000.00	10.00	L1	GND	9.80	
2.34	37.21	---	56.00	18.79	1000.00	10.00	L1	GND	9.80	
4.46	---	20.53	46.00	25.47	1000.00	10.00	L1	GND	9.80	
4.46	31.97	---	56.00	24.03	1000.00	10.00	L1	GND	9.80	
7.59	---	20.01	50.00	29.99	1000.00	10.00	L1	GND	9.80	
7.59	30.14	---	60.00	29.86	1000.00	10.00	L1	GND	9.80	
11.92	---	20.40	50.00	29.60	1000.00	10.00	L1	GND	9.80	
11.92	29.49	---	60.00	30.51	1000.00	10.00	L1	GND	9.80	
21.92	---	12.14	50.00	37.86	1000.00	10.00	L1	GND	9.80	
21.92	21.04	---	60.00	38.96	1000.00	10.00	L1	GND	9.80	

4.7.2.2 Neutral Line

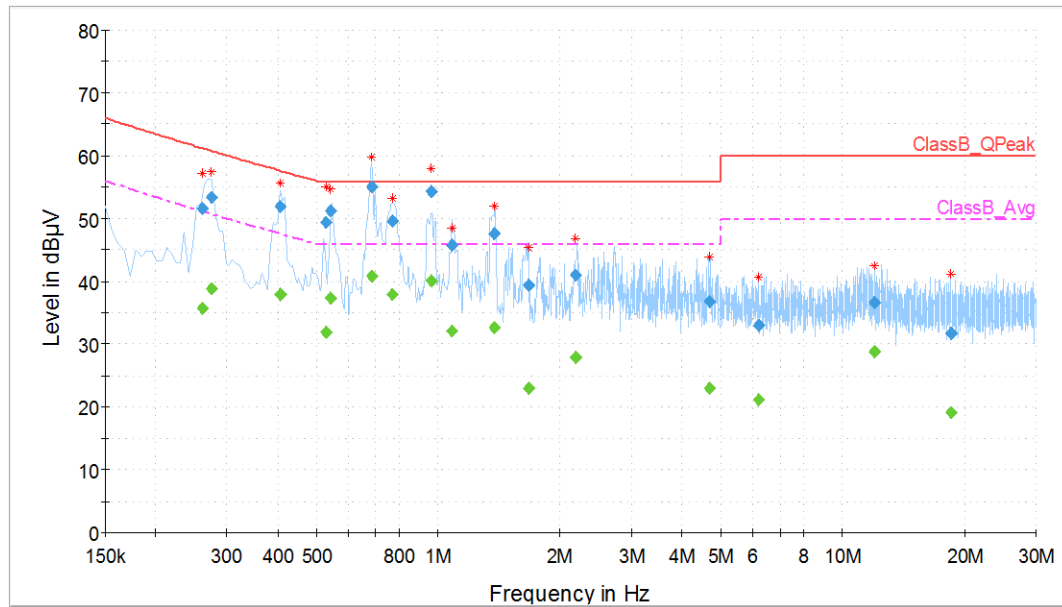

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)	Comment
0.26	51.66	---	61.22	9.57	1000.00	10.00	L1	GND	9.80	
0.26	---	35.80	51.18	15.38	1000.00	10.00	L1	GND	9.80	
0.28	53.46	---	60.74	7.28	1000.00	10.00	L1	GND	9.80	
0.28	---	38.87	50.70	11.83	1000.00	10.00	L1	GND	9.80	
0.41	51.91	---	57.58	5.68	1000.00	10.00	L1	GND	9.70	
0.41	---	37.95	47.56	9.61	1000.00	10.00	L1	GND	9.70	
0.53	49.38	---	56.00	6.62	1000.00	10.00	L1	GND	9.70	
0.53	---	31.85	46.00	14.15	1000.00	10.00	L1	GND	9.70	
0.54	51.21	---	56.00	4.79	1000.00	10.00	L1	GND	9.70	
0.54	---	37.27	46.00	8.73	1000.00	10.00	L1	GND	9.70	
0.69	---	40.91	46.00	5.09	1000.00	10.00	L1	GND	9.70	
0.69	55.11	---	56.00	0.89	1000.00	10.00	L1	GND	9.70	
0.77	49.52	---	56.00	6.48	1000.00	10.00	L1	GND	9.70	
0.77	---	37.85	46.00	8.15	1000.00	10.00	L1	GND	9.70	
0.96	---	40.04	46.00	5.96	1000.00	10.00	L1	GND	9.70	
0.96	54.26	---	56.00	1.74	1000.00	10.00	L1	GND	9.70	
1.08	45.66	---	56.00	10.34	1000.00	10.00	L1	GND	9.70	
1.08	---	32.08	46.00	13.92	1000.00	10.00	L1	GND	9.70	
1.38	---	32.61	46.00	13.39	1000.00	10.00	L1	GND	9.70	
1.38	47.62	---	56.00	8.38	1000.00	10.00	L1	GND	9.70	
1.67	39.38	---	56.00	16.62	1000.00	10.00	L1	GND	9.70	
1.67	---	22.89	46.00	23.11	1000.00	10.00	L1	GND	9.70	
2.18	---	27.84	46.00	18.16	1000.00	10.00	L1	GND	9.80	
2.18	40.94	---	56.00	15.06	1000.00	10.00	L1	GND	9.80	
4.68	---	23.05	46.00	22.95	1000.00	10.00	L1	GND	9.80	
4.68	36.81	---	56.00	19.19	1000.00	10.00	L1	GND	9.80	
6.21	---	21.17	50.00	28.83	1000.00	10.00	L1	GND	9.80	
6.21	33.02	---	60.00	26.98	1000.00	10.00	L1	GND	9.80	
11.97	36.54	---	60.00	23.46	1000.00	10.00	L1	GND	9.80	
11.97	---	28.82	50.00	21.18	1000.00	10.00	L1	GND	9.80	
18.51	---	19.19	50.00	30.81	1000.00	10.00	L1	GND	9.80	
18.51	31.64	---	60.00	28.36	1000.00	10.00	L1	GND	9.80	

5 Test Equipment List

5.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal mm/dd/yyyy	Next Cal mm/dd/yyyy
Spectrum Analyzer	Rohde & Schwarz	FSU26.5	1166.1660.26	02/23/2020	02/23/2021
EMI Receiver	Rohde & Schwarz	ESW44	101663-dv	07/18/2019	07/18/2021
L.I.S.N.	Com-Power	LI-215	192000	01/16/2019	01/16/2021
Transient Limiter	Com-Power	LIT-930	531582	01/16/2019	01/16/2021
Preamplifier, 9 kHz – 1 GHz	Sonoma	310N	213221	01/16/2019	01/16/2021
Bilog Antenna	Sunol Sciences	JB3	A060502	12/19/2018	12/19/2020
Amplifier	Miteq	TTA1800-30-HG	1842452	01/15/2019	01/15/2021
Horn Antenna	Sunol Sciences	DRH-118	A040806	03/05/2019	03/05/2021
Amplifier	HP	8449B	3008A01013	01/15/2019	01/15/2021
Horn Antenna	EMCO	RA42-K-F-B-C	020131-004	03/04/2019	03/04/2021
Amplifier	Rohde & Schwarz	TS-PR26	3545.7014.03	03/04/2019	03/04/2021
Amplifier	Sonoma	310N	185516	N/A (See Note)	
1.6 GHz Low Pass Filter	K&L Microwave	8L120-X1600-0/09135-0249	UA691-35	N/A (See Note)	
3.5 GHz High Pass Filter	Hewlett Packard	84300-80038	820004	N/A (See Note)	
2.4GHZ Band Pass Filter	Microtronics	BRM50702	009	N/A (See Note)	

Note: Equipment is characterized before use.

6 EMC Test Plan

6.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

6.2 Customer

Table 8: Customer Information

Company Name	Grid Connect
Address	1630 W Diehl Rd
City, State, Zip	Naperville, IL, 60563
Country	USA

Table 9: Technical Contact Information

Name	Cristian Codreanu
E-mail	cristianc@gridconnect.com

6.3 Equipment Under Test (EUT)

The information provided in the following table should be listed as it should appear in the final report. For those products that have only a model name, list the model number as *non-applicable* and vice-versa.

Table 10: EUT Designation

Product Name	Smart Power Cord
Model Number	CS-SC-01
System Name	Smart Power Cord
Product Description	Smart cord with power control and monitoring, WiFi connectivity

6.4 Product Specifications

Table 11: EUT Specifications

EUT Specifications	
AC Input	100-240V AC, 50 – 60 Hz
Environment	Indoor
Operating Temperature Range:	0-40°C
Multiple Feeds:	☐ Yes and how many ☒ No
Product Marketing Name (PMN)	Smart Power Cord
Hardware Version Identification Number (HVIN)	GC-SCBL-PCBA rev 0.3
Firmware Version Identification Number (FVIN)	N/A
RF Test Software Version	espRFTTool v1.1.0
Operating Modes	802.11b 802.11g 802.11n HT20/40
Transmitter Frequency Band	2.4 GHz – 2.4835 GHz
Power Setting @ Operating Channel	See section 4.1.2.
Modulation	CCK (802.11b) and OFDM (802.11g/n)
TX/RX Chain (s)	SISO
Type of Equipment	☒ Table Top ☐ Wall-mount ☐ Floor standing cabinet ☐ Other:
Note: EUT will be on / transmitted at all times with the highest power levels and antenna gains per channel.	

Table 12: Antenna Information

Number	Antenna Type	Description	Max Gain (dBi)
Antenna 0	PCB trace antenna	2.4 GHz WiFi	-9.67

Table 13: Interface Specifications

Interface Type	Cabled with what type of cable?	Is the cable shielded?	Maximum potential length of the cable?	Metallic (M), Coax (C), Fiber (F), or Not Applicable?
N/A	N/A	☐ N/A	☐ Metric: N/A	☐ N/A

Table 14: Accessory Equipment

Equipment	Manufacturer	Model	Serial	Comment
N/A	N/A	N/A	N/A	N/A

Table 15: Ancillary Equipment (used for test purposes only)

Equipment	Manufacturer	Model	Serial	Used for
Laptop	Lenovo	Thinkpad	N/A	Setup EUT operating channels via QRCT with Ethernet connection to EUT
Note: None.				

Table 16: Description of Sample used for Testing

Sample Number	Device	Serial Number	Configuration	Used For
1	CS-SC-01	Unit #1	Radiated Sample	TX Spurious Emissions, Bandedge
2	CS-SC-01	Unit #1	Radiated Sample	AC Mains Conducted Emissions
3	CS-SC-01	Unit #2	Conducted Sample	All other conducted Measurements
Note: None.				

Table 17: Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	Setup Photo (X-Axis)	Setup Photo (Y-Axis)	Setup Photo (Z-Axis)
CS-SC-01	PCB trace antenna	Transmit	EUT upright	N/A	N/A

6.5 Test Specifications

Table 18: Test Specifications

Emissions and Immunity	
Standard	Requirement
CFR 47 Part 15.247: 2020	All
RSS 247 Issue 2, 2017	All

END OF REPORT