


5.6. Restricted band

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

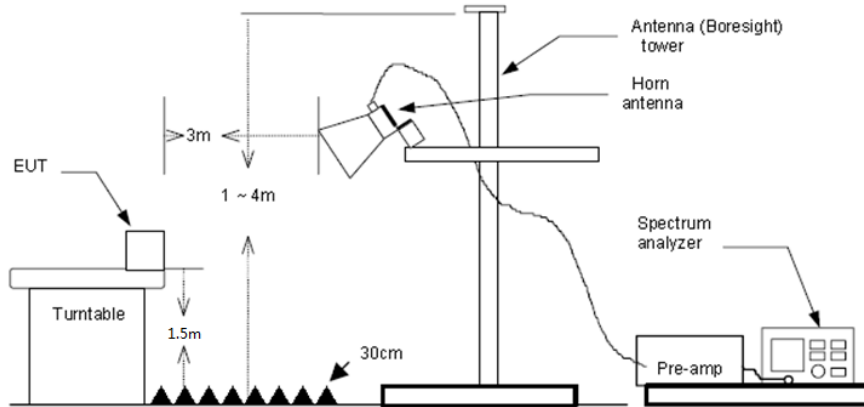

TEST PROCEDURE

- 1) The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2) The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3) The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
- 4) The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- 5) The receiver set as follow:
 RBW=1MHz, VBW=3MHz for Peak value
 RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed **Not Applicable**

Note:

- 1) $Final\ level = Read\ level + Antenna\ Factor + Cable\ Loss - Preamp\ Factor$

802.11b					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2310.00	18.17	28.05	6.62	0.00	52.84	74.00	-21.16	Vertical	Peak
2390.00	18.07	27.65	6.75	0.00	52.47	74.00	-21.53	Vertical	
2310.00	17.11	28.05	6.62	0.00	51.78	74.00	-22.22	Horizontal	
2390.00	17.60	27.65	6.75	0.00	52.00	74.00	-22.00	Horizontal	
2310.00	11.01	28.05	6.62	0.00	45.68	54.00	-8.32	Vertical	Average
2390.00	10.68	27.65	6.75	0.00	45.08	54.00	-8.92	Vertical	
2310.00	11.01	28.05	6.62	0.00	45.68	54.00	-8.32	Horizontal	
2390.00	10.64	27.65	6.75	0.00	45.04	54.00	-8.96	Horizontal	

802.11b					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2483.50	17.53	27.26	6.83	0.00	51.62	74.00	-22.38	Vertical	Peak
2500.00	18.18	27.20	6.84	0.00	52.22	74.00	-21.78	Vertical	
2483.50	17.85	27.26	6.83	0.00	51.94	74.00	-22.06	Horizontal	
2500.00	18.50	27.20	6.84	0.00	52.54	74.00	-21.46	Horizontal	
2483.49	10.64	27.26	6.83	0.00	44.73	54.00	-9.27	Vertical	Average
2500.00	10.53	27.20	6.84	0.00	44.57	54.00	-9.43	Vertical	
2483.50	10.64	27.26	6.83	0.00	44.73	54.00	-9.27	Horizontal	
2500.00	10.60	27.20	6.84	0.00	44.64	54.00	-9.36	Horizontal	

802.11g					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2310.00	18.44	28.05	6.62	0.00	53.11	74.00	-20.89	Vertical	Peak
2390.00	18.54	27.65	6.75	0.00	52.94	74.00	-21.06	Vertical	
2310.00	16.74	28.05	6.62	0.00	51.41	74.00	-22.59	Horizontal	
2390.00	17.24	27.65	6.75	0.00	51.64	74.00	-22.36	Horizontal	
2310.00	11.04	28.05	6.62	0.00	45.71	54.00	-8.29	Vertical	Average
2390.00	11.11	27.65	6.75	0.00	45.51	54.00	-8.49	Vertical	
2310.00	11.04	28.05	6.62	0.00	45.71	54.00	-8.29	Horizontal	
2390.00	11.46	27.65	6.75	0.00	45.86	54.00	-8.14	Horizontal	

802.11g					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2483.50	16.33	27.26	6.83	0.00	50.42	74.00	-23.58	Vertical	Peak
2500.00	17.47	27.20	6.84	0.00	51.51	74.00	-22.49	Vertical	
2483.50	16.39	27.26	6.83	0.00	50.48	74.00	-23.52	Horizontal	
2500.00	17.02	27.20	6.84	0.00	51.06	74.00	-22.94	Horizontal	
2483.50	10.88	27.26	6.83	0.00	44.97	54.00	-9.03	Vertical	Average
2500.00	10.60	27.20	6.84	0.00	44.64	54.00	-9.36	Vertical	
2483.50	11.57	27.26	6.83	0.00	45.66	54.00	-8.34	Horizontal	
2500.00	10.58	27.20	6.84	0.00	44.62	54.00	-9.38	Horizontal	

802.11n(H20)					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2310.00	17.38	28.05	6.62	0.00	52.05	74.00	-21.95	Vertical	Peak
2390.00	18.71	27.65	6.75	0.00	53.11	74.00	-20.89	Vertical	
2310.00	18.27	28.05	6.62	0.00	52.94	74.00	-21.06	Horizontal	
2390.00	18.61	27.65	6.75	0.00	53.01	74.00	-20.99	Horizontal	
2310.00	11.05	28.05	6.62	0.00	45.72	54.00	-8.28	Vertical	Average
2390.00	10.87	27.65	6.75	0.00	45.27	54.00	-8.73	Vertical	
2310.00	11.02	28.05	6.62	0.00	45.69	54.00	-8.31	Horizontal	
2390.00	10.92	27.65	6.75	0.00	45.32	54.00	-8.68	Horizontal	

802.11n(H20)					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2483.50	17.05	27.26	6.83	0.00	51.14	74.00	-22.86	Vertical	Peak
2500.00	17.23	27.20	6.84	0.00	51.27	74.00	-22.73	Vertical	
2483.50	18.03	27.26	6.83	0.00	52.12	74.00	-21.88	Horizontal	
2500.00	17.29	27.20	6.84	0.00	51.33	74.00	-22.67	Horizontal	
2483.50	10.99	27.26	6.83	0.00	45.08	54.00	-8.92	Vertical	Average
2500.00	10.64	27.20	6.84	0.00	44.68	54.00	-9.32	Vertical	
2483.50	10.91	27.26	6.83	0.00	45.00	54.00	-9.00	Horizontal	
2500.00	10.62	27.20	6.84	0.00	44.66	54.00	-9.34	Horizontal	


5.7. Band edge and Spurious Emission (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

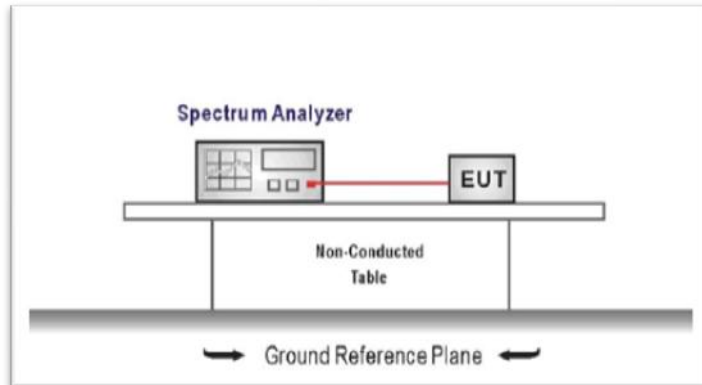

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure
Center frequency=DTS channel center frequency
The span = 1.5 times the DTS bandwidth.
RBW = 100 kHz, VBW ≥ 3 x RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum PSD level

Note: the channel found to contain the maximum PSD level can be used to establish the reference level.

3. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW ≥ 3 x RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emissions relative to the limit.


TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable

802.11b Bandedge

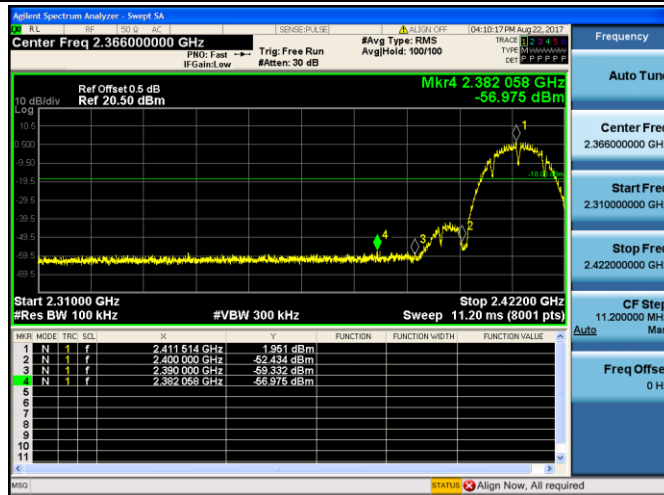


CH01-Bandedge




CH11-Bandedge


802.11b 100k PSD

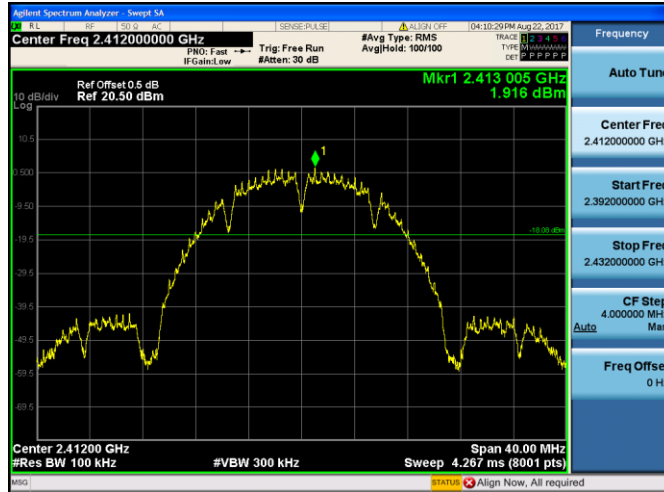

CH01

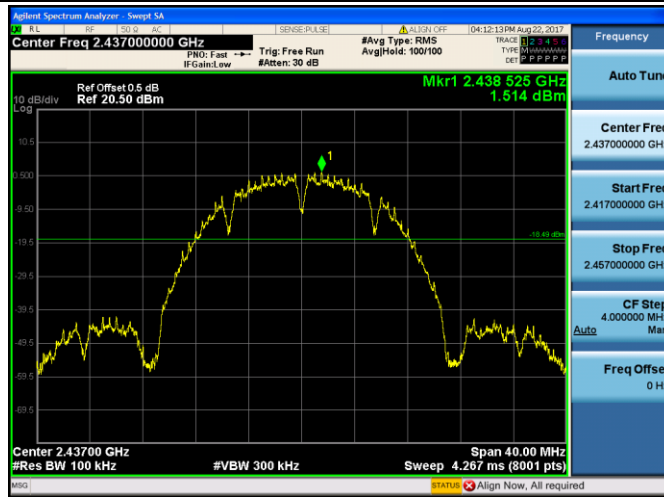


CH06

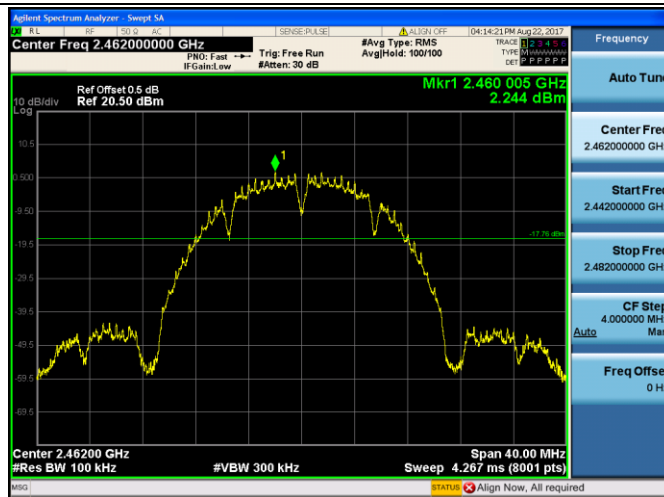



CH11

802.11b SE


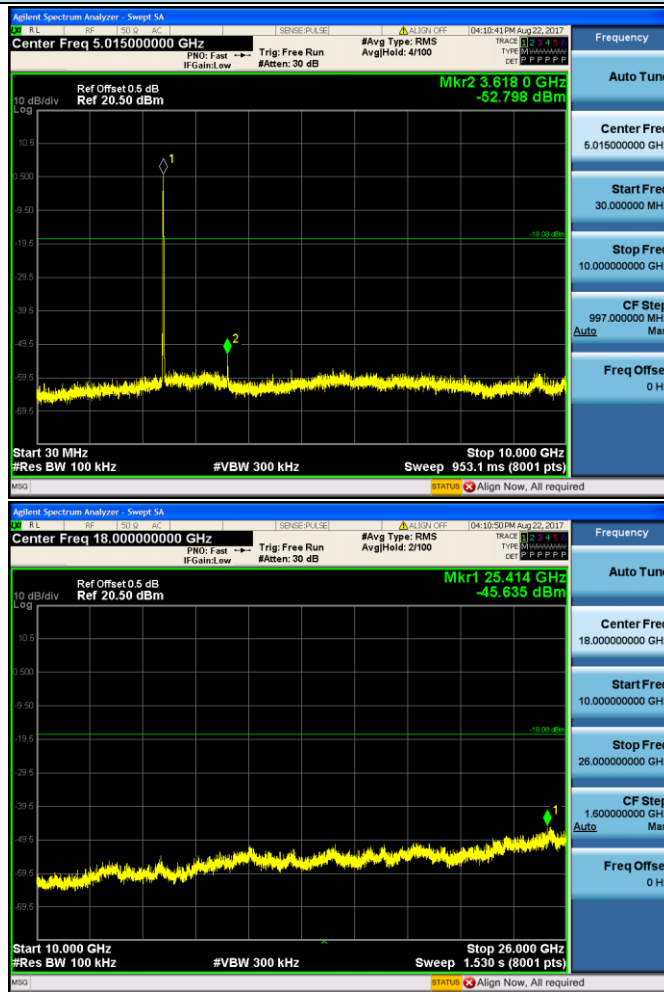


CH01

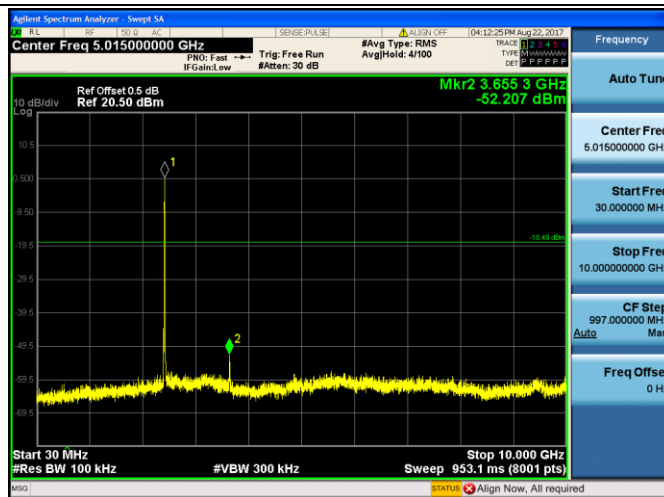

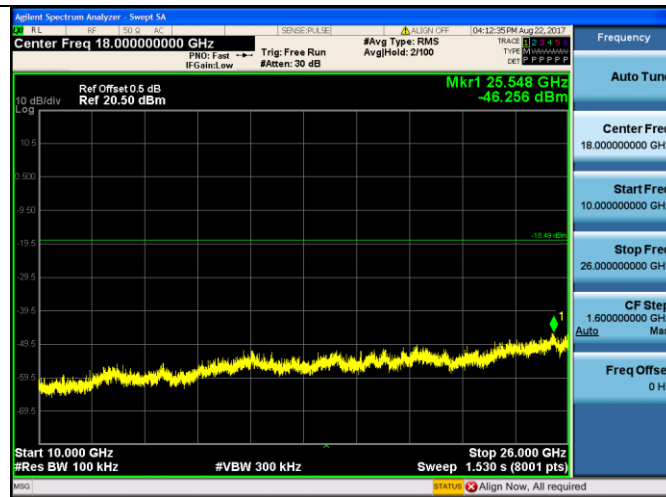


CH06

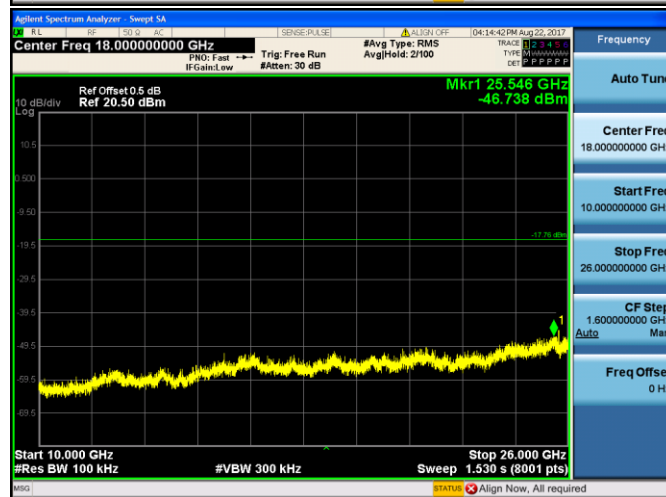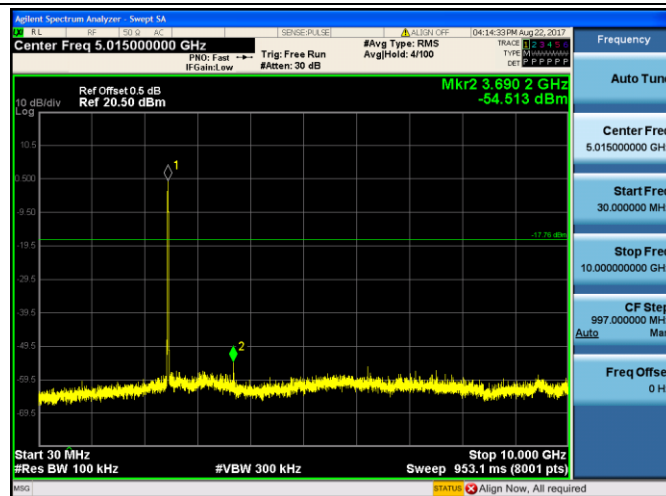


CH11

802.11g Bandedge

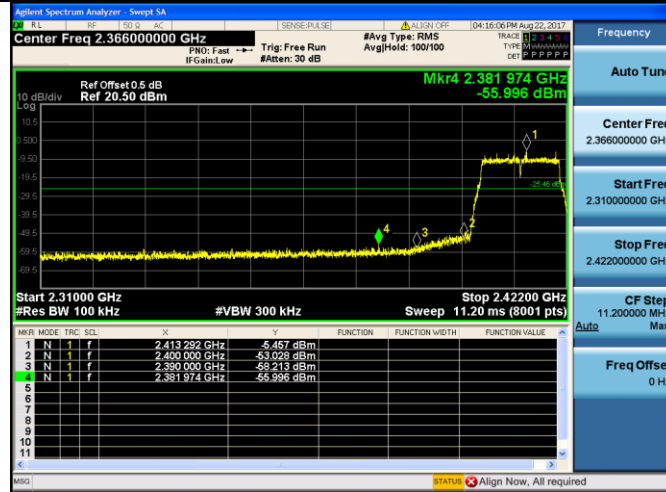


CH01-Bandedge

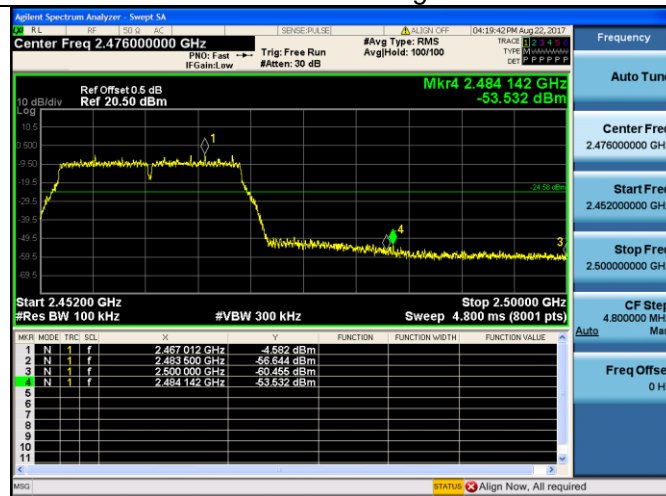


CH11-Bandedge


802.11g 100k PSD

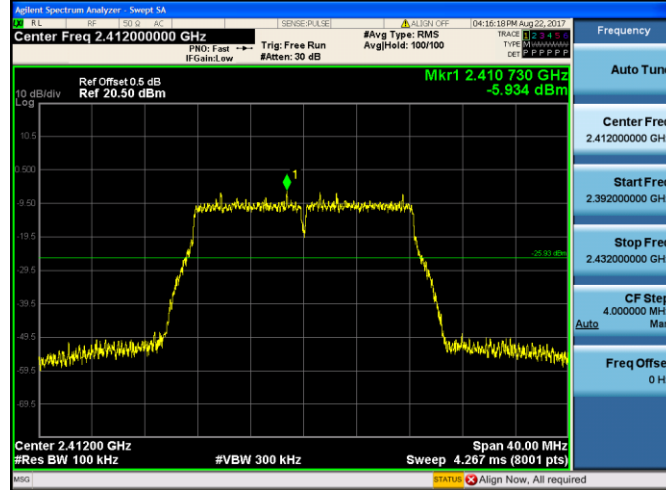

CH01

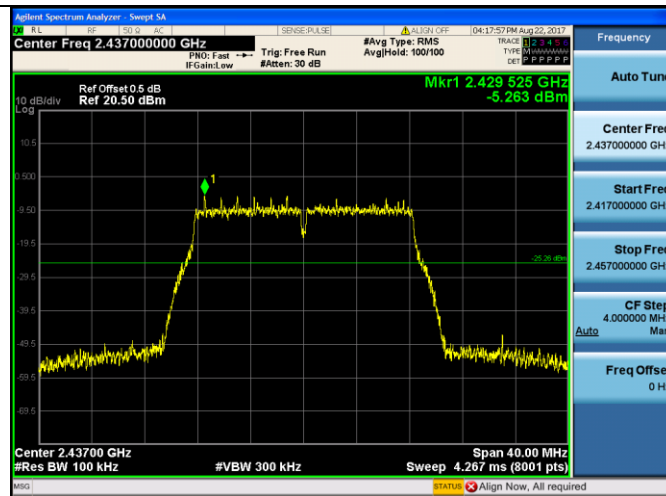


CH06

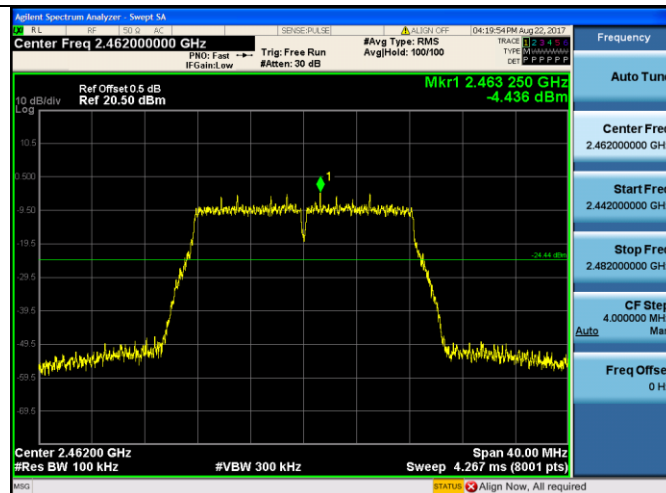


CH11

802.11g SE

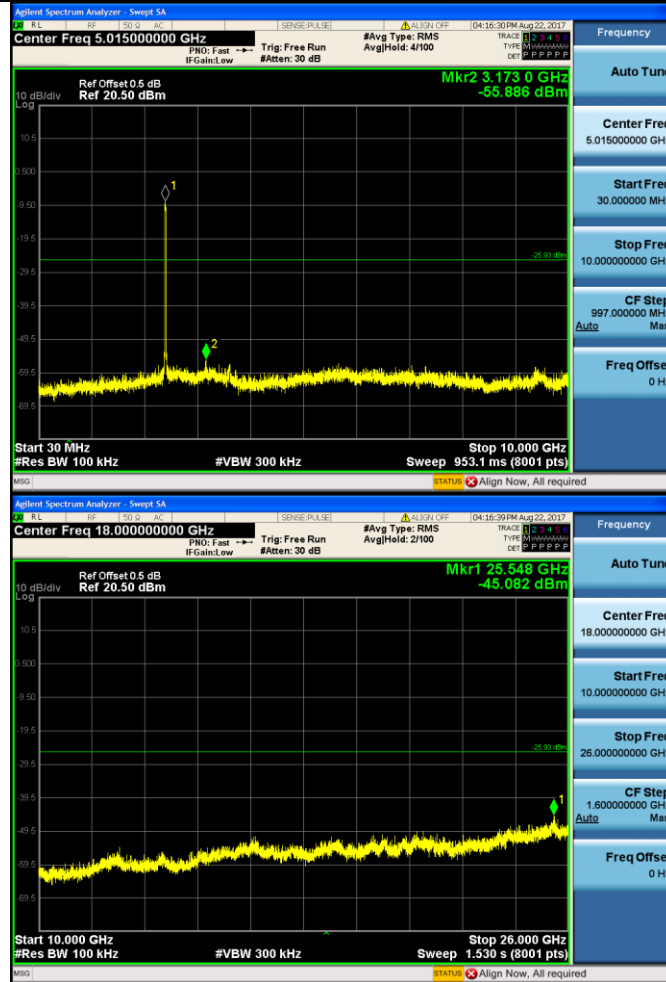


CH01

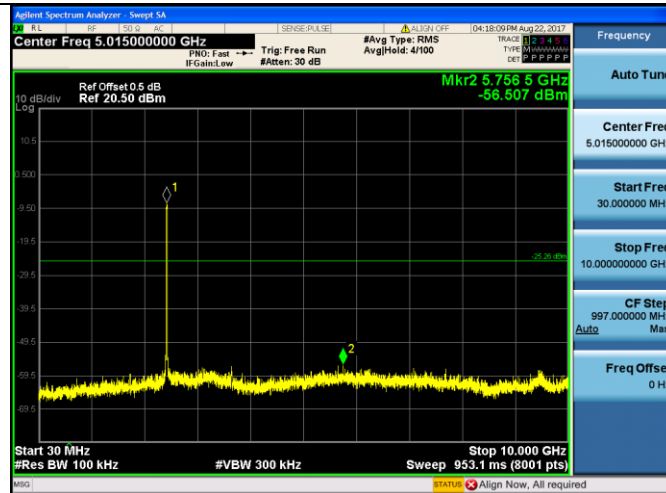




CH06

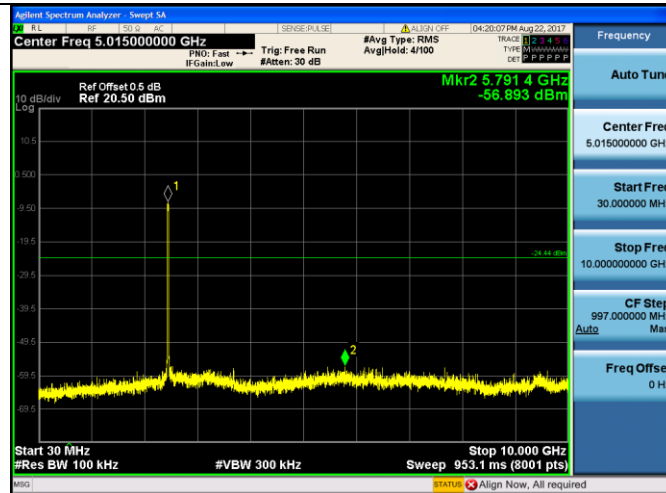


CH11

802.11n(H20) Bandedge

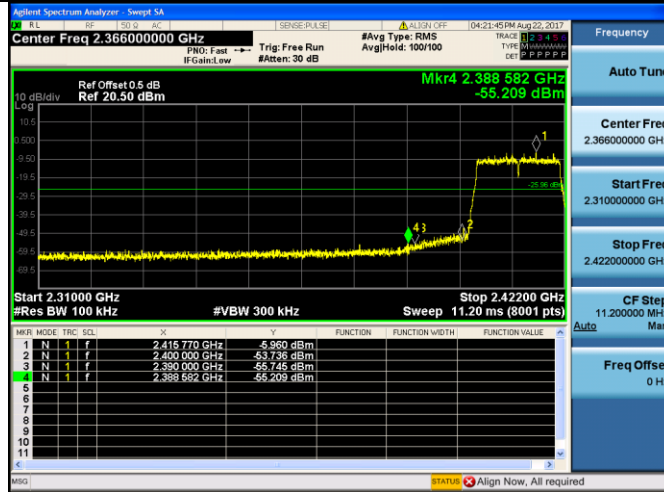


CH01-Bandedge

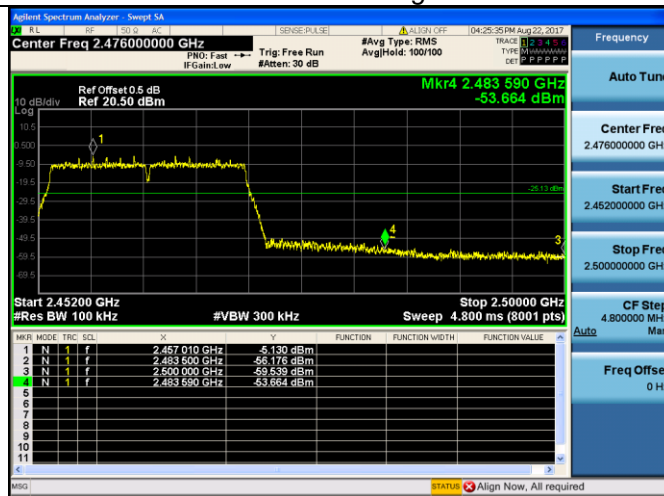


CH11-Bandedge


802.11n(H20)100k PSD

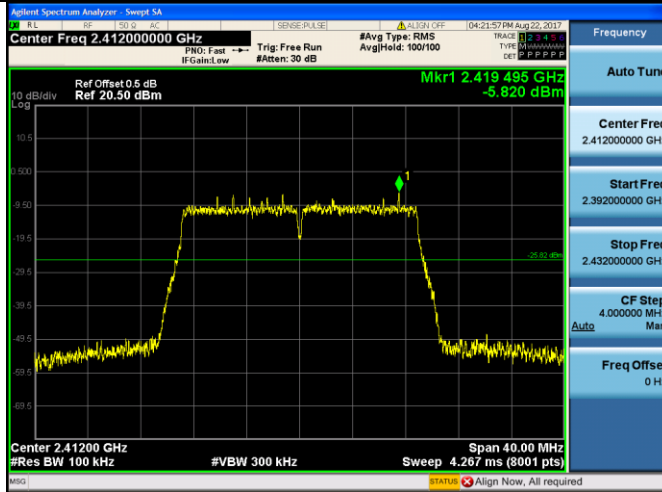

CH01

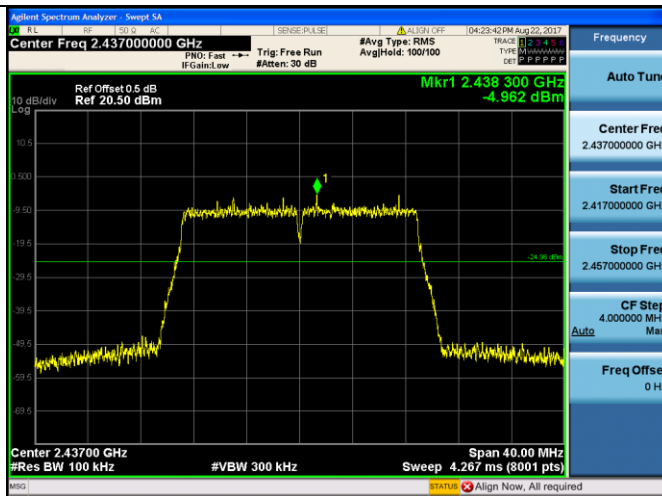


CH06

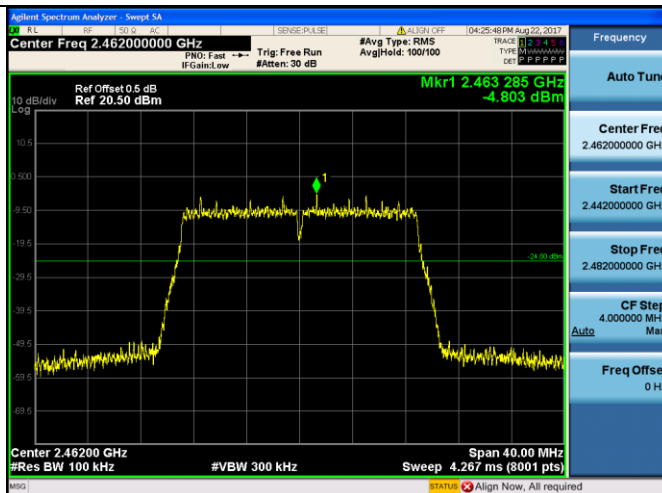


CH11

802.11n(H20) SE

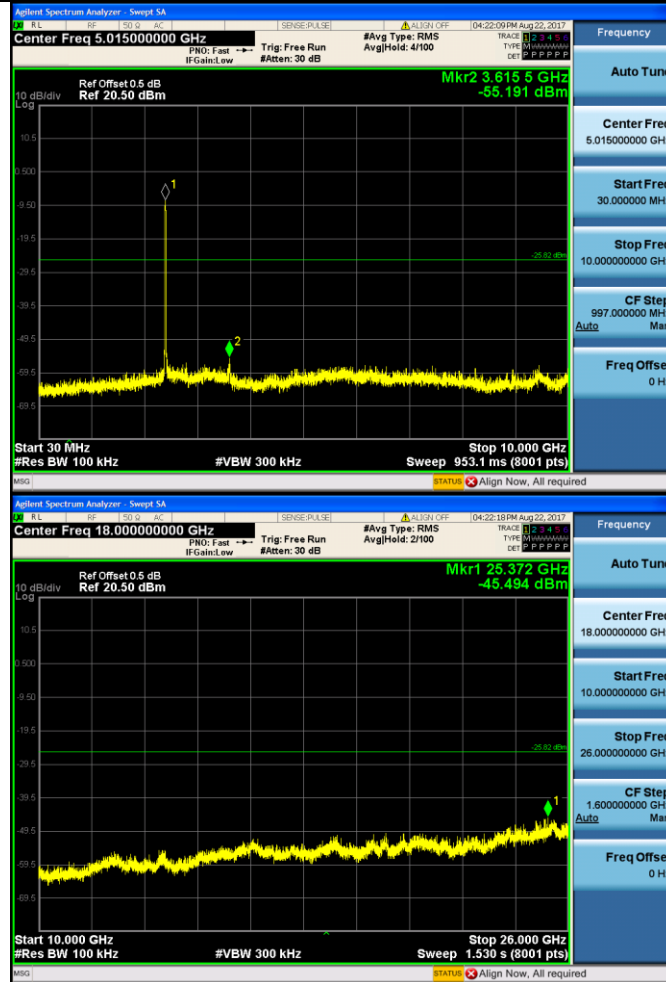


CH01

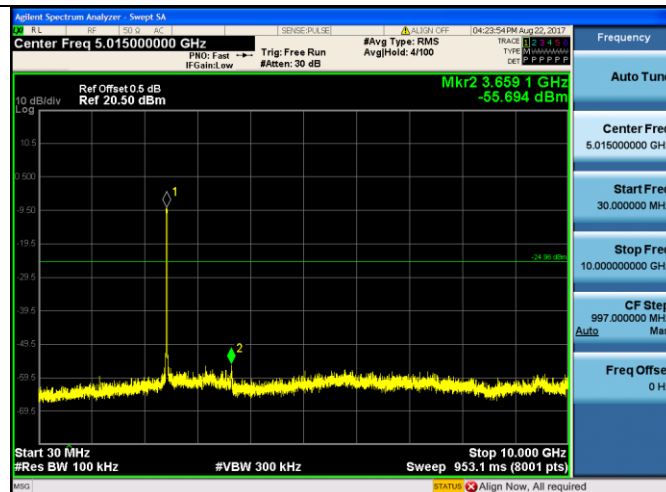



CH06

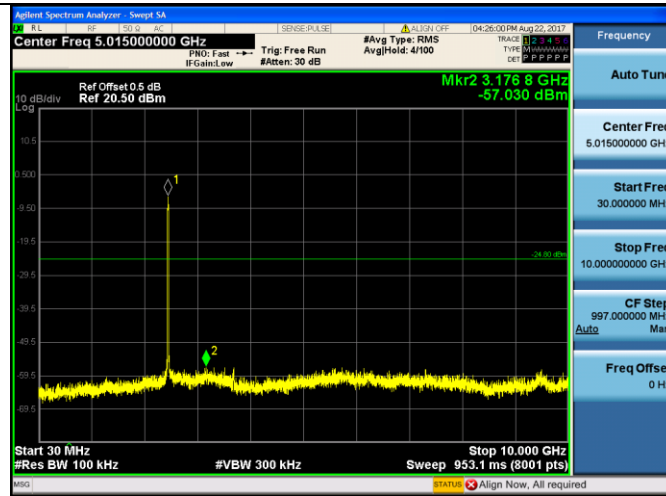

CH11

5.8. Spurious Emission (radiated)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


➤ 9kHz ~30MHz

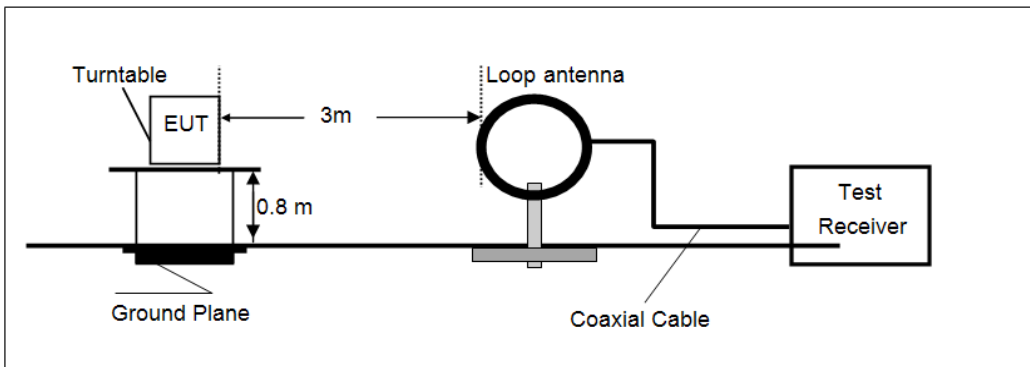

➤ 30MHz ~ 1GHz

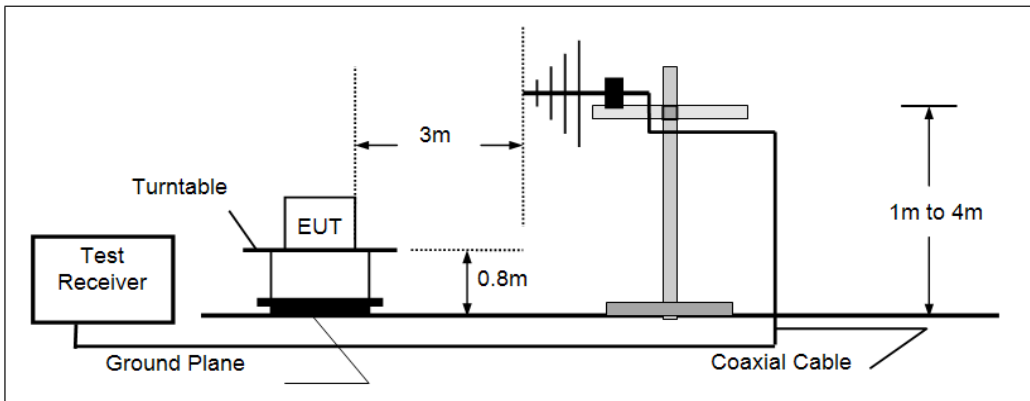

➤ Above 1GHz

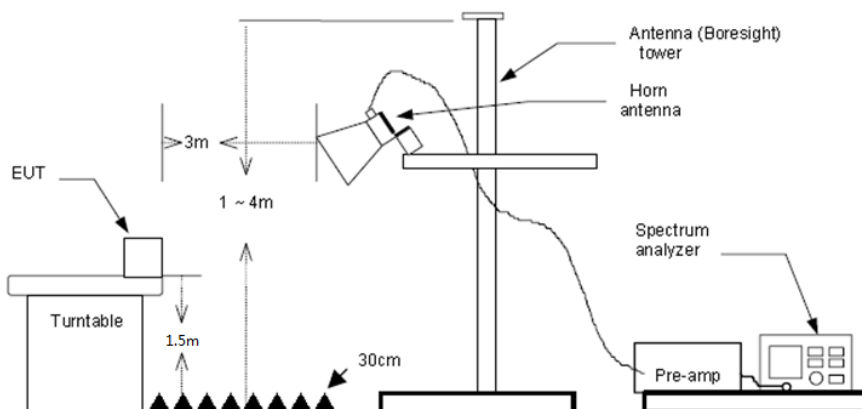

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
5. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1GHz, RBW=120kHz, VBW=300kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) Above 1GHz, RBW=1MHz, VBW=3MHz for Peak value
RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed **Not Applicable**

Note:

- 1) *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
- 2) *The emission levels of other frequencies are very lower than the limit and not show in test report.*

➤ **9kHz ~ 30MHz**


The EUT was pre-scanned the frequency band (9kHz~30MHz), found the radiated level lower than the limit, so don't show on the report.

➤ **30MHz ~1000MHz**

Have pre-scan all modulation mode, found the 802.11b mode CH01 which it was worst case, so only the worst case's data on the test report.

➤ 30MHz ~ 1GHz

Polarization: Vertical

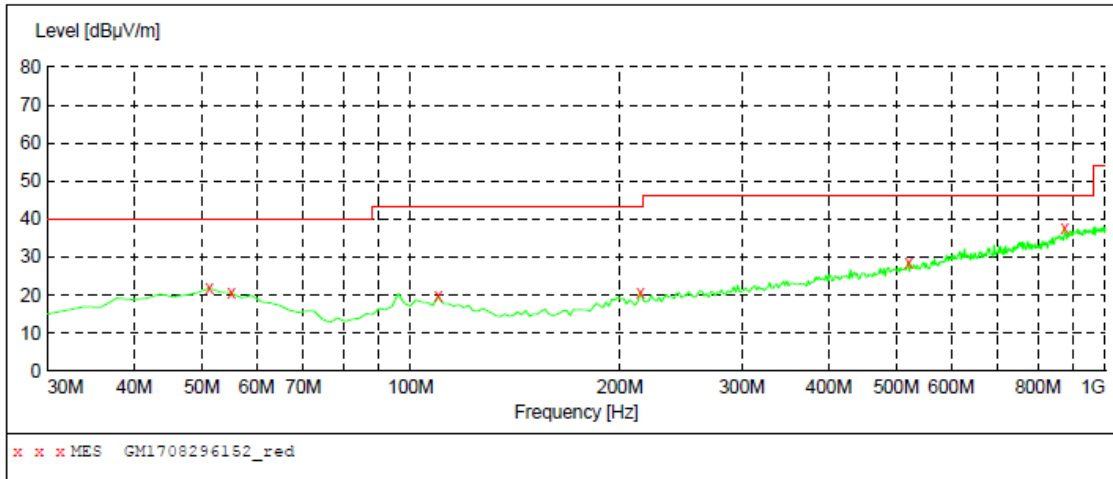


MEASUREMENT RESULT: "GM1708296152_red"

8/29/2017 9:52PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
51.340000	21.90	-8.8	40.0	18.1	QP	100.0	0.00	VERTICAL
55.220000	20.60	-9.2	40.0	19.4	QP	100.0	78.00	VERTICAL
109.540000	19.70	-10.8	43.5	23.8	QP	100.0	314.00	VERTICAL
214.300000	20.70	-10.3	43.5	22.8	QP	100.0	0.00	VERTICAL
520.820000	28.70	-1.3	46.0	17.3	QP	100.0	326.00	VERTICAL
873.900000	37.60	6.1	46.0	8.4	QP	100.0	298.00	VERTICAL

Polarization: Horizontal

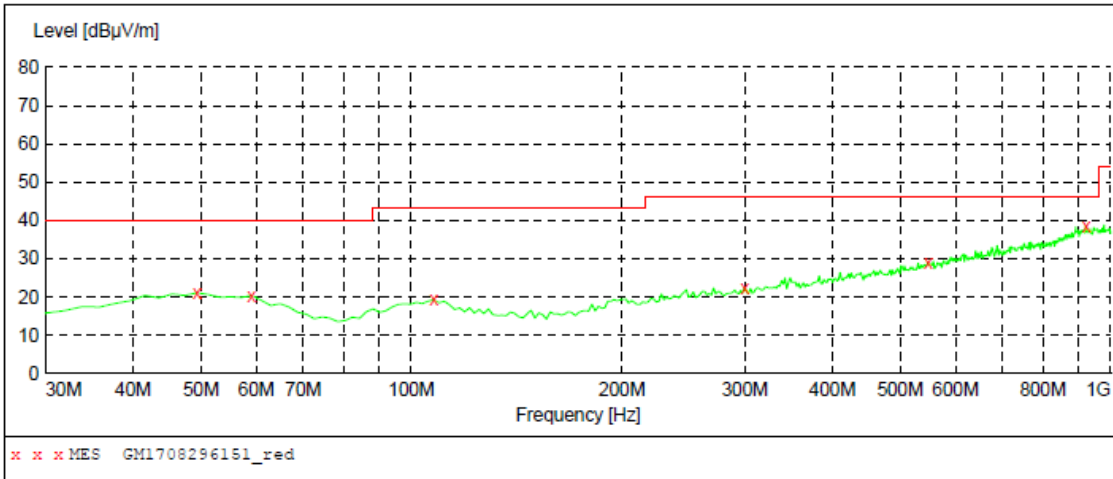

MEASUREMENT RESULT: "GM1708296151_red"

8/29/2017 9:50PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
49.400000	21.20	-8.7	40.0	18.8	QP	100.0	309.00	HORIZONTAL
59.100000	20.40	-9.8	40.0	19.6	QP	300.0	354.00	HORIZONTAL
107.600000	19.30	-10.6	43.5	24.2	QP	100.0	0.00	HORIZONTAL
299.660000	22.40	-7.3	46.0	23.6	QP	100.0	0.00	HORIZONTAL
547.980000	29.10	-0.8	46.0	16.9	QP	300.0	239.00	HORIZONTAL
922.400000	38.40	7.0	46.0	7.6	QP	300.0	227.00	HORIZONTAL

➤ Above 1 GHz

802.11b					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1270.33	37.64	26.23	4.78	36.53	32.12	74.00	-41.88	Vertical	Peak
3151.99	37.51	28.80	7.66	38.21	35.76	74.00	-38.24	Vertical	
4821.76	38.97	31.56	9.55	36.90	43.18	74.00	-30.82	Vertical	
7245.81	33.56	36.25	11.91	35.02	46.70	74.00	-27.30	Vertical	
1225.86	36.72	26.27	4.70	36.56	31.13	74.00	-42.87	Horizontal	
3216.84	36.63	28.70	7.74	38.23	34.84	74.00	-39.16	Horizontal	
4821.76	36.77	31.56	9.55	36.90	40.98	74.00	-33.02	Horizontal	
7245.81	31.53	36.25	11.91	35.02	44.67	74.00	-29.33	Horizontal	

802.11b					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2292.96	36.82	28.06	6.59	37.60	33.87	74.00	-40.13	Vertical	Peak
3143.98	36.50	28.80	7.65	38.21	34.74	74.00	-39.26	Vertical	
4871.10	38.48	31.46	9.59	36.76	42.77	74.00	-31.23	Vertical	
5925.86	34.23	32.35	10.64	35.40	41.82	74.00	-32.18	Vertical	
2218.32	37.22	27.61	6.47	37.39	33.91	74.00	-40.09	Horizontal	
3064.96	36.60	28.73	7.56	38.22	34.67	74.00	-39.33	Horizontal	
4871.10	38.38	31.46	9.59	36.76	42.67	74.00	-31.33	Horizontal	
7045.74	32.74	35.44	11.85	34.86	45.17	74.00	-28.83	Horizontal	

802.11b					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2229.65	36.68	27.68	6.49	37.42	33.43	74.00	-40.57	Vertical	Peak
3112.13	37.15	28.80	7.61	38.21	35.35	74.00	-38.65	Vertical	
4920.96	38.10	31.42	9.62	36.62	42.52	74.00	-31.48	Vertical	
7081.70	33.06	35.55	11.85	34.91	45.55	74.00	-28.45	Vertical	
2195.85	35.89	27.47	6.44	37.34	32.46	74.00	-41.54	Horizontal	
3200.50	36.54	28.80	7.72	38.20	34.86	74.00	-39.14	Horizontal	
4065.71	35.29	29.83	8.83	37.96	35.99	74.00	-38.01	Horizontal	
4920.96	37.75	31.42	9.62	36.62	42.17	74.00	-31.83	Horizontal	

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11g					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2207.06	36.86	27.54	6.45	37.36	33.49	74.00	-40.51	Vertical	Peak
3184.25	38.42	28.80	7.70	38.20	36.72	74.00	-37.28	Vertical	
4834.05	36.29	31.53	9.56	36.86	40.52	74.00	-33.48	Vertical	
7451.57	32.57	36.20	12.24	34.86	46.15	74.00	-27.85	Vertical	
2195.85	36.22	27.47	6.44	37.34	32.79	74.00	-41.21	Horizontal	
3143.98	36.91	28.80	7.65	38.21	35.15	74.00	-38.85	Horizontal	
4834.05	34.53	31.53	9.56	36.86	38.76	74.00	-35.24	Horizontal	
6628.18	32.00	34.20	11.39	35.31	42.28	74.00	-31.72	Horizontal	

802.11g					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1289.89	37.09	26.21	4.81	36.52	31.59	74.00	-42.41	Vertical	Peak
3480.97	36.72	28.85	8.09	38.44	35.22	74.00	-38.78	Vertical	
4871.10	36.66	31.46	9.59	36.76	40.95	74.00	-33.05	Vertical	
6678.99	32.92	34.20	11.45	35.21	43.36	74.00	-30.64	Vertical	
1773.13	36.32	25.35	5.91	37.08	30.50	74.00	-43.50	Horizontal	
3192.37	36.76	28.80	7.71	38.20	35.07	74.00	-38.93	Horizontal	
4724.56	33.61	31.30	9.51	37.06	37.36	74.00	-36.64	Horizontal	
7027.82	33.87	35.38	11.85	34.83	46.27	74.00	-27.73	Horizontal	

802.11g					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1724.17	36.03	25.25	5.81	36.98	30.11	74.00	-43.89	Vertical	Peak
3516.59	36.94	29.05	8.14	38.39	35.74	74.00	-38.26	Vertical	
5086.52	34.67	31.85	9.74	36.31	39.95	74.00	-34.05	Vertical	
7394.88	33.06	36.30	12.06	34.83	46.59	74.00	-27.41	Vertical	
1241.56	37.10	26.26	4.73	36.55	31.54	74.00	-42.46	Horizontal	
3026.20	36.90	28.65	7.51	38.23	34.83	74.00	-39.17	Horizontal	
4547.56	34.46	30.80	9.37	37.32	37.31	74.00	-36.69	Horizontal	
6696.01	32.80	34.20	11.48	35.18	43.30	74.00	-30.70	Horizontal	

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit (54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n(H20)					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1750.70	36.53	25.30	5.86	37.04	30.65	74.00	-43.35	Vertical	Peak
3168.08	36.82	28.80	7.68	38.20	35.10	74.00	-38.90	Vertical	
4821.76	36.10	31.56	9.55	36.90	40.31	74.00	-33.69	Vertical	
8973.25	31.76	37.87	13.28	34.39	48.52	74.00	-25.48	Vertical	
1267.10	36.08	26.23	4.77	36.53	30.55	74.00	-43.45	Horizontal	
3184.25	36.18	28.80	7.70	38.20	34.48	74.00	-39.52	Horizontal	
4834.05	33.59	31.53	9.56	36.86	37.82	74.00	-36.18	Horizontal	
6992.14	31.80	35.25	11.84	34.80	44.09	74.00	-29.91	Horizontal	

802.11n(H20)					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2184.70	36.34	27.38	6.43	37.34	32.81	74.00	-41.19	Vertical	Peak
3049.39	36.47	28.70	7.54	38.22	34.49	74.00	-39.51	Vertical	
4871.10	36.59	31.46	9.59	36.76	40.88	74.00	-33.12	Vertical	
6833.77	32.52	34.24	11.64	34.96	43.44	74.00	-30.56	Vertical	
1773.13	37.19	25.35	5.91	37.08	31.37	74.00	-42.63	Horizontal	
3834.51	35.72	29.63	8.55	38.21	35.69	74.00	-38.31	Horizontal	
4883.52	34.59	31.43	9.59	36.73	38.88	74.00	-35.12	Horizontal	
7860.74	31.90	36.47	12.97	34.91	46.43	74.00	-27.57	Horizontal	

802.11n(H20)					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2235.33	36.36	27.72	6.50	37.44	33.14	74.00	-40.86	Vertical	Peak
3472.12	36.99	28.78	8.07	38.45	35.39	74.00	-38.61	Vertical	
4547.56	34.45	30.80	9.37	37.32	37.30	74.00	-36.70	Vertical	
7413.73	32.00	36.27	12.11	34.83	45.55	74.00	-28.45	Vertical	
1457.52	35.36	25.84	5.16	36.53	29.83	74.00	-44.17	Horizontal	
3135.99	36.10	28.80	7.64	38.21	34.33	74.00	-39.67	Horizontal	
4920.96	35.70	31.42	9.62	36.62	40.12	74.00	-33.88	Horizontal	
7099.75	32.43	35.60	11.85	34.93	44.95	74.00	-29.05	Horizontal	

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.


6. Test Setup Photos of the EUT

Conducted Emission



Radiated Emission



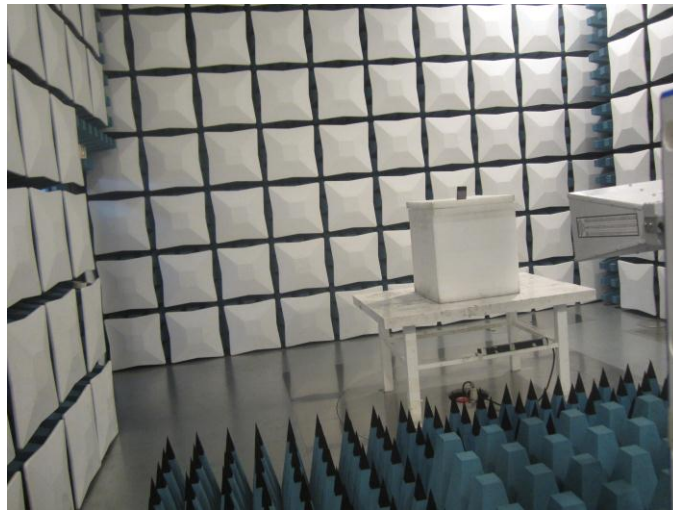

7. External and Internal Photos of the EUT

Reference to Test Report No.: TRE1708011801

.....End of Report.....