

# FCC Part 15C

## Measurement and Test Report

For

### SUNVALLEYTEK INTERNATIONAL, INC.

46724 Lakeview Blvd, Fremont, CA 94538-6529

**FCC ID: 2AFDGRP-WD007**

<b>FCC Rule(s):</b>	<u>FCC Part 15C</u>
<b>Product Description:</b>	<u>FileHub</u>
<b>Tested Model:</b>	<u>RP-WD007</u>
<b>Report No.:</b>	<u>STR18018127I-2</u>
<b>Sample Receipt Date:</b>	<u>2018-01-10</u>
<b>Tested Date:</b>	<u>2018-01-11 to 2018-01-26</u>
<b>Issued Date:</b>	<u>2018-01-26</u>
<b>Tested By:</b>	<u>Mike Shi / Engineer</u>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u>
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u>
<b>Prepared By:</b>	

*Mike Shi*

*Silin Chen*

*Jandy So*

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
<b>2. SUMMARY OF TEST RESULTS</b>	<b>7</b>
<b>3. RF EXPOSURE</b>	<b>8</b>
3.1 STANDARD APPLICABLE	8
3.2 TEST RESULT	8
<b>4. ANTENNA REQUIREMENT</b>	<b>9</b>
4.1 STANDARD APPLICABLE	9
4.2 EVALUATION INFORMATION	9
<b>5. POWER SPECTRAL DENSITY</b>	<b>10</b>
5.1 STANDARD APPLICABLE	10
5.2 TEST PROCEDURE	10
5.3 ENVIRONMENTAL CONDITIONS	10
5.4 SUMMARY OF TEST RESULTS/PLOTS	11
<b>6. 6DB BANDWIDTH</b>	<b>24</b>
6.1 STANDARD APPLICABLE	24
6.2 TEST PROCEDURE	24
6.3 ENVIRONMENTAL CONDITIONS	24
6.4 SUMMARY OF TEST RESULTS/PLOTS	24
<b>7. RF OUTPUT POWER</b>	<b>38</b>
7.1 STANDARD APPLICABLE	38
7.2 TEST PROCEDURE	38
7.3 ENVIRONMENTAL CONDITIONS	38
7.4 SUMMARY OF TEST RESULTS/PLOTS	39
<b>8. FIELD STRENGTH OF SPURIOUS EMISSIONS</b>	<b>52</b>
8.1 STANDARD APPLICABLE	52
8.2 TEST PROCEDURE	52
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	53
8.4 ENVIRONMENTAL CONDITIONS	53
8.5 SUMMARY OF TEST RESULTS/PLOTS	54
<b>9. OUT OF BAND EMISSIONS</b>	<b>68</b>
9.1 STANDARD APPLICABLE	68
9.2 TEST PROCEDURE	68
9.3 ENVIRONMENTAL CONDITIONS	69
9.4 SUMMARY OF TEST RESULTS/PLOTS	69
<b>10. CONDUCTED EMISSIONS</b>	<b>109</b>
10.1 TEST PROCEDURE	109
10.2 BASIC TEST SETUP BLOCK DIAGRAM	109
10.3 ENVIRONMENTAL CONDITIONS	109
10.4 TEST RECEIVER SETUP	110
10.5 SUMMARY OF TEST RESULTS/PLOTS	110
10.6 CONDUCTED EMISSIONS TEST DATA	110

# 1. GENERAL INFORMATION

## 1.1 Product Description for Equipment Under Test (EUT)

### Client Information

Applicant: SUNVALLEYTEK INTERNATIONAL, INC.  
 Address of applicant: 46724 Lakeview Blvd, Fremont, CA 94538-6529

Manufacturer: Shenzhen NearbyExpress Technology Development Company Limited  
 Address of manufacturer: 333 Bulong Road, Jialianda Industrial Park, Building 1, Bantian, Longgang District, Shenzhen, China, 518129

General Description of EUT	
Product Name:	File Hub
Trade Name:	RAVPOWER
Model No.:	RP-WD007
Adding Model:	/
Rated Voltage:	Battery DC 3.7V
Battery capacity:	5200mAh
Power Adapter Model:	/
Software Version:	2.000.004
Hardware Version:	V1.1
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
RF Output Power:	Antenna 0 : 16.55dBm(Conducted) Antenna 1 : 16.53dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 300Mbps
Quantity of Channels:	11/7
Channel Separation:	5MHz
Type of Antenna:	Antenna 0: Integral Antenna Antenna 1: Chip Antenna
Antenna Gain:	2.0dBi
Lowest Internal Frequency	12MHz

## 1.2 Test Standards

The following report is prepared on behalf of the SUNVALLEYTEK INTERNATIONAL, INC. in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 v04 for digital transmission systems shall be performed also.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz
TM4	802.11n-HT40	2422MHz, 2437MHz, 2452MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Accessories Equipment List and Details			
Description	Manufacturer	Model No.	Serial Number
Adapter	Dell Inc.	PSAI10R-050Q	/

Accessories Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With Core/Without Core
Network cable1	4.0	Shielded	Without Core
Network cable2	1.5	Unshielded	Without Core
Network cable3	1.0	Unshielded	Without Core

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With Core/Without Core
Type-C Cable	0.43	Shielded	Without Core

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2017-06-12	2018-06-11
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2017-06-12	2018-06-11
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2017-06-12	2018-06-11
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2017-06-12	2018-06-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2017-06-12	2018-06-11
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2018-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2018-06-07
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2017-08-01	2017-03-09
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2018-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2017-06-12	2018-06-11
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2017-06-12	2018-06-11
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2017-06-12	2018-06-11
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2017-08-15	2018-08-14
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2017-08-15	2018-08-14
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2017-06-12	2018-06-11
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2017-03-09	2018-03-08

## 2. SUMMARY OF TEST RESULTS

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the SAR Test Report.



## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has two integral antennas, and they can't transmit simultaneously, fulfill the requirement of this section.

## 5. Power Spectral Density

---

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Procedure

According to the KDB 558074 D01 v04, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$ .
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

### 5.3 Environmental Conditions


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

## 5.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz			Limit dBm/3kHz
		Chain 0	Chain 1	Total	
802.11b	2412	-18.19	-17.61	/	8
	2437	-16.22	-15.81	/	8
	2462	-15.15	-22.43	/	8
802.11g	2412	-18.50	-16.62	/	8
	2437	-18.53	-17.23	/	8
	2462	-17.98	-18.07	/	8
802.11n HT20	2412	-17.57	-17.15	-14.34	8
	2437	-19.22	-18.41	-15.79	8
	2462	-18.10	-18.93	-15.48	8
802.11n HT40	2422	-22.66	-20.05	-18.15	8
	2437	-21.74	-21.49	-18.60	8
	2452	-21.57	-21.21	-18.38	8
Please refer to the test plots:					

Please refer to the following test plots:


Antenna 0  
802.11b-Low Channel

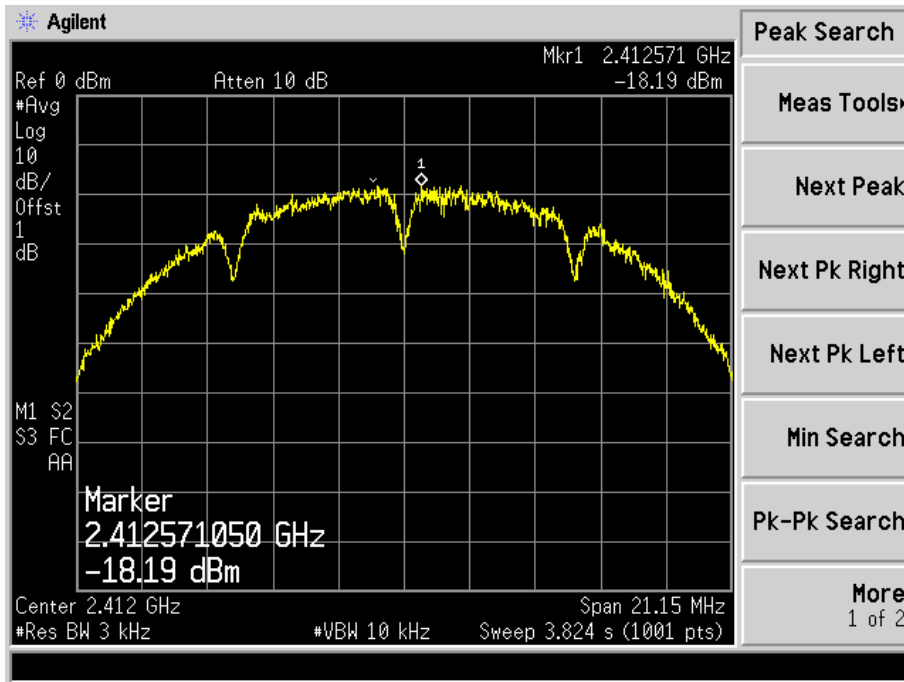


802.11b-Middle Channel

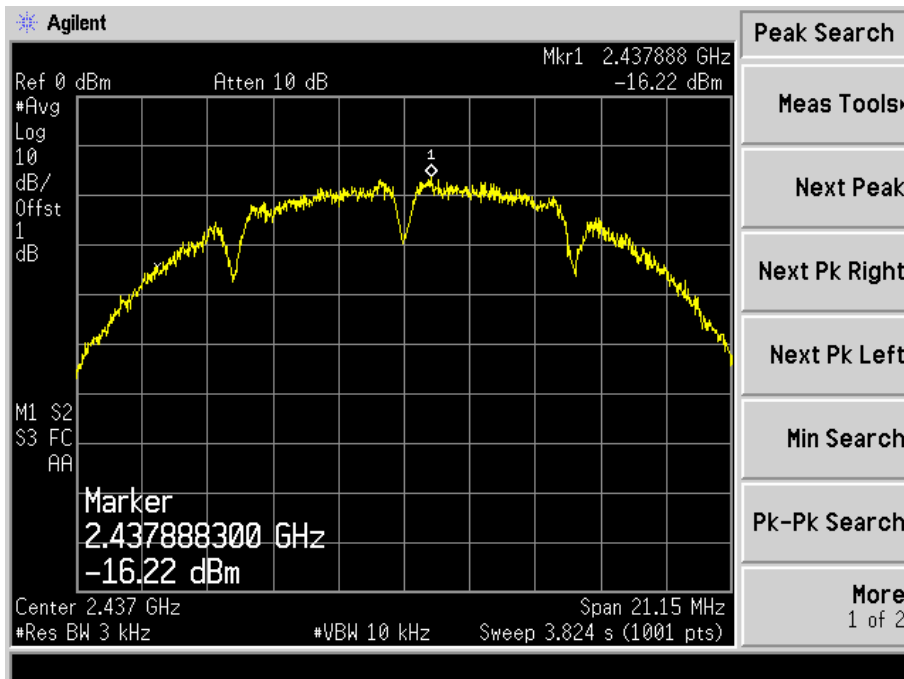


802.11b-High Channel

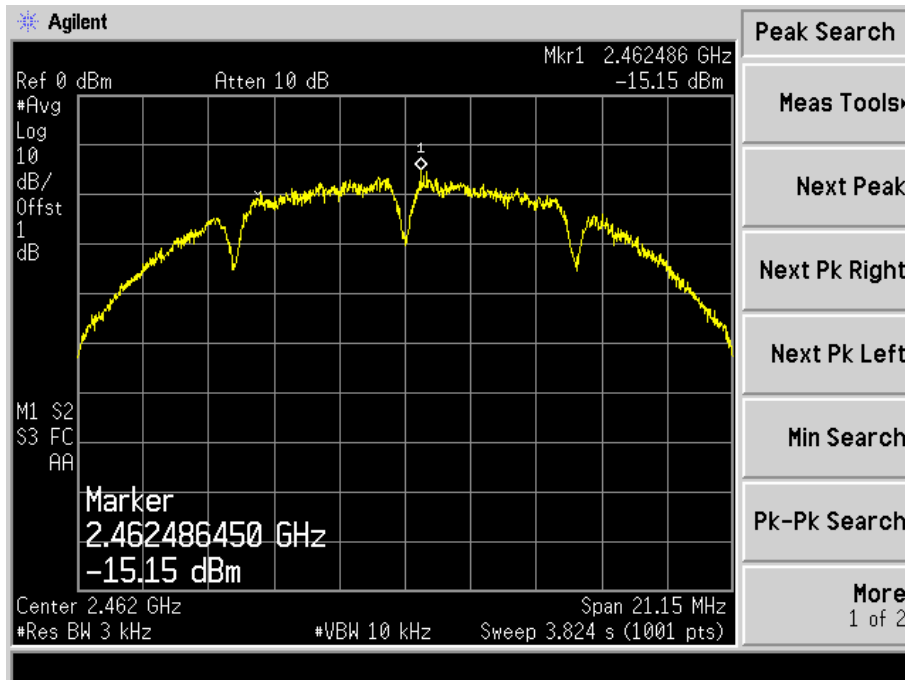


802.11g-Low Channel

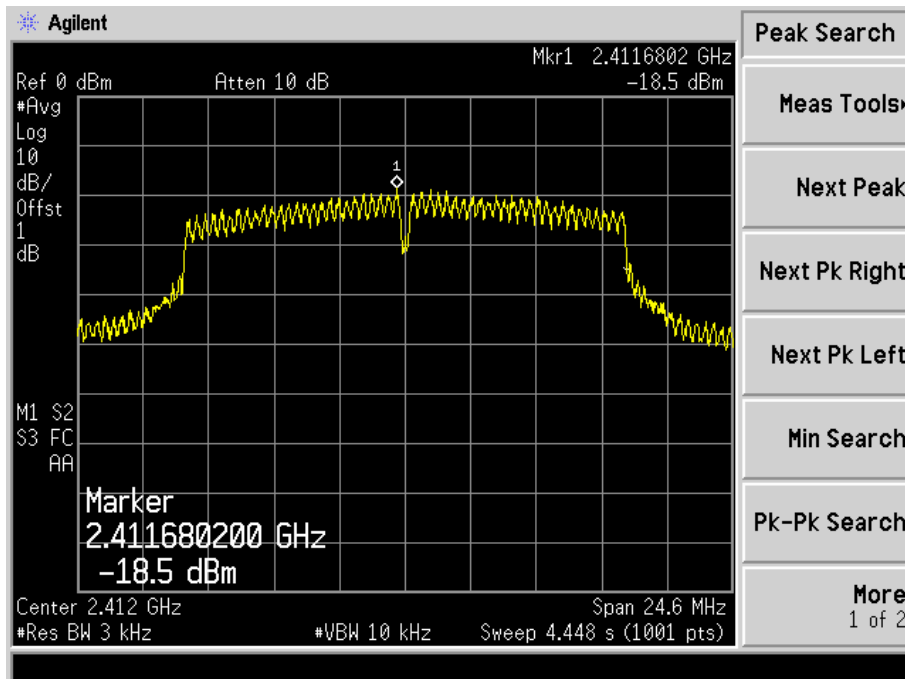


802.11g-Middle Channel

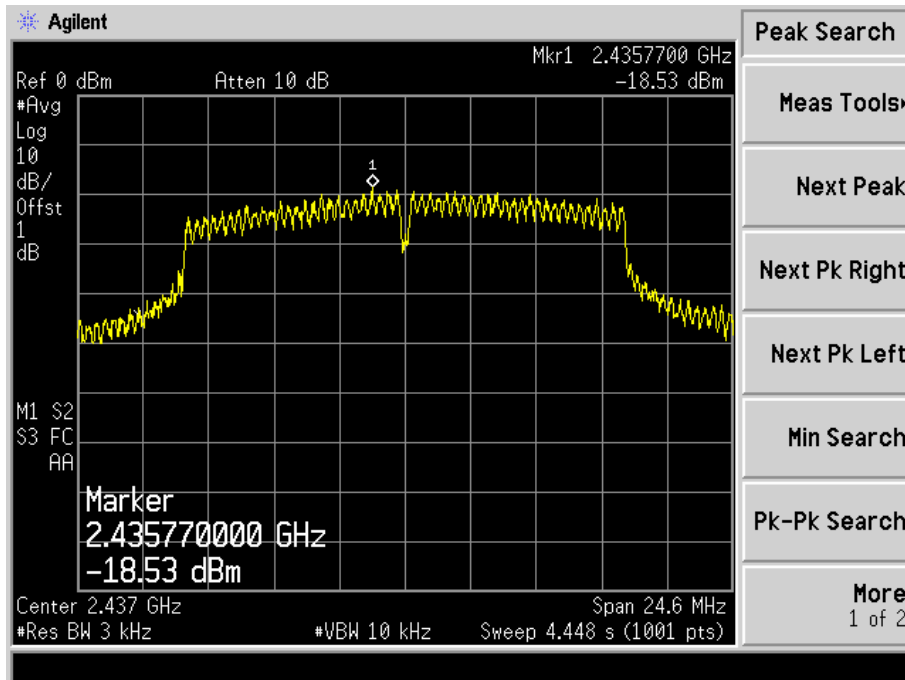


802.11g-High Channel

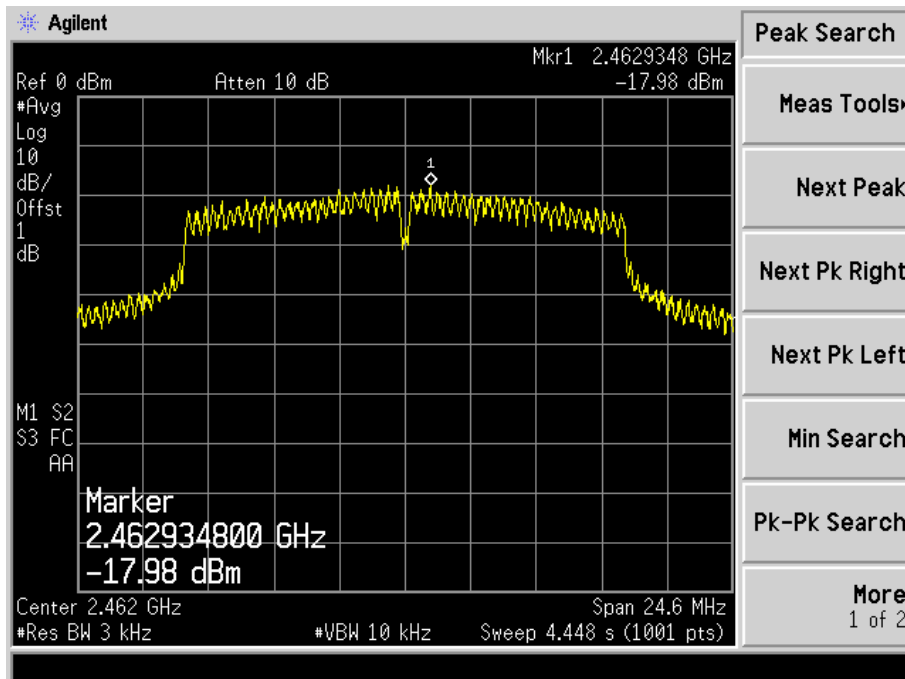


802.11n-HT20-Low Channel

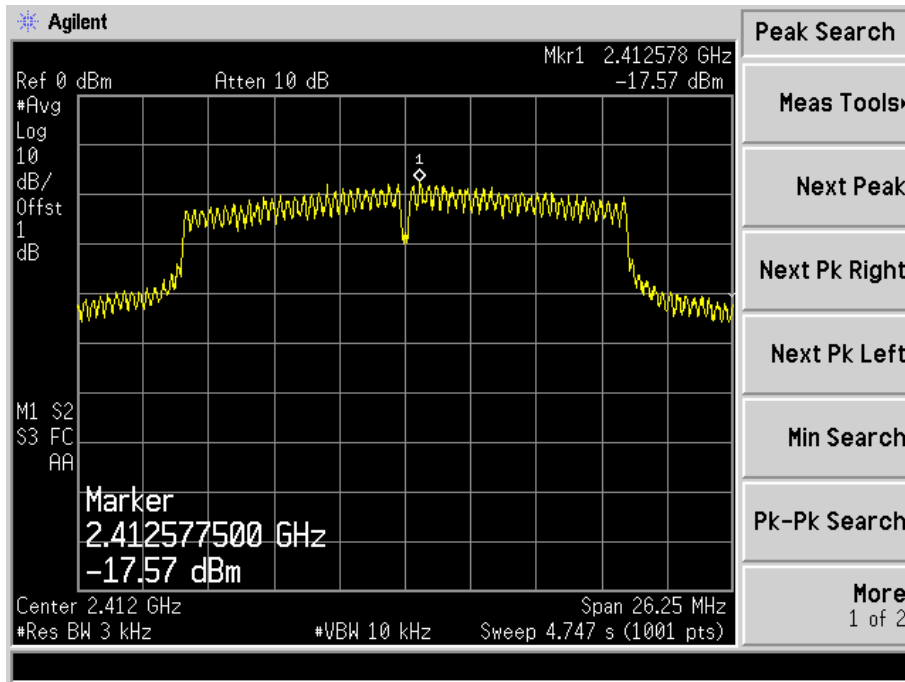


802.11n-HT20-Middle Channel

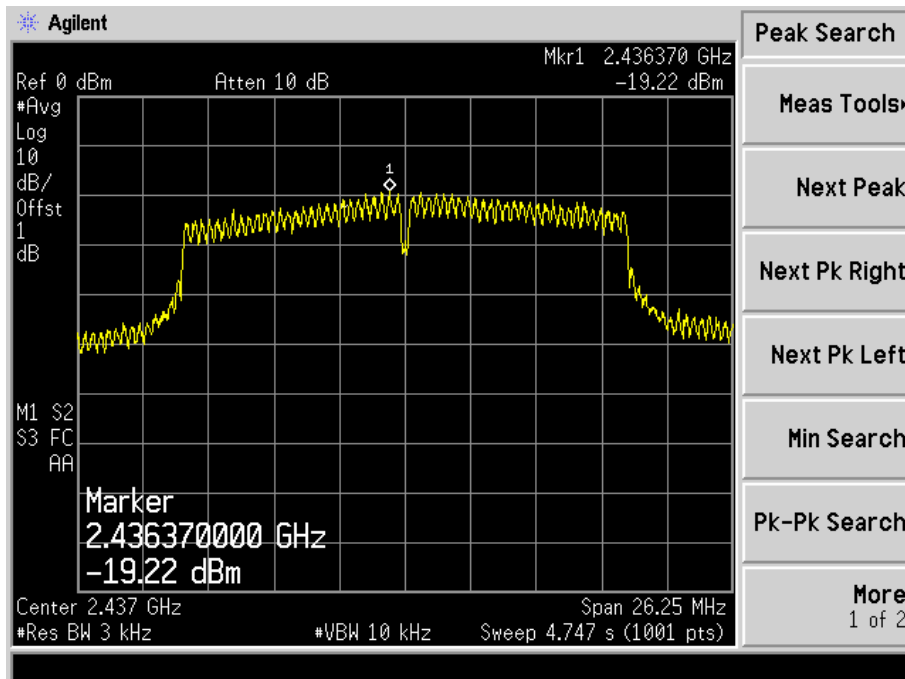

## 802.11n-HT20-High Channel

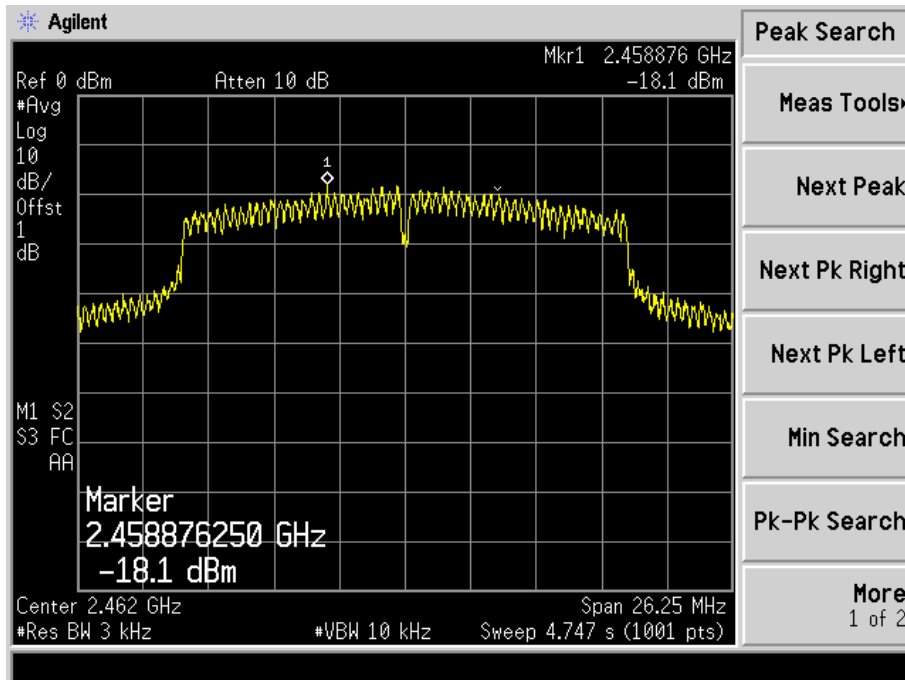


## 802.11n-HT40-Low Channel

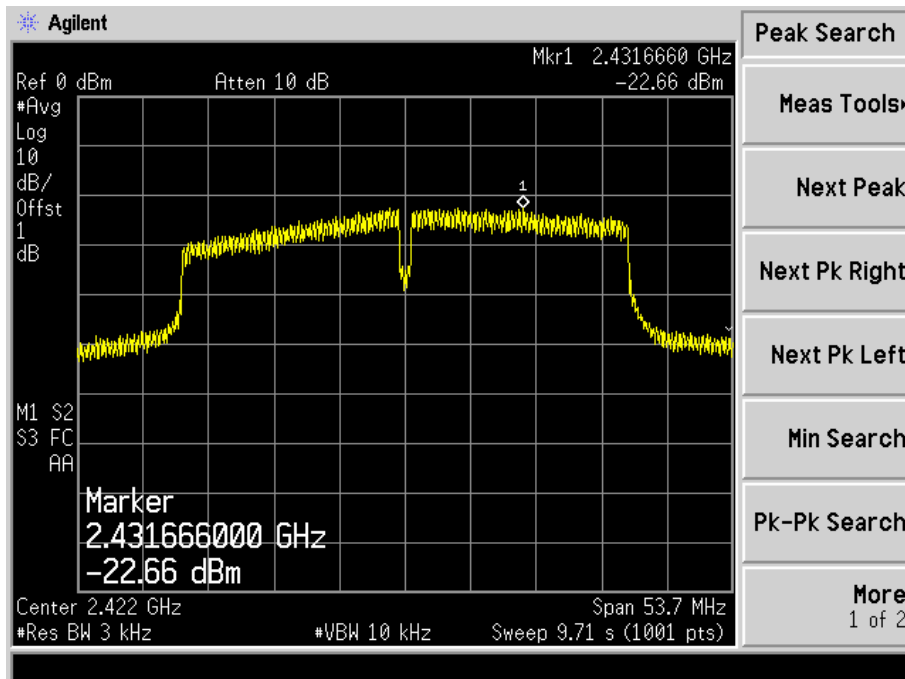





802.11n-HT40-Middle Channel

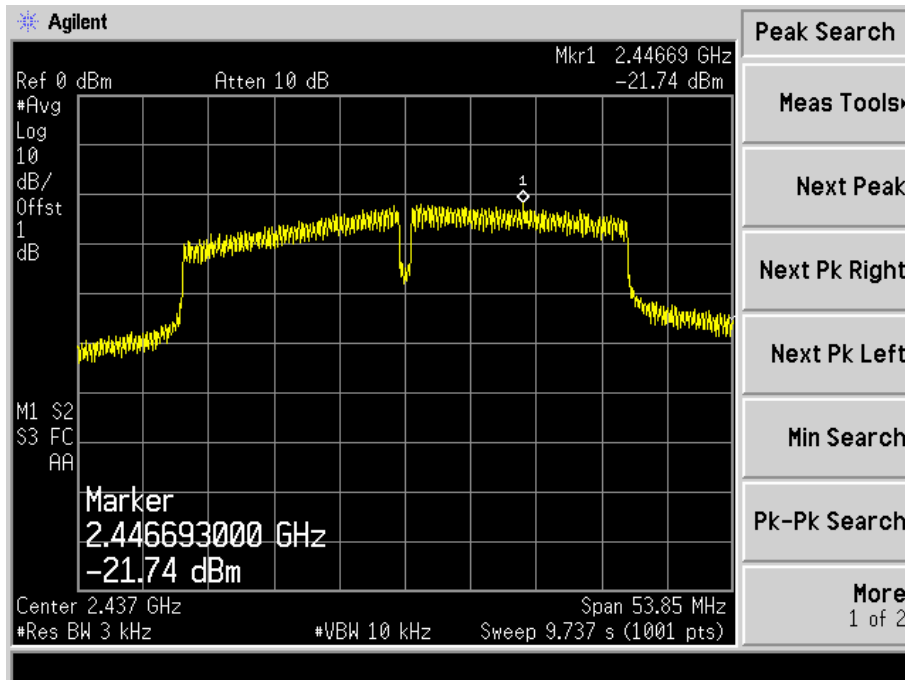


802.11n-HT40-High Channel

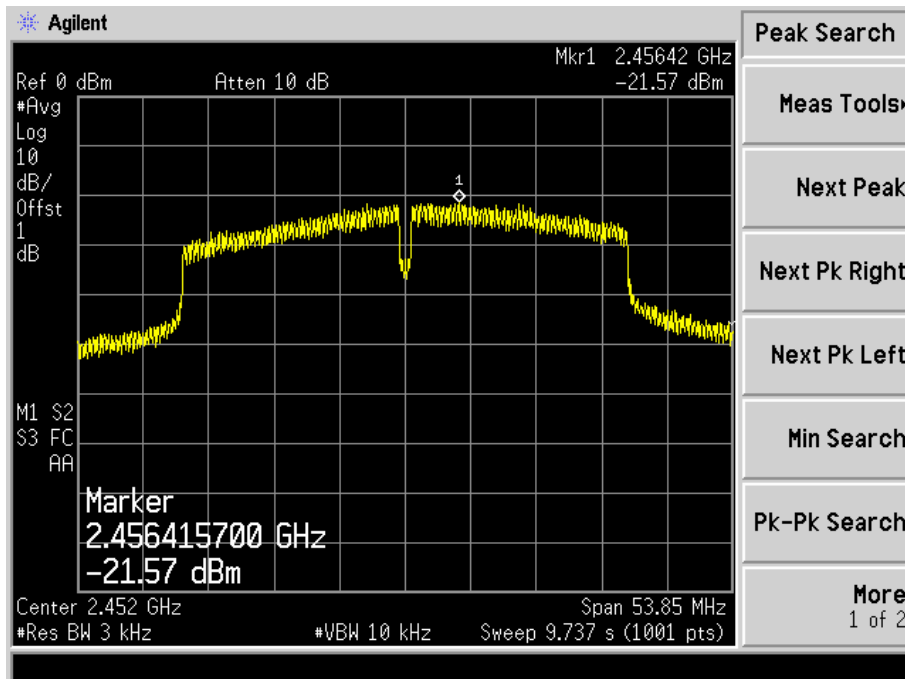


Antenna 1  
802.11b-Low Channel

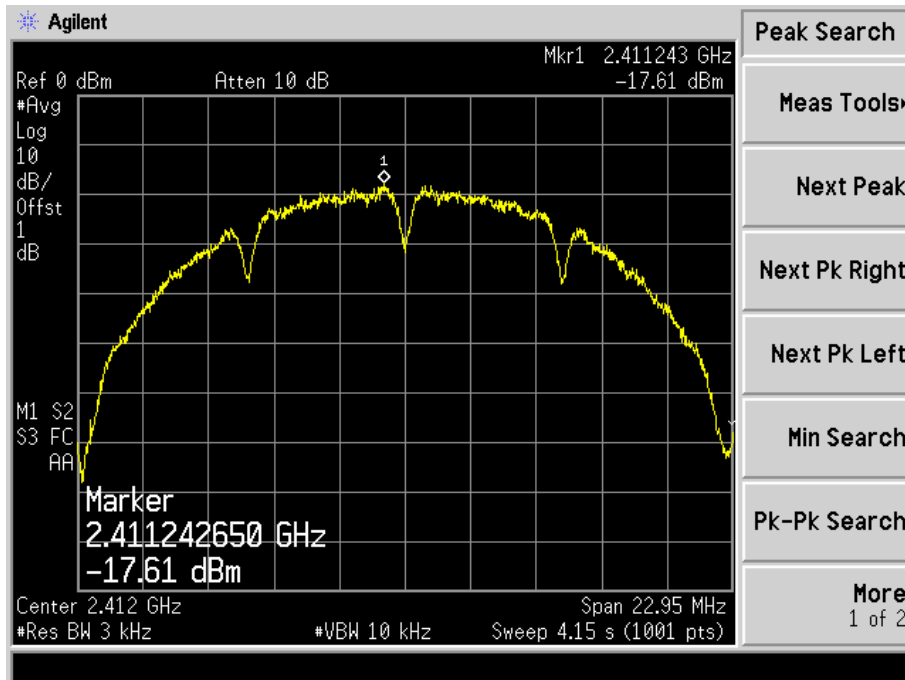


802.11b-Middle Channel

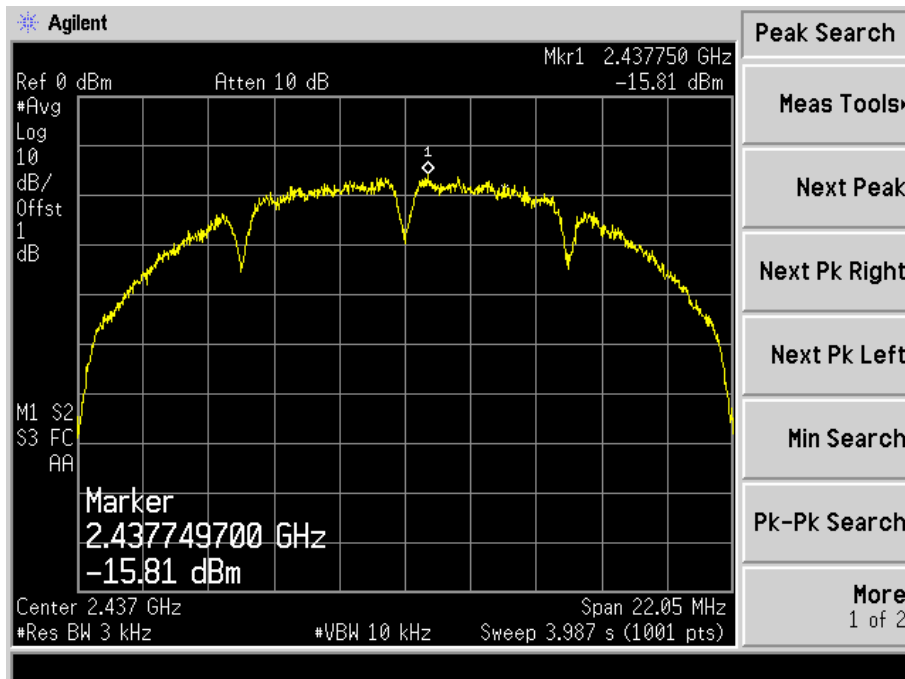


## 802.11b-High Channel

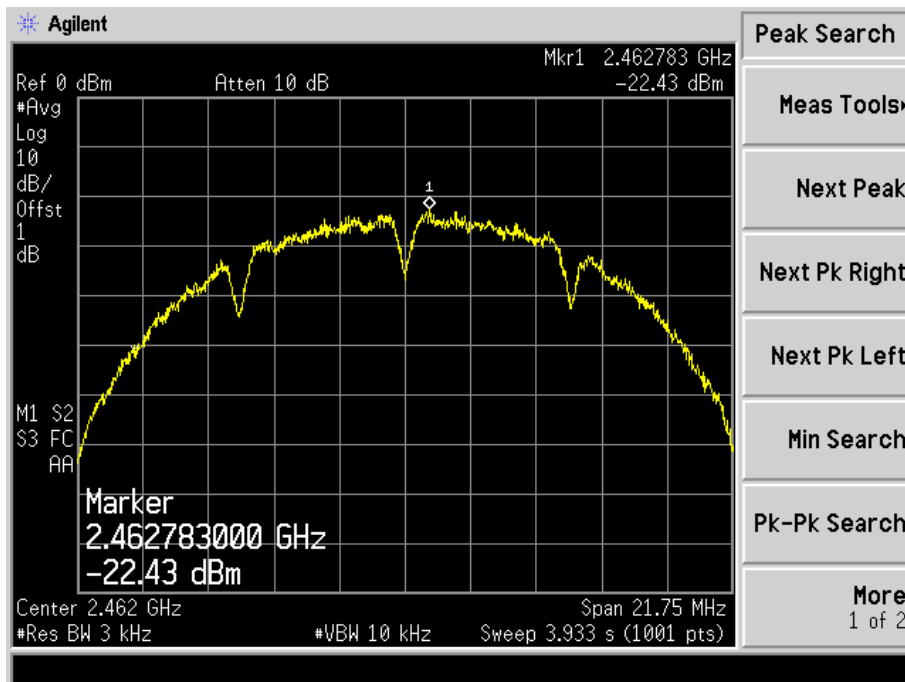


## 802.11g-Low Channel

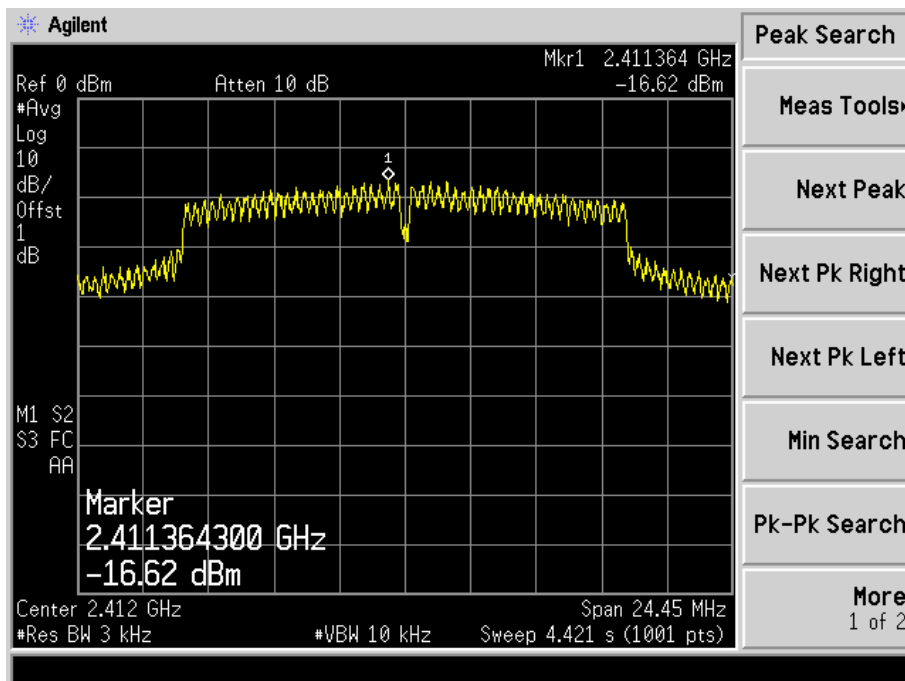


802.11g-Middle Channel

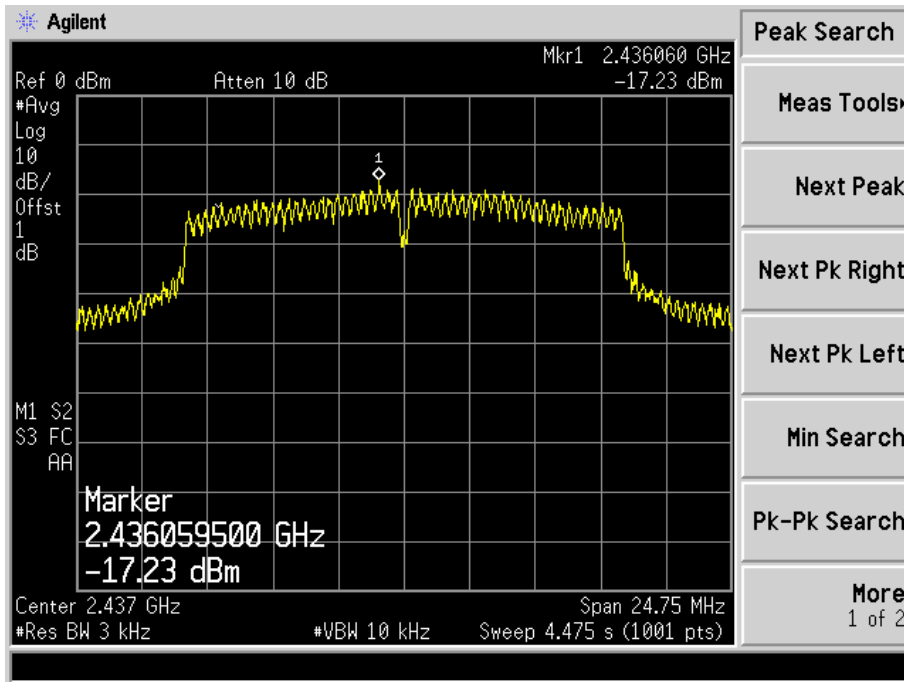


802.11g-High Channel

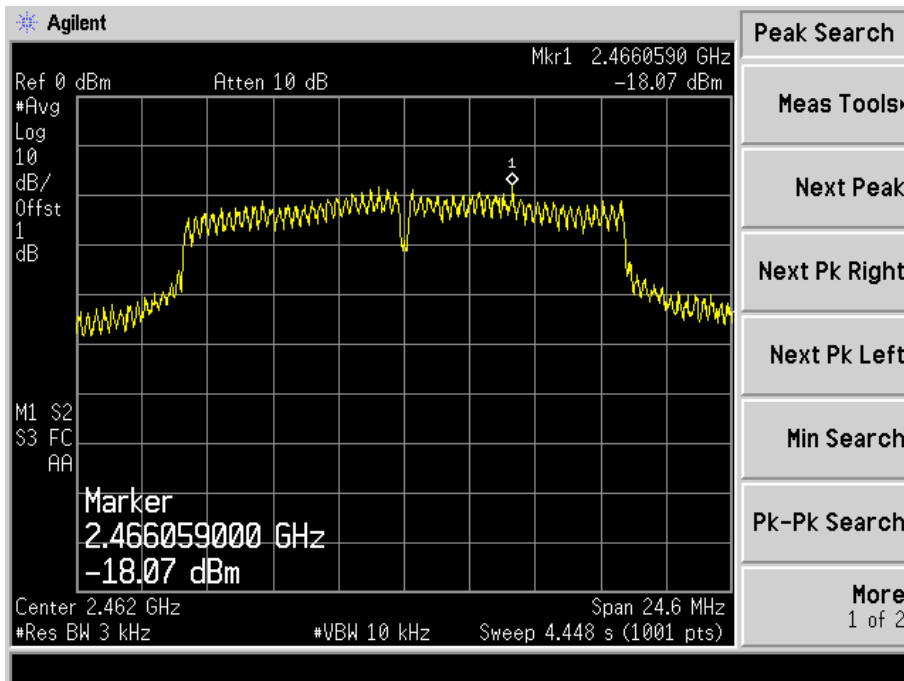


802.11n-HT20-Low Channel

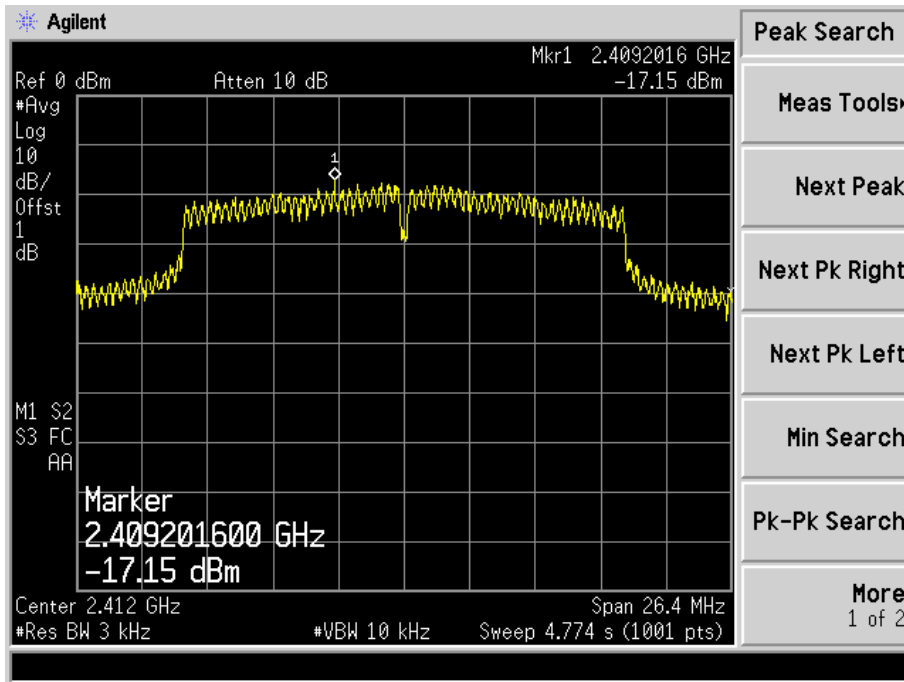


802.11n-HT20-Middle Channel

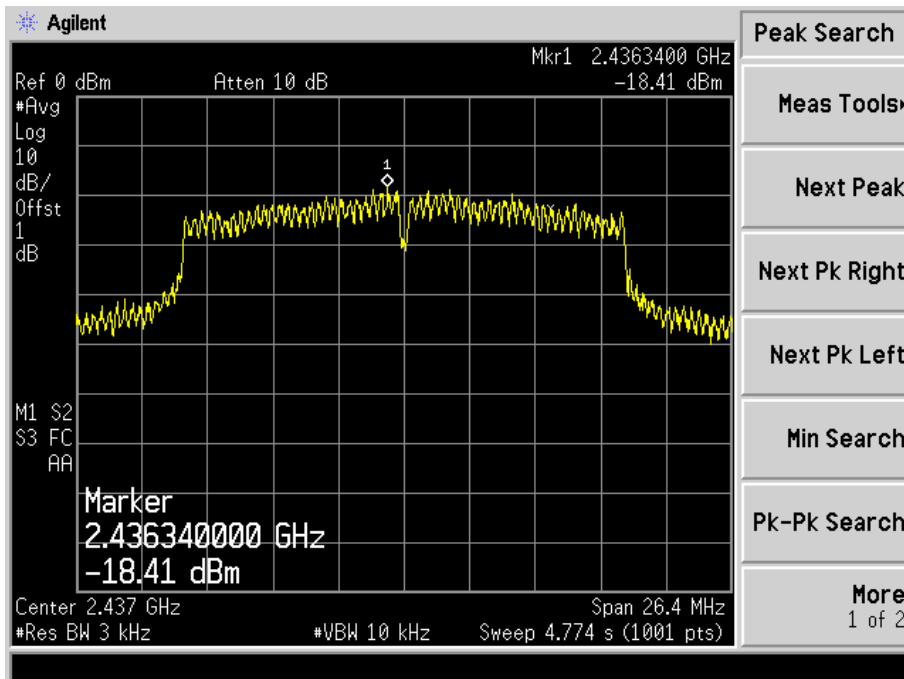


## 802.11n-HT20-High Channel

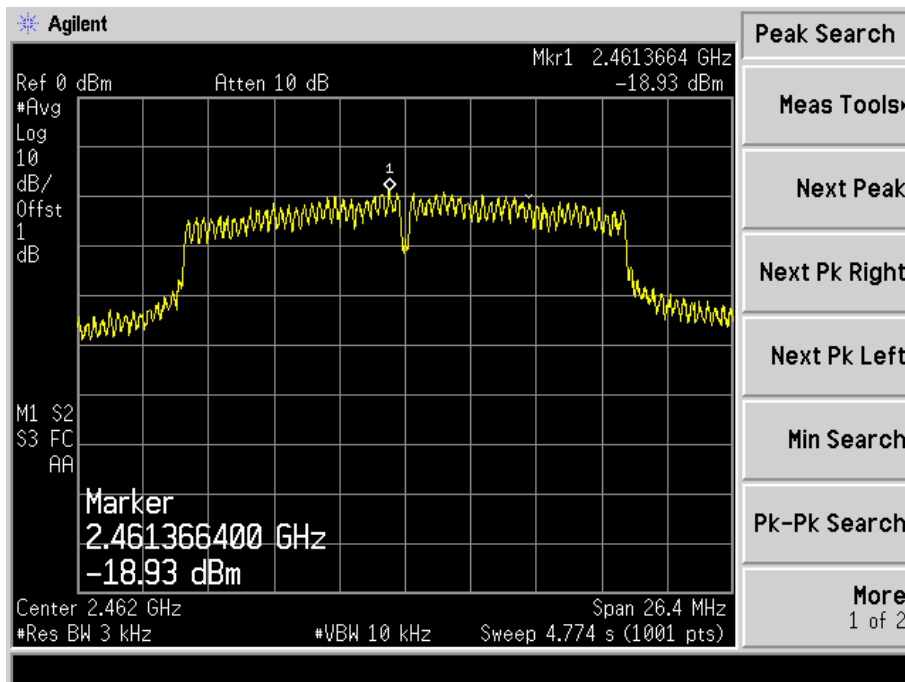


## 802.11n-HT40-Low Channel

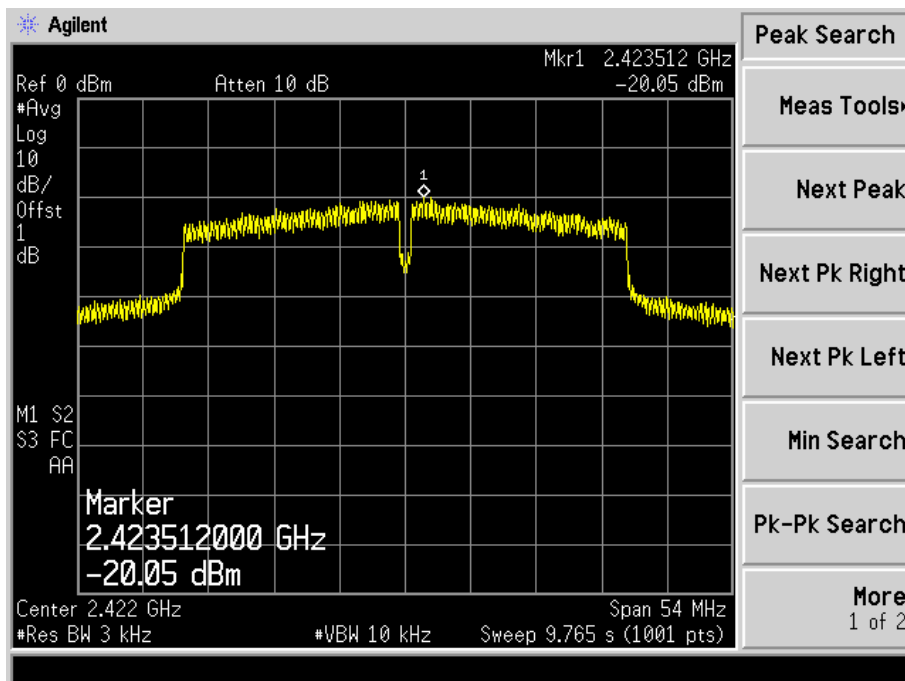

## 802.11n-HT40-Middle Channel

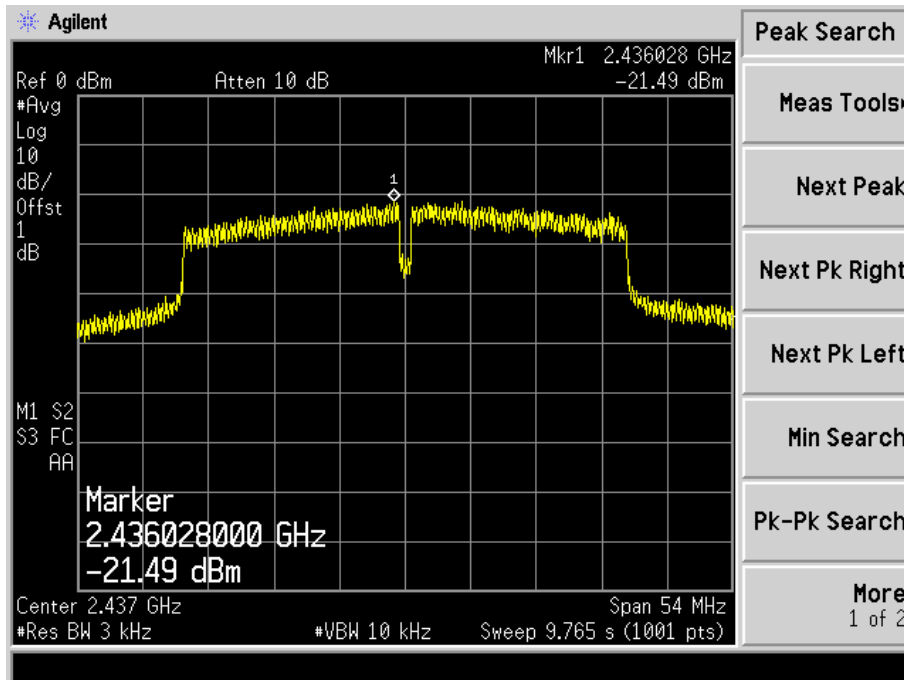

## 802.11n-HT40-High Channel

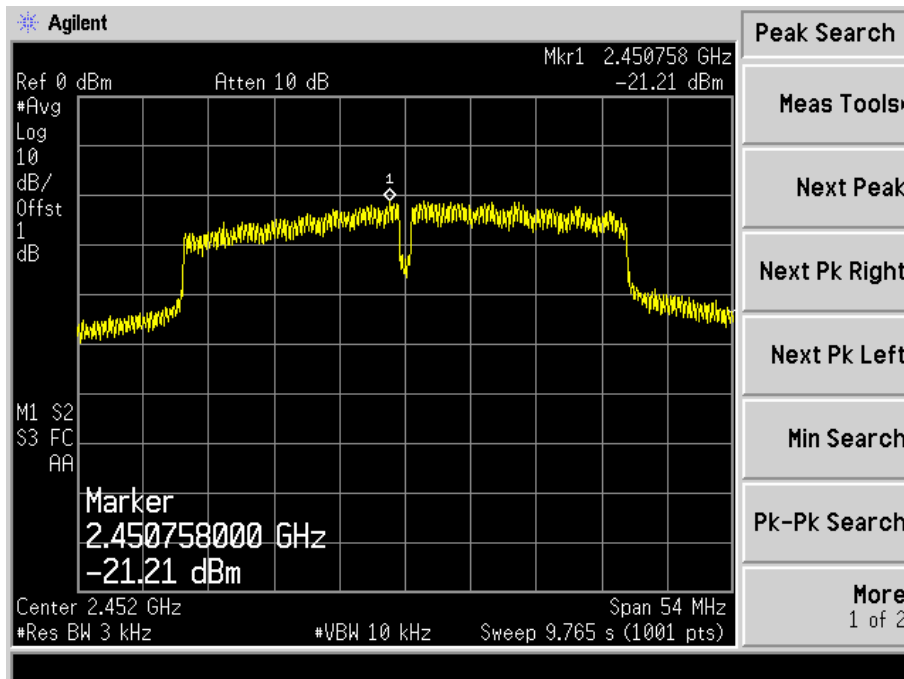

## 6. 6dB Bandwidth

---

### 6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.3 Environmental Conditions

Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

### 6.4 Summary of Test Results/Plots



**Antenna 0**

Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
802.11b	2412	9.555	14.0938	≥500
	2437	8.580	14.0470	≥500
	2462	9.553	14.0517	≥500
802.11g	2412	16.080	16.3123	≥500
	2437	16.319	16.3127	≥500
	2462	16.275	16.3232	≥500
802.11n-HT20	2412	17.382	17.4901	≥500
	2437	17.408	17.4855	≥500
	2462	17.285	17.4964	≥500
802.11n-HT40	2422	35.069	35.7933	≥500
	2437	34.255	35.8016	≥500
	2452	35.880	35.8920	≥500


**Antenna 1**

Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
802.11b	2412	10.082	15.2668	≥500
	2437	9.542	14.6172	≥500
	2462	10.052	14.4946	≥500
802.11g	2412	16.281	16.2912	≥500
	2437	16.286	16.4186	≥500
	2462	16.292	16.3648	≥500
802.11n-HT20	2412	17.516	17.5545	≥500
	2437	17.544	17.5669	≥500
	2462	17.513	17.5377	≥500
802.11n-HT40	2422	34.477	35.9214	≥500
	2437	35.260	35.9119	≥500
	2452	34.174	35.9421	≥500


Please refer to the following test plots:

**Antenna 0**


## 802.11b-Low Channel

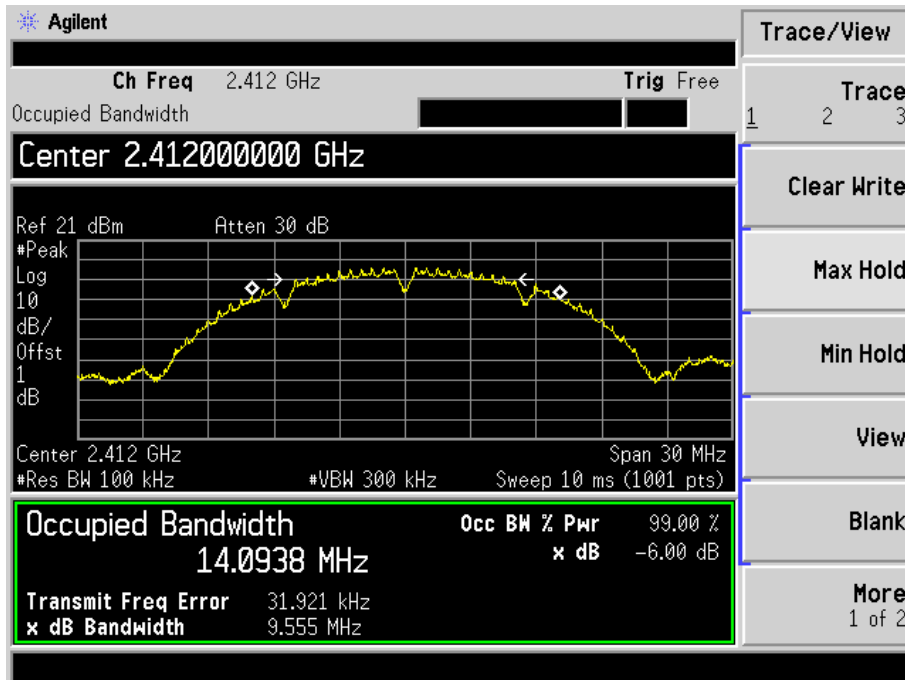


## 802.11b-Middle Channel

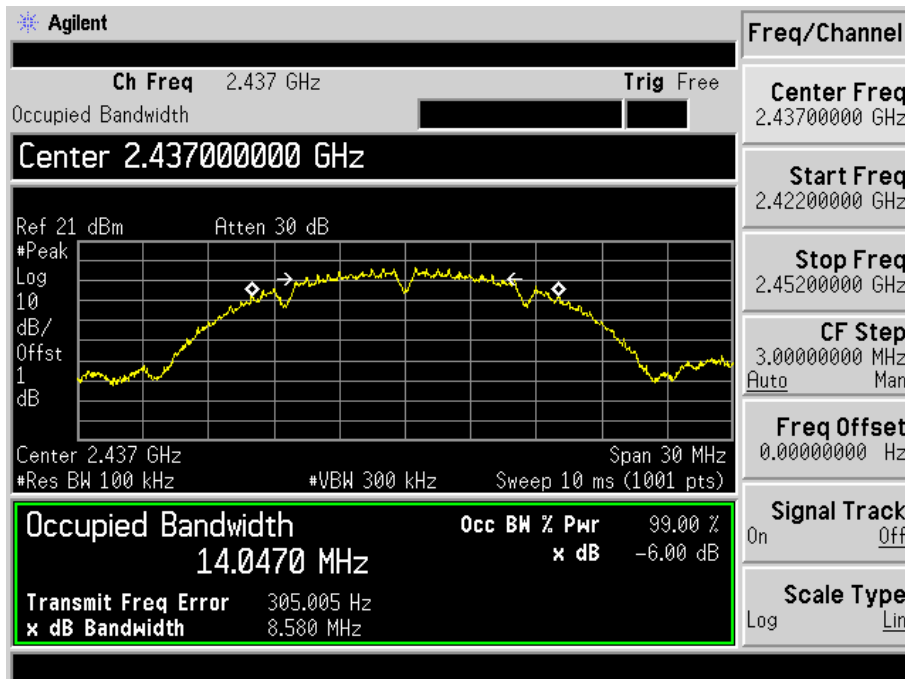


802.11b-High Channel

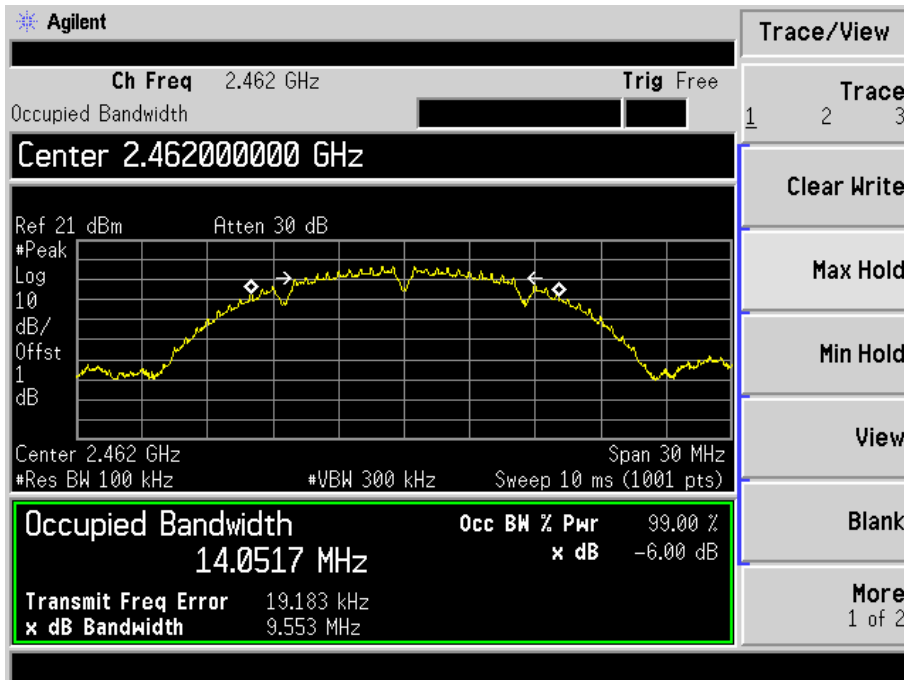


802.11g-Low Channel

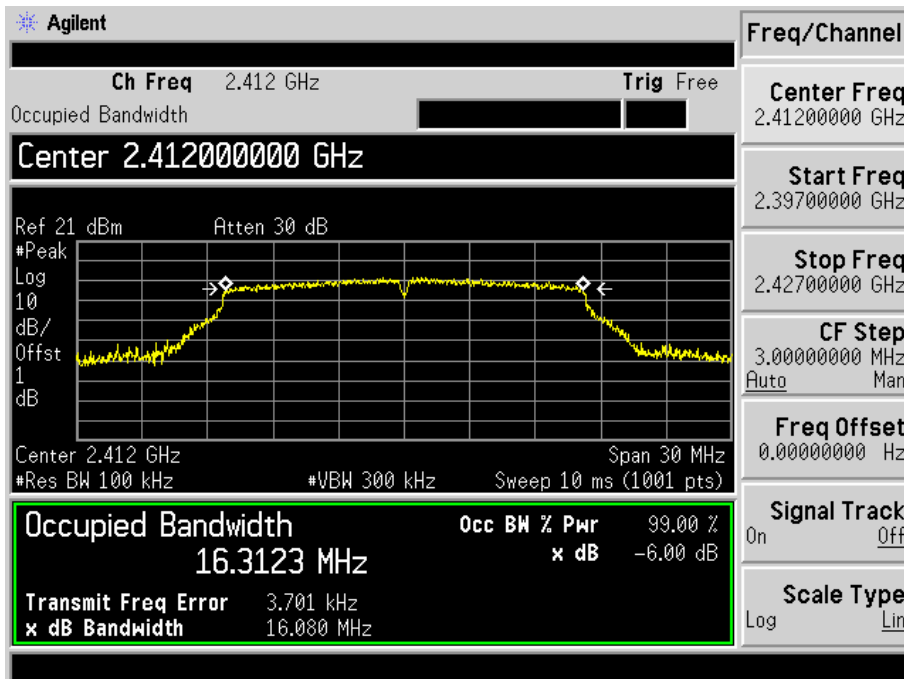


802.11g-Middle Channel

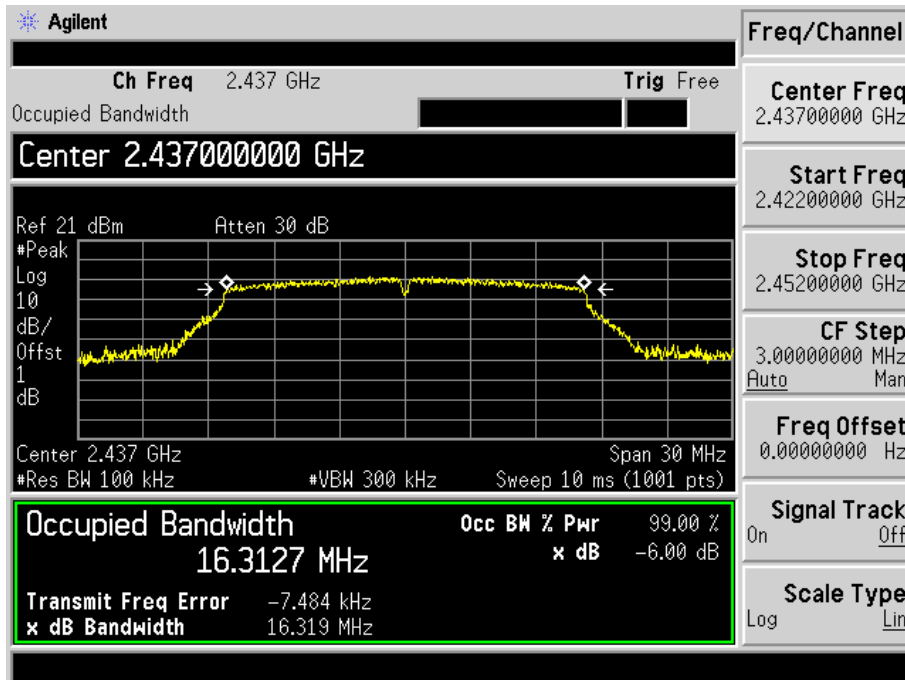


802.11g-High Channel

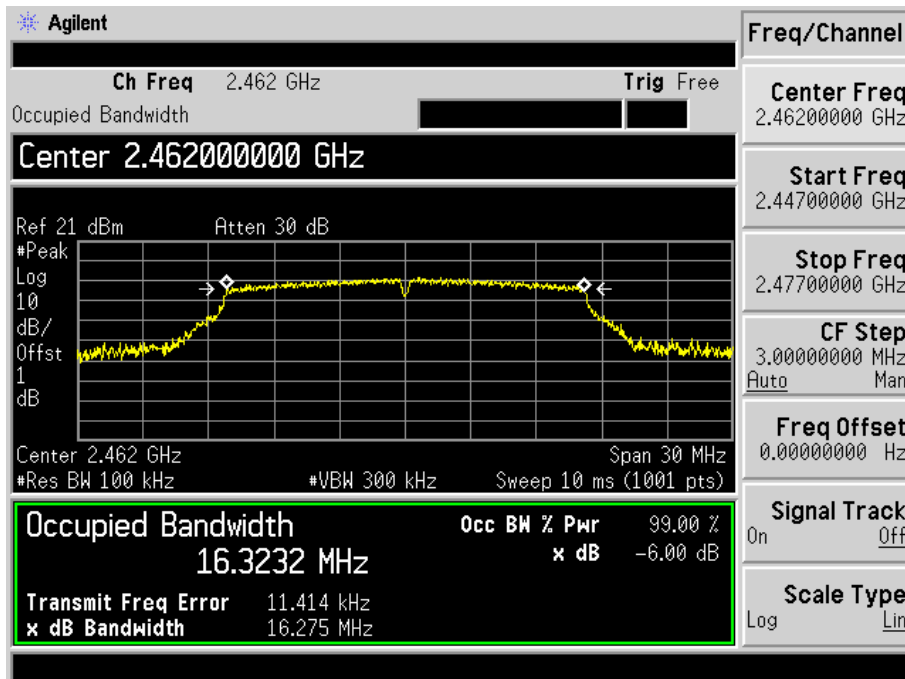


802.11n-HT20-Low Channel

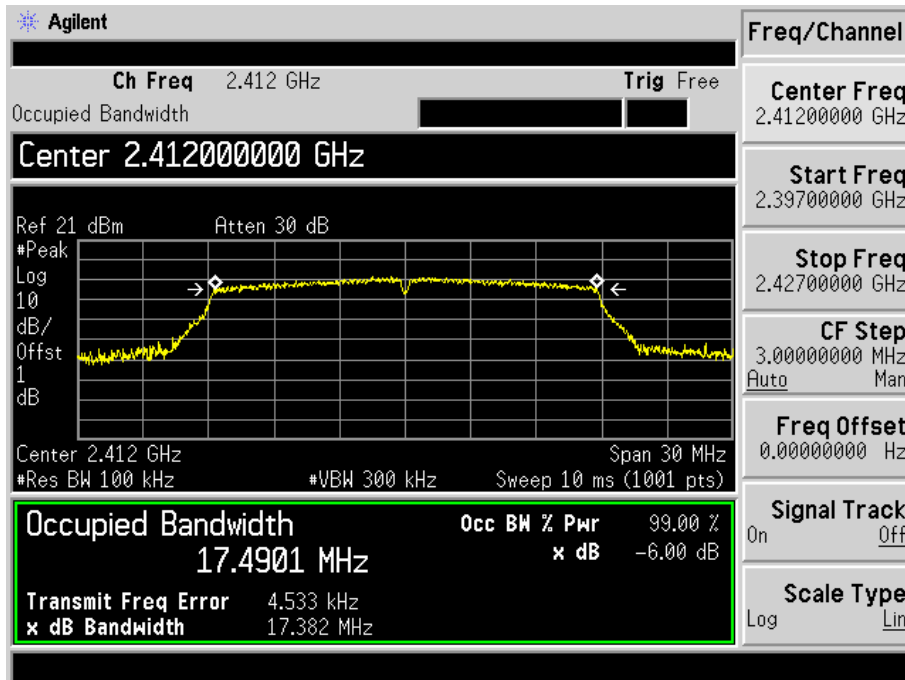


802.11n-HT20-Middle Channel

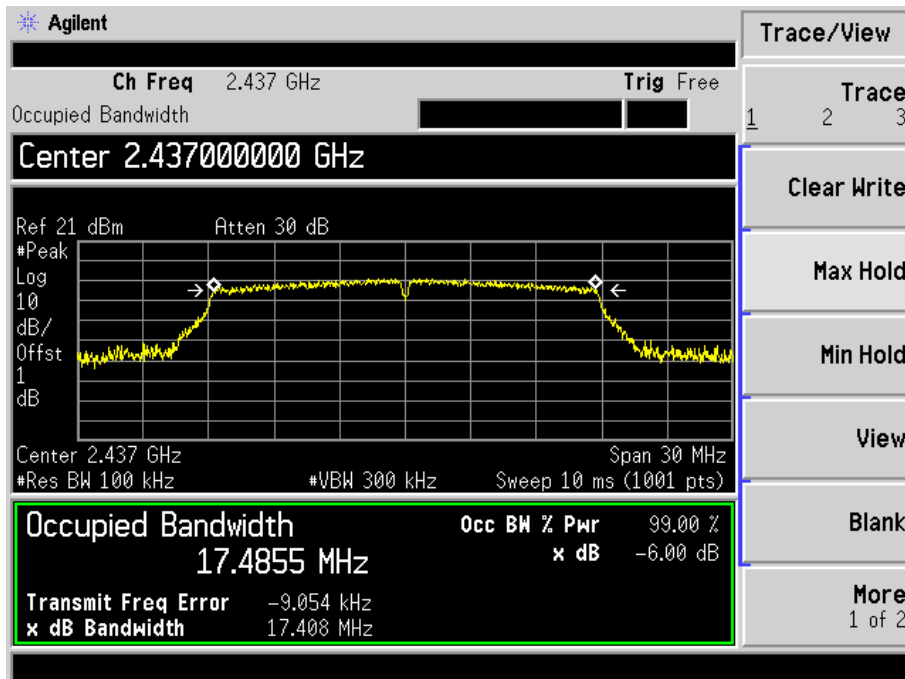


## 802.11n-HT20-High Channel

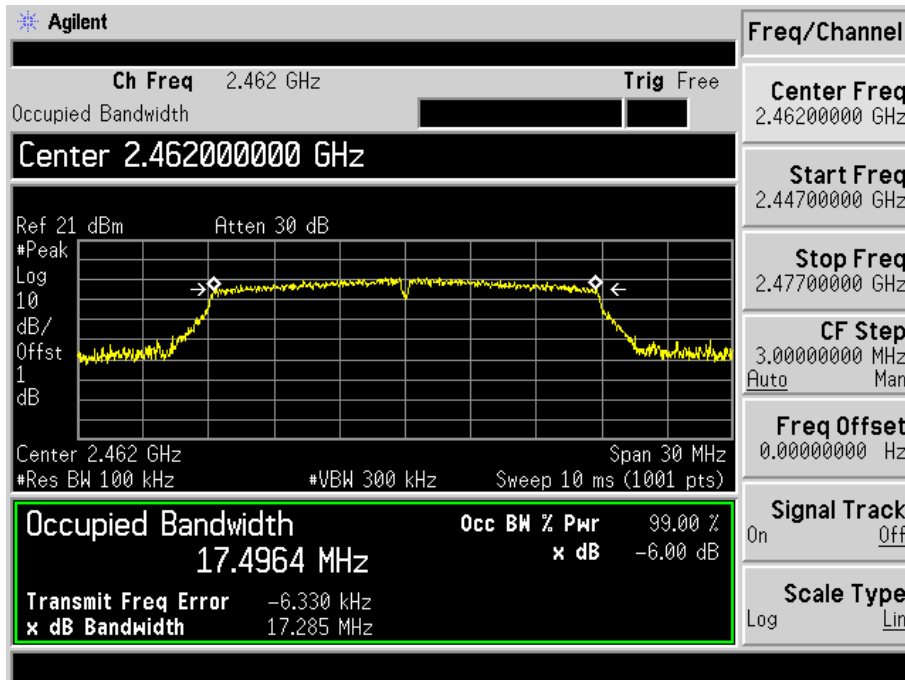


## 802.11n-HT40-Low Channel

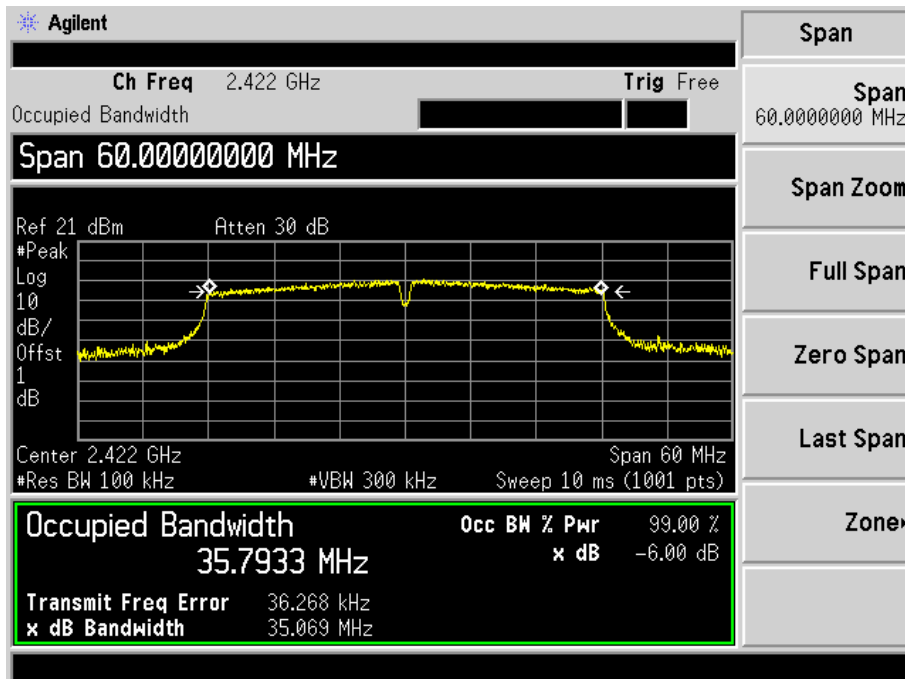

802.11n-HT40-Middle Channel

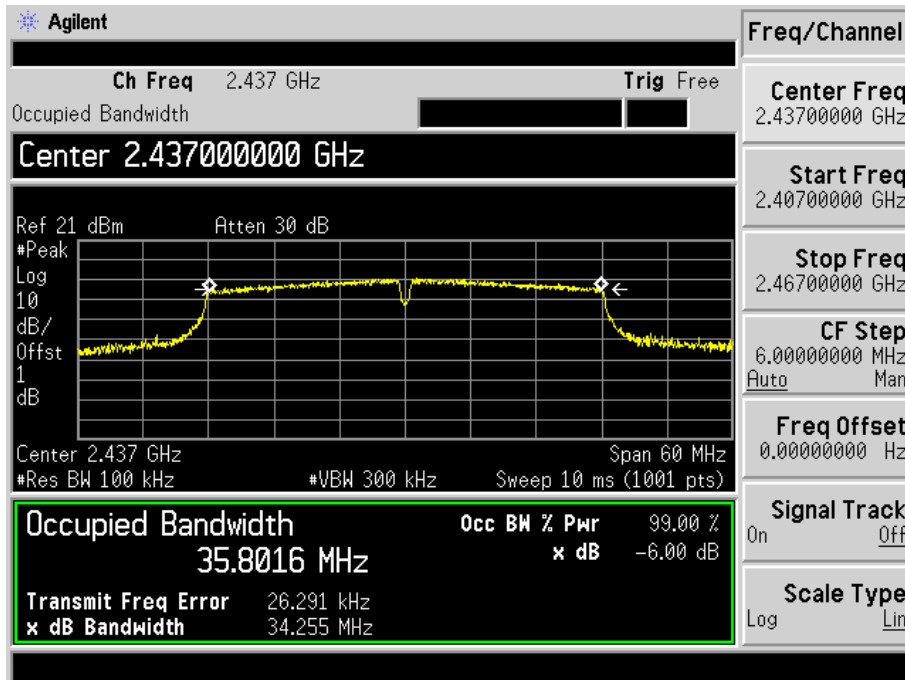


802.11n-HT40-High Channel

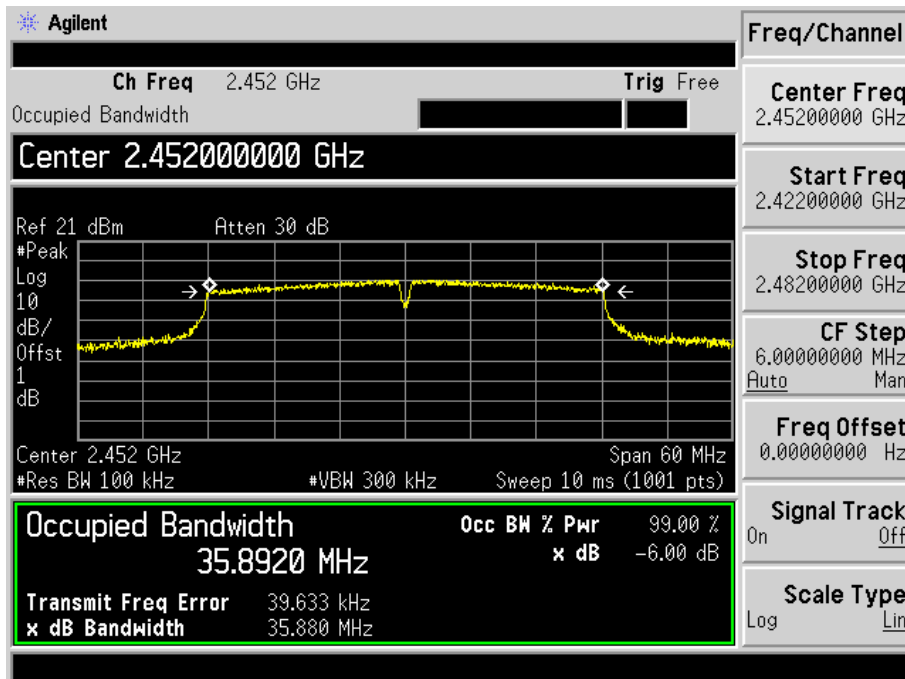


**Antenna 1**

## 802.11b-Low Channel

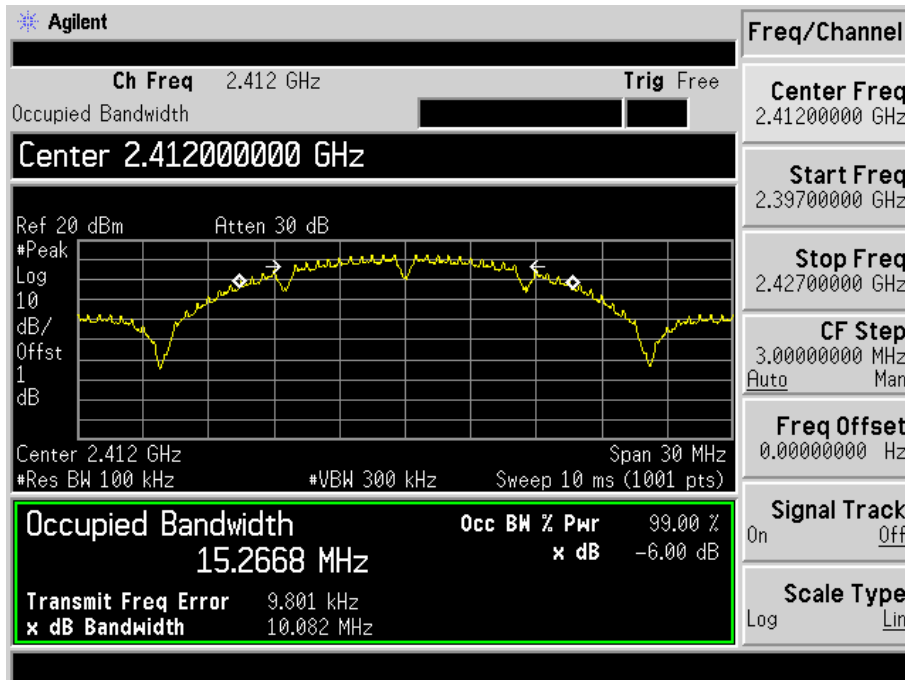


## 802.11b-Middle Channel

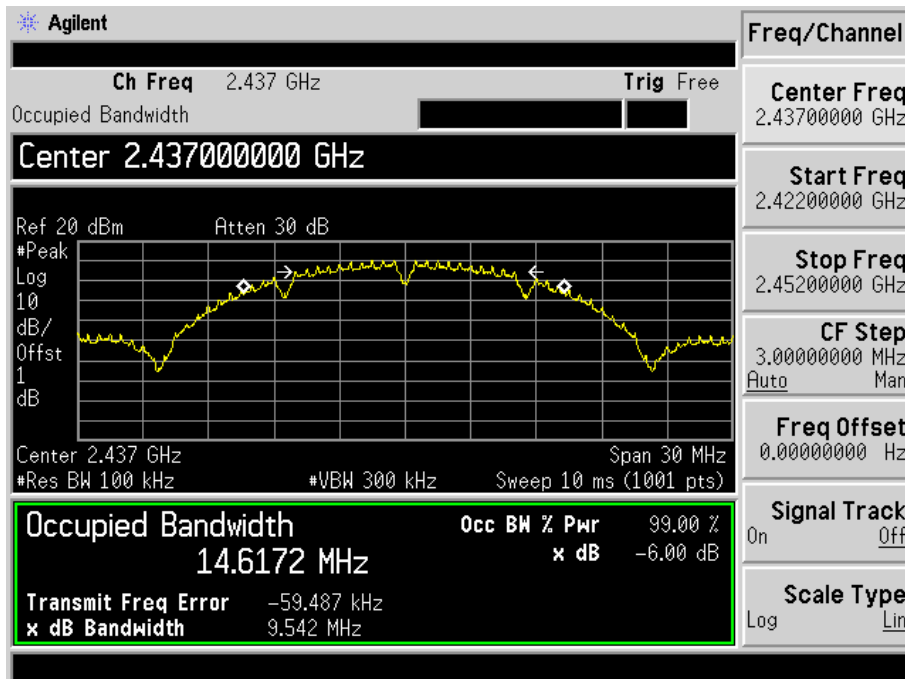





## 802.11b-High Channel

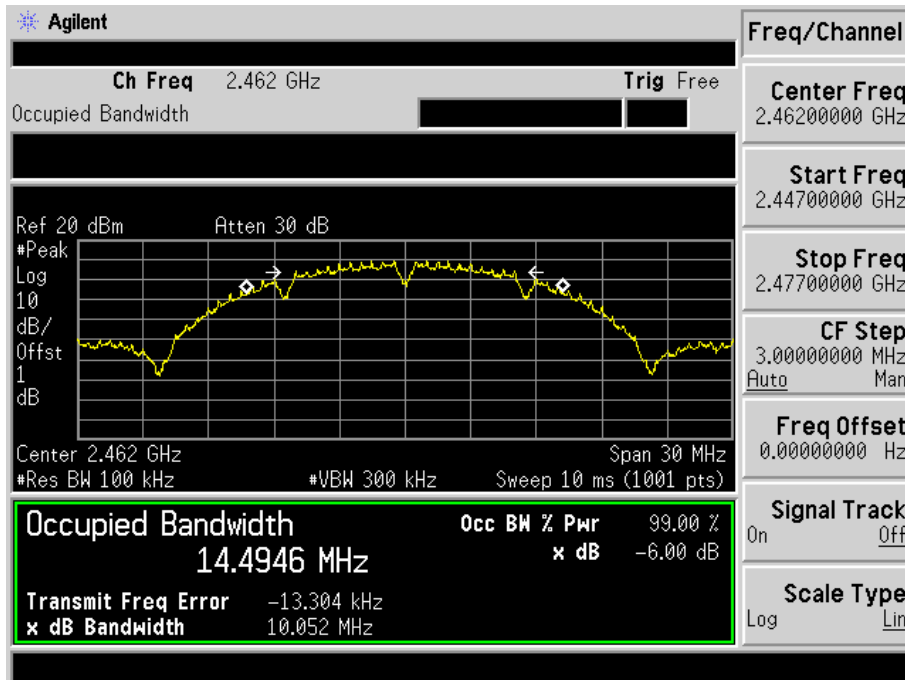


## 802.11g-Low Channel

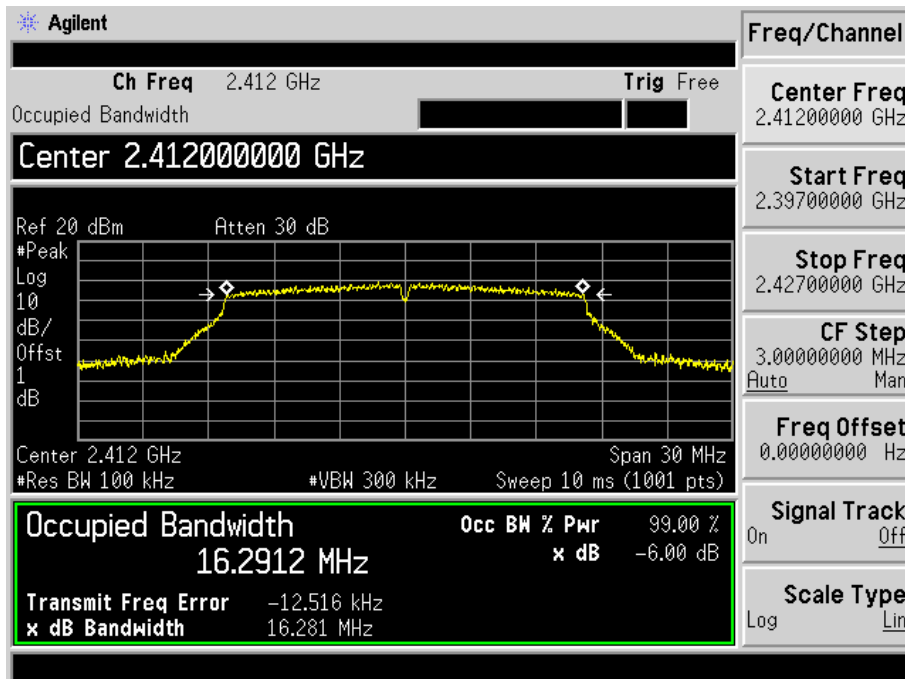


## 802.11g-Middle Channel

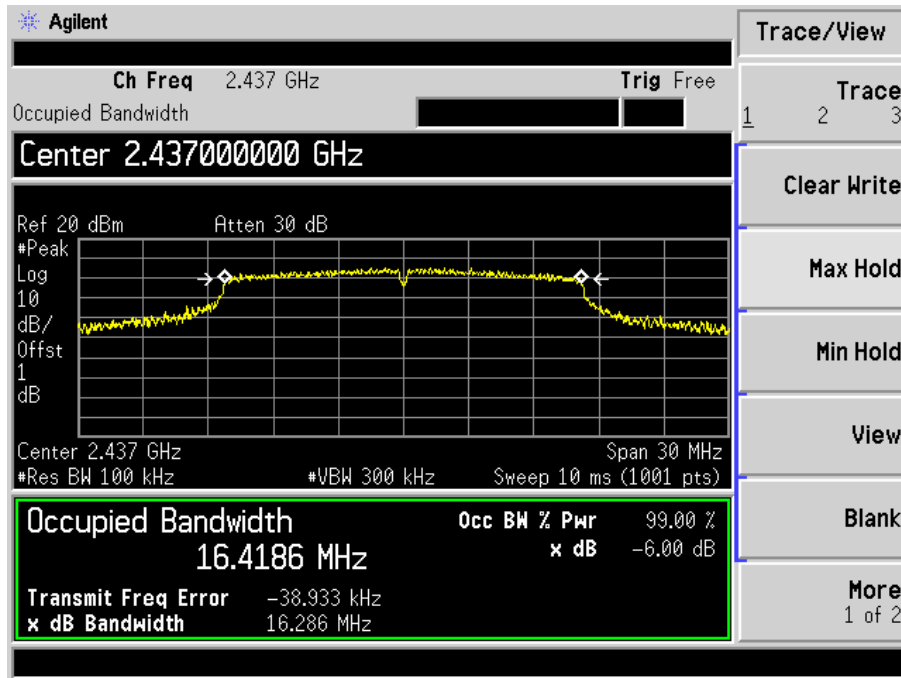


## 802.11g-High Channel

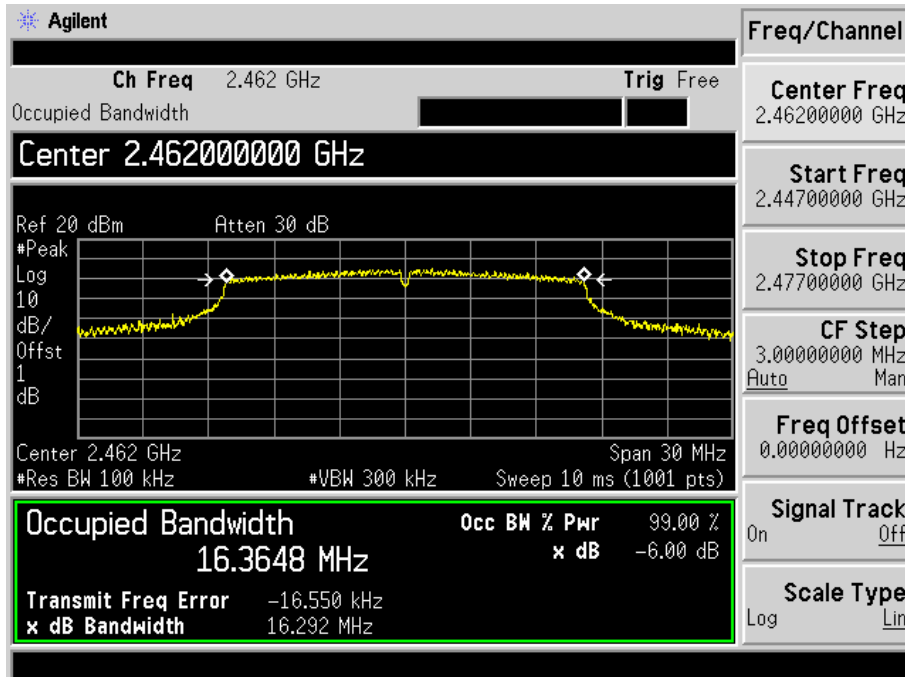


## 802.11n-HT20-Low Channel

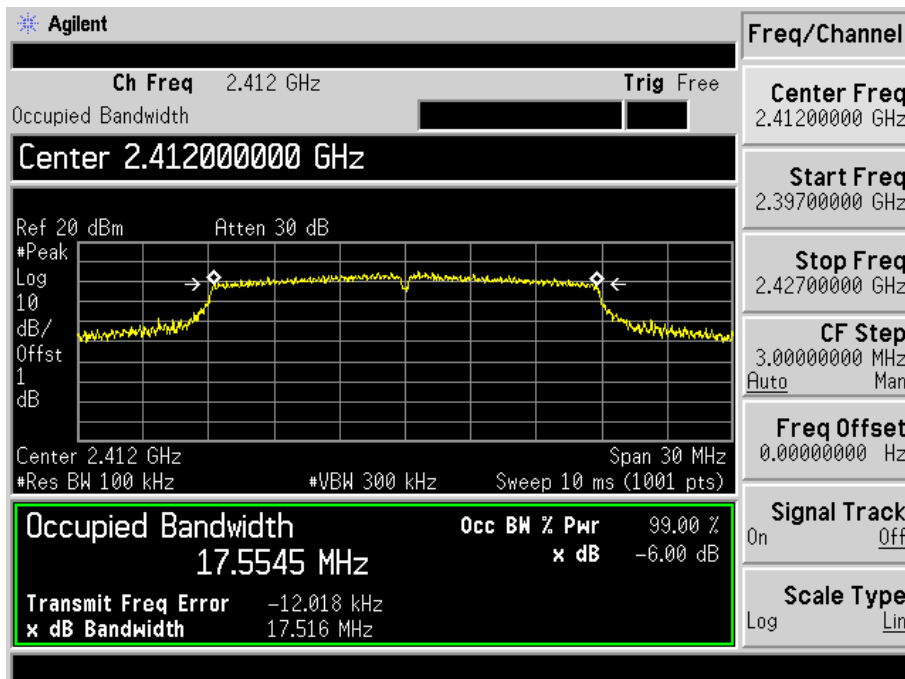


## 802.11n-HT20-Middle Channel

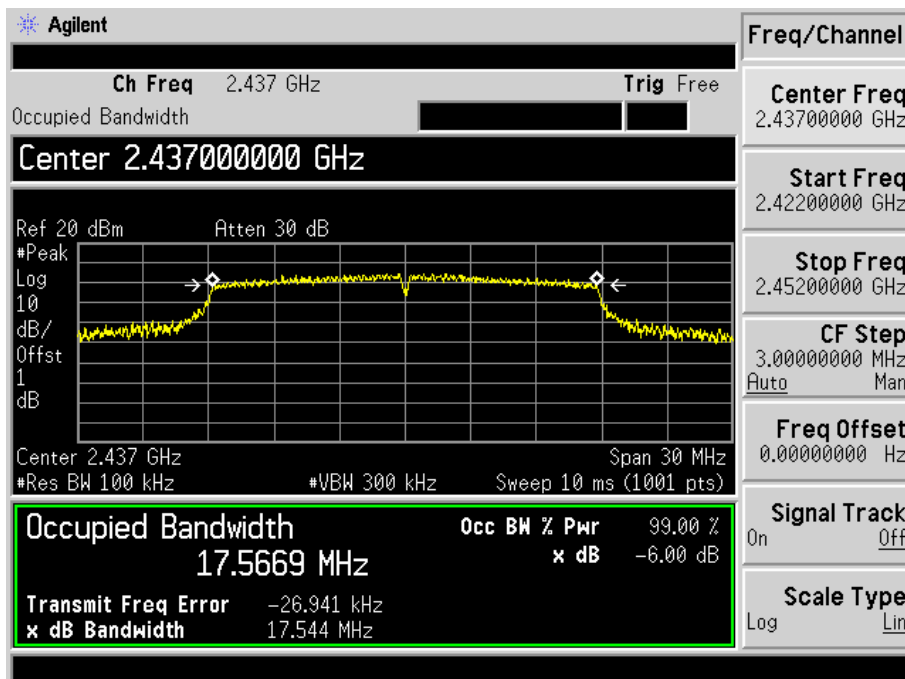


## 802.11n-HT20-High Channel

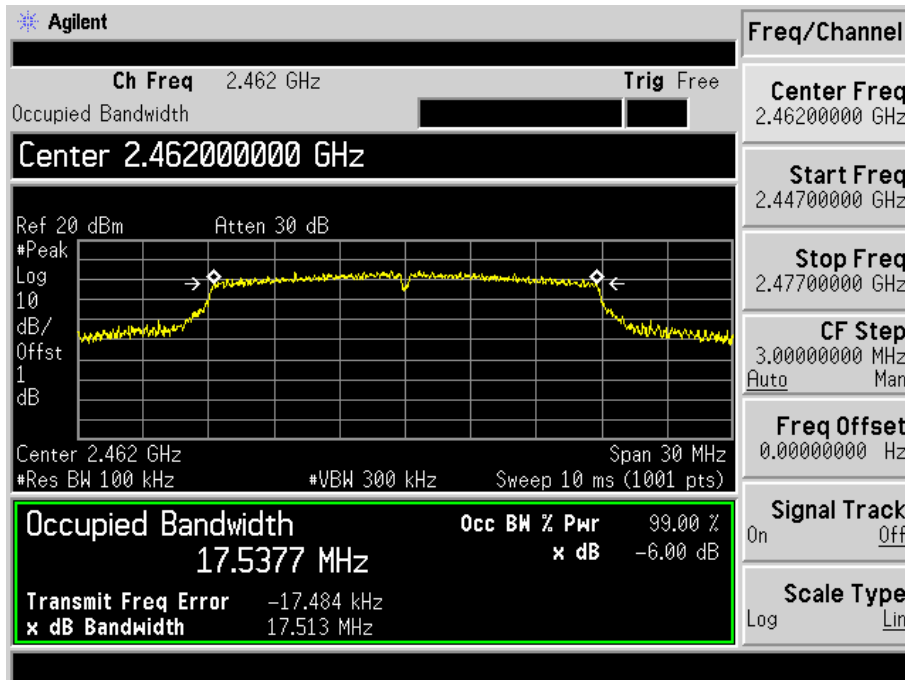


## 802.11n-HT40-Low Channel

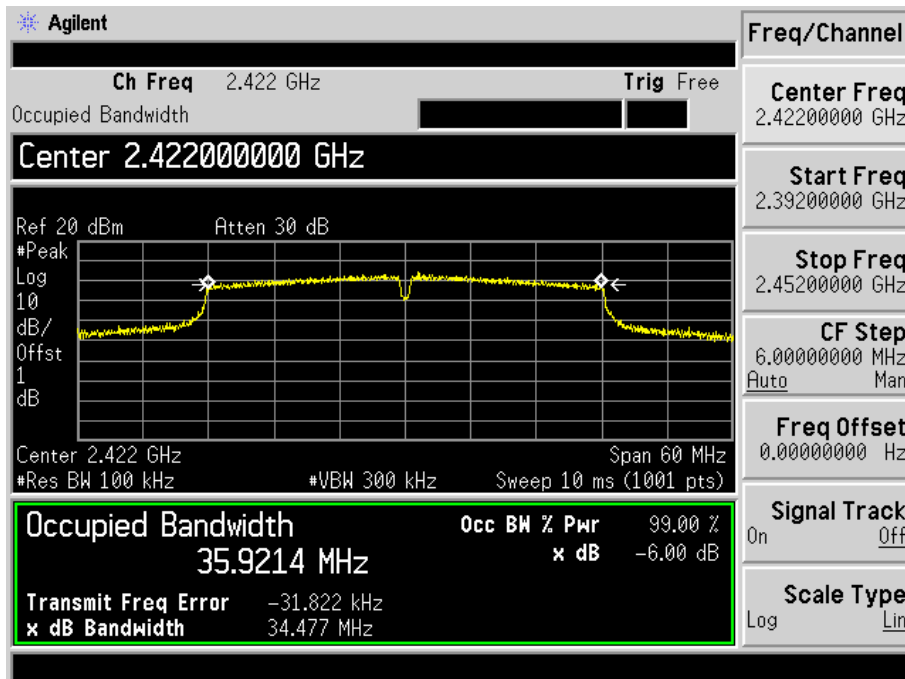

## 802.11n-HT40-Middle Channel

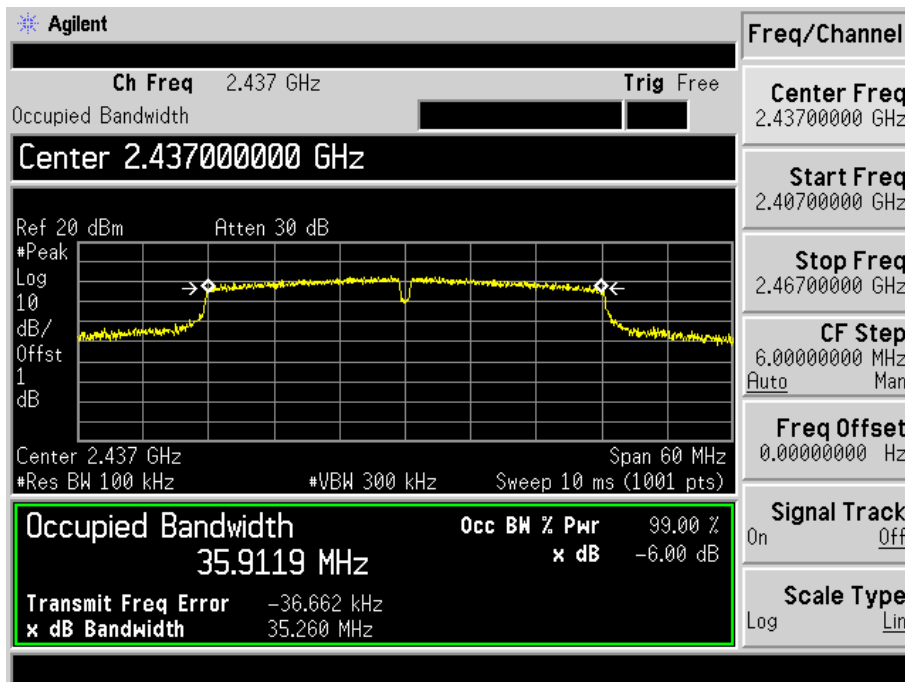

## 802.11n-HT40-High Channel

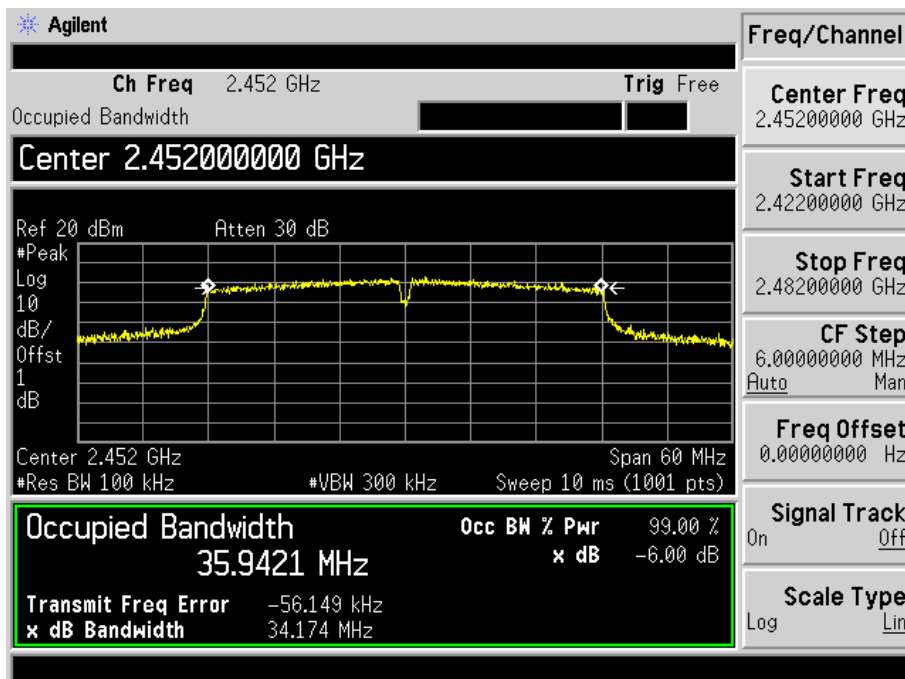

## 7. RF Output Power

---

### 7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 Test Procedure

According to the KDB-558074 D01 v04, 9.2.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle  $< 98 \%$ , use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98 \%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

### 7.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar


## 7.4 Summary of Test Results/Plots

Test Mode	Frequency MHz	Power 0 dBm	Power 1 dBm	Power 0 mW	Power 1 mW	Total Power dBm	Total Power mW	Limit mW
802.11b_1Mbps	2412	16.28	16.53	42.46	44.98	/	/	1000
	2437	16.42	16.40	43.85	43.65	/	/	1000
	2462	16.21	16.46	41.78	44.26	/	/	1000
802.11g_6Mbps	2412	14.96	15.14	31.33	32.66	/	/	1000
	2437	15.18	14.89	32.96	30.83	/	/	1000
	2462	15.57	15.61	36.06	36.39	/	/	1000
802.11n HT20_MCS0	2412	15.32	15.12	34.04	32.51	18.23	66.55	1000
	2437	15.28	15.43	33.73	34.91	18.37	68.64	1000
	2462	15.28	14.89	33.73	30.83	18.10	64.56	1000
802.11n HT40_MCS0	2422	16.50	16.25	44.67	42.17	19.39	86.84	1000
	2437	16.55	16.35	45.19	43.15	19.46	88.34	1000
	2452	16.22	16.28	41.88	42.46	19.26	84.34	1000


Please refer to the following test plots:

Antenna 0

802.11b-11Mbps-Low Channel

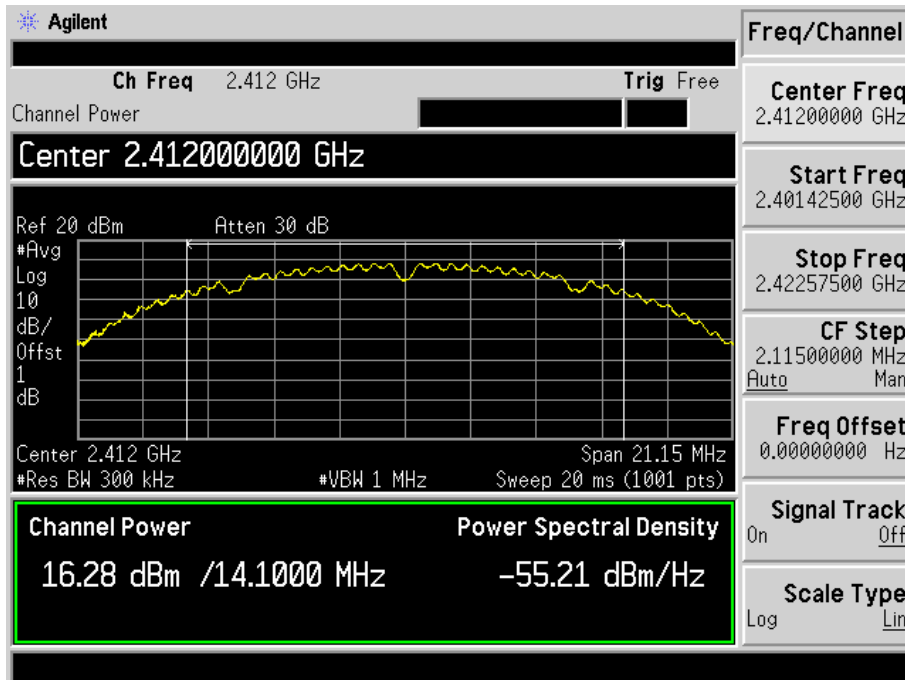


802.11b -11Mbps-Middle Channel

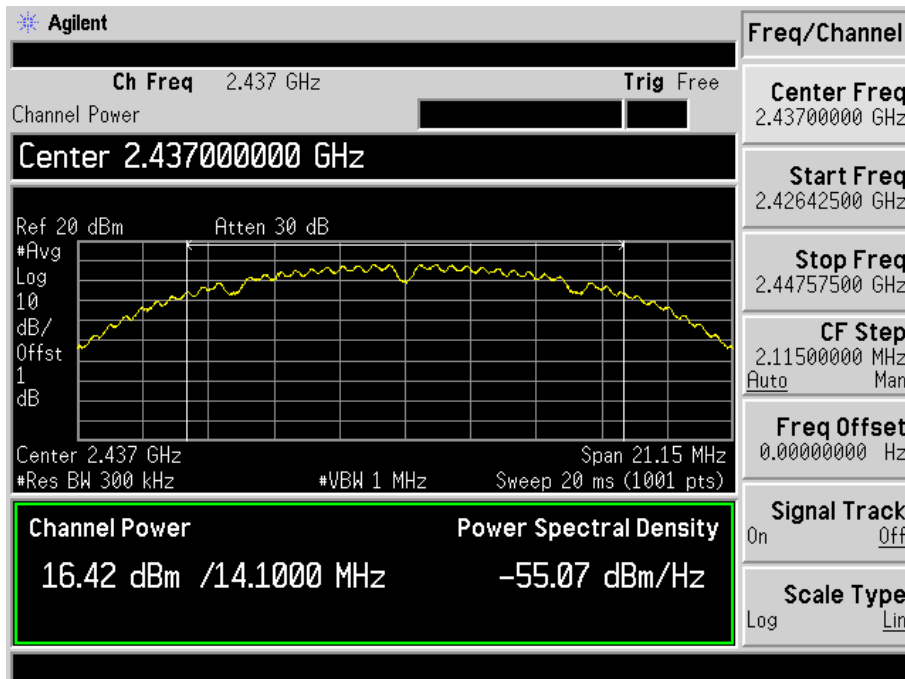





## 802.11b -11Mbps-High Channel

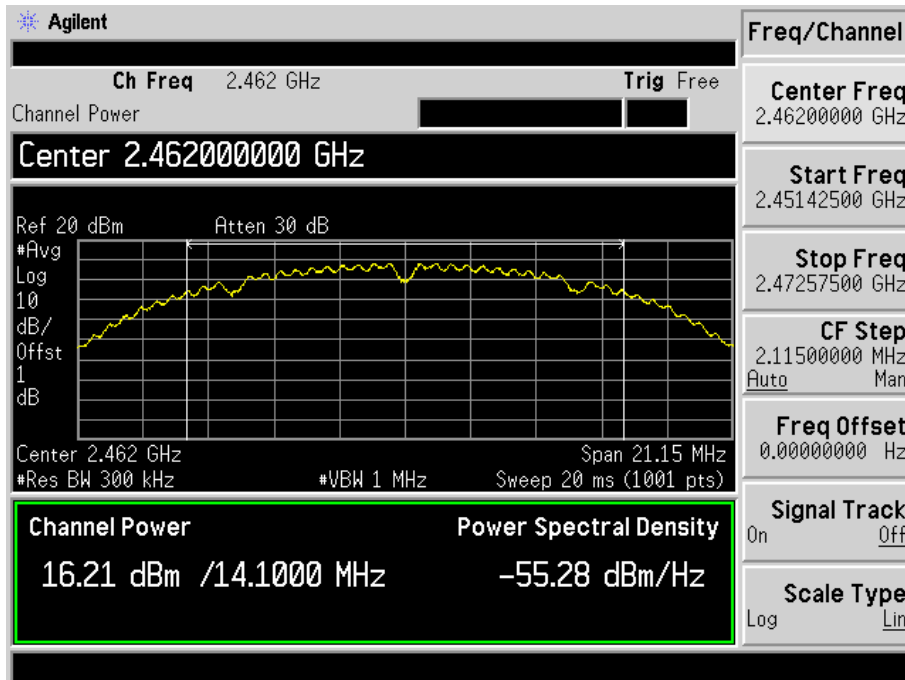


## 802.11g-54Mbps-Low Channel

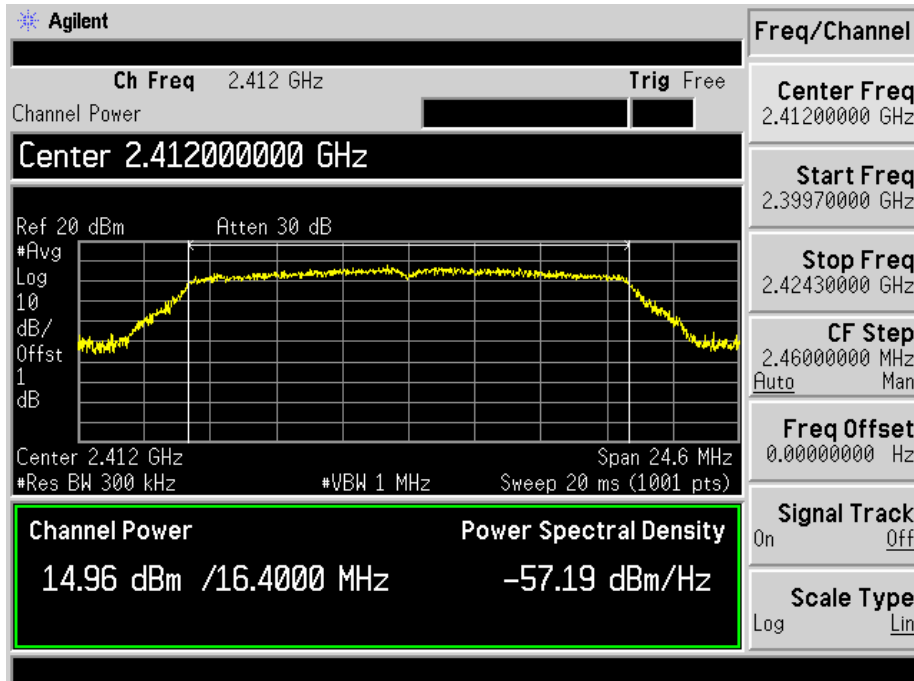


## 802.11g-54Mbps-Middle Channel

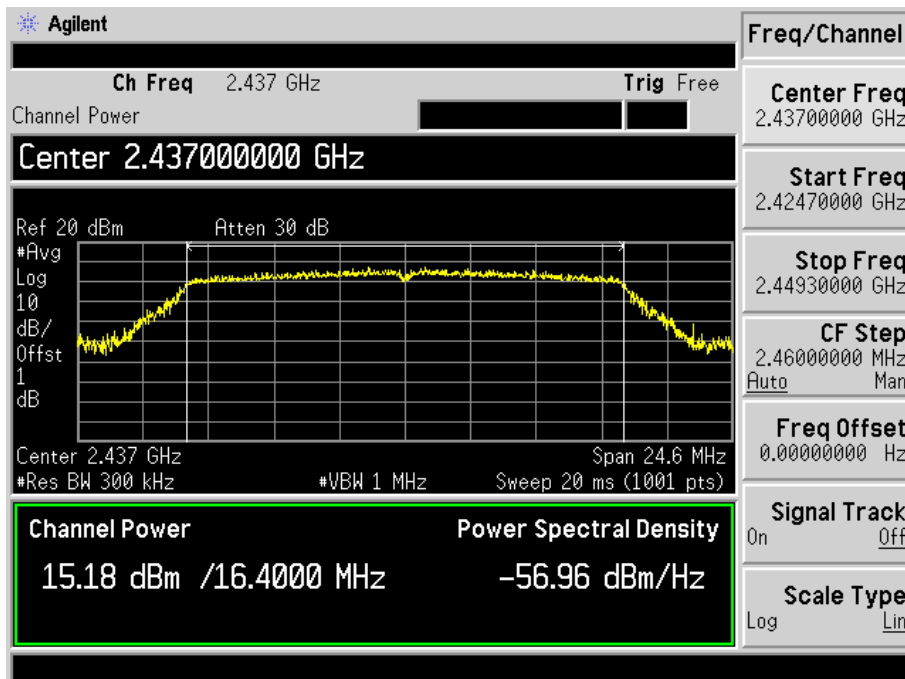


## 802.11g-54Mbps-High Channel

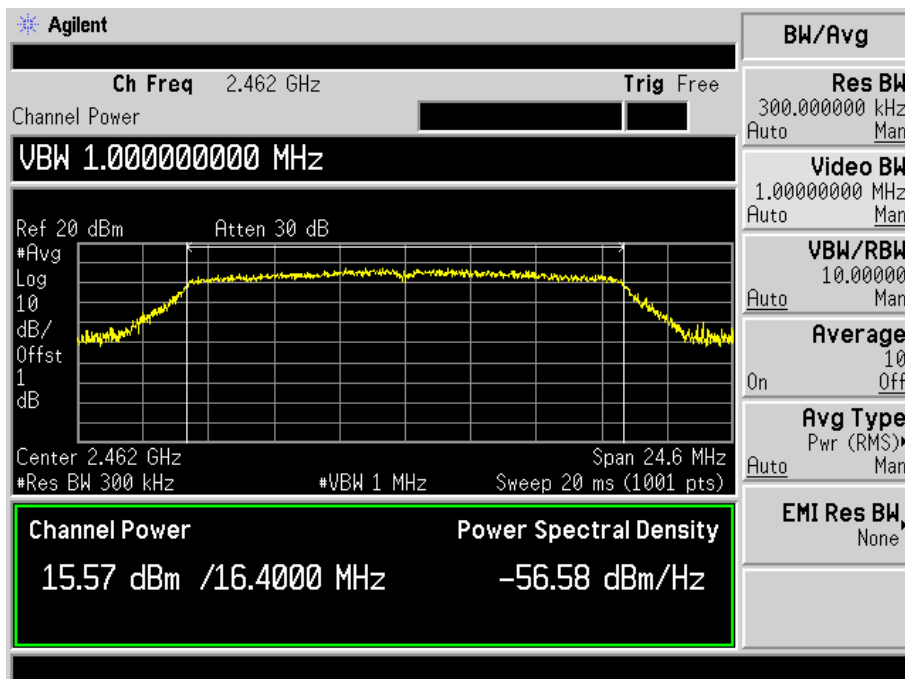


## 802.11n-HT20-MCS7-Low Channel

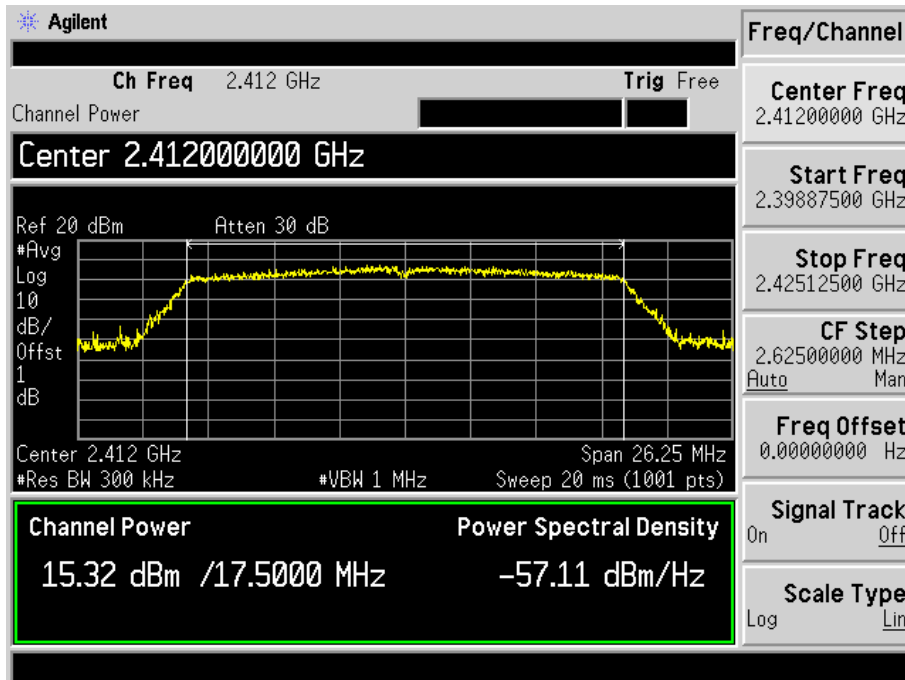


## 802.11n-HT20-MCS7-Middle Channel

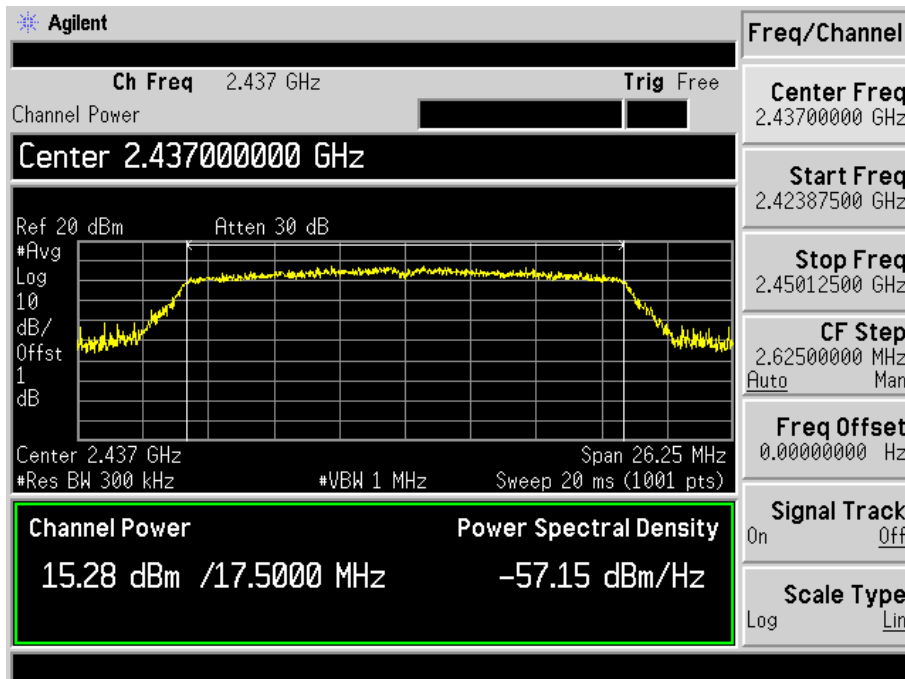


802.11n-HT20-MCS7-High Channel

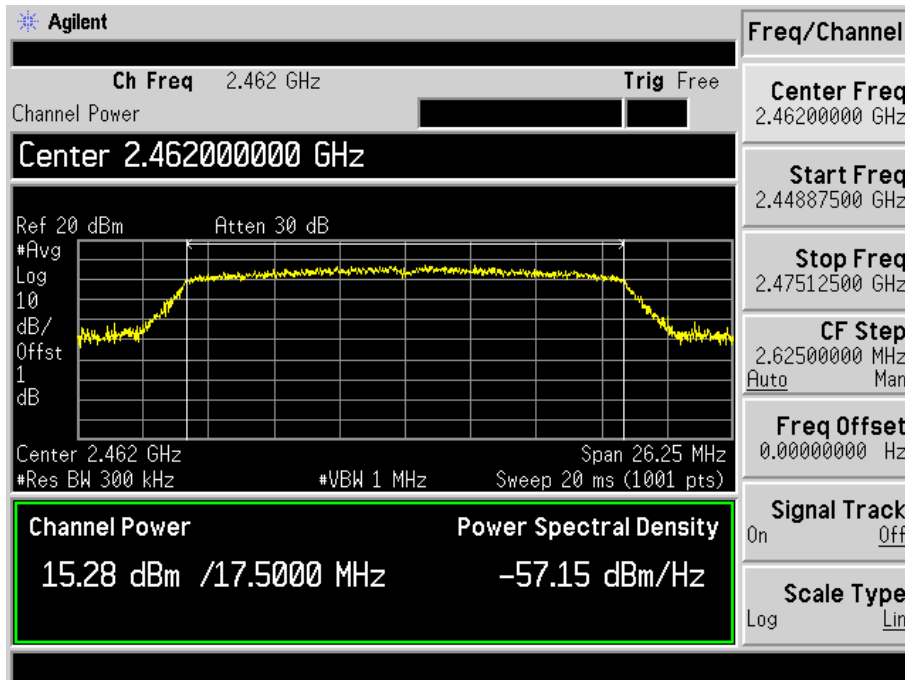


802.11n-HT40-MCS7-Low Channel

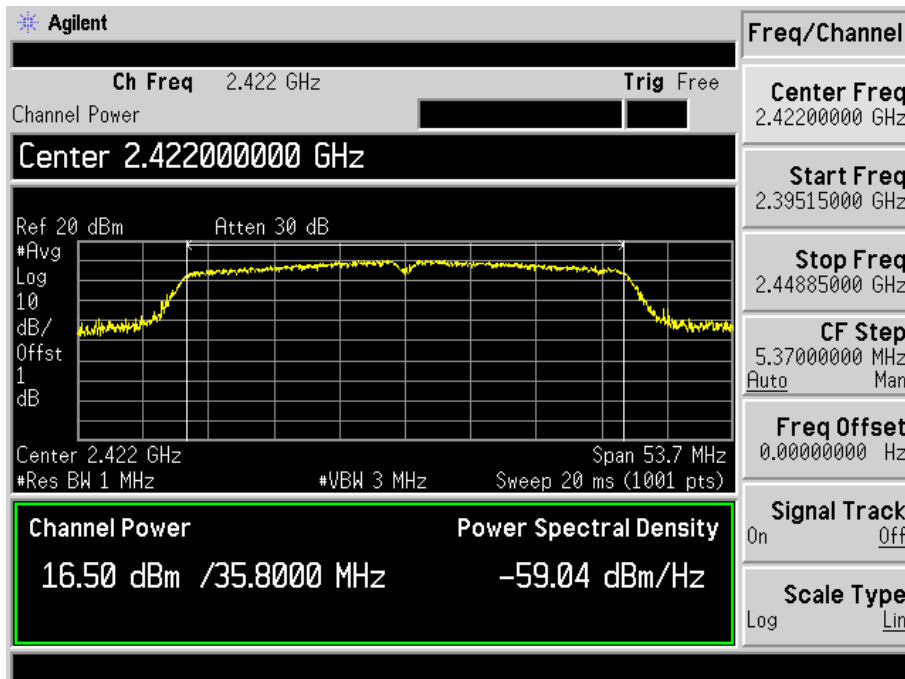

## 802.11n-HT40-MCS7-Middle Channel

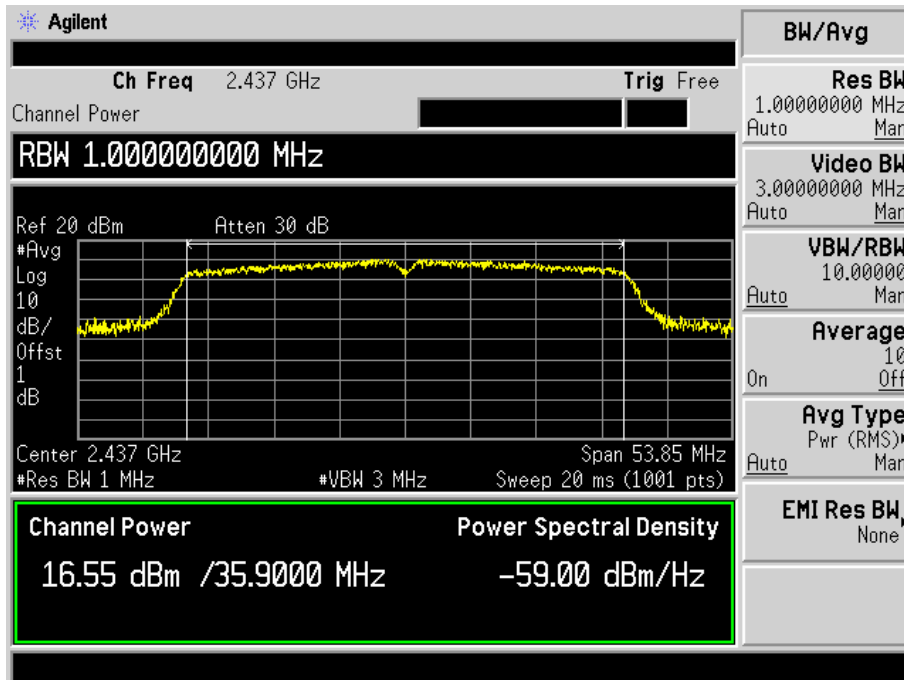


## 802.11n-HT40-MCS7-High Channel

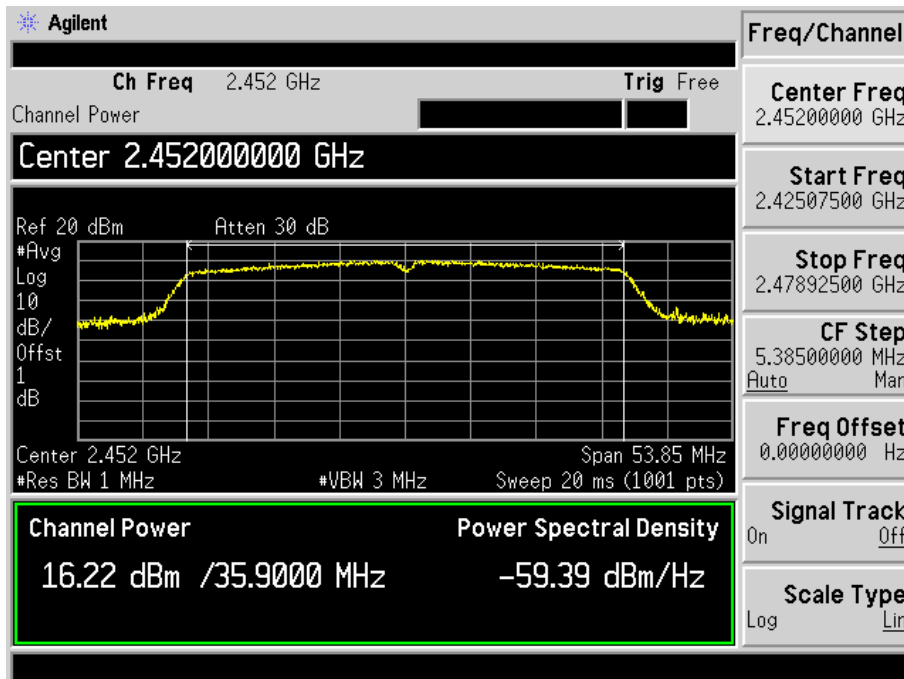


## Antenna 1


## 802.11b-11Mbps-Low Channel

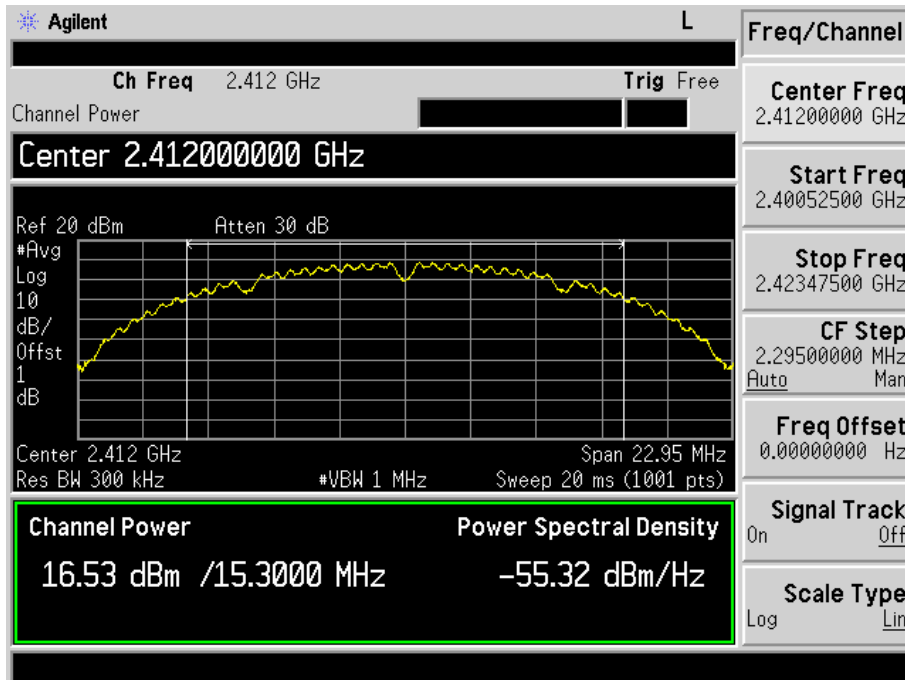


## 802.11b -11Mbps-Middle Channel

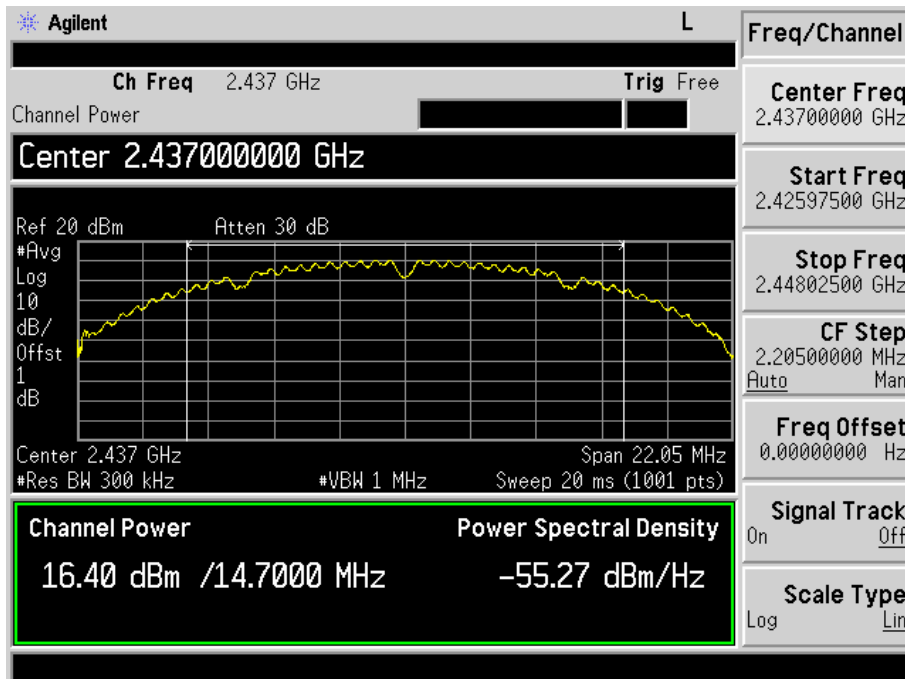


## 802.11b -11Mbps-High Channel

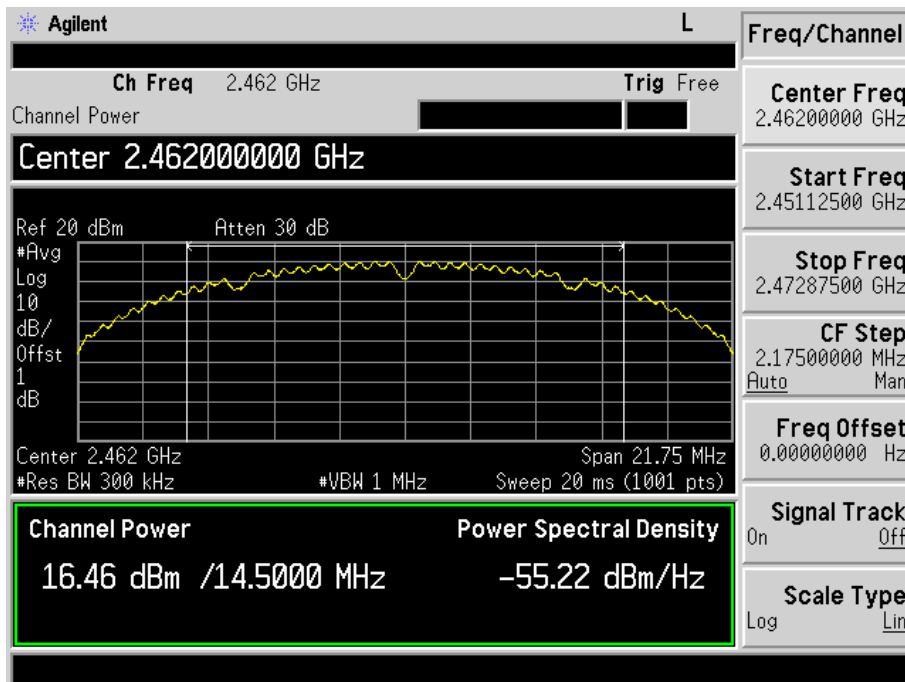


## 802.11g-54Mbps-Low Channel

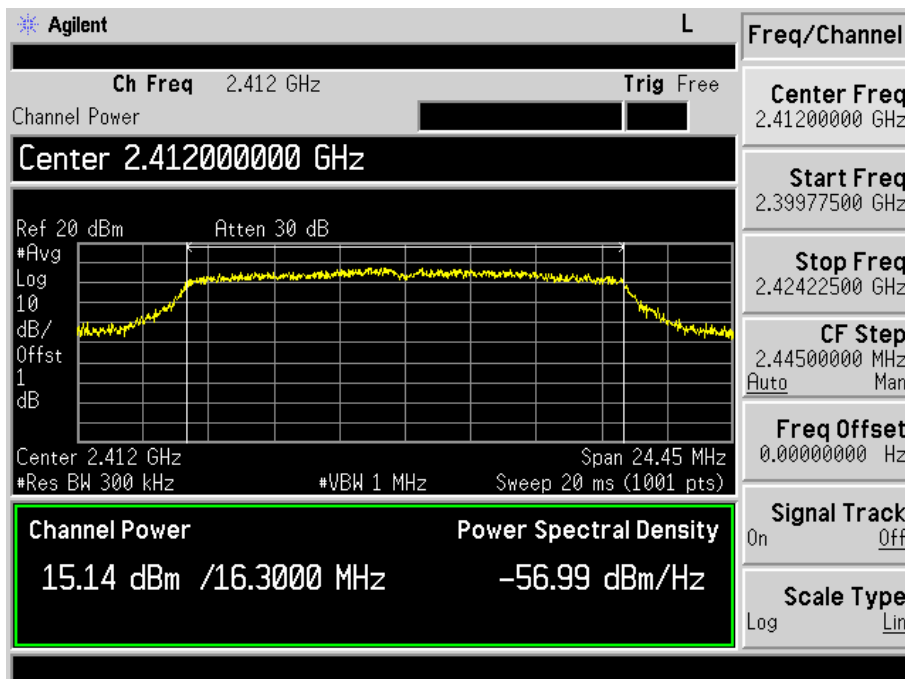

## 802.11g-54Mbps-Middle Channel

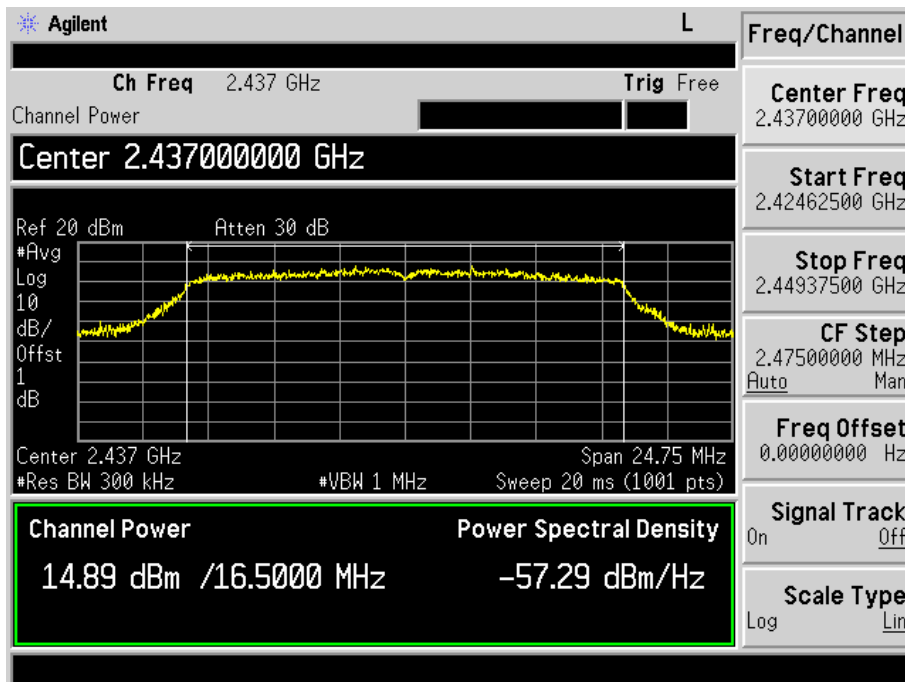


## 802.11g-54Mbps-High Channel

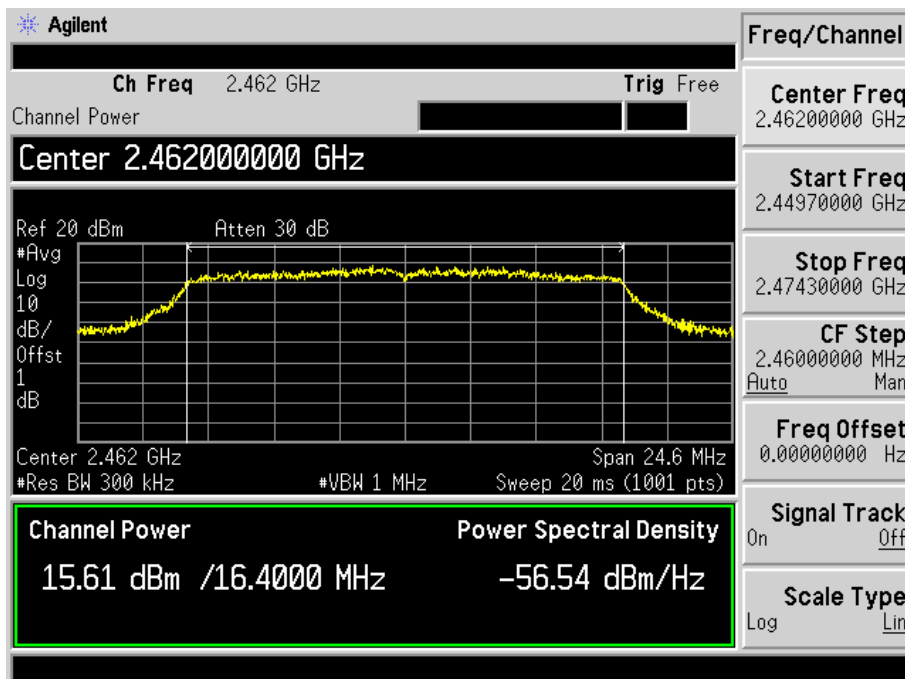





## 802.11n-HT20-MCS7-Low Channel

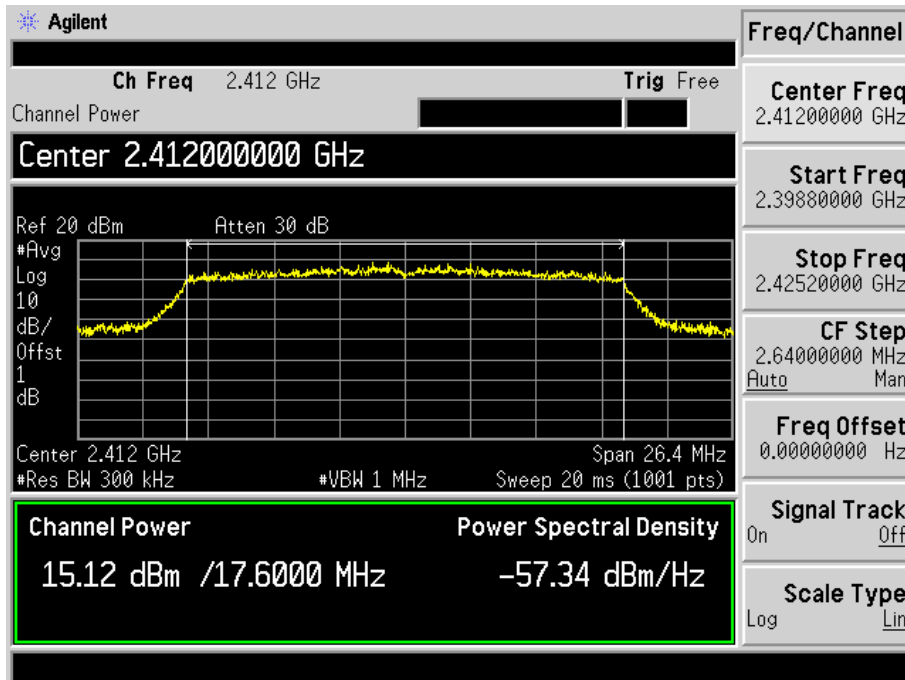


## 802.11n-HT20-MCS7-Middle Channel

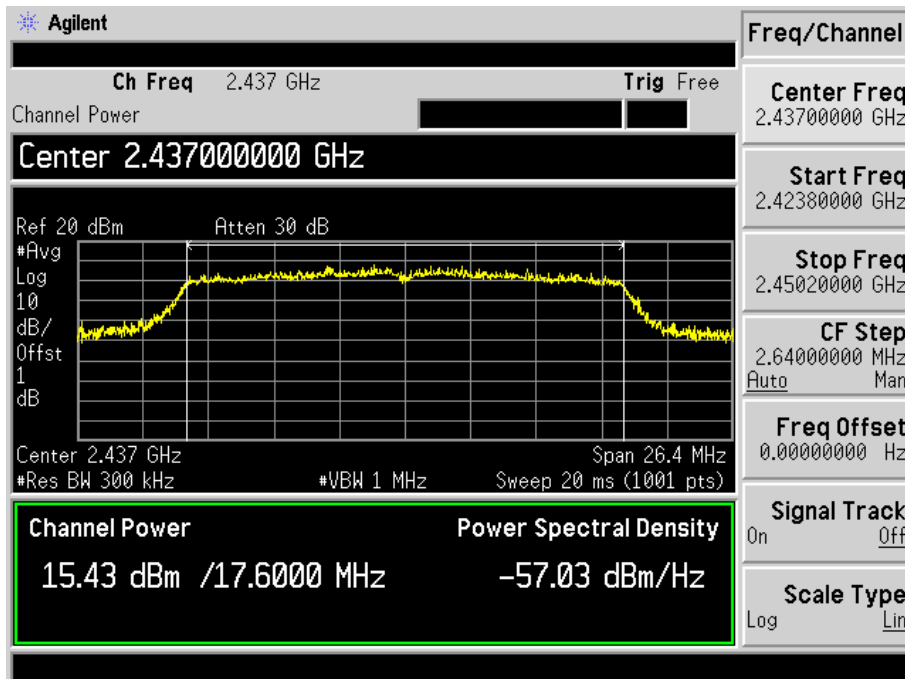


## 802.11n-HT20-MCS7-High Channel

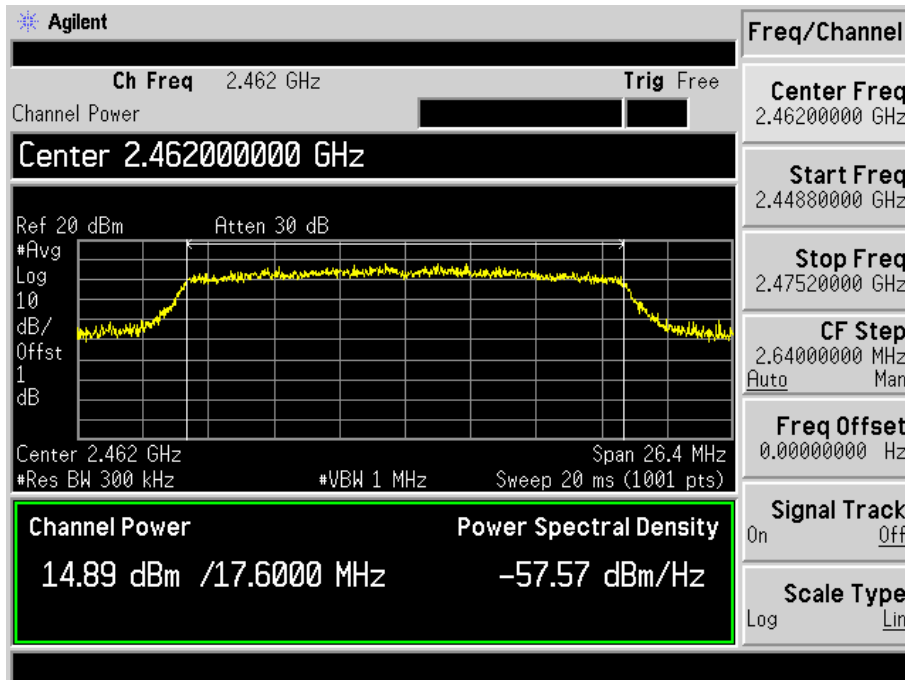


## 802.11n-HT40-MCS7-Low Channel

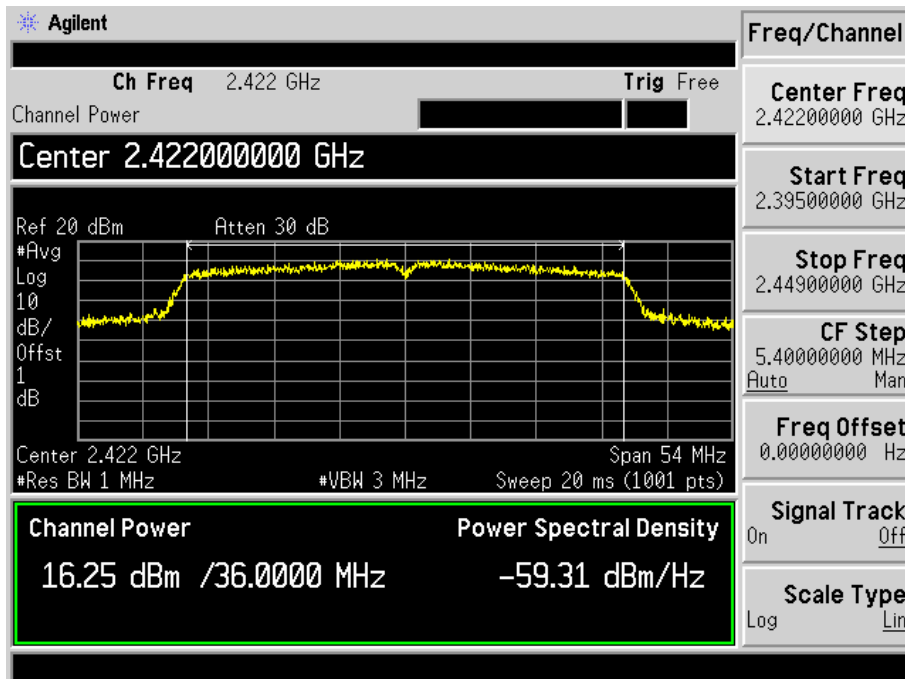

## 802.11n-HT40-MCS7-Middle Channel

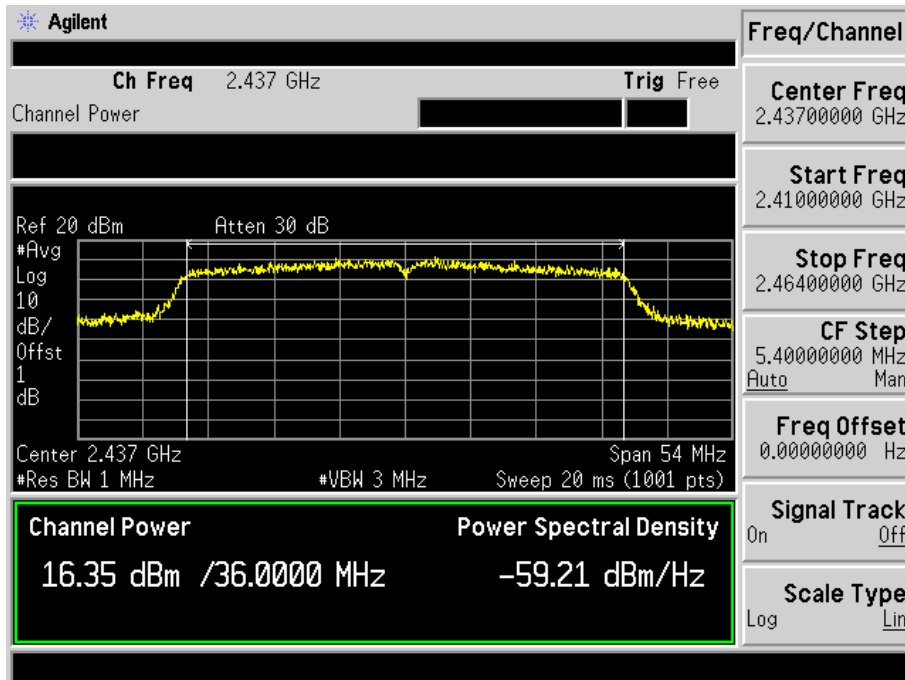

## 802.11n-HT40-MCS7-High Channel

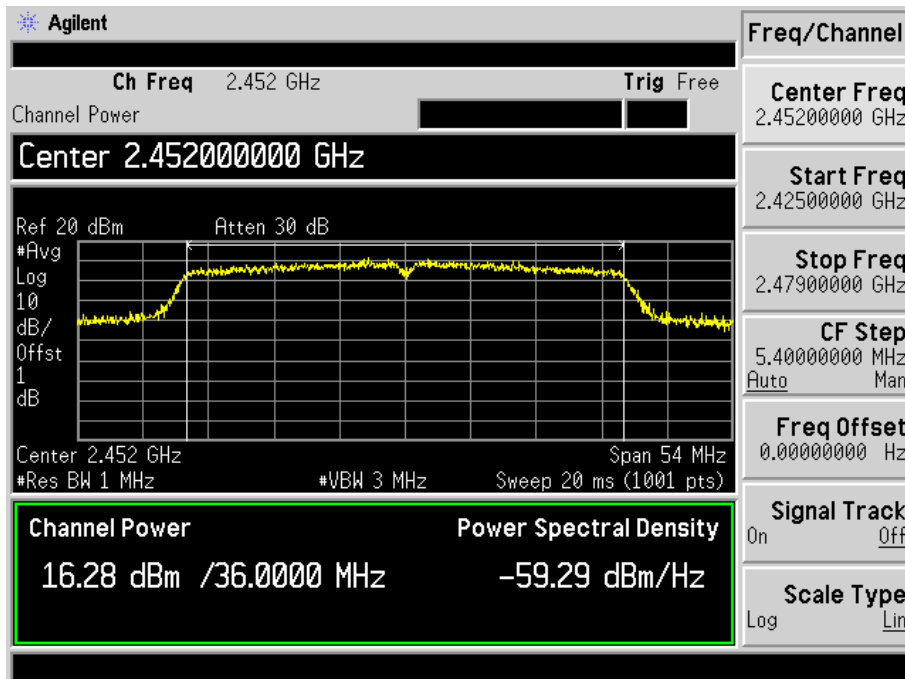

## 8. Field Strength of Spurious Emissions

### 8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

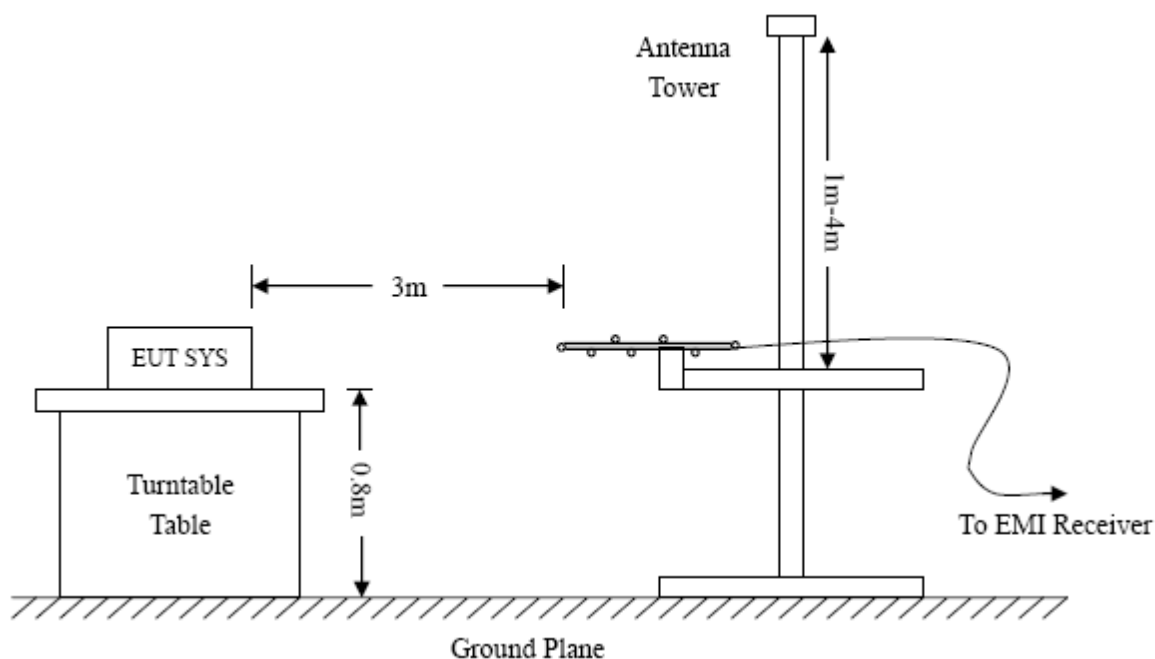

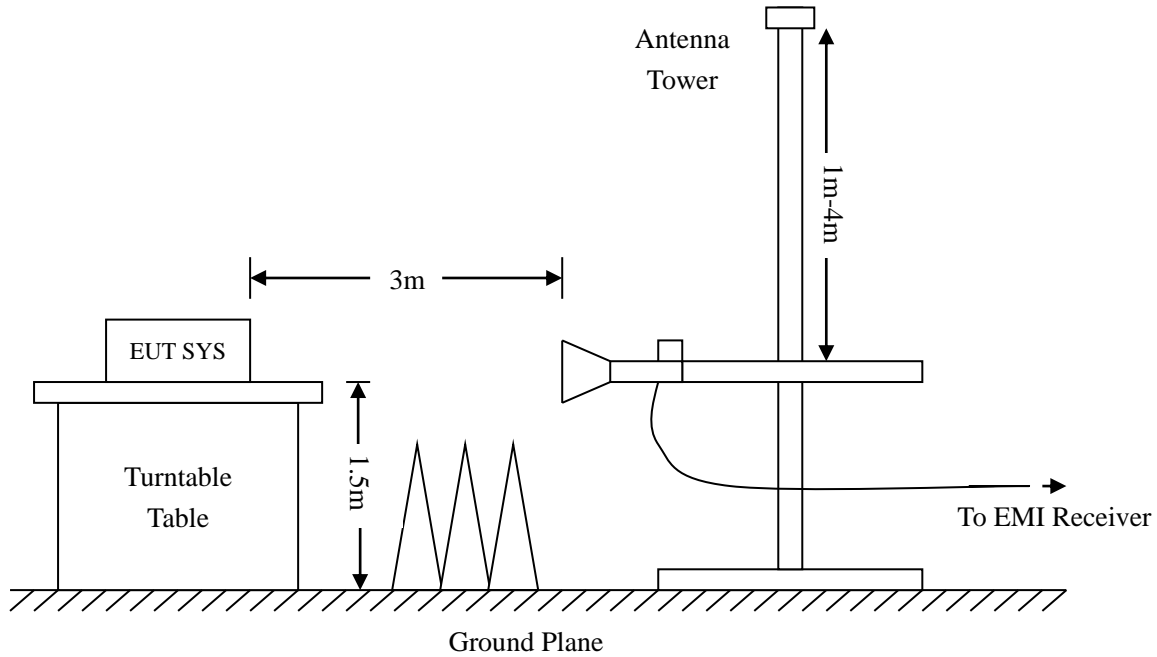

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=360KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

### 8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 8.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

### 8.5 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:


*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

Antenna 0

#### Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: FileHub  
 Tested Model: RP-WD007  
 Operating Condition: 802.11b Transmitting Low Channel-2412MHz(worst case)  
 Comment: DC 3.7V

Test Specification: Horizontal

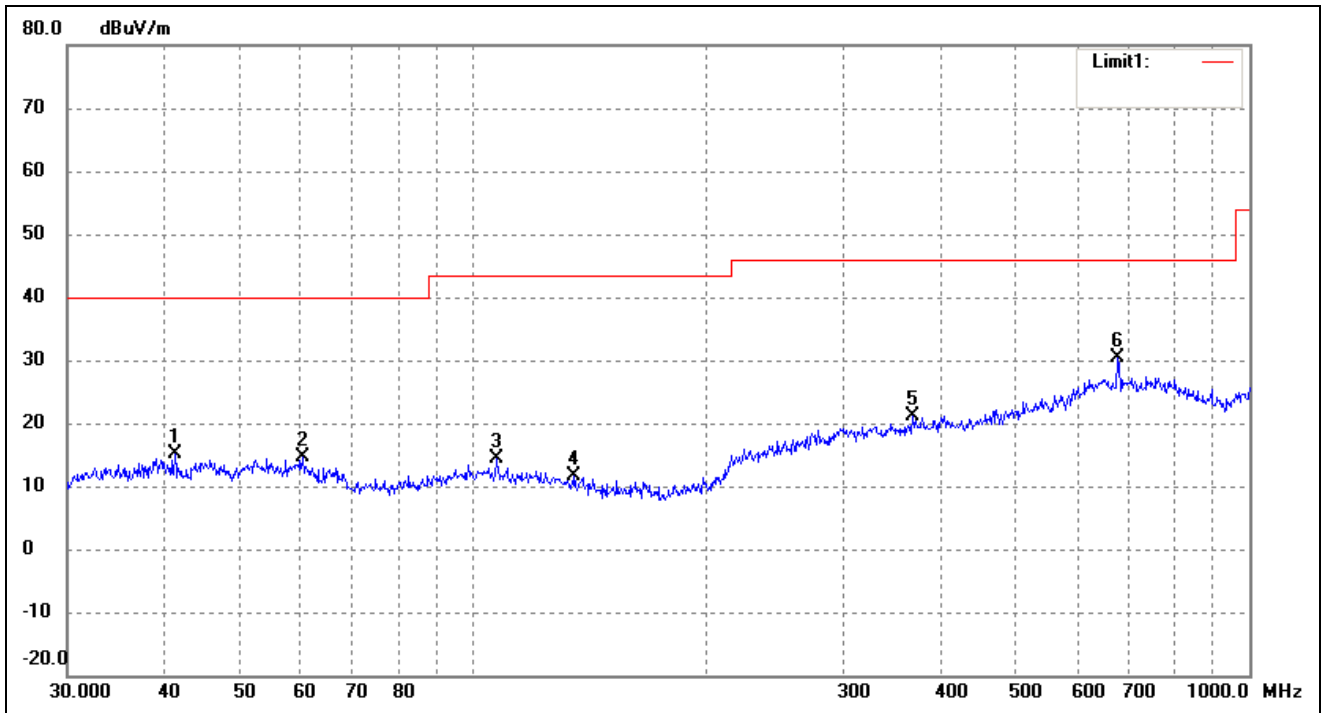

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	41.2765	31.64	-16.52	15.12	40.00	-24.88	265	100	peak
2	60.2801	31.11	-16.56	14.55	40.00	-25.45	96	100	peak
3	107.1337	30.91	-16.61	14.30	43.50	-29.20	228	100	peak
4	135.0319	29.52	-17.93	11.59	43.50	-31.91	92	100	peak
5	368.1116	29.98	-8.90	21.08	46.00	-24.92	61	100	peak
6	677.5798	30.91	-0.50	30.41	46.00	-15.59	256	100	peak

Test Specification: Vertical

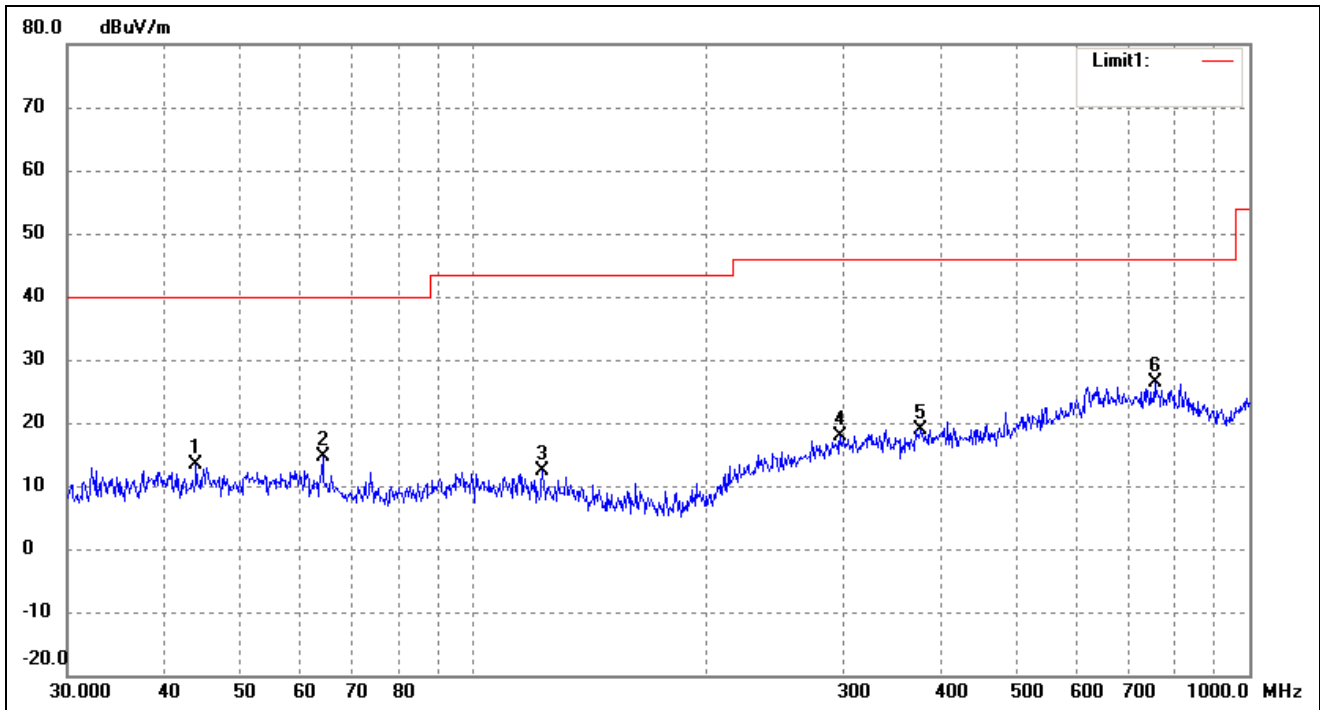


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	43.9658	29.98	-16.49	13.49	40.00	-26.51	309	100	peak
2	63.9828	31.91	-17.35	14.56	40.00	-25.44	97	100	peak
3	122.8340	29.27	-16.90	12.37	43.50	-31.13	53	100	peak
4	297.2241	27.54	-9.69	17.85	46.00	-28.15	101	100	peak
5	377.2591	27.81	-8.87	18.94	46.00	-27.06	96	100	peak
6	755.3873	26.75	-0.43	26.32	46.00	-19.68	133	100	peak

Operating Condition: 802.11b Transmitting Middle Channel-2437MHz(worst case)

Comment: DC 3.7V


Test Specification: Horizontal

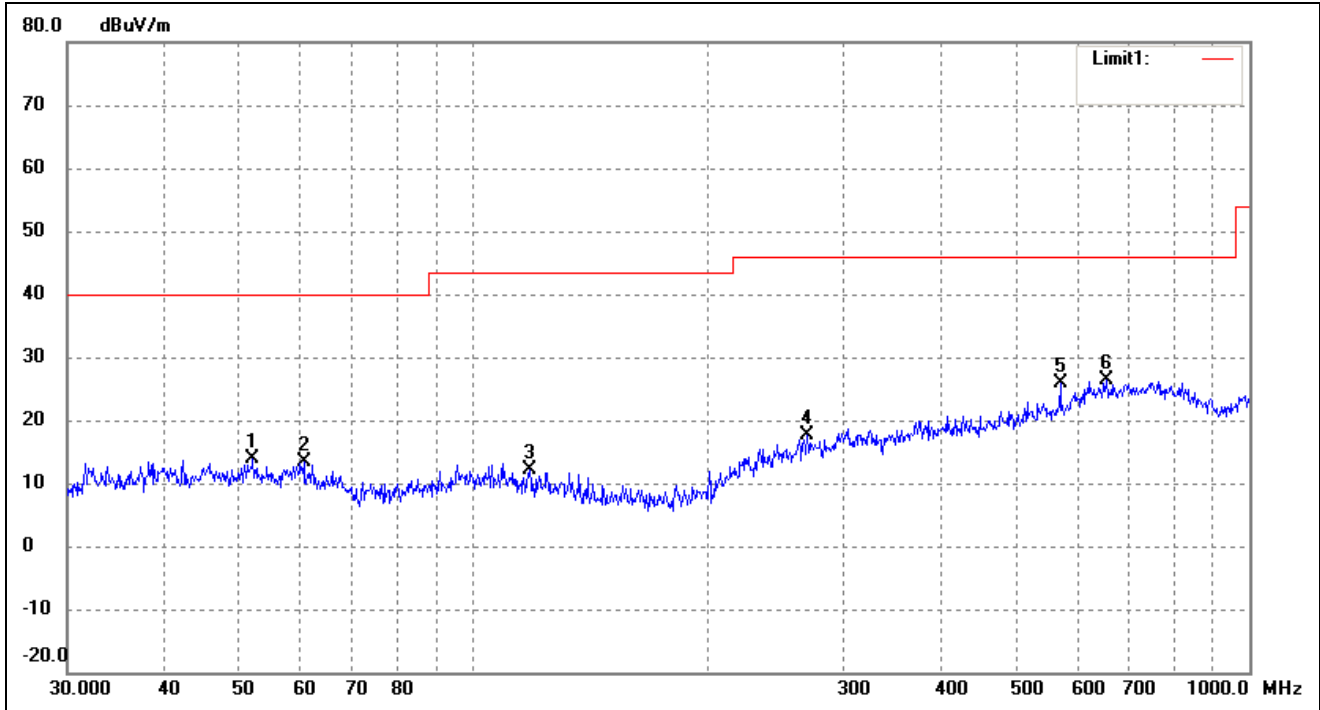

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	52.0251	30.27	-16.50	13.77	40.00	-26.23	160	100	peak
2	60.4919	29.96	-16.61	13.35	40.00	-26.65	313	100	peak
3	118.1861	28.76	-16.66	12.10	43.50	-31.40	90	100	peak
4	269.4284	28.78	-11.12	17.66	46.00	-28.34	269	100	peak
5	570.6100	30.21	-4.44	25.77	46.00	-20.23	313	100	peak
6	654.2318	27.82	-1.38	26.44	46.00	-19.56	336	100	peak



Test Specification: Vertical

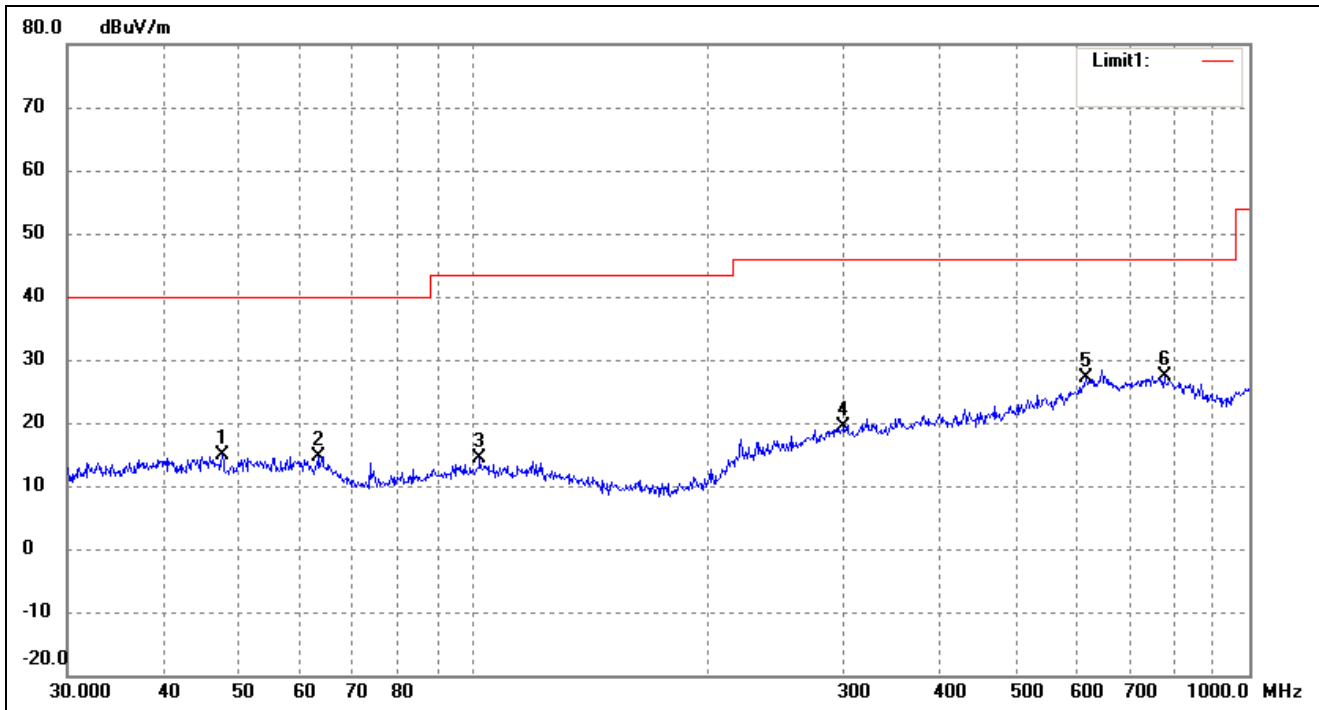


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	47.4918	31.28	-16.52	14.76	40.00	-25.24	327	100	peak
2	63.3132	31.93	-17.21	14.72	40.00	-25.28	156	100	peak
3	102.0014	30.91	-16.57	14.34	43.50	-29.16	91	100	peak
4	300.3673	29.07	-9.59	19.48	46.00	-26.52	188	100	peak
5	616.3718	28.58	-1.43	27.15	46.00	-18.85	126	100	peak
6	776.8778	29.10	-1.65	27.45	46.00	-18.55	311	100	peak

Operating Condition: 802.11b Transmitting High Channel-2462MHz(worst case)


Comment: DC 3.7V

Test Specification: Horizontal

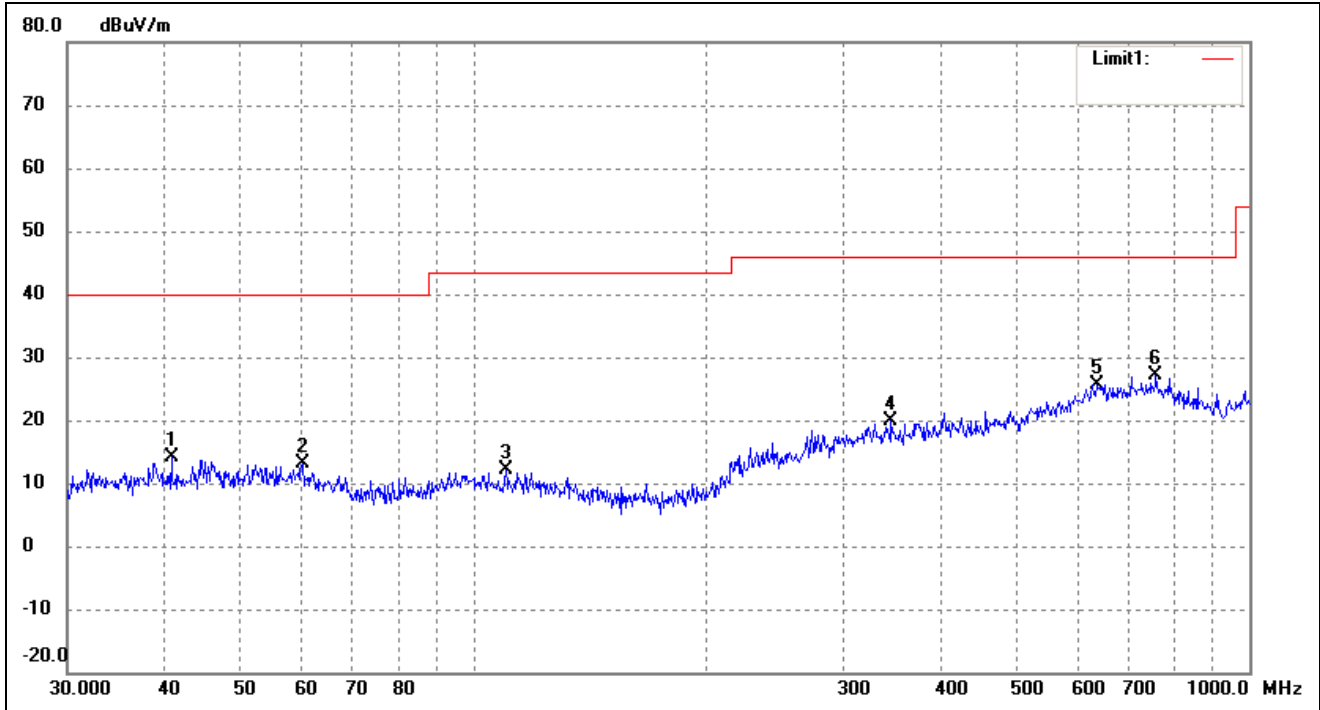

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	40.8446	30.64	-16.52	14.12	40.00	-25.88	166	100	peak
2	60.2801	29.67	-16.56	13.11	40.00	-26.89	97	100	peak
3	110.1816	28.70	-16.62	12.08	43.50	-31.42	141	100	peak
4	345.5952	29.23	-9.45	19.78	46.00	-26.22	103	100	peak
5	636.1340	26.83	-1.15	25.68	46.00	-20.32	335	100	peak
6	758.0408	27.78	-0.53	27.25	46.00	-18.75	148	100	peak

Test Specification: Vertical

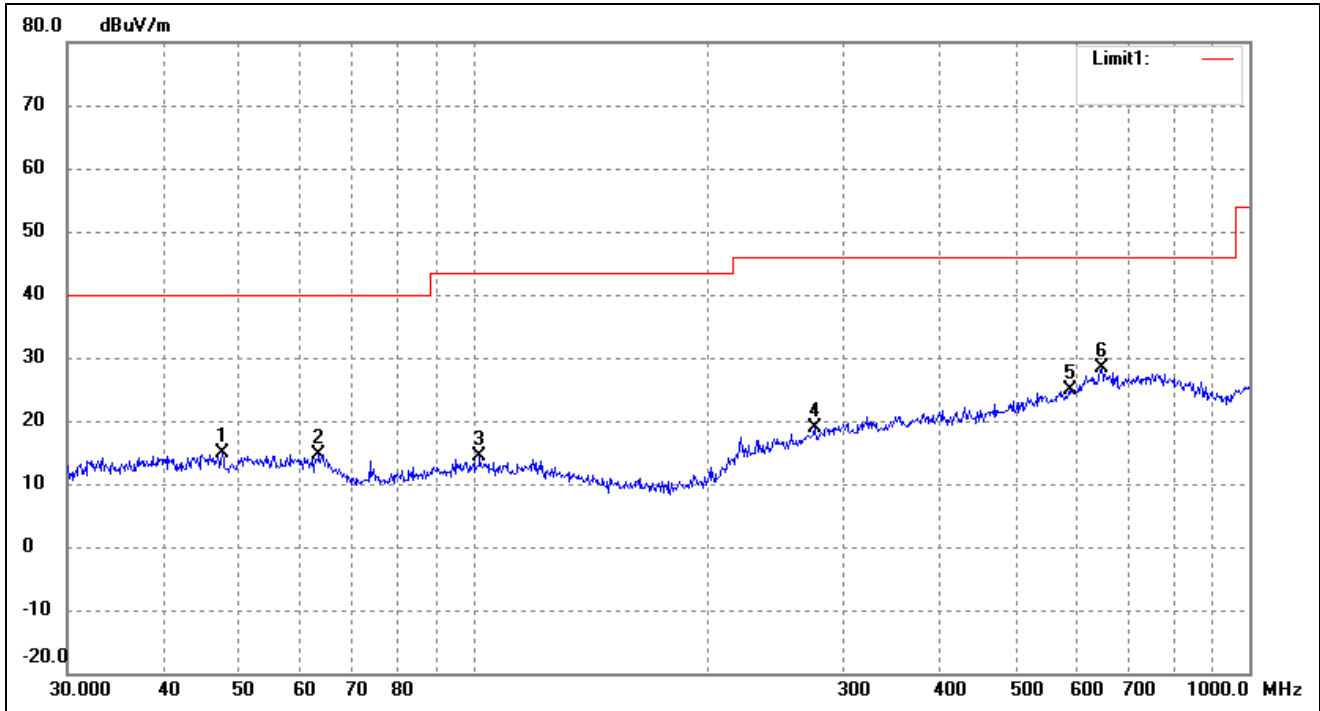

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	47.4918	31.28	-16.52	14.76	40.00	-25.24	97	100	peak
2	63.3132	31.93	-17.21	14.72	40.00	-25.28	152	100	peak
3	102.0014	30.91	-16.57	14.34	43.50	-29.16	103	100	peak
4	275.1570	29.66	-10.70	18.96	46.00	-27.04	140	100	peak
5	586.8437	27.55	-2.69	24.86	46.00	-21.14	289	100	peak
6	645.1195	29.49	-1.15	28.34	46.00	-17.66	139	100	peak

## Antenna 1


**Plot of Radiated Emissions Test Data (30MHz to 1GHz)**

 EUT: *FileHub*

 Tested Model: *RP-WD007*


 Operating Condition: *802.11b Transmitting Low Channel-2412MHz(worst case)*

 Comment: *DC 3.7V*

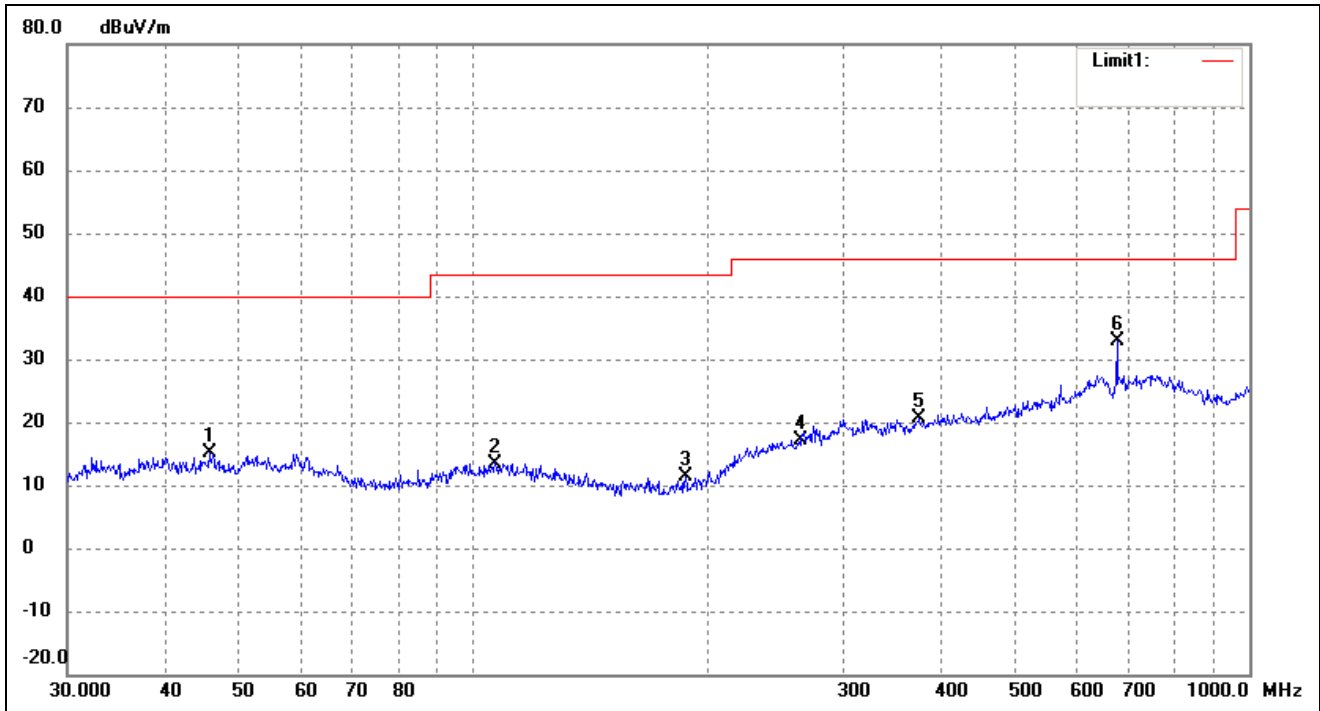 Test Specification: *Horizontal*


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	45.6948	31.70	-16.49	15.21	40.00	-24.79	303	100	peak
2	106.7587	30.11	-16.61	13.50	43.50	-30.00	96	100	peak
3	187.7530	30.08	-18.75	11.33	43.50	-32.17	144	100	peak
4	264.7457	28.66	-11.44	17.22	46.00	-28.78	94	100	peak
5	375.9385	29.53	-8.88	20.65	46.00	-25.35	169	100	peak
6	675.2080	33.46	-0.63	32.83	46.00	-13.17	331	100	peak

Test Specification: Vertical

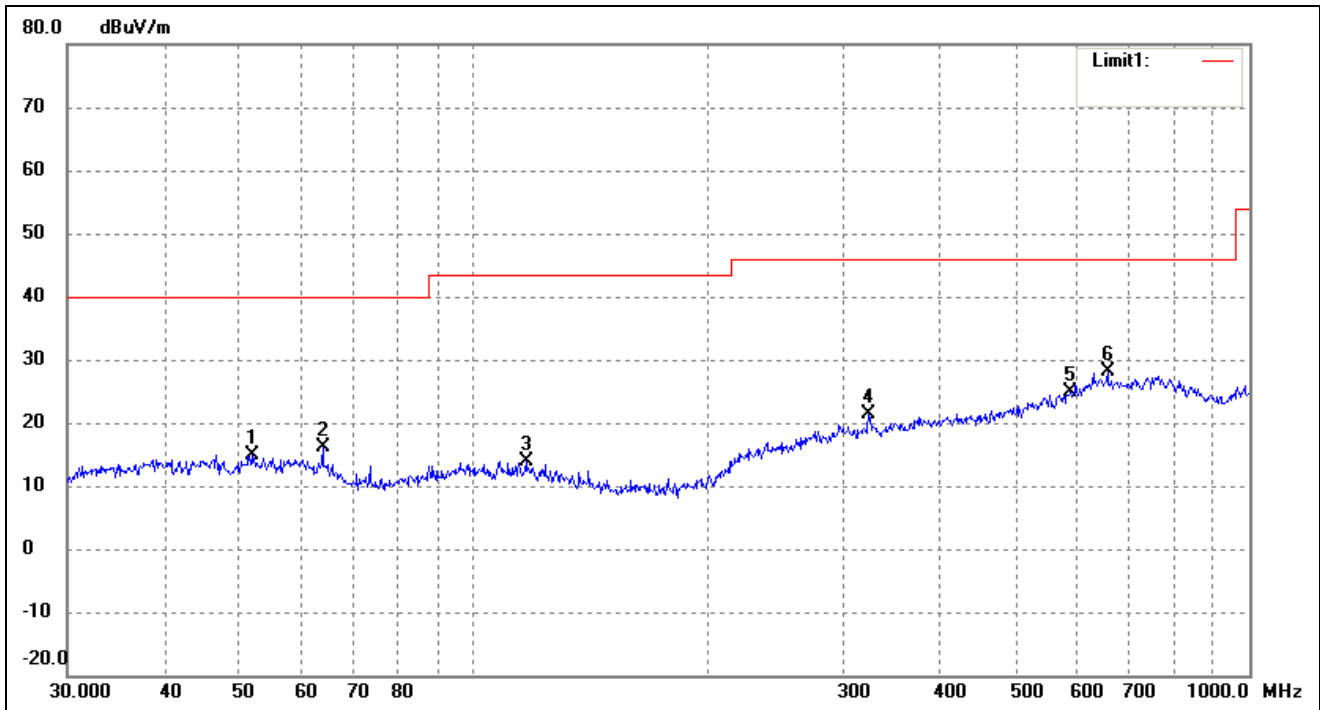


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	51.8430	31.40	-16.50	14.90	40.00	-25.10	323	100	peak
2	63.9828	33.53	-17.35	16.18	40.00	-23.82	97	100	peak
3	116.9495	30.58	-16.66	13.92	43.50	-29.58	341	100	peak
4	323.3204	30.80	-9.41	21.39	46.00	-24.61	95	100	peak
5	588.9051	27.17	-2.31	24.86	46.00	-21.14	312	100	peak
6	656.5300	29.45	-1.41	28.04	46.00	-17.96	298	100	peak

Operating Condition: 802.11b Transmitting Middle Channel-2437MHz(worst case)


Comment: DC 3.7V

Test Specification: Horizontal

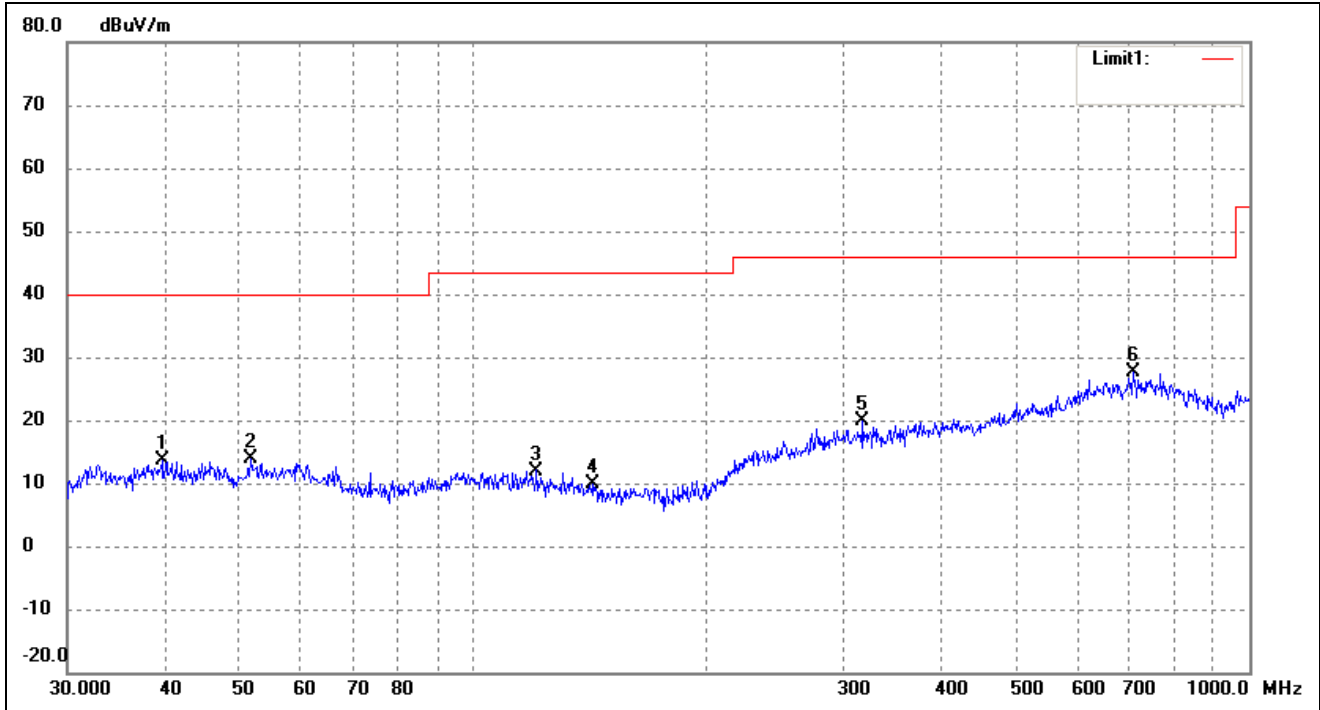

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	39.7147	30.21	-16.57	13.64	40.00	-26.36	249	100	peak
2	51.6616	30.31	-16.51	13.80	40.00	-26.20	138	100	peak
3	120.6991	28.73	-16.73	12.00	43.50	-31.50	72	100	peak
4	142.3244	28.29	-18.42	9.87	43.50	-33.63	341	100	peak
5	317.7011	29.33	-9.36	19.97	46.00	-26.03	50	100	peak
6	709.1823	29.14	-1.50	27.64	46.00	-18.36	333	100	peak

Test Specification: Vertical

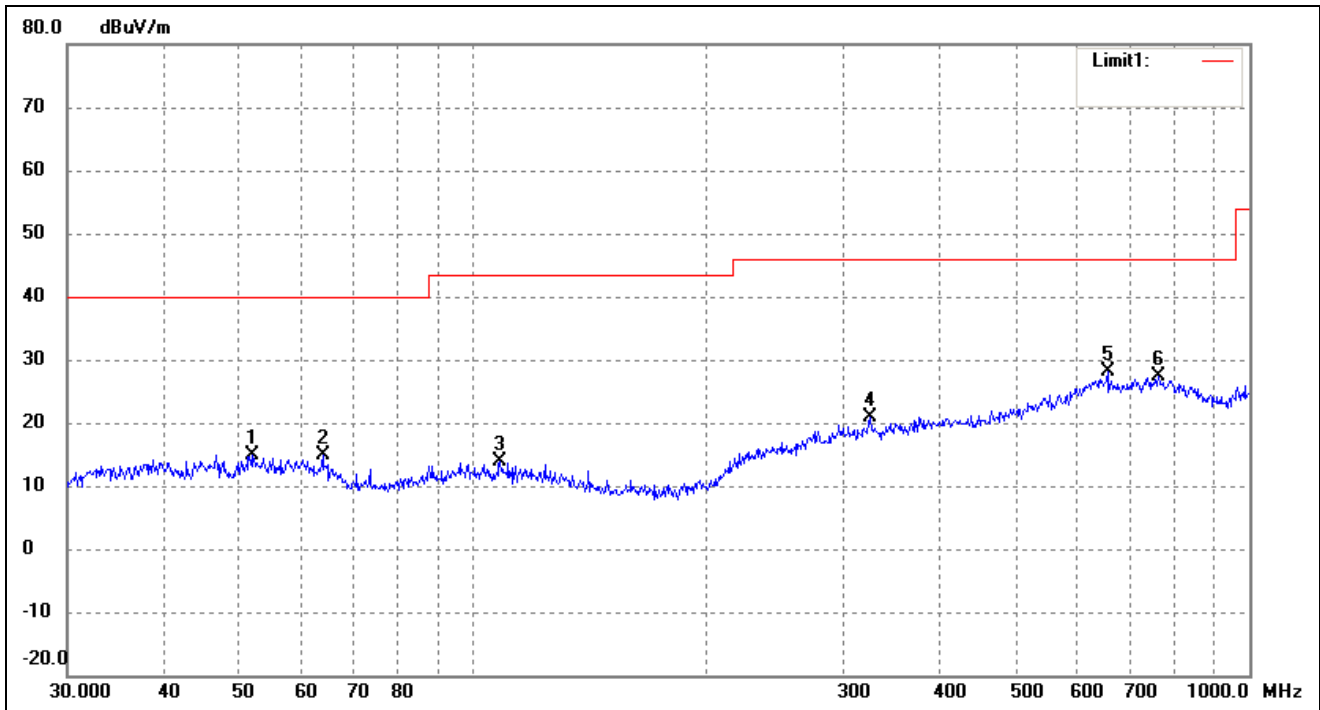


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	51.8430	31.40	-16.50	14.90	40.00	-25.10	280	100	peak
2	63.9827	32.17	-17.35	14.82	40.00	-25.18	187	100	peak
3	108.2667	30.39	-16.61	13.78	43.50	-29.72	55	100	peak
4	324.4560	30.27	-9.44	20.83	46.00	-25.17	347	100	peak
5	656.5299	29.45	-1.41	28.04	46.00	-17.96	130	100	peak
6	763.3757	28.06	-0.78	27.28	46.00	-18.72	332	100	peak

Operating Condition: 802.11b Transmitting High Channel-2462MHz(worst case)

Comment: DC 3.7V


Test Specification: Horizontal

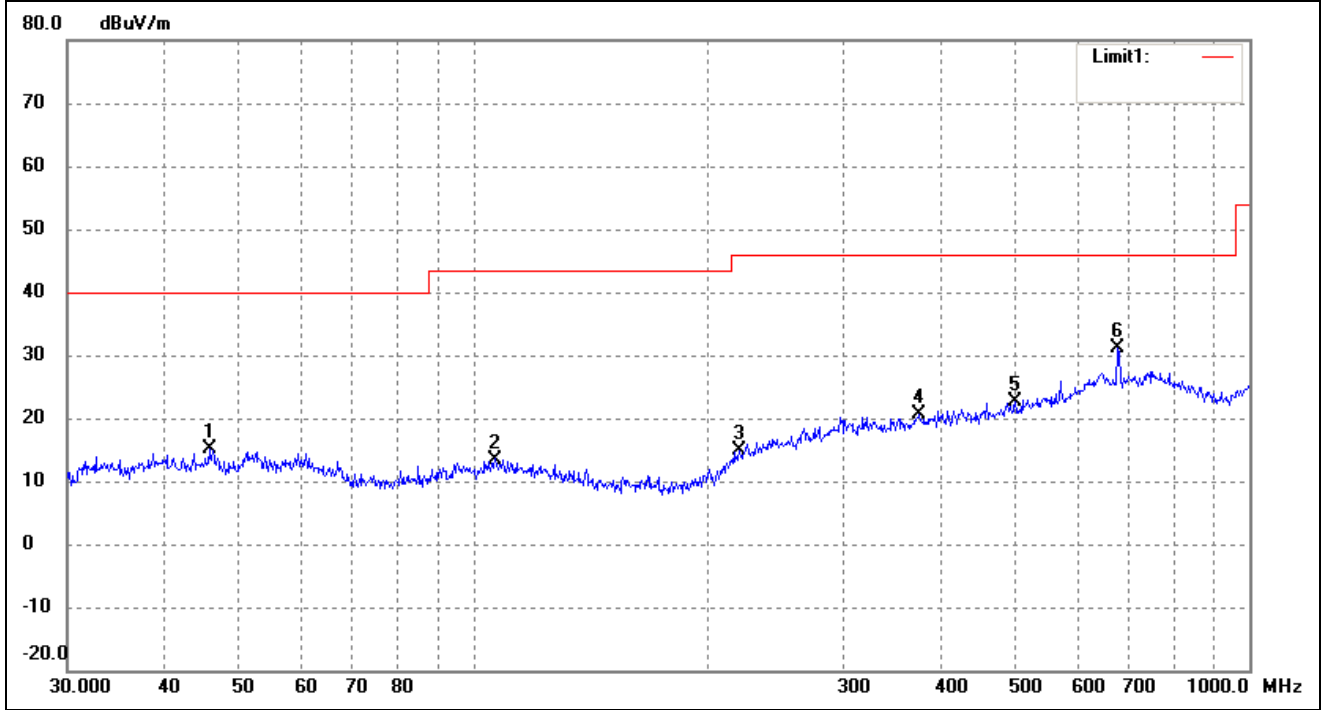

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	45.6948	31.70	-16.49	15.21	40.00	-24.79	182	100	peak
2	106.7587	30.11	-16.61	13.50	43.50	-30.00	117	100	peak
3	219.8449	28.80	-13.87	14.93	46.00	-31.07	123	100	peak
4	375.9385	29.53	-8.88	20.65	46.00	-25.35	128	100	peak
5	499.4247	28.40	-5.85	22.55	46.00	-23.45	342	100	peak
6	675.2080	31.65	-0.63	31.02	46.00	-14.98	294	100	peak



Test Specification: Vertical

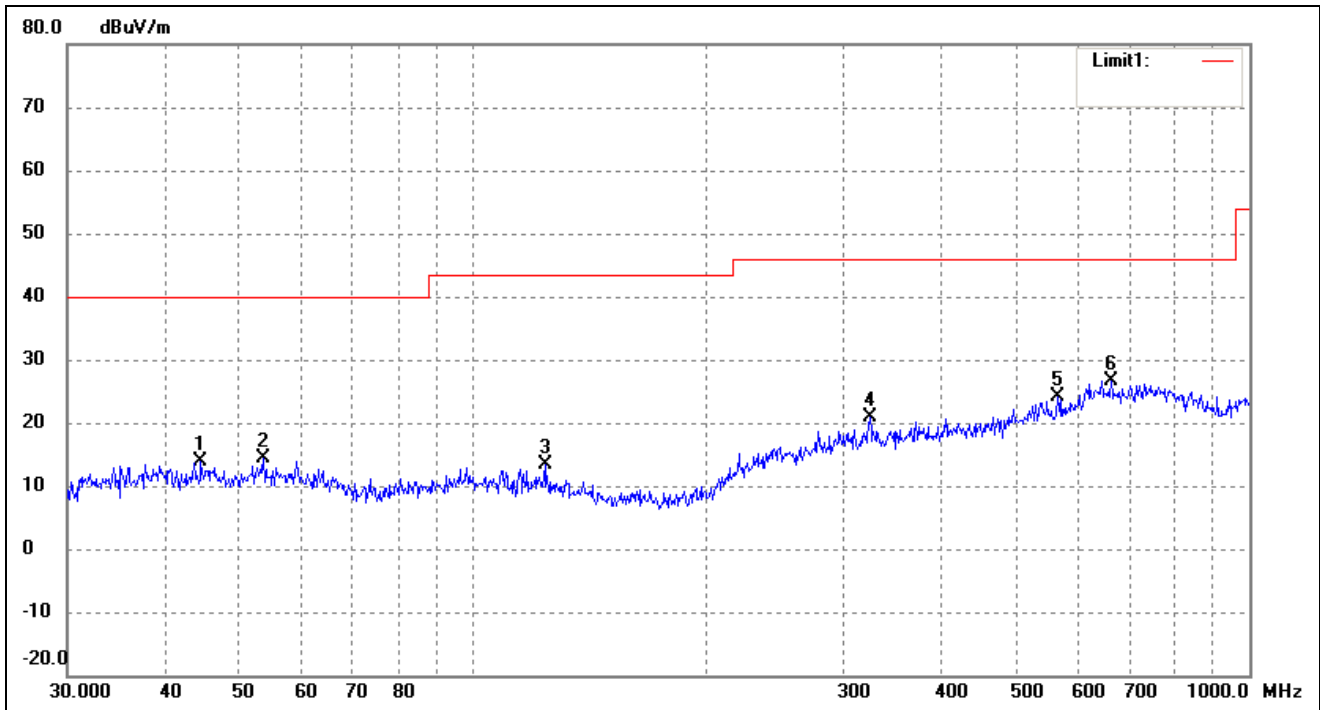

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	44.5868	30.32	-16.48	13.84	40.00	-26.16	97	100	peak
2	53.6932	30.75	-16.49	14.26	40.00	-25.74	195	100	peak
3	123.6985	30.24	-16.97	13.27	43.50	-30.23	84	100	peak
4	324.4561	30.27	-9.44	20.83	46.00	-25.17	94	100	peak
5	566.6223	28.69	-4.64	24.05	46.00	-21.95	326	100	peak
6	663.4729	27.94	-1.31	26.63	46.00	-19.37	143	100	peak

## Antenna 0

## Spurious Emissions Above 1GHz

Test Mode: 802.11b (worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.00	67.03	-3.87	63.16	74	-10.84	H	PK
4824.00	51.49	-3.87	47.62	54	-6.38	H	AV
7236.00	66.91	1.14	68.05	74	-5.95	H	PK
7236.00	44.57	1.19	45.76	54	-8.24	H	AV
4824.00	69.81	-3.86	65.95	74	-8.05	V	PK
4824.00	54.80	-3.86	50.94	54	-3.06	V	AV
7236.00	69.65	1.10	70.75	74	-3.25	V	PK
7236.00	45.45	1.10	46.55	54	-7.45	V	AV
Middle Channel-2437MHz							
4874.00	65.48	-3.74	61.74	74	-12.26	H	PK
4874.00	53.97	-3.74	50.23	54	-3.77	H	AV
7311.00	65.95	1.47	67.42	74	-6.58	H	PK
7311.00	46.67	1.47	48.14	54	-5.86	H	AV
4874.00	66.05	-3.74	62.31	74	-11.69	V	PK
4874.00	52.59	-3.74	48.85	54	-5.15	V	AV
7311.00	67.71	1.47	69.18	74	-4.82	V	PK
7311.00	45.89	1.47	47.36	54	-6.64	V	AV
High Channel-2462MHz							
4924.00	65.12	-3.59	61.53	74	-12.47	H	PK
4924.00	48.61	-3.59	45.02	54	-8.98	H	AV
7386.00	64.60	1.79	66.39	74	-7.61	H	PK
7386.00	48.64	1.79	50.43	54	-3.57	H	AV
4924.00	64.73	-3.59	61.14	74	-12.86	V	PK
4924.00	48.69	-3.59	45.10	54	-8.90	V	AV
7386.00	66.08	1.79	67.87	74	-6.13	V	PK
7386.00	48.14	1.79	49.93	54	-4.07	V	AV

## Antenna 1

## Spurious Emissions Above 1GHz

Test Mode: 802.11b (worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.00	64.74	-3.87	60.87	74	-13.13	H	PK
4824.00	54.13	-3.87	50.26	54	-3.74	H	AV
7236.00	66.93	1.14	68.07	74	-5.93	H	PK
7236.00	44.42	1.19	45.61	54	-8.39	H	AV
4824.00	66.23	-3.86	62.37	74	-11.63	V	PK
4824.00	52.31	-3.86	48.45	54	-5.55	V	AV
7236.00	65.48	1.10	66.58	74	-7.42	V	PK
7236.00	45.41	1.10	46.51	54	-7.49	V	AV
Middle Channel-2437MHz							
4874.00	66.10	-3.74	62.36	74	-11.64	H	PK
4874.00	51.57	-3.74	47.83	54	-6.17	H	AV
7311.00	64.70	1.47	66.17	74	-7.83	H	PK
7311.00	47.84	1.47	49.31	54	-4.69	H	AV
4874.00	66.17	-3.74	62.43	74	-11.57	V	PK
4874.00	55.31	-3.74	51.57	54	-2.43	V	AV
7311.00	64.44	1.47	65.91	74	-8.09	V	PK
7311.00	44.66	1.47	46.13	54	-7.87	V	AV
High Channel-2462MHz							
4924.00	67.50	-3.59	63.91	74	-10.09	H	PK
4924.00	50.31	-3.59	46.72	54	-7.28	H	AV
7386.00	67.18	1.79	68.97	74	-5.03	H	PK
7386.00	48.60	1.79	50.39	54	-3.61	H	AV
4924.00	64.83	-3.59	61.24	74	-12.76	V	PK
4924.00	46.93	-3.59	43.34	54	-10.66	V	AV
7386.00	66.05	1.79	67.84	74	-6.16	V	PK
7386.00	47.87	1.79	49.66	54	-4.34	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

---

## 9. Out of Band Emissions

---

### 9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 9.2 Test Procedure

According to the KDB 558074D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v04, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW  $\geq$  300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

### 9.3 Environmental Conditions


Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

### 9.4 Summary of Test Results/Plots

Antenna 0

802.11b-Lowest Bandedge


Horizontal (Worst case)

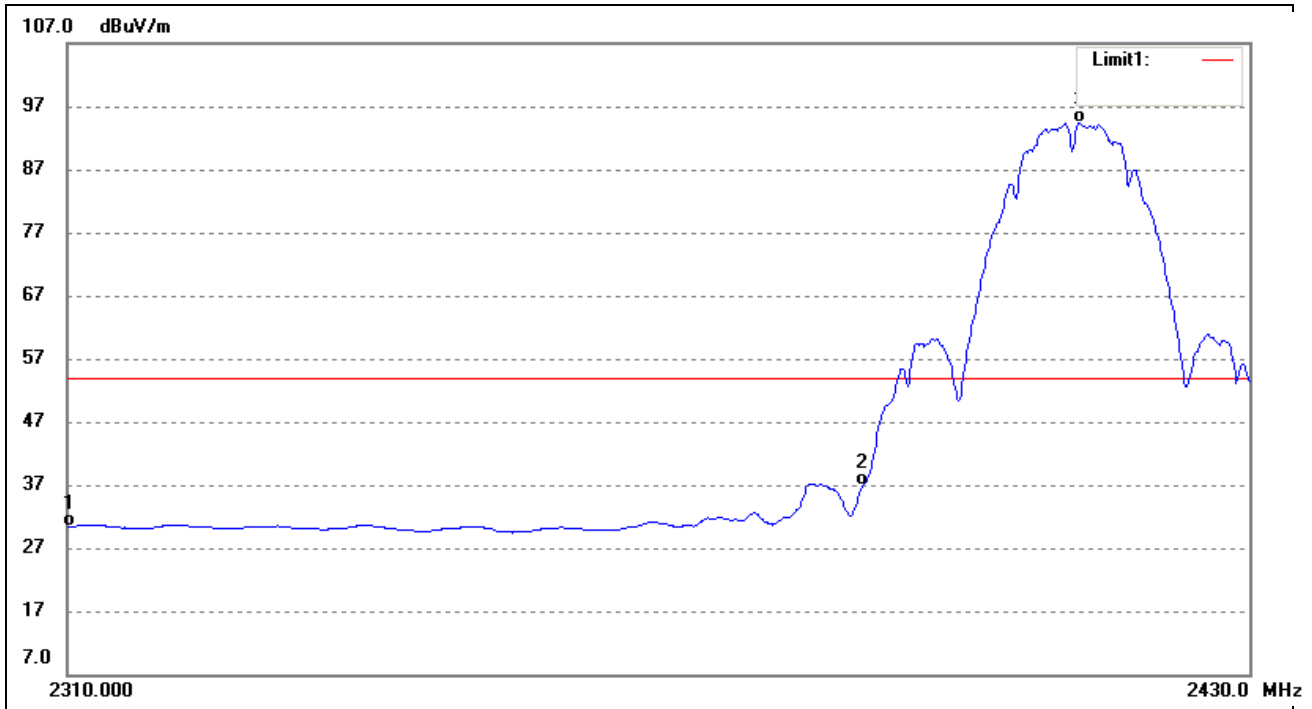

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.00	36.72	-6.38	30.34	54.00	-23.66	Average Detector
	2310.00	51.01	-6.38	44.63	74.00	-29.37	Peak Detector
2	2390.00	44.21	-7.26	36.95	54.00	-17.05	Average Detector
	2390.00	55.06	-7.26	47.80	74.00	-26.20	Peak Detector
3	2412.34	101.83	-7.41	94.42	/	/	Average Detector
	2413.08	107.13	-7.40	99.73	/	/	Peak Detector

## 802.11b-Highest Bandedge


Horizontal (Worst case)

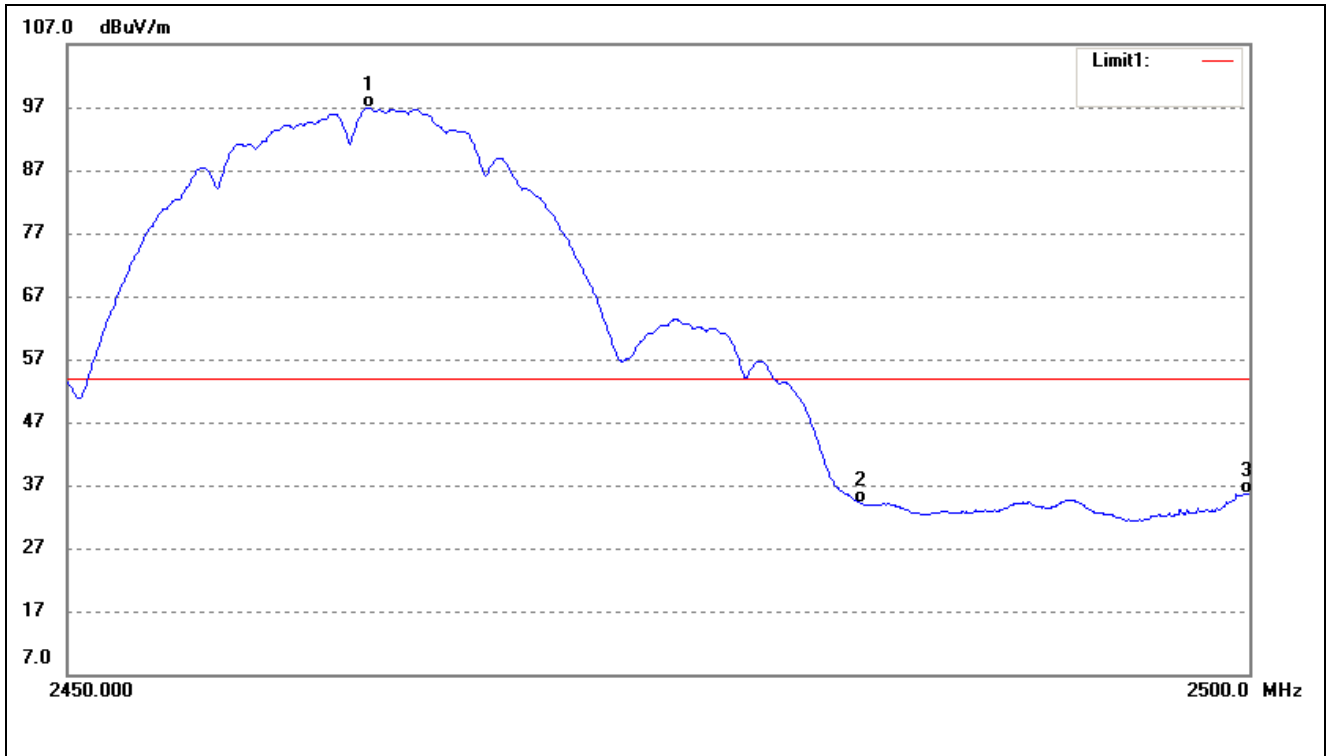

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.65	104.25	-7.31	96.94	/	/	Average Detector
	2463.35	109.05	-7.31	101.74	/	/	Peak Detector
2	2483.50	41.29	-7.28	34.01	54.00	-19.99	Average Detector
	2483.50	53.31	-7.28	46.03	74.00	-27.97	Peak Detector
3	2500.00	42.80	-7.25	35.55	54.00	-18.45	Average Detector
	2500.00	54.87	-7.25	47.62	74.00	-26.38	Peak Detector

## 802.11g-Lowest Bandedge


Horizontal (Worst case)

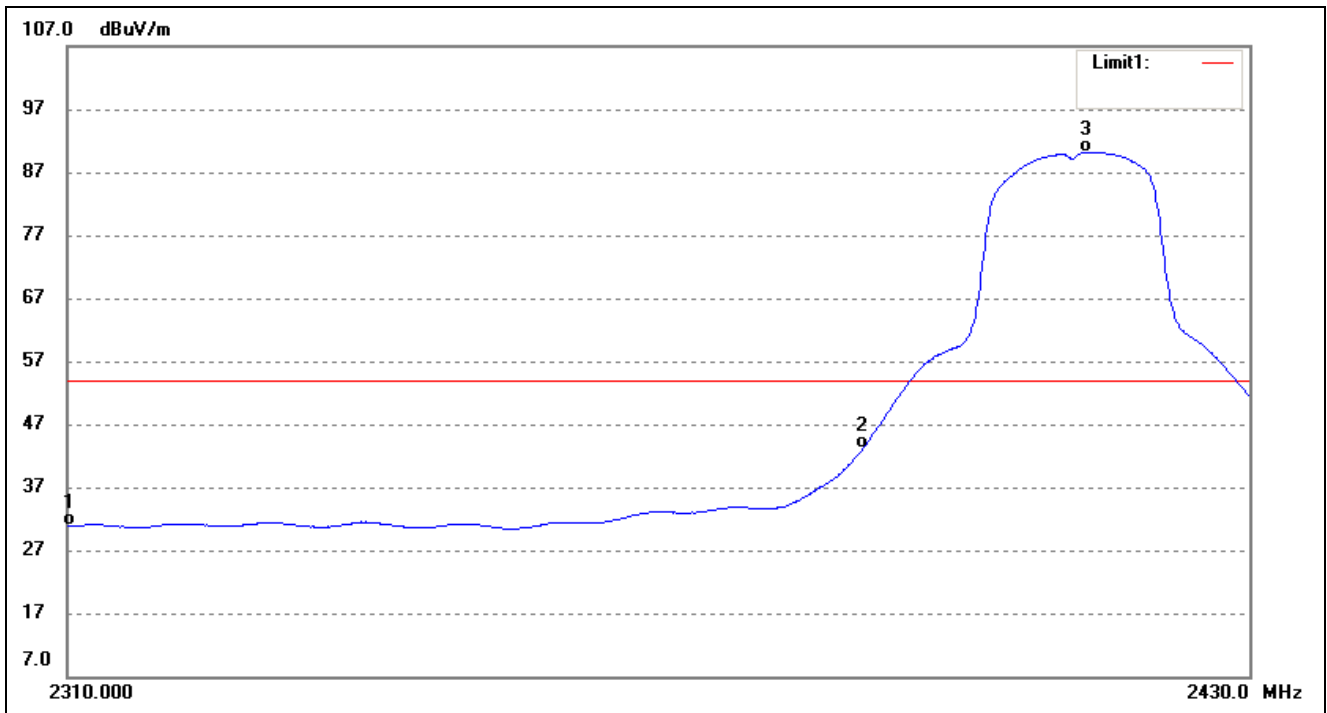

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.00	37.15	-6.38	30.77	54.00	-23.23	Average Detector
	2310.00	49.97	-6.38	43.59	74.00	-30.41	Peak Detector
2	2390.00	50.47	-7.26	43.21	54.00	-10.79	Average Detector
	2390.00	70.06	-7.26	62.80	74.00	-11.20	Peak Detector
3	2413.08	97.52	-7.40	90.12	/	/	Average Detector
	2412.95	108.40	-7.40	101.00	/	/	Peak Detector

802.11g-Highest Bandedge

Horizontal (Worst case)

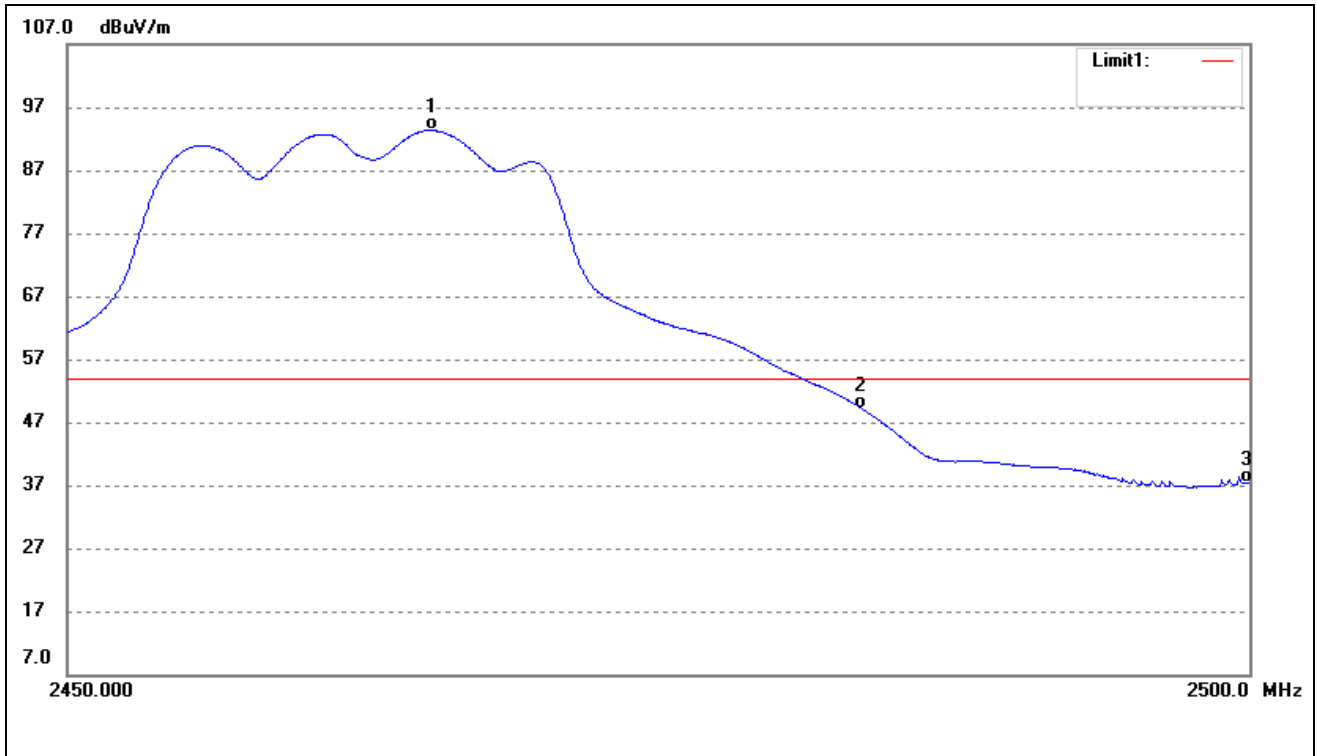


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2465.29	100.65	-7.31	93.34	/	/	Average Detector
	2465.44	110.95	-7.31	103.64	/	/	Peak Detector
2	2483.50	56.37	-7.28	49.09	54.00	-4.91	Average Detector
	2483.50	78.71	-7.28	71.43	74.00	-2.57	Peak Detector
3	2500.00	44.74	-7.25	37.49	54.00	-16.51	Average Detector
	2500.00	66.97	-7.25	59.72	74.00	-14.28	Peak Detector



## 802.11n-HT20-Lowest Bandedge


Horizontal (Worst case)

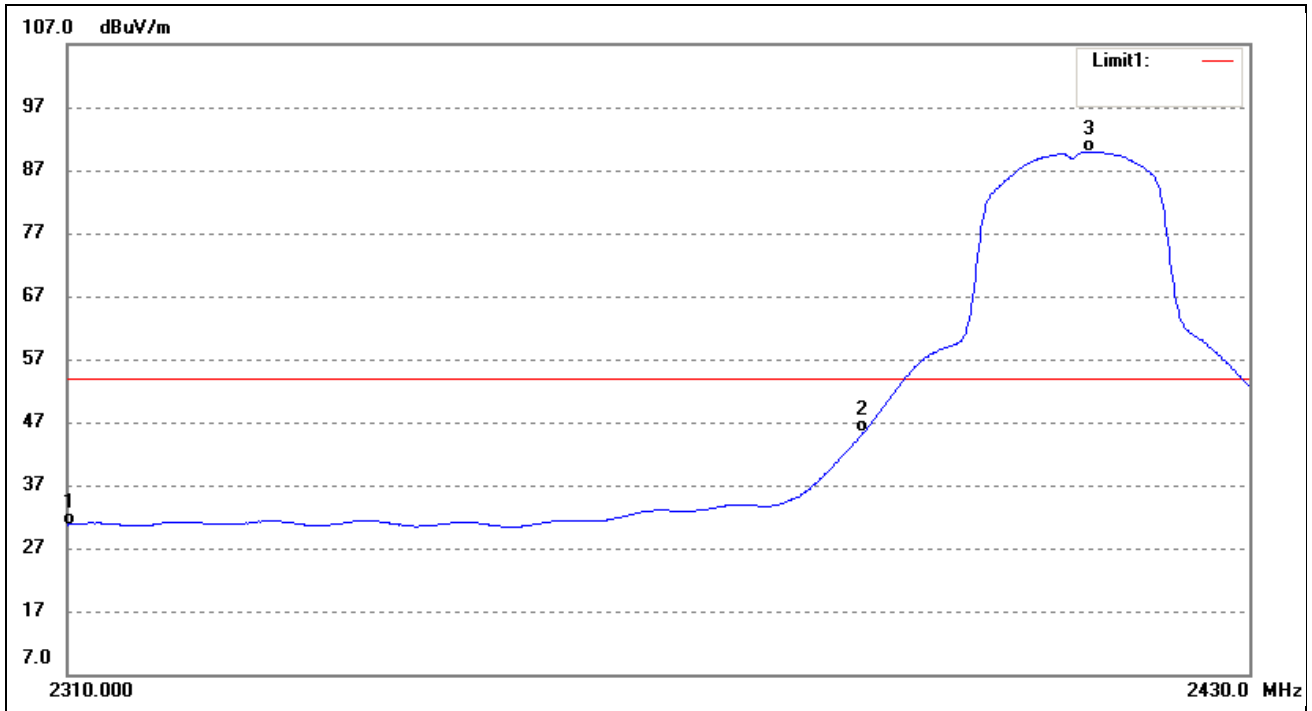

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.00	37.13	-6.38	30.75	54.00	-23.25	Average Detector
	2310.00	49.77	-6.38	43.39	74.00	-30.61	Peak Detector
2	2390.00	52.54	-7.26	45.28	54.00	-8.72	Average Detector
	2390.00	70.34	-7.26	63.08	74.00	-10.92	Peak Detector
3	2413.44	97.27	-7.40	89.87	/	/	Average Detector
	2415.16	108.13	-7.40	100.73	/	/	Peak Detector

802.11n-HT20-Highest Bandedge


Horizontal (Worst case)

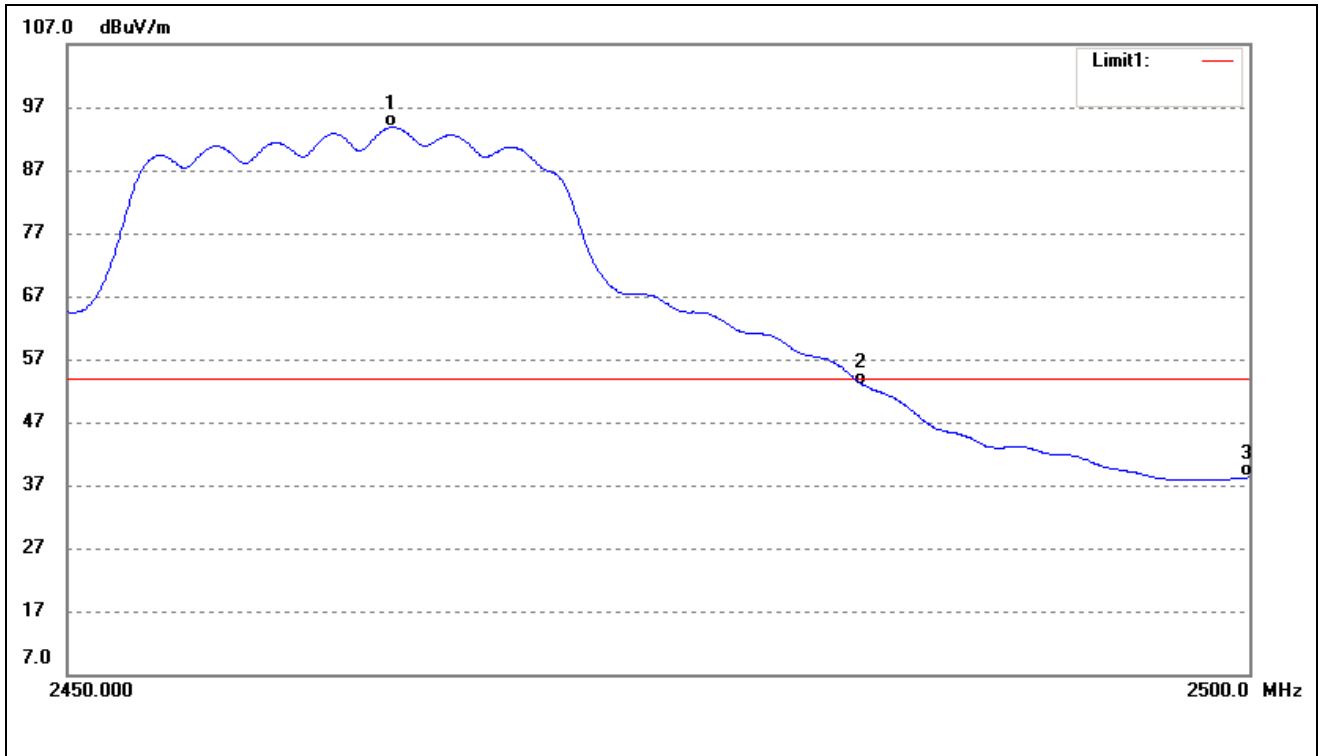

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.60	101.14	-7.31	93.83	/	/	Average Detector
	2463.55	110.93	-7.31	103.62	/	/	Peak Detector
2	2483.50	60.26	-7.28	52.98	54.00	-1.02	Average Detector
	2483.50	79.37	-7.28	72.09	74.00	-1.91	Peak Detector
3	2500.00	45.53	-7.25	38.28	54.00	-15.72	Average Detector
	2500.00	57.74	-7.25	50.49	74.00	-23.51	Peak Detector

## 802.11n-HT40-Lowest Bandedge


Horizontal (Worst case)

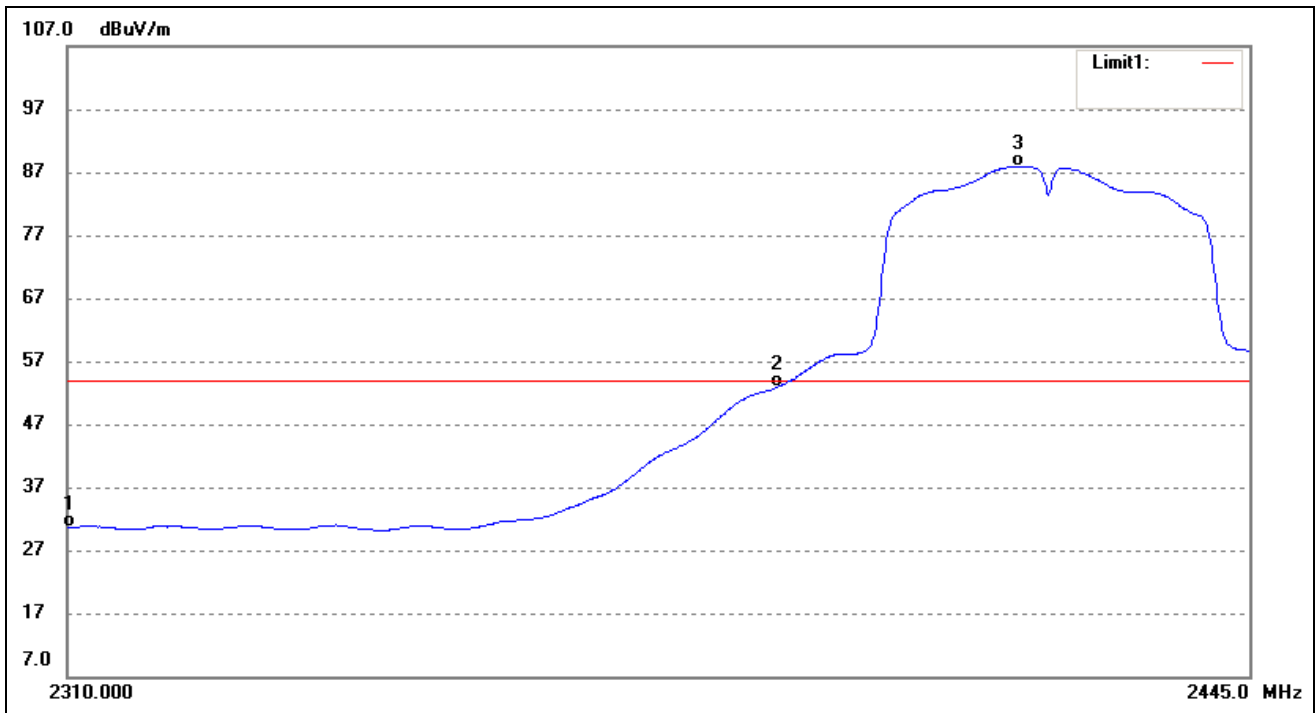

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.00	36.89	-6.38	30.51	54.00	-23.49	Average Detector
	2310.00	49.75	-6.38	43.37	74.00	-30.63	Peak Detector
2	2390.00	60.11	-7.26	52.85	54.00	-1.15	Average Detector
	2390.00	75.31	-7.26	68.05	74.00	-5.95	Peak Detector
3	2418.07	95.29	-7.39	87.90	/	/	Average Detector
	2417.80	106.63	-7.39	99.24	/	/	Peak Detector


802.11n-HT40-Highest Bandedge

Horizontal (Worst case)

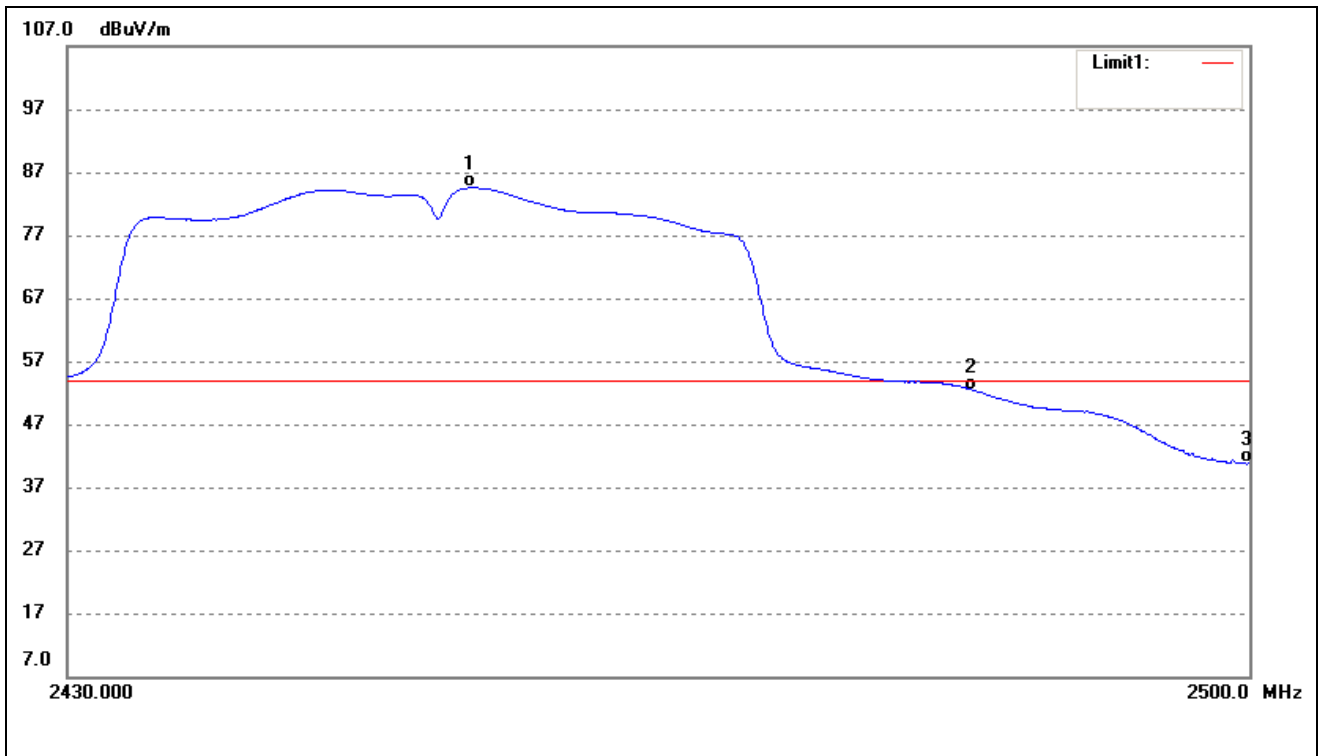

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2453.65	91.89	-7.33	84.56	/	/	Average Detector
	2445.09	103.22	-7.35	95.87	/	/	Peak Detector
2	2483.50	59.65	-7.28	52.37	54.00	-1.63	Average Detector
	2483.50	76.38	-7.28	69.10	74.00	-4.90	Peak Detector
3	2500.00	48.01	-7.25	40.76	54.00	-13.24	Average Detector
	2500.00	65.18	-7.25	57.93	74.00	-16.07	Peak Detector


Antenna 1  
 802.11b-Lowest Bandedge  
 Horizontal (Worst case)

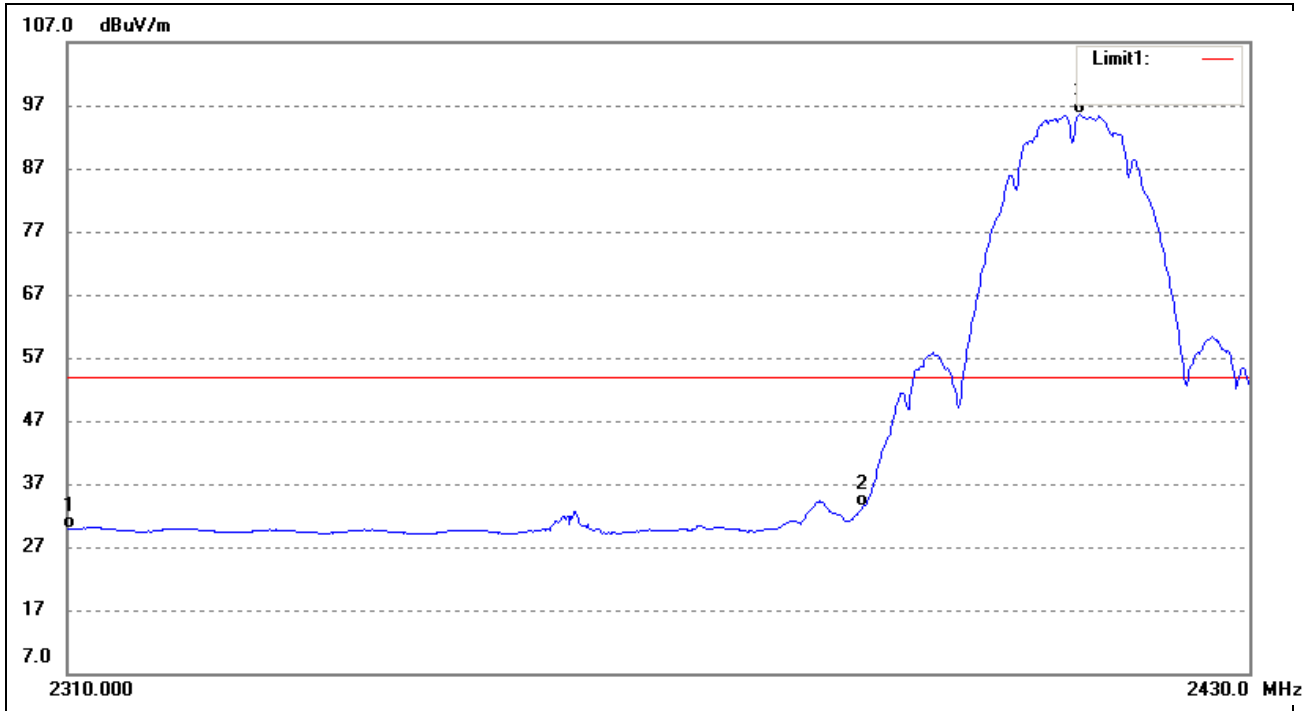

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.00	36.15	-6.38	29.77	54.00	-24.23	Average Detector
	2310.00	48.22	-6.38	41.84	74.00	-32.16	Peak Detector
2	2390.00	40.61	-7.26	33.35	54.00	-20.65	Average Detector
	2390.00	52.02	-7.26	44.76	74.00	-29.24	Peak Detector
3	2412.34	103.03	-7.41	95.62	/	/	Average Detector
	2413.08	107.75	-7.40	100.35	/	/	Peak Detector

802.11b-Highest Bandedge


Horizontal (Worst case)

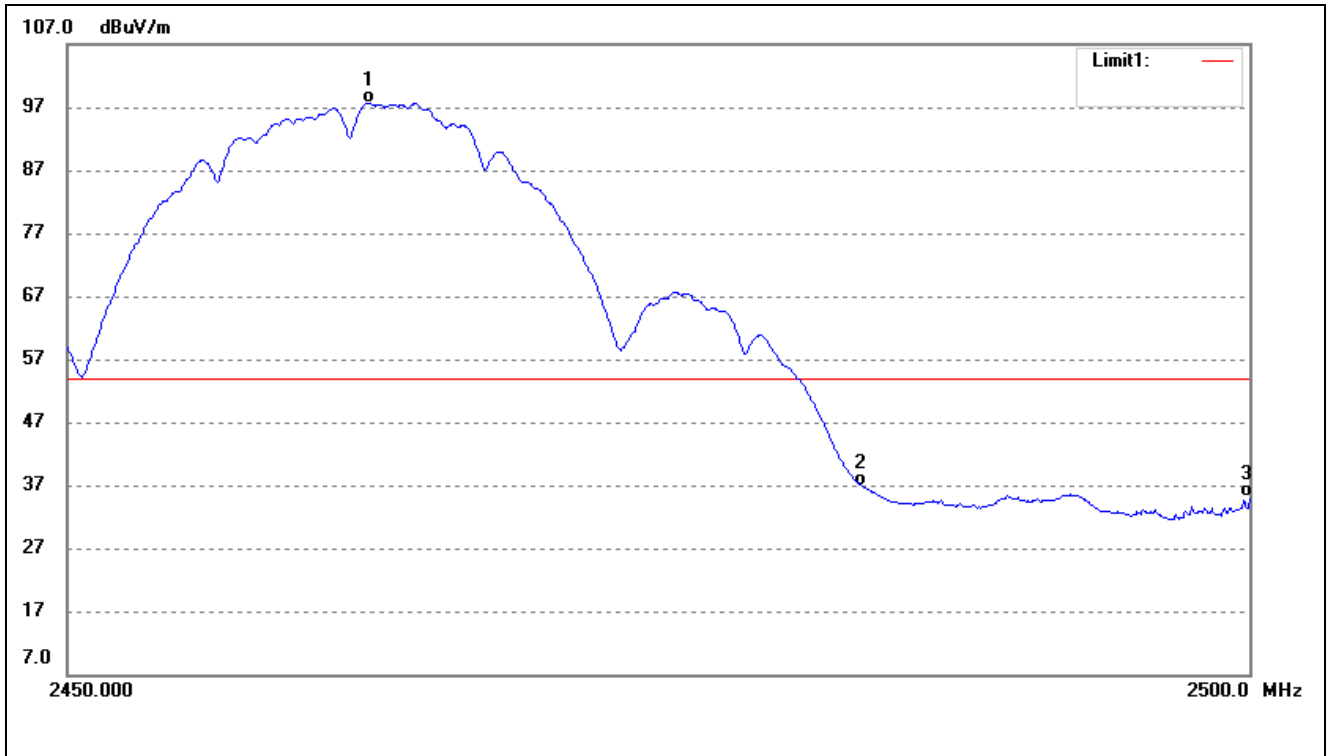

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.65	105.05	-7.31	97.74	/	/	Average Detector
	2463.30	110.18	-7.31	102.87	/	/	Peak Detector
2	2483.50	44.09	-7.28	36.81	54.00	-17.19	Average Detector
	2483.50	59.61	-7.28	52.33	74.00	-21.67	Peak Detector
3	2500.00	42.35	-7.25	35.10	54.00	-18.90	Average Detector
	2500.00	58.94	-7.25	51.69	74.00	-22.31	Peak Detector

## 802.11g-Lowest Bandedge


Horizontal (Worst case)

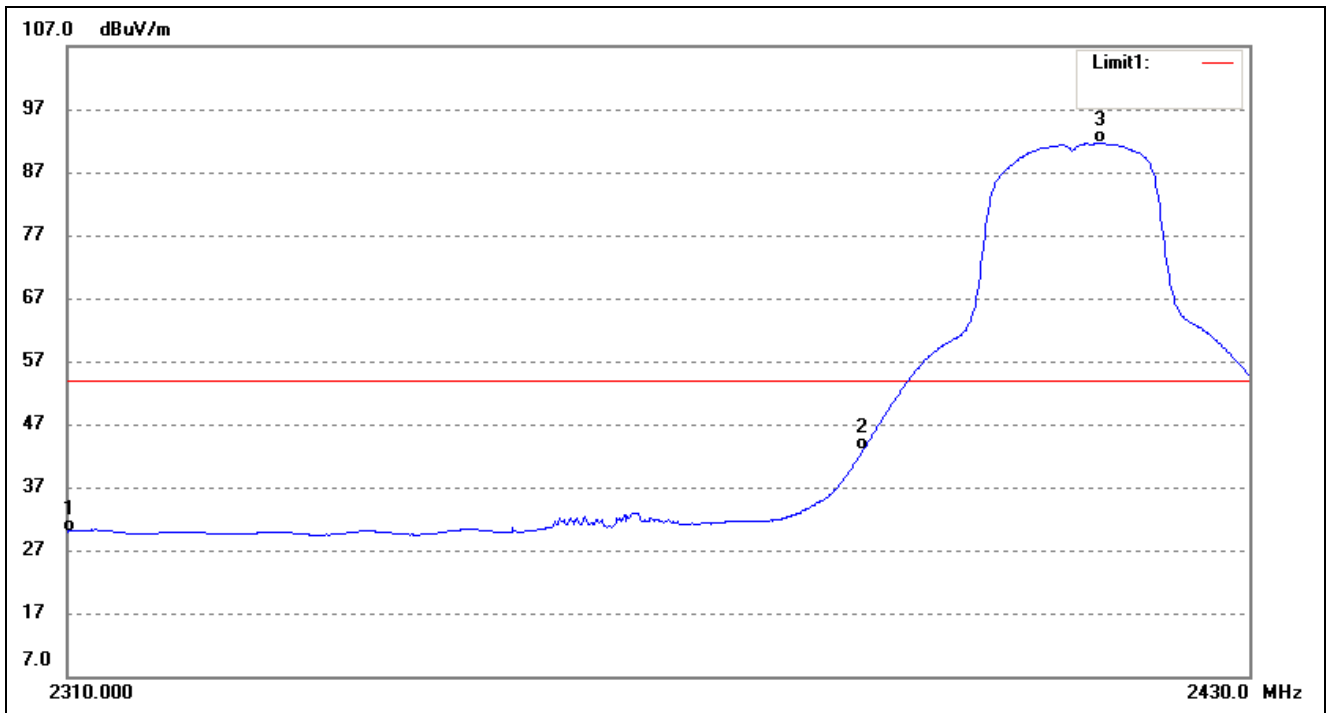

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.00	36.37	-6.38	29.99	54.00	-24.01	Average Detector
	2310.00	49.22	-6.38	42.84	74.00	-31.16	Peak Detector
2	2390.00	50.13	-7.26	42.87	54.00	-11.13	Average Detector
	2390.00	70.19	-7.26	62.93	74.00	-11.07	Peak Detector
3	2414.54	98.94	-7.40	91.54	/	/	Average Detector
	2414.79	110.93	-7.40	103.53	/	/	Peak Detector

## 802.11g-Highest Bandedge

Horizontal (Worst case)

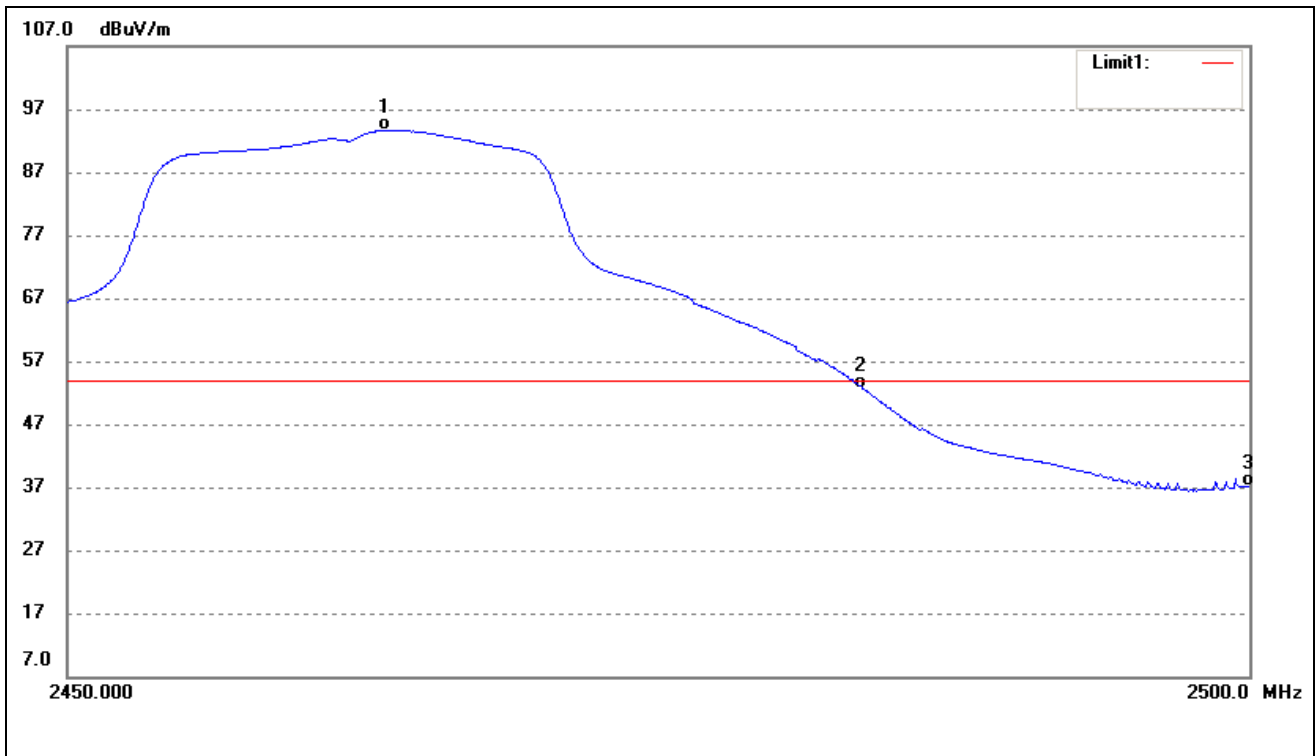


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.35	100.93	-7.31	93.62	/	/	Average Detector
	2464.79	110.92	-7.31	103.61	/	/	Peak Detector
2	2483.50	59.99	-7.28	52.71	54.00	-1.29	Average Detector
	2483.50	75.85	-7.28	68.57	74.00	-5.43	Peak Detector
3	2500.00	44.43	-7.25	37.18	54.00	-16.82	Average Detector
	2500.00	56.44	-7.25	49.19	74.00	-24.81	Peak Detector



## 802.11n-HT20-Lowest Bandedge


Horizontal (Worst case)

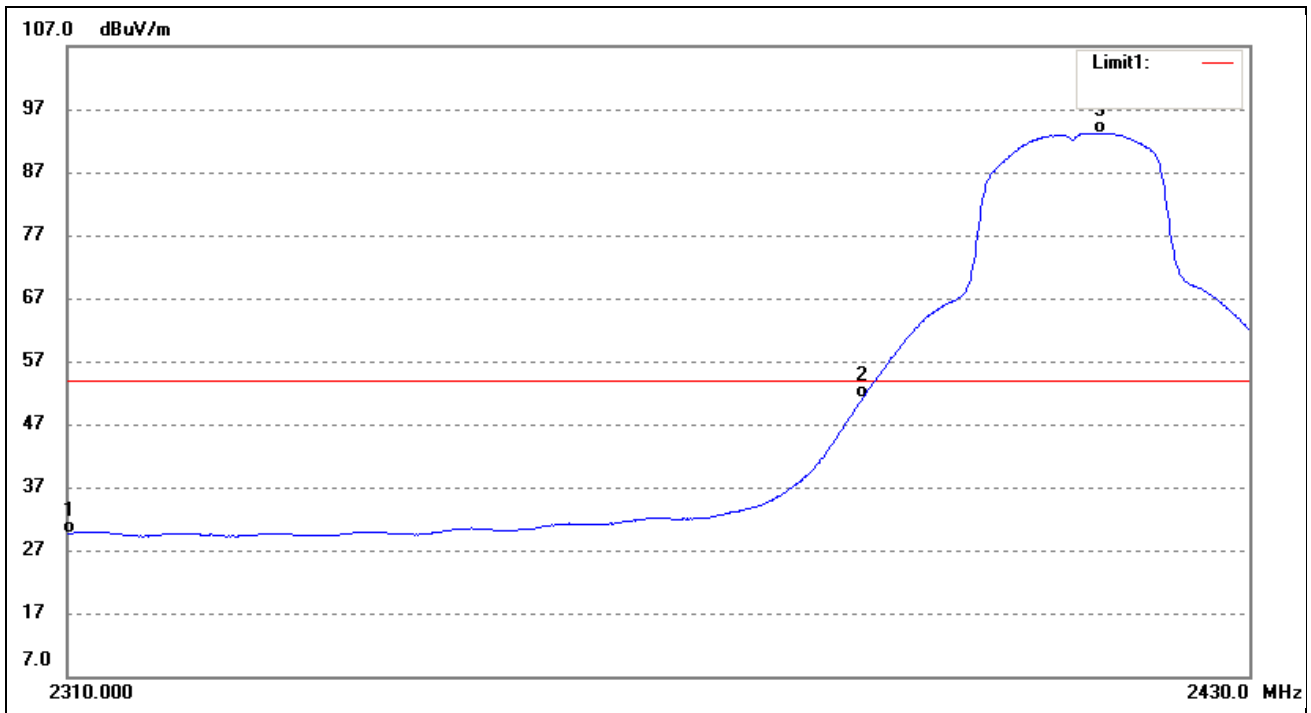

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.00	36.04	-6.38	29.66	54.00	-24.34	Average Detector
	2310.00	48.87	-6.38	42.49	74.00	-31.51	Peak Detector
2	2390.00	58.43	-7.26	51.17	54.00	-2.83	Average Detector
	2390.00	79.20	-7.26	71.94	74.00	-2.06	Peak Detector
3	2414.54	100.61	-7.40	93.21	/	/	Average Detector
	2414.05	110.97	-7.40	103.57	/	/	Peak Detector

## 802.11n-HT20-Highest Bandedge


Horizontal (Worst case)

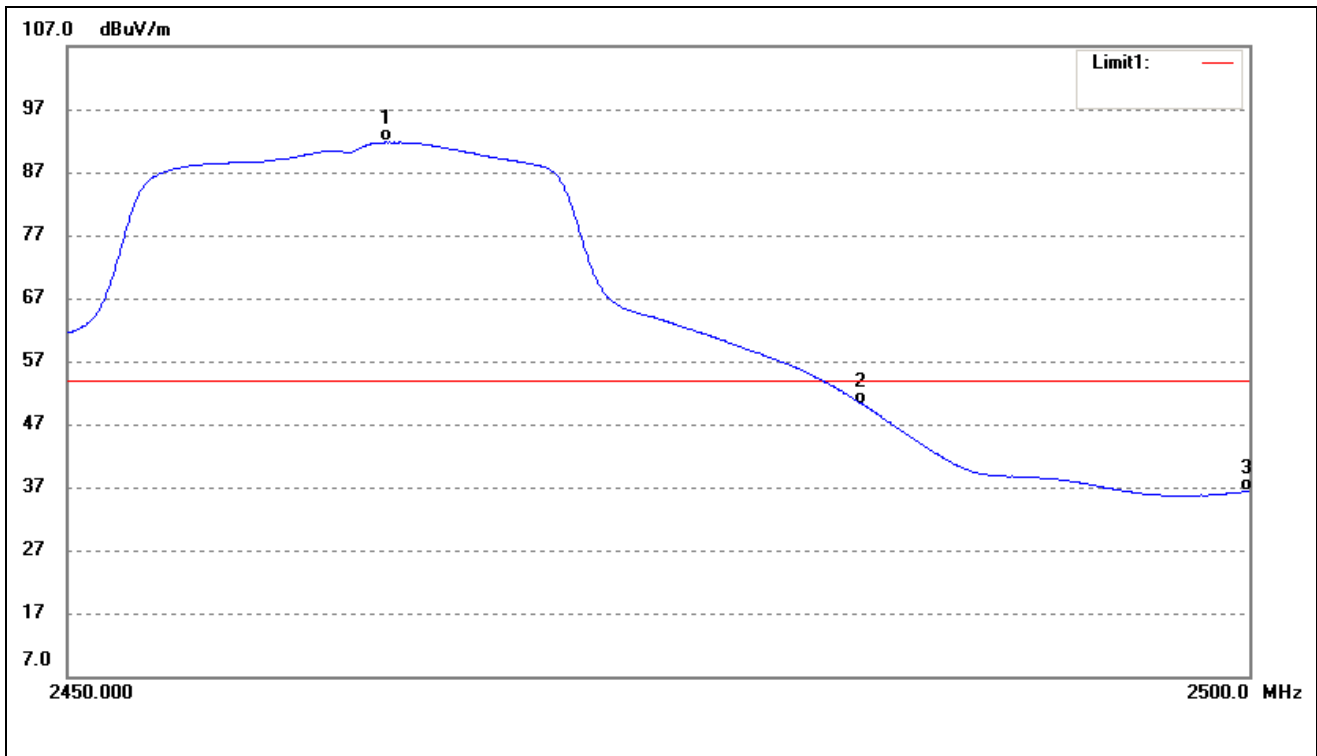

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.40	99.08	-7.31	91.77	/	/	Average Detector
	2463.65	110.93	-7.31	103.62	/	/	Peak Detector
2	2483.50	57.41	-7.28	50.13	54.00	-3.87	Average Detector
	2483.50	79.10	-7.28	71.82	74.00	-2.18	Peak Detector
3	2500.00	43.66	-7.25	36.41	54.00	-17.59	Average Detector
	2500.00	56.86	-7.25	49.61	74.00	-24.39	Peak Detector


## 802.11n-HT40-Lowest Bandedge

Horizontal (Worst case)

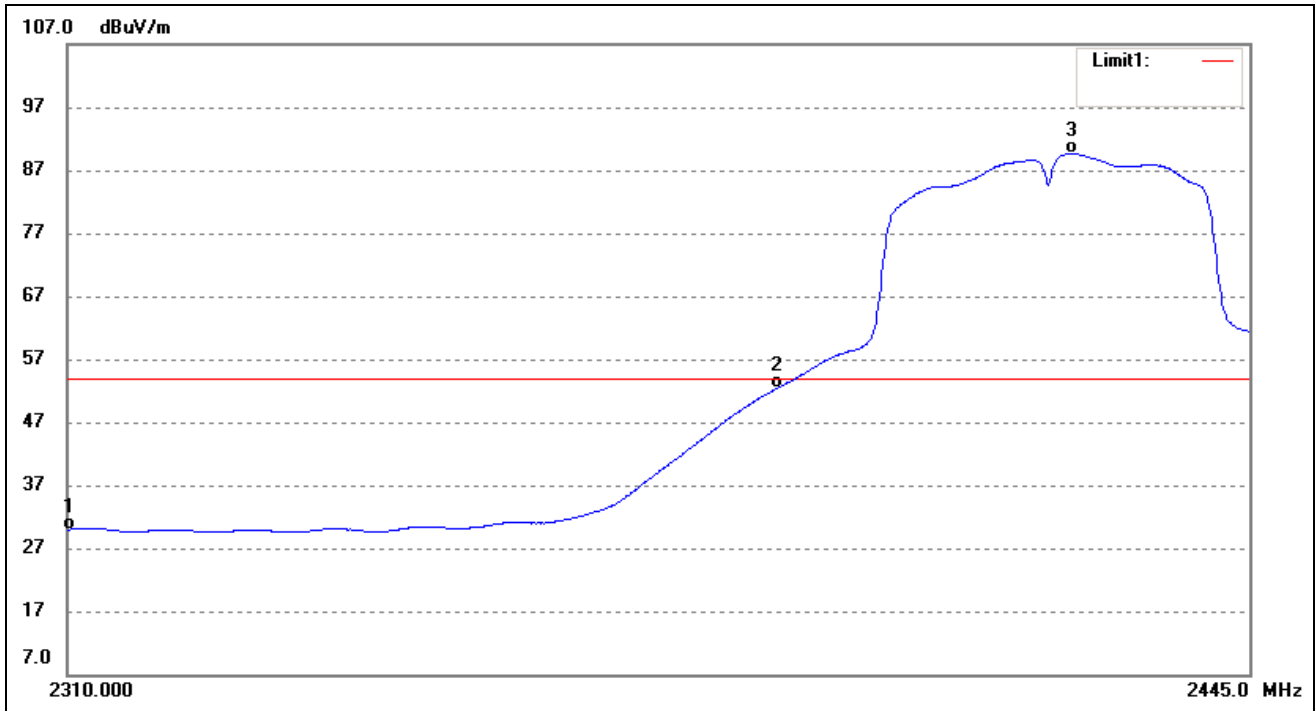



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.00	36.35	-6.38	29.97	54.00	-24.03	Average Detector
	2310.00	48.91	-6.38	42.53	74.00	-31.47	Peak Detector
2	2390.00	59.60	-7.26	52.34	54.00	-1.66	Average Detector
	2390.00	75.85	-7.26	68.59	74.00	-5.41	Peak Detector
3	2424.26	96.99	-7.38	89.61	/	/	Average Detector
	2424.53	109.15	-7.38	101.77	/	/	Peak Detector

802.11n-HT40-Highest Bandedge  
Horizontal (Worst case)


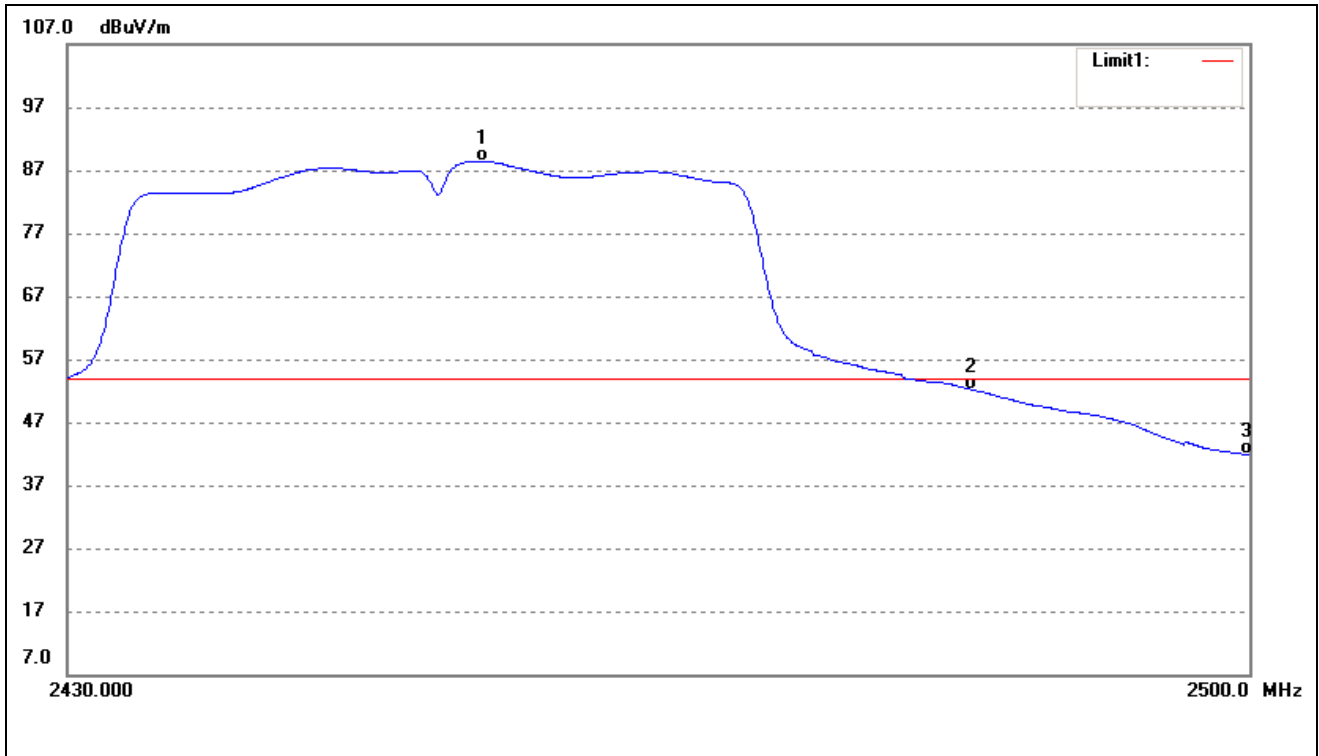


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2454.34	95.80	-7.33	88.47	/	/	Average Detector
	2454.83	107.85	-7.33	100.52	/	/	Peak Detector
2	2483.50	59.39	-7.28	52.11	54.00	-1.89	Average Detector
	2483.50	79.92	-7.28	72.64	74.00	-1.36	Peak Detector
3	2500.00	49.12	-7.25	41.87	54.00	-12.13	Average Detector
	2500.00	66.91	-7.25	59.66	74.00	-14.34	Peak Detector



Antenna 0  
 Spurious (Conducted)  
 802.11b-Lowest

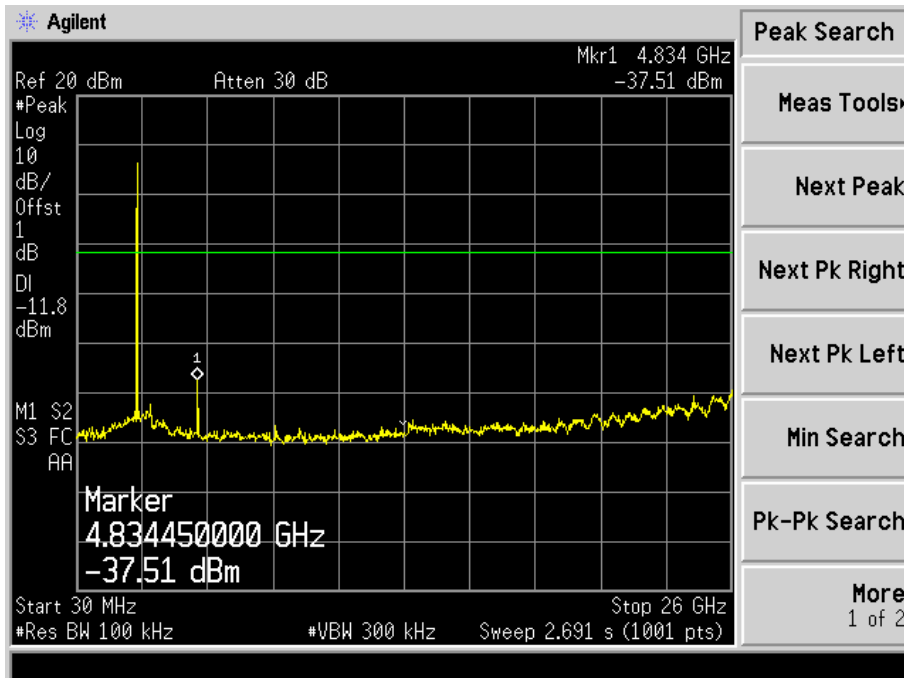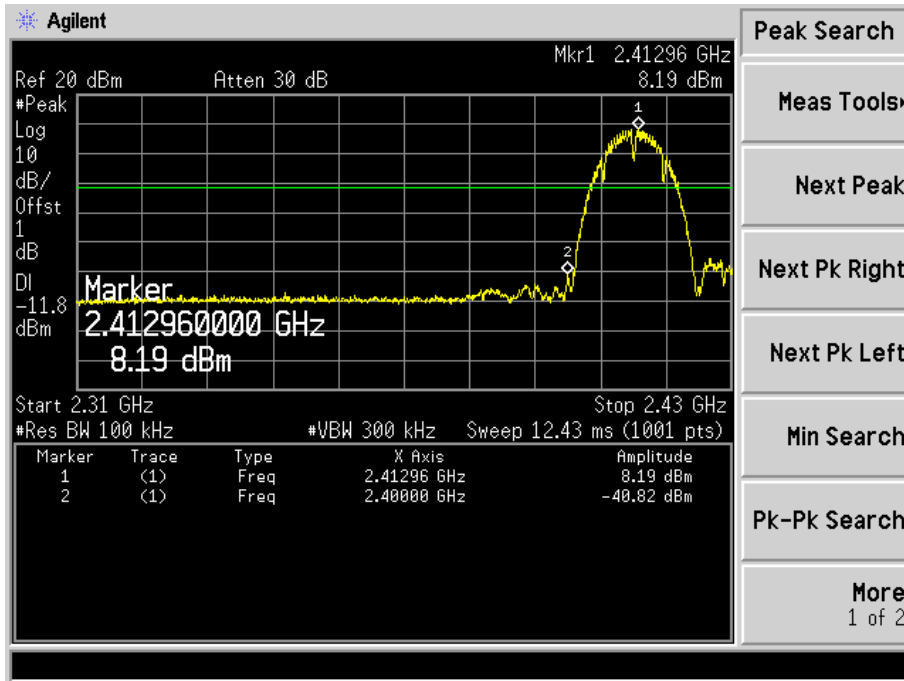



Middle

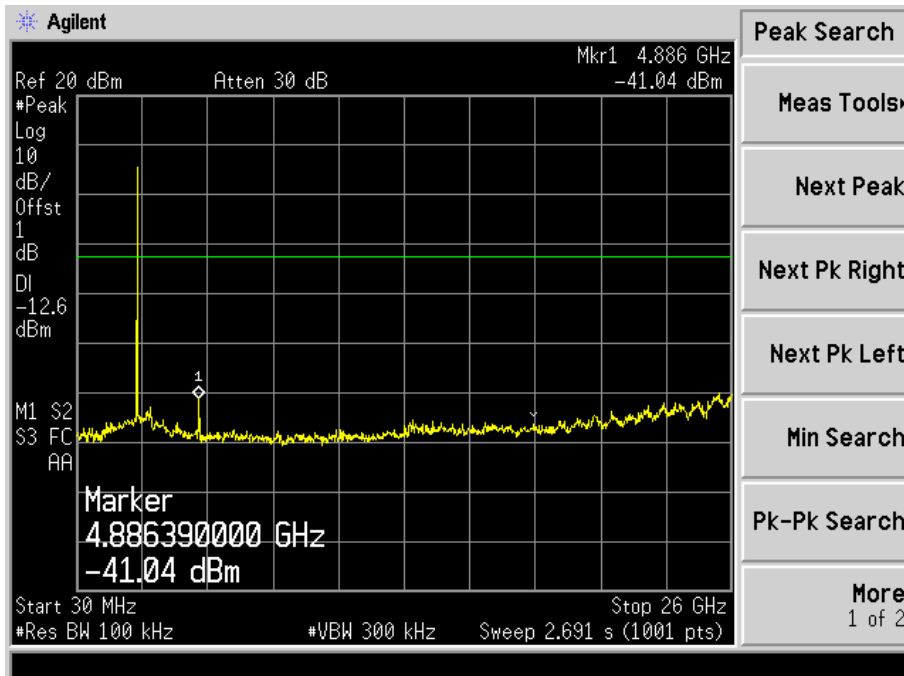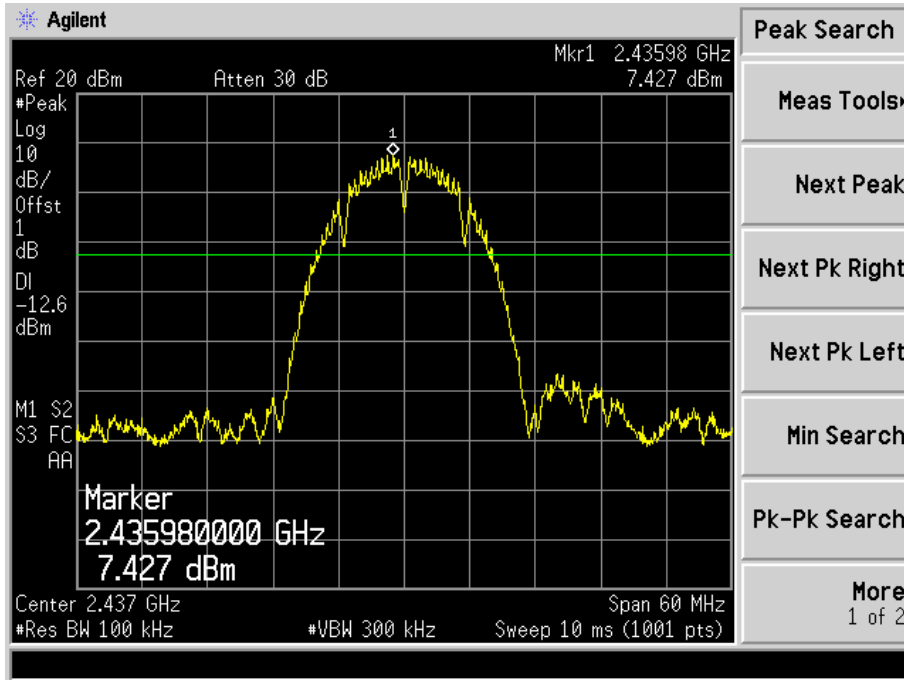

Highest

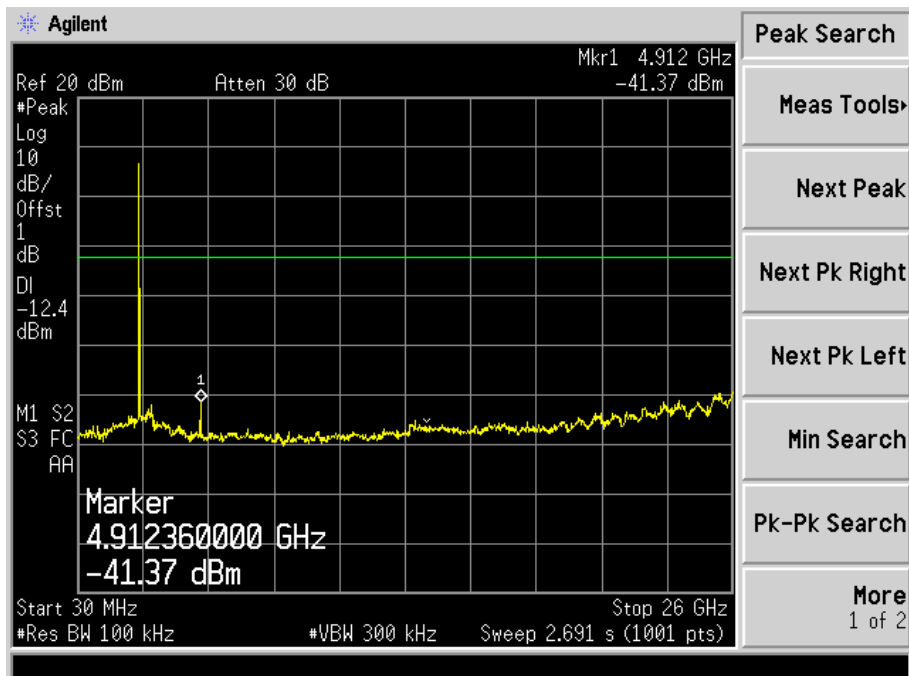
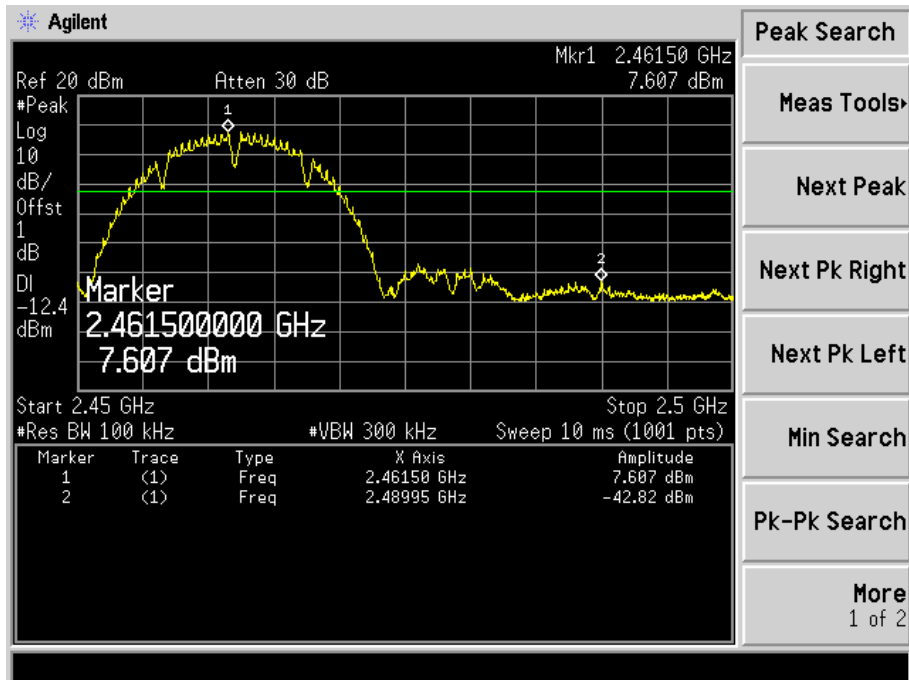


Spurious (Conducted)  
802.11g-Lowest

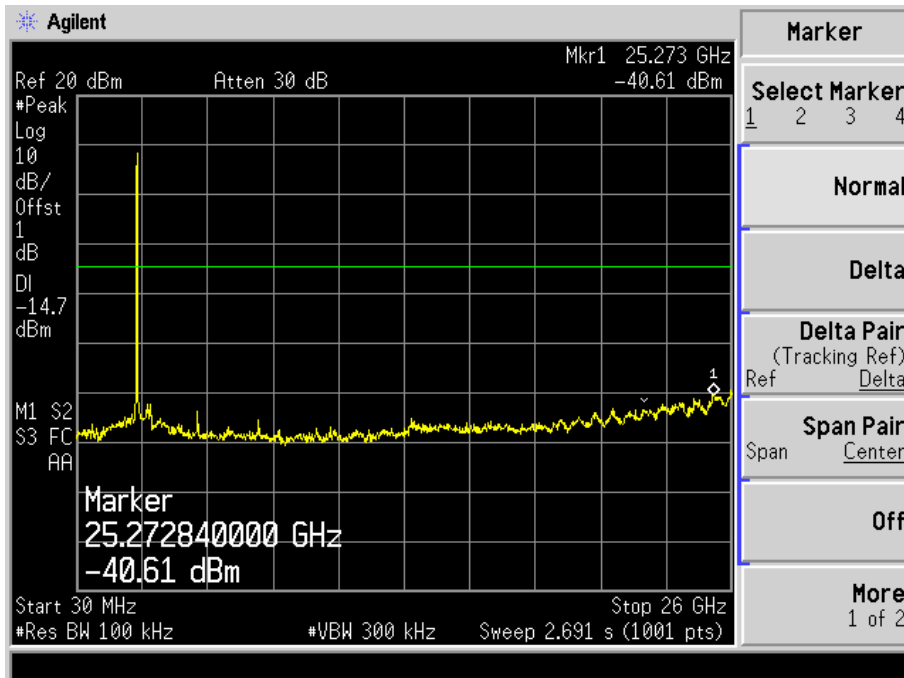
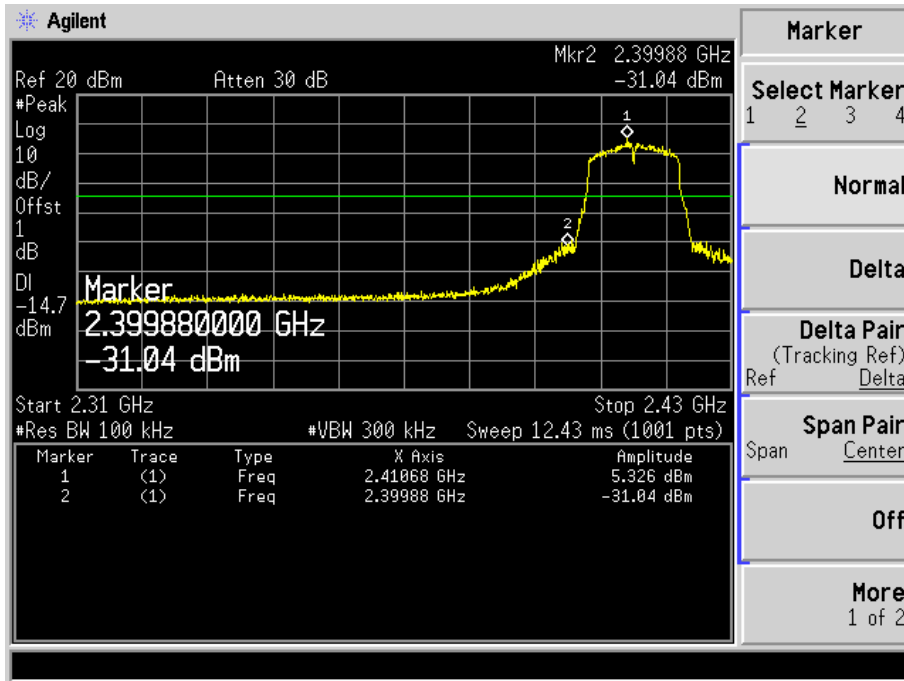






Middle

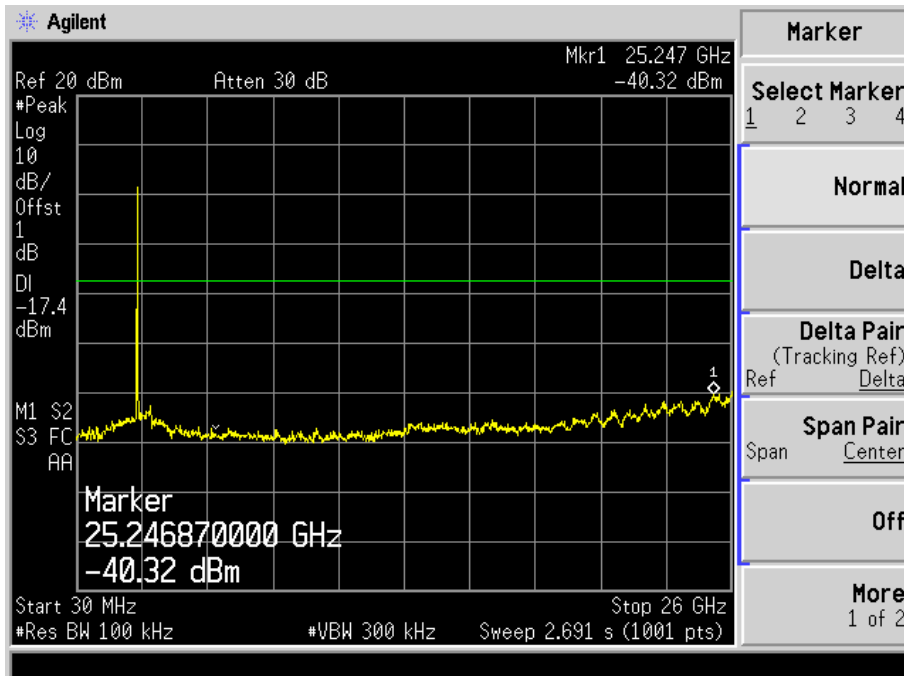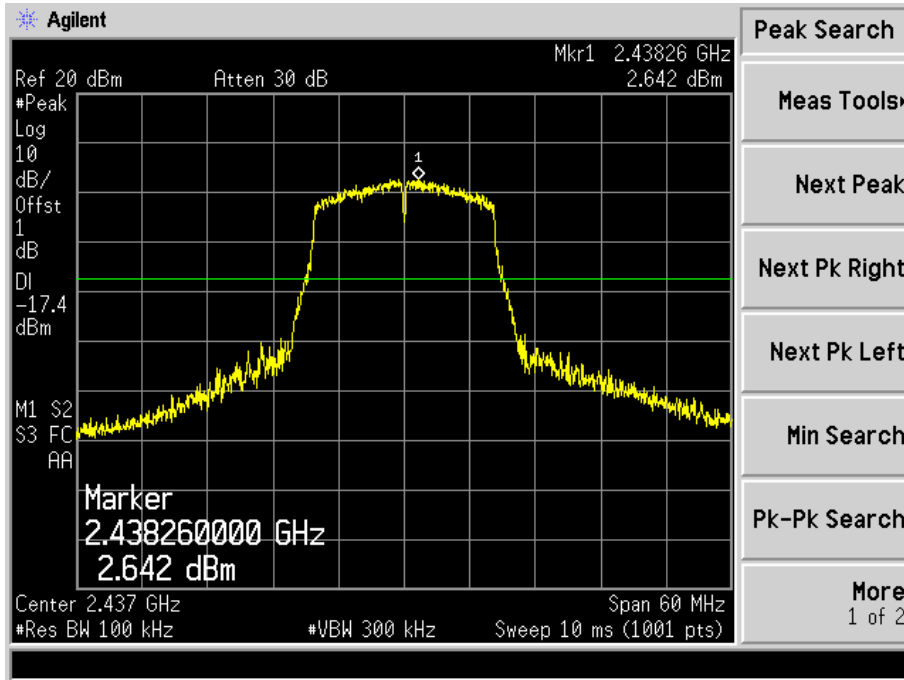



Highest

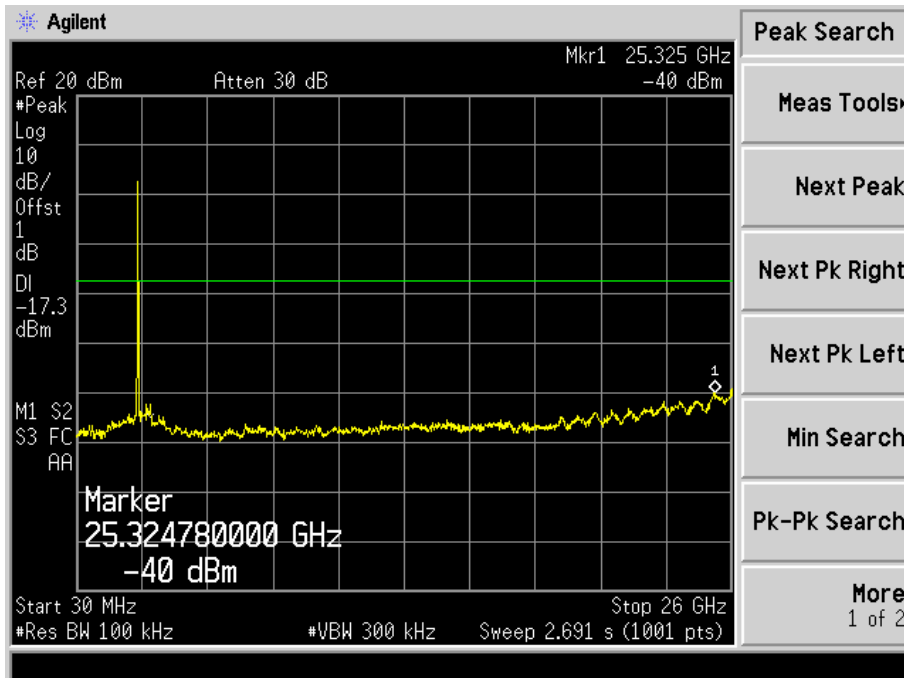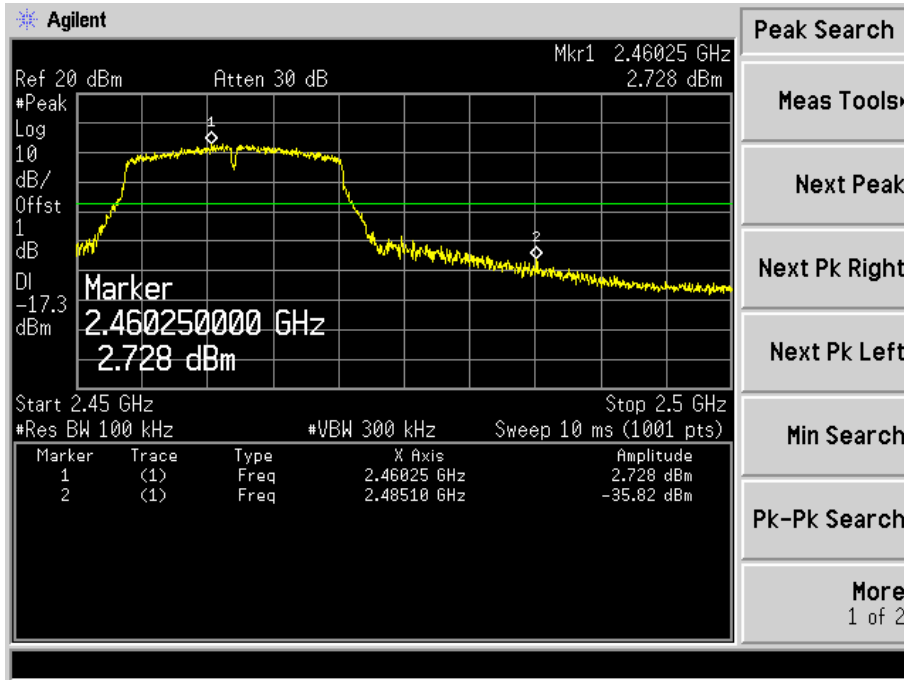



Spurious (Conducted)  
802.11n-HT20-Lowest

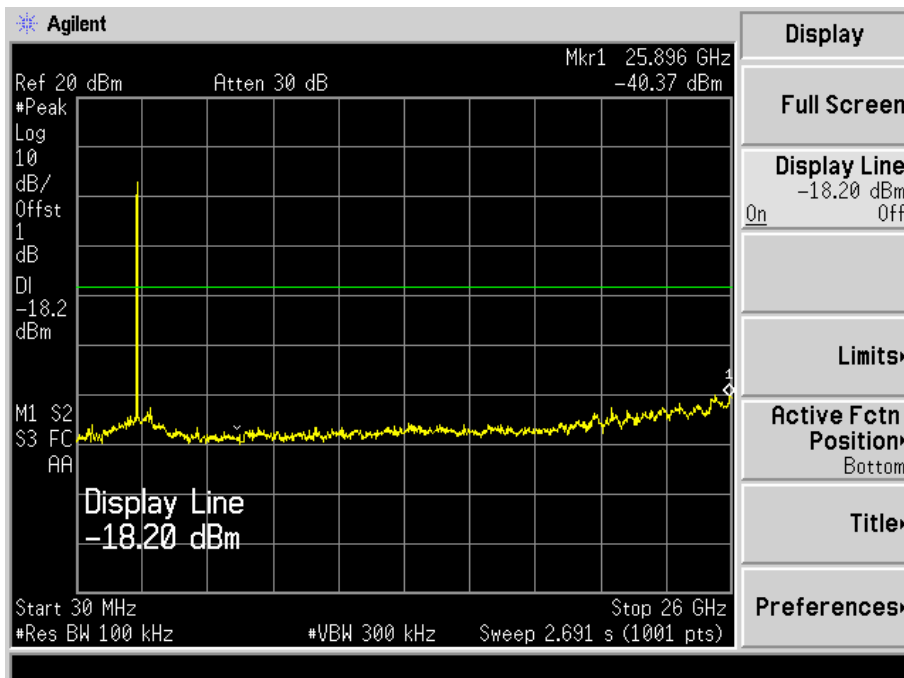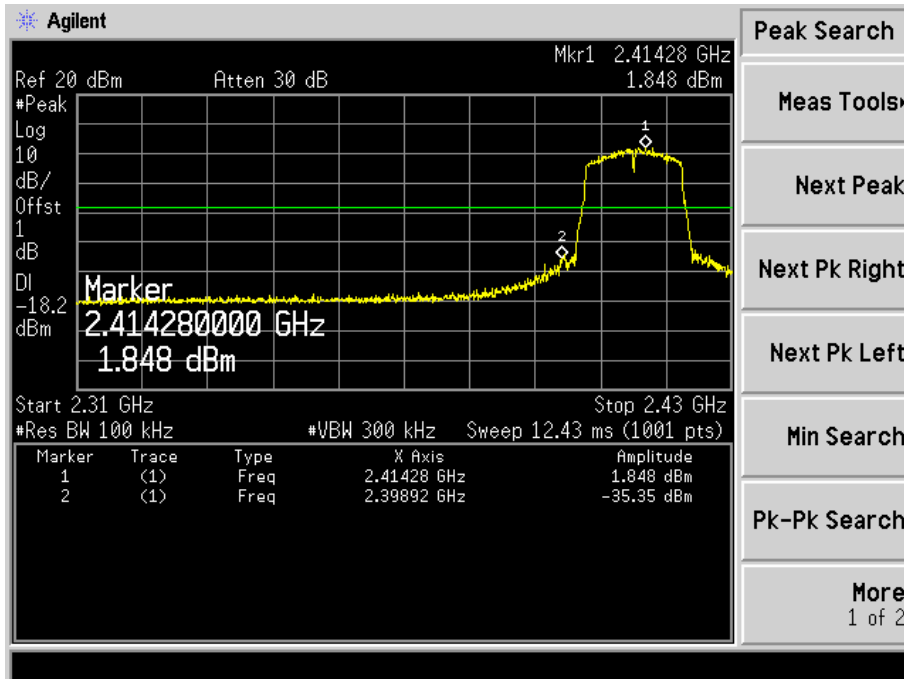



Middle

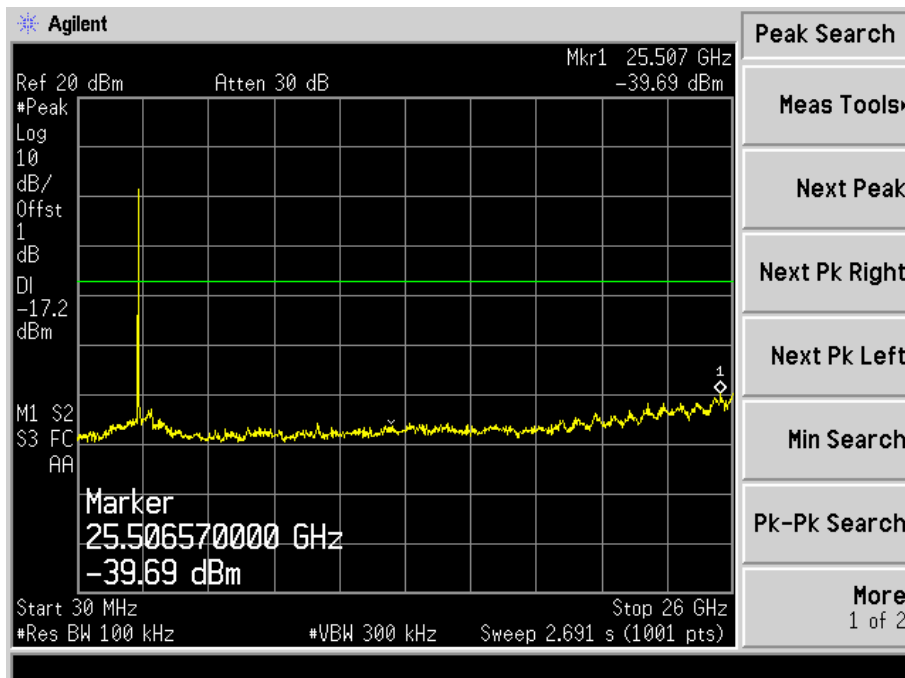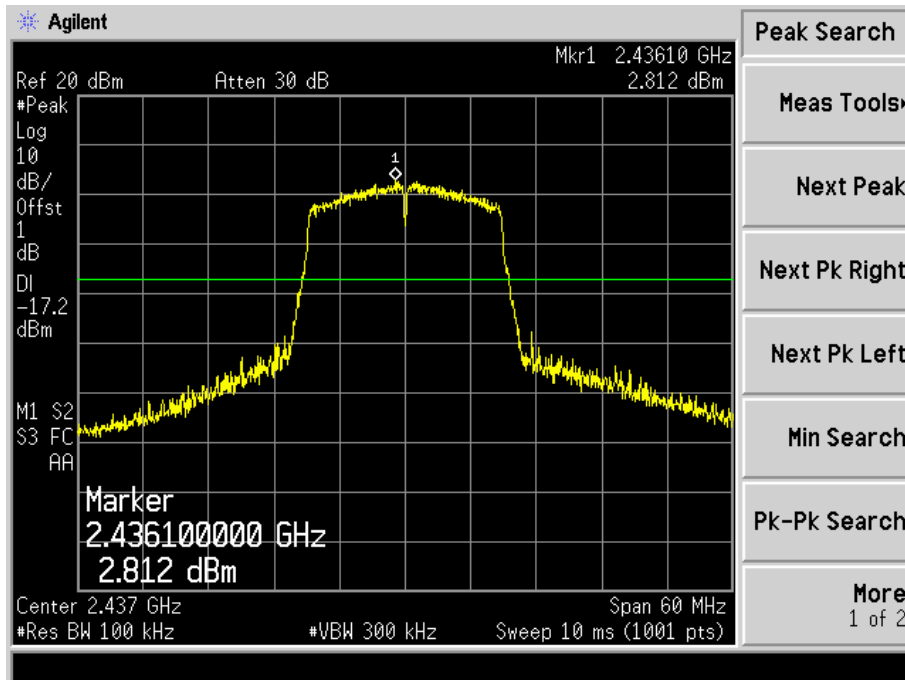



Highest

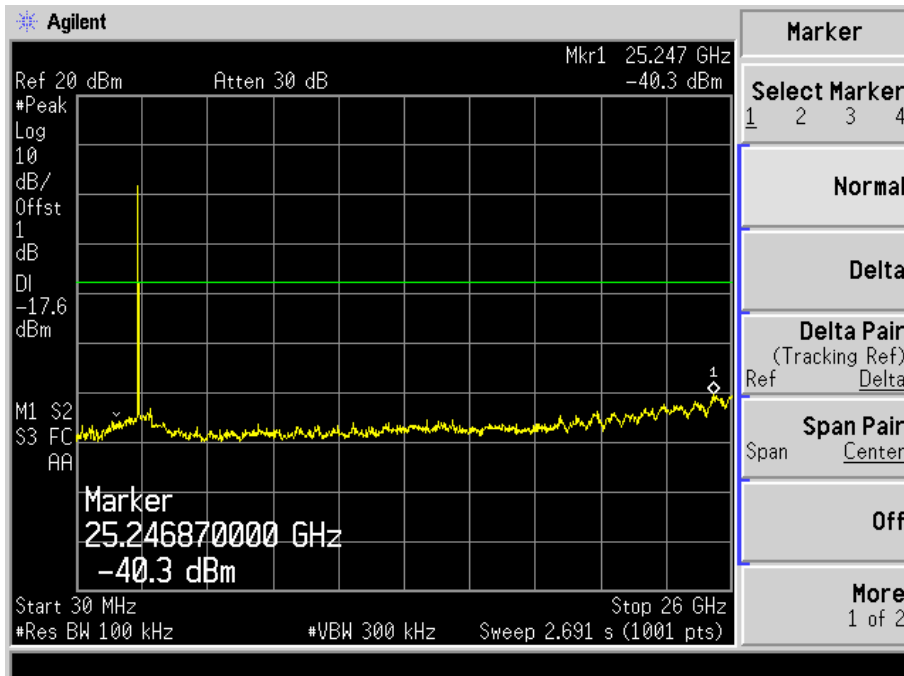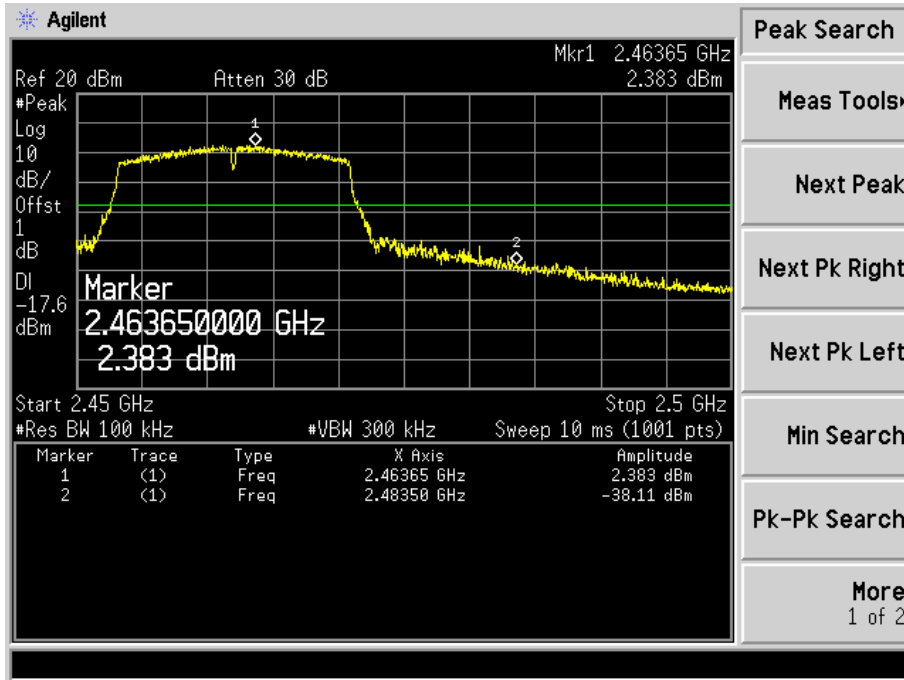



Spurious (Conducted)  
802.11n-HT40-Lowest

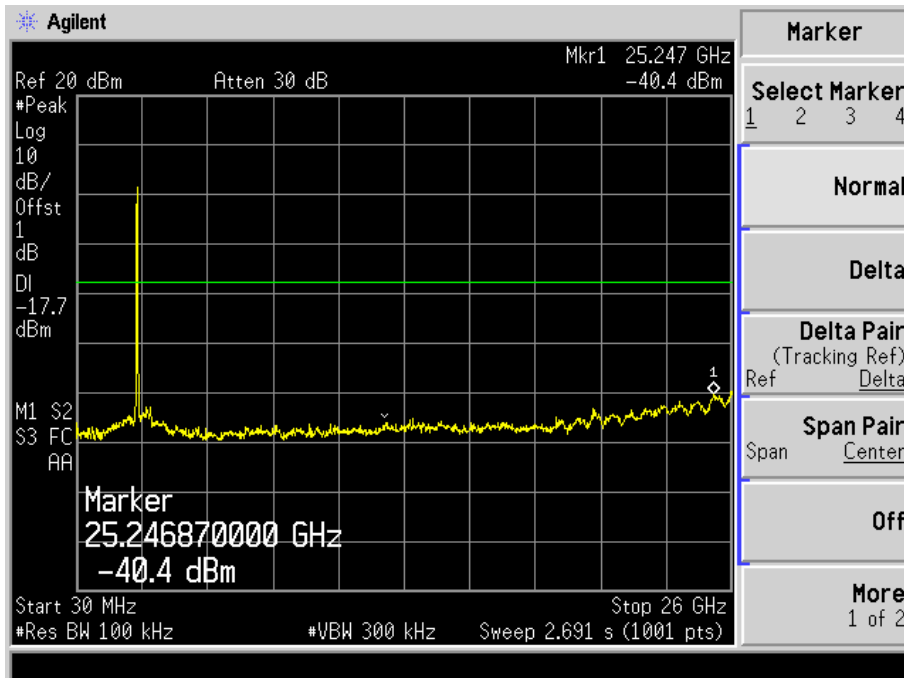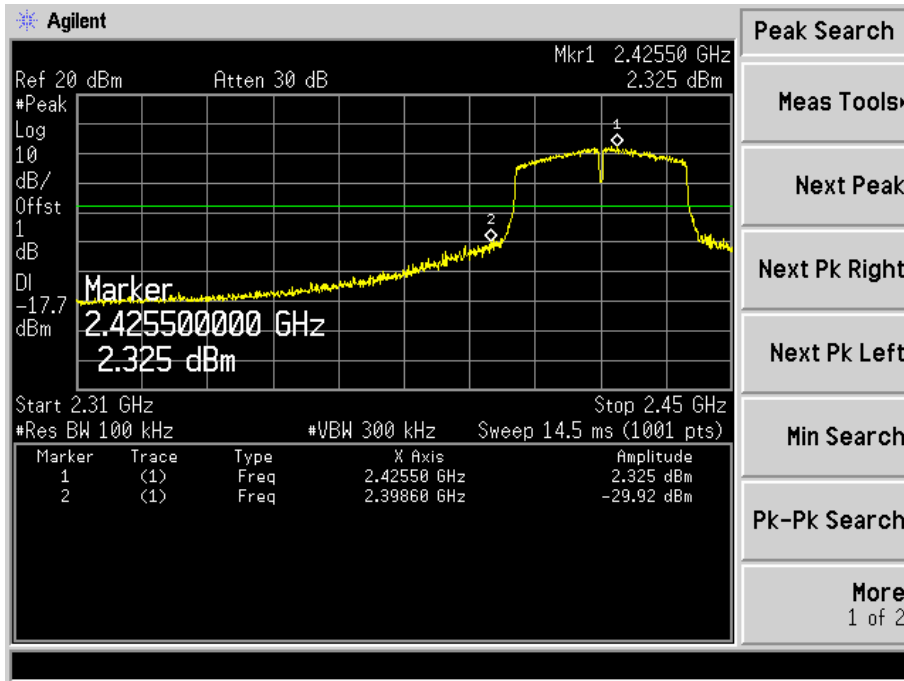

Middle

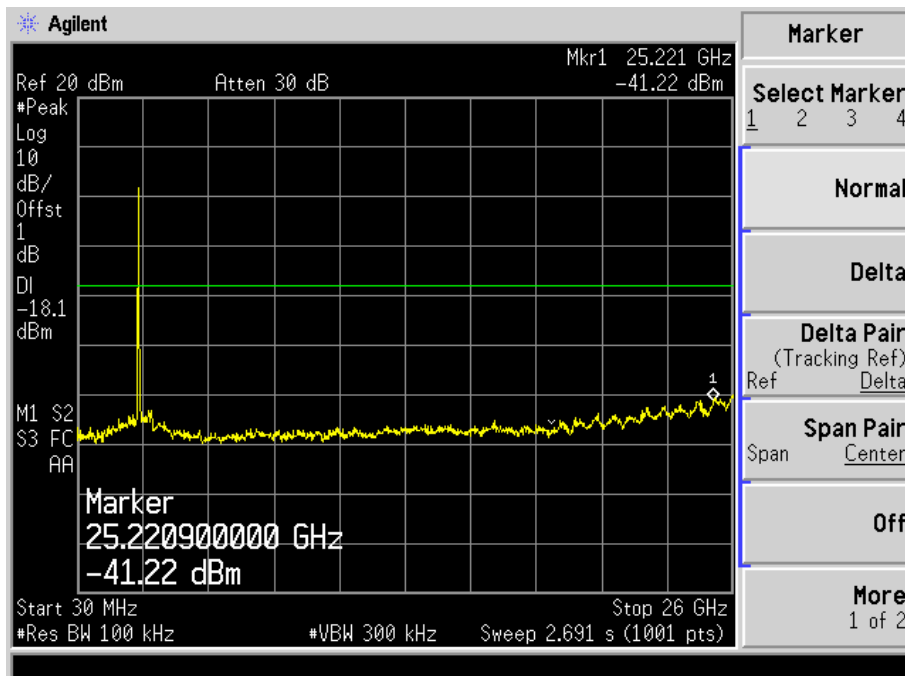
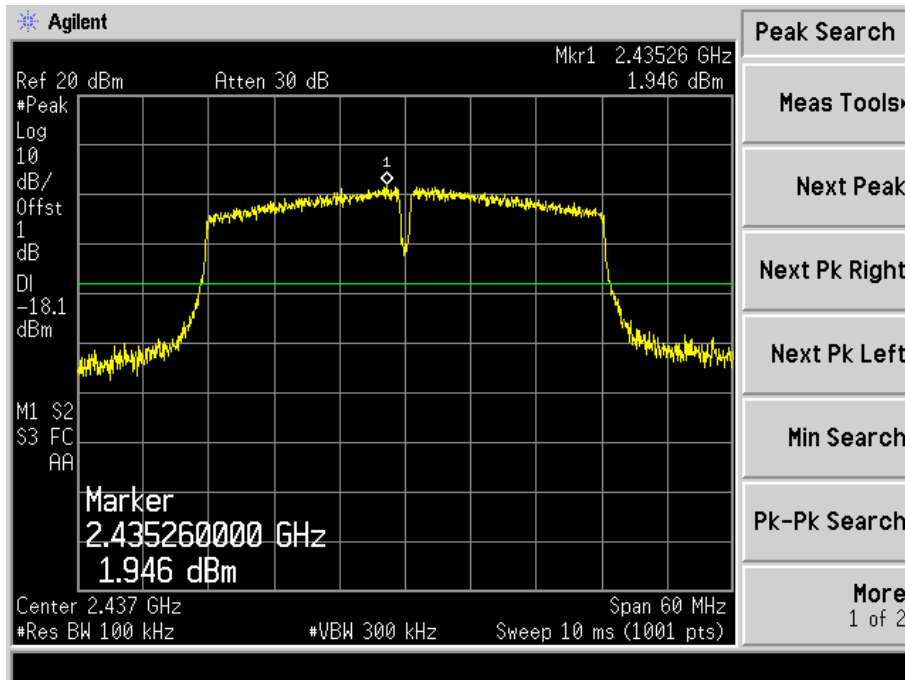


Highest

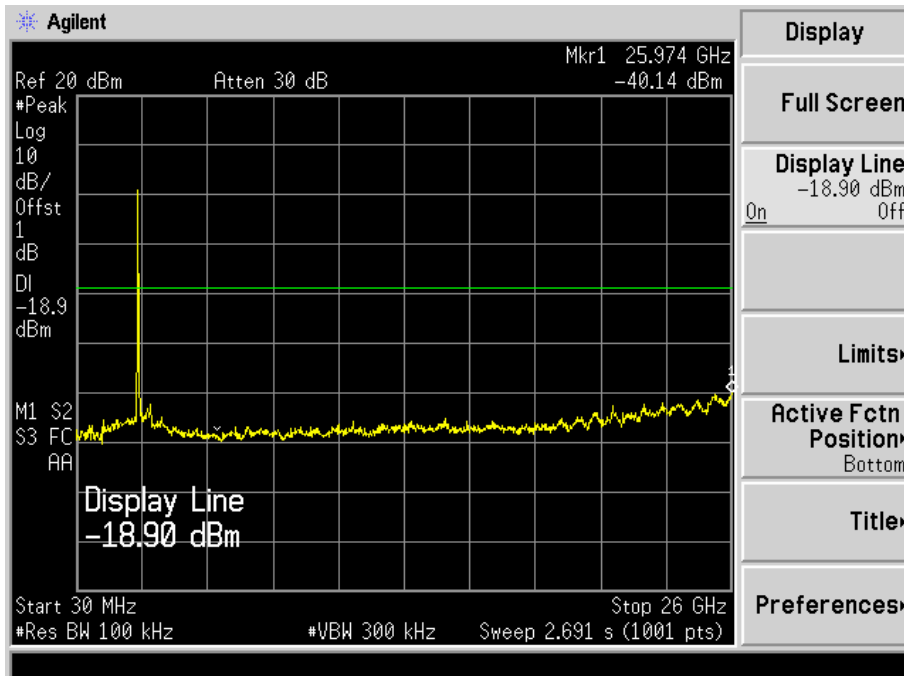
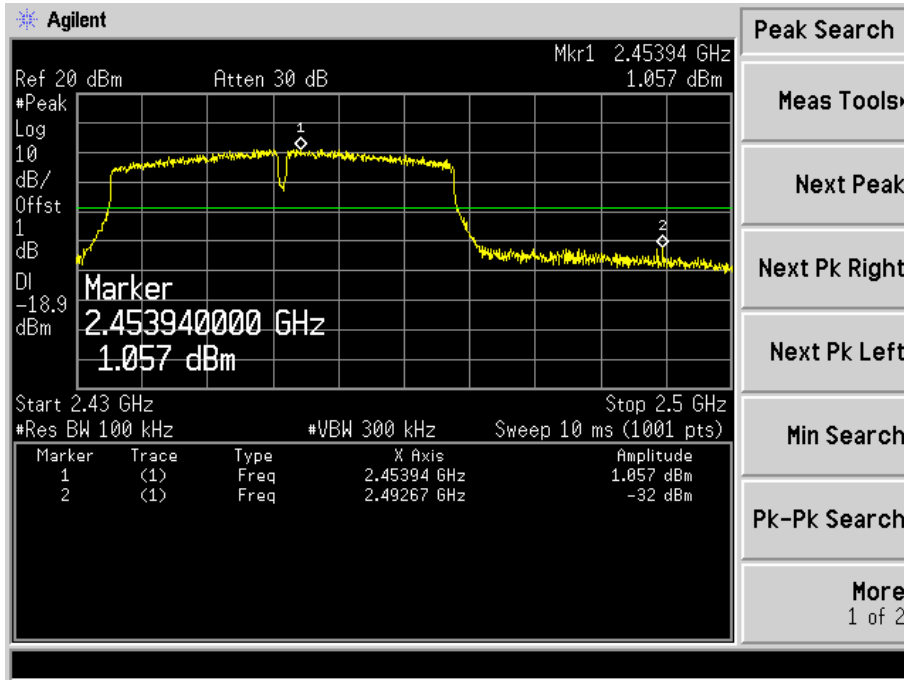






Antenna 1  
 Spurious (Conducted)  
 802.11b-Lowest

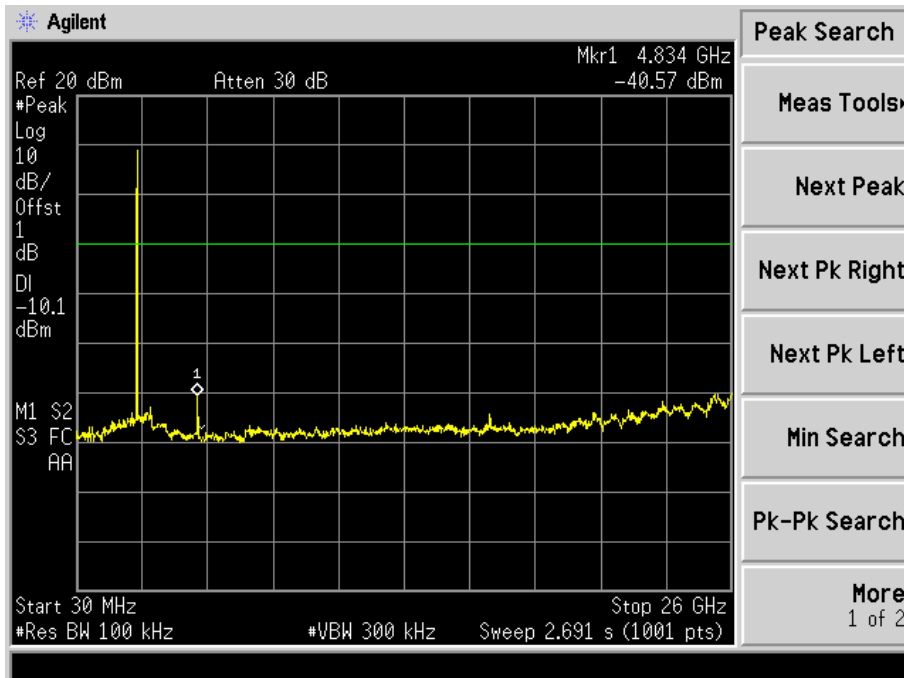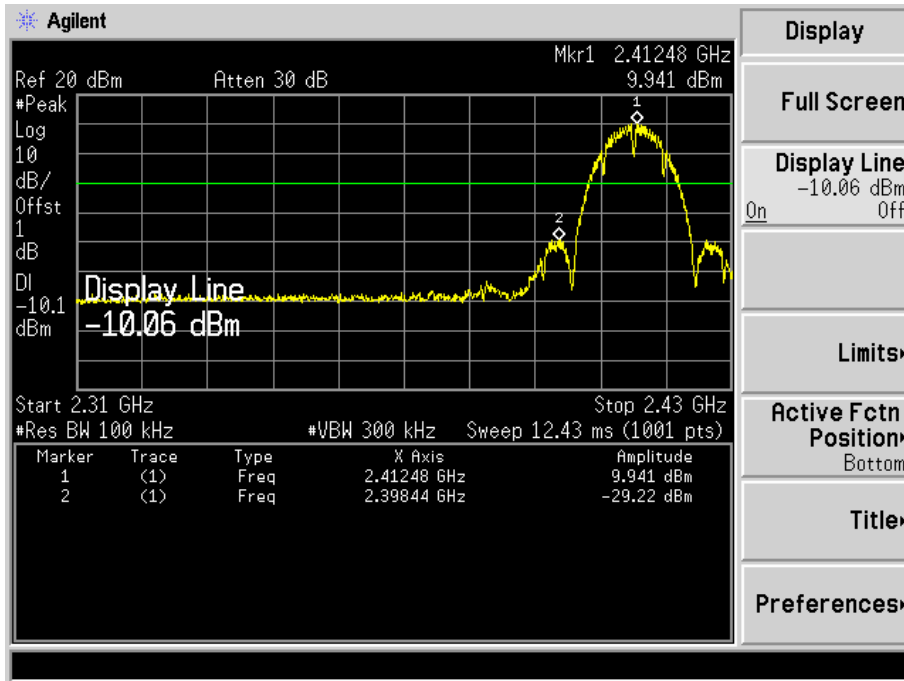



Middle

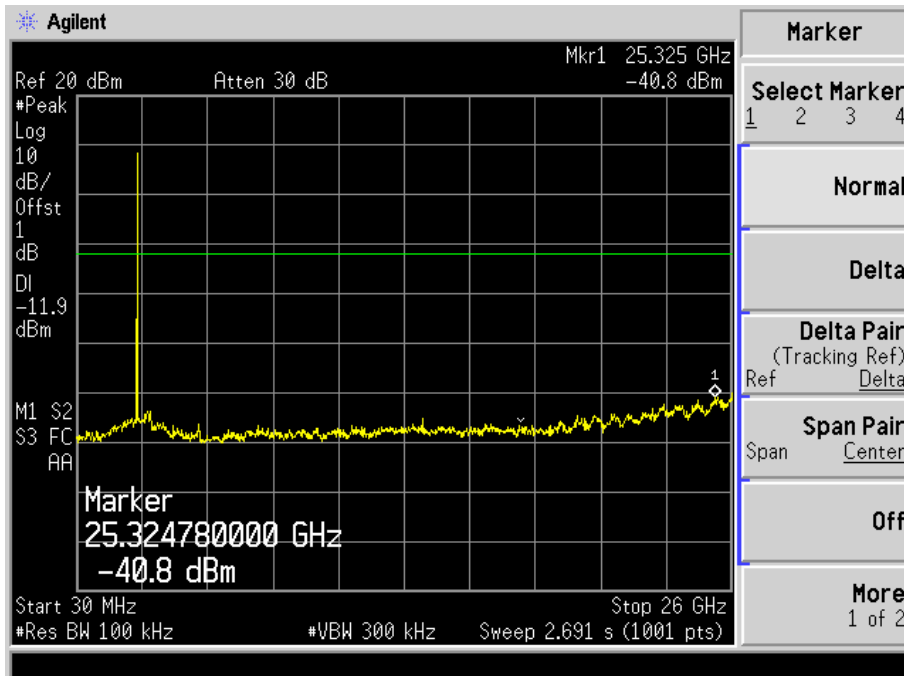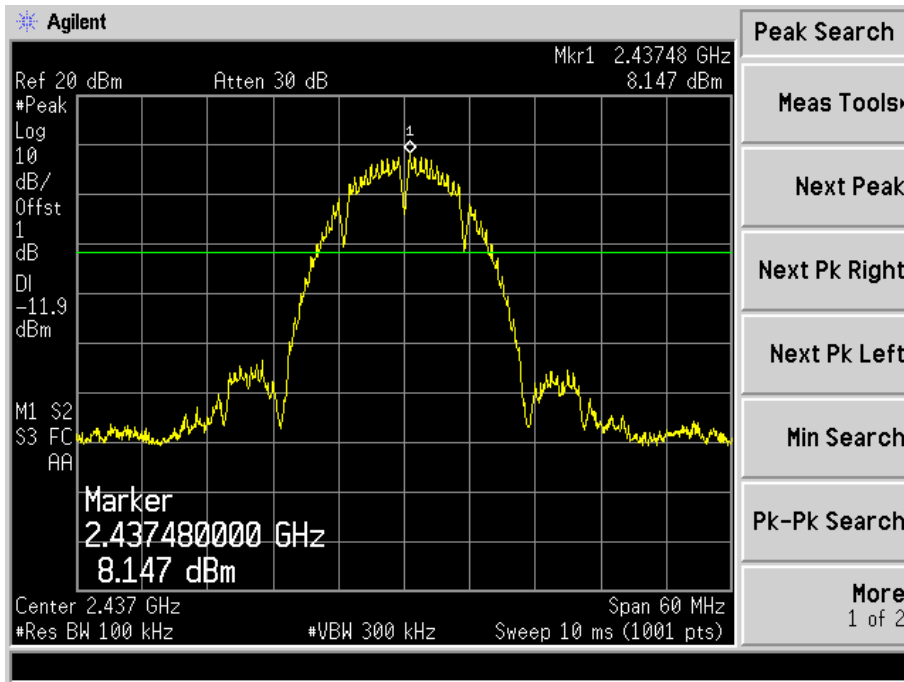



Highest

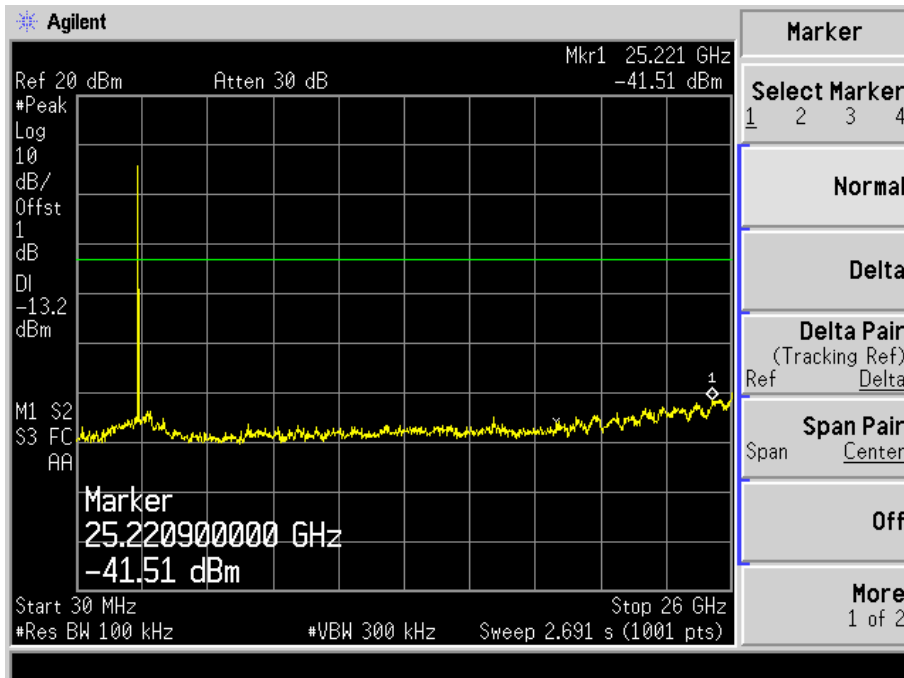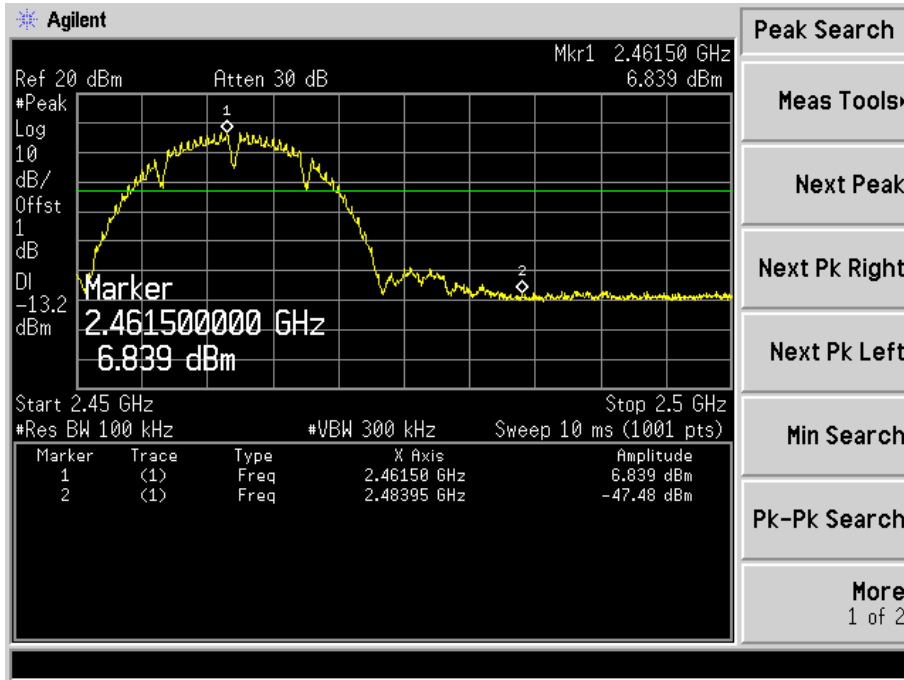



Spurious (Conducted)  
802.11g-Lowest

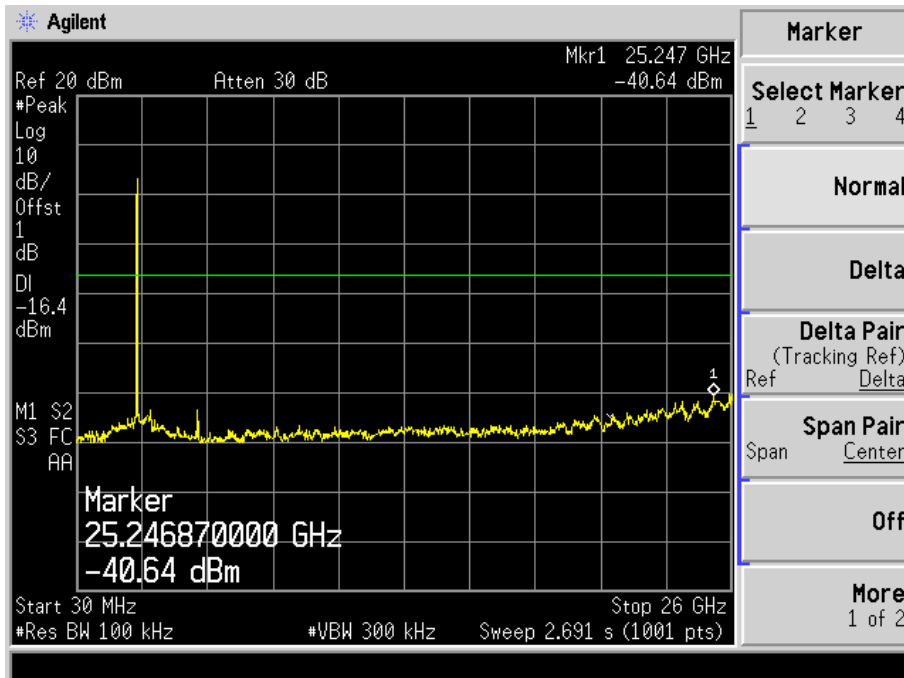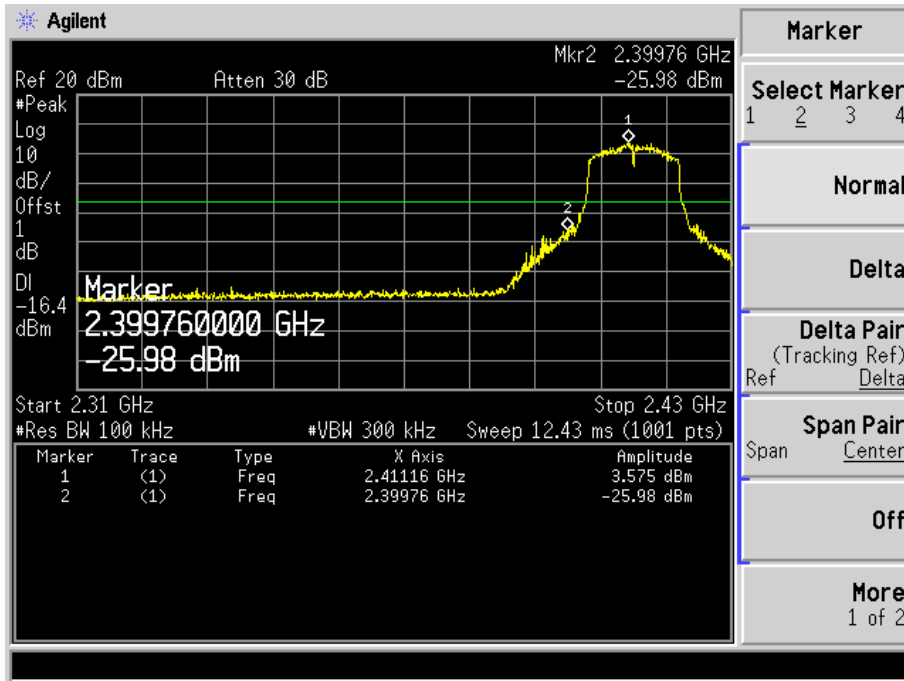



Middle

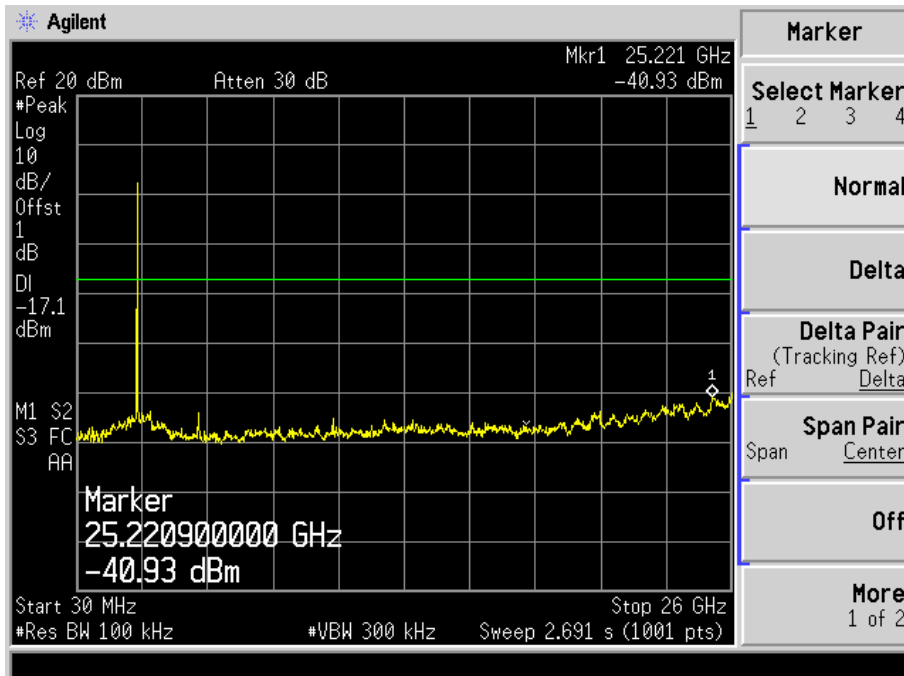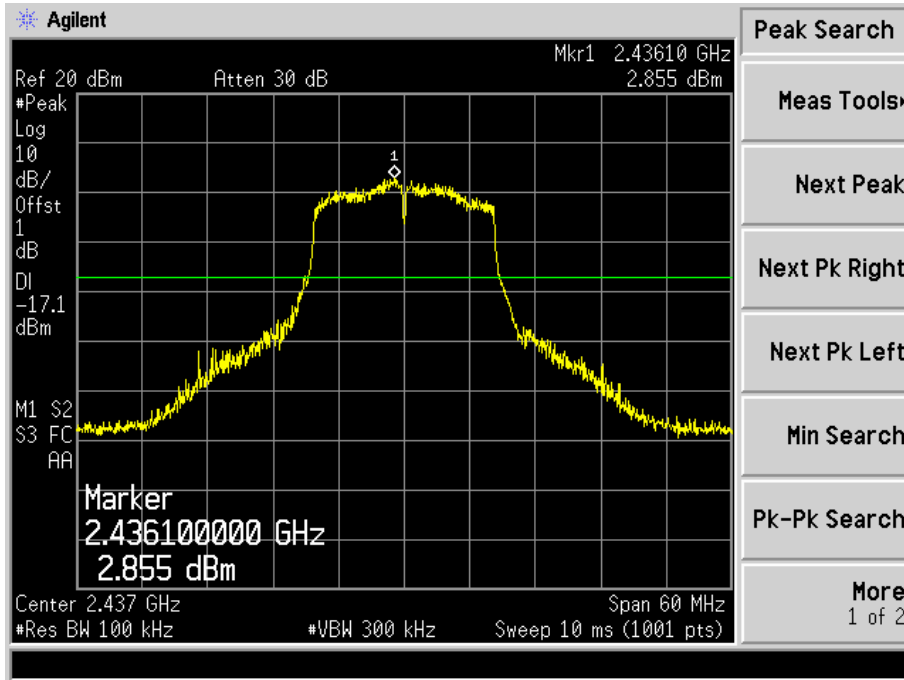



Highest

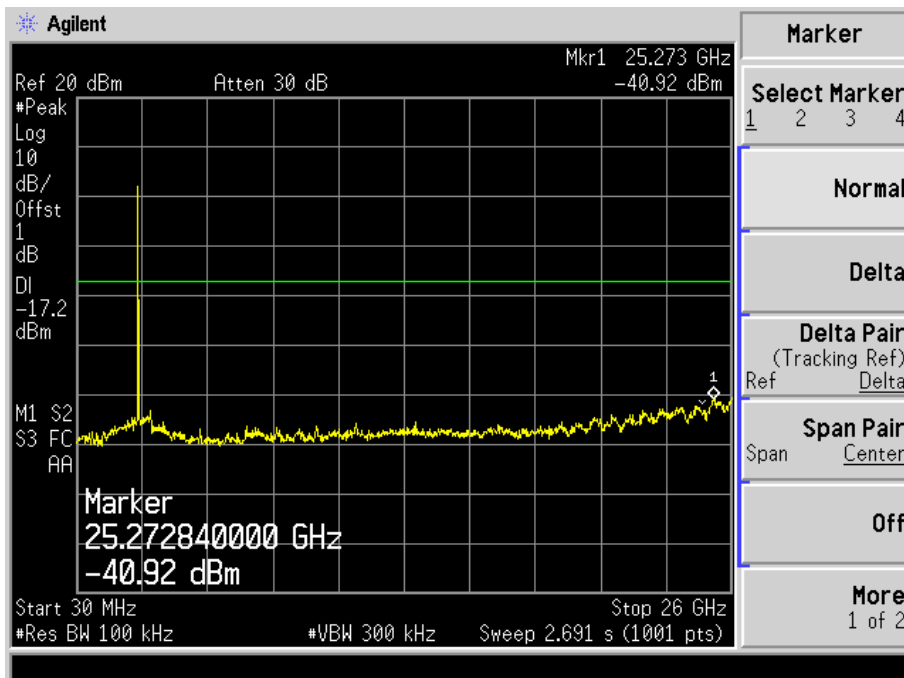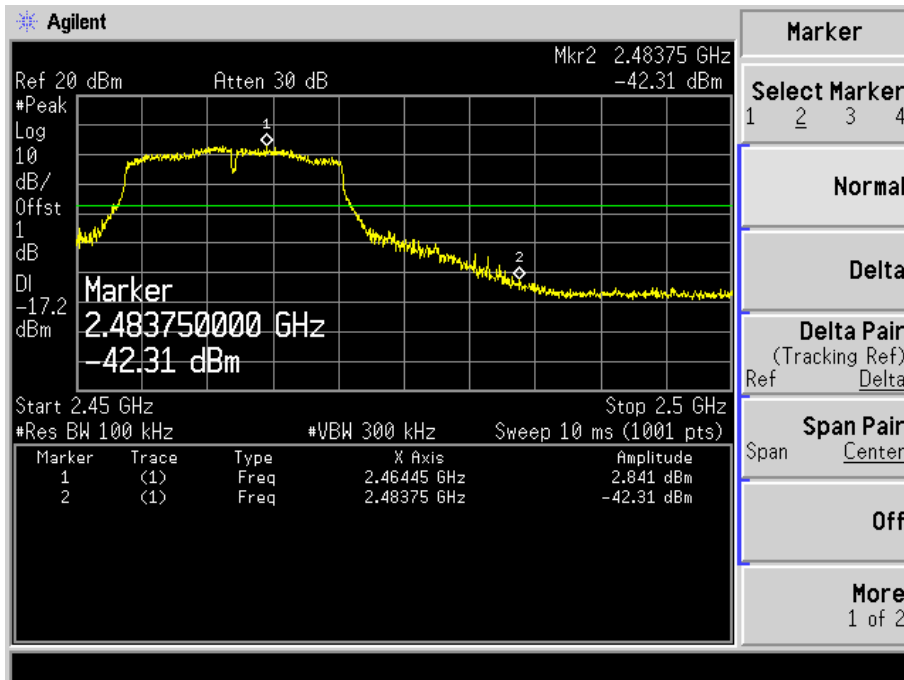

Spurious (Conducted)  
802.11n-HT20-Lowest

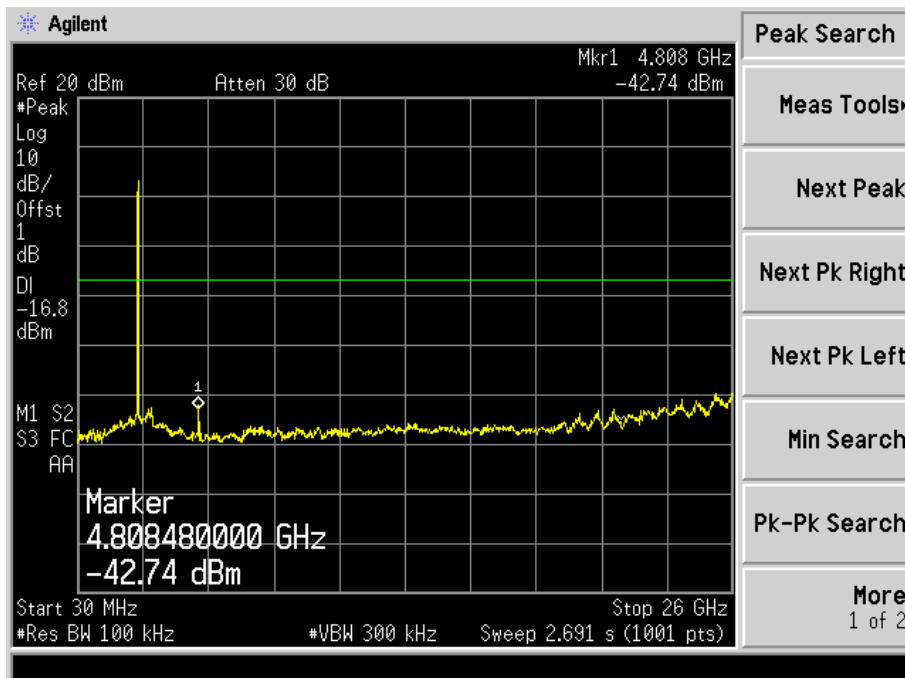
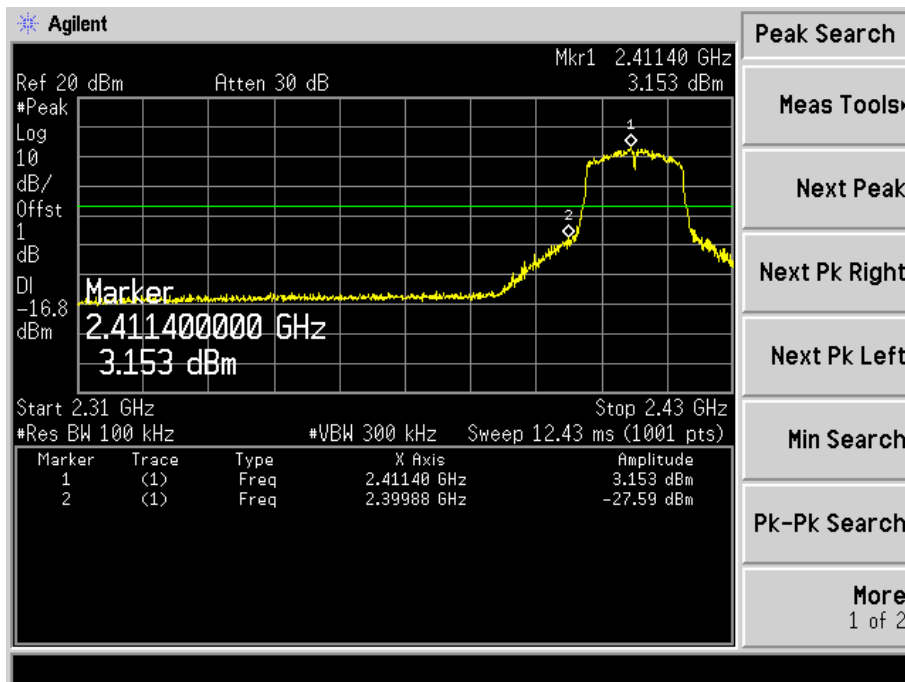


Middle

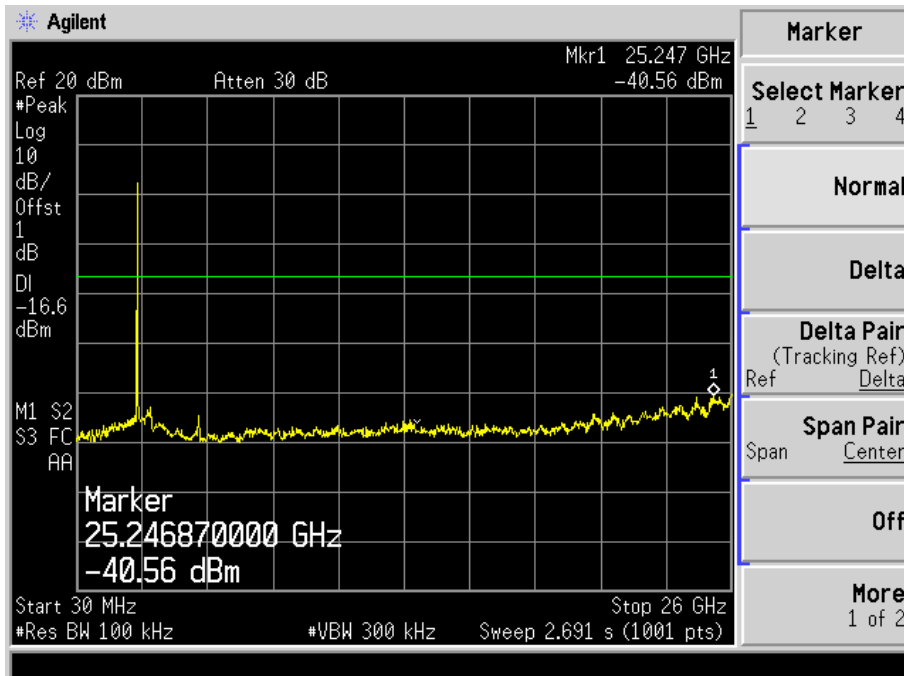
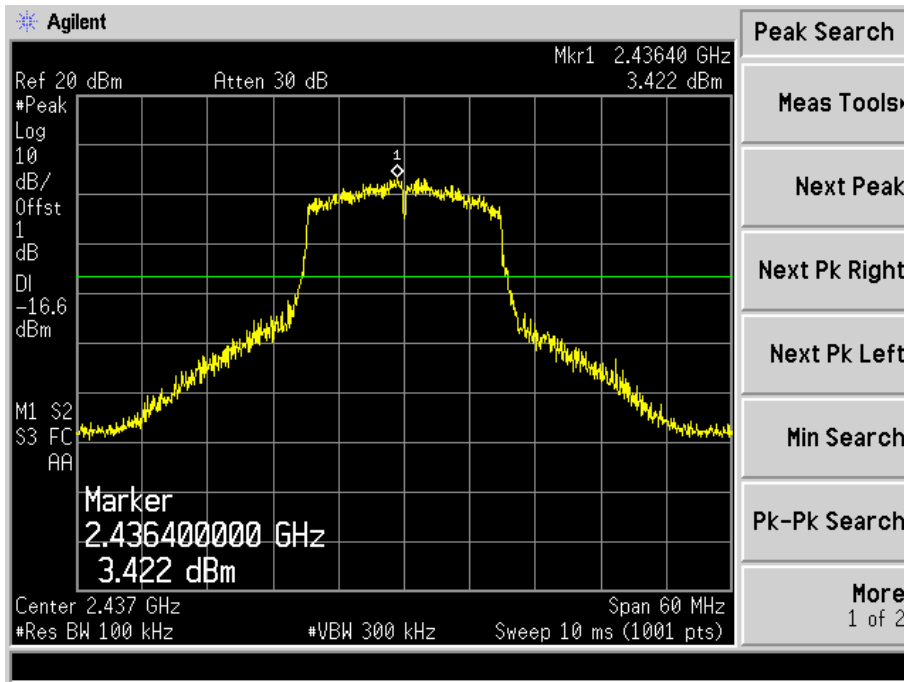






Highest

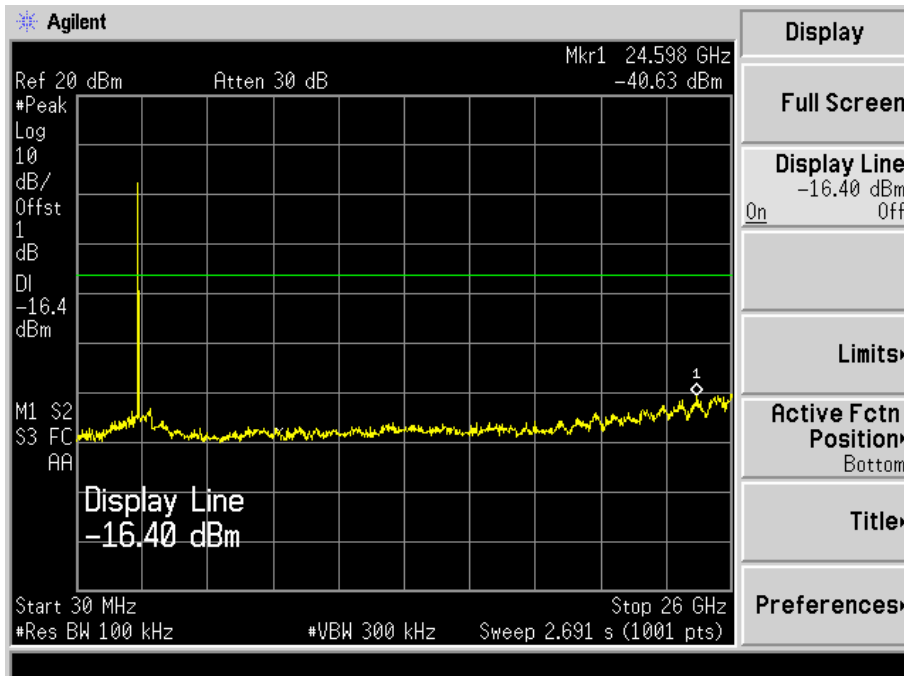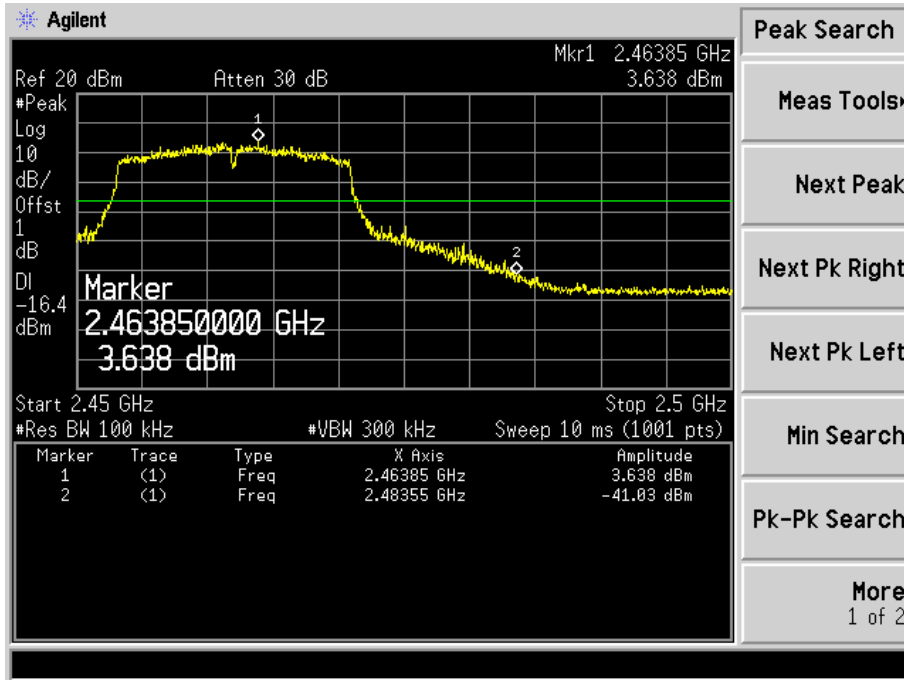



Spurious (Conducted)  
802.11n-HT40-Lowest

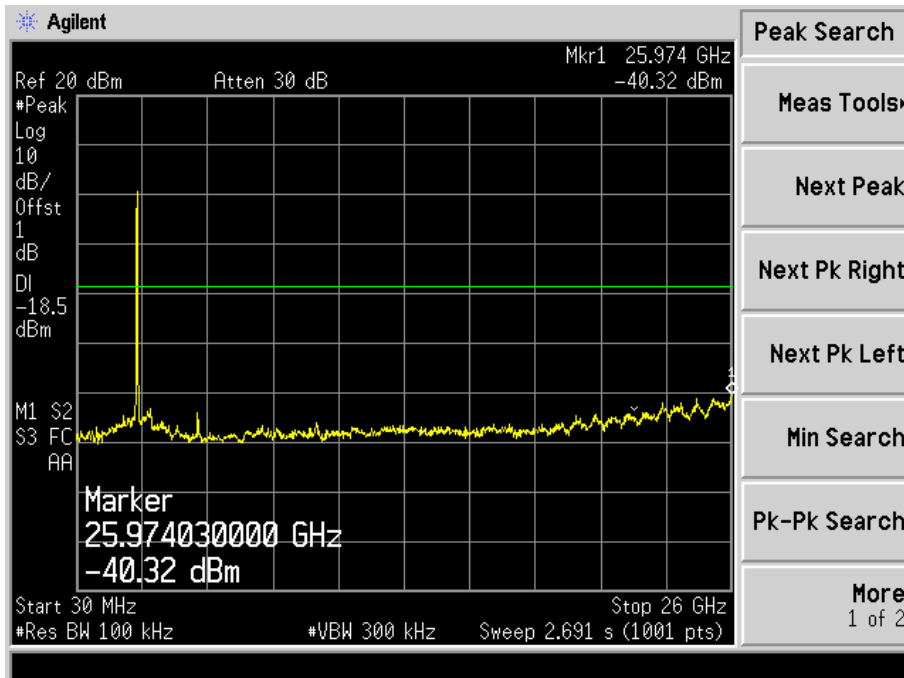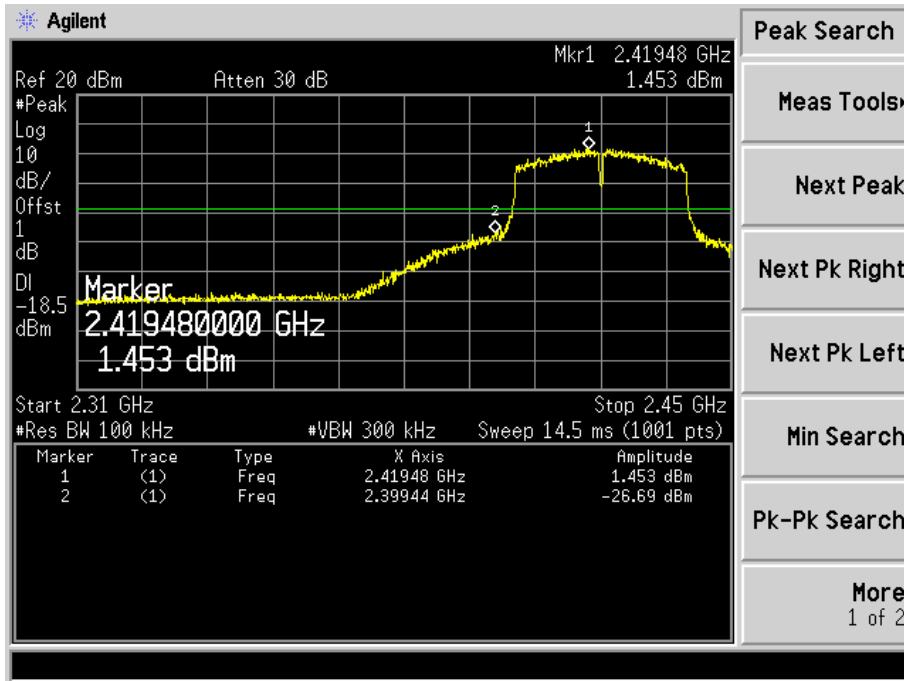

Middle

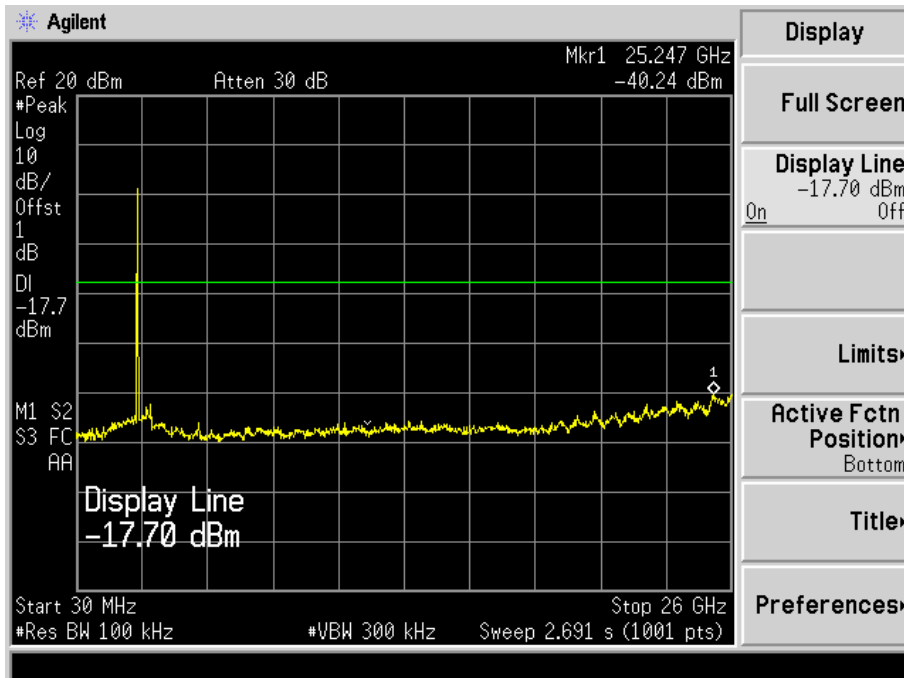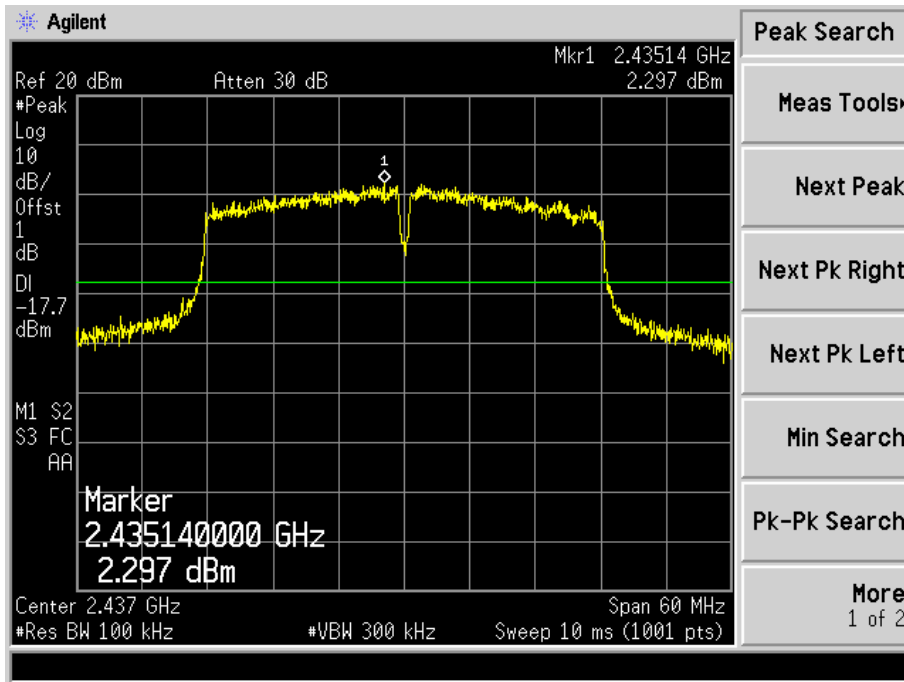

Highest

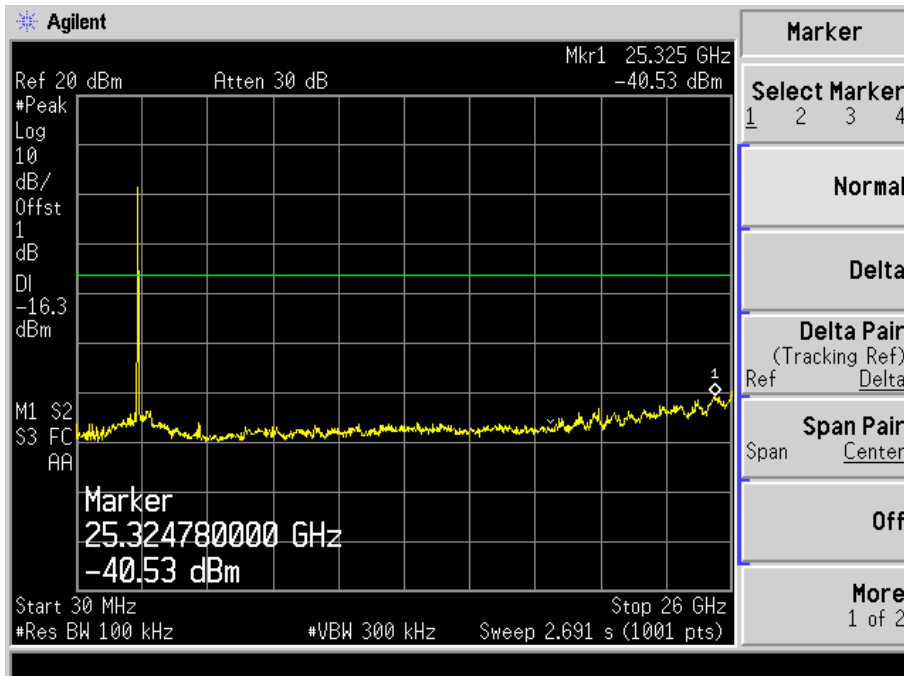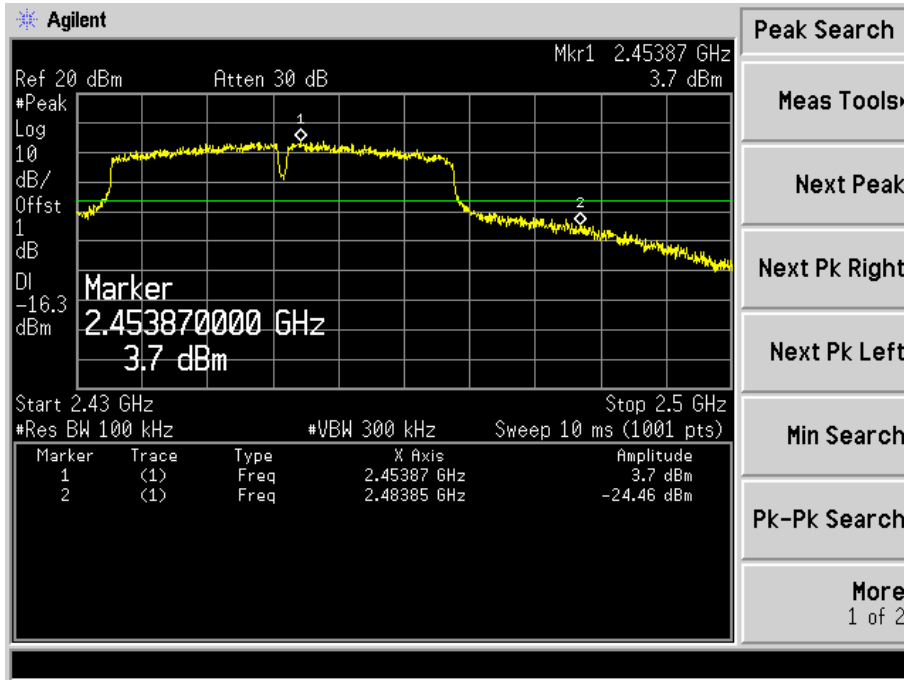


## 10. Conducted Emissions

### 10.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 10.2 Basic Test Setup Block Diagram

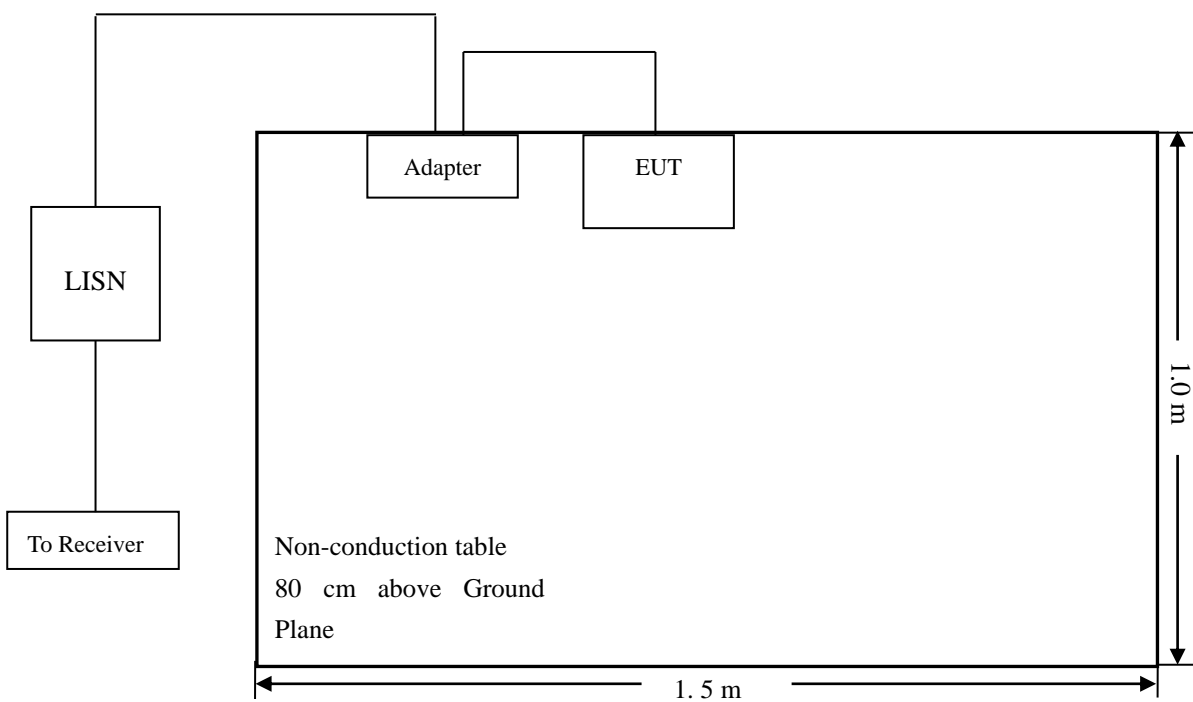

### 10.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 10.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
Stop Frequency ..... 30 MHz  
Sweep Speed ..... Auto  
IF Bandwidth..... 10 kHz  
Quasi-Peak Adapter Bandwidth ..... 9 kHz  
Quasi-Peak Adapter Mode ..... Normal

## 10.5 Summary of Test Results/Plots

According to the data in section 10.6, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:


**-8.01 dB at 0.3420 MHz in the Line mode, QP detector, 0.15-30MHz**

## 10.6 Conducted Emissions Test Data

**Plot of Conducted Emissions Test Data**


EUT: *FileHub*  
 Tested Model: *RP-WD007*  
 Operating Condition: *Transmitting(Wi-Fi)*  
 Comment: *AC 120V/60Hz*

Test Specification: *Neutral*

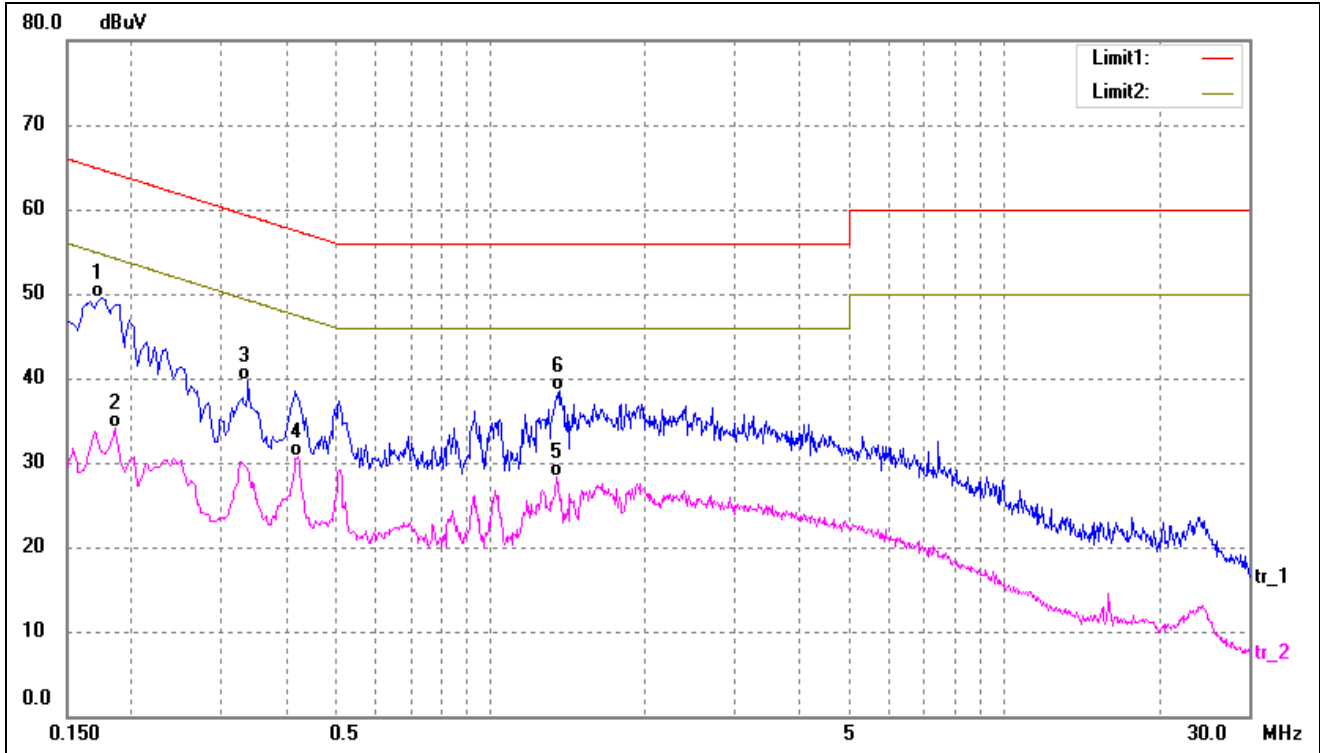

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1740	39.75	9.83	49.58	64.77	-15.19	QP
2	0.1860	24.20	9.81	34.01	54.21	-20.20	AVG
3	0.3380	29.88	9.80	39.68	59.25	-19.57	QP
4	0.4220	20.85	9.80	30.65	47.41	-16.76	AVG
5	1.3460	18.62	9.75	28.37	46.00	-17.63	AVG
6	1.3700	28.84	9.75	38.59	56.00	-17.41	QP

Test Specification: Line

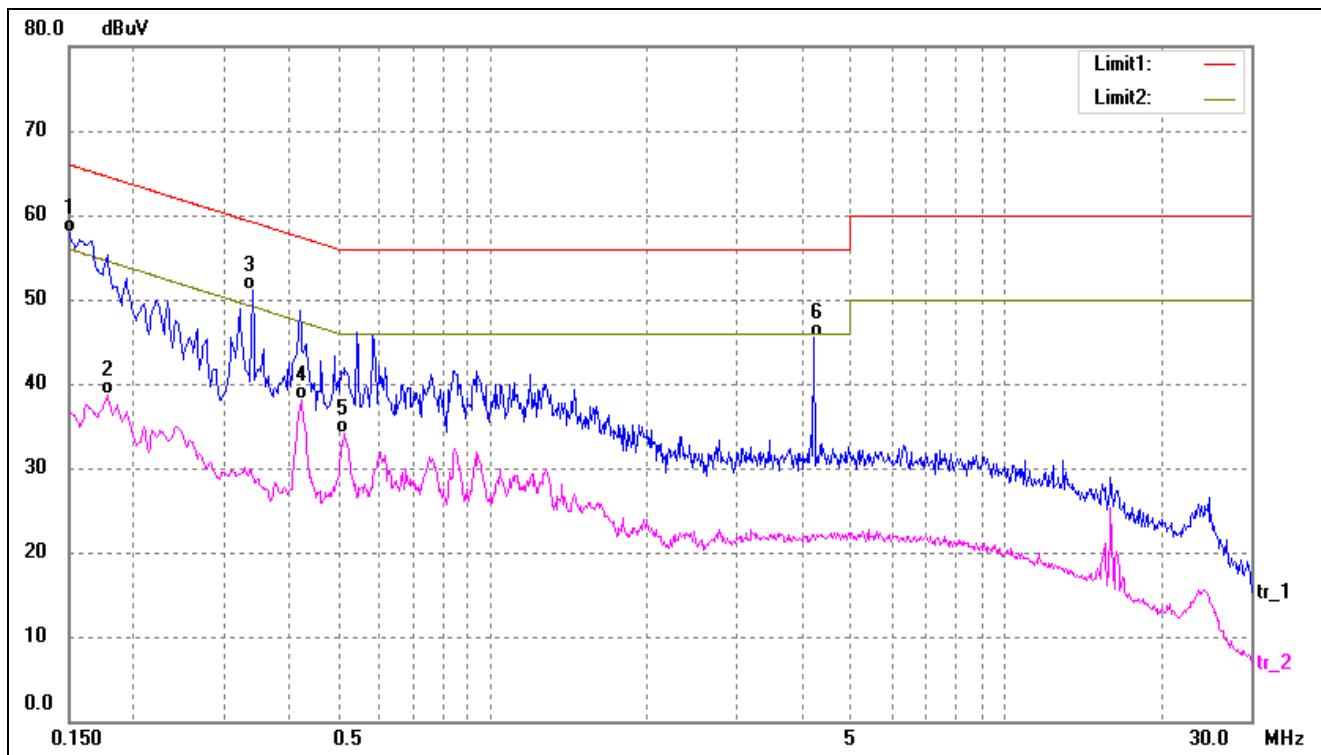

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	47.99	9.85	57.84	66.00	-8.16	QP
2	0.1780	28.86	9.82	38.68	54.58	-15.90	AVG
3*	0.3420	41.34	9.80	51.14	59.15	-8.01	QP
4	0.4260	28.22	9.80	38.02	47.33	-9.31	AVG
5	0.5140	24.24	9.80	34.04	46.00	-11.96	AVG
6	4.2300	35.86	9.68	45.54	56.00	-10.46	QP

\*\*\*\*\* END OF REPORT \*\*\*\*\*