

FCC TEST REPORT

For

SUNVALLEYTEK INTERNATIONAL, INC.

LED DESK LAMP

Model No.: TT-DL057

Prepared For : SUNVALLEYTEK INTERNATIONAL, INC.
Address : 46724 Lakeview Blvd, Fremont, California, United States 94538-6529

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei
community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,
China.518102
Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number : SZAWW18112002-01

Date of Receipt : Nov. 12, 2018

Date of Test : Nov. 12~Dec. 03, 2018

Date of Report : Dec. 03, 2018

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. Description Of Test Setup.....	6
1.6. Test Equipment List.....	7
1.7. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
5. Antenna Requirement.....	23
5.1. Test Standard and Requirement.....	23
5.2. Antenna Connected Construction.....	23
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	24
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	26
APPENDIX III -- INTERNAL PHOTOGRAPH.....	31

TEST REPORT

Applicant : SUNVALLEYTEK INTERNATIONAL, INC.
Manufacturer : Shenzhen NearbyExpress Technology Development Company Limited
Product Name : LED DESK LAMP
Model No. : TT-DL057
Trade Mark : TAOTRONICS
Rating(s) : Input: DC 12V, 1.2A
 Output: 5W Max

Test Standard(s) : **FCC Part15 Subpart C 2018, Paragraph 15.209**
Test Method(s) : **ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test

Nov. 12~Dec. 03, 2018

Prepared By



Oliay Yang

(Engineer / Oliay Yang)

Reviewer

Snowy Meng

(Supervisor / Snowy Meng)

Approved & Authorized Signer

Sally Zhang

(Manager / Sally Zhang)

1. General Information

1.1. Client Information

Applicant	:	SUNVALLEYTEK INTERNATIONAL, INC.
Address	:	46724 Lakeview Blvd, Fremont, California, United States 94538-6529
Manufacturer	:	Shenzhen NearbyExpress Technology Development Company Limited
Address	:	333 Bulong Road, Jialianda Industrial Park, Building 1, Bantian, Longgang District, Shenzhen, China
Factory	:	Shenzhen NearbyExpress Technology Development Company Limited
Address	:	333 Bulong Road, Jialianda Industrial Park, Building 1, Bantian, Longgang District, Shenzhen, China

1.2. Description of Device (EUT)

Product Name	:	LED DESK LAMP	
Model No.	:	TT-DL057	
Trade Mark	:	TAOTRONICS	
Test Power Supply	:	AC 240V, 60Hz for adapter/ AC 120V, 60Hz for adapter	
Test Sample No.	:	S1(Normal Sample), S2(Engineering Sample)	
Product Description	:	Operation Frequency:	111~205KHz
	:	Modulation Type:	MSK
	:	Antenna Type:	Inductive loop coil Antenna
	:	Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

1.3. Auxiliary Equipment Used During Test

Adapter	:	MODEL: NLB120120W1A1S47 INPUT: 100-240V~ 50/60Hz, 0.5A MAX OUTPUT: DC 12V, 1.2A
Mobile Phone	:	iPhone 6S

1.4. Description of Test Modes



To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Wireless Charger Mode+ON Mode
Mode 2	ON Mode

For Conducted Emission	
Final Test Mode	Description
Mode 1	Wireless Charger Mode+ON Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	Wireless Charger Mode+ON Mode
Mode 2	ON Mode

1.5. Description Of Test Setup

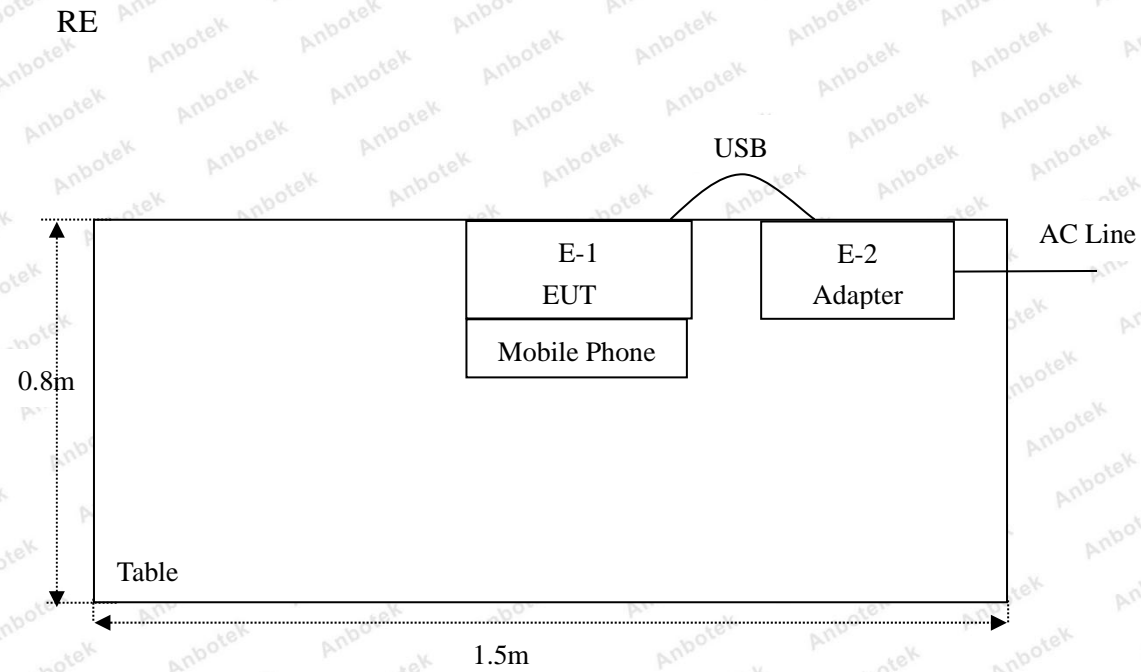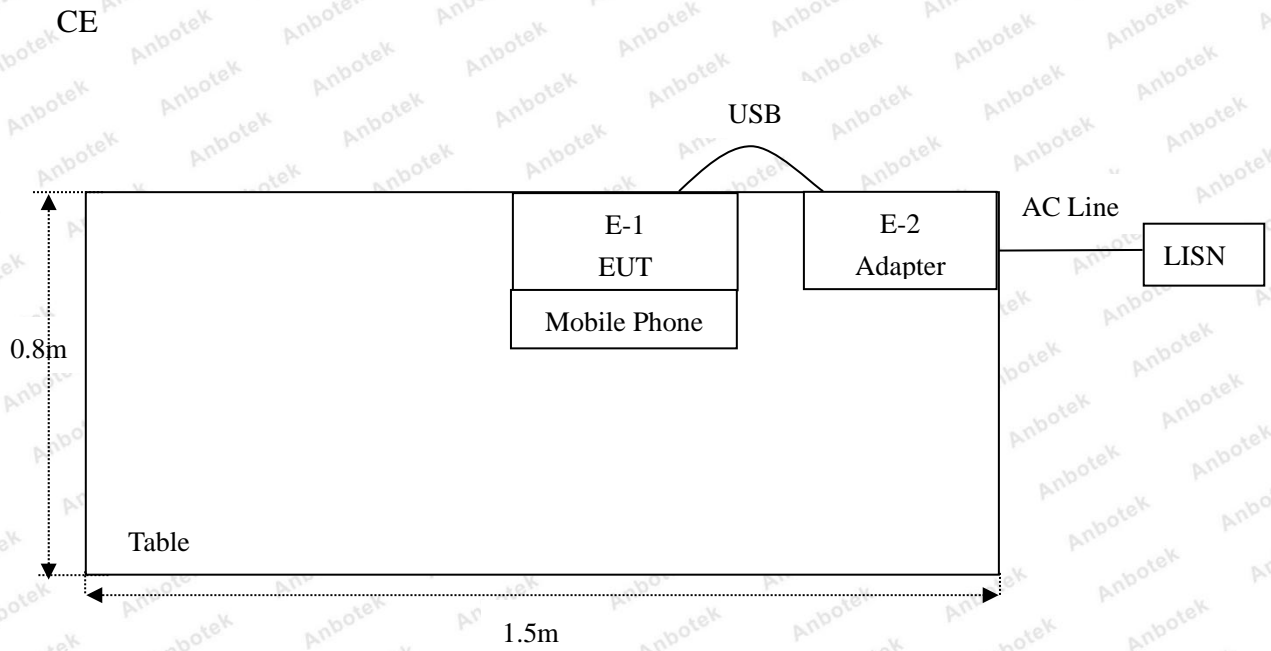

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 05, 2018	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 05, 2018	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 05, 2018	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 05, 2018	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 05, 2018	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Nov. 05, 2018	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 19, 2018	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 19, 2018	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 19, 2018	1 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Nov. 20, 2018	1 Year
11.	Pre-amplifier	SONOMA	310N	186860	Nov. 05, 2018	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 05, 2018	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 05, 2018	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 05, 2018	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 05, 2018	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 05, 2018	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 05, 2018	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Apr. 02, 2018	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Nov. 01, 2018	1 Year

1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS
Part 15.203	Antenna Requirement	PASS


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

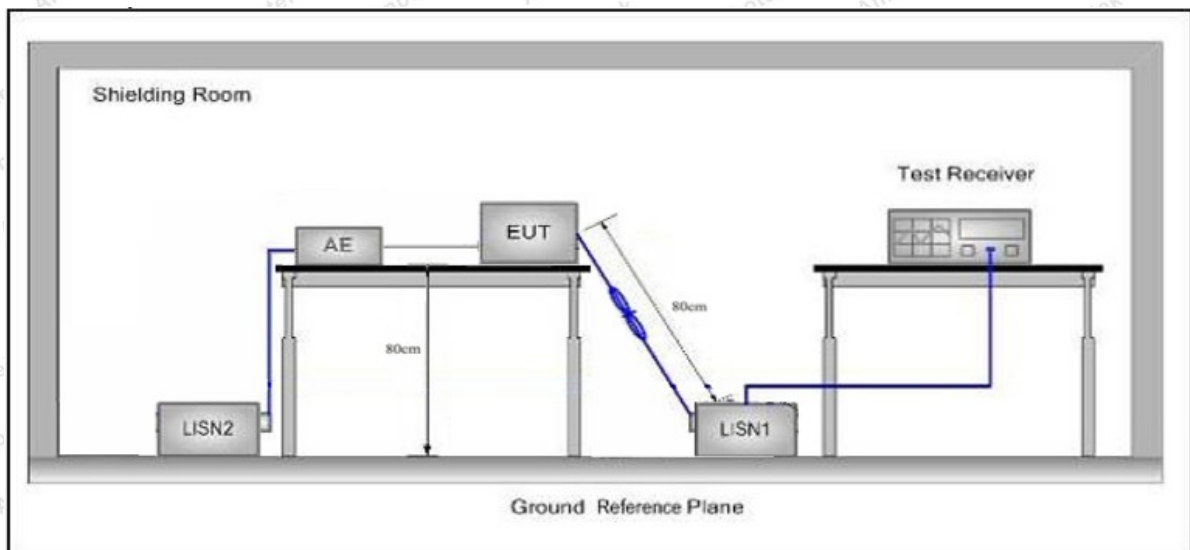

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Wireless Charger Mode+ON Mode
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.: 24.2°C Hum.: 47%

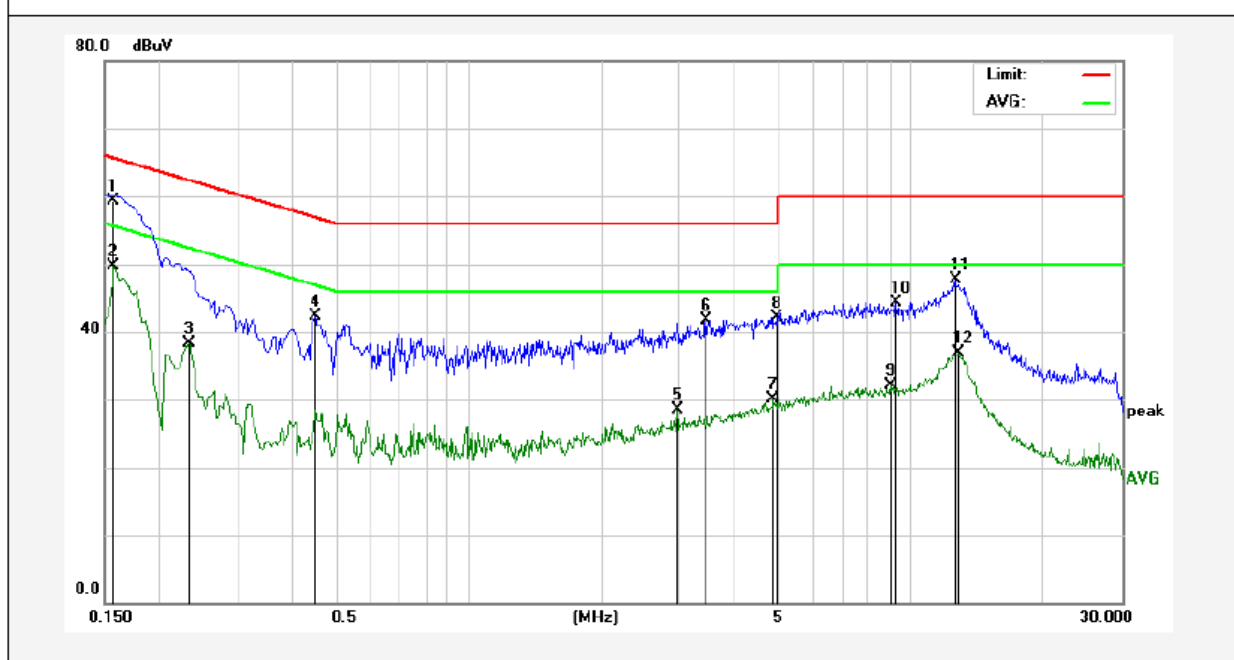

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1580	39.36	19.90	59.26	65.56	-6.30	QP	
2	0.1580	29.72	19.90	49.62	55.56	-5.94	AVG	
3	0.2340	18.38	19.89	38.27	52.30	-14.03	AVG	
4	0.4500	22.29	19.96	42.25	56.87	-14.62	QP	
5	2.9620	8.33	20.16	28.49	46.00	-17.51	AVG	
6	3.4420	21.56	20.17	41.73	56.00	-14.27	QP	
7	4.8900	9.97	20.20	30.17	46.00	-15.83	AVG	
8	4.9699	21.93	20.21	42.14	56.00	-13.86	QP	
9	8.9660	11.81	20.31	32.12	50.00	-17.88	AVG	
10	9.2940	24.06	20.32	44.38	60.00	-15.62	QP	
11	12.5860	27.33	20.30	47.63	60.00	-12.37	QP	
12	12.8380	16.67	20.29	36.96	50.00	-13.04	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Wireless Charger Mode+ON Mode
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 24.2°C Hum.: 47%

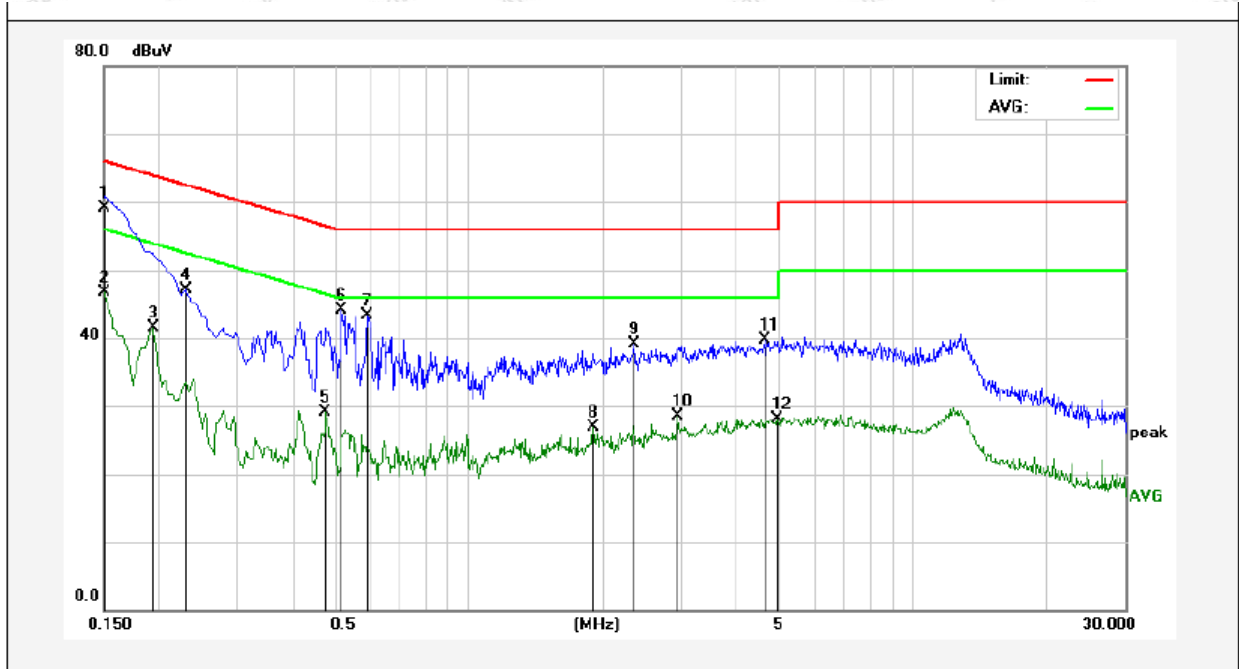

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	39.24	19.90	59.14	65.99	-6.85	QP	
2	0.1500	26.73	19.90	46.63	55.99	-9.36	AVG	
3	0.1940	21.60	19.90	41.50	53.86	-12.36	AVG	
4	0.2300	27.27	19.89	47.16	62.45	-15.29	QP	
5	0.4740	9.07	19.97	29.04	46.44	-17.40	AVG	
6	0.5180	24.03	19.99	44.02	56.00	-11.98	QP	
7	0.5899	23.36	20.01	43.37	56.00	-12.63	QP	
8	1.9060	6.79	20.14	26.93	46.00	-19.07	AVG	
9	2.3460	19.01	20.15	39.16	56.00	-16.84	QP	
10	2.9580	8.32	20.16	28.48	46.00	-17.52	AVG	
11	4.6460	19.58	20.20	39.78	56.00	-16.22	QP	
12	4.9340	8.00	20.20	28.20	46.00	-17.80	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Wireless Charger Mode+ON Mode
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.: 24.2°C Hum.: 47%

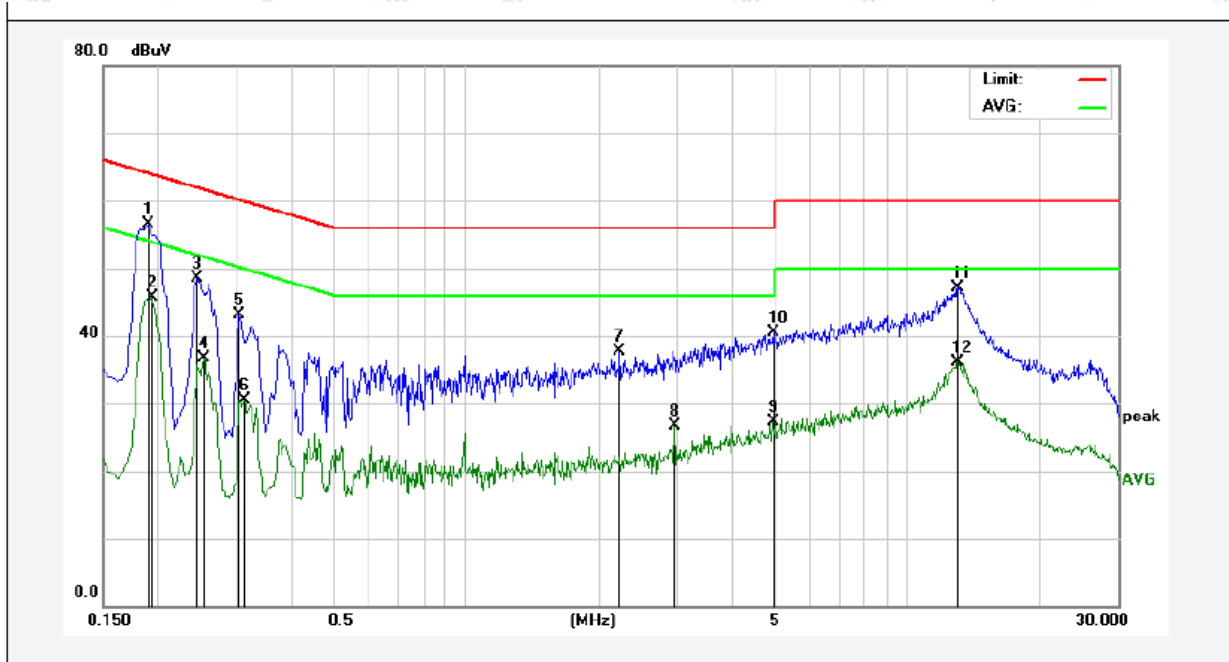

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1900	36.67	19.90	56.57	64.03	-7.46	QP	
2	0.1940	25.79	19.90	45.69	53.86	-8.17	AVG	
3	0.2460	28.62	19.89	48.51	61.89	-13.38	QP	
4	0.2540	16.78	19.89	36.67	51.62	-14.95	AVG	
5	0.3060	23.21	19.89	43.10	60.08	-16.98	QP	
6	0.3140	10.70	19.90	30.60	49.86	-19.26	AVG	
7	2.2260	17.56	20.14	37.70	56.00	-18.30	QP	
8	2.9660	6.62	20.16	26.78	46.00	-19.22	AVG	
9	4.9420	7.13	20.20	27.33	46.00	-18.67	AVG	
10	4.9540	20.38	20.21	40.59	56.00	-15.41	QP	
11	13.0380	26.79	20.29	47.08	60.00	-12.92	QP	
12	13.0380	15.82	20.29	36.11	50.00	-13.89	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: Wireless Charger Mode+ON Mode
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 24.2°C Hum.: 47%

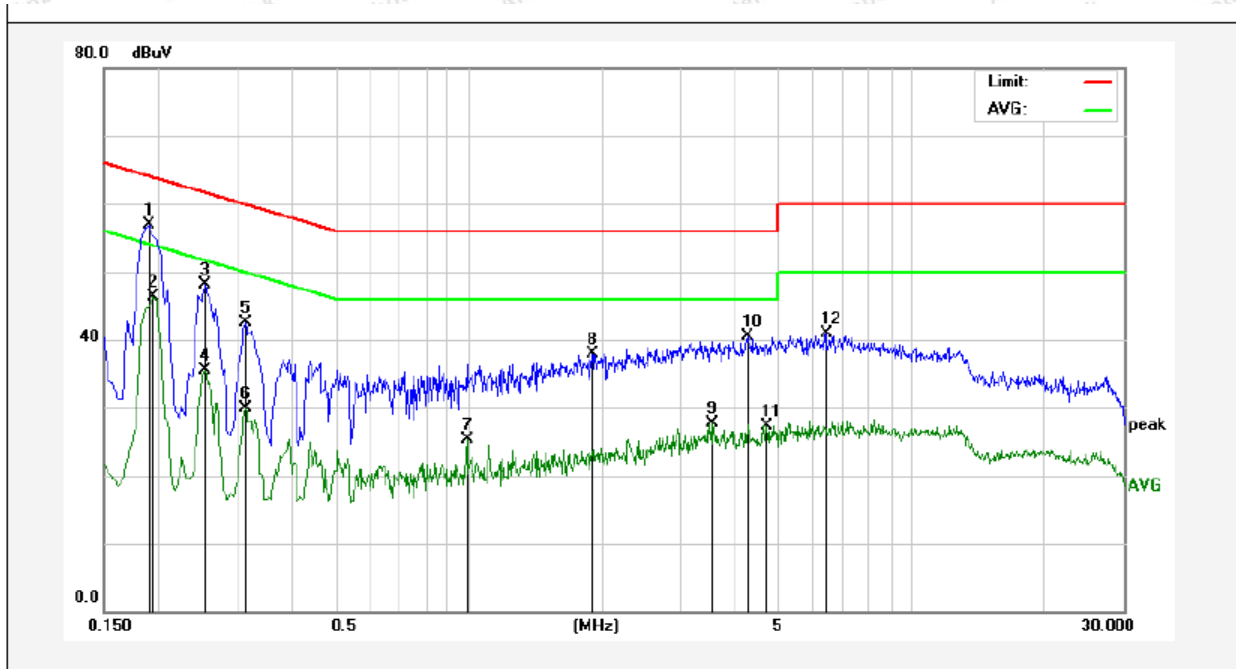

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1900	36.96	19.90	56.86	64.03	-7.17	QP	
2	0.1940	26.45	19.90	46.35	53.86	-7.51	AVG	
3	0.2540	28.13	19.89	48.02	61.62	-13.60	QP	
4	0.2540	15.68	19.89	35.57	51.62	-16.05	AVG	
5	0.3140	22.61	19.90	42.51	59.86	-17.35	QP	
6	0.3140	10.09	19.90	29.99	49.86	-19.87	AVG	
7	0.9900	5.15	20.12	25.27	46.00	-20.73	AVG	
8	1.8980	17.75	20.14	37.89	56.00	-18.11	QP	
9	3.5500	7.62	20.17	27.79	46.00	-18.21	AVG	
10	4.2540	20.28	20.19	40.47	56.00	-15.53	QP	
11	4.7100	7.15	20.20	27.35	46.00	-18.65	AVG	
12	6.4140	20.59	20.24	40.83	60.00	-19.17	QP	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

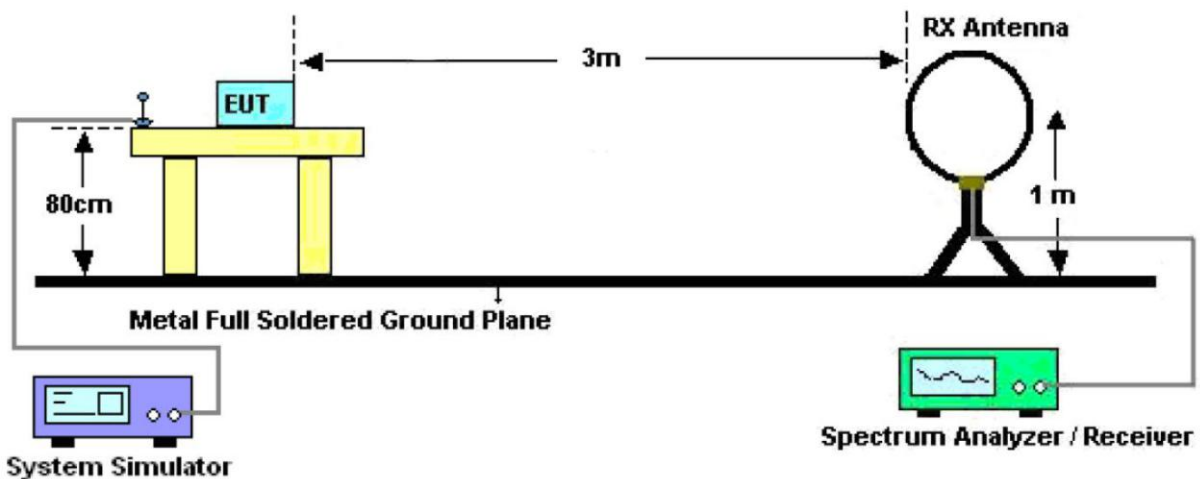


Figure 1. Below 30MHz

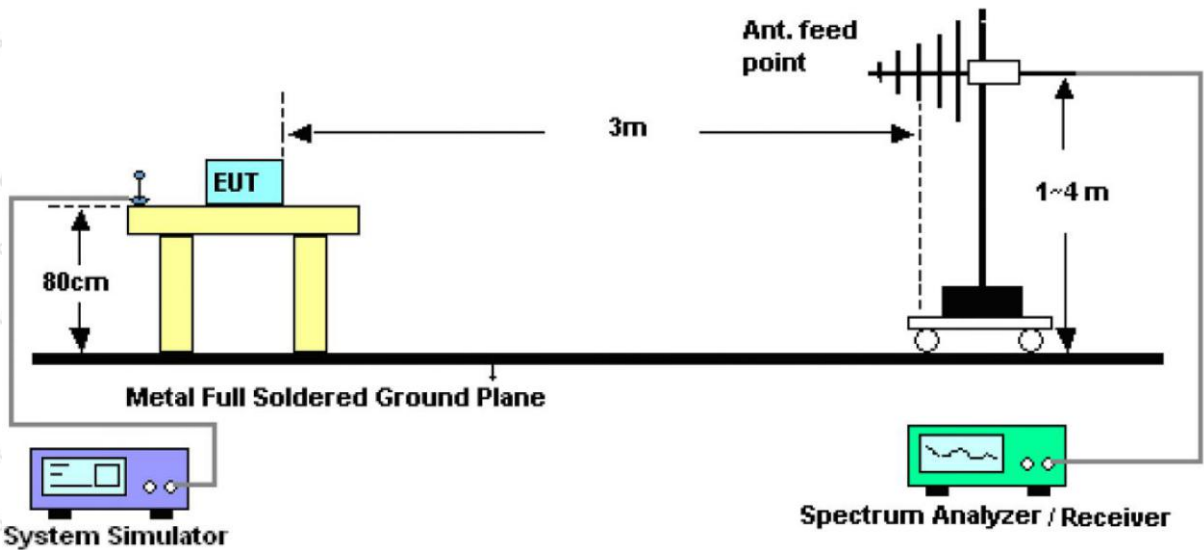


Figure 2. 30MHz to 1GHz

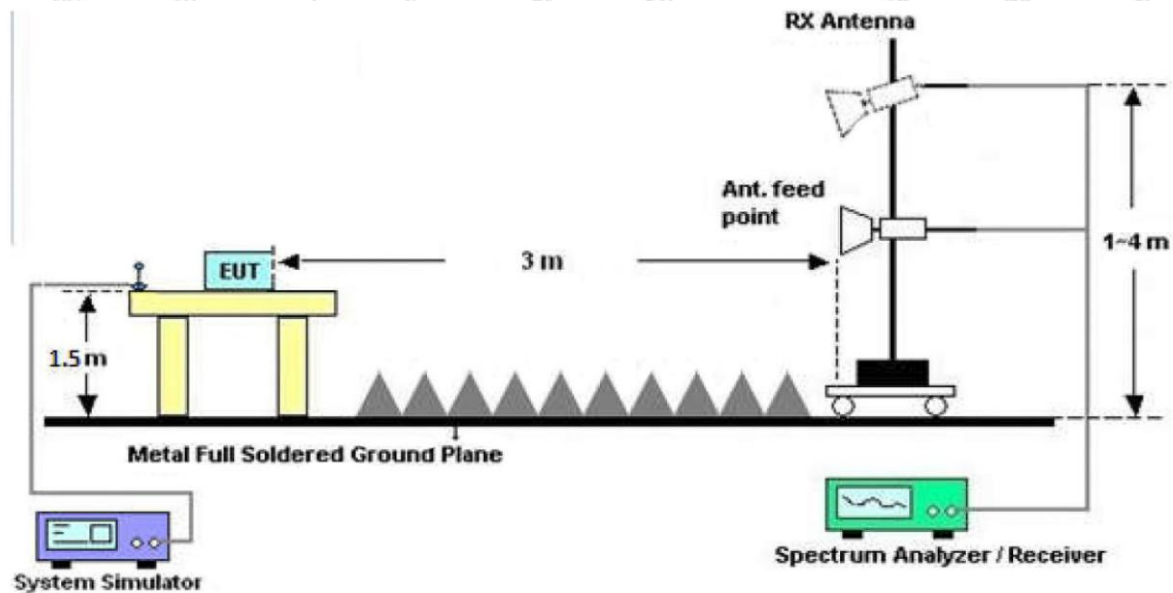


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

Test Results

(Between 9KHz – 30MHz)

Job No.:	SZAWW18112002-01		
Standard:	FCC PART15 C _3m	Power Source:	AC 120V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	25.4°C/54%RH
Test Mode:	Mode 1	Distance:	3m




Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	degree
									(dgc)
0.0157	67.42	19.27	2.53	0	89.22	143.52	-54.30	Peak	240
0.0157	57.29	19.27	2.53	0	79.09	123.52	-44.43	AV	240
0.0354	49.12	19.30	2.53	0	70.95	136.50	-65.55	Peak	124
0.0354	39.90	19.30	2.53	0	61.73	116.50	-54.77	AV	124
0.0518	43.34	19.35	2.55	0	65.24	133.21	-67.97	Peak	95
0.0518	22.88	19.35	2.55	0	44.78	113.21	-68.43	AV	95
0.0781	41.64	19.35	2.55	0	63.54	129.66	-66.12	Peak	250
0.0781	30.34	19.35	2.55	0	52.24	109.66	-57.42	AV	250
0.2060	36.33	20.73	2.60	0	59.66	121.28	-61.62	Peak	330
0.2060	26.25	20.73	2.60	0	49.58	101.28	-51.70	AV	330
3.5420	12.18	21.83	2.72	0	36.73	69.54	-32.81	QP	100

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.


(Between 30MHz -1000 MHz)

Job No.:	SZAWW18112002-01	Polarization:	Horizontal
Standard:	FCC PART15 C _3m	Power Source:	AC 120V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.2°C/52%RH
Test Mode:	Mode 1	Distance:	3m

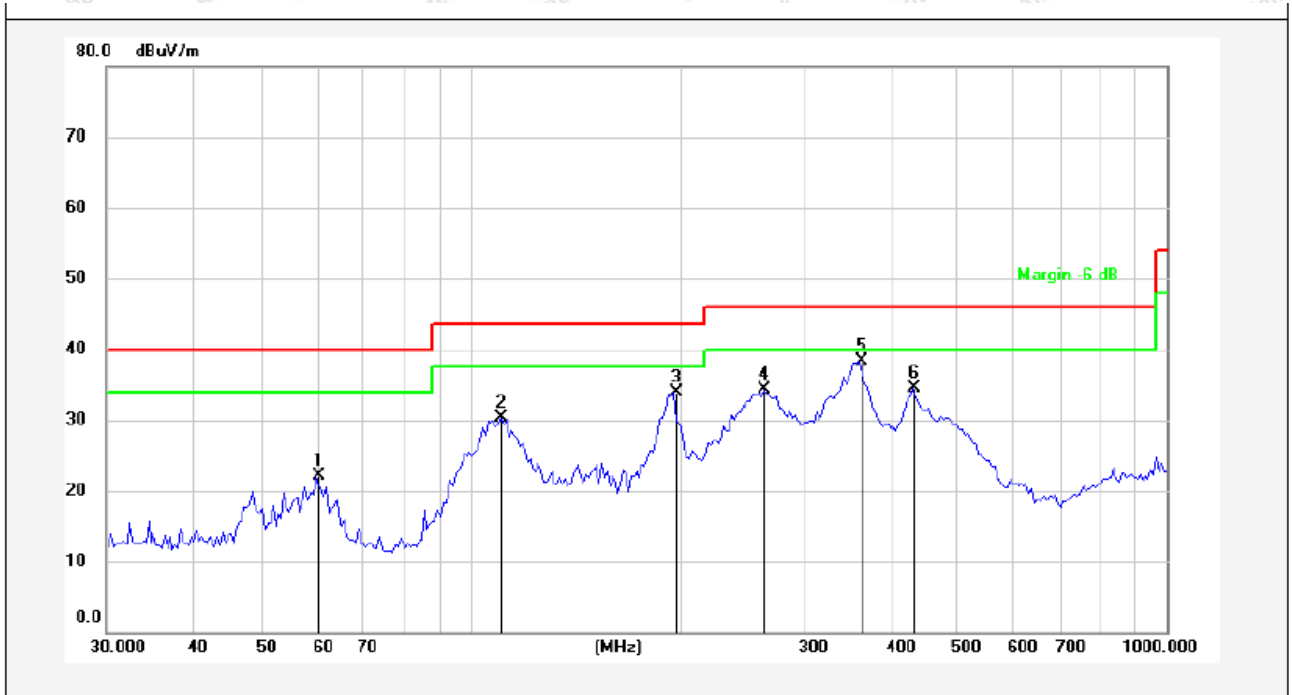


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	59.9639	38.28	-16.23	22.05	40.00	-17.95	QP	300	152	
2	110.7627	51.71	-21.46	30.25	43.50	-13.25	QP	300	296	
3	195.8220	54.81	-20.95	33.86	43.50	-9.64	QP	300	341	
4	263.8190	53.91	-19.63	34.28	46.00	-11.72	QP	300	320	
5	361.7139	53.45	-15.18	38.27	46.00	-7.73	QP	300	12	
6	431.0316	48.71	-14.25	34.46	46.00	-11.54	QP	300	35	

Job No.: SZAWW18112002-01 **Polarization:** Vertical
Standard: FCC PART15 C _3m **Power Source:** AC 120V, 60Hz for adapter
Test item: Radiation Test **Temp.(C)/Hum.(%RH):** 24.2°C/52%RH
Test Mode: Mode 1 **Distance:** 3m

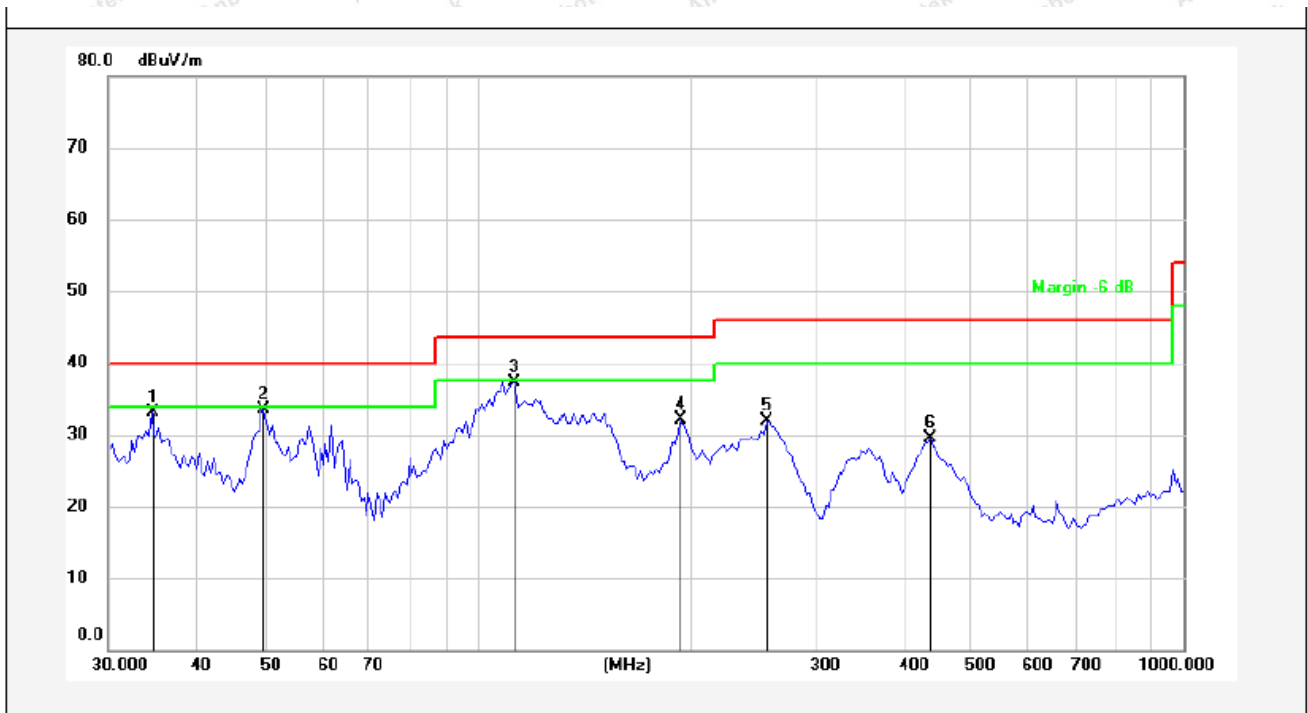


No.	Freq. (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	34.5173	49.00	-15.96	33.04	40.00	-6.96	QP	300	46	
2	49.8814	48.42	-14.85	33.57	40.00	-6.43	QP	300	274	
3	112.7218	53.14	-15.79	37.35	43.50	-6.15	QP	300	152	
4	194.1128	48.69	-16.54	32.15	43.50	-11.35	QP	300	320	
5	256.9712	46.58	-14.73	31.85	46.00	-14.15	QP	300	312	
6	438.6554	42.62	-13.21	29.41	46.00	-16.59	QP	300	203	

Job No.:	SZAWW18112002-01	Polarization:	Horizontal
Standard:	FCC PART15 C _3m	Power Source:	AC 240V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.2°C/52%RH
Test Mode:	Mode 1	Distance:	3m

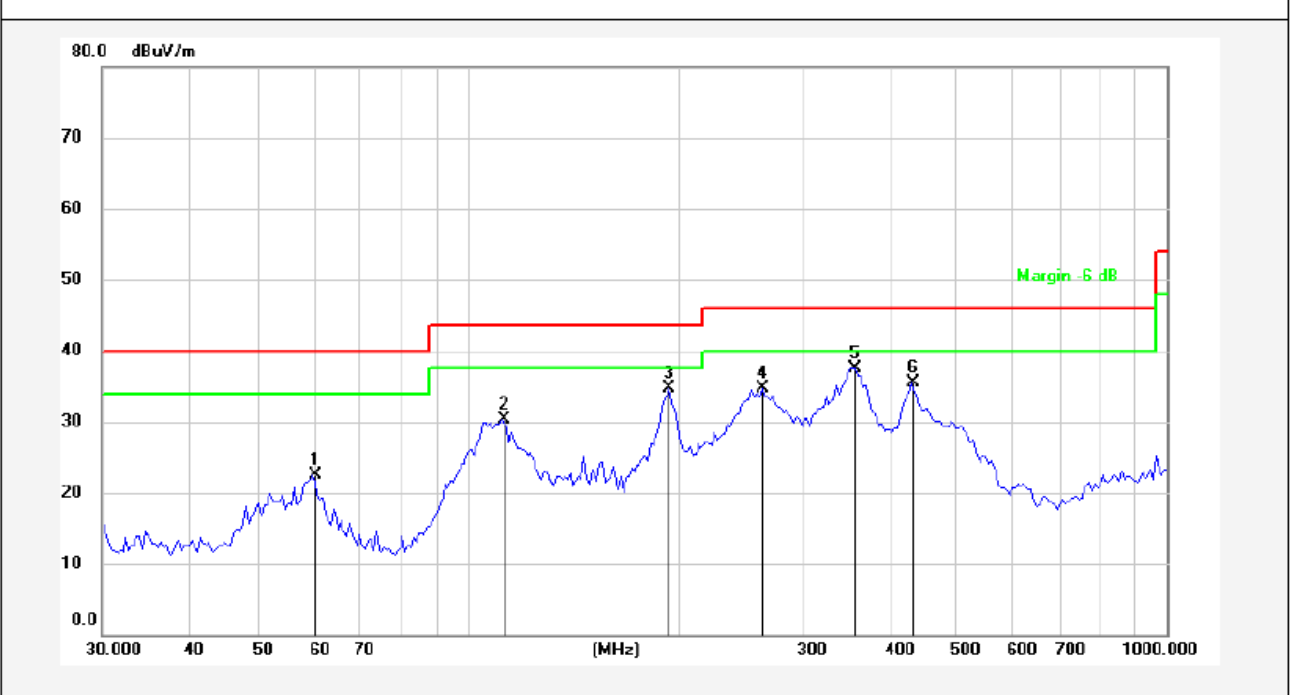

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	59.9639	38.80	-16.23	22.57	40.00	-17.43	QP	300	174	
2	111.7380	51.93	-21.63	30.30	43.50	-13.20	QP	300	214	
3	194.1128	55.73	-21.12	34.61	43.50	-8.89	QP	300	304	
4	263.8190	54.34	-19.63	34.71	46.00	-11.29	QP	300	286	
5	358.5568	52.71	-15.24	37.47	46.00	-8.53	QP	300	120	
6	431.0316	49.72	-14.25	35.47	46.00	-10.53	QP	300	99	

Job No.: SZAWW181112002-01 **Polarization:** Vertical
Standard: FCC PART15 C _3m **Power Source:** AC 240V, 60Hz for adapter
Test item: Radiation Test **Temp.(C)/Hum.(%RH):** 24.2°C/52%RH
Test Mode: Mode 1 **Distance:** 3m

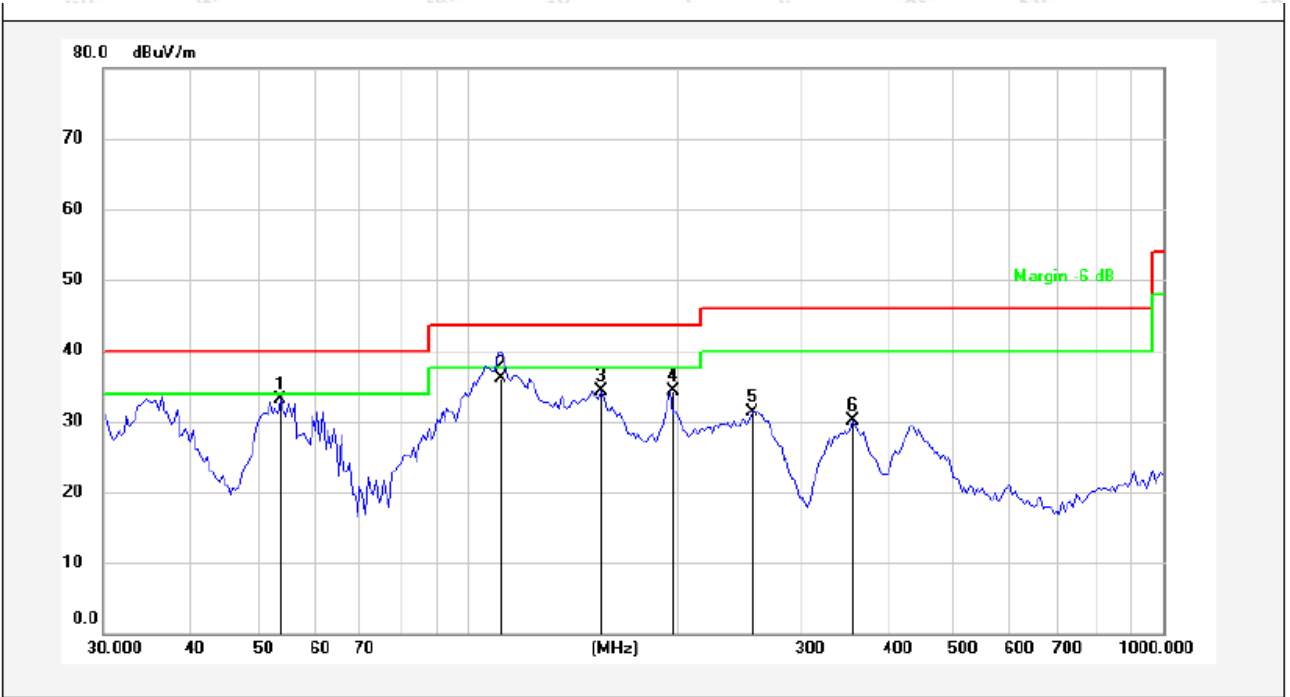

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	53.9763	48.02	-14.94	33.08	40.00	-6.92	QP	300	123	
2	111.6380	51.74	-15.61	36.13	43.50	-7.37	QP	300	117	
3	155.9101	53.13	-18.74	34.39	43.50	-9.11	QP	300	321	
4	195.8220	50.76	-16.53	34.23	43.50	-9.27	QP	300	201	
5	256.9712	46.13	-14.73	31.40	46.00	-14.60	QP	300	341	
6	358.5568	44.29	-14.24	30.05	46.00	-15.95	QP	300	360	


5. Antenna Requirement

5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard

5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

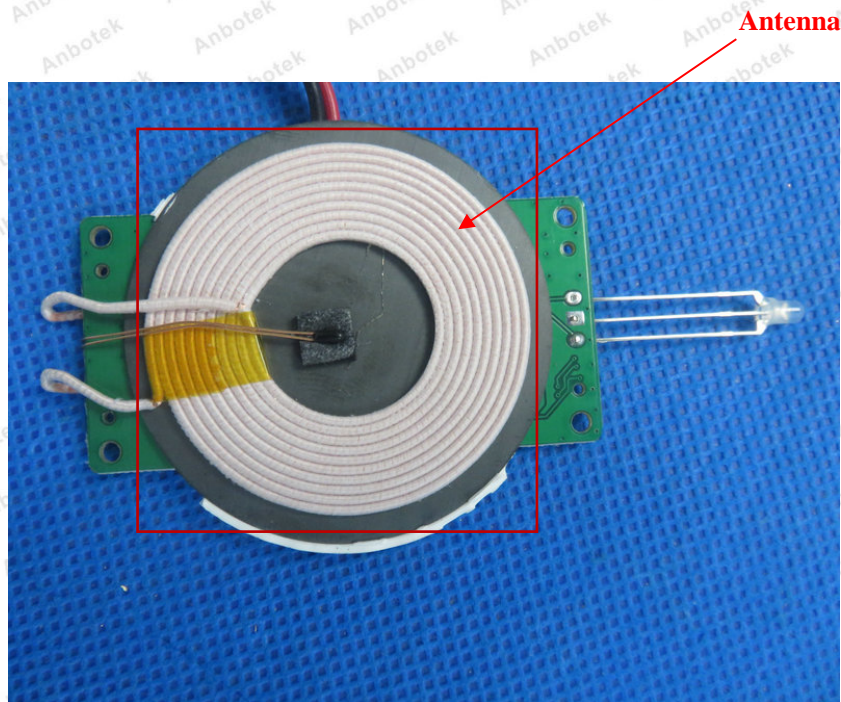



APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement





Photo of Radiation Emission Test


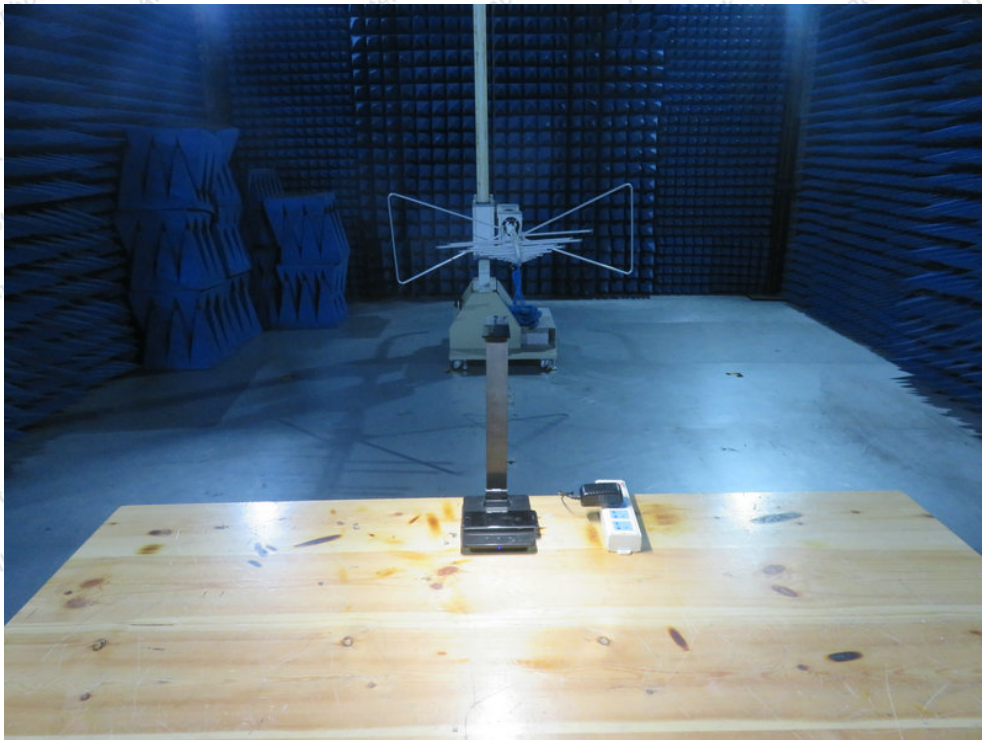


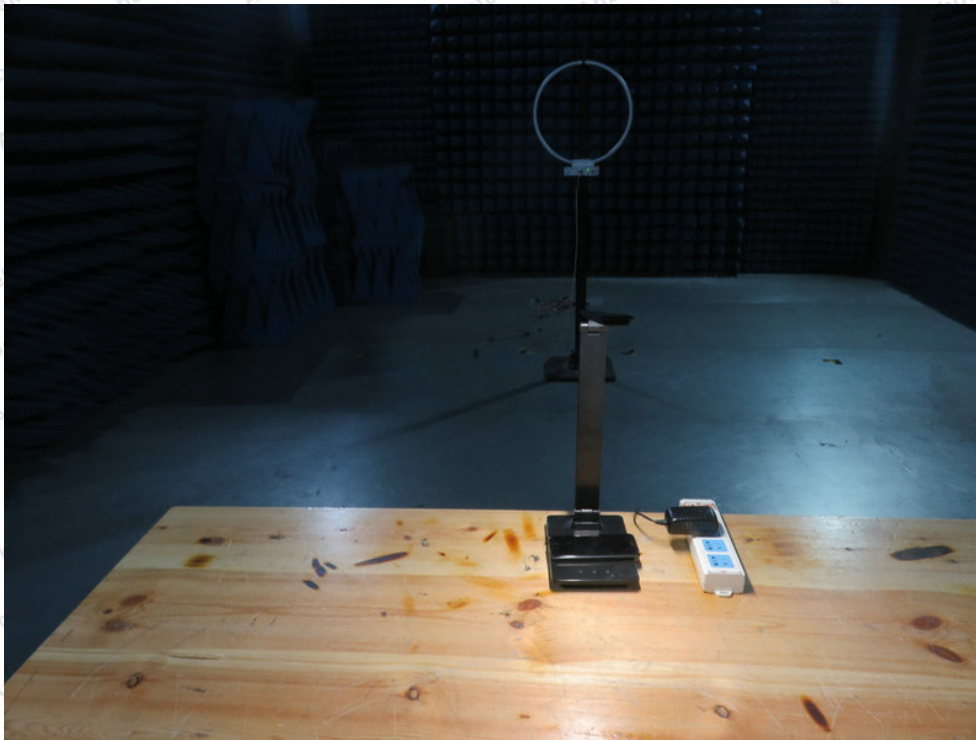

APPENDIX II -- EXTERNAL PHOTOGRAPH



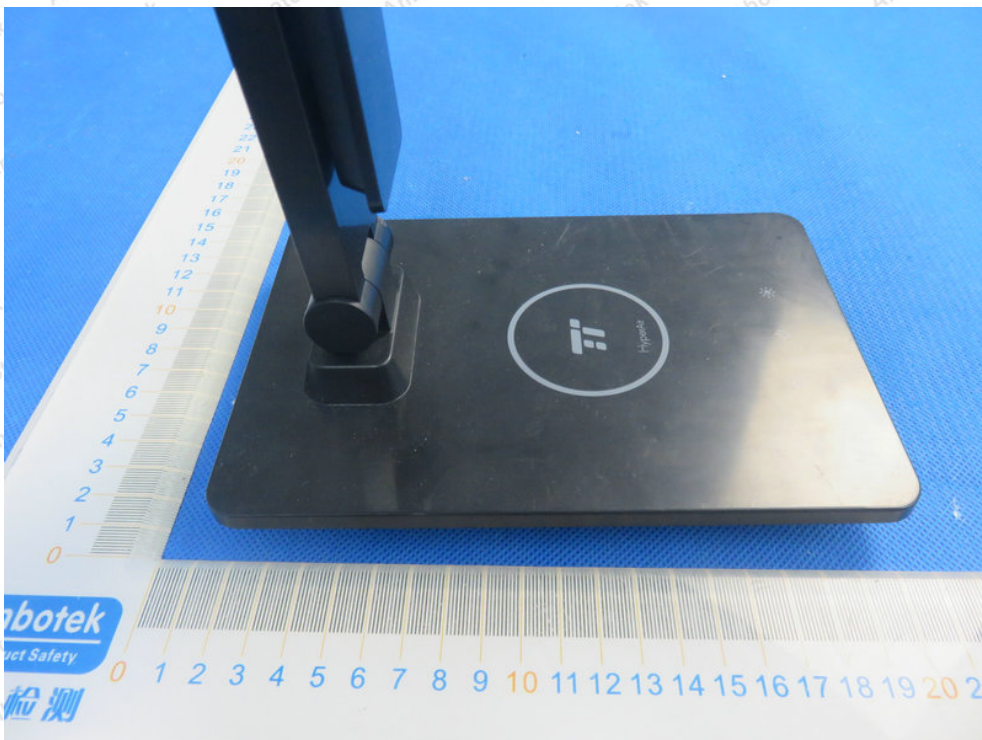
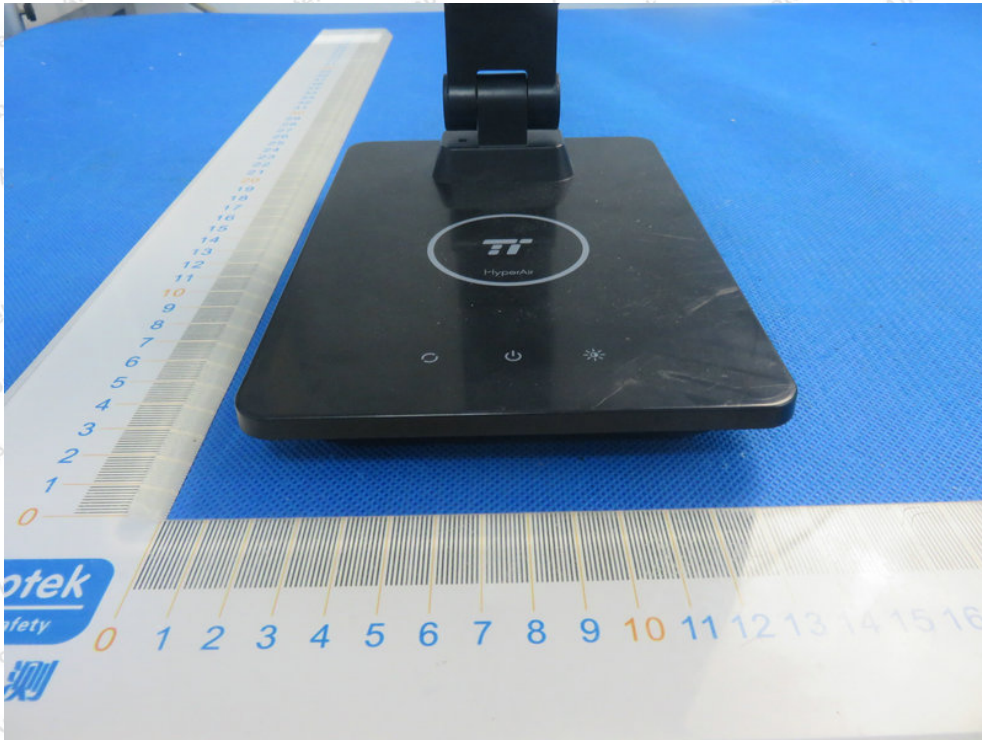


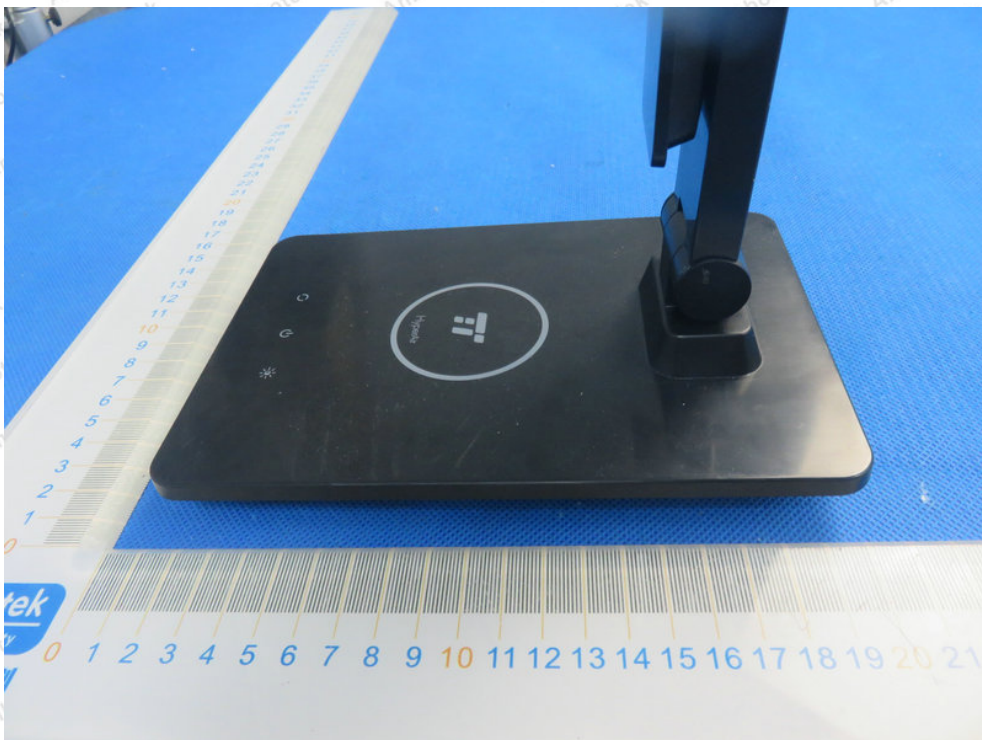
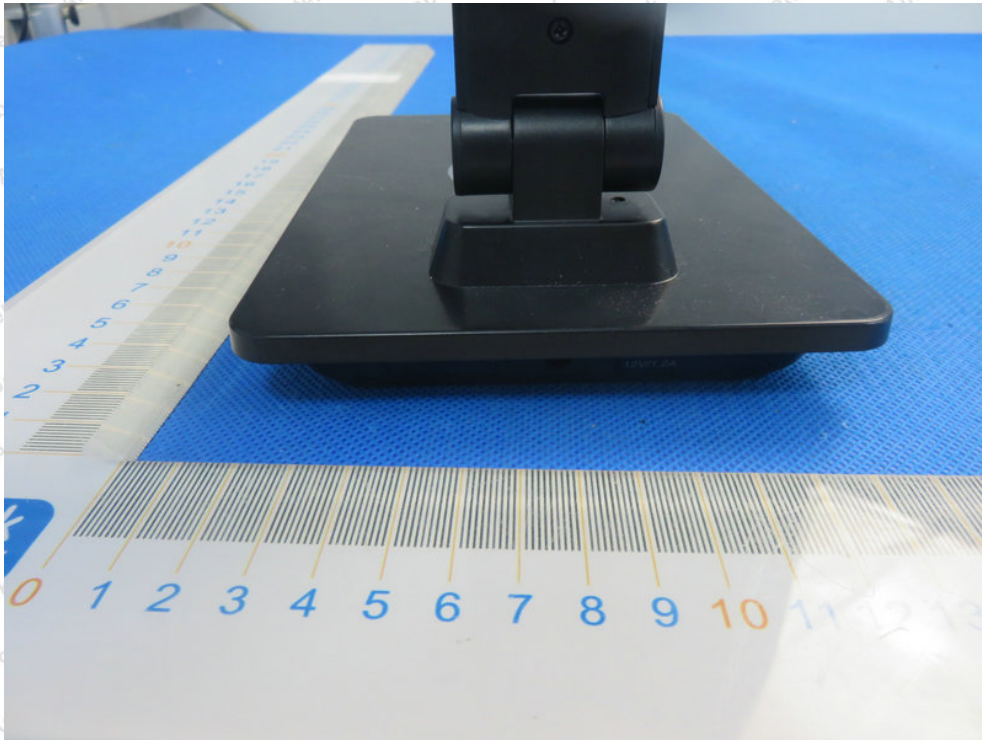











APPENDIX III -- INTERNAL PHOTOGRAPH

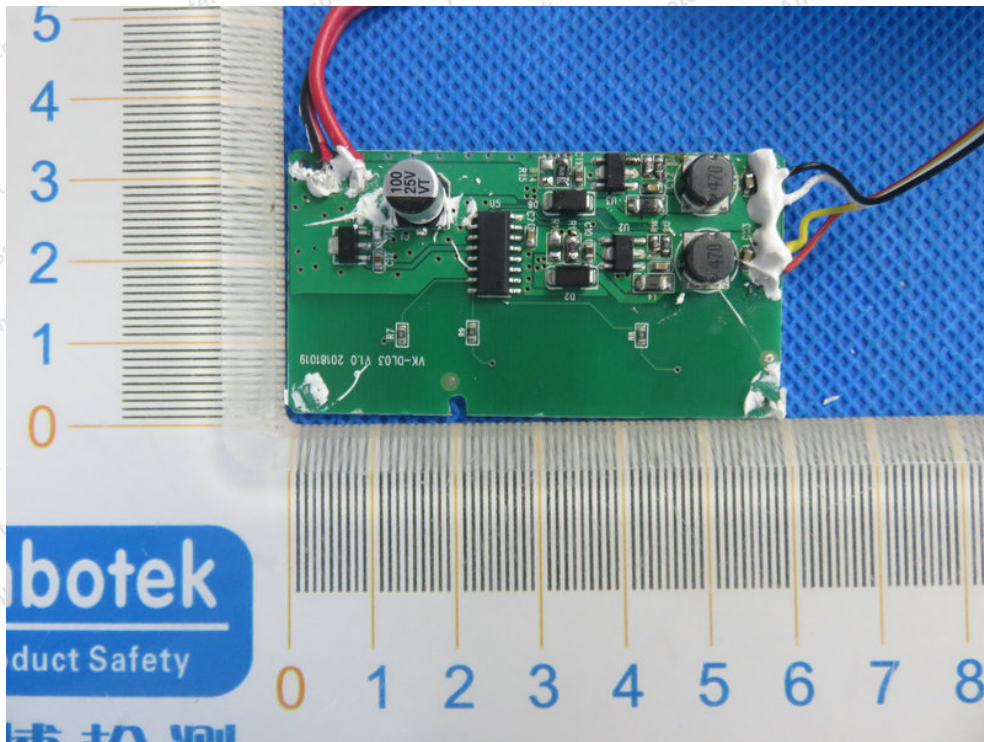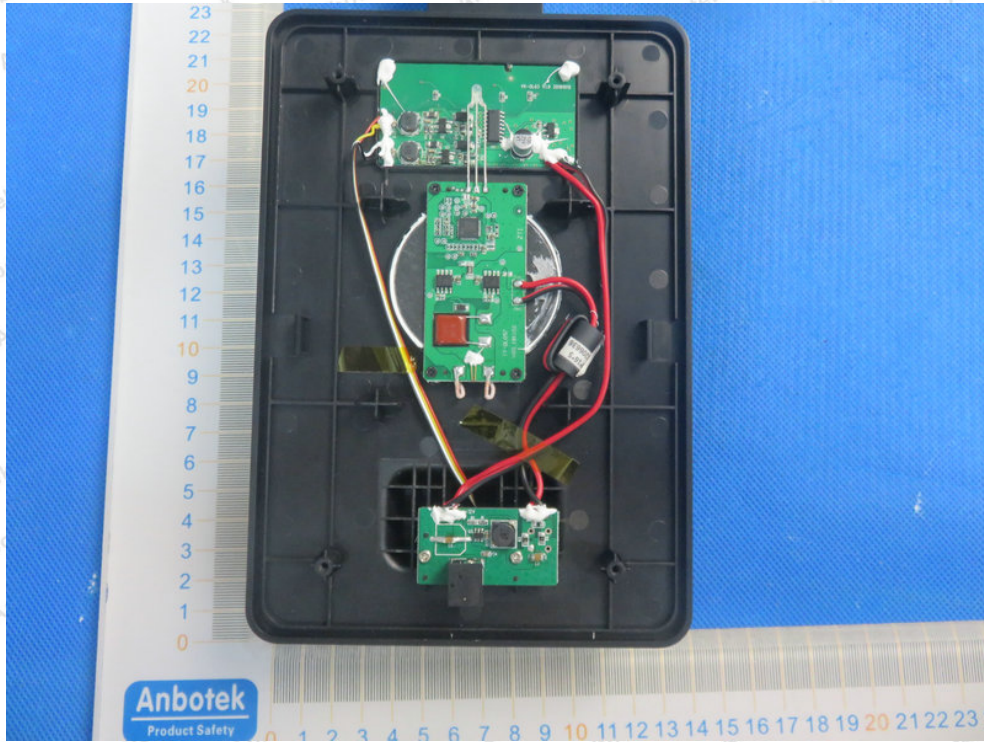

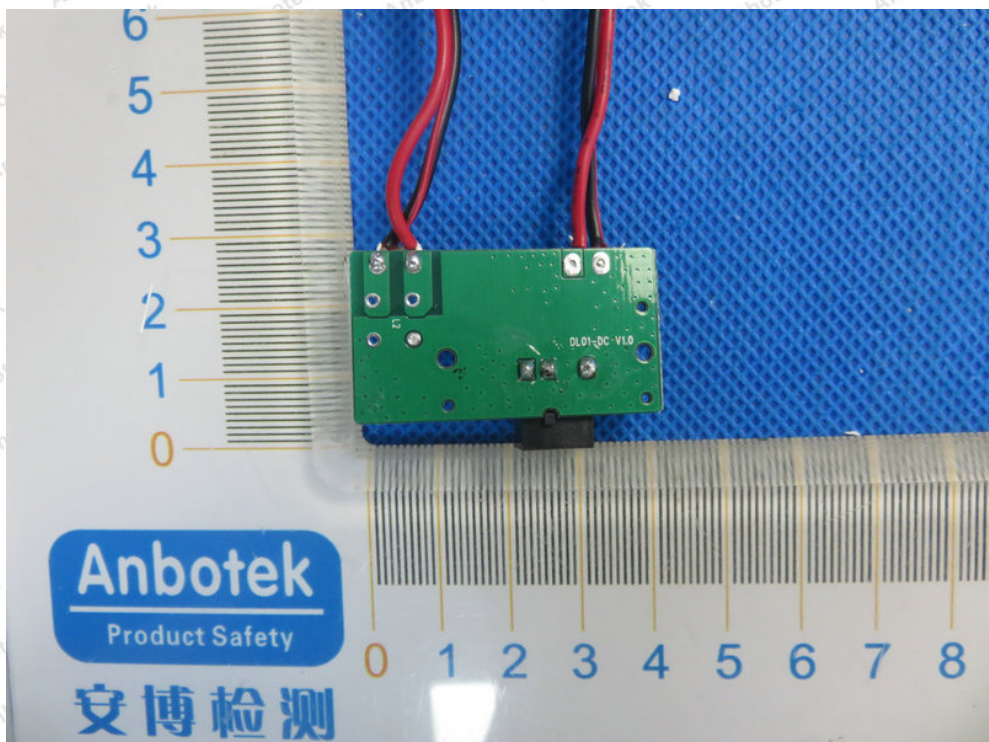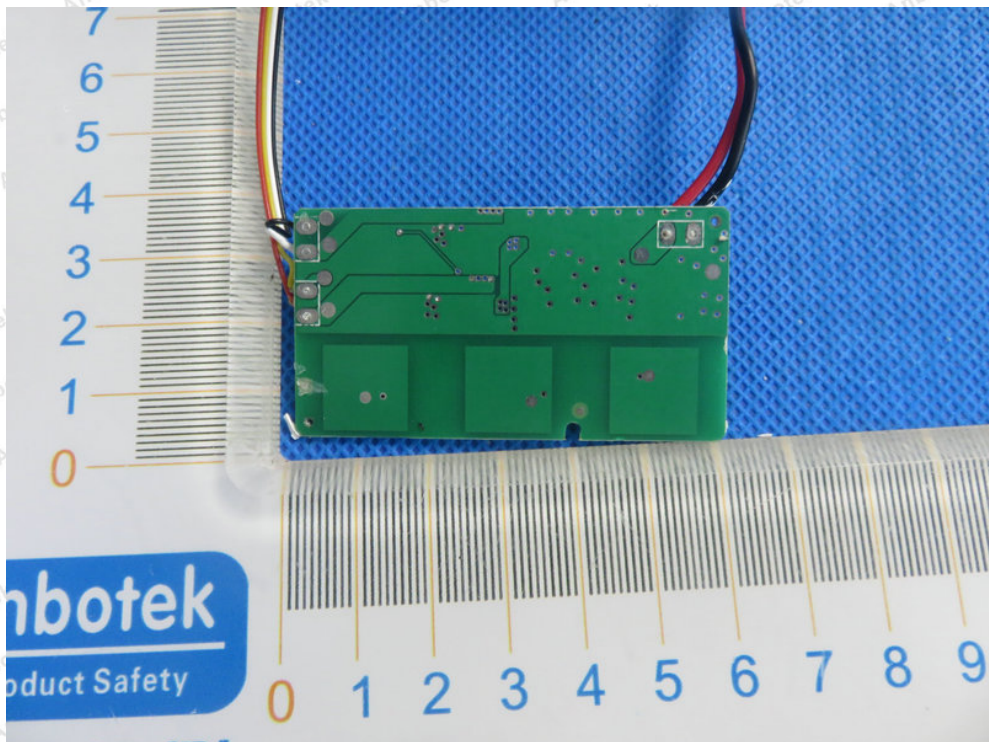

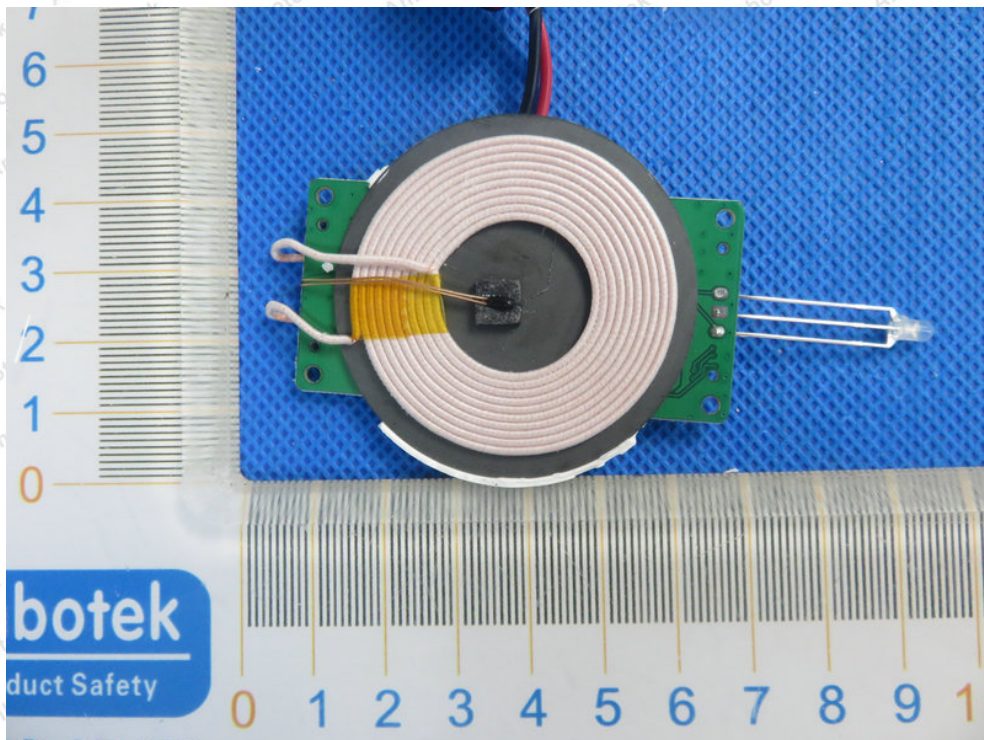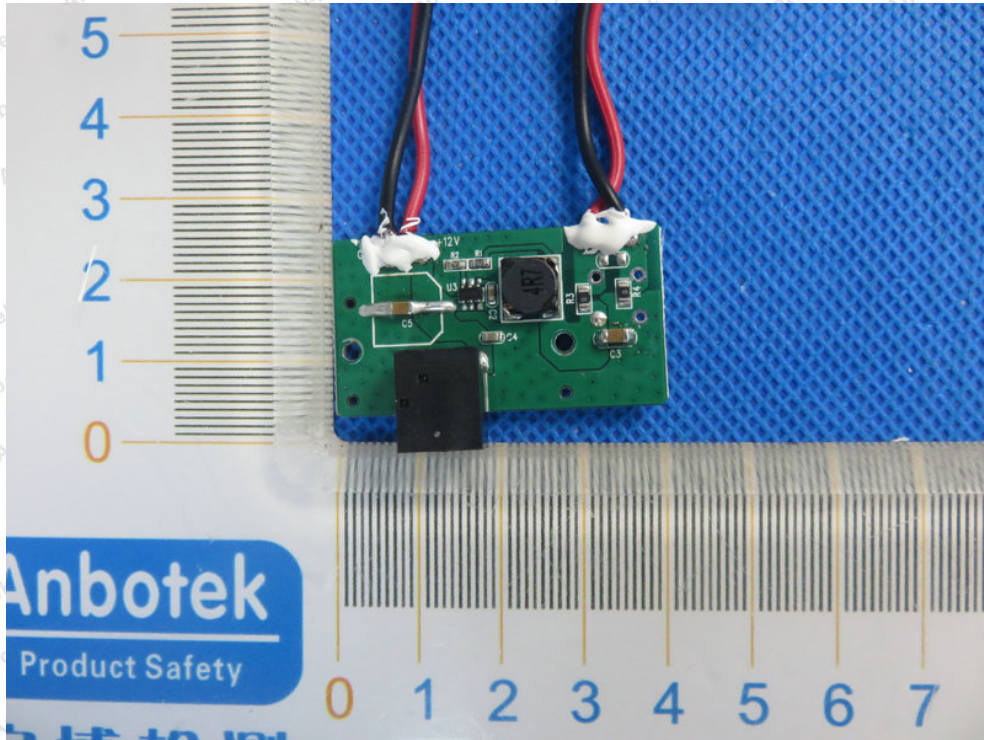

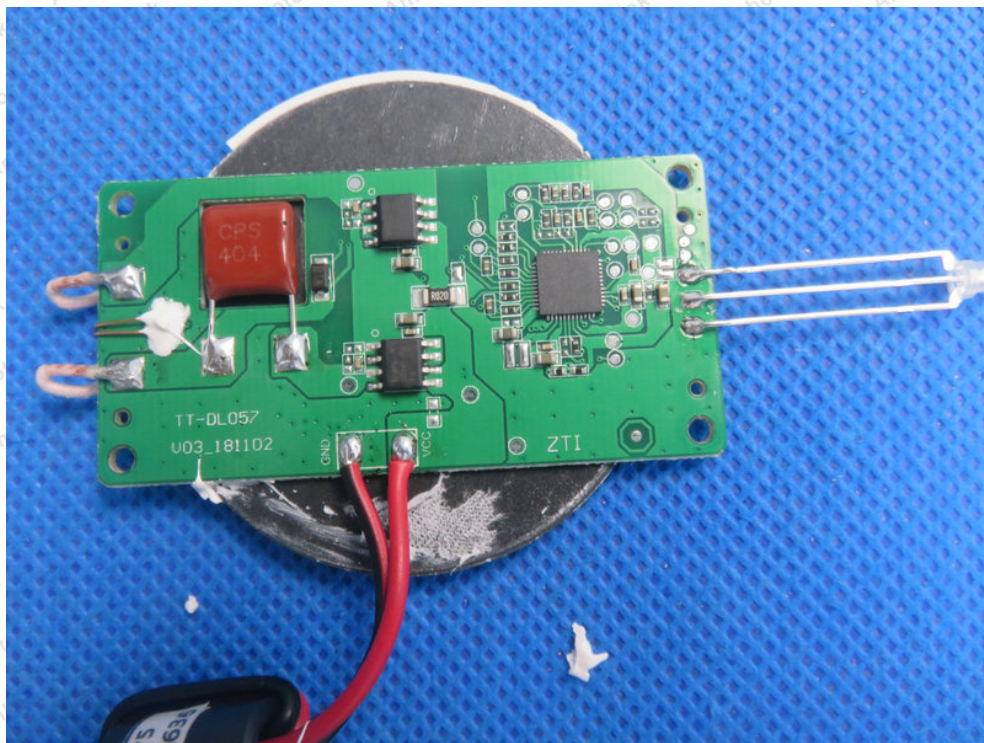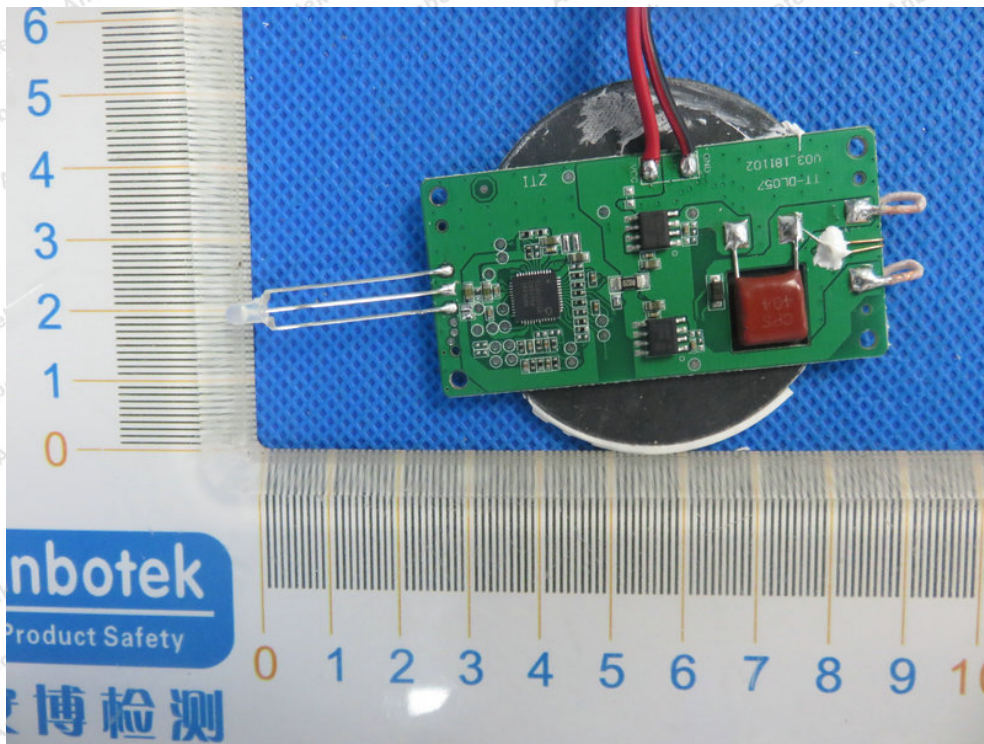

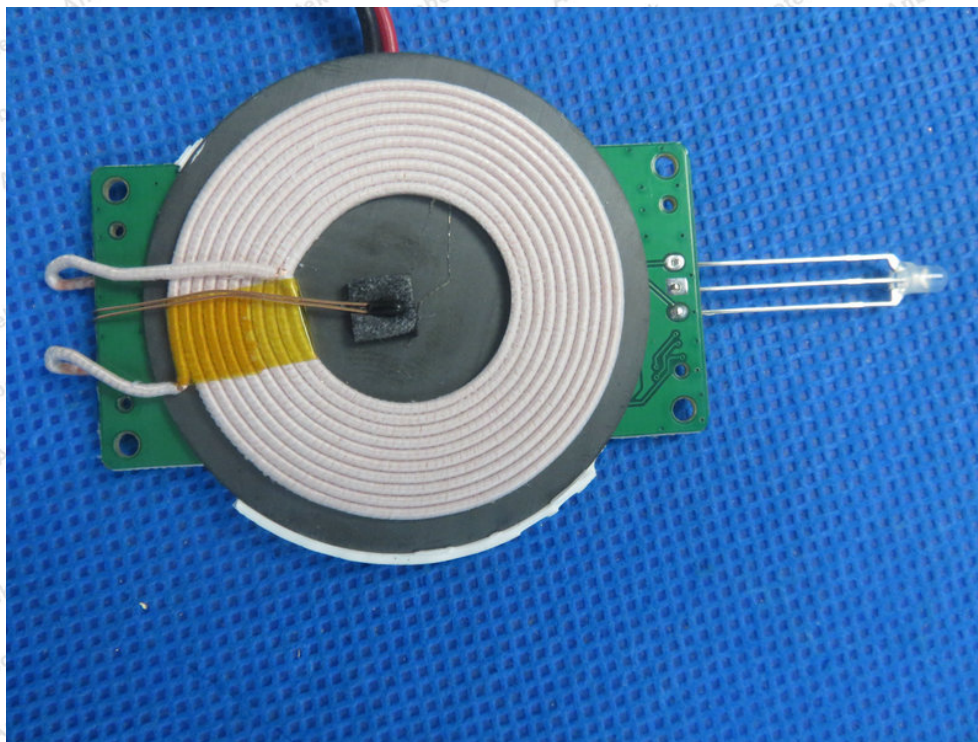

----- End of Report -----