

FCC TEST REPORT

For

SUNVALLEYTEK INTERNATIONAL, INC.

Base Station

Model No.: VA-HS002

Prepared For : SUNVALLEYTEK INTERNATIONAL, INC.
Address : 46724 Lakeview Blvd, Fremont, California, United States 94538-6529

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei
community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,
China.518102
Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number : SZAWW180929003-02
Date of Receipt : Sept. 29, 2018
Date of Test : Sept. 29~Dec. 22, 2018
Date of Report : Dec. 22, 2018

Contents

- 1. General Information.....
 - 1.1. Client Information.....
 - 1.2. Description of Device (EUT).....
 - 1.3. Auxiliary Equipment Used During Test.....
 - 1.4. Description of Test Modes.....
 - 1.5. Description of Test Setup.....
 - 1.6. Test Equipment List.....
 - 1.7. Measurement Uncertainty.....
 - 1.8. Description of Test Facility.....
- 2. Summary of Test Results.....
- 3. Conducted Emission Test.....
 - 3.1. Test Standard and Limit.....
 - 3.2. Test Setup.....
 - 3.3. Test Procedure.....
 - 3.4. Test Data.....
- 4. Radiation Spurious Emission and Band Edge.....
 - 4.1. Test Standard and Limit.....
 - 4.2. Test Setup.....
 - 4.3. Test Procedure.....
 - 4.4. Test Data.....
- 5. 20dB Bandwidth Test.....
 - 5.1. Test Standard and Limit.....
 - 5.2. Test Setup.....
 - 5.3. Test Procedure.....
 - 5.4. Test Data.....
- 6. Antenna Requirement.....
 - 6.1. Test Standard and Requirement.....
 - 6.2. Antenna Connected Construction.....
- APPENDIX I -- TEST SETUP PHOTOGRAPH.....
- APPENDIX II -- EXTERNAL PHOTOGRAPH.....
- APPENDIX III -- INTERNAL PHOTOGRAPH.....

TEST REPORT

Applicant : SUNVALLEYTEK INTERNATIONAL, INC.
Manufacturer : Shenzhen NearbyExpress Technology Development Company Limited
Product Name : Base Station
Model No. : VA-HS002
Trade Mark : VAVA
Rating(s) : Input: DC 12V, 1.5A
Output: DC 5V, 1A
Test Standard(s) : **FCC Part15 Subpart C, Paragraph 15.249**
Test Method(s) : **ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test

Sept. 29~Dec. 22, 2018

Prepared by



Oliang Yang

(Engineer / Oliang Yang)

Reviewer

Snowy Meng

(Supervisor / Snowy Meng)

Approved & Authorized Signer

Sally Zhang

(Manager / Sally Zhang)

1. General Information

1.1. Client Information

| | | |
|--------------|---|---|
| Applicant | : | SUNVALLEYTEK INTERNATIONAL, INC. |
| Address | : | 46724 Lakeview Blvd, Fremont, California, United States 94538-6529 |
| Manufacturer | : | Shenzhen NearbyExpress Technology Development Company Limited |
| Address | : | 333 Bulong Road, Jialianda Industrial Park, Building 1, Bantian, Longgang District, Shenzhen, China |
| Factory | : | Shenzhen NearbyExpress Technology Development Company Limited |
| Address | : | 333 Bulong Road, Jialianda Industrial Park, Building 1, Bantian, Longgang District, Shenzhen, China |

1.2. Description of Device (EUT)

| | | | |
|---|---|--|------------------|
| Product Name | : | Base Station | |
| Model No. | : | VA-HS002 | |
| Trade Mark | : | VAVA | |
| Test Power Supply | : | AC 120V, 60Hz for adapter/ AC 240V, 60Hz for adapter | |
| Test Sample No. | : | S1(Normal Sample), S2(Engineering Sample) | |
| Product Description | : | Operation Frequency: | 915MHz |
| | : | Modulation Type: | GFSK |
| | : | Antenna Type: | Monopole Antenna |
| | : | Antenna Gain(Peak): | 1 dBi |
| <p>Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2)This report is for 915MHz module.</p> | | | |

1.3. Auxiliary Equipment Used During Test

| | | |
|---------|---|--|
| Adapter | : | MODEL: MAU-120150Y-A-18 INPUT: AC 100-240 50/60Hz, 0.5A OUTPUT: DC 12V, 1.5A |
|---------|---|--|

1.4. Description of Test Modes



To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description |
|--------------|-------------|
| Mode 1 | CH01 |

| For Conducted Emission | |
|------------------------|-------------|
| Final Test Mode | Description |
| Mode 4 | CH01 |

| For Radiated Emission | |
|-----------------------|-------------|
| Final Test Mode | Description |
| Mode 1 | CH01 |

1.5. Description of Test Setup

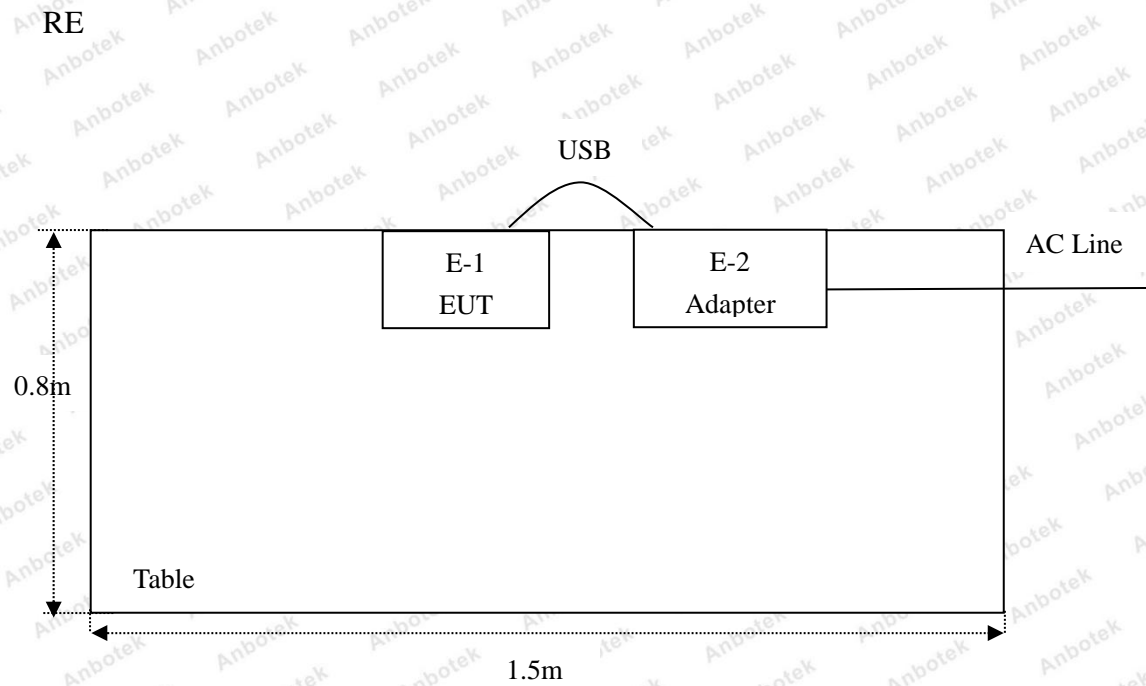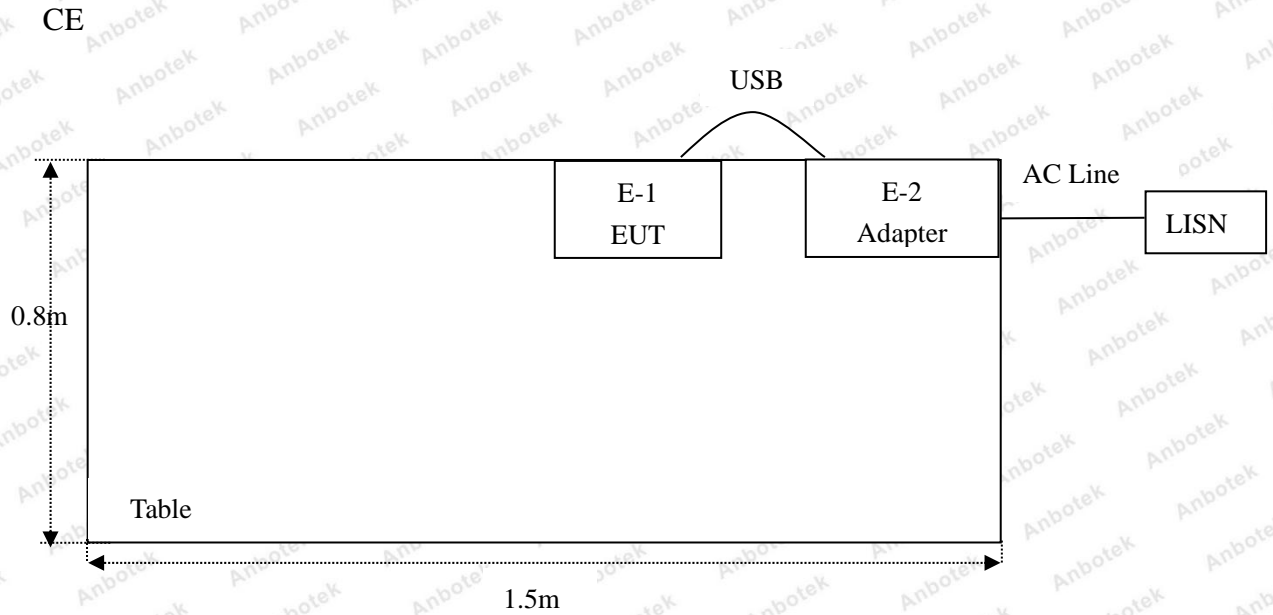

1.6. Test Equipment List

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|--|----------------------------|------------------|---------------|---------------|---------------|
| 1. | L.I.S.N. Artificial Mains Network | Rohde & Schwarz | ENV216 | 100055 | Nov. 05, 2018 | 1 Year |
| 2. | EMI Test Receiver | Rohde & Schwarz | ESPI3 | 101604 | Nov. 05, 2018 | 1 Year |
| 3. | RF Switching Unit | Compliance Direction | RSU-M2 | 38303 | Nov. 05, 2018 | 1 Year |
| 4. | Spectrum Analysis | Agilent | E4407B | US39390582 | Nov. 05, 2018 | 1 Year |
| 5. | MAX Spectrum Analysis | Agilent | N9020A | MY51170037 | Nov. 05, 2018 | 1 Year |
| 6. | Preamplifier | SKET Electronic | BK1G18G30D | KD17503 | Nov. 05, 2018 | 1 Year |
| 7. | Double Ridged Horn Antenna | Instruments corporation | GTH-0118 | 351600 | Nov. 20, 2018 | 1 Year |
| 8. | Bilog Broadband Antenna | Schwarzbeck | VULB9163 | VULB 9163-289 | Nov. 19, 2018 | 1 Year |
| 9. | Loop Antenna | Schwarzbeck | FMZB1519B | 00053 | Nov. 20, 2018 | 1 Year |
| 10. | Horn Antenna | A-INFO | LB-180400-K F | J211060628 | Nov. 20, 2018 | 1 Year |
| 11. | Pre-amplifier | SONOMA | 310N | 186860 | Nov. 05, 2018 | 1 Year |
| 12. | EMI Test Software EZ-EMC | SHURPLE | N/A | N/A | N/A | N/A |
| 13. | RF Test Control System | YIHENG | YH3000 | 2017430 | Nov. 05, 2018 | 1 Year |
| 14. | Power Sensor | DAER | RPR3006W | 15I00041SN045 | Nov. 05, 2018 | 1 Year |
| 15. | Power Sensor | DAER | RPR3006W | 15I00041SN046 | Nov. 05, 2018 | 1 Year |
| 16. | MXA Spectrum Analysis | Agilent | N9020A | MY51170037 | Nov. 05, 2018 | 1 Year |
| 17. | MXG RF Vector Signal Generator | Agilent | N5182A | MY48180656 | Nov. 05, 2018 | 1 Year |
| 18. | Signal Generator | Agilent | E4421B | MY41000743 | Nov. 05, 2018 | 1 Year |
| 19. | DC Power Supply | IVYTECH | IV3605 | 1804D360510 | Apr. 02, 2018 | 1 Year |
| 20. | Constant Temperature Humidity Chamber | ZHONGJIAN | ZJ-KHWS80B | N/A | Nov. 01, 2018 | 1 Year |

1.7. Measurement Uncertainty

| | | |
|------------------------|---|--------------------------|
| Radiation Uncertainty | : | Ur = 3.9 dB (Horizontal) |
| | | Ur = 3.8 dB (Vertical) |
| Conduction Uncertainty | : | Uc = 3.4 dB |

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

| Standard Section | Test Item | Result |
|---|---------------------|--------|
| 15.203 | Antenna Requirement | PASS |
| 15.207 | Conducted Emission | PASS |
| 15.249 | Spurious Emission | PASS |
| 15.215(c) | 20dB Bandwidth | PASS |
| 15.249(c) | Band Edge | PASS |
| Remark: "N/A" is an abbreviation for Not Applicable. | | |


3. Conducted Emission Test

3.1. Test Standard and Limit

| Test Standard | FCC Part15 Section 15.207 | | |
|---------------|---------------------------|--------------------------------|---------------|
| Test Limit | Frequency | Maximum RF Line Voltage (dBuV) | |
| | | Quasi-peak Level | Average Level |
| | 150kHz~500kHz | 66 ~ 56 * | 56 ~ 46 * |
| | 500kHz~5MHz | 56 | 46 |
| 5MHz~30MHz | 60 | 50 | |

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

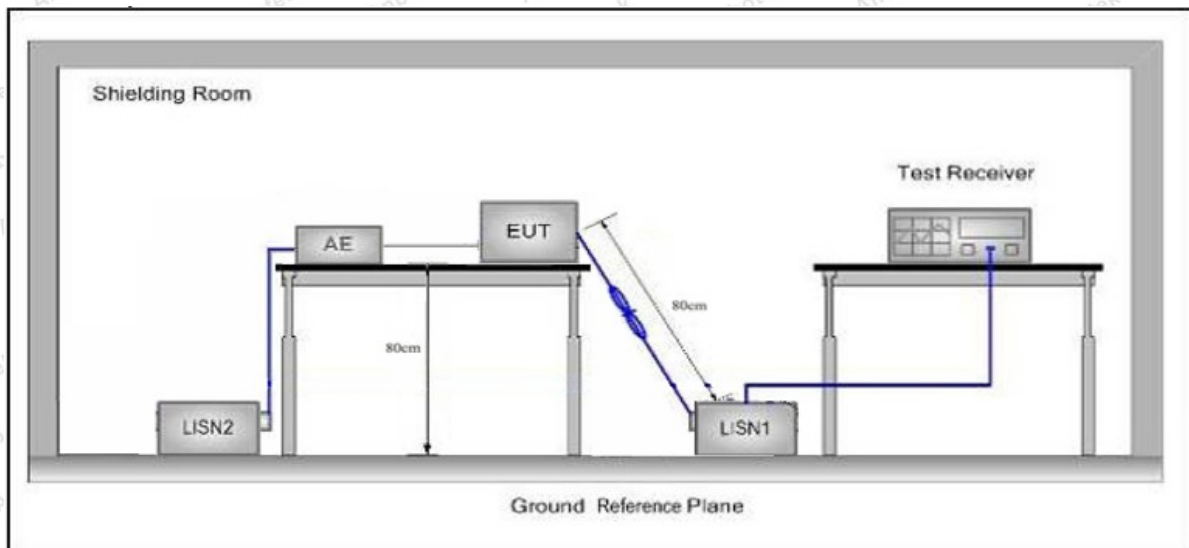

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages.

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: CH01
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.: 23.8°C Hum.: 48%

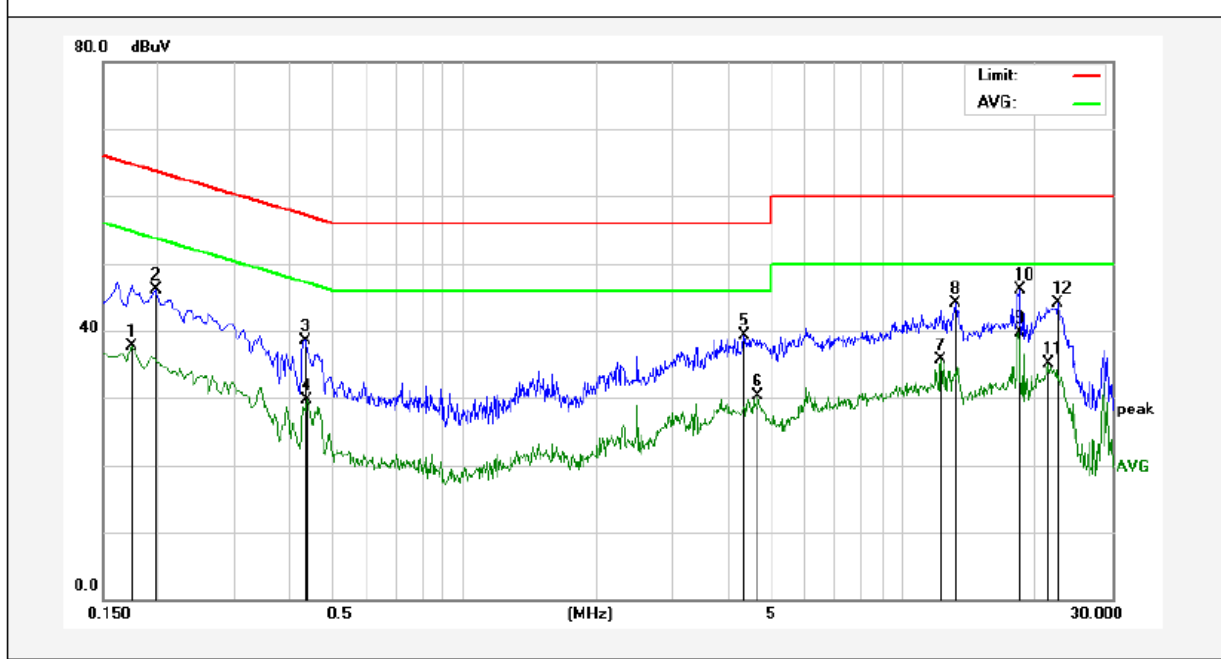

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-----------------|----------|--------|
| 1 | 0.1740 | 17.79 | 19.90 | 37.69 | 54.76 | -17.07 | AVG | |
| 2 | 0.1980 | 26.22 | 19.90 | 46.12 | 63.69 | -17.57 | QP | |
| 3 | 0.4340 | 18.61 | 19.95 | 38.56 | 57.18 | -18.62 | QP | |
| 4 | 0.4380 | 9.75 | 19.95 | 29.70 | 47.10 | -17.40 | AVG | |
| 5 | 4.3380 | 19.20 | 20.19 | 39.39 | 56.00 | -16.61 | QP | |
| 6 | 4.6820 | 10.19 | 20.20 | 30.39 | 46.00 | -15.61 | AVG | |
| 7 | 12.1980 | 15.36 | 20.30 | 35.66 | 50.00 | -14.34 | AVG | |
| 8 | 13.2500 | 23.86 | 20.29 | 44.15 | 60.00 | -15.85 | QP | |
| 9 | 18.3660 | 19.36 | 20.31 | 39.67 | 50.00 | -10.33 | AVG | |
| 10 | 18.4860 | 25.78 | 20.32 | 46.10 | 60.00 | -13.90 | QP | |
| 11 | 21.4140 | 14.73 | 20.32 | 35.05 | 50.00 | -14.95 | AVG | |
| 12 | 22.5780 | 23.78 | 20.31 | 44.09 | 60.00 | -15.91 | QP | |

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: CH01
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 23.8°C Hum.: 48%

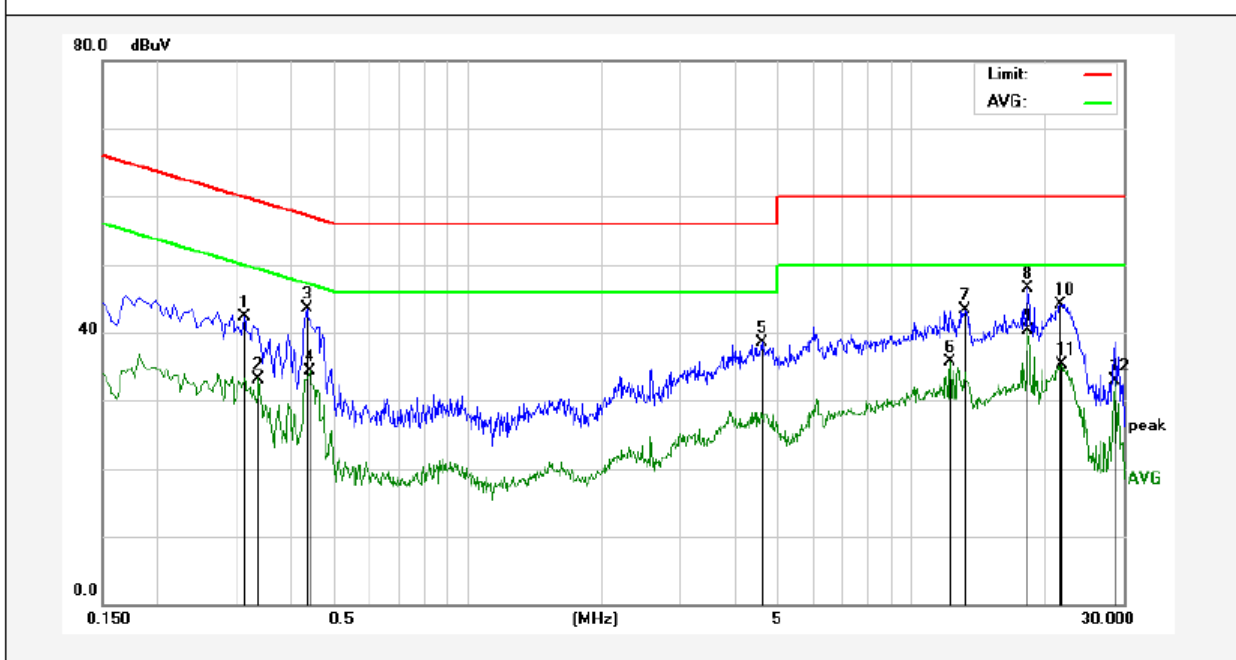

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-----------------|----------|--------|
| 1 | 0.3140 | 22.47 | 19.90 | 42.37 | 59.86 | -17.49 | QP | |
| 2 | 0.3379 | 13.29 | 19.91 | 33.20 | 49.25 | -16.05 | AVG | |
| 3 | 0.4340 | 23.50 | 19.95 | 43.45 | 57.18 | -13.73 | QP | |
| 4 | 0.4420 | 14.36 | 19.95 | 34.31 | 47.02 | -12.71 | AVG | |
| 5 | 4.6180 | 18.37 | 20.20 | 38.57 | 56.00 | -17.43 | QP | |
| 6 | 12.1980 | 15.42 | 20.30 | 35.72 | 50.00 | -14.28 | AVG | |
| 7 | 13.2540 | 23.01 | 20.29 | 43.30 | 60.00 | -16.70 | QP | |
| 8 | 18.2420 | 26.26 | 20.31 | 46.57 | 60.00 | -13.43 | QP | |
| 9 | 18.2420 | 20.05 | 20.31 | 40.36 | 50.00 | -9.64 | AVG | |
| 10 | 21.7020 | 23.74 | 20.32 | 44.06 | 60.00 | -15.94 | QP | |
| 11 | 21.8140 | 14.90 | 20.32 | 35.22 | 50.00 | -14.78 | AVG | |
| 12 | 28.6860 | 12.55 | 20.27 | 32.82 | 50.00 | -17.18 | AVG | |

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: CH01
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.: 23.8°C Hum.: 48%

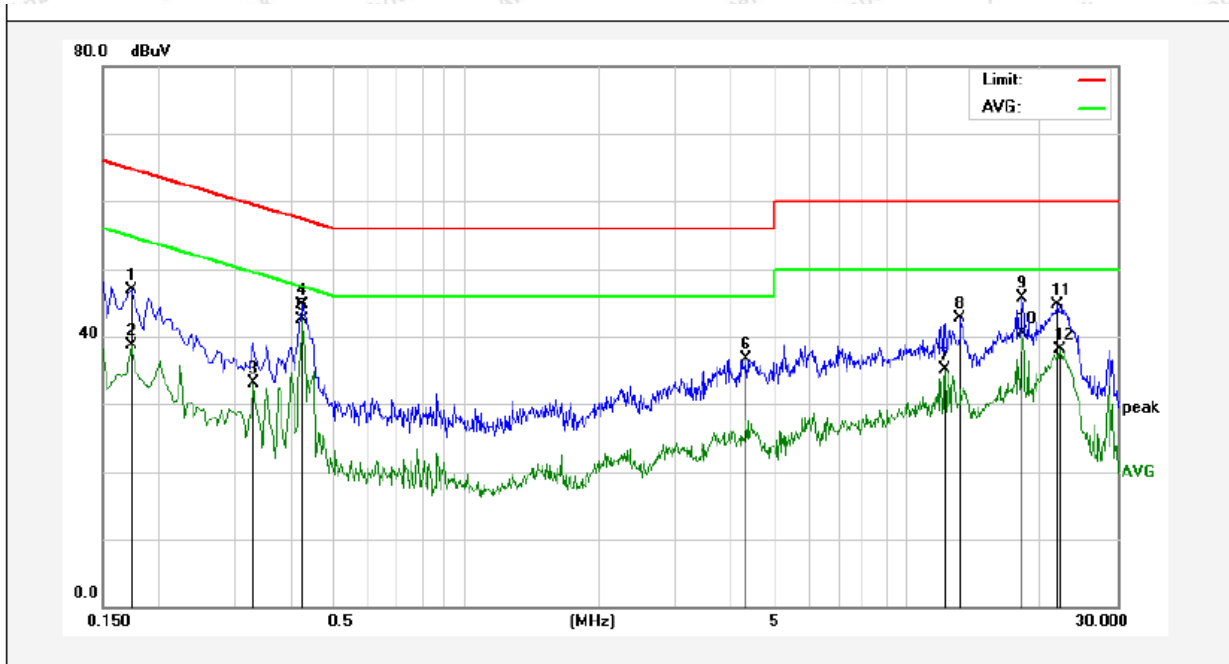

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-----------------|----------|--------|
| 1 | 0.1740 | 27.03 | 19.90 | 46.93 | 64.76 | -17.83 | QP | |
| 2 | 0.1740 | 18.72 | 19.90 | 38.62 | 54.76 | -16.14 | AVG | |
| 3 | 0.3300 | 13.29 | 19.90 | 33.19 | 49.45 | -16.26 | AVG | |
| 4 | 0.4260 | 24.67 | 19.95 | 44.62 | 57.33 | -12.71 | QP | |
| 5 | 0.4260 | 22.55 | 19.95 | 42.50 | 47.33 | -4.83 | AVG | |
| 6 | 4.3180 | 16.54 | 20.19 | 36.73 | 56.00 | -19.27 | QP | |
| 7 | 12.1980 | 14.75 | 20.30 | 35.05 | 50.00 | -14.95 | AVG | |
| 8 | 13.2540 | 22.42 | 20.29 | 42.71 | 60.00 | -17.29 | QP | |
| 9 | 18.2420 | 25.36 | 20.31 | 45.67 | 60.00 | -14.33 | QP | |
| 10 | 18.2420 | 20.10 | 20.31 | 40.41 | 50.00 | -9.59 | AVG | |
| 11 | 21.9940 | 24.34 | 20.32 | 44.66 | 60.00 | -15.34 | QP | |
| 12 | 22.2020 | 17.80 | 20.31 | 38.11 | 50.00 | -11.89 | AVG | |

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: CH01
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 23.8°C Hum.: 48%

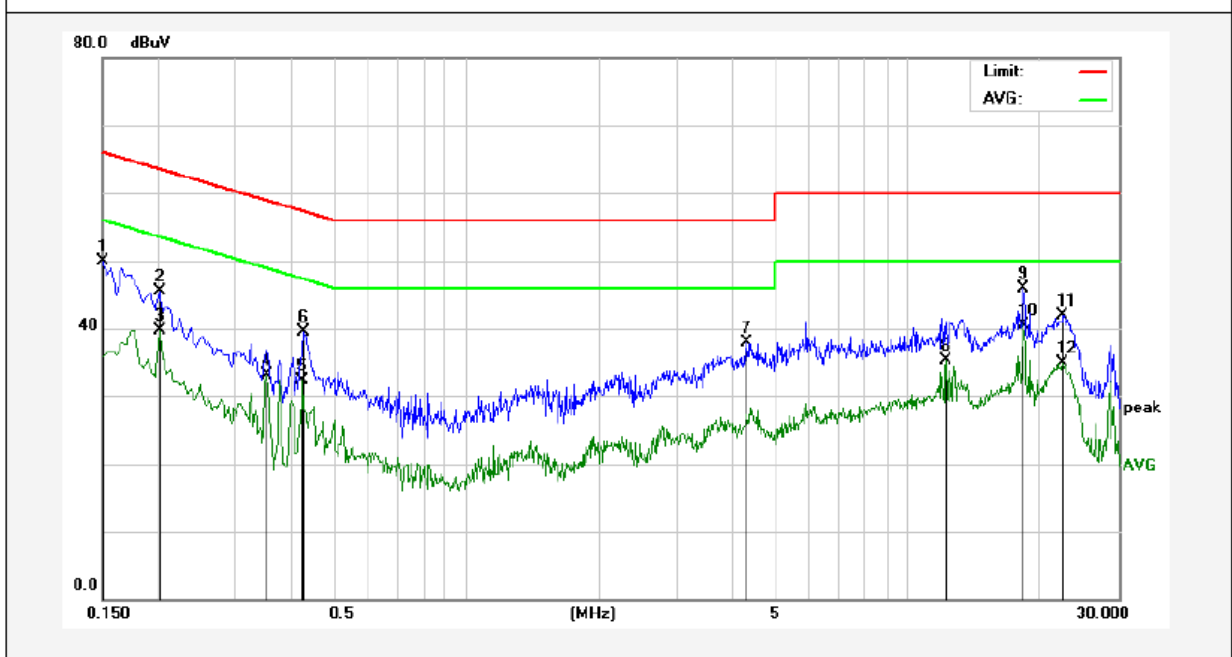

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-----------------|----------|--------|
| 1 | 0.1500 | 29.91 | 19.90 | 49.81 | 65.99 | -16.18 | QP | |
| 2 | 0.2020 | 25.65 | 19.90 | 45.55 | 63.52 | -17.97 | QP | |
| 3 | 0.2020 | 19.85 | 19.90 | 39.75 | 53.52 | -13.77 | AVG | |
| 4 | 0.3540 | 13.21 | 19.91 | 33.12 | 48.87 | -15.75 | AVG | |
| 5 | 0.4260 | 12.41 | 19.95 | 32.36 | 47.33 | -14.97 | AVG | |
| 6 | 0.4300 | 19.54 | 19.95 | 39.49 | 57.25 | -17.76 | QP | |
| 7 | 4.3180 | 17.67 | 20.19 | 37.86 | 56.00 | -18.14 | QP | |
| 8 | 12.1980 | 15.04 | 20.30 | 35.34 | 50.00 | -14.66 | AVG | |
| 9 | 18.2460 | 25.55 | 20.31 | 45.86 | 60.00 | -14.14 | QP | |
| 10 | 18.2460 | 20.13 | 20.31 | 40.44 | 50.00 | -9.56 | AVG | |
| 11 | 22.4500 | 21.65 | 20.31 | 41.96 | 60.00 | -18.04 | QP | |
| 12 | 22.4500 | 14.57 | 20.31 | 34.88 | 50.00 | -15.12 | AVG | |

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

| Test Standard | | FCC Part15 C Section 15.209 and 15.205 | | | | |
|---------------|-------------------|--|----------------|------------|--------------------------|--|
| Test Limit | Frequency (MHz) | Field strength (microvolt/meter) | Limit (dBuV/m) | Remark | Measurement distance (m) | |
| | 0.009MHz~0.490MHz | 2400/F(kHz) | - | - | 300 | |
| | 0.490MHz-1.705MHz | 24000/F(kHz) | - | - | 30 | |
| | 1.705MHz-30MHz | 30 | - | - | 30 | |
| | 30MHz~88MHz | 100 | 40.0 | Quasi-peak | 3 | |
| | 88MHz~216MHz | 150 | 43.5 | Quasi-peak | 3 | |
| | 216MHz~960MHz | 200 | 46.0 | Quasi-peak | 3 | |
| | 960MHz~1000MHz | 500 | 54.0 | Quasi-peak | 3 | |
| | | | 54.0 | Average | 3 | |
| | Above 1000MHz | - | 74.0 | Peak | 3 | |

Remark:
 (1)The lower limit shall apply at the transition frequency.
 (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

| Test Standard | | FCC Part15 C Section 15.249 | | | | |
|---------------|-----------------------------|-----------------------------|--------------------------|----------------|------------|--------------------------|
| Test Limit | Fundamental frequency (MHz) | Field Strength | Limit (microvolts/meter) | Limit (dBuV/m) | Remark | Measurement distance (m) |
| | 902~928 | Fundamental | 50 | 94.0 | Quasi-peak | 3 |
| | | | 500 | 74.0 | Average | 3 |
| | | Harmonics | - | 94.0 | Peak | 3 |

Remark:
 (1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

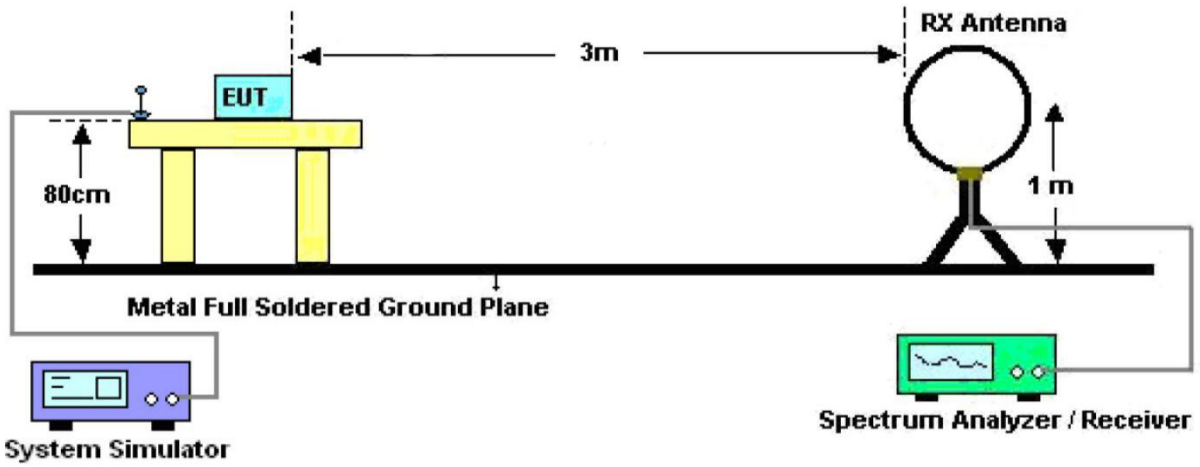


Figure 1. Below 30MHz

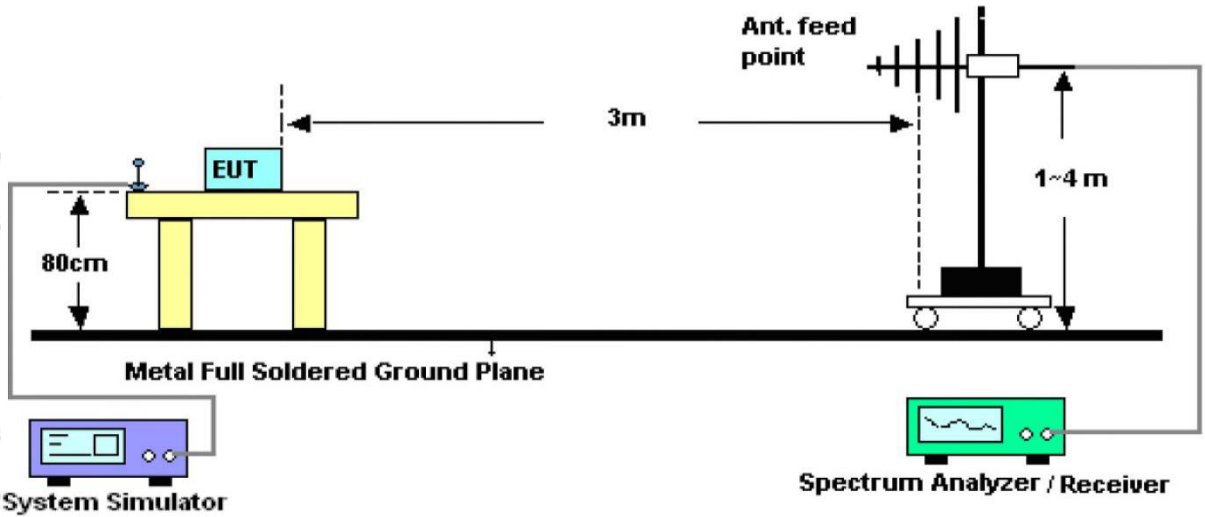


Figure 2. 30MHz to 1GHz

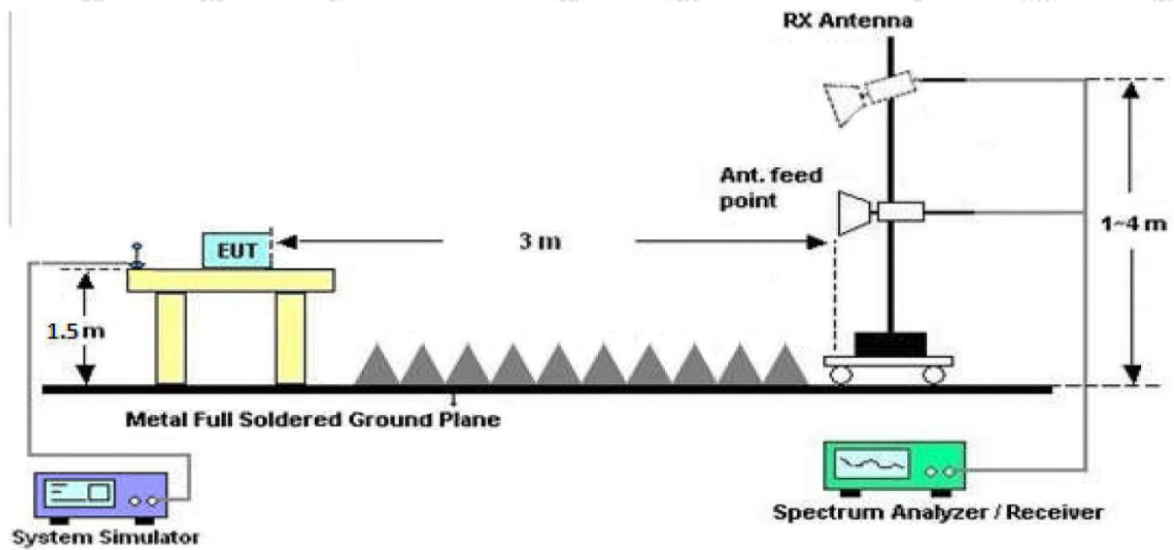


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 120KHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data


PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~1000MHz)


Job No.: SZAWW180929003-02 Temp.(°C)/Hum.(%RH): 17.7°C/51%RH
 Standard: FCC PART 15C Power Source: AC 240V, 60Hz for adapter
 Test Mode: CH01 Polarization: Horizontal

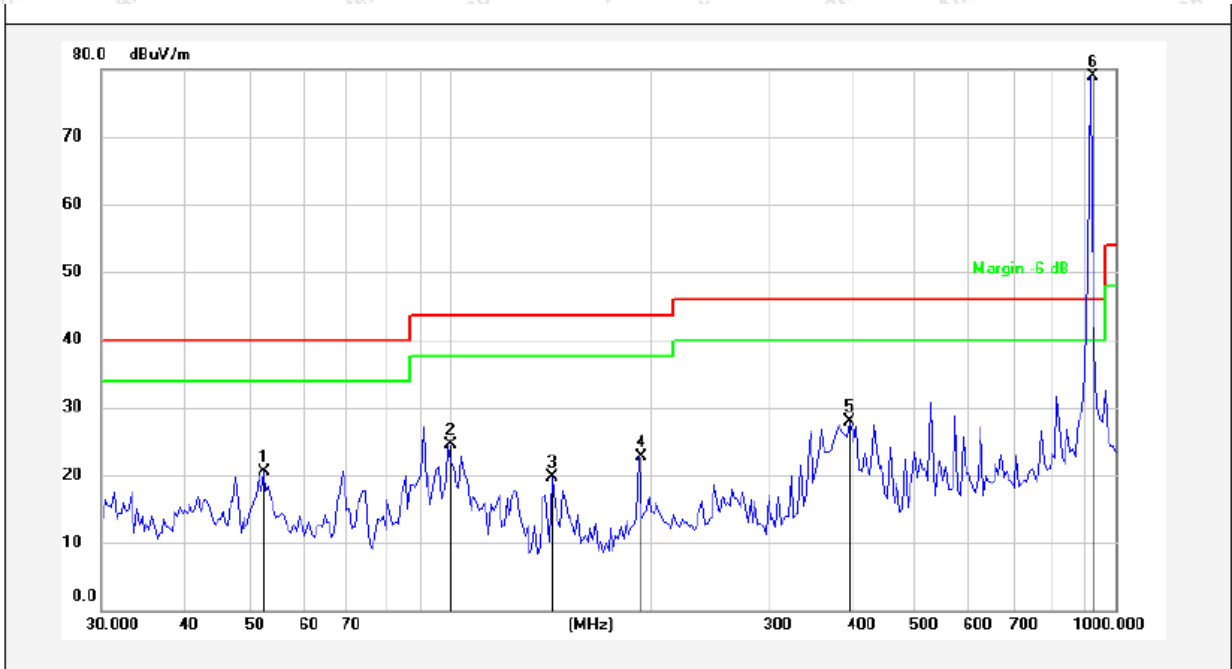

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1 | 52.5753 | 36.48 | -15.92 | 20.56 | 40.00 | -19.44 | QP | 300 | 0 | |
| 2 | 99.7028 | 45.08 | -20.53 | 24.55 | 43.50 | -18.95 | QP | 300 | 74 | |
| 3 | 142.8243 | 42.88 | -23.18 | 19.70 | 43.50 | -23.80 | QP | 300 | 156 | |
| 4 | 192.4186 | 43.91 | -21.29 | 22.62 | 43.50 | -20.88 | QP | 300 | 211 | |
| 5 | 398.3312 | 42.73 | -14.73 | 28.00 | 46.00 | -18.00 | QP | 300 | 296 | |
| 6 | 916.0687 | 86.19 | -7.21 | 78.98 | 46.00 | 32.98 | QP | 300 | 360 | |

Test Results (30~1000MHz)


Job No.: SZAWW180929003-02 Temp.(°C)/Hum.(%RH): 17.7°C/51%RH
 Standard: FCC PART 15C Power Source: AC 240V, 60Hz for adapter
 Test Mode: CH01 Polarization: Vertical

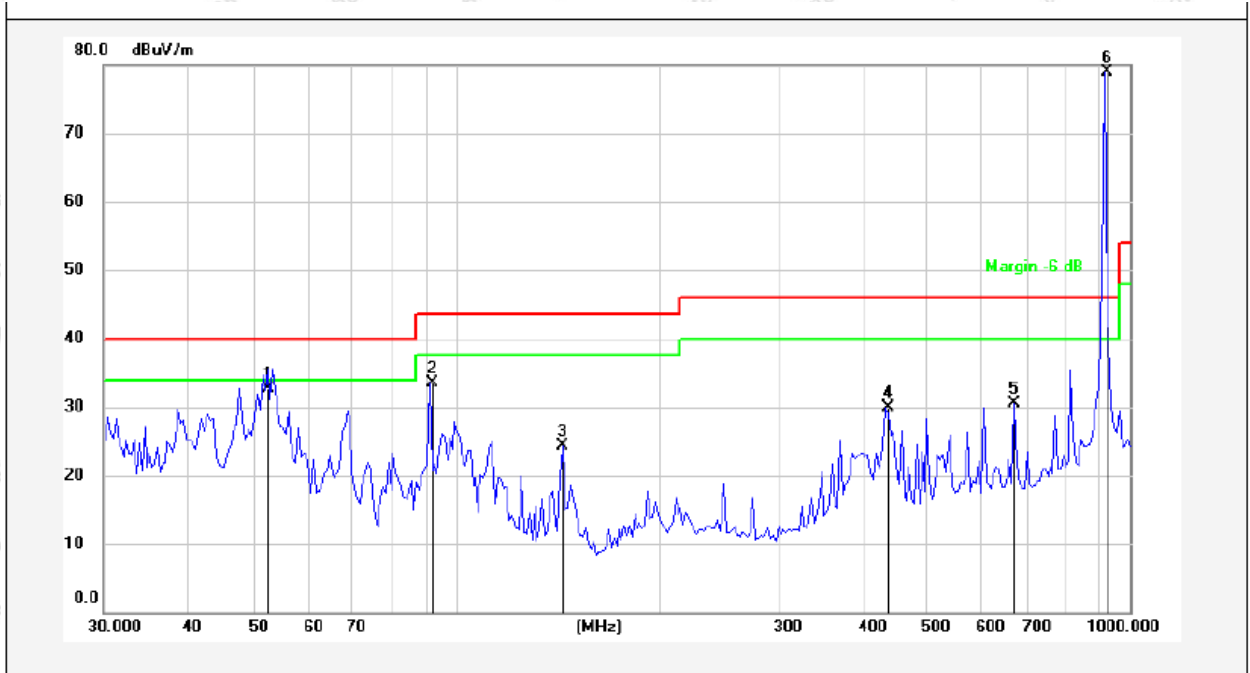

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1 | 52.5753 | 47.66 | -14.92 | 32.74 | 40.00 | -7.26 | QP | 300 | 0 | |
| 2 | 91.3346 | 49.84 | -16.25 | 33.59 | 43.50 | -9.91 | QP | 300 | 96 | |
| 3 | 144.0819 | 43.41 | -19.15 | 24.26 | 43.50 | -19.24 | QP | 300 | 157 | |
| 4 | 434.8268 | 43.10 | -13.21 | 29.89 | 46.00 | -16.11 | QP | 300 | 244 | |
| 5 | 674.0252 | 41.08 | -10.56 | 30.52 | 46.00 | -15.48 | QP | 300 | 307 | |
| 6 | 916.0687 | 85.15 | -6.21 | 78.94 | 46.00 | 32.94 | QP | 300 | 360 | |

Test Results (30~1000MHz)


Job No.: SZAWW180929003-02 Temp.(°C)/Hum.(%RH): 17.7°C/51%RH
 Standard: FCC PART 15C Power Source: AC 120V, 60Hz for adapter
 Test Mode: CH01 Polarization: Horizontal

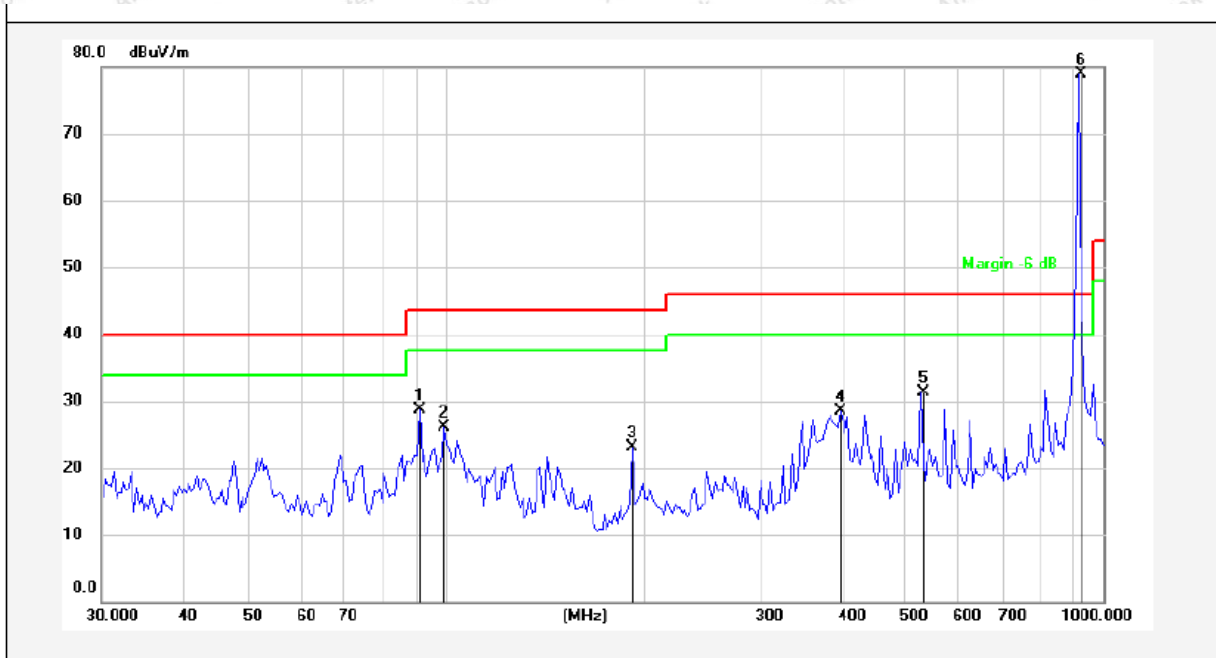

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1 | 91.3345 | 50.95 | -22.25 | 28.70 | 43.50 | -14.80 | QP | 300 | 0 | |
| 2 | 99.7026 | 46.58 | -20.53 | 26.05 | 43.50 | -17.45 | QP | 300 | 99 | |
| 3 | 192.4183 | 44.41 | -21.29 | 23.12 | 43.50 | -20.38 | QP | 300 | 177 | |
| 4 | 398.3312 | 43.23 | -14.73 | 28.50 | 46.00 | -17.50 | QP | 300 | 215 | |
| 5 | 527.3205 | 44.21 | -12.98 | 31.23 | 46.00 | -14.77 | QP | 300 | 296 | |
| 6 | 916.0687 | 86.19 | -7.21 | 78.98 | 46.00 | 32.98 | QP | 300 | 360 | |

Test Results (30~1000MHz)

Job No.: SZAWW180929003-02 Temp.(°C)/Hum.(%RH): 17.7°C/51%RH
 Standard: FCC PART 15C Power Source: AC 120V, 60Hz for adapter
 Test Mode: CH01 Polarization: Vertical

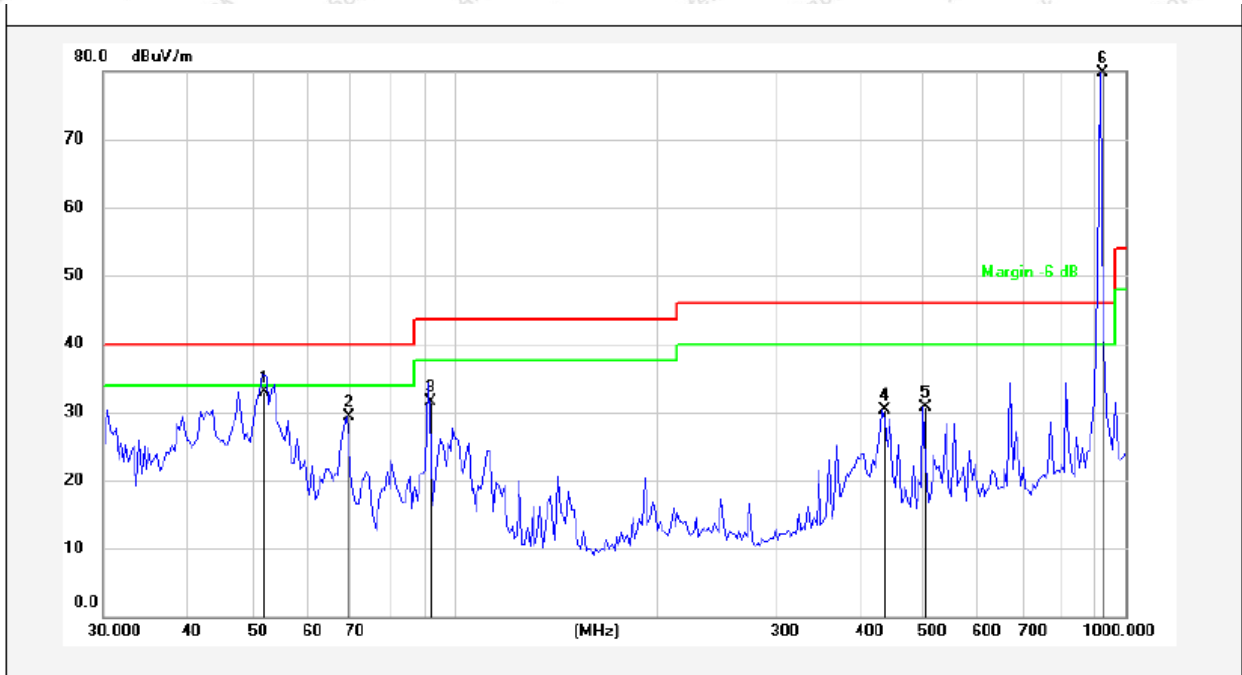

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1 | 51.6616 | 47.86 | -14.90 | 32.96 | 40.00 | -7.04 | QP | 300 | 0 | |
| 2 | 68.9930 | 47.97 | -18.65 | 29.32 | 40.00 | -10.68 | QP | 300 | 74 | |
| 3 | 91.3346 | 47.72 | -16.25 | 31.47 | 43.50 | -12.03 | QP | 300 | 124 | |
| 4 | 434.8268 | 43.43 | -13.21 | 30.22 | 46.00 | -15.78 | QP | 300 | 196 | |
| 5 | 500.3011 | 43.70 | -13.04 | 30.66 | 46.00 | -15.34 | QP | 300 | 241 | |
| 6 | 916.0687 | 85.83 | -6.21 | 79.62 | 46.00 | 33.62 | QP | 300 | 360 | |

Radiated Spurious Emission above1G,

| Frequency | Antenna | Reading | Cable Loss | Ant Factor | Amplifier | Level | Limits | Margin | Det. |
|-----------|---------|----------|------------|------------|-----------|----------|----------|--------|------|
| (MHz) | Pol. | (dBuV/m) | (dB) | (dB) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | Mode |
| 1830.0000 | H | 46.6 | 7.39 | 28.73 | 26.31 | 56.41 | 74 | -17.59 | PK |
| 1830.0000 | H | 36.41 | 7.39 | 28.73 | 26.31 | 46.22 | 54 | -7.78 | AV |
| 2745.0000 | H | 44.97 | 8.10 | 29.71 | 27.01 | 55.77 | 74 | -18.23 | PK |
| 2745.0000 | H | 35.07 | 8.10 | 29.71 | 27.01 | 45.87 | 54 | -8.13 | AV |
| 3660.0000 | H | -- | -- | -- | -- | -- | -- | -- | PK |
| 3660.0000 | H | -- | -- | -- | -- | -- | -- | -- | AV |
| 1830.0000 | V | 46.2 | 7.39 | 28.73 | 26.31 | 56.01 | 74 | -17.99 | PK |
| 1830.0000 | V | 36.31 | 7.39 | 28.73 | 26.31 | 46.12 | 54 | -7.88 | AV |
| 2745.0000 | V | 43.85 | 8.10 | 29.71 | 27.01 | 54.65 | 74 | -19.35 | PK |
| 2745.0000 | V | 34.41 | 8.10 | 29.71 | 27.01 | 45.21 | 54 | -8.79 | AV |
| 3660.0000 | V | -- | -- | -- | -- | -- | -- | -- | PK |
| 3660.0000 | V | -- | -- | -- | -- | -- | -- | -- | AV |

Remark:

1. Level = Reading + Cable Loss+Ant Factor-Amplifier
2. "--" Mark indicated Background Noise Level
3. The data in the table is the worst

Radiated Band Edge:


| Frequency (MHz) | Read Level (dBuV/m) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Pol. | Det. |
|-----------------|---------------------|---------------------|-----------------|--------------------|----------------|----------------|-----------------|------|------|
| 902.0000 | 43.94 | 22.45 | 4.48 | 31.33 | 39.54 | 46.00 | -6.46 | H | QP |
| 928.0000 | 39.88 | 22.59 | 4.54 | 31.35 | 35.66 | 46.00 | -10.34 | H | QP |
| 902.0000 | 42.94 | 22.45 | 4.48 | 31.33 | 38.54 | 46.00 | -7.46 | V | QP |
| 928.0000 | 39.66 | 22.59 | 4.54 | 31.35 | 35.44 | 46.00 | -10.56 | V | QP |

5. 20dB Bandwidth Test

5.1. Test Standard and Limit

| | |
|---------------|-----------------------------|
| Test Standard | FCC Part15 C Section 15.249 |
|---------------|-----------------------------|

5.2. Test Setup




5.3. Test Procedure

- Place the EUT on the table and set it in the transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set the spectrum analyzer as:
 - RBW = 100kHz, VBW ≥ 3*RBW = 300kHz,
 - Detector= peak
 - Trace mode= Max hold.
 - Sweep- auto couple.
- Mark the peak frequency and -20dB (upper and lower) frequency.
- Repeat until all the rest channels are investigated.

5.4. Test Data

| | | | |
|--------------|-----------------------------|-------------|-----------|
| Test Item | : 20dB Bandwidth | Test Mode | : TX Mode |
| Test Voltage | : AC 120V, 60Hz for adapter | Temperature | : 24°C |
| Test Result | : PASS | Humidity | : 55%RH |

| Frequency (MHz) | Bandwidth (kHz) | Result |
|-----------------|-----------------|--------|
| 915 | 245.1 | PASS |

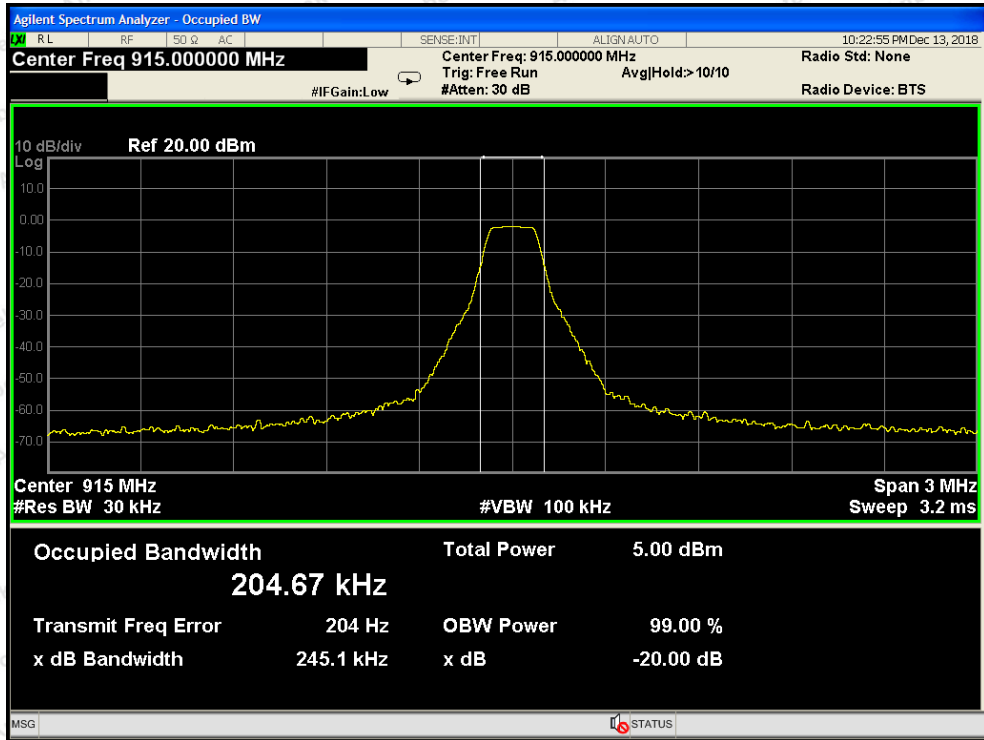


6. Antenna Requirement

6.1. Test Standard and Requirement

| | |
|---------------|--|
| Test Standard | FCC Part15 Section 15.203 |
| Requirement | <p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> |

6.2. Antenna Connected Construction

The antenna is a Monopole Antenna which permanently attached, and the best case gain of the antenna is 2.11 dBi. It complies with the standard requirement.

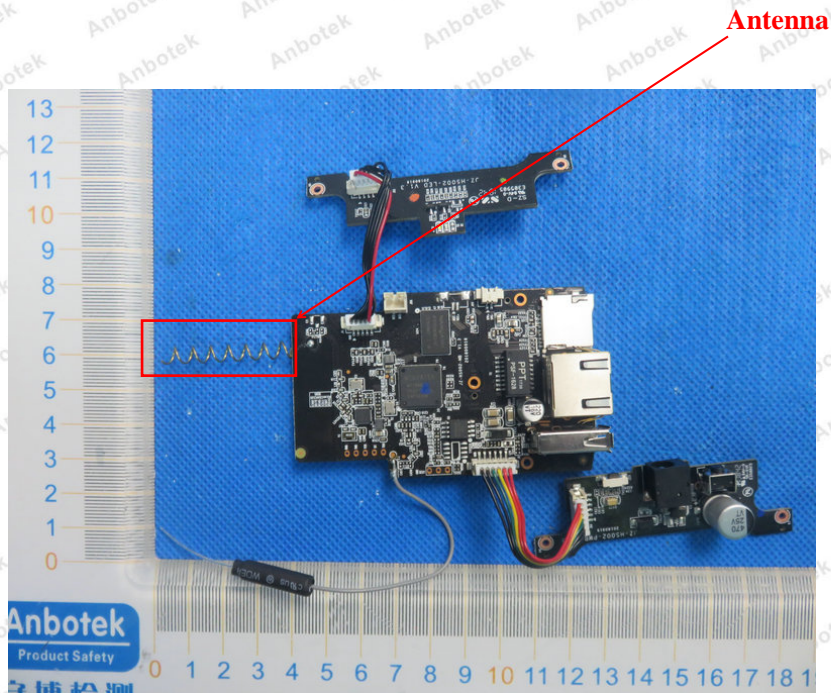


APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test


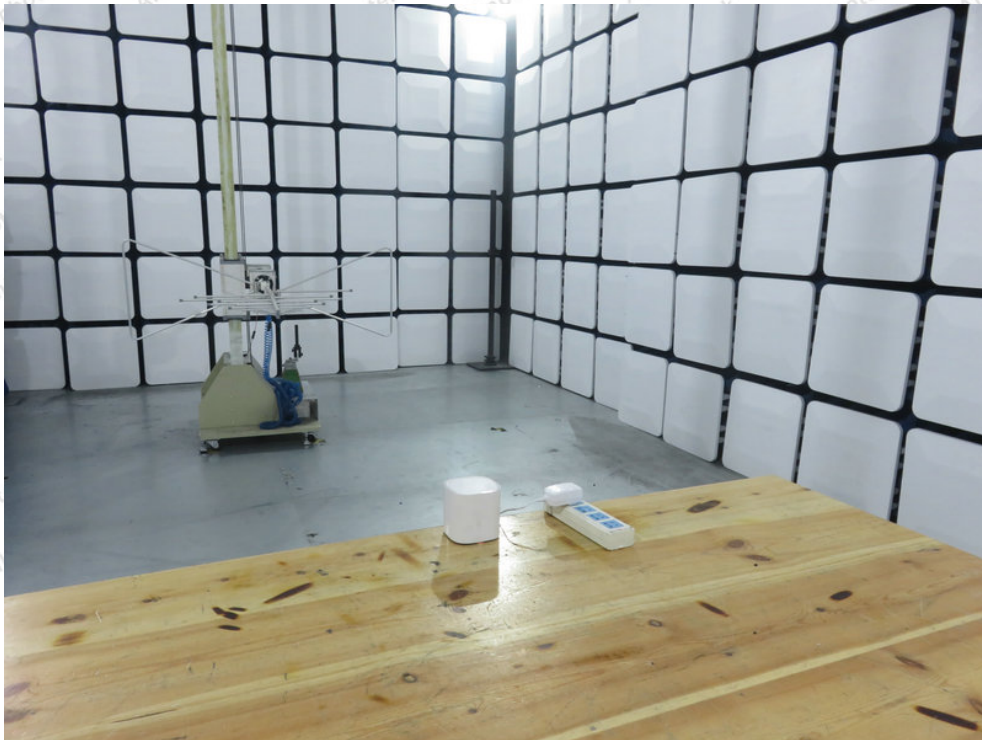





APPENDIX II -- EXTERNAL PHOTOGRAPH









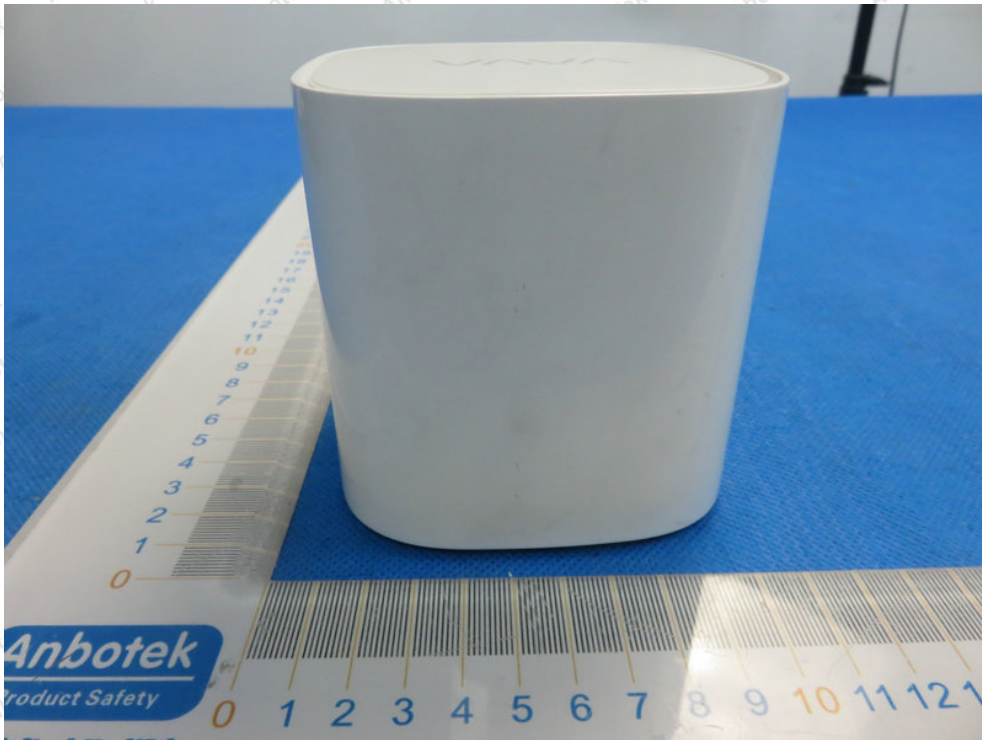
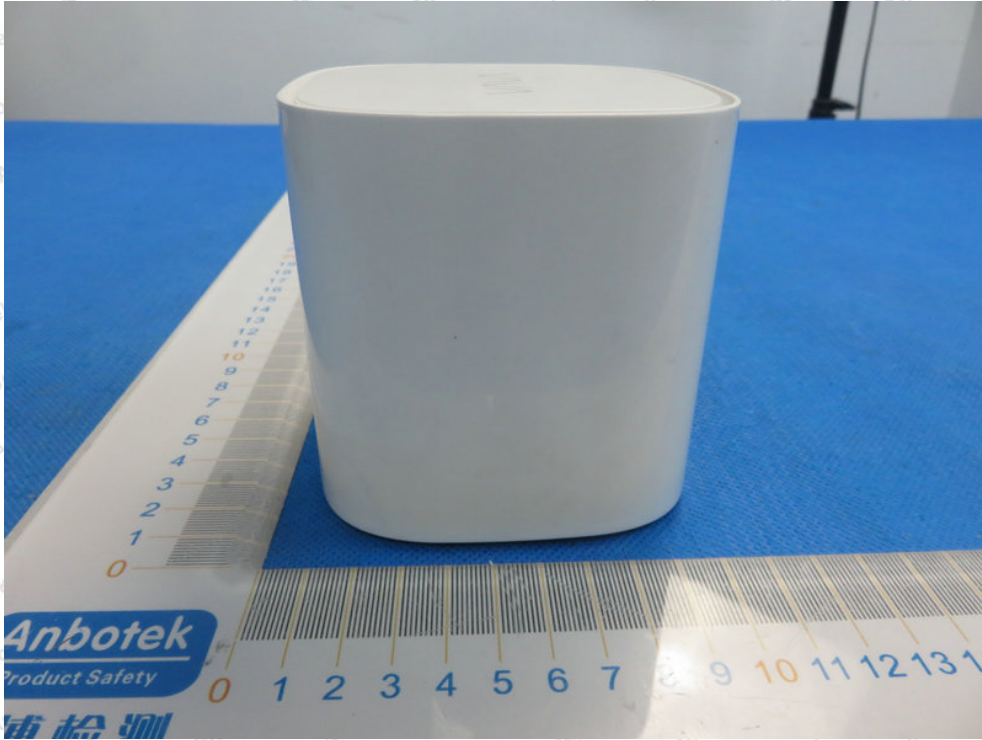



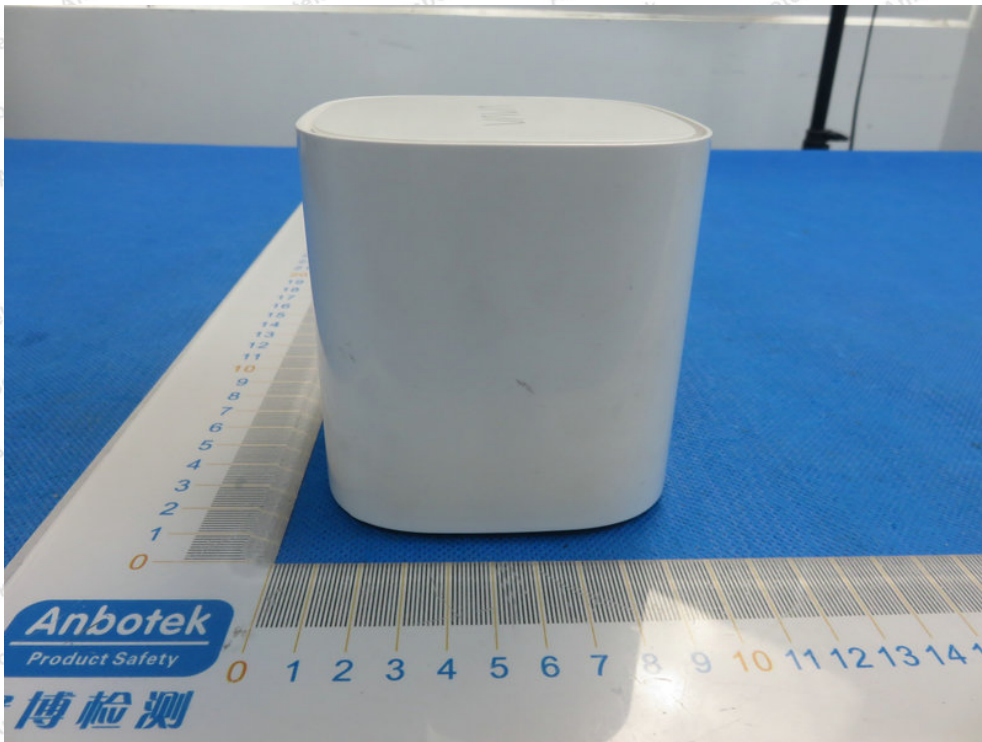




APPENDIX III -- INTERNAL PHOTOGRAPH

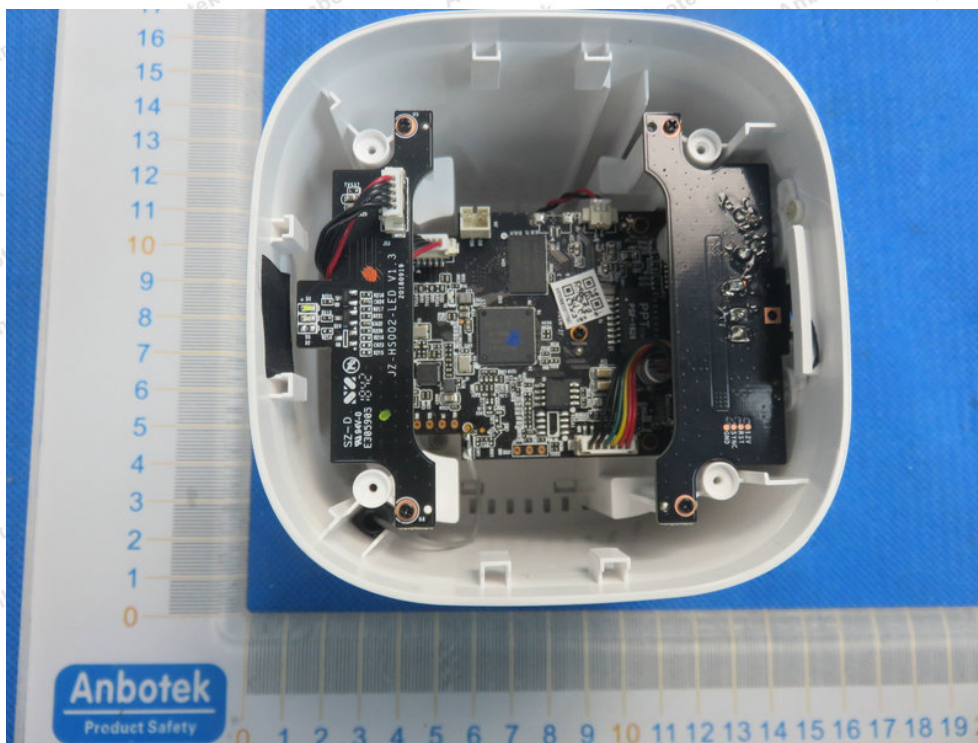
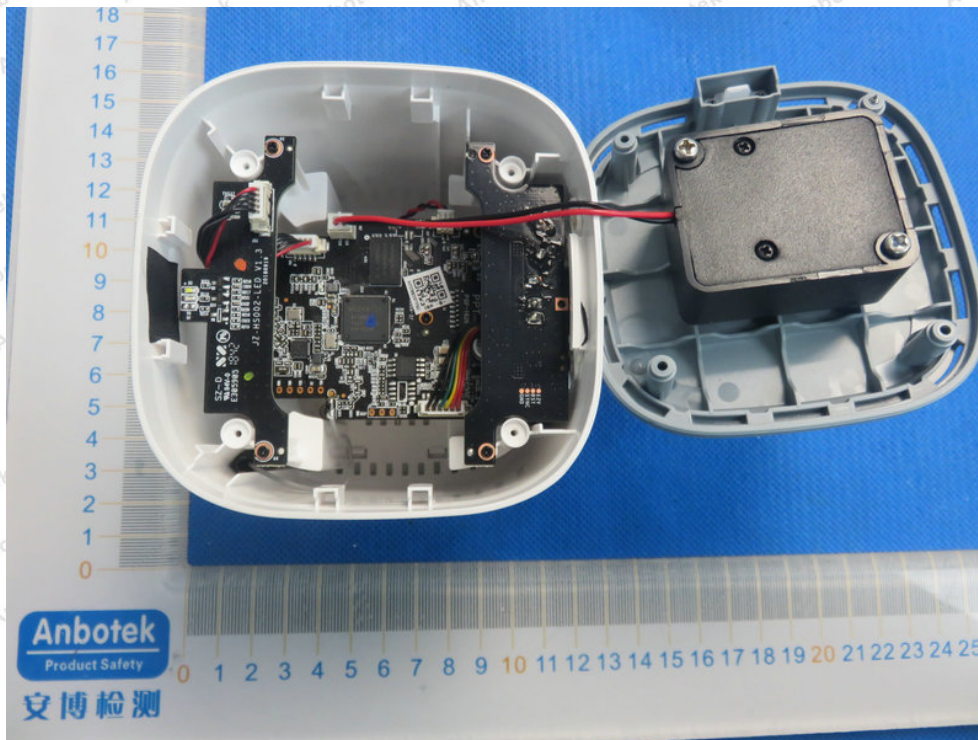


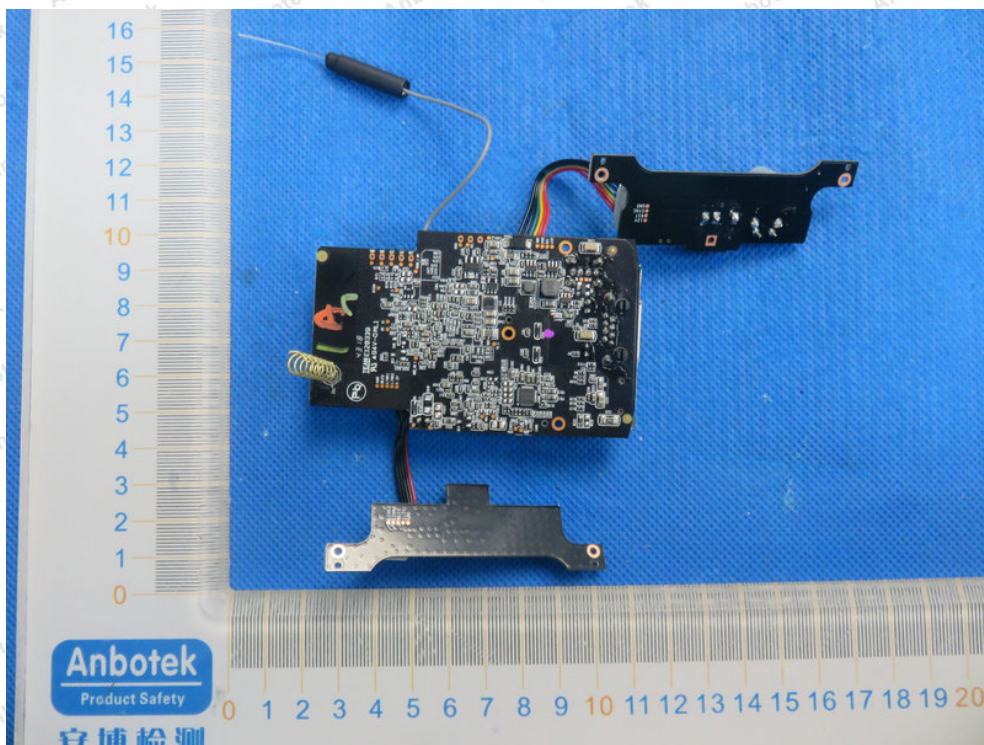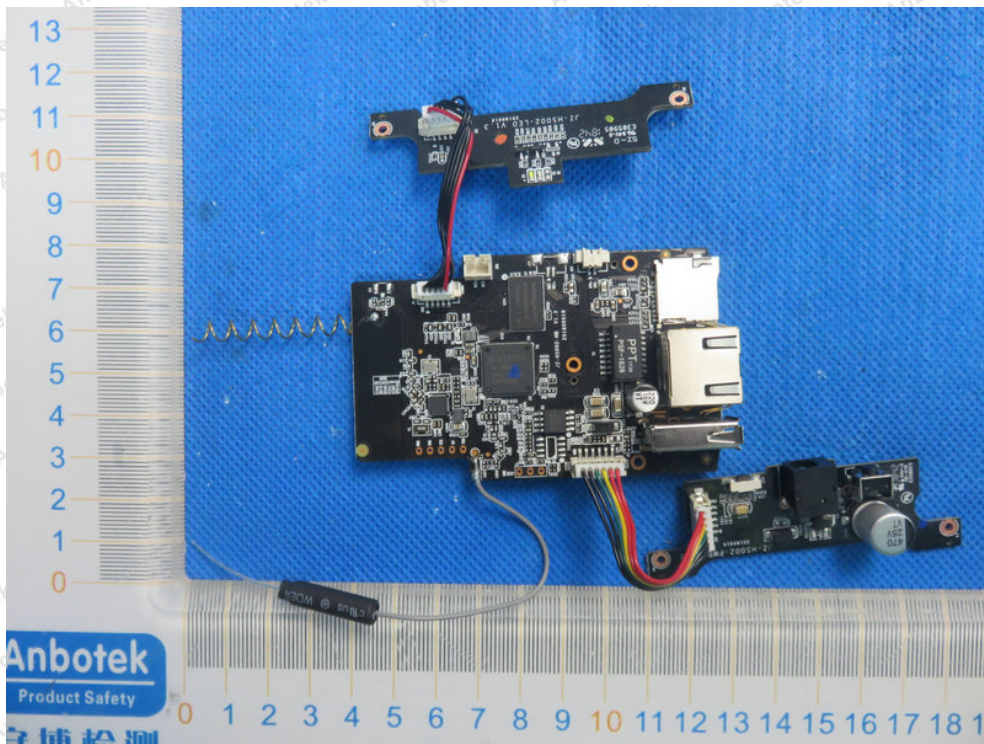


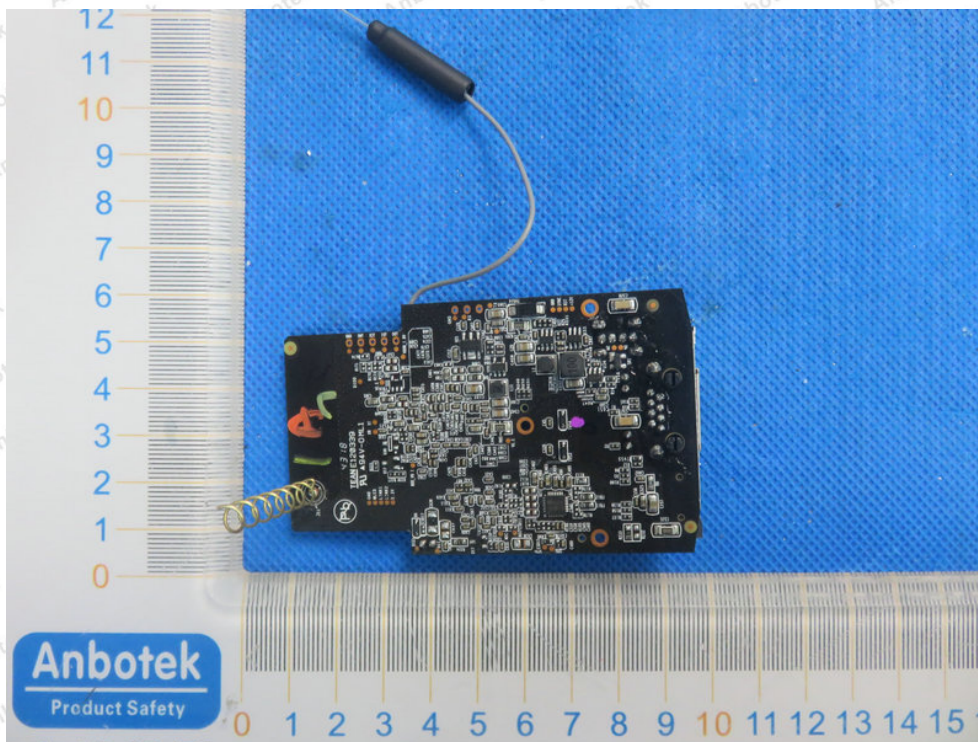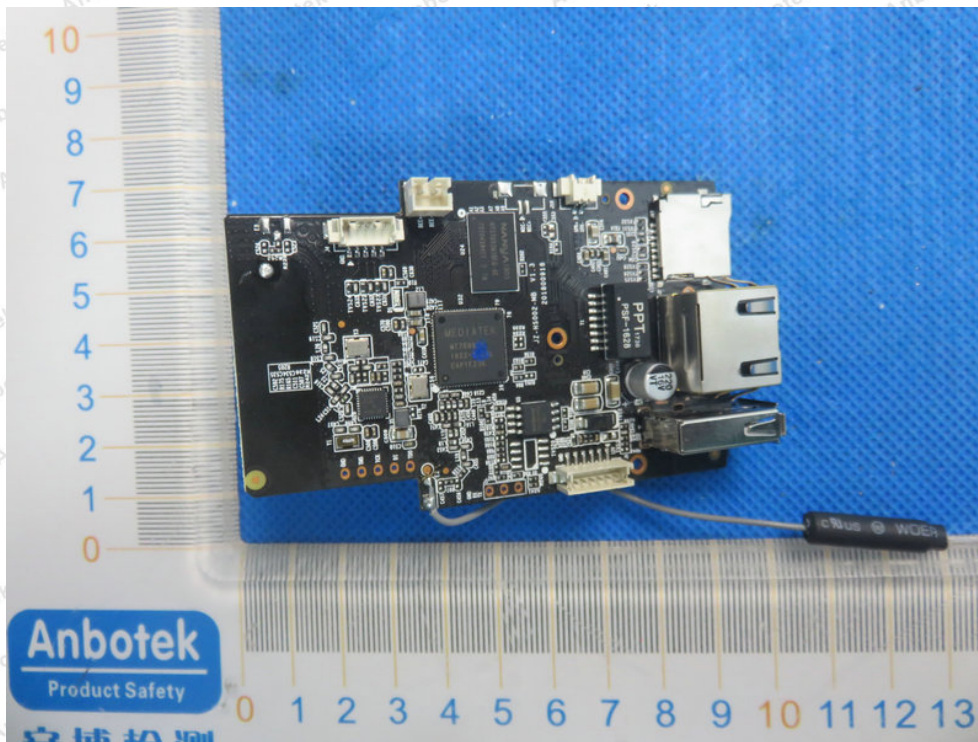

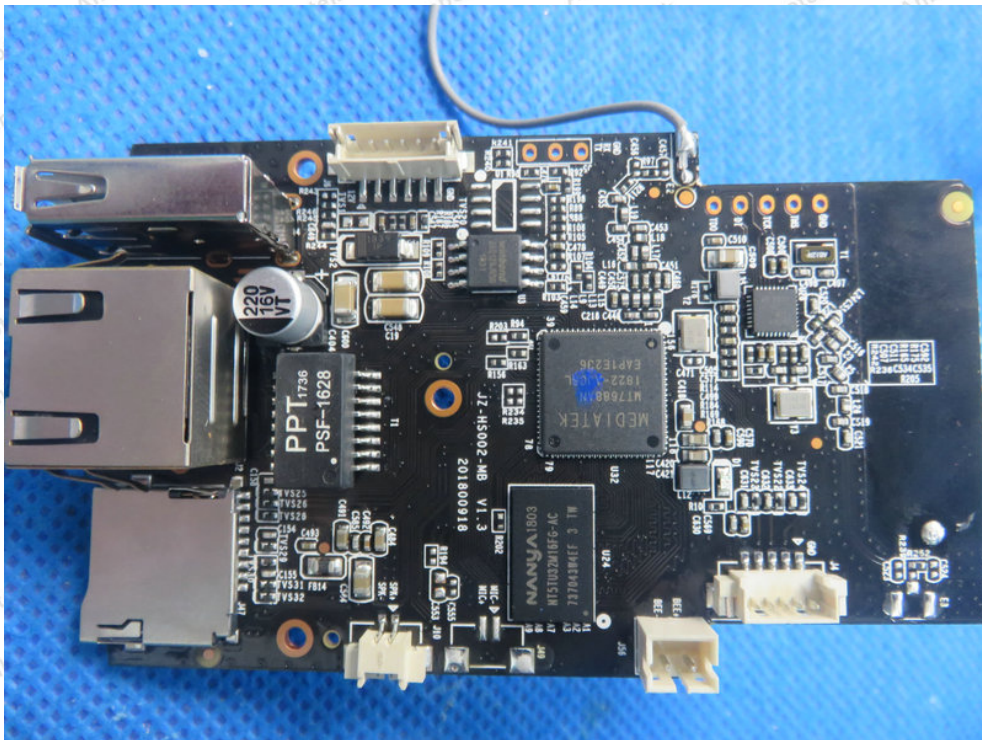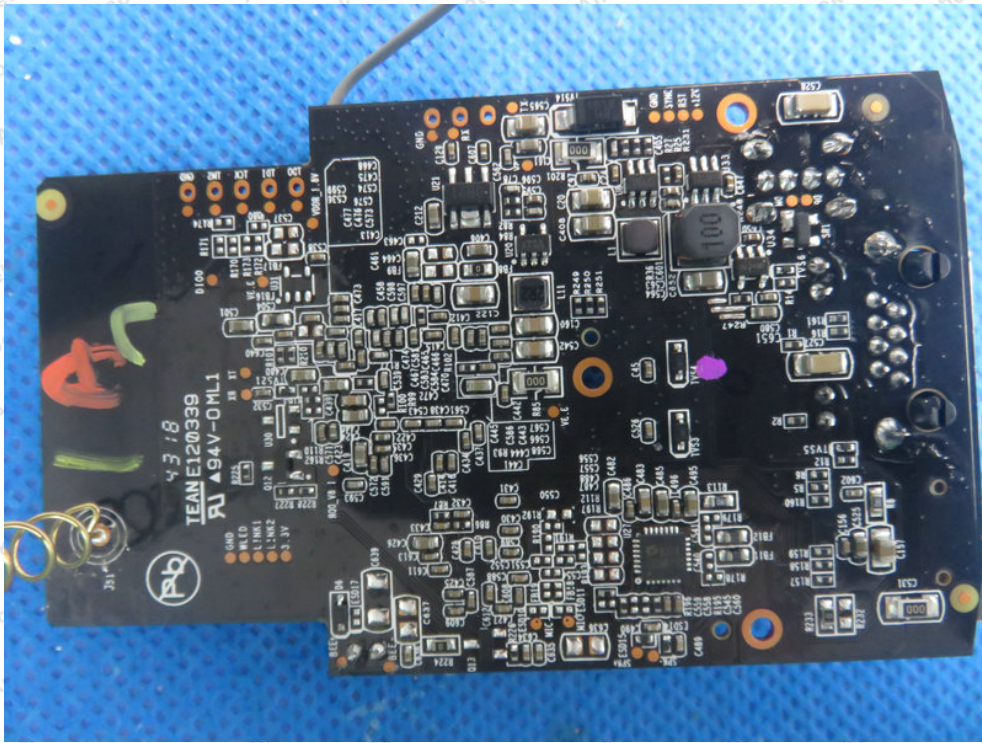

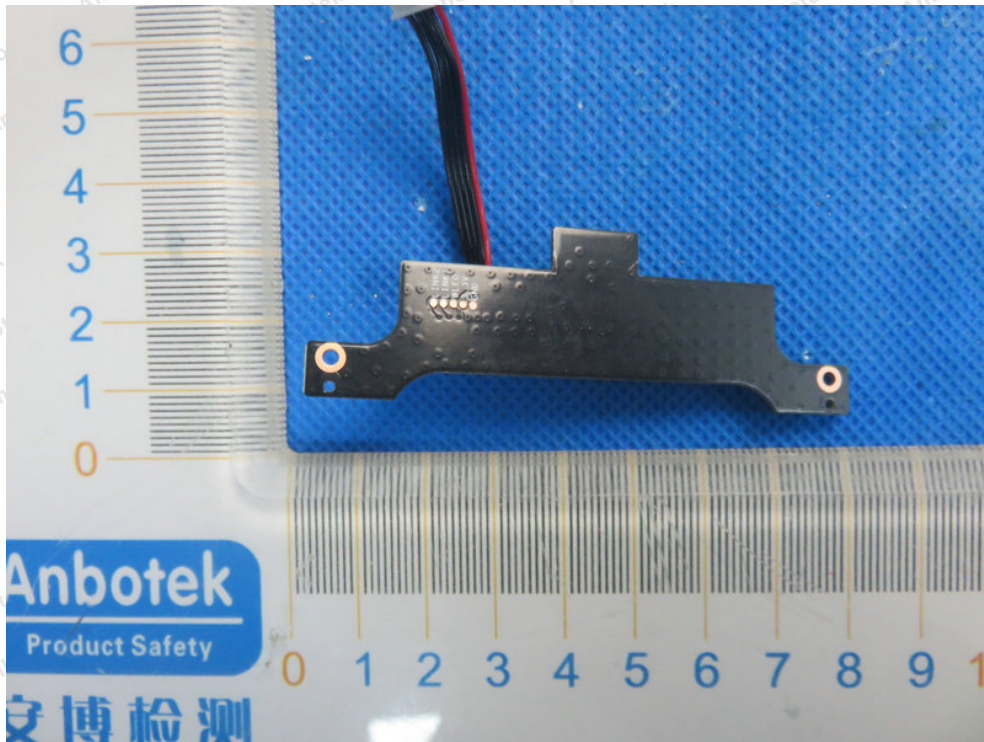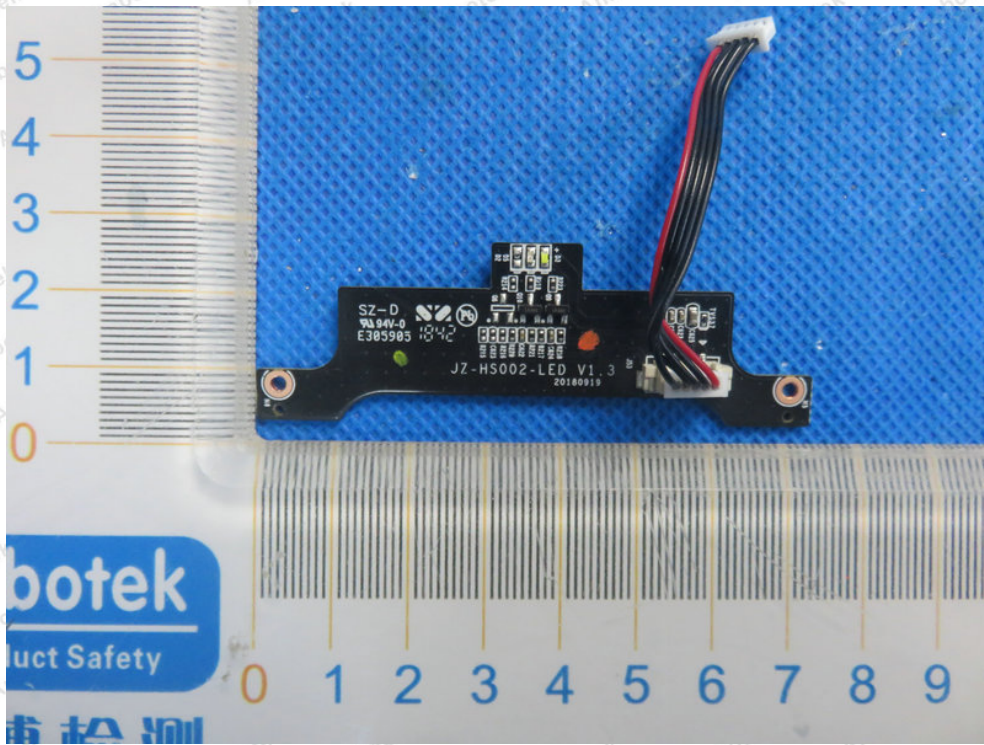

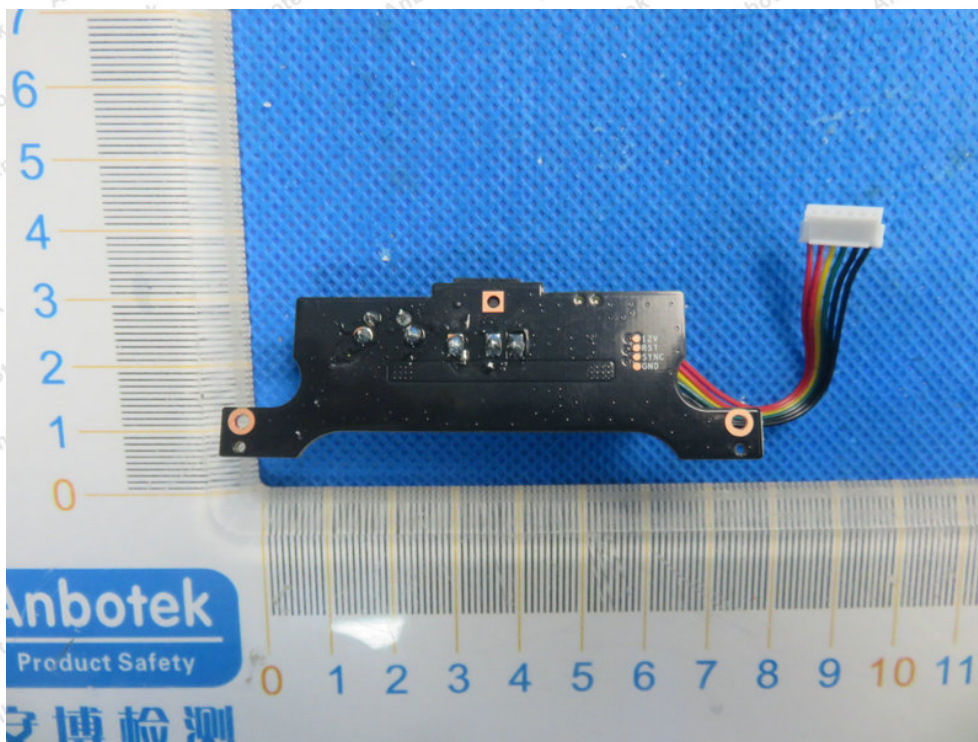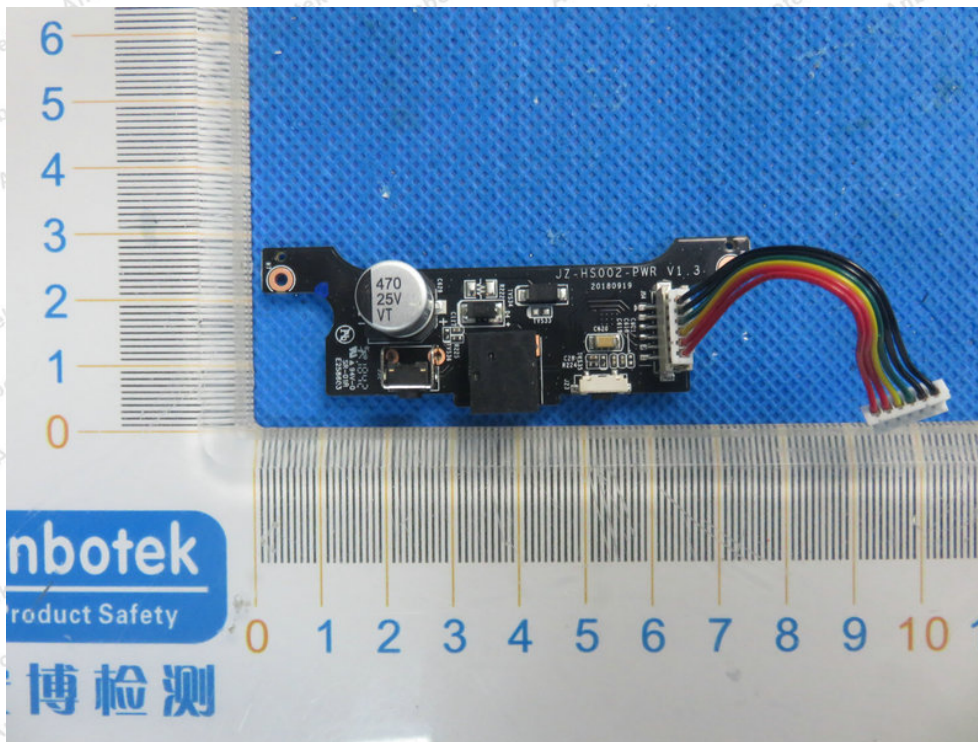

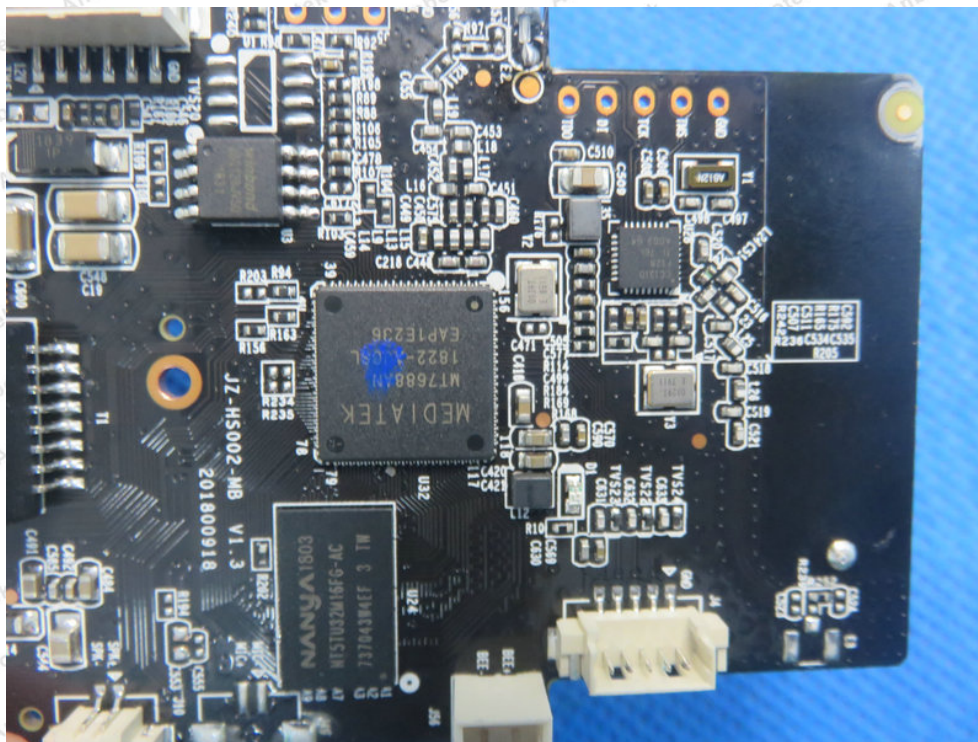

----- End of Report -----