

FCC REPORT

Certification

Applicant Name:

FRTEK CO., LTD.

Address:

1001, Doosan Venture Digm, 415, Heungandaero,
Dongan-Gu, Anyang-Si, Gyeonggi-do, 431-755 Korea

Date of Issue:

October 26, 2015

Test Site/Location:

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil,
Majang-myeon, Icheon-si, Gyeonggi-do, 17383,
Rep. of KOREA

Report No.: HCT-R-1510-F017-1

HCT FRN: 0005866421

FCC ID: 2AFEGFRWL46ROU80

APPLICANT: FRTEK CO., LTD.

FCC Model(s): FRWL46ROU80

EUT Type: MODAS(Multi-Operator DAS)

Frequency Ranges: 869 MHz – 890 MHz

Conducted Output Power: 40 W (46 dBm)

Date of Test: September 14, 2015 ~ October 16, 2015

FCC Rule Part(s): CFR 47, Part 22

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 22 of the FCC Rules under normal use and maintenance.



Report prepared by
: Yong Hyun Lee

Test engineer of RF Team



Approved by
: Sang Jun Lee

Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

| TEST REPORT NO. | DATE | DESCRIPTION |
|-------------------|------------------|--|
| HCT-R-1510-F017 | October 16, 2015 | - First Approval Report |
| HCT-R-1510-F017-1 | October 16, 2015 | - Revise the test plot : page14, page 57 to 58 |
| | | |
| | | |
| | | |

Table of Contents

| | |
|---|----|
| 1. CLIENT INFORMATION..... | 4 |
| 2. FACILITIES AND ACCREDITATIONS | 5 |
| 2.1. FACILITIES | 5 |
| 2.2. EQUIPMENT | 5 |
| 3. TEST SPECIFICATIONS..... | 6 |
| 3.1. STANDARDS | 6 |
| 3.2. MODE OF OPERATION DURING THE TEST..... | 6 |
| 3.3. Maximum measurement uncertainty | 7 |
| 4. STANDARDS ENVIRONMENTAL TEST CONDITIONS | 8 |
| 5. TEST EQUIPMENT | 9 |
| 6. RF OUTPUT POWER..... | 10 |
| 7. OCCUPIED BANDWIDTH..... | 23 |
| 8. OUT OF BAND REJECTION | 40 |
| 9. SPURIOUS AND HARMONIC EMISSION AT ANTENNA TERMINAL | 43 |
| 10. RADIATED SPURIOUS EMISSIONS | 72 |
| 11. FREQUENCY STABILITY OVER TEMPERATURE AND VOLTAGE VARIATIONS | 75 |

1. CLIENT INFORMATION

The EUT has been tested by request of

| | |
|---------|---|
| Company | FRTEK CO., LTD. 1001, Doosan Venture Digm, 415, Heungandaero, Dongan-Gu, Anyang-Si, Gyeonggi-do, 431-755 Korea |
|---------|---|

FCC ID: 2AFEGFRWL46ROU80

EUT Type: MODAS(Multi-Operator DAS)

FCC Model(s): FRWL46ROU80

Frequency Ranges: 869 MHz – 890 MHz

Conducted Output Power: 40 W (46 dBm)

Antenna Gain(s): Manufacturer does not provide an antenna.

Measurement standard(s): ANSI/TIA-603-C-2004, KDB 971168 D01 v02r02
KDB 935210 D02 v03, KDB 935210 D05 v01

FCC Rule Part(s): CFR Title 47 Part 22

Place of Tests: HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
(IC Recognition No. : 5944A-5)

2. FACILITIES AND ACCREDITATIONS

2.1. FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661).

2.2. EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

3. TEST SPECIFICATIONS

3.1. STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 22.

| Description | Reference | Results |
|---|--------------------|-----------|
| RF Output Power | §2.1046; §22.913 | Compliant |
| Occupied Bandwidth | §2.1049 | Compliant |
| Out of Band Rejection | KDB 935210 D02 v03 | Compliant |
| Spurious Emissions at Antenna Terminals | §2.1051, §22.917 | Compliant |
| Radiated Spurious Emissions | §2.1053, §22.917 | Compliant |
| Frequency Stability | §2.1055, §22.355 | Compliant |

3.2. MODE OF OPERATION DURING THE TEST

The EUT was operated in a manner representative of the typical usage of the equipment.

During all testing, system components were manipulated within the confines of typical usage to maximize each emission.

The device does not supply antenna(s) with the system, so the dummy loads were connected to the RF output ports for radiated spurious emission testing.

3.3. Maximum measurement uncertainty

The value of the measurement uncertainty for the measurement of each parameter.

Coverage factor $k = 2$, Confidence levels of 95 %

| Description | Condition | Uncertainty |
|---|-------------------------------|---------------------------------|
| Conducted RF Output Power | - | ± 0.72 dB |
| Occupied Bandwidth | OBW \leq 20 MHz | ± 52 kHz |
| Passband Gain and Bandwidth & Out of Band Rejection | Gain 20 dB bandwidth | ± 0.89 dB ± 0.58 MHz |
| Spurious Emissions at Antenna Terminals | - | ± 1.08 dB |
| Radiated Spurious Emissions | $f \leq 1$ GHz $f > 1$ GHz | ± 4.80 dB ± 6.07 dB |
| Frequency Stability | - | $\pm 1.22 \times 10^{-6}$ |

4. STANDARDS ENVIRONMENTAL TEST CONDITIONS

| | |
|---------------------------|-------------------------------|
| Temperature : | + 15 °C to + 35 °C |
| Relative humidity: | 30 % to 60 % |
| Air pressure | 860 mbar to 1 060 mbar |

5. TEST EQUIPMENT

| Manufacturer | Model / Equipment | Cal Interval | Calibration Date | Serial No. |
|--------------------|---|--------------|------------------|----------------|
| Agilent | E4438C /Signal Generator | Annual | 09/02/2015 | MY42082646 |
| Agilent | N5182A /Signal Generator | Annual | 04/07/2015 | MY50141649 |
| NANGYEUL CO., LTD. | NY-THR18750/ Temperature and Humidity Chamber | Annual | 10/29/2014 | NY-2009012201A |
| Agilent | N9020A /Signal Analyzer | Annual | 04/10/2015 | US46220219 |
| WEINSCHTEL | 67-30-33 / Fixed Attenuator | Annual | 11/04/2014 | BU5347 |
| Weinschel | AF9003-69-31 / Step Attenuator | Annual | 10/24/2014 | 11787 |
| DEAYOUNG ENT | DFSS60 / AC Power Supply | Annual | 04/01/2015 | 1003030-1 |
| Agilent | 6674A / DC Power Supply | Annual | 07/27/2015 | 3501A00901 |
| Rohde & Schwarz | FSP / Spectrum Analyzer | Annual | 10/21/2014 | 836650/016 |
| Innco | CO3000/ Controller | N/A | N/A | 842/35030115/L |
| ETS | 2090/ Turn Table | N/A | N/A | 1646 |
| CERNEX, Inc | CBLU1183540/AMP | Annual | 02/12/2015 | 24614 |
| Schwarzbeck | BBHA 9120D/ Horn Antenna | Biennial | 09/01/2014 | 147 |
| Schwarzbeck | VULB 9160/TRILOG Antenna | Biennial | 11/17/2014 | 3150 |

6. RF OUTPUT POWER

Test Requirements:

§ 2.1046 Measurements required: RF power output:

§ 2.1046 (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

§ 2.1046 (b) For single sideband, independent sideband, and single channel, controlled carrier radiotelephone transmitters, the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as specified and as applicable in § 2.1046 (b) (1-5). In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.

§ 2.1046 (c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

§ 22.913 Effective radiated power limits. The effective radiated power (ERP) of transmitters in the Cellular Radiotelephone Service must not exceed the limits in this section.

(a) Maximum ERP. In general, the effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. However, for those systems operating in areas more than 72 km (45 miles) from international borders that:

(1) Are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census; or,

(2) Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in § 22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.


Test Procedures:

Measurements were in accordance with the test methods section 3.5.2 of KDB 935210 D05 v01.

- a) Connect a signal generator to the input of the EUT.
- b) Configure to generate the AWGN (broadband) test signal.
- c) The frequency of the signal generator shall be set to the frequency of (f_0) as determined from 3.3.
- d) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- e) Set the signal generator output power to a level that produces an EUT output level that is just below the AGC threshold (see 3.2), but not more than 0.5 dB below.
- f) Measure the output power of the EUT and record (Power measurement with a spectrum analyzer).
- g) Remove the EUT from the measurement setup and using the same signal generator settings, repeat the power measurement on the input signal to the EUT and record as input power.
- h) Repeat the procedure with the narrowband test signal.
- i) Repeat the procedure for both test signals with input signal amplitude set to 3 dB above the AGC threshold level.
- j) Repeat for all frequency bands authorized for use by the EUT.

Power measurement Method :

Guidance for performing input/output power measurements using a spectrum or signal analyzer is provided in 5.2 of KDB Publication 971168.

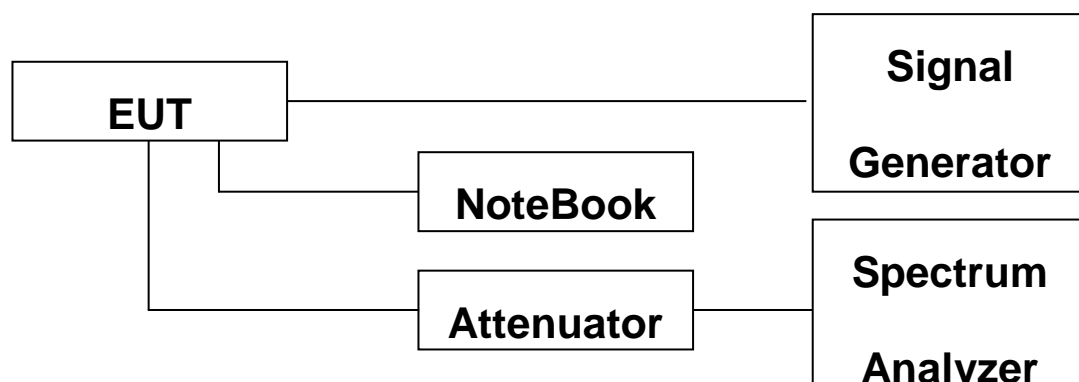

Block Diagram 1. RF Power Output Test Setup

Test Results:

Cellular Band

| Input Signal | Input Level (dBm) | Maximum Amp Gain |
|--------------|-------------------|------------------|
| LTE 5 MHz | DL: -30 dBm | DL : 76 dB |
| LTE 10 MHz | | |
| WCDMA | | |

[Downlink]


| | Channel | Frequency (MHz) | Output Power | |
|-----------------------------|---------|--------------------|--------------|--------|
| | | | (dBm) | (W) |
| AGC threshold LTE 5 MHz | Low | 871.50 | 46.50 | 44.668 |
| | Middle | 876.50 | 46.53 | 44.978 |
| | High | 887.50 | 46.77 | 47.534 |
| AGC threshold LTE 10 MHz | Low | 874.50 | 46.33 | 42.954 |
| | Middle | - | - | - |
| | High | 885.00 | 46.16 | 41.305 |
| AGC threshold WCDMA | Low | 871.50 | 46.37 | 43.351 |
| | Middle | 876.50 | 46.71 | 46.881 |
| | High | 887.50 | 46.93 | 49.317 |

[Downlink]


| | Channel | Frequency (MHz) | Output Power | |
|---|---------|--------------------|--------------|--------|
| | | | (dBm) | (W) |
| +3dB above the AGC threshold LTE 5 MHz | Low | 871.50 | 46.56 | 45.290 |
| | Middle | 876.50 | 46.59 | 45.604 |
| | High | 887.50 | 46.80 | 47.863 |
| +3dB above the AGC threshold LTE 10 MHz | Low | 874.50 | 46.32 | 42.855 |
| | Middle | - | - | - |
| | High | 885.00 | 46.19 | 41.591 |
| +3dB above the AGC threshold WCDMA | Low | 871.50 | 46.35 | 43.152 |
| | Middle | 876.50 | 46.65 | 46.238 |
| | High | 887.50 | 46.89 | 48.865 |

Plots of RF Output Power


[AGC threshold Downlink LTE 5 MHz Low]

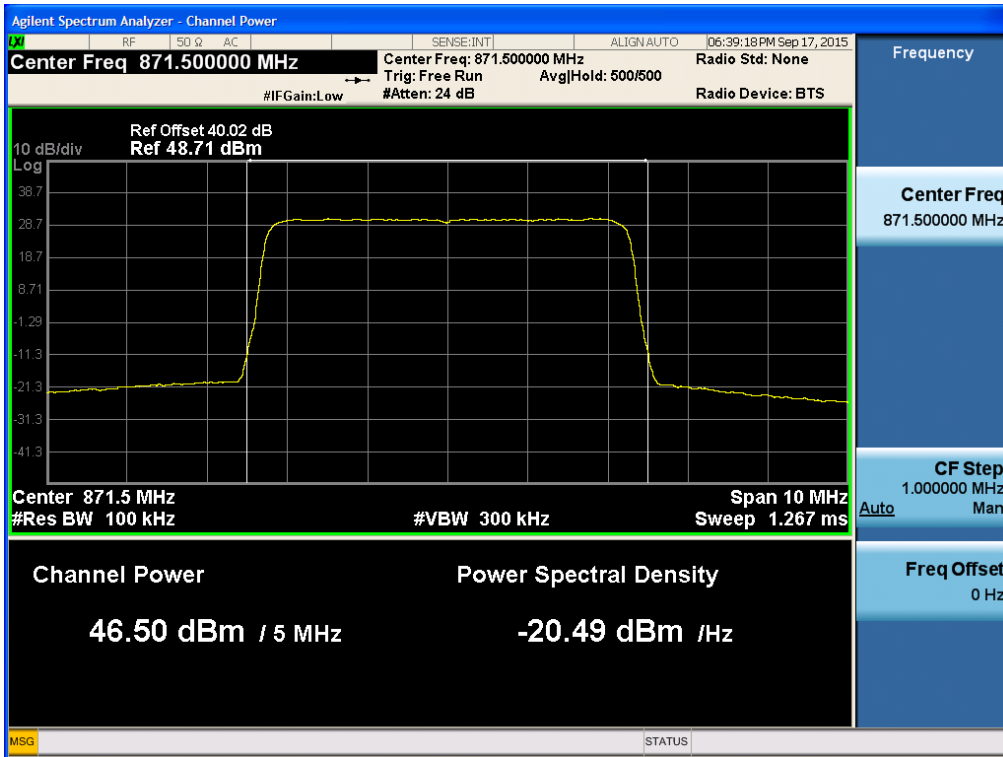


[AGC threshold Downlink LTE 5 MHz Middle]

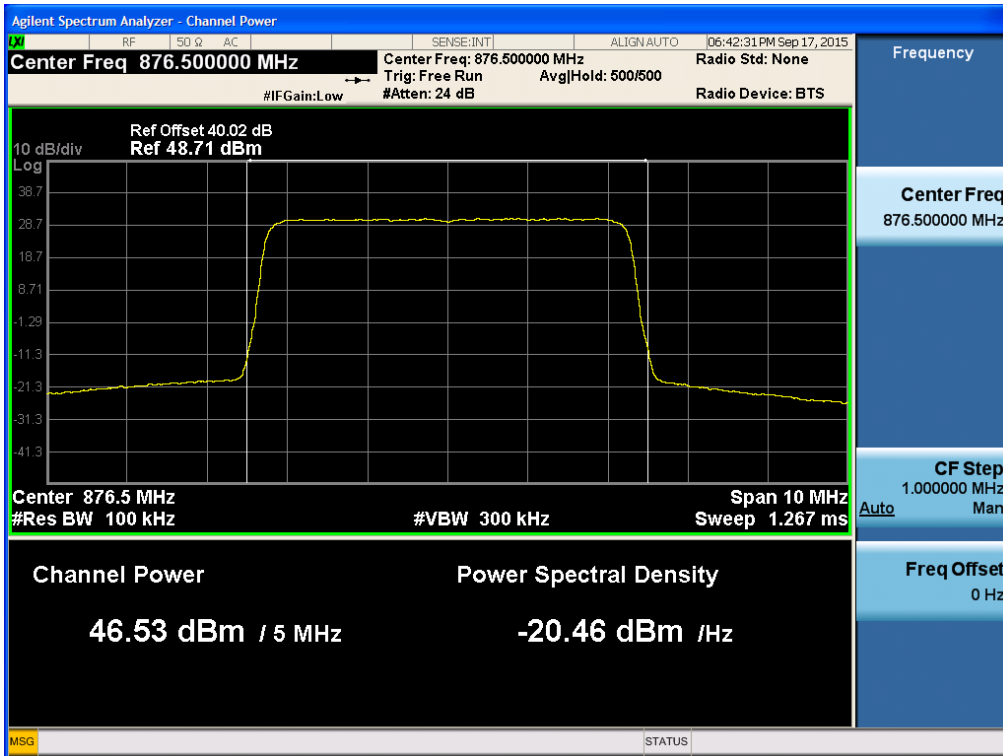


[AGC threshold Downlink LTE 5 MHz High]

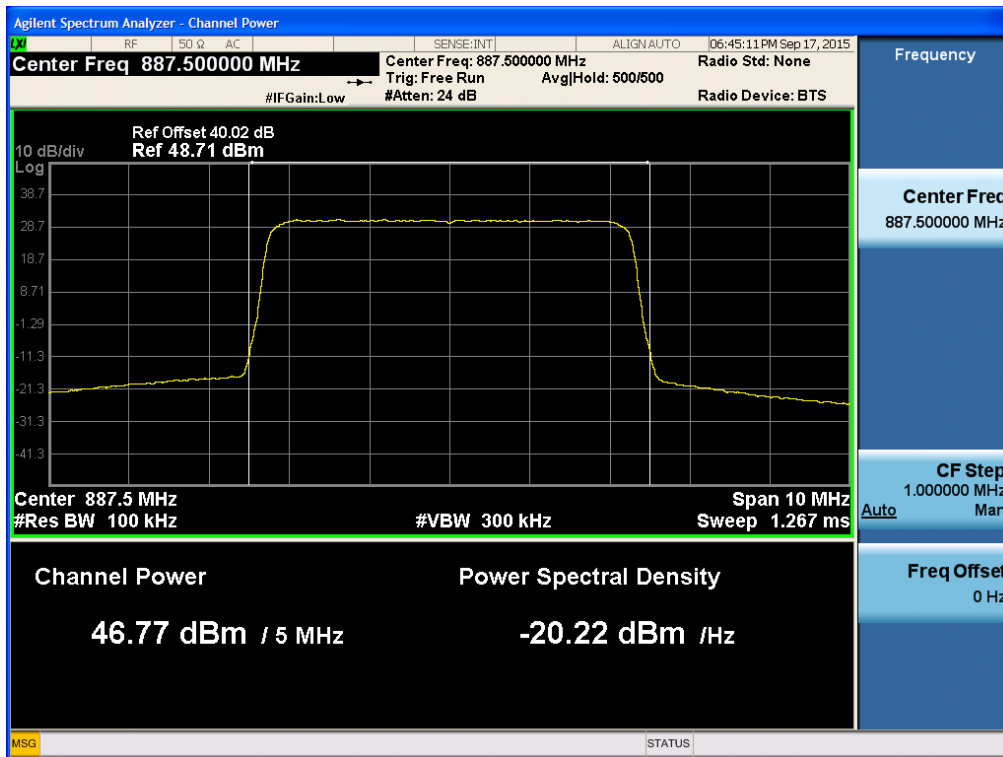


[AGC threshold Downlink LTE 10 MHz Low]

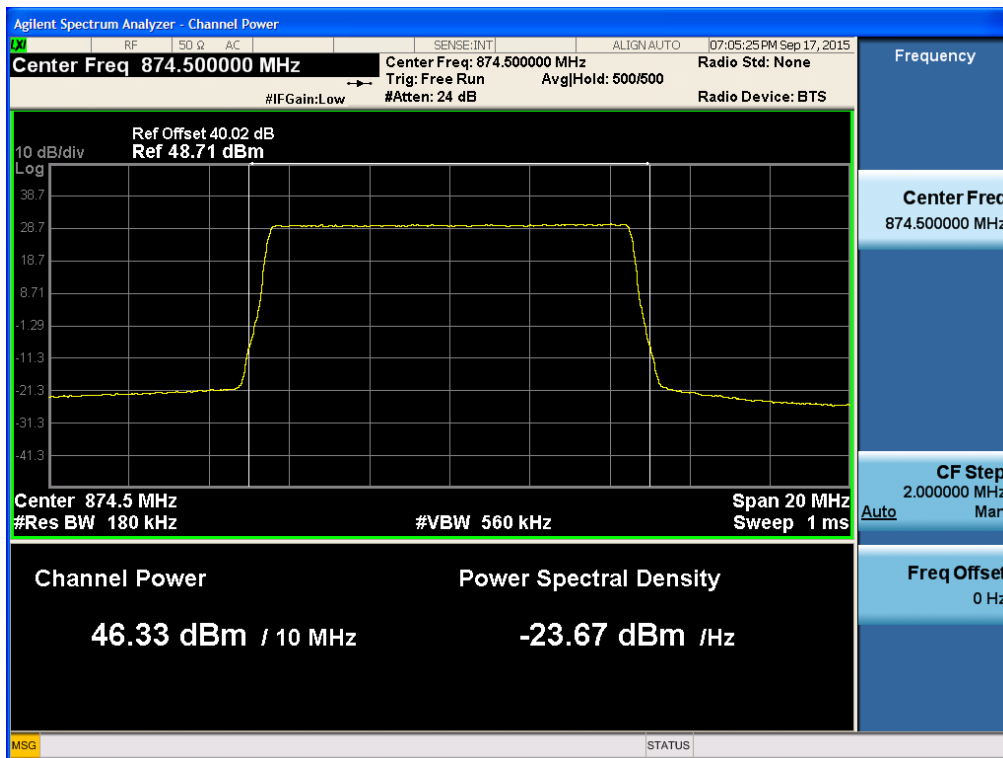


[AGC threshold Downlink LTE 10 MHz High]

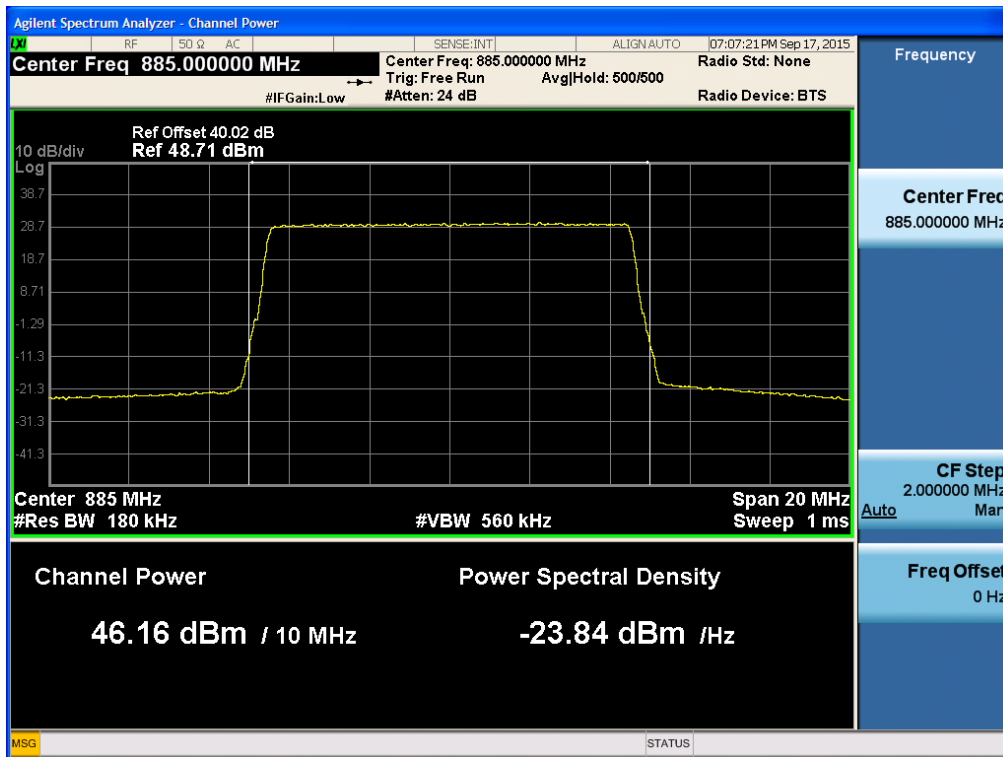


[AGC threshold Downlink WCDMA Low]

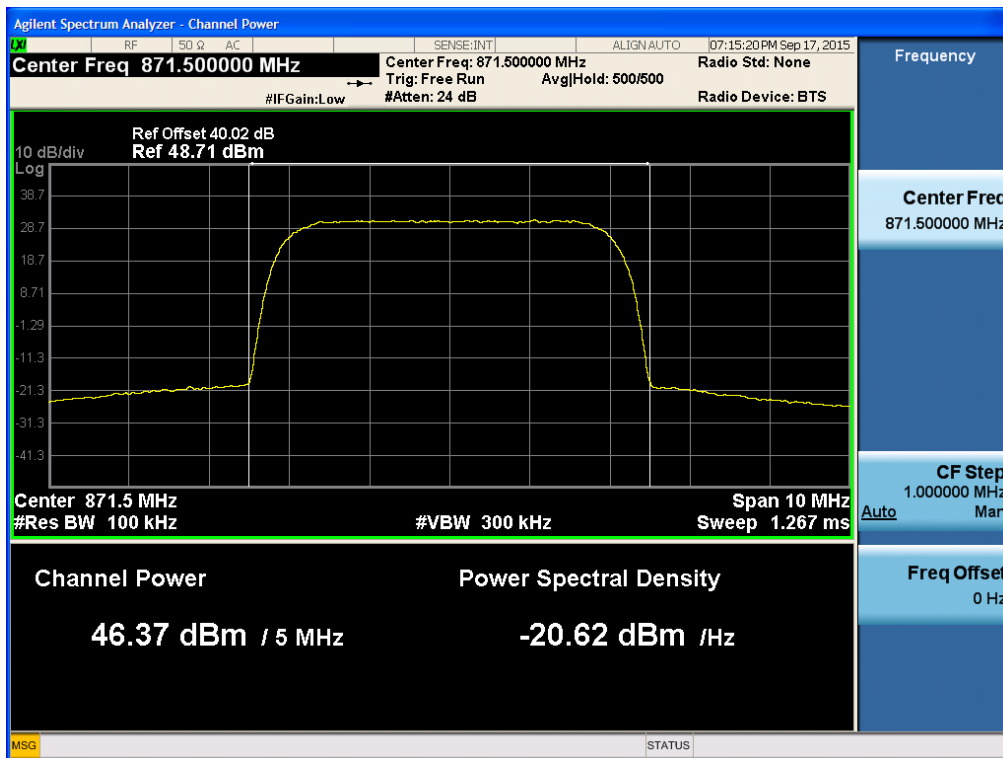


[AGC threshold Downlink WCDMA Middle]

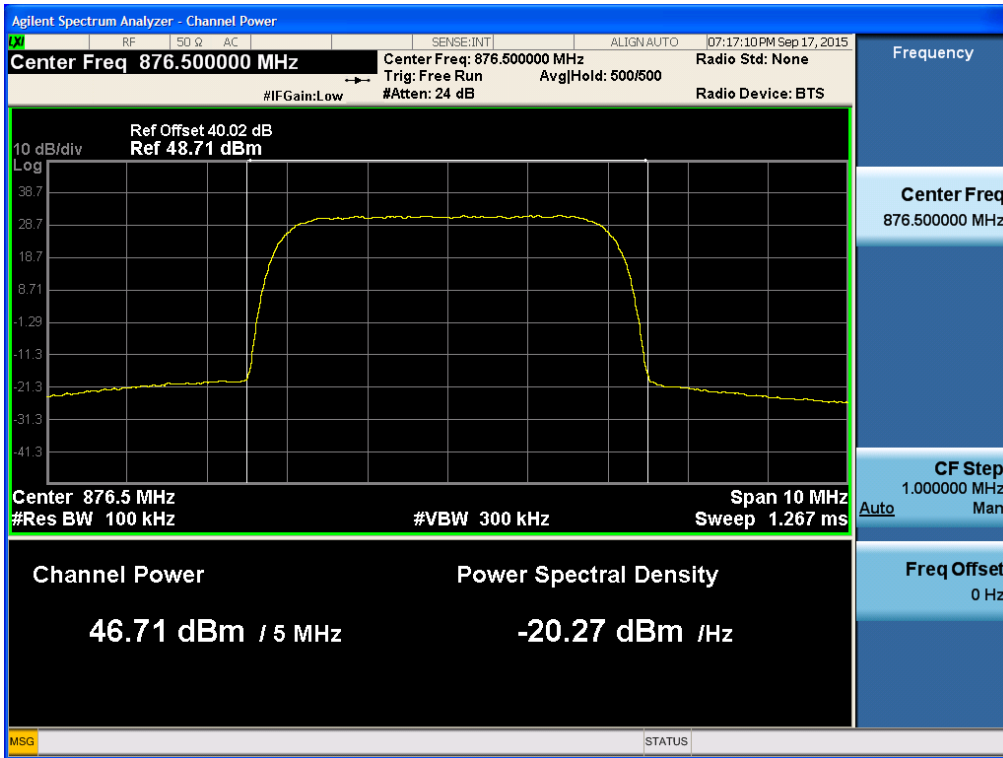


[AGC threshold Downlink WCDMA High]

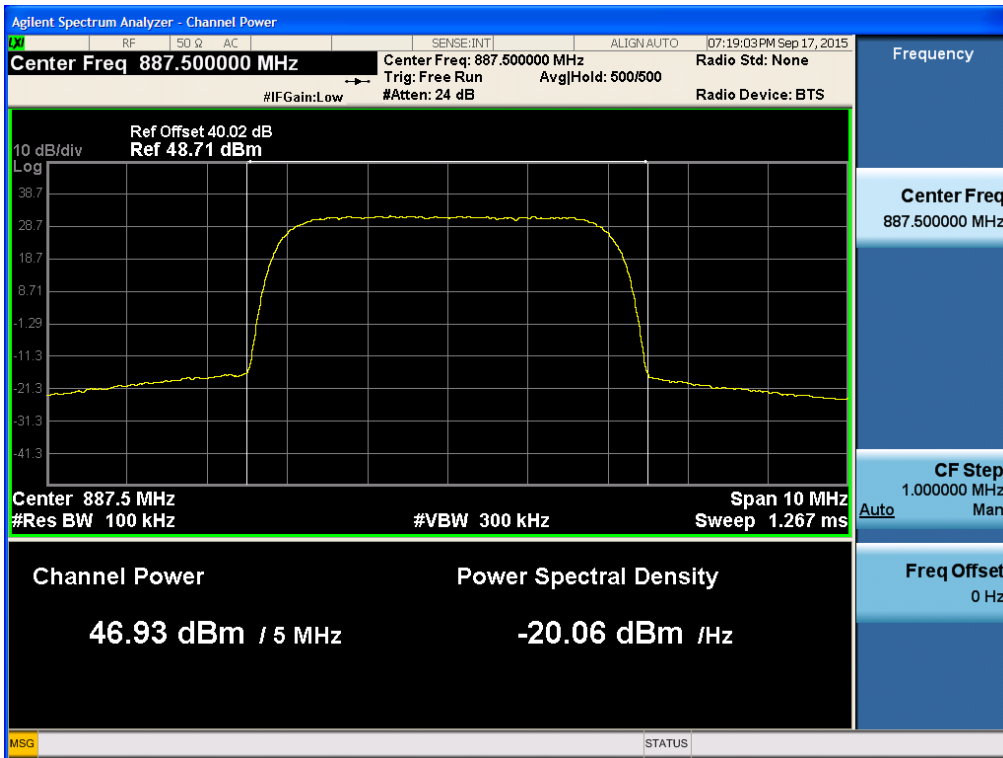


[+3dB above the AGC threshold Downlink LTE 5 MHz Low]

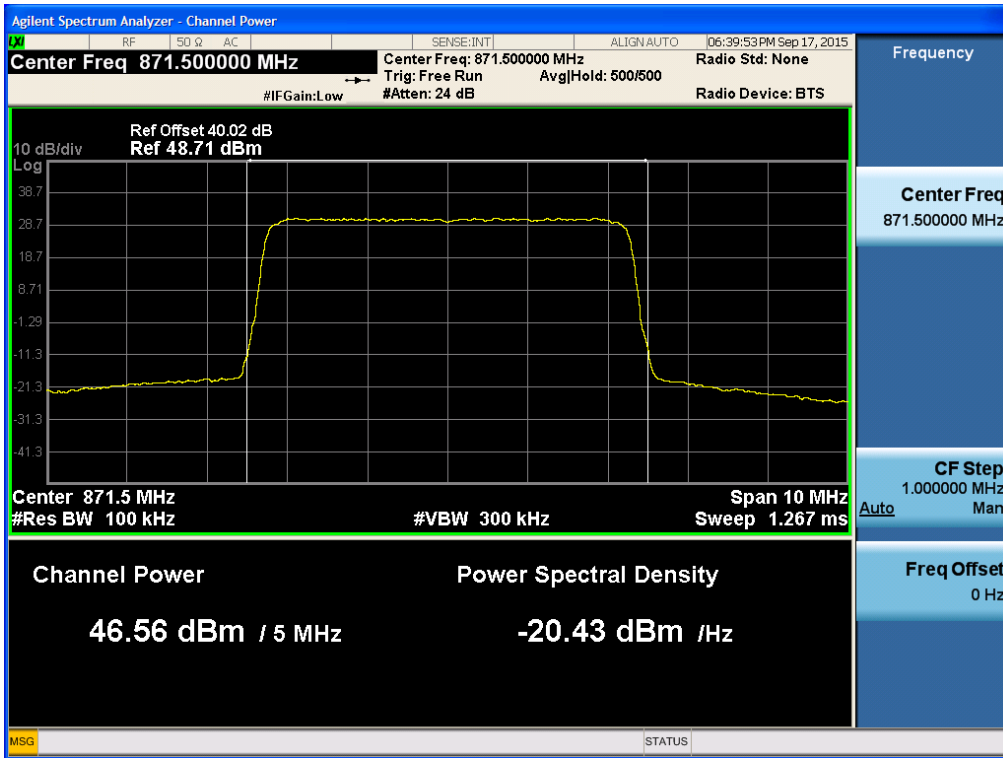


[+3dB above the AGC threshold Downlink LTE 5 MHz Middle]

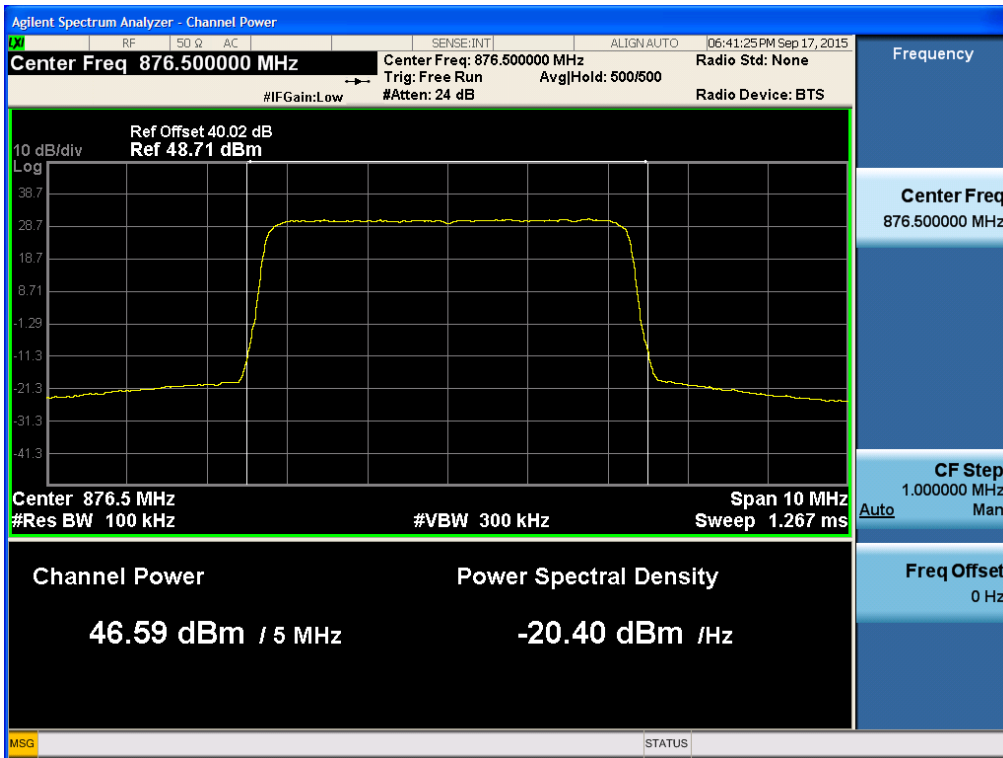


[+3dB above the AGC threshold Downlink LTE 5 MHz High]

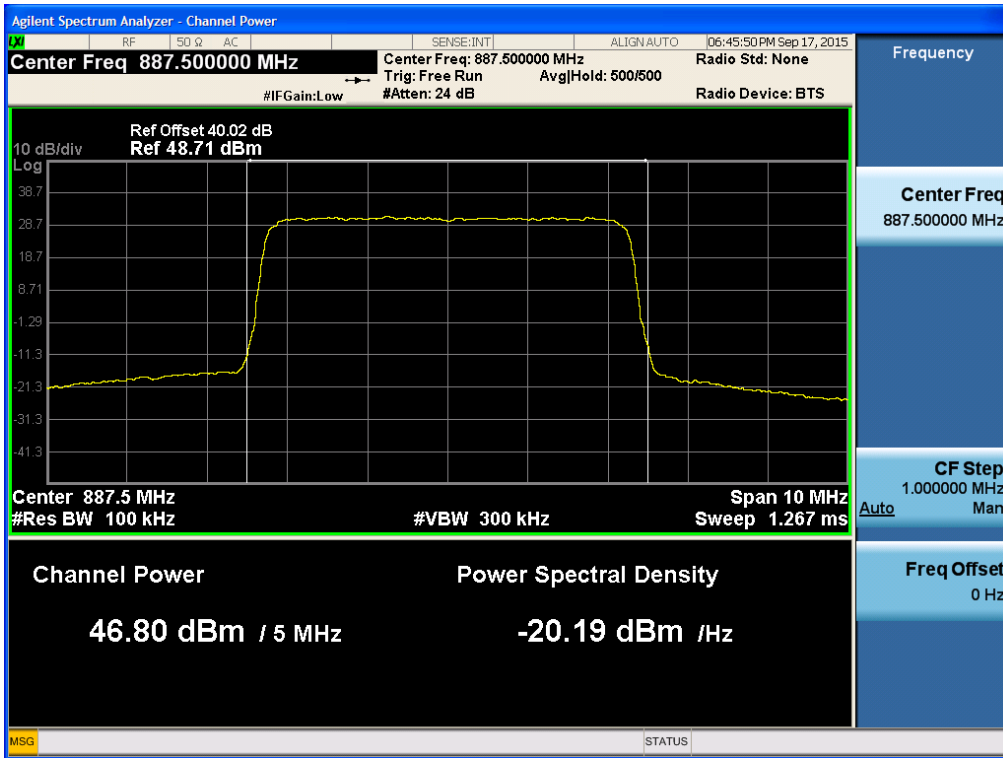


[+3dB above the AGC threshold Downlink LTE 10 MHz Low]

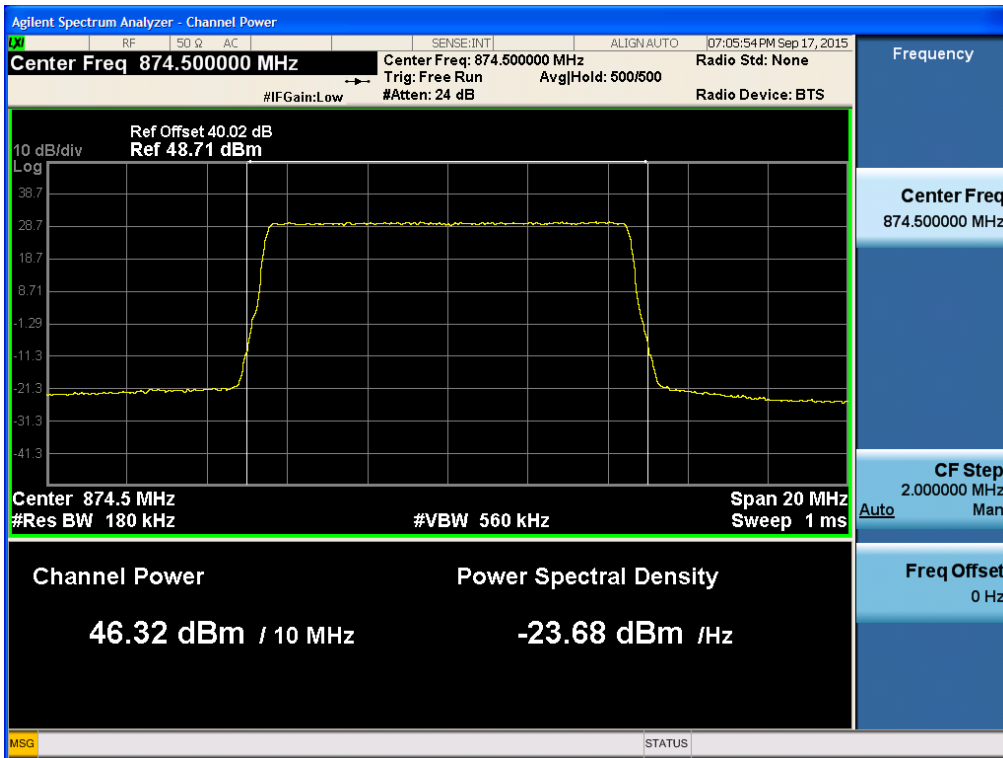


[+3dB above the AGC threshold Downlink LTE 10 MHz High]

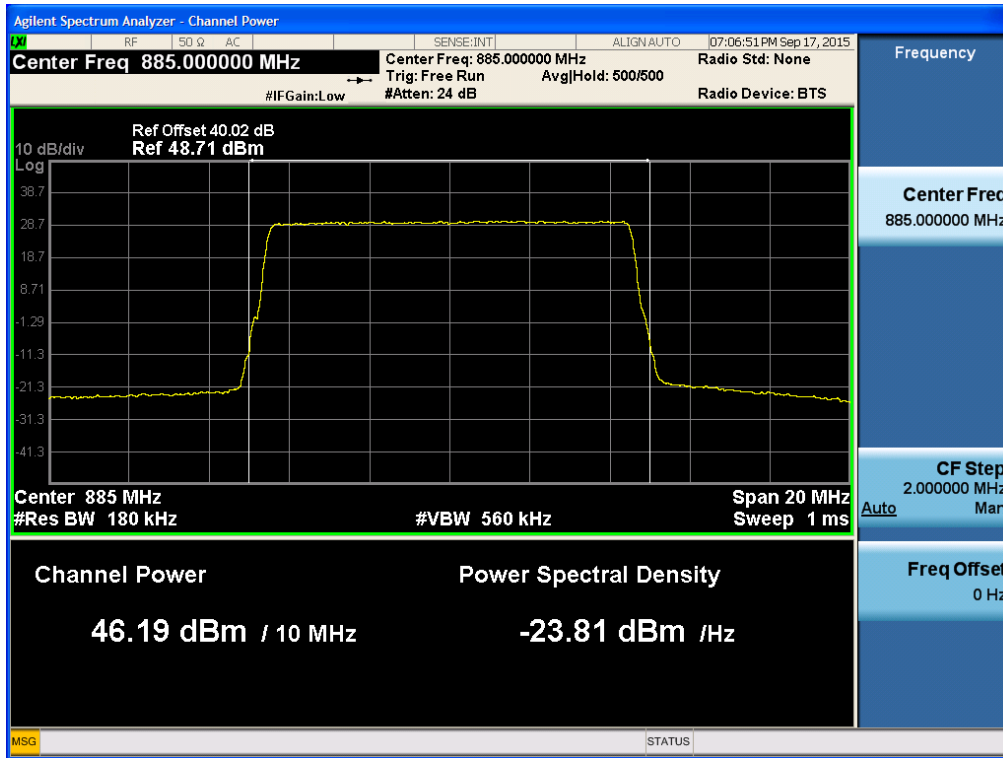


[+3dB above the AGC threshold Downlink WCDMA Low]

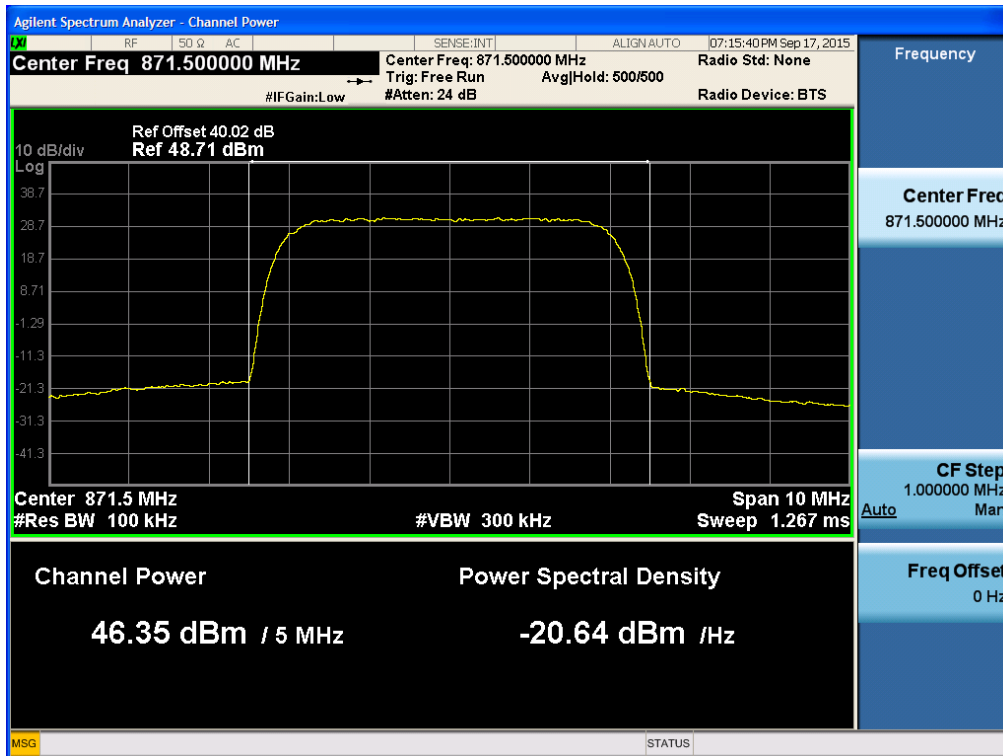

[+3dB above the AGC threshold Downlink WCDMA Middle]

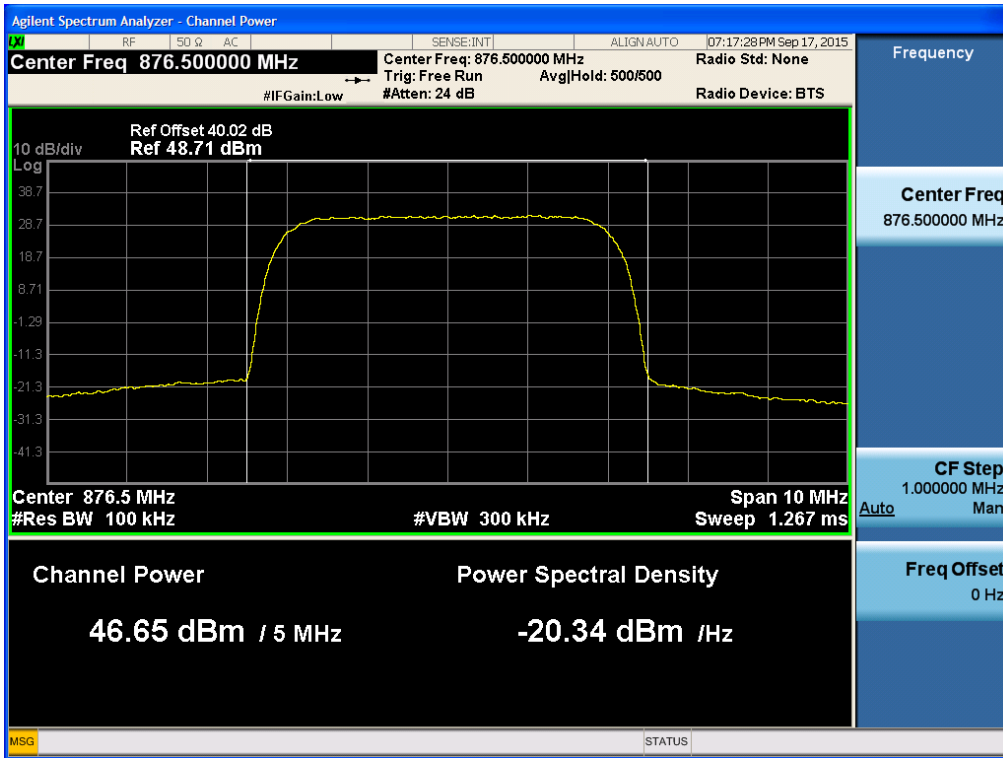

[+3dB above the AGC threshold Downlink WCDMA High]

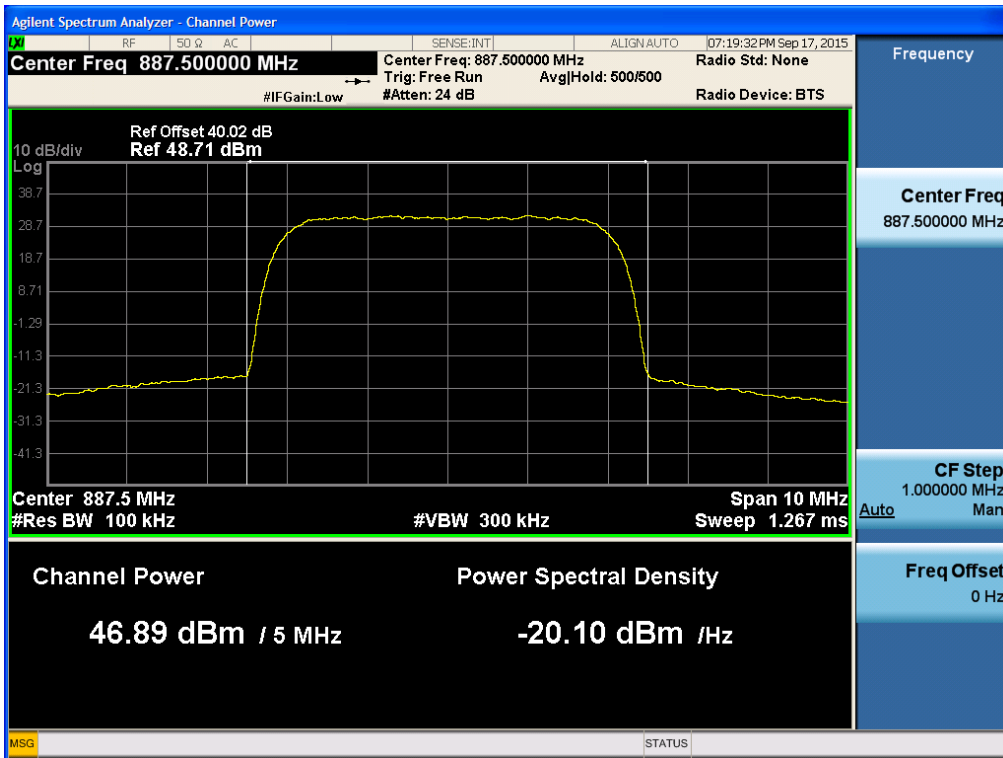

7. OCCUPIED BANDWIDTH

Test Requirement(s): § 2.1049 Measurements required: Occupied bandwidth:

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as applicable.

Test Procedures:

Measurements were in accordance with the test methods section 3.4 of KDB 935210 D05 v01 and section 4.2 of KDB 971168 D01 v02r02.

Test is 99% OBW measured and used.

- a) Connect a signal generator to the input of the EUT.
- b) Configure the signal generator to transmit the AWGN signal.
- c) Configure the signal amplitude to be just below the AGC threshold level (see 3.2), but not more than 0.5 dB below.
- d) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- e) Set the spectrum analyzer center frequency to the center frequency of the operational band under test. The span range of the spectrum analyzer shall be between 2 times to 5 times the OBW.
- f) The nominal resolution bandwidth (RBW) shall be in the range of 1% to 5 % of the anticipated OBW, and the VBW shall be $\geq 3 \times \text{RBW}$.
- g) Set the reference level of the instrument as required to preclude the signal from exceeding the maximum spectrum analyzer input mixer level for linear operation. In general, the peak of the spectral envelope must be more than $[10 \log (\text{OBW} / \text{RBW})]$ below the reference level.
NOTE—Steps f) and g) may require iteration to enable adjustments within the specified tolerances.
- h) The noise floor of the spectrum analyzer at the selected RBW shall be at least 36 dB below the reference level.
- i) Set spectrum analyzer detection function to positive peak.
- j) Set the trace mode to max hold.
- k) Use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.
- l) Repeat steps e) to k) with the input signal connected directly to the spectrum analyzer (i.e., input signal measurement).
- m) Compare the spectral plot of the input signal (determined from step l) to the output signal (determined from step k) to affirm that they are similar (in passband and rolloff characteristic

features and relative spectral locations), and include plot(s) and descriptions in test report.
n) Repeat for all frequency bands authorized for use by the EUT.

Test Results: The EUT complies with the requirements of this section.

Cellular Band

| Input Signal | Input Level (dBm) | Maximum Amp Gain |
|--------------|-------------------|------------------|
| LTE 5 MHz | DL: -30 dBm | DL : 76 dB |
| LTE 10 MHz | | |
| WCDMA | | |

[Downlink Output]

| | Channel | Frequency (MHz) | OBW (MHz) |
|-----------------------------|----------------|------------------------|------------------|
| AGC threshold LTE 5 MHz | Low | 871.50 | 4.447 |
| | Middle | 876.50 | 4.451 |
| | High | 887.50 | 4.450 |
| AGC threshold LTE 10 MHz | Low | 874.50 | 8.974 |
| | Middle | - | - |
| | High | 885.00 | 8.970 |
| AGC threshold WCDMA | Low | 871.50 | 4.131 |
| | Middle | 876.50 | 4.126 |
| | High | 887.50 | 4.130 |

[Downlink Input]


| | Channel | Frequency (MHz) | OBW (MHz) |
|-----------------------------|----------------|------------------------|------------------|
| AGC threshold LTE 5 MHz | Low | 871.50 | 4.554 |
| | Middle | 876.50 | 4.557 |
| | High | 887.50 | 4.552 |
| AGC threshold LTE 10 MHz | Low | 874.50 | 8.966 |
| | Middle | - | - |
| | High | 885.00 | 8.971 |
| AGC threshold WCDMA | Low | 871.50 | 4.203 |
| | Middle | 876.50 | 4.208 |
| | High | 887.50 | 4.204 |

[Downlink Output]


| | Channel | Frequency (MHz) | OBW (MHz) |
|--|----------------|------------------------|------------------|
| +3dB above the AGC threshold LTE 5 MHz | Low | 871.50 | 4.448 |
| | Middle | 876.50 | 4.447 |
| | High | 887.50 | 4.445 |
| +3dB above the AGC threshold LTE 10 MHz | Low | 874.50 | 8.974 |
| | Middle | - | - |
| | High | 885.00 | 8.968 |
| +3dB above the AGC threshold WCDMA | Low | 871.50 | 4.129 |
| | Middle | 876.50 | 4.138 |
| | High | 887.50 | 4.122 |

Plots of Occupied Bandwidth


[AGC threshold Downlink Output LTE 5 MHz Low]

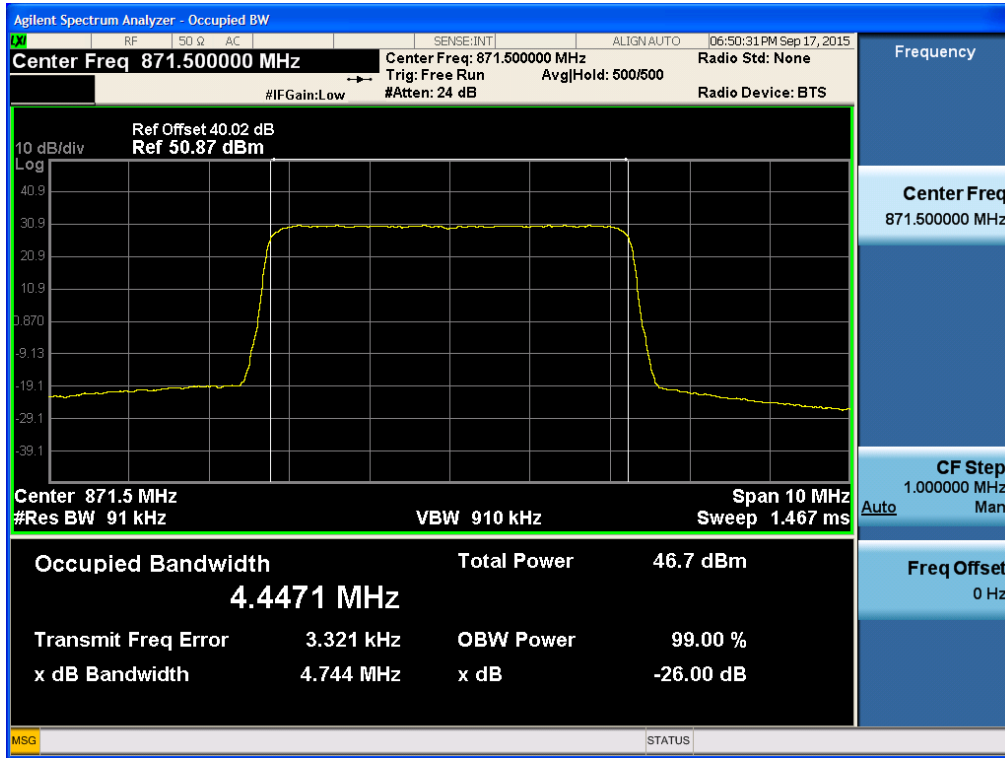


[AGC threshold Downlink Output LTE 5 MHz Middle]

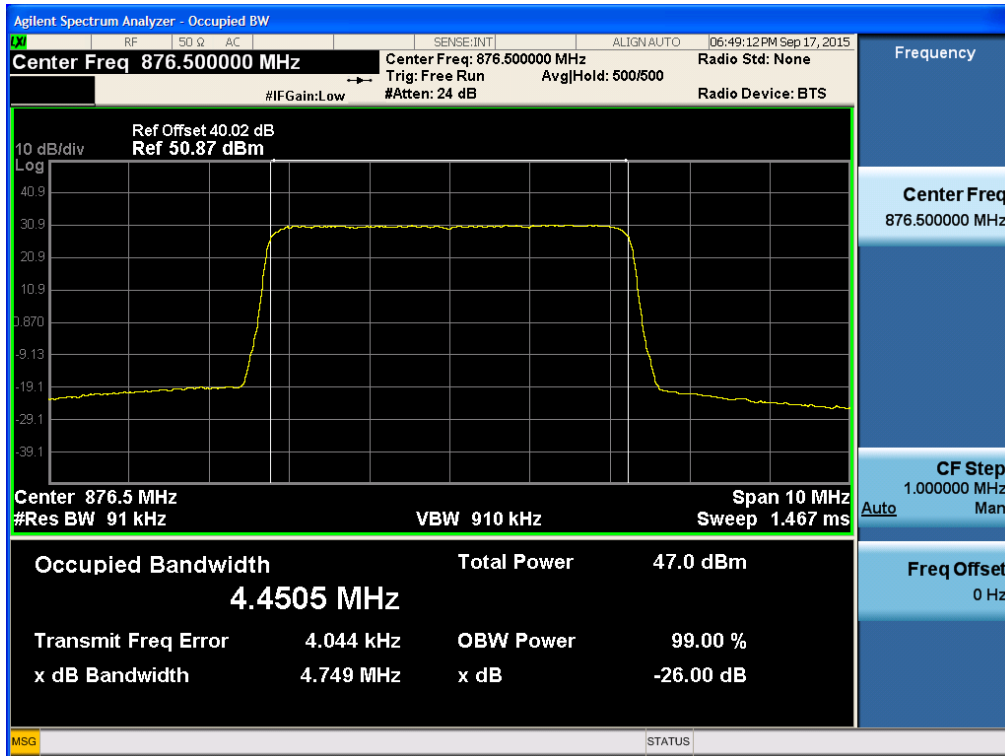


[AGC threshold Downlink Output LTE 5 MHz High]

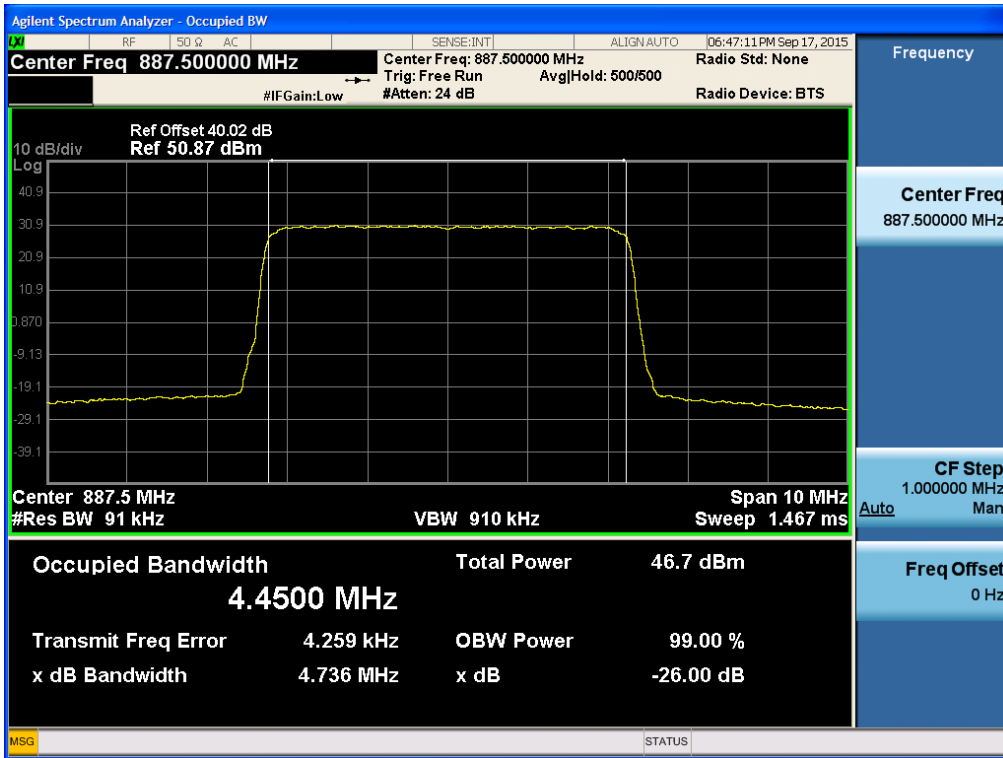


[AGC threshold Downlink Output LTE 10 MHz Low]

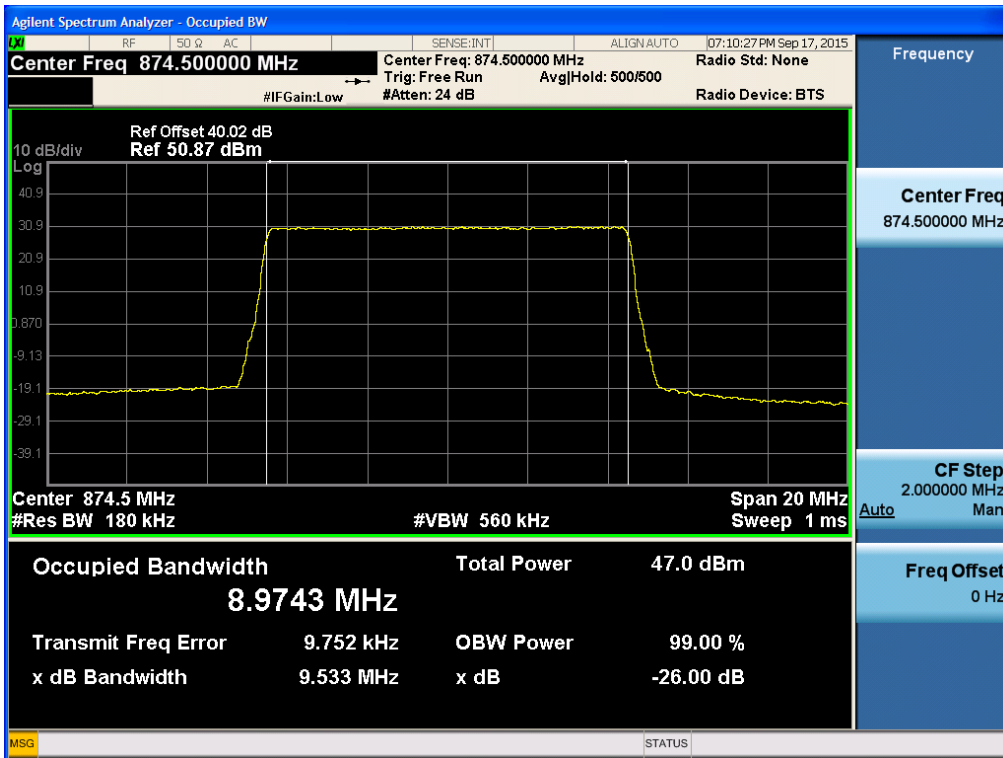


[AGC threshold Downlink Output LTE 10 MHz High]

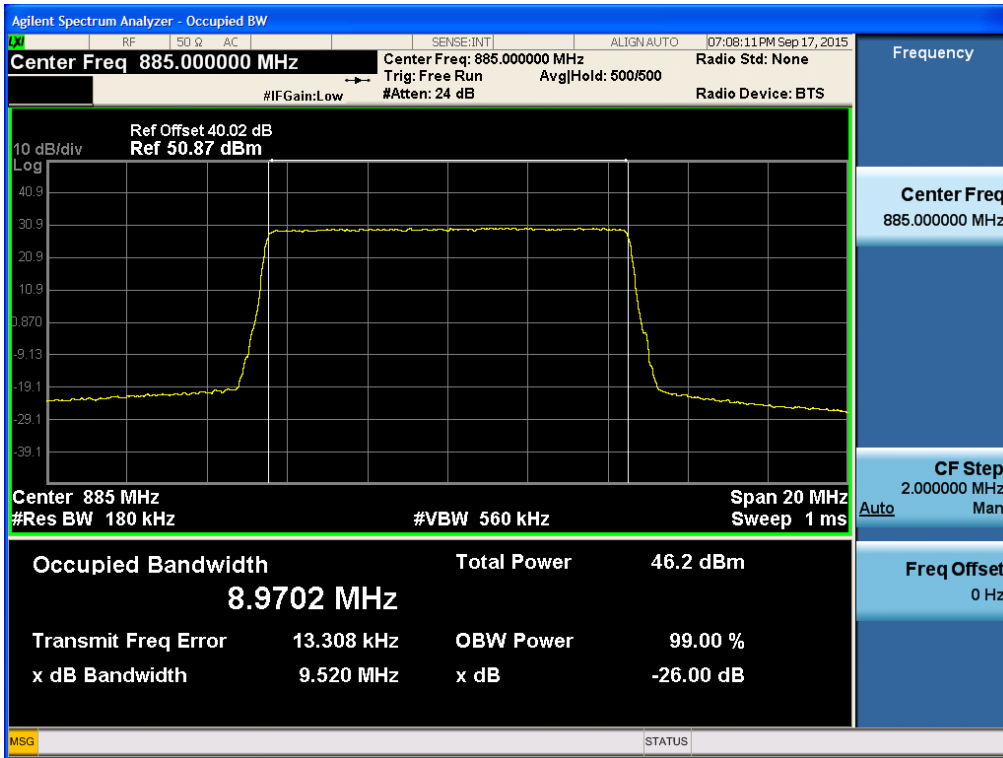


[AGC threshold Downlink Output WCDMA Low]

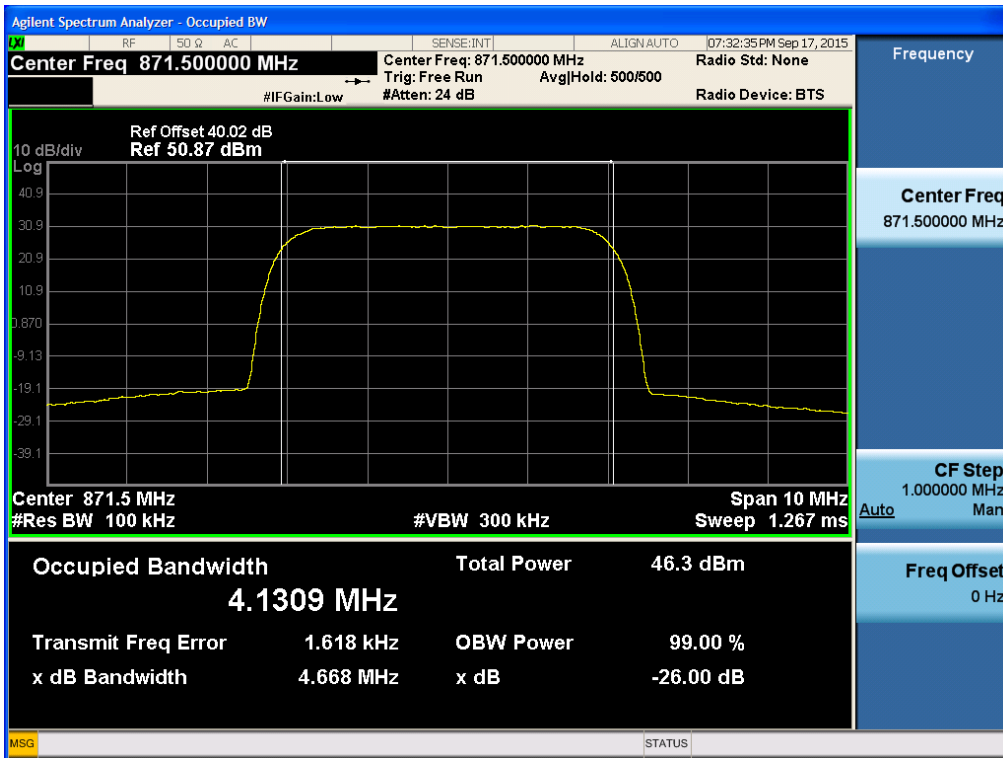


[AGC threshold Downlink Output WCDMA Middle]

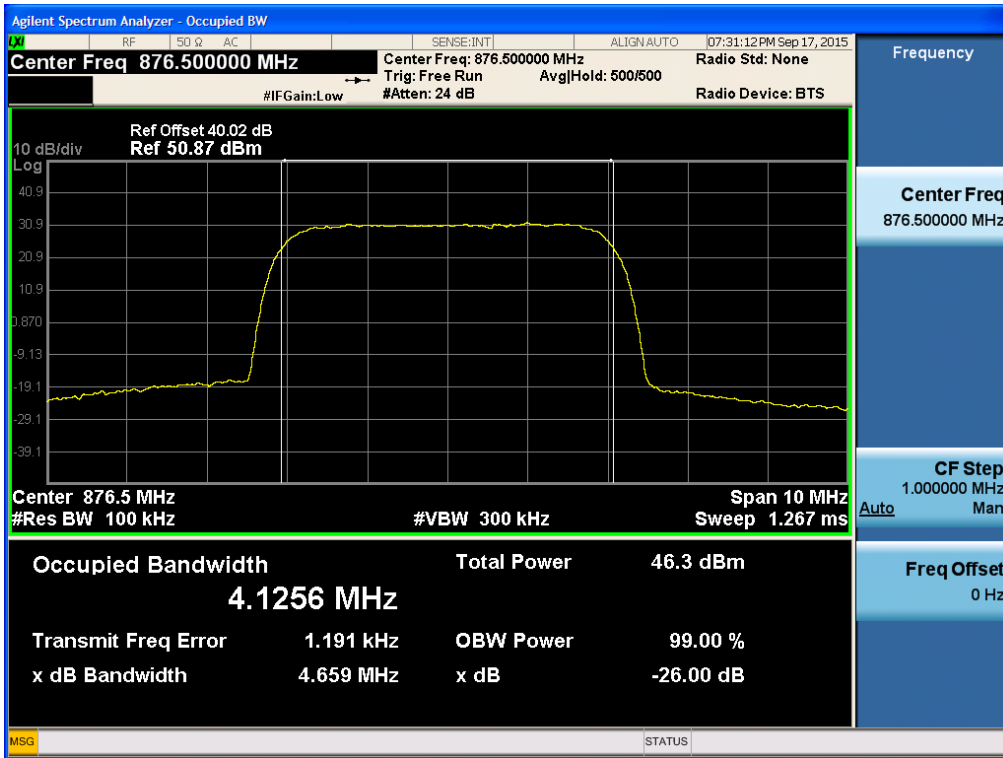


[AGC threshold Downlink Output WCDMA High]

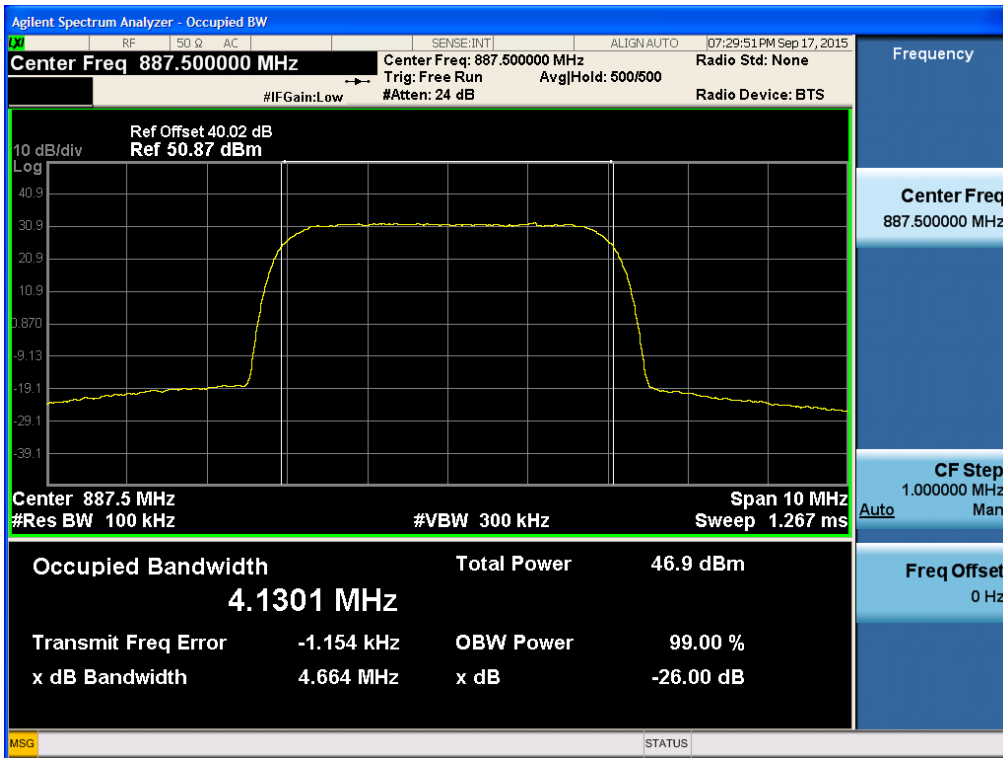


[AGC threshold Downlink Input LTE 5 MHz Low]

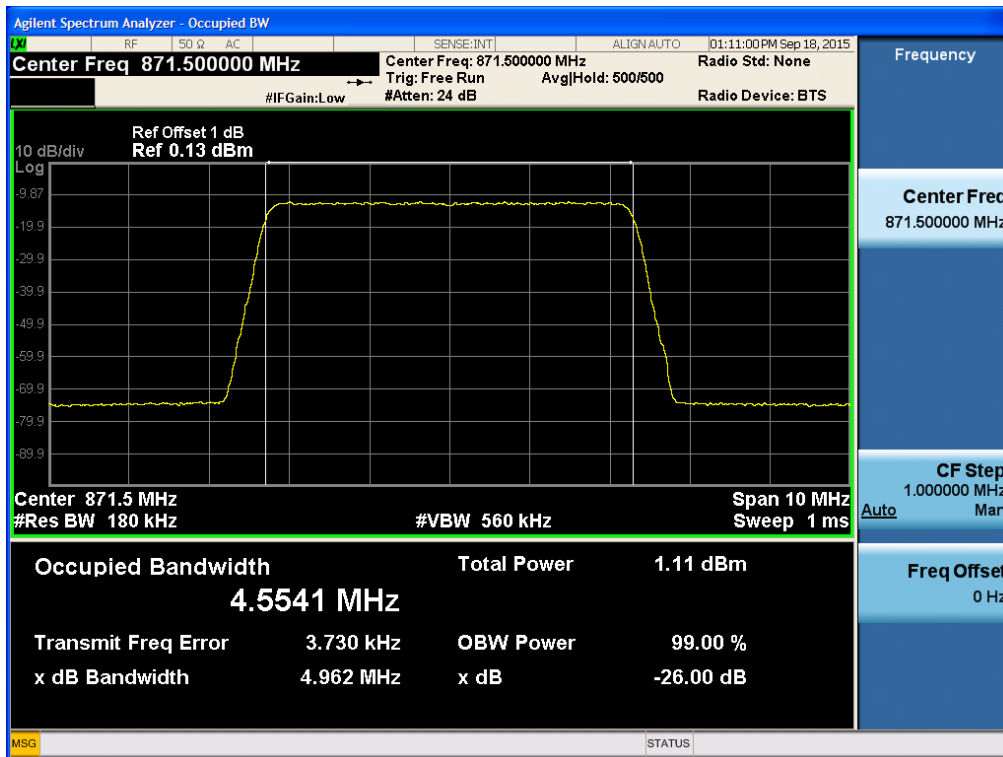


[AGC threshold Downlink Input LTE 5 MHz Middle]

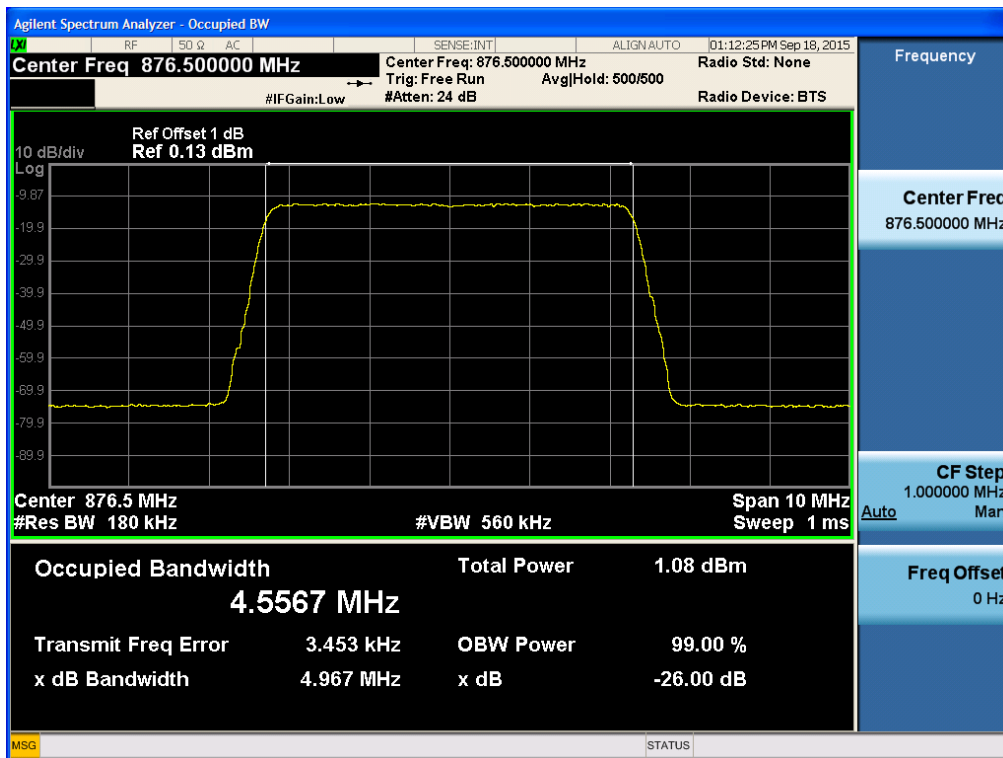


[AGC threshold Downlink Input LTE 5 MHz High]

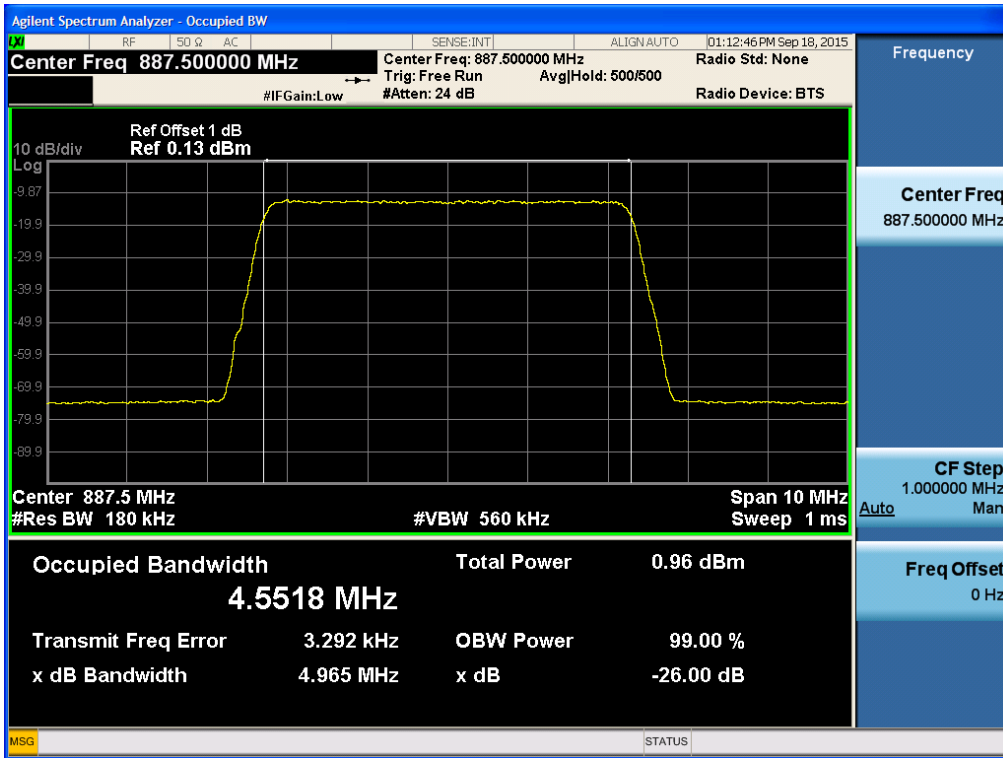


[AGC threshold Downlink Input LTE 10 MHz Low]

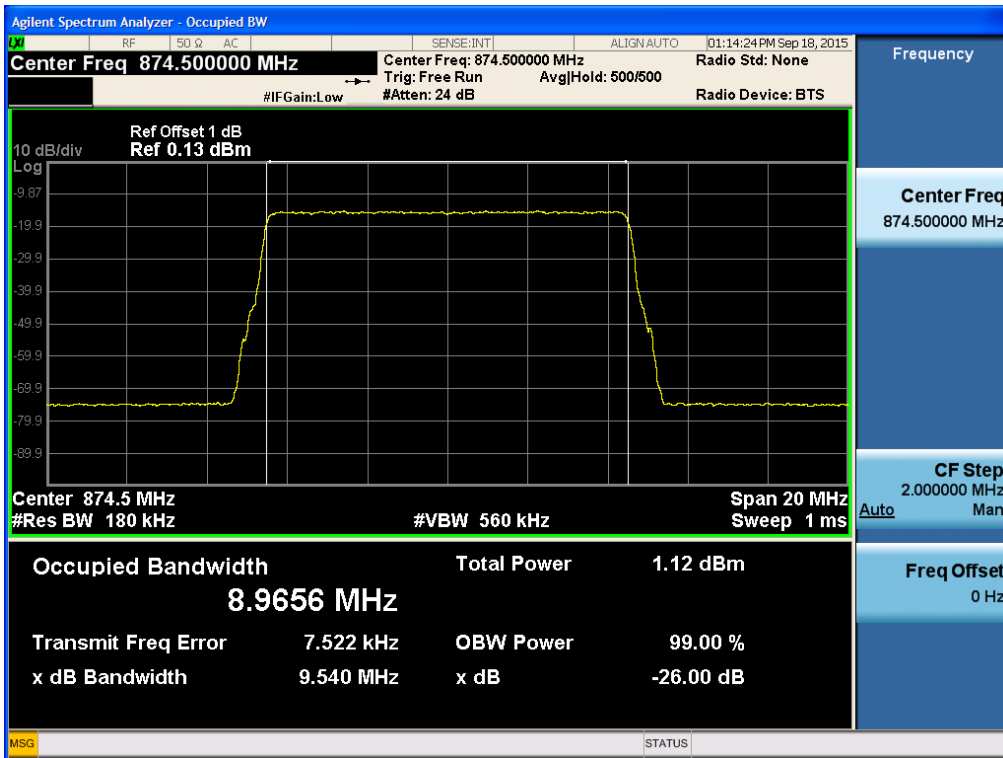


[AGC threshold Downlink Input LTE 10 MHz High]

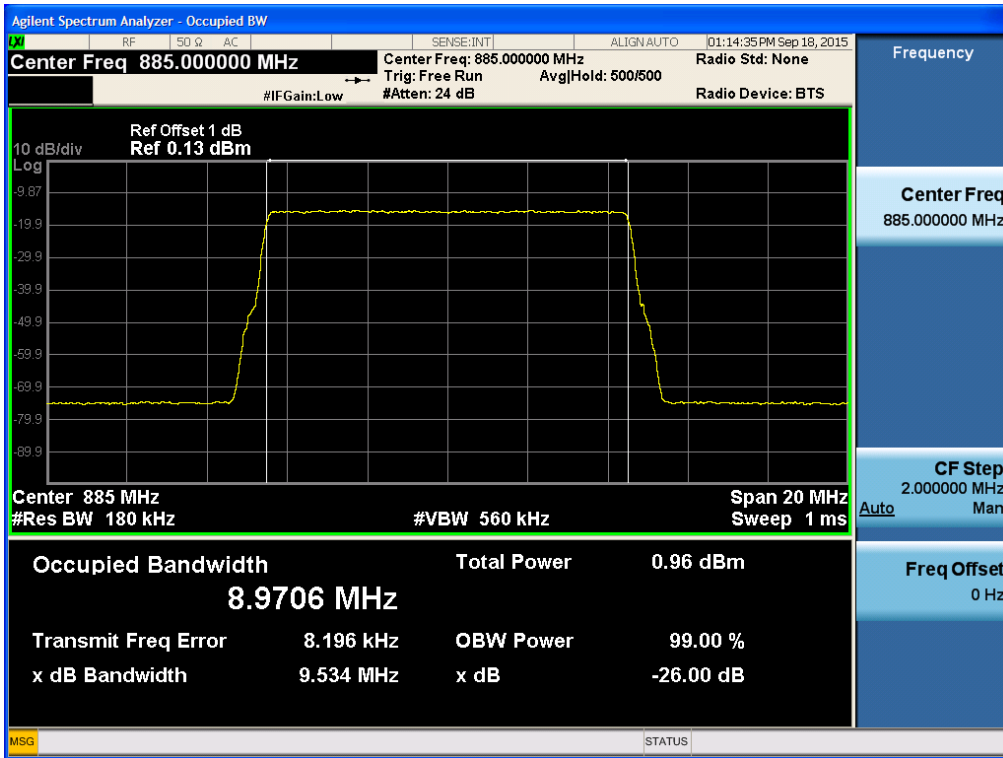


[AGC threshold Downlink Input WCDMA Low]

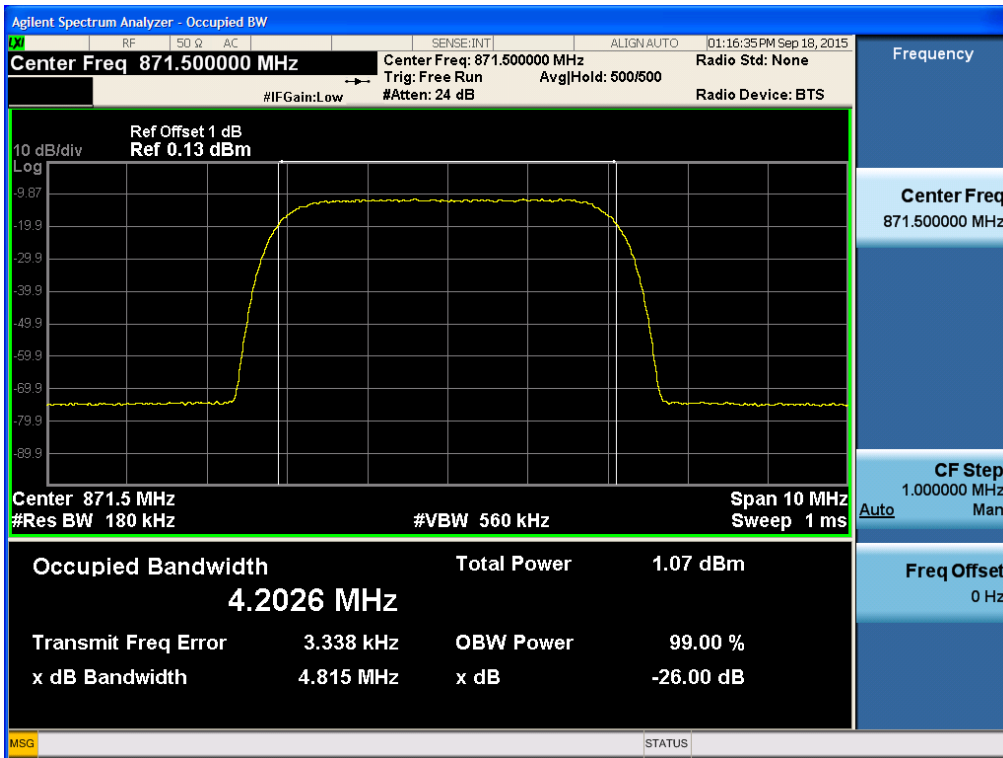


[AGC threshold Downlink Input WCDMA Middle]

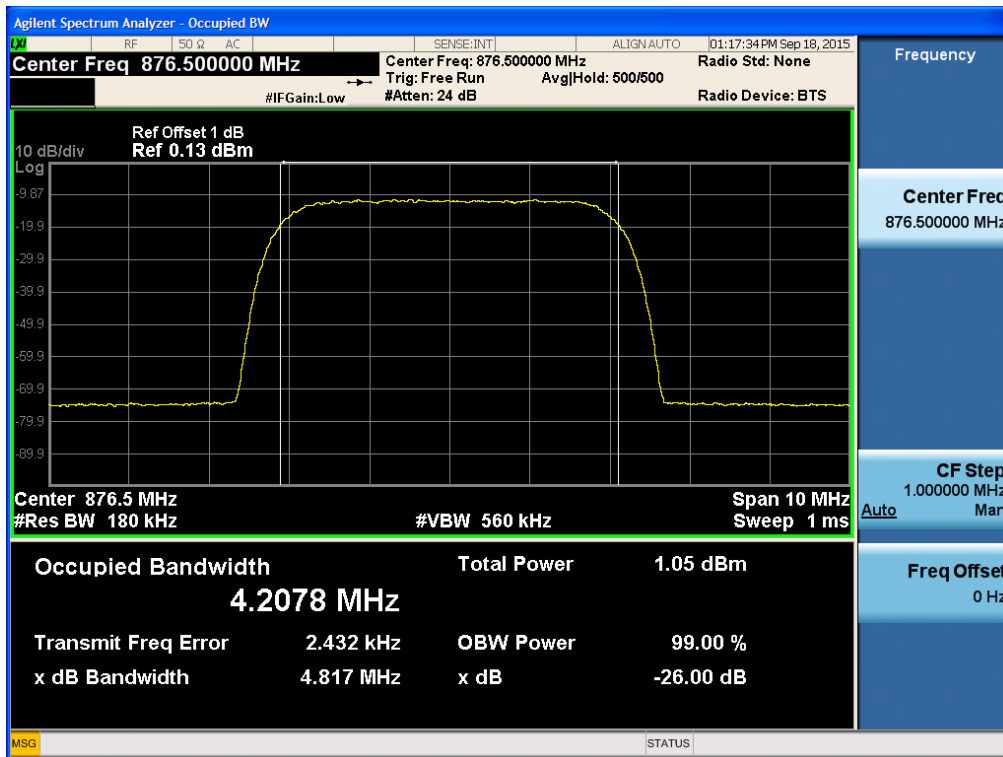


[AGC threshold Downlink Input WCDMA High]

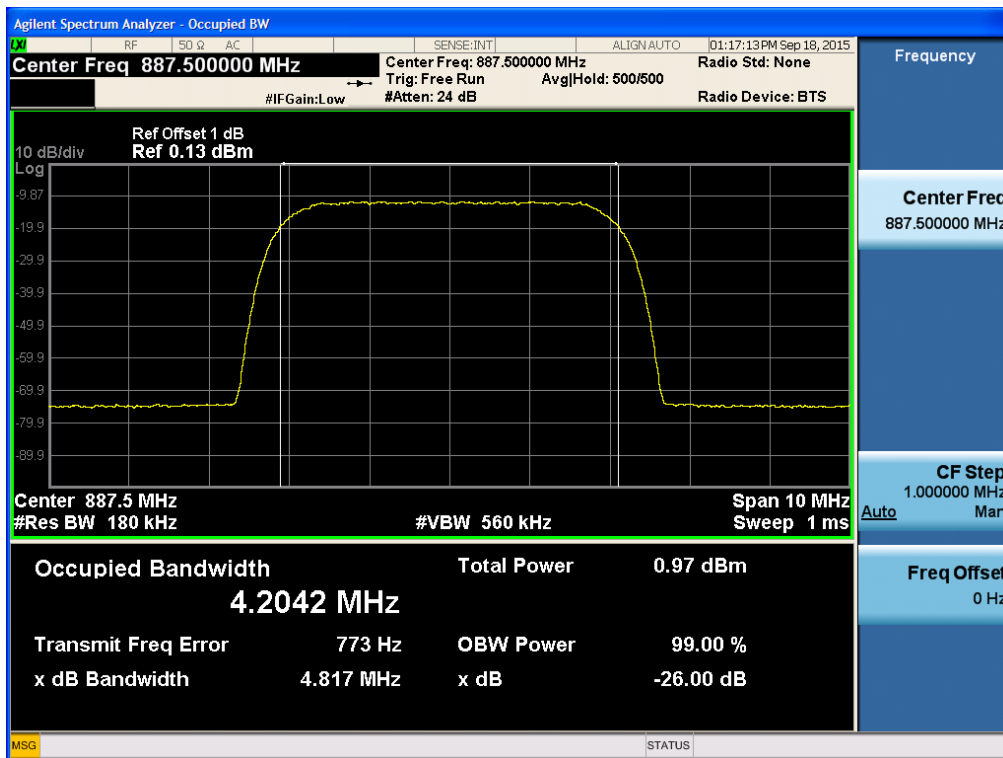


[+3dB above the AGC threshold Downlink Output LTE 5 MHz Low]

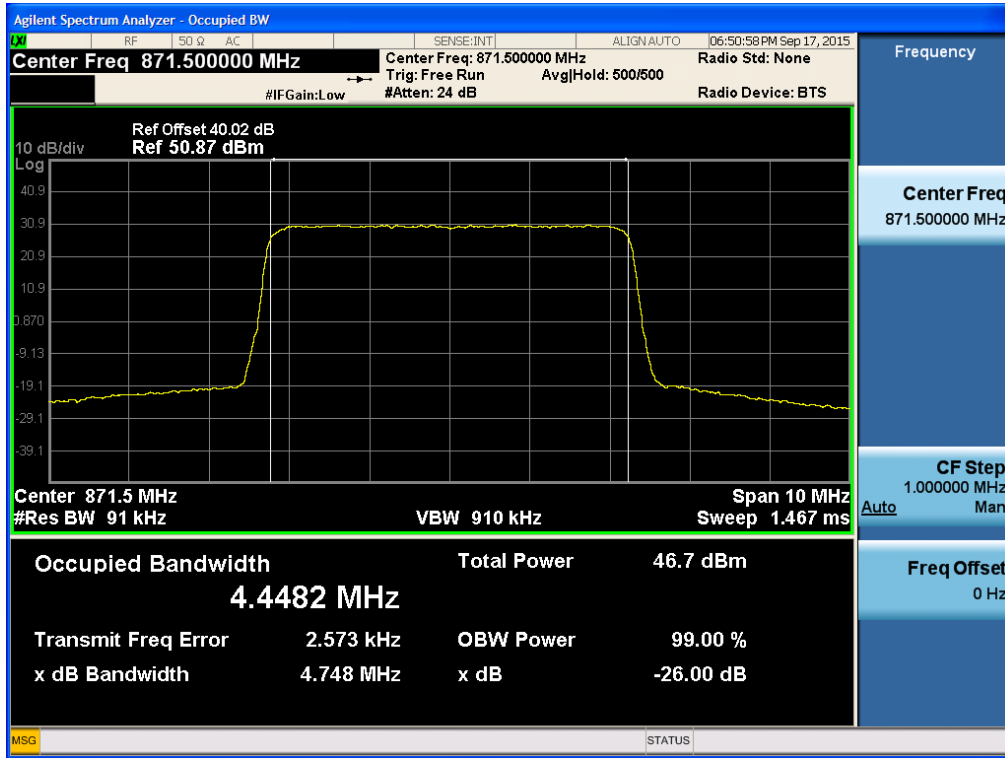


[+3dB above the AGC threshold Downlink Output LTE 5 MHz Middle]

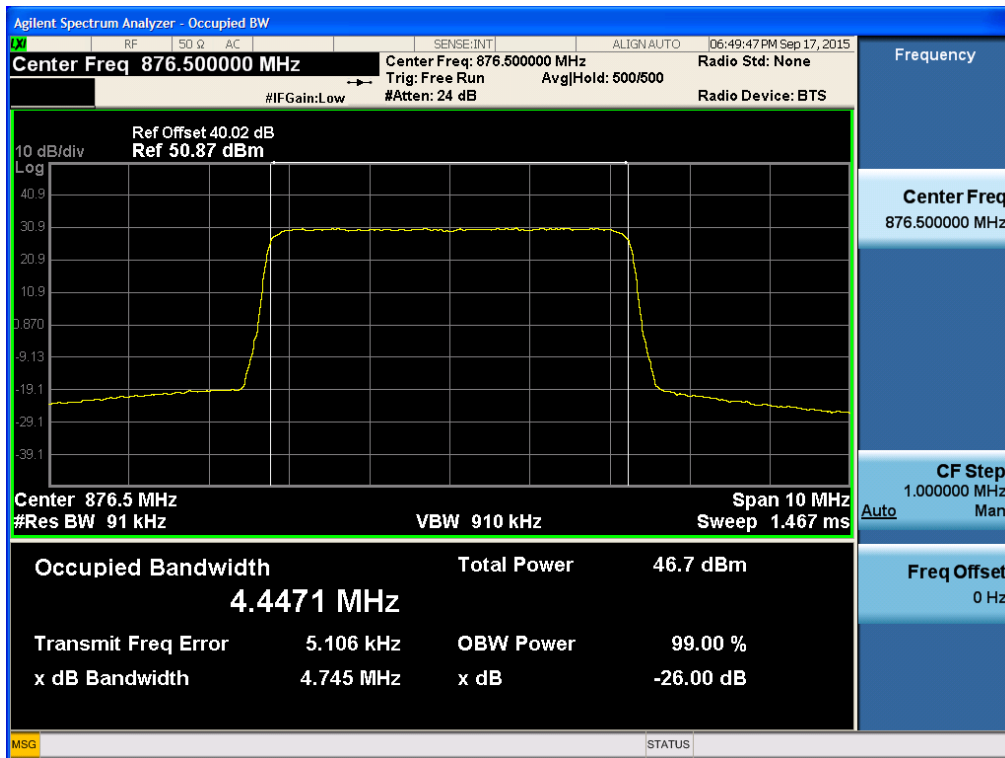

[+3dB above the AGC threshold Downlink Output LTE 5 MHz High]

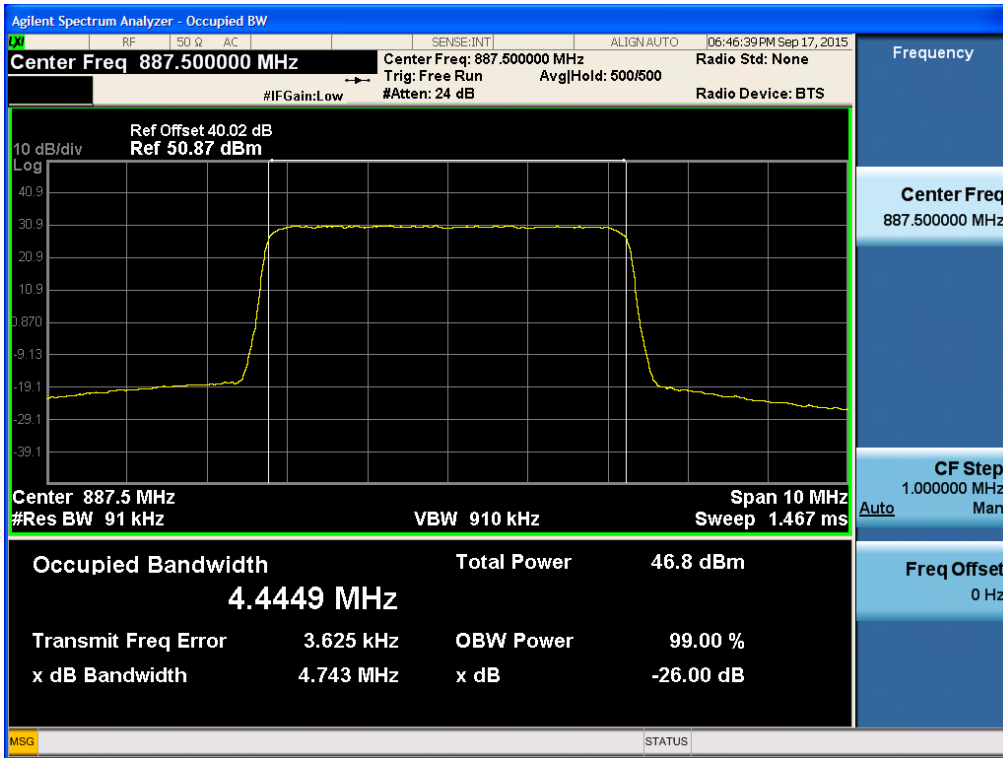


[+3dB above the AGC threshold Downlink Output LTE 10 MHz Low]

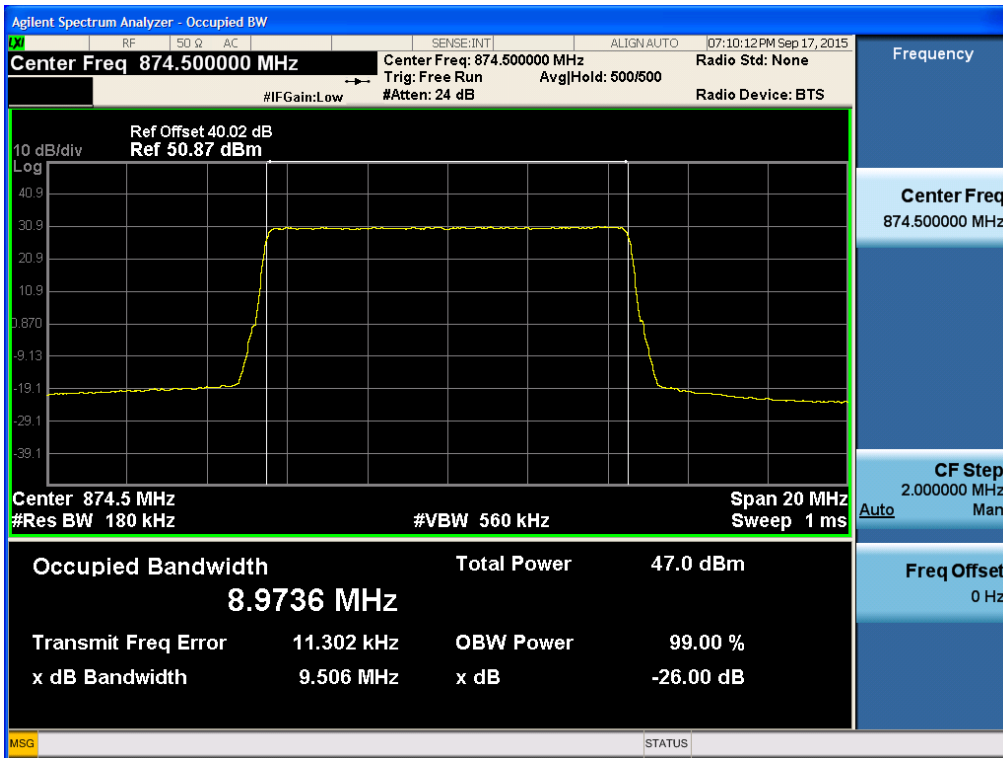


[+3dB above the AGC threshold Downlink Output LTE 10 MHz High]




[+3dB above the AGC threshold Downlink Output WCDMA Low]

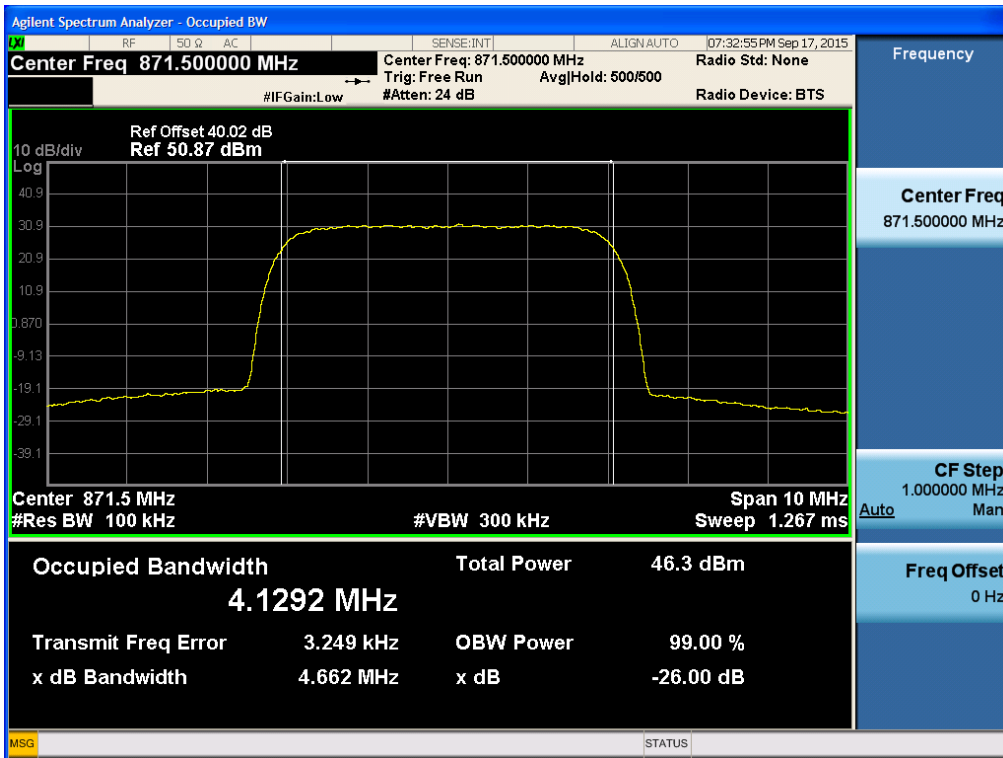

[+3dB above the AGC threshold Downlink Output WCDMA Middle]

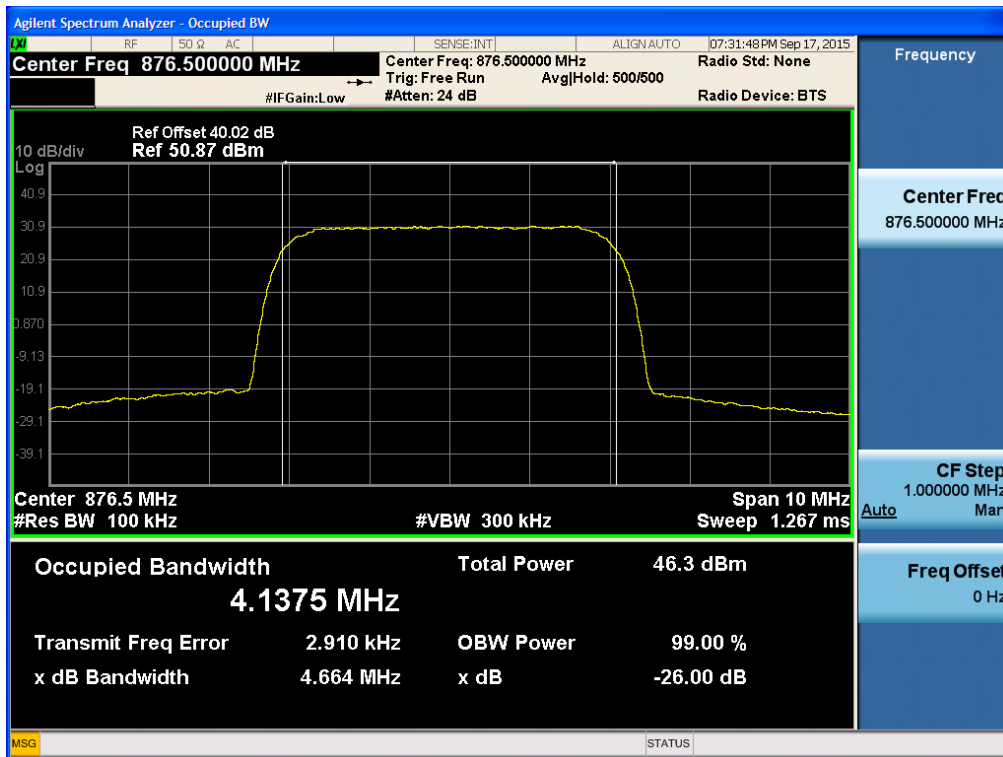

[+3dB above the AGC threshold Downlink Output WCDMA High]

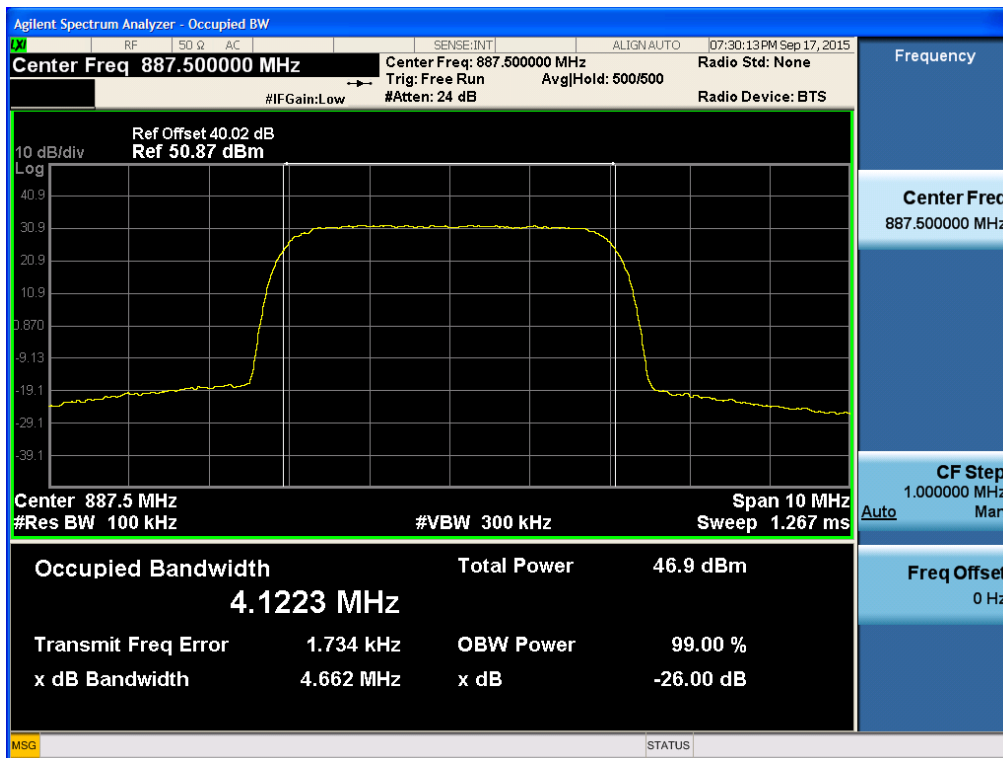

8. OUT OF BAND REJECTION

Test Requirement(s): KDB 935210 D02 v03

Out of Band Rejection – Test for rejection of out of band signals. Filter freq. response plots are acceptable.

Test Procedures:

Measurements were in accordance with the test methods section 3.3 of KDB 935210 D05 v01.

- a) Connect a signal generator to the input of the EUT.
- b) Configure a swept CW signal with the following parameters:
 - 1) Frequency range = $\pm 250\%$ of the passband from the center of the passband.
 - 2) Level = a sufficient level to affirm that the out-of-band rejection is > 20 dB above the noise floor and will not engage the AGC during the entire sweep.
 - 3) Dwell time = approx. 10 ms.
 - 4) Number of points = $\text{SPAN}/(\text{RBW}/2)$.
- c) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- d) Set the span of the spectrum analyzer to the same as the frequency range of the signal generator.
- e) Set the resolution bandwidth of the spectrum analyzer to be 1 % to 5 % of the passband and the video bandwidth shall be set to $\geq 3 \times \text{RBW}$.
- f) Set the detector to Peak Max-Hold and wait for the spectrum analyzer's spectral display to fill.
- g) Place a marker to the peak of the frequency response and record this frequency as f_0 .
- h) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the -20 dB down amplitude to determine the 20 dB bandwidth. Capture the frequency response of the EUT.

Test Results: The EUT complies with the requirements of this section.


| | |
|---------------------------|------------------|
| Input Level (dBm) | Maximum Amp Gain |
| Input Signal : Sinusoidal | |
| DL: -30 dBm | DL : 76 dB |

[Downlink]

| 20 dB point frequency (MHz) | Output power (dBm) | Gain (dB) |
|--|-------------------------------|------------------|
| 868.14 MHz ~ 890.88 MHz | 46.58 | 76.58 |

Plots of Out of Band Rejection

[Downlink]

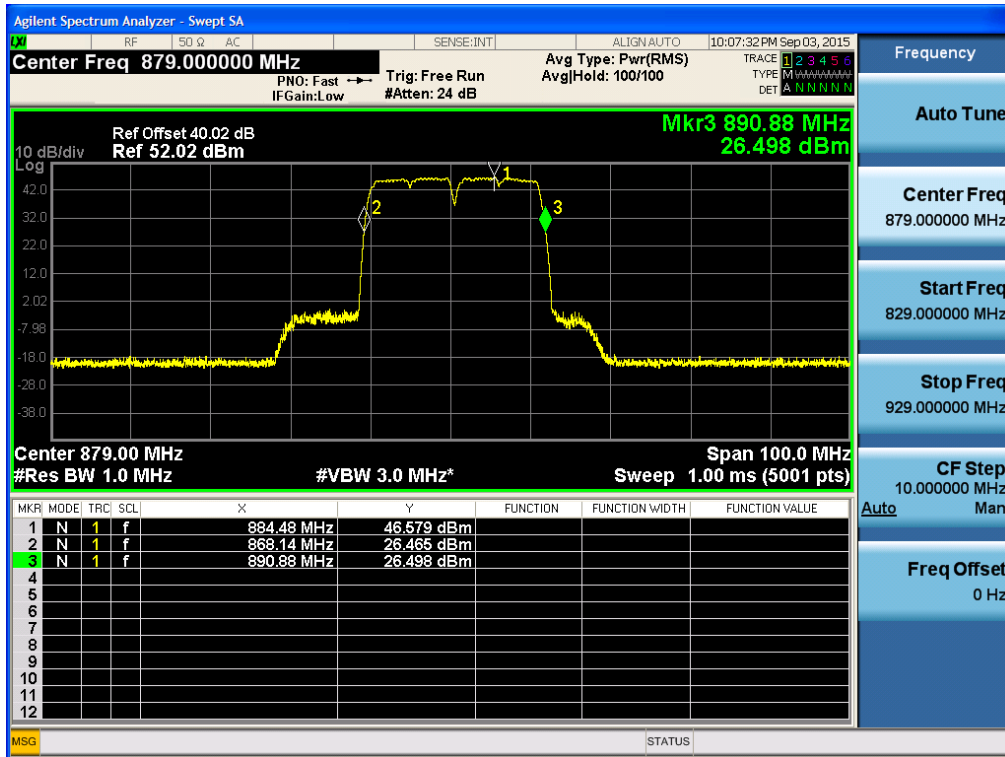

9. SPURIOUS AND HARMONIC EMISSION AT ANTENNA TERMINAL

Test Requirement(s):

§ 2.1051 Measurements required: Spurious emissions at antenna terminals:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

Test Procedures: Measurements were in accordance with the test methods section 3.6 of KDB 935210 D05 v01.

1. General

Spurious emissions shall be measured using a single test signal sequentially tuned to the low, middle and high channels or frequencies within each authorized frequency band of operation.

Out-of-band/block emissions (including intermodulation products) shall be measured under each of the following two stimulus conditions:

- a) two adjacent test signals sequentially tuned to the lower and upper frequency band/block edges;
- b) a single test signal, sequentially tuned to the lowest and highest frequencies or channels within the frequency band/block under examination.

NOTE—Single channel boosters that cannot accommodate two simultaneous signals within the passband, can be excluded from the test stipulated in step a).

2. EUT out-of-band/block emissions conducted measurement

- a) Connect a signal generator to the input of the EUT.

NOTE—If the signal generator is not capable of generating two modulated carriers simultaneously, then two discrete signal generators can be connected with an appropriate combining network to support the two-tone test.

- b) Set the signal generator to produce two AWGN signals as previously described (e.g., 4.1 MHz OBW).
- c) Set the center frequencies such that the AWGN signals occupy adjacent channels, as defined by industry standards such as 3GPP or 3GPP2, at the upper edge of the frequency band or block of interest.
- d) Set the composite power levels such that the input signal is just below the AGC threshold (see 3.2), but not more than 0.5 dB below. The composite power can be measured using the procedures provided in KDB Publication 971168, but it will be necessary to expand the power integration bandwidth so as to include both of the transmit channels. Alternatively, the composite power can be measured using an average power meter as described in KDB Publication 971168.
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band (typically 1 % of the emission bandwidth, 100 kHz, or 1 MHz)
- g) Set the VBW = 3 × RBW.
- h) Set the detector to power averaging (rms) detector.
- i) Set the Sweep time = auto-couple.

- j) Set the analyzer start frequency to the upper block edge frequency and the stop frequency to the upper block edge frequency plus 300 kHz or 3 MHz for frequencies below and above 1 GHz, respectively.
- k) Trace average at least 100 traces in power averaging (i.e., rms) mode.
- l) Use the marker function to find the maximum power level.
- m) Capture the spectrum analyzer trace of the power level for inclusion in the test report.
- n) Repeat the procedure with the composite input power level set to 3 dB above the AGC threshold.
- o) Reset the input signals frequencies to the lower edge of the frequency block or band under examination.
- p) Reset the spectrum analyzer start frequency to the lower block edge frequency minus 300 kHz, or 3 MHz (for frequencies below and above 1 GHz, respectively), and the stop frequency to the lower band or block edge frequency.
- q) Repeat steps k) to n).
- r) Repeat steps a) to q) with the signal generator configured for a single test signal tuned as close as possible to the block edges.
- s) Repeat steps a) to r) with the narrowband test signal.
- t) Repeat steps a) to s) for all authorized frequency bands or blocks used by the EUT.

3. EUT spurious emissions conducted measurement

- a) Connect a signal generator to the input of the EUT.
- b) Set the signal generator to produce the broadband test signal as previously described (e.g., 4.1 MHz OBW AWGN).
- c) Set the center frequency of the test signal to the lowest available channel within the frequency band or block.
- d) Set the EUT input power to a level that is just below the AGC threshold (see 3.2), but not more than 0.5 dB below.
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band of operation (e.g., reference bandwidth is typically 100 kHz or 1 MHz).
- g) Set the VBW $\geq 3 \times$ RBW.
- h) Set the Sweep time = auto-couple.
- i) Set the analyzer start frequency to the lowest radio frequency signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 100 kHz or 1 MHz, as specified in the applicable rule part.

NOTE—The number of measurement points in each sweep must be $\geq (2 \times \text{span}/\text{RBW})$ which may require that the measurement range defined by the start and stop frequencies be

subdivided, depending on the available number of measurement points provided by the spectrum analyzer.

j) Select the power averaging (rms) detector function.

k) Trace average at least 10 traces in power averaging (i.e., rms) mode.

l) Use the peak marker function to identify the highest amplitude level over each measured frequency range. Record the frequency and amplitude and capture a plot for inclusion in the test report.

m) Reset the analyzer start frequency to the upper band/block edge frequency plus 100 kHz or 1 MHz, as specified in the applicable rule part, and the analyzer stop frequency to 10 times the highest frequency of the fundamental emission (see §2.1057). Note that the number of measurement points in each sweep must be $\geq (2 \times \text{span}/\text{RBW})$ which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.

n) Trace average at least 10 traces in power averaging (i.e., rms) mode.

o) Use the peak marker function to identify the highest amplitude level over each of the measured frequency ranges. Record the frequency and amplitude and capture a plot for inclusion in the test report and provide tabular data, if required.

p) Repeat the procedure with the input test signals tuned to a middle band/block frequency/channel and then a high band/block frequency/channel.

q) Repeat entire procedure with the narrowband test signal.

r) Repeat for all authorized frequency bands/blocks used by the EUT.

Test Results: The EUT complies with the requirements of this section. There were no Detectable Spurious emissions for this EUT.


Plots of Spurious Emission

Conducted Spurious Emissions (9 kHz – 150 kHz)


[LTE 5 MHz Downlink Low]




[LTE 5 MHz Downlink Middle]

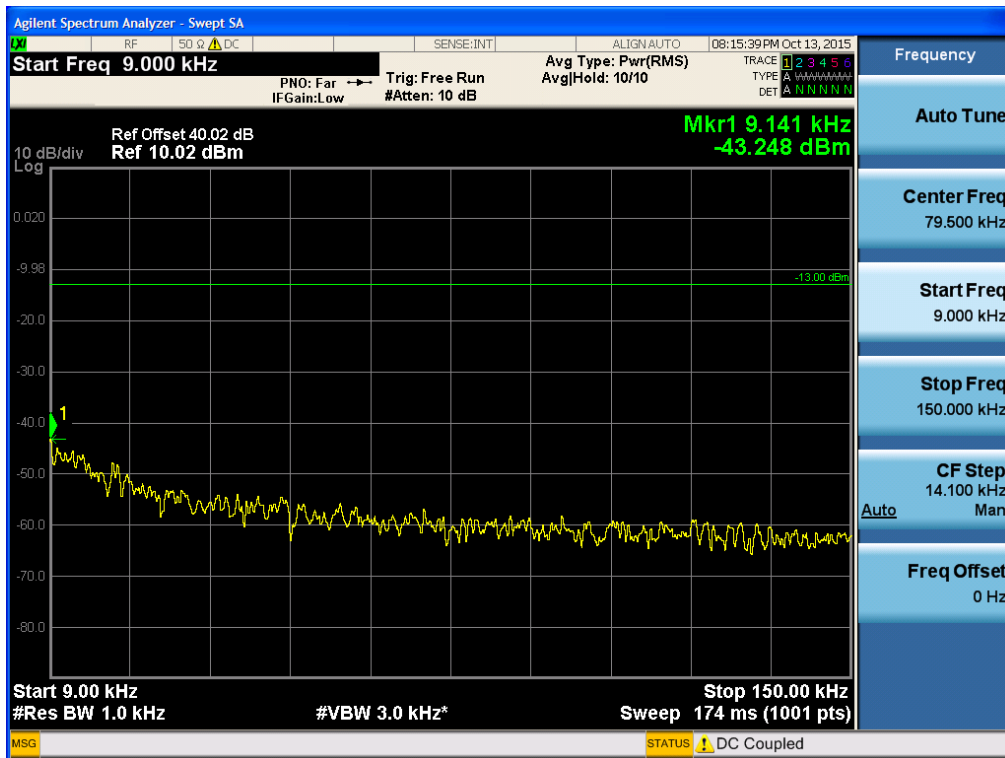


[LTE 5 MHz Downlink High]

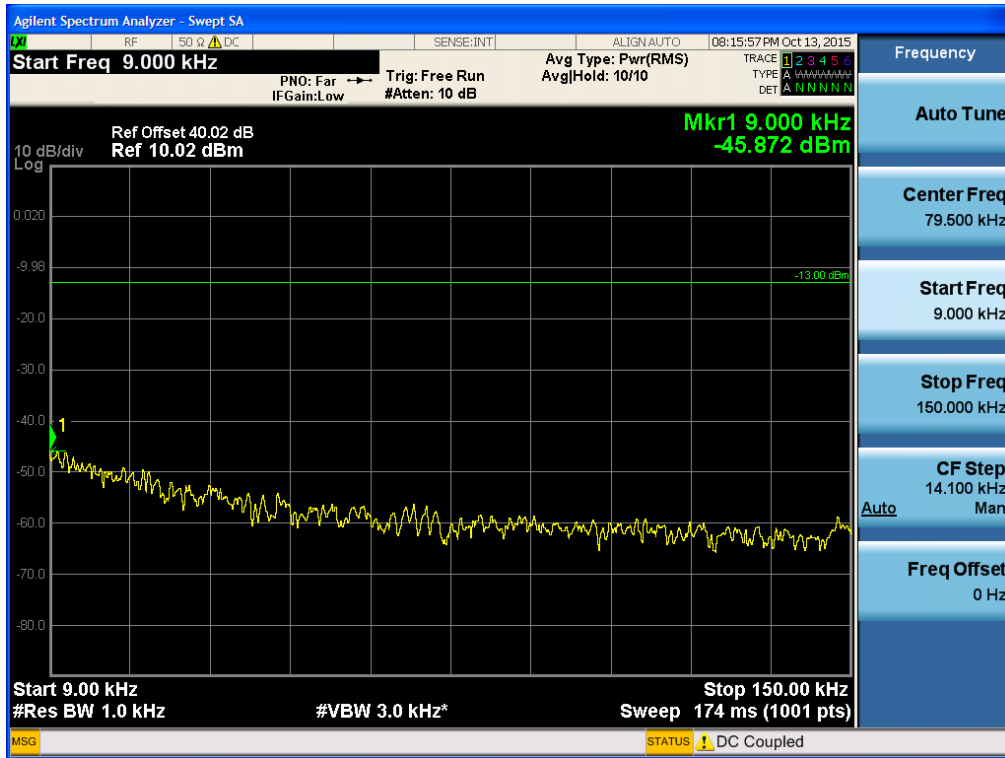


[LTE 10 MHz Downlink Low]

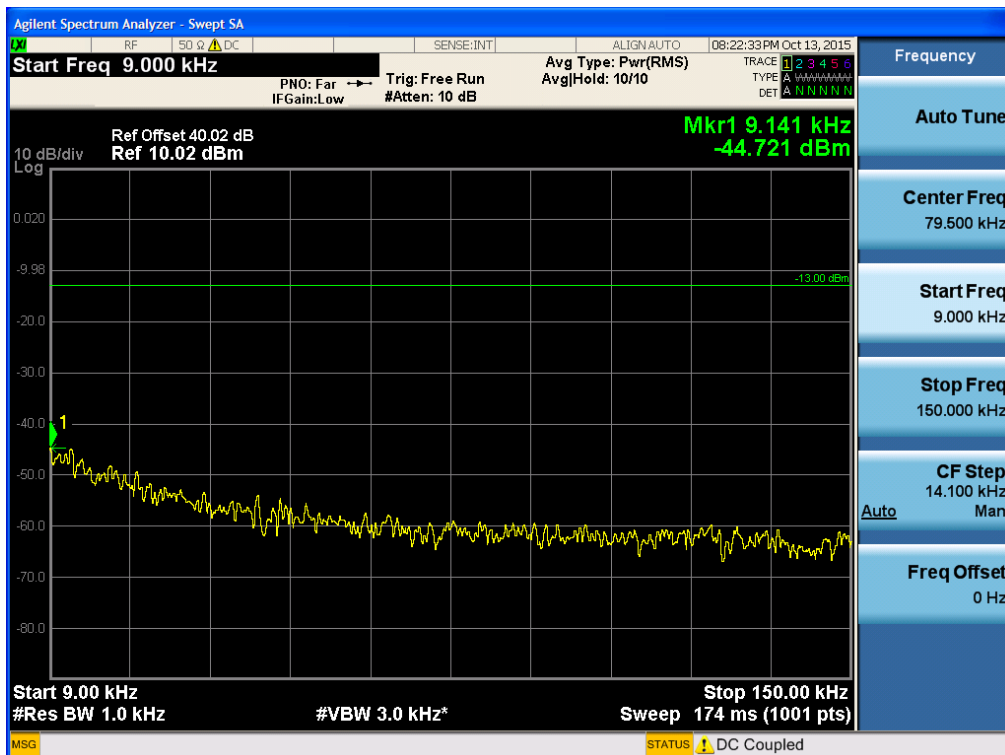


[LTE 10 MHz Downlink High]

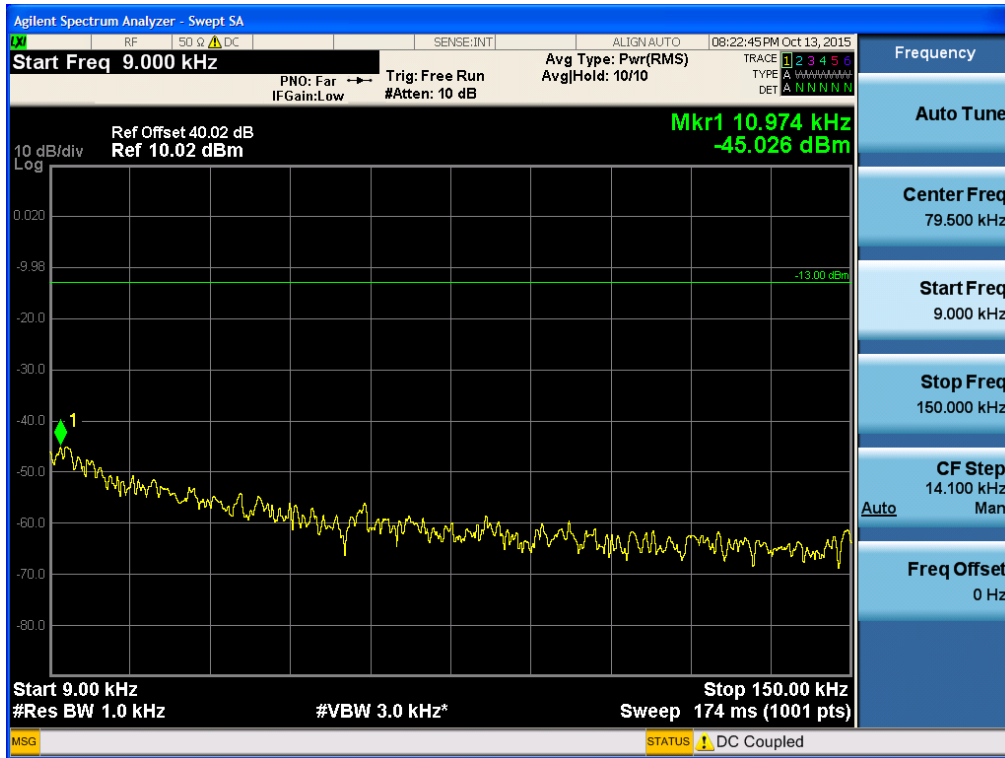


[WCDMA Downlink Low]

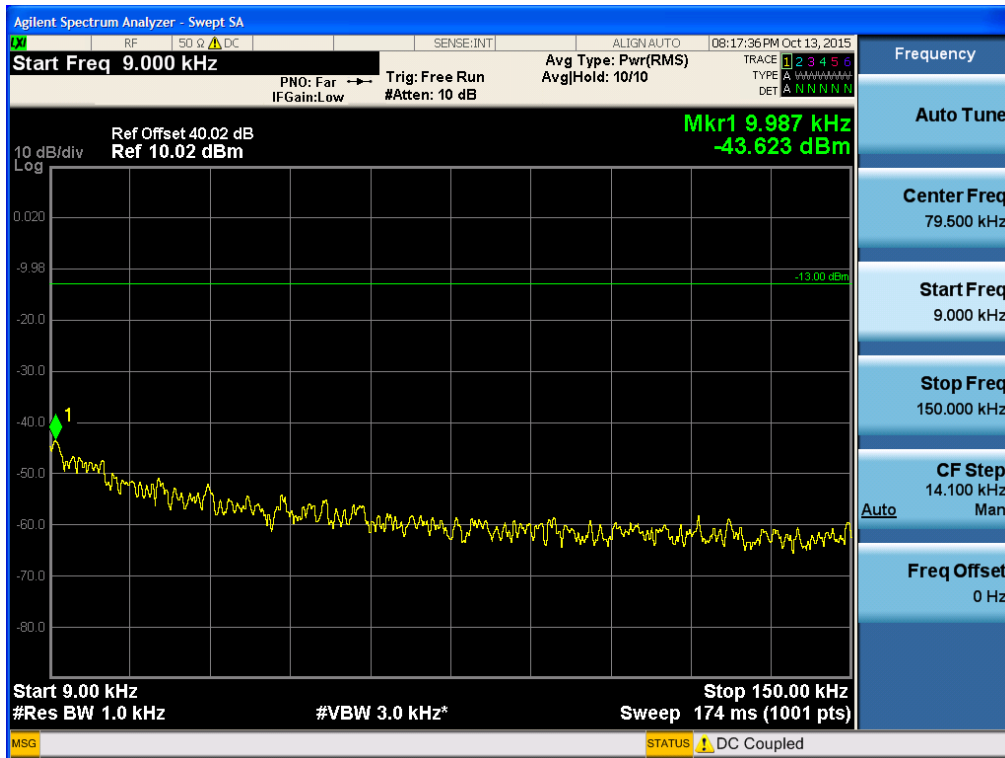

[WCDMA Downlink Middle]

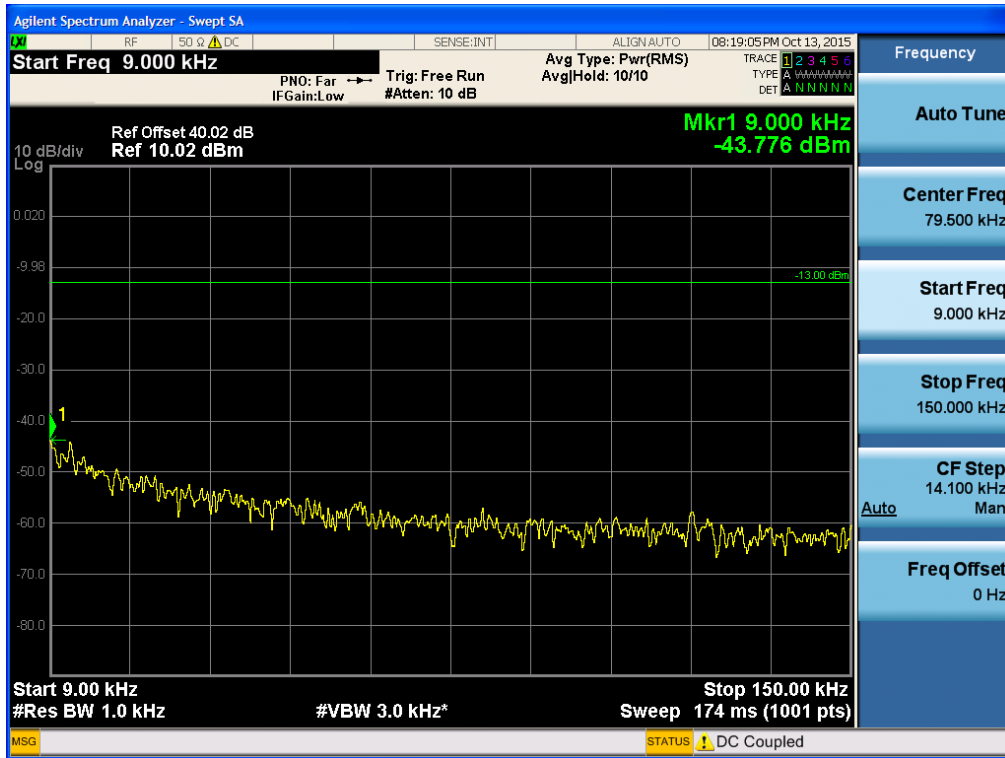


[WCDMA Downlink High]

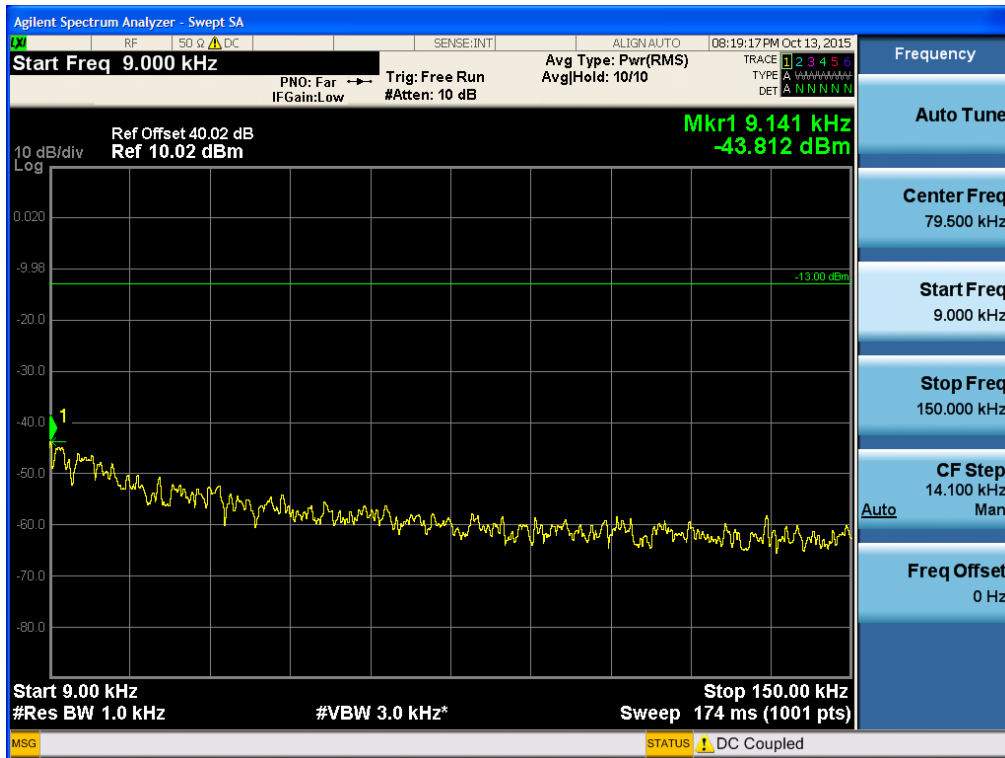


Conducted Spurious Emissions (150 kHz – 30 MHz)


[LTE 5 MHz Downlink Low]

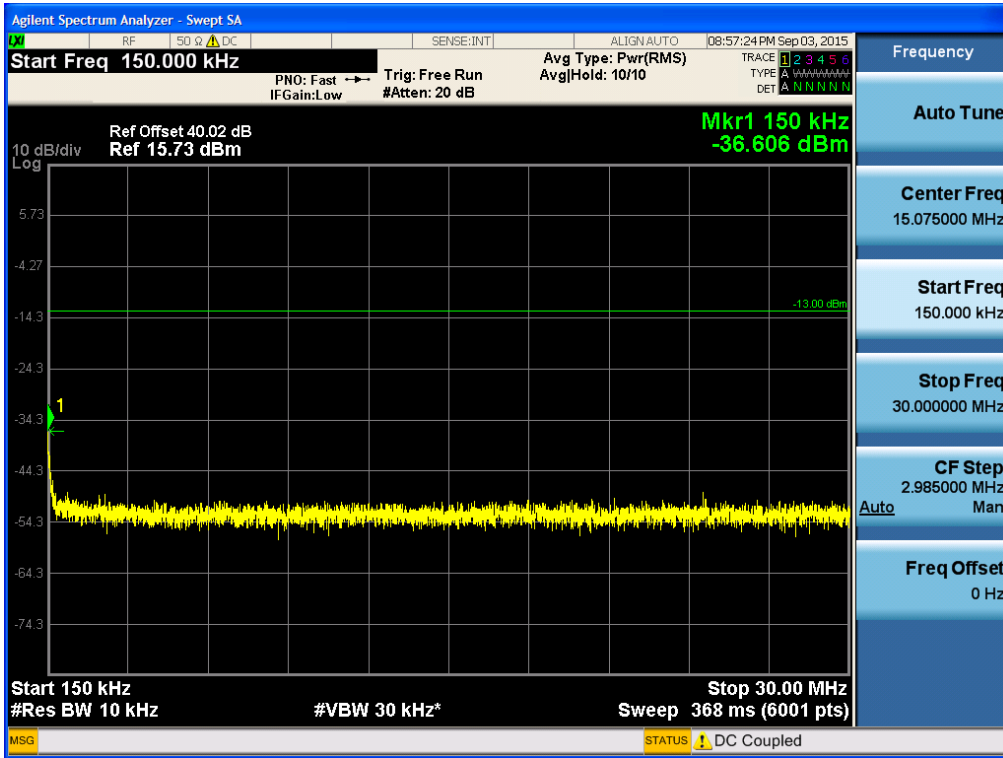


[LTE 5 MHz Downlink Middle]

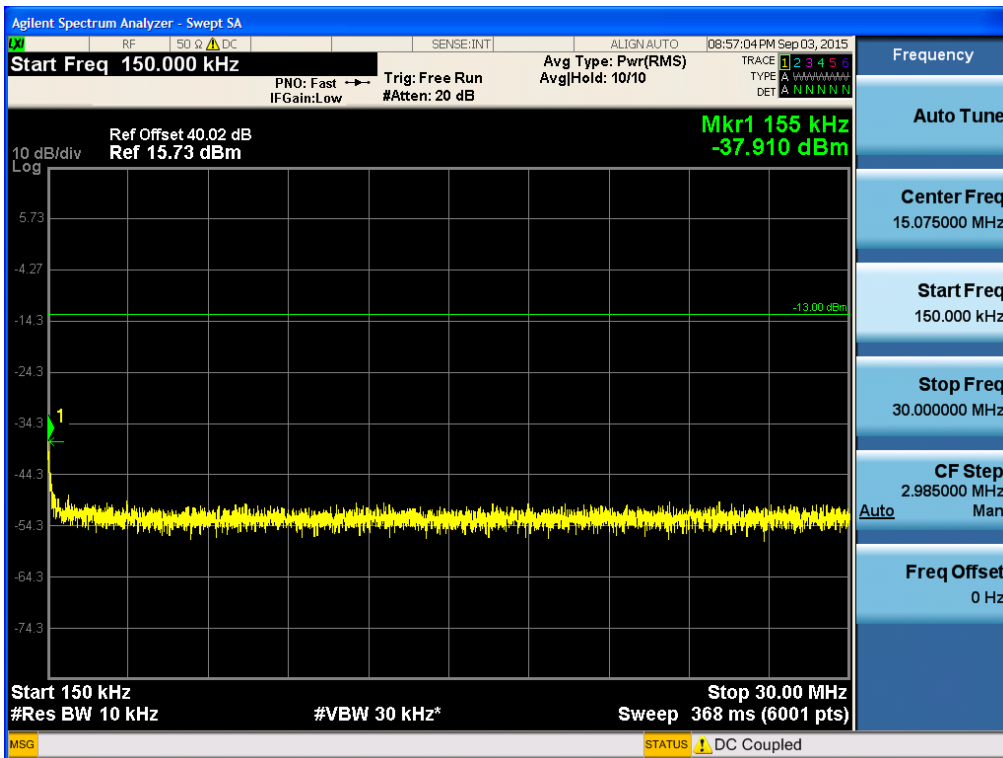


[LTE 5 MHz Downlink High]

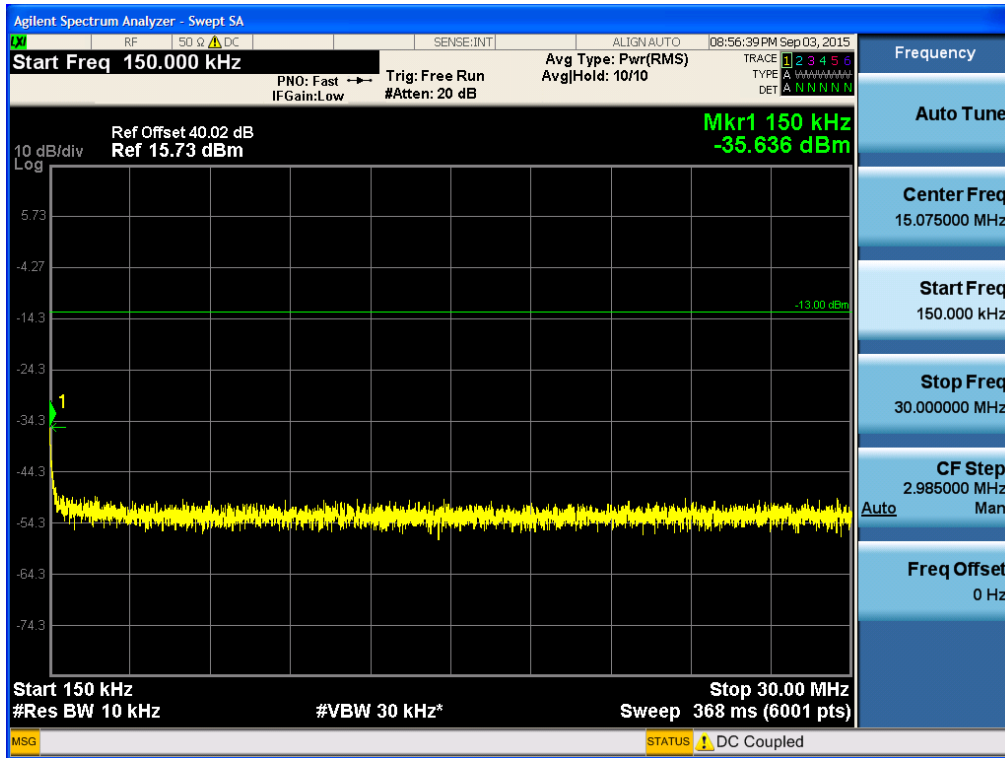


[LTE 10 MHz Downlink Low]

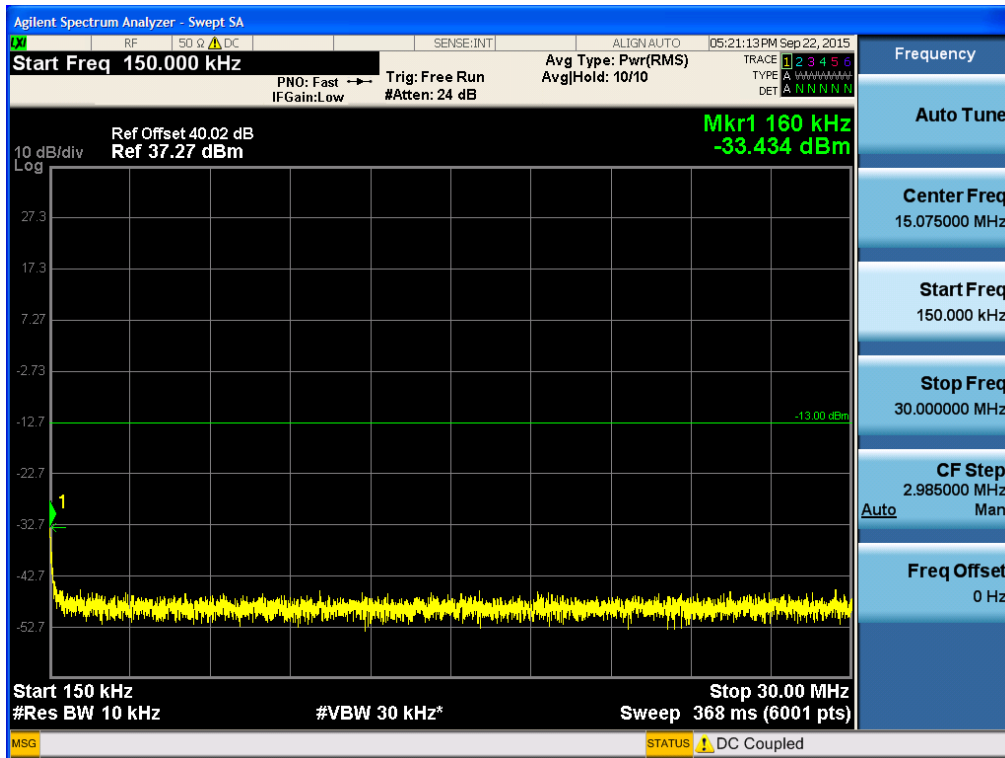


[LTE 10 MHz Downlink High]

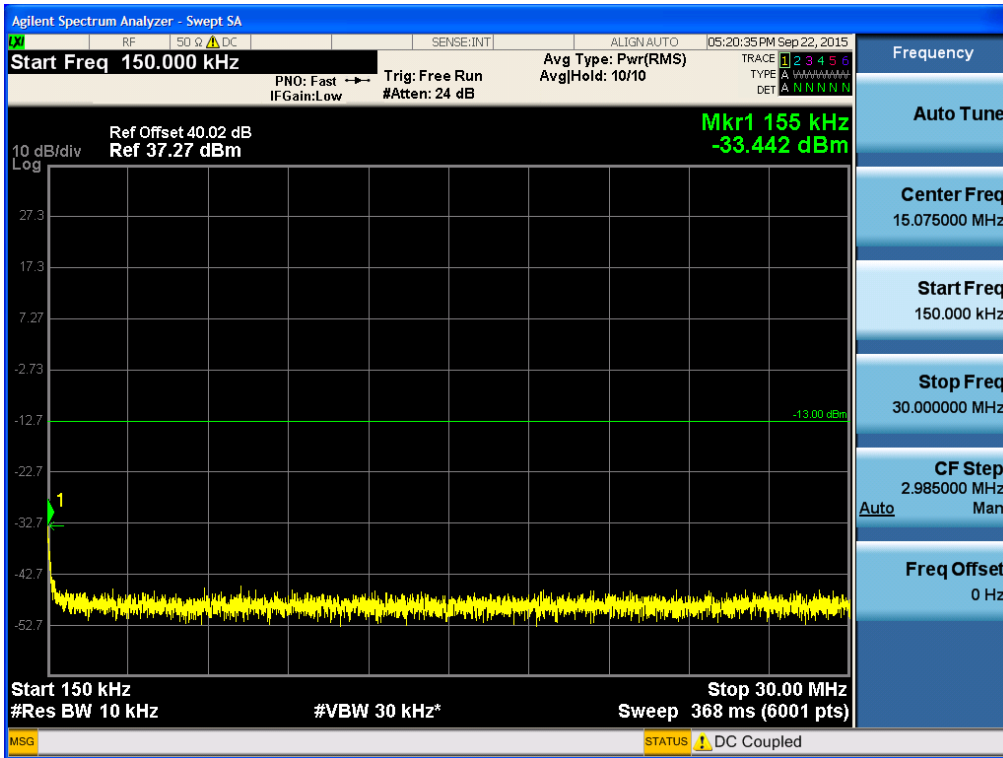


[WCDMA Downlink Low]

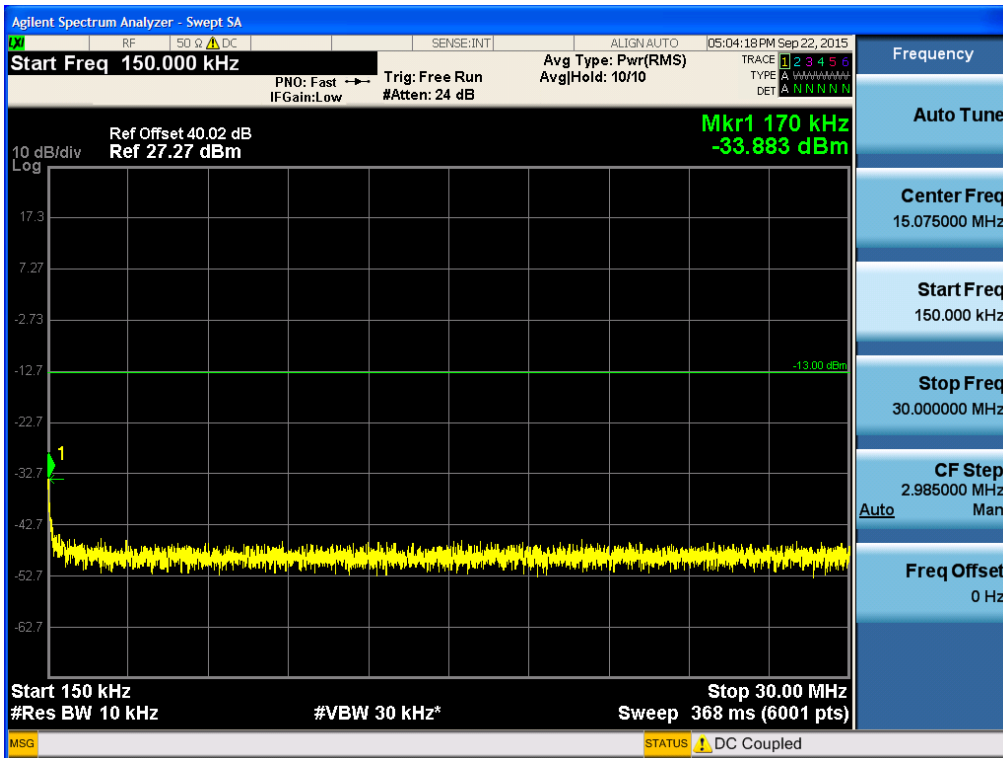


[WCDMA Downlink Middle]

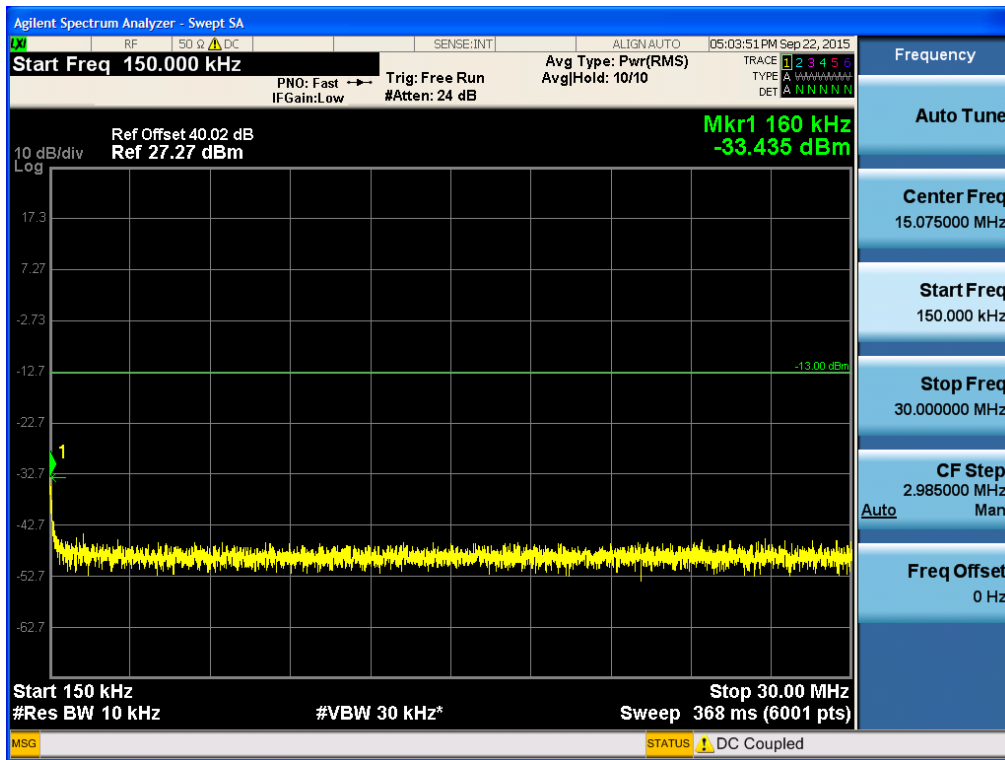


[WCDMA Downlink High]

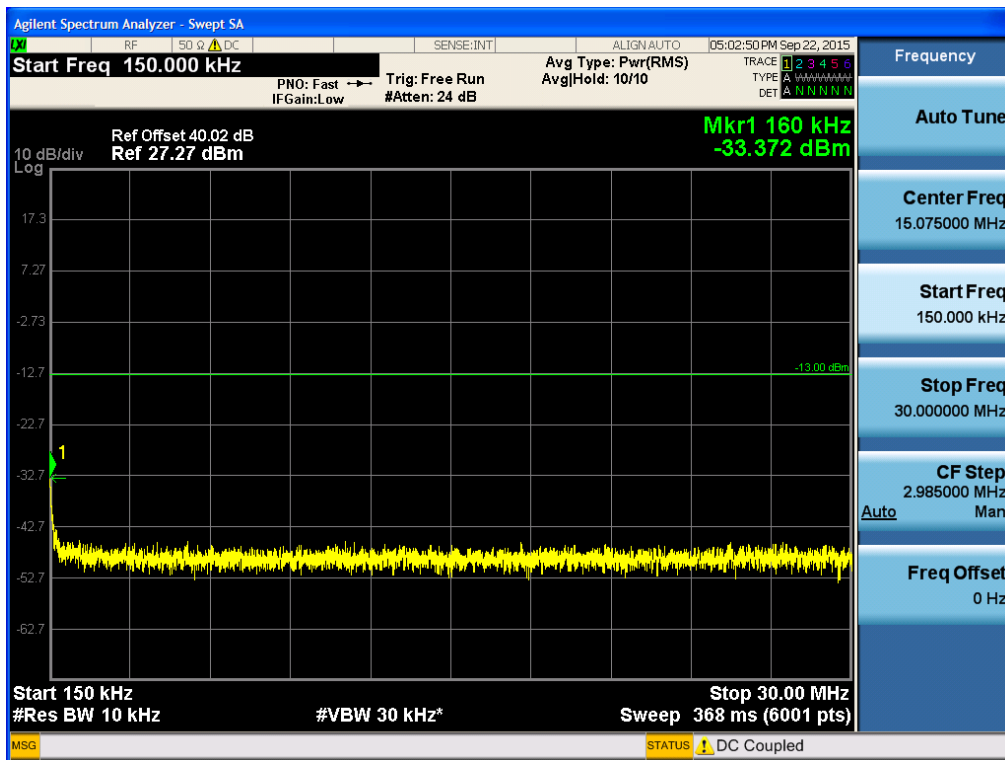


Conducted Spurious Emissions (30 MHz – 1 GHz)
[LTE 5 MHz Downlink Low]

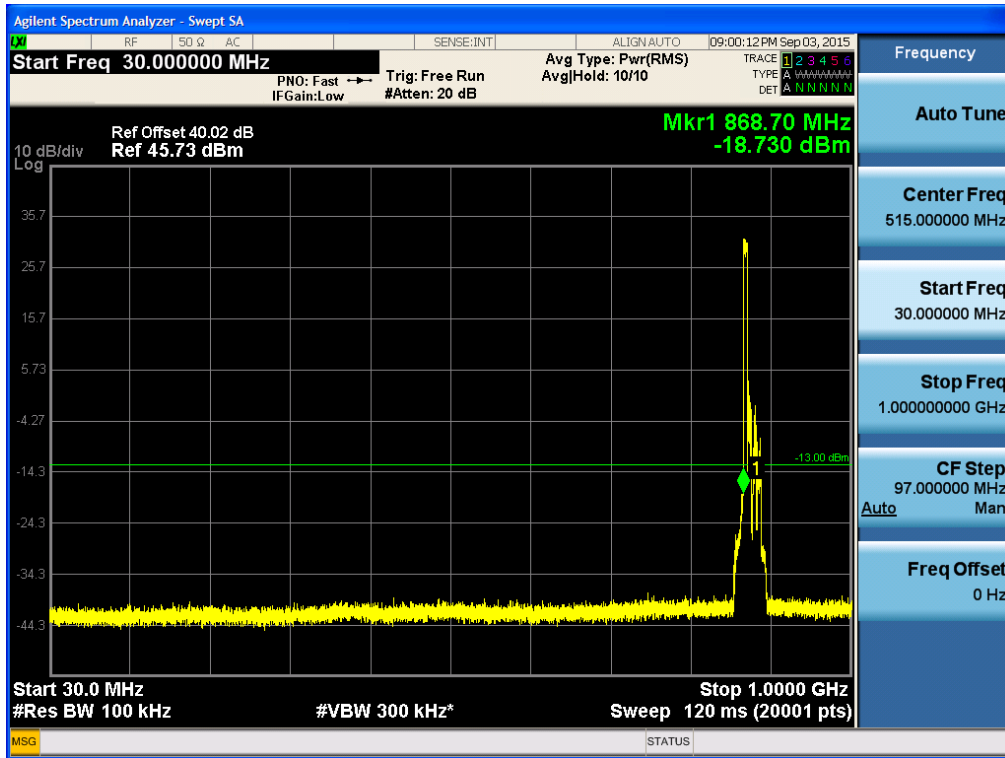


[LTE 5 MHz Downlink Middle]

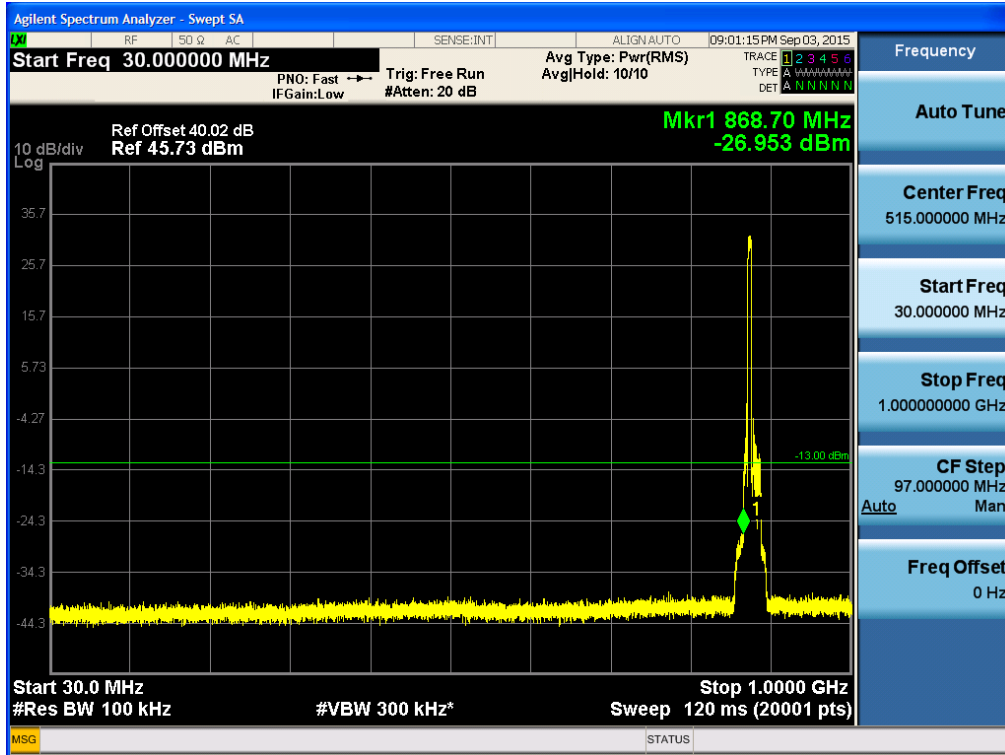


[LTE 5 MHz Downlink High]

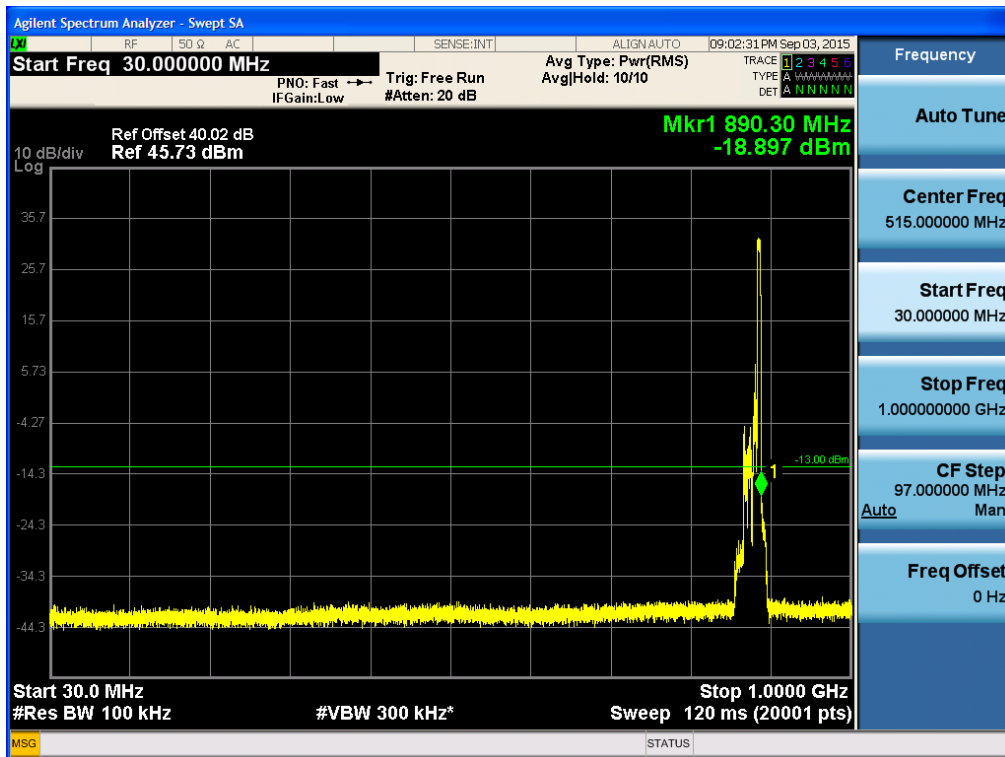


[LTE 10 MHz Downlink Low]

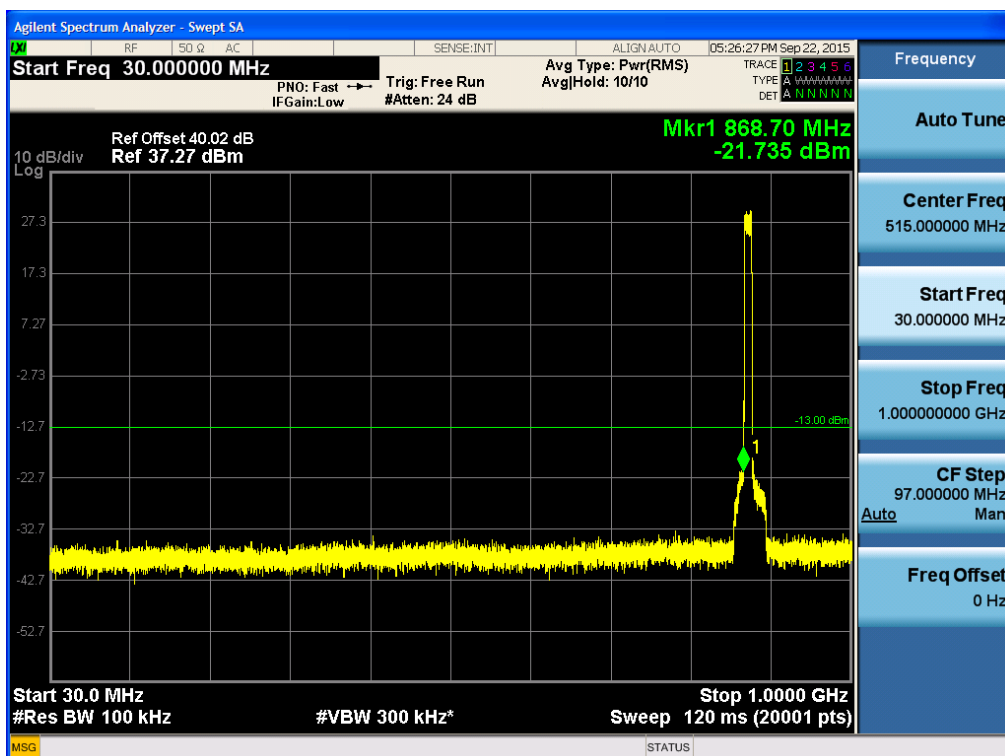


[LTE 10 MHz Downlink High]

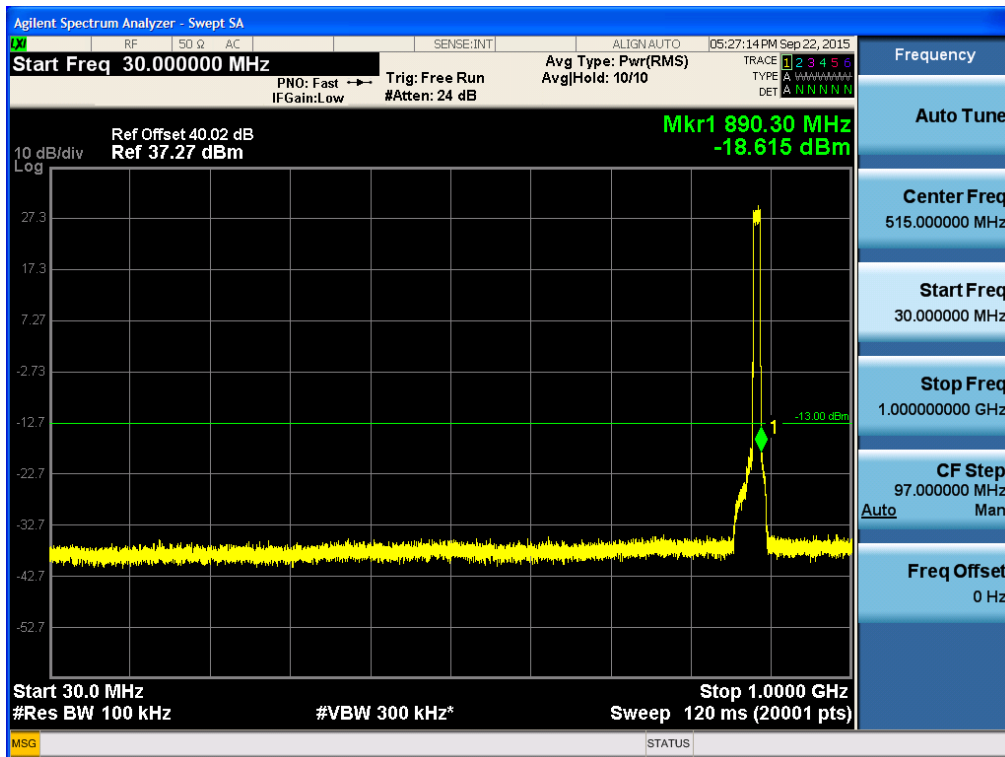


[WCDMA Downlink Low]

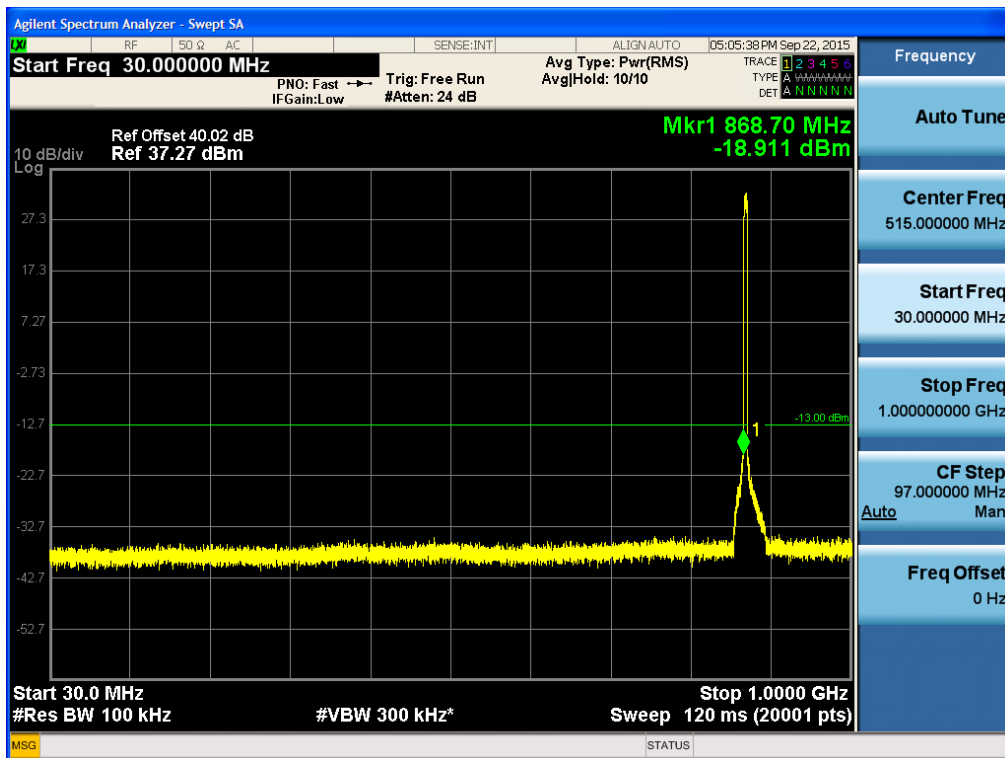

[WCDMA Downlink Middle]

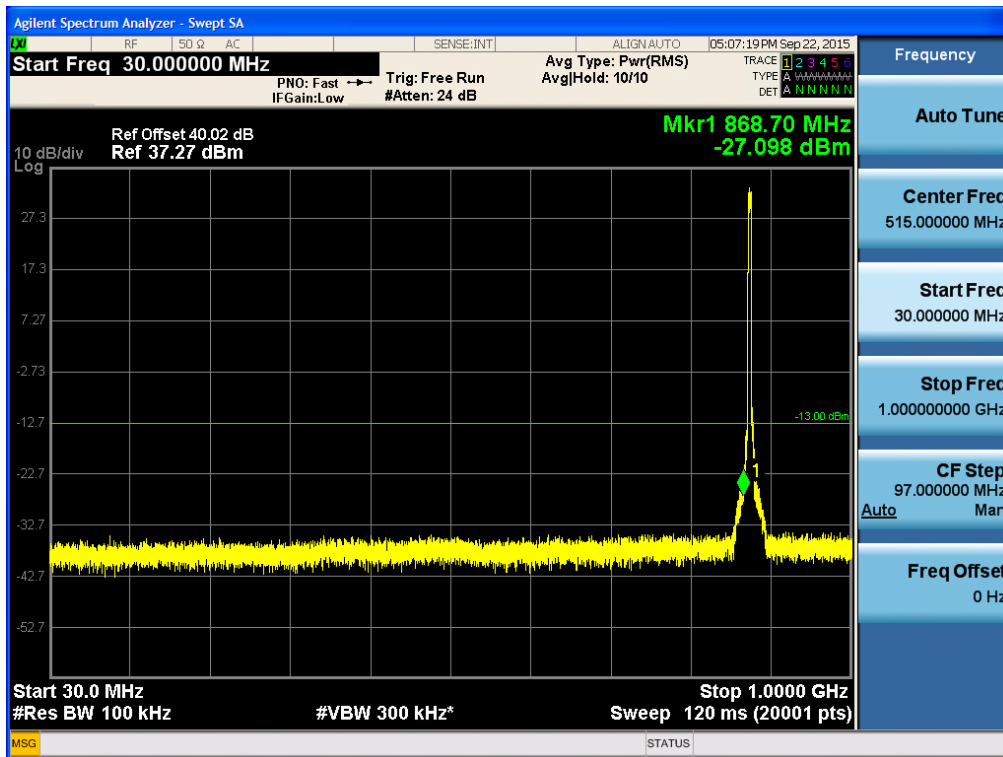


[WCDMA Downlink High]

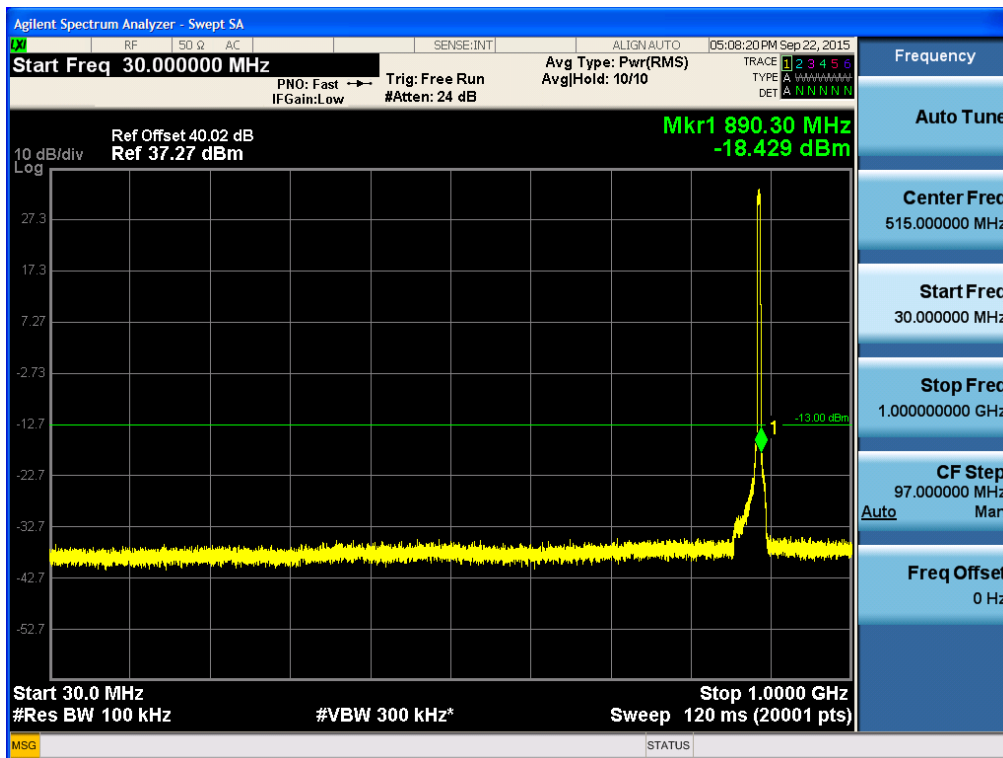


Conducted Spurious Emissions (1 GHz – 12.75 GHz)


[LTE 5 MHz Downlink Low]

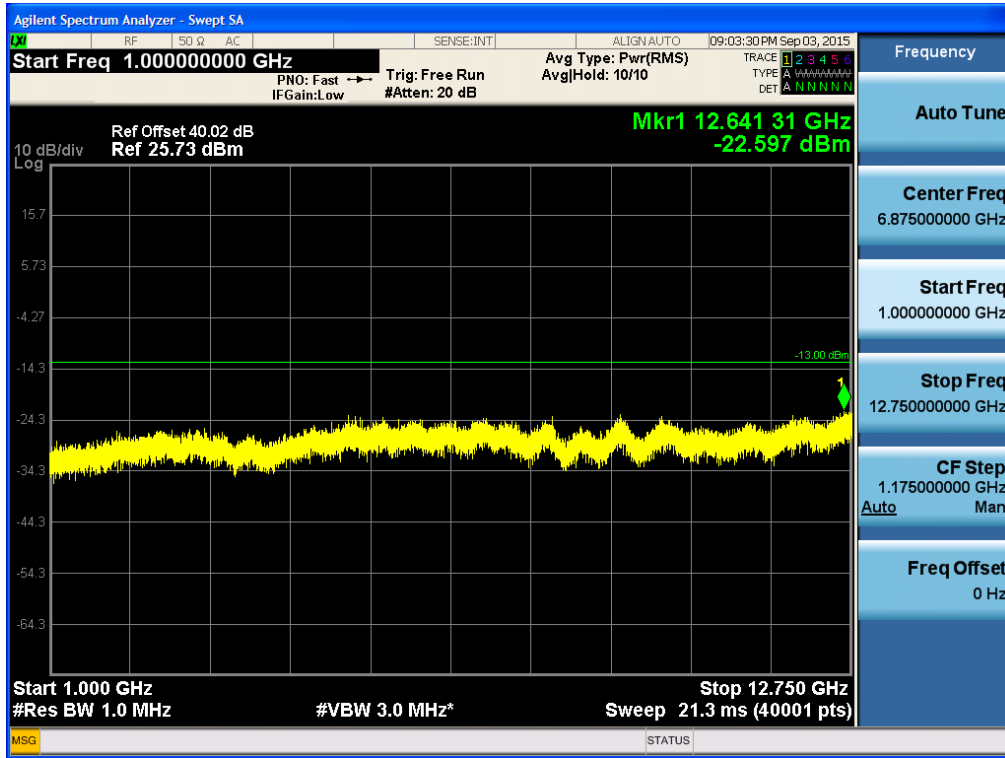


[LTE 5 MHz Downlink Middle]

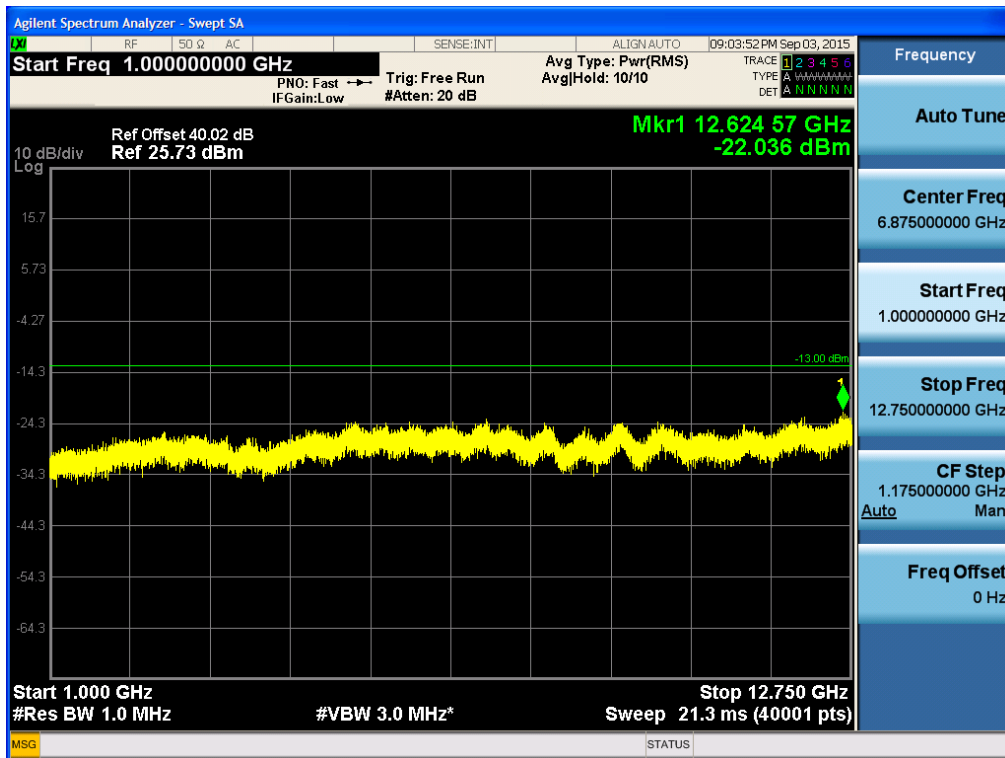


[LTE 5 MHz Downlink High]

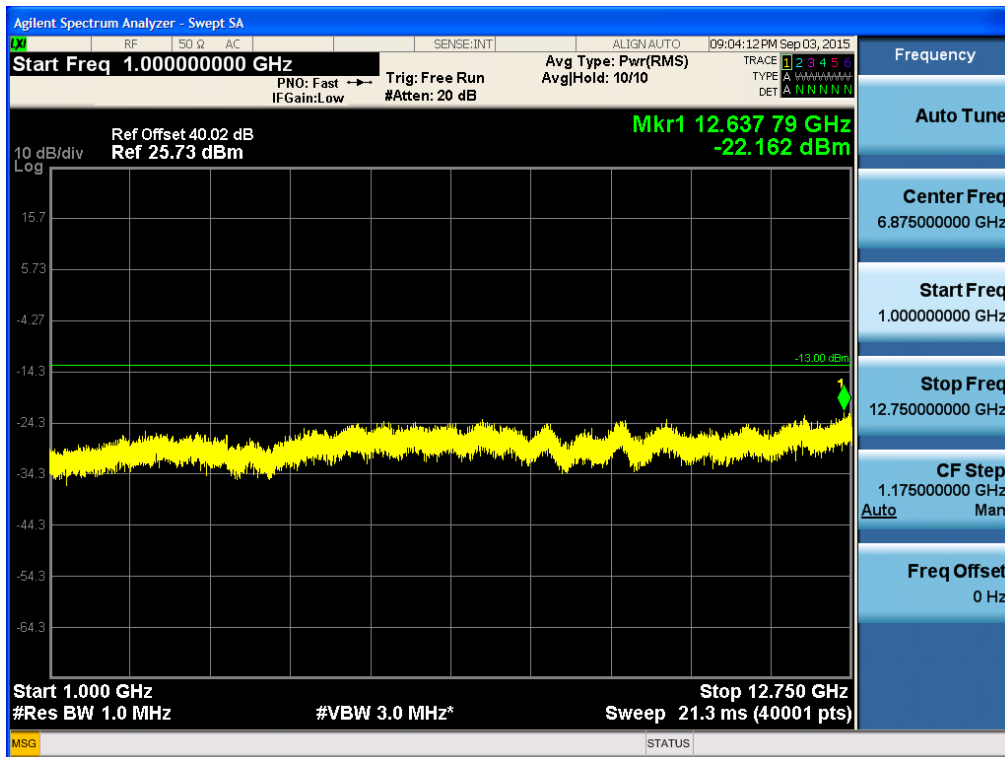


[LTE 10 MHz Downlink Low]

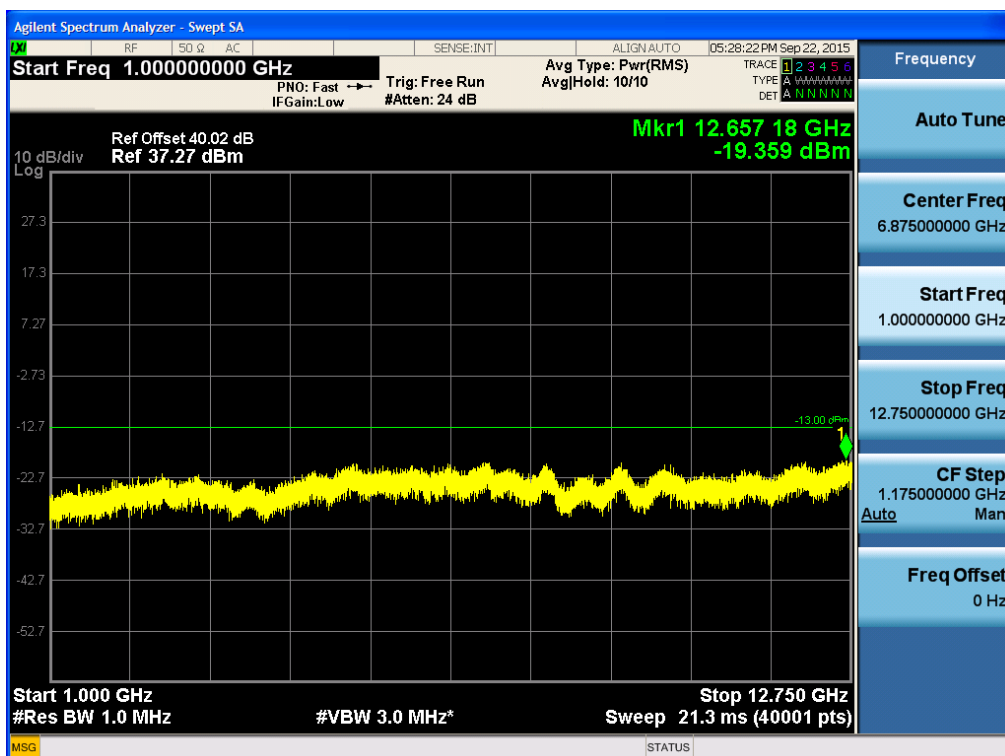


[LTE 10 MHz Downlink High]

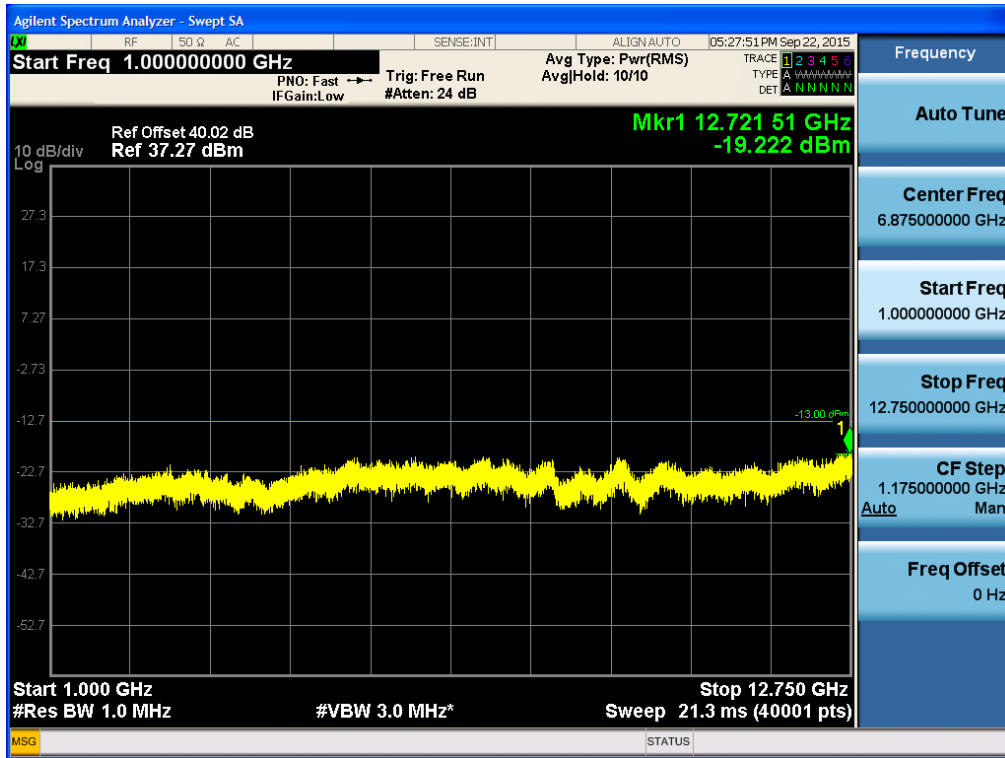


[WCDMA Downlink Low]

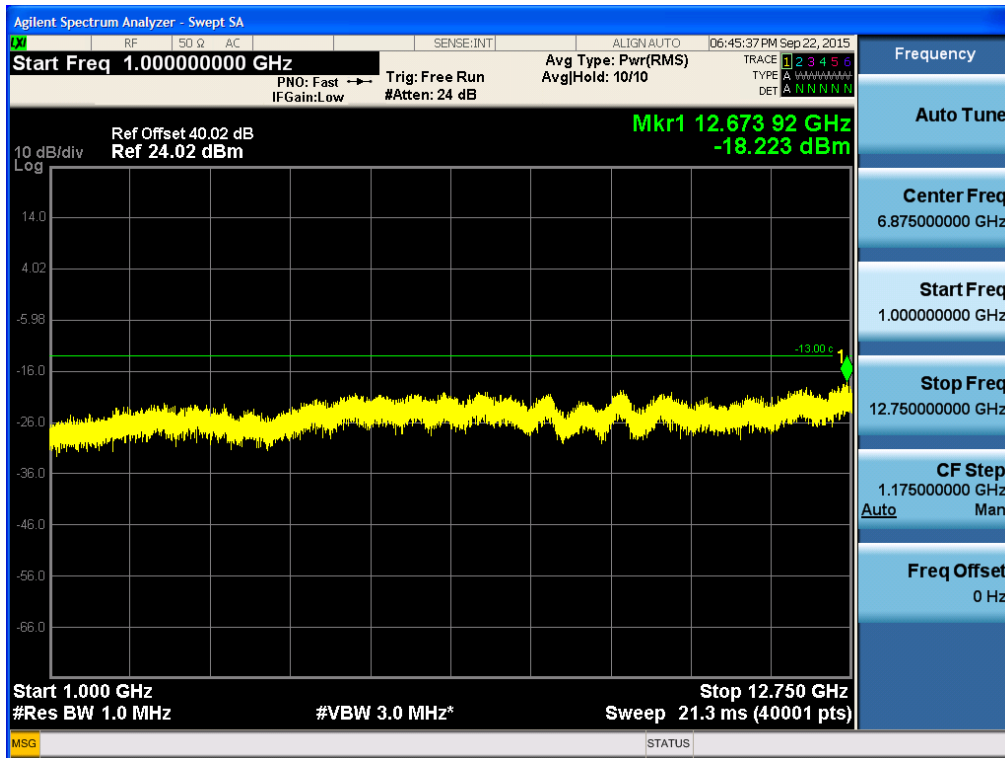

[WCDMA Downlink Middle]

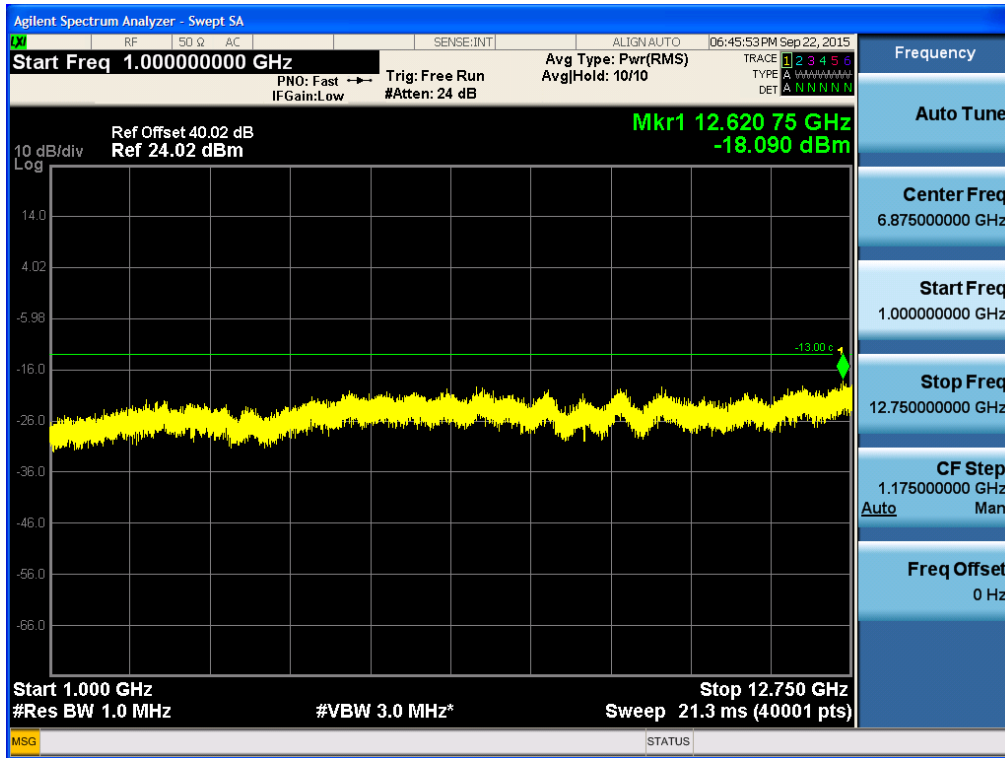


[WCDMA Downlink High]

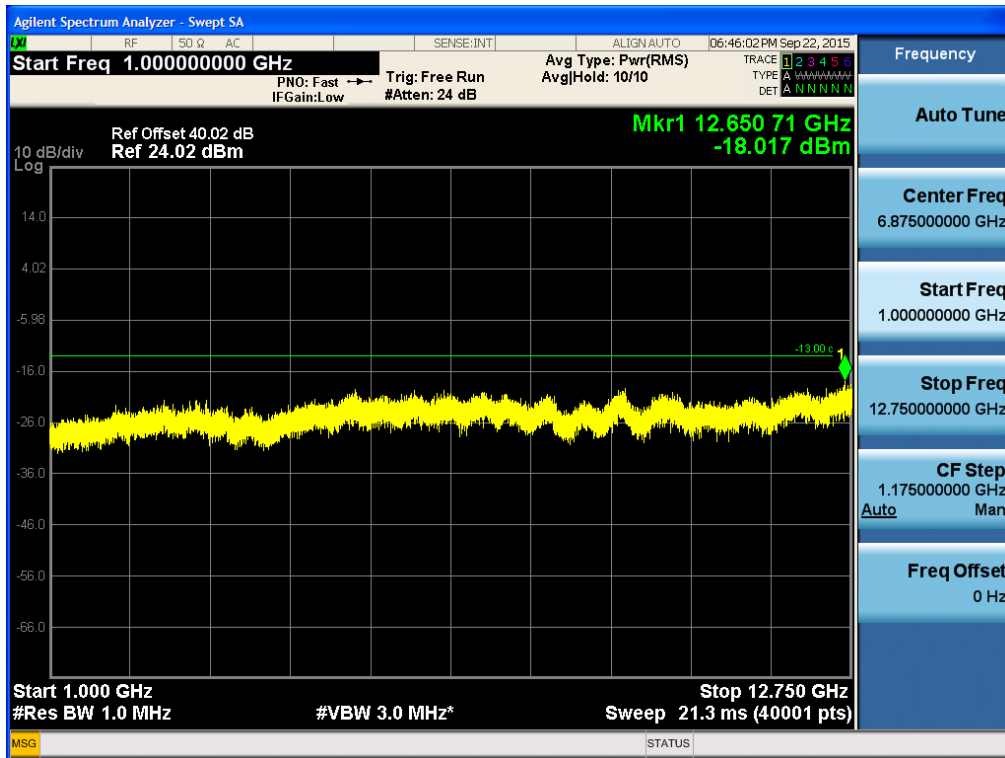


Intermodulation Spurious Emissions


[LTE 5 MHz Downlink Low]

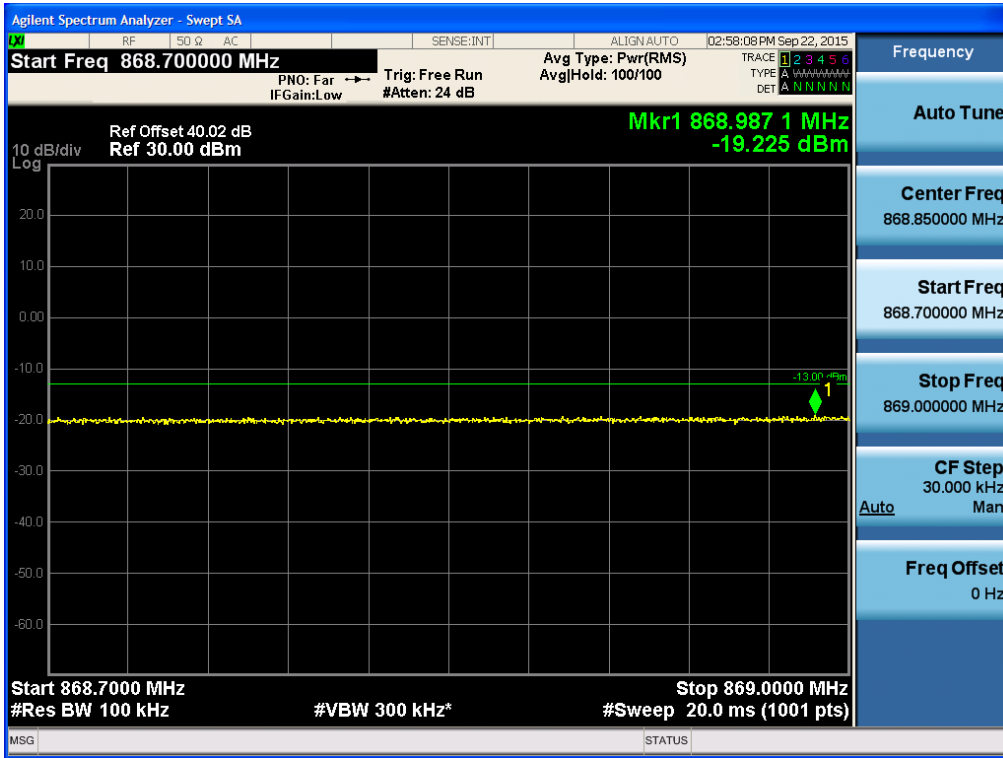


[LTE 5 MHz Downlink High]

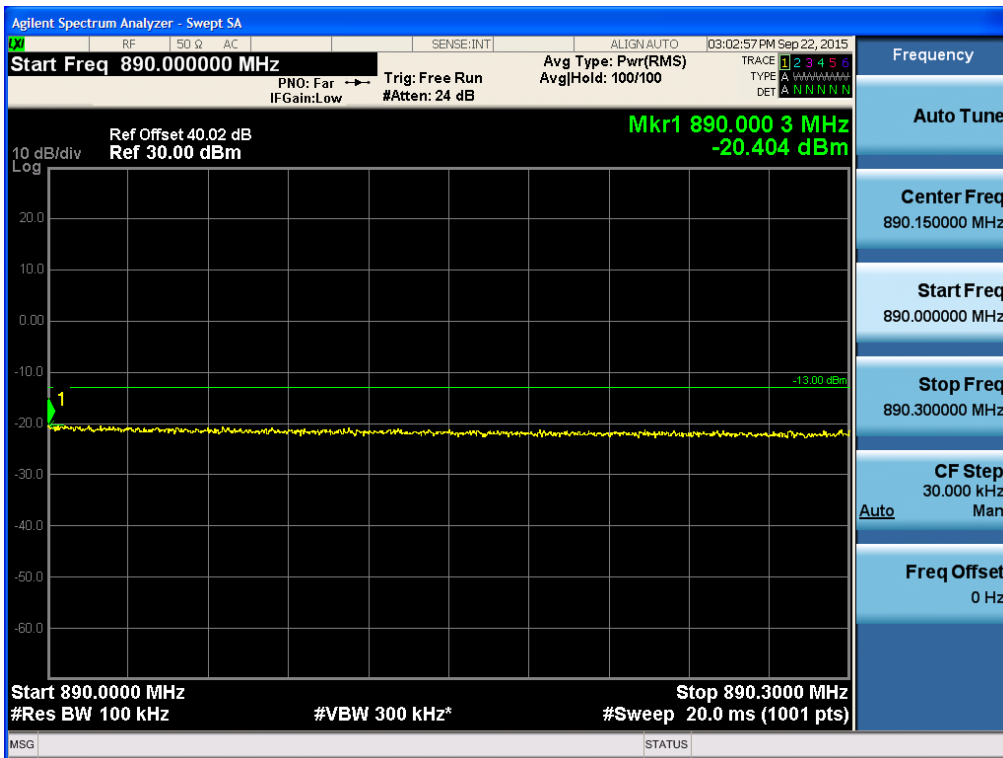


[LTE 10 MHz Downlink Low]

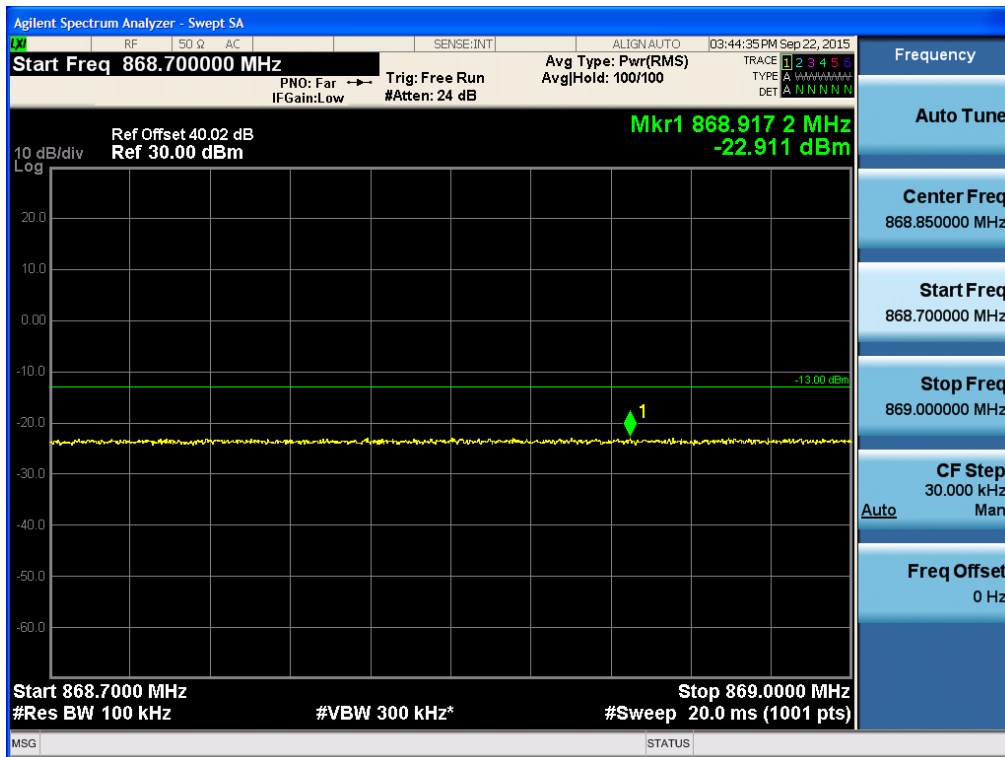


[LTE 10 MHz Downlink High]

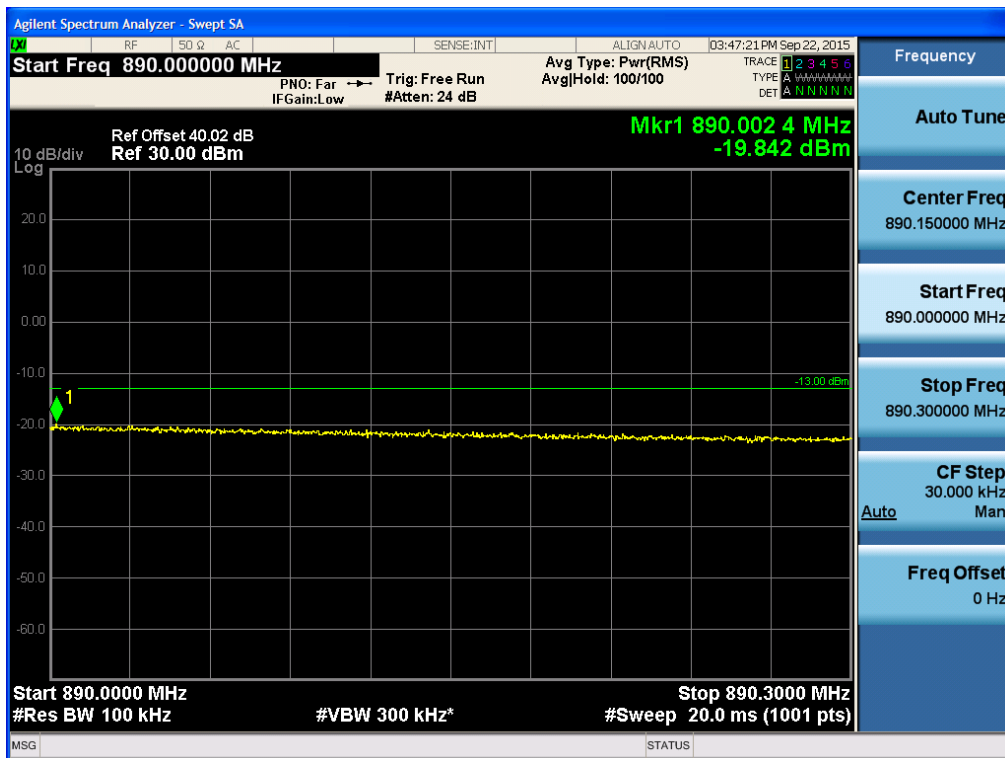

[WCDMA Downlink Low]

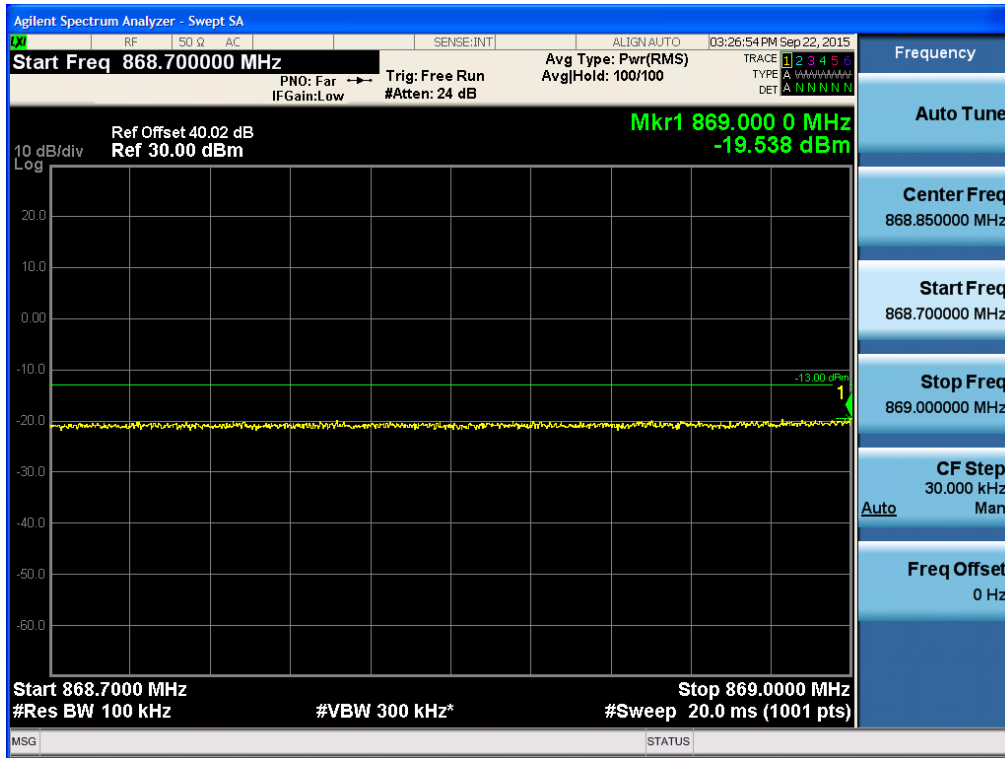


[WCDMA Downlink High]

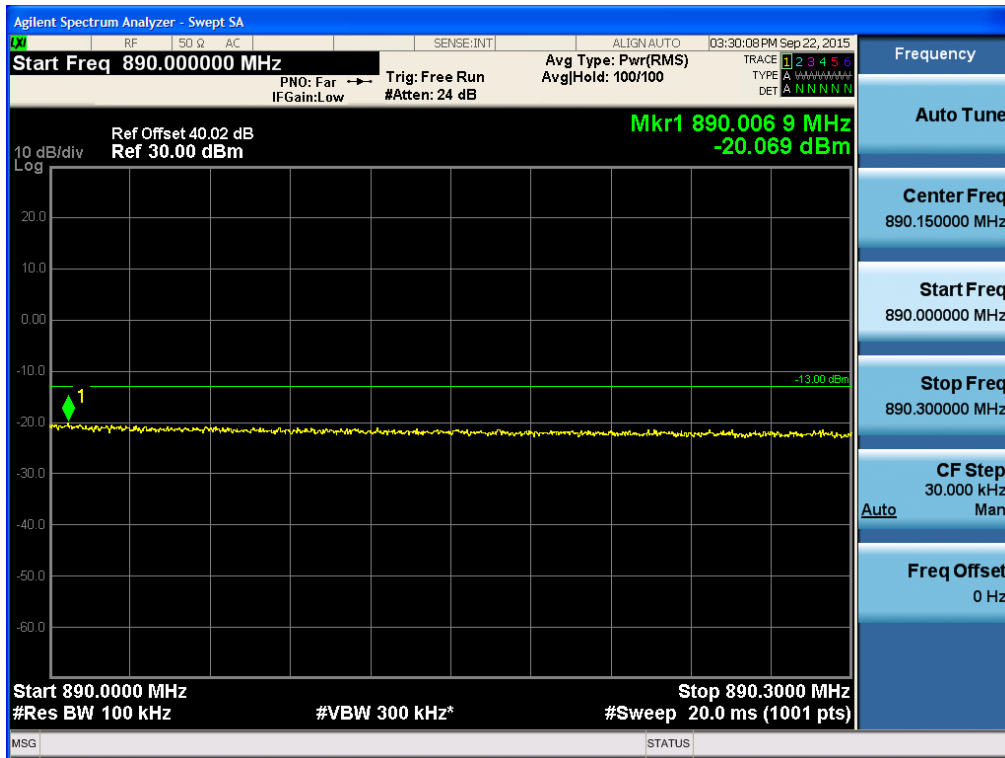


Intermodulation Spurious Emissions [Input Signal]


[LTE 5 MHz Downlink Low]

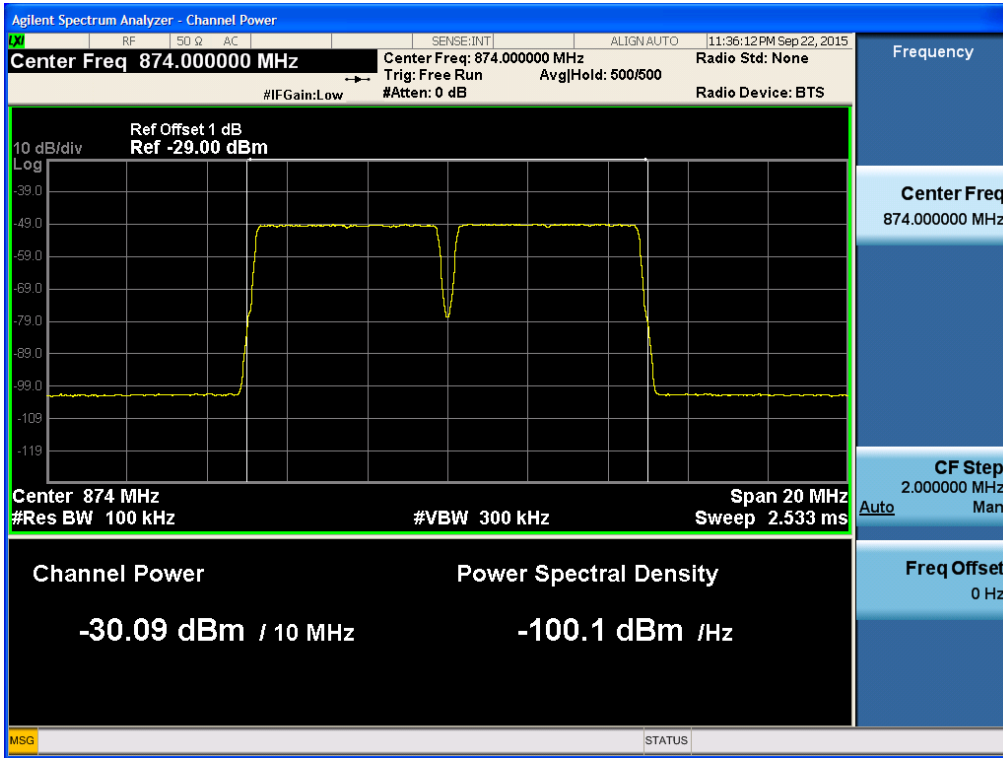


[LTE 5 MHz Downlink High]

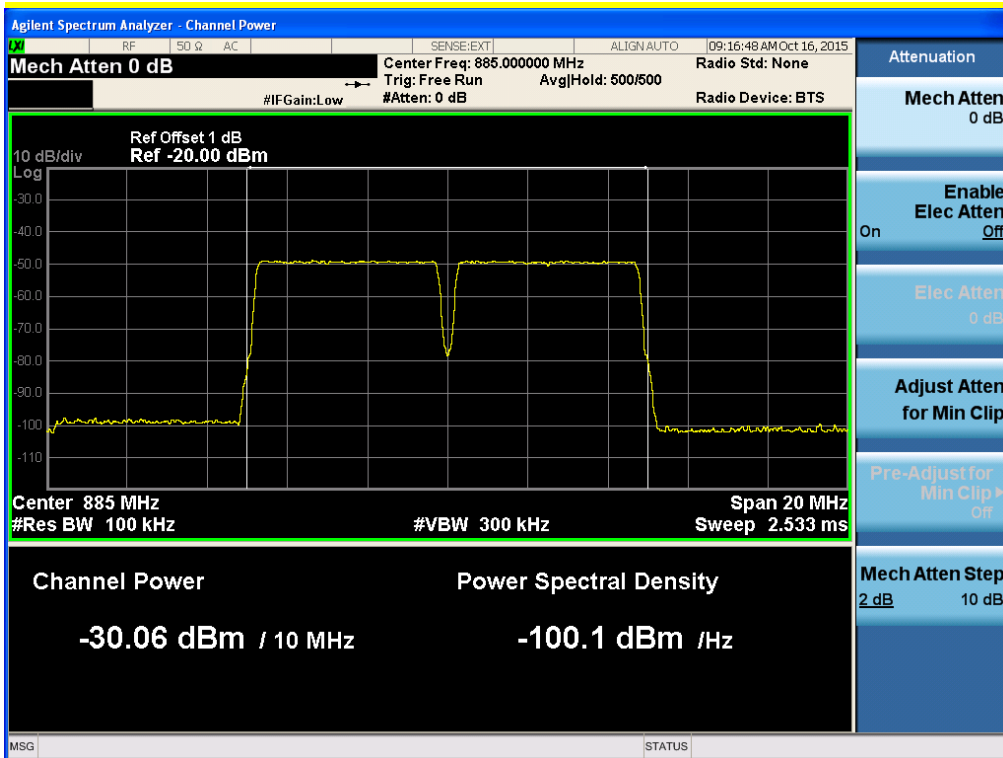


[LTE 10 MHz Downlink Low]

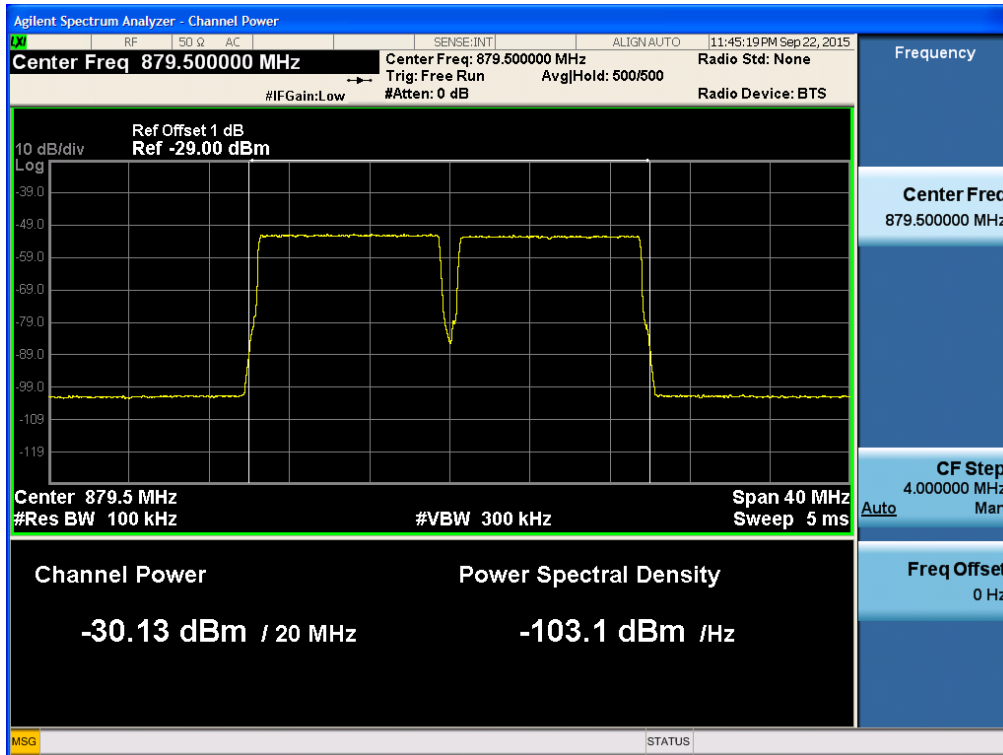


[LTE 10 MHz Downlink High]

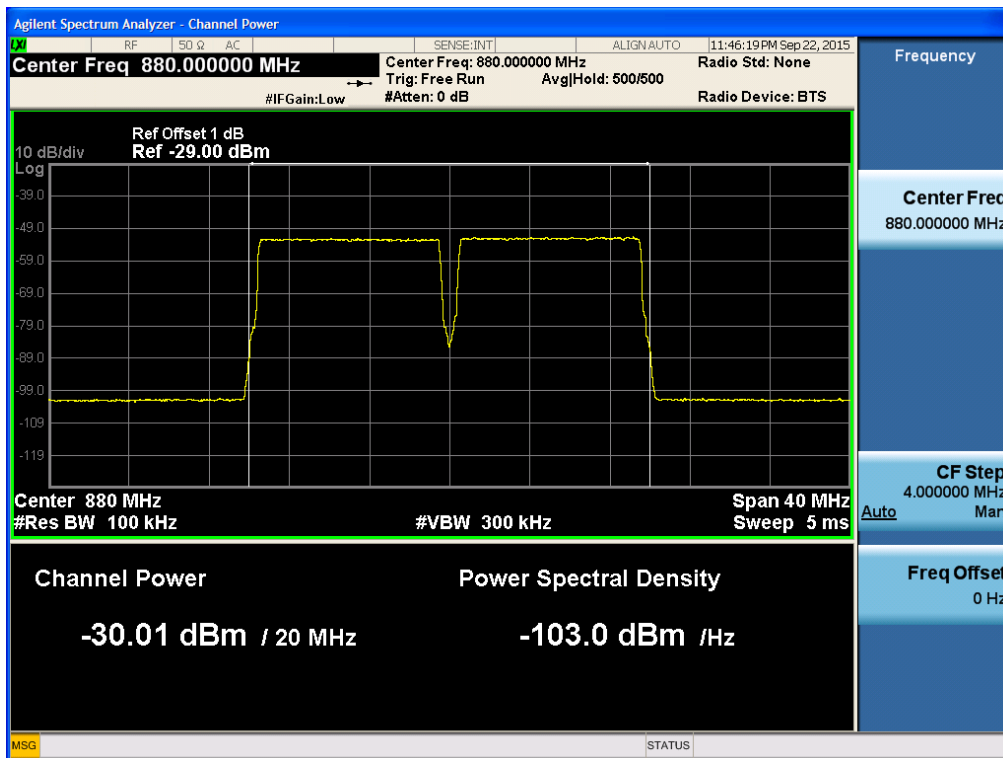

[WCDMA Downlink Low]

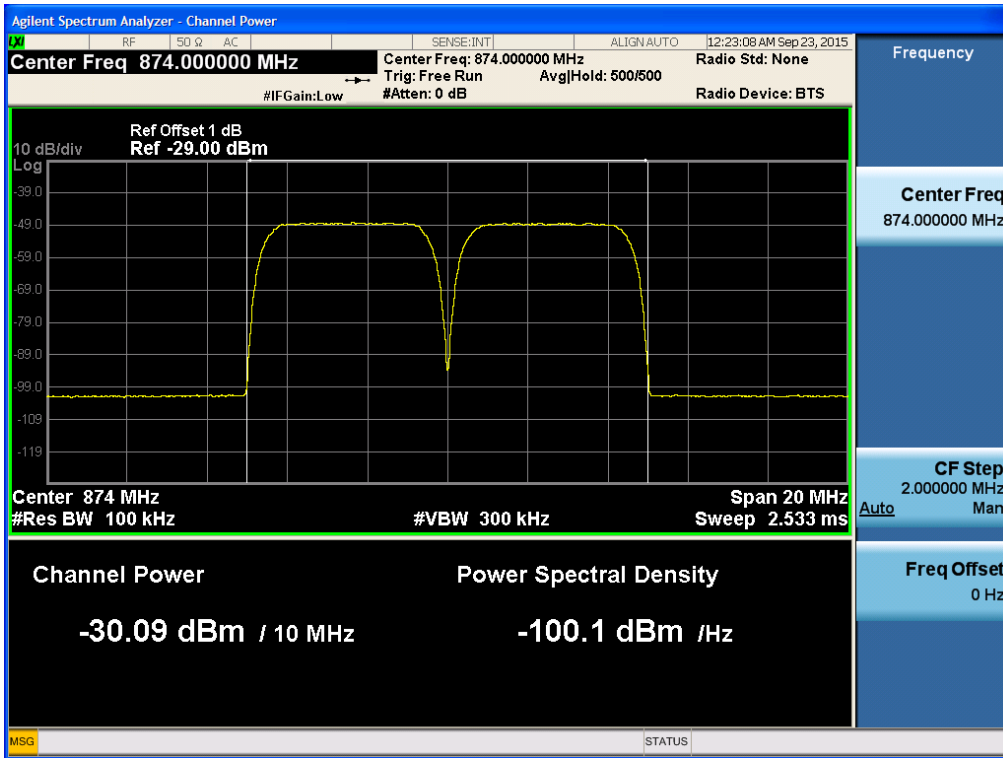


[WCDMA Downlink High]

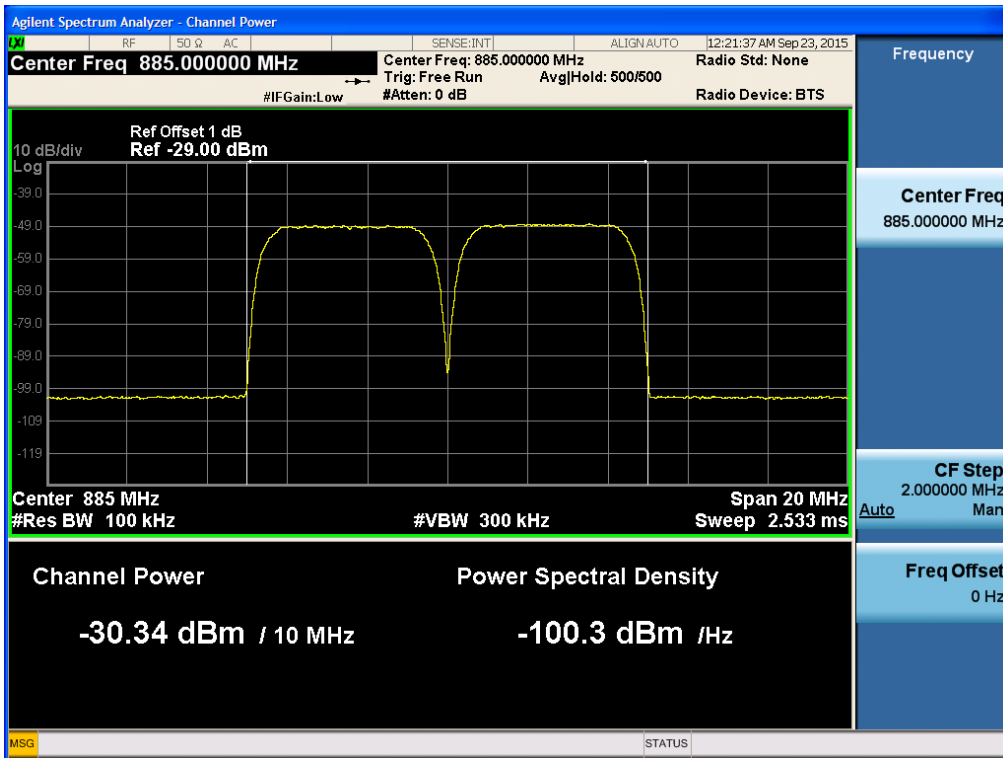


Band Edge


[LTE 5 MHz Downlink Low]

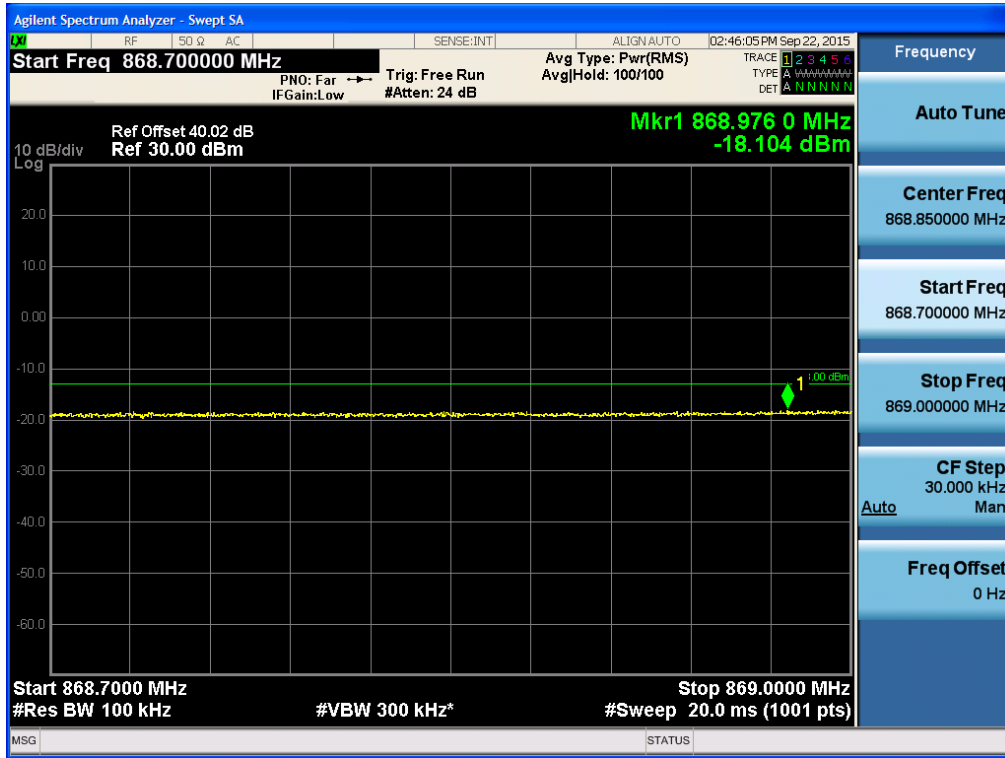


[LTE 5 MHz Downlink High]

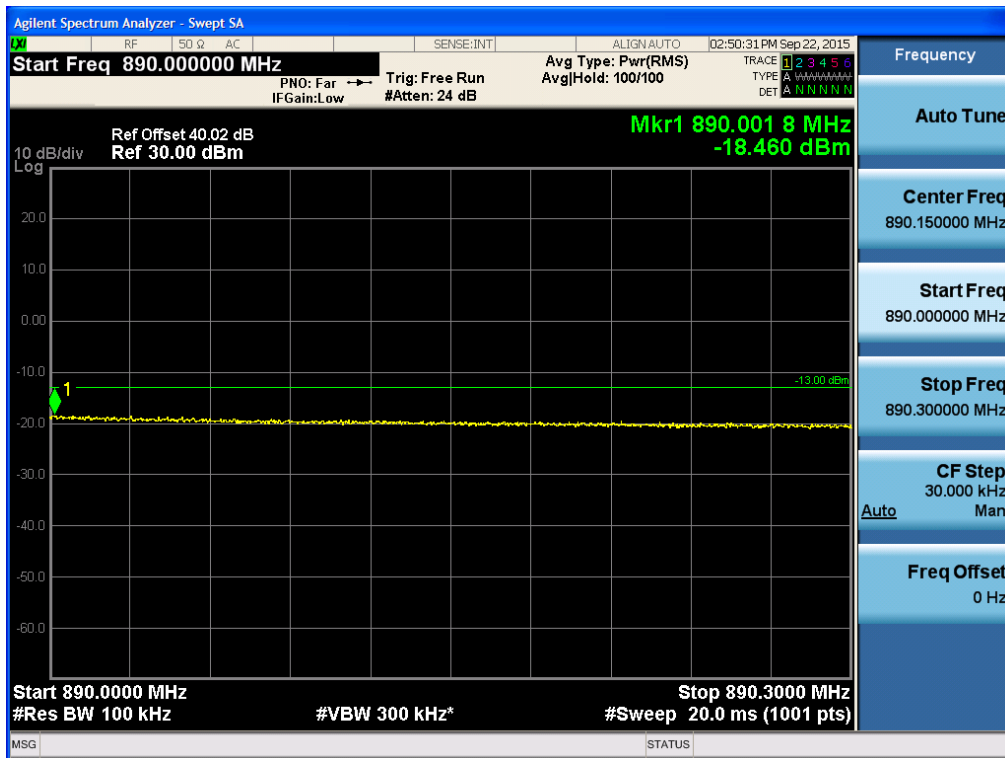


[LTE 10 MHz Downlink Low]

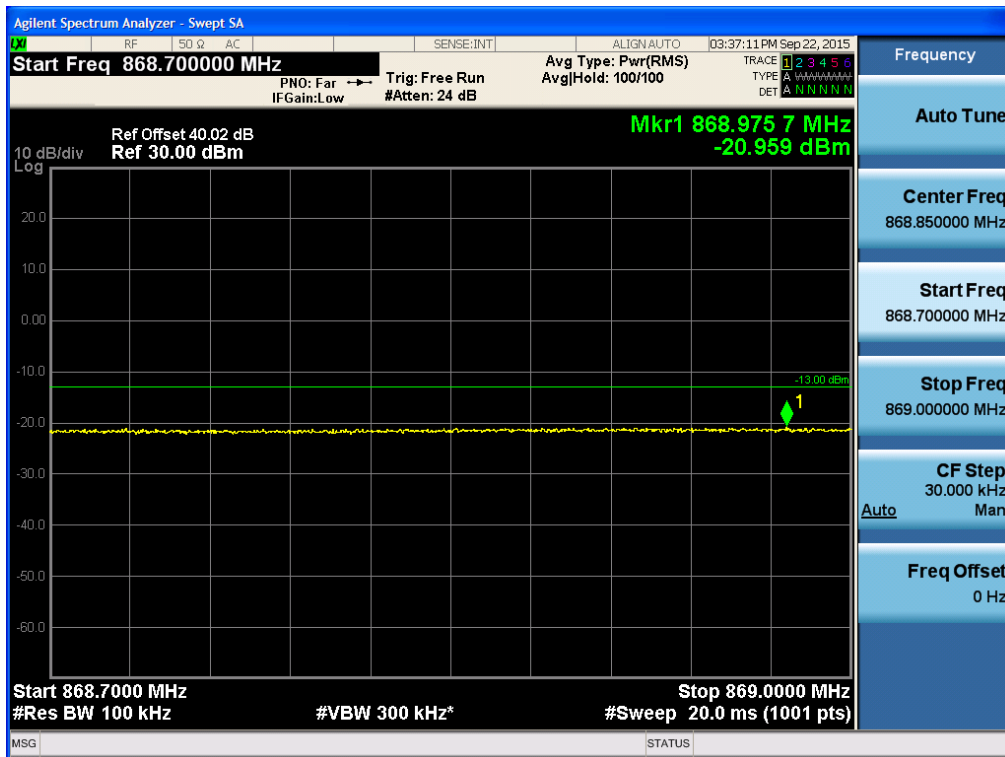


[LTE 10 MHz Downlink High]

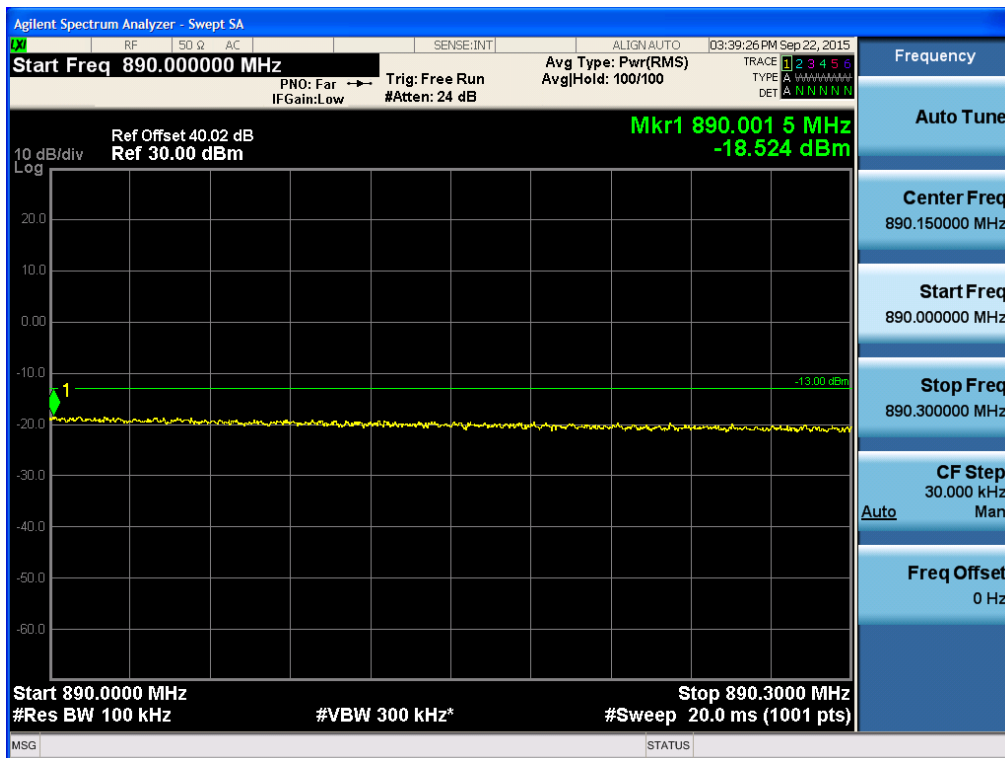

[WCDMA Downlink Low]

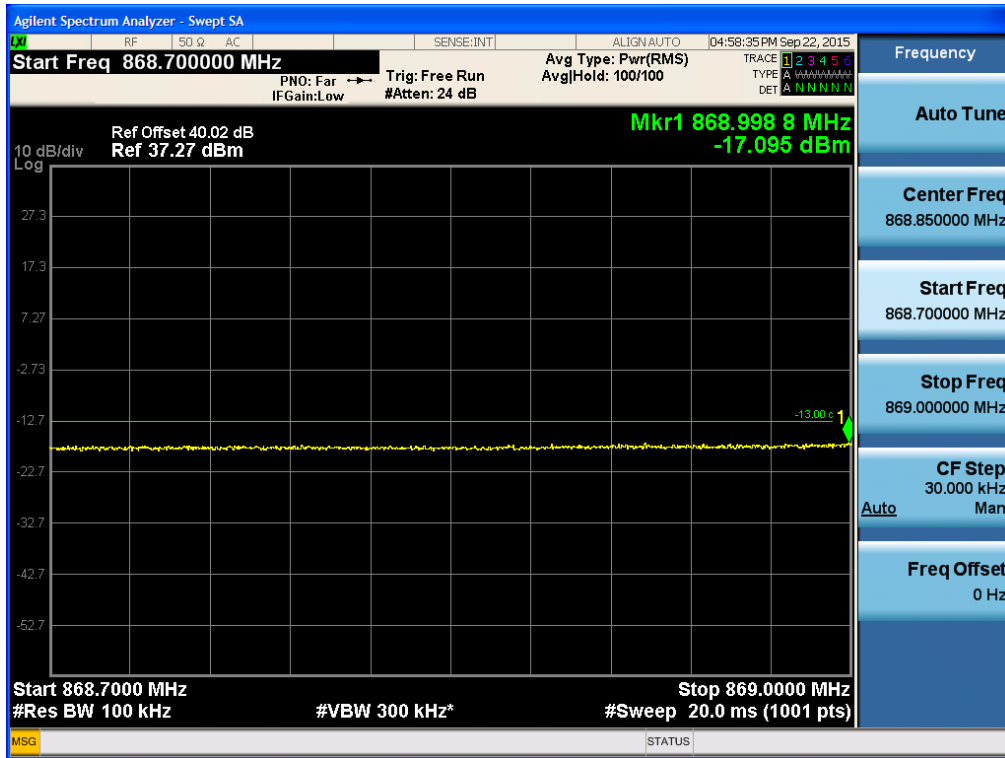

[WCDMA Downlink High]

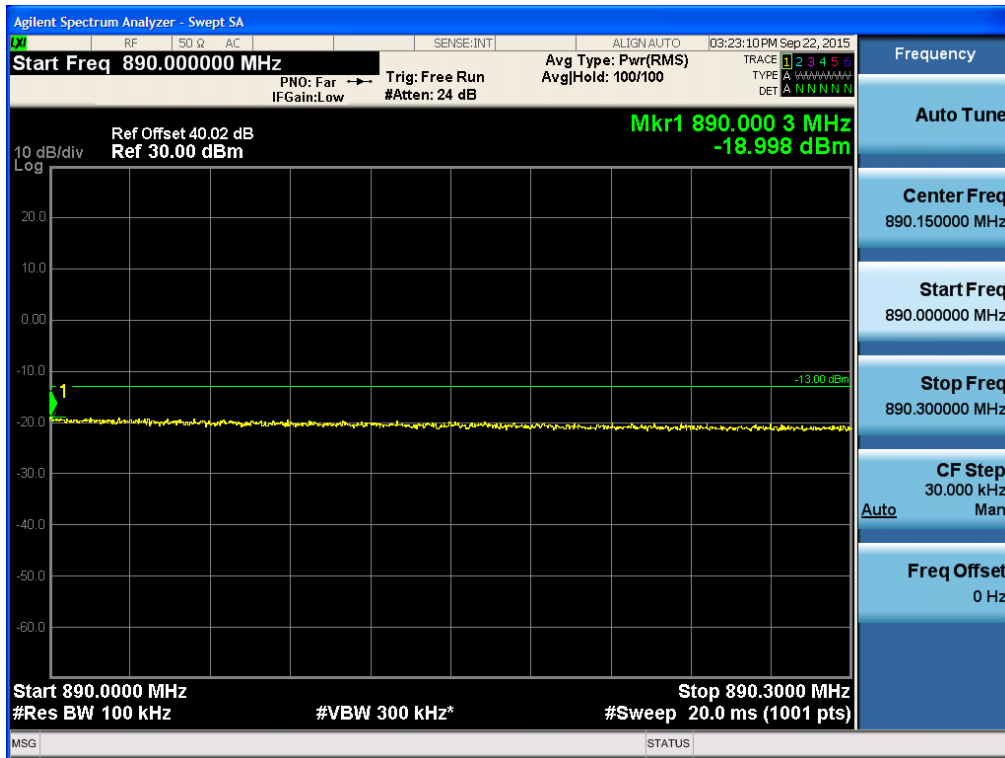

10. RADIATED SPURIOUS EMISSIONS

Test Requirement(s): § 2.1053 Measurements required: Field strength of spurious radiation.

§ 2.1053 (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

§ 2.1053 (b): The measurements specified in paragraph (a) of this section shall be made for the following equipment:


- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

Test Procedures: As required by 47 CFR 2.1053, *field strength of radiated spurious measurements* were made in accordance with the procedures of ANSI/TIA-603-C-2004 "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards".

Radiated emission measurements were performed inside a 3 meter semi-anechoic chamber. The EUT was set at a distance of 3m from the receiving antenna. The EUT's RF ports were terminated to 50ohm load. The EUT was set to transmit at the low, mid and high channels of the transmitter frequency range at its maximum power level. The EUT was rotated about

360 and the receiving antenna scanned from 1-3m in order to capture the maximum emission. A calibrated antenna source was positioned in place of the EUT and the previously recorded signal was duplicated. The maximum EIRP of the emission was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. Harmonic emissions up to the 10th or 40GHz, whichever was the lesser, were investigated.

Radiated Spurious Emissions Test Setup

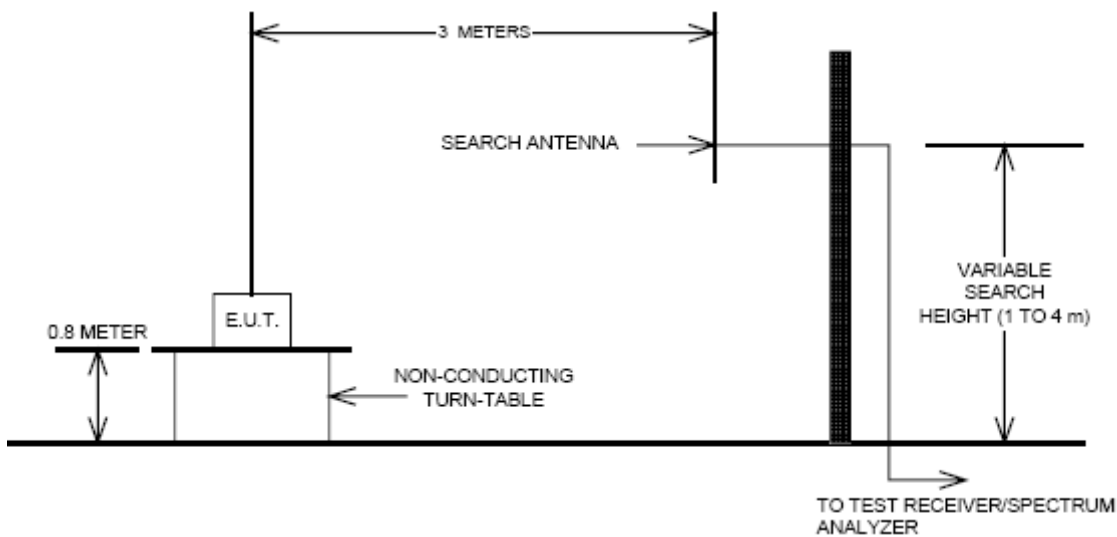

Test Result:

Note.

Input signal is the CW signal.

Harmonics were not found.

[Downlink]

| Voltage supplied to EUT | Tx Freq.(MHz) | Measurement Freq.(MHz) | Substitute Level [dBm] | Ant. Gain (dBi) | C.L (dB) | Pol. | ERP (dBm) | Margin (dB) |
|-------------------------|---------------|------------------------|------------------------|-----------------|----------|------|-----------|-------------|
| 120 Vac | 871.5 | 1743.0 | -52.53 | 8.99 | 3.10 | V | -46.64 | 33.64 |
| | 876.5 | 1753.0 | -52.56 | 9.04 | 3.11 | V | -46.64 | 33.64 |
| | 887.5 | 1775.0 | -52.70 | 9.15 | 3.13 | V | -46.69 | 33.69 |

11. FREQUENCY STABILITY OVER TEMPERATURE AND VOLTAGE VARIATIONS

Test Requirement(s): §2.1055(a)(1), § 22.355

Test Procedures:

As required by 47 CFR 2.1055, *Frequency Stability measurements* were made at the RF output terminals using a Spectrum Analyzer.

The EUT was placed in the Environmental Chamber.

A CW signal was injected into the EUT at the appropriate RF level. The frequency counter option on the Spectrum Analyzer was used to measure frequency deviations.

The frequency drift was investigated for every 10 °C increment until the unit is stabilized then recorded the reading in tabular format with the temperature range of -30 to 50 °C.

Voltage supplied to EUT is 120 Vac reference temperature was done at 20°C.


The voltage was varied by ± 15 % of nominal

§ 22.355 Frequency tolerance. Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C–1 of this section.

Table C–1—Frequency Tolerance for Transmitters in the Public Mobile Services

| Frequency range (MHz) | Base, fixed (ppm) | Mobile >3 watts (ppm) | Mobile ≤3 watts (ppm) |
|-----------------------|-------------------|-----------------------|-----------------------|
| 25 to 50 | 20.0 | 20.0 | 50.0 |
| 50 to 450 | 5.0 | 5.0 | 50.0 |
| 450 to 512 | 2.5 | 5.0 | 5.0 |
| 821 to 896 | 1.5 | 2.5 | 2.5 |
| 928 to 929 | 5.0 | n/a | n/a |
| 929 to 960 | 1.5 | n/a | n/a |
| 2110 to 2220 | 10.0 | n/a | n/a |

Test Setup:

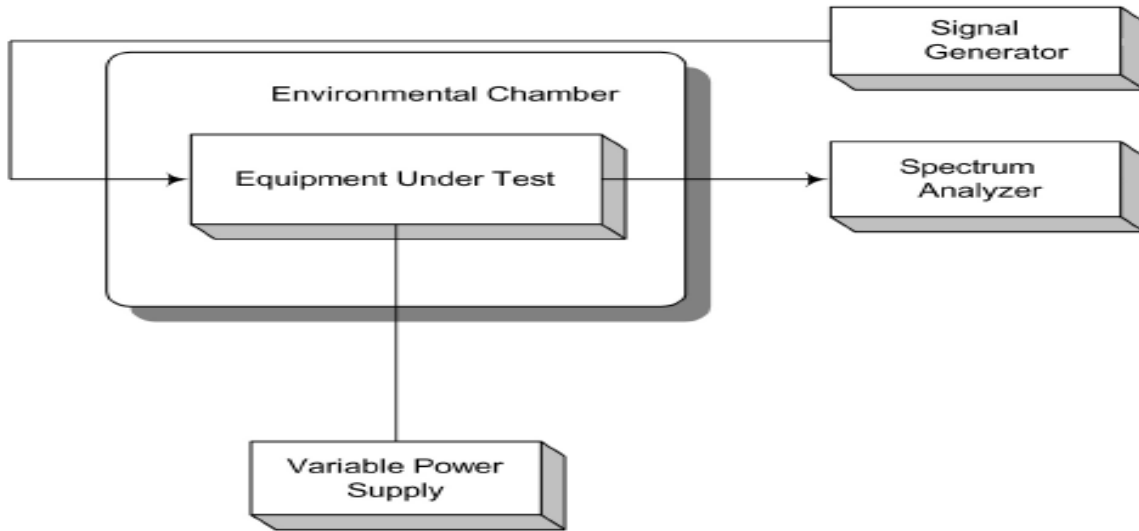

Test Results:

The E.U.T was found in compliance for Frequency Stability and Voltage Test

Frequency Stability and Voltage Test Results

Reference: 120 Vac at 20°C Freq. = 876.5 MHz

| Voltage (%) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (Hz) | ppm |
|-------------|------------|----------------|----------------------|----------------|--------|
| 100% | +20(Ref) | 876 500 000 | -0.4 | 0.0 | 0.0000 |
| | -30 | 876 500 000 | 0.0 | 0.4 | 0.0005 |
| | -20 | 876 500 000 | 0.1 | 0.5 | 0.0006 |
| | -10 | 876 500 000 | 0.1 | 0.5 | 0.0006 |
| | 0 | 876 500 000 | -0.2 | 0.2 | 0.0002 |
| | +10 | 876 500 000 | 0.1 | 0.5 | 0.0006 |
| | +30 | 876 500 000 | -0.3 | 0.1 | 0.0001 |
| | +40 | 876 500 000 | 0.2 | 0.6 | 0.0007 |
| 115% | +20 | 876 500 000 | -0.1 | 0.3 | 0.0003 |
| 85% | +20 | 876 500 000 | 0.2 | 0.6 | 0.0007 |