

# FCC Test Report

## Part 15 subpart C

### Client Information:

Applicant : Chengdu XGimi Technology Co.,Ltd.  
Applicant add.: 5F,Building A7,Tianfu Software Park, Tianfu Avenue,Hi-tech Zone,Chengdu,China.

### EUT Information:

EUT Name : LED Projector  
Model No. : XEC09 (Refer to page 5)  
Brand Name : XGIMI  
FCC ID : 2AFENXEC09

### Prepared By:

DongGuan NTEK Testing Technology Co., Ltd.  
Add. : 5/F, Building 11, Creative Industry Center Park, No. 34 Guantai Road,  
Guancheng District, Dong Guan, 523000, P.R.China  
Date of Receipt: Sep. 25, 2015 Date of Test: Sep. 26~ Oct. 07, 2015  
Date of Issue: Oct. 07, 2015 Test Result: **Pass**

### Test procedure used: ANSI C63.4-2009

This device described above has been tested by DongGuan NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

\*This test report must not be used by the client to claim product endorsement by any agency of the U.S. government.

Reviewed by: Yandy Xie  
Yandy Xie

Approved by: Lori Mei  
Lori Mei

# 1 Contents

	Page
<b>COVER PAGE</b>	
<b>1 CONTENTS .....</b>	<b>2</b>
<b>2 TEST SUMMARY .....</b>	<b>4</b>
2.1 COMPLIANCE WITH FCC PART 15 SUBPART C .....	4
2.2 MEASUREMENT UNCERTAINTY .....	4
<b>3 GENERAL INFORMATION .....</b>	<b>5</b>
3.1 GENERAL DESCRIPTION OF EUT .....	5
3.2 DESCRIPTION OF TEST CONDITIONS .....	7
3.3 EUT PERIPHERAL LIST .....	8
3.4 TEST PERIPHERAL LIST .....	8
3.5 TEST LOCATION .....	8
<b>4 EQUIPMENTS LIST FOR ALL TEST ITEMS .....</b>	<b>9</b>
<b>5 TEST RESULT.....</b>	<b>10</b>
5.1 ANTENNA REQUIREMENT .....	10
5.1.1 Standard requirement .....	10
5.1.2 EUT Antenna .....	10
5.2 CONDUCTION EMISSIONS MEASUREMENT .....	11
5.2.1 Applied procedures / Limit .....	11
5.2.2 Test procedure .....	11
5.2.3 Test results .....	12
5.3 RADIATED EMISSIONS MEASUREMENT .....	14
5.3.1 Applied procedures / Limit .....	14
5.3.2 Test procedure .....	14
5.3.3 Test Result .....	15
5.3.4 TEST RESULTS (Restricted Bands Requirements).....	20
5.4 BANDWIDTH TEST .....	26
5.4.1 Applied procedures / Limit .....	26
5.4.2 Test procedure .....	26
5.4.3 Deviation from standard .....	26
5.4.4 Test setup .....	26
5.4.5 Test results .....	27
5.5 CARRIER FREQUENCIES SEPARATED .....	31
5.5.1 Applied procedures / Limit .....	31
5.5.2 Test procedure .....	31
5.5.3 Deviation from standard .....	31
5.5.4 Test results .....	32
5.6 HOPPING CHANNEL NUMBER.....	35
5.6.1 Applied procedures / Limit .....	35
5.6.2 Test procedure .....	35

---

5.6.3	Test result .....	35
5.7	DWELL TIME.....	37
5.7.1	Applied procedures / Limit .....	37
5.7.2	Test procedure.....	37
5.7.3	Test result .....	38
5.8	MAXIMUM PEAK OUTPUT POWER.....	48
5.8.1	Applied procedures / Limit .....	48
5.8.2	Test procedure.....	48
5.8.3	Deviation from standard.....	48
5.8.4	Test setup .....	48
5.8.5	Test results .....	49
5.9	BAND EDGE .....	53
5.9.1	Applied procedures / Limit .....	53
5.9.2	Test procedure.....	53
5.9.3	Deviation from standard.....	53
5.9.4	Test setup .....	53
5.9.5	Test results .....	54

## 2 Test Summary

### 2.1 Compliance with FCC Part 15 subpart C

Test	Test Requirement	Standard Paragraph	Result
Antenna Requirement	FCC Part 15 C:2013	Section 15.247(c)	<b>PASS</b>
Conduction Emissions	FCC Part 15 C:2013	Section 15.207(a)	<b>PASS</b>
Radiated Emissions	FCC Part 15 C:2013	Section 15.247(d)	<b>PASS</b>
Carrier Frequencies Separated	FCC Part 15 C:2013	Section 15.247(a)(1)	<b>PASS</b>
Hopping Channel Number	FCC Part 15 C:2013	Section 15.247(a)(1) (iii)	<b>PASS</b>
Dwell Time	FCC Part 15 C:2013	Section 15.247(a)(1) (iii)	<b>PASS</b>
Maximum Peak Output Power	FCC Part 15 C:2013	Section 15.247(b)	<b>PASS</b>
Band edge	FCC Part 15 C:2013	Section 15.247(d)	<b>PASS</b>
Conducted Spurious Emissions	FCC Part 15 C:2013	Section 15.247(d)	<b>PASS</b>

### 2.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, The following measurements uncertainty Levels have estimated based on ANSI C63.4:2009, the maximum value of the uncertainty as below

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	Radiated Emission Test	$\pm 3.57\text{dB}$

### 3 General Information

#### 3.1 General Description of EUT

<b>Manufacturer:</b>	(1) Fujian Ruichi electronic technology CO., LTD. (2) TCL King electrical appliances (Chengdu) CO., LTD.
<b>Manufacturer Address:</b>	(1) No. C-09 land of the first planning about special automobile foundation in Quanzhou city of China. (2) Chengdu high-tech industrial development zone (west park), Chengdu, Sichuan, China
<b>EUT Name:</b>	LED Projector
<b>Model No:</b>	XEC09
<b>Brand Name:</b>	XGIMI
<b>Serial No:</b>	XEC10,XEC11,XEC12,XEC13,XEC14,XEC15,XEC16,XEC17,XEC18,XEC19, XEC20,XEC21,XEC22,XEC23,WEC59,WEC60,WEC61,WEC62,WEC63, WEC64,WEC65,WEC66,WEC67,WEC68,WEC69,WEC70,WEC71,WEC72, WEC73,WEC74,WEC75,WEC76,WEC77,WEC78,WEC79,WEC80,WEC81, WEC82,WEC83,WEC84,WEC85,WEC86,WEC87,WEC88
<b>Operation frequency:</b>	2402MHz to 2480MHz
<b>Channel Number:</b>	79
<b>Modulation Technology:</b>	GFSK, ( $\pi/4$ )DQPSK, 8DPSK
<b>Antenna Type:</b>	Integral
<b>Antenna Gain:</b>	2 dBi
<b>Power Supply Range:</b>	DC 19V from adapter
<b>Power Supply:</b>	DC 19V from adapter, AC 120V/60Hz for adapter
<b>Power Cord:</b>	1.5 m x 3 wires unshielded AC mains cable 1.8 m x 2 wires unshielded DC mains cable
<b>Effective Isotropic Radiated Power(max):</b>	-4.74dBm

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.


2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3. According to the declaration of the applicant, the electrical circuit design, layout, components used and internal wiring were identical for above models, with only difference being the model no.. Therefore, only one model XEC09 was tested in this report.

### 3.2 Description of Test conditions

(1) EUT was tested in normal configuration (Please See following Block diagram)

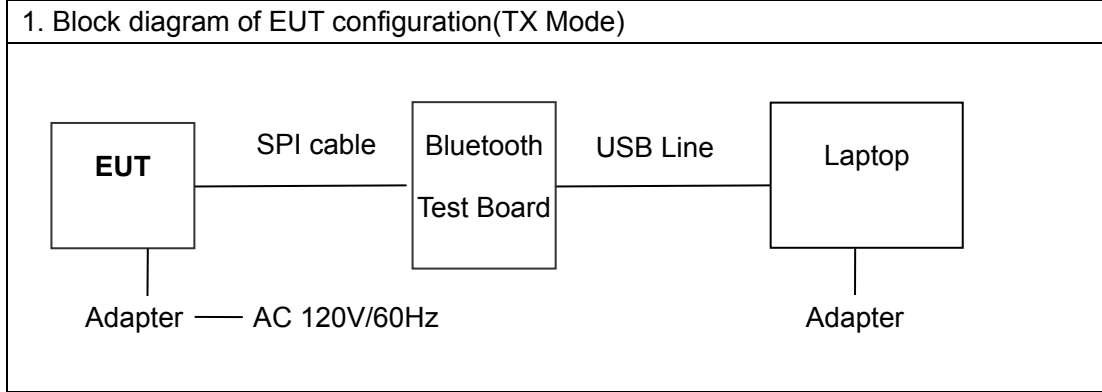

(2) E.U.T. test conditions:

15.31(e): For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

(3) Test frequencies:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. If required reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

(4) Frequency range of radiated measurements:

According to the 15.33, The test range will be up to the tenth harmonic of the highest fundamental frequency .

### 3.3 EUT Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	signal cable
1	Adapter	DELTA	CE, FCC	ADP-90 MD H	N/A	N/A	N/A
2	AC Line(adapter)	N/A	N/A	N/A	N/A	1.5m /unshielded /detachable	N/A
3	DC Line(adapter)	N/A	N/A	N/A	N/A	1.8m /unshielded /detachable	N/A
4	remote control	N/A	N/A	N/A	N/A	N/A	N/A

### 3.4 Test Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	signal cable
1	Lap top	ASUS	N/A	X401A	X16-96072	N/A	N/A
2	Adapter (laptop)	ASUS	N/A	EXA0703 YH	N/A	1.8m/unshielded /detachable	N/A

### 3.5 Test Location

All tests were performed at:

NTEK Testing Technology Co., Ltd

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street

Bao' an District, Shenzhen P.R. China

The FCC Registration No. of NTEK Testing Technology Co., Ltd is 238937.



## 4 Equipments List for All Test Items

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	ADVANTEST	R3182	150900201	2014.10.16	2015.10.15
2	EMI Measuring Receiver	Schaffner	SCR3501	235	2014.10.16	2015.10.15
3	Low Noise Pre Amplifier	Tsj	MLA-10K01-B01-27	1205323	2015.09.08	2016.09.07
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2015.04.08	2016.04.07
5	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2015.07.05	2016.07.04
6	Broadband Horn Antenna	SCHWARZBECK	BBHA9120A	451	2015.07.05	2016.07.04
7	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2015.09.08	2016.09.07
8	EMI Test Receiver	R&S	ESCI	100124	2014.12.29	2015.12.28
9	LISN	Kyoritsu	KNW-242	8-837-4	2015.04.08	2016.04.07
10	LISN	Kyoritsu	KNW-407	8-1789-3	2015.04.08	2016.04.07
11	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2015.04.08	2016.04.07
12	Loop Antenna	ARA	PLA-1030/B	1029	2015.04.08	2016.04.07
13	Power sensor	Anritsu	MA2411B	1126168	2015.06.17	2016.06.16
14	EMI Test Receiver	Rohde & Schwarz	ESIB26	100394	2015.04.08	2016.04.07

## 5 Test Result

### 5.1 Antenna Requirement

#### 5.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### 5.1.2 EUT Antenna

The antenna is integrated on the main PCB and no consideration of replacement. Antenna gain is max 2 dBi from 2.4GHz to 2.5GHz.

## 5.2 Conduction Emissions Measurement

### 5.2.1 Applied procedures / Limit

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

Note: Decreases with the logarithm of the frequency.


### 5.2.2 Test procedure

EUT was placed upon a wooden test table 0.8m above the horizontal metal reference plane and 0.4m from the vertical ground plane, and it was connected to an AMN. The closest distance between the boundary of the EUT and the surface of the AMN is 0.8m. All peripherals were connected to another AMN, and placed at a distance of 10cm from each other. A spectrum and receiver was connected to the RF output port of the AMN. Both average and quasi-peak value were detected.

### 5.2.3 Test results

EUT:	LED Projector	Model Name. :	XEC09
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Test Date :	2015-09-30
Test Mode:	TX	Phase :	Line
<b>Test Voltage :</b>	DC 19V from adapter, AC 120V/60Hz for adapter		

Level(dBuV)

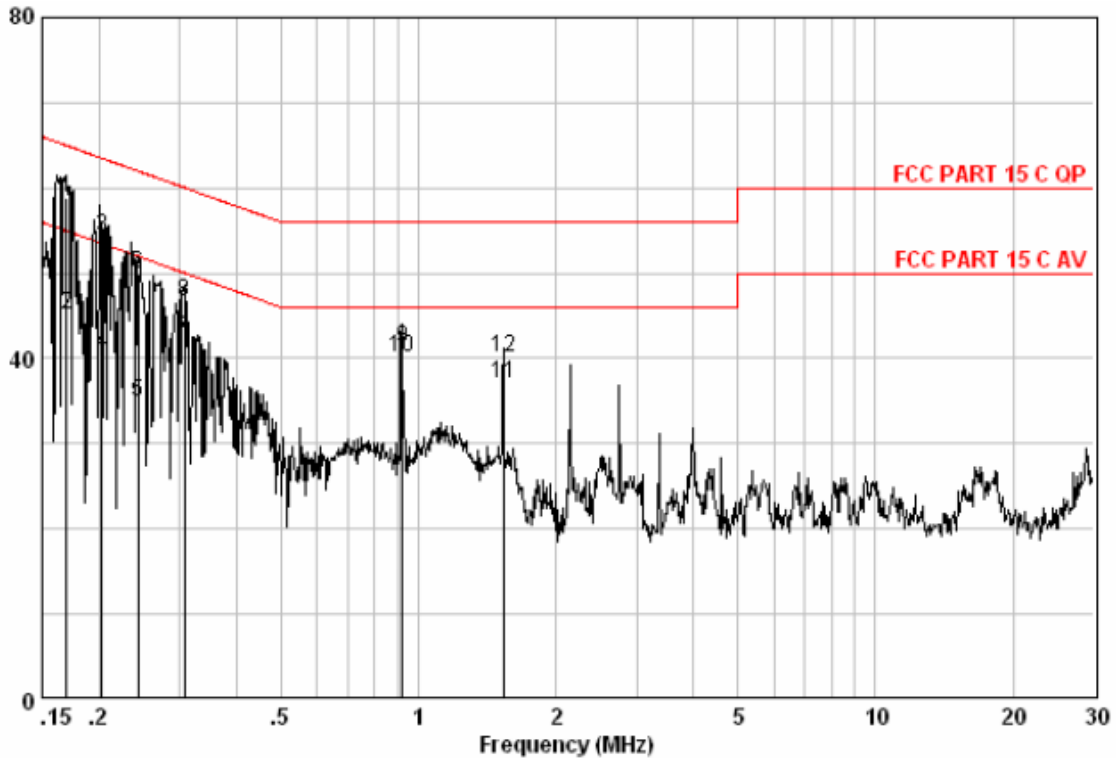


Measure data:

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.169	49.06	0.09	9.64	58.79	64.99	-6.20	QP
0.169	35.34	0.09	9.64	45.07	54.99	-9.92	AVERAGE
0.203	44.50	0.13	9.64	54.27	63.49	-9.22	QP
0.203	30.67	0.13	9.64	40.44	53.49	-13.05	AVERAGE
0.243	25.22	0.11	9.64	34.97	52.00	-17.03	AVERAGE
0.243	40.20	0.11	9.64	49.95	62.00	-12.05	QP
0.307	32.62	0.08	9.63	42.33	50.06	-7.73	AVERAGE
0.307	36.90	0.08	9.63	46.61	60.06	-13.45	QP
0.922	31.48	0.04	9.69	41.21	56.00	-14.79	QP
0.922	30.35	0.04	9.69	40.08	46.00	-5.92	AVERAGE
1.535	27.39	0.04	9.71	37.14	46.00	-8.86	AVERAGE
1.535	30.30	0.04	9.71	40.05	56.00	-15.95	QP

EUT:	LED Projector	Model Name. :	XEC09
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Test Date :	2015-09-30
Test Mode:	TX	Phase :	Neutral
<b>Test Voltage :</b>	DC 19V from adapter, AC 120V/60Hz for adapter		

Level(dBμV)

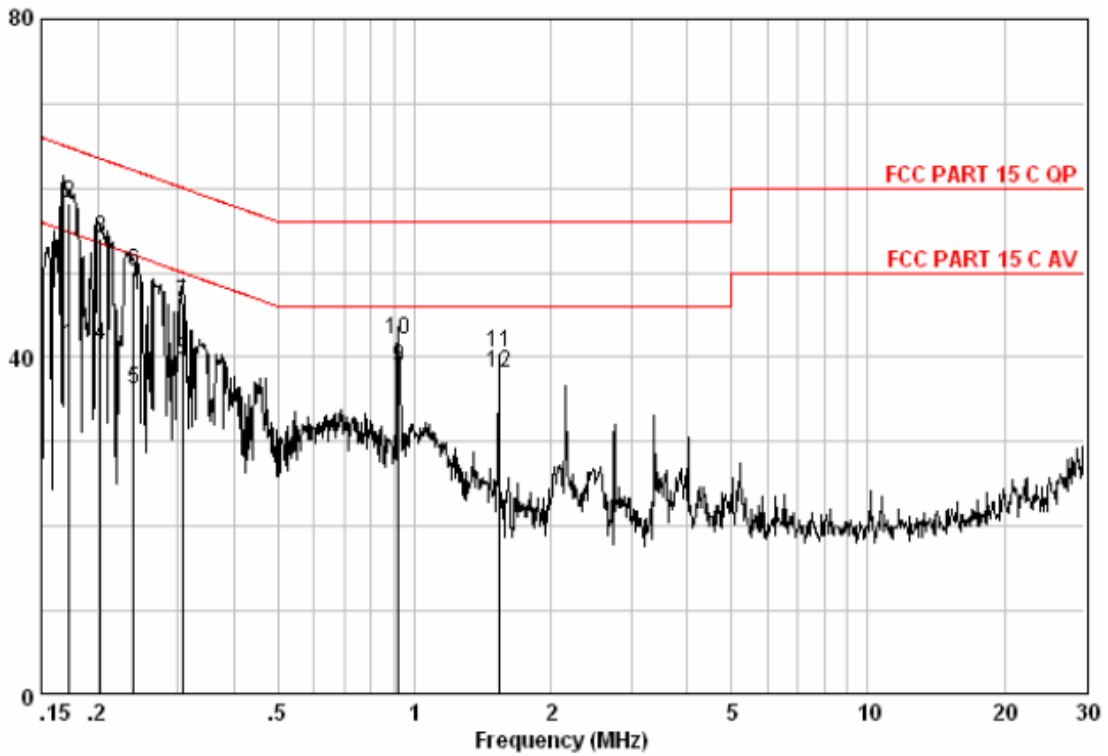

Measure result:

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dBμV	dB	dB	dBμV	dBμV	dB	
0.173	31.67	0.09	9.63	41.39	54.81	-13.42	AVERAGE
0.173	48.46	0.09	9.63	58.18	64.81	-6.63	QP
0.203	44.40	0.13	9.62	54.15	63.49	-9.34	QP
0.203	31.61	0.13	9.62	41.36	53.49	-12.13	AVERAGE
0.240	26.48	0.11	9.63	36.22	52.08	-15.87	AVERAGE
0.240	40.30	0.11	9.63	50.04	62.08	-12.05	QP
0.307	36.68	0.08	9.64	46.40	60.06	-13.66	QP
0.307	29.92	0.08	9.64	39.64	50.06	-10.42	AVERAGE
0.923	29.09	0.04	9.64	38.77	46.00	-7.23	AVERAGE
0.923	32.34	0.04	9.64	42.02	56.00	-13.98	QP
1.535	30.92	0.04	9.61	40.57	56.00	-15.43	QP
1.535	28.60	0.04	9.61	38.25	46.00	-7.75	AVERAGE

## 5.3 Radiated Emissions Measurement

### 5.3.1 Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Frequency of Emission (MHz)	Field Strength		Measurement Distance (meters)
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	
0.009-0.49	2400/F(kHz)		300
0.49-1.705	24000/F(kHz)		30
1.705-30	30		30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

### 5.3.2 Test procedure

EUT was placed upon a wooden test table which was placed on the turn table 0.8m above the horizontal metal ground plane, and operating in the mode as mentioned above. A receiving antenna was placed 3m away from the EUT. During testing, turn around the turn table and move the antenna from 1m to 4m to find the maximum field-strength reading. All peripherals were placed at a distance of 10cm between each other. Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 5.3.3 Test Result


There is not detected blow 30MHz.

EUT:	LED Projector	Model Name :	XEC09
Temperature:	25 °C	Test Data	2015-09-30
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX	Test Voltage :	DC 19V from adapter, AC 120V/60Hz for adapter
Measurement Distance	3 m	Frequency Range	30MHz to 1GHz
RBW/VBW	100KHz / 300KHz for spectrum, RBW=120KHz for receiver.		

(a) Antenna polarization: Horizontal

Peak scan

Level (dB $\mu$ V/m)

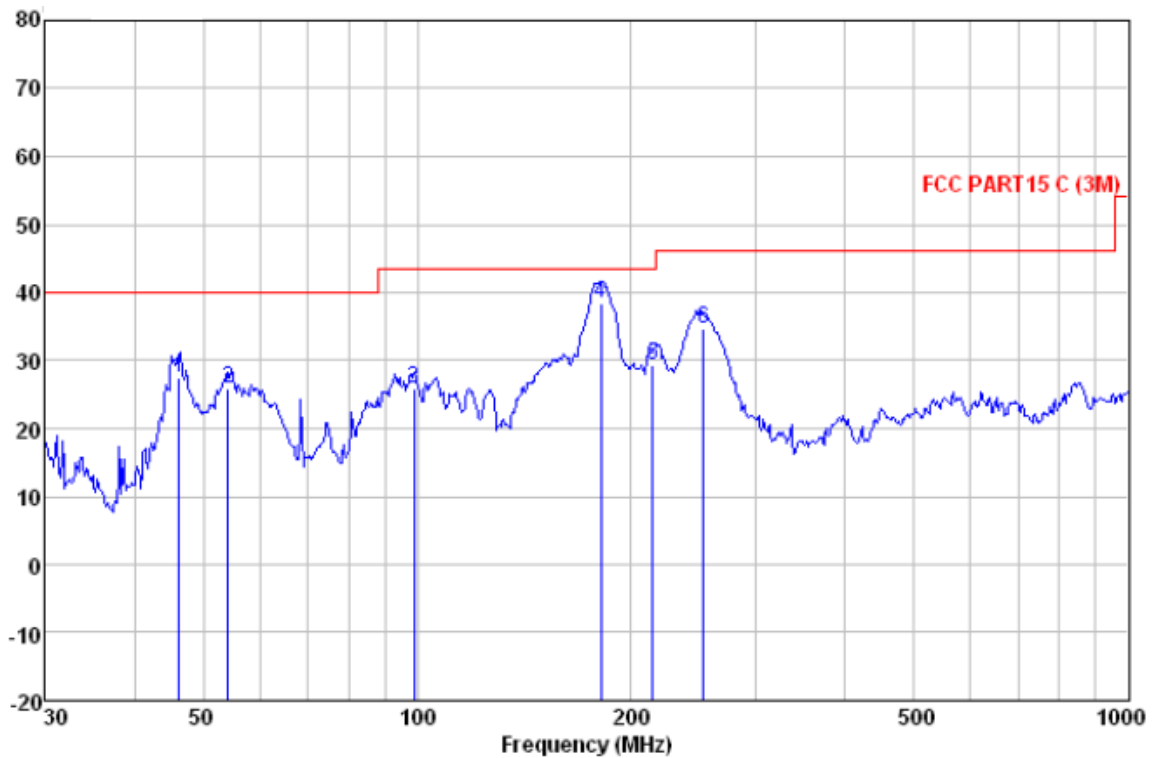


Quasi-peak measurement

Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
MHz	dB $\mu$ V	dB/m	dB	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	
46.178	44.74	13.48	0.97	31.60	27.59	40.00	-12.41	QP
54.261	43.41	13.05	1.05	31.60	25.91	40.00	-14.09	QP
98.833	42.95	13.10	1.42	31.60	25.87	43.50	-17.63	QP
181.283	58.25	9.76	1.82	31.33	38.50	43.50	-5.00	QP
214.514	47.59	11.03	1.96	31.30	29.28	43.50	-14.22	QP
252.948	51.87	12.06	2.16	31.30	34.79	46.00	-11.21	QP

(b) Antenna polarization: vertical

Peak scan

Level (dB $\mu$ V/m)

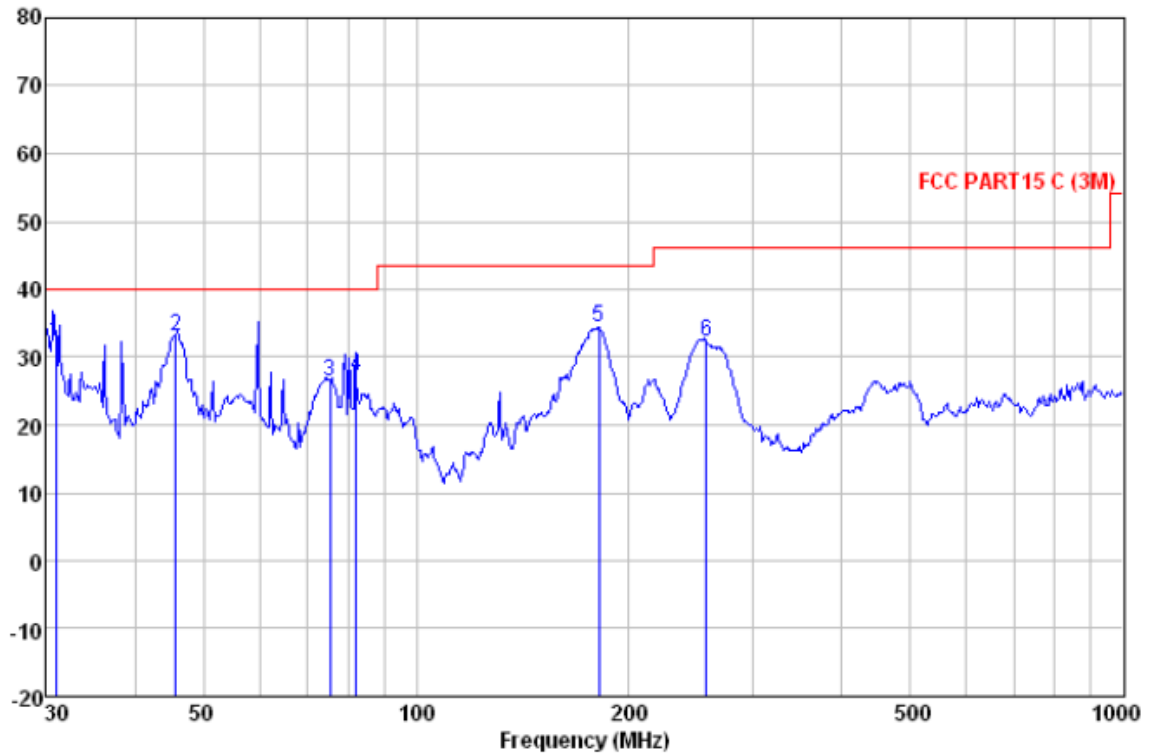

Quasi-peak measurement

Freq	ReadAntenna	Cable Preamp	Limit	Over	Remark
MHz	Level	Factor	Line	Limit	
	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB	
30.962	50.82	12.32	0.84	31.60	32.38 40.00 -7.62 QP
45.695	50.12	13.51	0.97	31.60	33.00 40.00 -7.00 QP
75.446	48.86	7.91	1.26	31.60	26.43 40.00 -13.57 QP
82.359	48.18	9.43	1.30	31.60	27.31 40.00 -12.69 QP
181.283	54.10	9.76	1.82	31.33	34.35 43.50 -9.15 QP
257.422	49.44	12.06	2.18	31.30	32.38 46.00 -13.62 QP

Note: Measurement Level = Reading Level + Factor  
 Factor=Ant Factor + Cable Loss-Preamp Factor



EUT:	LED Projector	Model Name :	XEC09
Temperature:	25 °C	Test Data	2015-09-30
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	1Mbps(the worst case)	Test Voltage :	DC 19V from adapter, AC 120V/60Hz for adapter
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	1MHz/1MHz for Peak, 1MHz/10Hz for Average.		

## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Vertical Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	factor (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna polarization
4804.000	51.01	5.06	56.07	74.00	-17.93	peak
*4804.000	36.52	5.06	41.58	54.00	-12.42	AVG
7206.000	45.82	7.03	52.85	74.00	-21.15	peak
7206.000	31.65	7.03	38.68	54.00	-15.32	AVG
9608.000	37.91	10.63	48.54	74.00	-25.46	peak
9608.000	24.61	10.63	35.24	54.00	-18.76	AVG

**Horizontal Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	factor (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna polarization
4804.000	52.11	5.06	57.17	74.00	-16.83	peak
*4804.000	37.43	5.06	42.49	54.00	-11.51	AVG
7206.000	46.69	7.03	53.72	74.00	-20.28	peak
7206.000	33.43	7.03	40.46	54.00	-13.54	AVG
9608.000	38.31	10.63	48.94	74.00	-25.06	peak
9608.000	24.99	10.63	35.62	54.00	-18.38	AVG

Note: '\*' means the worst case

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamp Factor

Low Channel 00: 2402 MHz

Data rate: 1Mbps

## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Vertical Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	factor (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna polarization
4882.000	52.18	5.14	57.32	74.00	-16.68	peak
*4882.000	38.02	5.14	43.16	54.00	-10.84	AVG
7323.000	45.08	7.54	52.62	74.00	-21.38	peak
7323.000	31.92	7.54	39.46	54.00	-14.54	AVG
9764.000	37.88	11.39	49.27	74.00	-24.73	peak
9764.000	25.14	11.39	36.53	54.00	-17.47	AVG

**Horizontal Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	factor (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna polarization
4882.000	52.66	5.14	57.80	74.00	-16.20	peak
*4882.000	38.12	5.14	43.26	54.00	-10.74	AVG
7323.000	45.03	7.54	52.57	74.00	-21.43	peak
7323.000	32.07	7.54	39.61	54.00	-14.39	AVG
9764.000	36.95	11.39	48.34	74.00	-25.66	peak
9764.000	24.44	11.39	35.83	54.00	-18.17	AVG

Note: '\*' means the worst case

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamp Factor

Middle Channel 39: 2441 MHz

Data rate: 1Mbps

## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Vertical Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	factor (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna polarization
4960.000	51.28	5.22	56.50	74.00	-17.50	peak
*4960.000	37.68	5.22	42.90	54.00	-11.10	AVG
7440.000	44.16	8.06	52.22	74.00	-21.78	peak
7440.000	31.22	8.06	39.28	54.00	-14.72	AVG
9920.000	36.02	12.10	48.12	74.00	-25.88	peak
9920.000	24.12	12.10	36.22	54.00	-17.78	AVG

**Horizontal Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	factor (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna polarization
4960.000	51.39	5.22	56.61	74.00	-17.39	peak
*4960.000	37.49	5.22	42.71	54.00	-11.29	AVG
7440.000	45.37	8.06	53.43	74.00	-20.57	peak
7440.000	32.02	8.06	40.08	54.00	-13.92	AVG
9920.000	37.34	12.10	49.44	74.00	-24.56	peak
9920.000	24.37	12.10	36.47	54.00	-17.53	AVG

Note: '\*' means the worst case

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamp Factor


High Channel 78: 2480 MHz

Data rate: 1Mbps

### 5.3.4 TEST RESULTS (Restricted Bands Requirements)

#### 1. Low Channel


Vertical:

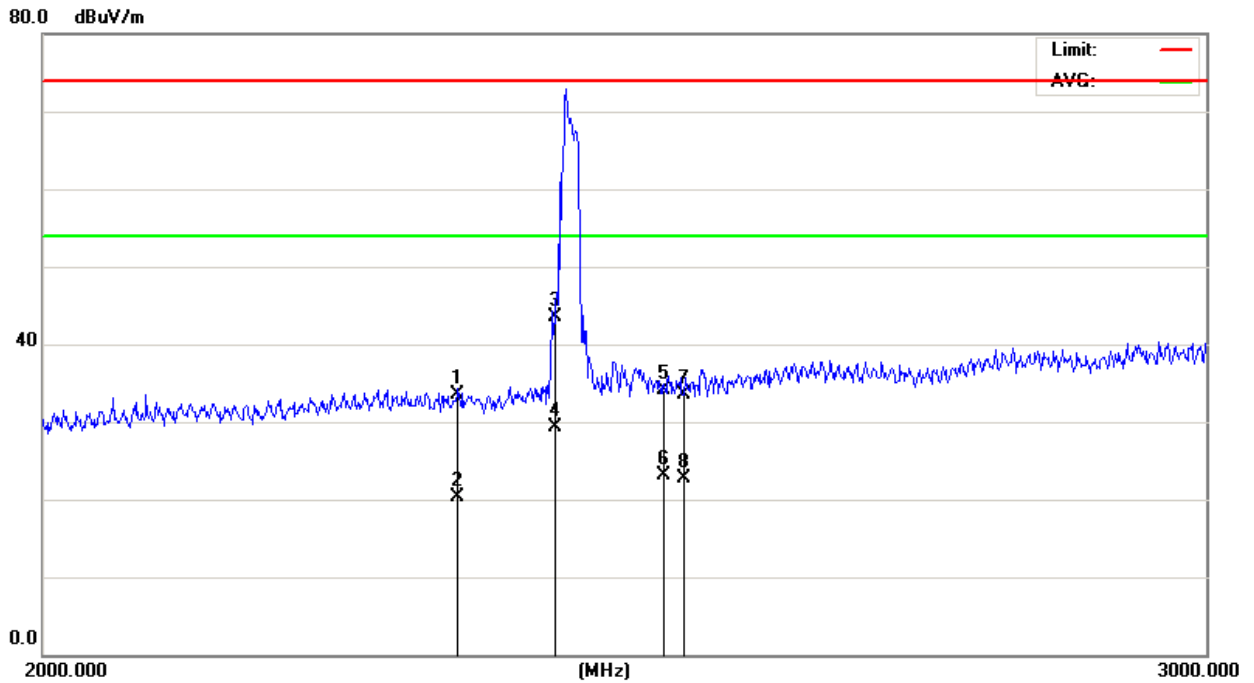

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2310.000	40.02	-6.42	33.60	74.00	-40.40	peak
2		2310.000	26.82	-6.42	20.40	54.00	-33.60	AVG
3		2390.000	49.39	-5.79	43.60	74.00	-30.40	peak
4	*	2390.000	35.07	-5.79	29.28	54.00	-24.72	AVG
5		2483.500	39.08	-4.98	34.10	74.00	-39.90	peak
6		2483.500	28.13	-4.98	23.15	54.00	-30.85	AVG
7		2500.000	38.33	-4.83	33.50	74.00	-40.50	peak
8		2500.000	27.44	-4.83	22.61	54.00	-31.39	AVG

**1. Low Channel**


Horizontal:

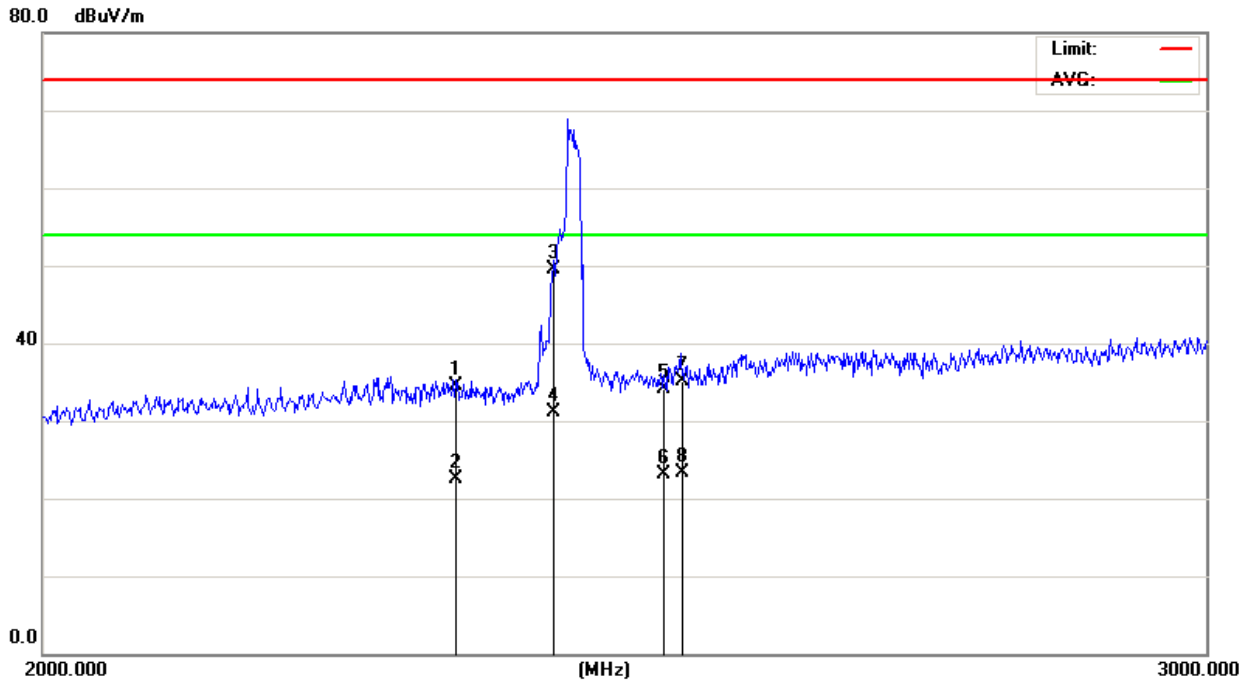

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2310.000	41.02	-6.42	34.60	74.00	-39.40	peak
2		2310.000	28.96	-6.42	22.54	54.00	-31.46	AVG
3		2390.000	55.29	-5.79	49.50	74.00	-24.50	peak
4	*	2390.000	36.83	-5.79	31.04	54.00	-22.96	AVG
5		2483.500	39.18	-4.98	34.20	74.00	-39.80	peak
6		2483.500	27.99	-4.98	23.01	54.00	-30.99	AVG
7		2500.000	40.03	-4.83	35.20	74.00	-38.80	peak
8		2500.000	28.07	-4.83	23.24	54.00	-30.76	AVG

## 2. Middle Channel


Vertical:

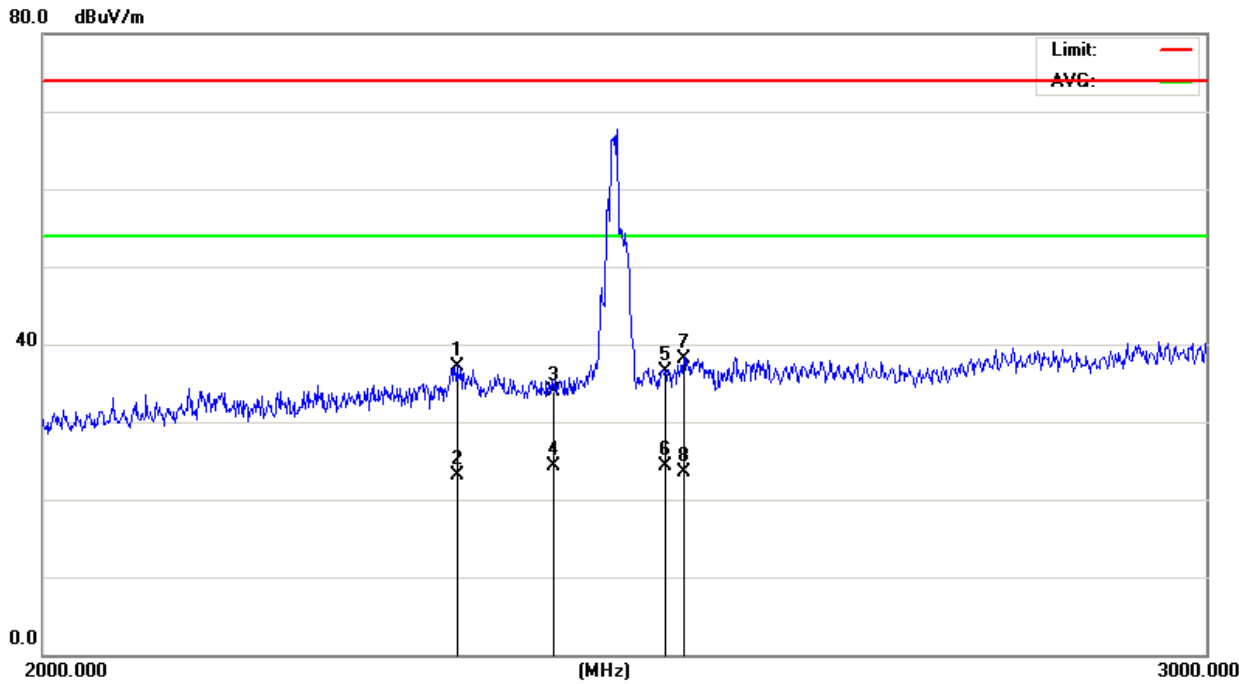

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2310.000	43.62	-6.42	37.20	74.00	-36.80	peak
2		2310.000	29.49	-6.42	23.07	54.00	-30.93	AVG
3		2390.000	39.69	-5.79	33.90	74.00	-40.10	peak
4		2390.000	30.02	-5.79	24.23	54.00	-29.77	AVG
5		2483.500	41.58	-4.98	36.60	74.00	-37.40	peak
6	*	2483.500	29.37	-4.98	24.39	54.00	-29.61	AVG
7		2500.000	43.03	-4.83	38.20	74.00	-35.80	peak
8		2500.000	28.34	-4.83	23.51	54.00	-30.49	AVG

## 2. Middle Channel


Horizontal:

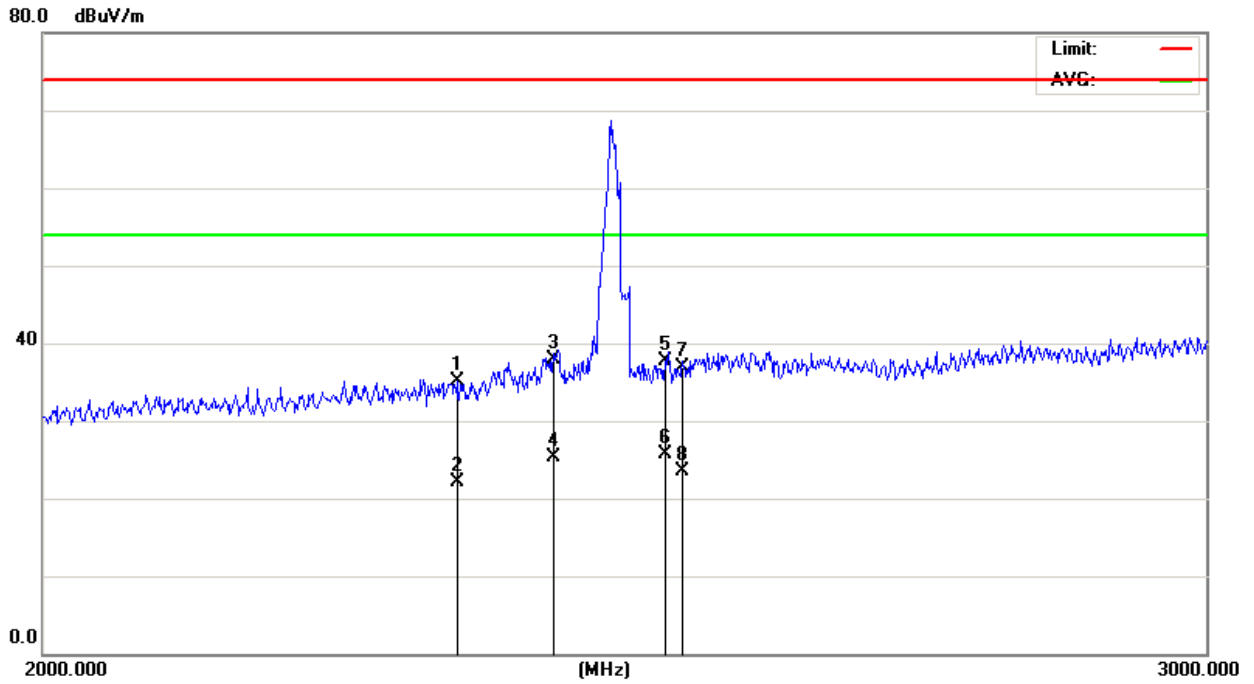

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2310.000	41.52	-6.42	35.10	74.00	-38.90	peak
2		2310.000	28.43	-6.42	22.01	54.00	-31.99	AVG
3		2390.000	43.69	-5.79	37.90	74.00	-36.10	peak
4		2390.000	31.08	-5.79	25.29	54.00	-28.71	AVG
5		2483.500	42.78	-4.98	37.80	74.00	-36.20	peak
6	*	2483.500	30.72	-4.98	25.74	54.00	-28.26	AVG
7		2500.000	41.83	-4.83	37.00	74.00	-37.00	peak
8		2500.000	28.43	-4.83	23.60	54.00	-30.40	AVG

### 3. High Channel

Vertical:

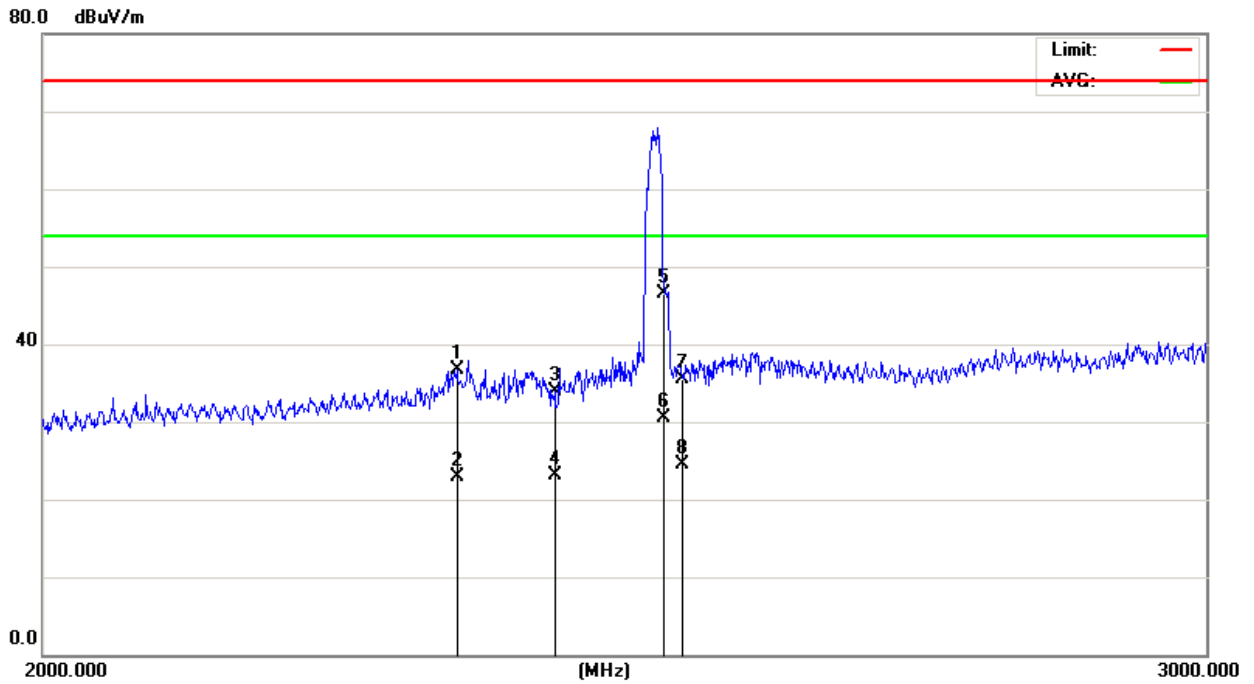


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2310.000	43.22	-6.42	36.80	74.00	-37.20	peak
2		2310.000	29.31	-6.42	22.89	54.00	-31.11	AVG
3		2390.000	39.69	-5.79	33.90	74.00	-40.10	peak
4		2390.000	28.94	-5.79	23.15	54.00	-30.85	AVG
5		2483.500	51.48	-4.98	46.50	74.00	-27.50	peak
6	*	2483.500	35.46	-4.98	30.48	54.00	-23.52	AVG
7		2500.000	40.33	-4.83	35.50	74.00	-38.50	peak
8		2500.000	29.28	-4.83	24.45	54.00	-29.55	AVG



### 3. High Channel

Horizontal:

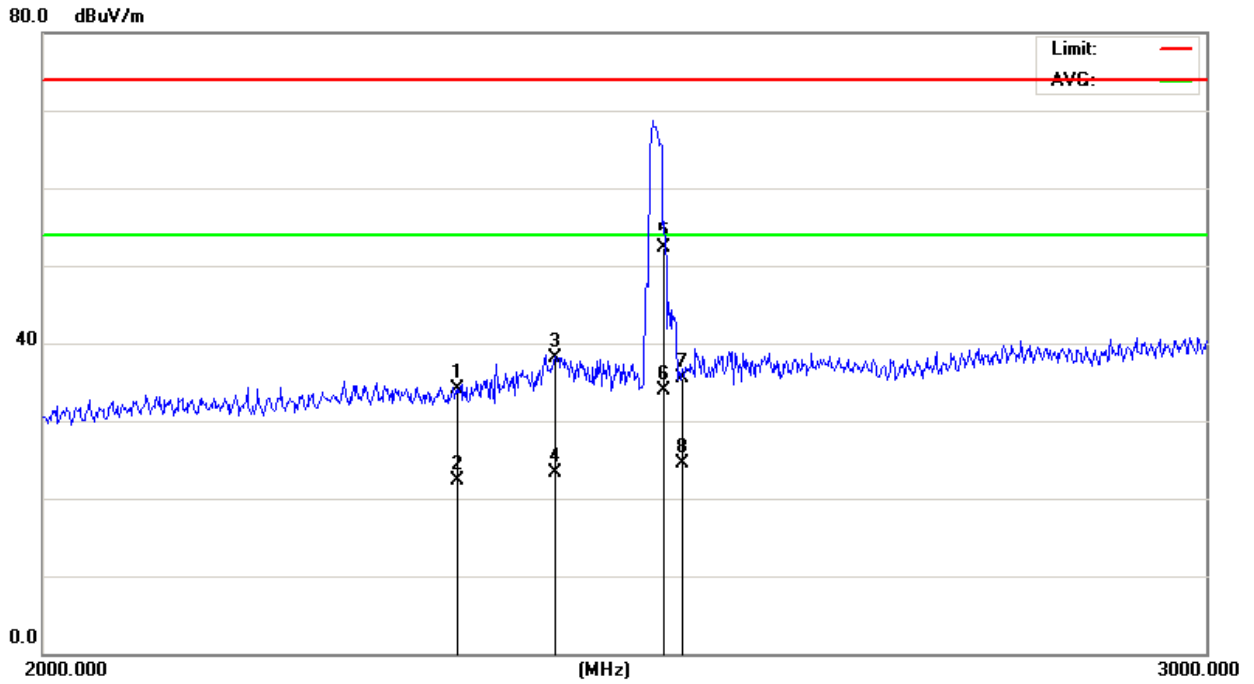

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2310.000	40.52	-6.42	34.10	74.00	-39.90	peak
2		2310.000	28.67	-6.42	22.25	54.00	-31.75	AVG
3		2390.000	43.99	-5.79	38.20	74.00	-35.80	peak
4		2390.000	29.03	-5.79	23.24	54.00	-30.76	AVG
5		2483.500	57.28	-4.98	52.30	74.00	-21.70	peak
6	*	2483.500	38.93	-4.98	33.95	54.00	-20.05	AVG
7		2500.000	40.43	-4.83	35.60	74.00	-38.40	peak
8		2500.000	29.34	-4.83	24.51	54.00	-29.49	AVG

Remark: No any other emission which falls in restricted bands can be detected and be reported.

**Test result: The unit does meet the FCC requirements.**

## 5.4 BANDWIDTH TEST

### 5.4.1 Applied procedures / Limit

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.


### 5.4.2 Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100KHz, VBW $\geq$ RBW, Sweep time = Auto.

### 5.4.3 Deviation from standard

No deviation.

### 5.4.4 Test setup

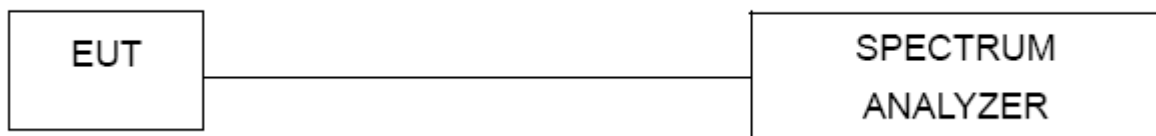

### 5.4.5 Test results

EUT:	LED Projector	Model Name :	XEC09
Temperature:	26 °C	Relative Humidity:	53%
Pressure:	1010 hPa	Test Power :	DC 19V from adapter, AC 120V/60Hz foradapter
Test Mode :	TX 1Mbps\ 3Mbps		

**Test result:**


**Normal mode:**

Test Channel	Bandwidth(MHz)	2/3 bandwidth(MHz)
Lowest	1.132	0.881
Middle	1.122	0.748
Highest	1.122	0.748


**EDR mode:**

Test Channel	bandwidth	2/3 bandwidth
Lowest	1.402	0.934
Middle	1.392	0.927
Highest	1.402	0.934


### CH00-1Mbps

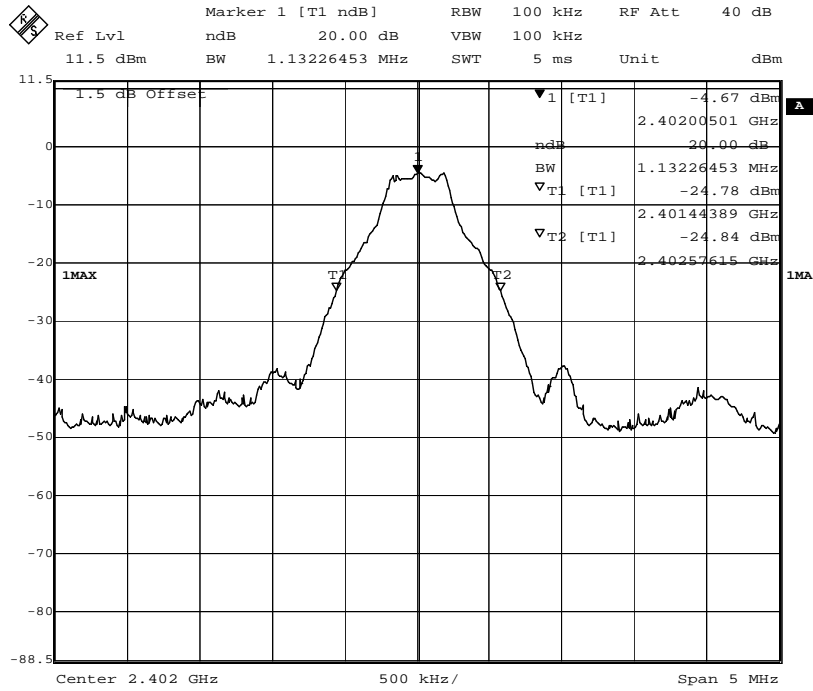


### CH 39-1Mbps

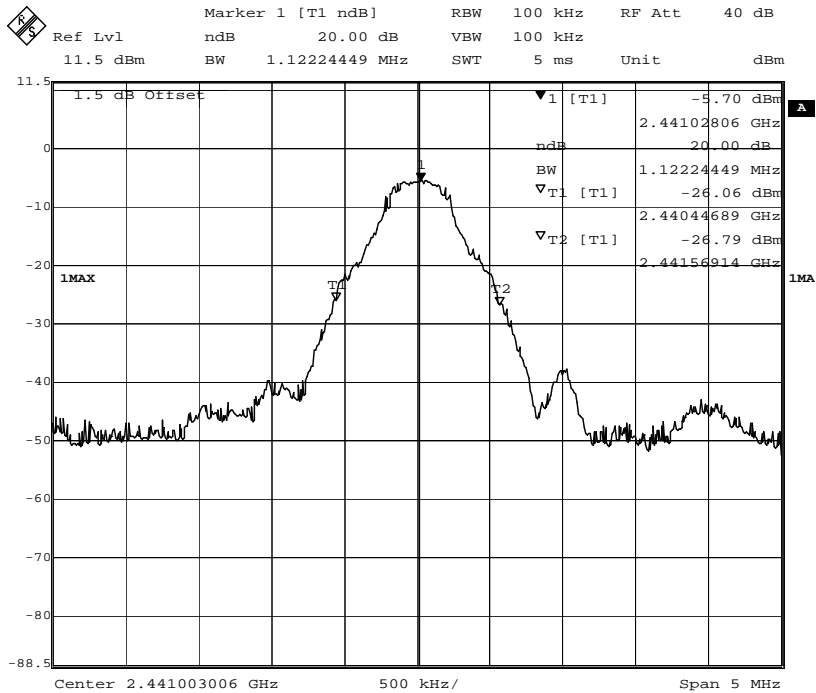


### CH 78-1Mbps

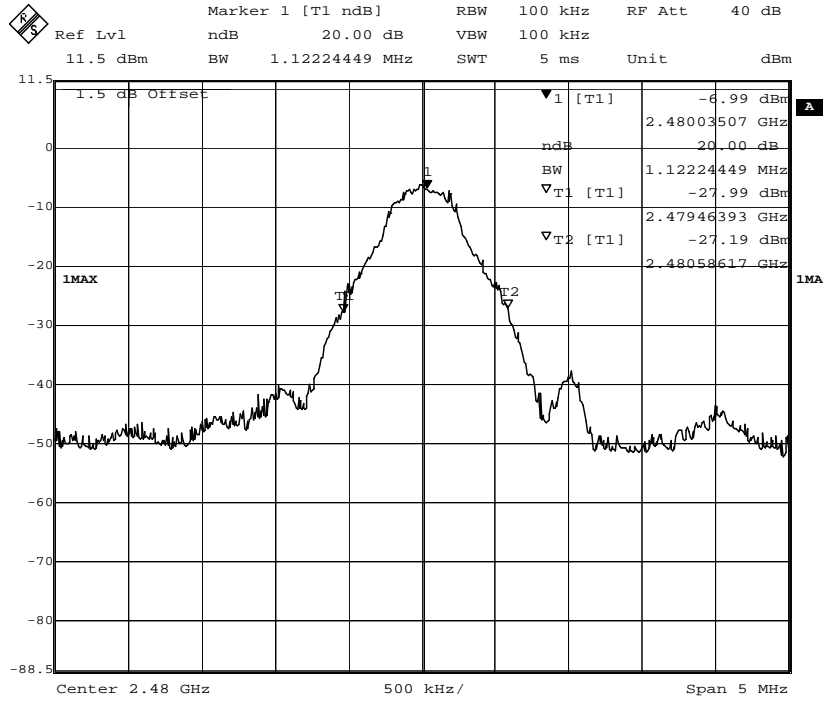


### CH 00-3Mbps

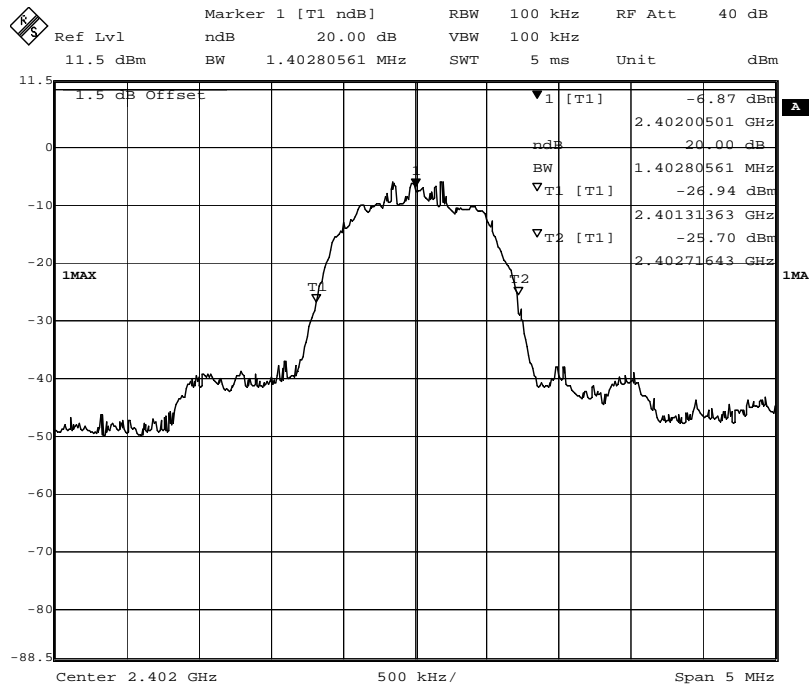

### CH 39-3Mbps

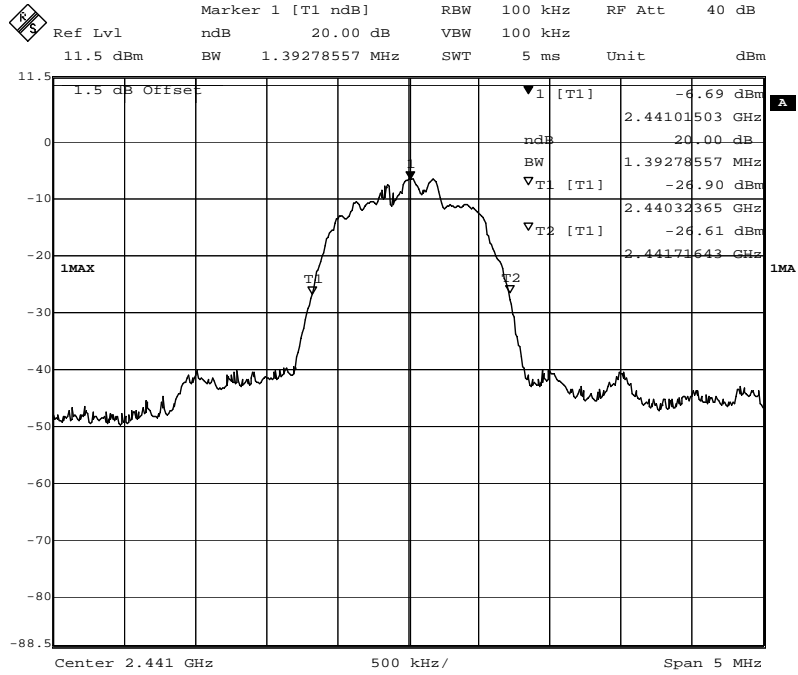

### CH 78-3Mbps

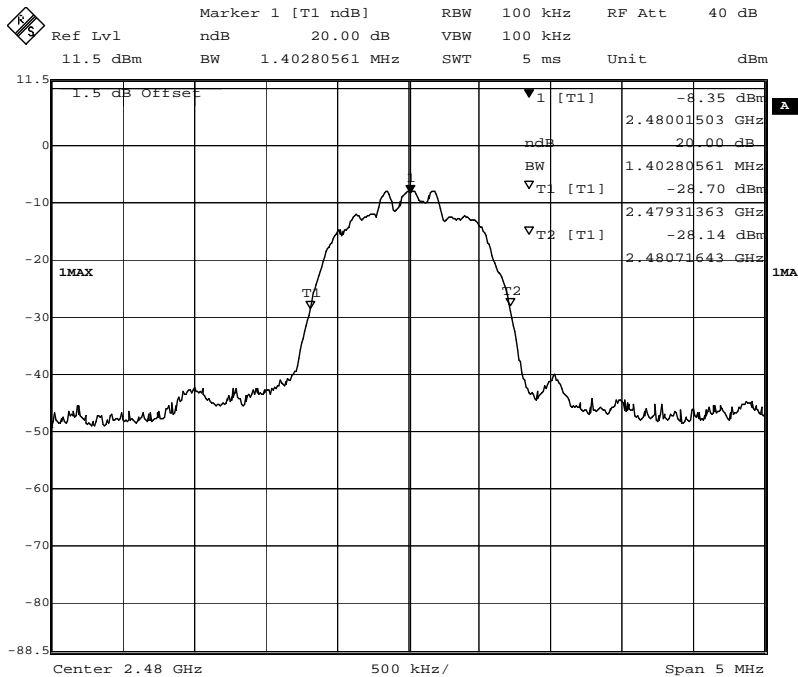

## 5.5 Carrier Frequencies Separated

### 5.5.1 Applied procedures / Limit

15.247(a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 5.5.2 Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as RBW=100kHz, VBW $\geq$ RBW, Sweep time=Auto, Detector Function=Peak.
- (2) The EUT should be transmitting at its maximum data rate. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. also shall be performed at different modes of operation.

### 5.5.3 Deviation from standard

No deviation.

### 5.5.4 Test results

EUT:	LED Projector	Model Name :	XEC09
Temperature:	22 °C	Relative Humidity:	53%
Pressure:	1010 hPa	Test Power :	DC 19V from adapter, AC 120V/60Hz foradapter
Test Mode :	TX 3Mbps(the worst case)		

#### Test result:


Test Channel	Carrier Frequencies Separated	Pass/Fail
Lower Channels (channel 0 and channel 1)	1.002MHz	Pass
Middle Channels (channel 39 and channel 40)	1.011MHz	Pass
Upper Channels (channel 77 and channel 78)	1.010MHz	Pass

#### Remark:


The limit is maximum two-thirds of the 20 dB bandwidth: 934 KHz.




### CH 00-1Mbps

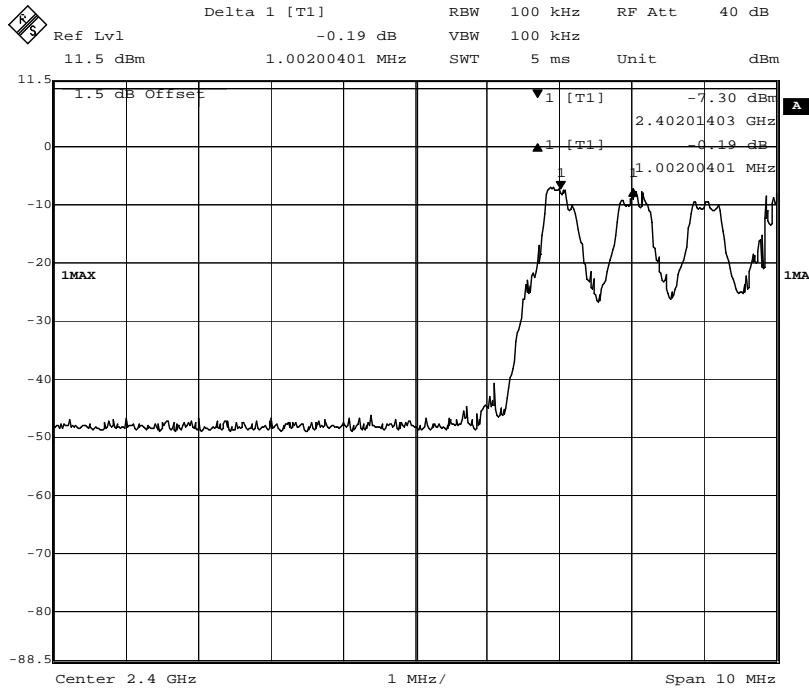

### CH 39-1Mbps

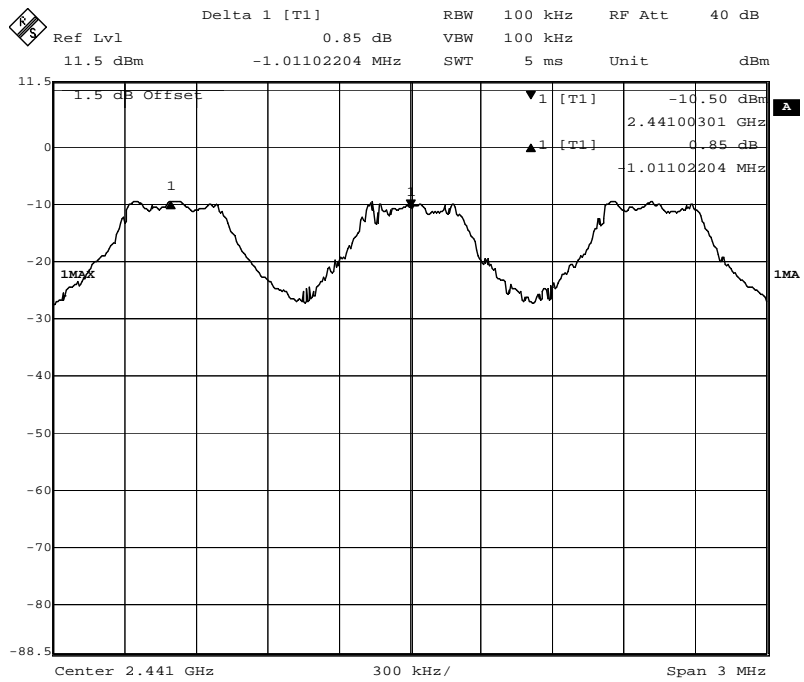

### CH 78-1Mbps

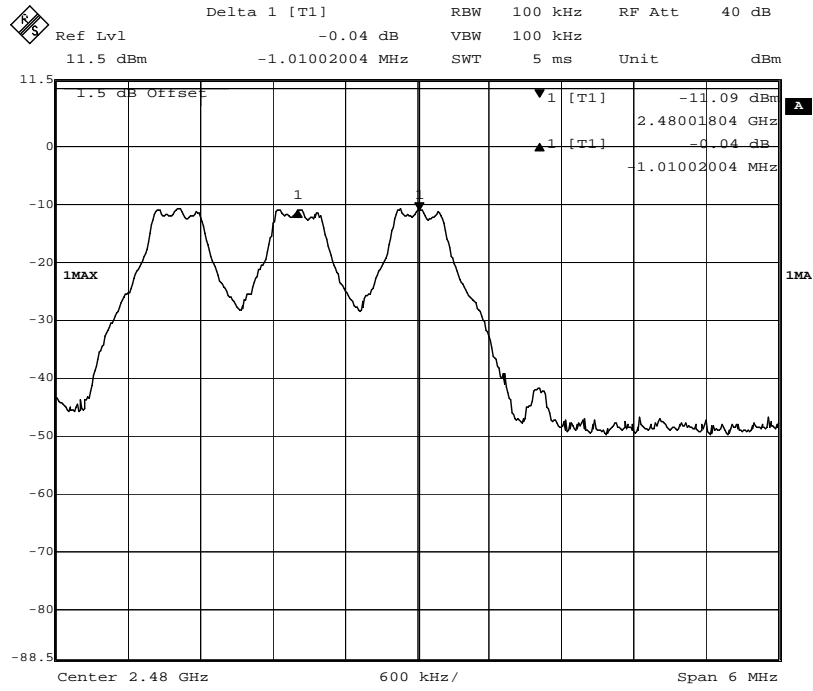

**Test result: The unit does meet the FCC requirements.**

## 5.6 Hopping Channel Number

### 5.6.1 Applied procedures / Limit

15.247(a) (1) (iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


### 5.6.2 Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer , set the Spectrum Analyzer as RBW=100kHz,VBW $\geq$ RBW, Sweep time=Auto, Detector Function=Peak Trace=Maxhold.
- (2) The EUT should be have its hopping function enabled. Maxhold and record hopping channels It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

### 5.6.3 Test result

Hopping Channel Number result		
Operating Mode: 1Mbps\ 3Mbps Mode		Test date:2015-09-30
Result	Limit	Conclusion
79	15	Pass

EUT:	LED Projector	Model Name :	XEC09
Temperature:	22 °C	Relative Humidity:	53%
Pressure:	1010 hPa	Test Power :	DC 19V from adapter, AC 120V/60Hz for adapter
Test Mode :	TX 1Mbps		

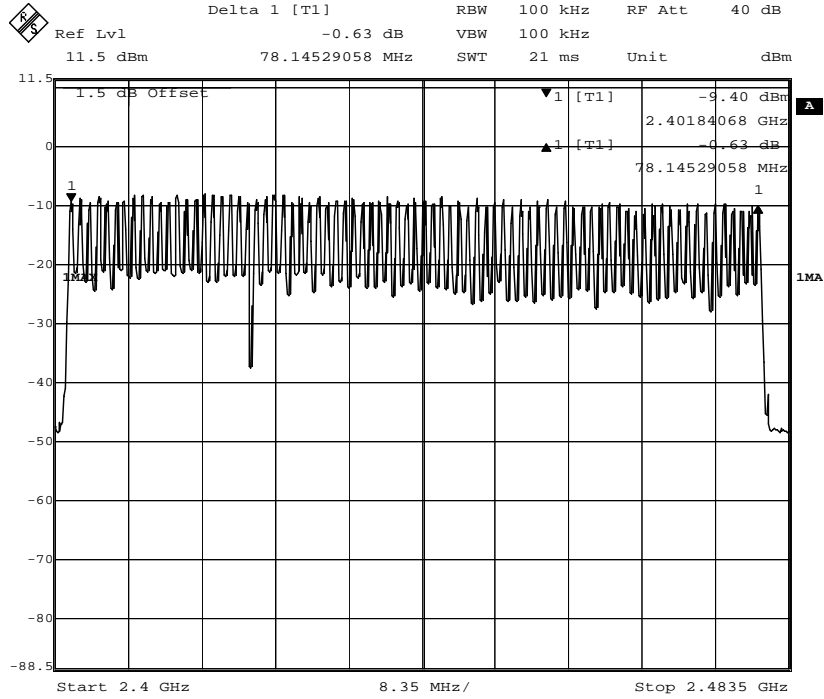

**Test result: The unit does meet the FCC requirements.**

## 5.7 Dwell time

### 5.7.1 Applied procedures / Limit

15.247(a) (1) (iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 5.7.2 Test procedure

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. centered on a hopping channel;
3. Set RBW = 1 MHz and VBW = 1 MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Detector Function = Peak. Trace = Max hold;
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). Repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.

### 5.7.3 Test result

EUT:	LED Projector	Model Name :	XEC09
Temperature:	22 °C	Relative Humidity:	53%
Pressure:	1010 hPa	Test Power :	DC 19V from adapter, AC 120V/60Hz for adapter
Test Mode :	3DH1/3DH3/3DH5		

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

<b>1. Channel 0: 2.402GHz</b>									
3DH1 time slot	=	0.401 (ms)	*	33	*	(31.6/3.16)	=	132.330	ms
3DH3 time slot	=	1.622 (ms)	*	16	*	(31.6/3.16)	=	259.520	ms
3DH5 time slot	=	2.892 (ms)	*	11	*	(31.6/3.16)	=	318.120	ms
<b>2. Channel 39: 2.441GHz</b>									
3DH1 time slot	=	0.401 (ms)	*	33	*	(31.6/3.16)	=	132.330	ms
3DH3 time slot	=	1.561 (ms)	*	16	*	(31.6/3.16)	=	249.760	ms
3DH5 time slot	=	2.610 (ms)	*	11	*	(31.6/3.16)	=	287.100	ms
<b>3. Channel 78: 2.480GHz</b>									
3DH1 time slot	=	0.406 (ms)	*	33	*	(31.6/3.16)	=	133.980	ms
3DH3 time slot	=	1.676 (ms)	*	16	*	(31.6/3.16)	=	268.160	ms
3DH5 time slot	=	2.698 (ms)	*	11	*	(31.6/3.16)	=	296.780	ms

The average time of occupancy in the specified 31.6 second period is equal to pulse width\*(# of pulse in observation period)\*(test period / observation period)

The results are not greater than 0.4 seconds.


**The unit does meet the FCC requirements.**

Result plot as follows:


1. Lowest channel (2.402 GHz):

(1). 3DH1

Pulse Width:

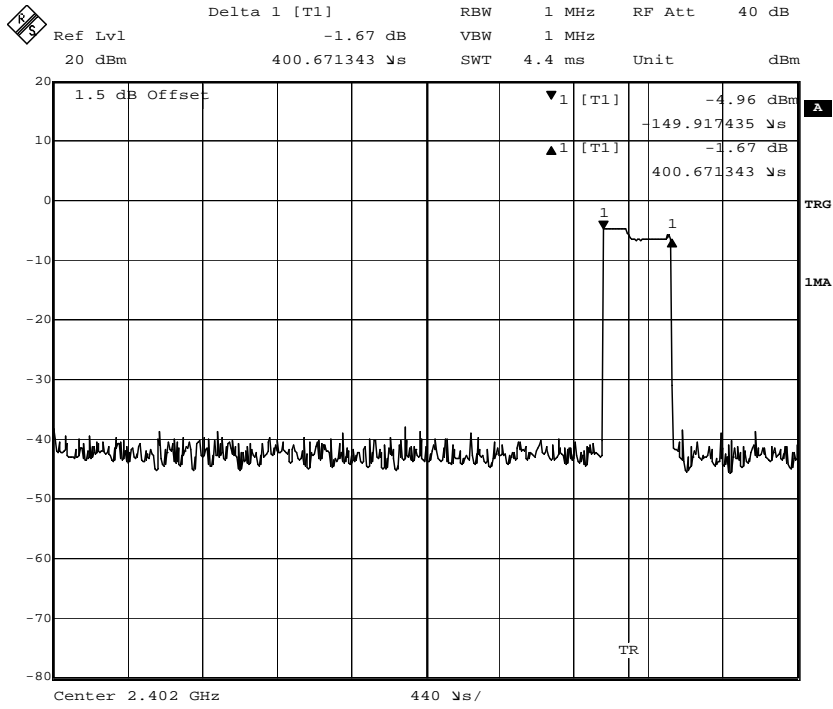


Number of Pulses in 3.16 S observation period:

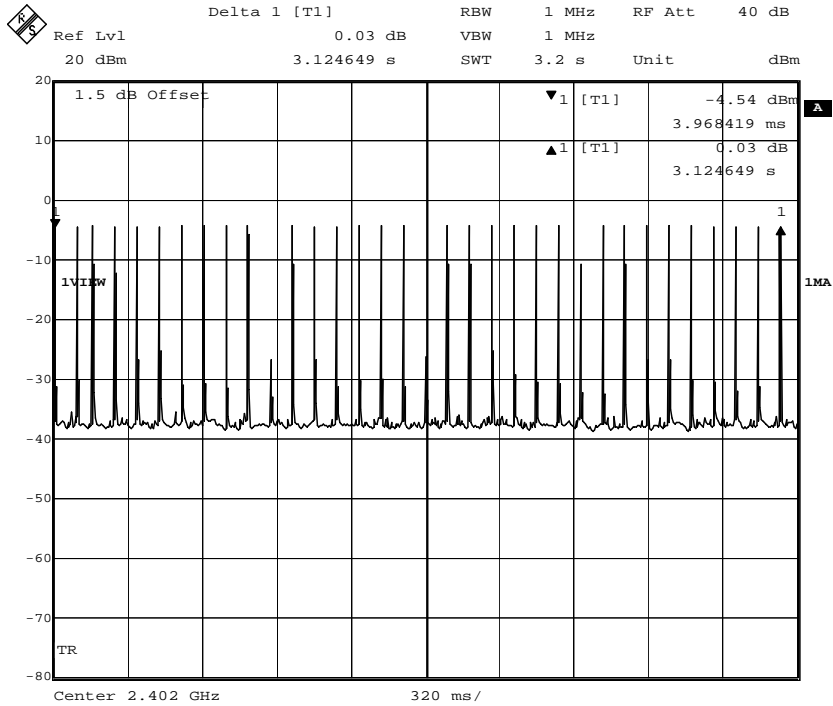


(2) 3DH3

Pulse Width:

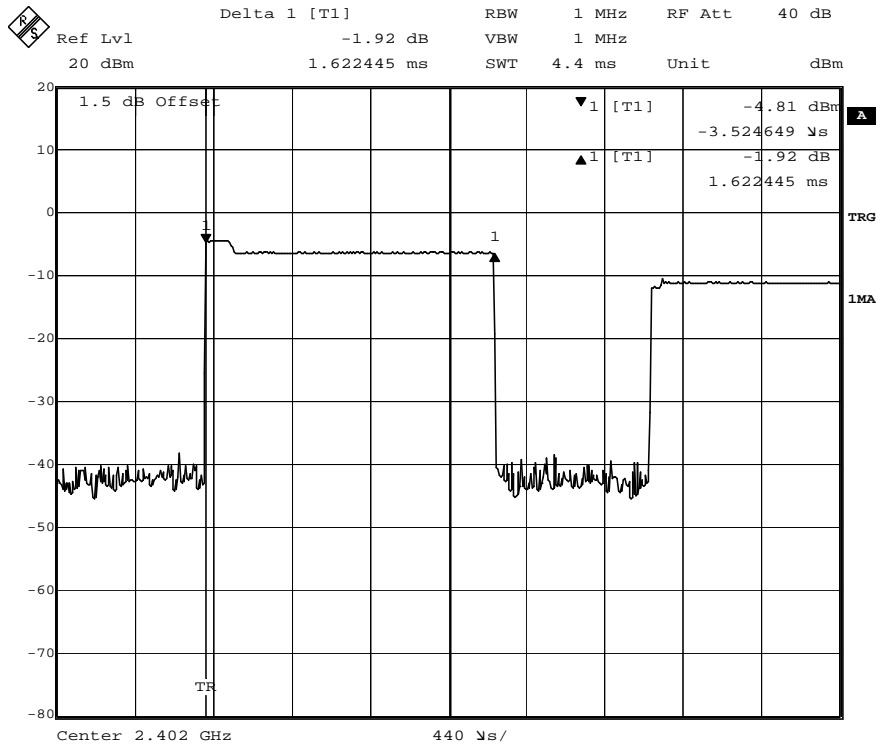


Number of Pulses in 3.16 S observation period:

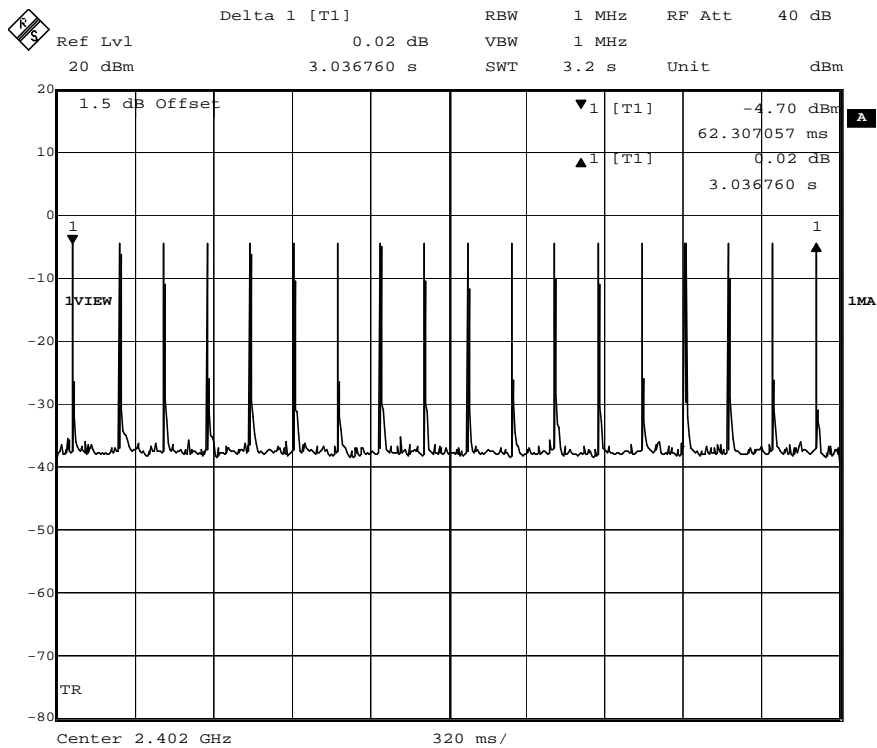




(3) 3DH5

Pulse Width:

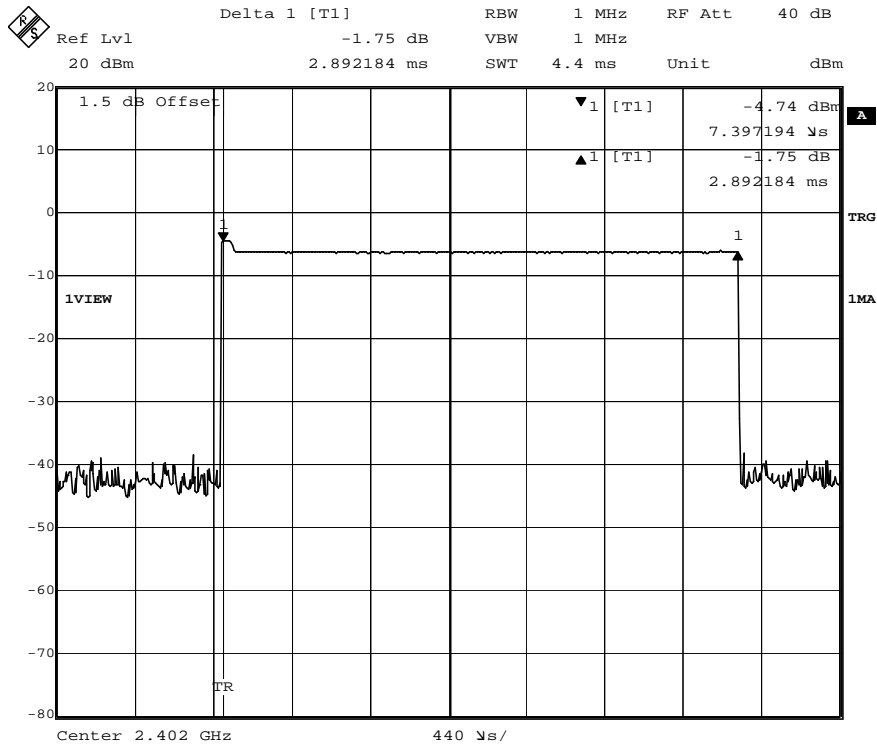


Number of Pulses in 3.16 S observation period:

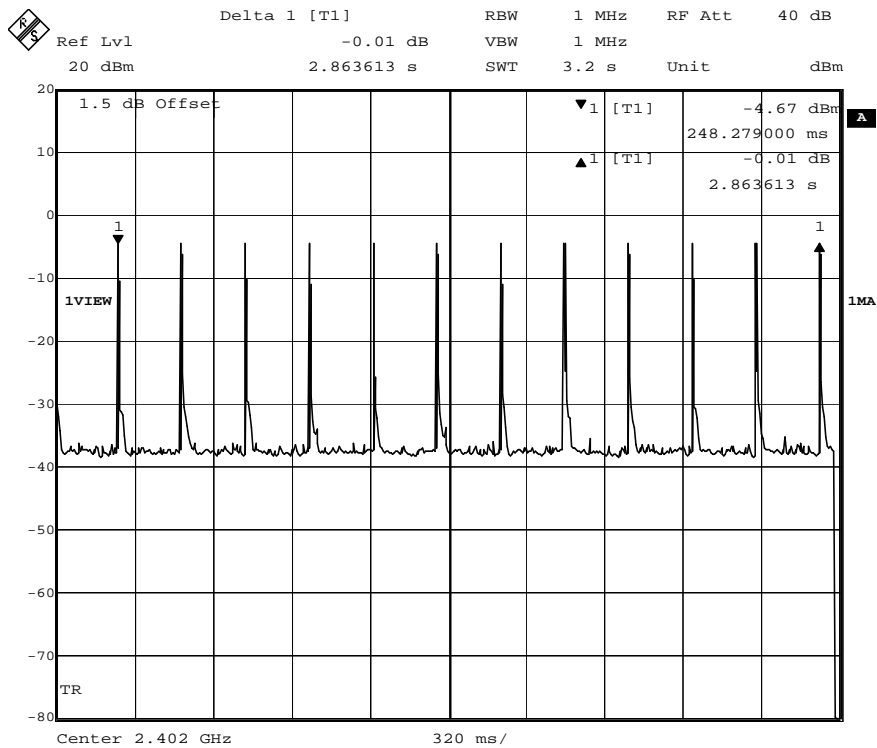


2. Middle Channel (2.441 GHz):

(1). 3DH1

Pulse Width:

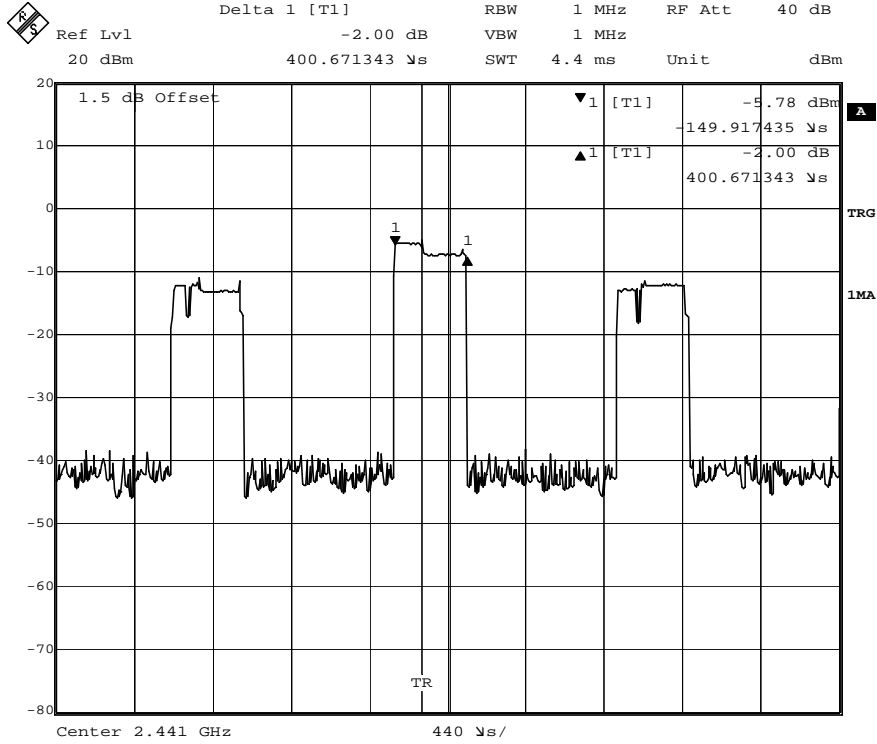


Number of Pulses in 3.16 S observation period:

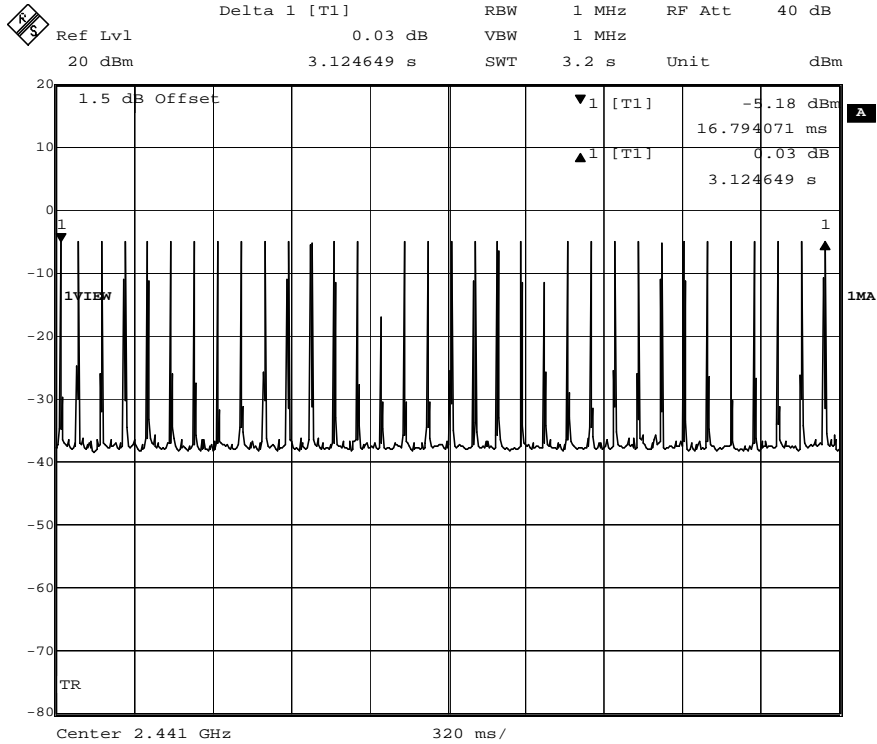


(2) 3DH3

Pulse Width:

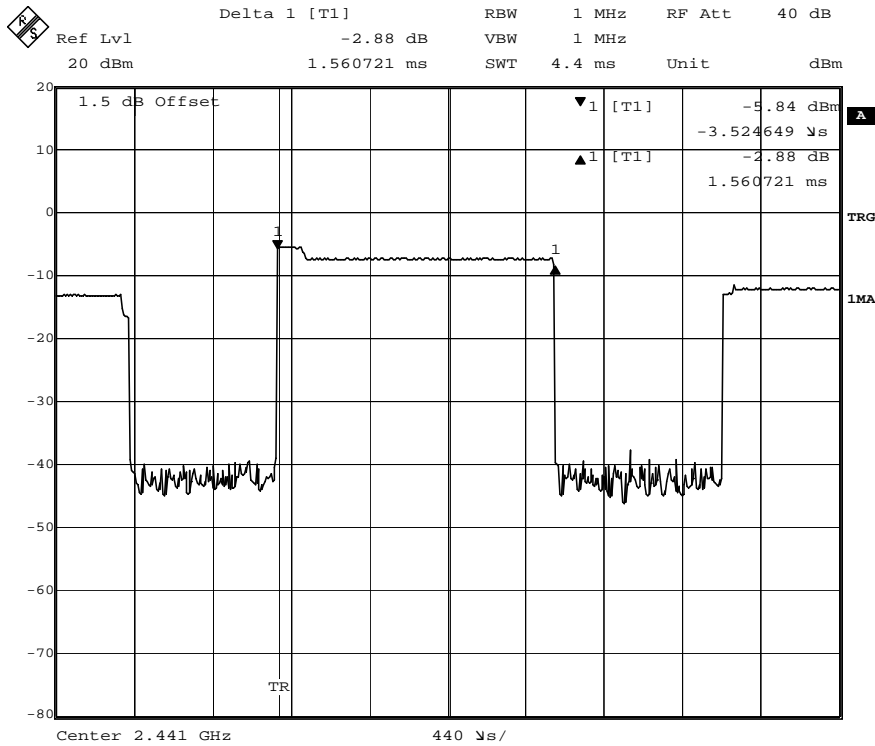


Number of Pulses in 3.16 S observation period:

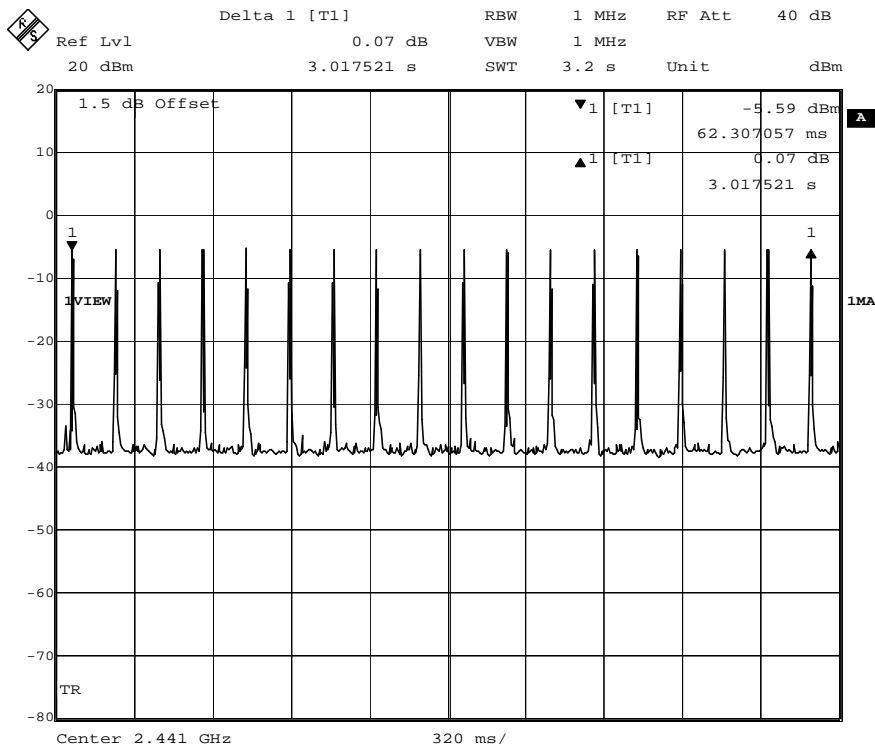


(3) 3DH5

Pulse Width:

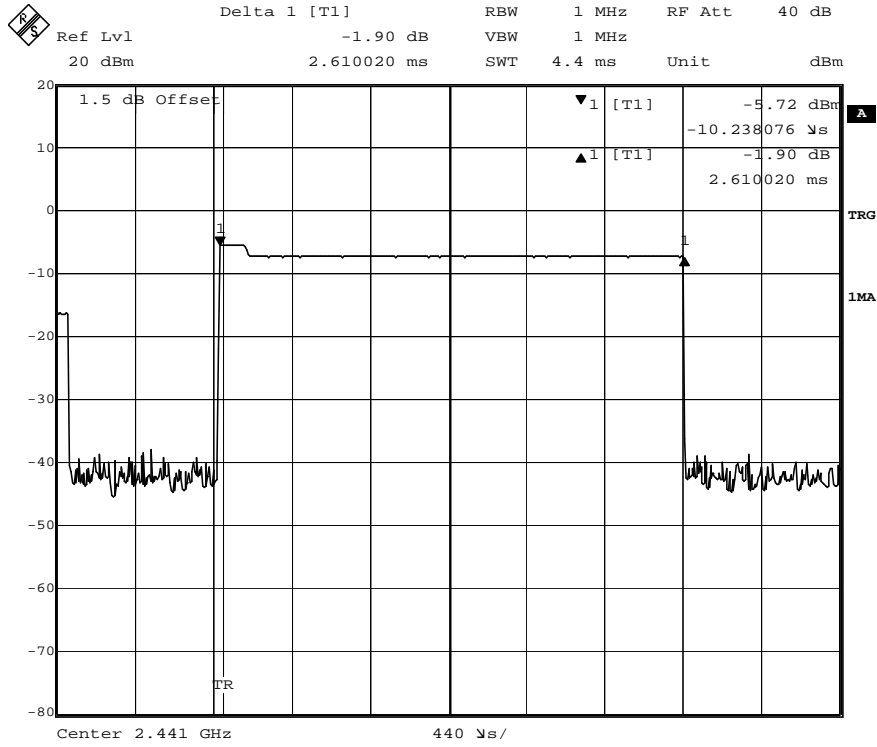


Number of Pulses in 3.16 S observation period:

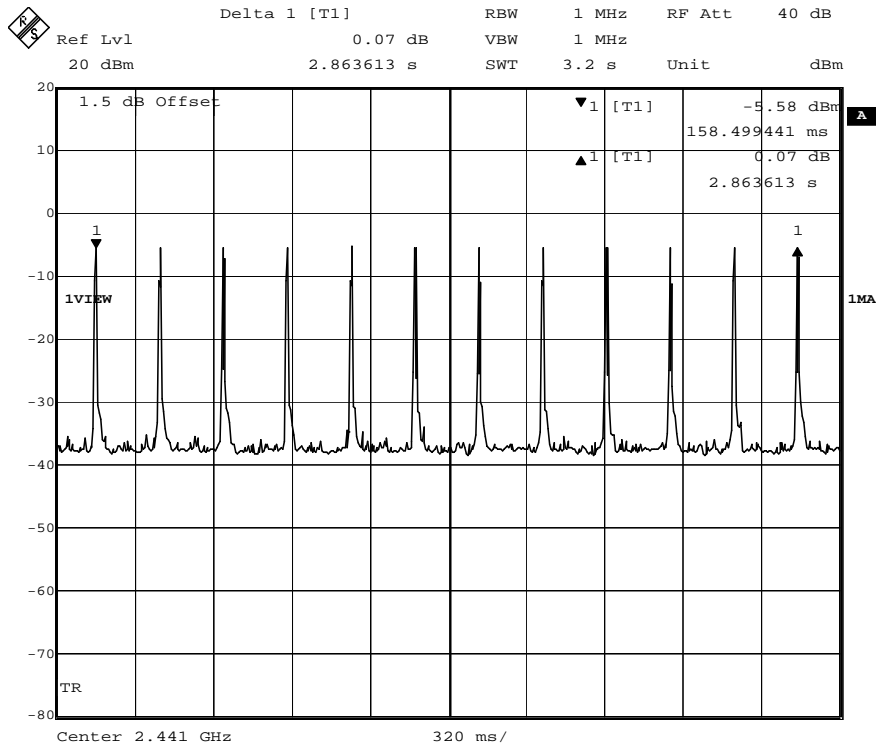


### 3. Highest Channel (2.480 GHz):

(1). 3DH1

Pulse Width:

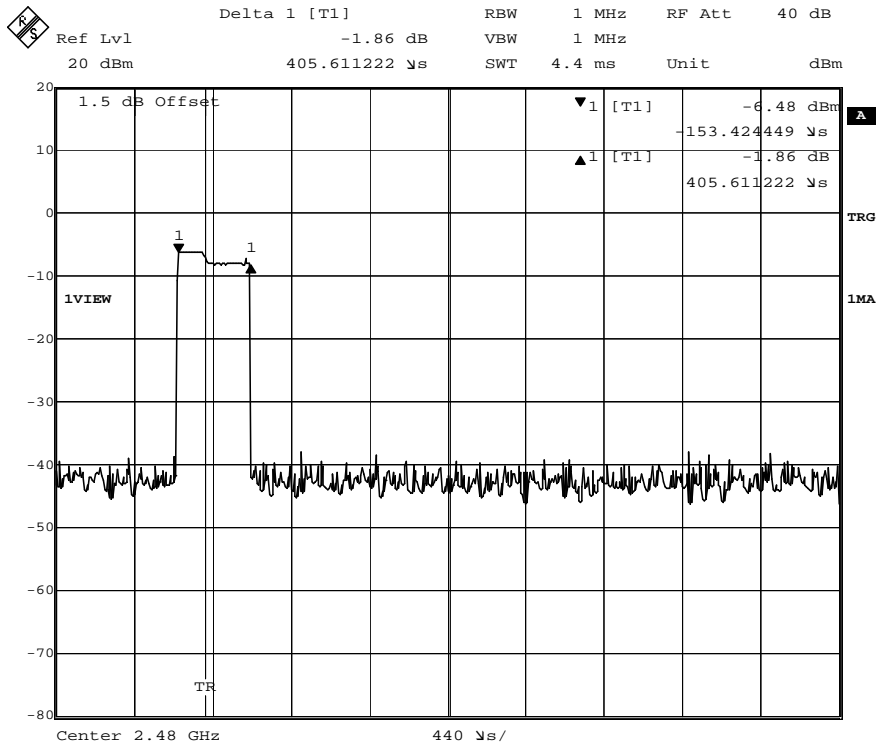


Number of Pulses in 3.16 S observation period:

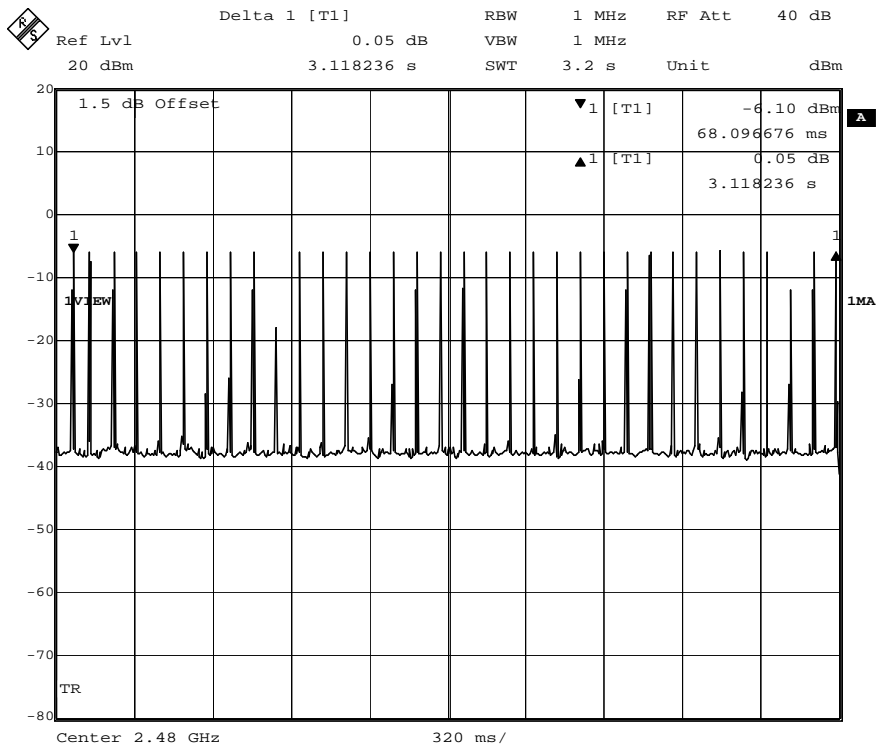


(2) 3DH3

Pulse Width:

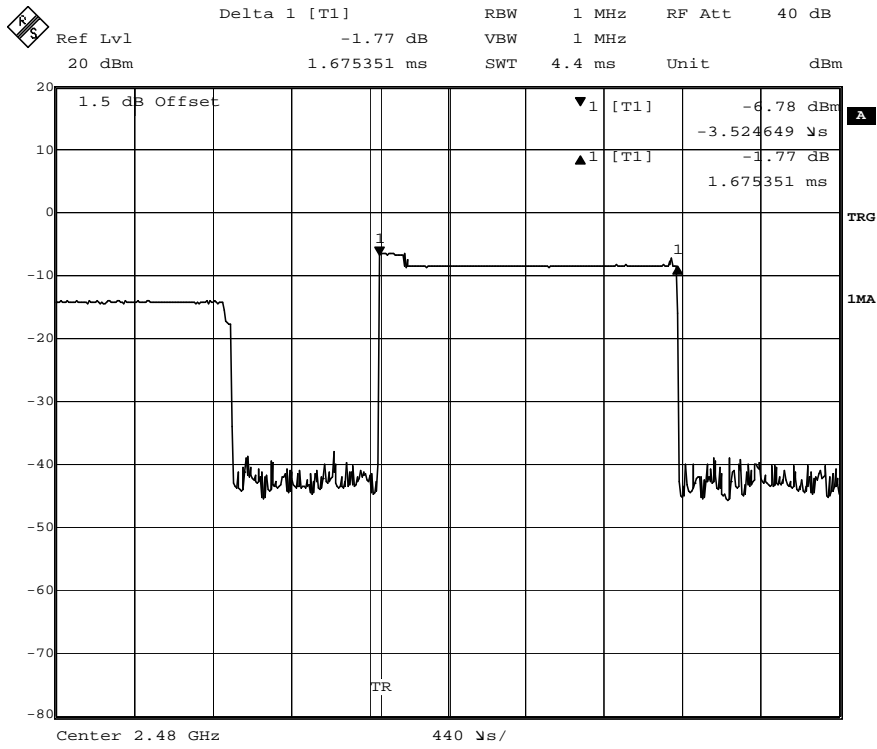


Number of Pulses in 3.16 S observation period:

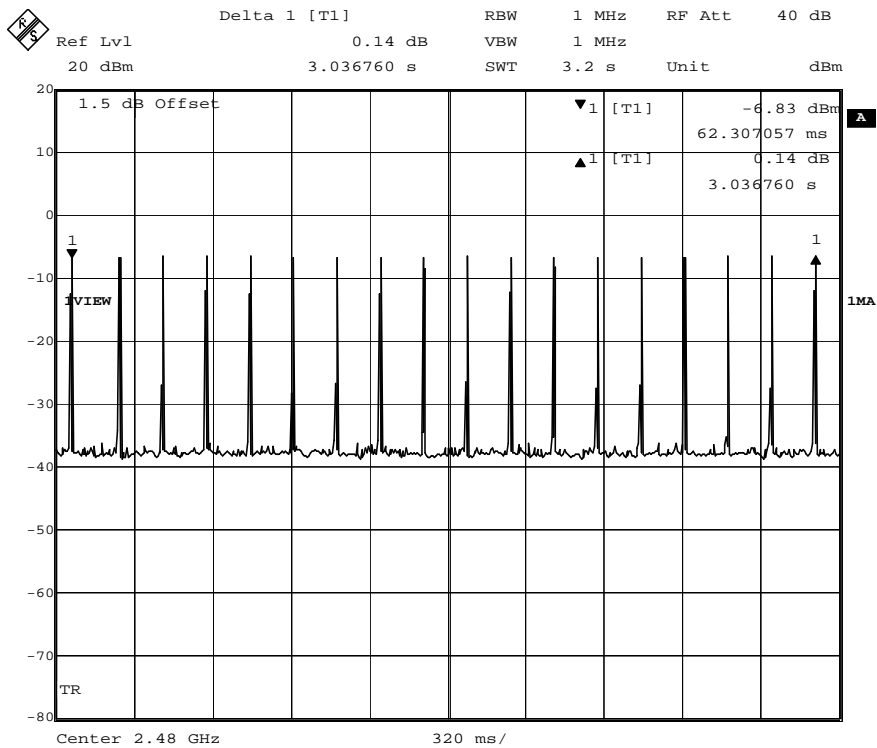


## (3) 3DH5

## Pulse Width:

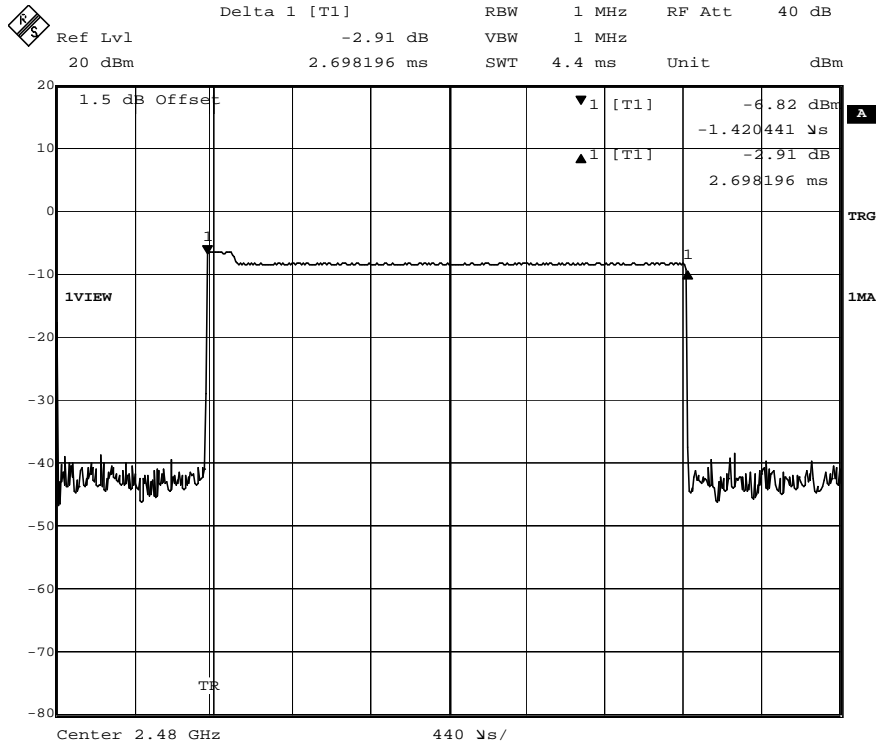

## Number of Pulses in 3.16 S observation period:

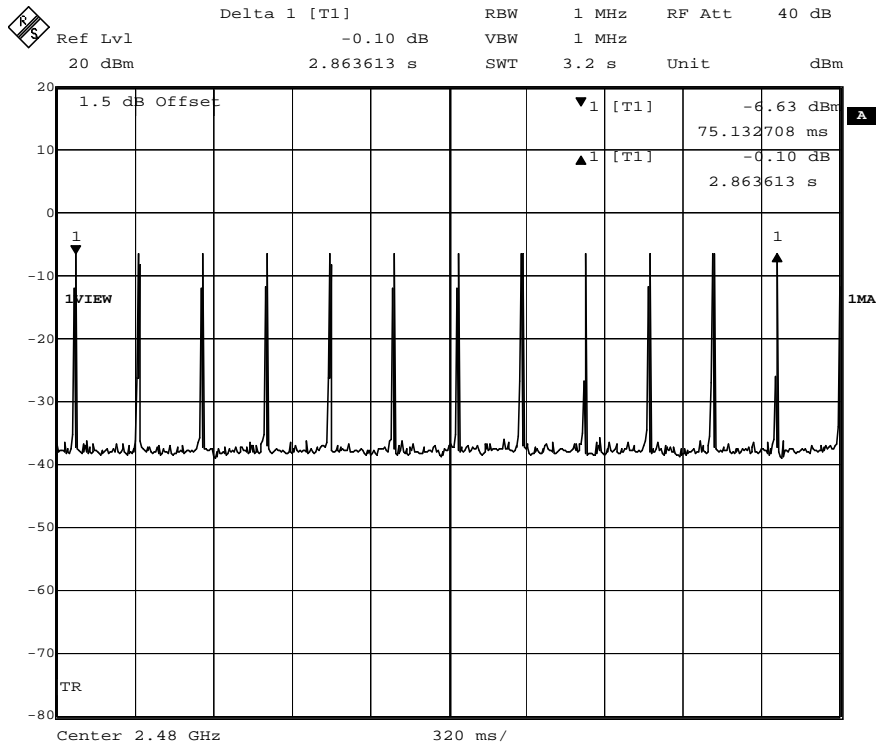

## 5.8 Maximum Peak Output Power

### 5.8.1 Applied procedures / Limit

15.247(b) (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 5.8.2 Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as RBW=3MHz,VBW $\geq$ RBW, Sweep time=Auto, Detector Function=Peak.
- (2) The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. also shall be performed at different modes of operation.

### 5.8.3 Deviation from standard

No deviation.

### 5.8.4 Test setup






### 5.8.5 Test results


EUT:	LED Projector	Model Name :	XEC09
Temperature:	22 °C	Relative Humidity:	60%
Pressure:	1010 hPa	Test Voltage :	DC 19V from adapter, AC 120V/60Hz for adapter
Test Mode :	TX		
Note: All the data rates have be tested and the worst-case as the table below.			

<b>Test Result:</b>				
<b>Normal mode:</b>				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	-5.85	30.0	Pass
Middle	2441	-6.49	30.0	Pass
Highest	2480	-7.90	30.0	Pass
<b>EDR mode:</b>				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	-5.89	30.0	Pass
Middle	2441	-4.74	30.0	Pass
Highest	2480	-7.21	30.0	Pass
<b>Remark: cable lose=1.5 dB</b>				
<b>Test result: The unit does meet the FCC requirements.</b>				


### CH 00-1Mbps

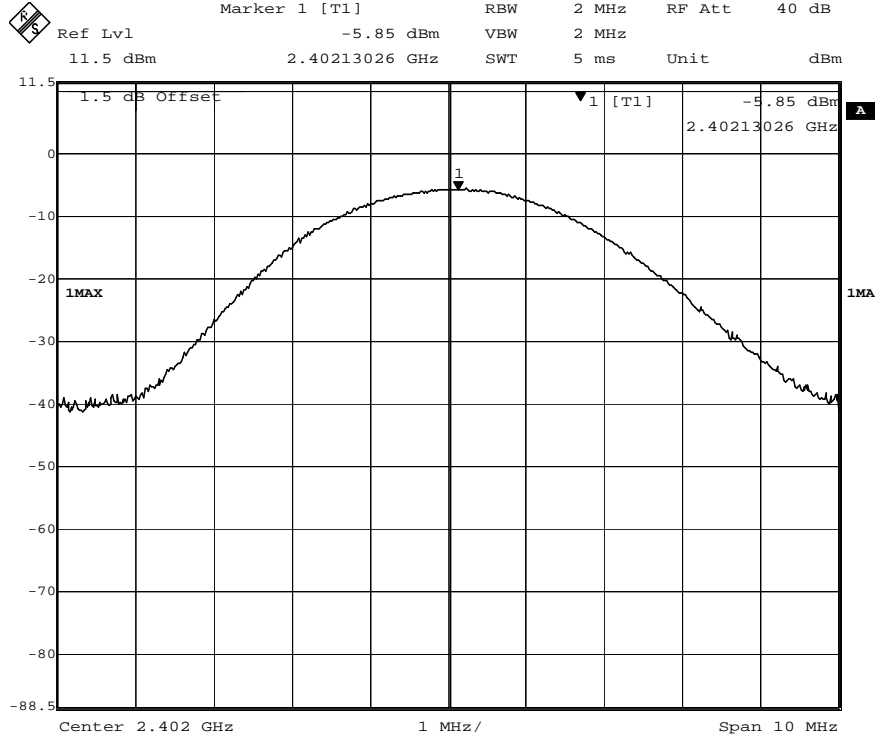


### CH 39-1Mbps

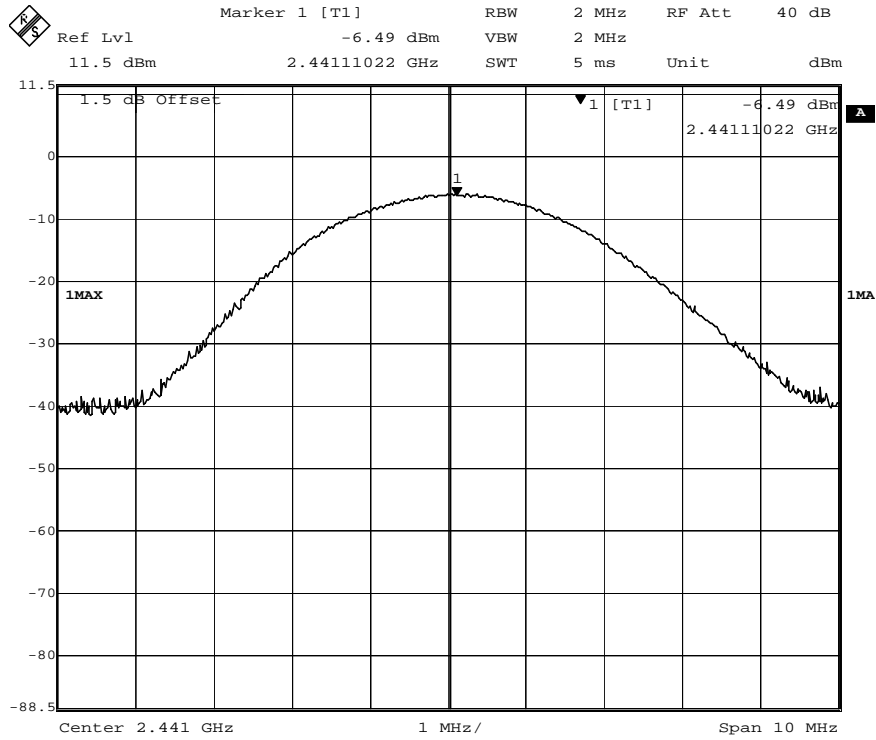


### CH 78-1Mbps

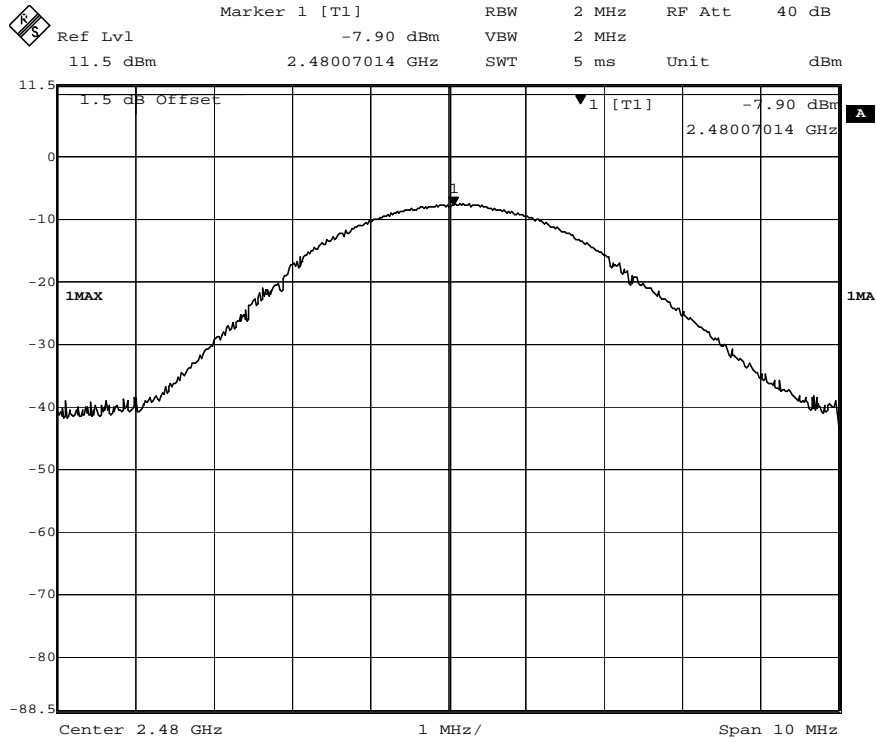


### CH 00-3Mbps

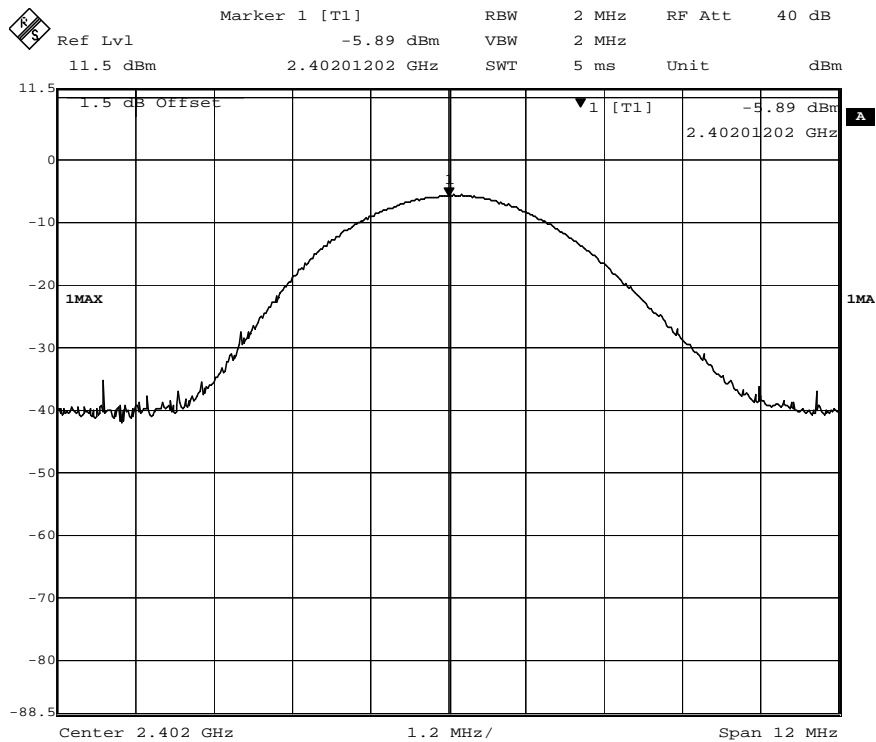

### CH 39-3Mbps

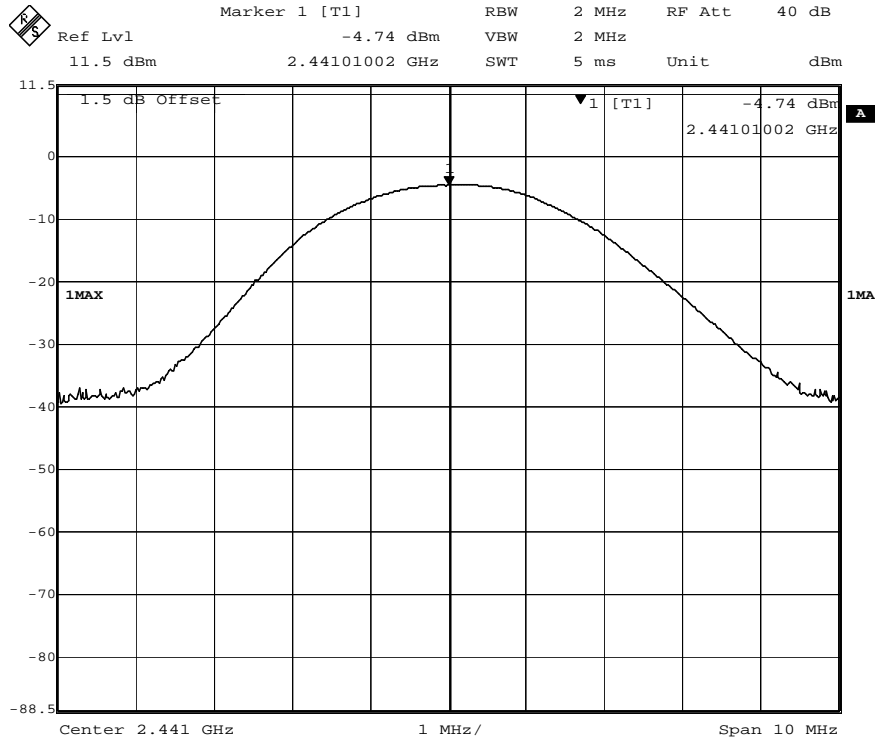

### CH 78-3Mbps

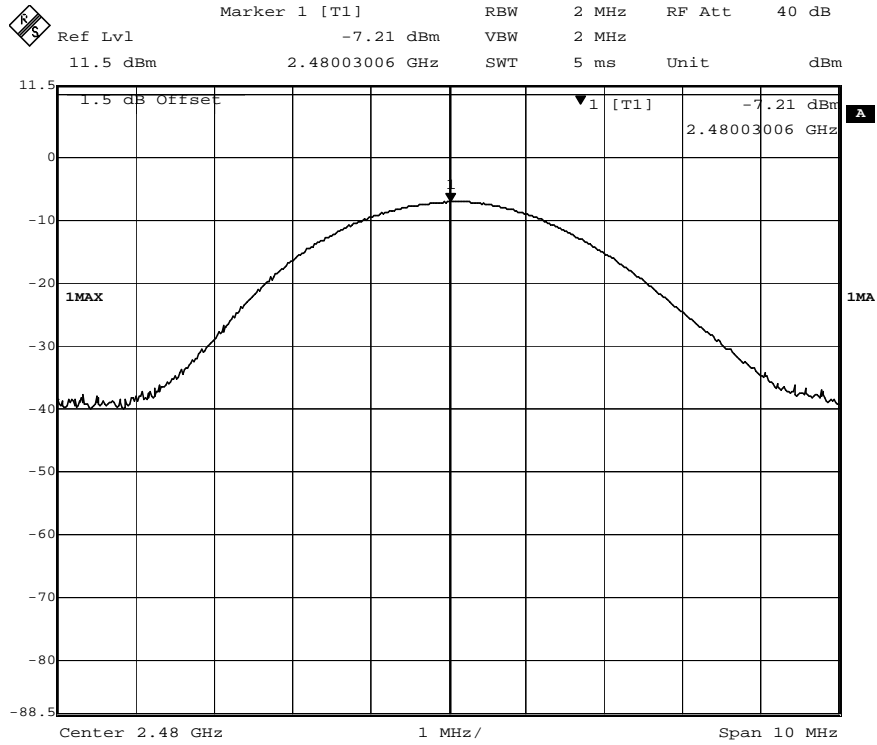

## 5.9 Band edge

### 5.9.1 Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 5.9.2 Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW=100kHz, VBW $\geq$ RBW, Sweep time=Auto, Detector Function=Peak.

### 5.9.3 Deviation from standard


No deviation.

### 5.9.4 Test setup




### 5.9.5 Test results


#### CH00 (Lower) Data rate 1Mbps

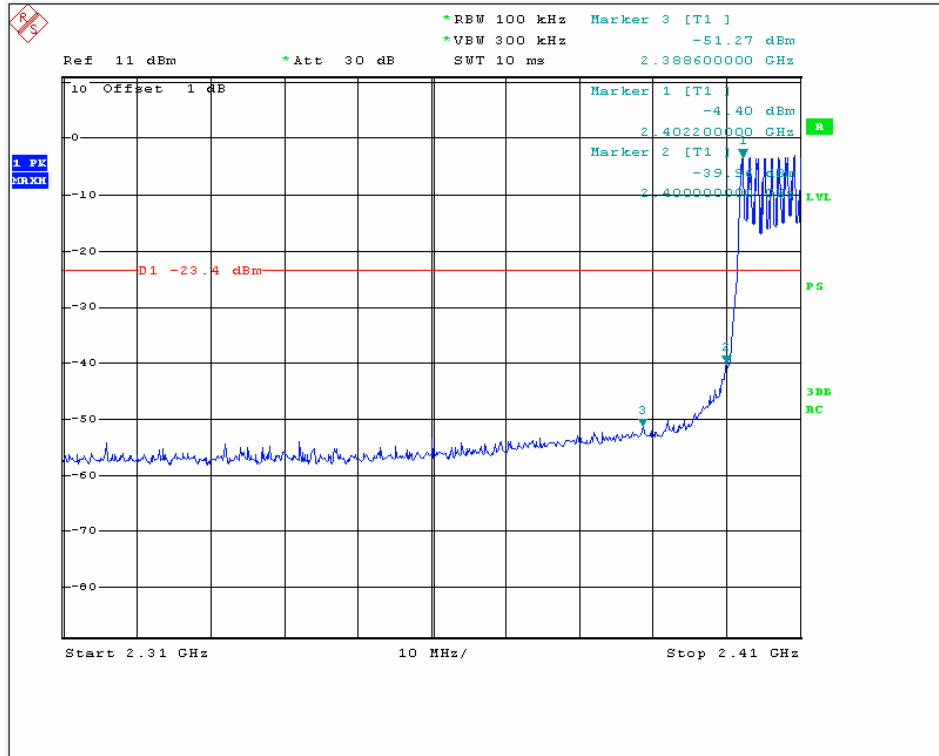


#### CH 78 (Upper) Data rate 1Mbps

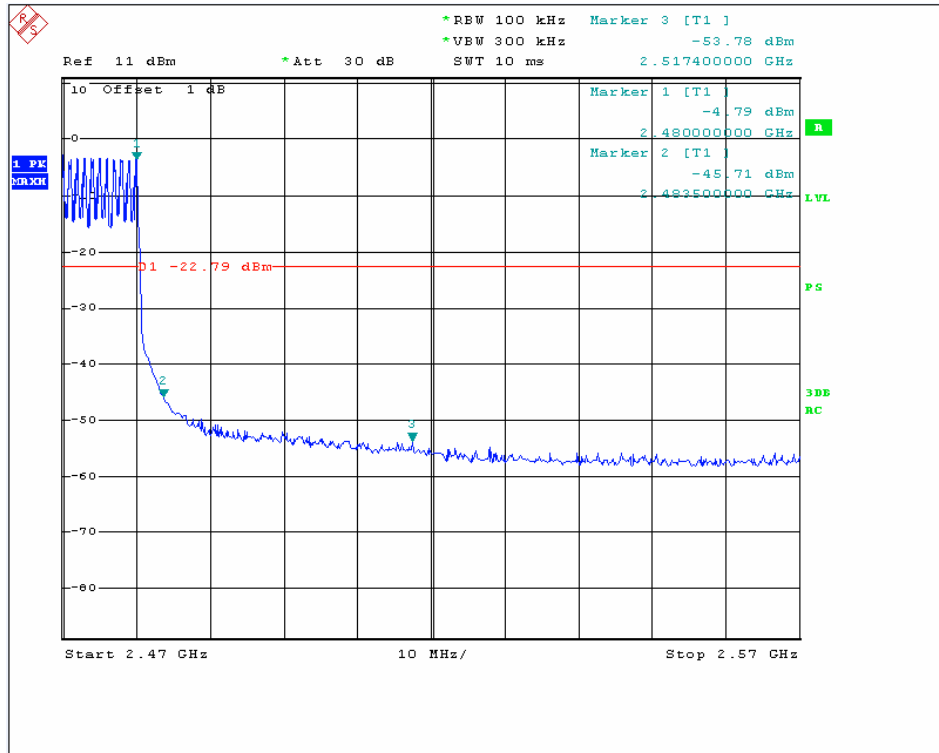


### CH00 (Lower) Data rate 1Mbps

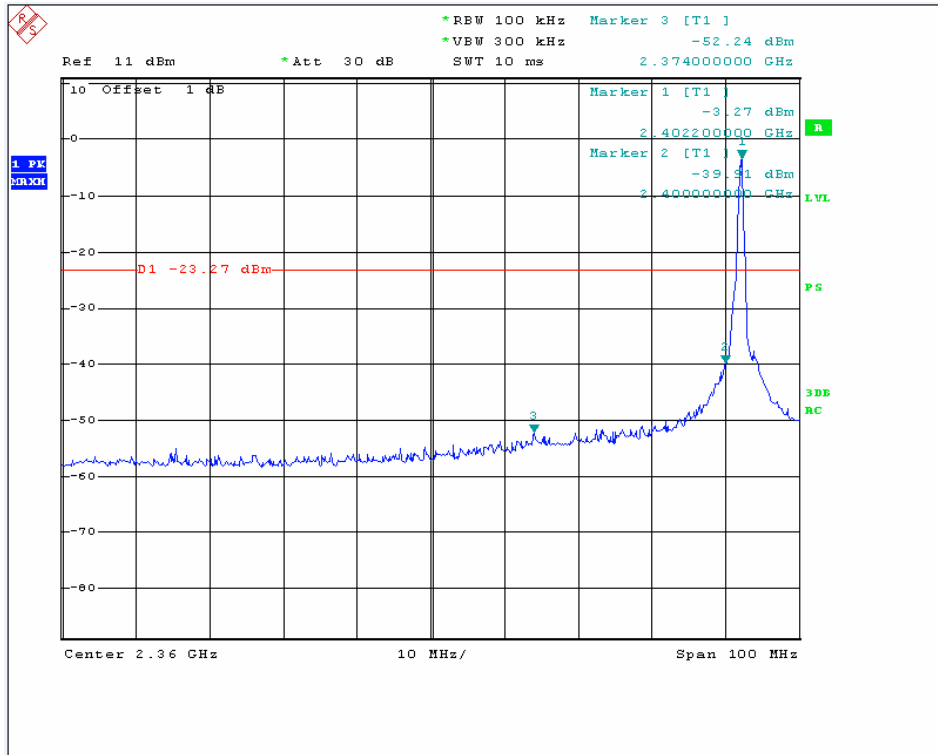


### CH 78 (Upper) Data rate 1Mbps

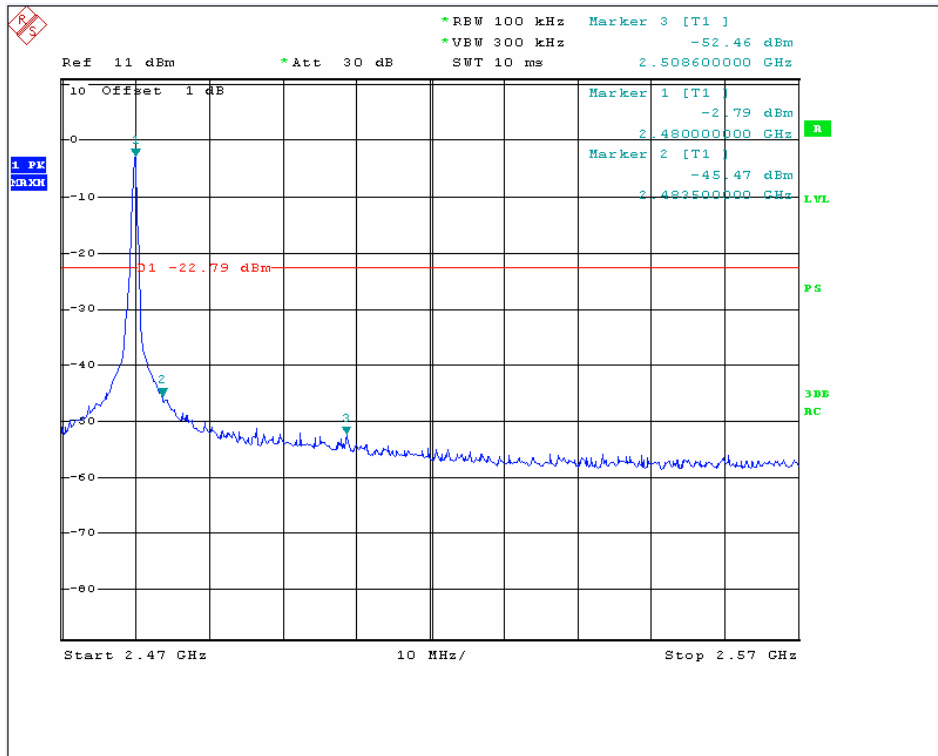

### CH00 (Lower) Data rate 3Mbps

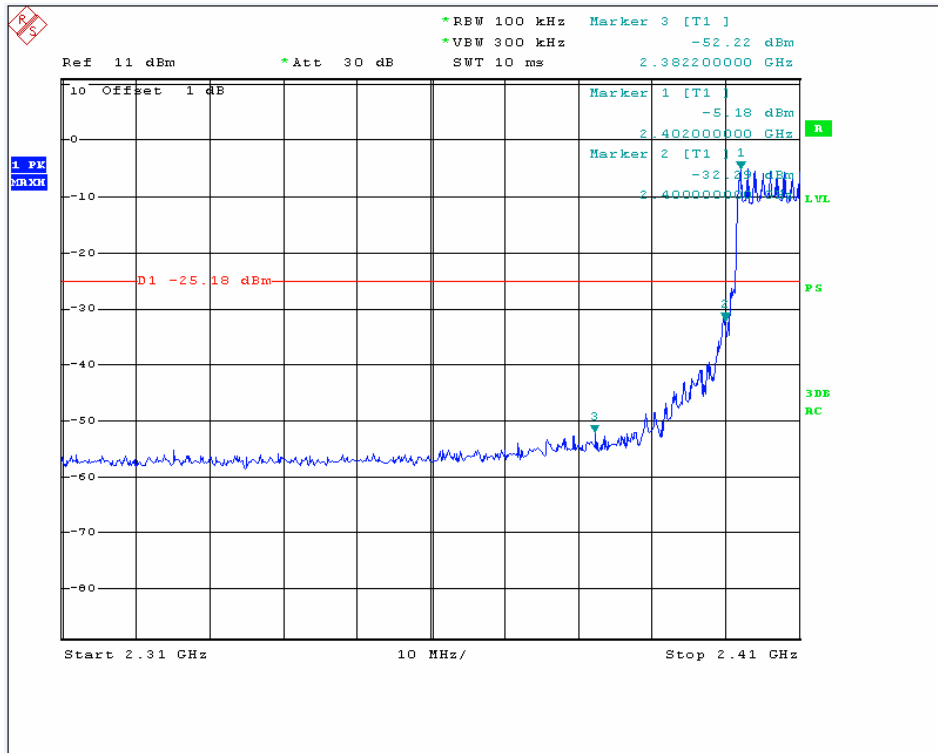


### CH 78 (Upper) Data rate 3Mbps

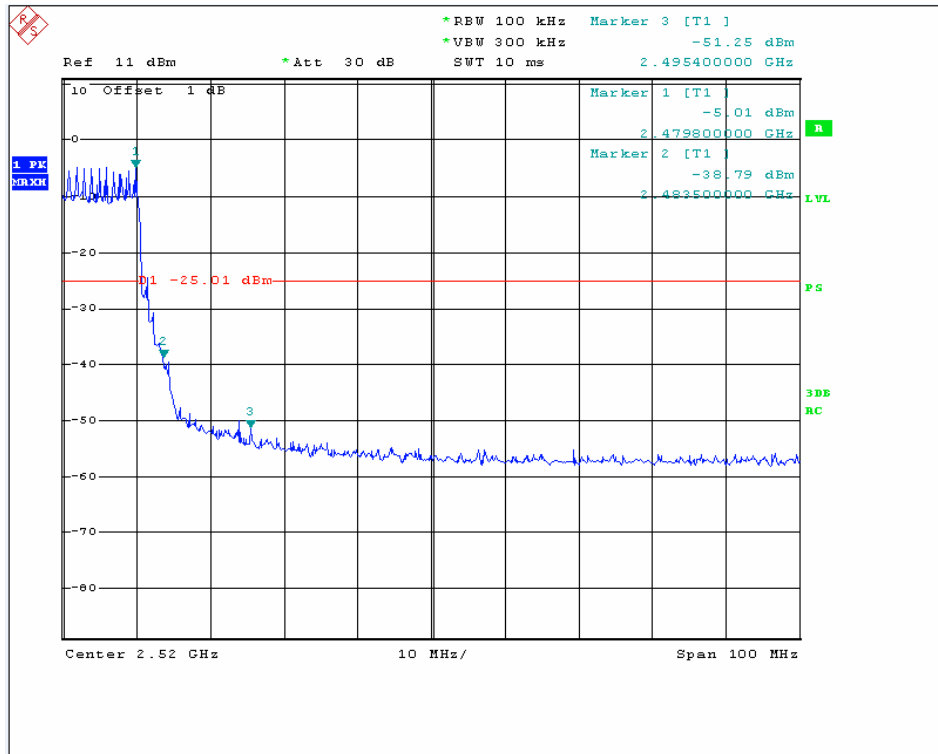



### CH00 (Lower) Data rate 3Mbps

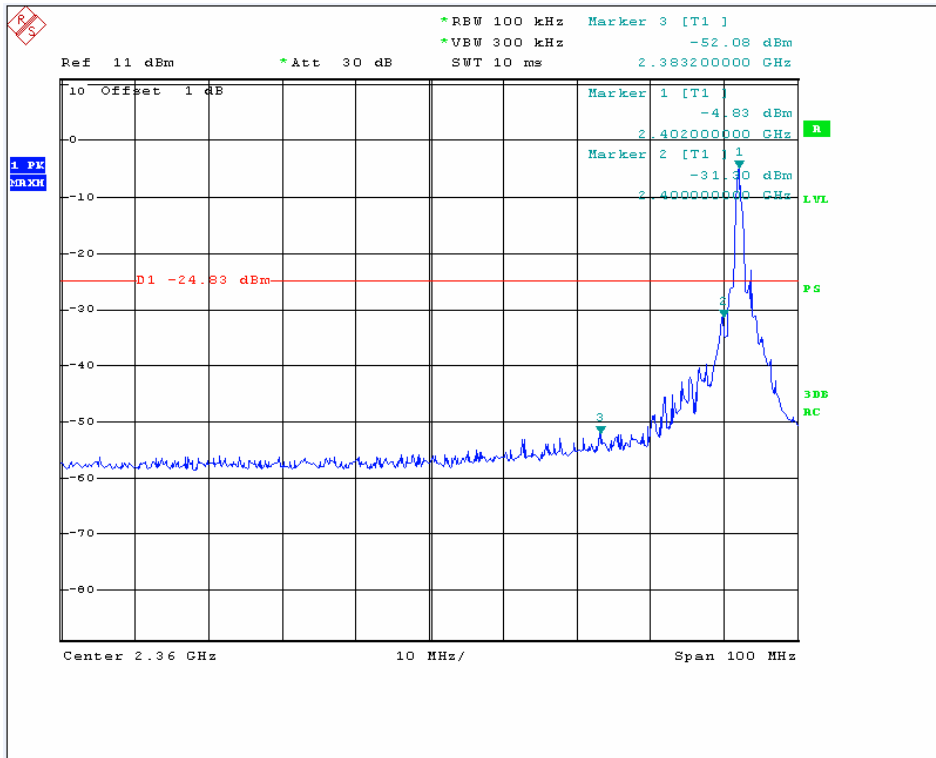

### CH 78 (Upper) Data rate 3Mbps

