




FCC PART 15.407 TEST REPORT

For

Chengdu XGimi Technology Co., Ltd.

5F, Building A7, Tianfu Software Park, Tianfu Avenue, Hi-tech Zone, Chengdu, China

FCC ID: 2AFENXG08X

Report Type: Original Report	Product Name: LED Projector
Report Number:	<u>RSC170821002D</u>
Report Date:	<u>2018-01-11</u>
Reviewed By:	Sula Huang Engineering Director 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Chengdu) No. 5040, HuiLongWan Plaza, No. 1, ShaWan Road, JinNiu District, ChengDu, Sichuan, China Tel: 028-65525123, Fax: 028-65525125 www.baclcorp.com

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Chengdu).

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
MECHANICAL DESCRIPTION OF EUT	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
MEASUREMENT UNCERTAINTY	5
TEST METHODOLOGY	5
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE.....	7
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	11
EXTERNAL I/O CABLE	11
BLOCK DIAGRAM OF TEST SETUP	12
TEST EQUIPMENTS LIST.....	13
SUMMARY OF TEST RESULTS	14
FCC §15.407(f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	15
APPLICABLE STANDARD.....	15
FCC §15.203 - ANTENNA REQUIREMENT	17
APPLICABLE STANDARD.....	17
ANTENNA CONNECTOR CONSTRUCTION	17
FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS	18
APPLICABLE STANDARD.....	18
EUT SETUP.....	18
EMI TEST RECEIVER SETUP	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST PROCEDURE	19
TEST RESULTS SUMMARY	19
TEST DATA	19
FCC §15.209, §15.205 & §15.407(b) (1) (4)(i) (6) (7) – UNDESIRABLE EMISSION, RESTRICTED BANDS	22
APPLICABLE STANDARD.....	22
EUT SETUP.....	23
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	24
TEST PROCEDURE	24
CORRECTED AMPLITUDE & MARGIN CALCULATION	24
TEST RESULTS SUMMARY	24
TEST DATA	25
FCC §15.407(b) (1), (4) (i) – BAND EDGE	42
APPLICABLE STANDARD.....	42
TEST PROCEDURE	42
TEST DATA	42
FCC §15.407(a) (5) & (e) – 26dB & 6dB BANDWIDTH	65
APPLICABLE STANDARD.....	65
TEST PROCEDURE	65
TEST DATA	66
FCC §15.407(g) – FREQUENCY STABILITY	124
APPLICABLE STANDARD.....	124
TEST PROCEDURE	124

TEST DATA	124
FCC §15.407(a) (1)(IV), (3), (4) – CONDUCTED TRANSMITTER OUTPUT POWER	129
APPLICABLE STANDARD	129
TEST PROCEDURE	129
TEST DATA	130
FCC §15.407(a) (1) (iv) (3) (5) - POWER SPECTRAL DENSITY	132
APPLICABLE STANDARD	132
TEST PROCEDURE	132
TEST DATA	133



GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The **Chengdu XGimi Technology Co., Ltd.**, model number: **XG08X (FCC ID: 2AFENXG08X)** or the "EUT" as referred to in this report was one **LED Projector**.

Mechanical Description of EUT

The EUT was measured approximately: 345 mm (L) x 338 mm (W) x 57 mm (H).
Rated input voltage: DC 19V from adapter.

AC Adapter information:

Manufacturer: SHENZHEN HUNTKEY ELECTRIC CO., LTD.

Model: HDZ1201-3C

Input: 100-240V AC, 50/60Hz

Current: 2.0A Max

Output: +19V DC, 6.32A

Note: The products, test model: XG08X, multiple models: XG07X, XG09X, XG10X, XG11X. Their differences were presented in Product Difference Statement provided by the applicant of this report. So, we selected model XG08X to fully test.

**All measurement and test data in this report was gathered from final production sample, serial number: 170821002/01 (assigned by the BACL, Chengdu). It may have deviation from any other sample. The EUT supplied by the applicant was received on 2017-08-14, and EUT conformed to test requirement.*

Objective

This type approval report is prepared on behalf of **Chengdu XGimi Technology Co., Ltd.** in accordance with Part 2-Subpart J, Part 15-Subparts A, C and E of the Federal Communications Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, section subpart C, 15.203, 15.205, 15.207, 15.209 and Subpart E, 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS submissions with FCC ID: 2AFENXG08X

FCC Part 15.247 DTS submissions with FCC ID: 2AFENXG08X

FCC Part 15.249 DXX submissions with FCC ID: 2AFENB914C

Measurement Uncertainty

Item			Uncertainty
AC power line conducted emission			2.71 dB
Radiated Emission(Field Strength)	30MHz-200MHz	H	4.57 dB
		V	4.81 dB
	200MHz-1GHz	H	5.69 dB
		V	6.07 dB
	1GHz-6GHz		5.49 dB
	6GHz-18GHz		5.57 dB
	18GHz-40GHz		5.48 dB
Conducted RF Power			±0.61dB
Power Spectrum Density			±0.61dB
Occupied Bandwidth			±5%
Conducted Emission			±1.5dB
Humidity			±5%
Temperature			±1°C

Test Methodology

All measurements contained in this report were conducted with:

1. ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
2. KDB789033 D02 UNII Meas Guidance v01r04.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Chengdu) to collect test data is located No.5040, Huilongwan Plaza, No. 1, Shawan Road, Jinniu District, Chengdu, Sichuan, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 910975, the FCC Designation No. : CN1186.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062C-1.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

For 5150~5250 MHz band, channels are provided to test as follows:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a, 802.11ac20, 802.11n-HT20: Channel 36, 40 and 48 were tested; for 802.11ac40, 802.11n-HT40: Channel 38, 46 were tested; for ac80: Channel 42 was tested.

For 5725~5850 MHz band, channels are provided to test as follows:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a, 802.11ac20, 802.11n-HT20: Channel 149, 157 and 165 were tested.

For 802.11n-HT40, 802.11ac40: Channel 151, 159 were tested; for ac80: Channel 155 was tested.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

802.11a supports SISO, 802.11n/ac supports SISO and MIMO mode. For Radiated Emission, according to pretest, the worst case of 802.11a is Antenna 1, the worst case of 802.11ac/n are MIMO mode. So 802.11a Antenna 1 and 802.11ac/n MIMO mode test data were recorded in the report.

EUT Exercise Software


The software "DRTU" was used for testing, which was provided by manufacturer. The maximum power with maximum duty cycle was set as below:

Software				DRTU			
UNII Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)		Power Level	
				Antenna 1	Antenna 2	Antenna 1	Antenna 2
5150-5250MHz	802.11a	Low	5180	6	6	13	13
		Middle	5200	6	6	13	13
		High	5240	6	6	13	13
	802.11n-HT20	Low	5180	HT0	HT0	13	13
		Middle	5200	HT0	HT0	13	13
		High	5240	HT0	HT0	13	13
	802.11n-HT40	Low	5190	HT0	HT0	11	11
		High	5230	HT0	HT0	11	11
	802.11ac20	Low	5180	VHT0	VHT0	12	12
		Middle	5200	VHT0	VHT0	12	12
		High	5240	VHT0	VHT0	12	12
	802.11ac40	Low	5190	VHT0	VHT0	11	11
		High	5230	VHT0	VHT0	11	11
	802.11ac80	Middle	5210	VHT0	VHT0	10	10
5725-5850MHz	802.11a	Low	5745	6	6	13	13
		Middle	5785	6	6	13	13
		High	5825	6	6	13	13
	802.11n-HT20	Low	5745	HT0	HT0	13	13
		Middle	5785	HT0	HT0	13	13
		High	5825	HT0	HT0	13	13
	802.11n-HT40	Low	5755	HT0	HT0	11	11
		High	5795	HT0	HT0	11	11
	802.11ac20	Low	5745	VHT0	VHT0	12	12
		Middle	5785	VHT0	VHT0	12	12
		High	5825	VHT0	VHT0	12	12
	802.11ac40	Low	5755	VHT0	VHT0	11	11
		High	5795	VHT0	VHT0	11	11
	802.11ac80	Middle	5775	VHT0	VHT0	10	10

Duty Cycle information is below:


Mode	Ton (ms)	Ton+Toff (ms)	Duty cycle(%)
802.11a	1.12	1.13	99.12
802.11n-HT20	1.14	1.15	99.13
802.11n-HT40	0.95	0.96	98.96
802.11ac20	1.14	1.15	99.13
802.11ac40	0.97	0.98	98.98
802.11ac80	0.46	0.47	97.87

802.11a

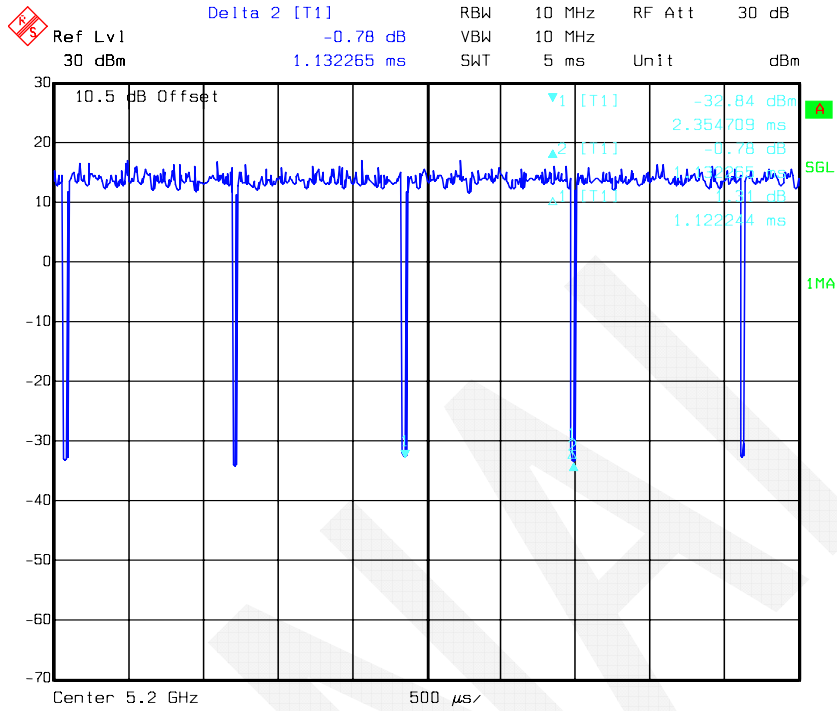


Date: 01.DEC.2017 13:54:36

802.11n- HT20

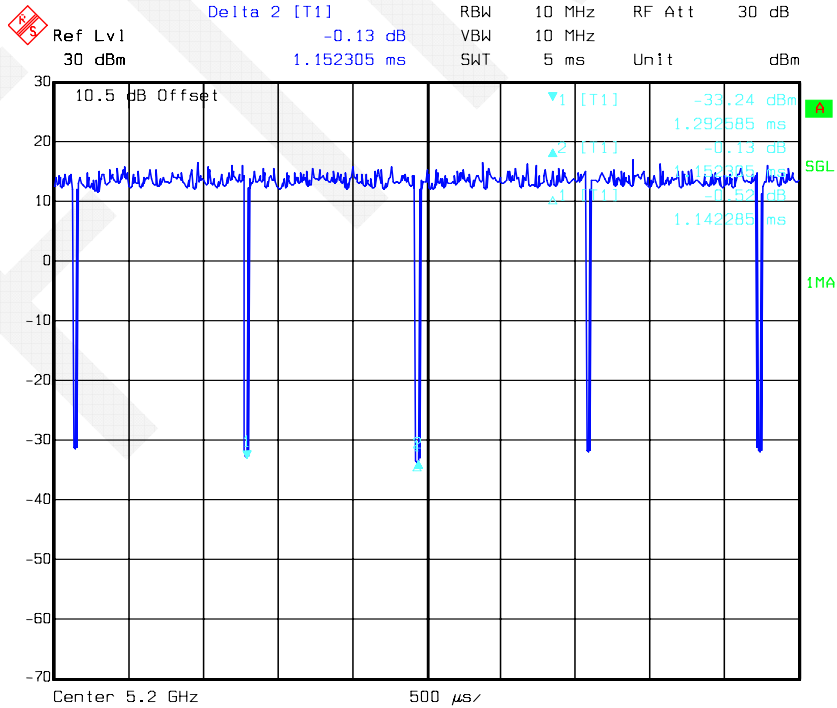


Date: 01.DEC.2017 13:53:19


802.11n- HT40

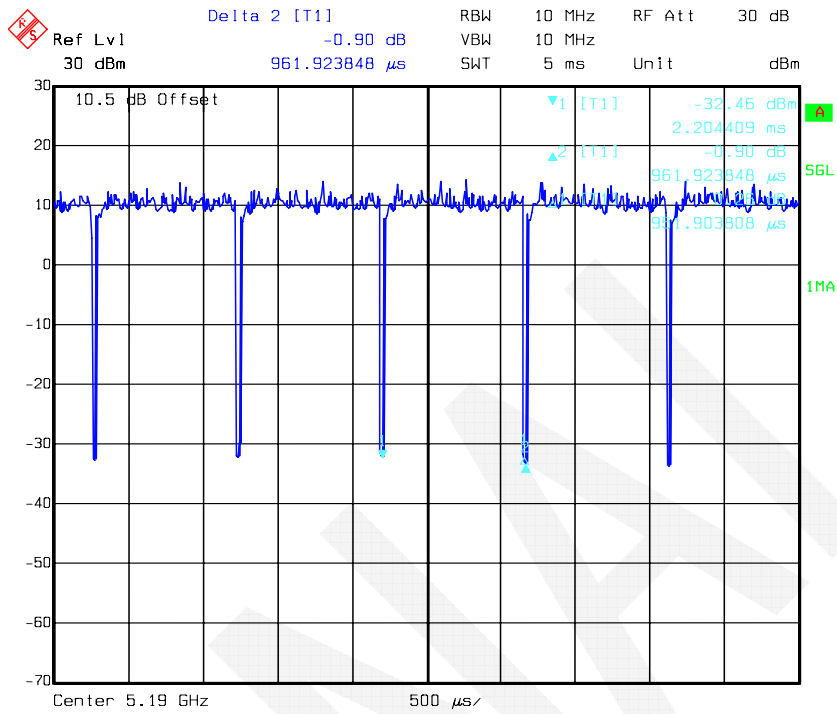

802.11ac20

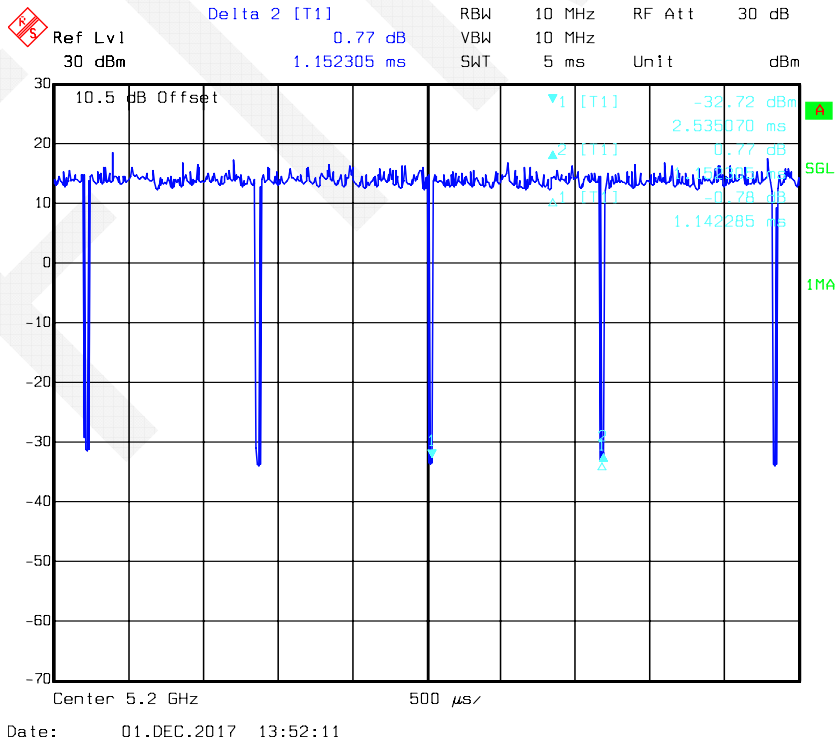


802.11ac40

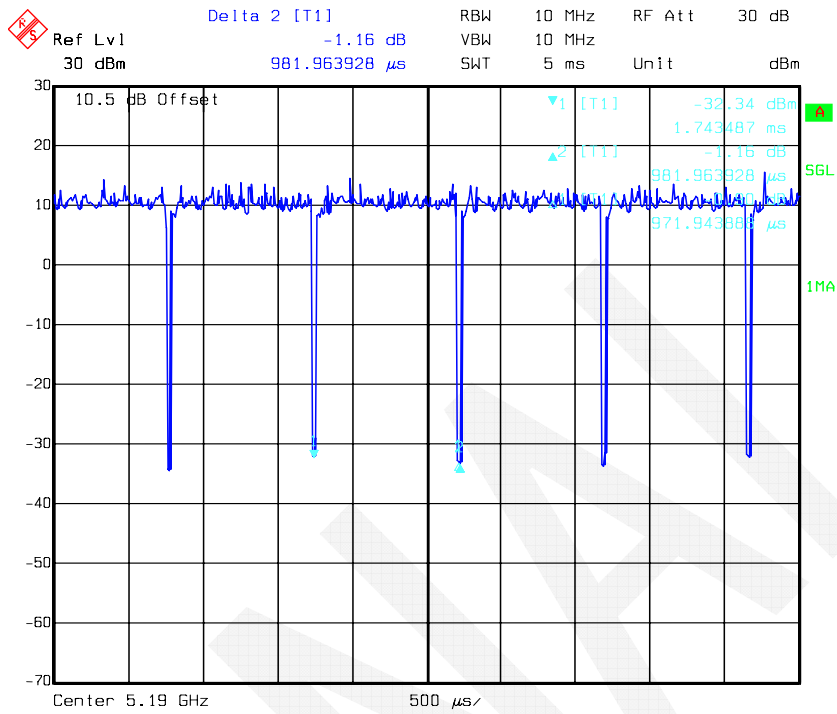

Date: 01.DEC.2017 13:46:54

802.11ac80

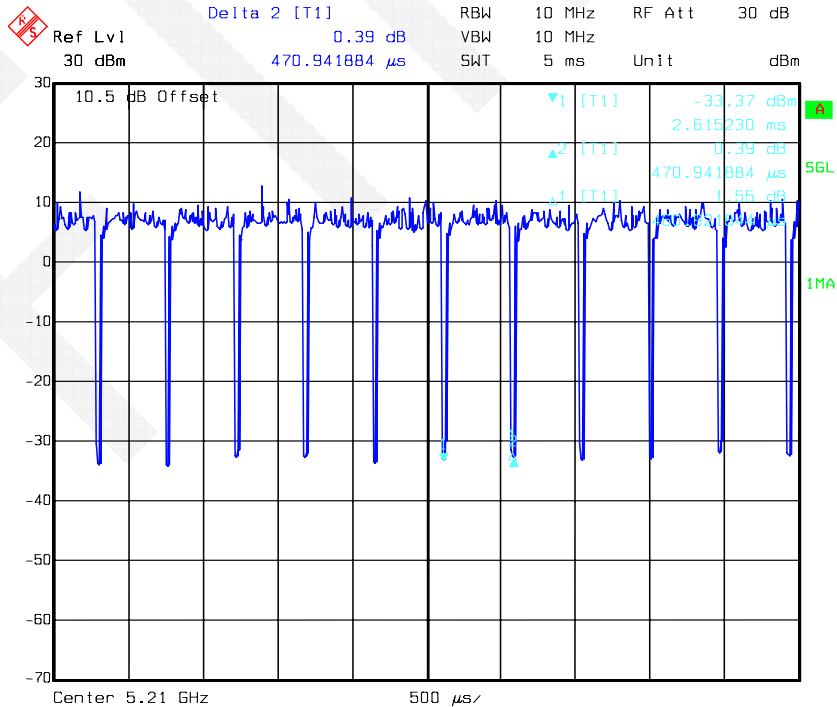

Date: 01.DEC.2017 13:49:15

Local Support Equipment List and Details


Manufacturer	Description	Model Number	Serial Number
SONY	Laptop	SVF143A1QT	None
Logitech	Mouse	M-U0004	810-001808
TOSHIBA	Mobile HDD	V637020-A	1297FHOYSRE8
LAPOP	Keyboard	JT-505	JT5056UBD200312
HUAWEI	Earphone	P9	None
DL	Switch	DL-S1005PM	None

External I/O Cable

Cable Description	Length (m)	From / Port	To
Unshielded Power Cable	1.2	AC Adapter	EUT
Unshielded USB Cable	1.8	EUT/USB Port	Keyboard
Unshielded USB Cable	1.8	EUT/USB Port	Mouse
Unshielded USB Cable	0.3	EUT/USB Port	Mobile HDD
Shielded HDMI Cable	1.2	EUT / HDMI Port	Laptop
Unshielded RJ45 Cable	5.0	EUT / LAN Port	Switch
Unshielded Earphone Cable	1.0	EUT	Earphone

Block Diagram of Test Setup

AC Power Lines Conducted Emissions Test

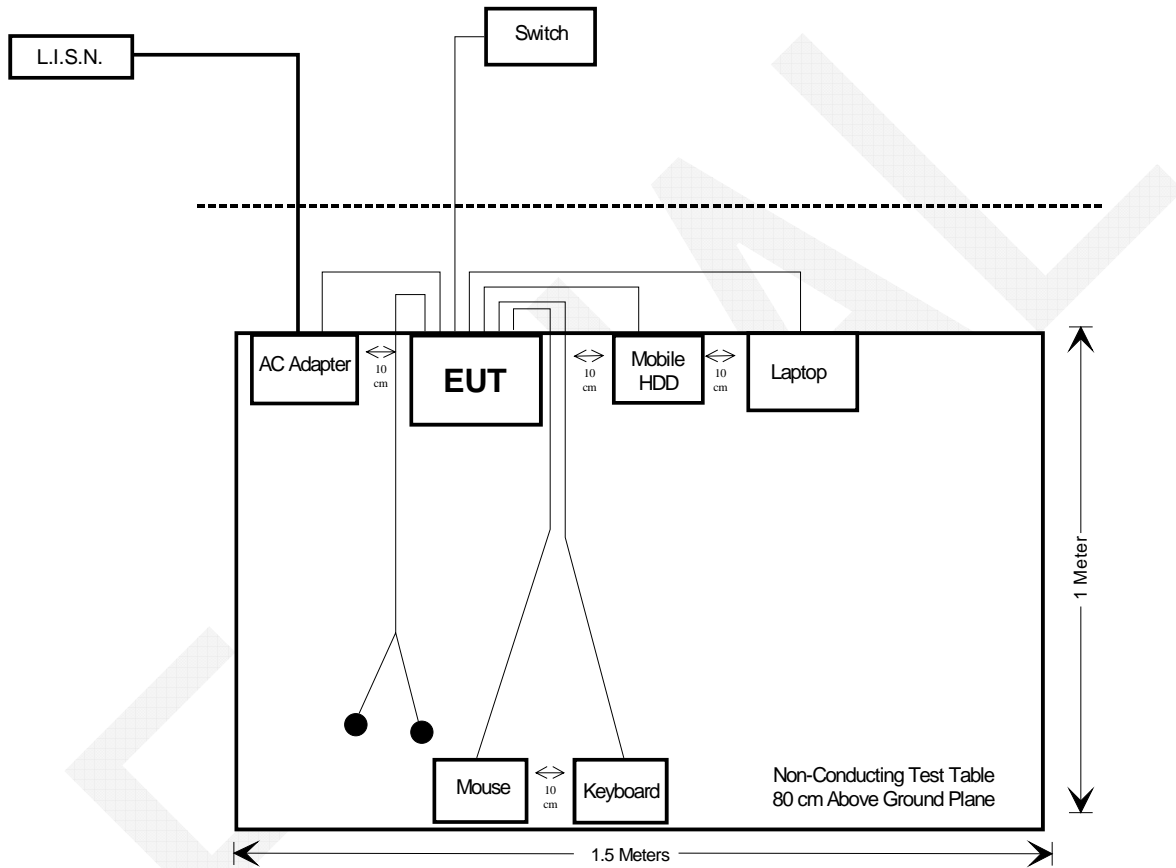

Test Equipments List

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCS 30	836858/0016	2016-12-02	2017-12-01
Rohde & Schwarz	L.I.S.N.	ENV216	100018	2017-05-20	2018-05-19
EMCO	L.I.S.N.	3810-2/NM	9803-1907	2017-10-31	2018-10-30
Rohde & Schwarz	PULSE LIMITER	ESH3Z2	DE14781	2017-11-10	2018-11-09
N/A	Conducted Cable	NO.5	N/A	2017-11-10	2018-11-09
Rohde & Schwarz	EMC32	N/A	V 8.52.0	N/A	N/A
Radiated Emissions Test					
Sonoma	Pre-Amplifier	310N	186684	2017-08-18	2018-08-17
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2017-05-20	2018-05-19
Sunol Sciences	Broadband Antenna	JB3	A121808	2017-05-18	2020-05-17
Rohde & Schwarz	EMI Test Receiver	ESIB 40	100215	2017-09-12	2018-09-11
ETS	Horn Antenna	3115	003-6076	2017-05-19	2020-05-18
A.H.Systems,inc	Horn Antenna	SAS-574	505	2017-12-02	2018-12-01
Mini-circuits	Pre-Amplifier	ZVA-183-S+	771001215	2017-05-20	2018-05-19
Quinstar	Pre-Amplifier	QLW-18405536-JO	15964004001	2017-05-20	2018-05-19
INMET	Attenuator	N-6dB	/	2017-11-10	2018-11-09
Sinoscite.,Co Ltd	Reject Band Filter	BSF 5150-5850MN	0899V2	2017-11-10	2018-11-09
EMCT	Semi-Anechoic Chamber	966	N/A	2015-04-24	2018-04-23
N/A	RF Cable (below 1GHz)	NO.1	N/A	2017-11-10	2018-11-09
N/A	RF Cable (below 1GHz)	NO.4	N/A	2017-11-10	2018-11-09
N/A	RF Cable (above 1GHz)	NO.2	N/A	2017-11-10	2018-11-09
Rohde & Schwarz	EMC32	N/A	V 8.52.0	N/A	N/A
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2017-05-18	2018-05-17
WEINSCHHEL ENGINEERING	Attenuator	1A10dB	AA4135	2017-11-10	2018-11-09
Agilent	USB Wideband Power Sensor	U2021XA	MY53320008	2017-12-02	2018-12-01
ZHAOXIN	DC Power Supply	RXN-305D	17R305D050045	2017-07-02	2018-07-01
Shenzhen BACL	High Temperature Test Chamber	BTH-150	30024	2017-12-02	2018-12-01
FLUKE	Multimeter	114	28810293WS	2017-05-18	2018-05-17
N/A	RF Cable	NO.3	N/A	2017-11-10	2018-11-09
E-Microwave	DC Block	EMDCB-00036	OE01304225	Each Time	/
N/A	RF Cable	N/A	N/A	Each Time	/

* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.407(f) & §1.1310 & §2.1091	Maximum Permissible Exposure(MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
§15.205& §15.209 §15.407(b) (1), (4)(i), (6), (7)	Undesirable Emission& Restricted Bands	Compliance
§15.407(b) (1), (4)(i)	Band Edge	Compliance
§15.407(a) (1),(3) & (e)	26dB & 6dB Bandwidth	Compliance
§15.407(g)	Frequency Stability	Compliance
§15.407(a)(1),(3)	Conducted Transmitter Output Power	Compliance
§15.407 (a)(1),(3),(5)	Power Spectral Density	Compliance

FCC §15.407(f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.407(f) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Per 447498 D01 General RF Exposure Guidance v06, simultaneous transmission MPE test exclusion applies when the sum of the MPE for all simultaneous transmitting antennas incorporated in a host device, based on the calculated/estimated, numerically modeled or measured field strengths or power density, is ≤ 1.0.

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where:

S = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

The rated tune-up output power and antenna gain in the below table:

Calculated Data:

MPE evaluation for single transmission:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
WLAN	2412-2462	5.60	3.63	16.00	39.81	20	0.029	1.0
	5150-5250	7.20	5.25	14.00	25.12	20	0.026	1.0
	5725-5850	7.20	5.25	15.00	31.62	20	0.033	1.0
BT3.0	2402-2480	5.60	3.63	4.00	2.51	20	0.002	1.0
BLE	2402-2480	5.60	3.63	1.00	1.26	20	0.001	1.0

Note: Wi-Fi (2.4G) & Wi-Fi (5G) or Wi-Fi & Bluetooth can not transmit simultaneously.

Result: MPE evaluation of single transmission meets the requirement of standard.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT used three built in FPC antennas (antenna 1: Bluetooth, 2.4G&5GHz Wi-Fi; antenna 2: 2.4G/5G Wi-Fi; antenna 3: 2.4G-RX), which connected to the main board with IPEX socket, fulfill the requirement of this section. Please refer to the EUT internal photos and the below table for detail.

Antenna Information

Antenna Model Number	Manufacturer	Band	Antenna Gain	Antenna type	Connector
AG-041533-1286 FPC(31.7mm x 23.4mm)	ZHONGSHAN B&T TECHONOLOGY Co.,Ltd	Wi-Fi 2.4GHz/Bluetooth	5.6dBi	Omni-directional	IPEX
		Wi-Fi 5GHz	7.2dBi	Omni-directional	IPEX
AG-041533-1285 FPC(25.6mm x 24.5mm)	ZHONGSHAN B&T TECHONOLOGY Co.,Ltd	Wi-Fi 2.4GHz	4.3dBi	Omni-directional	IPEX
		Wi-Fi 5GHz	6.7dBi	Omni-directional	IPEX
AG-041533-1287 FPC(26.9mm x 17.2mm)	ZHONGSHAN B&T TECHONOLOGY Co.,Ltd	2.4G-RX	0.5 dBi	Omni-directional	IPEX


Result: Compliance.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

EUT Setup

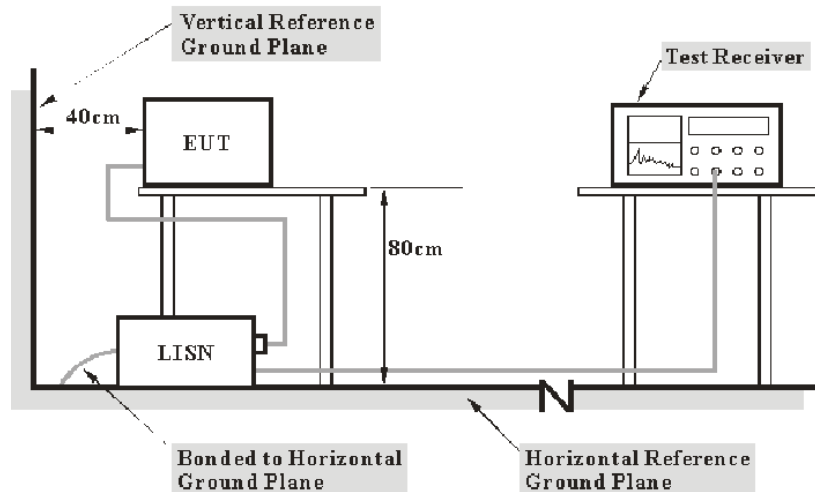

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to AC 120V/60Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$
$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the [FCC Part 15.207](#).

Test Data


Environmental Conditions

Temperature:	19 °C
Relative Humidity:	58 %
ATM Pressure:	96.4 kPa

The testing was performed by Tom Tang on 2017-11-30.

Test Mode: Transmitting


AC120V/60Hz, Line

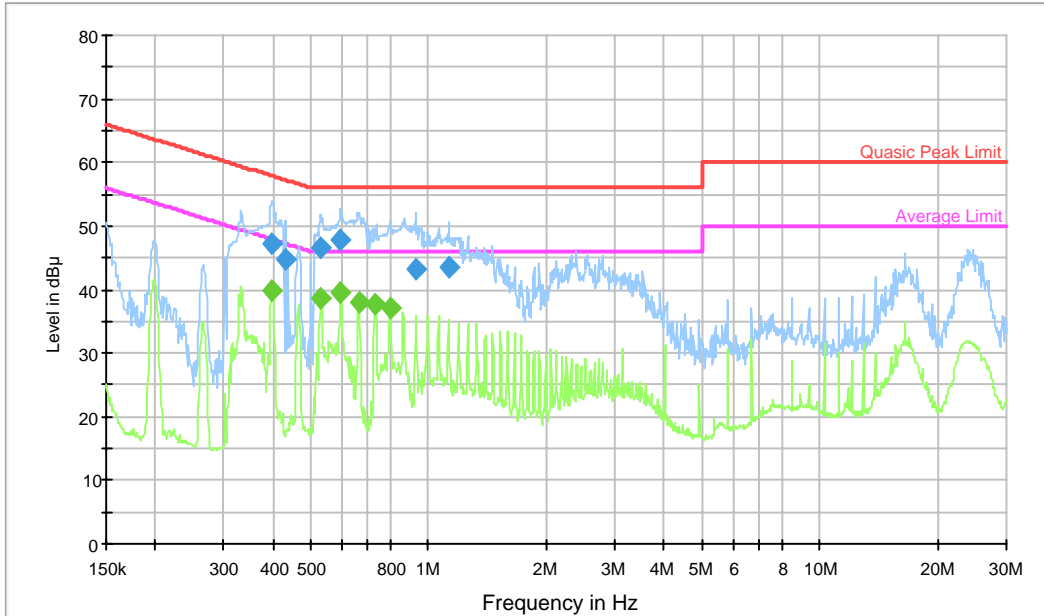

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Margin (dB)	Limit (dBµV)
0.397299	47.1	9.000	L1	19.8	10.8	57.9
0.432041	44.9	9.000	L1	19.8	12.3	57.2
0.529596	46.7	9.000	L1	19.8	9.3	56.0
0.596975	47.8	9.000	L1	19.8	8.2	56.0
0.929819	43.3	9.000	L1	19.8	12.7	56.0
1.130707	43.5	9.000	L1	19.7	12.5	56.0

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Margin (dB)	Limit (dBµV)
0.398888	39.9	9.000	L1	19.8	8.0	47.9
0.531715	38.5	9.000	L1	19.8	7.5	46.0
0.596975	39.5	9.000	L1	19.8	6.5	46.0
0.664915	37.9	9.000	L1	19.8	8.1	46.0
0.731772	37.6	9.000	L1	19.8	8.4	46.0
0.795763	37.2	9.000	L1	19.7	8.8	46.0

AC120V/60Hz, Neutral

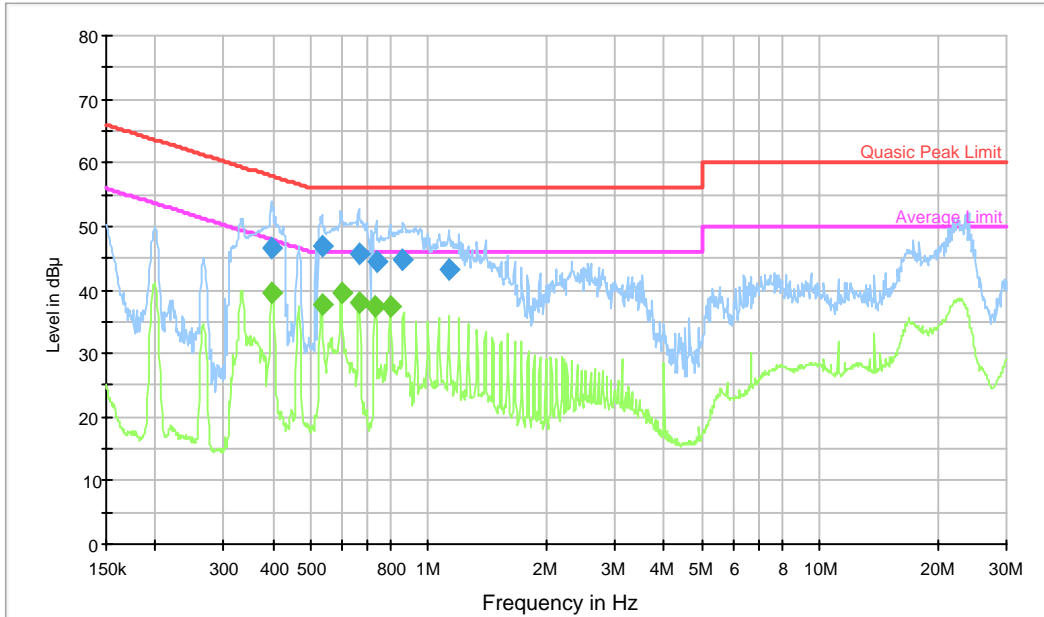

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Margin (dB)	Limit (dBµV)
0.395716	46.4	9.000	N	19.5	11.5	57.9
0.533841	47.0	9.000	N	19.5	9.0	56.0
0.664915	45.6	9.000	N	19.5	10.4	56.0
0.734699	44.4	9.000	N	19.5	11.6	56.0
0.861902	44.7	9.000	N	19.5	11.3	56.0
1.130707	43.1	9.000	N	19.5	12.9	56.0

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Margin (dB)	Limit (dBµV)
0.398888	39.7	9.000	N	19.5	8.2	47.9
0.533841	37.6	9.000	N	19.5	8.4	46.0
0.599363	39.6	9.000	N	19.5	6.4	46.0
0.664915	38.0	9.000	N	19.5	8.0	46.0
0.731772	37.3	9.000	N	19.5	8.7	46.0
0.798946	37.3	9.000	N	19.5	8.7	46.0

Note:

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.407(b) (1) (4)(i) (6) (7) – UNDESIRABLE EMISSION, RESTRICTED BANDS

Applicable Standard

FCC §15.407 (b) (1) (4)(i), (6), (7); §15.209; §15.205

FCC 15.407 (b)

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.


According to KDB 789033 D02 General UNII Test Procedures New Rules v01r04, emission shall be computed as:

$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3$ meters.


- 1) For 75 MHz above or below the band edge, a level of -27 dBm/MHz (68.2dB μ V/m) was applied.
- 2) For 25MHz-75 MHz above or below the band edge, a level of 10 dBm/MHz (105.2dB μ V/m) was applied.
- 3) For 5MHz-25 MHz above or below the band edge, a level of 15.6 dBm/MHz (110.8dB μ V/m) was applied.
- 4) For 0 MHz-5 MHz above or below the band edge, a level of 27 dBm/MHz (122.2dB μ V/m) was applied.

EUT Setup

Below 1GHz:

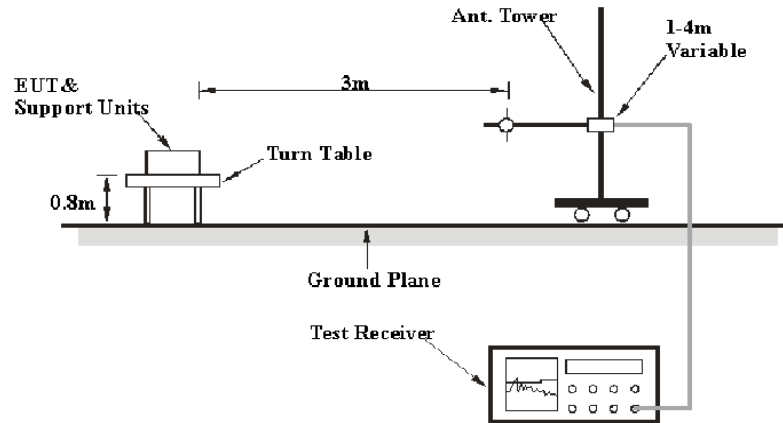

Above 1 GHz:

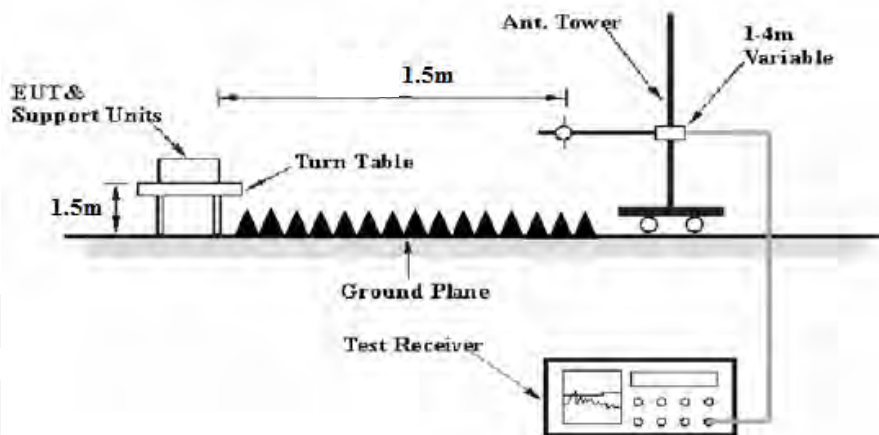

The radiated emission tests were performed in the 3 meters semi-anechoic chamber, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to AC 120V/60Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP

Frequency Range	RBW	Video B/W	Duty Cycle	Detector
Above 1 GHz	1MHz	3 MHz	Any	PK
	1MHz	3 MHz	Any	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1 GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v01r04, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB

Extrapolation result = Corrected Amplitude (dB μ V/m) - distance extrapolation factor (6dB)

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Receiver Reading + Cable loss + Antenna Factor – Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, Section 15.205 and 15.209, Subpart E, Section 15.407.

Test Data


Environmental Conditions

Temperature:	21 °C
Relative Humidity:	58 %
ATM Pressure:	96.2 kPa

The testing was performed by Tom Tang on 2017-12-02.

Test mode: Transmitting

1) 30 MHz to 1 GHz:

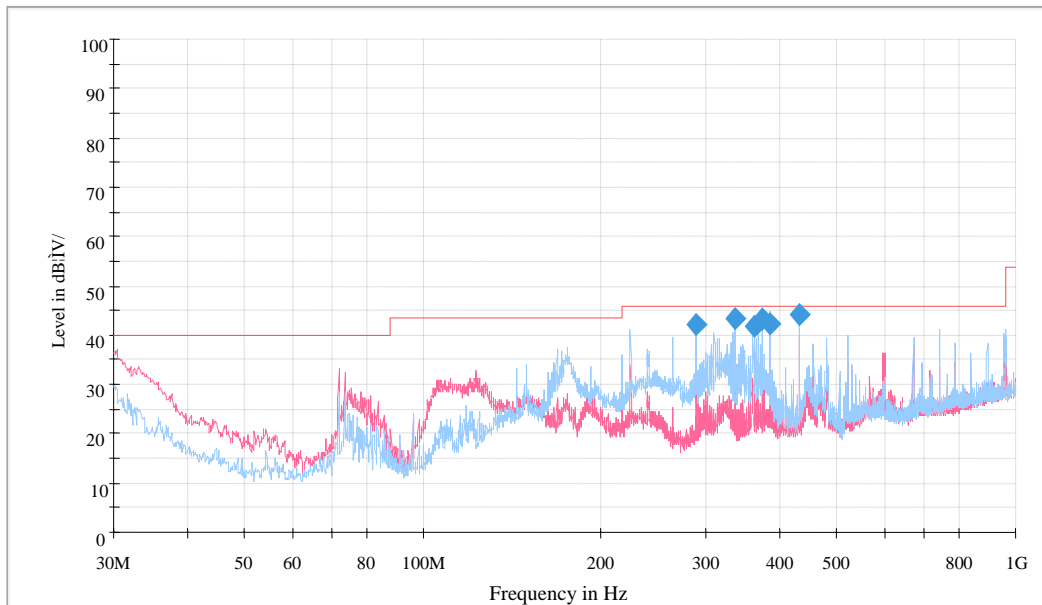

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corrected Factor (dB/m)	Margin (dB)	Limit (dBµV/m)
289.383750	41.9	120.000	135.0	H	0.0	-11.0	*4.1	46.0
336.277500	43.7	120.000	121.0	H	36.0	-9.8	*2.3	46.0
361.376250	41.0	120.000	102.0	H	70.0	-9.6	*5.0	46.0
373.258750	44.5	120.000	130.0	H	94.0	-9.3	*1.5	46.0
384.535000	41.7	120.000	130.0	H	78.0	-9.0	*4.3	46.0
432.428750	44.6	120.000	199.0	H	38.0	-8.0	*1.4	46.0

**Within measurement uncertainty!*

2) 1GHz-40GHz

(Note: Above 1GHz was performed at distance 1.5m)

For 5150-5250 MHz:

For 802.11a mode (SISO) (Antenna 1-Worst Case)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5180 MHz										
5180	71.32	PK	H	34.51	5.21	0.00	111.04	105.04	N/A	N/A
5180	61.63	AV	H	34.51	5.21	0.00	101.35	95.35	N/A	N/A
5180	66.54	PK	V	34.51	5.21	0.00	106.26	100.26	N/A	N/A
5180	55.21	AV	V	34.51	5.21	0.00	94.93	88.93	N/A	N/A
5150	30.54	PK	H	34.49	5.18	0.00	70.21	64.21	74.00	9.79
5150	15.41	AV	H	34.49	5.18	0.00	55.08	49.08	54.00	*4.92
10360	32.03	PK	H	38.67	7.76	26.37	52.09	46.09	74.00	27.91
10360	17.24	AV	H	38.67	7.76	26.37	37.30	31.30	54.00	22.70
Frequency: 5200 MHz										
5200	71.39	PK	H	34.52	5.23	0.00	111.14	105.14	N/A	N/A
5200	61.64	AV	H	34.52	5.23	0.00	101.39	95.39	N/A	N/A
5200	65.85	PK	V	34.52	5.23	0.00	105.60	99.60	N/A	N/A
5200	55.48	AV	V	34.52	5.23	0.00	95.23	89.23	N/A	N/A
10400	32.72	PK	H	38.68	7.79	26.36	52.83	46.83	74.00	27.17
10400	17.98	AV	H	38.68	7.79	26.36	38.09	32.09	54.00	21.91
Frequency: 5240 MHz										
5240	71.35	PK	H	34.54	5.27	0.00	111.16	105.16	N/A	N/A
5240	61.24	AV	H	34.54	5.27	0.00	101.05	95.05	N/A	N/A
5240	65.06	PK	V	34.54	5.27	0.00	104.87	98.87	N/A	N/A
5240	55.67	AV	V	34.54	5.27	0.00	95.48	89.48	N/A	N/A
5350	30.20	PK	H	34.61	5.37	0.00	70.18	64.18	74.00	9.82
5350	17.01	AV	H	34.61	5.37	0.00	56.99	50.99	54.00	*3.01
10480	33.31	PK	H	38.70	7.84	26.35	53.50	47.50	74.00	26.50
10480	18.34	AV	H	38.70	7.84	26.35	38.53	32.53	54.00	21.47

**Within measurement uncertainty!*

For 802.11n-HT20 mode (MIMO)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5180 MHz										
5180	73.86	PK	H	34.51	5.21	0.00	113.58	107.58	N/A	N/A
5180	63.94	AV	H	34.51	5.21	0.00	103.66	97.66	N/A	N/A
5180	67.25	PK	V	34.51	5.21	0.00	106.97	100.97	N/A	N/A
5180	57.23	AV	V	34.51	5.21	0.00	96.95	90.95	N/A	N/A
5150	29.65	PK	H	34.49	5.18	0.00	69.32	63.32	74.00	10.68
5150	15.79	AV	H	34.49	5.18	0.00	55.46	49.46	54.00	*4.54
10360	32.34	PK	H	38.67	7.76	26.37	52.40	46.40	74.00	27.60
10360	17.19	AV	H	38.67	7.76	26.37	37.25	31.25	54.00	22.75
Frequency: 5200 MHz										
5200	72.99	PK	H	34.52	5.23	0.00	112.74	106.74	N/A	N/A
5200	63.36	AV	H	34.52	5.23	0.00	103.11	97.11	N/A	N/A
5200	67.07	PK	V	34.52	5.23	0.00	106.82	100.82	N/A	N/A
5200	57.13	AV	V	34.52	5.23	0.00	96.88	90.88	N/A	N/A
10400	32.61	PK	H	38.68	7.79	26.36	52.72	46.72	74.00	27.28
10400	17.78	AV	H	38.68	7.79	26.36	37.89	31.89	54.00	22.11
Frequency: 5240 MHz										
5240	72.73	PK	H	34.54	5.27	0.00	112.54	106.54	N/A	N/A
5240	62.85	AV	H	34.54	5.27	0.00	102.66	96.66	N/A	N/A
5240	67.16	PK	V	34.54	5.27	0.00	106.97	100.97	N/A	N/A
5240	57.25	AV	V	34.54	5.27	0.00	97.06	91.06	N/A	N/A
5350	30.73	PK	H	34.61	5.37	0.00	70.71	64.71	74.00	9.29
5350	17.06	AV	H	34.61	5.37	0.00	57.04	51.04	54.00	*2.96
10480	33.09	PK	H	38.70	7.84	26.35	53.28	47.28	74.00	26.72
10480	18.39	AV	H	38.70	7.84	26.35	38.58	32.58	54.00	21.42

*Within measurement uncertainty!

For 802.11n-HT40 mode (MIMO)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5190 MHz										
5190	70.79	PK	H	34.51	5.22	0.00	110.52	104.52	N/A	N/A
5190	60.94	AV	H	34.51	5.22	0.00	100.67	94.67	N/A	N/A
5190	65.61	PK	V	34.51	5.22	0.00	105.34	99.34	N/A	N/A
5190	55.23	AV	V	34.51	5.22	0.00	94.96	88.96	N/A	N/A
5150	29.50	PK	H	34.49	5.18	0.00	69.17	63.17	74.00	10.83
5150	15.61	AV	H	34.49	5.18	0.00	55.28	49.28	54.00	*4.72
10380	32.61	PK	H	38.68	7.78	26.37	52.70	46.70	74.00	27.30
10380	18.41	AV	H	38.68	7.78	26.37	38.50	32.50	54.00	21.50
Frequency: 5230 MHz										
5230	69.94	PK	H	34.54	5.26	0.00	109.74	103.74	N/A	N/A
5230	59.76	AV	H	34.54	5.26	0.00	99.56	93.56	N/A	N/A
5230	65.88	PK	V	34.54	5.26	0.00	105.68	99.68	N/A	N/A
5230	55.06	AV	V	34.54	5.26	0.00	94.86	88.86	N/A	N/A
5350	30.80	PK	H	34.61	5.37	0.00	70.78	64.78	74.00	9.22
5350	17.12	AV	H	34.61	5.37	0.00	57.10	51.10	54.00	*2.90
10460	33.71	PK	H	38.69	7.83	26.36	53.87	47.87	74.00	26.13
10460	18.37	AV	H	38.69	7.83	26.36	38.53	32.53	54.00	21.47

*Within measurement uncertainty!

For 802.11ac20 mode (MIMO)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5180 MHz										
5180	72.72	PK	H	34.51	5.21	0.00	112.44	106.44	N/A	N/A
5180	62.91	AV	H	34.51	5.21	0.00	102.63	96.63	N/A	N/A
5180	67.63	PK	V	34.51	5.21	0.00	107.35	101.35	N/A	N/A
5180	58.21	AV	V	34.51	5.21	0.00	97.93	91.93	N/A	N/A
5150	29.94	PK	H	34.49	5.18	0.00	69.61	63.61	74.00	10.39
5150	15.68	AV	H	34.49	5.18	0.00	55.35	49.35	54.00	*4.65
10360	33.23	PK	H	38.67	7.76	26.37	53.29	47.29	74.00	26.71
10360	17.10	AV	H	38.67	7.76	26.37	37.16	31.16	54.00	22.84
Frequency: 5200 MHz										
5200	72.29	PK	H	34.52	5.23	0.00	112.04	106.04	N/A	N/A
5200	62.57	AV	H	34.52	5.23	0.00	102.32	96.32	N/A	N/A
5200	66.93	PK	V	34.52	5.23	0.00	106.68	100.68	N/A	N/A
5200	56.99	AV	V	34.52	5.23	0.00	96.74	90.74	N/A	N/A
10400	33.37	PK	H	38.68	7.79	26.36	53.48	47.48	74.00	26.52
10400	17.59	AV	H	38.68	7.79	26.36	37.70	31.70	54.00	22.30
Frequency: 5240 MHz										
5240	72.07	PK	H	34.54	5.27	0.00	111.88	105.88	N/A	N/A
5240	62.61	AV	H	34.54	5.27	0.00	102.42	96.42	N/A	N/A
5240	66.34	PK	V	34.54	5.27	0.00	106.15	100.15	N/A	N/A
5240	56.12	AV	V	34.54	5.27	0.00	95.93	89.93	N/A	N/A
5350	30.78	PK	H	34.61	5.37	0.00	70.76	64.76	74.00	9.24
5350	17.13	AV	H	34.61	5.37	0.00	57.11	51.11	54.00	*2.89
10480	33.53	PK	H	38.70	7.84	26.35	53.72	47.72	74.00	26.28
10480	18.36	AV	H	38.70	7.84	26.35	38.55	32.55	54.00	21.45

*Within measurement uncertainty!

For 802.11ac40 mode (MIMO)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5190 MHz										
5190	71.67	PK	H	34.51	5.22	0.00	111.40	105.40	N/A	N/A
5190	61.22	AV	H	34.51	5.22	0.00	100.95	94.95	N/A	N/A
5190	66.06	PK	V	34.51	5.22	0.00	105.79	99.79	N/A	N/A
5190	56.06	AV	V	34.51	5.22	0.00	95.79	89.79	N/A	N/A
5150	30.12	PK	H	34.49	5.18	0.00	69.79	63.79	74.00	10.21
5150	15.21	AV	H	34.49	5.18	0.00	54.88	48.88	54.00	*5.12
10380	33.01	PK	H	38.68	7.78	26.37	53.10	47.10	74.00	26.90
10380	18.39	AV	H	38.68	7.78	26.37	38.48	32.48	54.00	21.52
Frequency: 5230 MHz										
5230	70.90	PK	H	34.54	5.26	0.00	110.70	104.70	N/A	N/A
5230	60.79	AV	H	34.54	5.26	0.00	100.59	94.59	N/A	N/A
5230	65.42	PK	V	34.54	5.26	0.00	105.22	99.22	N/A	N/A
5230	55.04	AV	V	34.54	5.26	0.00	94.84	88.84	N/A	N/A
5350	30.75	PK	H	34.61	5.37	0.00	70.73	64.73	74.00	9.27
5350	17.22	AV	H	34.61	5.37	0.00	57.20	51.20	54.00	*2.80
10460	34.03	PK	H	38.69	7.83	26.36	54.19	48.19	74.00	25.81
10460	18.31	AV	H	38.69	7.83	26.36	38.47	32.47	54.00	21.53

*Within measurement uncertainty!

For 802.11ac80 mode (MIMO)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5210 MHz										
5210	69.85	PK	H	34.53	5.24	0.00	109.62	103.62	N/A	N/A
5210	59.75	AV	H	34.53	5.24	0.00	99.52	93.52	N/A	N/A
5210	65.04	PK	V	34.53	5.24	0.00	104.81	98.81	N/A	N/A
5210	54.87	AV	V	34.53	5.24	0.00	94.64	88.64	N/A	N/A
5150	30.39	PK	H	34.49	5.18	0.00	70.06	64.06	74.00	9.94
5150	15.33	AV	H	34.49	5.18	0.00	55.00	49.00	54.00	*5.00
5350	30.85	PK	H	34.61	5.37	0.00	70.83	64.83	74.00	9.17
5350	17.02	AV	H	34.61	5.37	0.00	57.00	51.00	54.00	*3.00
10420	33.45	PK	H	38.68	7.80	26.36	53.57	47.57	74.00	26.43
10420	18.40	AV	H	38.68	7.80	26.36	38.52	32.52	54.00	21.48

*Within measurement uncertainty!

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Margin = Limit- Corr. Amplitude

Spurious emissions more than 20 dB below the limit were not reported.


Please refer to the below pre-scan plot of worst case:

Note: The test distance is 1.5m and distance factor add to the total factor.

802.11ac20 Mode: High Channel_Horizontal_1GHz-18GHz

Ref Lvl 97 dBμV
RBW 1 MHz RF Att 0 dB
VBW 3 MHz
SWT 170 ms Unit dBμV


Fundamental with Reject Band Filter

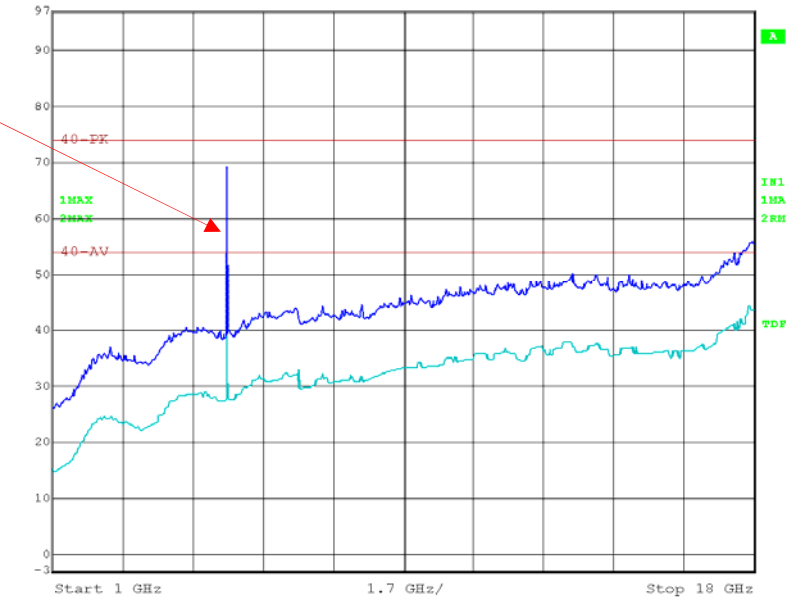

Date: 2.DEC.2017 10:44:06


802.11ac20 Mode: High Channel_Horizontal_18GHz-26.5GHz

Ref Lvl 97 dBμV
RBW 1 MHz RF Att 0 dB
VBW 3 MHz
SWT 86 ms Unit dBμV

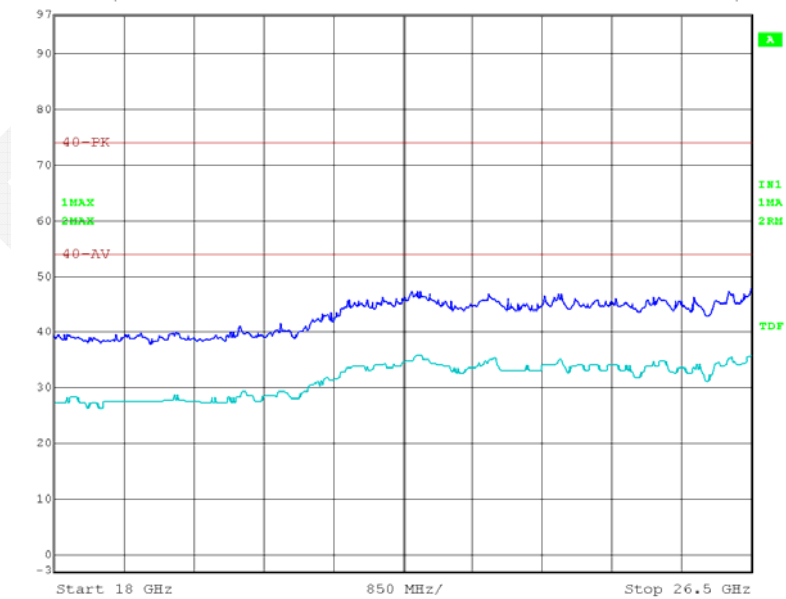


Date: 2.DEC.2017 10:47:02


802.11ac20 Mode: High Channel_Horizontal_26.5GHz-40GHz

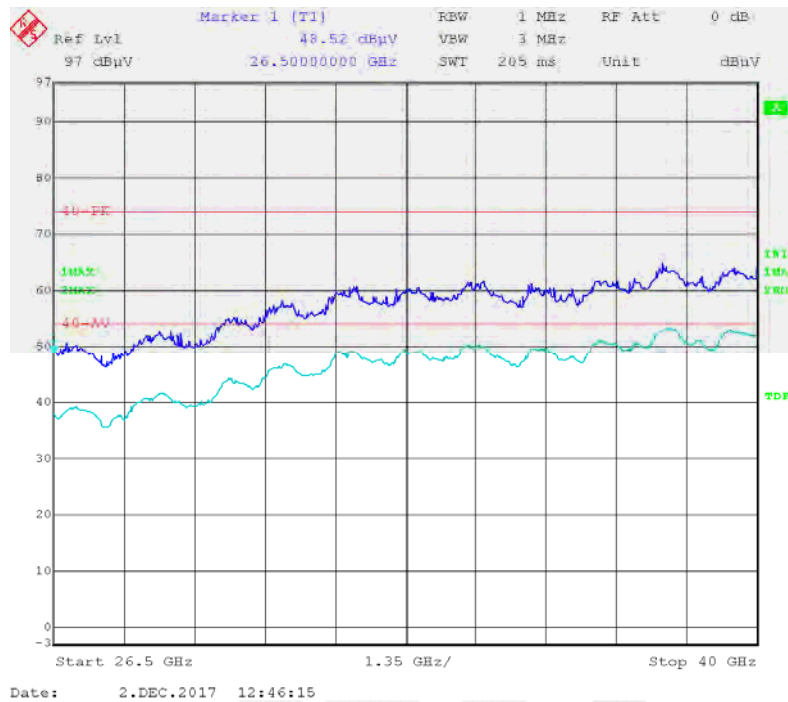

802.11ac20 Mode: High Channel_Vertical_1GHz-18GHz

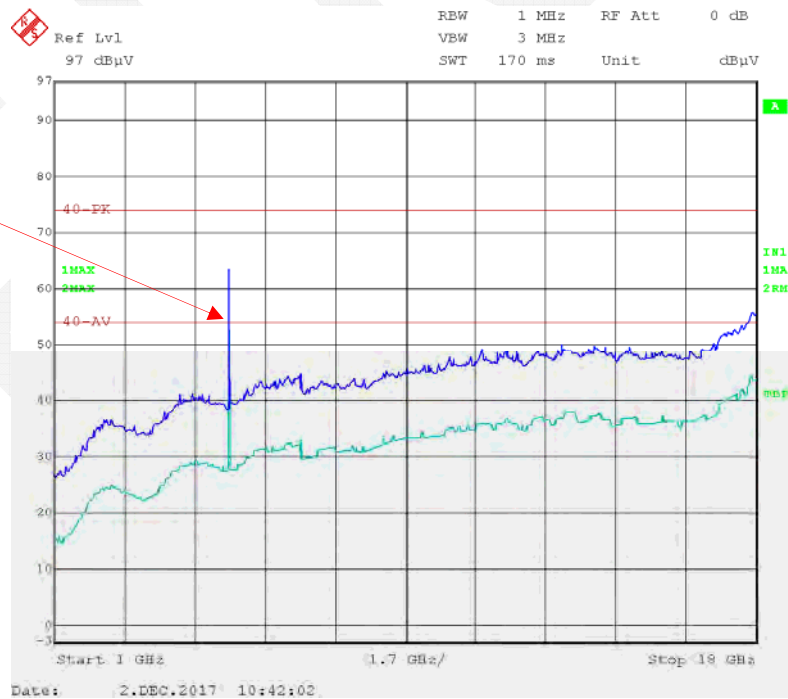


802.11ac20 Mode: High Channel_Vertical_18GHz-26.5GHz

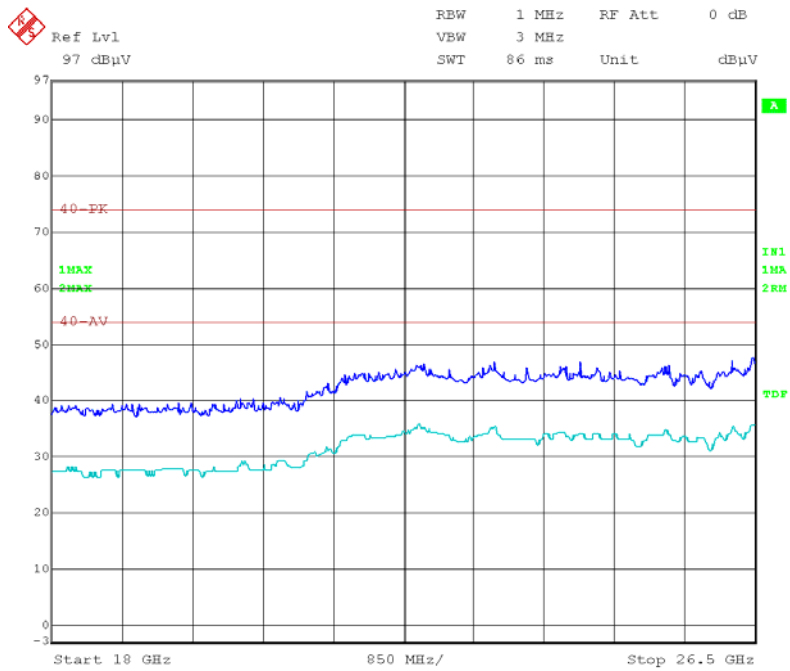

Date: 2.DEC.2017 10:45:31

802.11ac20 Mode: High Channel_Vertical_26.5GHz-40GHz

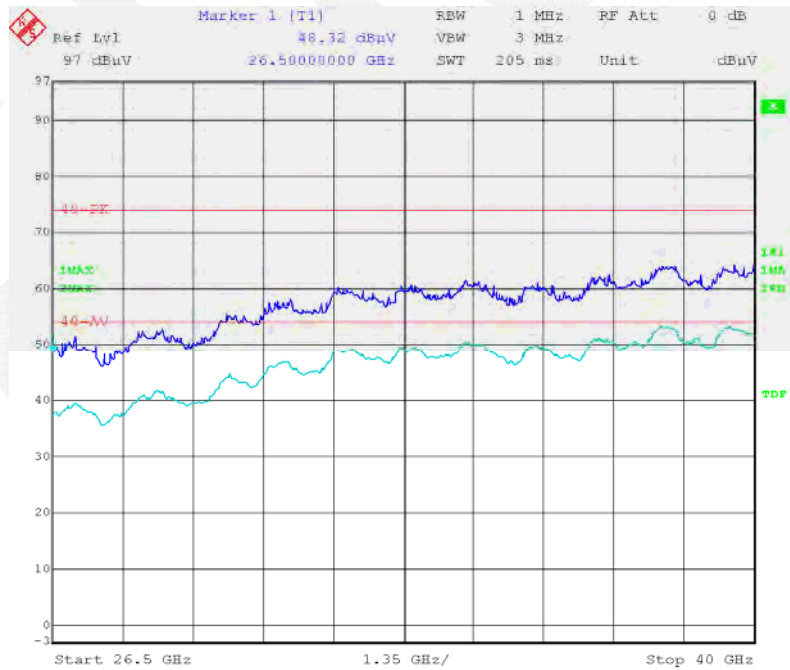

Date: 2.DEC.2017 12:47:03

For 5725-5850 MHz

For 802.11a mode (SISO) (Antenna 1-Worst Case)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5745 MHz										
5745	70.81	PK	H	34.75	5.74	0.00	111.30	105.30	N/A	N/A
5745	60.86	AV	H	34.75	5.74	0.00	101.35	95.35	N/A	N/A
5745	67.93	PK	V	34.75	5.74	0.00	108.42	102.42	N/A	N/A
5745	57.94	AV	V	34.75	5.74	0.00	98.43	92.43	N/A	N/A
5650	31.42	PK	H	34.73	5.65	0.00	71.80	65.80	68.20	*2.40
5700	31.56	PK	H	34.74	5.70	0.00	72.00	66.00	105.20	39.20
5720	30.80	PK	H	34.74	5.71	0.00	71.25	65.25	110.80	45.55
5725	31.35	PK	H	34.75	5.72	0.00	71.82	65.82	122.20	56.38
11490	34.18	PK	H	38.90	8.22	26.02	55.28	49.28	74.00	24.72
11490	18.41	AV	H	38.90	8.22	26.02	39.51	33.51	54.00	20.49
Frequency: 5785 MHz										
5785	70.49	PK	H	34.76	5.77	0.00	111.02	105.02	N/A	N/A
5785	60.26	AV	H	34.76	5.77	0.00	100.79	94.79	N/A	N/A
5785	67.73	PK	V	34.76	5.77	0.00	108.26	102.26	N/A	N/A
5785	57.44	AV	V	34.76	5.77	0.00	97.97	91.97	N/A	N/A
11570	33.79	PK	H	38.91	8.21	26.00	54.91	48.91	74.00	25.09
11570	18.34	AV	H	38.91	8.21	26.00	39.46	33.46	54.00	20.54
Frequency: 5825 MHz										
5825	70.24	PK	H	34.77	5.81	0.00	110.82	104.82	N/A	N/A
5825	59.79	AV	H	34.77	5.81	0.00	100.37	94.37	N/A	N/A
5825	67.64	PK	V	34.77	5.81	0.00	108.22	102.22	N/A	N/A
5825	57.13	AV	V	34.77	5.81	0.00	97.71	91.71	N/A	N/A
5850	31.71	PK	H	34.77	5.83	0.00	72.31	66.31	122.20	55.89
5855	32.10	PK	H	34.77	5.83	0.00	72.70	66.70	110.80	44.10
5875	32.06	PK	H	34.78	5.85	0.00	72.69	66.69	105.20	38.51
5925	31.73	PK	H	34.79	5.89	0.00	72.41	66.41	68.20	*1.79
11650	33.59	PK	H	38.93	8.20	25.98	54.74	48.74	74.00	25.26
11650	18.31	AV	H	38.93	8.20	25.98	39.46	33.46	54.00	20.54

**Within measurement uncertainty!*

For 802.11n-HT20 mode (MIMO)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5745 MHz										
5745	73.63	PK	H	34.75	5.74	0.00	114.12	108.12	N/A	N/A
5745	64.28	AV	H	34.75	5.74	0.00	104.77	98.77	N/A	N/A
5745	69.83	PK	V	34.75	5.74	0.00	110.32	104.32	N/A	N/A
5745	60.71	AV	V	34.75	5.74	0.00	101.20	95.20	N/A	N/A
5650	31.29	PK	H	34.73	5.65	0.00	71.67	65.67	68.20	*2.53
5700	31.37	PK	H	34.74	5.70	0.00	71.81	65.81	105.20	39.39
5720	31.15	PK	H	34.74	5.71	0.00	71.60	65.60	110.80	45.20
5725	31.99	PK	H	34.75	5.72	0.00	72.46	66.46	122.20	55.74
11490	33.34	PK	H	38.90	8.22	26.02	54.44	48.44	74.00	25.56
11490	18.42	AV	H	38.90	8.22	26.02	39.52	33.52	54.00	20.48
Frequency: 5785 MHz										
5785	73.02	PK	H	34.76	5.77	0.00	113.55	107.55	N/A	N/A
5785	63.44	AV	H	34.76	5.77	0.00	103.97	97.97	N/A	N/A
5785	69.75	PK	V	34.76	5.77	0.00	110.28	104.28	N/A	N/A
5785	60.13	AV	V	34.76	5.77	0.00	100.66	94.66	N/A	N/A
11570	33.07	PK	H	38.91	8.21	26.00	54.19	48.19	74.00	25.81
11570	18.44	AV	H	38.91	8.21	26.00	39.56	33.56	54.00	20.44
Frequency: 5825 MHz										
5825	72.58	PK	H	34.77	5.81	0.00	113.16	107.16	N/A	N/A
5825	62.69	AV	H	34.77	5.81	0.00	103.27	97.27	N/A	N/A
5825	69.74	PK	V	34.77	5.81	0.00	110.32	104.32	N/A	N/A
5825	59.65	AV	V	34.77	5.81	0.00	100.23	94.23	N/A	N/A
5850	31.99	PK	H	34.77	5.83	0.00	72.59	66.59	122.20	55.61
5855	31.71	PK	H	34.77	5.83	0.00	72.31	66.31	110.80	44.49
5875	31.91	PK	H	34.78	5.85	0.00	72.54	66.54	105.20	38.66
5925	32.65	PK	H	34.79	5.89	0.00	73.33	67.33	68.20	*0.87
11650	33.21	PK	H	38.93	8.20	25.98	54.36	48.36	74.00	25.64
11650	18.48	AV	H	38.93	8.20	25.98	39.63	33.63	54.00	20.37

*Within measurement uncertainty!

For 802.11n-HT40 mode (MIMO)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5755 MHz										
5755	71.03	PK	H	34.75	5.74	0.00	111.52	105.52	N/A	N/A
5755	60.46	AV	H	34.75	5.74	0.00	100.95	94.95	N/A	N/A
5755	66.48	PK	V	34.75	5.74	0.00	106.97	100.97	N/A	N/A
5755	56.78	AV	V	34.75	5.74	0.00	97.27	91.27	N/A	N/A
5650	31.09	PK	H	34.73	5.65	0.00	71.47	65.47	68.20	*2.73
5700	31.21	PK	H	34.74	5.70	0.00	71.65	65.65	105.20	39.55
5720	31.39	PK	H	34.74	5.71	0.00	71.84	65.84	110.80	44.96
5725	31.03	PK	H	34.75	5.72	0.00	71.50	65.50	122.20	56.70
11510	33.74	PK	H	38.90	8.22	26.02	54.84	48.84	74.00	25.16
11510	18.36	AV	H	38.90	8.22	26.02	39.46	33.46	54.00	20.54
Frequency: 5795 MHz										
5795	70.41	PK	H	34.76	5.78	0.00	110.95	104.95	N/A	N/A
5795	59.74	AV	H	34.76	5.78	0.00	100.28	94.28	N/A	N/A
5795	66.71	PK	V	34.76	5.78	0.00	107.25	101.25	N/A	N/A
5795	56.34	AV	V	34.76	5.78	0.00	96.88	90.88	N/A	N/A
5850	31.77	PK	H	34.77	5.83	0.00	72.37	66.37	122.20	55.83
5855	31.74	PK	H	34.77	5.83	0.00	72.34	66.34	110.80	44.46
5875	32.25	PK	H	34.78	5.85	0.00	72.88	66.88	105.20	38.32
5925	32.18	PK	H	34.79	5.89	0.00	72.86	66.86	68.20	*1.34
11590	33.26	PK	H	38.92	8.21	25.99	54.40	48.40	74.00	25.60
11590	18.35	AV	H	38.92	8.21	25.99	39.49	33.49	54.00	20.51

*Within measurement uncertainty!

For 802.11ac20 mode (MIMO)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5745 MHz										
5745	72.82	PK	H	34.75	5.74	0.00	113.31	107.31	N/A	N/A
5745	62.72	AV	H	34.75	5.74	0.00	103.21	97.21	N/A	N/A
5745	69.53	PK	V	34.75	5.74	0.00	110.02	104.02	N/A	N/A
5745	59.82	AV	V	34.75	5.74	0.00	100.31	94.31	N/A	N/A
5650	31.49	PK	H	34.73	5.65	0.00	71.87	65.87	68.20	*2.33
5700	31.30	PK	H	34.74	5.70	0.00	71.74	65.74	105.20	39.46
5720	31.34	PK	H	34.74	5.71	0.00	71.79	65.79	110.80	45.01
5725	32.30	PK	H	34.75	5.72	0.00	72.77	66.77	122.20	55.43
11490	33.72	PK	H	38.90	8.22	26.02	54.82	48.82	74.00	25.18
11490	18.43	AV	H	38.90	8.22	26.02	39.53	33.53	54.00	20.47
Frequency: 5785 MHz										
5785	72.11	PK	H	34.76	5.77	0.00	112.64	106.64	N/A	N/A
5785	62.22	AV	H	34.76	5.77	0.00	102.75	96.75	N/A	N/A
5785	70.25	PK	V	34.76	5.77	0.00	110.78	104.78	N/A	N/A
5785	60.08	AV	V	34.76	5.77	0.00	100.61	94.61	N/A	N/A
11570	33.48	PK	V	38.91	8.21	26.00	54.60	48.60	74.00	25.40
11570	18.28	AV	V	38.91	8.21	26.00	39.40	33.40	54.00	20.60
Frequency: 5825 MHz										
5825	71.74	PK	H	34.77	5.81	0.00	112.32	106.32	N/A	N/A
5825	61.83	AV	H	34.77	5.81	0.00	102.41	96.41	N/A	N/A
5825	71.09	PK	V	34.77	5.81	0.00	111.67	105.67	N/A	N/A
5825	60.38	AV	V	34.77	5.81	0.00	100.96	94.96	N/A	N/A
5850	31.43	PK	H	34.77	5.83	0.00	72.03	66.03	122.20	56.17
5855	31.90	PK	H	34.77	5.83	0.00	72.50	66.50	110.80	44.30
5875	31.88	PK	H	34.78	5.85	0.00	72.51	66.51	105.20	38.69
5925	31.74	PK	H	34.79	5.89	0.00	72.42	66.42	68.20	*1.78
11650	33.49	PK	H	38.93	8.20	25.98	54.64	48.64	74.00	25.36
11650	18.35	AV	H	38.93	8.20	25.98	39.50	33.50	54.00	20.50

*Within measurement uncertainty!

For 802.11ac40 mode (MIMO)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5755 MHz										
5755	71.59	PK	H	34.75	5.74	0.00	112.08	106.08	N/A	N/A
5755	61.53	AV	H	34.75	5.74	0.00	102.02	96.02	N/A	N/A
5755	67.79	PK	V	34.75	5.74	0.00	108.28	102.28	N/A	N/A
5755	57.94	AV	V	34.75	5.74	0.00	98.43	92.43	N/A	N/A
5650	31.14	PK	H	34.73	5.65	0.00	71.52	65.52	68.20	*2.68
5700	31.45	PK	H	34.74	5.70	0.00	71.89	65.89	105.20	39.31
5720	31.06	PK	H	34.74	5.71	0.00	71.51	65.51	110.80	45.29
5725	32.10	PK	H	34.75	5.72	0.00	72.57	66.57	122.20	55.63
11510	33.33	PK	H	38.90	8.22	26.02	54.43	48.43	74.00	25.57
11510	18.37	AV	H	38.90	8.22	26.02	39.47	33.47	54.00	20.53
Frequency: 5795 MHz										
5795	70.78	PK	H	34.76	5.78	0.00	111.32	105.32	N/A	N/A
5795	60.86	AV	H	34.76	5.78	0.00	101.40	95.40	N/A	N/A
5795	67.51	PK	V	34.76	5.78	0.00	108.05	102.05	N/A	N/A
5795	57.49	AV	V	34.76	5.78	0.00	98.03	92.03	N/A	N/A
5850	31.43	PK	H	34.77	5.83	0.00	72.03	66.03	122.20	56.17
5855	31.53	PK	H	34.77	5.83	0.00	72.13	66.13	110.80	44.67
5875	31.80	PK	H	34.78	5.85	0.00	72.43	66.43	105.20	38.77
5925	32.39	PK	H	34.79	5.89	0.00	73.07	67.07	68.20	*1.13
11590	33.14	PK	H	38.92	8.21	25.99	54.28	48.28	74.00	25.72
11590	18.39	AV	H	38.92	8.21	25.99	39.53	33.53	54.00	20.47

*Within measurement uncertainty!

For 802.11ac80 mode (MIMO)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Measurement (PK /AV)	Polar (H/V)	Factor (dB/m)						
Frequency: 5775 MHz										
5775	70.20	PK	H	34.76	5.76	0.00	110.72	104.72	N/A	N/A
5775	60.04	AV	H	34.76	5.76	0.00	100.56	94.56	N/A	N/A
5775	67.50	PK	V	34.76	5.76	0.00	108.02	102.02	N/A	N/A
5775	57.08	AV	V	34.76	5.76	0.00	97.60	91.60	N/A	N/A
5650	31.57	PK	H	34.73	5.65	0.00	71.95	65.95	68.20	*2.25
5700	30.62	PK	H	34.74	5.70	0.00	71.06	65.06	105.20	40.14
5720	30.43	PK	H	34.74	5.71	0.00	70.88	64.88	110.80	45.92
5725	30.86	PK	H	34.75	5.72	0.00	71.33	65.33	122.20	56.87
5850	31.26	PK	H	34.77	5.83	0.00	71.86	65.86	122.20	56.34
5855	31.72	PK	H	34.77	5.83	0.00	72.32	66.32	110.80	44.48
5875	31.68	PK	H	34.78	5.85	0.00	72.31	66.31	105.20	38.89
5925	32.14	PK	H	34.79	5.89	0.00	72.82	66.82	68.20	*1.38
11550	33.09	PK	H	38.91	8.21	26.01	54.20	48.20	74.00	25.80
11550	18.35	AV	H	38.91	8.21	26.01	39.46	33.46	54.00	20.54

*Within measurement uncertainty!

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Margin = Limit- Corr. Amplitude

Spurious emissions more than 20 dB below the limit were not reported.

Please refer to the below pre-scan plot of worst case:


Note: The test distance is 1.5m and distance factor add to the total factor.

802.11n20 Mode: High Channel_Horizontal_1GHz-18GHz

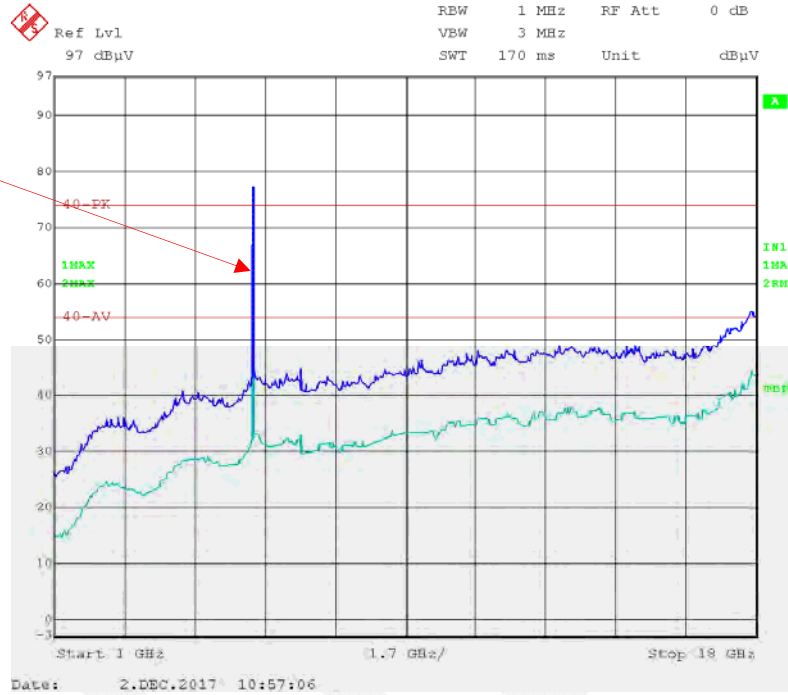


Fundamental with Reject Band Filter


802.11n20 Mode: High Channel_Horizontal_18GHz-26.5GHz

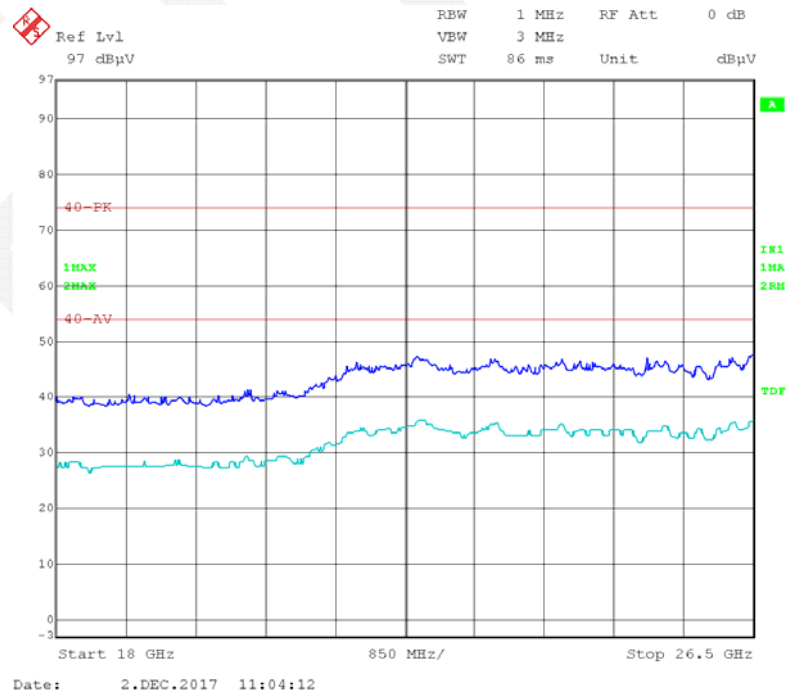

802.11n20 Mode: High Channel_Horizontal_26.5GHz-40GHz

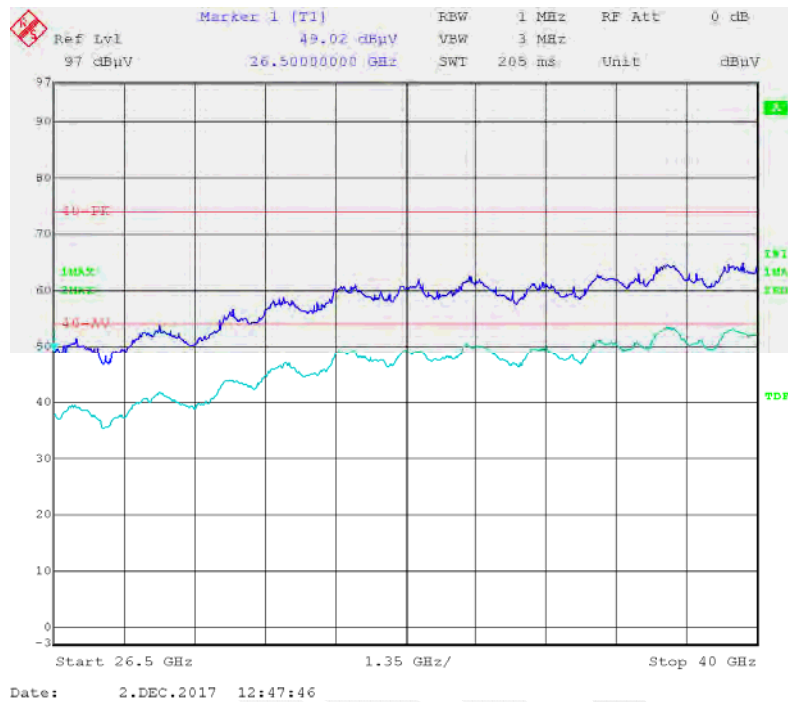


802.11n20 Mode: High Channel_Vertical_1GHz-18GHz

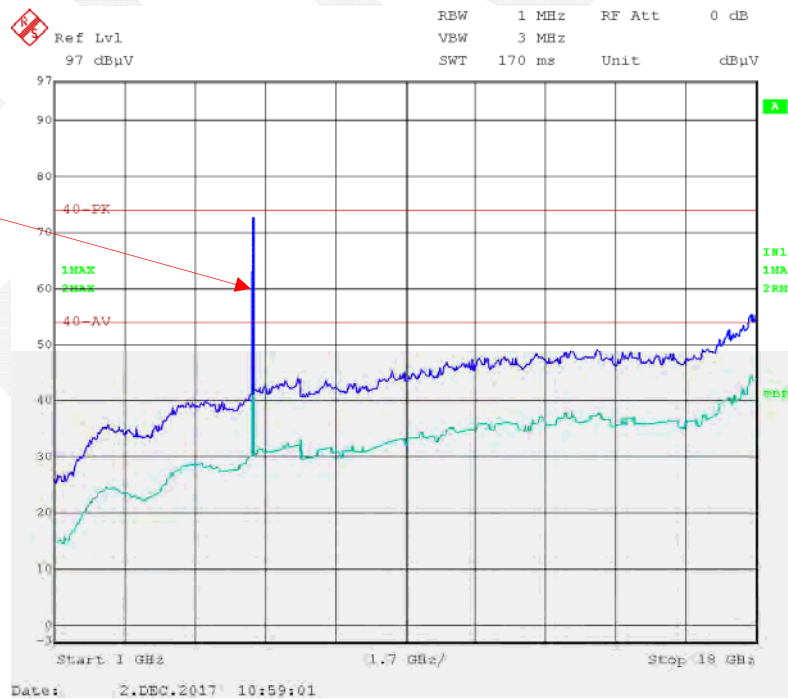


Fundamental with
Reject Band Filter

802.11n20 Mode: High Channel_Vertical_18GHz-26.5GHz

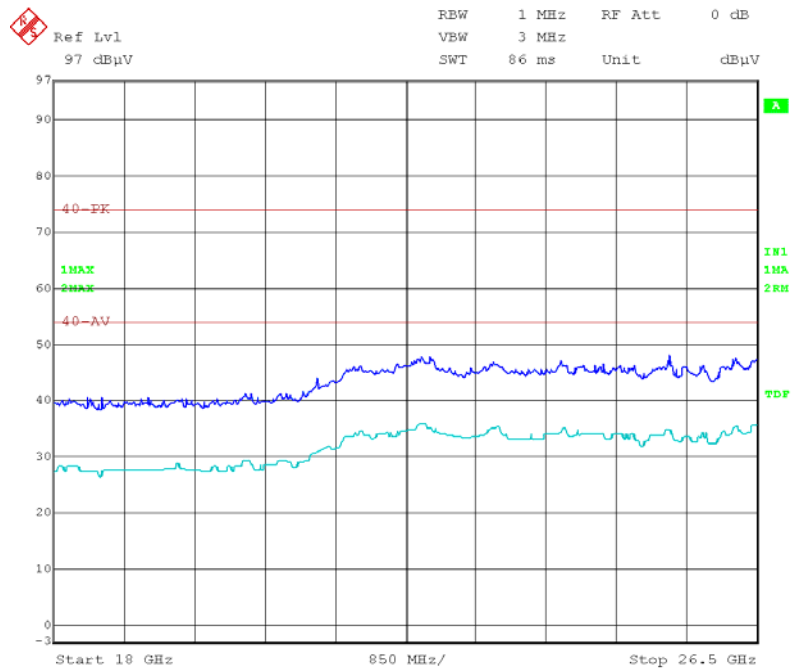

Date: 2.DEC.2017 11:09:05

802.11n20 Mode: High Channel_Vertical_26.5GHz-40GHz

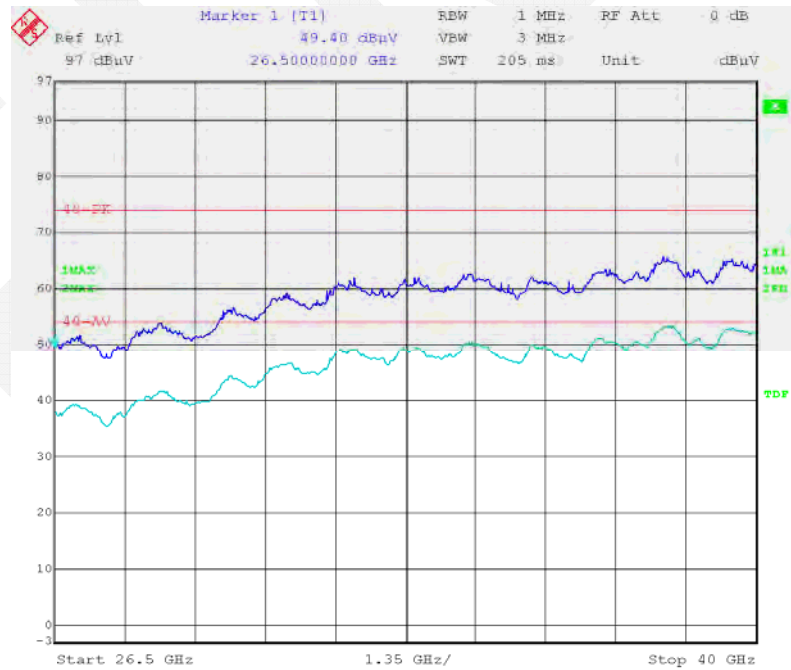

Date: 2.DEC.2017 12:50:43

FCC §15.407(b) (1), (4) (i) – BAND EDGE

Applicable Standard

FCC §15.407(b) (1), (4) (i)

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibration or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 1 MHz and VBW to 3 MHz of spectrum analyzer. Offset the antenna gain and cable loss.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	18 °C
Relative Humidity:	54 %
ATM Pressure:	96.8 kPa


* The testing was performed by Tom Tang on 2017-12-01.

Test mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

For 5150-5250 MHz (Note: The antenna gain was set in the offset, all emissions under limit more than 3dBc, so MIMO mode also comply the requirement.)


802.11a: Band Edge, Left Side, Antenna 1

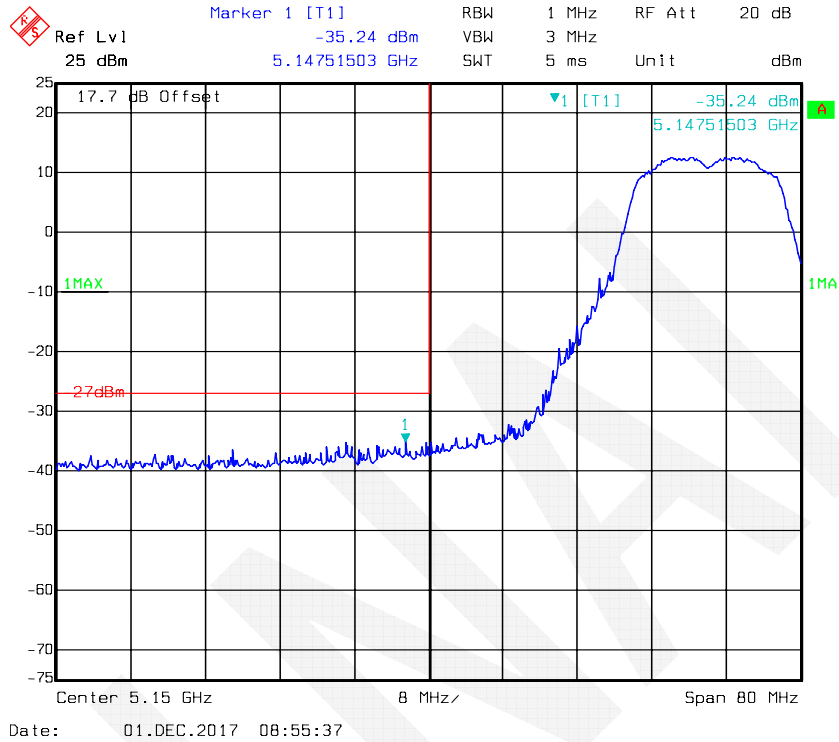

802.11a: Band Edge, Right Side, Antenna 1

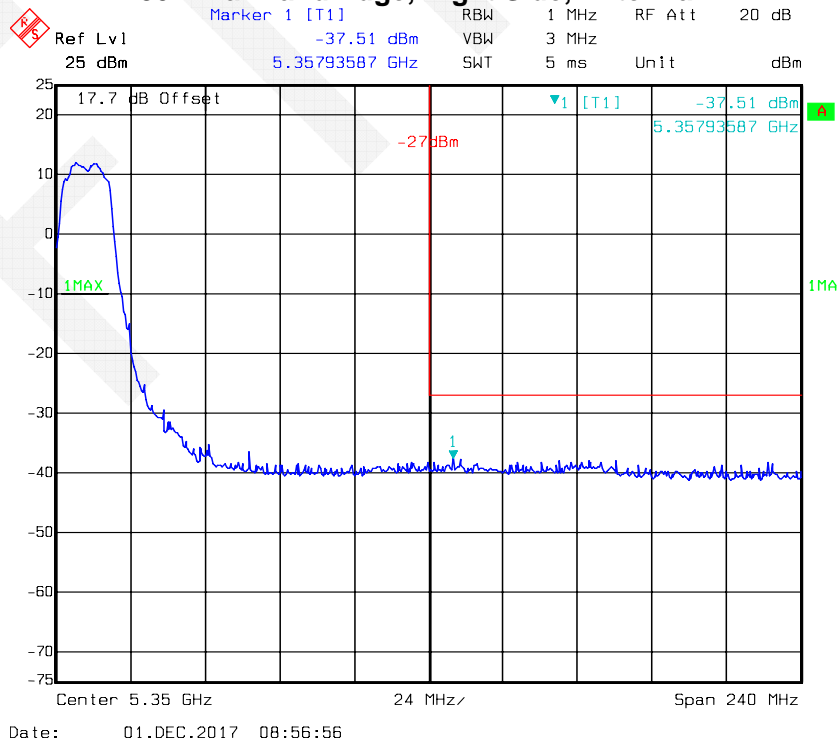


802.11a: Band Edge, Left Side, Antenna 2

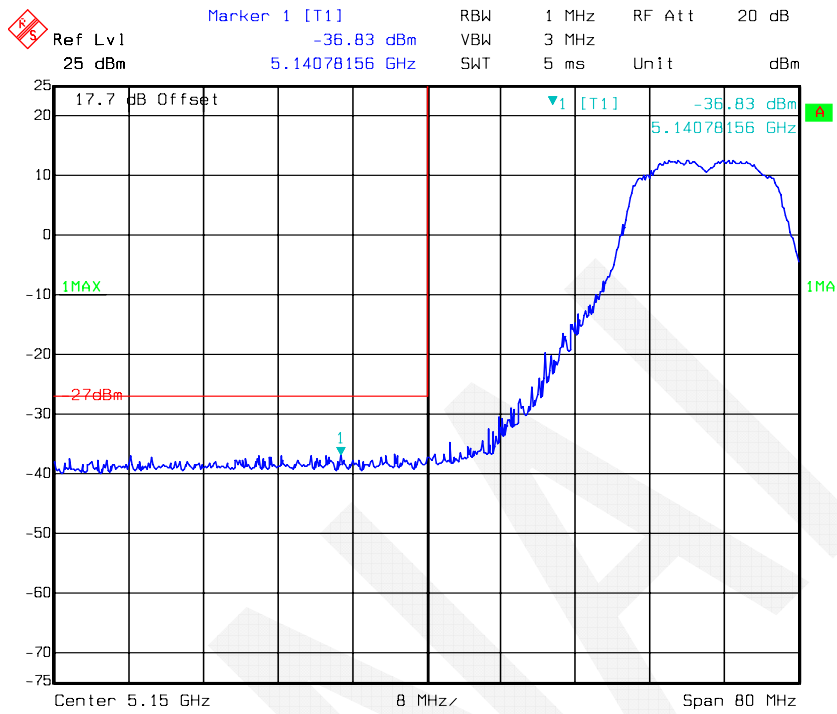


Date: 01.DEC.2017 09:06:58

802.11a: Band Edge, Right Side, Antenna 2

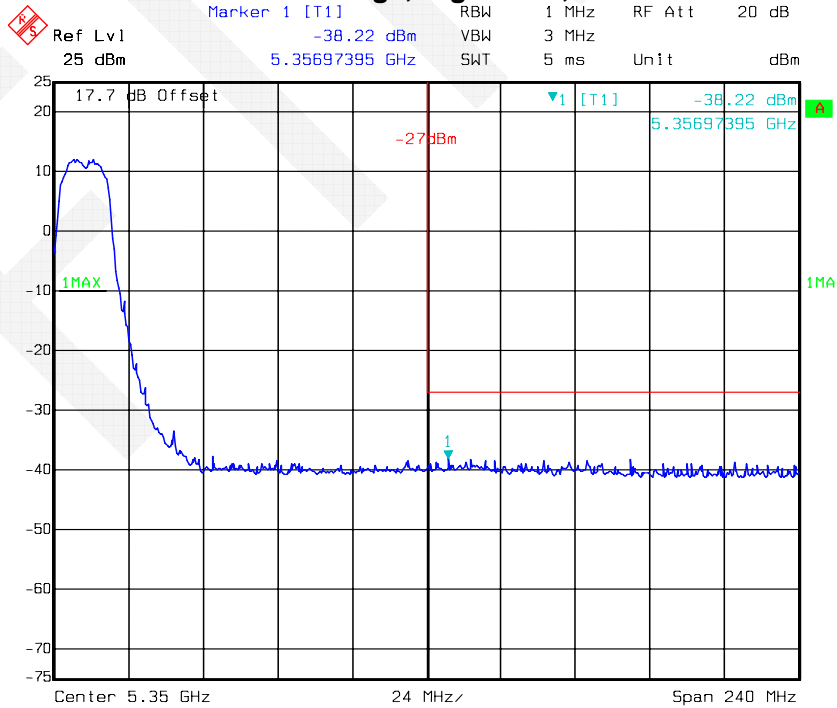


Date: 01.DEC.2017 09:07:30

802.11n-HT20: Band Edge, Left Side, Antenna 1

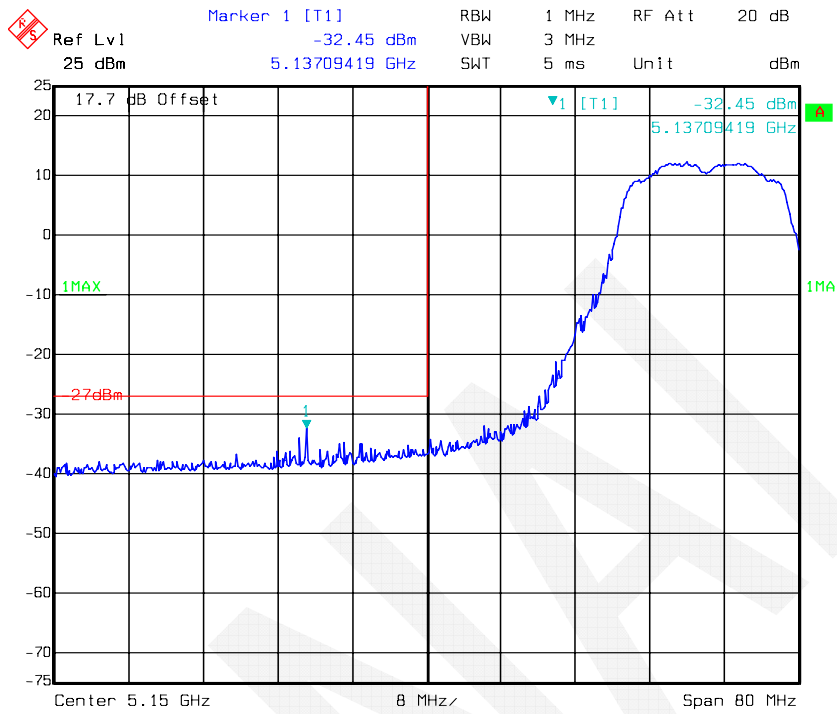


Date: 01.DEC.2017 08:58:21

802.11n-HT20: Band Edge, Right Side, Antenna 1

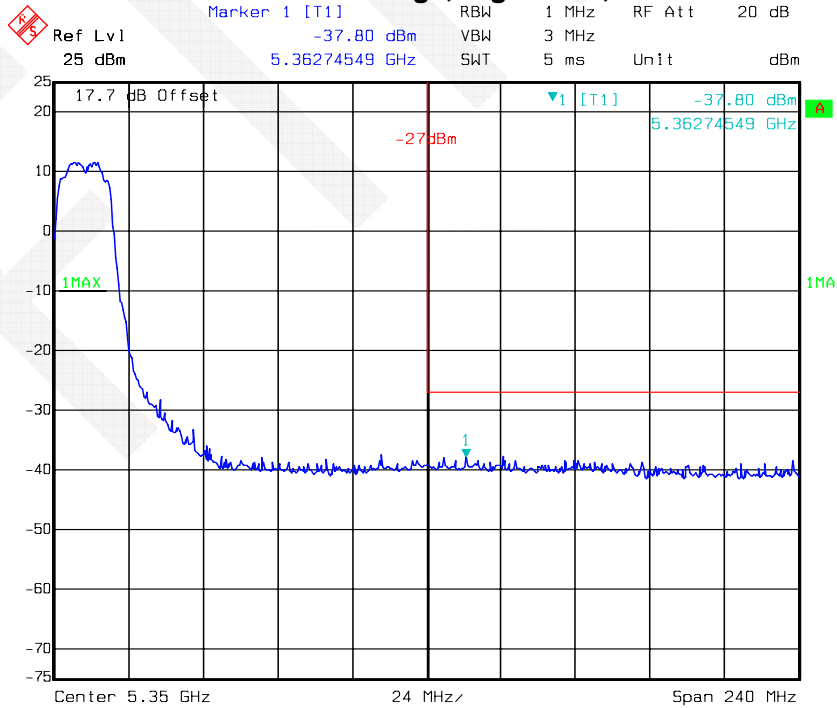


Date: 01.DEC.2017 08:57:42

802.11n-HT20: Band Edge, Left Side, Antenna 2

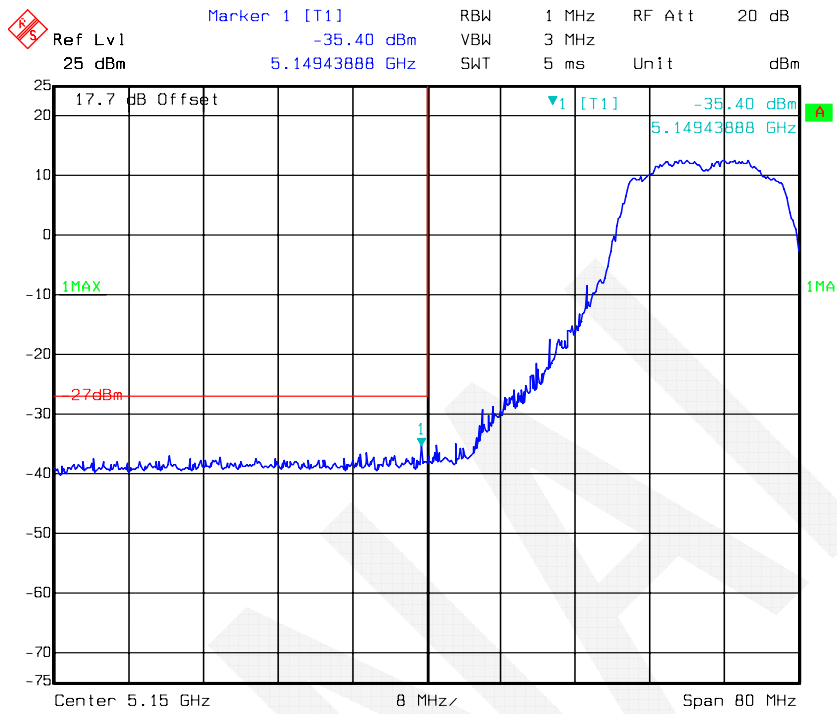


Date: 01.DEC.2017 09:08:11

802.11n-HT20: Band Edge, Right Side, Antenna 2

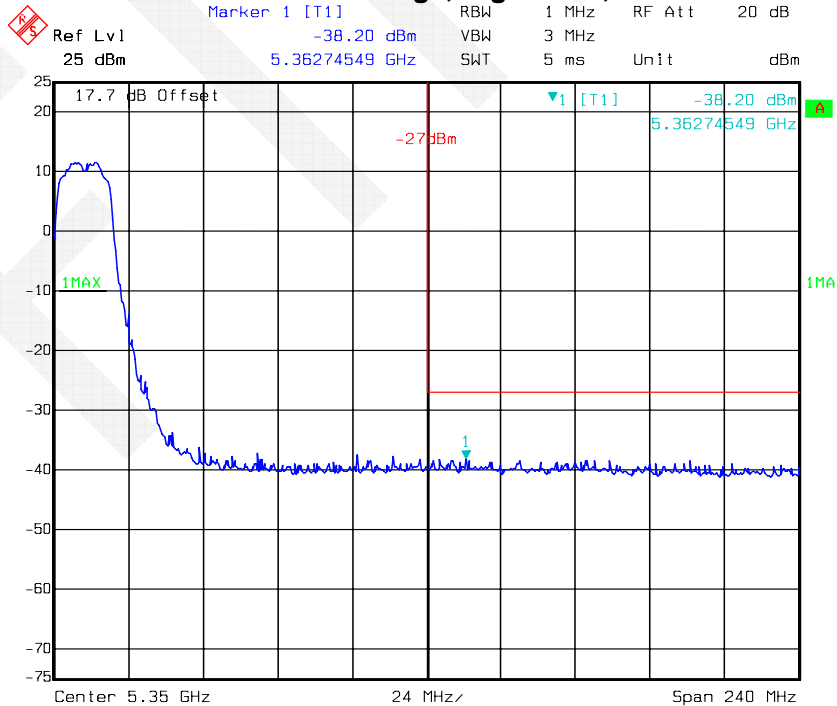


Date: 01.DEC.2017 09:08:48

802.11n-HT40: Band Edge, Left Side, Antenna 1

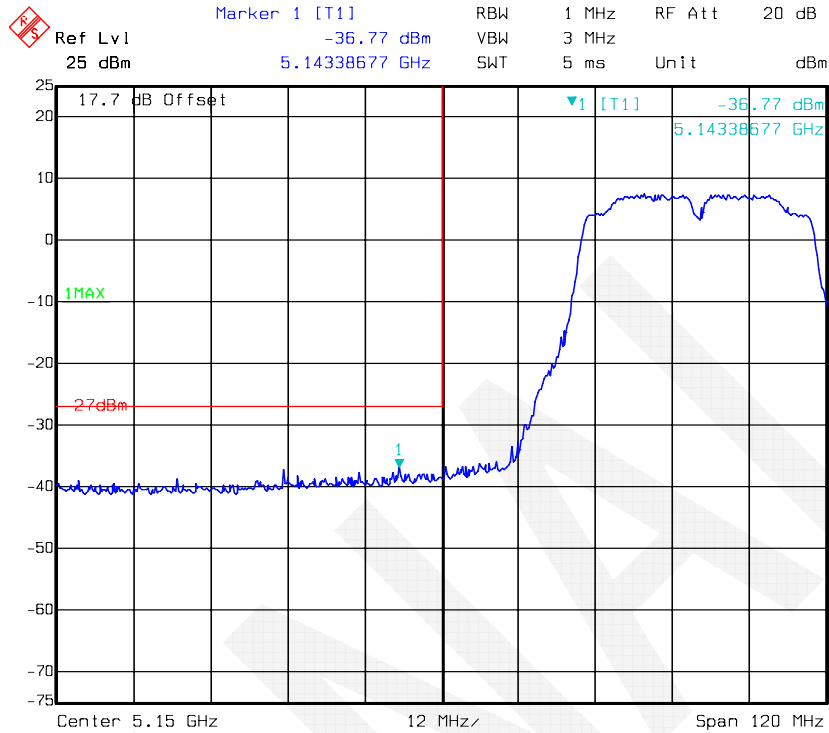


Date: 01.DEC.2017 09:03:56

802.11n-HT40: Band Edge, Right Side, Antenna 1

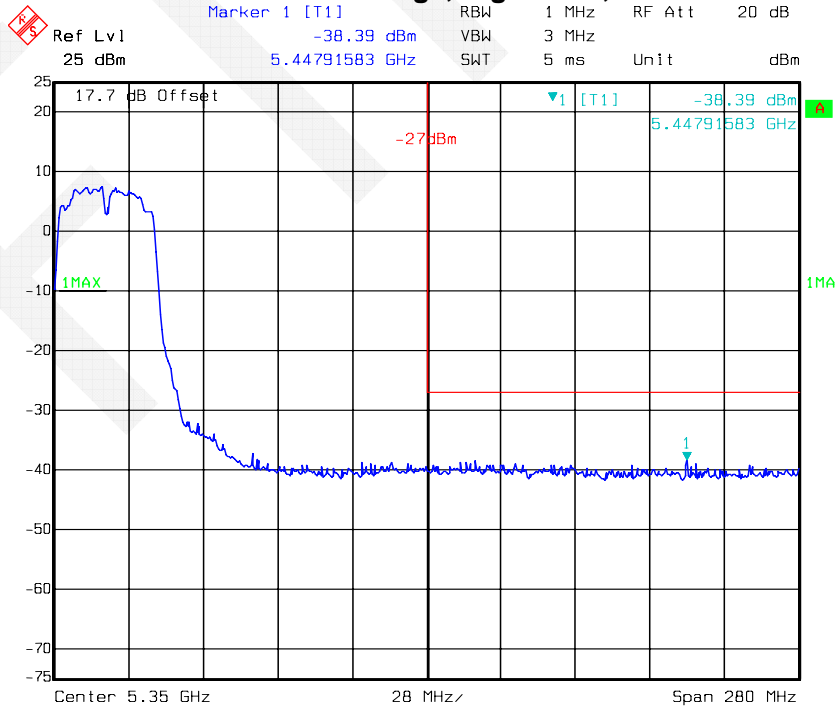


Date: 01.DEC.2017 09:00:27


802.11n-HT40: Band Edge, Left Side, Antenna 2

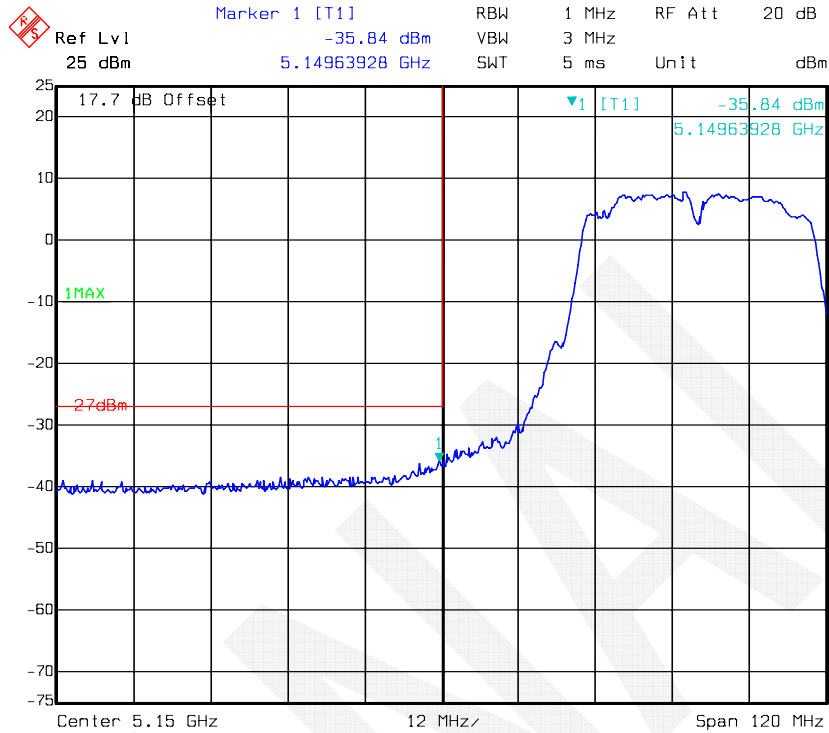

802.11n-HT40: Band Edge, Right Side, Antenna 2

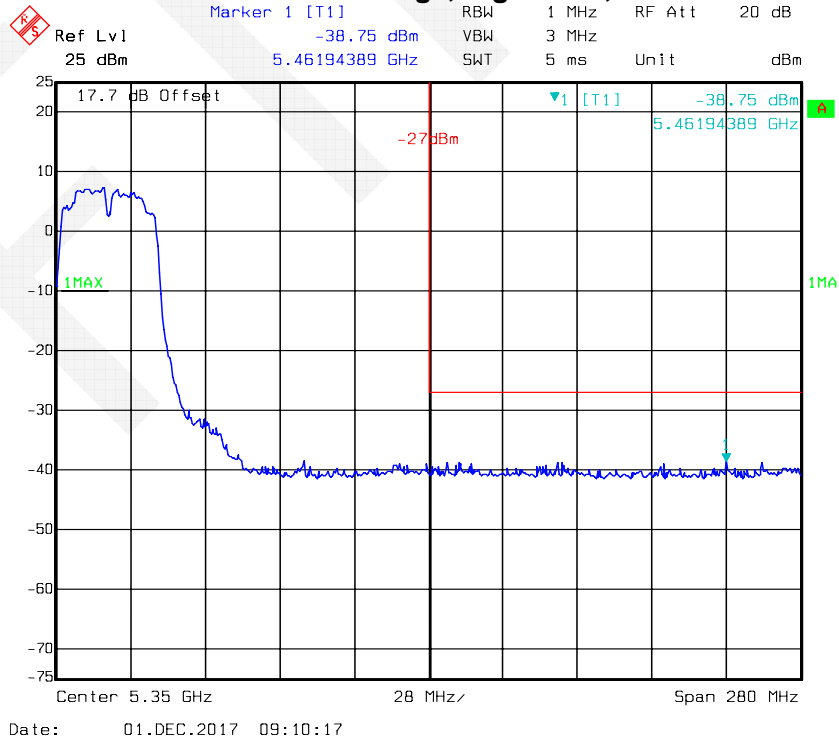


802.11ac20: Band Edge, Left Side, Antenna 1

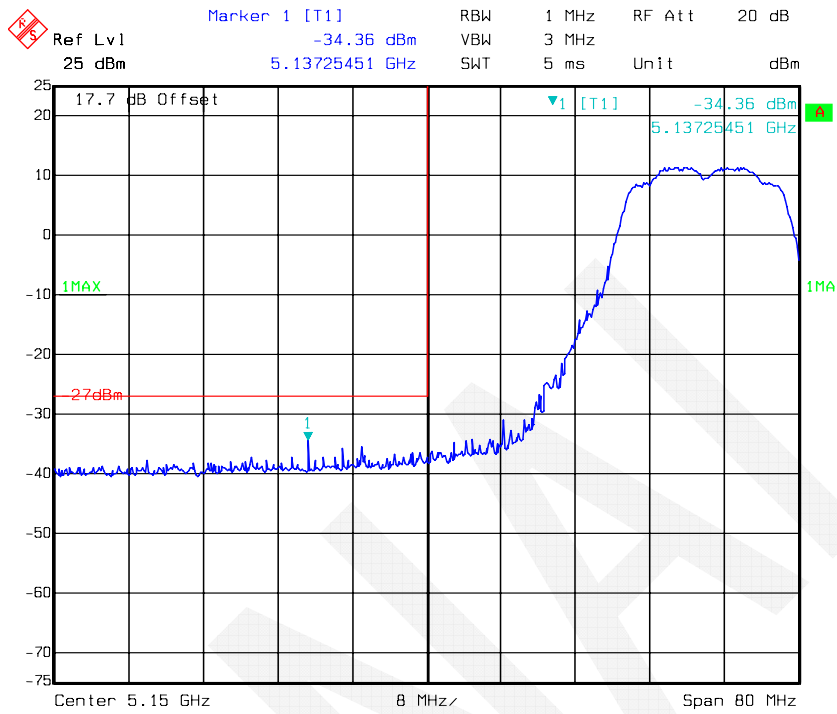


Date: 01.DEC.2017 09:02:17

802.11ac20: Band Edge, Right Side, Antenna 1

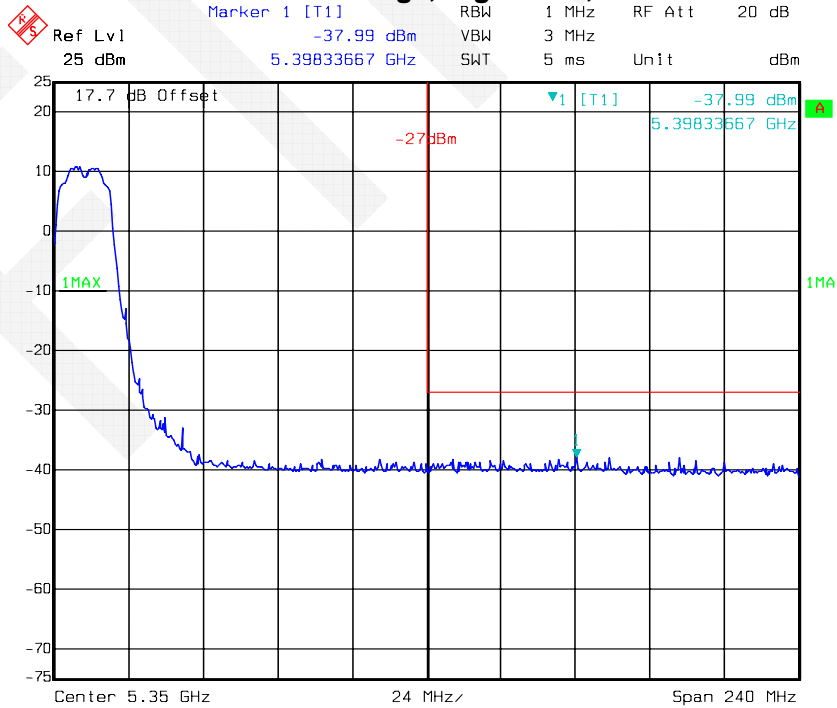


Date: 01.DEC.2017 09:03:09

802.11ac20: Band Edge, Left Side, Antenna 2

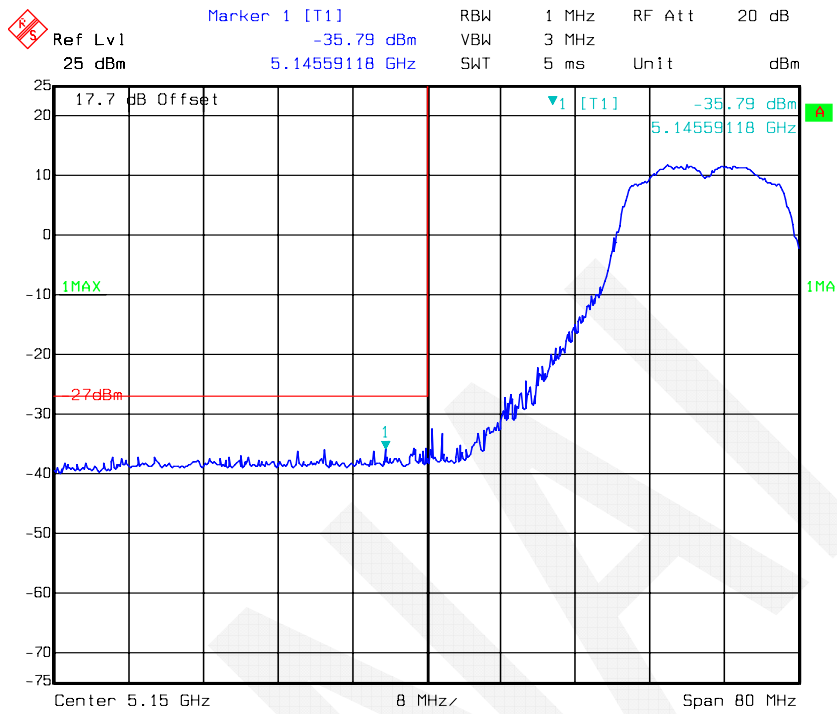


Date: 01.DEC.2017 09:11:24

802.11ac20: Band Edge, Right Side, Antenna 2

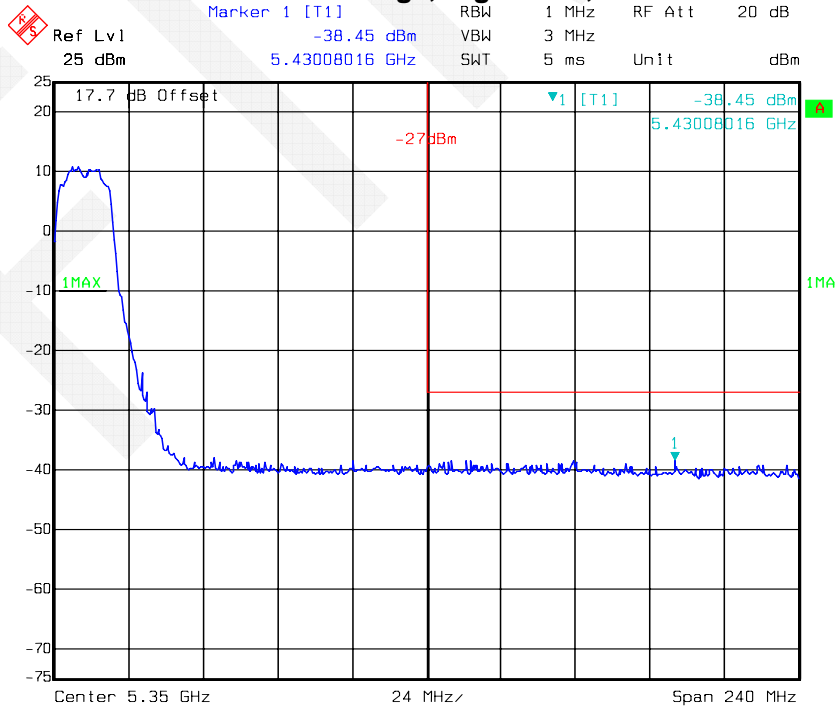


Date: 01.DEC.2017 09:12:02

802.11ac40: Band Edge, Left Side, Antenna 1

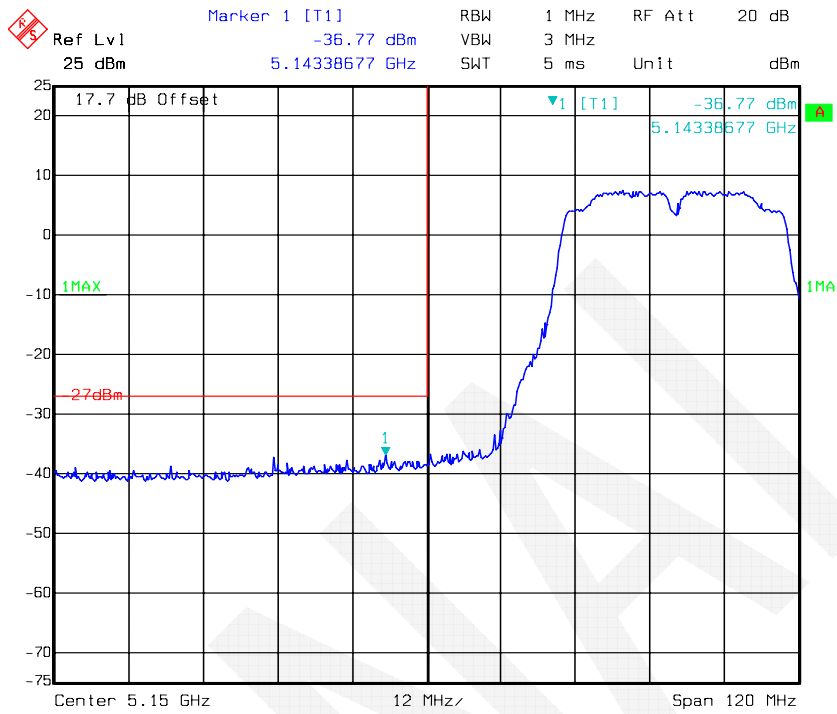


Date: 01.DEC.2017 09:03:56

802.11ac40: Band Edge, Right Side, Antenna 1

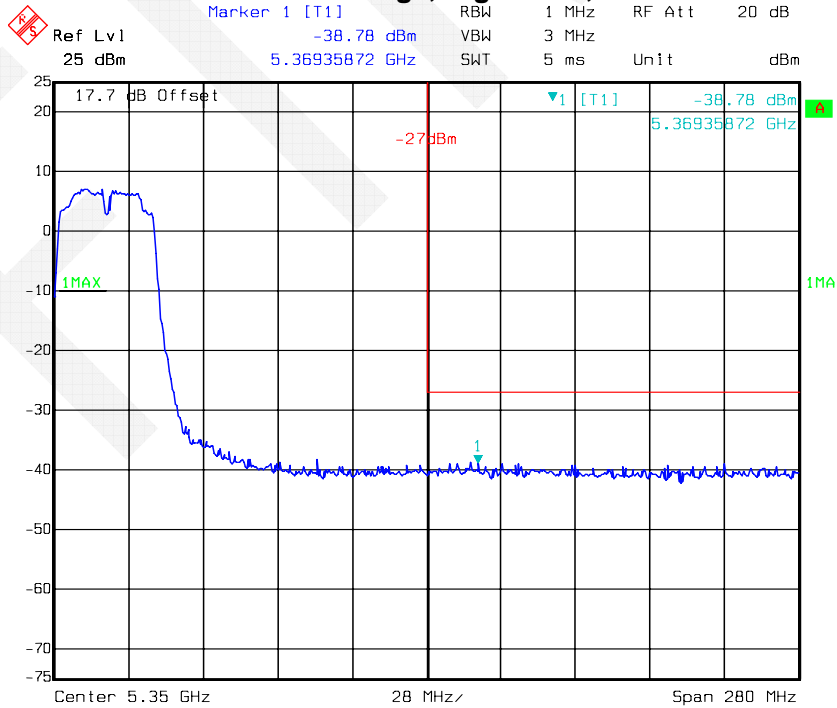


Date: 01.DEC.2017 09:04:30

802.11ac40: Band Edge, Left Side, Antenna 2

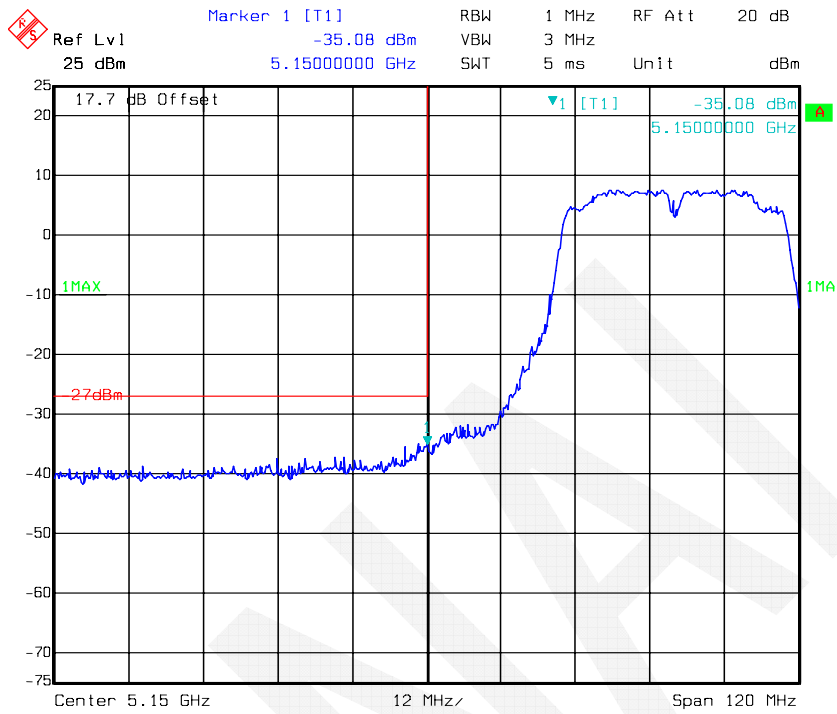


Date: 01.DEC.2017 09:13:15

802.11ac40: Band Edge, Right Side, Antenna 2

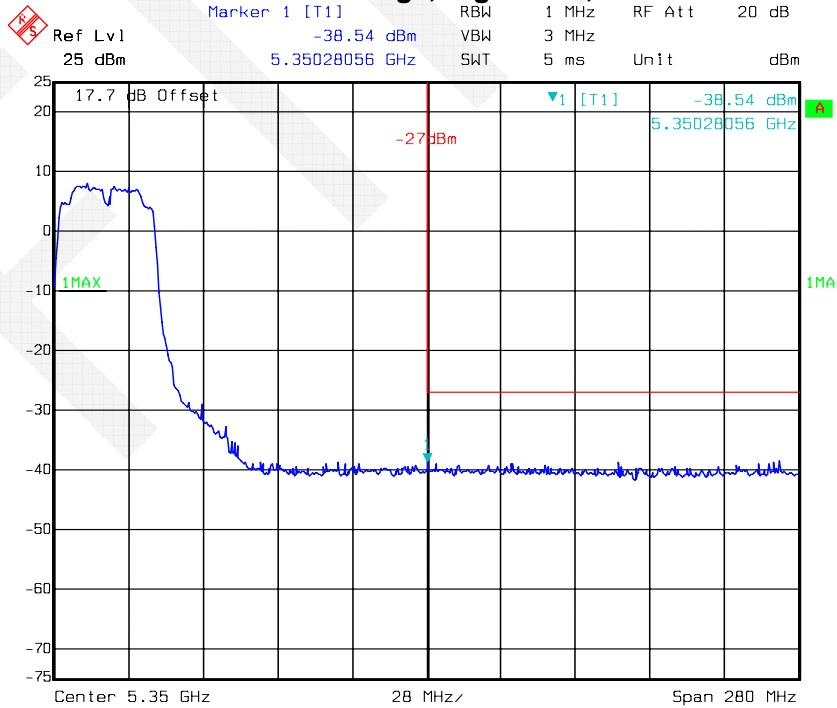


Date: 01.DEC.2017 09:13:51

802.11ac80: Band Edge, Antenna 1

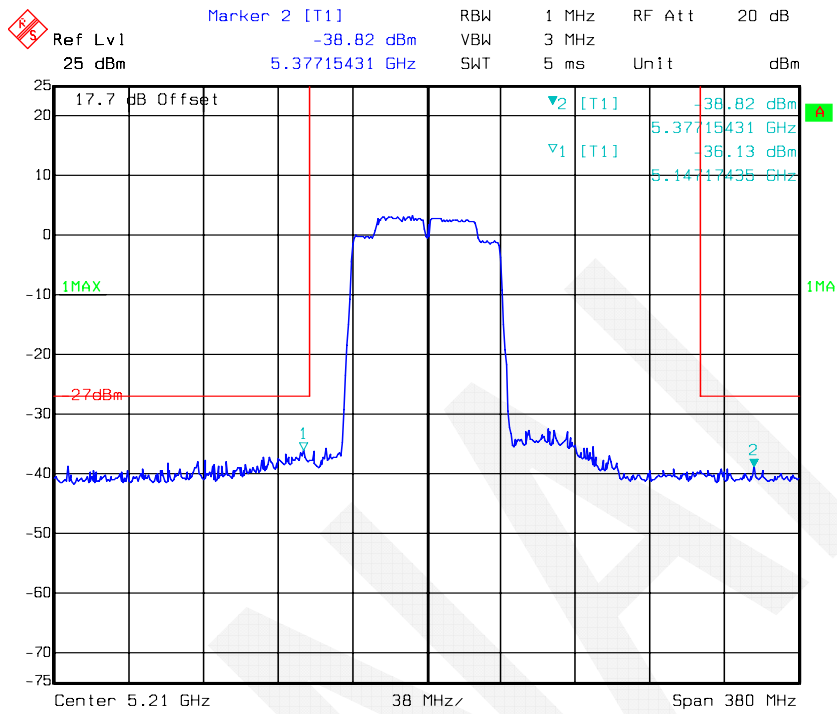


802.11ac80: Band Edge, Antenna 2

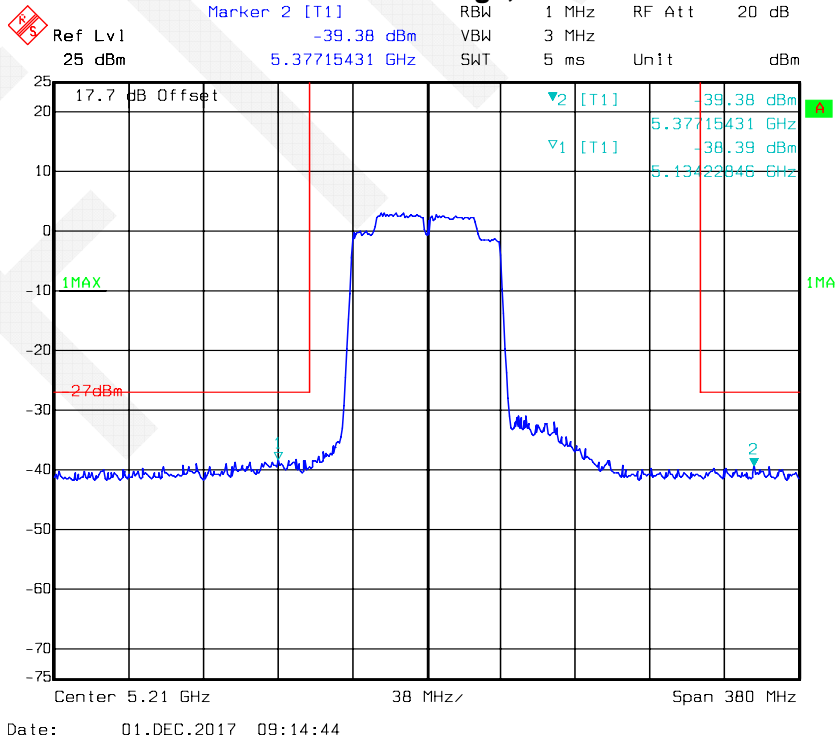


For 5725-5850 MHz: (Note: The antenna gain was set in the offset, all emissions under limit more than 3dBc, so MIMO mode also comply the requirement.)


802.11a: Band Edge, Left Side, Antenna 1

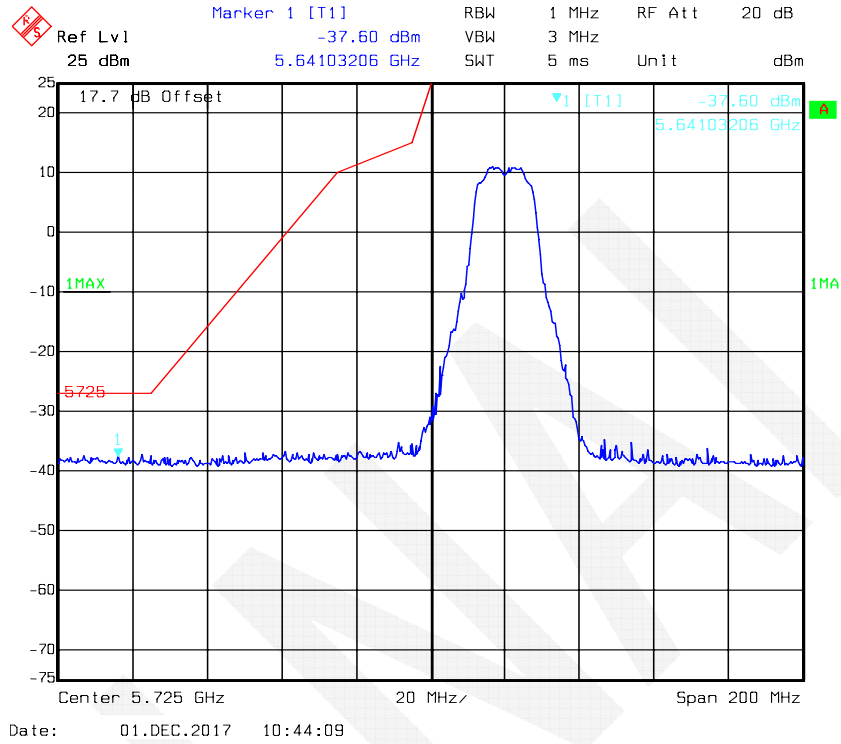

802.11a: Band Edge, Right Side, Antenna 1

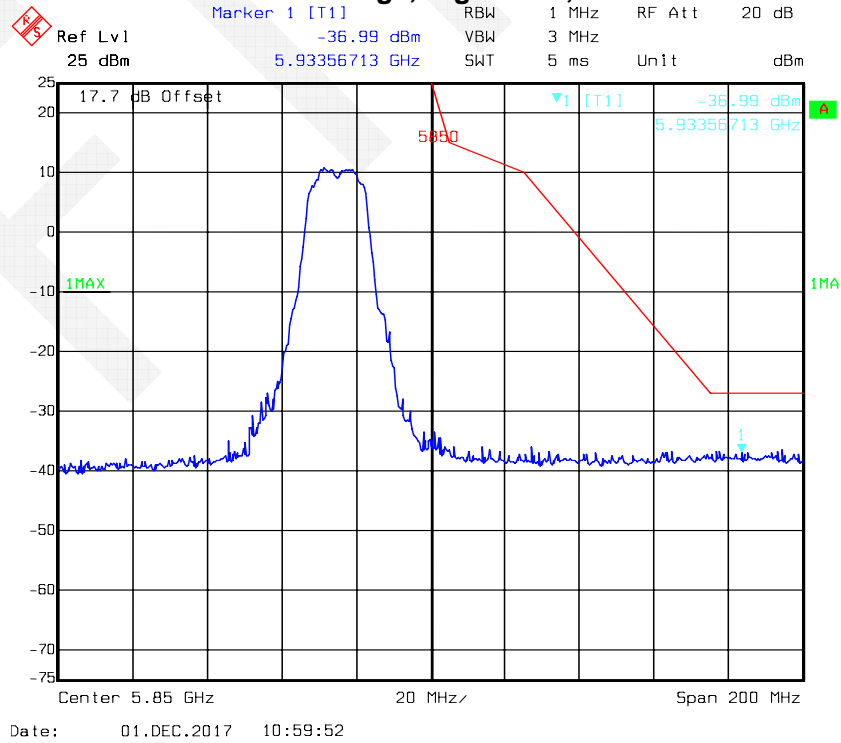


802.11a: Band Edge, Left Side, Antenna 2

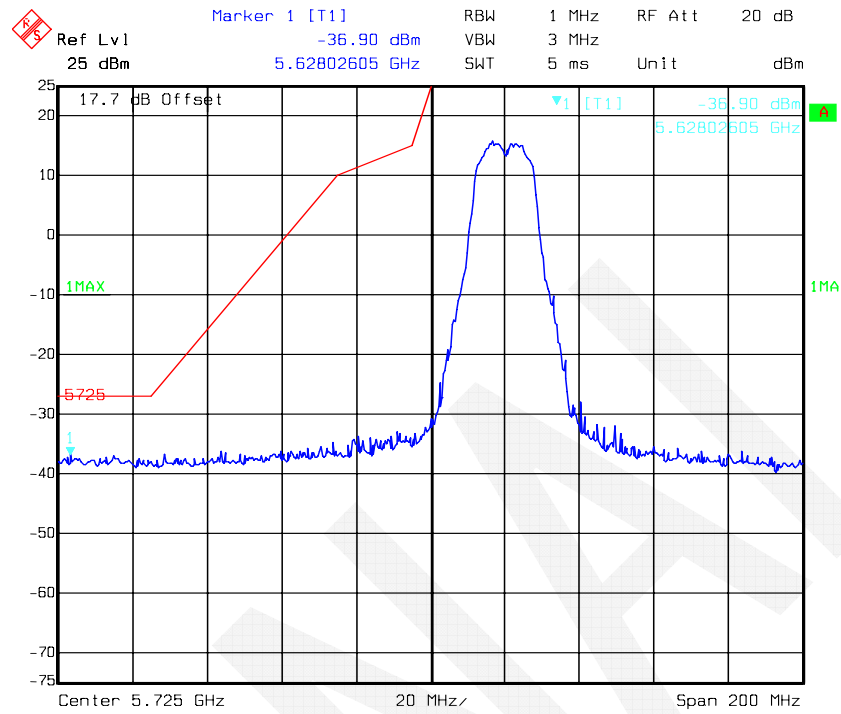


Date: 01.DEC.2017 11:17:36

802.11a: Band Edge, Right Side, Antenna 2

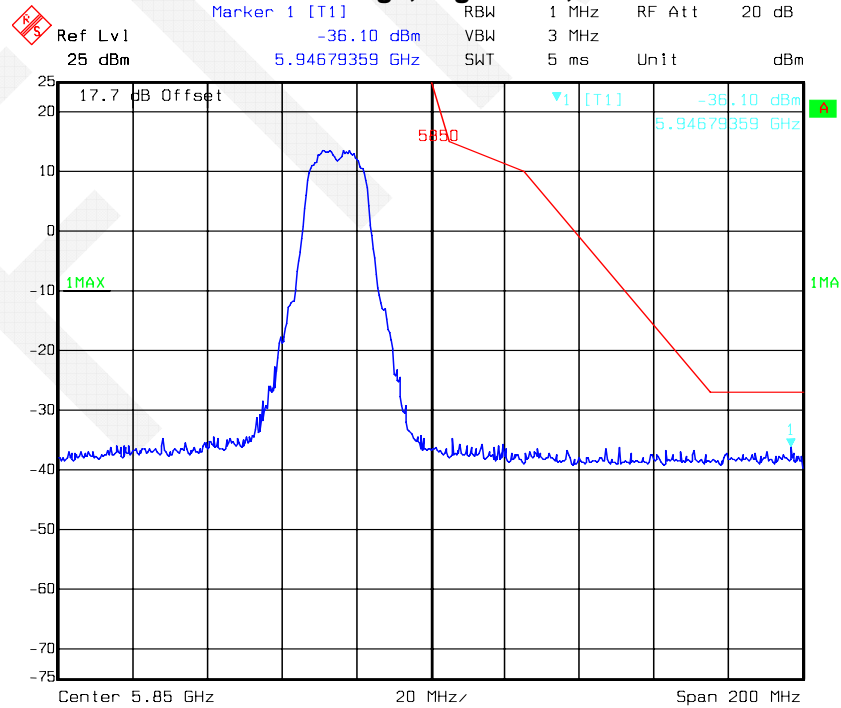


Date: 01.DEC.2017 11:03:21

802.11n-HT20: Band Edge, Left Side, Antenna 1

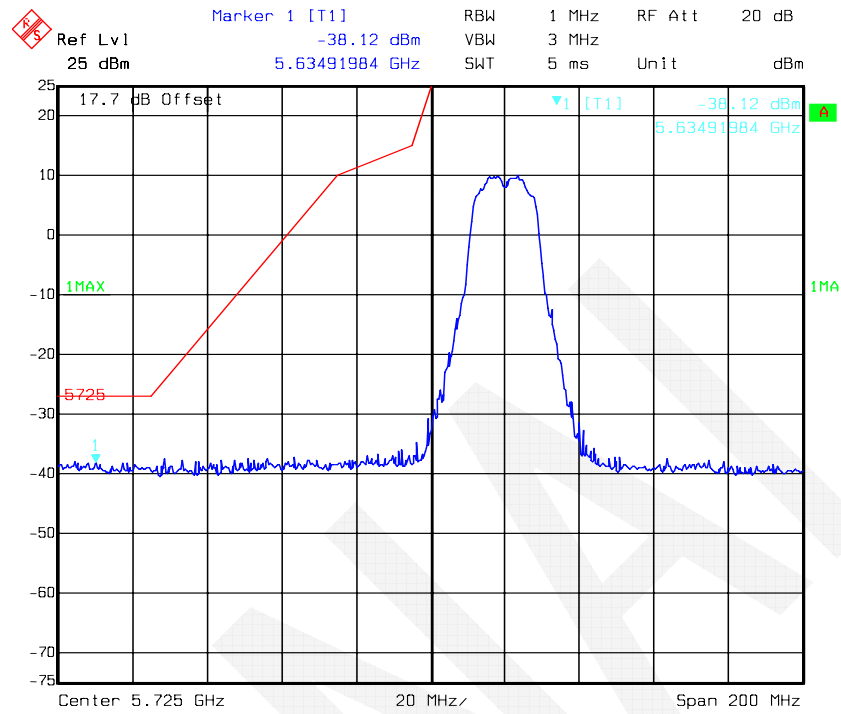


Date: 01.DEC.2017 10:51:07

802.11n-HT20: Band Edge, Right Side, Antenna 1

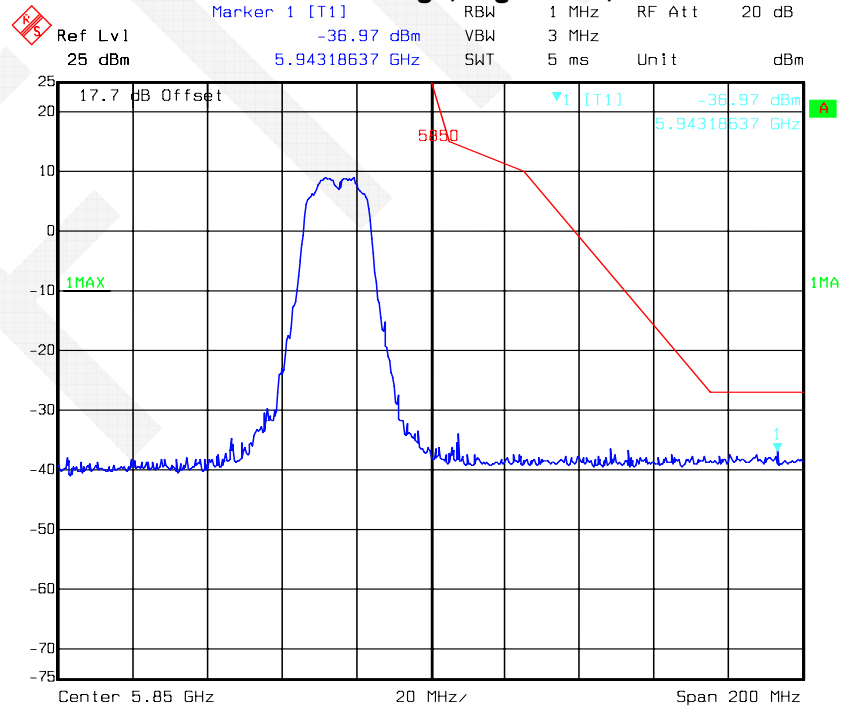


Date: 01.DEC.2017 10:56:52

802.11n-HT20: Band Edge, Left Side, Antenna 2

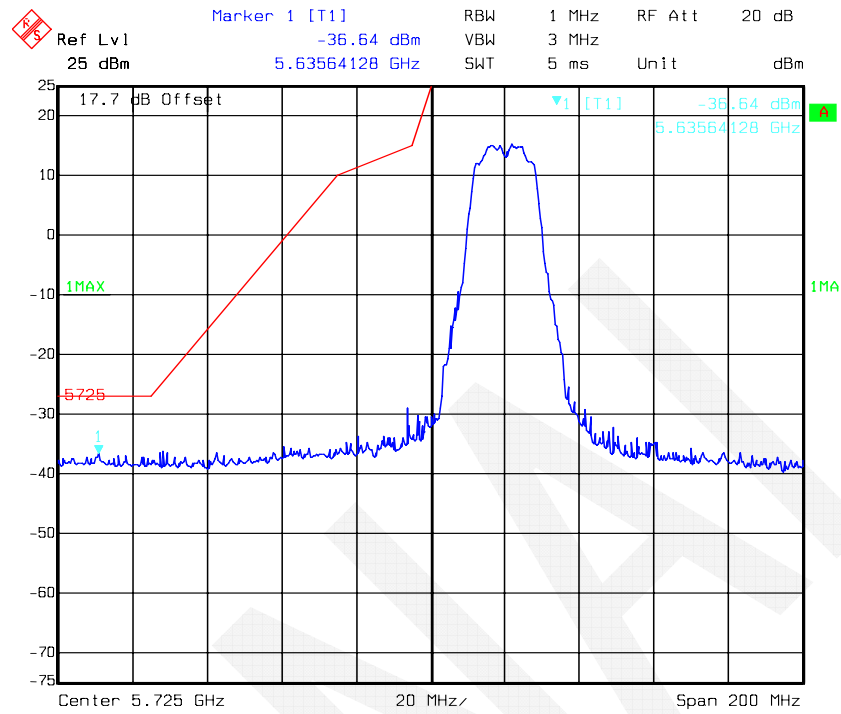


Date: 01.DEC.2017 11:16:58

802.11n-HT20: Band Edge, Right Side, Antenna 2

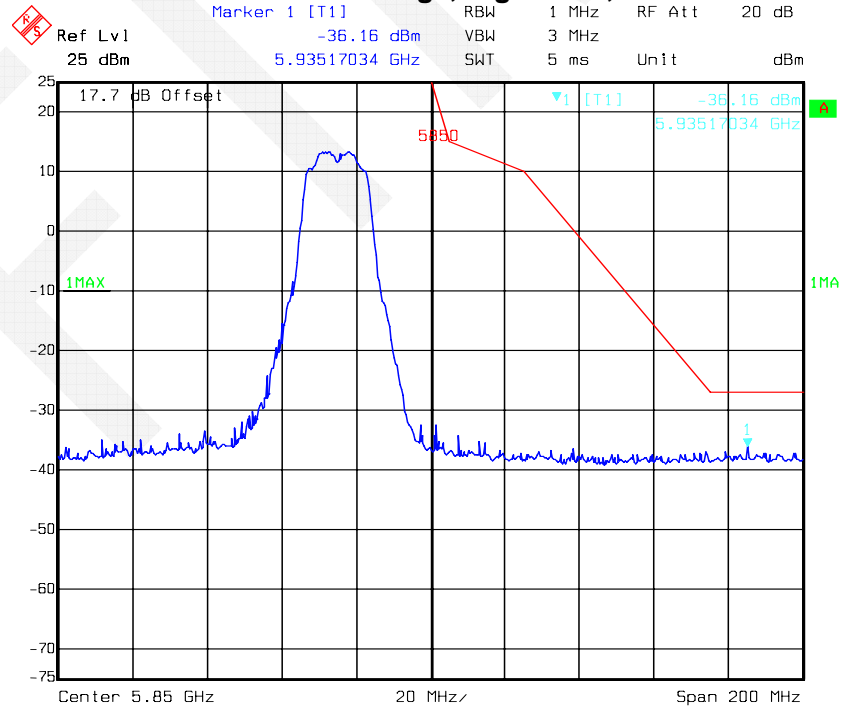


Date: 01.DEC.2017 11:04:25

802.11n-HT40: Band Edge, Left Side, Antenna 1

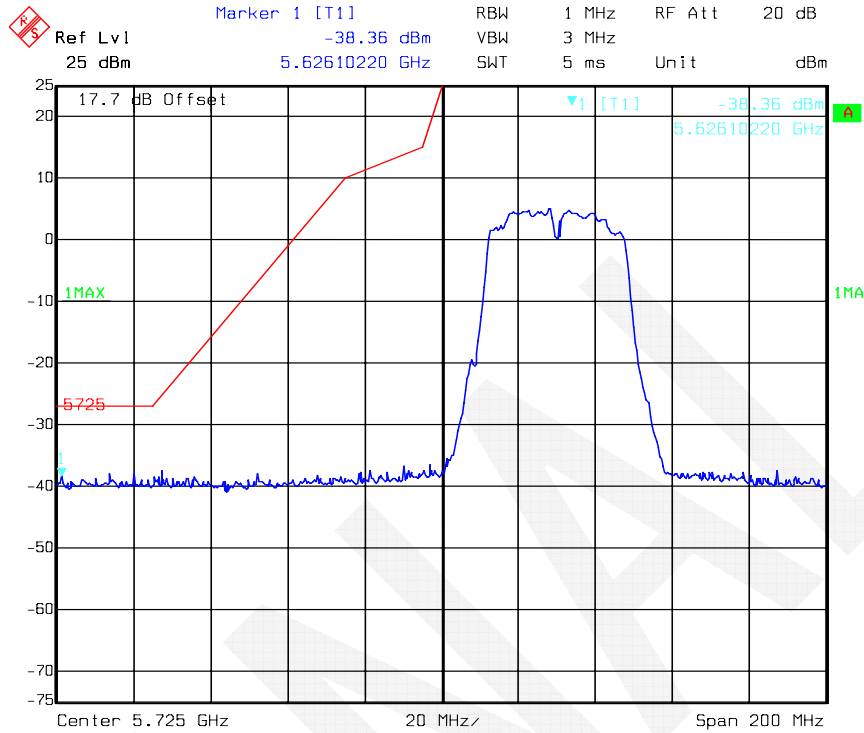


Date: 01.DEC.2017 10:54:40

802.11n-HT40: Band Edge, Right Side, Antenna 1

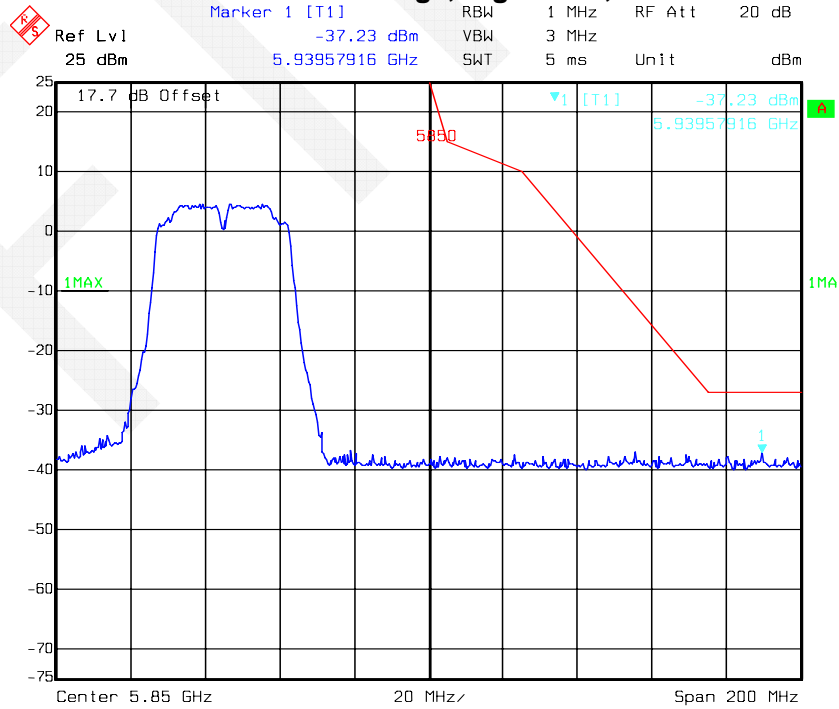


Date: 01.DEC.2017 10:58:47

802.11n-HT40: Band Edge, Left Side, Antenna 2

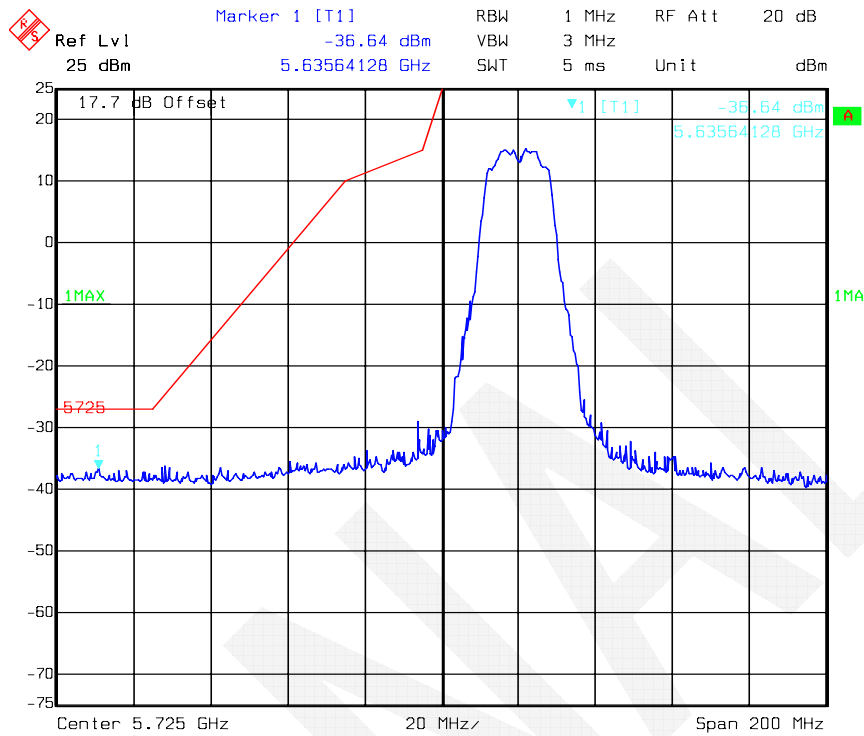


Date: 01.DEC.2017 11:16:58

802.11n-HT40: Band Edge, Right Side, Antenna 2

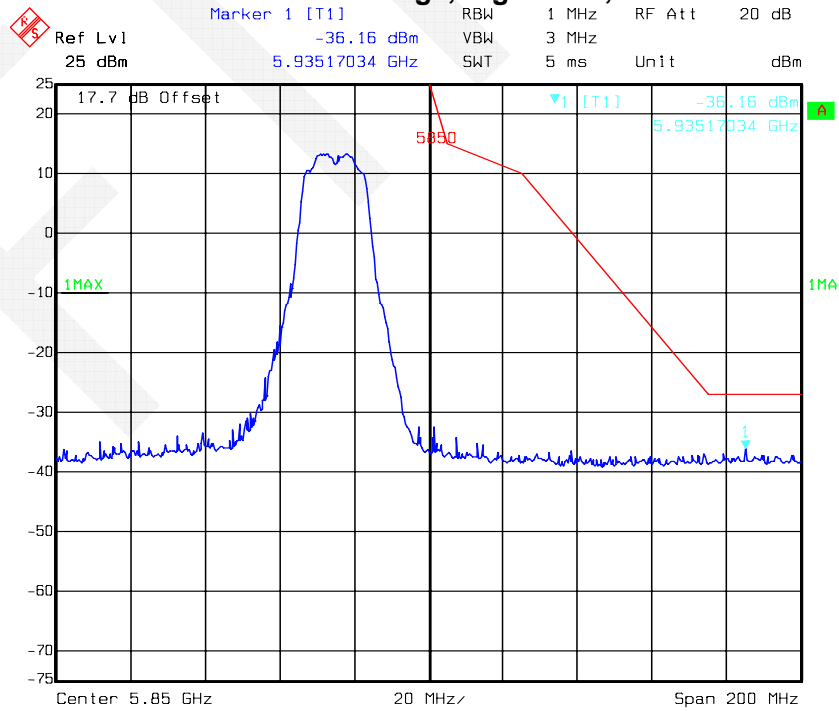


Date: 01.DEC.2017 11:04:25

802.11ac20: Band Edge, Left Side, Antenna 1

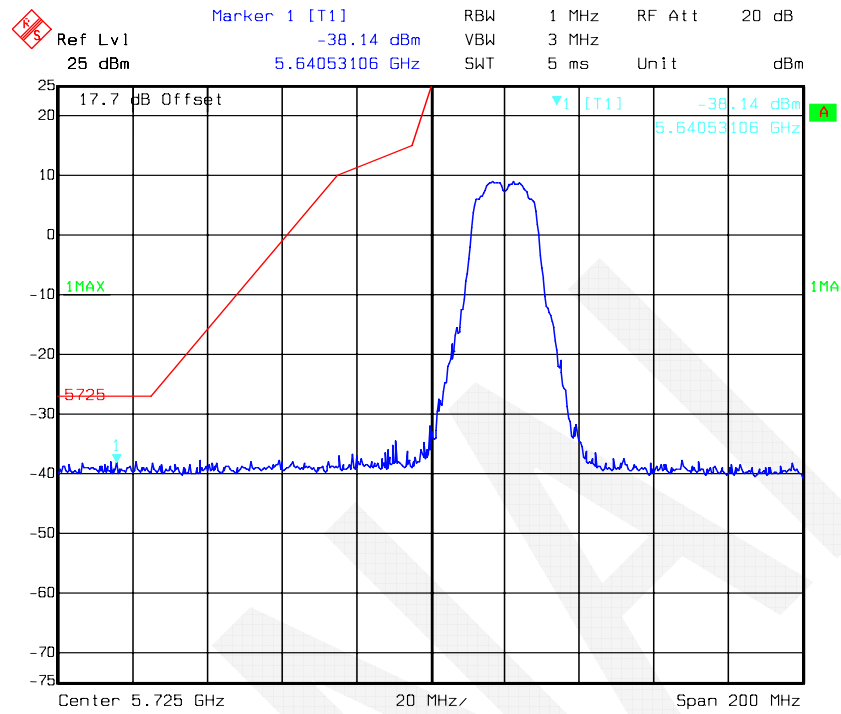


Date: 01.DEC.2017 10:52:48

802.11ac20: Band Edge, Right Side, Antenna 1

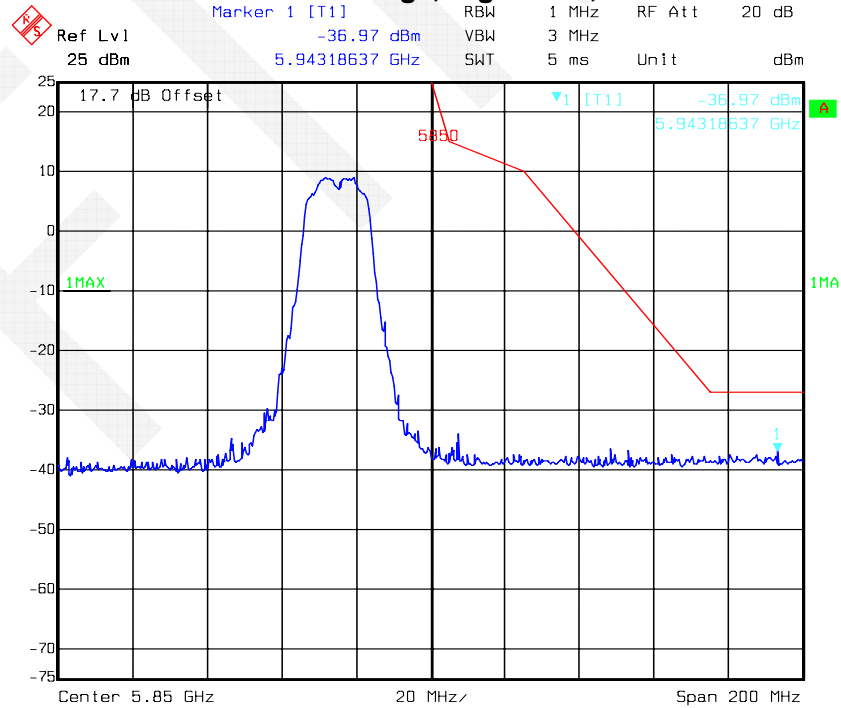


Date: 01.DEC.2017 10:56:52

802.11ac20: Band Edge, Left Side, Antenna 2

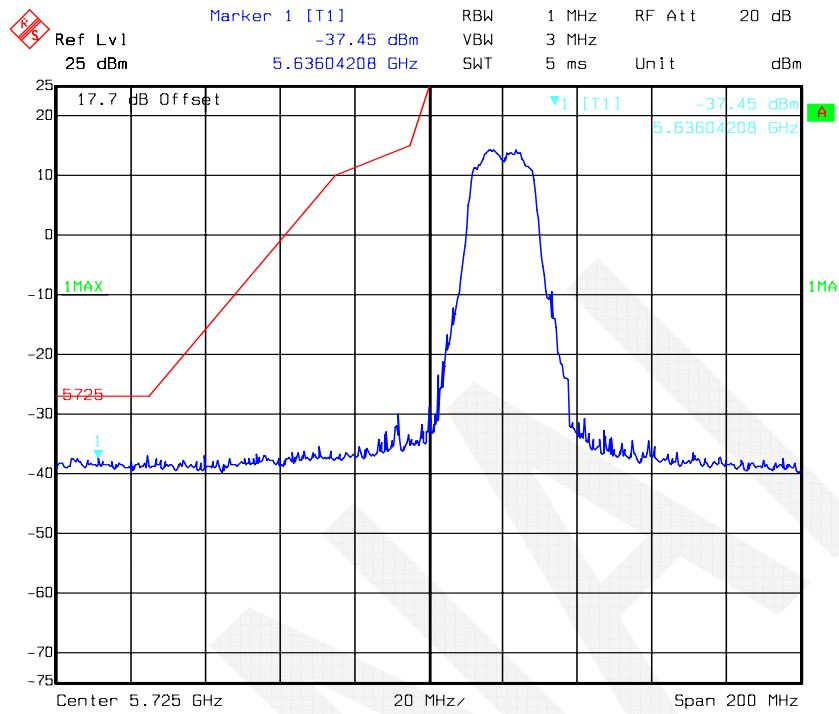


Date: 01.DEC.2017 11:15:04

802.11ac20: Band Edge, Right Side, Antenna 2

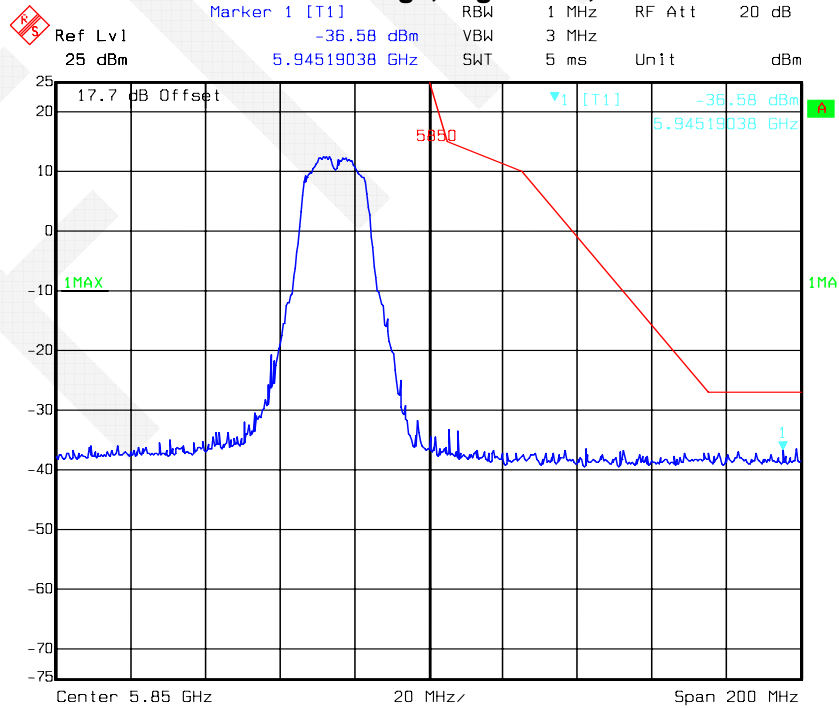


Date: 01.DEC.2017 11:07:26

802.11ac40: Band Edge, Left Side, Antenna 1

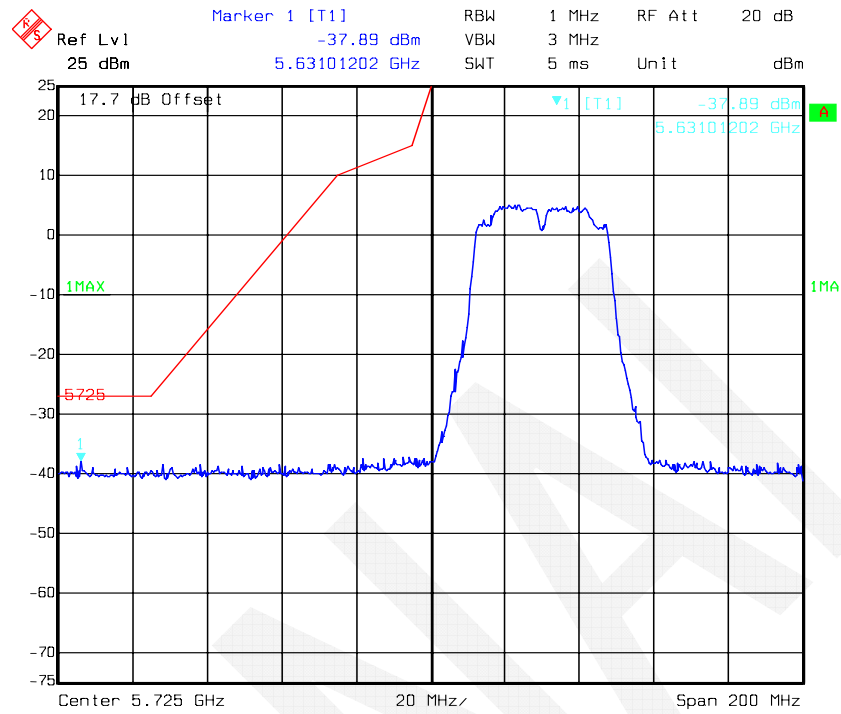


Date: 01.DEC.2017 10:47:03

802.11ac40: Band Edge, Right Side, Antenna 1

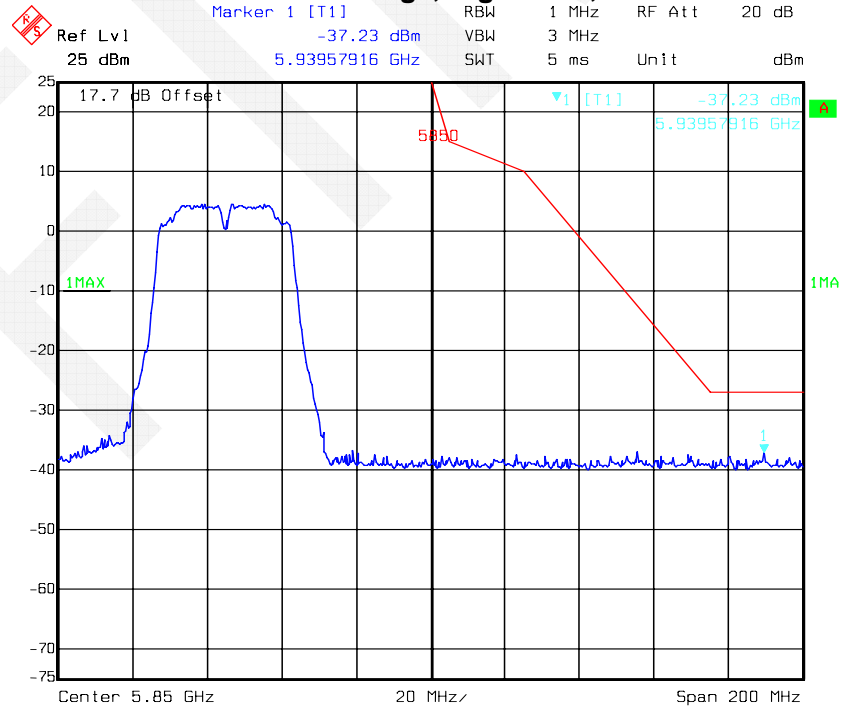


Date: 01.DEC.2017 10:58:47

802.11ac40: Band Edge, Left Side, Antenna 2

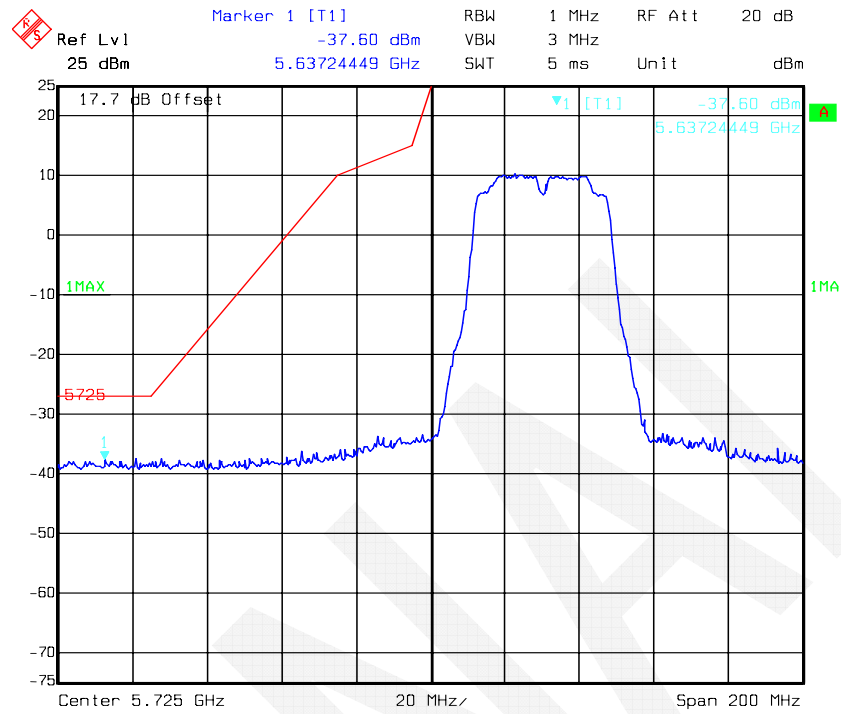


Date: 01.DEC.2017 11:14:17

802.11ac40: Band Edge, Right Side, Antenna 2

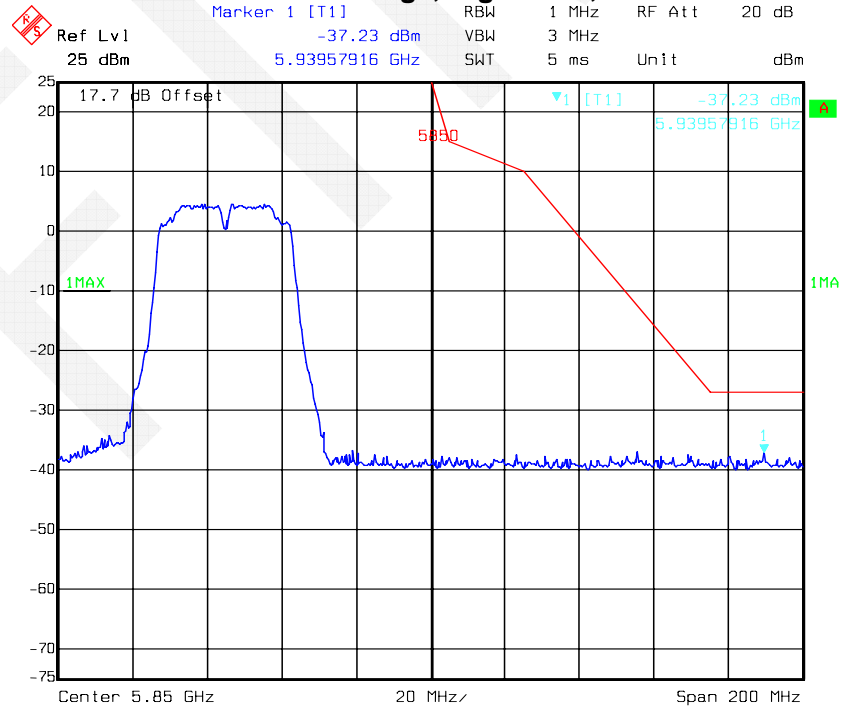


Date: 01.DEC.2017 10:58:47

802.11ac80: Band Edge, Antenna 1

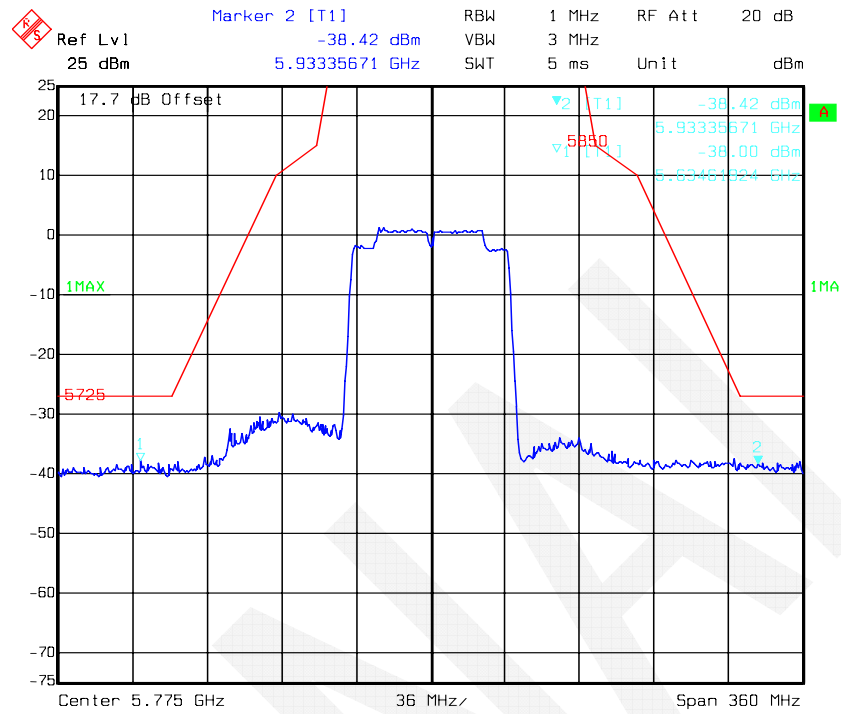

802.11ac80: Band Edge, Antenna 2

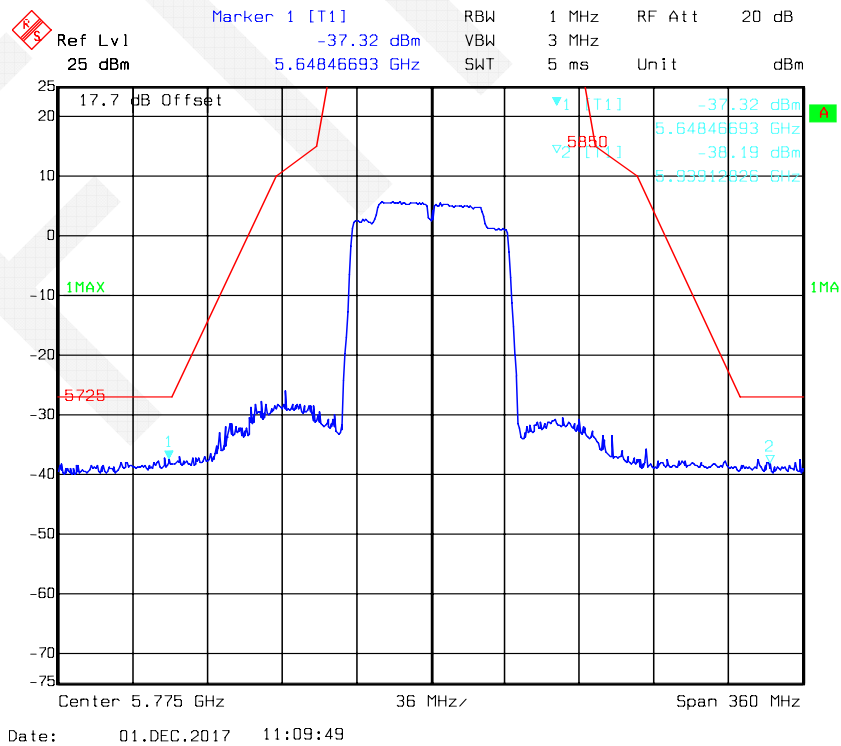

FCC §15.407(a) (5) & (e) – 26dB & 6dB BANDWIDTH

Applicable Standard

(a)(5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3.
 - (A) 26dB Bandwidth
Set RBW = approximately 1% of the emission bandwidth.
Set the VBW > RBW. Detector= Peak. Trace mode = max hold. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
 - (B) 6dB Bandwidth
Set RBW = 100 kHz. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
Detector = Peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
 - (C) 99% Occupied Bandwidth
The following procedure shall be used for measuring (99 %) power bandwidth:
 1. Set center frequency to the nominal EUT channel center frequency.
 2. Set span = 1.5 times to 5.0 times the OBW.
 3. Set RBW = 1 % to 5 % of the OBW
 4. Set VBW $\geq 3 \cdot$ RBW
 5. Use the 99 % power bandwidth function of the instrument.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	18 °C
Relative Humidity:	54 %
ATM Pressure:	96.8 kPa

* The testing was performed by Tom Tang on 2017-12-01.

Test Result: Pass. Please refer to the following tables and plots.


Test mode: Transmitting

For 5150-5250 MHz:


Mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)		99% Occupied Bandwidth (MHz)	
			Antenna 1	Antenna 2	Antenna 1	Antenna 2
802.11a	Low	5180	23.41	23.97	16.75	16.75
	Middle	5200	23.57	24.29	16.75	16.83
	High	5240	24.21	24.45	16.75	16.75
802.11n-HT20	Low	5180	23.49	25.33	17.88	17.96
	Middle	5200	23.89	25.01	17.88	17.96
	High	5240	24.45	24.21	17.88	17.88
802.11n-HT40	Low	5190	42.48	43.61	36.39	36.39
	High	5230	42.81	44.25	36.39	36.55
802.11ac20	Low	5180	23.17	24.37	17.88	17.88
	Middle	5200	23.81	24.93	17.88	17.96
	High	5240	23.65	24.69	17.88	17.96
802.11ac40	Low	5190	42.32	42.97	36.39	36.39
	High	5230	42.16	43.13	36.39	36.55
802.11ac80	-	5210	82.40	82.08	75.35	75.35

Note: the 99% Occupied Bandwidth doesn't extend U-NII-2A band 5250-5350MHz.


802.11a mode, 26 dB Bandwidth-5180 MHz, Antenna 1

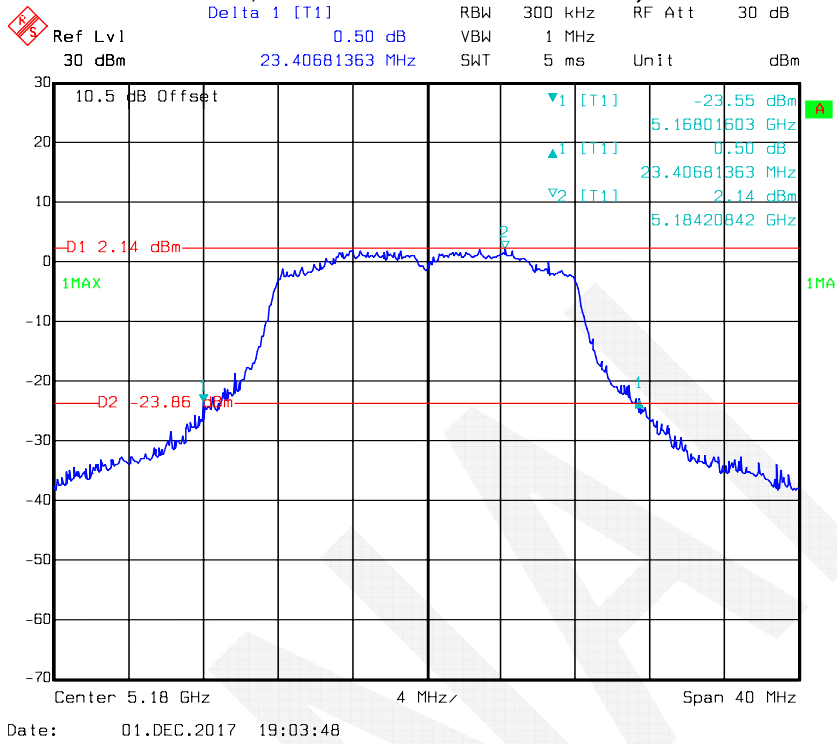

802.11a mode, 26 dB Bandwidth-5200 MHz, Antenna 1

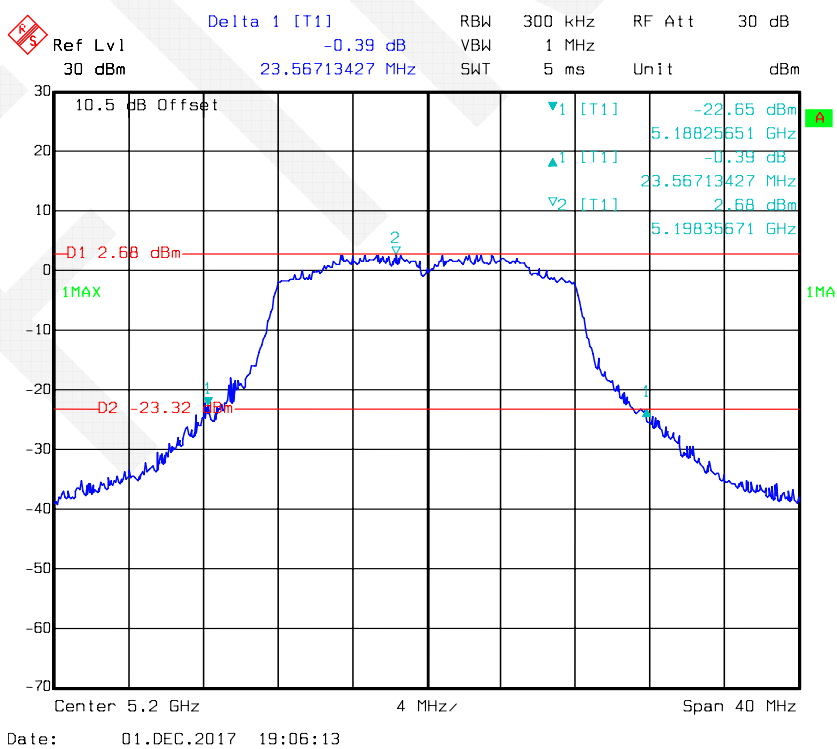


802.11a mode, 26 dB Bandwidth-5240 MHz, Antenna 1

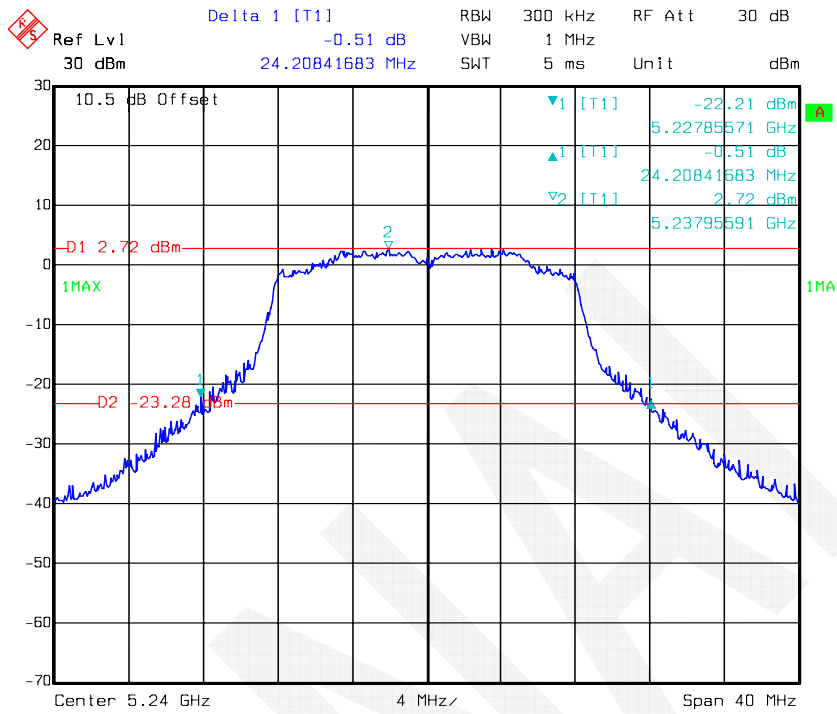


Date: 01.DEC.2017 19:08:13

802.11a mode, 26 dB Bandwidth-5180 MHz, Antenna 2

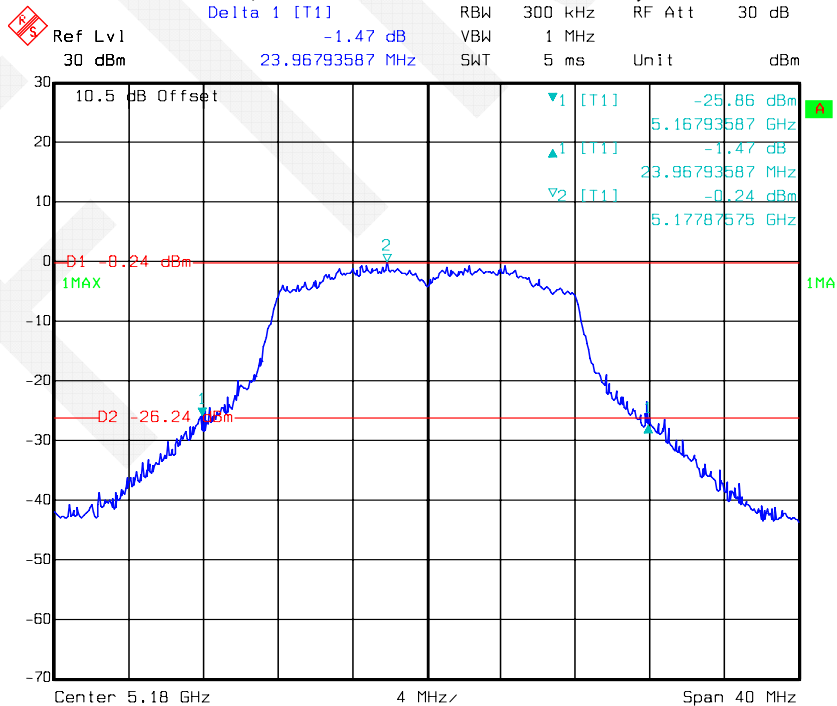


Date: 01.DEC.2017 20:15:36

802.11a mode, 26 dB Bandwidth-5200 MHz, Antenna 2

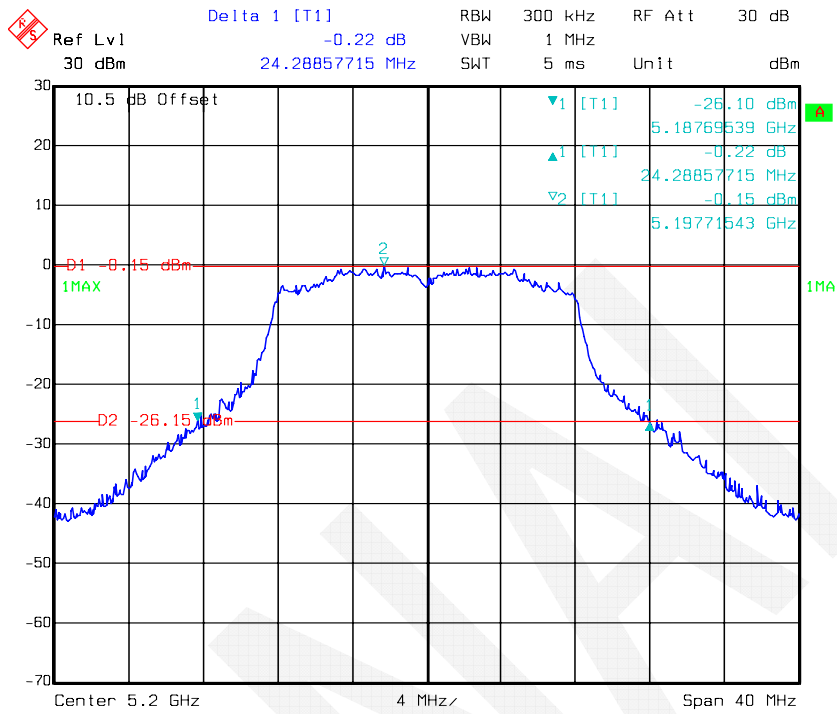


Date: 01.DEC.2017 20:17:23

802.11a mode, 26 dB Bandwidth-5240 MHz, Antenna 2

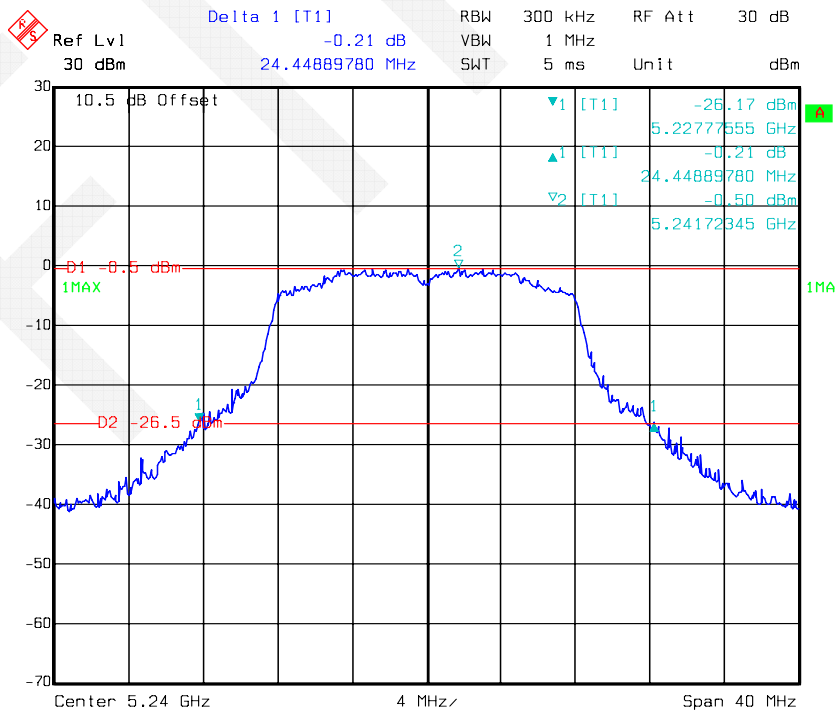


Date: 01.DEC.2017 20:18:54

802.11n-HT20 mode, 26 dB Bandwidth-5180 MHz, Antenna 1

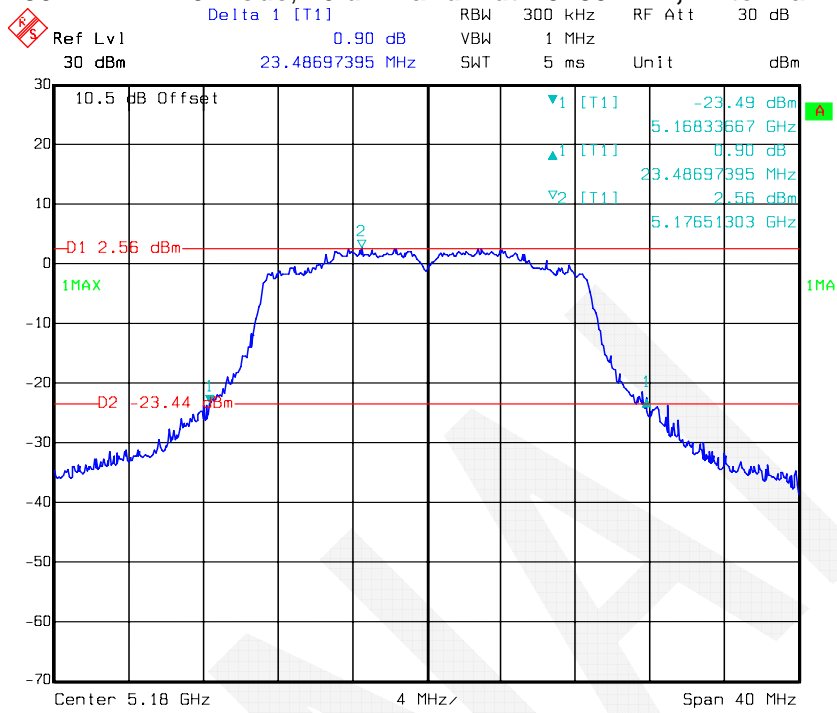


Date: 01.DEC.2017 19:11:39

802.11n-HT20 mode, 26 dB Bandwidth-5200 MHz, Antenna 1

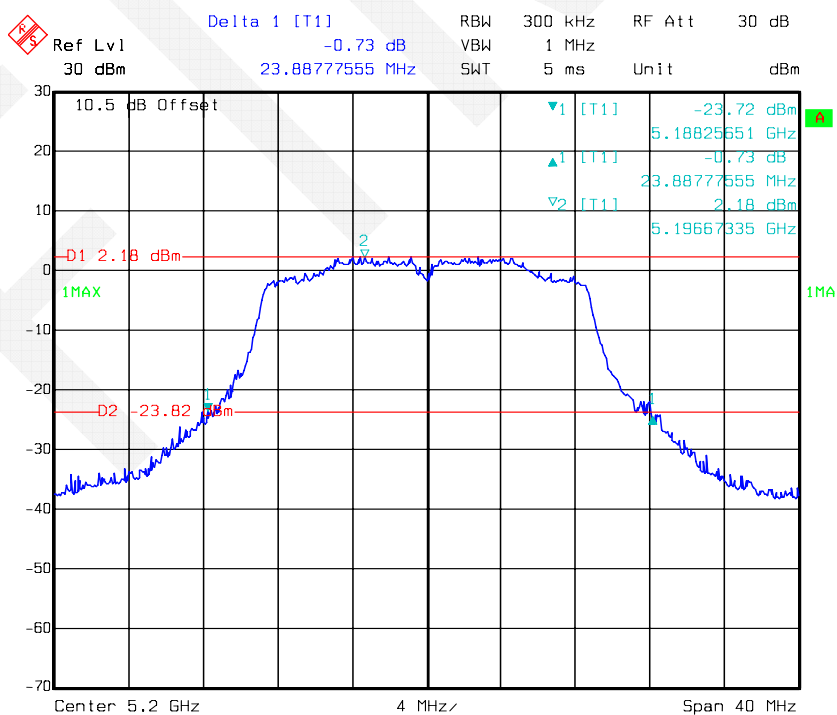


Date: 01.DEC.2017 19:13:25

802.11n-HT20 mode, 26 dB Bandwidth-5240 MHz, Antenna 1

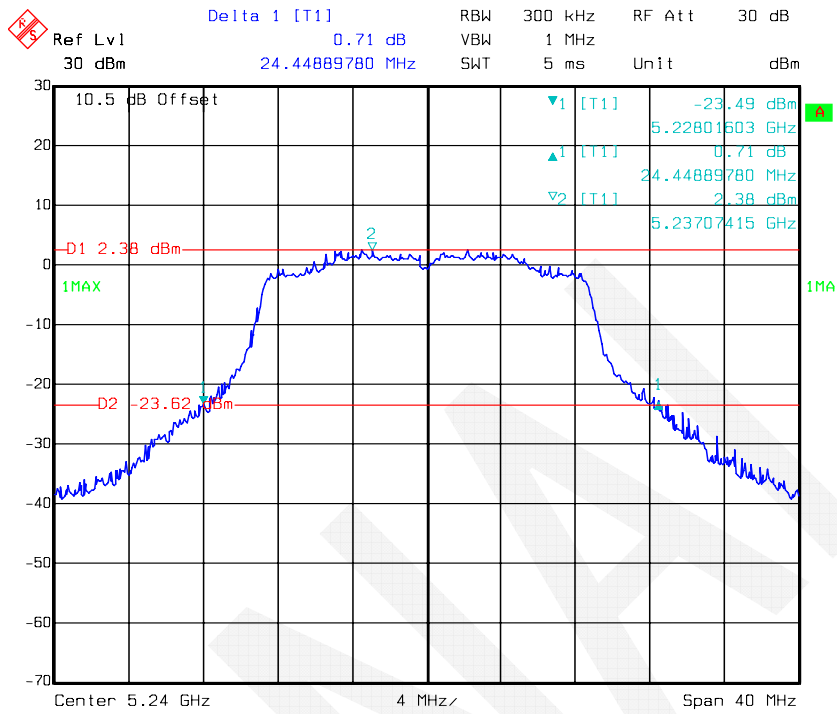


Date: 01.DEC.2017 19:14:56

802.11n-HT20 mode, 26 dB Bandwidth-5180 MHz, Antenna 2

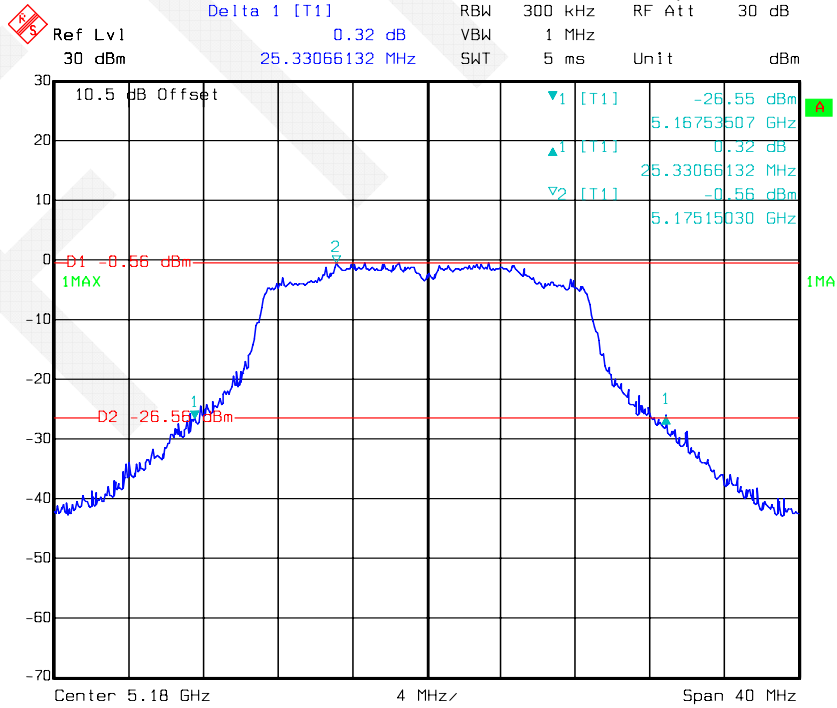


Date: 01.DEC.2017 20:10:28

802.11n-HT20 mode, 26 dB Bandwidth-5200 MHz, Antenna 2

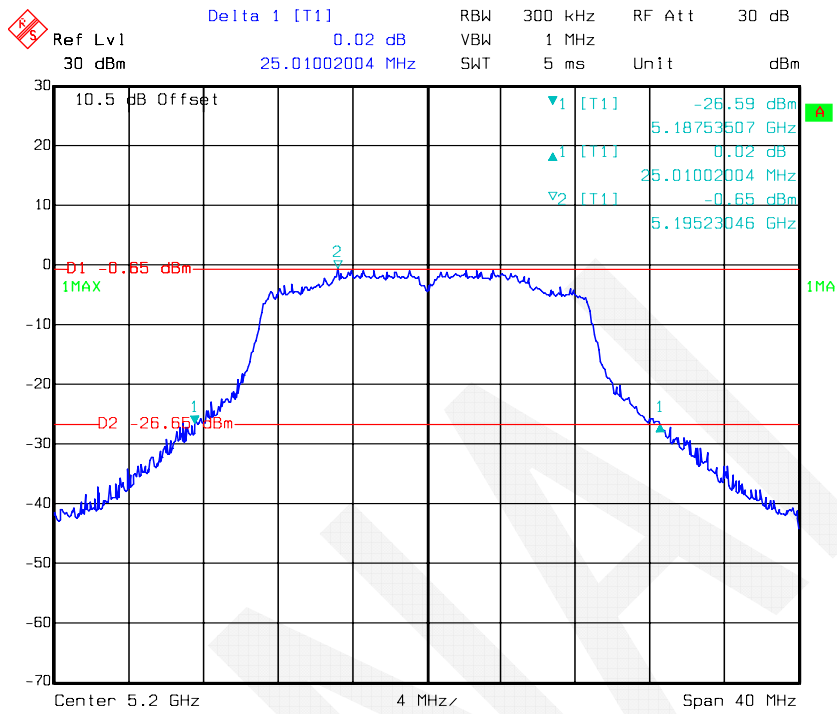


Date: 01.DEC.2017 20:12:15

802.11n-HT20 mode, 26 dB Bandwidth-5240 MHz, Antenna 2

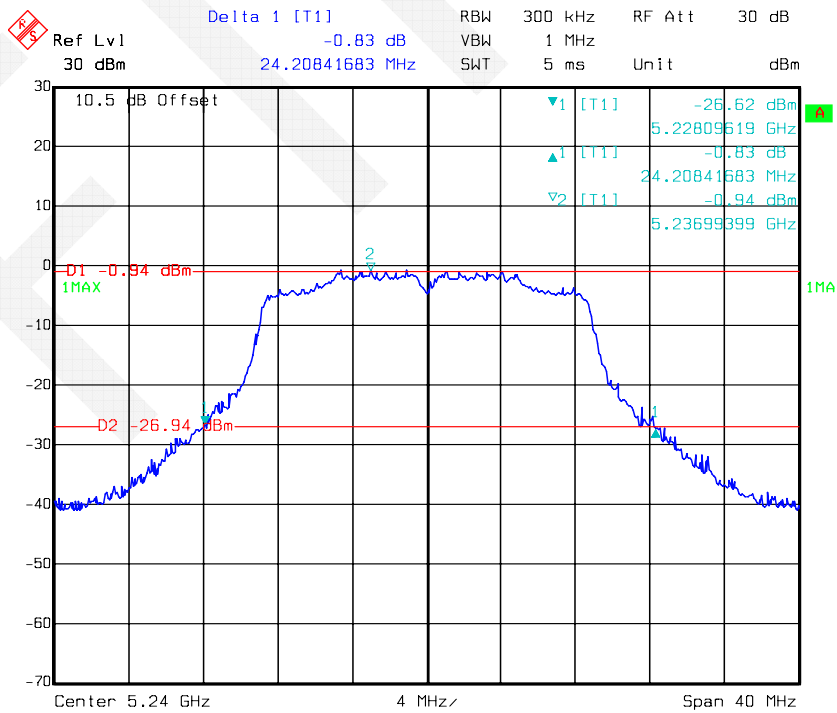


Date: 01.DEC.2017 20:13:43

802.11n-HT40 mode, 26 dB Bandwidth-5190 MHz, Antenna 1

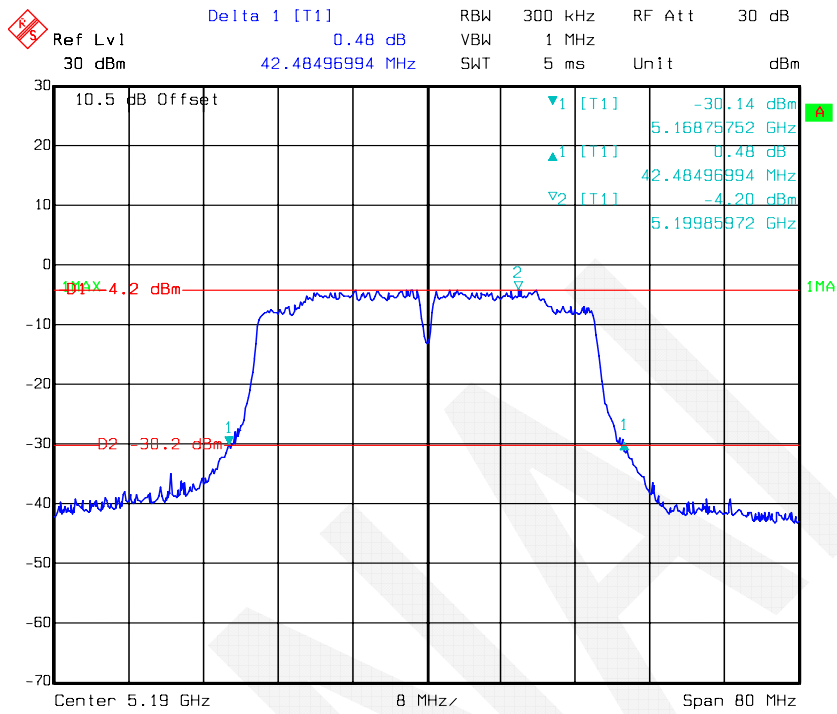


Date: 01.DEC.2017 19:19:51

802.11n-HT40 mode, 26 dB Bandwidth-5230 MHz, Antenna 1

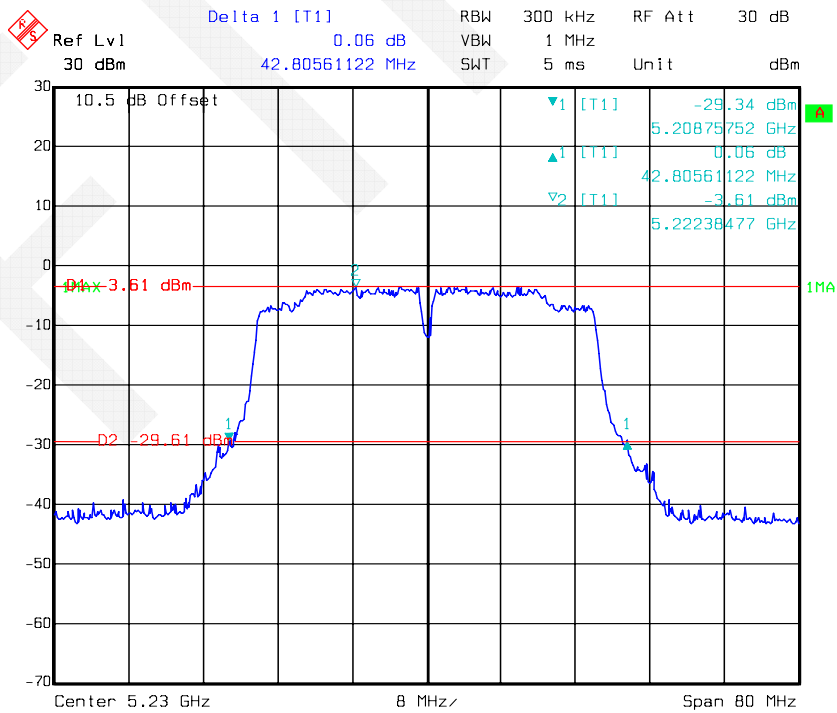


Date: 01.DEC.2017 19:21:27

802.11n-HT40 mode, 26 dB Bandwidth-5190 MHz, Antenna 2

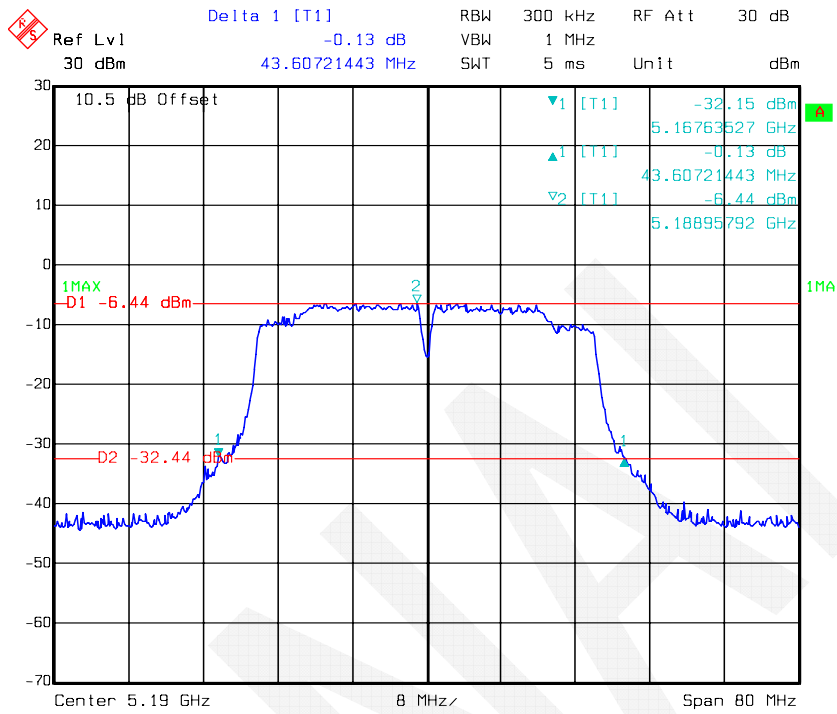


Date: 01.DEC.2017 20:05:25

802.11n-HT40 mode, 26 dB Bandwidth-5230 MHz, Antenna 2

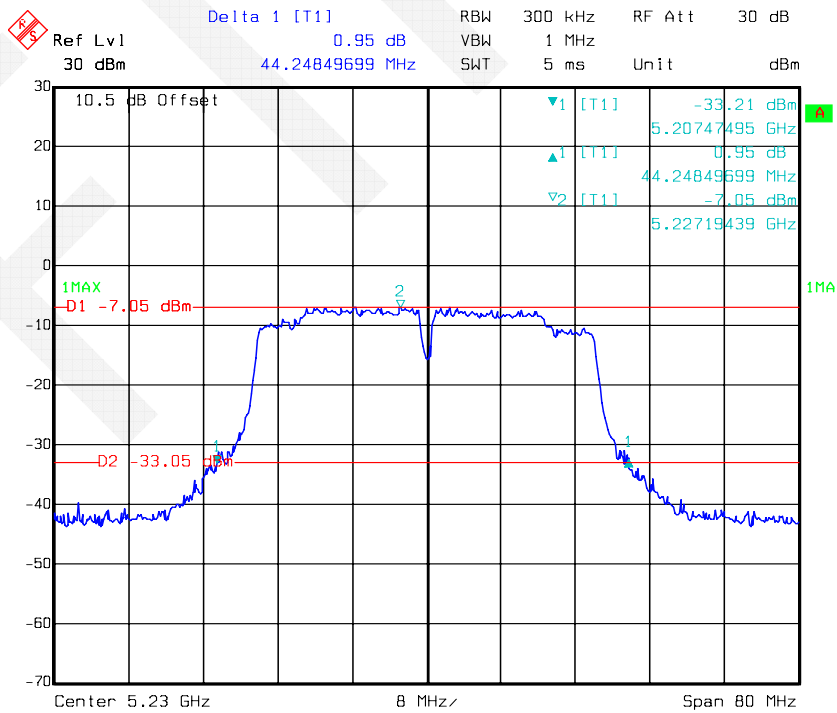


Date: 01.DEC.2017 20:07:15

802.11ac20 mode, 26 dB Bandwidth-5180 MHz, Antenna 1

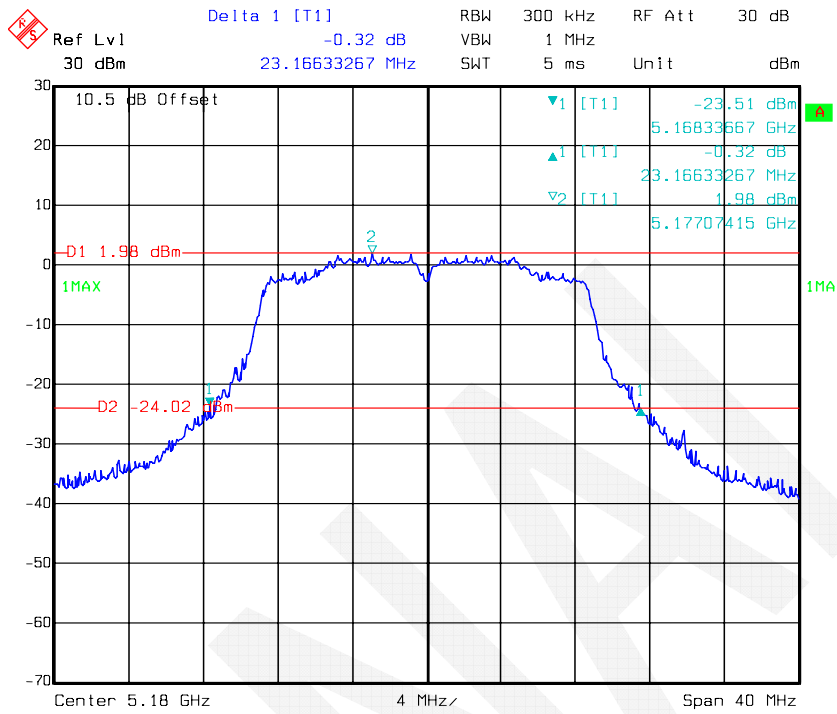


Date: 01.DEC.2017 19:26:13

802.11ac20 mode, 26 dB Bandwidth-5200 MHz, Antenna 1

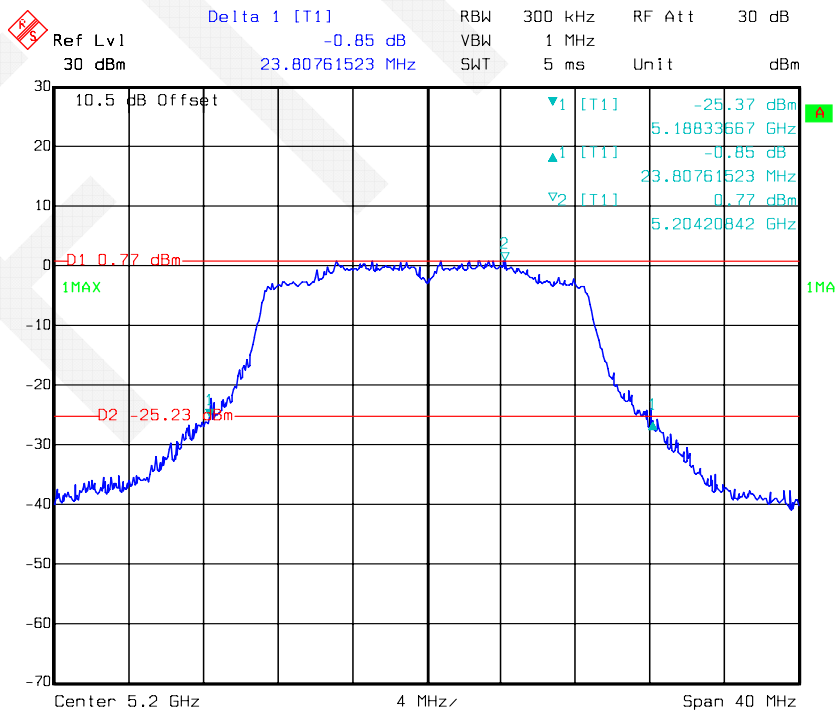


Date: 01.DEC.2017 19:31:02

802.11ac20 mode, 26 dB Bandwidth-5240 MHz, Antenna 1

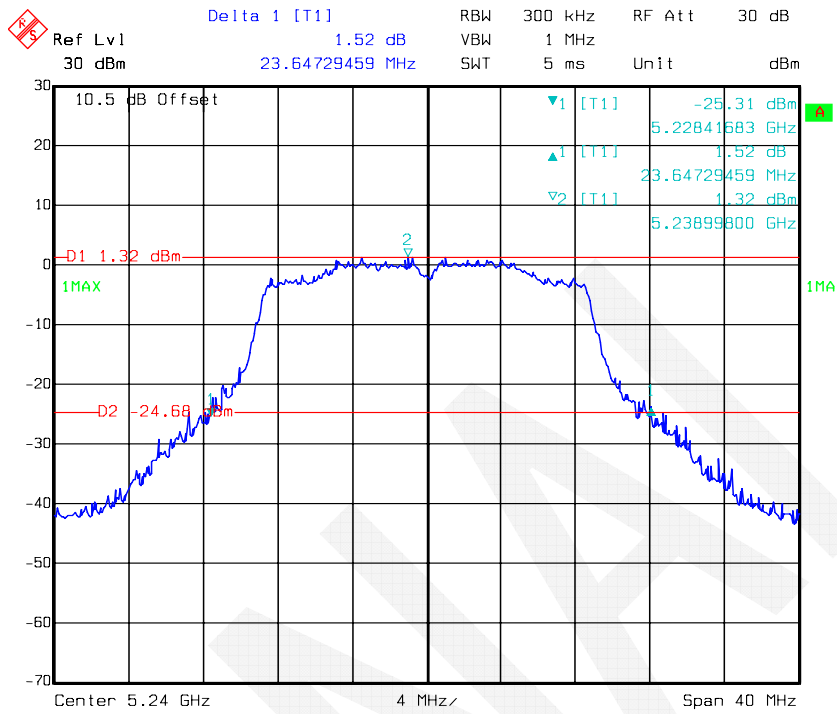


Date: 01.DEC.2017 19:33:03

802.11ac20 mode, 26 dB Bandwidth-5180 MHz, Antenna 2

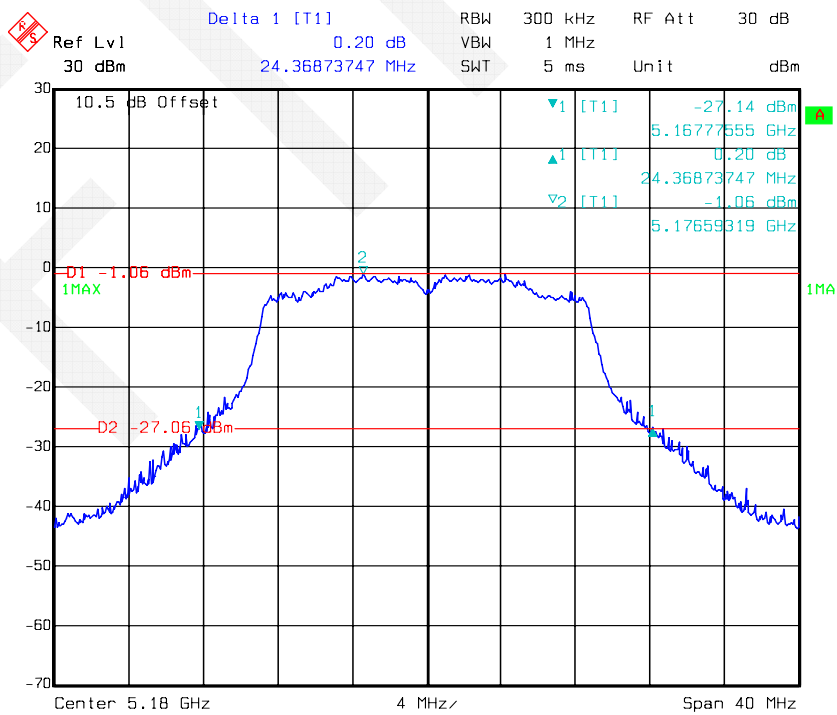


Date: 01.DEC.2017 19:55:51

802.11ac20 mode, 26 dB Bandwidth-5200 MHz, Antenna 2

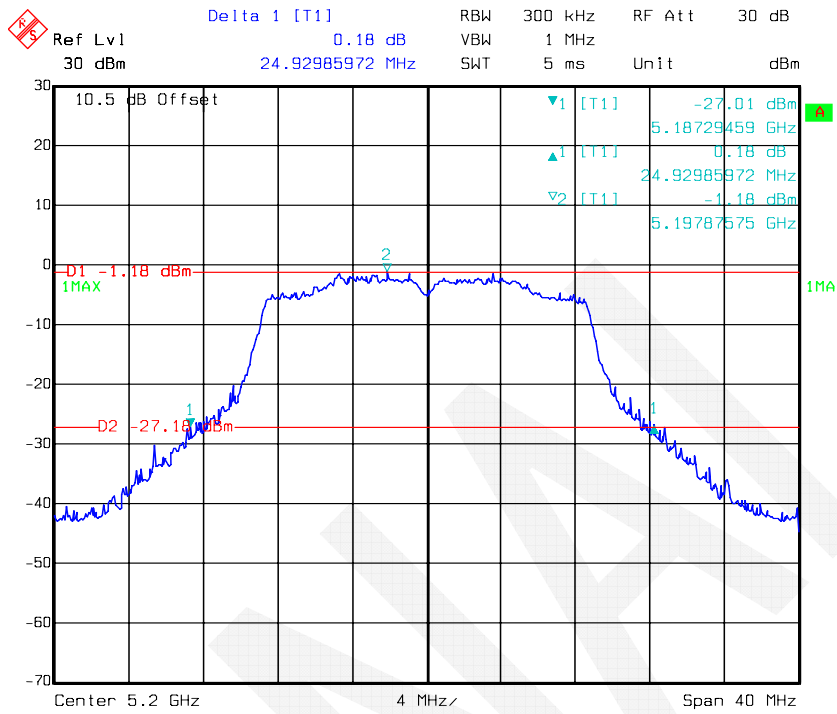


Date: 01.DEC.2017 20:00:31

802.11ac20 mode, 26 dB Bandwidth-5240 MHz, Antenna 2

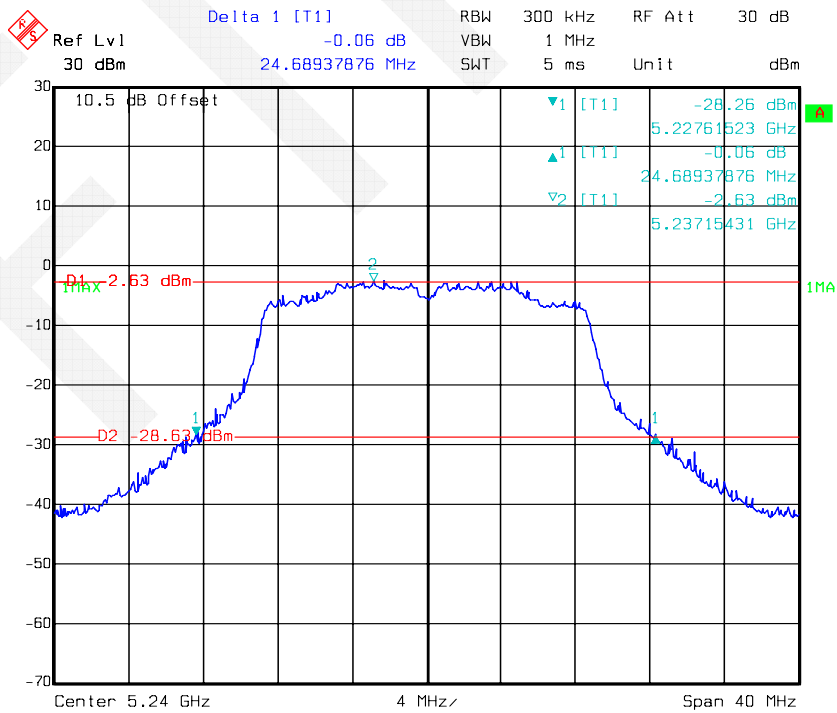


Date: 01.DEC.2017 20:01:58


802.11ac40 mode, 26 dB Bandwidth-5190 MHz, Antenna 1

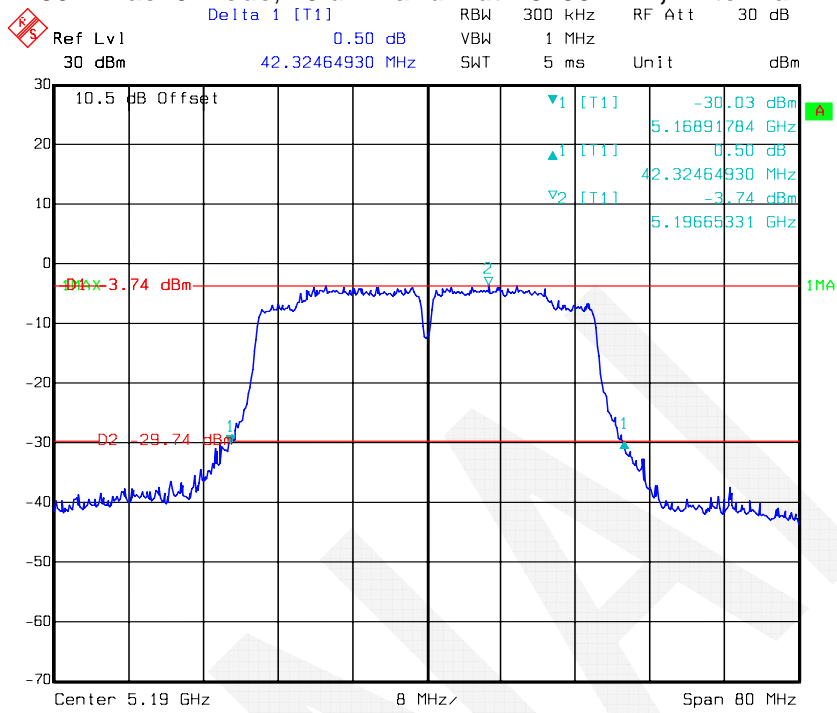

802.11ac40 mode, 26 dB Bandwidth-5230 MHz, Antenna 1

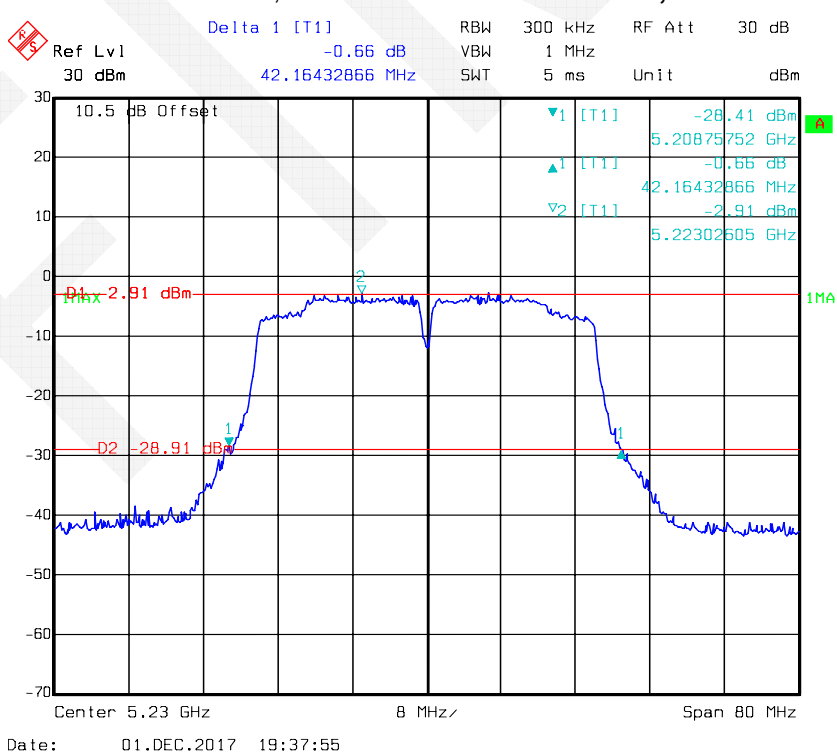


802.11ac40 mode, 26 dB Bandwidth-5190 MHz, Antenna 2

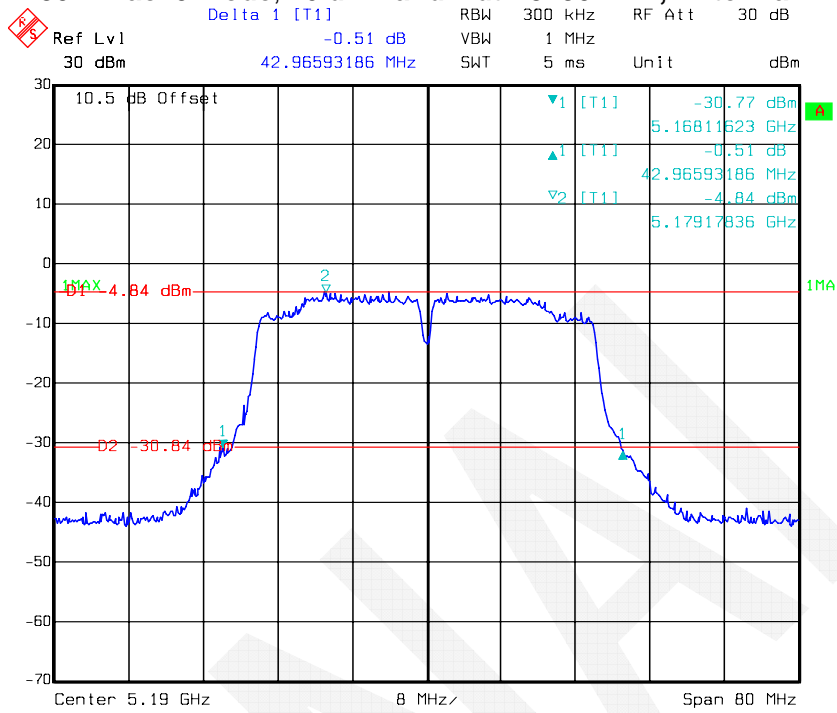


Date: 01.DEC.2017 19:51:54

802.11ac40 mode, 26 dB Bandwidth-5230 MHz, Antenna 2

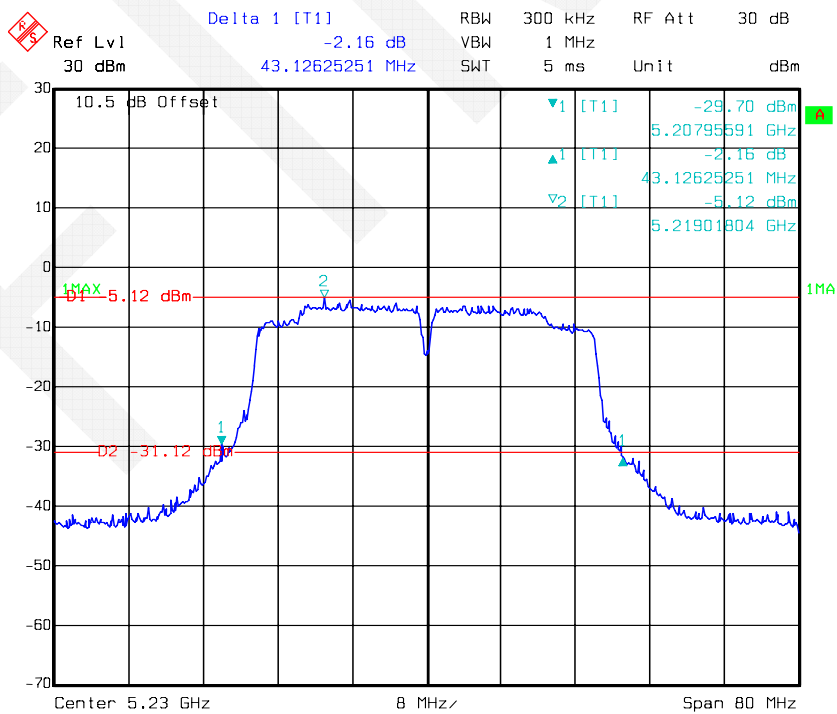


Date: 01.DEC.2017 19:53:45

802.11ac80 mode, 26 dB Bandwidth-5210 MHz, Antenna 1

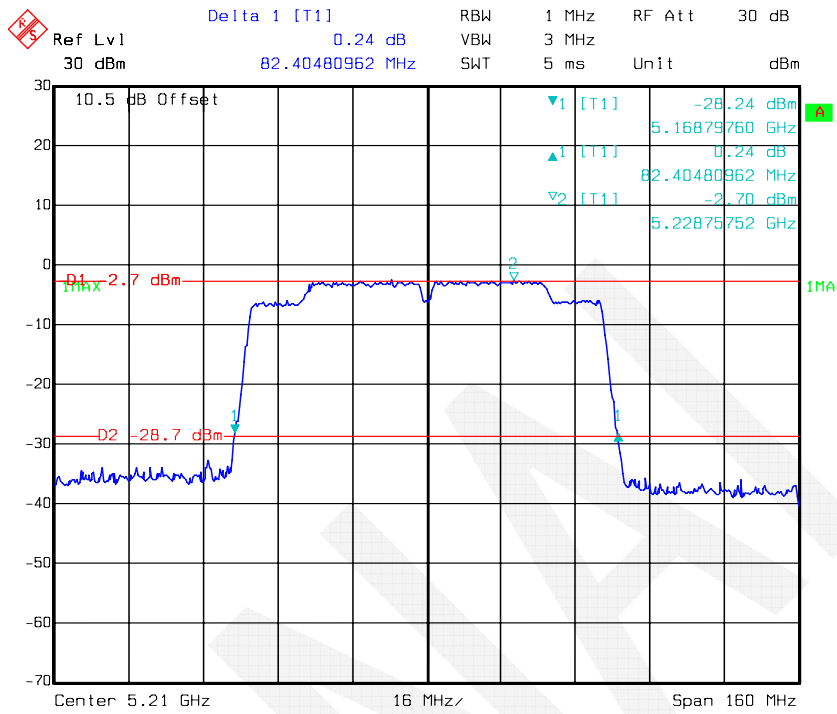


Date: 01.DEC.2017 19:47:38

802.11ac80 mode, 26 dB Bandwidth-5210 MHz, Antenna 2

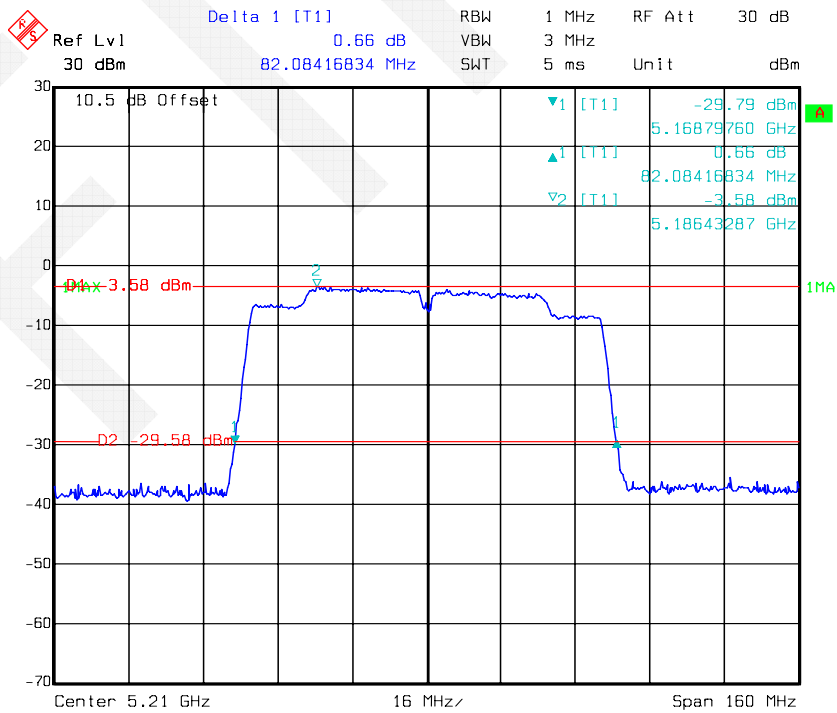

Date: 01.DEC.2017 19:44:59

802.11a mode, 99% Occupied Bandwidth-5180 MHz, Antenna 1

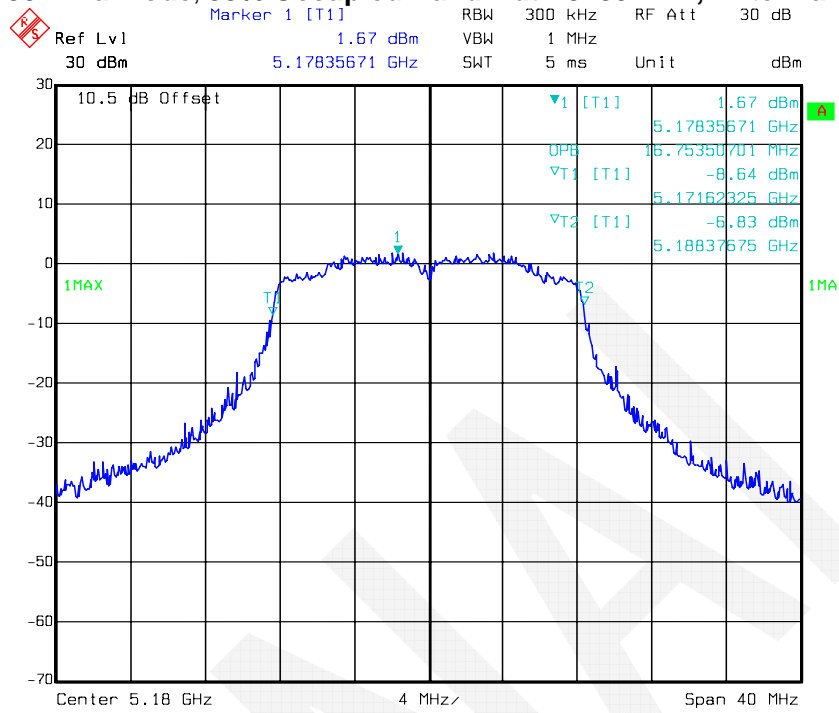

802.11a mode, 99% Occupied Bandwidth -5200 MHz, Antenna 1

