



























11AX20SISO_Ant1_5745



11AX20SISO_Ant1_5785



11AX20SISO_Ant1_5825














6dB Bandwidth:

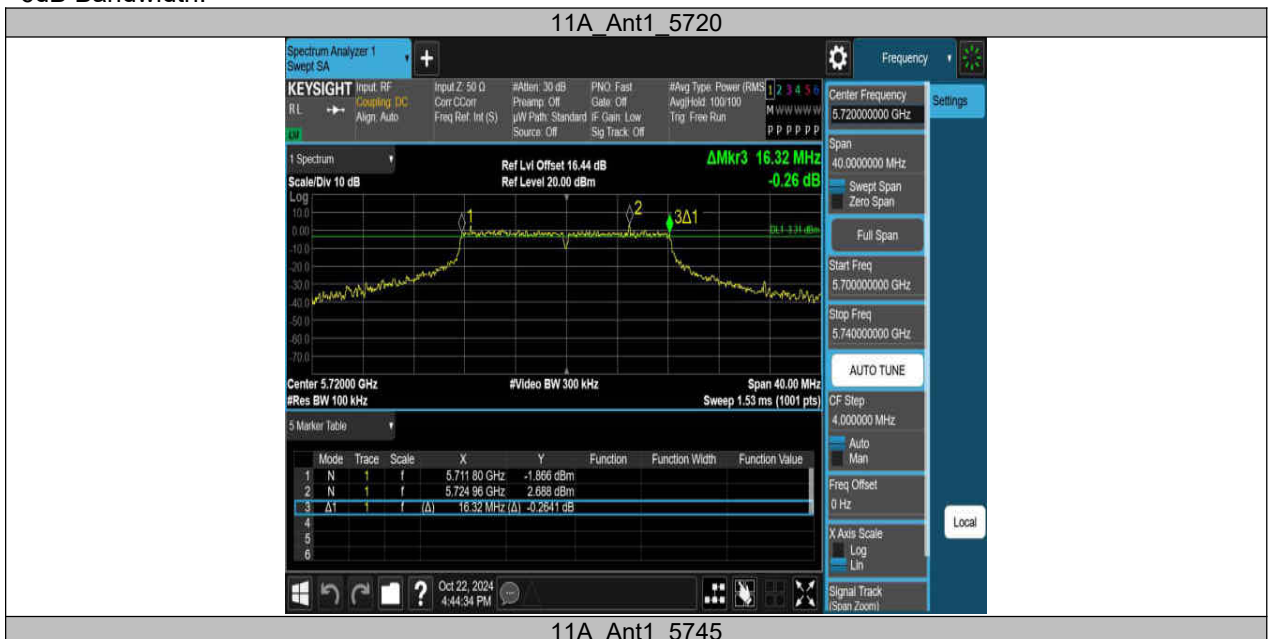













11AC40SISO Ant1 5755







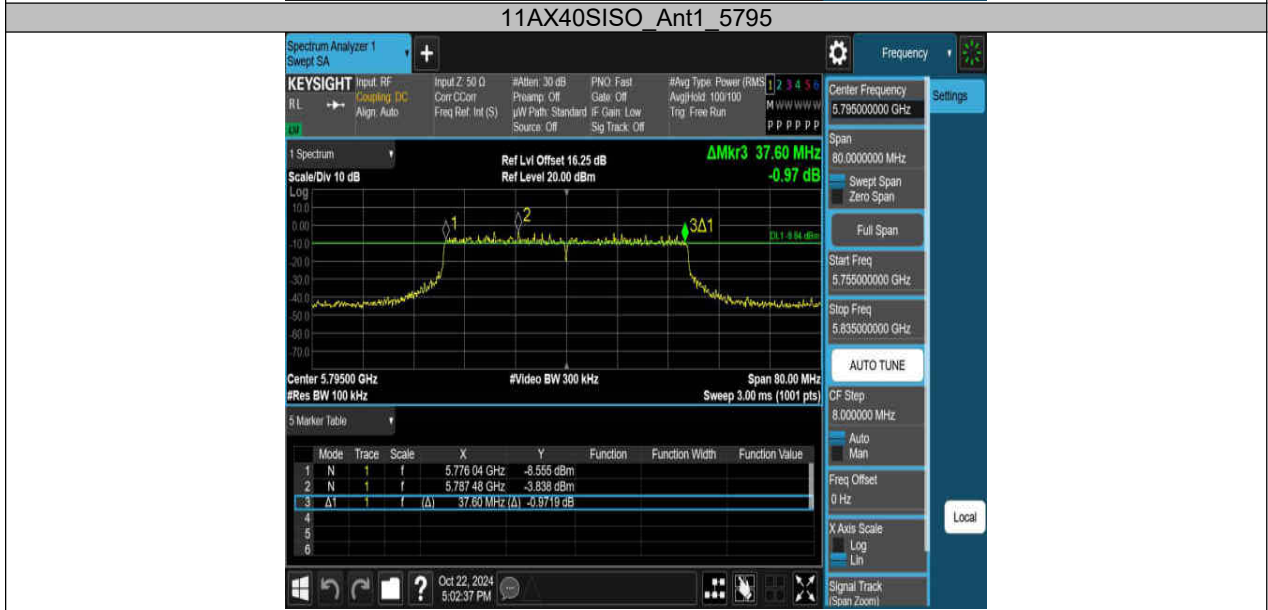

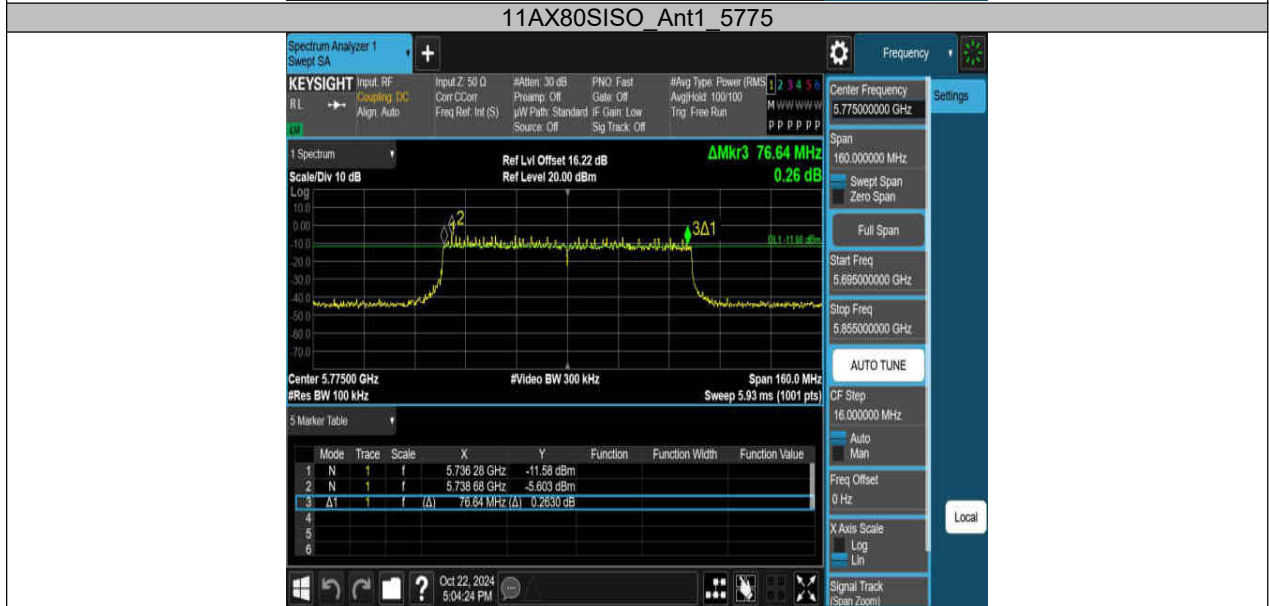

10. Maximum Output Power

10.1. Block Diagram of Test Setup

Same as section 8.1

10.2. Limits

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	<input type="checkbox"/> Outdoor Access Point: 1 W (30 dBm)	5150-5250
	<input type="checkbox"/> Indoor Access Point: 1 W (30 dBm)	
	<input type="checkbox"/> Fixed Point-To-Point Access Points: 1 W (30 dBm)	
	<input checked="" type="checkbox"/> Client Devices: 250 mW (24 dBm)	
	Shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.	5250-5350 5470-5725
	Shall not exceed 1 Watt (30 dBm).	5725-5850

ISED RSS-247 ISSUE 2		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power or e.i.r.p.	The maximum e.i.r.p. shall not exceed 200 mW (23 dBm) or 10 + 10 log ₁₀ B, dBm, whichever power is less. B is the 99 % emission bandwidth in megahertz.	5150-5250
	a. The maximum conducted output power shall not exceed 250 mW (24 dBm) or 11 + 10 log ₁₀ B dBm, whichever is less.	5250-5350
	b. The maximum e.i.r.p. shall not exceed 1.0 W (30 dBm) or 17 + 10 log ₁₀ B dBm, whichever is less. B is the 99 % emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.	5250-5350 5470-5600 5650-5725
	Shall not exceed 1 Watt (30 dBm). The e.i.r.p. shall not exceed 4 W	5725-5850

Note: The above limits are based upon the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

10.3. Test Procedure

- (1) Connect each EUT's antenna output to power meter by RF cable and attenuator
- (2) Add each antenna port's results to get the total output power of EUT.

10.4. Test Result

Test Mode	Ant.	Freq. (MHz)	Channel Power (dBm)	DC Factor (dBm)	Result (dBm)	Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
11A	Ant1	5180	13.85	1.41	15.26	≤23.98	18.61	≤23.01	PASS
		5200	13.95	1.40	15.35	≤23.98	18.7	≤23.01	PASS
		5240	13.85	1.40	15.25	≤23.98	18.6	≤23.01	PASS
		5260	15.25	1.37	16.62	≤23.98	19.97	≤26.99	PASS
		5280	15.06	1.44	16.50	≤23.98	19.85	≤26.99	PASS
		5320	15.05	1.43	16.48	≤23.98	19.83	≤26.99	PASS
		5500	12.75	1.41	14.16	≤23.98	17.51	≤26.99	PASS
		5580	15.23	1.40	16.63	≤23.98	19.98	≤26.99	PASS
		5700	10.28	1.41	11.69	≤23.98	15.04	≤26.99	PASS
		5720_UN II-2C	14.54	1.37	15.91	≤23.89	19.26	≤26.99	PASS
		5720_UN II-3	7.65	1.37	9.02	≤30.00	12.37	---	PASS
		5745	14.67	1.41	16.08	≤30.00	19.43	---	PASS
		5785	14.00	1.37	15.37	≤30.00	18.72	---	PASS
		5825	12.69	1.41	14.10	≤30.00	17.45	---	PASS
11N20SIS O	Ant1	5180	13.58	1.49	15.07	≤23.98	18.42	≤23.01	PASS
		5200	13.19	1.49	14.68	≤23.98	18.03	≤23.01	PASS
		5240	13.13	1.49	14.62	≤23.98	17.97	≤23.01	PASS
		5260	14.51	1.49	16.00	≤23.98	19.35	≤26.99	PASS
		5280	14.56	1.49	16.05	≤23.98	19.4	≤26.99	PASS
		5320	12.02	1.49	13.51	≤23.98	16.86	≤26.99	PASS
		5500	11.86	1.48	13.34	≤23.98	16.69	≤26.99	PASS
		5580	15.09	1.49	16.58	≤23.98	19.93	≤26.99	PASS
		5700	9.16	1.49	10.65	≤23.98	14	≤26.99	PASS
		5720_UN II-2C	14.73	1.48	16.21	≤23.98	19.56	≤26.99	PASS
		5720_UN II-3	8.49	1.48	9.97	≤30.00	13.32	---	PASS
		5745	14.93	1.48	16.41	≤30.00	19.76	---	PASS
		5785	14.38	1.49	15.87	≤30.00	19.22	---	PASS
		5825	12.76	1.49	14.25	≤30.00	17.6	---	PASS
11N40SIS O	Ant1	5190	10.89	2.61	13.50	≤23.98	16.85	≤23.01	PASS
		5230	11.95	2.55	14.50	≤23.98	17.85	≤23.01	PASS
		5270	13.50	2.61	16.11	≤23.98	19.46	≤26.99	PASS
		5310	11.42	2.61	14.03	≤23.98	17.38	≤26.99	PASS
		5510	9.13	2.55	11.68	≤23.98	15.03	≤26.99	PASS
		5550	14.73	2.58	17.31	≤23.98	20.66	≤26.99	PASS
		5670	10.80	2.55	13.35	≤23.98	16.7	≤26.99	PASS
		5710_UN II-2C	14.60	2.61	17.21	≤23.98	20.56	≤26.99	PASS
		5710_UN II-3	3.51	2.61	6.12	≤30.00	9.47	---	PASS
		5755	13.14	2.58	15.72	≤30.00	19.07	---	PASS
5795	12.51	2.58	15.09	≤30.00	18.44	---	PASS		
11AC20SI SO	Ant1	5180	13.69	1.50	15.19	≤23.98	18.54	≤22.75	PASS
		5200	13.01	1.48	14.49	≤23.98	17.84	≤23.01	PASS
		5240	12.66	1.46	14.12	≤23.98	17.47	≤23.01	PASS
		5260	14.55	1.48	16.03	≤23.98	19.38	≤26.99	PASS
		5280	14.25	1.47	15.72	≤23.98	19.07	≤26.99	PASS
		5320	12.49	1.47	13.96	≤23.98	17.31	≤26.99	PASS
		5500	12.74	1.47	14.21	≤23.98	17.56	≤26.99	PASS
		5580	15.19	1.45	16.64	≤23.98	19.99	≤26.99	PASS
		5700	11.47	1.45	12.92	≤23.98	16.27	≤26.99	PASS
		5720_UN II-2C	14.59	1.48	16.07	≤23.63	19.42	≤26.99	PASS
		5720_UN II-3	8.27	1.48	9.75	≤30.00	13.1	---	PASS

		5745	14.35	1.48	15.83	≤30.00	19.18	---	PASS
		5785	13.56	1.48	15.04	≤30.00	18.39	---	PASS
		5825	12.71	1.48	14.19	≤30.00	17.54	---	PASS
11AC40SI SO	Ant1	5190	12.65	2.58	15.23	≤23.98	18.58	≤23.01	PASS
		5230	11.60	2.58	14.18	≤23.98	17.53	≤23.01	PASS
		5270	13.30	2.58	15.88	≤23.98	19.23	≤26.99	PASS
		5310	11.37	2.58	13.95	≤23.98	17.3	≤26.99	PASS
		5510	12.07	2.58	14.65	≤23.98	18	≤26.99	PASS
		5550	15.07	2.55	17.62	≤23.98	20.97	≤26.99	PASS
		5670	10.12	2.58	12.70	≤23.98	16.05	≤26.99	PASS
		5710_UN II-2C	13.91	2.58	16.49	≤23.98	19.84	≤26.99	PASS
		5710_UN II-3	3.35	2.58	5.93	≤30.00	9.28	---	PASS
		5755	13.13	2.58	15.71	≤30.00	19.06	---	PASS
		5795	12.49	2.58	15.07	≤30.00	18.42	---	PASS
		11AC80SI SO	Ant1	5210	8.47	4.14	12.61	≤23.98	15.96
5290	10.14			4.19	14.33	≤23.98	17.68	≤26.99	PASS
5530	9.05			4.19	13.24	≤23.98	16.59	≤26.99	PASS
5610	7.98			4.19	12.17	≤23.98	15.52	≤26.99	PASS
5690_UN II-2C	11.77			4.19	15.96	≤23.98	19.31	≤26.99	PASS
5690_UN II-3	-1.45			4.19	2.75	≤30.00	6.1	---	PASS
5775	11.66			4.14	15.80	≤30.00	19.15	---	PASS
11AX20SI SO	Ant1	5180	13.04	1.83	14.87	≤23.98	18.22	≤23.01	PASS
		5200	12.59	1.79	14.38	≤23.98	17.73	≤23.01	PASS
		5240	12.31	1.82	14.13	≤23.98	17.48	≤23.01	PASS
		5260	13.93	1.86	15.79	≤23.98	19.14	≤26.99	PASS
		5280	13.90	1.82	15.72	≤23.98	19.07	≤26.99	PASS
		5320	10.99	1.83	12.82	≤23.98	16.17	≤26.99	PASS
		5500	12.55	1.82	14.37	≤23.98	17.72	≤26.99	PASS
		5580	14.56	1.83	16.39	≤23.98	19.74	≤26.99	PASS
		5700	9.26	1.82	11.08	≤23.98	14.43	≤26.99	PASS
		5720_UN II-2C	13.77	1.79	15.56	≤23.35	18.91	≤26.99	PASS
		5720_UN II-3	8.05	1.79	9.84	≤30.00	13.19	---	PASS
		5745	14.09	1.82	15.91	≤30.00	19.26	---	PASS
		5785	13.34	1.79	15.13	≤30.00	18.48	---	PASS
		5825	12.07	1.82	13.89	≤30.00	17.24	---	PASS
11AX40SI SO	Ant1	5190	9.12	2.97	12.09	≤23.98	15.44	≤23.01	PASS
		5230	11.38	2.97	14.35	≤23.98	17.7	≤23.01	PASS
		5270	12.85	2.97	15.82	≤23.98	19.17	≤26.99	PASS
		5310	9.99	3.21	13.20	≤23.98	16.55	≤26.99	PASS
		5510	9.91	2.89	12.80	≤23.98	16.15	≤26.99	PASS
		5550	14.41	2.97	17.38	≤23.98	20.73	≤26.99	PASS
		5670	9.72	2.89	12.61	≤23.98	15.96	≤26.99	PASS
		5710_UN II-2C	13.25	2.97	16.22	≤23.98	19.57	≤26.99	PASS
		5710_UN II-3	4.15	2.97	7.12	≤30.00	10.47	---	PASS
		5755	12.92	2.97	15.89	≤30.00	19.24	---	PASS
		5795	12.21	2.97	15.18	≤30.00	18.53	---	PASS
11AX80SI SO	Ant1	5210	7.61	4.56	12.17	≤23.98	15.52	≤23.01	PASS
		5290	8.63	4.56	13.19	≤23.98	16.54	≤26.99	PASS
		5530	10.17	4.56	14.73	≤23.98	18.08	≤26.99	PASS
		5610	8.37	4.56	12.93	≤23.98	16.28	≤26.99	PASS
		5690_UN II-2C	11.86	4.56	16.42	≤23.98	19.77	≤26.99	PASS
		5690_UN II-3	-1.38	4.56	3.18	≤30.00	6.53	---	PASS
		5775	11.35	4.56	15.91	≤30.00	19.26	---	PASS

11. Power Spectral Density

11.1. Block Diagram of Test Setup

Same as section 8.1

11.2. Limits

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	<input type="checkbox"/> Outdoor Access Point: 17 dBm/MHz <input type="checkbox"/> Indoor Access Point: 17 dBm/MHz <input type="checkbox"/> Fixed Point-To-Point Access Points: 17 dBm/MHz <input checked="" type="checkbox"/> Client Devices: 11 dBm/MHz	5150-5250
	11 dBm/MHz	5250-5350 5470-5725
	30 dBm/500 kHz	5725-5850

ISED RSS-247 ISSUE 2		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.	5150-5250
	The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.	5250-5350 5470-5600 5650-5725
	30 dBm/500 kHz	5725-5850

Note: The above limits are based upon the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

11.3. Test Procedure

The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 1MHz RBW and 3MHz VBW.

Connect the UUT to the spectrum analyzer and use the following settings:

5150 MHz~5250 MHz, 5250 MHz~5350 MHz, 5470 MHz~5725 MHz

Center Frequency	The centre frequency of the channel under test
Detector	RMS
RBW	1MHz
VBW	$\geq 3 \times$ RBW
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

5725 MHz-5850 MHz

Center Frequency	The centre frequency of the channel under test
Detector	RMS
RBW	500 kHz
VBW	$\geq 3 \times$ RBW
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold

Sweep time	Auto
------------	------

Note:

1. For UNII-3, according to KdB publication 789033 D02 General U-NII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 1 MHz and VBW at 3 MHz if the spectrum analyzer does not have 500 kHz RBW.

2. The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is - 3dB. For example, if the measured value is +30 dBm using RBW=500kHz (that is +30 dBm/500kHz), then the converted value will be +33 dBm/1MHz.

3. Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

11.4. Test Result


Test Mode	Ant.	Freq. (MHz)	Result (dBm/MHz)	Limit (dBm/MHz)	EIRP Result(dBm/MHz)	EIRP Limit(dBm/MHz)	Verdict
11A	Ant1	5180	4.61	≤11.00	7.96	≤10.00	PASS
		5200	4.01	≤11.00	7.36	≤10.00	PASS
		5240	3.86	≤11.00	7.21	≤10.00	PASS
		5260	5.13	≤11.00	-	-	PASS
		5280	4.89	≤11.00	-	-	PASS
		5320	5.62	≤11.00	-	-	PASS
		5500	2.17	≤11.00	-	-	PASS
		5580	5.44	≤11.00	-	-	PASS
		5700	-0.47	≤11.00	-	-	PASS
		5720_UNII-2C	5.04	≤11.00	-	-	PASS
		5720_UNII-3	2.24	≤27.78	-	-	PASS
		5745	1.89	≤27.78	-	-	PASS
		5785	1.44	≤27.78	-	-	PASS
		5825	-0.08	≤27.78	-	-	PASS
11N20SISO	Ant1	5180	3.60	≤11.00	6.95	≤10.00	PASS
		5200	3.57	≤11.00	6.92	≤10.00	PASS
		5240	3.61	≤11.00	6.96	≤10.00	PASS
		5260	4.87	≤11.00	-	-	PASS
		5280	4.36	≤11.00	-	-	PASS
		5320	3.04	≤11.00	-	-	PASS
		5500	1.74	≤11.00	-	-	PASS
		5580	4.82	≤11.00	-	-	PASS
		5700	-0.18	≤11.00	-	-	PASS
		5720_UNII-2C	6.04	≤11.00	-	-	PASS
		5720_UNII-3	2.70	≤27.78	-	-	PASS
		5745	1.92	≤27.78	-	-	PASS
		5785	1.22	≤27.78	-	-	PASS
		5825	-0.11	≤27.78	-	-	PASS
11N40SISO	Ant1	5190	-0.23	≤11.00	3.12	≤10.00	PASS
		5230	0.07	≤11.00	3.42	≤10.00	PASS
		5270	2.78	≤11.00	-	-	PASS
		5310	0.02	≤11.00	-	-	PASS
		5510	-2.76	≤11.00	-	-	PASS
		5550	2.94	≤11.00	-	-	PASS
		5670	-1.78	≤11.00	-	-	PASS
		5710_UNII-2C	-1.15	≤11.00	-	-	PASS
		5710_UNII-3	-4.45	≤27.78	-	-	PASS
		5755	-0.40	≤27.78	-	-	PASS
		5795	-0.85	≤27.78	-	-	PASS
11AC20SISO	Ant1	5180	2.33	≤11.00	5.68	≤10.00	PASS
		5200	3.86	≤11.00	7.21	≤10.00	PASS
		5240	3.34	≤11.00	6.69	≤10.00	PASS



		5260	5.27	≤11.00	-	-	PASS
		5280	4.86	≤11.00	-	-	PASS
		5320	3.14	≤11.00	-	-	PASS
		5500	2.87	≤11.00	-	-	PASS
		5580	5.25	≤11.00	-	-	PASS
		5700	-0.34	≤11.00	-	-	PASS
		5720_UNII -2C	6.05	≤11.00	-	-	PASS
		5720_UNII -3	2.51	≤27.78	-	-	PASS
		5745	1.89	≤27.78	-	-	PASS
		5785	1.56	≤27.78	-	-	PASS
11AC40SIS O	Ant1	5190	-1.51	≤11.00	1.84	≤10.00	PASS
		5230	1.03	≤11.00	4.38	≤10.00	PASS
		5270	2.71	≤11.00	-	-	PASS
		5310	-1.58	≤11.00	-	-	PASS
		5510	-1.65	≤11.00	-	-	PASS
		5550	3.26	≤11.00	-	-	PASS
		5670	0.23	≤11.00	-	-	PASS
		5710_UNII -2C	3.75	≤11.00	-	-	PASS
		5710_UNII -3	-0.15	≤27.78	-	-	PASS
		5755	-0.38	≤27.78	-	-	PASS
5795	-1.54	≤27.78	-	-	PASS		
11AC80SIS O	Ant1	5210	-6.05	≤11.00	-2.7	≤10.00	PASS
		5290	-4.76	≤11.00	-	-	PASS
		5530	-6.29	≤11.00	-	-	PASS
		5610	-6.31	≤11.00	-	-	PASS
		5690_UNII -2C	0.40	≤11.00	-	-	PASS
		5690_UNII -3	-5.95	≤27.78	-	-	PASS
5775	-3.32	≤27.78	-	-	PASS		
11AX20SIS O	Ant1	5180	4.15	≤11.00	7.5	≤10.00	PASS
		5200	3.41	≤11.00	6.76	≤10.00	PASS
		5240	3.52	≤11.00	6.87	≤10.00	PASS
		5260	5.57	≤11.00	-	-	PASS
		5280	4.90	≤11.00	-	-	PASS
		5320	1.18	≤11.00	-	-	PASS
		5500	0.81	≤11.00	-	-	PASS
		5580	5.30	≤11.00	-	-	PASS
		5700	-0.29	≤11.00	-	-	PASS
		5720_UNII -2C	5.93	≤11.00	-	-	PASS
		5720_UNII -3	2.45	≤27.78	-	-	PASS
		5745	2.06	≤27.78	-	-	PASS
		5785	1.71	≤27.78	-	-	PASS
5825	0.53	≤27.78	-	-	PASS		
11AX40SIS O	Ant1	5190	-1.90	≤11.00	1.45	≤10.00	PASS
		5230	1.03	≤11.00	4.38	≤10.00	PASS
		5270	2.15	≤11.00	-	-	PASS
		5310	-1.67	≤11.00	-	-	PASS
		5510	-1.53	≤11.00	-	-	PASS
		5550	3.57	≤11.00	-	-	PASS
		5670	-1.32	≤11.00	-	-	PASS
		5710_UNII -2C	3.47	≤11.00	-	-	PASS
		5710_UNII -3	-0.07	≤27.78	-	-	PASS
		5755	-0.11	≤27.78	-	-	PASS
5795	-0.57	≤27.78	-	-	PASS		
11AX80SIS O	Ant1	5210	-4.32	≤11.00	-0.97	≤10.00	PASS
		5290	-3.70	≤11.00	-	-	PASS
		5530	-5.16	≤11.00	-	-	PASS



	5610	-3.62	≤11.00	-	-	PASS
	5690_UNII -2C	-0.09	≤11.00	-	-	PASS
	5690_UNII -3	-3.66	≤27.78	-	-	PASS
	5775	-2.50	≤27.78	-	-	PASS




Note: 1.The Result and Limit Unit is dBm/300 kHz in the band 5.725–5.85 GHz.
 2.The Duty Cycle Factor and RBW Factor is compensated in the graph.


11.5. Original Test Data

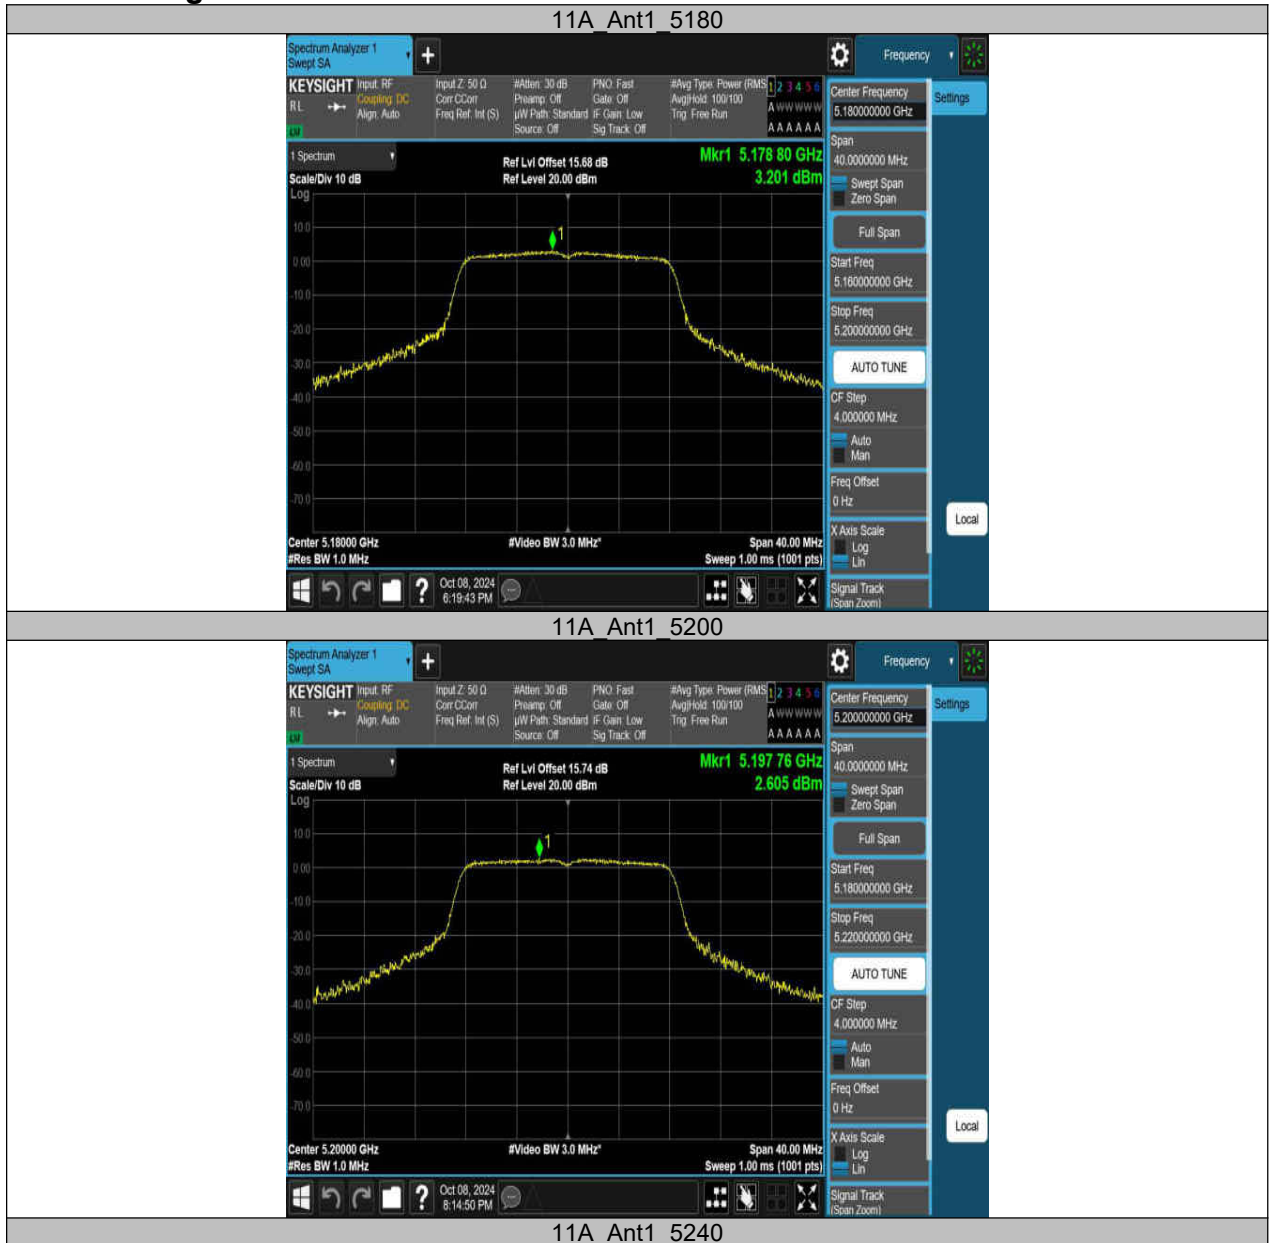

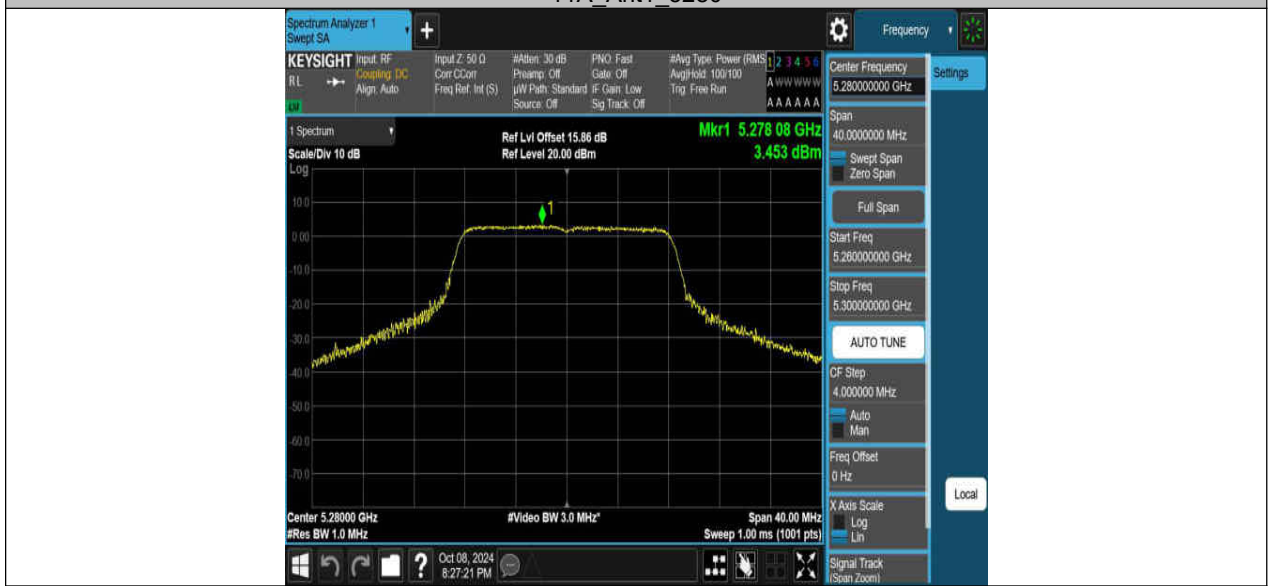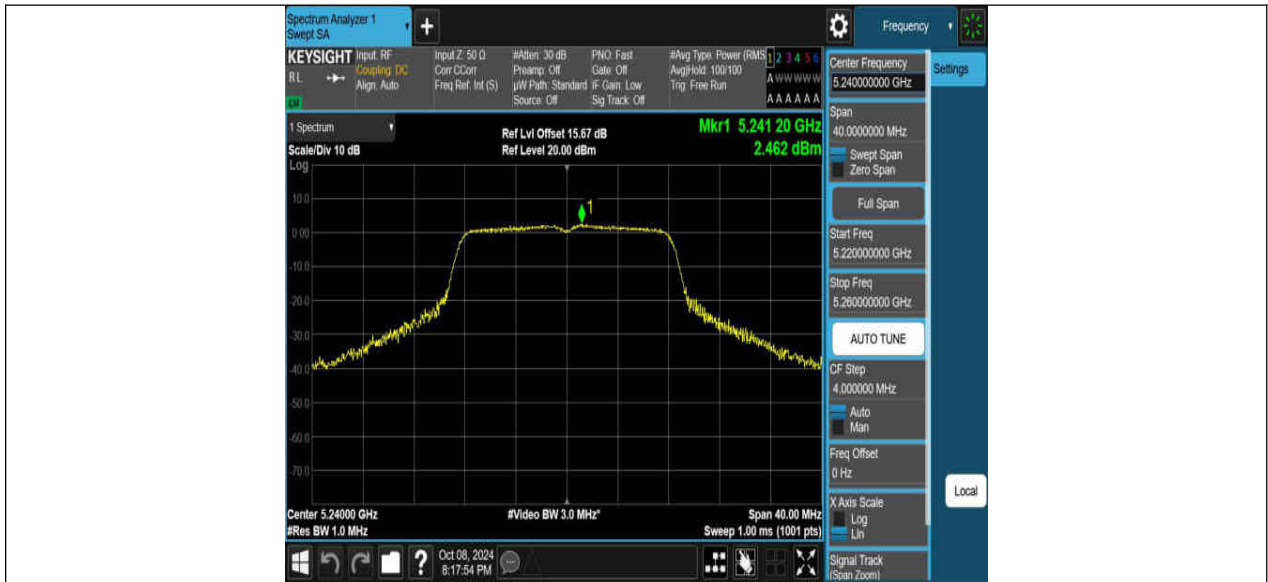


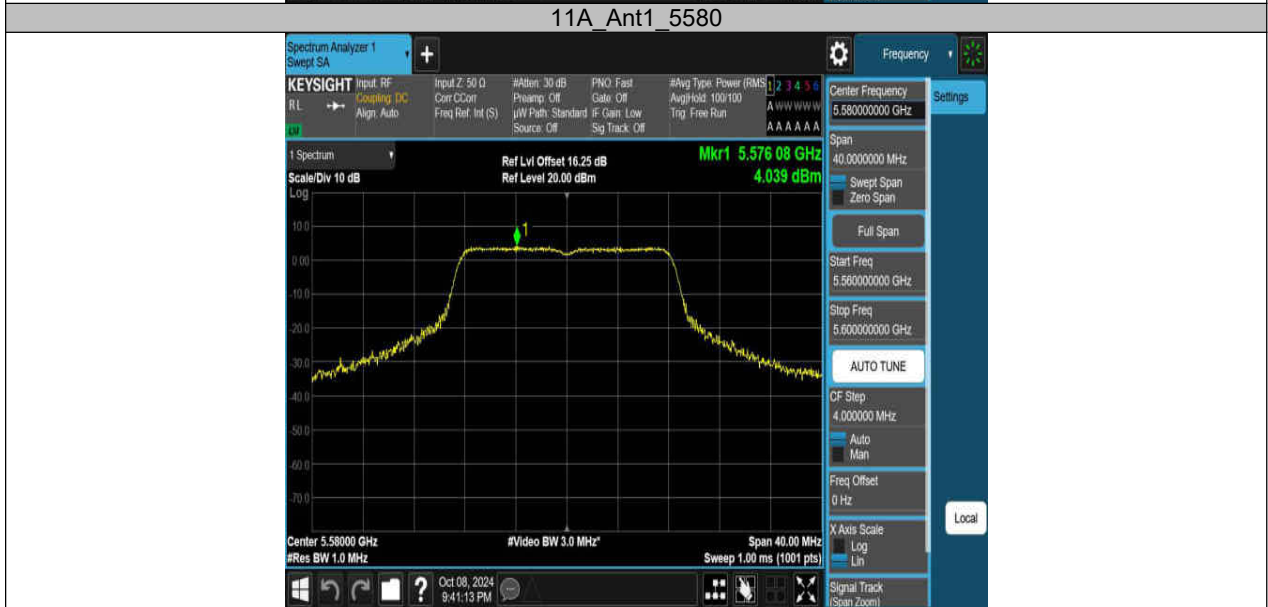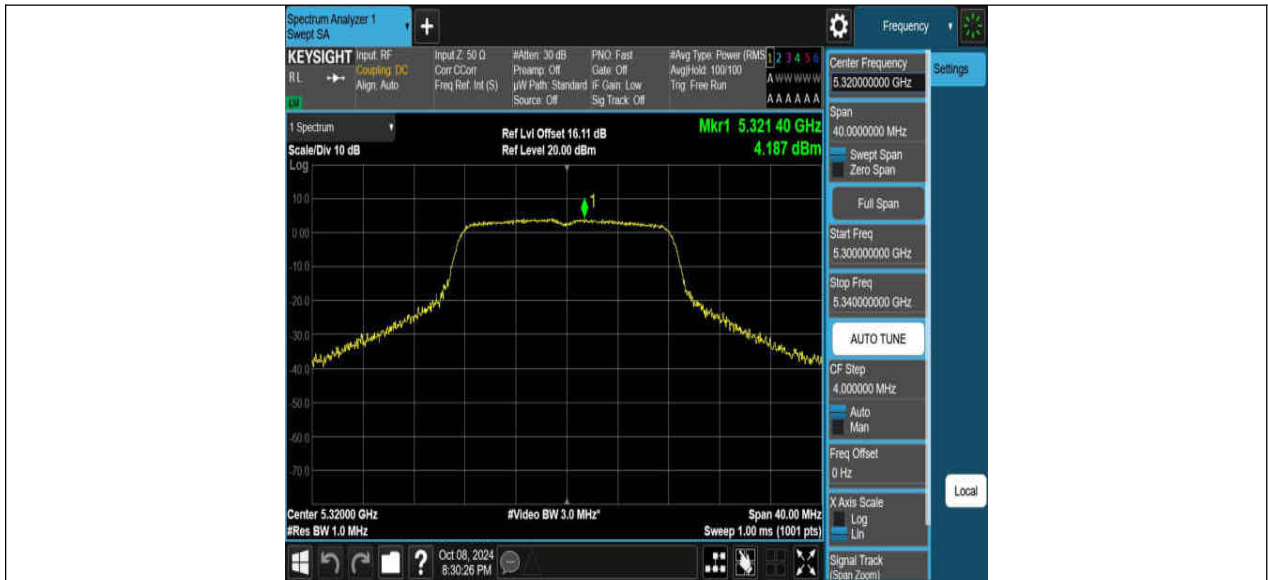

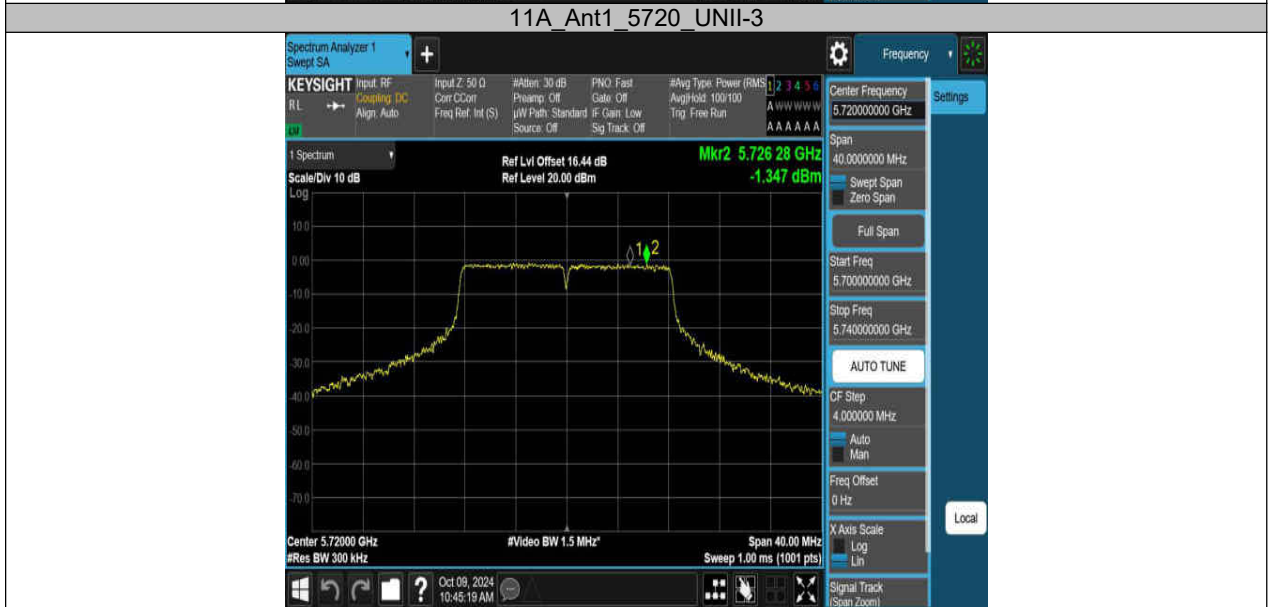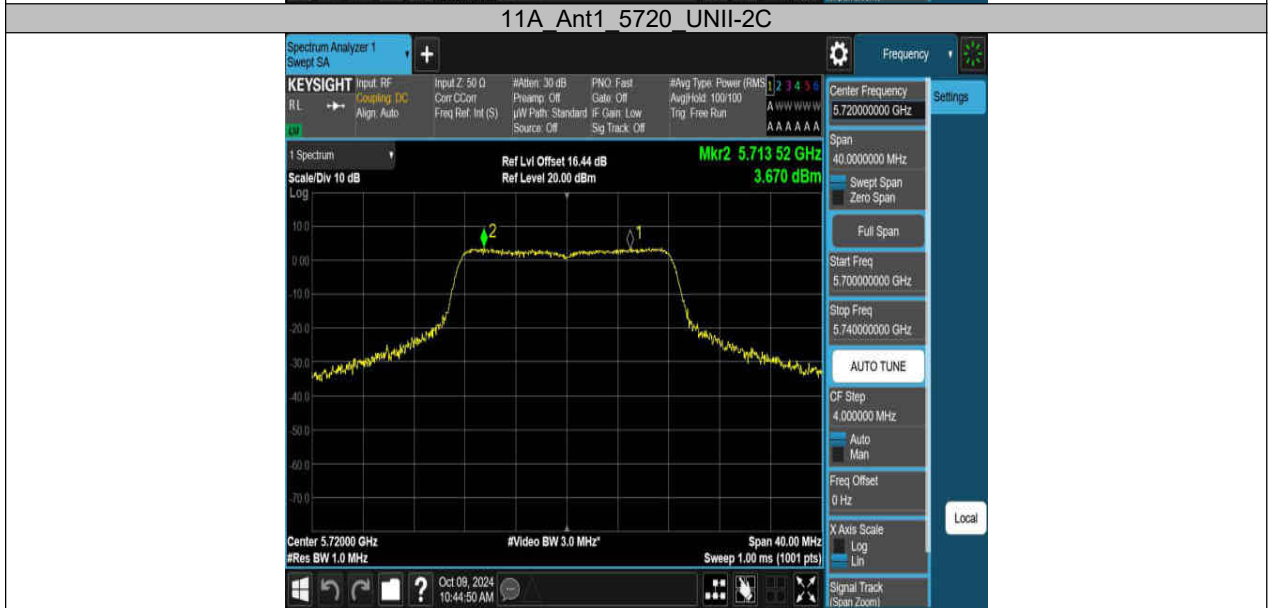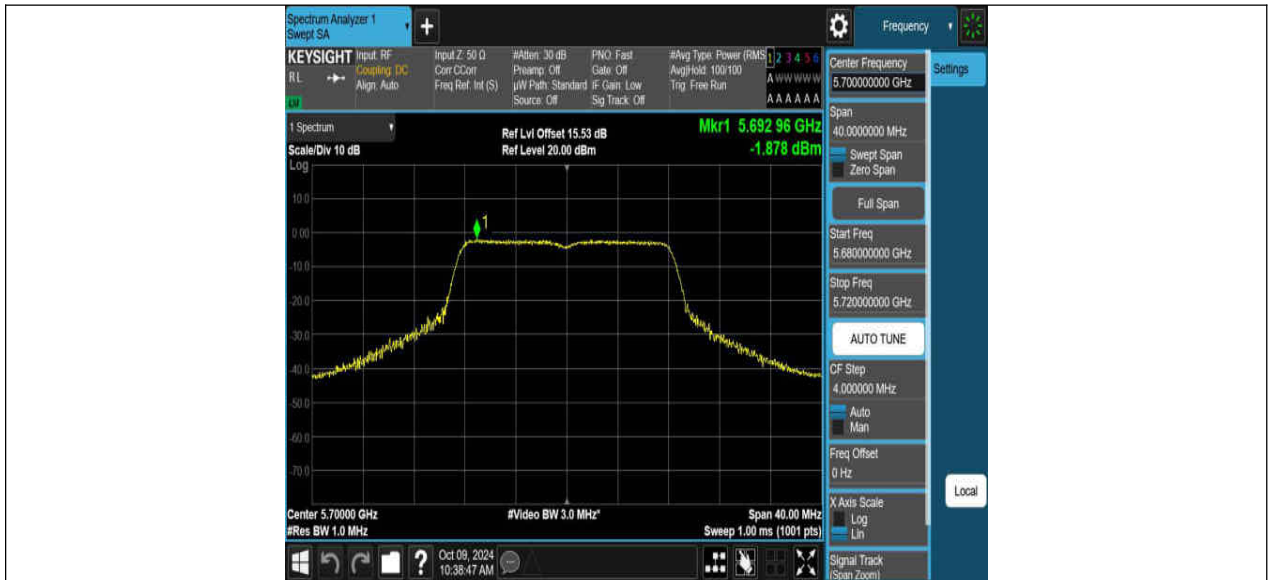


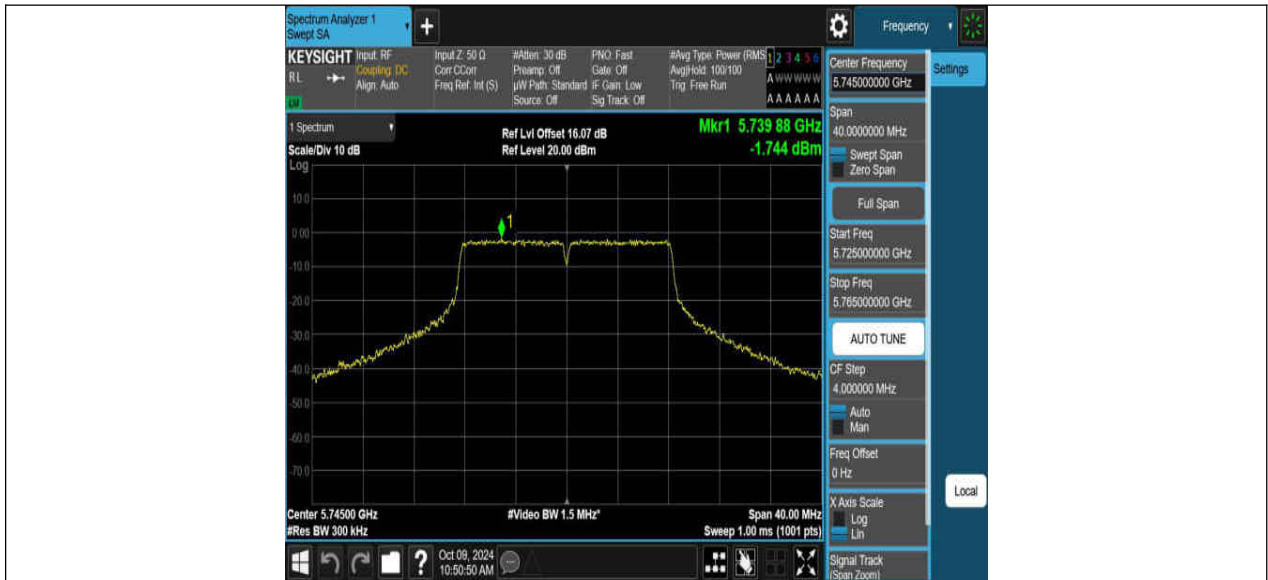


11A Ant1 5785

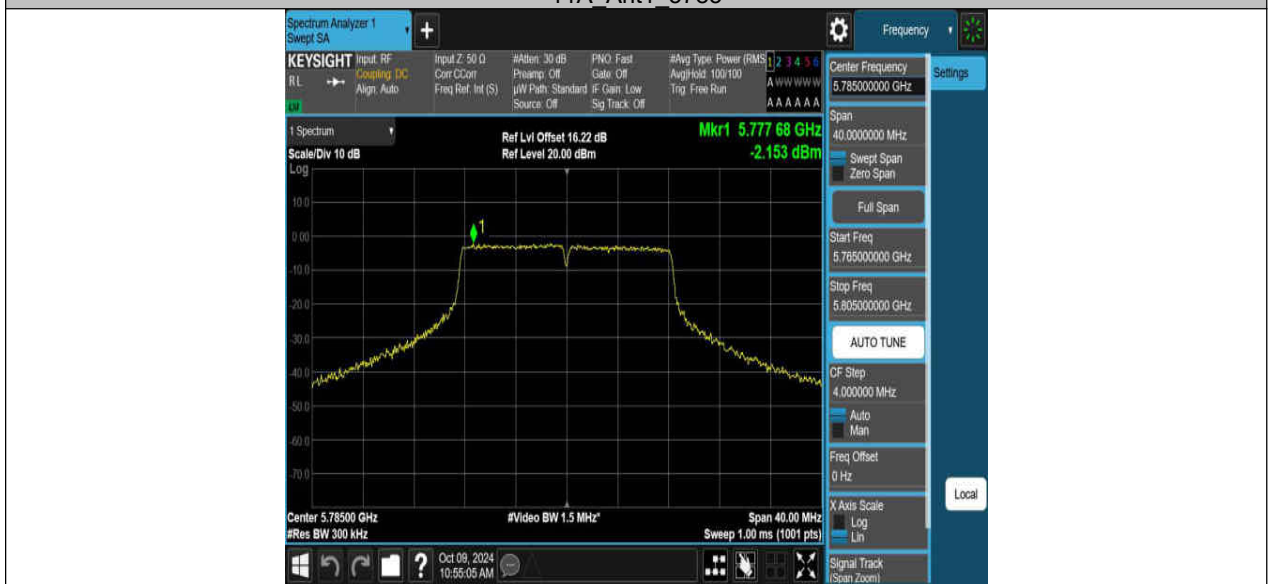


11A Ant1 5825


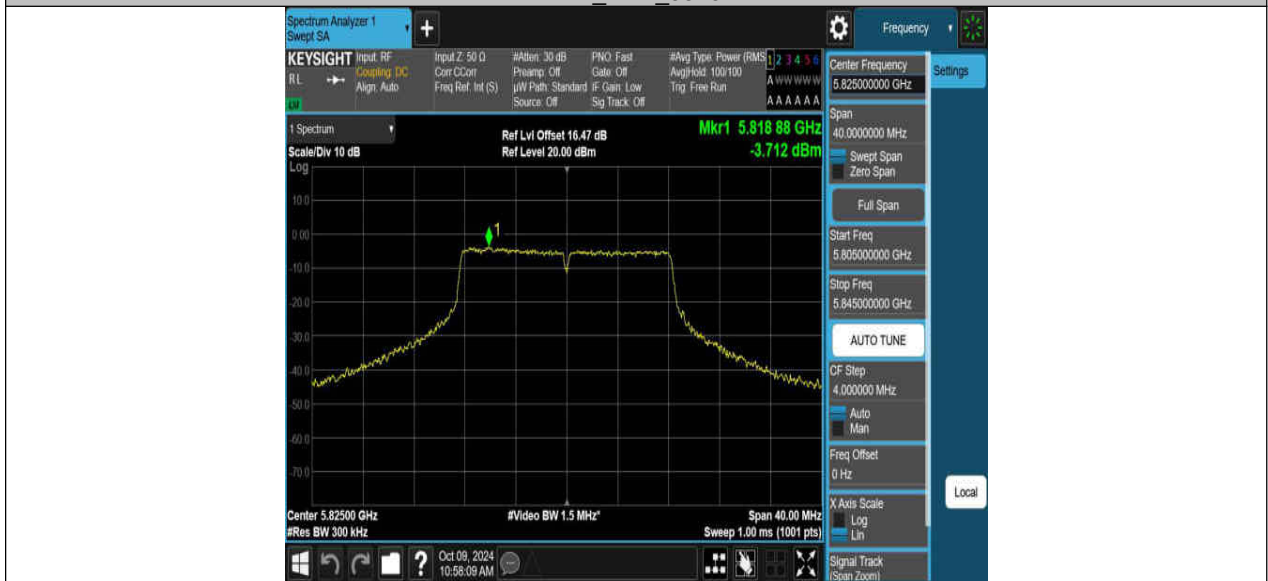


11N20SISO Ant1 5180

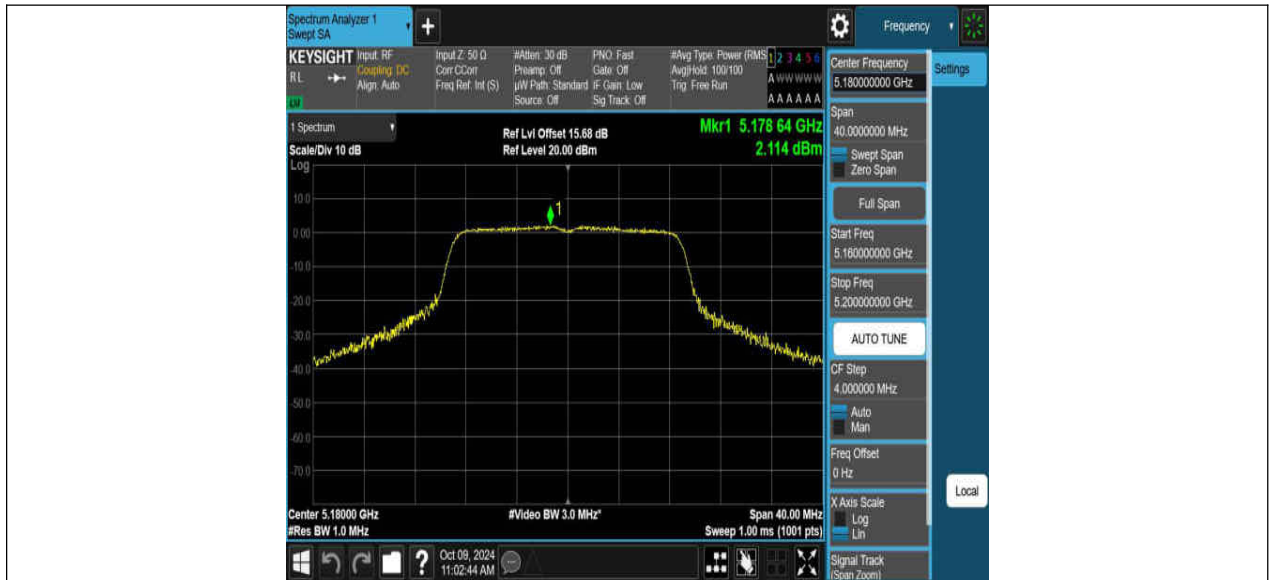



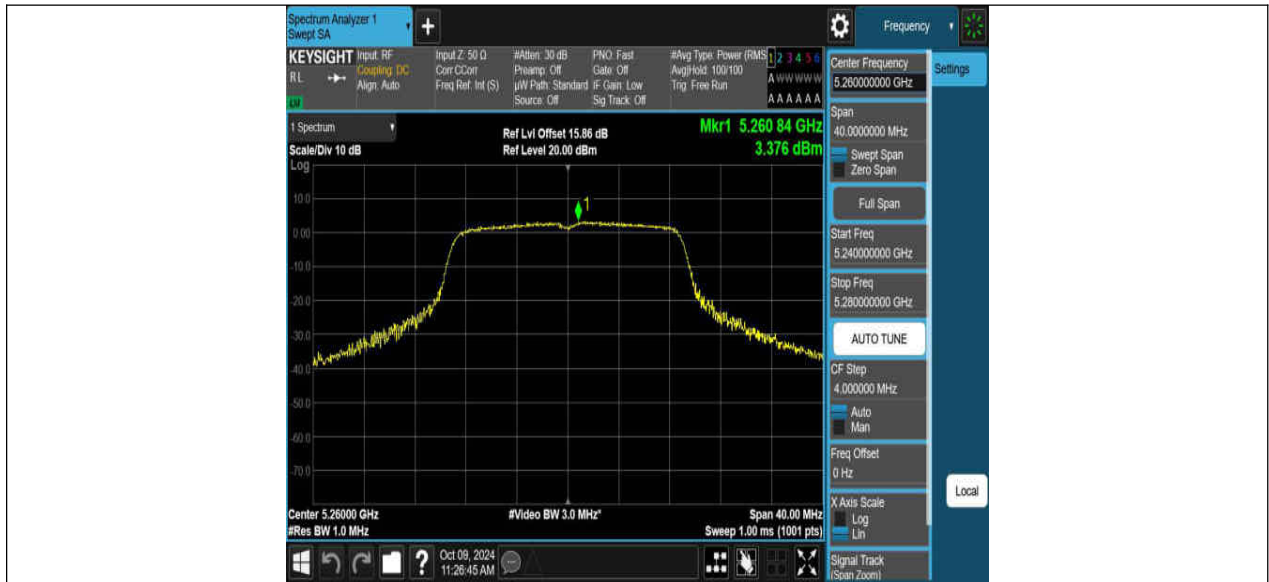





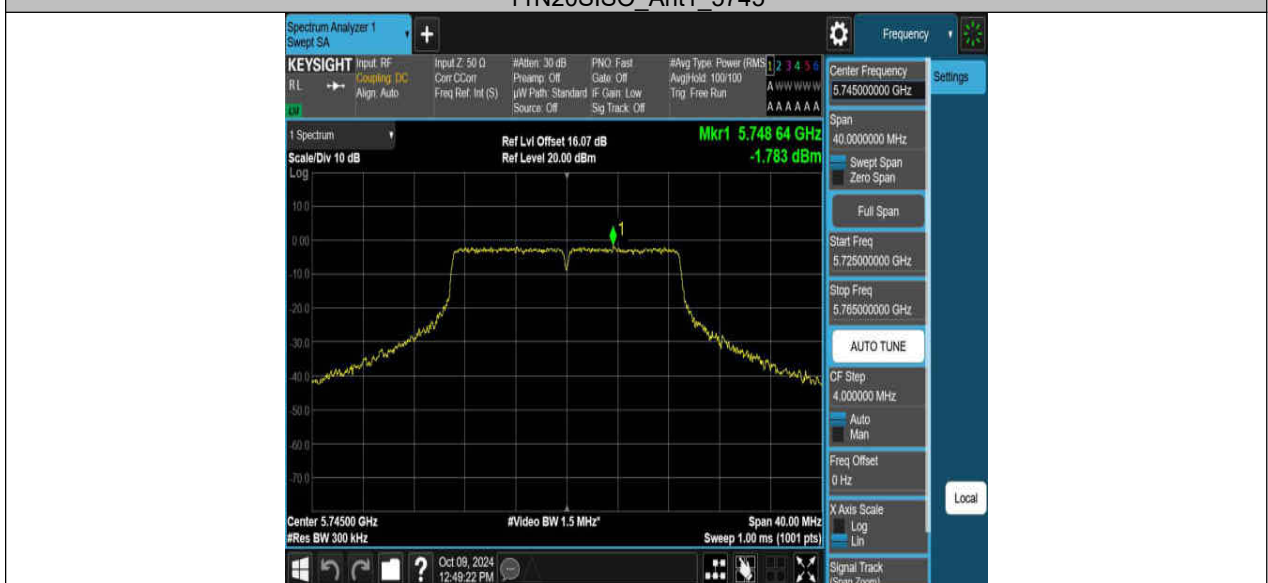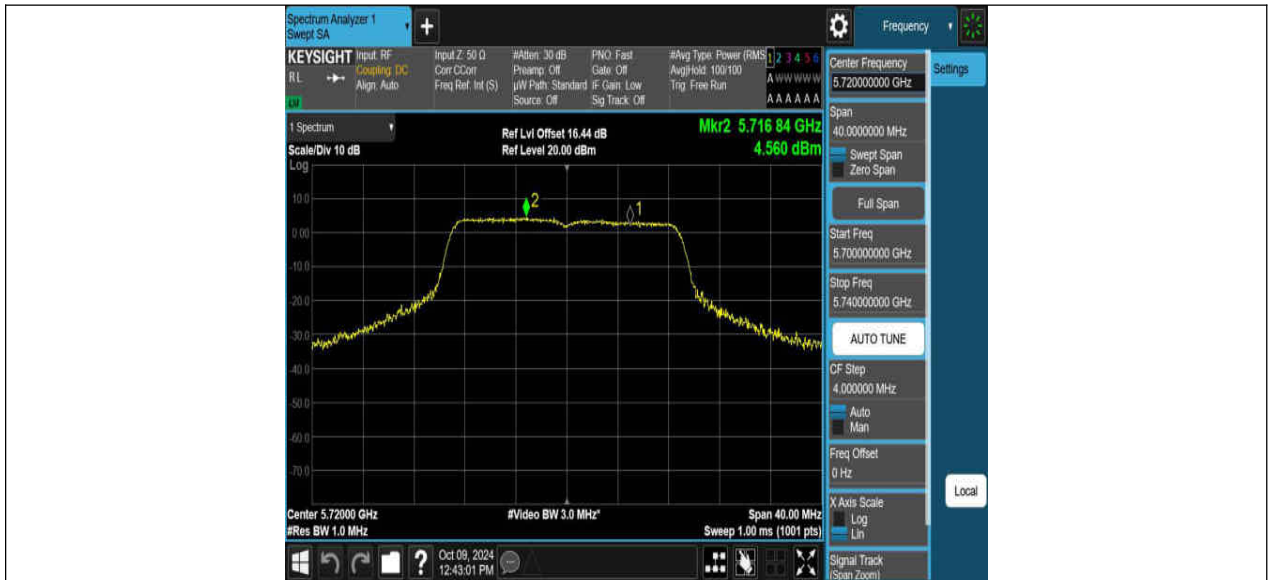




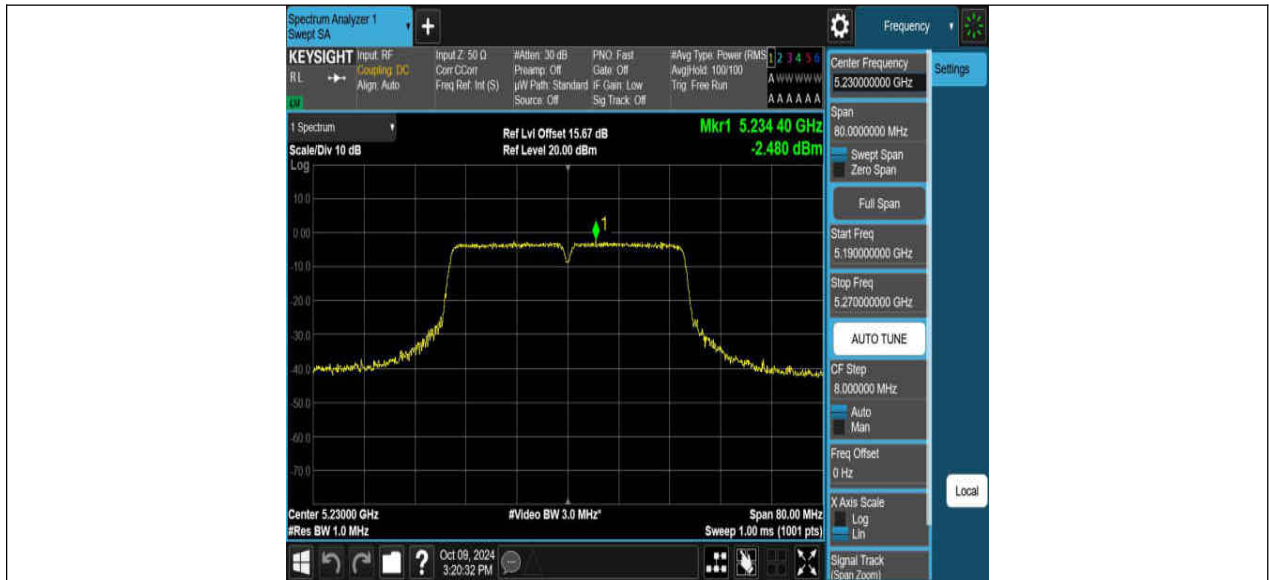

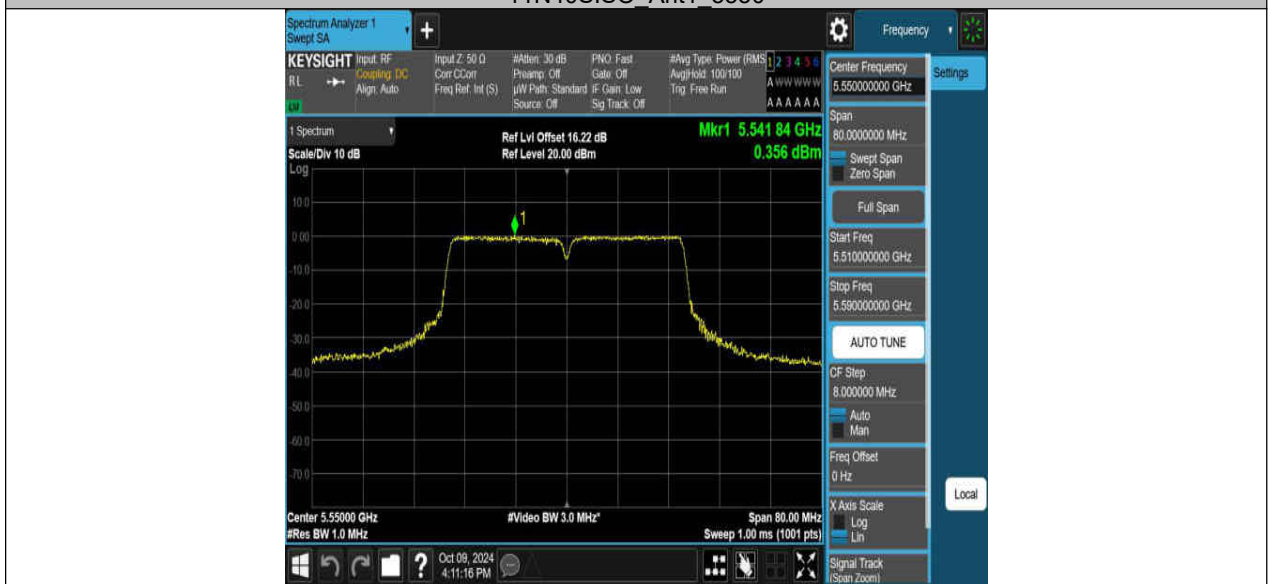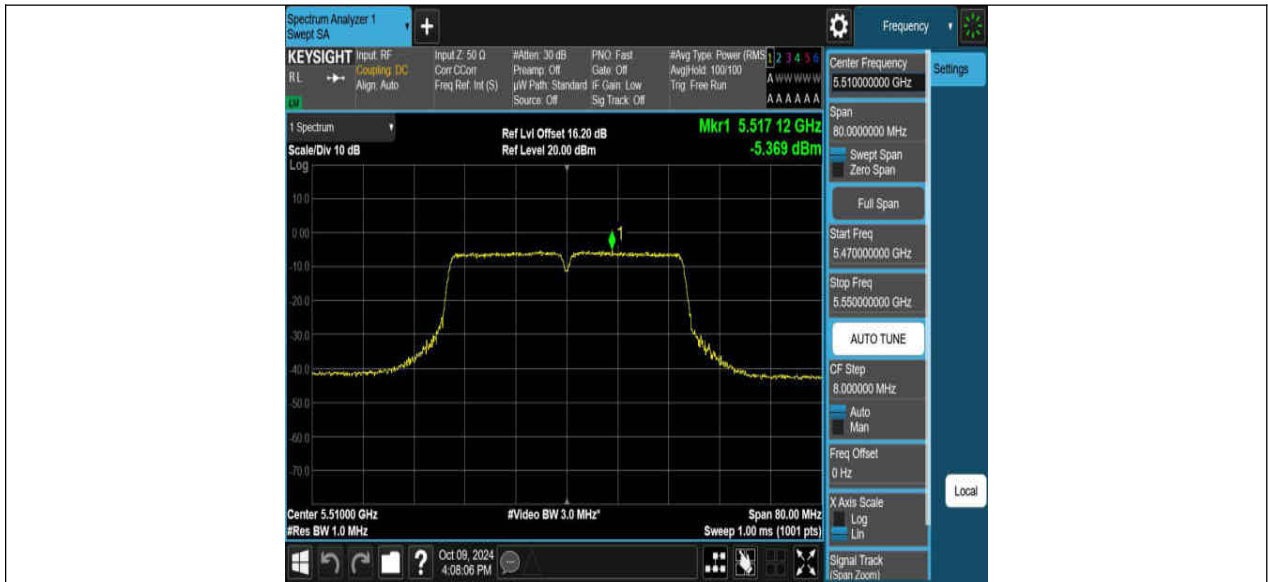

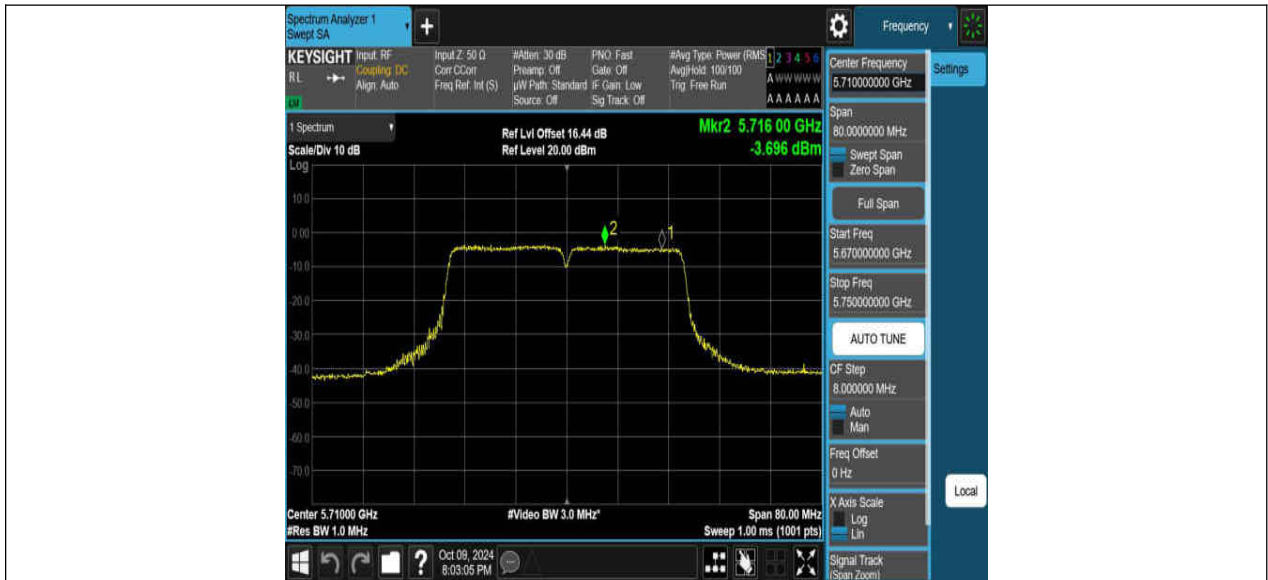


11N40SISO Ant1 5710 UNII-3

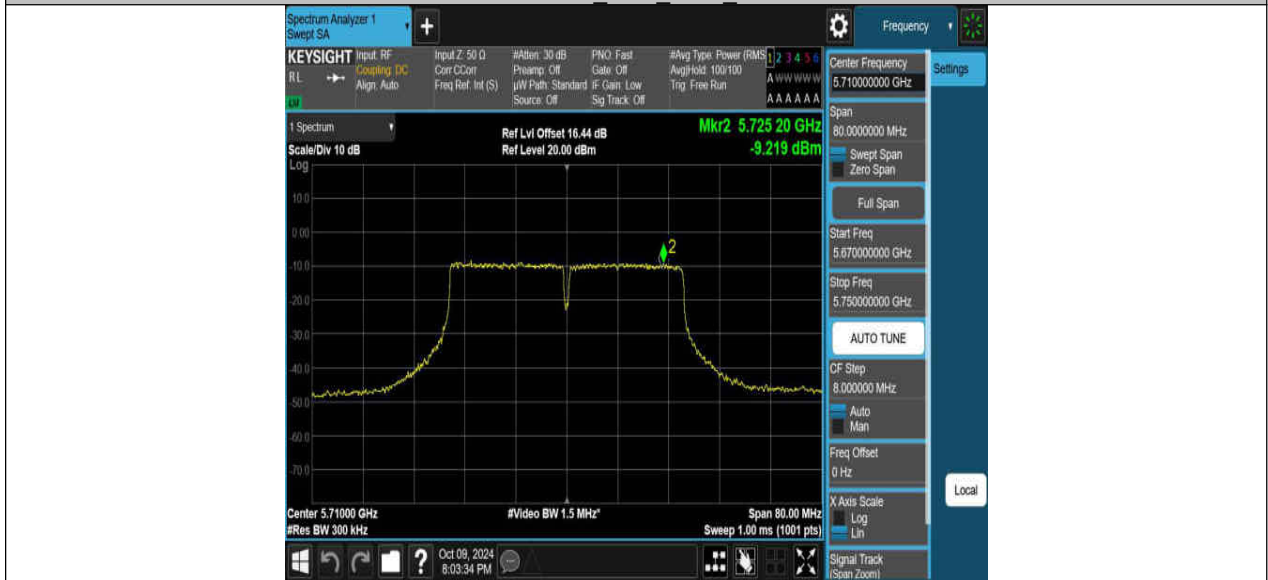

11N40SISO Ant1 5755



11N40SISO Ant1 5795

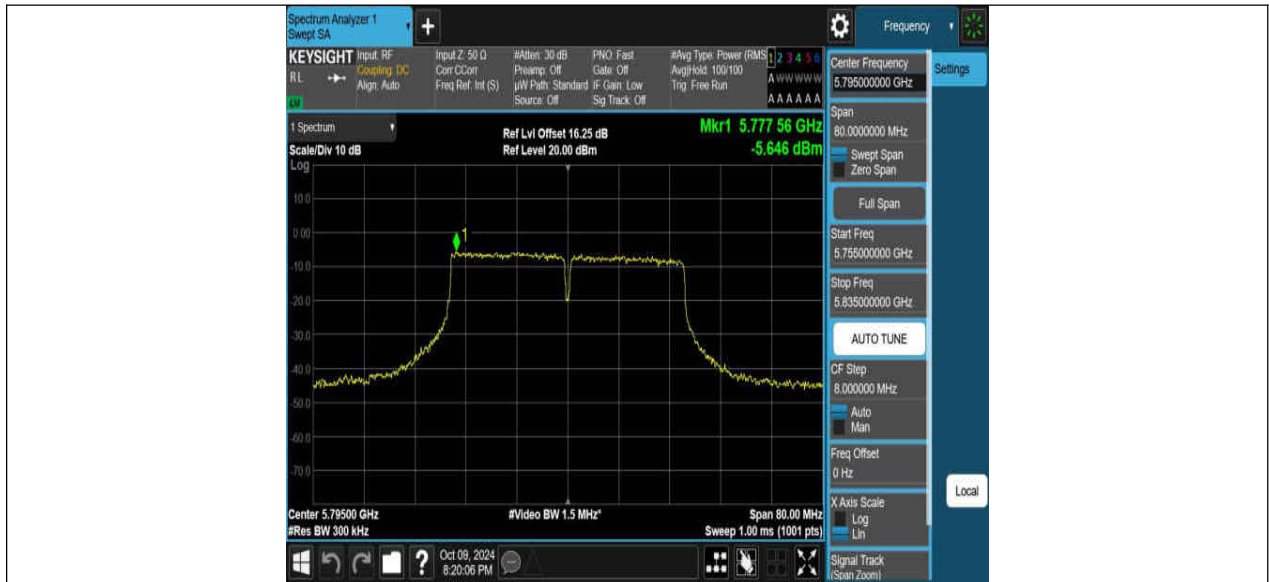

11AC20SISO_Ant1_5180



11AC20SISO_Ant1_5200



11AC20SISO_Ant1_5240

