

APPROVAL SHEET

Supplier name: Guangzhou Vision enthalpy Technology Co., LTD


Supplier material name:Coaxial Cable antenna

Supplier specifications and model: Coaxial Cable antenna ,2.4-2.5GHz, 5.1~7.1GHz, 20.1×218.68mm, Green, I-PEX1, PCB, 4COAX, Double-sided tape 3M5908,4PCS-Coaxial Cable

CVTE Item number: 004.032.0052887

Admission edition: A0

Drawing version number (no drawing): A0

Supplier acknowledgement column		
lay down	examine and verify	ratify
Jack	Lucy	

Supplier Address: ROOM 202, BUILDING B, NO.238, GUANGPU EAST ROAD, HUANGPU DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA

telephone:

portraiture:

Note: Supplier commitment and confirmation, Suppliers to Guangzhou bin electronic technology Co., Ltd., and its affiliated companies (including but not limited to Guangzhou visual source electronic Technology Co., Ltd., Guangzhou electronic Technology Co., Ltd., Guangzhou into information technology Co., Ltd., Guangzhou, medical equipment technology Co., Ltd., Guangzhou yi intelligent electronic technology Co., Ltd., Guangzhou farce ear acoustic technology Co., Ltd., Guangzhou rui xin electronic Technology Co., Ltd., Qingdao source dynamic wisdom sports technology Co., Ltd., Guangzhou radium morning automatic control technology Co., Ltd., Guangzhou Liuhuan Information Technology Co., Ltd.) (known as "CVTE") supply of materials, Are able to meet the standards stipulated in this admission, Without the supplier. The scanned copy, photocopy and faxed copy of this admission letter shall have the same legal effect as the original copy.


Contents Directory

1. Document Revision	1
2. Product Photos.....	2
3. Product Drawings And Specifications.....	2
4. Performance Parameters.....	3
5. Packaging Standard:.....	18
6. Reliability Test Report:.....	19
7. Test list of Raw Materials.....	20
8. Prohibited Substance Guarantee.....	21

2. Product Photos



3. Product Drawings, Specifications

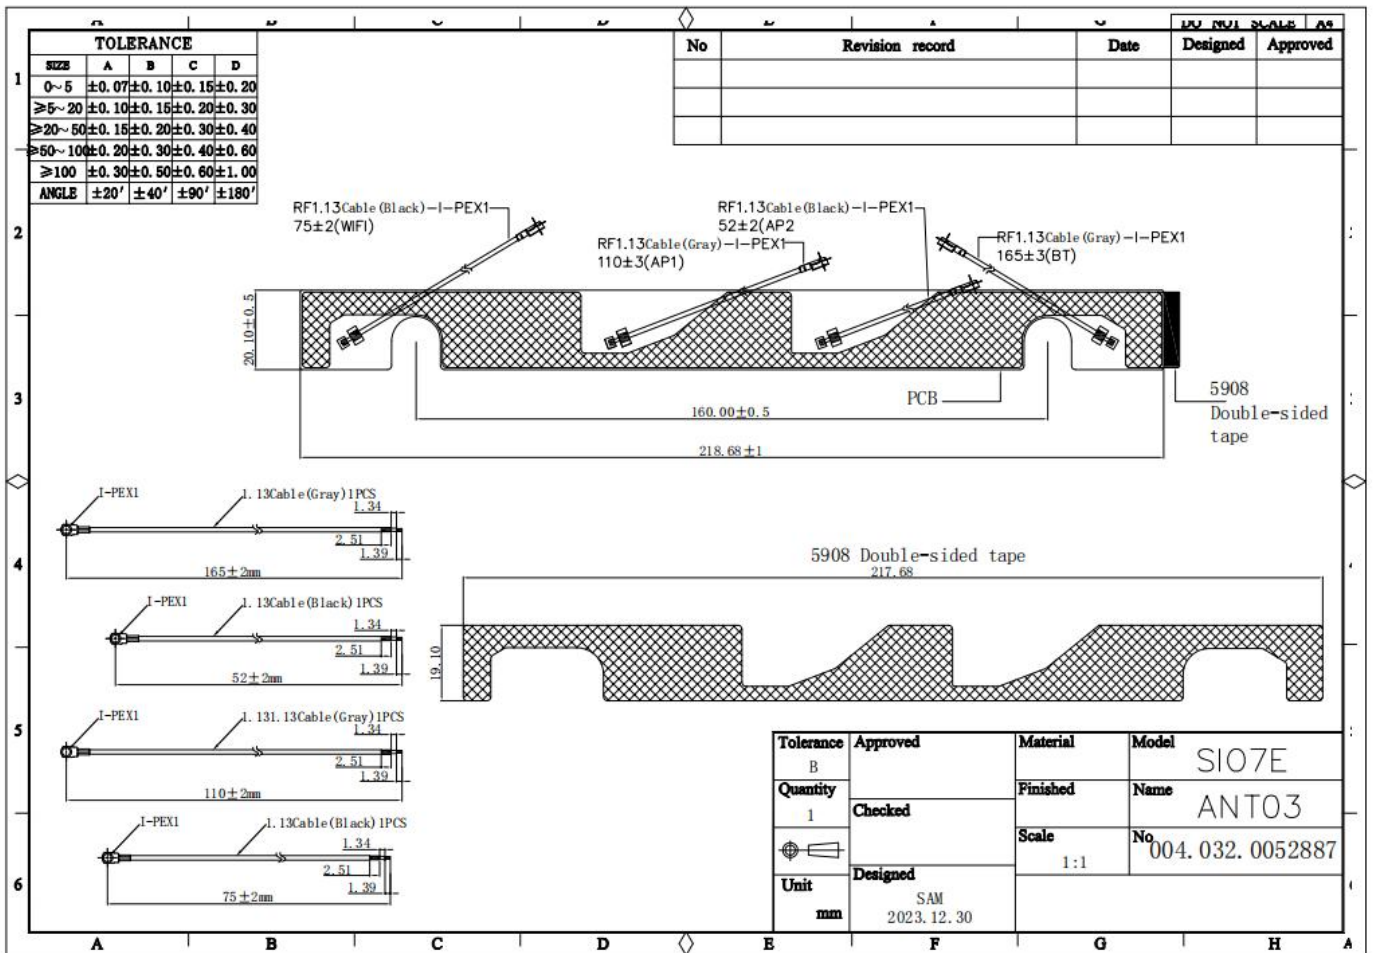


4. performance Parameter

4-1 Performance Parameters


Electrical Parameters	
Frequency Range	2.4-2.5GHz 5.15-5.85GHz 7.12GHz
Input Impedence	50 Ω
Standing-wave Ratio	sample for reference
Gain	/
Power Capacity	/
Through The Test	Thoroughfare
Polarization Mode	Linear
Radiation Direction	/
Connector Model	I-PEX terminal 1 generation * 4
Mechanical Parameters	
Terminal Maintenance Force	/
Antenna Material	PCB
Coax	Grey-Black 1.13 Cable
Salt Spray Test	24H
Enviromental Parameter	
Working Temperature	-30℃~65℃

4-2 Performance Test(Local parts of the entire machine)


S11/VSWR WIFI

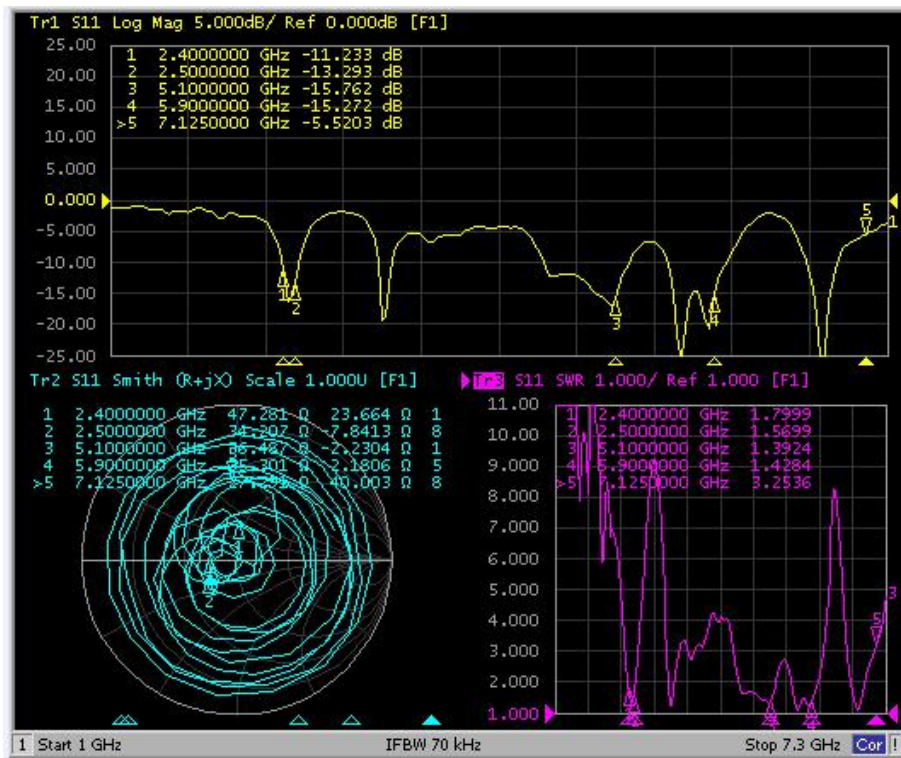


S11/VSWR BT

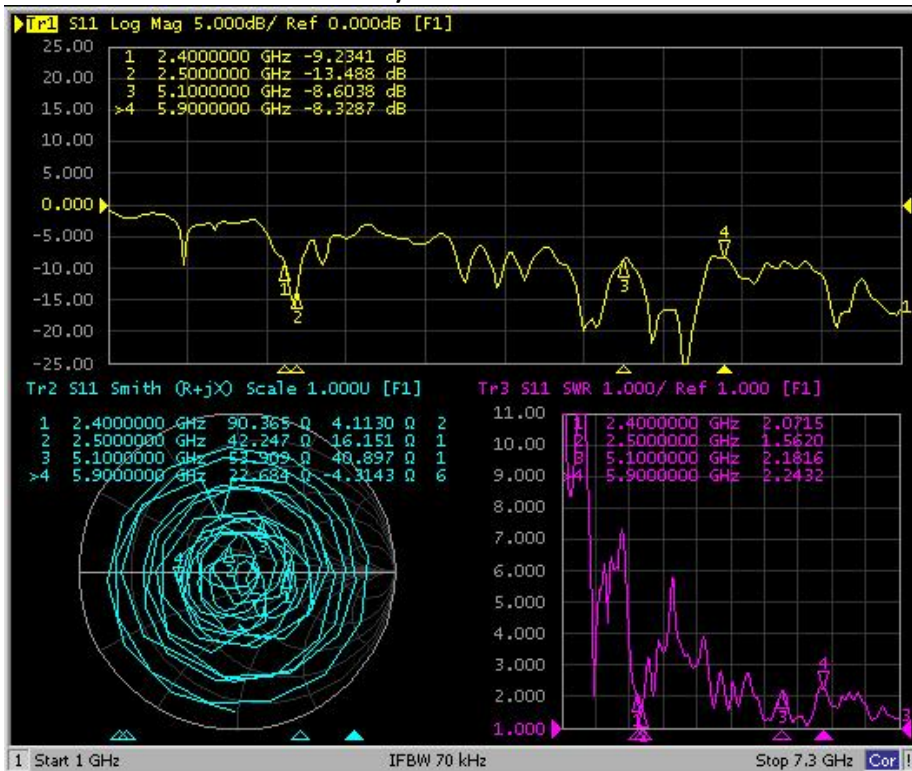

S11/VSWR AP2

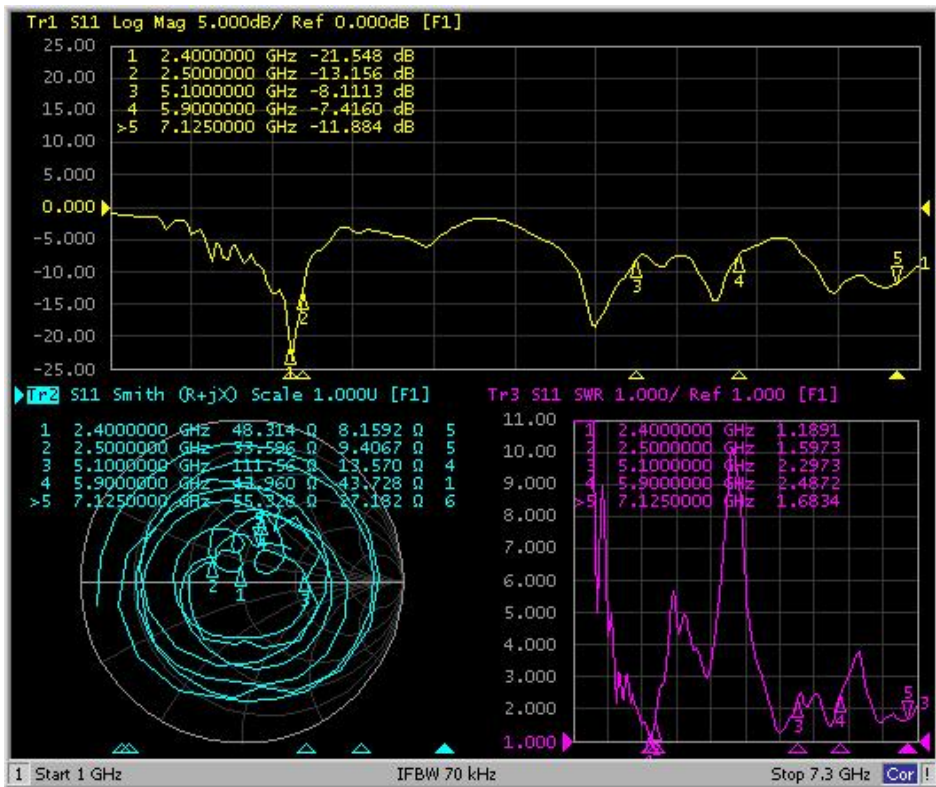

S11/VSWR AP1

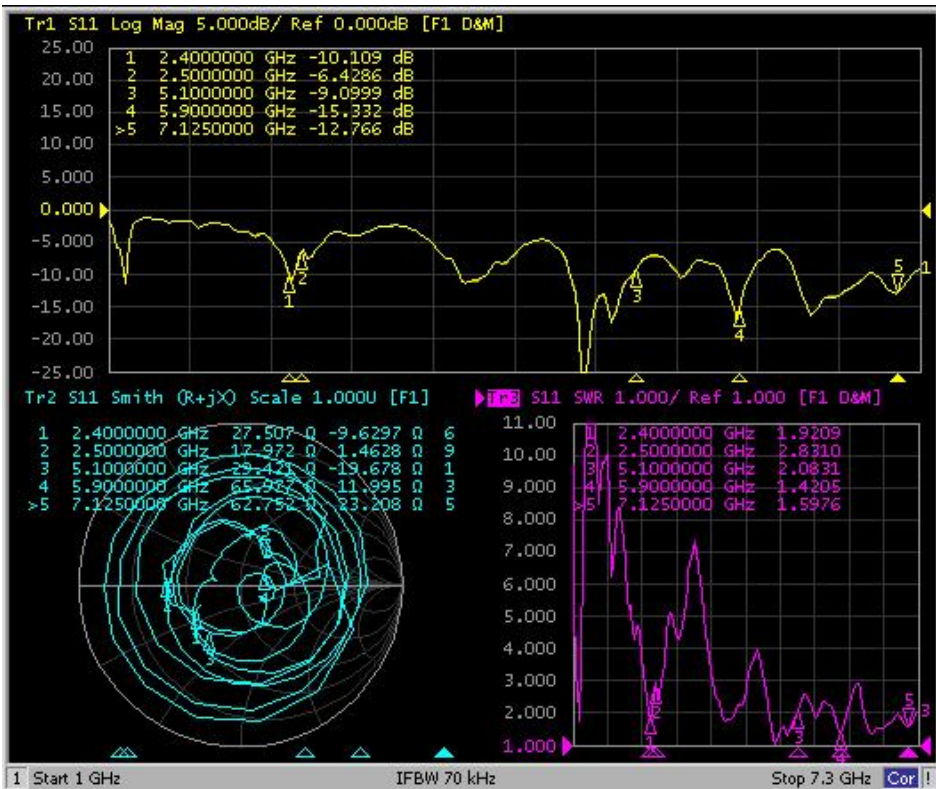

4-3 Antenna Efficiency (Local parts of the entire machine) WIFI


frequency 频率 (MHz)	gain 增益 (dBi)	efficiency 效率(dB)	efficiency 效率(%)
2400	3.59	-2.81	52.36
2410	4.18	-2.68	53.96
2420	4.28	-2.42	57.27
2430	4.21	-2.23	59.89
2440	4.25	-2.11	61.54
2450	4.01	-2.06	62.18
2460	3.88	-2.08	61.96
2470	3.94	-2.21	60.18
2480	3.83	-2.31	58.69
2490	3.69	-2.25	59.63
2500	3.68	-2.12	61.43

frequency 频率(MHz)	gain 增益(dBi)	efficiency 效率(dB)	efficiency 效率(%)
5100	4.54	-3.03	49.76
5150	4.17	-2.99	50.18
5200	4.12	-3.64	43.24
5250	4.02	-3.36	46.12
5300	4.43	-3.55	44.18
5350	4.09	-3.83	41.44
5400	3.71	-4.27	37.39
5450	3.48	-4.16	38.34
5500	3.3	-4.57	34.9
5550	3.56	-4.85	32.75
5600	4.02	-4.79	33.22
5650	4.54	-3.69	42.77
5700	4.68	-3.54	44.31
5750	4.4	-3.47	45.03
5800	3.9	-3.36	46.16
5850	3.39	-3.63	43.34
5900	3.2	-3.79	41.76


frequency 频率(MHz)	gain 增益 (dBi)	efficiency 效率(dB)	efficiency 效率(%)
5920	2.72	-4	39.77
5960	2.14	-3.98	39.97
6000	1.56	-4.19	38.08
6040	1.3	-4.45	35.93
6080	1.05	-5.1	30.88
6120	0.36	-5.79	26.35
6160	-0.51	-6.56	22.07
6200	-1.05	-6.37	23.06
6240	-2.42	-6.60	21.89
6280	-2.88	-6.64	21.66
6320	-2.86	-6.49	22.42
6360	-3.23	-6.64	21.7
6400	-3.39	-6.76	21.07
6440	-3.17	-6.55	22.11
6480	-2.44	-6.23	23.8
6520	-2.25	-5.75	26.58

frequency 频率(MHz)	gain 增益(dBi)	efficiency 效率(dB)	efficiency 效率(%)
6560	-1.84	-5.59	27.62
6600	-0.86	-5.27	29.71
6640	-0.57	-5.18	30.31
6680	-0.12	-4.6	34.67
6720	0.38	-4.2	38.05
6760	0.1	-4.23	37.75
6800	0.35	-4.23	37.75
6840	0.85	-4.13	38.64
6880	0.32	-4.34	36.82
6920	0.26	-4.29	37.23
6960	0.02	-4.48	35.62
7000	-0.02	-4.77	33.37
7040	-0.27	-4.99	31.7
7080	-1.24	-5.24	29.93
7120	-1.86	-5.78	26.42
7160	-2.12	-6.01	24.89


Phi=90 freq=2400MHz

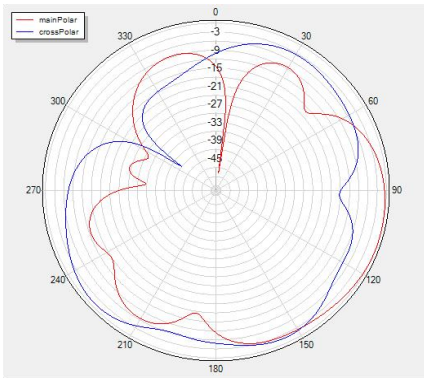


Phi=0 freq=2400MHz

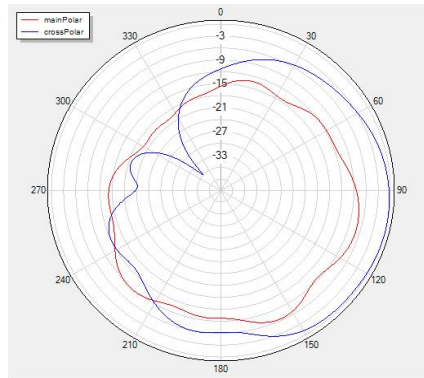


Theta=90 freq=2400MHz

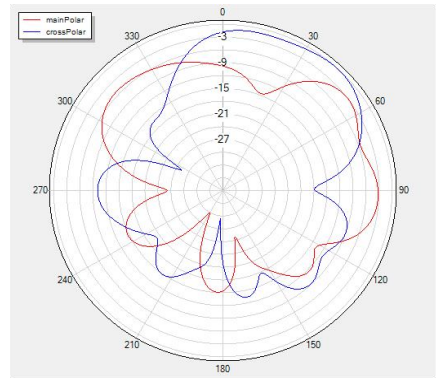


MAX: 3.59dBi
MIN: -26dBi

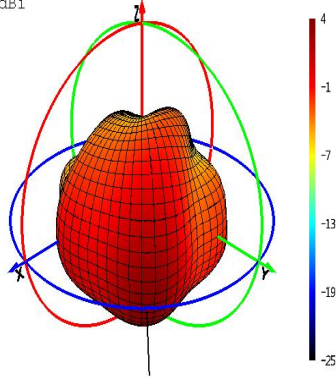


Phi=90 freq=2450MHz

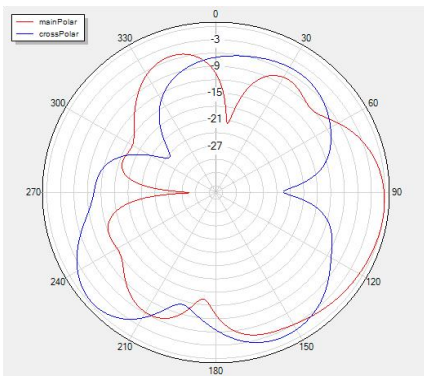


Phi=0 freq=2450MHz

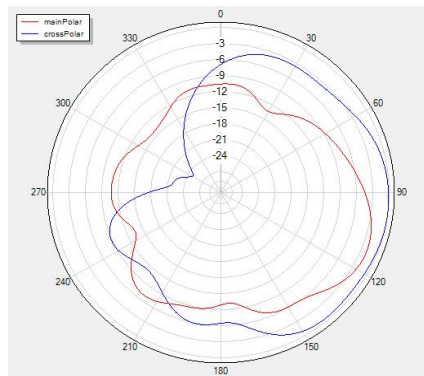


Theta=90 freq=2450MHz

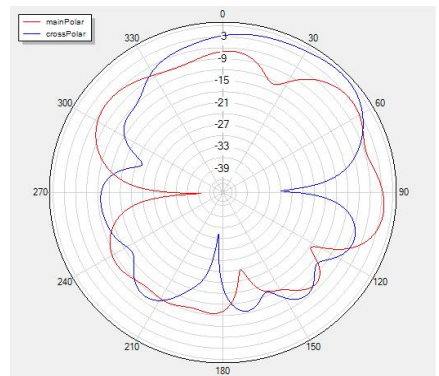


MAX: 4.01dBi
MIN: -29.52dBi

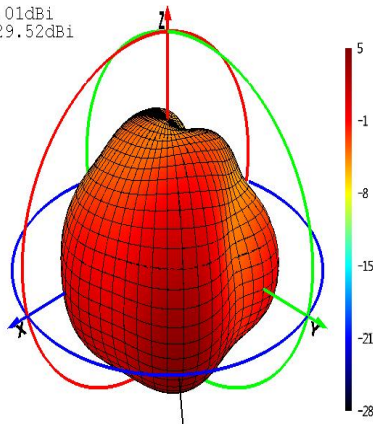


Phi=90 freq=2480MHz

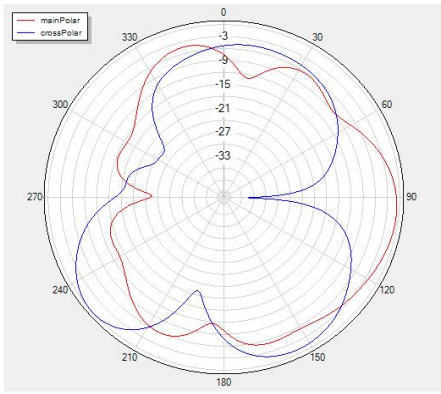


Phi=0 freq=2480MHz

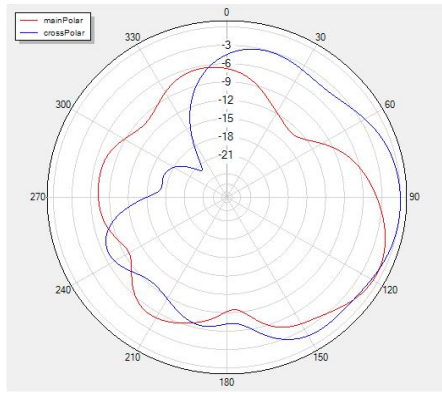


Theta=90 freq=2480MHz

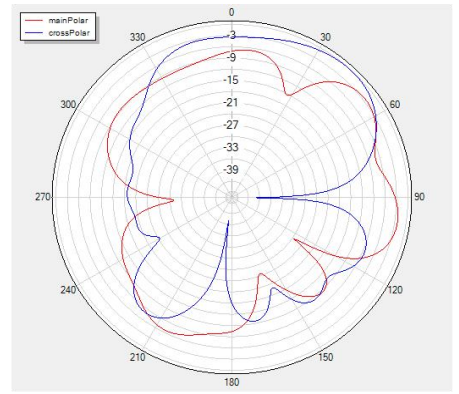


MAX: 3.83dBi
MIN: -18.86dBi

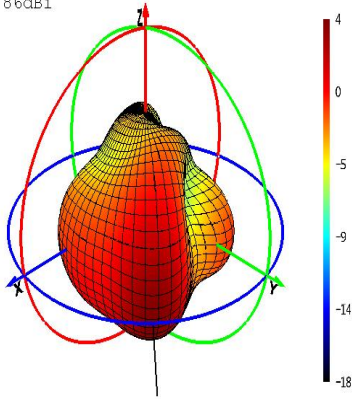


Phi=90 freq=2420MHz

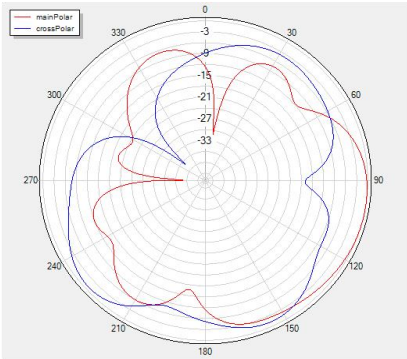


Phi=0 freq=2420MHz

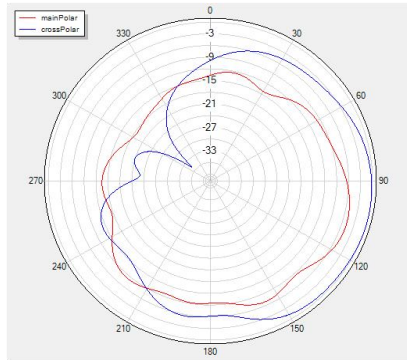


Theta=90 freq=2420MHz

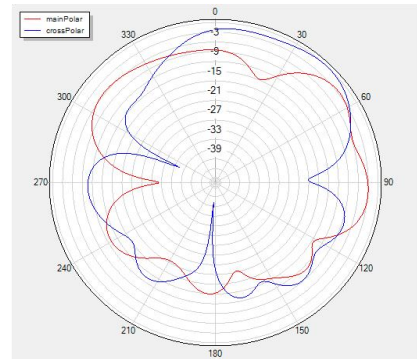


MAX: 4.28dBi
MIN: -19.65dBi

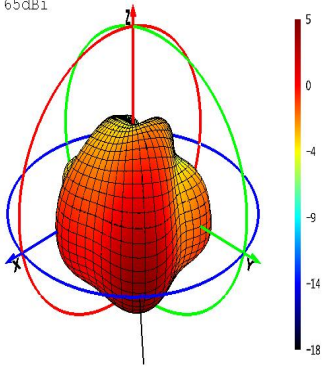


Phi=90 freq=5100MHz

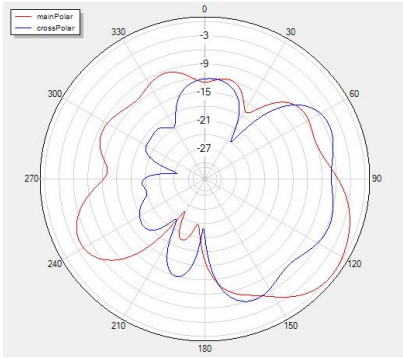


Phi=0 freq=5100MHz

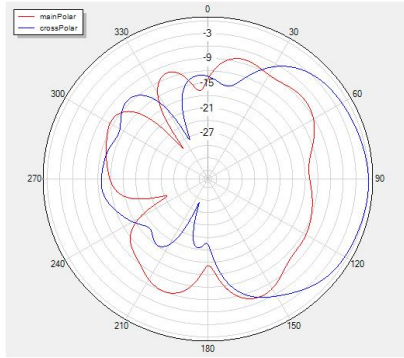


Theta=90 freq=5100MHz

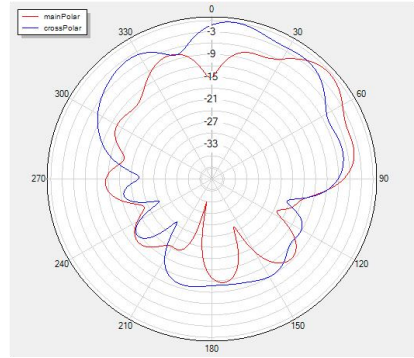


MAX: 4.54dBi
MIN: -31.35dBi

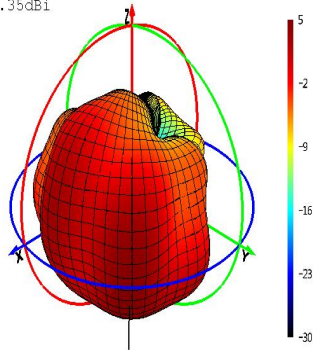


Phi=90 freq=5450MHz

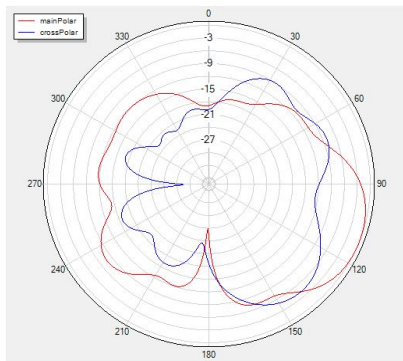


Phi=0 freq=5450MHz

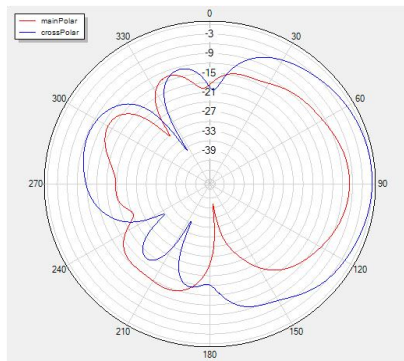


Theta=90 freq=5450MHz

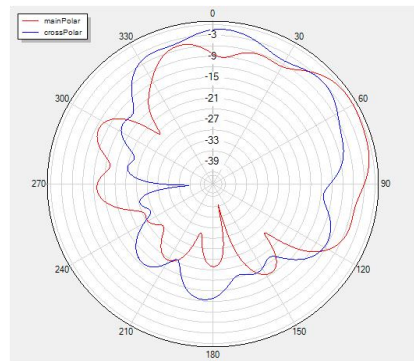


MAX: 3.48dBi
MIN: -29.27dBi

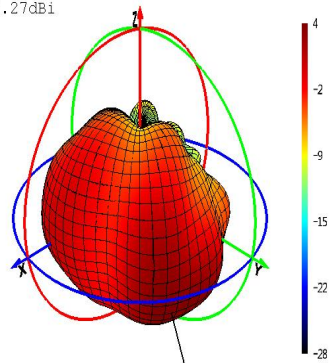


Phi=90 freq=5900MHz

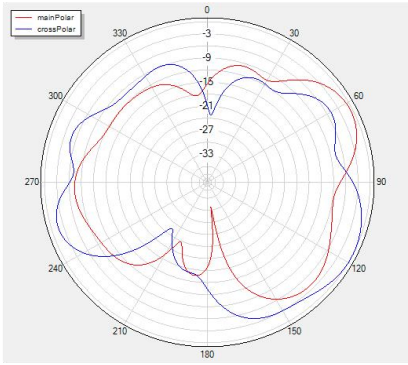


Phi=0 freq=5900MHz

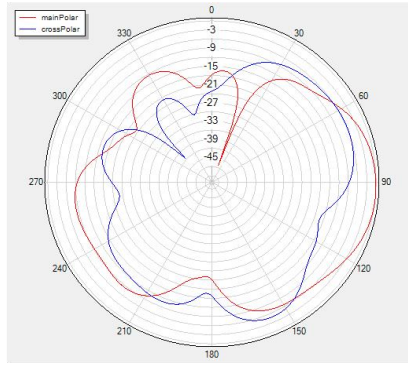


Theta=90 freq=5900MHz

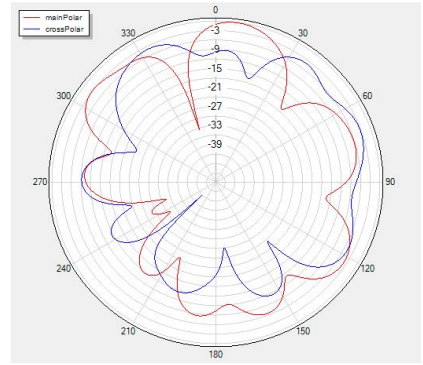


MAX: 3.2dBi
MIN: -24.15dBi

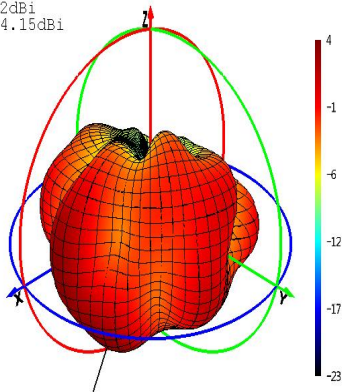


Phi=90 freq=5700MHz

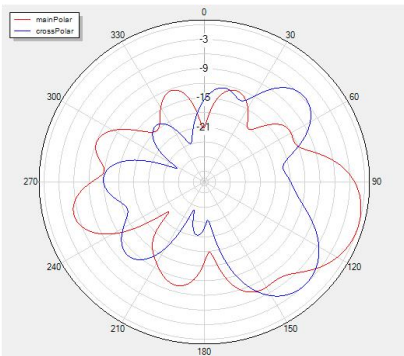


Phi=0 freq=5700MHz

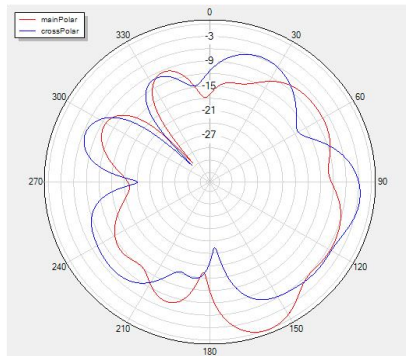


Theta=90 freq=5700MHz

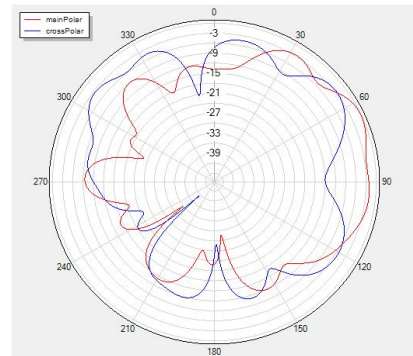


MAX: 4.68dBi
MIN: -29.93dBi

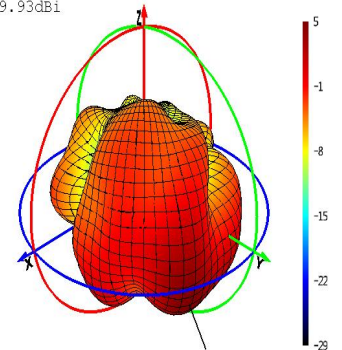



Phi=0 5920MHz

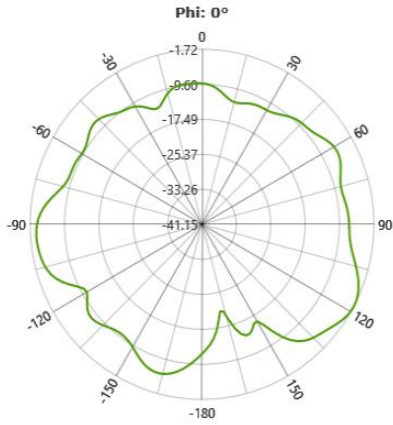


Phi=90 5920MHz

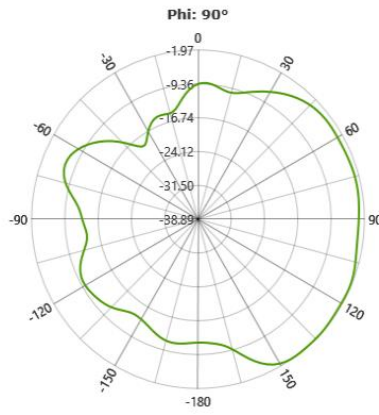


Theta=90 5920MHz

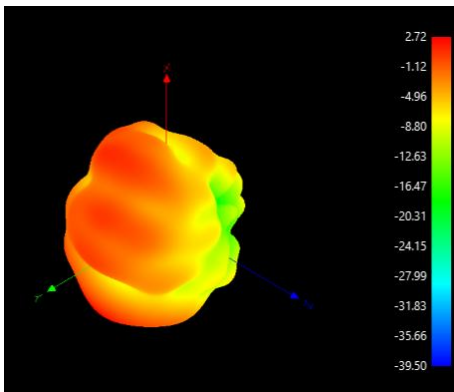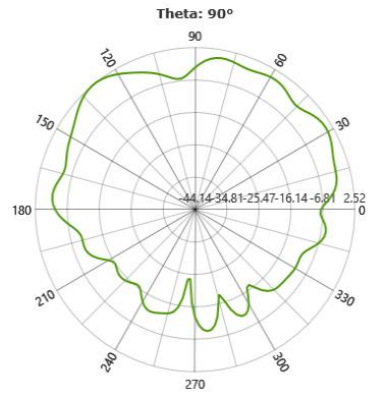



Phi=0 6560MHz

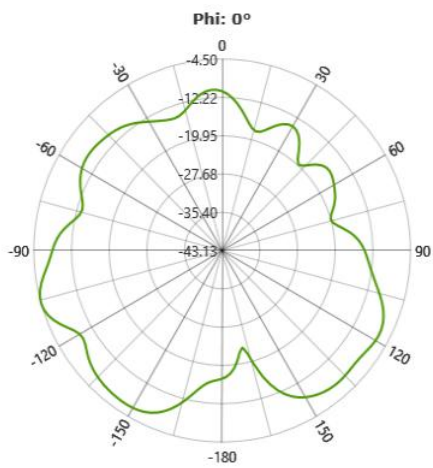


Phi=90 6560MHz

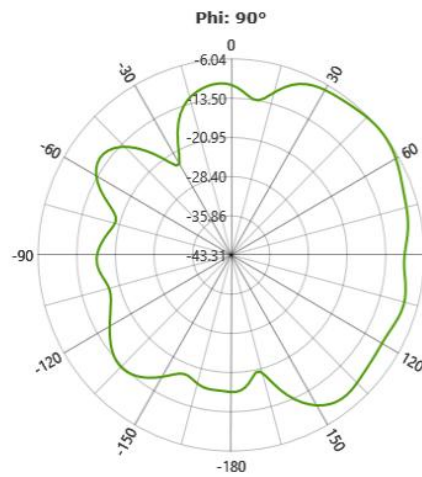


Theta=90 6560MHz

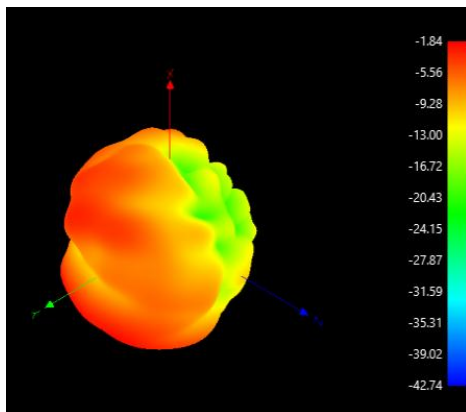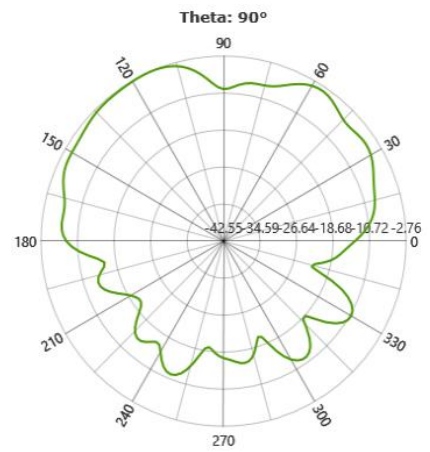



Phi=0 7120MHz

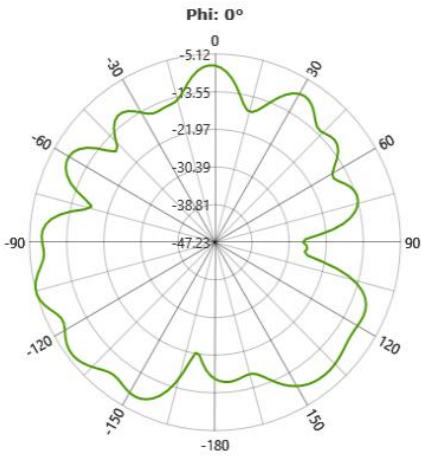

Phi=90 7120MHz

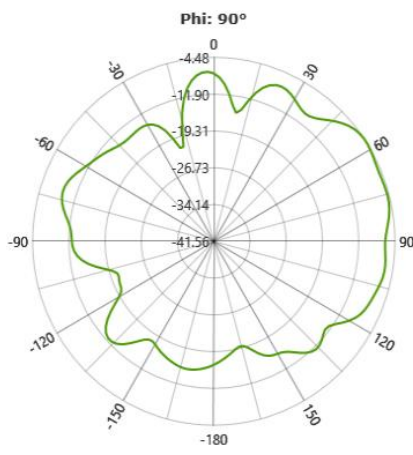


Theta=90 7120MHz

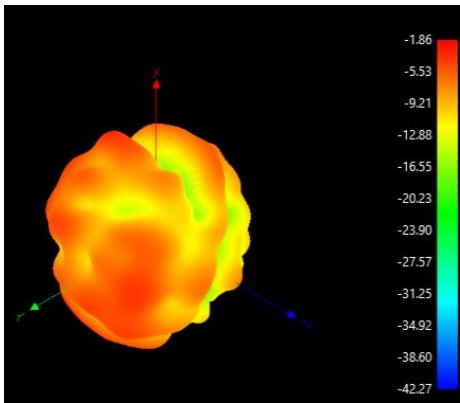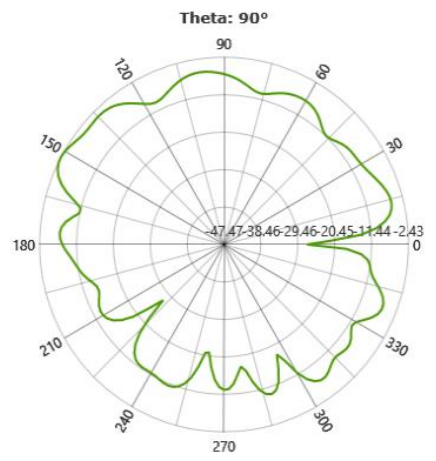


Antenna Efficiency (Local parts of the entire machine) BT

frequency 频率(MHz)	gain 增益 (dBi)	efficiency 效率(dB)	efficiency 效率(%)
2400	2.65	-4.16	38.34
2410	2.98	-3.70	42.68
2420	2.91	-3.39	45.77
2430	2.85	-3.05	49.56
2440	2.93	-3.06	49.46
2450	2.72	-3.04	49.68
2460	2.61	-3.06	49.41
2470	2.56	-3.20	47.81
2480	2.32	-3.34	46.35
2490	2.17	-3.27	47.08
2500	2.17	-3.19	47.97


Phi=90 freq=2410MHz

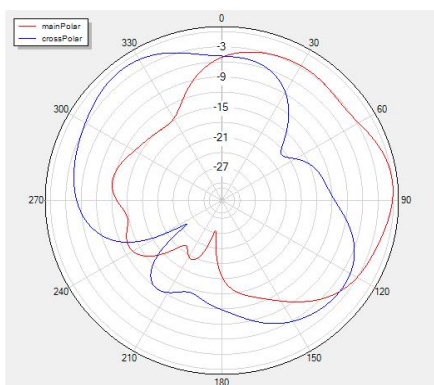


Phi=0 freq=2410MHz

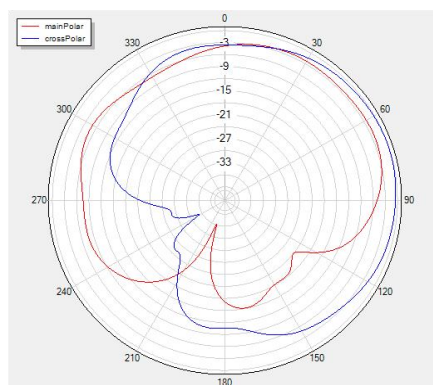


Theta=90 freq=2410MHz

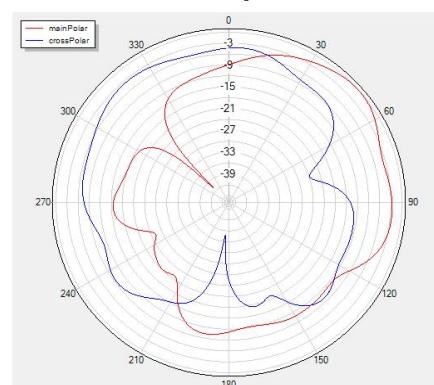


MAX: 2.98dBi
MIN: -19.19dBi

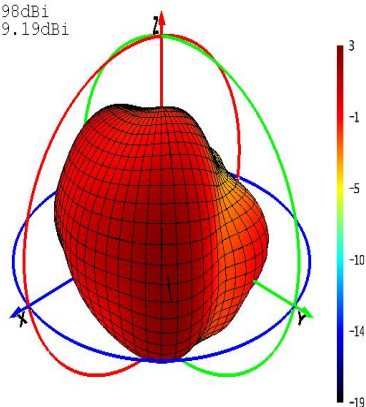


Phi=90 freq=5400MHz

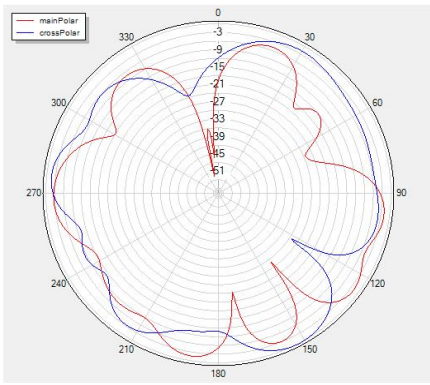


Phi=0 freq=5400MHz

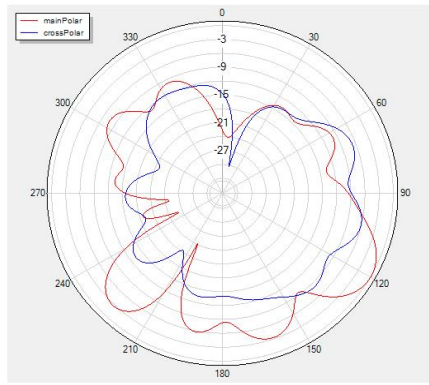

Theta=90 freq=5400MHz

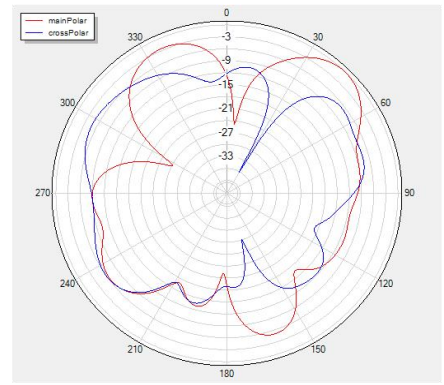

MAX: 3.53dBi
MIN: -43.16dBi

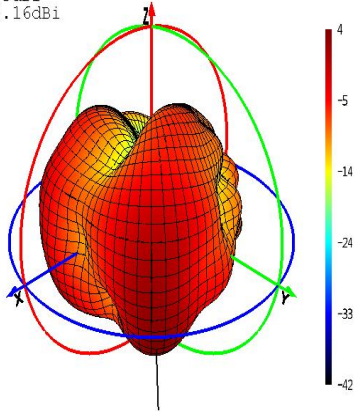


Antenna Efficiency (Local parts of the entire machine) AP1


frequency 频率 (MHz)	gain 增益 (dBi)	efficiency 效率(dB)	efficiency 效率(%)
2400	3.09	-3.60	43.64
2410	3.13	-3.44	45.33
2420	3.15	-3.40	45.7
2430	2.92	-3.43	45.44
2440	2.84	-3.50	44.62
2450	2.64	-3.60	43.69
2460	2.78	-3.76	42.07
2470	3.04	-4.06	39.3
2480	3.08	-4.19	38.14
2490	3.05	-3.98	39.98
2500	3.13	-3.73	42.35

frequency 频率 (MHz)	gain 增益 (dBi)	efficiency 效率(dB)	efficiency 效率(%)
5100	2.32	-4.41	36.23
5150	3.24	-3.94	40.34
5200	4.03	-3.95	40.26
5250	3.89	-3.68	42.89
5300	3.47	-3.95	40.25
5350	3.19	-4.09	38.97
5400	3.77	-4.16	38.33
5450	3.67	-4.11	38.86
5500	2.7	-4.93	32.15
5550	2.27	-4.88	32.48
5600	2.04	-4.55	35.06
5650	3.02	-3.56	44.1
5700	3.61	-3.63	43.3
5750	3.8	-3.94	40.41
5800	3.02	-4.45	35.88
5850	1.45	-5.16	30.5
5900	1.19	-5.67	27.1


Phi=90 freq=2420MHz

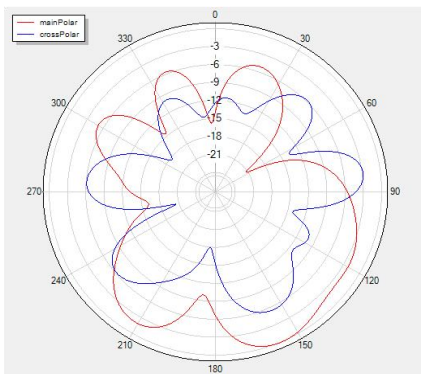


Phi=0 freq=2420MHz

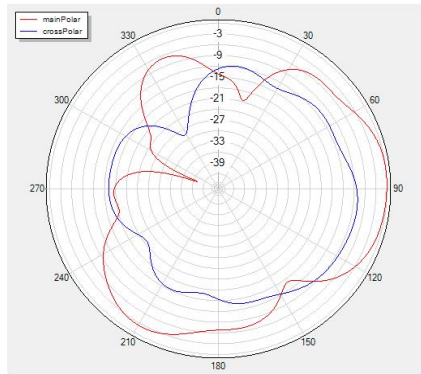


Theta=90 freq=2420MHz

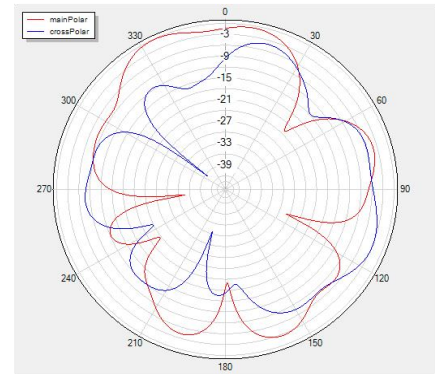


MAX: 3.15dBi
MIN: -20.43dBi

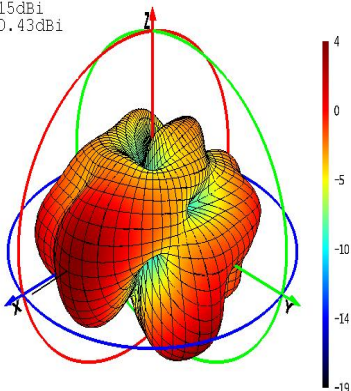


Phi=90 freq=5200MHz

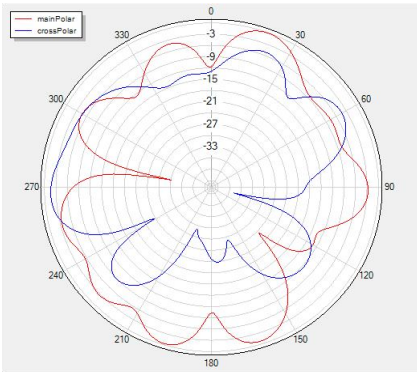


Phi=0 freq=5200MHz

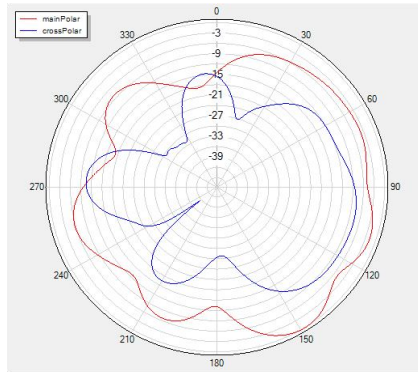

Theta=90 freq=5200MHz

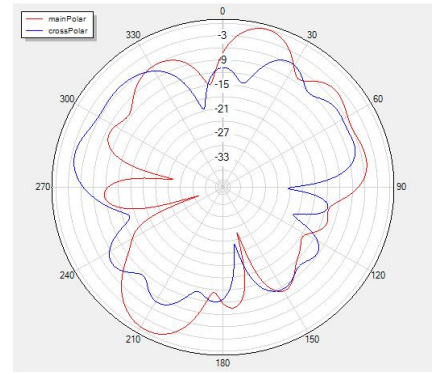

MAX: 4.03dBi
MIN: -29.71dBi

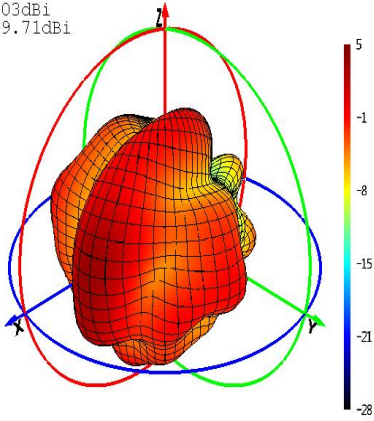

5. Packaging Standard


Product Material No. : 004.032.0052887

Product specification: Coaxial Cable antenna, 2.4 ~ 2.5GHz, 5.1 ~ 7.1GHz, 20.1 × 218.68mm, Green, I-PEX1, PCB, 4COAX, Double-sided tape 3M5908, 4PCS-Coaxial Cable

li. Packaging requirements and operation instructions:


1. Internal packaging:

Product 50 PCS small Pe bag into the big PE bag

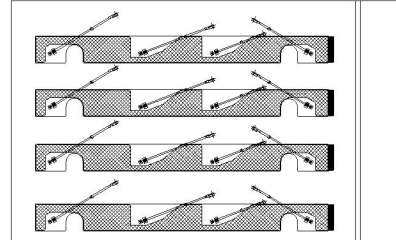

2. Packaging:

Quantity / box according to the actual packing

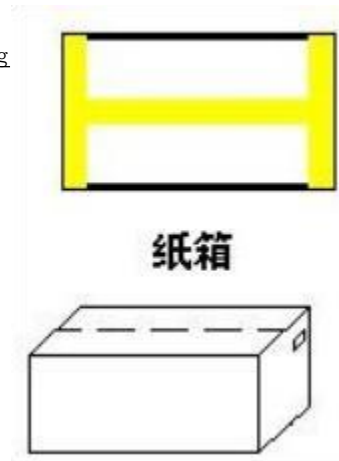

matters need attention:

1. Whether to add a partition board, pearl cotton;
2. Attachment of labels, such as ROHS;

6. Reliability test report

7-1. Reliability test standards

test item		test method	acceptance standard	Judgment results
1	V.S.W.R	Set the network analyzer parameters for testing	According to the specifications to be tested	PASS
2	Plug in damage	Set the network analyzer parameters for testing	According to the specifications to be tested	PASS
3	salt atmosphere	Temperature 35° C humidity 95% saline concentration 5%; test for 24 hours	After 2H, there was no obvious bad appearance: frequency offset of 5%	PASS
4	constant temperature and humidity	Temperature 80° C test 12H to-40° C Test 12H: Humidity 90%: Test 24 hours	After 2H, there was no obvious bad appearance: frequency offset of 5%	PASS
5	strain relief test	Tometer test product connector and terminal tension greater than; 1 Kgf	Visual inspection / measurement meets SOP requirements, no shedding, poor contact	PASS

6. Test List Of Raw Materials

原材料测试清单 Raw Material Test List																	
客户编码 (Customer P/N): 004.032.0052887			物料名称 (Part Name) Coaxial Cable ANT						供应商 (Vendor)					供货商料号 (Vendor P/N)			
No (序号)	Raw Material Name (原材料料名称)	Raw Material description (原材料描述)	Raw Material Supplier (原材料供应商)	Pb (铅)	Cd (镉)	Hg (汞)	Cr+6 (六价铬)	PBBs (聚溴 化苯 酯)	PBDEs (聚溴 化苯 醚)	邻苯二甲酸二				Test Lab 检测机构	Test Report Number (检测报告号)	Test Date (测试日期)	Remark (备注)
										邻苯二甲酸二 丁酯 (DEHP)	邻苯二甲酸二 丁酯 (DBP)	邻苯二甲酸二 苯酯 (BBP)	邻苯二甲酸二 异丁酯 (DIBP)				
1	1.13 Cable	Coaxial Cable	tian mai	N.D	N.D	N.D	N.D	N.D	N.D	N.D	N.D	N.D	N.D	SGS	SZXEC23001776703	2023/8/8	
	RF 端子	C5210	dingrong	13	ND	ND	ND	ND	ND	ND	ND	ND	ND	SGS	CANEC23002609908	2023/5/11	
	RF Connector	镀锌 NI 镀金 AU	tonghua	30	N.D	N.D	N.D	N.D	N.D	N.D	N.D	N.D	N.D	SGS	CANEC23007797304	2023/8/17	
				tonghua	10	N.D	N.D	N.D	N.D	N.D	N.D	N.D	N.D	SGS	CANEC23007797302	2023/8/17	
				GOLDENMAX INTERNATI ONAL	8	ND	ND	ND	ND	ND	ND	ND	ND	SGS	CANEC23010851106	2023/10/11	
				ZHAOQING CHAOYANG	N.D	N.D	N.D	N.D	N.D	N.D	N.D	N.D	N.D	SGS	CANEC23003293208	2023/5/25	
				Runda New Materials	N.D	N.D	N.D	N.D	N.D	N.D	N.D	N.D	N.D	SGS	TST2023 1000799- 3EN	2023/10/23	

上述均质材料如果属非金属，还需回答三个问题：
 ①是否含卤素： 含有YES 不含有NO
 ②是否含红磷： 含有YES 不含有NO
 ③是否含三氧化二锡： 含有YES 不含有NO

8. Disabled Material Guarantee

禁用物质保证(Certification of Restricted Substance)

我方保证所提供的物料，完全遵守签核的广州视源电子科技股份有限公司/或其子公司的质量和环保协议中的各项条款，物料中禁用物含量，符合最新版《有害物质管理规范》中的各项标准。

We hereby certify that all the Material fully conform to the requirements of the ShiRuan/or its affiliated companies Declaration of Conformity that had been signed, and the maximum concentration value of restricted substance in Materials comply with the latest 《Regulations on the management of hazardous substances.》

公司盖章