


Test Report

Project Information			
Customer:		EUT:	ePaper *
Model:	SN03	SN:	
Mode:	11AC20_5320	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-17 20:47:56

Test Graph

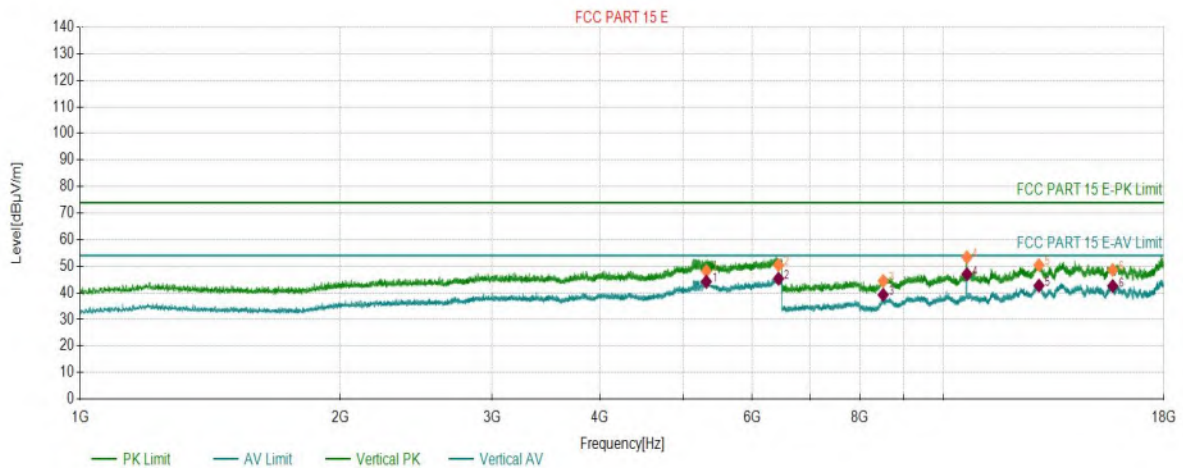

PK Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5311.3311	20.96	48.18	74.00	25.82	100	181	Vertical
2	6438.3938	21.80	50.44	74.00	23.56	200	210	Vertical
3	8511.5512	1.53	44.45	74.00	29.55	200	149	Vertical
4	10642.7143	4.97	53.39	74.00	20.61	200	142	Vertical
5	12894.6395	10.75	50.41	74.00	23.59	200	84	Vertical
6	15699.7700	11.50	48.65	74.00	25.35	100	220	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5311.3311	20.96	44.21	54.00	9.79	100	181	Vertical
2	6438.3938	21.80	45.32	54.00	8.68	200	210	Vertical
3	8511.5512	1.53	39.27	54.00	14.73	200	149	Vertical
4	10642.7143	4.97	47.03	54.00	6.97	200	142	Vertical
5	12894.6395	10.75	42.71	54.00	11.29	200	84	Vertical
6	15699.7700	11.50	42.57	54.00	11.43	100	220	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5500	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 15:40:59

Test Graph

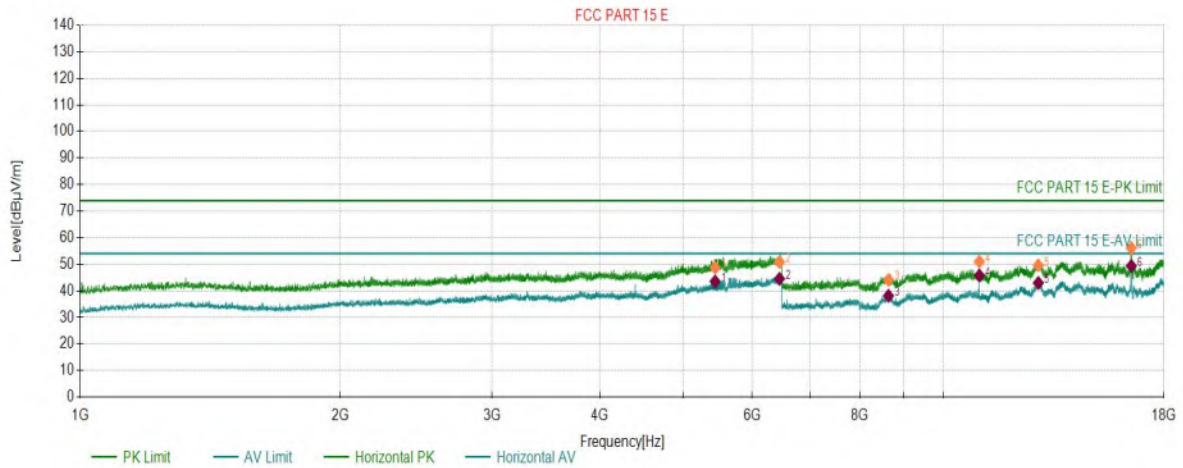

PK Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5437.8438	18.30	48.76	74.00	25.24	150	303	Horizontal
2	6454.8955	21.55	50.83	74.00	23.17	150	31	Horizontal
3	8632.3132	1.94	44.07	74.00	29.93	150	15	Horizontal
4	10999.2499	5.08	51.01	74.00	22.99	150	212	Horizontal
5	12873.9374	10.36	49.63	74.00	24.37	150	178	Horizontal
6	16495.6496	12.01	56.14	74.00	17.86	150	311	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5437.8438	18.30	43.55	54.00	10.45	150	303	Horizontal
2	6454.8955	21.55	44.54	54.00	9.46	150	31	Horizontal
3	8632.3132	1.94	38.14	54.00	15.86	150	15	Horizontal
4	10999.2499	5.08	45.80	54.00	8.20	150	212	Horizontal
5	12873.9374	10.36	43.02	54.00	10.98	150	178	Horizontal
6	16495.6496	12.01	49.38	54.00	4.62	150	311	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5500	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 15:42:25

Test Graph

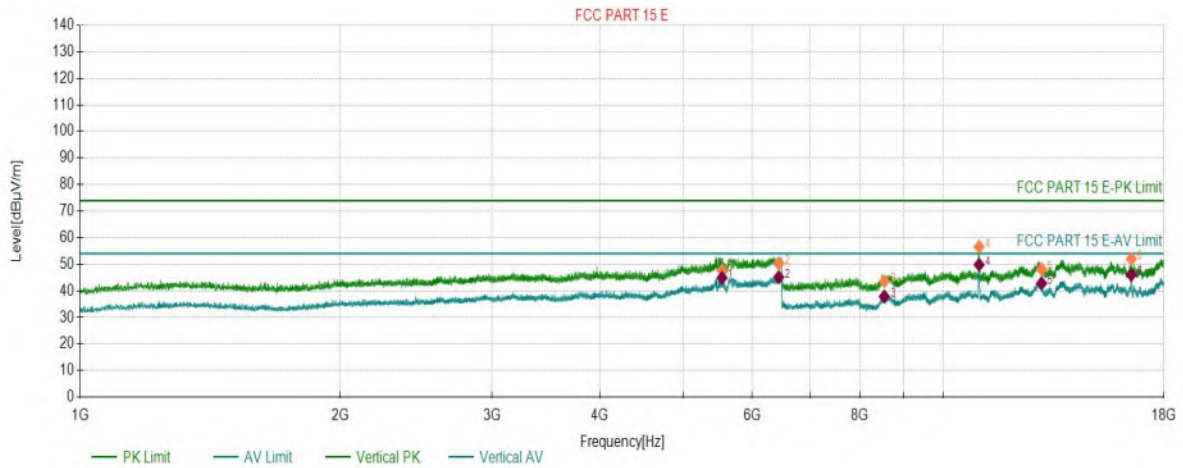

PK Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5538.5039	19.63	47.73	74.00	26.27	150	269	Vertical
2	6443.8944	21.53	50.31	74.00	23.69	150	8	Vertical
3	8538.0038	1.63	43.60	74.00	30.40	150	359	Vertical
4	10992.3492	5.11	56.56	74.00	17.44	150	156	Vertical
5	12985.4986	9.85	48.08	74.00	25.92	150	240	Vertical
6	16496.7997	12.01	52.03	74.00	21.97	150	304	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5538.5039	19.63	44.91	54.00	9.09	150	269	Vertical
2	6443.8944	21.53	45.15	54.00	8.85	150	8	Vertical
3	8538.0038	1.63	37.86	54.00	16.14	150	359	Vertical
4	10992.3492	5.11	49.87	54.00	4.13	150	156	Vertical
5	12985.4986	9.85	42.86	54.00	11.14	150	240	Vertical
6	16496.7997	12.01	46.04	54.00	7.96	150	304	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5580	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 15:47:27

Test Graph

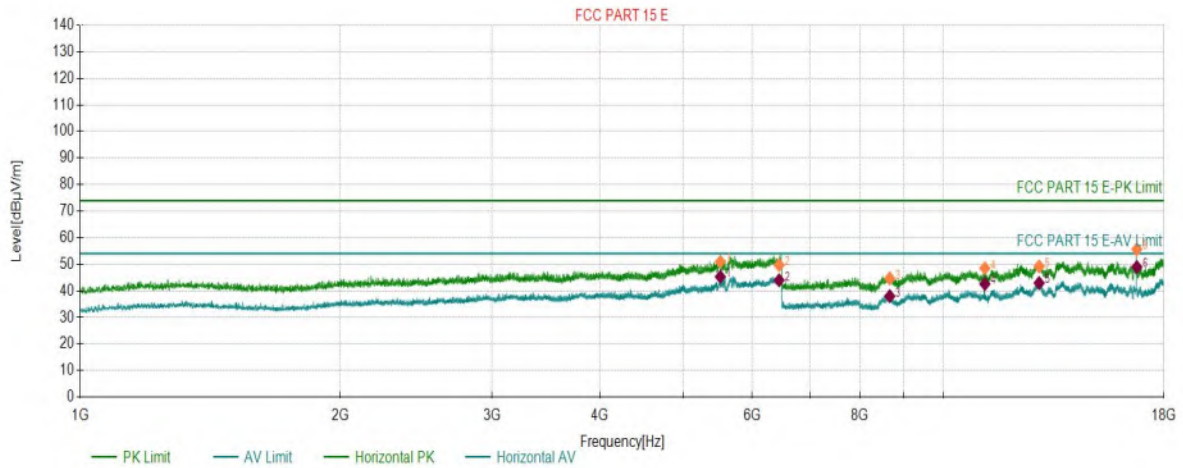

PK Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5513.2013	19.57	50.97	74.00	23.03	150	70	Horizontal
2	6448.8449	21.54	49.70	74.00	24.30	150	152	Horizontal
3	8662.2162	2.03	44.68	74.00	29.32	150	202	Horizontal
4	11162.5663	4.95	48.51	74.00	25.49	150	210	Horizontal
5	12901.5402	10.80	49.17	74.00	24.83	150	312	Horizontal
6	16739.4739	10.49	55.66	74.00	18.34	150	318	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5513.2013	19.57	45.30	54.00	8.70	150	70	Horizontal
2	6448.8449	21.54	43.99	54.00	10.01	150	152	Horizontal
3	8662.2162	2.03	37.99	54.00	16.01	150	202	Horizontal
4	11162.5663	4.95	42.58	54.00	11.42	150	210	Horizontal
5	12901.5402	10.80	42.96	54.00	11.04	150	312	Horizontal
6	16739.4739	10.49	48.96	54.00	5.04	150	318	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5580	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 15:48:54

Test Graph

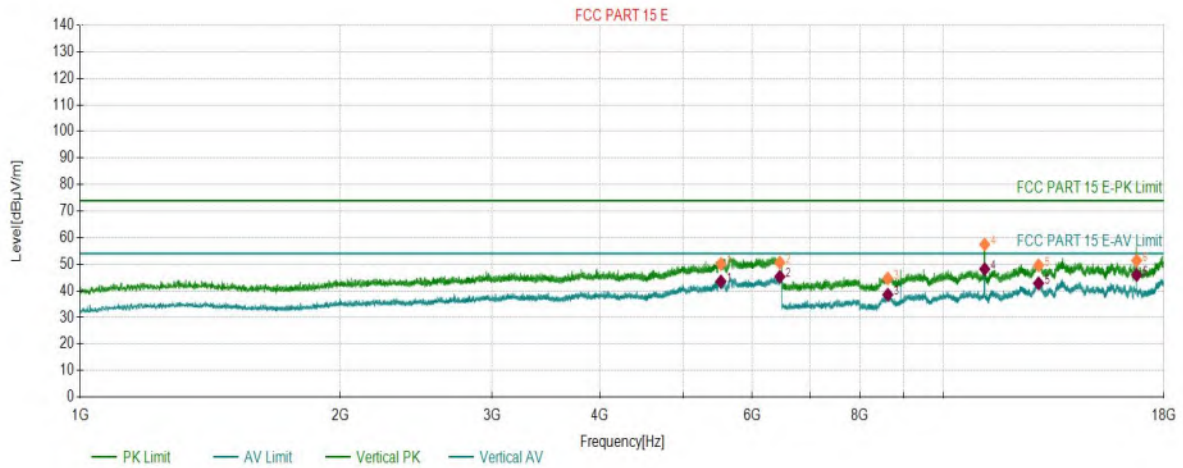

PK Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5522.0022	19.59	50.13	74.00	23.87	150	214	Vertical
2	6460.9461	21.57	50.63	74.00	23.37	150	272	Vertical
3	8617.3617	1.89	44.64	74.00	29.36	150	232	Vertical
4	11157.9658	4.95	57.47	74.00	16.53	150	215	Vertical
5	12881.9882	10.50	49.58	74.00	24.42	150	114	Vertical
6	16736.0236	10.48	51.44	74.00	22.56	150	352	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5522.0022	19.59	43.54	54.00	10.46	150	214	Vertical
2	6460.9461	21.57	45.31	54.00	8.69	150	272	Vertical
3	8617.3617	1.89	38.55	54.00	15.45	150	232	Vertical
4	11157.9658	4.95	48.22	54.00	5.78	150	215	Vertical
5	12881.9882	10.50	42.83	54.00	11.17	150	114	Vertical
6	16736.0236	10.48	45.98	54.00	8.02	150	352	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5700	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 16:00:38

Test Graph

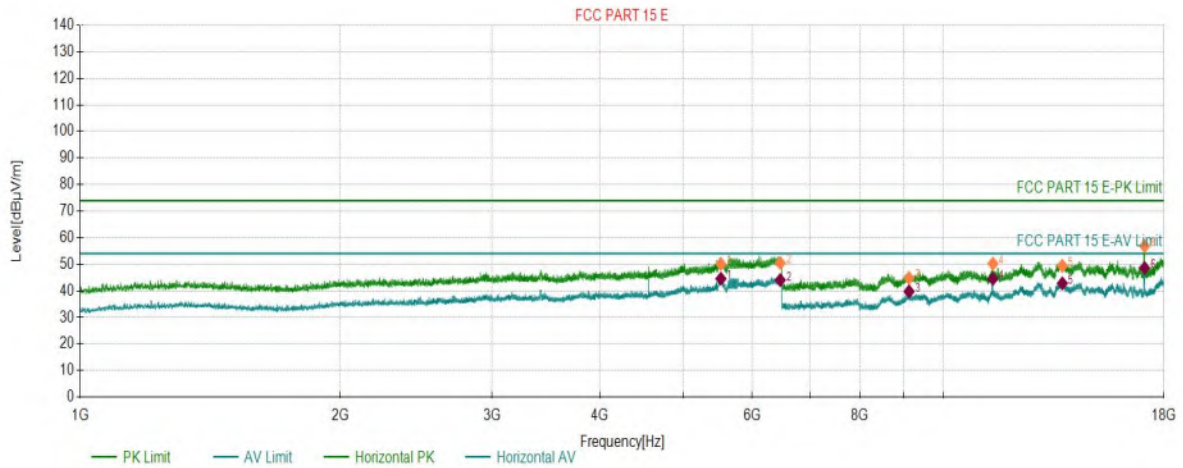

PK Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5522.0022	19.59	50.08	74.00	23.92	150	299	Horizontal
2	6468.6469	21.58	50.51	74.00	23.49	150	68	Horizontal
3	9119.9620	2.86	44.81	74.00	29.19	150	296	Horizontal
4	11406.3906	5.72	50.23	74.00	23.77	150	346	Horizontal
5	13725.0225	11.62	49.40	74.00	24.60	150	10	Horizontal
6	17091.4091	10.98	56.88	74.00	17.12	150	313	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5522.0022	19.59	44.56	54.00	9.44	150	299	Horizontal
2	6468.6469	21.58	44.05	54.00	9.95	150	68	Horizontal
3	9119.9620	2.86	39.78	54.00	14.22	150	296	Horizontal
4	11406.3906	5.72	44.54	54.00	9.46	150	346	Horizontal
5	13725.0225	11.62	42.83	54.00	11.17	150	10	Horizontal
6	17091.4091	10.98	48.64	54.00	5.36	150	313	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5700	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 16:02:03

Test Graph

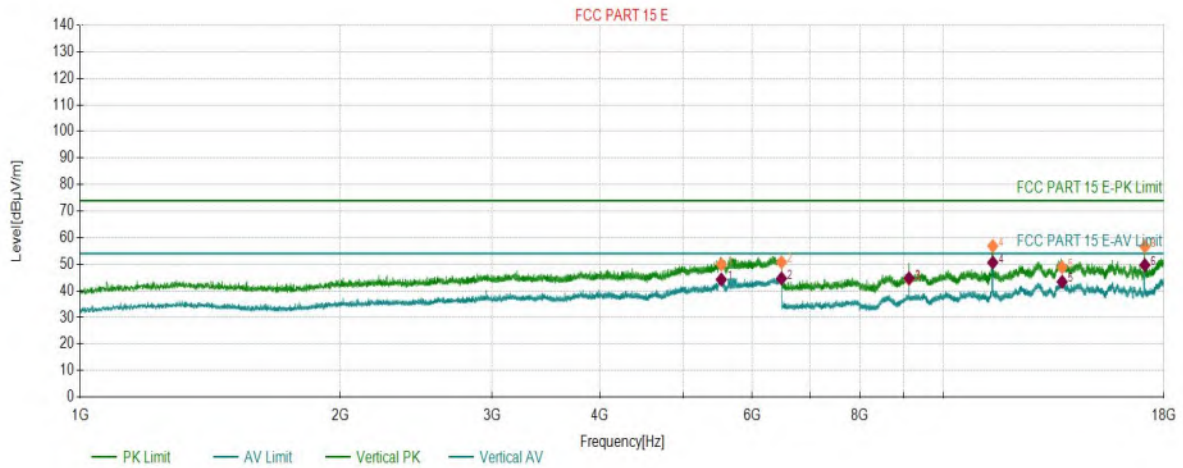

PK Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5528.6029	19.60	49.92	74.00	24.08	150	318	Vertical
2	6490.0990	21.64	50.79	74.00	23.21	150	284	Vertical
3	9119.9620	2.86	44.40	74.00	29.60	150	191	Vertical
4	11400.6401	5.69	56.85	74.00	17.15	150	149	Vertical
5	13715.8216	11.73	48.85	74.00	25.15	150	0	Vertical
6	17102.9103	11.03	56.69	74.00	17.31	150	18	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5528.6029	19.60	44.26	54.00	9.74	150	318	Vertical
2	6490.0990	21.64	44.67	54.00	9.33	150	284	Vertical
3	9119.9620	2.86	44.76	54.00	9.24	150	191	Vertical
4	11400.6401	5.69	50.64	54.00	3.36	150	149	Vertical
5	13715.8216	11.73	43.41	54.00	10.59	150	0	Vertical
6	17102.9103	11.03	49.70	54.00	4.30	150	18	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5180	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 17.5		
Test Standard:			

Start of Test: 2023-04-17 19:48:33

Test Graph

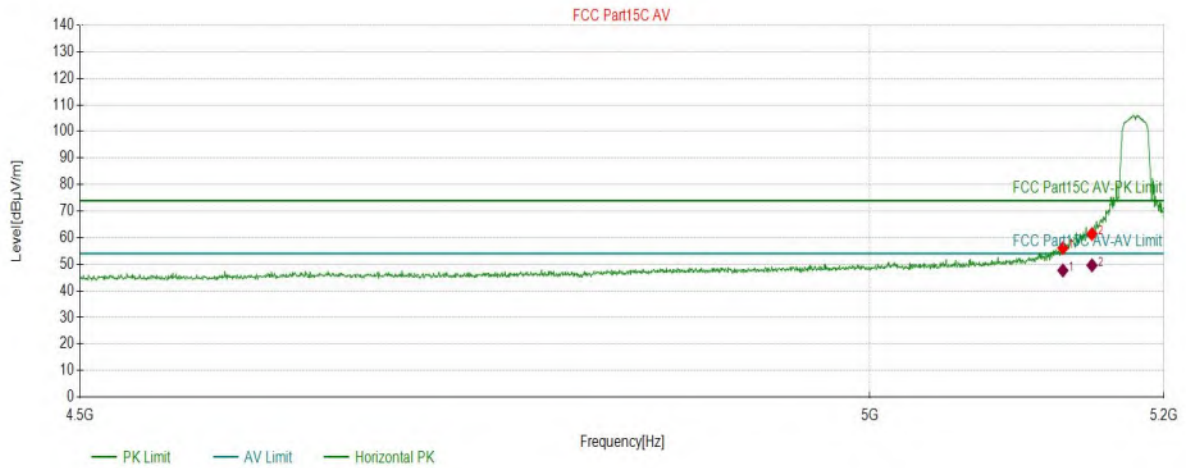

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5130.3152	56.11	16.41	74.00	17.89	150	0	PK	Horizontal
2	5150.2751	61.41	16.36	74.00	12.59	150	3	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5130.3152	16.41	47.68	54.00	6.32	150	0	Horizontal
2	5150.2751	16.36	49.61	54.00	4.39	150	3	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5180	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 17.5		
Test Standard:			

Start of Test: 2023-04-17 19:49:13

Test Graph

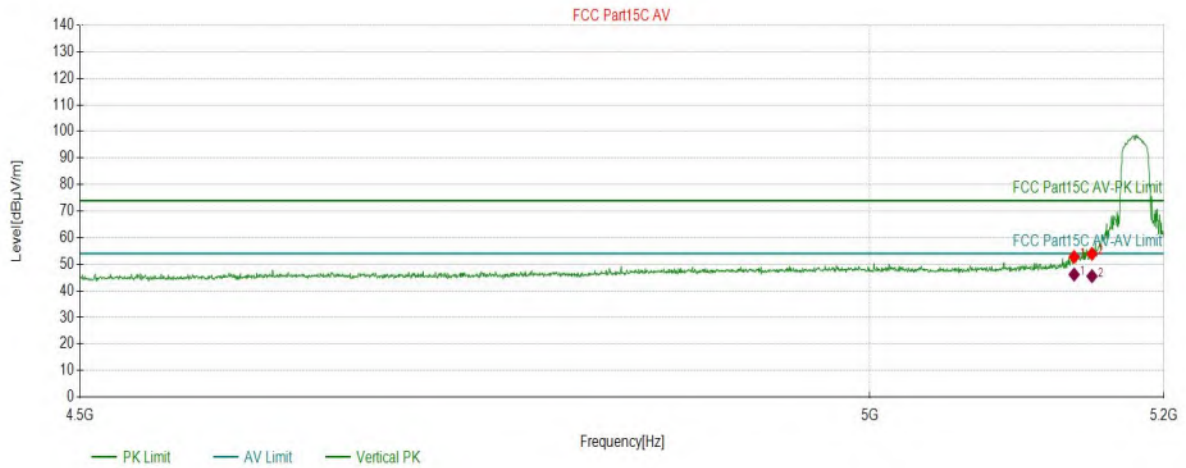

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5138.0190	52.78	16.39	74.00	21.22	150	152	PK	Vertical
2	5150.2751	53.91	16.36	74.00	20.09	150	280	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5138.0190	16.39	46.15	54.00	7.85	150	152	Vertical
2	5150.2751	16.36	45.52	54.00	8.48	150	280	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5320	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-17 20:40:24

Test Graph

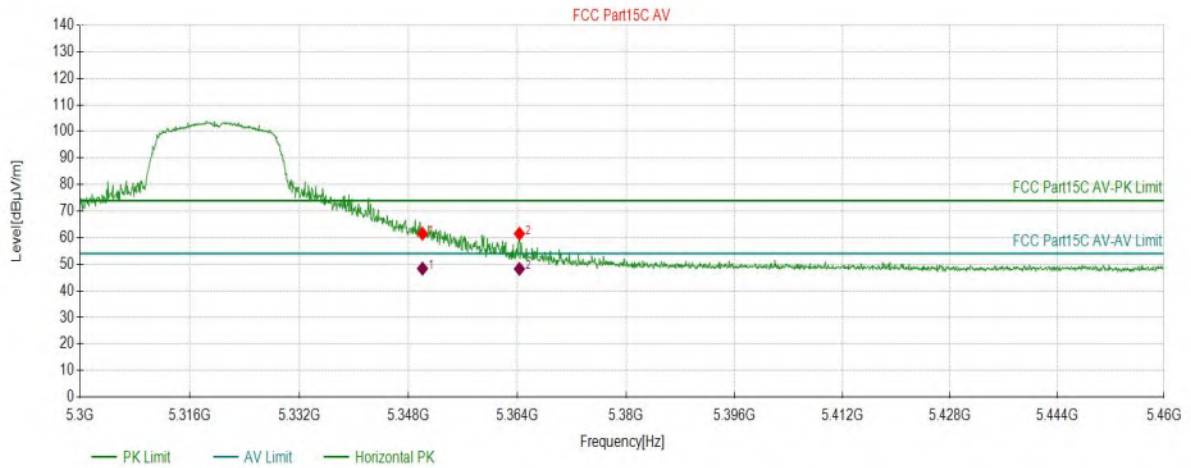

Suspected Data List									
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5350.0250	61.53	16.70	74.00	12.47	150	295	PK	Horizontal
2	5364.2721	61.50	16.77	74.00	12.50	150	197	PK	Horizontal


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0250	16.70	48.38	54.00	5.62	150	295	Horizontal
2	5364.2721	16.77	48.26	54.00	5.74	150	197	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5320	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-17 20:41:05

Test Graph

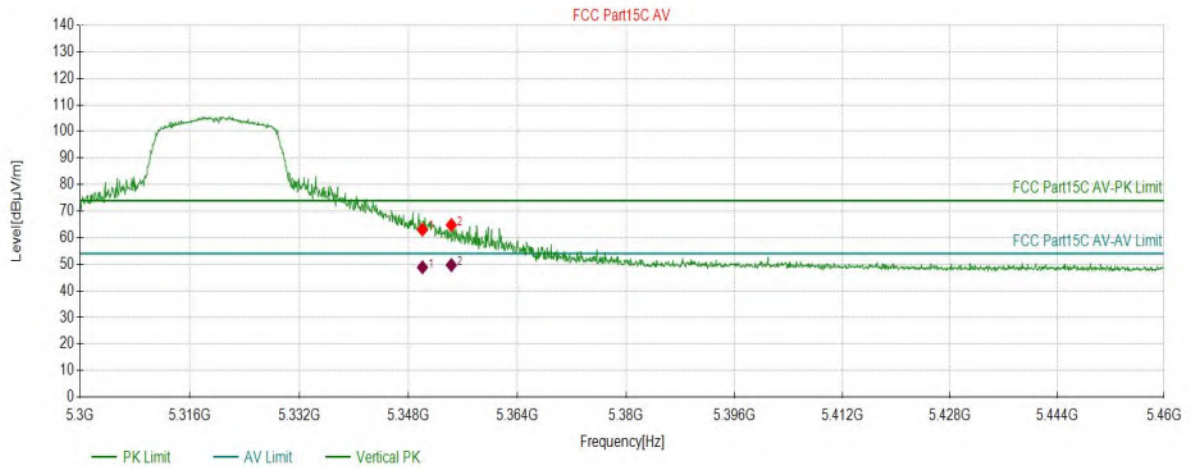

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5350.0250	63.06	16.70	74.00	10.94	150	159	PK	Vertical
2	5354.2671	64.79	16.72	74.00	9.21	150	176	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0250	16.70	48.86	54.00	5.14	150	159	Vertical
2	5354.2671	16.72	49.71	54.00	4.29	150	176	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC40_5190	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 16		
Test Standard:			

Start of Test: 2023-04-17 21:51:51

Test Graph

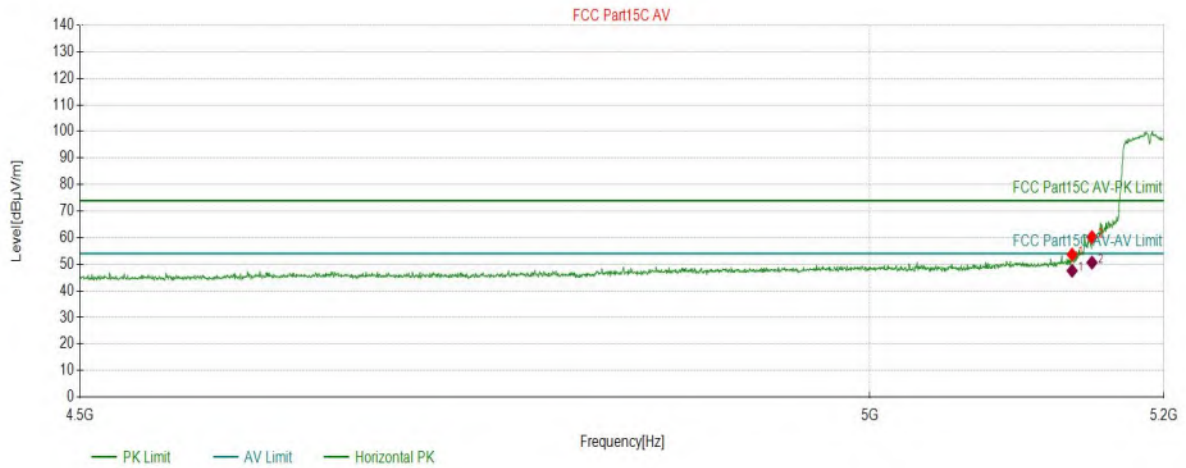

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5136.6183	53.64	16.40	74.00	20.36	150	4	PK	Horizontal
2	5150.2751	60.23	16.36	74.00	13.77	150	5	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5136.6183	16.40	47.56	54.00	6.44	150	4	Horizontal
2	5150.2751	16.36	50.64	54.00	3.36	150	5	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC40_5190	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 16		
Test Standard:			

Start of Test: 2023-04-17 21:52:31

Test Graph

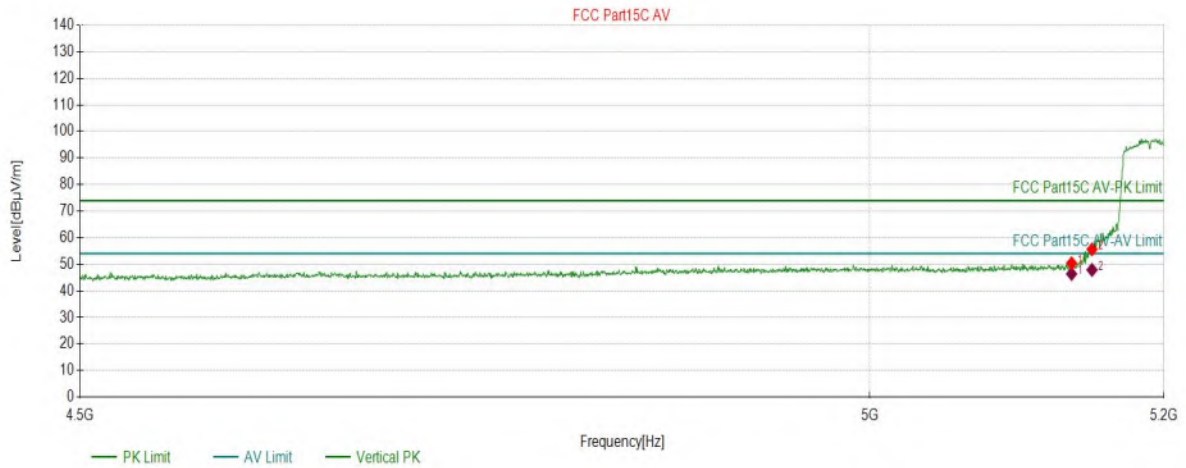

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5136.2681	50.36	16.40	74.00	23.64	150	197	PK	Vertical
2	5150.2751	55.64	16.36	74.00	18.36	150	159	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5136.2681	16.40	46.38	54.00	7.62	150	197	Vertical
2	5150.2751	16.36	47.90	54.00	6.10	150	159	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC40_5310	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 18.5		
Test Standard:			

Start of Test: 2023-04-18 16:01:17

Test Graph

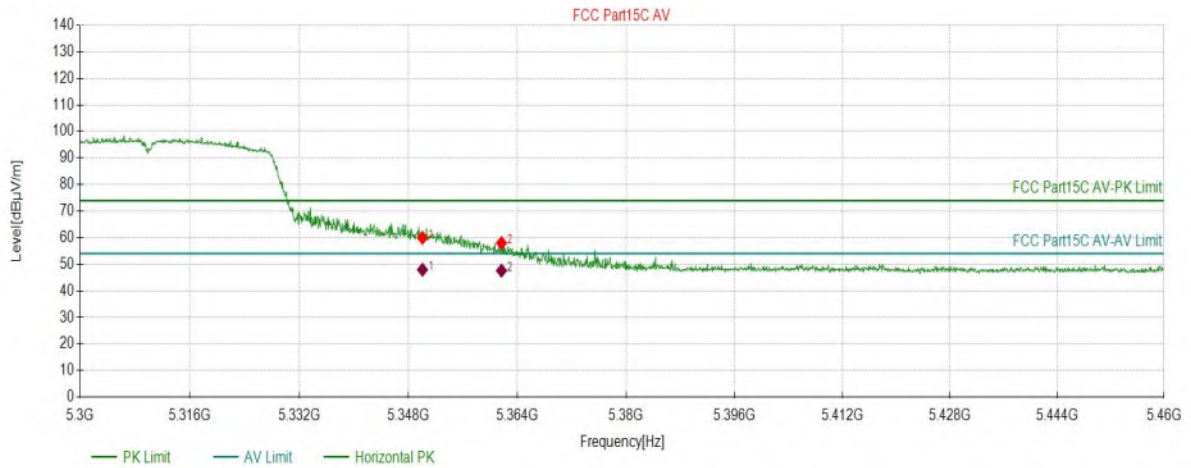

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5350.0250	59.98	16.70	74.00	14.02	150	213	PK	Horizontal
2	5361.6308	57.99	16.76	74.00	16.01	150	293	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0250	16.70	47.94	54.00	6.06	150	213	Horizontal
2	5361.6308	16.76	47.60	54.00	6.40	150	293	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC40_5310	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 18.5		
Test Standard:			

Start of Test: 2023-04-18 16:02:05

Test Graph

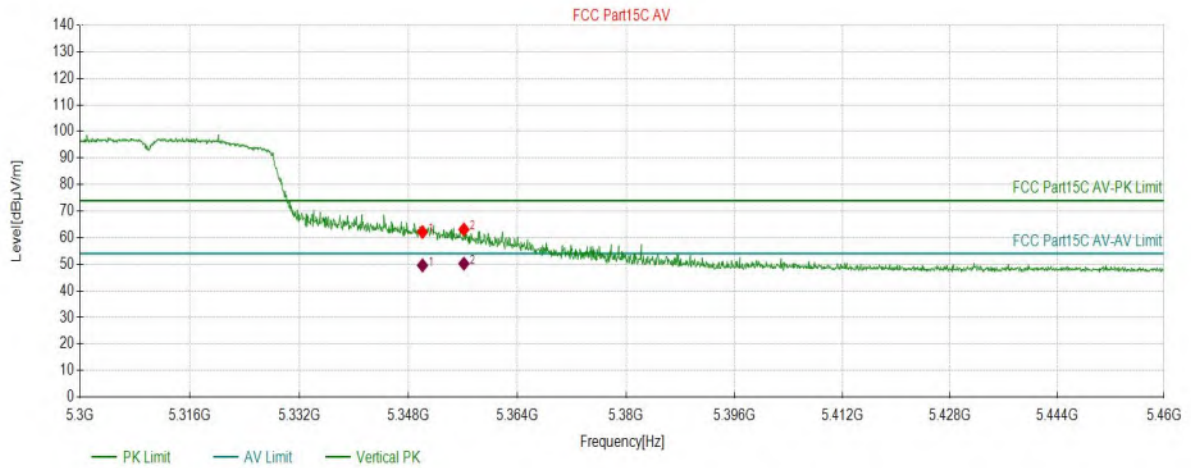

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5350.0250	62.13	16.70	74.00	11.87	150	215	PK	Vertical
2	5356.1081	63.11	16.73	74.00	10.89	150	215	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0250	16.70	49.59	54.00	4.41	150	215	Vertical
2	5356.1081	16.73	50.22	54.00	3.78	150	215	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC80_5210	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 15.5		
Test Standard:			

Start of Test: 2023-04-18 19:00:10

Test Graph

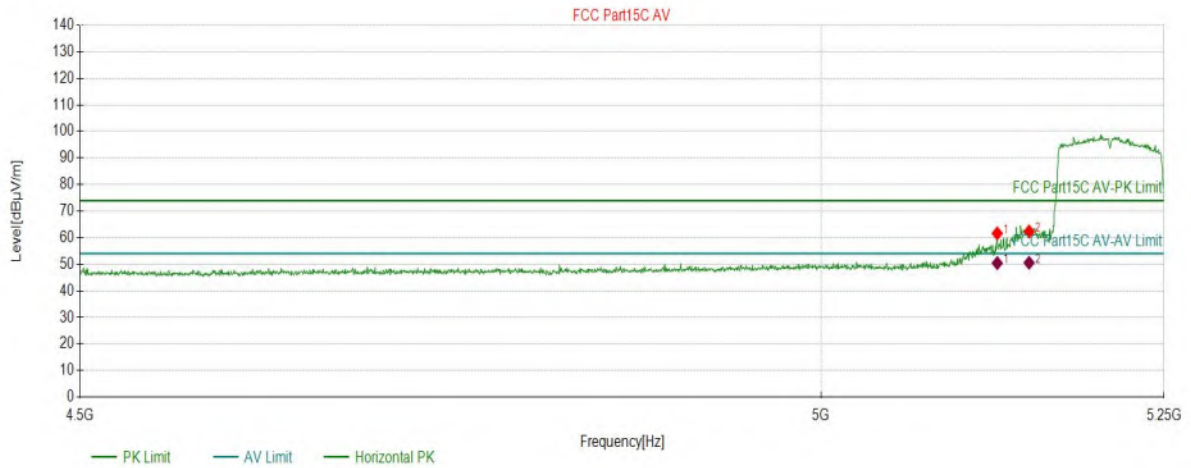

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5126.9385	61.63	16.42	74.00	12.37	150	315	PK	Horizontal
2	5150.2001	62.31	16.36	74.00	11.69	150	307	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5126.9385	16.42	50.44	54.00	3.56	150	315	Horizontal
2	5150.2001	16.36	50.57	54.00	3.43	150	307	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC80_5210	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 15.5		
Test Standard:			

Start of Test: 2023-04-18 19:00:50

Test Graph

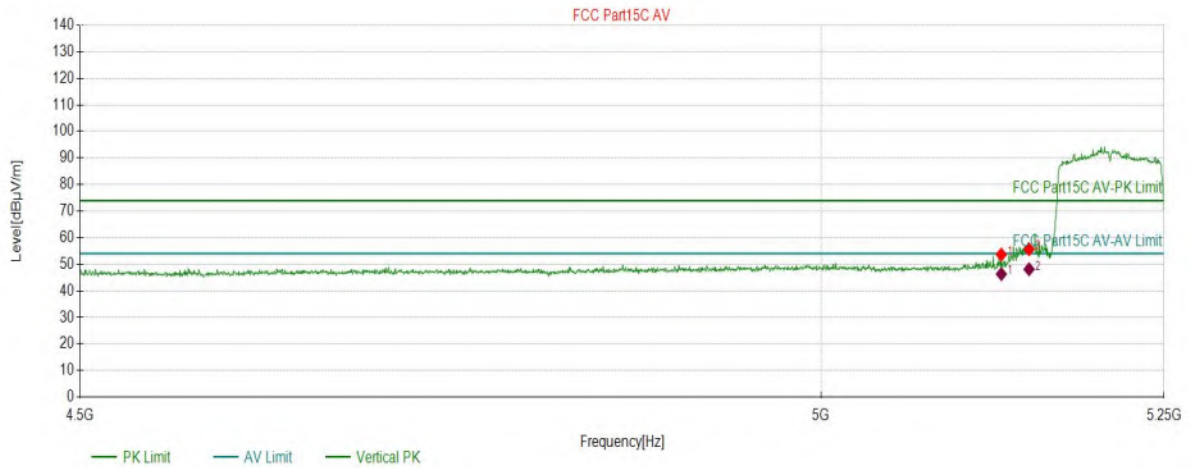

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5129.9400	53.66	16.42	74.00	20.34	150	40	PK	Vertical
2	5150.2001	55.64	16.36	74.00	18.36	150	77	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5129.9400	16.42	46.31	54.00	7.69	150	40	Vertical
2	5150.2001	16.36	48.12	54.00	5.88	150	77	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC80_5290	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 16		
Test Standard:			

Start of Test: 2023-04-19 10:24:13

Test Graph

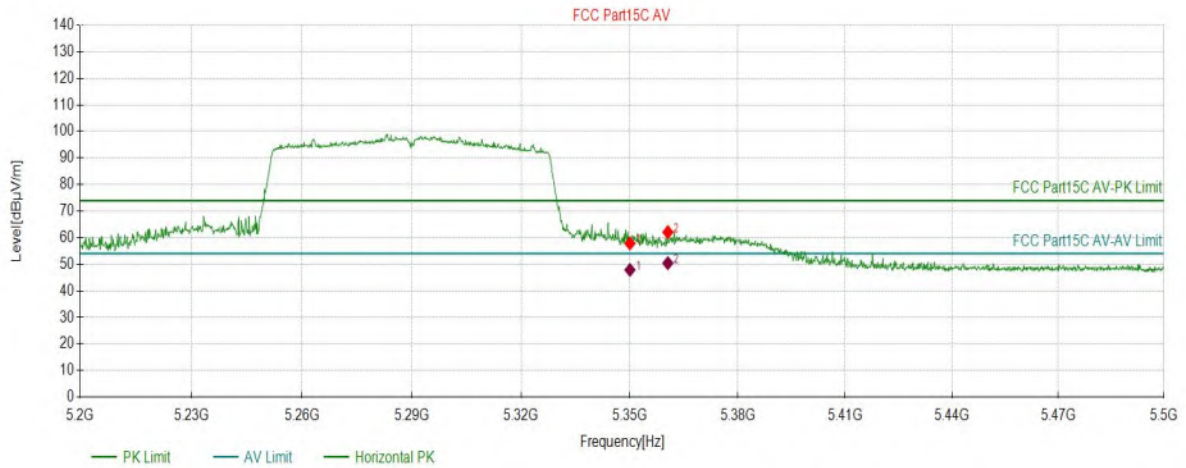

Suspected Data List

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5350.0750	57.88	16.70	74.00	16.12	150	308	PK	Horizontal
2	5360.5803	62.08	16.75	74.00	11.92	150	303	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0750	16.70	47.89	54.00	6.11	150	308	Horizontal
2	5360.5803	16.75	50.42	54.00	3.58	150	303	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC80_5290	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 16		
Test Standard:			

Start of Test: 2023-04-19 10:25:01

Test Graph

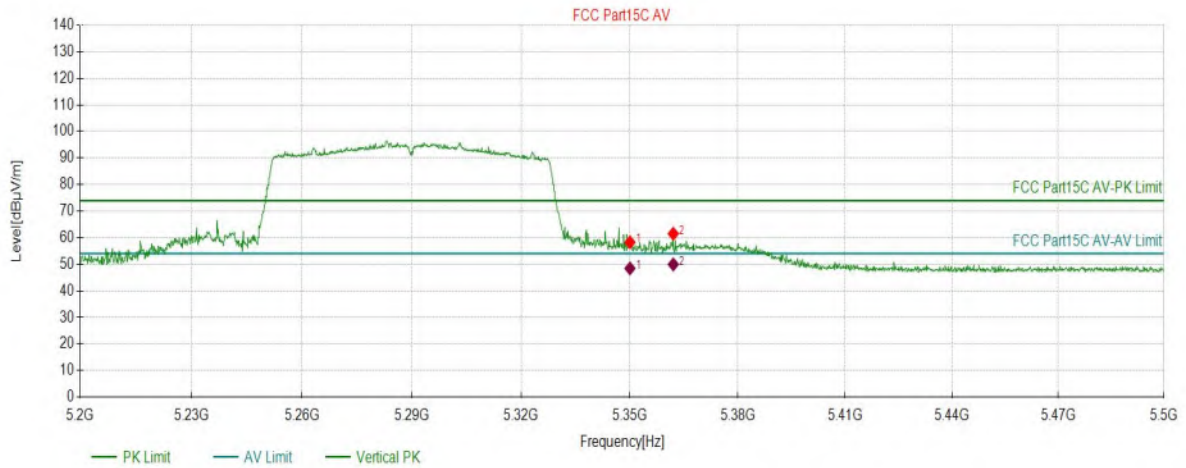

Suspected Data List

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5350.0750	58.29	16.70	74.00	15.71	150	177	PK	Vertical
2	5362.0810	61.51	16.76	74.00	12.49	150	198	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0750	16.70	48.44	54.00	5.56	150	177	Vertical
2	5362.0810	16.76	49.95	54.00	4.05	150	198	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11A_5180	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-19 18:15:35

Test Graph

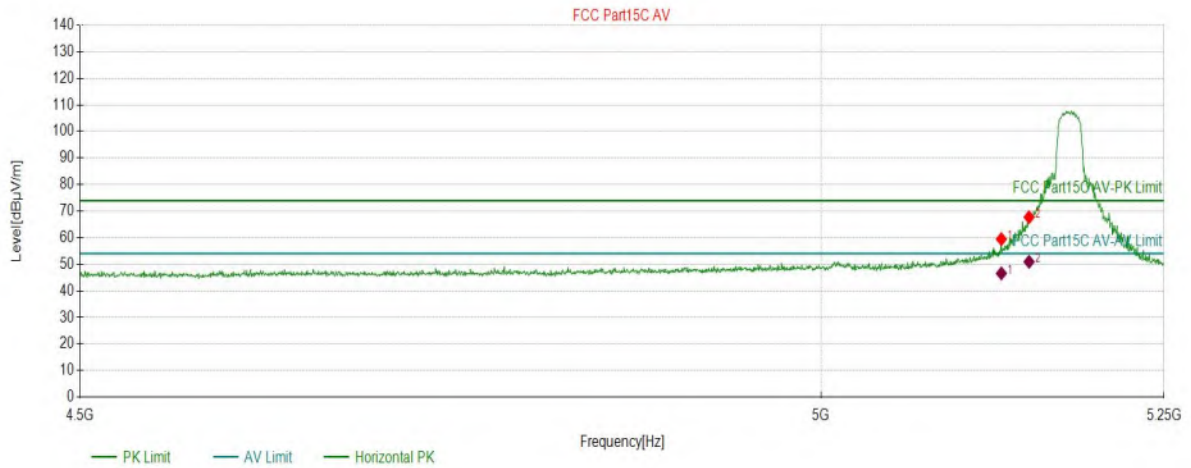

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5129.9400	59.48	16.42	74.00	14.52	150	40	PK	Horizontal
2	5150.2001	67.73	16.36	74.00	6.27	150	336	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5129.9400	16.42	46.58	54.00	7.42	150	40	Horizontal
2	5150.2001	16.36	50.94	54.00	3.06	150	336	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11A_5180	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-19 18:16:23

Test Graph

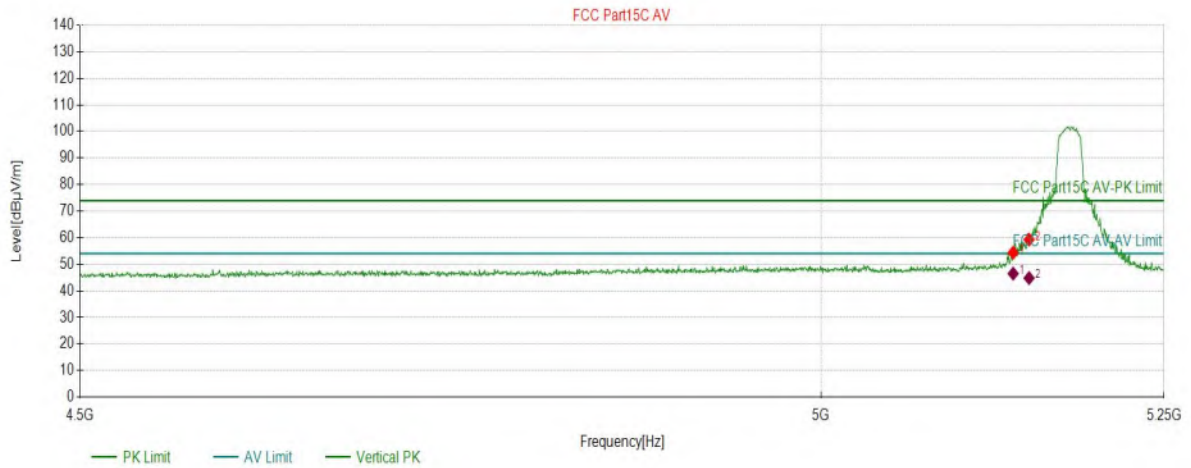

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5138.5693	54.40	16.39	74.00	19.60	150	165	PK	Vertical
2	5150.2001	59.32	16.36	74.00	14.68	150	212	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5138.5693	16.39	46.49	54.00	7.51	150	165	Vertical
2	5150.2001	16.36	44.82	54.00	9.18	150	212	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11A_5320	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-20 17:53:34

Test Graph

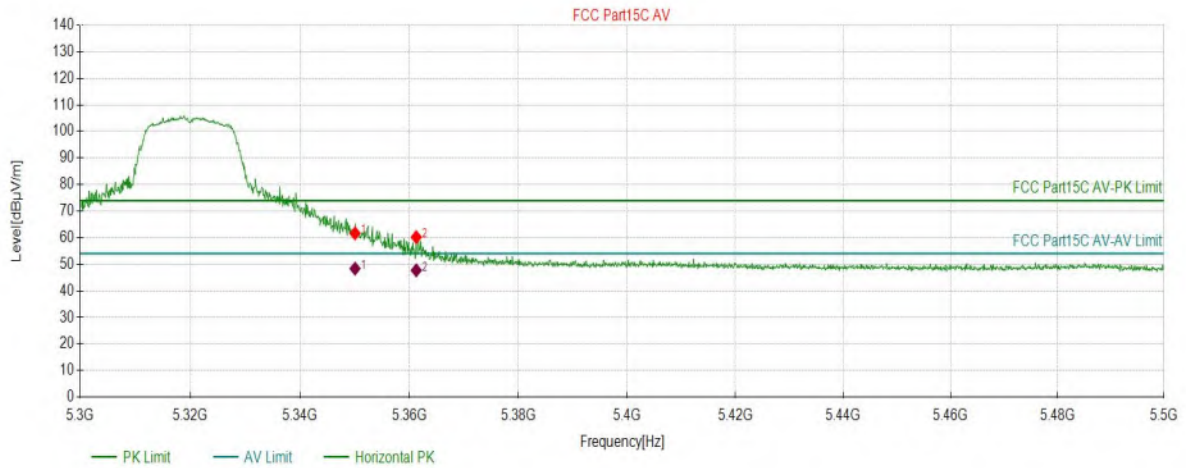

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5350.0250	61.64	16.70	74.00	12.36	150	214	PK	Horizontal
2	5361.2306	60.21	16.75	74.00	13.79	150	334	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0250	16.70	48.37	54.00	5.63	150	214	Horizontal
2	5361.2306	16.75	47.71	54.00	6.29	150	334	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11A_5320	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-20 17:54:22

Test Graph

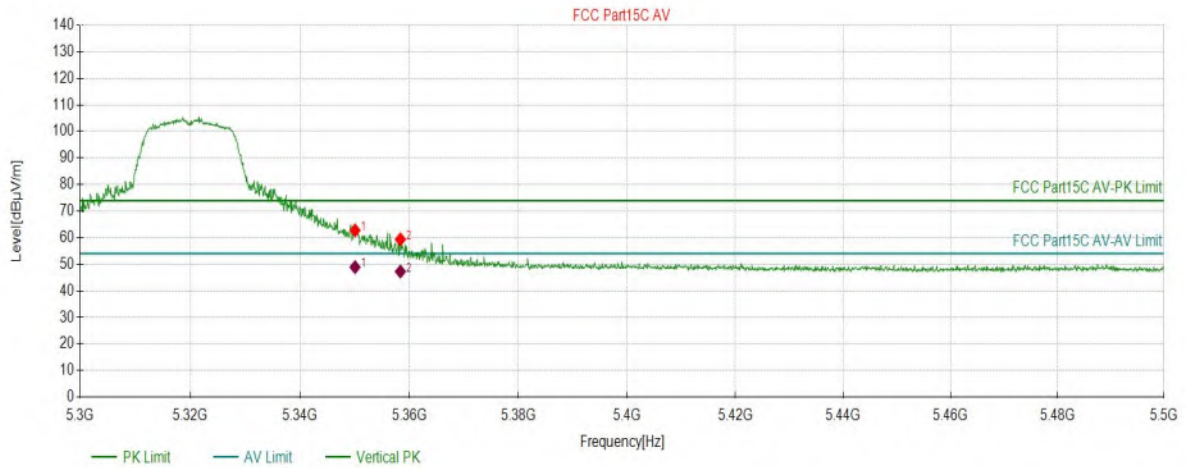

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5350.0250	62.76	16.70	74.00	11.24	150	185	PK	Vertical
2	5358.3292	59.37	16.74	74.00	14.63	150	10	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0250	16.70	48.93	54.00	5.07	150	185	Vertical
2	5358.3292	16.74	47.28	54.00	6.72	150	10	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N20_5180	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 18.5		
Test Standard:			

Start of Test: 2023-04-20 18:13:54

Test Graph

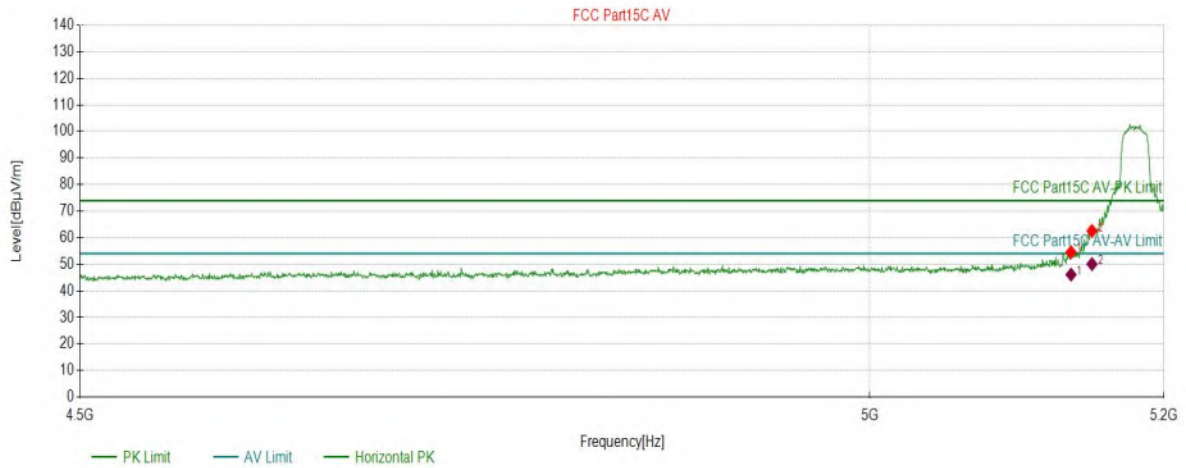

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5135.9180	54.54	16.40	74.00	19.46	150	9	PK	Horizontal
2	5150.2751	62.58	16.36	74.00	11.42	150	327	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5135.9180	16.40	46.13	54.00	7.87	150	9	Horizontal
2	5150.2751	16.36	50.07	54.00	3.93	150	327	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N20_5180	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 18.5		
Test Standard:			

Start of Test: 2023-04-20 18:14:42

Test Graph

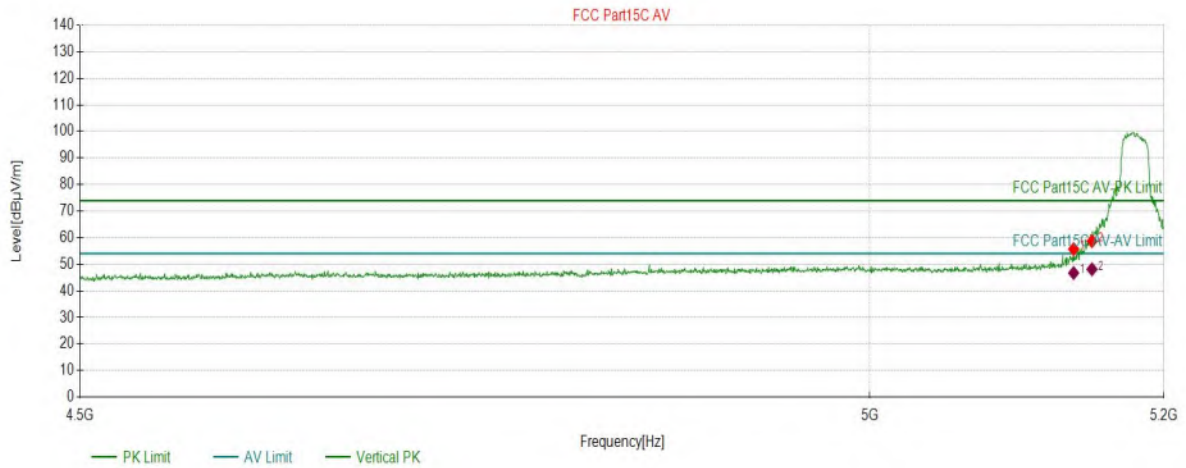

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5137.6688	55.74	16.40	74.00	18.26	150	23	PK	Vertical
2	5150.2751	58.65	16.36	74.00	15.35	150	218	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5137.6688	16.40	46.71	54.00	7.29	150	23	Vertical
2	5150.2751	16.36	48.11	54.00	5.89	150	218	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N20_5320	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-20 18:23:28

Test Graph

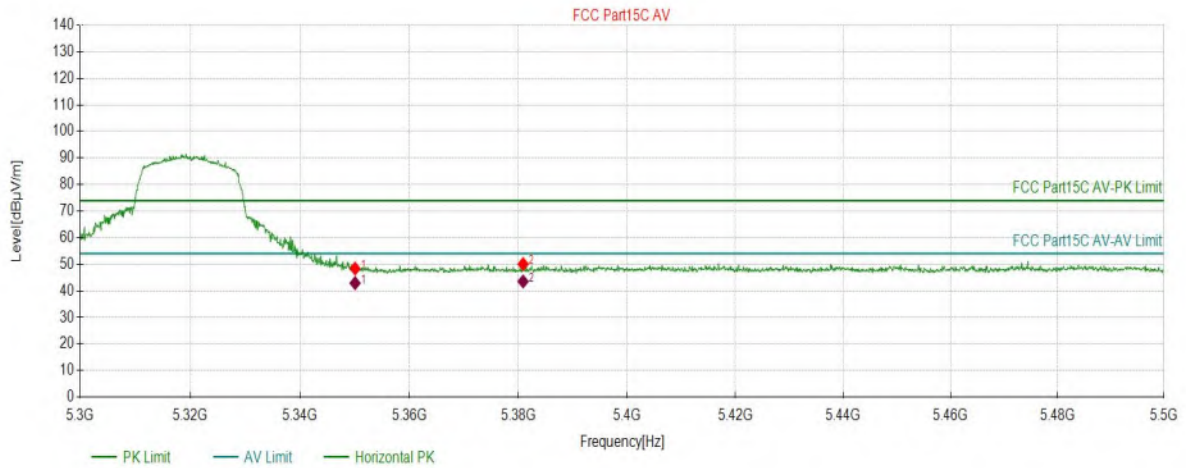

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5350.0250	48.39	16.70	74.00	25.61	150	229	PK	Horizontal
2	5380.8404	50.05	16.85	74.00	23.95	150	51	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0250	16.70	42.91	54.00	11.09	150	229	Horizontal
2	5380.8404	16.85	43.53	54.00	10.47	150	51	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N20_5320	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-20 18:24:16

Test Graph

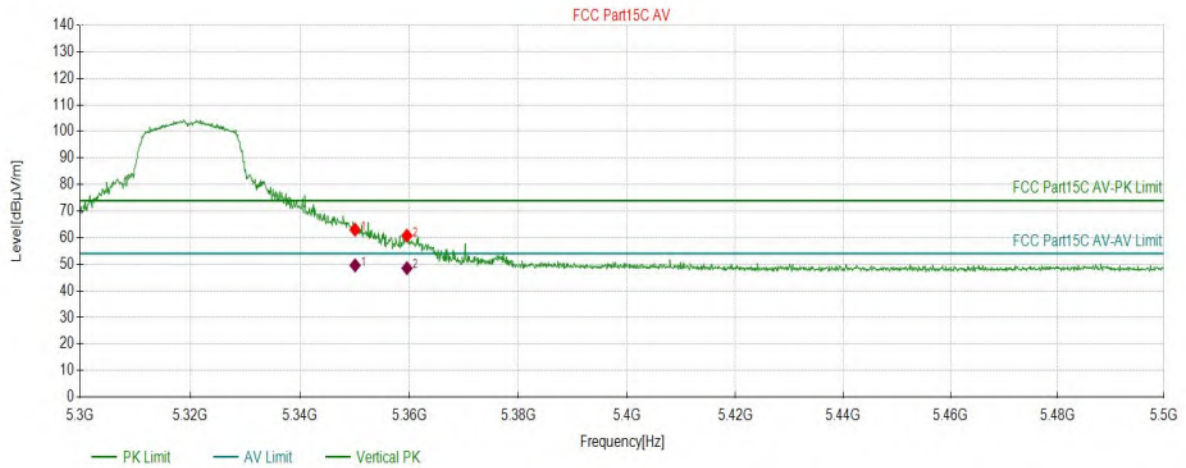

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5350.0250	63.01	16.70	74.00	10.99	150	183	PK	Vertical
2	5359.5298	60.78	16.75	74.00	13.22	150	201	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0250	16.70	49.61	54.00	4.39	150	183	Vertical
2	5359.5298	16.75	48.53	54.00	5.47	150	201	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N40_5190	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 17.5		
Test Standard:			

Start of Test: 2023-04-20 18:58:45

Test Graph

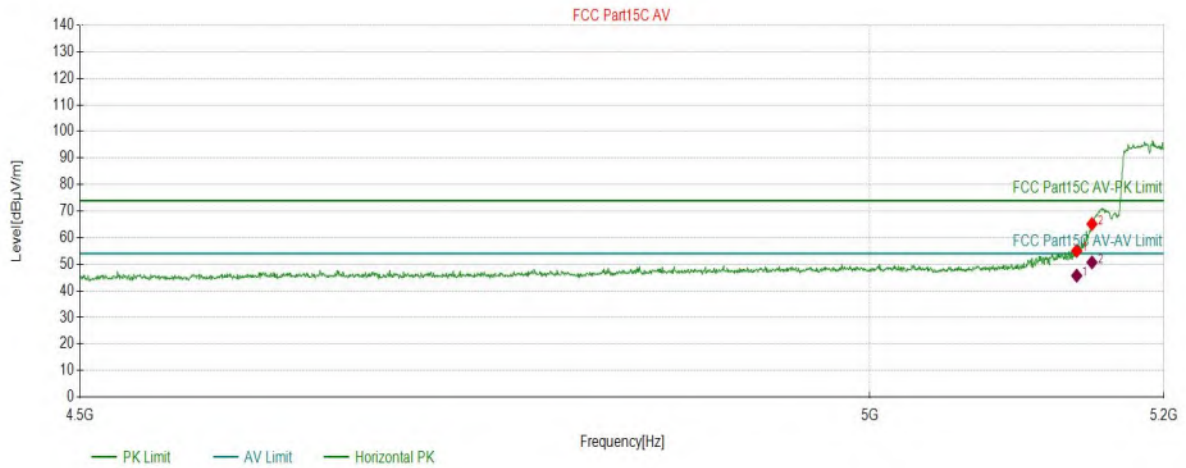

Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5139.7699	55.05	16.39	74.00	18.95	150	305	PK	Horizontal
2	5150.2751	65.18	16.36	74.00	8.82	150	305	PK	Horizontal


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5139.7699	16.39	45.71	54.00	8.29	150	305	Horizontal
2	5150.2751	16.36	50.71	54.00	3.29	150	305	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N40_5190	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 17.5		
Test Standard:			

Start of Test: 2023-04-20 18:59:34

Test Graph

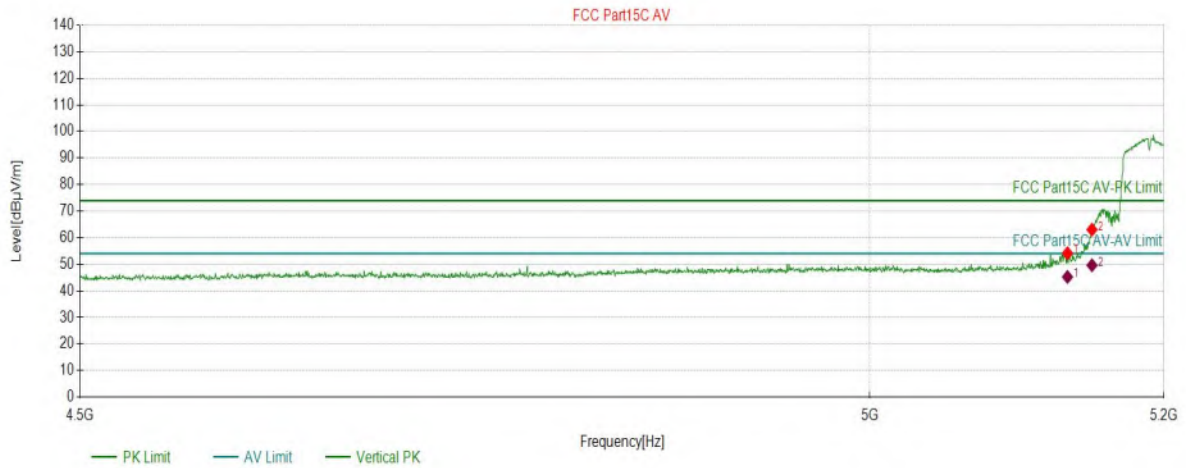

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5133.4667	54.14	16.41	74.00	19.86	150	14	PK	Vertical
2	5150.2751	63.04	16.36	74.00	10.96	150	14	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5133.4667	16.41	45.24	54.00	8.76	150	14	Vertical
2	5150.2751	16.36	49.64	54.00	4.36	150	14	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N40_5310	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 17		
Test Standard:			

Start of Test: 2023-04-20 19:16:18

Test Graph

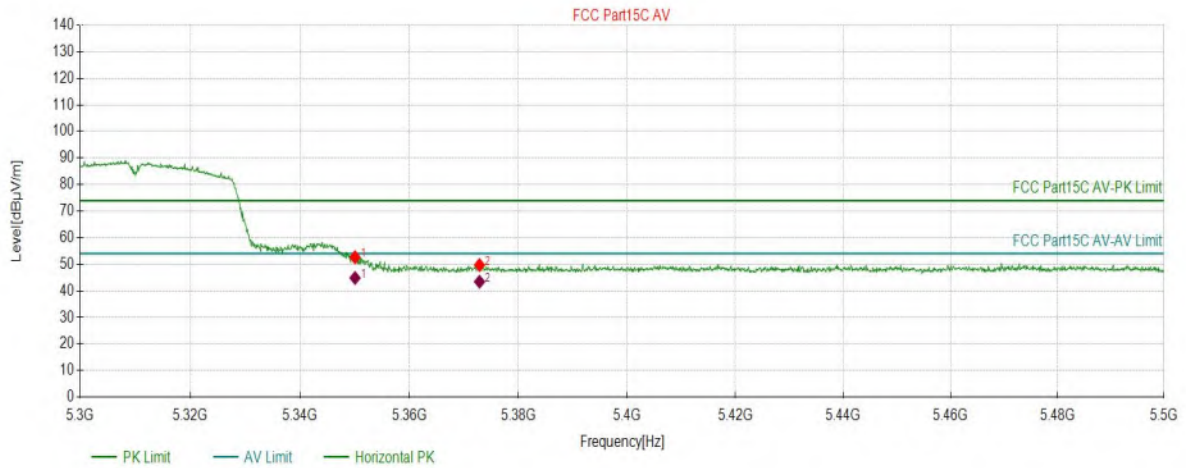

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5350.0250	52.66	16.70	74.00	21.34	150	355	PK	Horizontal
2	5372.8364	49.71	16.81	74.00	24.29	150	72	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0250	16.70	44.85	54.00	9.15	150	355	Horizontal
2	5372.8364	16.81	43.44	54.00	10.56	150	72	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N40_5310	Voltage:	DC5V 1.5A
Environment:	21.1°C 47%	Engineer:	Kennys
Remark:	Power Set: 17		
Test Standard:			

Start of Test: 2023-04-20 19:17:06

Test Graph

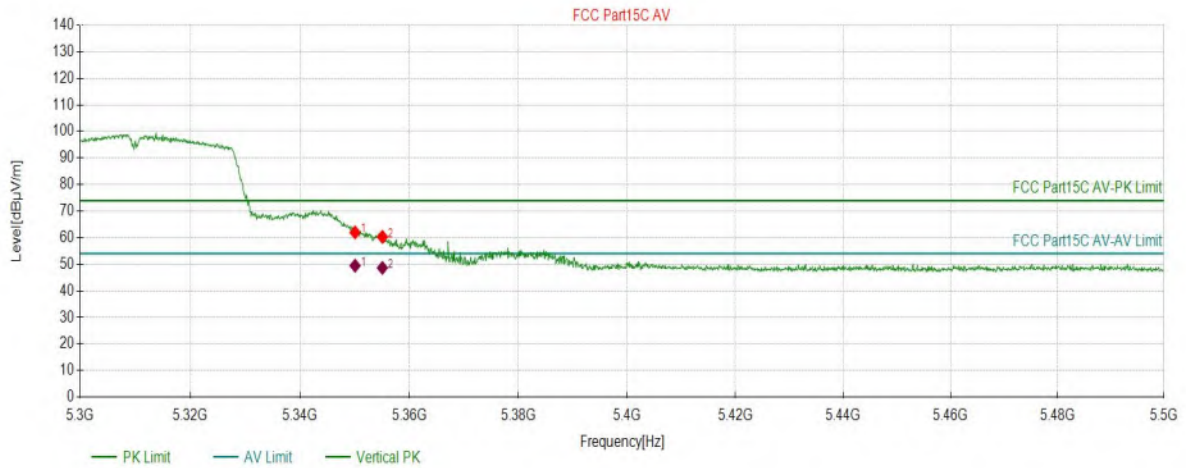

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5350.0250	62.00	16.70	74.00	12.00	150	177	PK	Vertical
2	5355.0275	60.32	16.72	74.00	13.68	150	177	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5350.0250	16.70	49.47	54.00	4.53	150	177	Vertical
2	5355.0275	16.72	48.65	54.00	5.35	150	177	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11A_5500	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 14:24:00

Test Graph

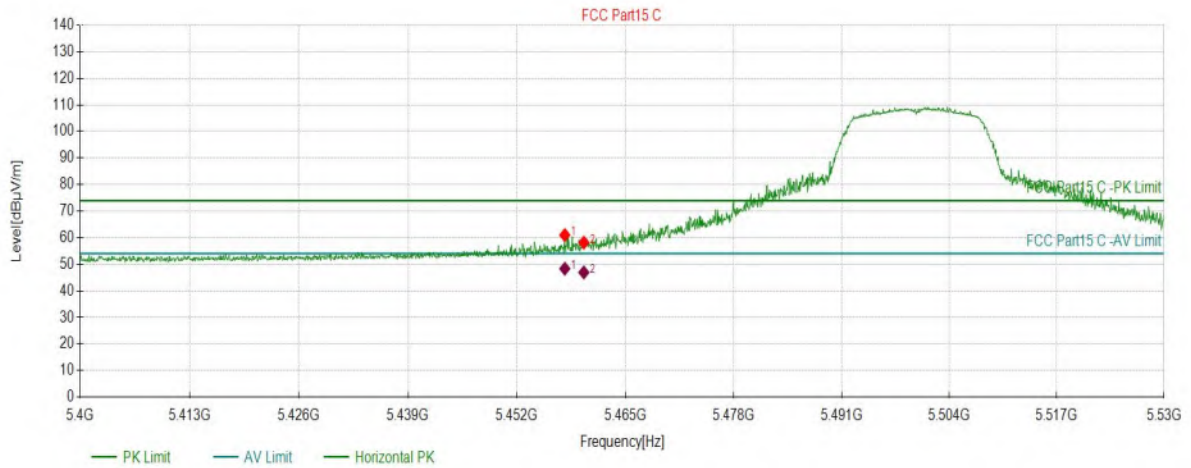

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5457.7489	61.00	16.76	74.00	13.00	150	272	PK	Horizontal
2	5460.0250	58.16	16.76	74.00	15.84	150	290	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5457.7489	16.76	48.35	54.00	5.65	150	272	Horizontal
2	5460.0250	16.76	46.93	54.00	7.07	150	290	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11A_5500	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 14:24:48

Test Graph

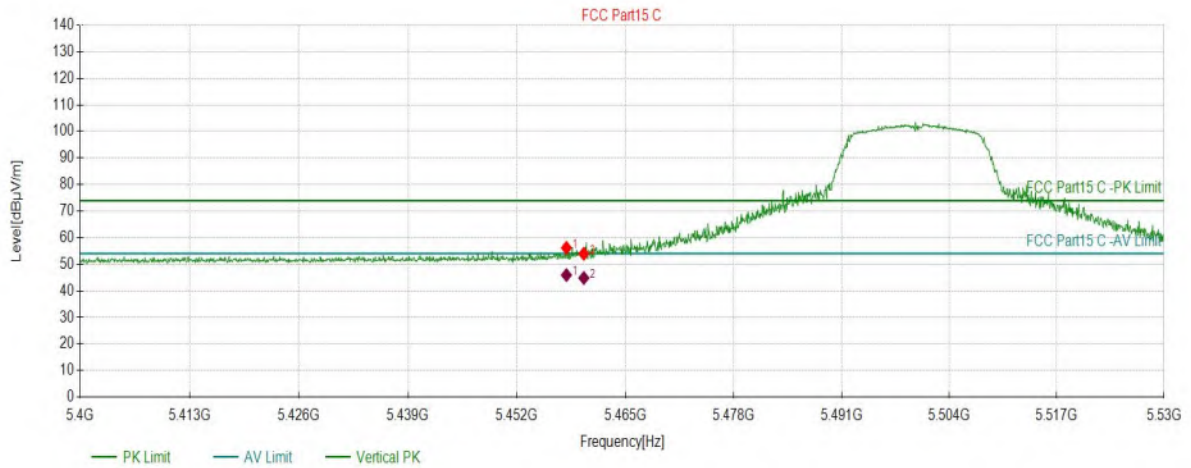

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5457.9440	56.17	16.76	74.00	17.83	150	208	PK	Vertical
2	5460.0250	53.96	16.76	74.00	20.04	150	208	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5457.9440	16.76	45.94	54.00	8.06	150	208	Vertical
2	5460.0250	16.76	44.83	54.00	9.17	150	208	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11A_5700	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 14:36:43

Test Graph

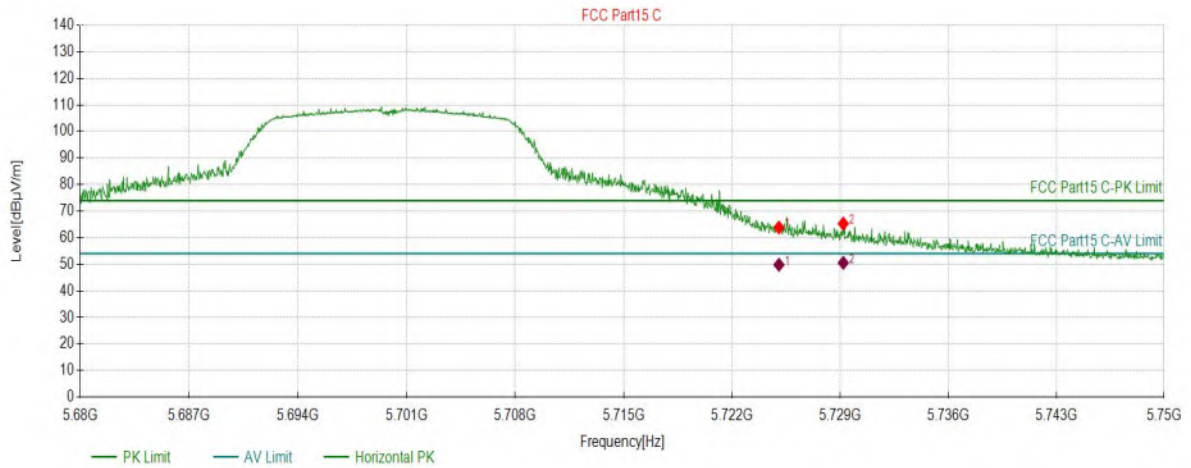

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5725.0325	63.86	17.96	74.00	10.14	150	304	PK	Horizontal
2	5729.1996	65.29	17.98	74.00	8.71	150	349	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0325	17.96	49.81	54.00	4.19	150	304	Horizontal
2	5729.1996	17.98	50.54	54.00	3.46	150	349	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11A_5700	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 14:37:27

Test Graph

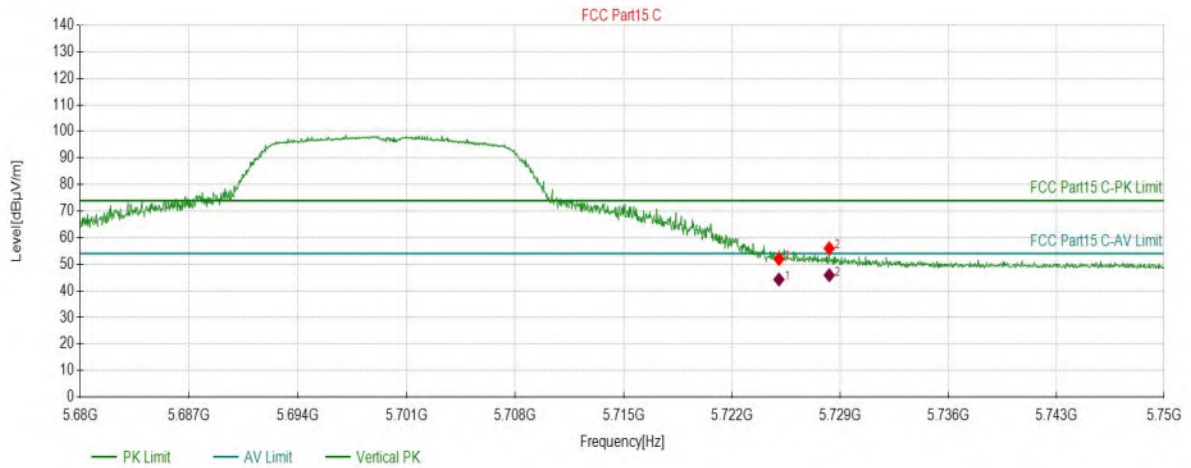

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5725.0325	51.98	17.96	74.00	22.02	150	5	PK	Vertical
2	5728.2891	55.98	17.97	74.00	18.02	150	3	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0325	17.96	44.27	54.00	9.73	150	5	Vertical
2	5728.2891	17.97	45.88	54.00	8.12	150	3	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N20_5500	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 14:51:27

Test Graph

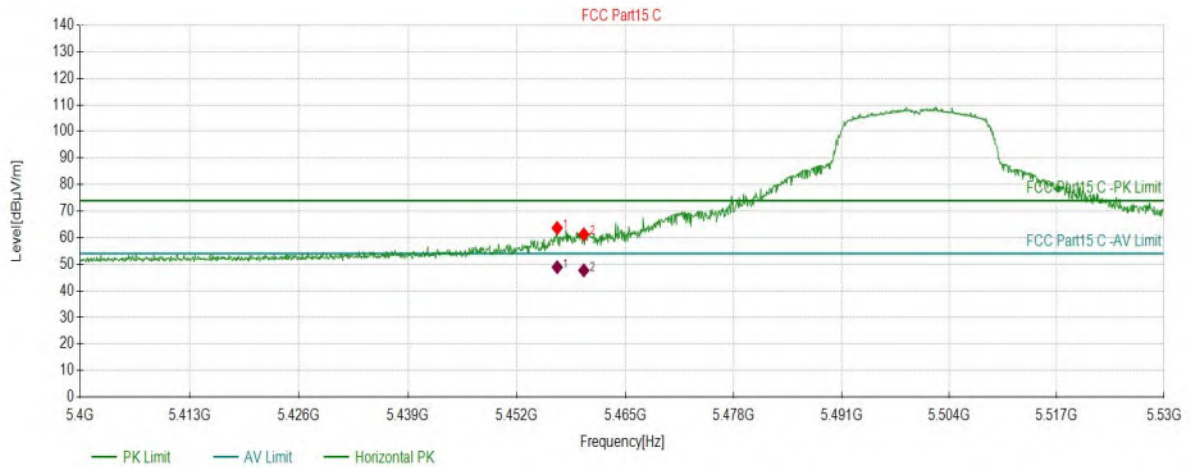

Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5456.8384	63.64	16.76	74.00	10.36	150	346	PK	Horizontal
2	5460.0250	61.24	16.76	74.00	12.76	150	295	PK	Horizontal


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5456.8384	16.76	48.90	54.00	5.10	150	346	Horizontal
2	5460.0250	16.76	47.70	54.00	6.30	150	295	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N20_5500	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 14:52:15

Test Graph

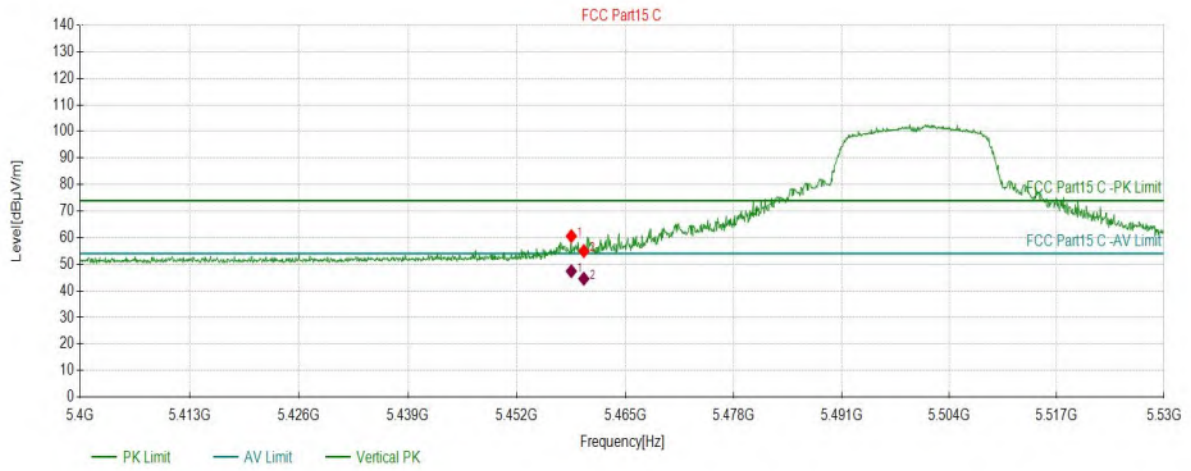

Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5458.5293	60.61	16.76	74.00	13.39	150	214	PK	Vertical
2	5460.0250	54.94	16.76	74.00	19.06	150	130	PK	Vertical


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5458.5293	16.76	47.39	54.00	6.61	150	214	Vertical
2	5460.0250	16.76	44.56	54.00	9.44	150	130	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N20_5700	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 18.5		
Test Standard:			

Start of Test: 2023-04-23 15:12:12

Test Graph

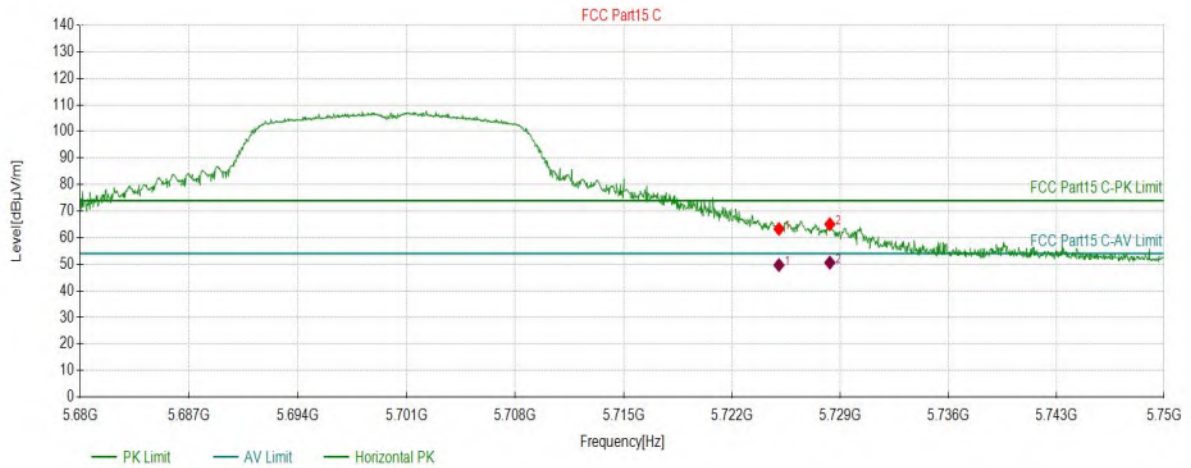

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5725.0325	63.28	17.96	74.00	10.72	150	357	PK	Horizontal
2	5728.3242	65.08	17.97	74.00	8.92	150	302	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0325	17.96	49.70	54.00	4.30	150	357	Horizontal
2	5728.3242	17.97	50.61	54.00	3.39	150	302	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N20_5700	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 18.5		
Test Standard:			

Start of Test: 2023-04-23 15:12:57

Test Graph

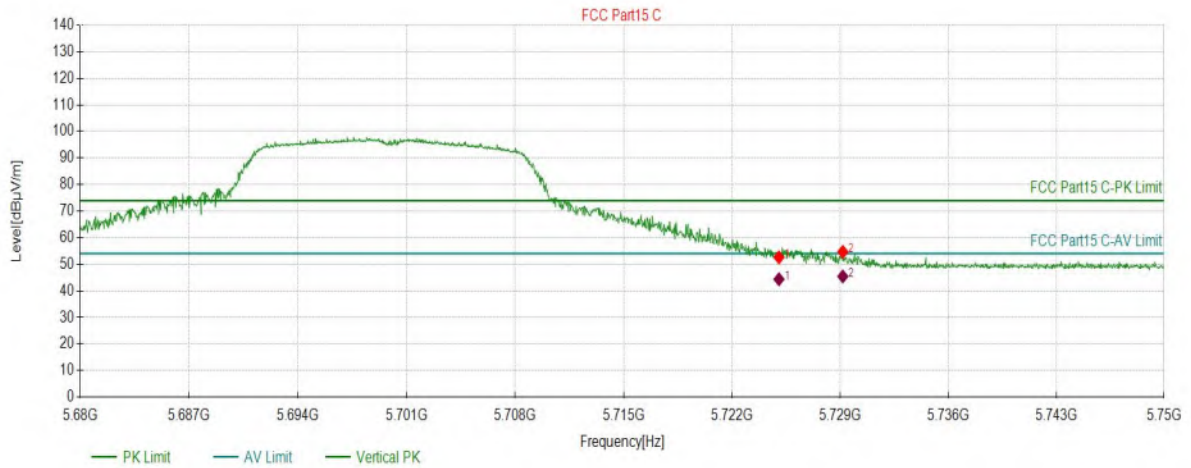

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5725.0325	52.62	17.96	74.00	21.38	150	210	PK	Vertical
2	5729.1646	54.68	17.98	74.00	19.32	150	215	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0325	17.96	44.37	54.00	9.63	150	210	Vertical
2	5729.1646	17.98	45.42	54.00	8.58	150	215	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N40_5510	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 15:18:51

Test Graph

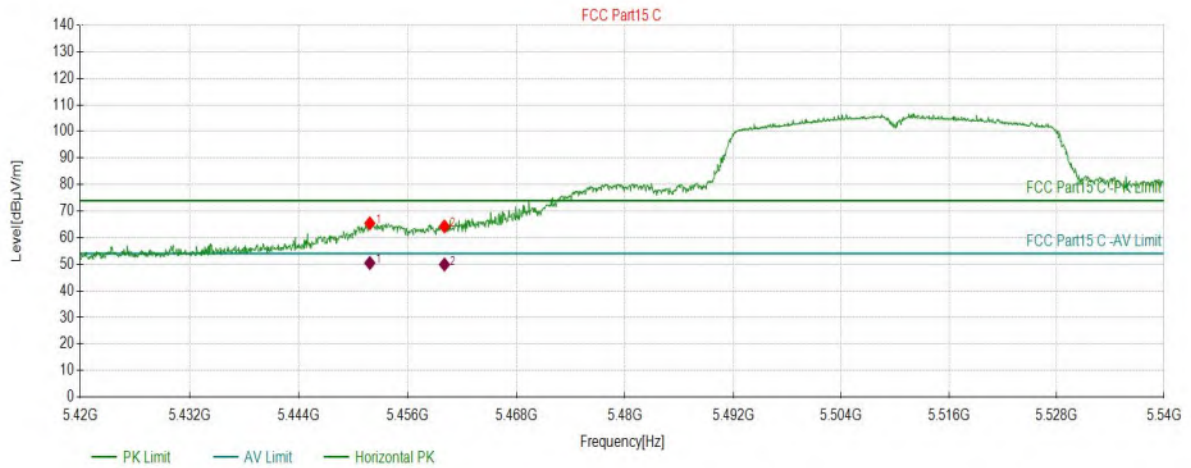

Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5451.8159	65.42	16.76	74.00	8.58	150	304	PK	Horizontal
2	5460.0400	64.27	16.76	74.00	9.73	150	290	PK	Horizontal


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5451.8159	16.76	50.48	54.00	3.52	150	304	Horizontal
2	5460.0400	16.76	49.91	54.00	4.09	150	290	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N40_5510	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 15:19:39

Test Graph

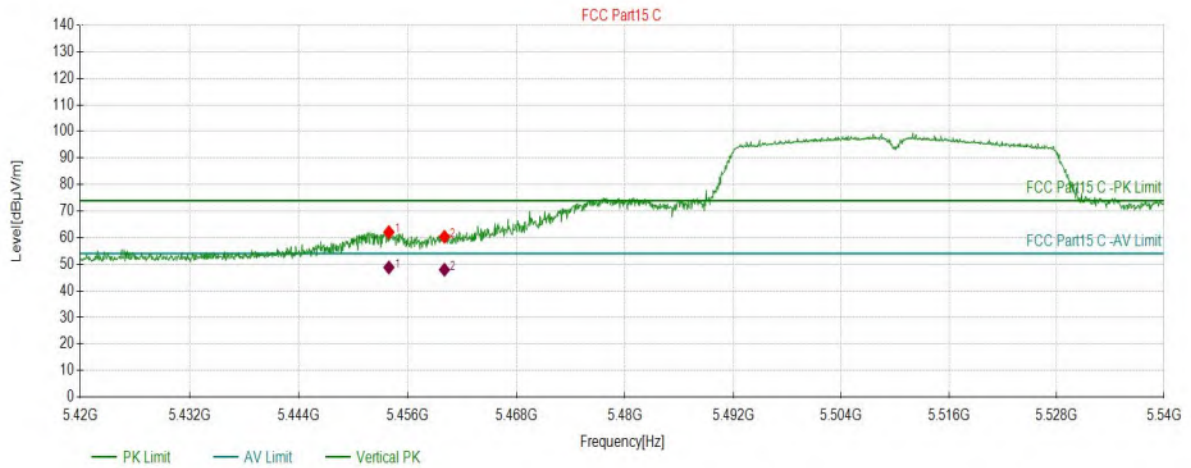

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5453.9170	62.08	16.76	74.00	11.92	150	209	PK	Vertical
2	5460.0400	60.34	16.76	74.00	13.66	150	204	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5453.9170	16.76	48.81	54.00	5.19	150	209	Vertical
2	5460.0400	16.76	47.94	54.00	6.06	150	204	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N40_5670	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 15:26:17

Test Graph

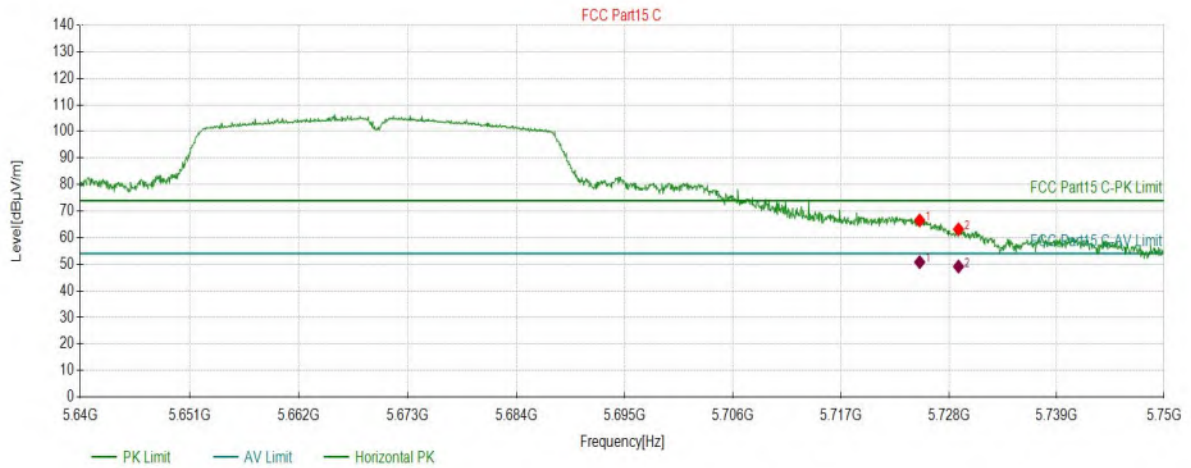

Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5725.0175	66.52	17.96	74.00	7.48	150	306	PK	Horizontal
2	5728.9795	63.17	17.98	74.00	10.83	150	306	PK	Horizontal


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0175	17.96	50.80	54.00	3.20	150	306	Horizontal
2	5728.9795	17.98	49.15	54.00	4.85	150	306	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N40_5670	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 15:27:01

Test Graph

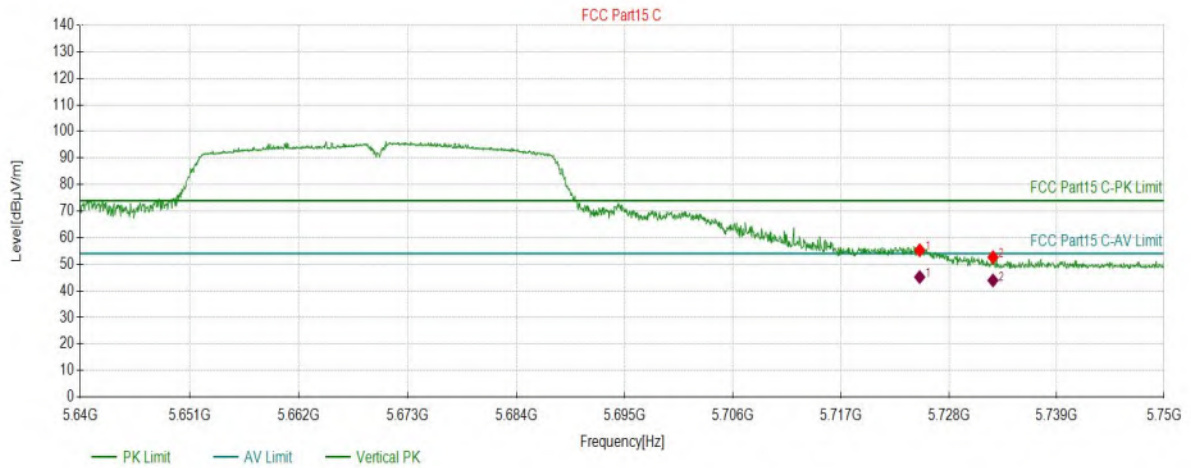

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5725.0175	55.29	17.96	74.00	18.71	150	216	PK	Vertical
2	5732.5013	52.66	18.00	74.00	21.34	150	356	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0175	17.96	45.19	54.00	8.81	150	216	Vertical
2	5732.5013	18.00	43.91	54.00	10.09	150	356	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5500	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 15:34:31

Test Graph

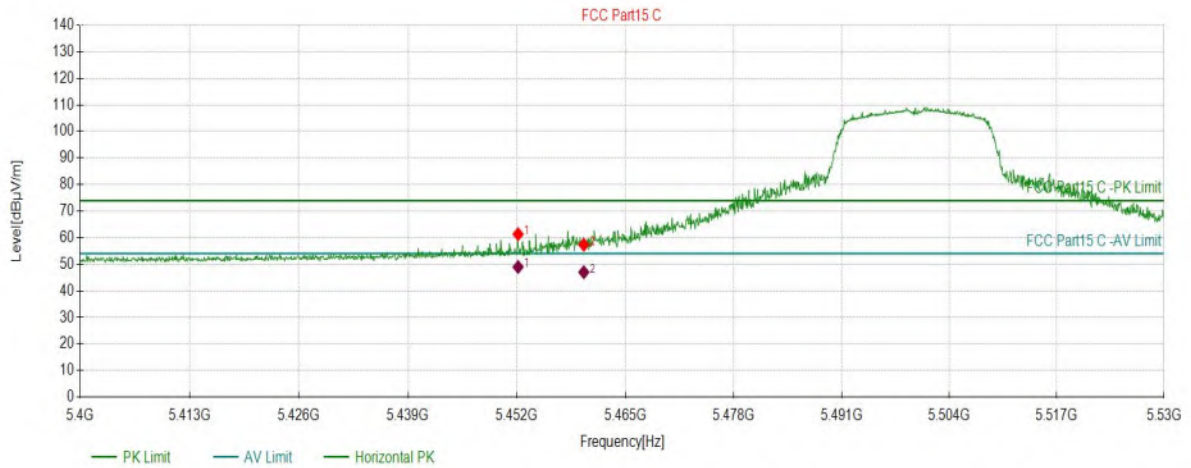

Suspected Data List									
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5452.1561	61.34	16.76	74.00	12.66	150	295	PK	Horizontal
2	5460.0250	57.35	16.76	74.00	16.65	150	290	PK	Horizontal


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5452.1561	16.76	48.99	54.00	5.01	150	295	Horizontal
2	5460.0250	16.76	47.02	54.00	6.98	150	290	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5500	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 15:35:19

Test Graph

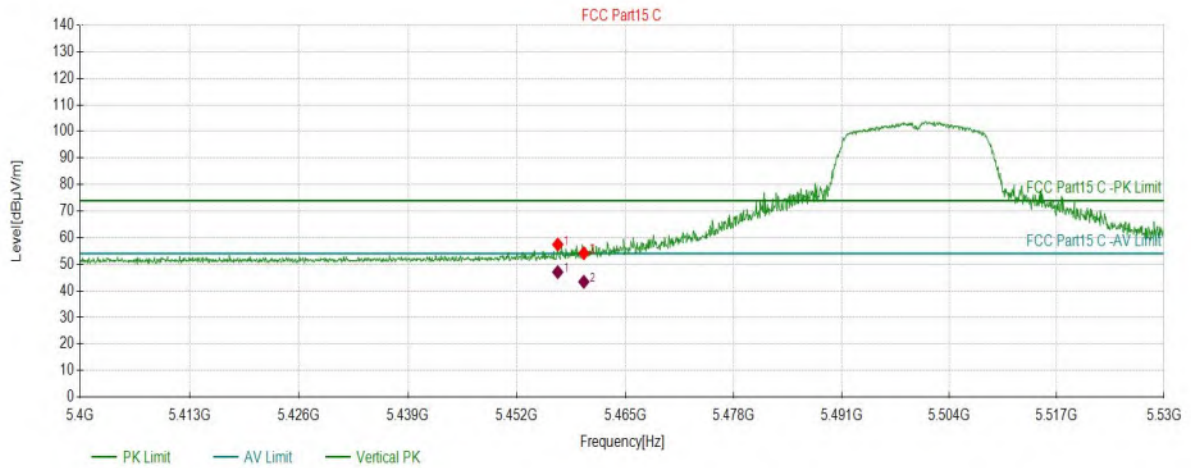

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5456.9035	57.45	16.76	74.00	16.55	150	2	PK	Vertical
2	5460.0250	54.15	16.76	74.00	19.85	150	216	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5456.9035	16.76	47.05	54.00	6.95	150	2	Vertical
2	5460.0250	16.76	43.40	54.00	10.60	150	216	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5700	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 15:52:23

Test Graph

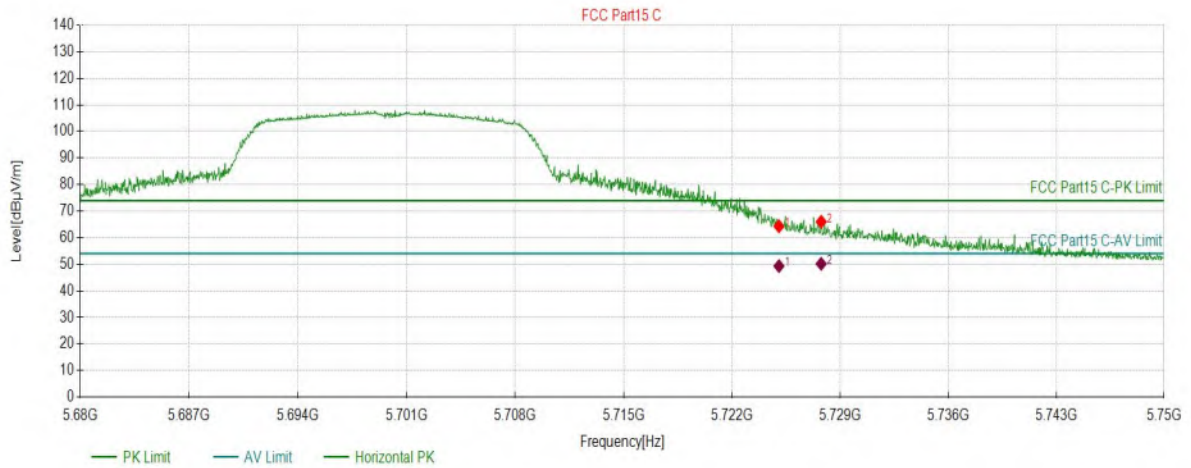

Suspected Data List									
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5725.0325	64.32	17.96	74.00	9.68	150	291	PK	Horizontal
2	5727.7639	66.01	17.97	74.00	7.99	150	8	PK	Horizontal


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0325	17.96	49.32	54.00	4.68	150	291	Horizontal
2	5727.7639	17.97	50.18	54.00	3.82	150	8	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5700	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 15:53:07

Test Graph

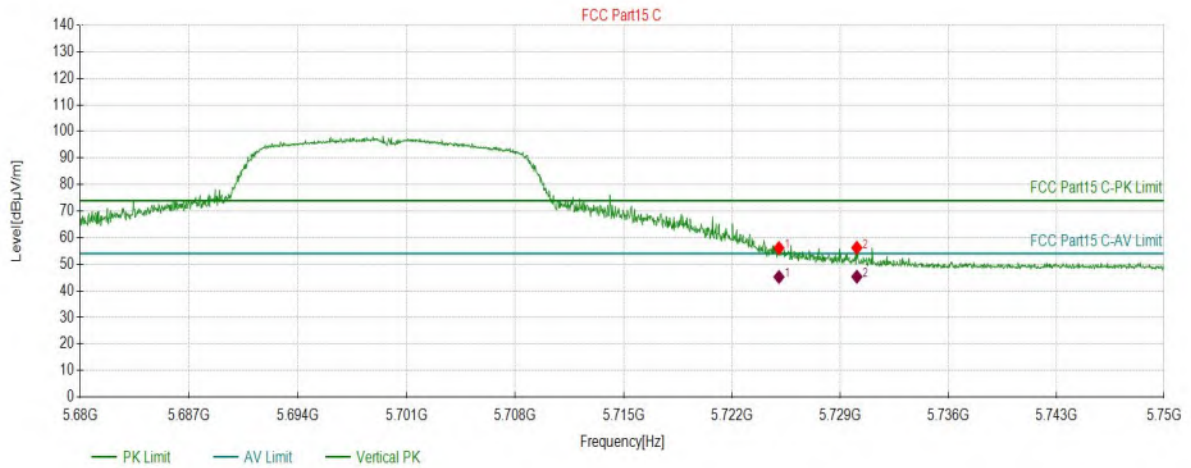

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5725.0325	56.12	17.96	74.00	17.88	150	96	PK	Vertical
2	5730.0750	56.22	17.98	74.00	17.78	150	11	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0325	17.96	45.23	54.00	8.77	150	96	Vertical
2	5730.0750	17.98	45.30	54.00	8.70	150	11	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC40_5510	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 18.5		
Test Standard:			

Start of Test: 2023-04-23 16:18:38

Test Graph

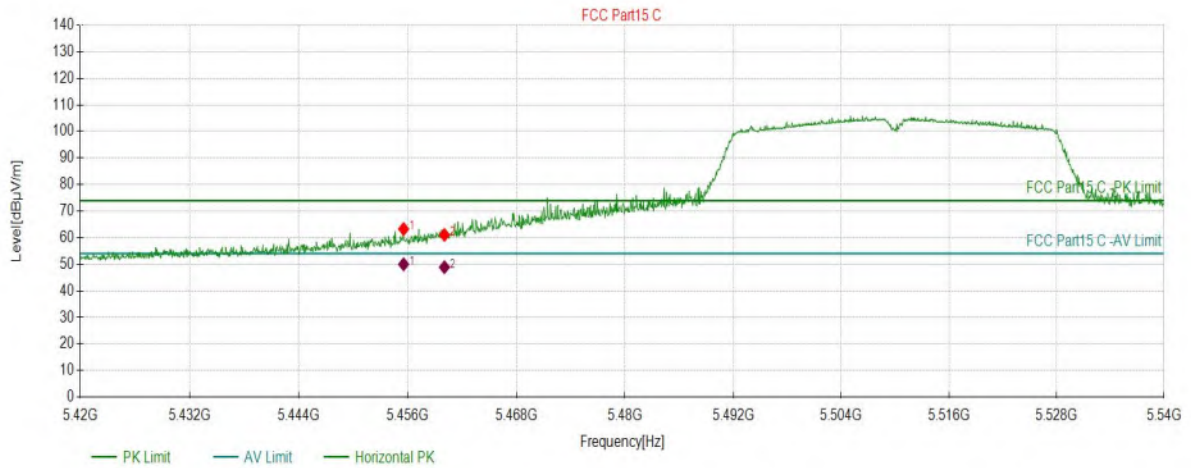

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5455.5378	63.26	16.76	74.00	10.74	150	302	PK	Horizontal
2	5460.0400	61.06	16.76	74.00	12.94	150	293	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5455.5378	16.76	50.00	54.00	4.00	150	302	Horizontal
2	5460.0400	16.76	48.90	54.00	5.10	150	293	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC40_5510	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 18.5		
Test Standard:			

Start of Test: 2023-04-23 16:19:26

Test Graph

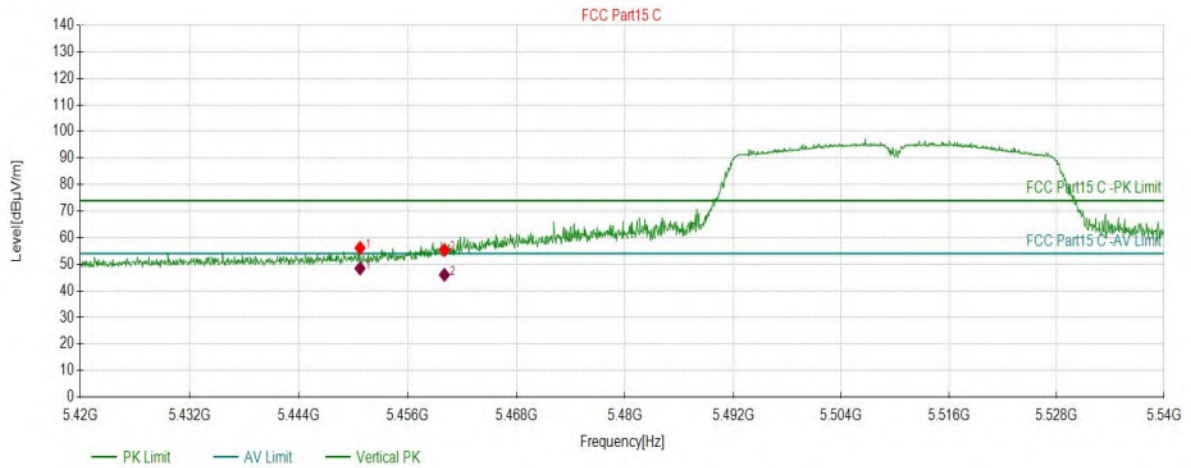

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5450.7354	56.12	16.76	74.00	17.88	150	0	PK	Vertical
2	5460.0400	55.31	16.76	74.00	18.69	150	0	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5450.7354	16.76	48.43	54.00	5.57	150	0	Vertical
2	5460.0400	16.76	46.03	54.00	7.97	150	0	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC40_5670	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 17:10:47

Test Graph

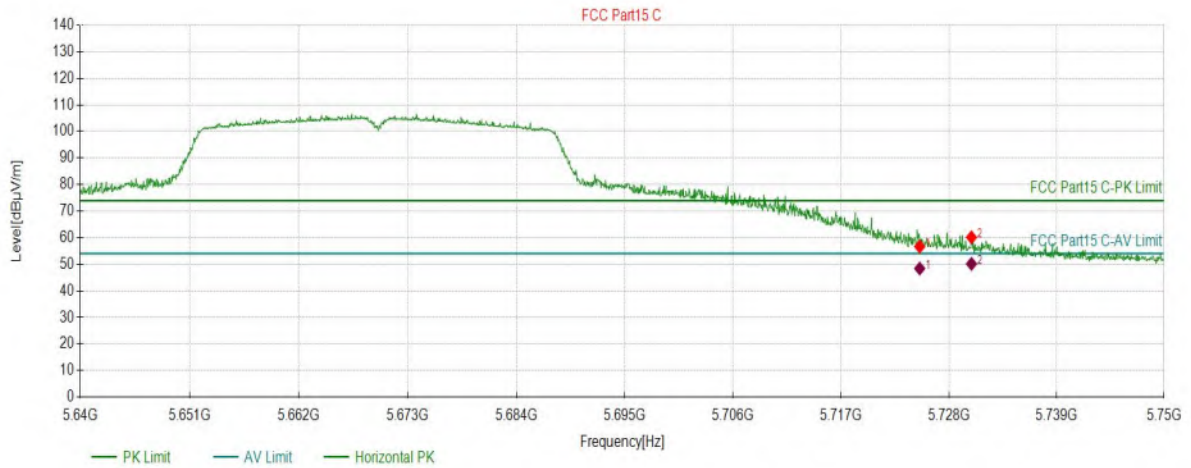

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5725.0175	56.65	17.96	74.00	17.35	150	0	PK	Horizontal
2	5730.3002	60.13	17.99	74.00	13.87	150	357	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0175	17.96	48.39	54.00	5.61	150	0	Horizontal
2	5730.3002	17.99	50.16	54.00	3.84	150	357	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC40_5670	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 17:11:31

Test Graph

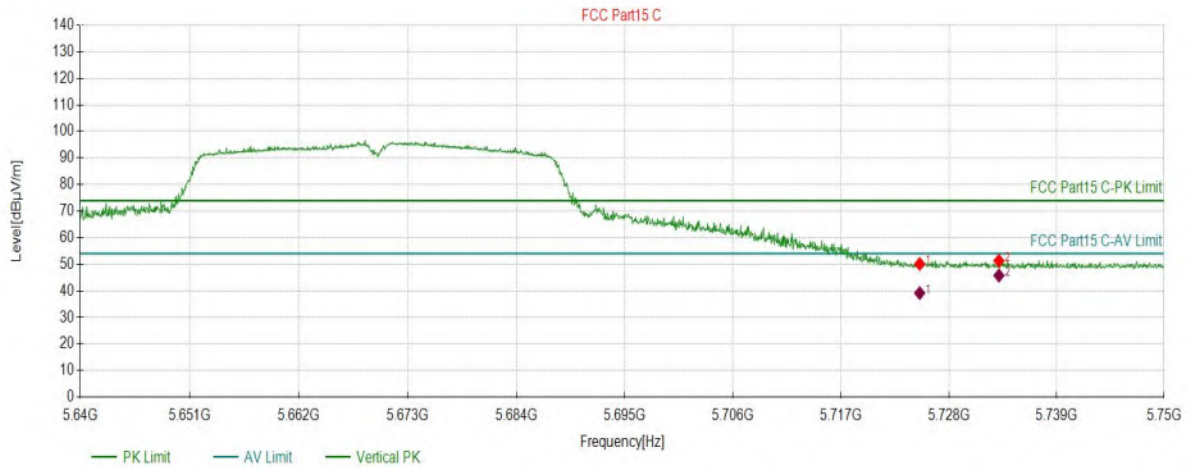

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5725.0175	50.13	17.96	74.00	23.87	150	358	PK	Vertical
2	5733.1066	51.32	18.00	74.00	22.68	150	278	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0175	17.96	39.13	54.00	14.87	150	358	Vertical
2	5733.1066	18.00	45.77	54.00	8.23	150	278	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC80_5530	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 16.5		
Test Standard:			

Start of Test: 2023-04-23 17:21:50

Test Graph

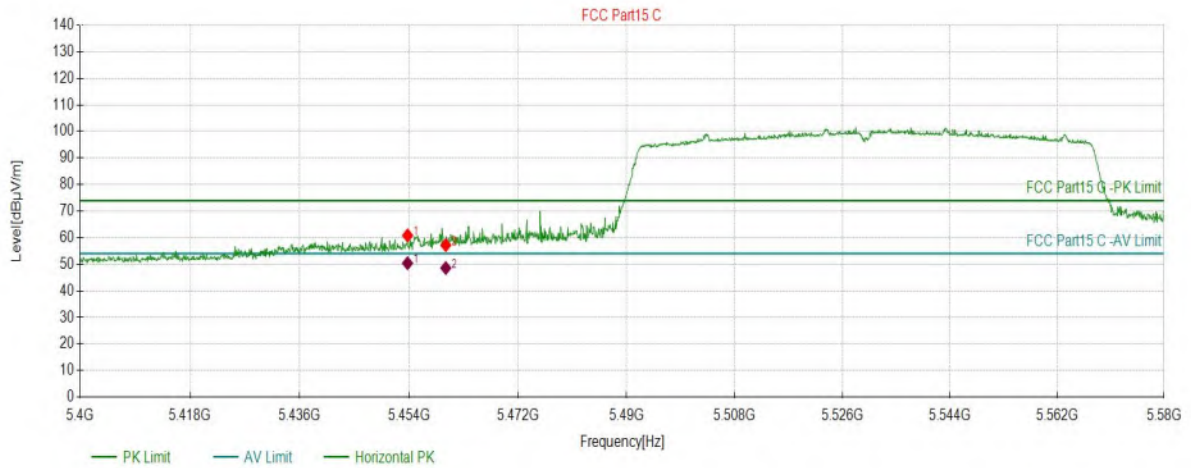

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5453.7569	60.84	16.76	74.00	13.16	150	336	PK	Horizontal
2	5460.0600	57.20	16.76	74.00	16.80	150	282	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5453.7569	16.76	50.40	54.00	3.60	150	336	Horizontal
2	5460.0600	16.76	48.58	54.00	5.42	150	282	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC80_5530	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 16.5		
Test Standard:			

Start of Test: 2023-04-23 17:22:38

Test Graph

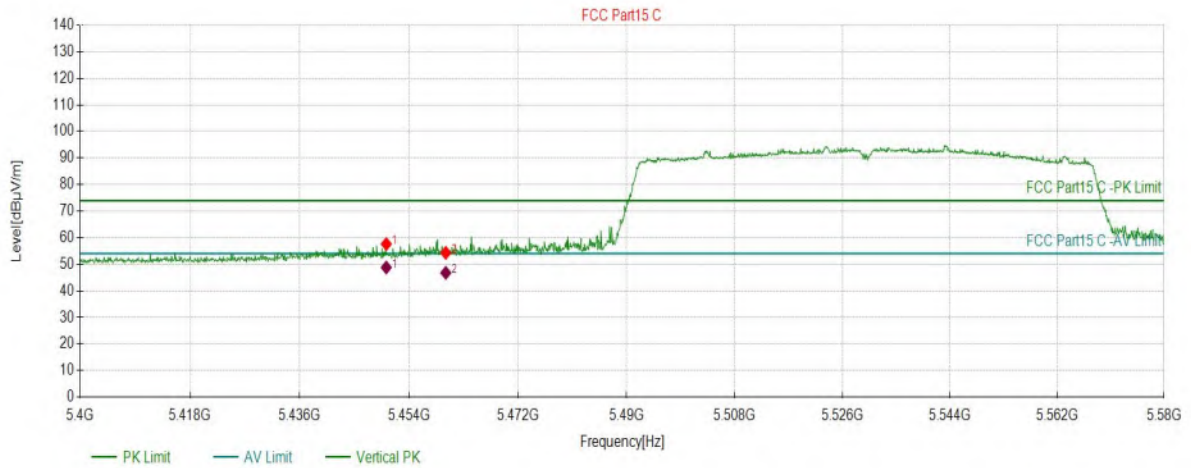

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5450.2451	57.64	16.76	74.00	16.36	150	357	PK	Vertical
2	5460.0600	54.31	16.76	74.00	19.69	150	357	PK	Vertical

AV Final Data List


NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5450.2451	16.76	48.80	54.00	5.20	150	357	Vertical
2	5460.0600	16.76	46.78	54.00	7.22	150	357	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC80_5610	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 17:34:16

Test Graph

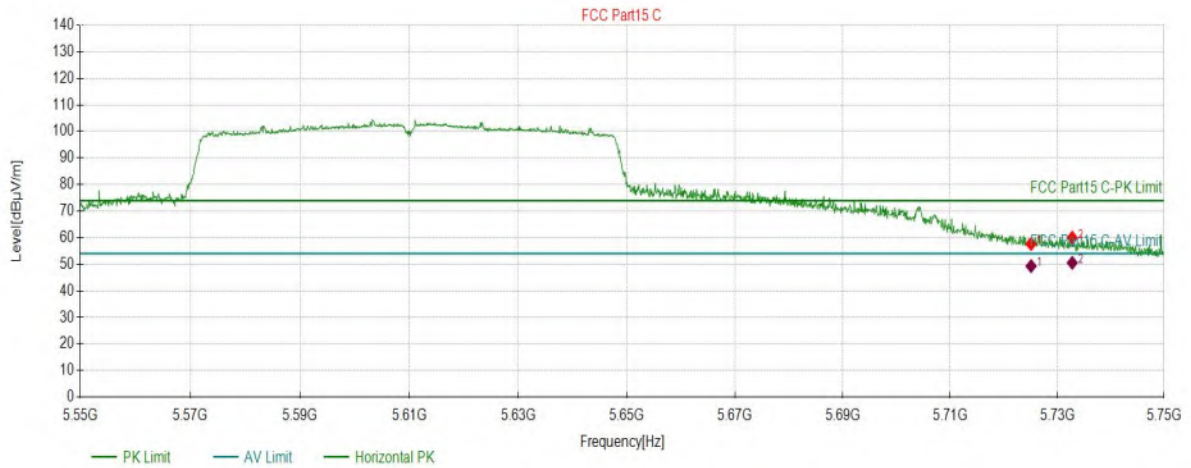

Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5725.0875	57.65	17.96	74.00	16.35	150	325	PK	Horizontal
2	5732.7914	59.99	18.00	74.00	14.01	150	355	PK	Horizontal


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0875	17.96	49.32	54.00	4.68	150	325	Horizontal
2	5732.7914	18.00	50.53	54.00	3.47	150	355	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC80_5610	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-23 17:35:00

Test Graph

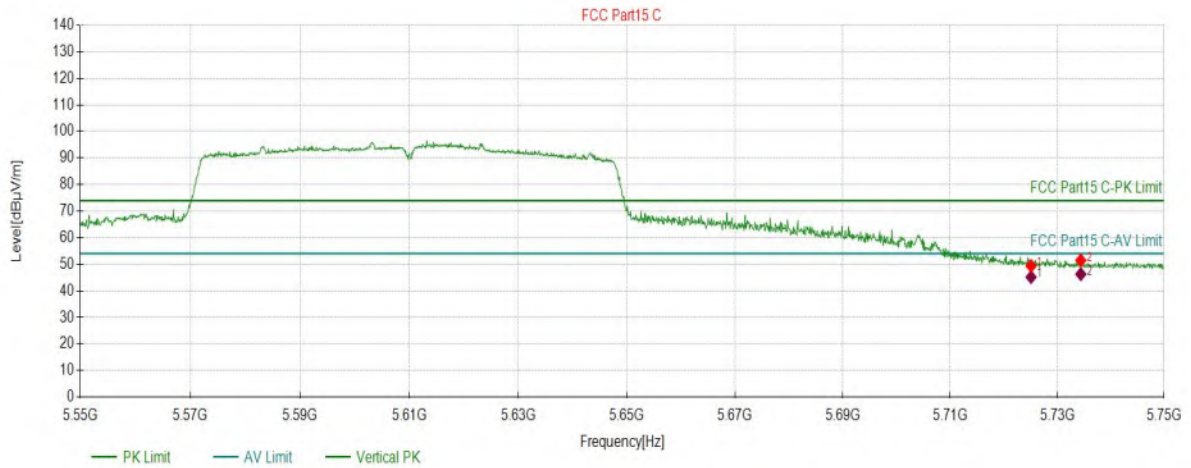

Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5725.0875	49.37	17.96	74.00	24.63	150	2	PK	Vertical
2	5734.3922	51.46	18.01	74.00	22.54	150	247	PK	Vertical


AV Final Data List								
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5725.0875	17.96	45.18	54.00	8.82	150	2	Vertical
2	5734.3922	18.01	46.28	54.00	7.72	150	247	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5745	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 18		
Test Standard:			

Start of Test: 2023-04-25 10:57:53

Test Graph

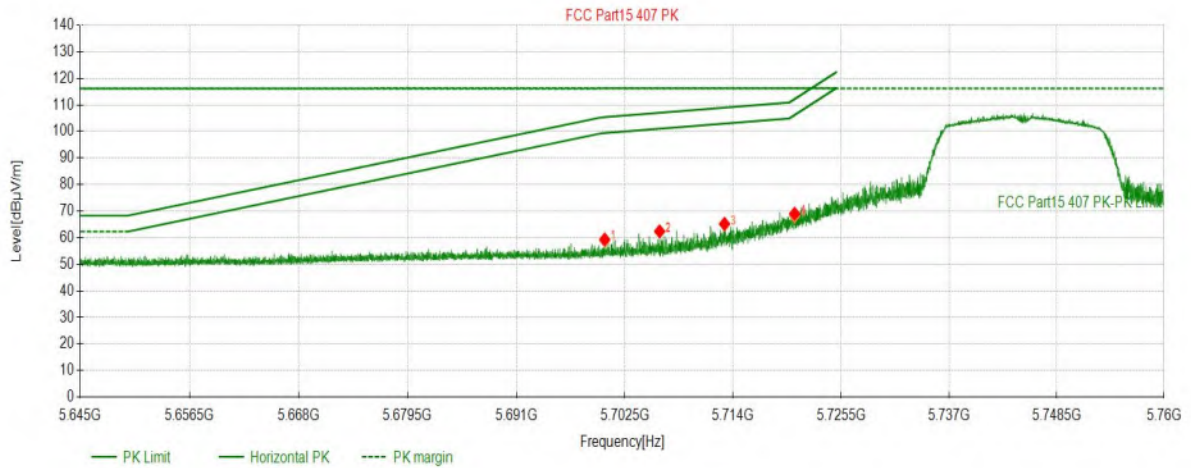


Suspected Data List									
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5700.3665	59.37	17.81	105.40	46.03	150	305	PK	Horizontal
2	5706.1976	62.41	17.85	107.04	44.63	150	359	PK	Horizontal
3	5713.0868	65.25	17.89	108.97	43.72	150	293	PK	Horizontal
4	5720.5396	69.06	17.93	112.13	43.07	150	312	PK	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5745	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 18		
Test Standard:			

Start of Test: 2023-04-25 10:59:07

Test Graph

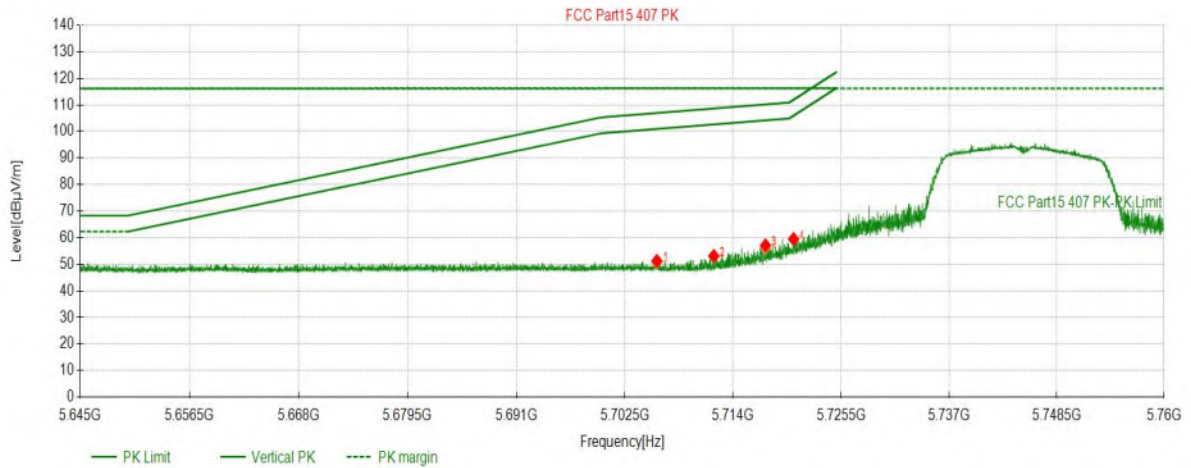

Suspected Data List


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5705.9101	51.29	17.84	106.96	55.67	150	12	PK	Vertical
2	5711.9482	53.14	17.88	108.65	55.51	150	6	PK	Vertical
3	5717.4457	57.13	17.91	110.19	53.06	150	269	PK	Vertical
4	5720.4360	59.50	17.93	111.89	52.39	150	263	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5825	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 18.5		
Test Standard:			

Start of Test: 2023-04-25 11:51:37

Test Graph

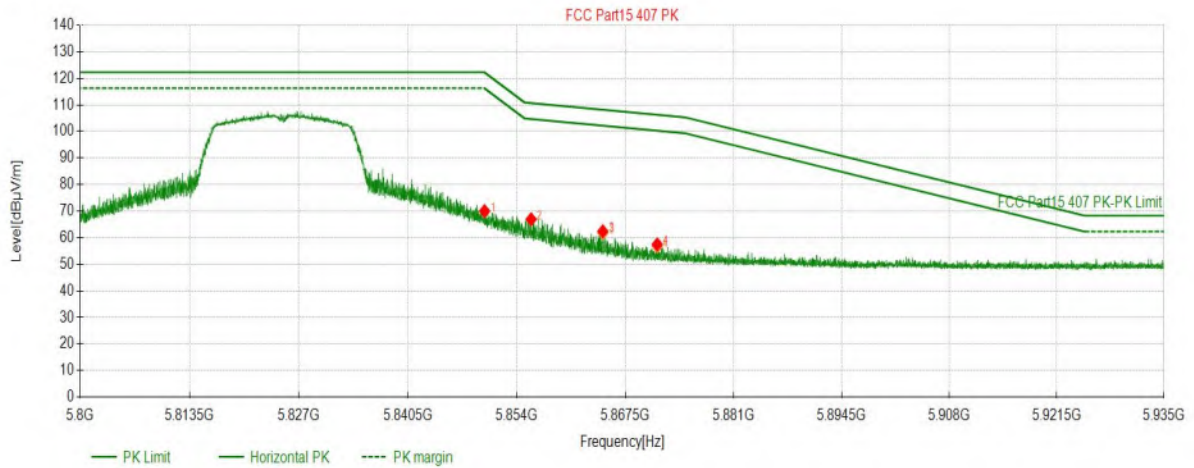


Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5850.0090	70.02	18.57	122.28	52.26	150	299	PK	Horizontal
2	5855.8011	66.94	18.59	110.68	43.74	150	293	PK	Horizontal
3	5864.7120	62.45	18.62	108.18	45.73	150	282	PK	Horizontal
4	5871.4896	57.53	18.65	106.28	48.75	150	285	PK	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC20_5825	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 18.5		
Test Standard:			

Start of Test: 2023-04-25 11:52:50

Test Graph

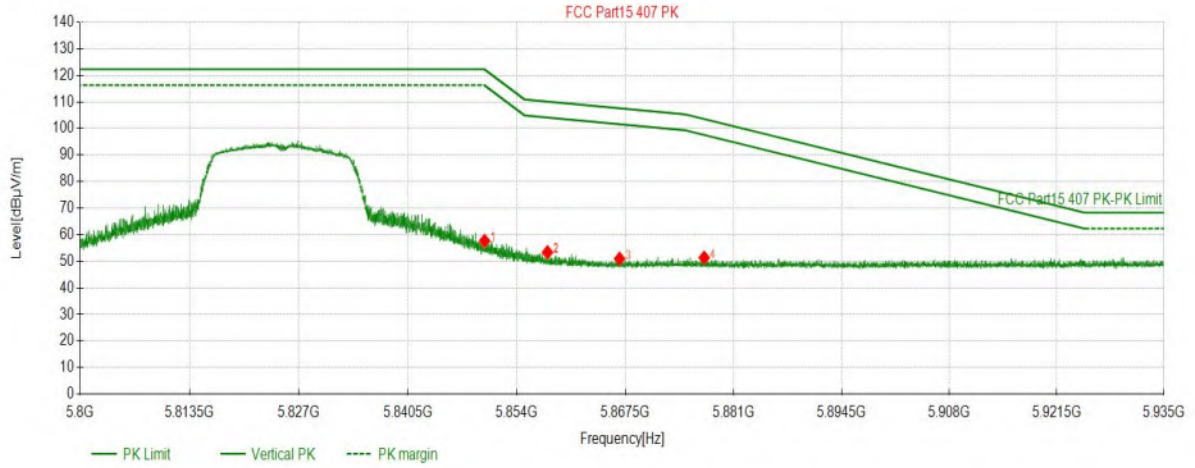


Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5850.0090	57.75	18.57	122.28	64.53	150	325	PK	Vertical
2	5857.8263	53.47	18.60	110.11	56.64	150	102	PK	Vertical
3	5866.8047	50.98	18.63	107.59	56.61	150	2	PK	Vertical
4	5877.3492	51.41	18.67	103.55	52.14	150	120	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC40_5755	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 11:59:24

Test Graph

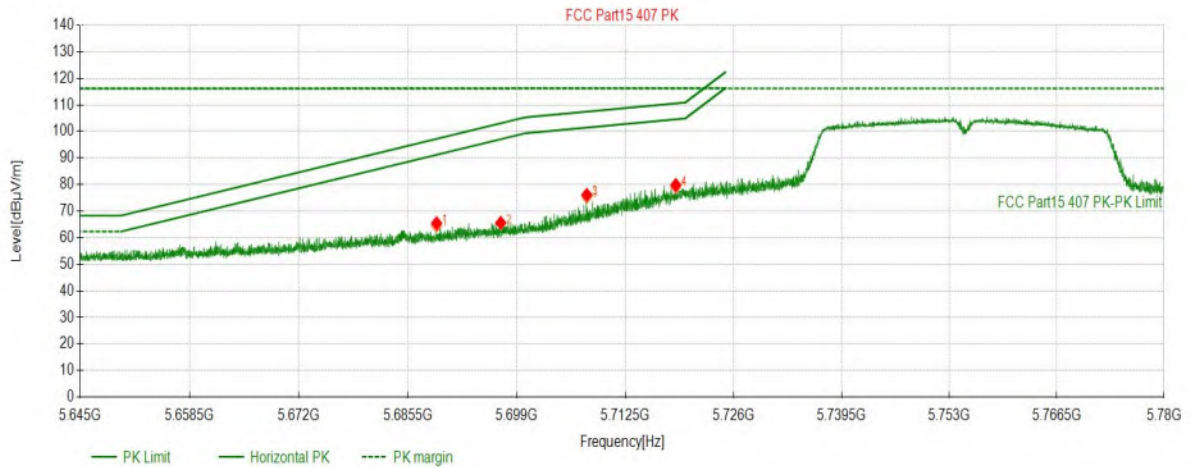


Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5689.0414	65.47	17.73	97.22	31.75	150	292	PK	Horizontal
2	5697.0072	65.61	17.79	103.09	37.48	150	297	PK	Horizontal
3	5707.7138	76.15	17.85	107.46	31.31	150	286	PK	Horizontal
4	5718.7984	79.85	17.92	110.56	30.71	150	297	PK	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC40_5755	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 12:00:38

Test Graph

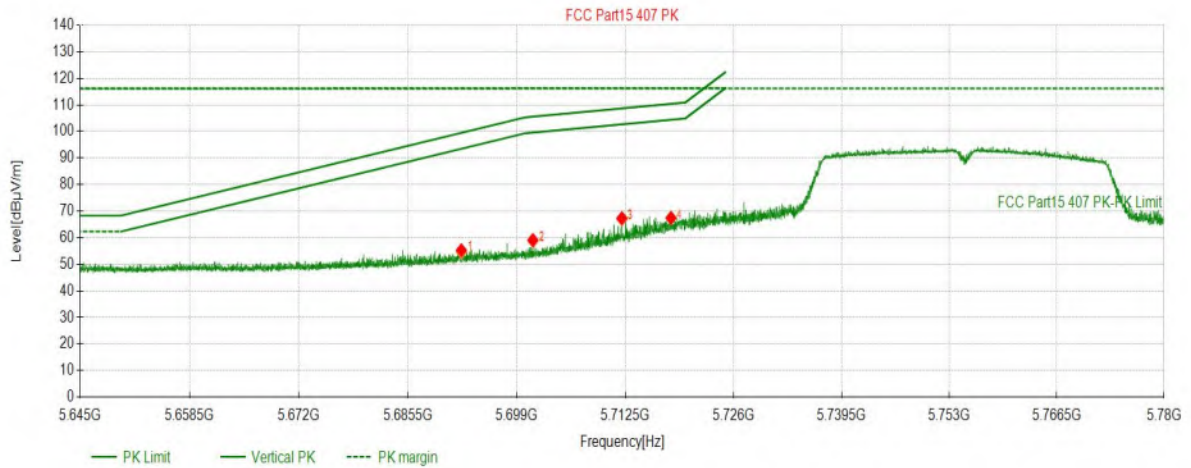

Suspected Data List


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5692.1197	55.33	17.75	99.49	44.16	150	7	PK	Vertical
2	5701.0036	59.14	17.82	105.58	46.44	150	11	PK	Vertical
3	5712.0747	67.37	17.88	108.68	41.31	150	298	PK	Vertical
4	5718.2043	67.48	17.92	110.40	42.92	150	7	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC40_5795	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 12:04:35

Test Graph

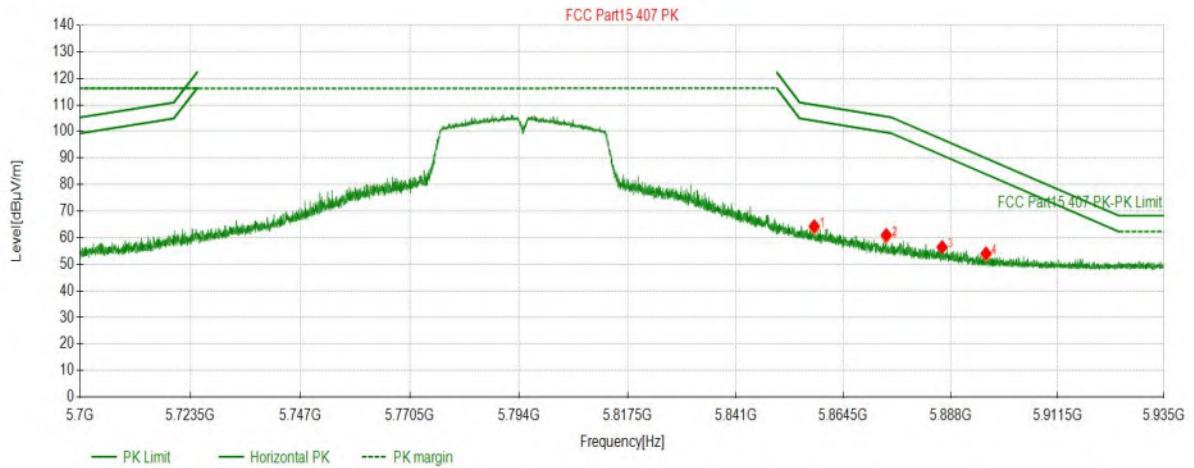

Suspected Data List


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5858.1238	64.39	18.60	110.02	45.63	150	306	PK	Horizontal
2	5873.8704	61.08	18.66	105.62	44.54	150	306	PK	Horizontal
3	5886.1151	56.45	18.70	97.05	40.60	150	310	PK	Horizontal
4	5895.7511	54.14	18.73	89.91	35.77	150	303	PK	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC40_5795	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 12:05:50

Test Graph

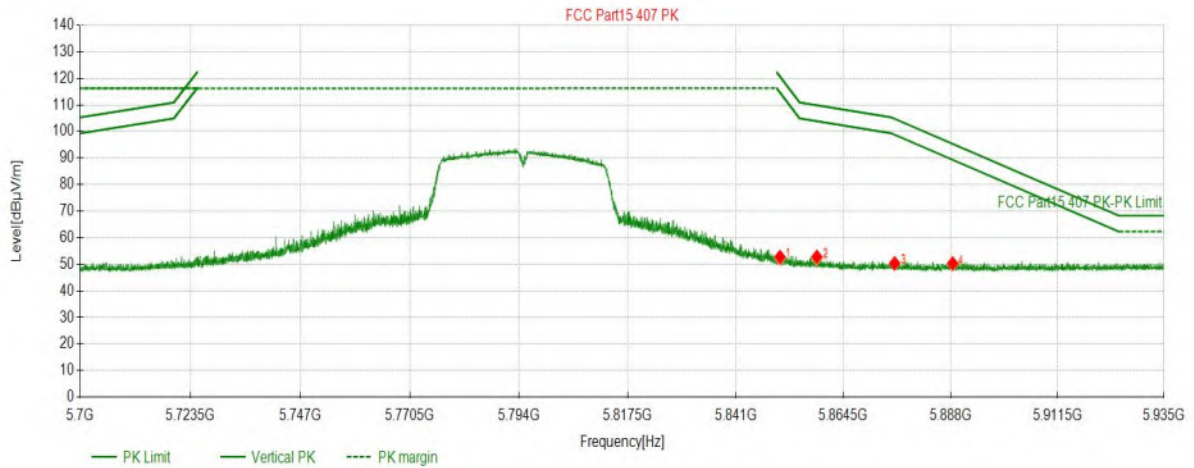


Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5850.6501	52.83	18.57	120.82	67.99	150	284	PK	Vertical
2	5858.6879	52.88	18.60	109.87	56.99	150	275	PK	Vertical
3	5875.7036	50.42	18.66	104.78	54.36	150	329	PK	Vertical
4	5888.4183	50.37	18.71	95.34	44.97	150	104	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC80_5775	Voltage:	DC5V F
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 12:08:53

Test Graph

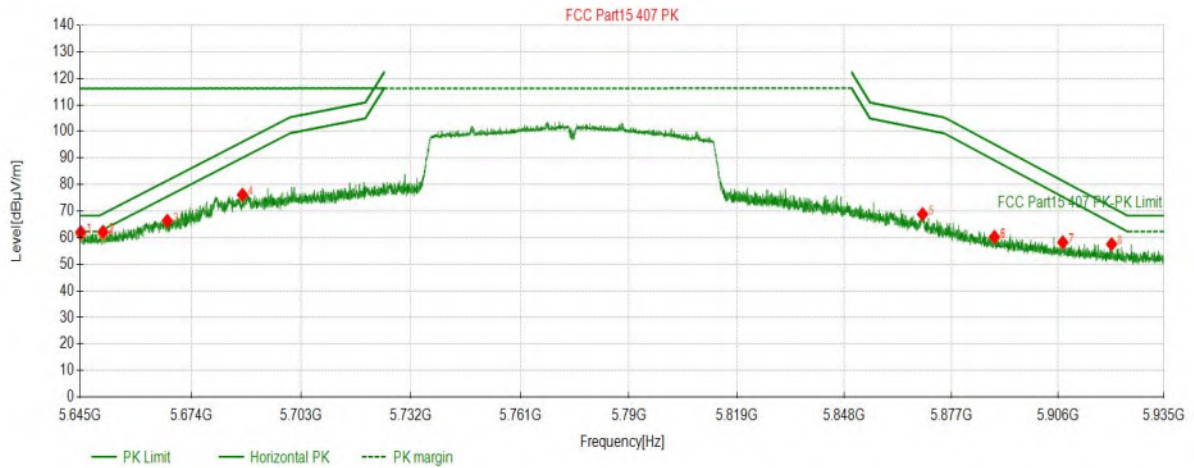


Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5645.1740	62.11	17.39	68.30	6.19	150	300	PK	Horizontal
2	5650.9746	62.26	17.43	69.02	6.76	150	284	PK	Horizontal
3	5667.7963	66.37	17.56	81.51	15.14	150	300	PK	Horizontal
4	5687.5183	76.15	17.71	96.09	19.94	150	300	PK	Horizontal
5	5869.1344	68.88	18.64	106.94	38.06	150	313	PK	Horizontal
6	5888.6534	60.35	18.71	95.17	34.82	150	319	PK	Horizontal
7	5907.3022	58.32	18.77	81.36	23.04	150	313	PK	Horizontal
8	5920.6436	57.61	18.81	71.51	13.90	150	313	PK	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11AC80_5775	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 12:10:05

Test Graph

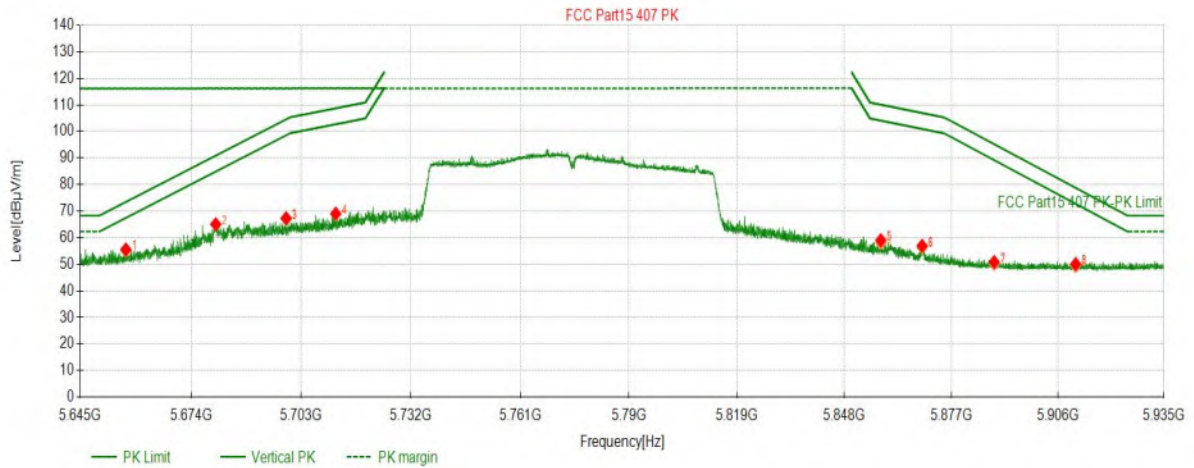


Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5656.9492	55.61	17.48	73.46	17.85	150	266	PK	Vertical
2	5680.4996	65.10	17.66	90.91	25.81	150	266	PK	Vertical
3	5699.0034	67.35	17.80	104.57	37.22	150	162	PK	Vertical
4	5712.0837	69.10	17.88	108.69	39.59	150	278	PK	Vertical
5	5857.8233	59.08	18.60	110.11	51.03	150	328	PK	Vertical
6	5869.0184	56.96	18.64	106.97	50.01	150	359	PK	Vertical
7	5888.5954	50.89	18.71	95.21	44.32	150	249	PK	Vertical
8	5910.8116	50.10	18.78	78.77	28.67	150	12	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11A_5745	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 12:13:22

Test Graph

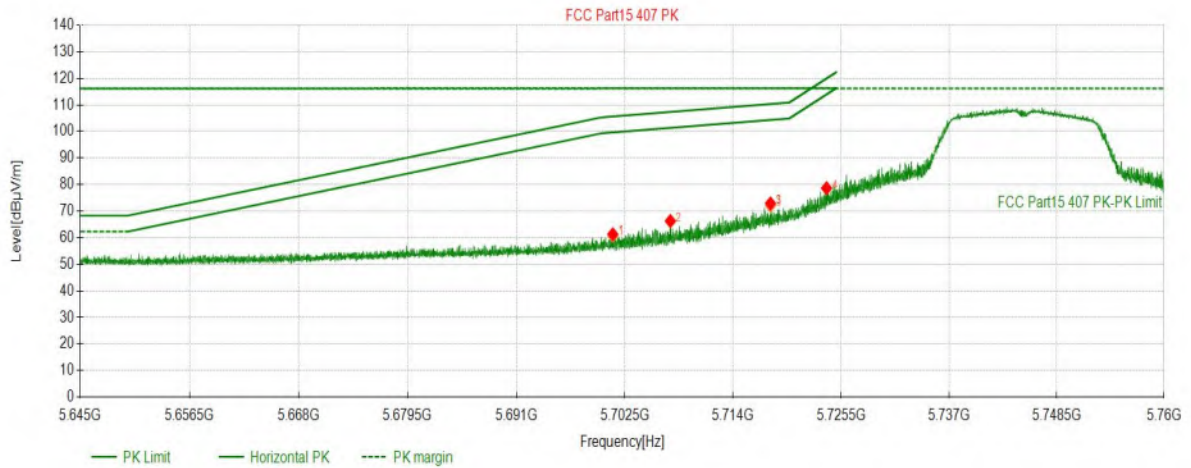


Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5701.2291	61.34	17.82	105.64	44.30	150	303	PK	Horizontal
2	5707.3362	66.33	17.85	107.36	41.03	150	303	PK	Horizontal
3	5717.9748	72.93	17.91	110.33	37.40	150	346	PK	Horizontal
4	5723.9439	78.65	17.95	119.89	41.24	150	293	PK	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11A_5745	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 12:14:36

Test Graph

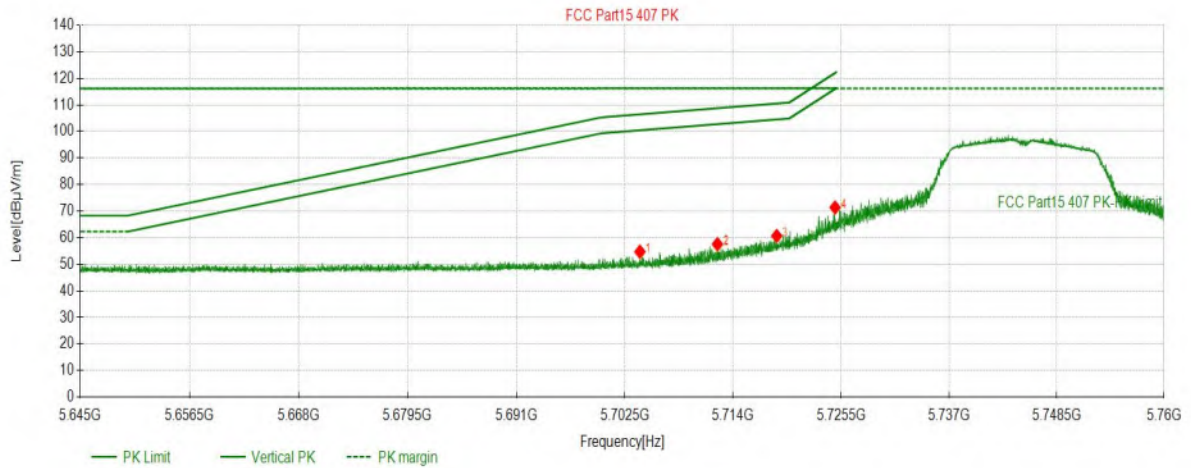


Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5704.1044	54.82	17.83	106.45	51.63	150	8	PK	Vertical
2	5712.3392	57.65	17.88	108.76	51.11	150	279	PK	Vertical
3	5718.6419	60.74	17.92	110.52	49.78	150	11	PK	Vertical
4	5724.8525	71.44	17.95	121.96	50.52	150	279	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11A_5825	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 12:17:19

Test Graph

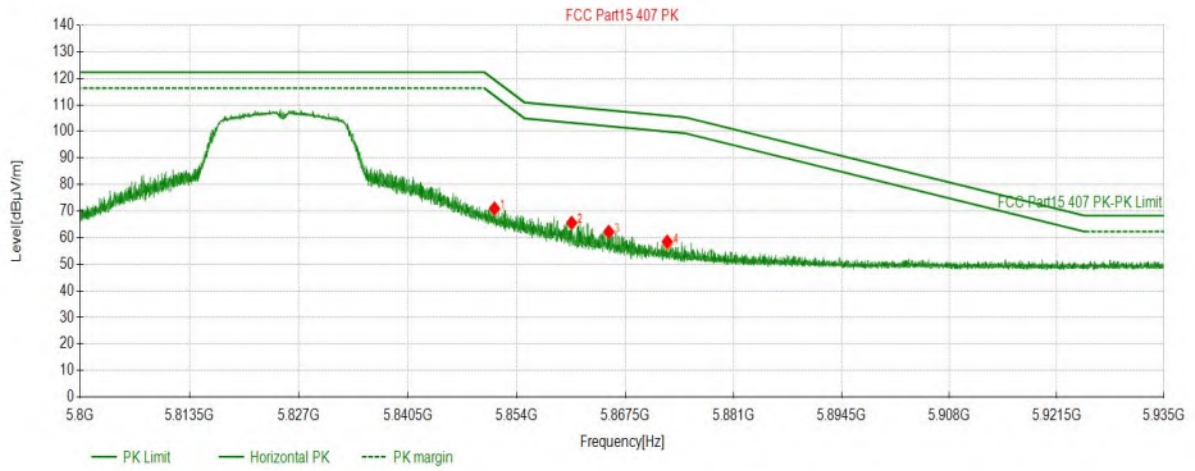


Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5851.2376	71.05	18.57	119.48	48.43	150	301	PK	Horizontal
2	5860.8371	65.66	18.61	109.26	43.60	150	293	PK	Horizontal
3	5865.4545	62.25	18.63	107.97	45.72	150	301	PK	Horizontal
4	5872.7453	58.56	18.65	105.93	47.37	150	301	PK	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11A_5825	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 12:18:31

Test Graph

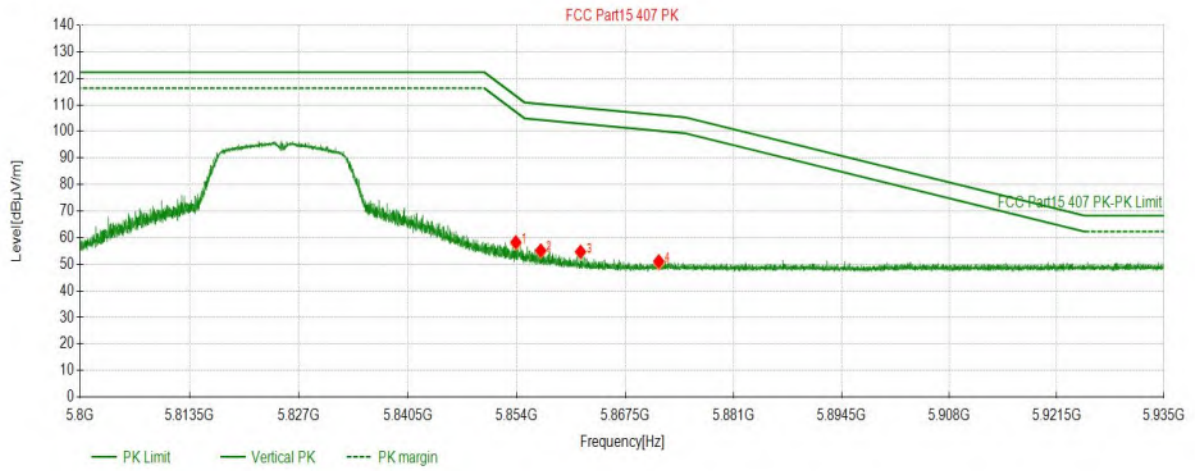


Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5853.8974	58.35	18.58	113.41	55.06	150	267	PK	Vertical
2	5856.9892	55.25	18.60	110.34	55.09	150	270	PK	Vertical
3	5861.9442	54.76	18.61	108.95	54.19	150	2	PK	Vertical
4	5871.6787	51.17	18.65	106.23	55.06	150	264	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N20_5745	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 14:03:32

Test Graph

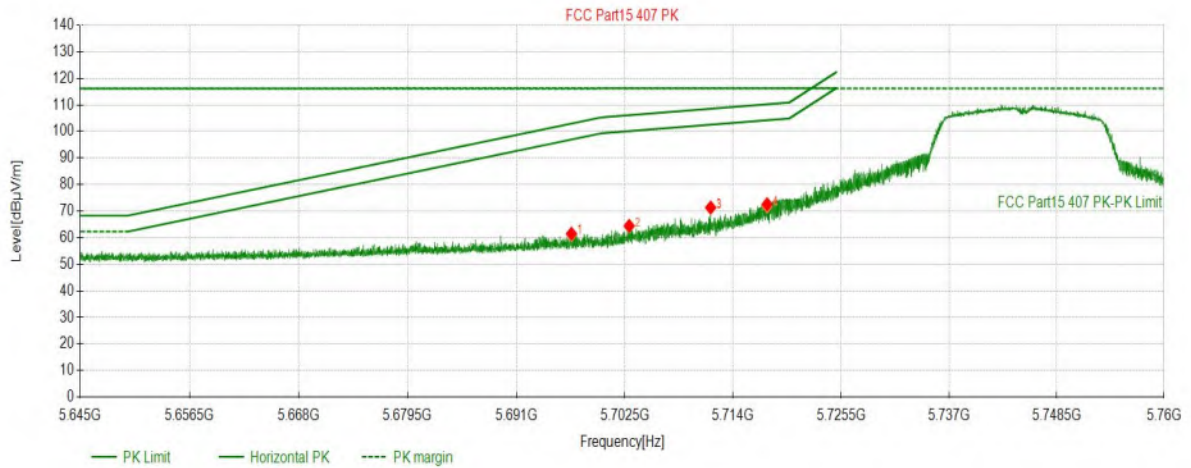


Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5696.8472	61.58	17.79	102.98	41.40	150	346	PK	Horizontal
2	5702.9658	64.48	17.83	106.13	41.65	150	304	PK	Horizontal
3	5711.6147	71.38	17.88	108.55	37.17	150	309	PK	Horizontal
4	5717.6183	72.61	17.91	110.23	37.62	150	304	PK	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N20_5745	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 14:04:44

Test Graph

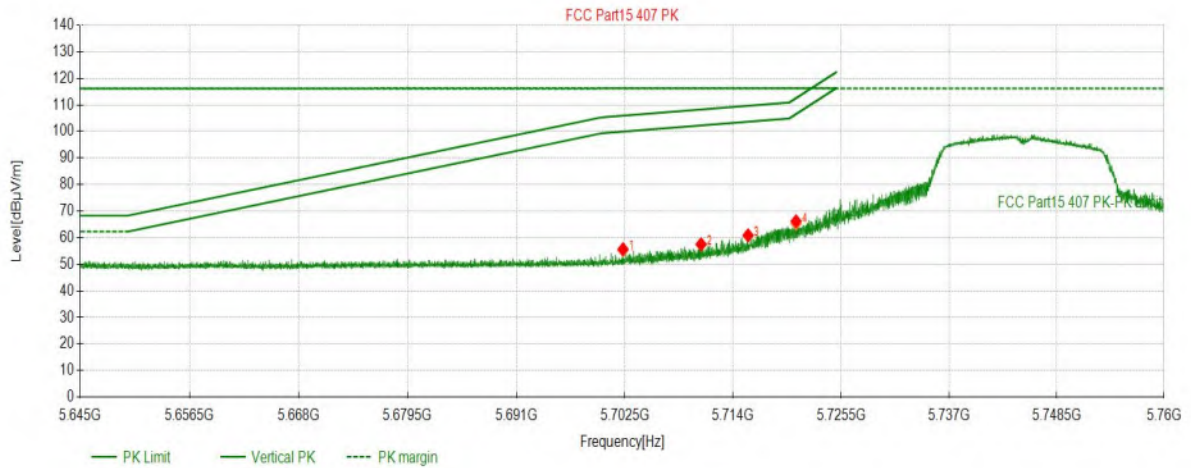


Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5702.3102	55.72	17.82	105.95	50.23	150	289	PK	Vertical
2	5710.6026	57.55	17.87	108.27	50.72	150	359	PK	Vertical
3	5715.5941	60.91	17.90	109.67	48.76	150	287	PK	Vertical
4	5720.7006	66.24	17.93	112.50	46.26	150	2	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N20_5825	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 14:08:16

Test Graph

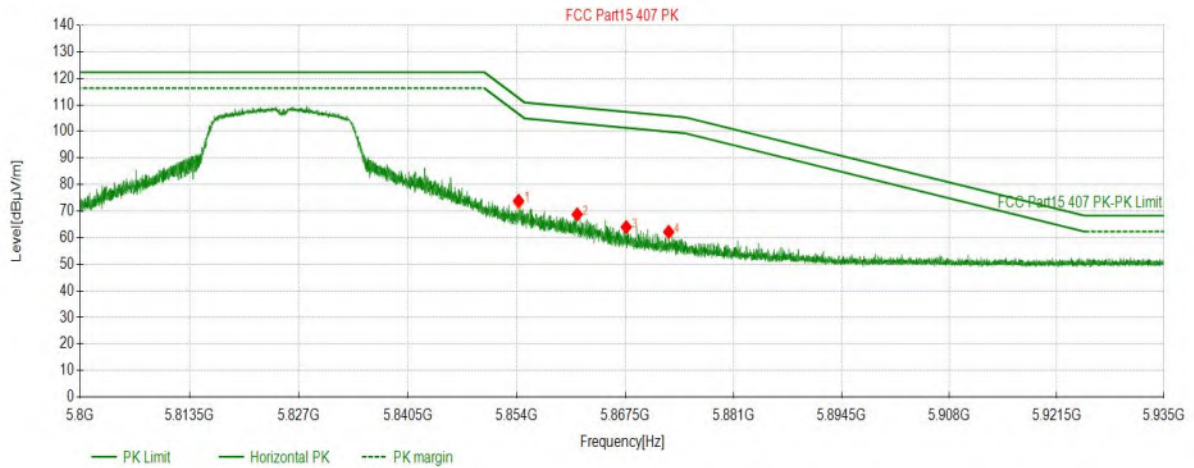


Suspected Data List									
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5854.2349	73.91	18.59	112.64	38.73	150	302	PK	Horizontal
2	5861.5257	68.80	18.61	109.07	40.27	150	311	PK	Horizontal
3	5867.6283	63.99	18.63	107.36	43.37	150	302	PK	Horizontal
4	5872.9208	62.23	18.65	105.88	43.65	150	311	PK	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N20_5825	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 14:09:28

Test Graph

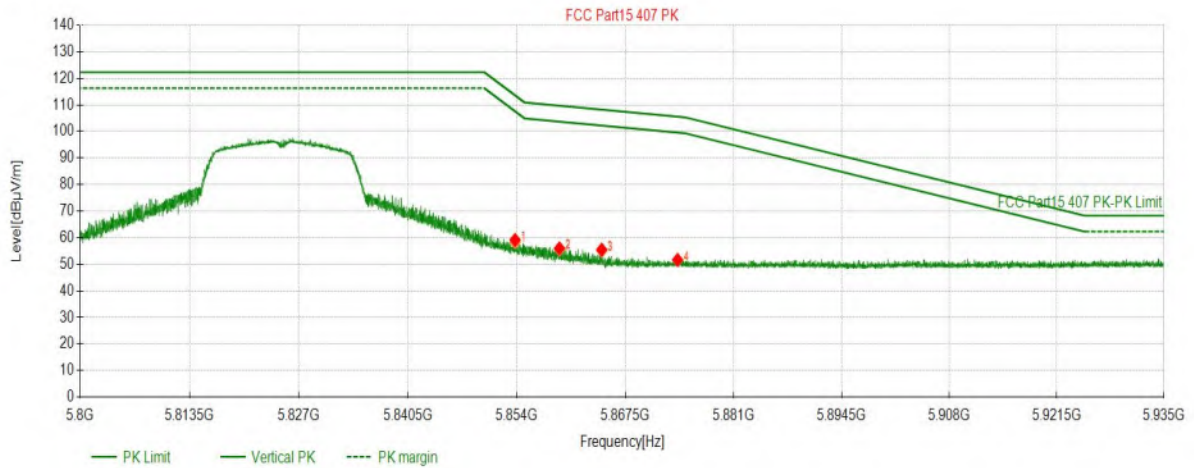


Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5853.8029	59.20	18.58	113.63	54.43	150	276	PK	Vertical
2	5859.3114	56.05	18.60	109.69	53.64	150	313	PK	Vertical
3	5864.5770	55.55	18.62	108.22	52.67	150	286	PK	Vertical
4	5874.0279	51.69	18.66	105.57	53.88	150	259	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N40_5755	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 14:12:37

Test Graph

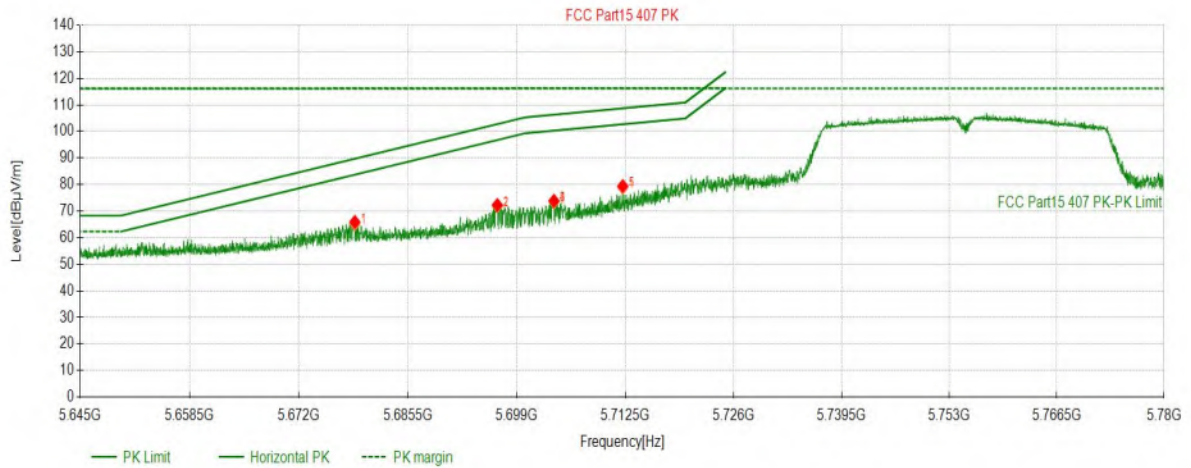

Suspected Data List


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5678.9154	65.97	17.65	89.74	23.77	150	312	PK	Horizontal
2	5696.5887	72.35	17.78	102.79	30.44	150	304	PK	Horizontal
3	5703.6229	73.91	17.83	106.32	32.41	150	308	PK	Horizontal
4	5703.6229	73.91	17.83	106.32	32.41	150	308	PK	Horizontal
5	5712.1827	79.47	17.88	108.71	29.24	150	0	PK	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N40_5755	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 14:13:52

Test Graph

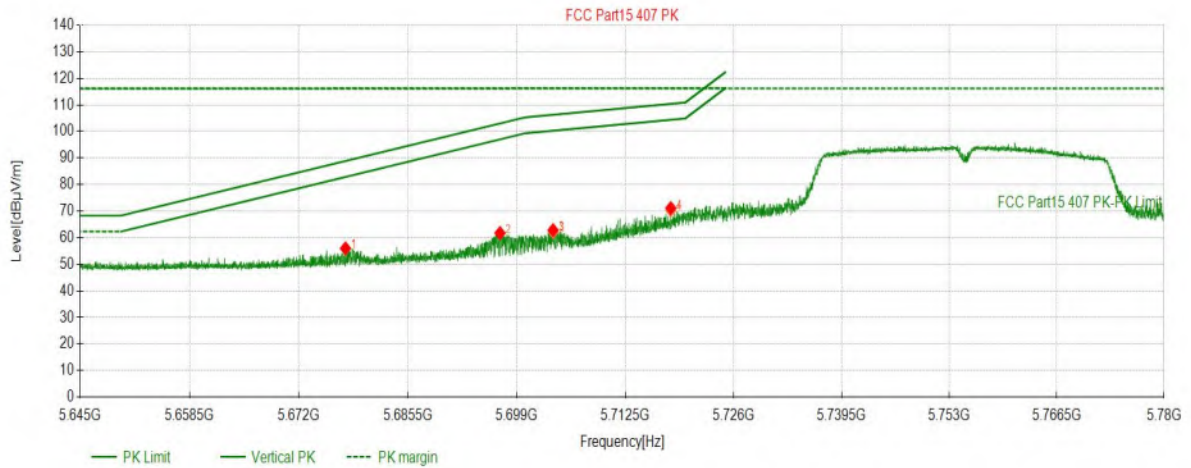


Suspected Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5677.7543	56.01	17.64	88.88	32.87	150	279	PK	Vertical
2	5696.9127	61.77	17.79	103.02	41.25	150	279	PK	Vertical
3	5703.5149	62.88	17.83	106.29	43.41	150	277	PK	Vertical
4	5718.1773	71.17	17.92	110.39	39.22	150	282	PK	Vertical

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N40_5795	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 14:16:41

Test Graph

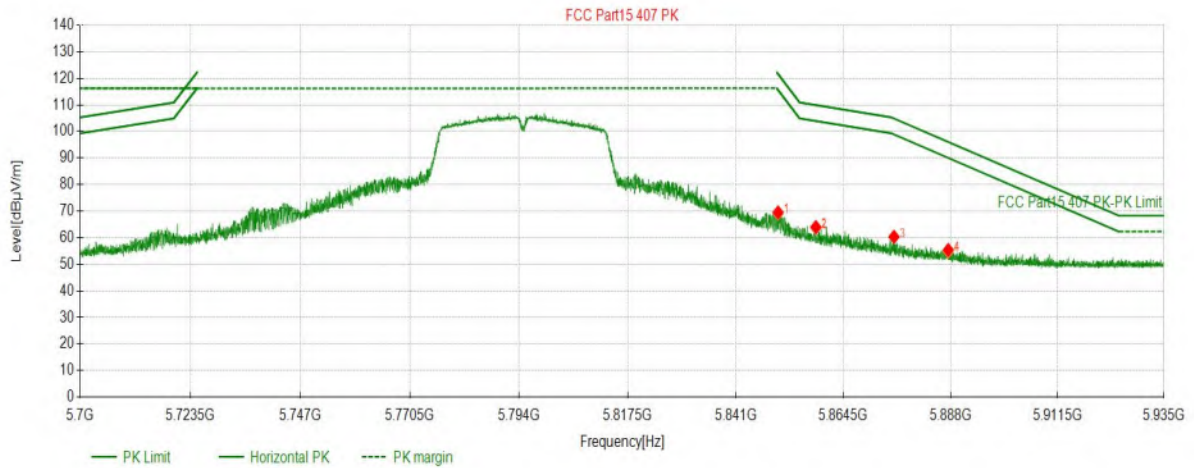

Suspected Data List


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5850.2270	69.54	18.57	121.78	52.24	150	303	PK	Horizontal
2	5858.4763	64.04	18.60	109.93	45.89	150	309	PK	Horizontal
3	5875.5626	60.35	18.66	104.88	44.53	150	309	PK	Horizontal
4	5887.4547	55.43	18.70	96.05	40.62	150	303	PK	Horizontal

Test Report

Project Information			
Customer:		EUT:	ePaper
Model:	SN03	SN:	
Mode:	11N40_5795	Voltage:	DC5V 1.5A
Environment:	23°C/57%	Engineer:	Kennys
Remark:	Power Set: 19.5		
Test Standard:			

Start of Test: 2023-04-25 14:17:55


Test Graph

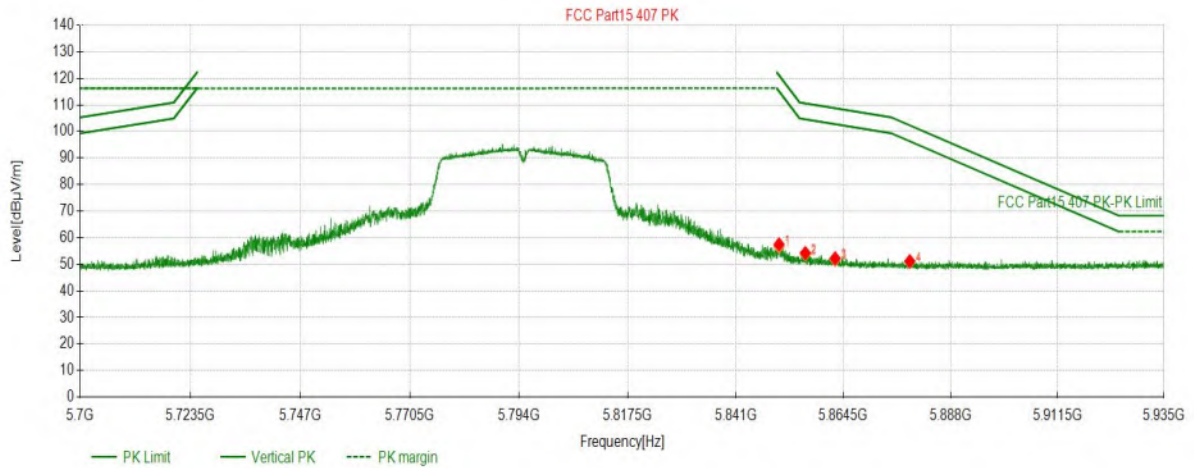

Suspected Data List									
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity
1	5850.4385	57.51	18.57	121.30	63.79	150	270	PK	Vertical
2	5856.1731	54.26	18.59	110.57	56.31	150	266	PK	Vertical
3	5862.6833	52.28	18.62	108.75	56.47	150	263	PK	Vertical
4	5879.0174	51.20	18.67	102.32	51.12	150	352	PK	Vertical

Conducted Emission Measurement

File : SN03 Data : #8 Date: 2023/4/22 Time: 9:42:28

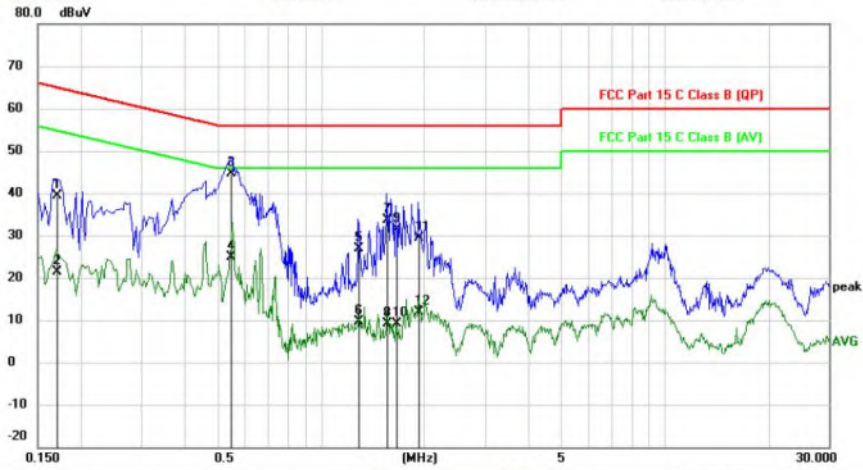

Site Phase: **L1** Temperature: 26
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %
 EUT: Epaper
 M/N: SN03
 Mode: 5G WiFi Mode
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1700	29.71	9.65	39.36	64.96	-25.60	QP	
2		0.1700	11.66	9.65	21.31	54.96	-33.65	AVG	
3	*	0.5460	34.75	9.77	44.52	56.00	-11.48	QP	
4		0.5460	15.22	9.77	24.99	46.00	-21.01	AVG	
5		1.2860	17.11	9.77	26.88	56.00	-29.12	QP	
6		1.2860	-0.03	9.77	9.74	46.00	-36.26	AVG	
7		1.5580	23.89	9.76	33.65	56.00	-22.35	QP	
8		1.5580	-0.54	9.76	9.22	46.00	-36.78	AVG	
9		1.6540	21.58	9.76	31.34	56.00	-24.66	QP	
10		1.6540	-0.70	9.76	9.06	46.00	-36.94	AVG	
11		1.9220	19.65	9.75	29.40	56.00	-26.60	QP	
12		1.9220	2.21	9.75	11.96	46.00	-34.04	AVG	

END OF REPORT