



■ Report No.: DDT-R22062203-2E05

■ Issued Date: Sep. 21, 2022

FCC CERTIFICATION TEST REPORT

FOR

Applicant	:	Guangzhou Shirui Electronics Co., Ltd
Address	:	192 Kezhu Road, Sciencetech Park, Guangzhou Economic Technology Development District, Guangzhou, China
Equipment under Test	:	Integrated video conference terminal
Model No.	:	UC S15, MS*****(*=0-9,A-Z or blank), UC S*****(*=0-9,A-Z or blank)
Trade Mark	:	MAXHUB
FCC ID	:	2AFG6-UCS15
Manufacturer	:	Guangzhou Shirui Electronics Co., Ltd
Address	:	192 Kezhu Road, Sciencetech Park, Guangzhou Economic Technology Development District, Guangzhou, China

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

TABLE OF CONTENTS

	Test report declares.....	4
1.	Summary of test results	6
2.	General test information.....	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT.....	7
2.3.	Assistant equipment used for test.....	7
2.4.	Block diagram of EUT configuration for test	8
2.5.	Deviations of test standard.....	8
2.6.	Test environment conditions	8
2.7.	Test laboratory	8
2.8.	Measurement uncertainty.....	9
3.	Equipment used during test	10
4.	6dB Bandwidth and 99% Bandwidth.....	11
4.1.	Block diagram of test setup.....	11
4.2.	Limits	11
4.3.	Test Procedure.....	11
4.4.	Test Result	12
4.5.	original test data	12
5.	Conducted peak Output Power.....	14
5.1.	Block diagram of test setup.....	14
5.2.	Limits	14
5.3.	Test Procedure.....	14
5.4.	Test Result	14
6.	Power Spectral Density.....	15
6.1.	Block diagram of test setup.....	15
6.2.	Limits	15
6.3.	Test Procedure.....	15
6.4.	Test Result	15
6.5.	original test data	16
7.	Band Edge Compliance (Conducted Method)	17
7.1.	Block diagram of test setup.....	17
7.2.	Limits	17
7.3.	Test procedure	17
7.4.	Test Result	17
7.5.	original test data	18
8.	Conducted Spurious Emissions (Conducted Method).....	20
8.1.	Block diagram of test setup.....	20

8.2.	Limits	20
8.3.	Test procedure	20
8.4.	Test Result	21
8.5.	original test data	21
9.	Radiated Spurious Emissions	24
9.1.	Block diagram of test setup	24
9.2.	Limit	25
9.3.	Test Procedure	26
9.4.	Test result	28
10.	Radiated Band Edge Compliance	39
10.1.	Block diagram of test setup	39
10.2.	Limit	39
10.3.	Test Procedure	39
10.4.	Test result	39
11.	Power Line Conducted Emission	44
11.1.	Block diagram of test setup	44
11.2.	Power Line Conducted Emission Limits (Class B)	44
11.3.	Test Procedure	44
11.4.	Test Result	45
12.	Antenna Requirements	48
12.1.	Limit	48
12.2.	Result	48
13.	Test setup photograph	49
14.	Photos of the EUT	51

TEST REPORT DECLARE

Applicant	:	Guangzhou Shirui Electronics Co., Ltd
Address	:	192 Kezhu Road, Sciencetech Park, Guangzhou Economic Technology Development District, Guangzhou, China
Equipment under Test	:	Integrated video conference terminal
Model No	:	UC S15, MS*****(*=0-9,A-Z or blank), UC S*****(*=0-9,A-Z or blank)
Trade Mark	:	MAXHUB
Manufacturer	:	Guangzhou Shirui Electronics Co., Ltd
Address	:	192 Kezhu Road, Sciencetech Park, Guangzhou Economic Technology Development District, Guangzhou, China

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C

Test procedure used:

ANSI C63.10:2013, 558074 D01 15.247 Meas Guidance v05r02, 662911 D01 Multiple Transmitter Output v02r01

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No:	DDT-R22062203-2E05		
Date of Receipt:	Aug. 02, 2022	Date of Test:	Aug. 02, 2022 ~ Sep. 20, 2022

Prepared By:

Johnny Wang

Johnny Wang/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision history

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Sep. 21, 2022	

1. Summary of test results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
6dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247 ANSI C63.10:2013	Pass
Conducted Output Power	FCC Part 15: 15.247 ANSI C63.10:2013	Pass
Power Spectral Density	FCC Part 15:15.247 ANSI C63.10:2013	Pass
Band-edge and Spurious Emissions (Conducted)	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013	Pass
Radiated Spurious Emissions	FCC Part 15: 15.247 ANSI C63.10:2013	Pass
Radiated Band Edge Compliance	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013	Pass
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10: 2013	Pass
Antenna requirement	FCC Part 15: 15.203	Pass

2. General test information

2.1. Description of EUT

EUT* Name	: Integrated video conference terminal
Model Number	: UC S15, MS*****(*=0-9,A-Z or blank), UC S*****(*=0-9,A-Z or blank)
Difference of models	: Above models are identical in schematic and structure, only the name is different for all the models, therefore the test performed on the model UC S15.
EUT function description	: Please reference user manual of this device
Power supply	: Input: 100-240V ~ 50/60Hz
Radio Technology	: IEEE 802.11n
FCC Operation frequency	: IEEE 802.11n HT20: 2437MHz
Modulation	: IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK)
Transmitter rate	: IEEE 802.11n HT20: up to 144.4 Mbps
Antenna Gain	: Antenna 1: PCB antenna, Maximum PK gain: 3.9 dBi : Antenna 2: PCB antenna, Maximum PK gain: 3.9 dBi
Sample Number	: S22062203-01 for conductive : S22062203-02 for radiation

Note: EUT is the ab. of equipment under test.

Antenna information			
	Ant1 gain	Ant2 gain	MIMO
IEEE 802.11n HT20	3.9	3.9	6.91

Channel	Frequency (MHz)
6	2437


2.2. Accessories of EUT

Assistant equipment	Manufacturer	Model number	Other
Switching adapter	Dong Guan City GangQi Electronic Co., Ltd.	GQ36-120300-AX	Input: 100-240V ~ 50/60Hz 1A MAX Output: DC 12V3A 36W
HDMI cable	N/A	N/A	Length: 1.6m
Remote control	N/A	N/A	N/A
Type-C cable	N/A	N/A	Length: 3.0m

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
N/A	N/A	N/A	N/A	N/A

2.4. Block diagram of EUT configuration for test



The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.

Test software: MobaXterm.exe

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, channel, and data rate information				
Mode	Setting Tx Power	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11n HT20	/	MCS 0	CH6	2437

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No Deviation

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+21 °C to +25 °C
Humidity range:	40% to 75%
Pressure range:	86 kPa to 106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 × 10 ⁻⁸ (Antenna couple method)
	5.5 × 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 22 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3 × 10 ⁻⁸
Temperature	0.4 °C
Humidity	2%
Uncertainty for Radiation Emission test (30 MHz-1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz-40 GHz)	4.10 dB (1-6 GHz)
	4.40 dB (6 GHz-18 GHz)
	3.54 dB (18 GHz-26 GHz)
	4.30 dB (26 GHz-40 GHz)
Uncertainty for Power line conduction emission test	3.32 dB (150 kHz-30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment used during test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☑RF Connected Test (Tonscend RF Measurement System 3#)					
SPECTRUM ANALYZER	R&S	FSV40	101407	Jul. 21, 2022	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	May 18, 2022	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	May 18, 2022	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	May 18, 2022	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC01449	May 18, 2022	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	May 26, 2022	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.6.77.0518	N/A	N/A
☑Radiation 3#chamber					
EMI Test Receiver	R&S	ESU	100472	May 18, 2022	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	May 18, 2022	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 19, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Jul. 22, 2022	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA 9120 D	02468	Nov. 29, 2021	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 06, 2022	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Sep. 02, 2021	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Aug. 27, 2022	1 Year
Pre-amplifier	COM-POWER	PAM-840A	461369	Apr. 11, 2022	1 Year
Test software	Audix	E3	V 6.1.1.1	N/A	N/A
☑Power Line Conducted Emissions Test 1#					
Test Receiver	R&S	ESCI	100551	Sep. 02, 2021	1 Year
Test Receiver	R&S	ESCI	100551	Aug. 26, 2022	1 Year
LISN 1	R&S	ENV216	101109	Sep. 07, 2021	1 Year
LISN 1	R&S	ENV216	101109	Aug. 26, 2022	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 07, 2021	1 Year
LISN 2	R&S	ESH2-Z5	100309	Aug. 26, 2022	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 02, 2021	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Aug. 26, 2022	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 02, 2021	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Aug. 26, 2022	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. 6dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

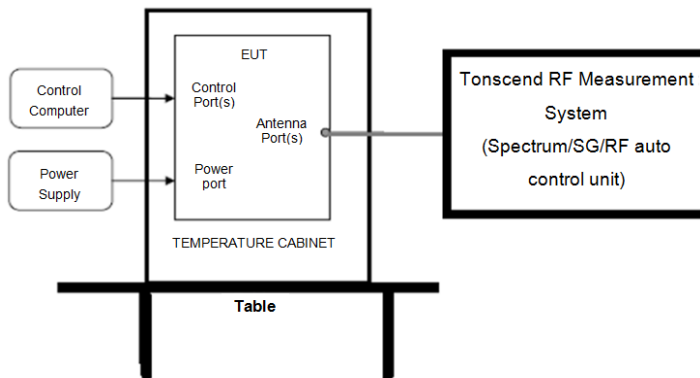

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) 99% Bandwidth set the spectrum analyzer as follows:

RBW:	300 kHz
VBW:	1 MHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) 6dB Bandwidth set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(4) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


4.4. Test Result

Test Mode	Test	Ant	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
11N20MIMO	2437	Ant1	16.00	0.5	Pass
11N20MIMO	2437	Ant2	17.52	0.5	Pass



Test Mode	Test	Ant	99% OBW [MHz]	Limit [MHz]	Verdict
11N20MIMO	2437	Ant1	17.78	---	Pass
11N20MIMO	2437	Ant2	17.66	---	Pass

4.5. original test data

6 dB bandwidth:

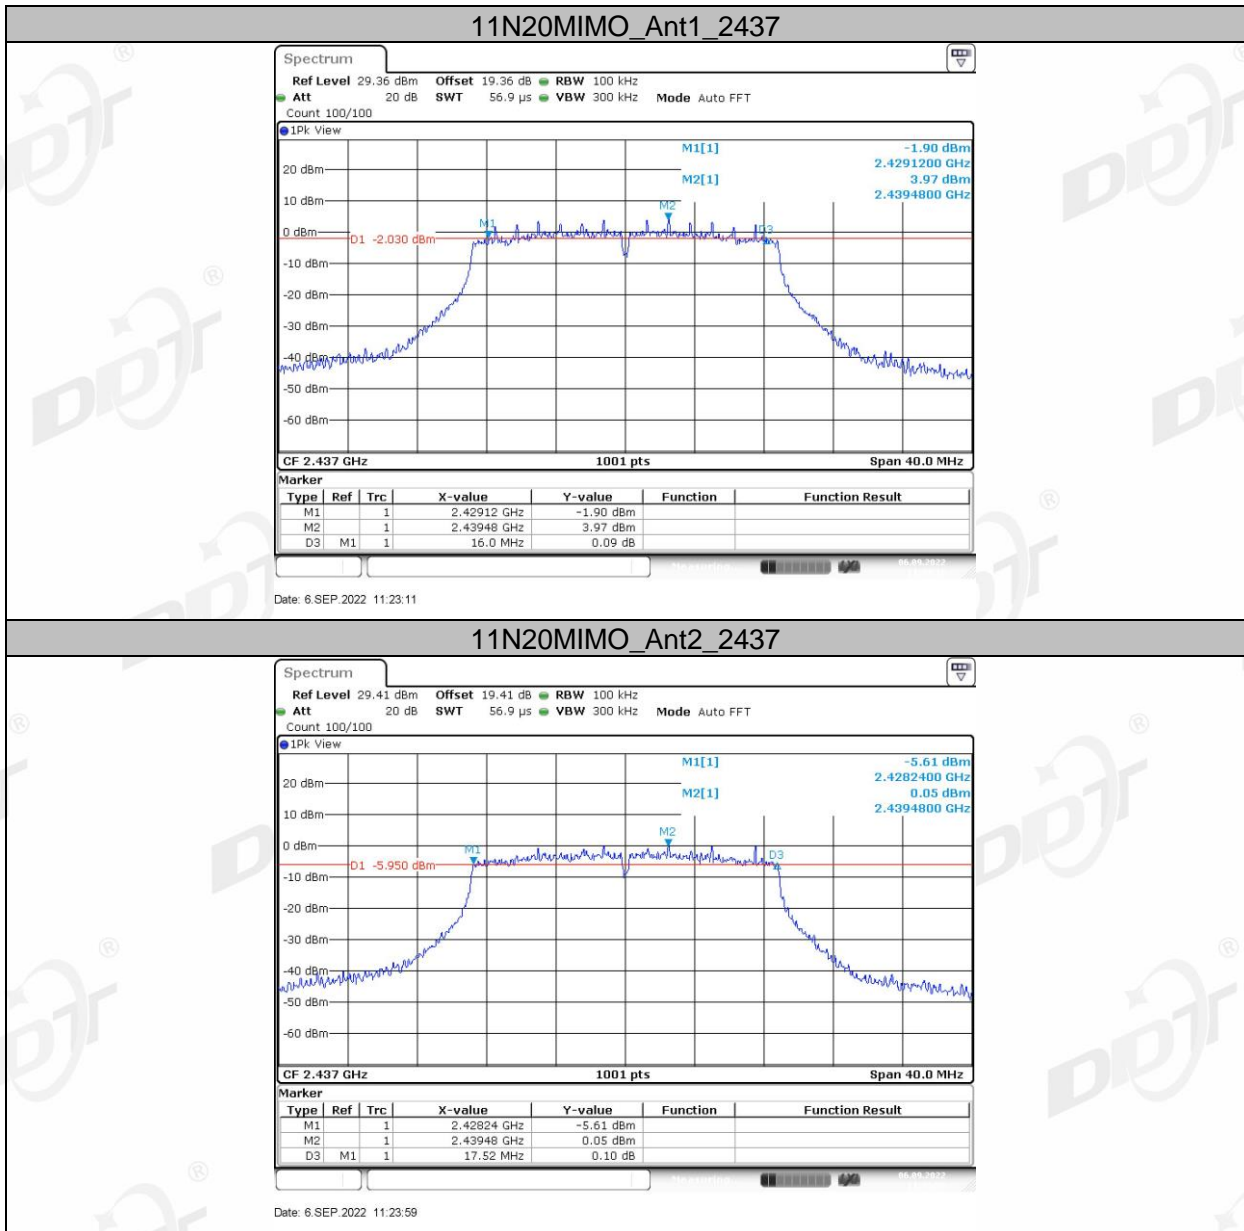

99% bandwidth:

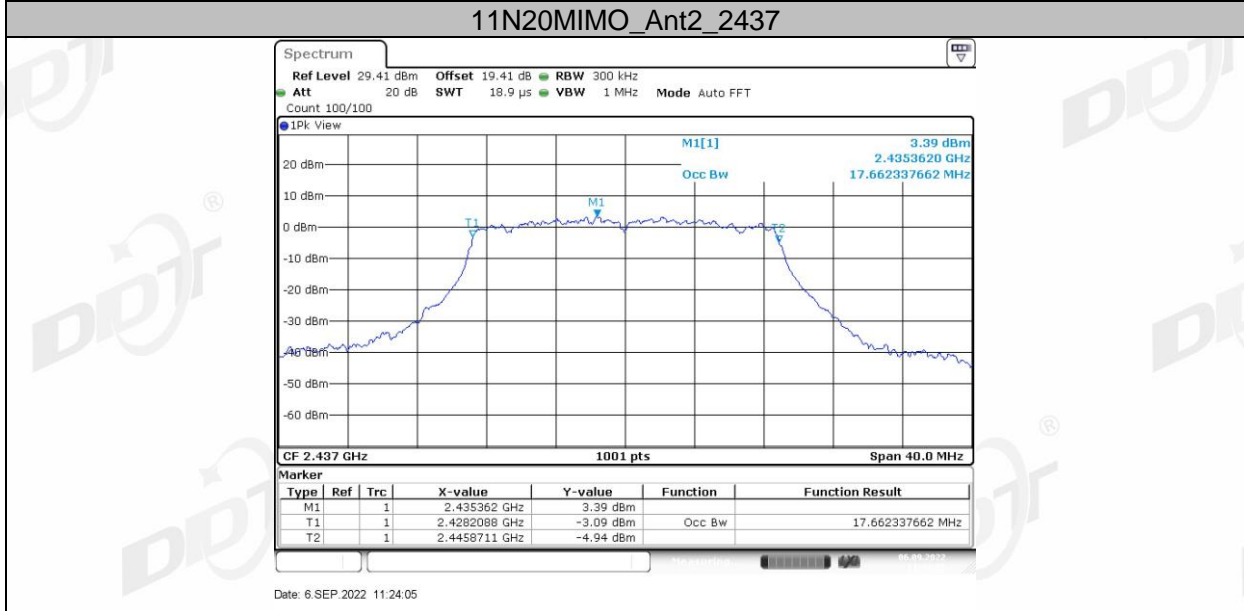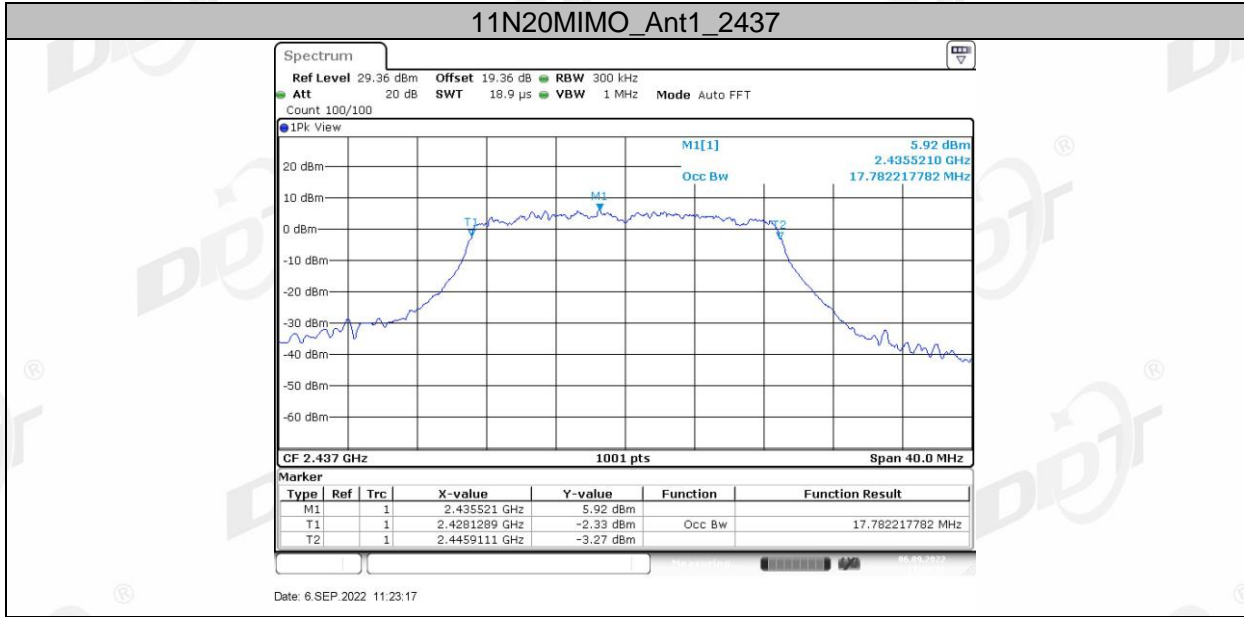

5. Conducted peak Output Power

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test Procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the PK output power of each antenna port by power meter.

5.4. Test Result

Test Mode	Antenna	Channel	Conducted Output Power (dBm)	Limit [dBm]	Verdict
11N20MIMO	Ant1	2437	15.29	<=30	Pass
	Ant2	2437	12.85	<=30	Pass
	total	2437	17.25	<=30	Pass

8800+8822

Test Mode	Antenna	Channel	Conducted Output Power (dBm)	Limit [dBm]	Verdict
11N20MIMO	total	2437	18.48	<=30	Pass

Test Mode	Antenna	Channel	EIRP (dBm)	Limit [dBm]	Verdict
11N20MIMO	Ant1	2437	19.19	<=36	Pass
	Ant2	2437	16.75	<=36	Pass
	total	2437	24.16	<=36	Pass

Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)

8800+8822

Test Mode	Antenna	Channel	EIRP (dBm)	Limit [dBm]	Verdict
11N20MIMO	total	2437	24.82	<=36	Pass

6. Power Spectral Density

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	Max hold

- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
- (4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


6.4. Test Result

Test Mode	Test Channel	Ant	PSD [dBm]	Limit [dBm/3kHz]	Verdict
11N20MIMO	2437	ANT1	-16.58	8.00	Pass
11N20MIMO	2437	ANT2	-19.11	8.00	Pass
11N20MIMO	2437	total	-14.65	8.00	Pass

8800+8822

Test Mode	Test Channel	Ant	PSD [dBm]	Limit [dBm/3kHz]	Verdict
11N20MIMO	2437	total	-13.82	8.00	Pass

6.5. original test data

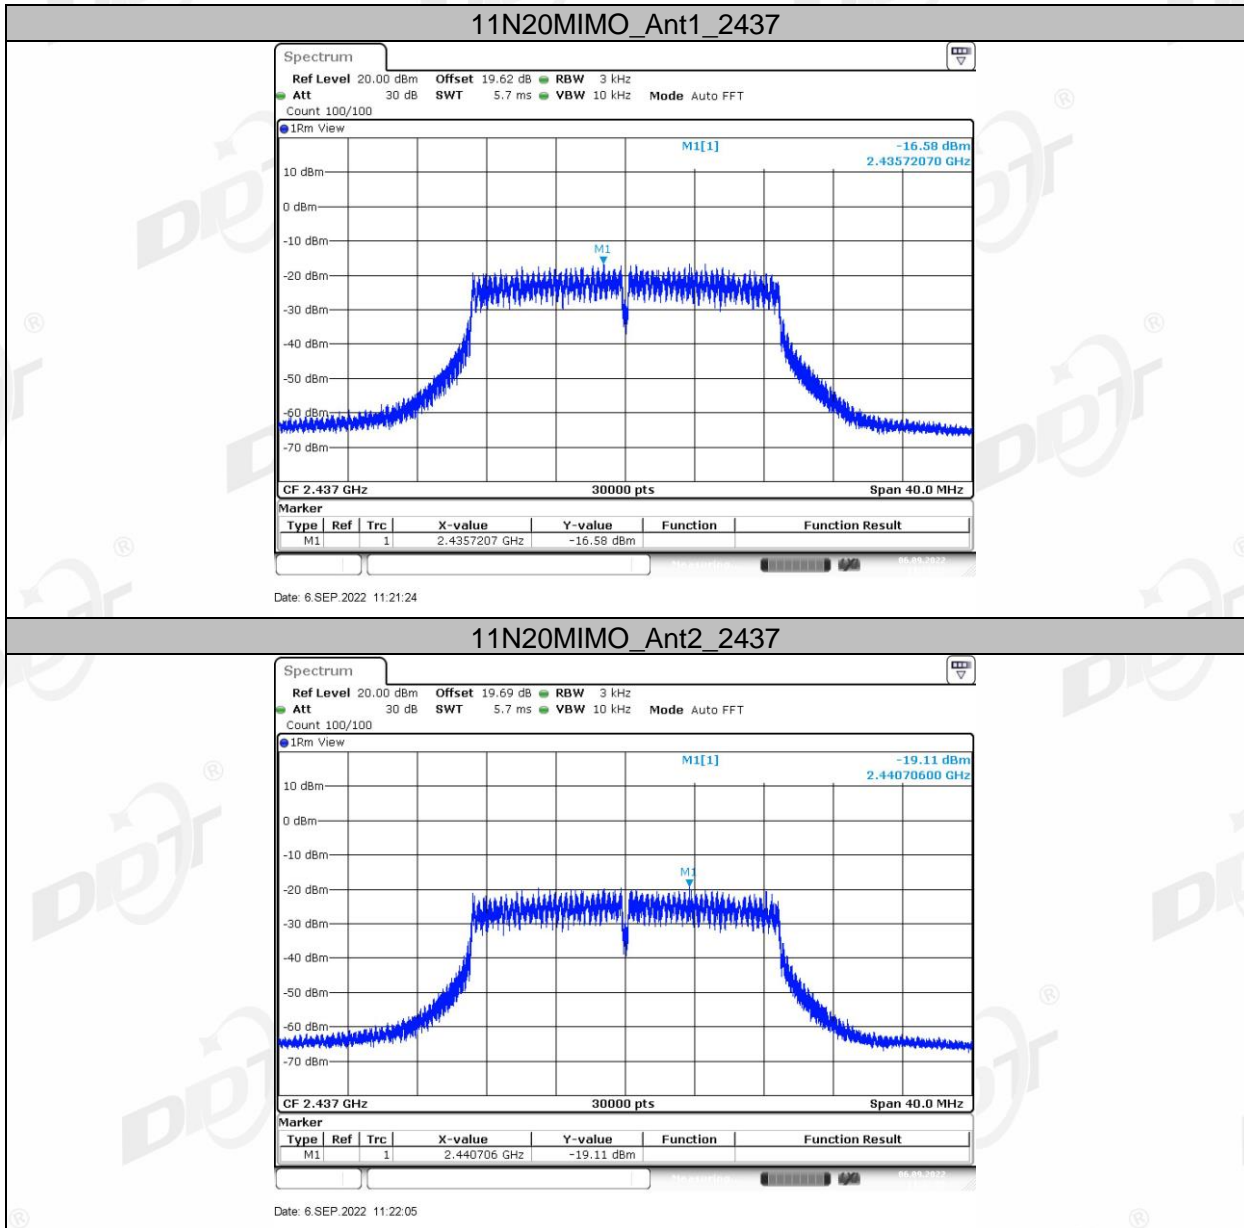

7. Band Edge Compliance (Conducted Method)

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.

7.4. Test Result


EUT Set Mode	CH or Frequency	Result (dBm)
11n HT 20	CH6	Pass

7.5. original test data

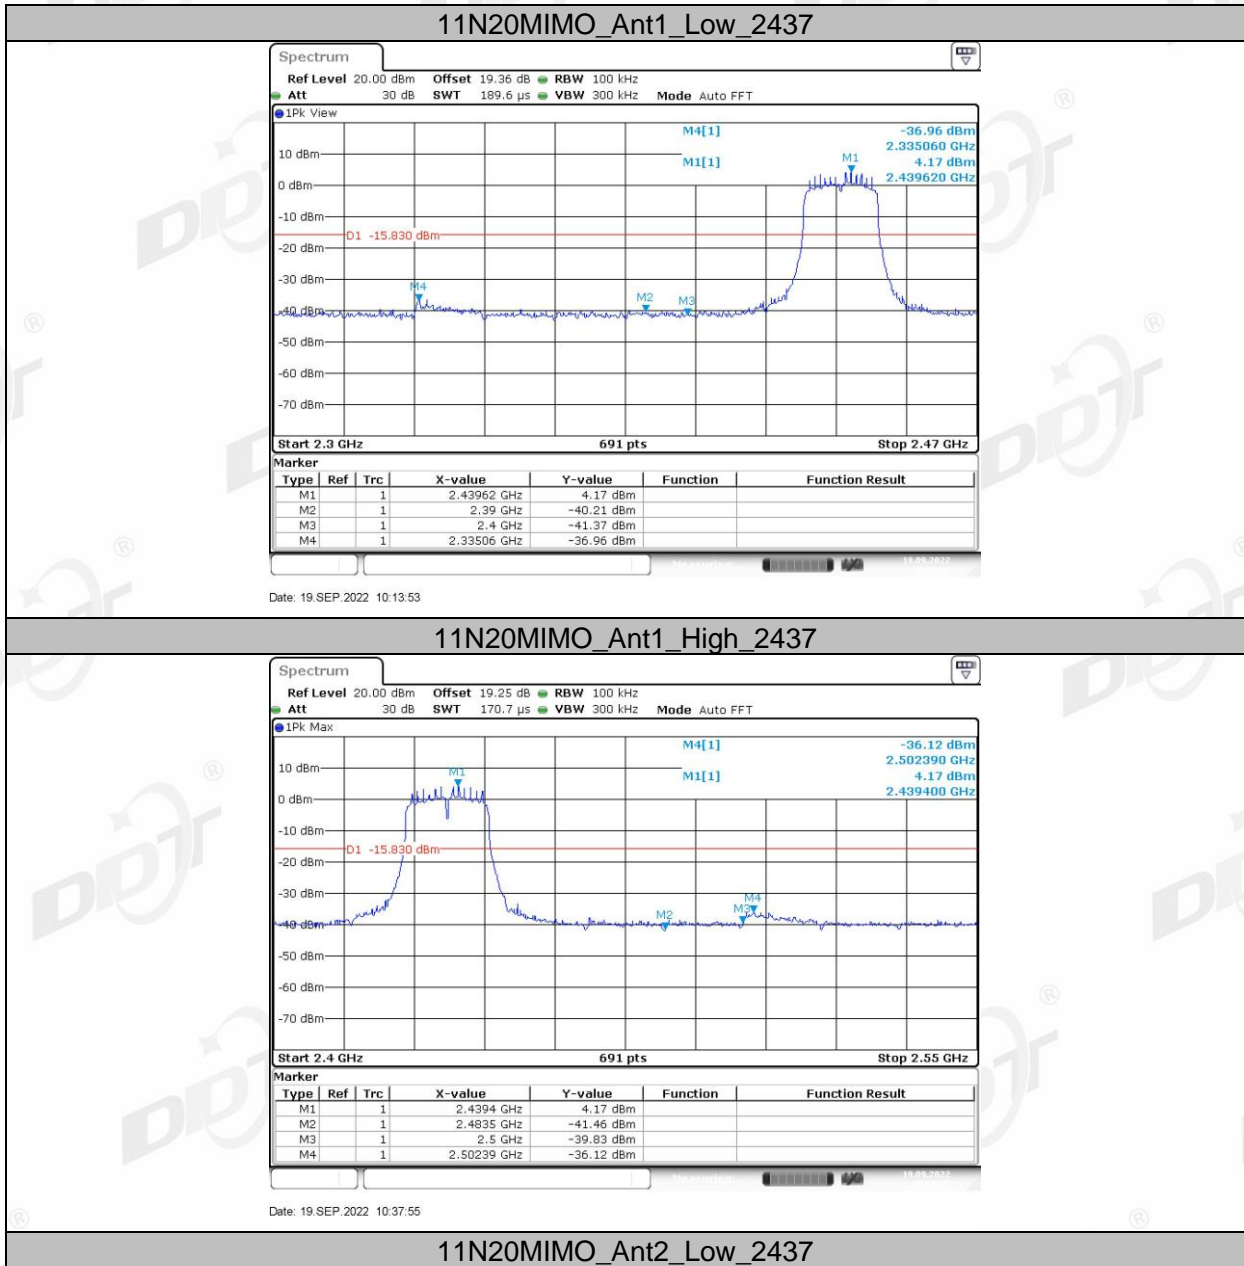

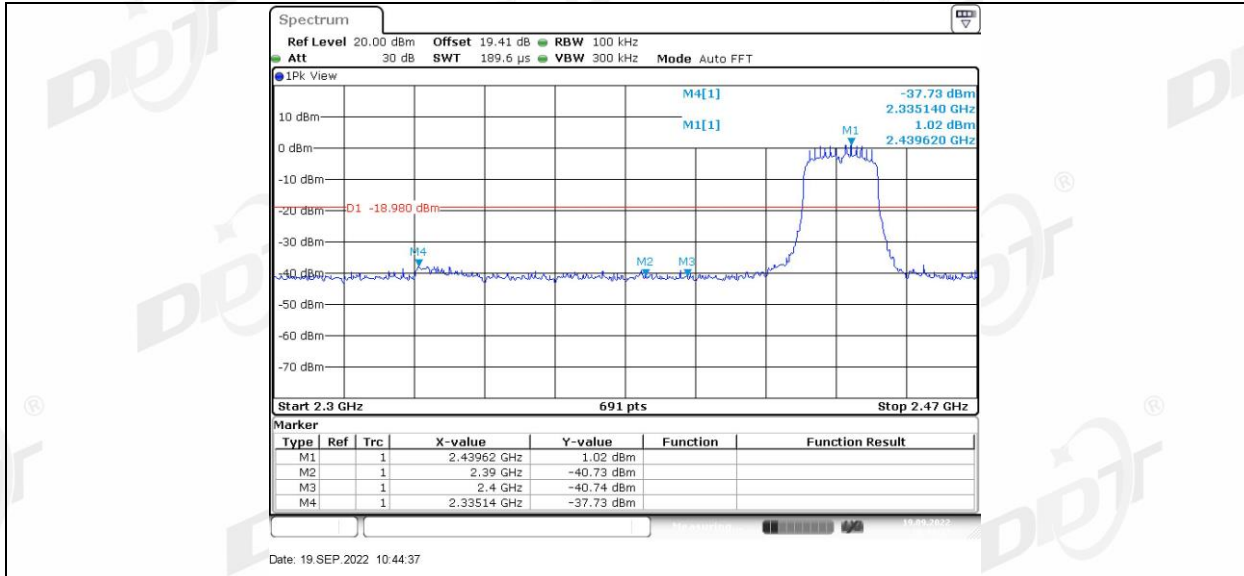

11N20MIMO_Ant2_High_2437

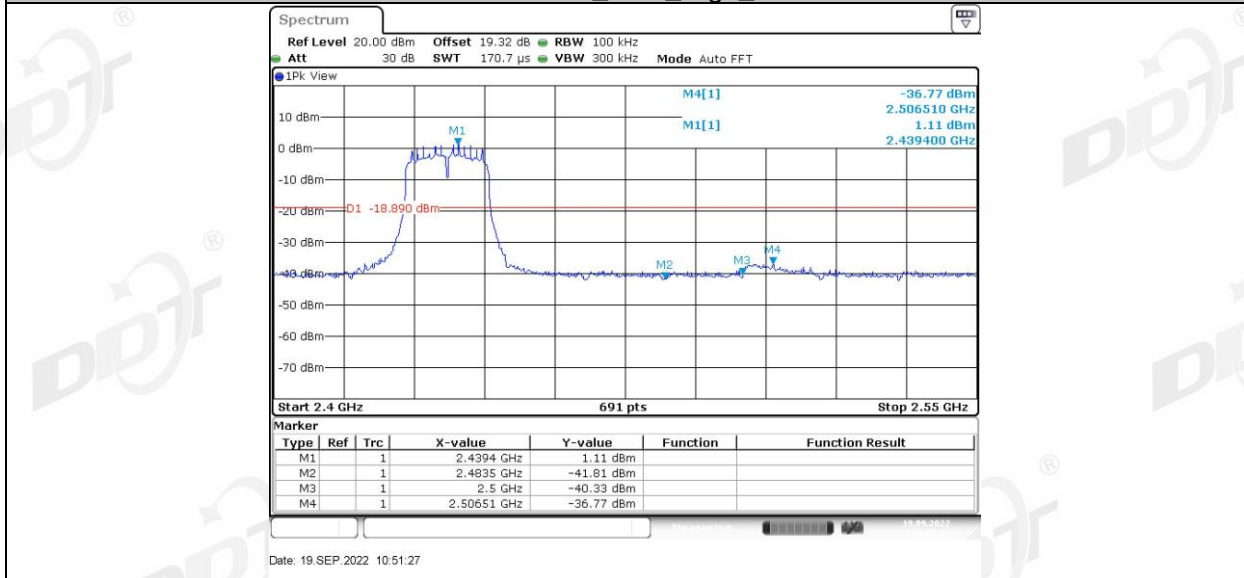

8. Conducted Spurious Emissions (Conducted Method)

8.1. Block diagram of test setup

Same as section 4.1

8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

8.4. Test Result


EUT Set Mode	CH or Frequency	Result (dBm)
11n HT 20	CH6	Pass

8.5. original test data

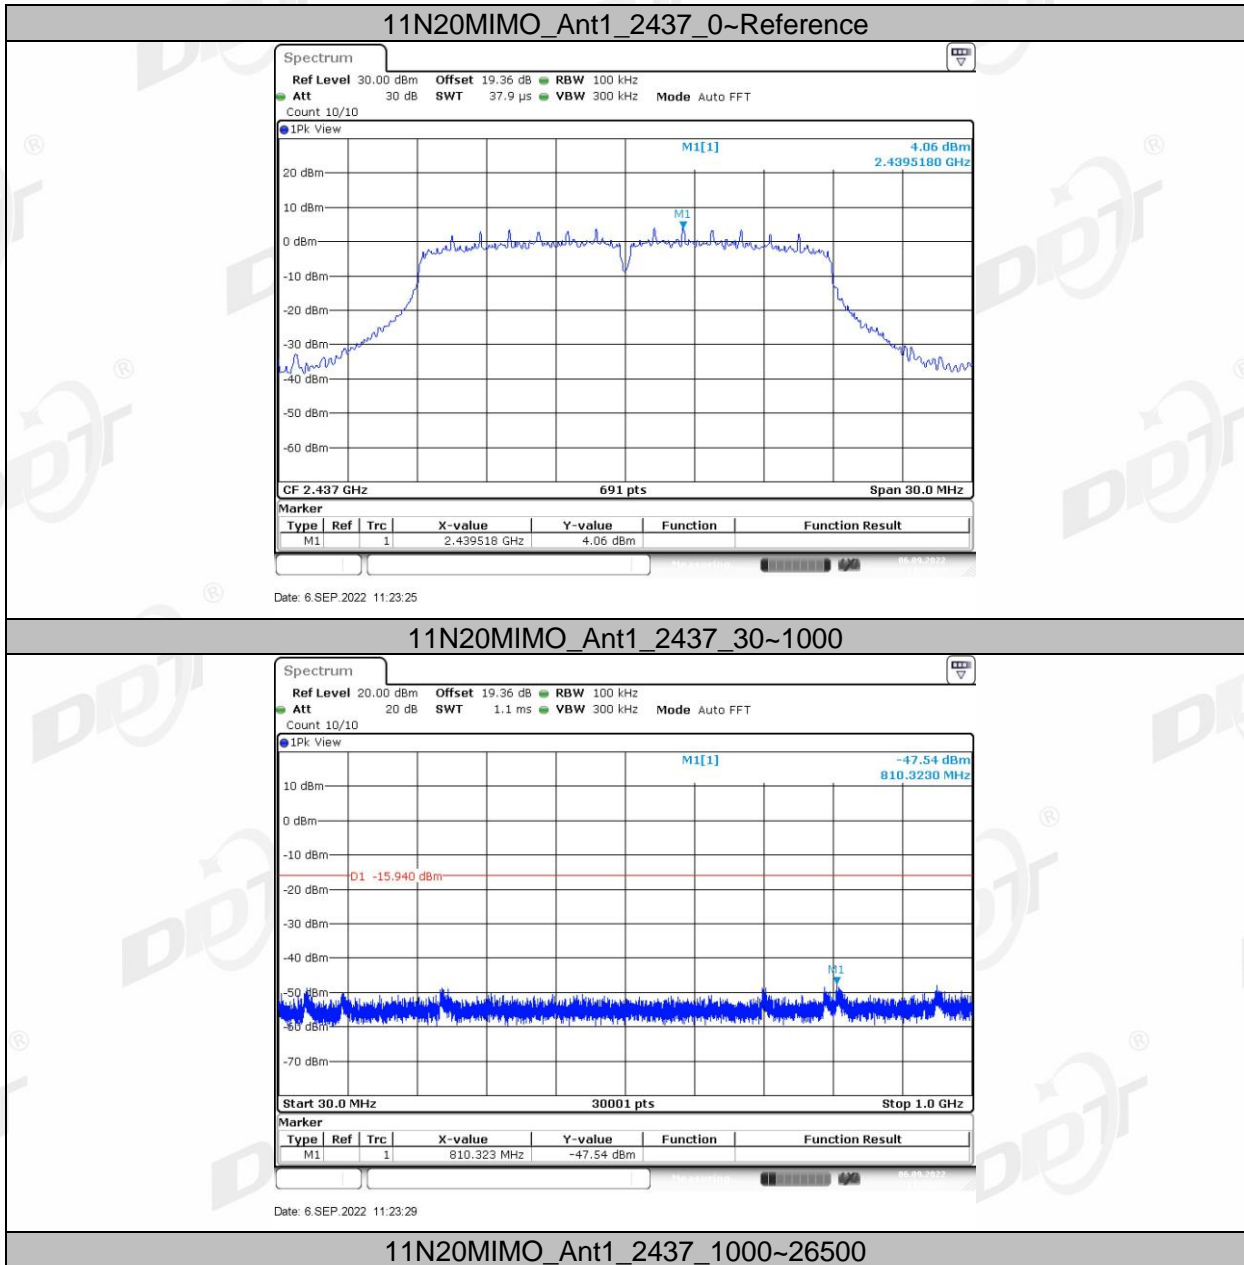


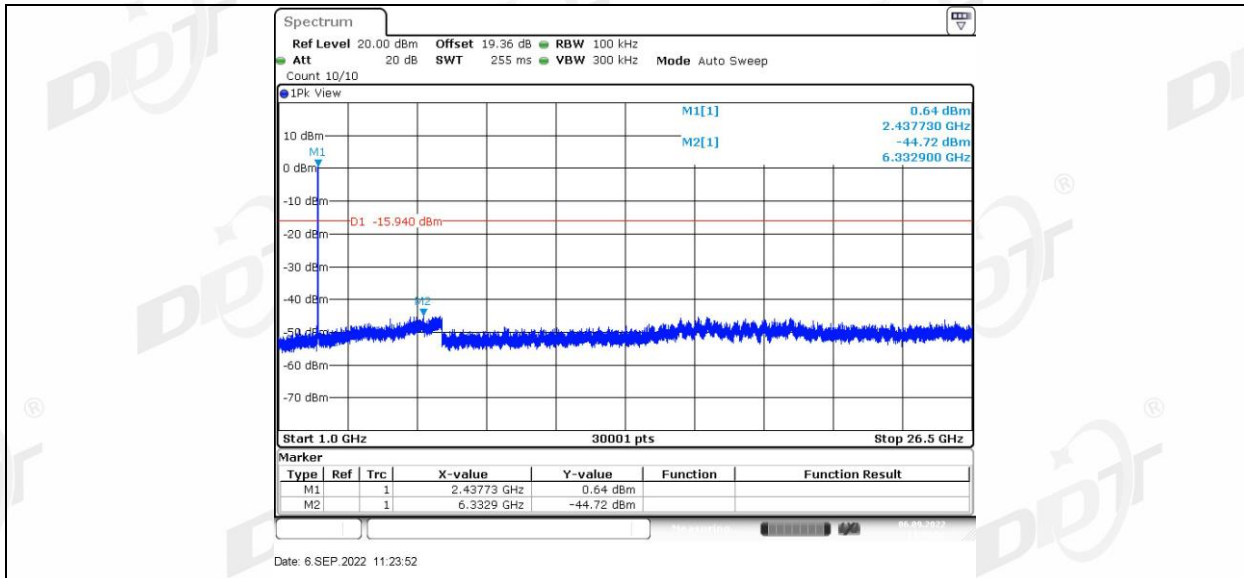


11N20MIMO_Ant2_2437_0~Reference

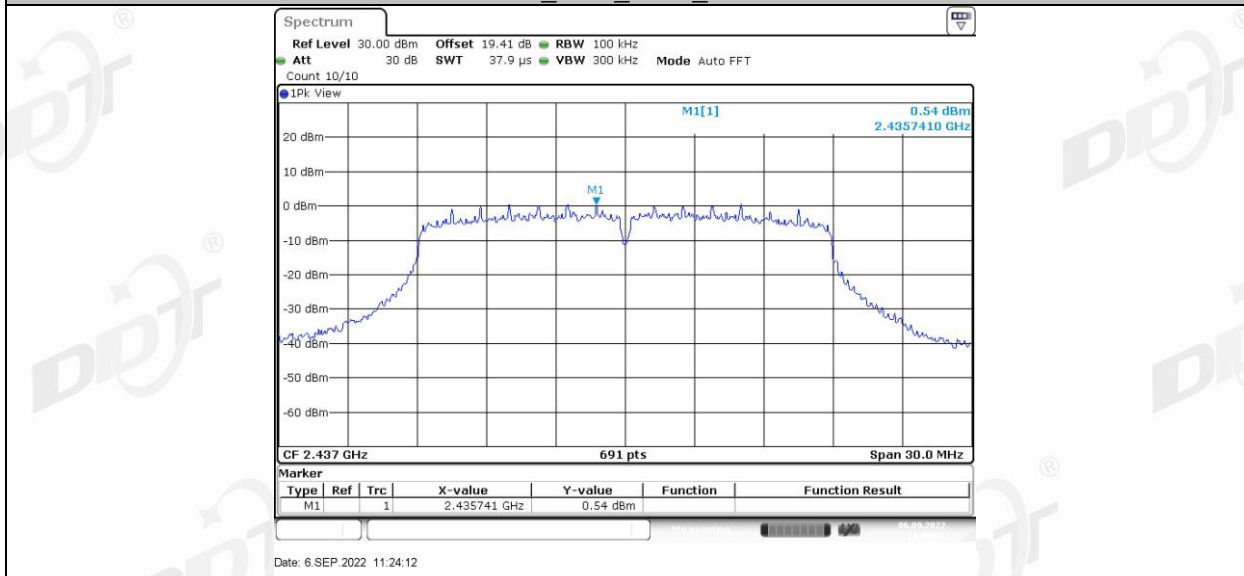

11N20MIMO_Ant2_2437_30~1000

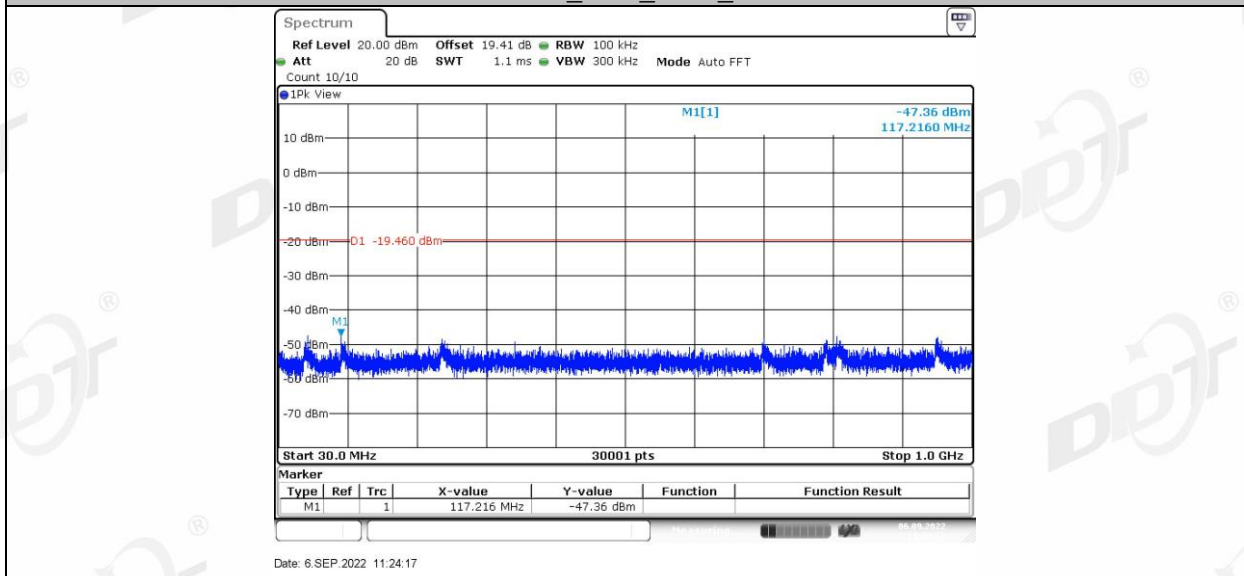


11N20MIMO_Ant2_2437_1000~26500

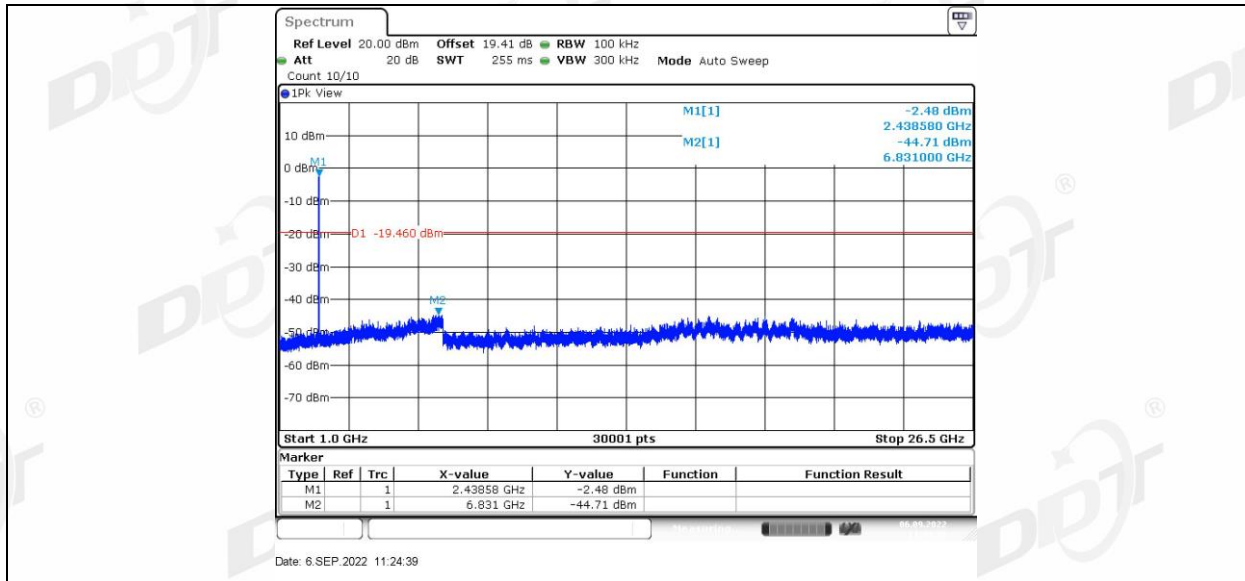


9. Radiated Spurious Emissions

9.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

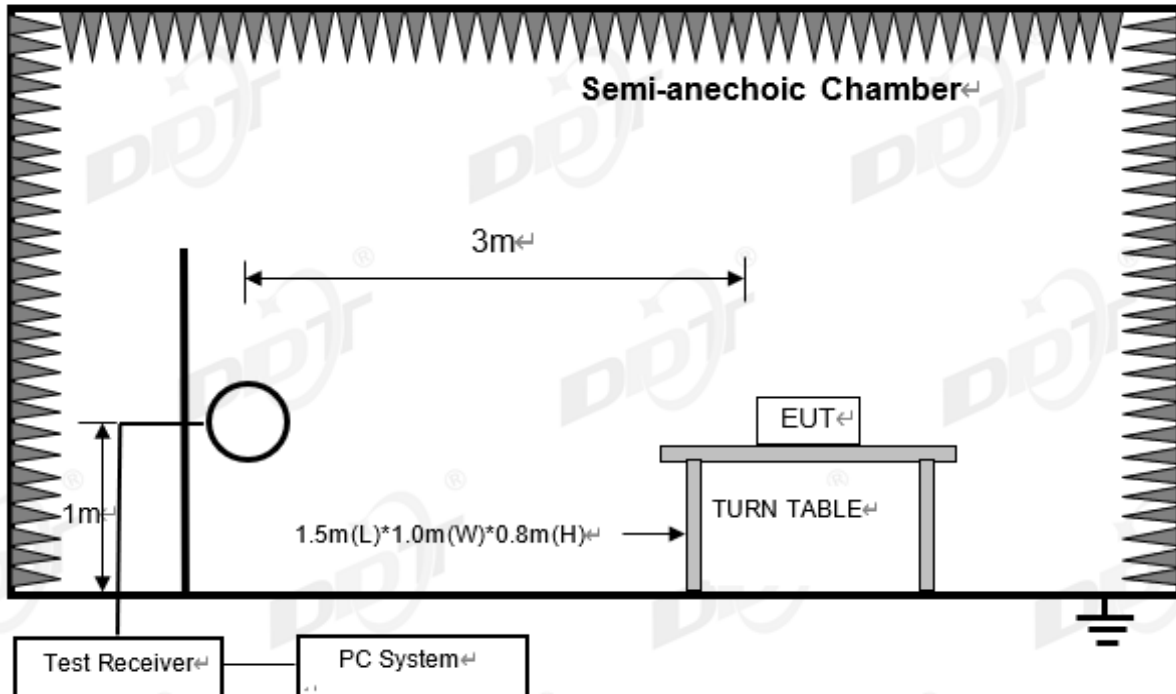

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

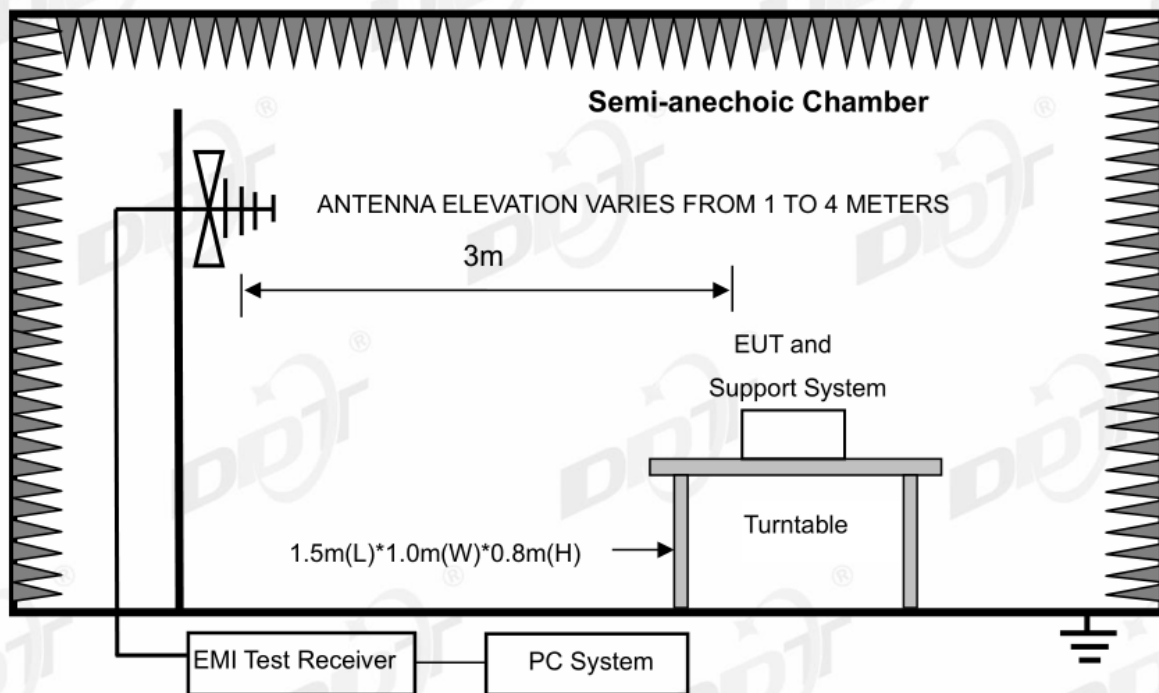

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

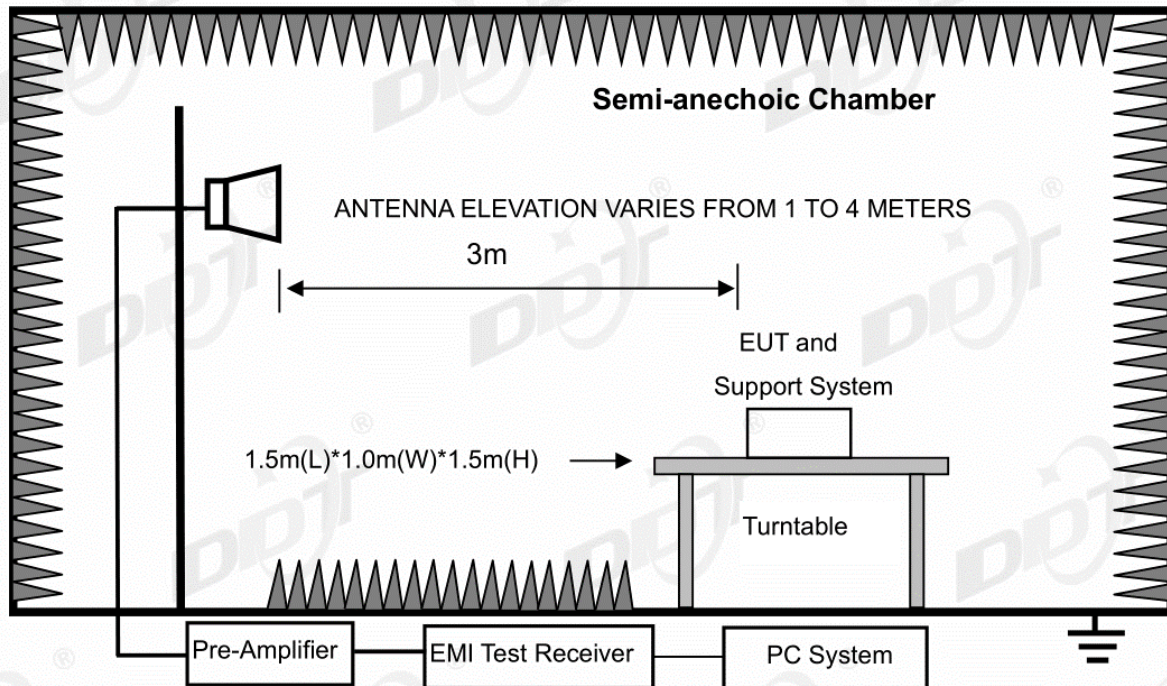

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

9.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

9.3. Test Procedure

(1) EUT height should be 0.8 m for below 1 GHz at a semi-anechoic chamber while EUT height should be 1.5 m for above 1 GHz at full chamber or semi-anechoic chamber ground with absorbers.

(2) The antenna used as below table.

Test frequency range	Test antenna used	Measuring distance
9 kHz-30 MHz	Active Loop antenna	3 m
30 MHz-1 GHz	Trilog Broadband Antenna	3 m
1 GHz-18 GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18 GHz-40 GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30 MHz, the Trilog Broadband Antenna or

Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9kHz to 18GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90 kHz, 110 kHz-490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; RMS detector RBW 1 MHz VBW 10 Hz for Average measure (according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

9.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is MIMO of 802.11n20 mode)


Note3: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in MIMO of 802.11n20 mode.

Note4: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 3#	D:\E3 6.111\2022 Report Data\Q22062203-2E
Test Date	: 2022-08-12	UCS15\8822\FCC BELOW 1G.EM6
EUT	: Integrated video conference terminal	Tested By : Bairong
Power Supply	: AC 120V/60Hz	Model Number : UC S15
Condition	: Temp:22.8°C,Humi:59.1%,Press:100.1kPa	Test Mode : Tx Mode
Memo	: 2.4GWIFI	Antenna/Distance : 2022 9161 #3/3m/HORIZONTAL

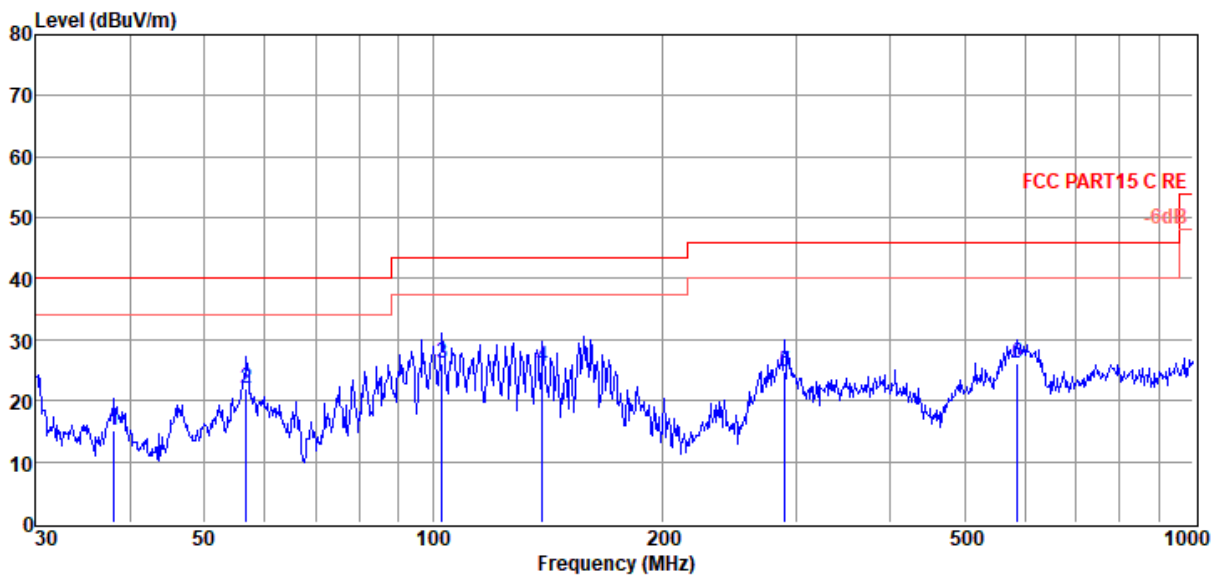


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	38.08	31.88	12.02	3.60	15.22	40.00	-24.78	QP	HORIZONTAL
2	56.79	39.18	11.48	3.73	22.12	40.00	-17.88	QP	HORIZONTAL
3	102.72	41.68	12.57	4.00	26.01	43.50	-17.49	QP	HORIZONTAL
4	139.36	36.85	16.71	4.21	25.58	43.50	-17.92	QP	HORIZONTAL
5	290.02	39.48	12.90	4.79	24.87	46.00	-21.13	QP	HORIZONTAL
6	586.84	34.14	18.84	5.70	25.98	46.00	-20.02	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\8822\FCC BELOW 1G.EM6
Test Date : 2022-08-12 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15
Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode
Condition : Temp:22.8°C,Humi:59.1%,Press:100.1kPa **Antenna/Distance** : 2022 9161 #3/3m/VERTICAL
Memo : 2.4GWIFI

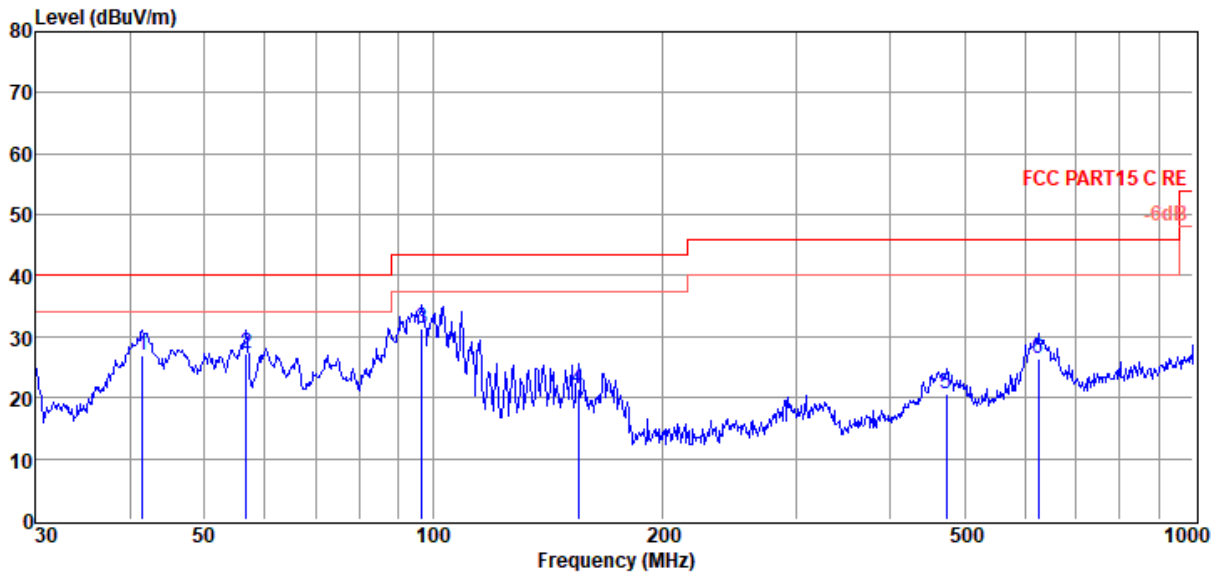

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	41.42	43.18	12.44	3.62	26.96	40.00	-13.04	QP	VERTICAL
2	56.79	44.16	11.48	3.73	27.10	40.00	-12.90	QP	VERTICAL
3	96.78	47.41	12.08	3.97	31.22	43.50	-12.28	QP	VERTICAL
4	155.36	31.27	18.07	4.28	21.43	43.50	-22.07	QP	VERTICAL
5	473.84	30.60	17.20	5.40	20.70	46.00	-25.30	QP	VERTICAL
6	625.08	33.87	19.60	5.80	26.51	46.00	-19.49	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1 GHz)


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-08-29
EUT : Integrated video conference terminal
Power Supply : AC 120V/60Hz
Condition : Temp:23.1°C,Humi:51.5%,Press:100.3kPa
Memo : 11N20 2437

Tested By : Bairong
Model Number : UC S15
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D
 3#/3m/HORIZONTAL

D:\E3 6.111\2022 Report Data\Q22062203-2E
 UCS15\8822\FCC ABOVE 1G.EM6

Data: 1

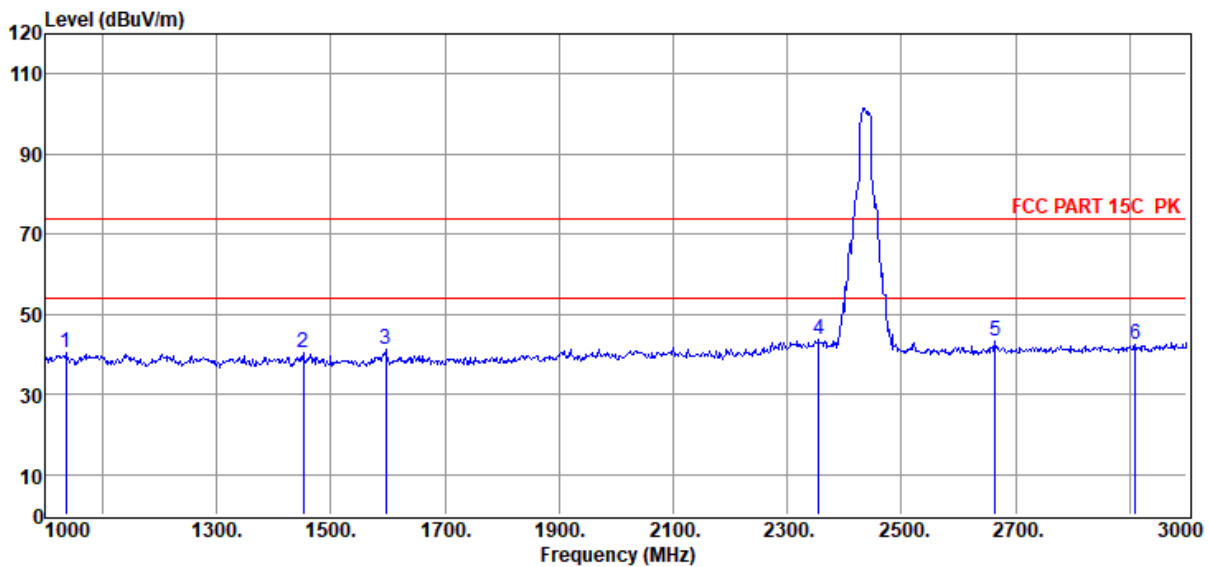

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1036.00	51.35	25.49	37.95	1.12	0.51	40.52	74.00	-33.48	Peak	HORIZONTAL
2	1452.00	51.77	25.41	38.58	1.35	0.58	40.53	74.00	-33.47	Peak	HORIZONTAL
3	1596.00	52.38	25.65	38.79	1.42	0.61	41.27	74.00	-32.73	Peak	HORIZONTAL
4	2356.00	53.67	27.34	39.58	1.70	0.72	43.85	74.00	-30.15	Peak	HORIZONTAL
5	2664.00	52.17	28.22	39.73	1.78	0.75	43.19	74.00	-30.81	Peak	HORIZONTAL
6	2910.00	50.57	29.16	39.86	1.85	0.78	42.50	74.00	-31.50	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\8822\FCC ABOVE 1G.EM6
Test Date : 2022-08-29 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15
Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode
Condition : Temp:23.1°C,Humi:51.5%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL
Memo : 11N20 2437

Data: 2

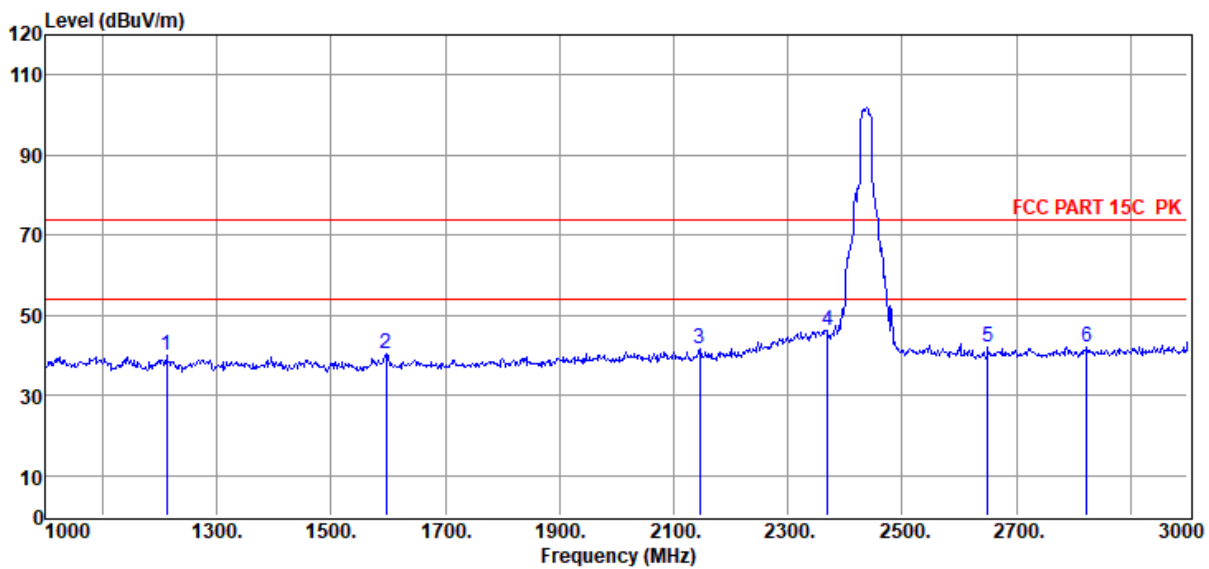


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1212.00	50.96	25.46	38.22	1.22	0.54	39.96	74.00	-34.04	Peak	VERTICAL
2	1596.00	51.37	25.65	38.79	1.42	0.61	40.26	74.00	-33.74	Peak	VERTICAL
3	2146.00	51.99	26.96	39.47	1.64	0.70	41.82	74.00	-32.18	Peak	VERTICAL
4	2370.00	56.18	27.37	39.59	1.70	0.72	46.38	74.00	-27.62	Peak	VERTICAL
5	2650.00	51.16	28.17	39.73	1.78	0.75	42.13	74.00	-31.87	Peak	VERTICAL
6	2824.00	50.50	28.83	39.81	1.82	0.77	42.11	74.00	-31.89	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\8822\FCC ABOVE 1G.EM6
Test Date : 2022-08-29 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15
Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode
Condition : Temp:23.1°C,Humi:51.5%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D
3#/3m/HORIZONTAL
Memo : 11N20 2437

Data: 3

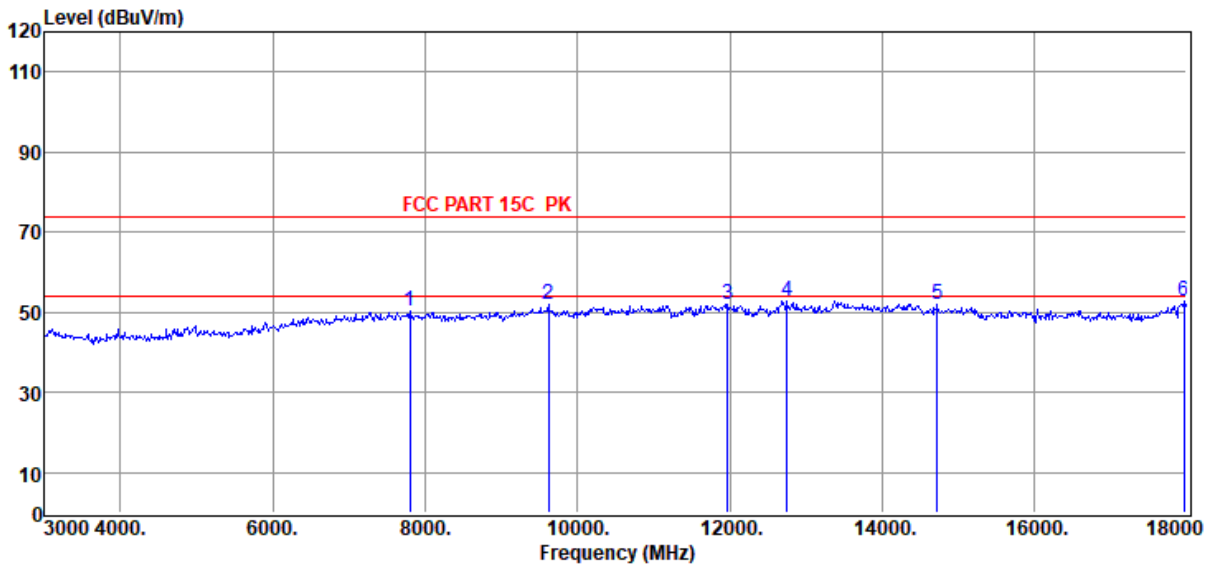


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	7800.00	47.71	36.76	39.78	3.17	2.28	50.14	74.00	-23.86	Peak	HORIZONTAL
2	9615.00	47.62	38.63	40.33	3.63	2.36	51.91	74.00	-22.09	Peak	HORIZONTAL
3	11970.00	46.55	39.19	40.10	4.05	2.40	52.09	74.00	-21.91	Peak	HORIZONTAL
4	12750.00	46.95	39.30	40.33	4.06	2.82	52.80	74.00	-21.20	Peak	HORIZONTAL
5	14730.00	44.86	39.72	39.63	4.41	2.70	52.06	74.00	-21.94	Peak	HORIZONTAL
6	17970.00	42.43	42.31	40.68	4.95	3.78	52.79	74.00	-21.21	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\8822\FCC ABOVE 1G.EM6
Test Date : 2022-08-29 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15
Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode
Condition : Temp:23.1°C,Humi:51.5%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL
Memo : 11N20 2437

Data: 4

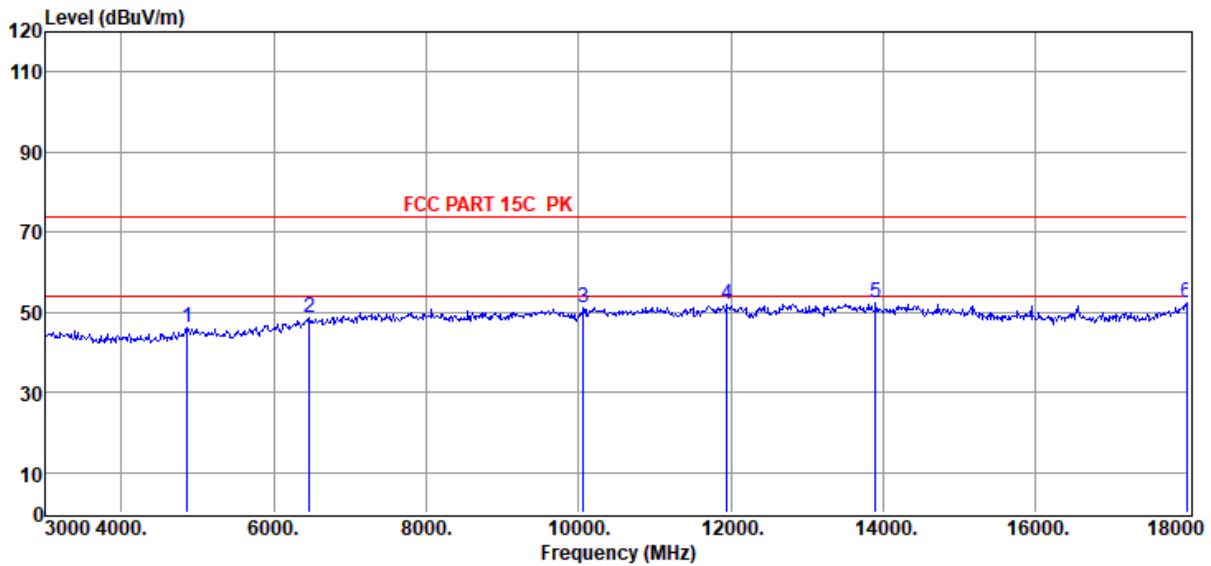


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4860.00	49.05	32.65	40.37	2.49	2.17	45.99	74.00	-28.01	Peak	VERTICAL
2	6465.00	47.79	35.12	40.13	3.25	2.55	48.58	74.00	-25.42	Peak	VERTICAL
3	10065.00	47.24	38.48	40.57	3.67	2.47	51.29	74.00	-22.71	Peak	VERTICAL
4	11955.00	46.27	39.18	40.10	4.04	2.40	51.79	74.00	-22.21	Peak	VERTICAL
5	13905.00	44.81	39.92	39.77	4.43	2.91	52.30	74.00	-21.70	Peak	VERTICAL
6	17985.00	41.82	42.41	40.69	4.96	3.79	52.29	74.00	-21.71	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\8822\FCC ABOVE 1G.EM6
Test Date : 2022-09-03 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15
Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode
Condition : Temp:23.1°C,Humi:51.5%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D
3#/3m/HORIZONTAL
Memo : 8822 11N20 2437 + 8800 DH5 2402

Data: 15

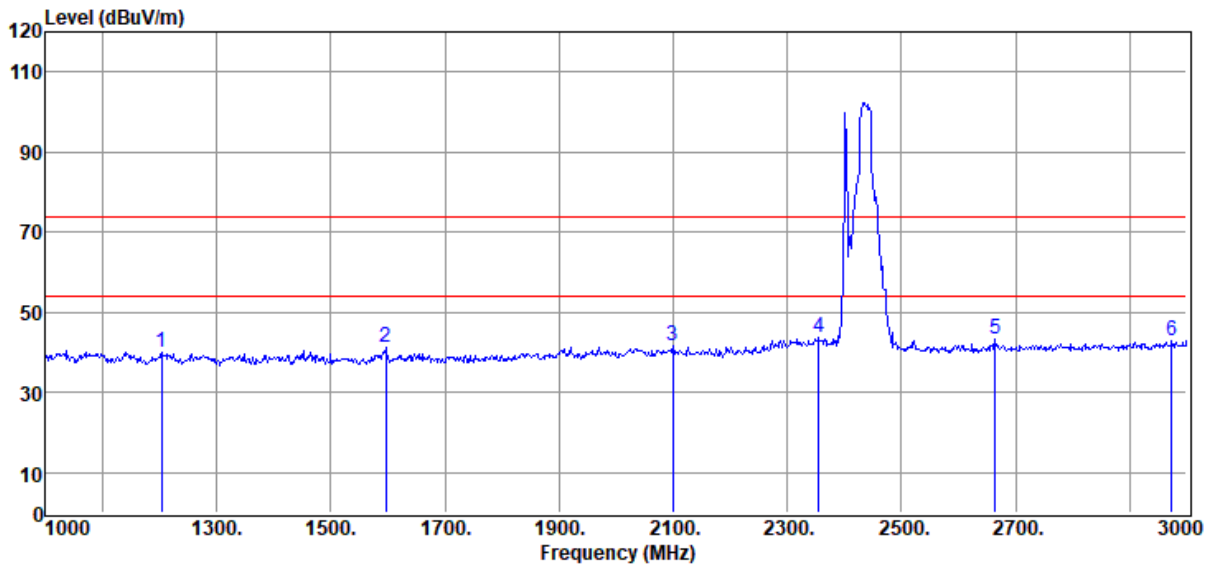

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1204.00	51.19	25.46	38.21	1.21	0.54	40.19	74.00	-33.81	Peak	HORIZONTAL
2	1596.00	52.38	25.65	38.79	1.42	0.61	41.27	74.00	-32.73	Peak	HORIZONTAL
3	2100.00	51.85	26.88	39.45	1.63	0.69	41.60	74.00	-32.40	Peak	HORIZONTAL
4	2356.00	53.67	27.34	39.58	1.70	0.72	43.85	74.00	-30.15	Peak	HORIZONTAL
5	2664.00	52.17	28.22	39.73	1.78	0.75	43.19	74.00	-30.81	Peak	HORIZONTAL
6	2974.00	50.59	29.40	39.89	1.86	0.79	42.75	74.00	-31.25	Peak	HORIZONTAL


Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\8822\FCC ABOVE 1G.EM6
Test Date : 2022-09-03 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15
Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode
Condition : Temp:23.1°C,Humi:51.5%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL
Memo : 8822 11N20 2437 + 8800 DH5 2402

Data: 16

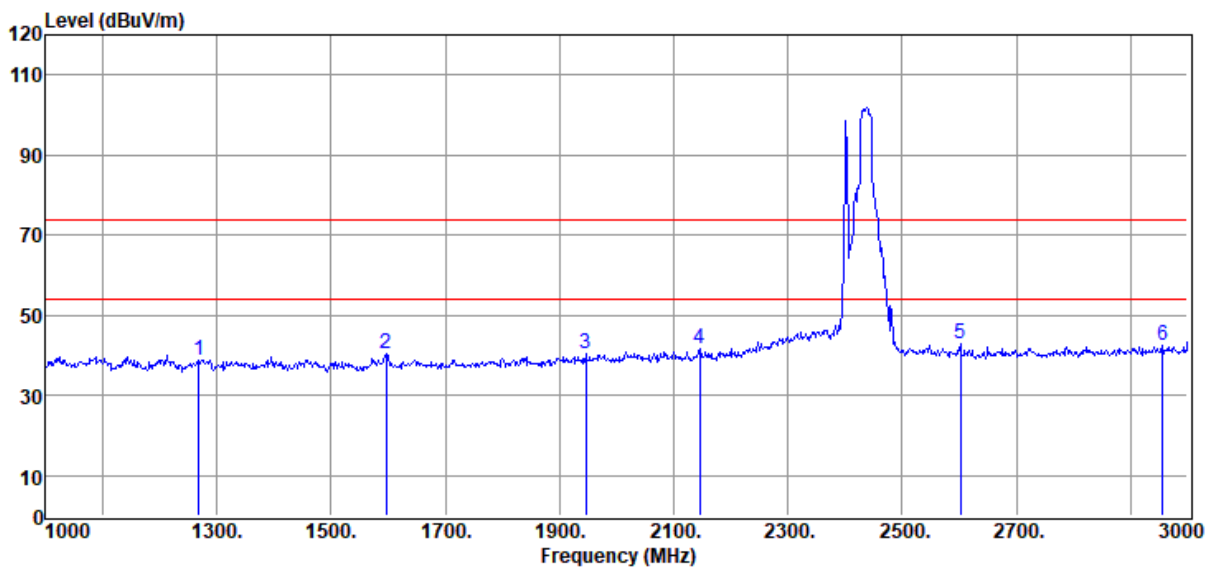

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1268.00	49.99	25.45	38.30	1.25	0.55	38.94	74.00	-35.06	Peak	VERTICAL
2	1596.00	51.37	25.65	38.79	1.42	0.61	40.26	74.00	-33.74	Peak	VERTICAL
3	1946.00	50.86	26.56	39.32	1.58	0.67	40.35	74.00	-33.65	Peak	VERTICAL
4	2146.00	51.99	26.96	39.47	1.64	0.70	41.82	74.00	-32.18	Peak	VERTICAL
5	2602.00	51.95	27.99	39.70	1.77	0.75	42.76	74.00	-31.24	Peak	VERTICAL
6	2956.00	50.25	29.33	39.88	1.86	0.79	42.35	74.00	-31.65	Peak	VERTICAL


Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\8822\FCC ABOVE 1G.EM6
Test Date : 2022-09-03 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15
Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode
Condition : Temp:23.1°C,Humi:51.5%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D
3#/3m/HORIZONTAL
Memo : 8822 11N20 2437 + 8800 DH5 2402

Data: 17

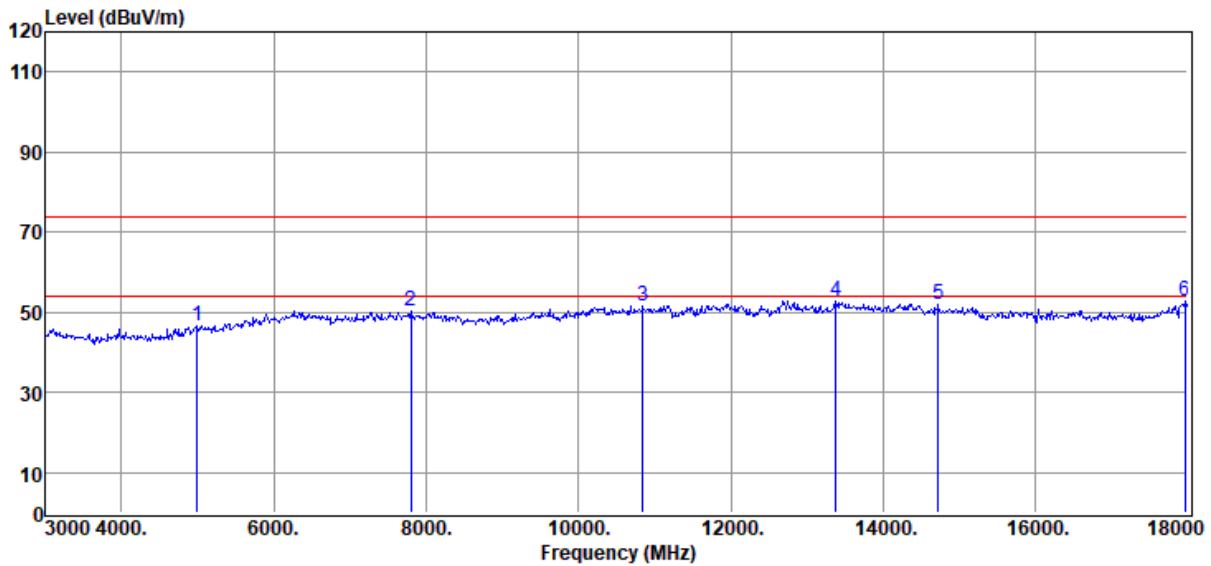

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4995.00	49.21	33.08	40.40	2.54	2.19	46.62	74.00	-27.38	Peak	HORIZONTAL
2	7800.00	47.71	36.76	39.78	3.17	2.28	50.14	74.00	-23.86	Peak	HORIZONTAL
3	10845.00	46.64	39.21	40.26	3.76	2.40	51.75	74.00	-22.25	Peak	HORIZONTAL
4	13380.00	45.80	39.90	40.13	4.09	2.94	52.60	74.00	-21.40	Peak	HORIZONTAL
5	14730.00	44.86	39.72	39.63	4.41	2.70	52.06	74.00	-21.94	Peak	HORIZONTAL
6	17970.00	42.43	42.31	40.68	4.95	3.78	52.79	74.00	-21.21	Peak	HORIZONTAL


Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\8822\FCC ABOVE 1G.EM6
Test Date : 2022-09-03 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15
Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode
Condition : Temp:23.1°C,Humi:51.5%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL
Memo : 8822 11N20 2437 + 8800 DH5 2402

Data: 18

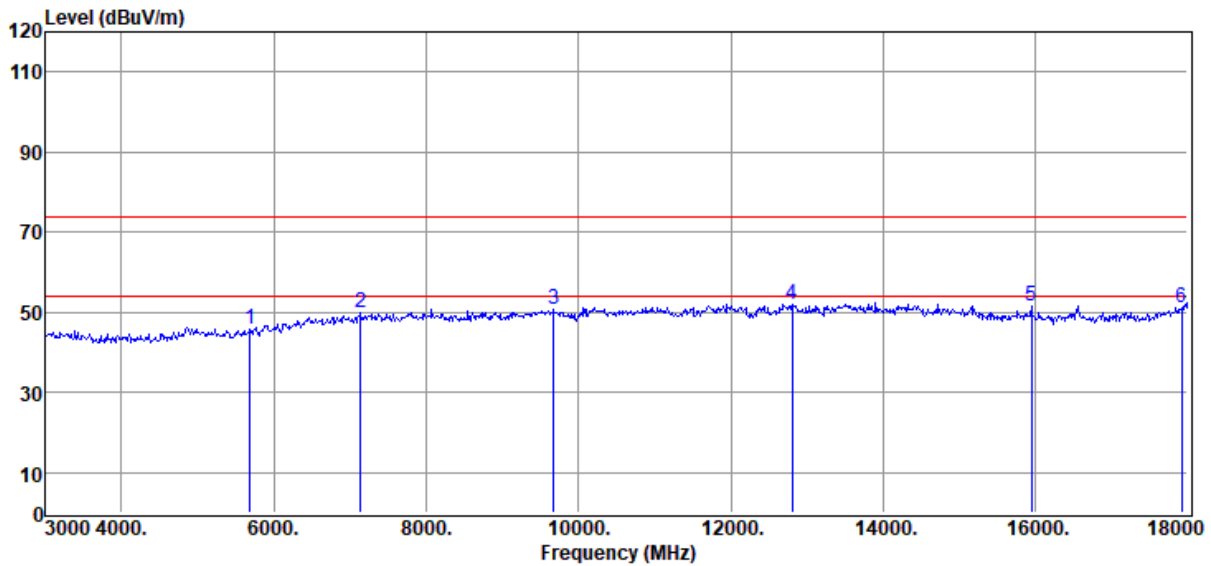


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5685.00	47.76	33.24	40.47	2.74	2.61	45.88	74.00	-28.12	Peak	VERTICAL
2	7140.00	48.21	36.11	39.71	3.05	2.26	49.92	74.00	-24.08	Peak	VERTICAL
3	9675.00	46.34	38.60	40.37	3.64	2.38	50.59	74.00	-23.41	Peak	VERTICAL
4	12810.00	45.82	39.37	40.34	4.14	2.85	51.84	74.00	-22.16	Peak	VERTICAL
5	15945.00	45.58	38.00	39.88	4.60	3.09	51.39	74.00	-22.61	Peak	VERTICAL
6	17925.00	41.10	42.03	40.65	4.94	3.77	51.19	74.00	-22.81	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

10. Radiated Band Edge Compliance

10.1. Block diagram of test setup

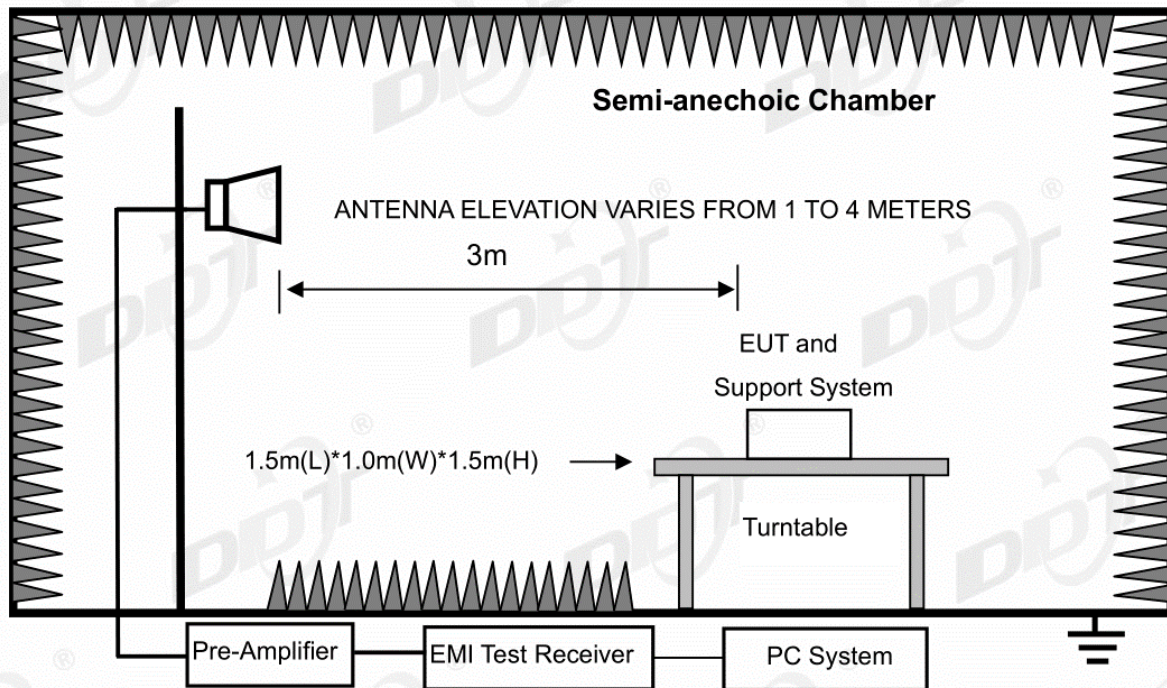

10.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400 MHz to 2483.5 MHz shall be at least 20dB below the fundamental emissions or comply with FCC 15.209 limits.

10.3. Test Procedure

Same with clause 8.3 except change investigated frequency range from 2310 MHz to 2450 MHz and 2430 MHz to 2500 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

10.4. Test result


Pass. (See below detailed test result)

Note: All mode was tested and only the worst case was recorded this report.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\8822\FCC ABOVE 1G.EM6
Test Date : 2022-08-29 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15 8822
Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode
Condition : Temp:23.1°C,Humi:51.5%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D
3#/3m/HORIZONTAL
Memo : 11N20 2437

Data: 5

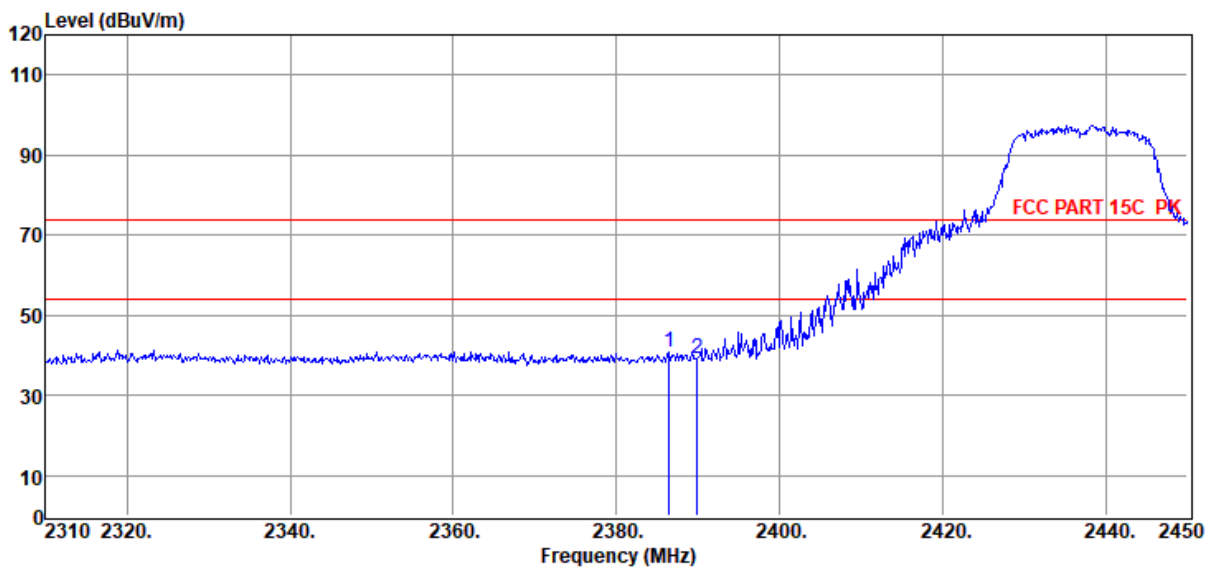


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2386.44	50.71	27.40	39.59	1.71	0.72	40.95	74.00	-33.05	Peak	HORIZONTAL
2	2389.94	49.03	27.40	39.59	1.71	0.72	39.27	74.00	-34.73	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\8822\FCC ABOVE 1G.EM6
Test Date : 2022-08-29 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15 8822
Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode
Condition : Temp:23.1°C,Humi:51.5%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL
Memo : 11N20 2437

Data: 6

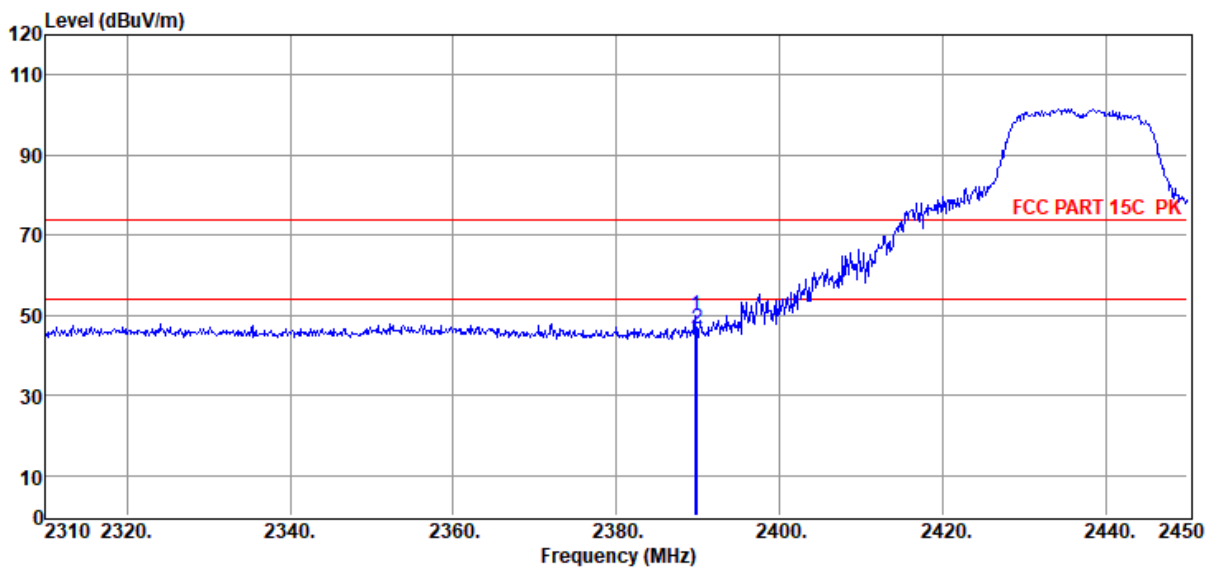


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2389.66	59.60	27.40	39.59	1.71	0.72	49.84	74.00	-24.16	Peak	VERTICAL
2	2389.94	56.24	27.40	39.59	1.71	0.72	46.48	74.00	-27.52	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\8822\FCC ABOVE 1G.EM6
Test Date : 2022-08-29 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15 8822
Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode
Condition : Temp:23.1°C,Humi:51.5%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D
3#/3m/HORIZONTAL
Memo : 11N20 2437

Data: 7

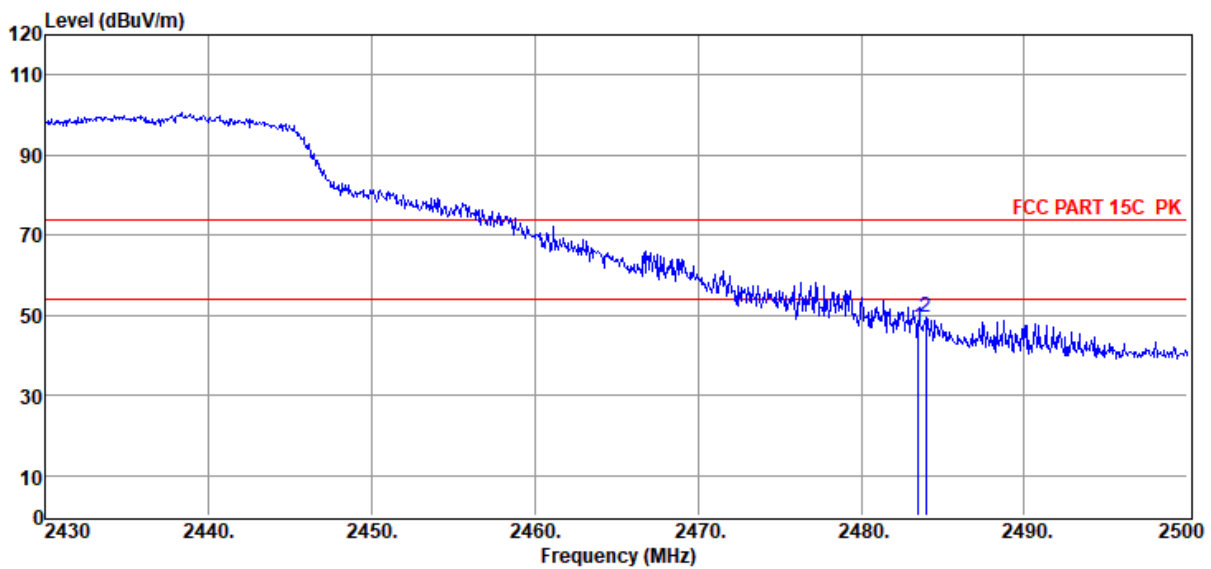


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.48	56.78	27.57	39.64	1.74	0.73	47.18	74.00	-26.82	Peak	HORIZONTAL
2	2483.97	59.15	27.57	39.64	1.74	0.73	49.55	74.00	-24.45	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22062203-2E UCS15\8822\FCC ABOVE 1G.EM6
Test Date : 2022-08-29 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15 8822
Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode
Condition : Temp:23.1°C,Humi:51.5%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL
Memo : 11N20 2437

Data: 8

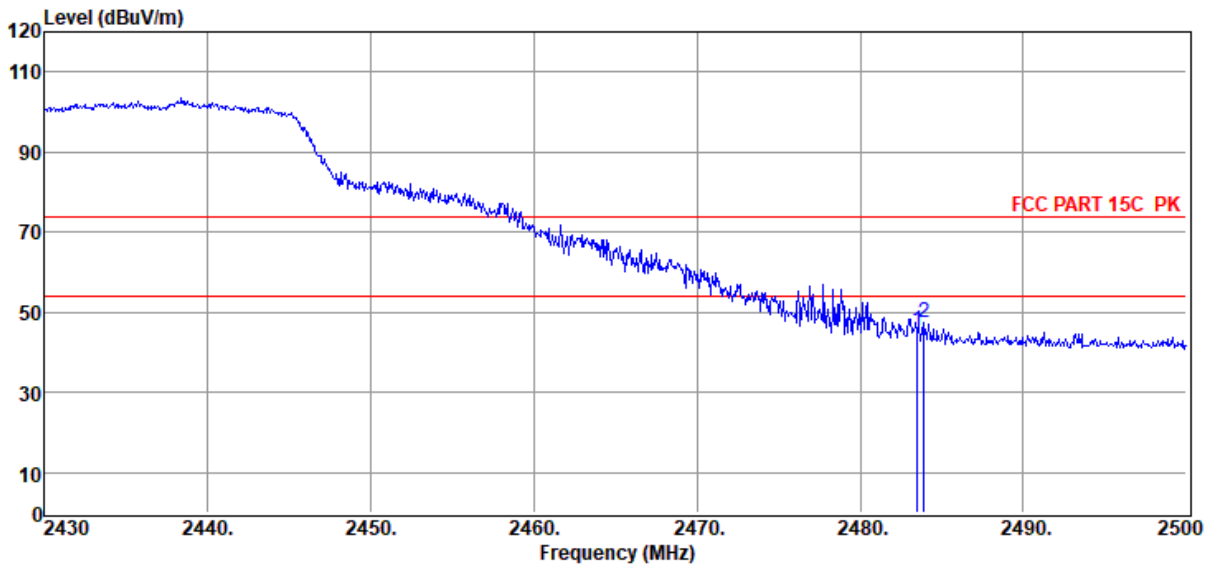


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.48	54.80	27.57	39.64	1.74	0.73	45.20	74.00	-28.80	Peak	VERTICAL
2	2483.90	57.18	27.57	39.64	1.74	0.73	47.58	74.00	-26.42	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

11. Power Line Conducted Emission

11.1. Block diagram of test setup

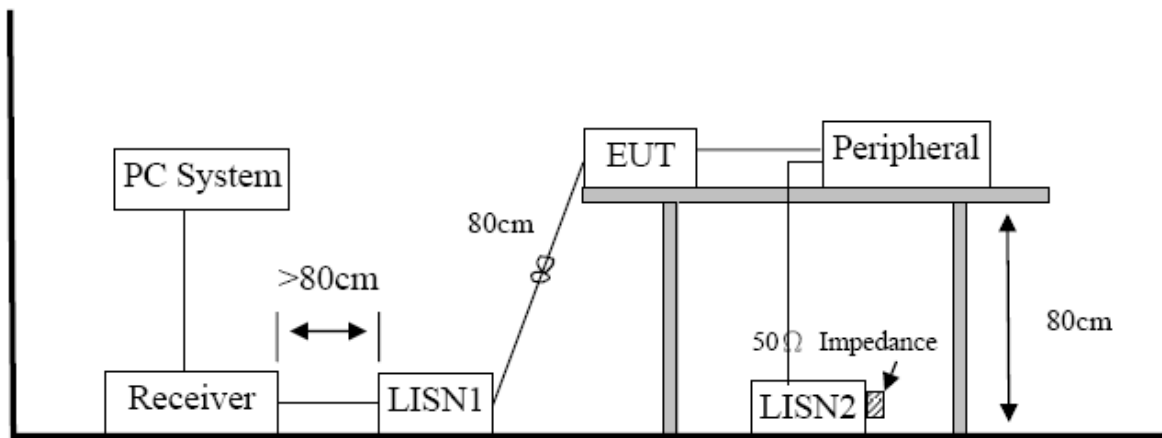

11.2. Power Line Conducted Emission Limits (Class B)

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

11.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

11.4. Test Result

Pass. (See below detailed test result)


Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "----" means peak detection; "----" means average detection

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/60Hz, recorded worse case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2022 CE report date\Q22062203-2E UCS15\FCC.EM6
Test Date : 2022-08-16 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15
Power Supply : AC 120V/60Hz **Test Mode** : TX mode
Condition : TEMP:23.8°C, RH:62.0%, BP:101.2kPa **LISN** : 2021 1# ENV216/LINE
Memo : 2.4GWIFI

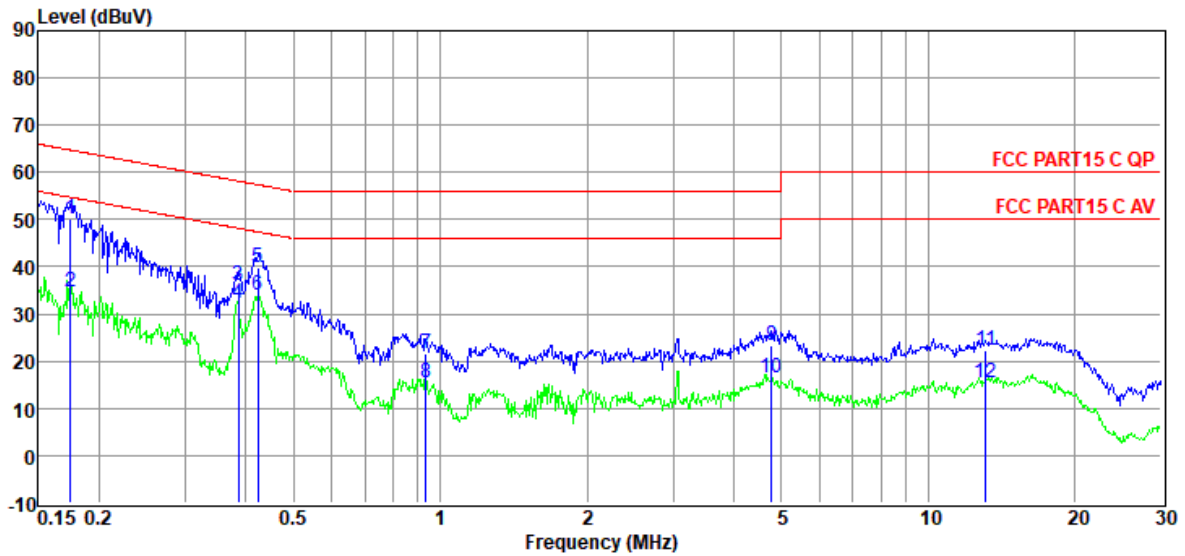


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	30.50	9.71	0.01	9.92	50.14	64.72	-14.58	QP	LINE
2	0.17	14.95	9.71	0.01	9.92	34.59	54.72	-20.13	Average	LINE
3	0.39	16.49	9.66	0.02	9.91	36.08	58.17	-22.09	QP	LINE
4	0.39	12.60	9.66	0.02	9.91	32.19	48.17	-15.98	Average	LINE
5	0.42	20.39	9.64	0.02	9.91	39.96	57.37	-17.41	QP	LINE
6	0.42	14.36	9.64	0.02	9.91	33.93	47.37	-13.44	Average	LINE
7	0.93	2.07	9.58	0.03	9.89	21.57	56.00	-34.43	QP	LINE
8	0.93	-3.91	9.58	0.03	9.89	15.59	46.00	-30.41	Average	LINE
9	4.77	3.93	9.57	0.06	9.93	23.49	56.00	-32.51	QP	LINE
10	4.77	-3.15	9.57	0.06	9.93	16.41	46.00	-29.59	Average	LINE
11	13.13	2.65	9.70	0.13	9.93	22.41	60.00	-37.59	QP	LINE
12	13.13	-4.31	9.70	0.13	9.93	15.45	50.00	-34.55	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2022 CE report date\Q22062203-2E UCS15\FCC.EM6
Test Date : 2022-08-16 **Tested By** : Bairong
EUT : Integrated video conference terminal **Model Number** : UC S15
Power Supply : AC 120V/60Hz **Test Mode** : TX mode
Condition : TEMP:23.8°C, RH:62.0%, BP:101.2kPa **LISN** : 2021 1# ENV216/NEUTRAL
Memo : 2.4GWIFI

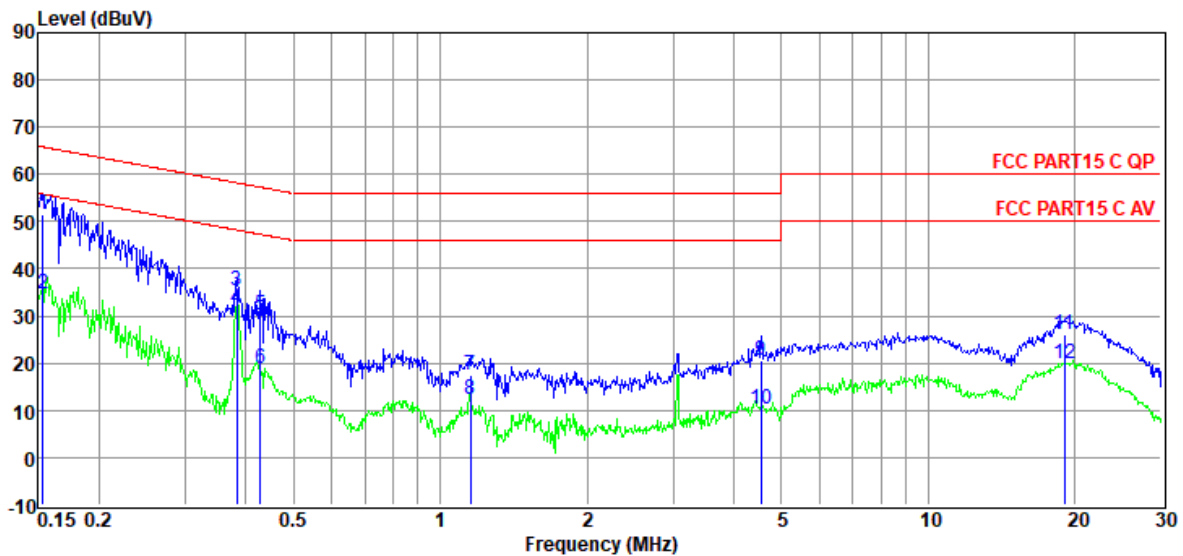

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Detector	Phase
1	0.15	31.91	9.80	0.01	9.92	51.64	65.82	-14.18	QP	NEUTRAL
2	0.15	15.07	9.80	0.01	9.92	34.80	55.82	-21.02	Average	NEUTRAL
3	0.38	15.74	9.59	0.02	9.91	35.26	58.21	-22.95	QP	NEUTRAL
4	0.38	11.91	9.59	0.02	9.91	31.43	48.21	-16.78	Average	NEUTRAL
5	0.43	10.85	9.55	0.02	9.91	30.33	57.29	-26.96	QP	NEUTRAL
6	0.43	-0.67	9.55	0.02	9.91	18.81	47.29	-28.48	Average	NEUTRAL
7	1.15	-1.94	9.68	0.03	9.89	17.66	56.00	-38.34	QP	NEUTRAL
8	1.15	-7.19	9.68	0.03	9.89	12.41	46.00	-33.59	Average	NEUTRAL
9	4.55	0.95	9.75	0.06	9.92	20.68	56.00	-35.32	QP	NEUTRAL
10	4.55	-9.35	9.75	0.06	9.92	10.38	46.00	-35.62	Average	NEUTRAL
11	19.02	6.15	9.77	0.17	9.95	26.04	60.00	-33.96	QP	NEUTRAL
12	19.02	0.17	9.77	0.17	9.95	20.06	50.00	-29.94	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

12. Antenna Requirements

12.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

12.2. Result

The device support 2T2R MIMO, the antennas both used for this product are FPC antennas and no antenna other than that furnished by the responsible party shall be used with the device, maximum antenna gain is 3.9 dBi for antenna 1, 3.9 dBi for antenna 2.