

Test Report No.10052314 10052388 001

Appendix D: Radiated Spurious Emission Data

(File: 10052314 10052388AppendixD)


Contents

Spurious Emissions, Band Edges, 2.35-2.5G	2
Spurious Emissions, TX Mode, 1-18G.....	6
Spurious Emissions, TX Mode, 18-26G.....	12
Spurious Emissions, TX Mode, 30M-1G	18
Spurious Emissions, RX Mode, 1-18G	20
Spurious Emissions, RX Mode, 18-26G	26
Spurious Emissions, RX Mode, 30M-1G.....	32


Spurious Emissions, Band Edges, 2.35-2.5G

Radiated Bandedge (GFSK)

Low Channel (Hor)

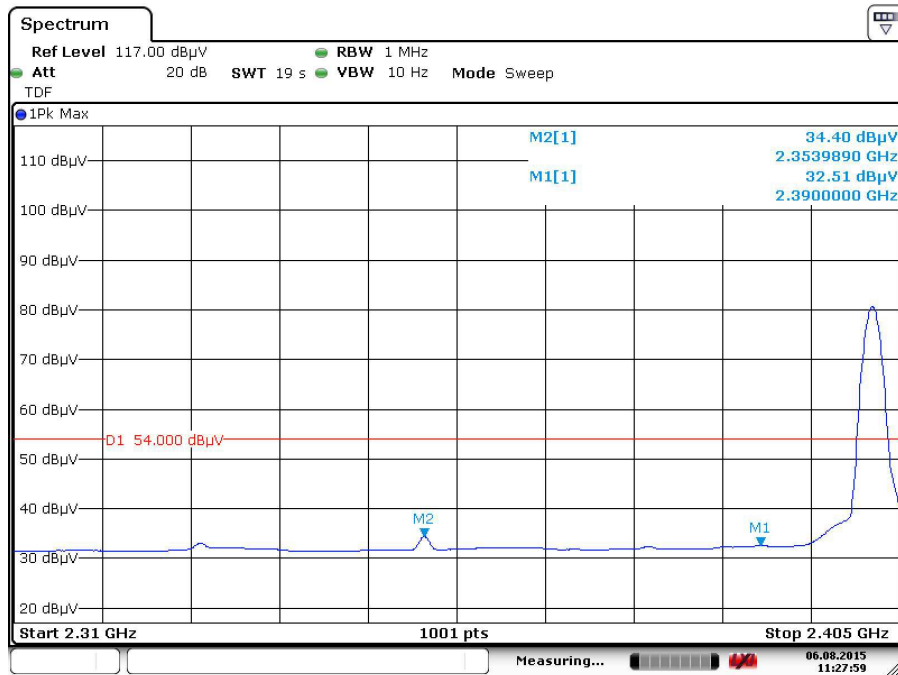


Date: 6.AUG.2015 11:27:59

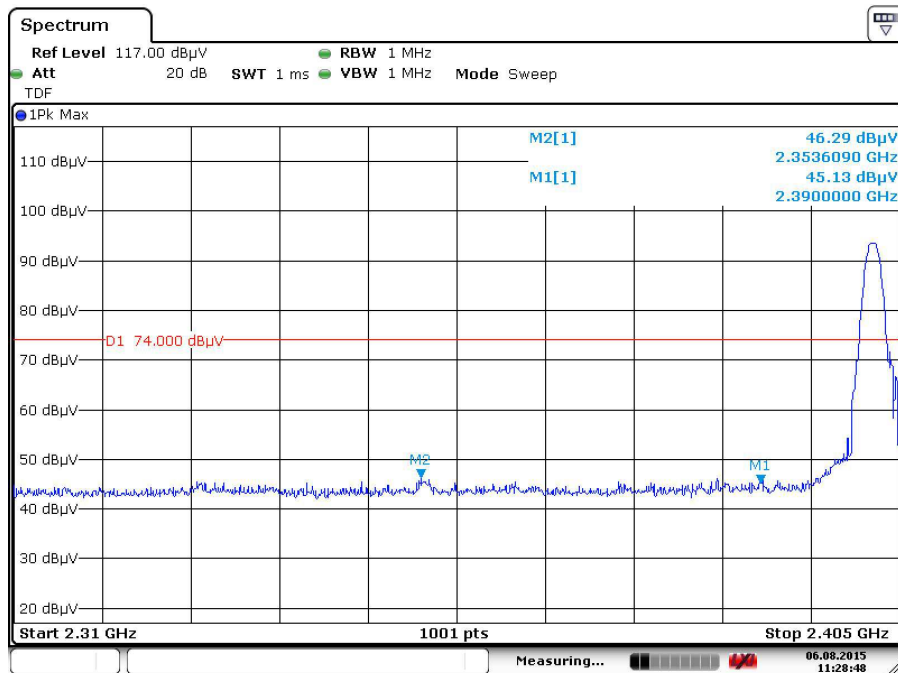


Date: 6.AUG.2015 11:28:48

Spurious Emissions, Band Edge, 2.35-2.5G

Low Channel (Ver)

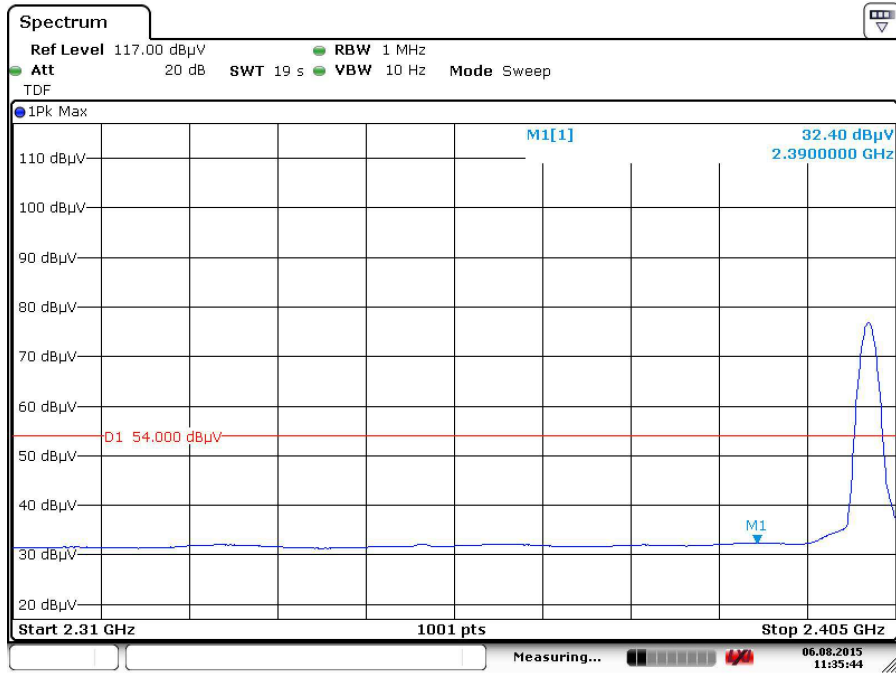

Date: 6.AUG.2015 11:35:44

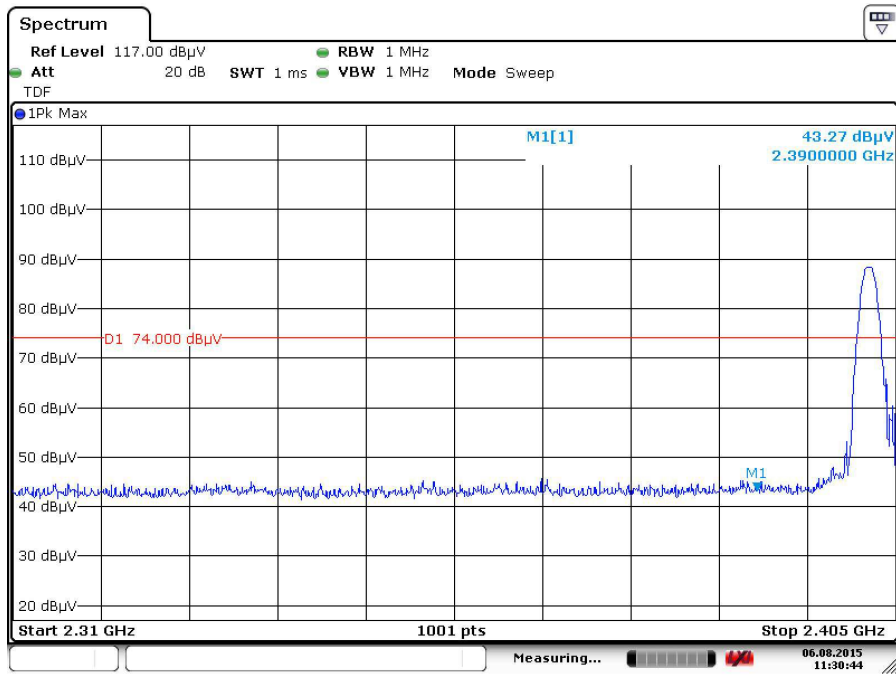


Date: 6.AUG.2015 11:30:44


Spurious Emissions, Band Edge, 2.35-2.5G

Radiated Bandedge (GFSK)

High Channel (Hor)

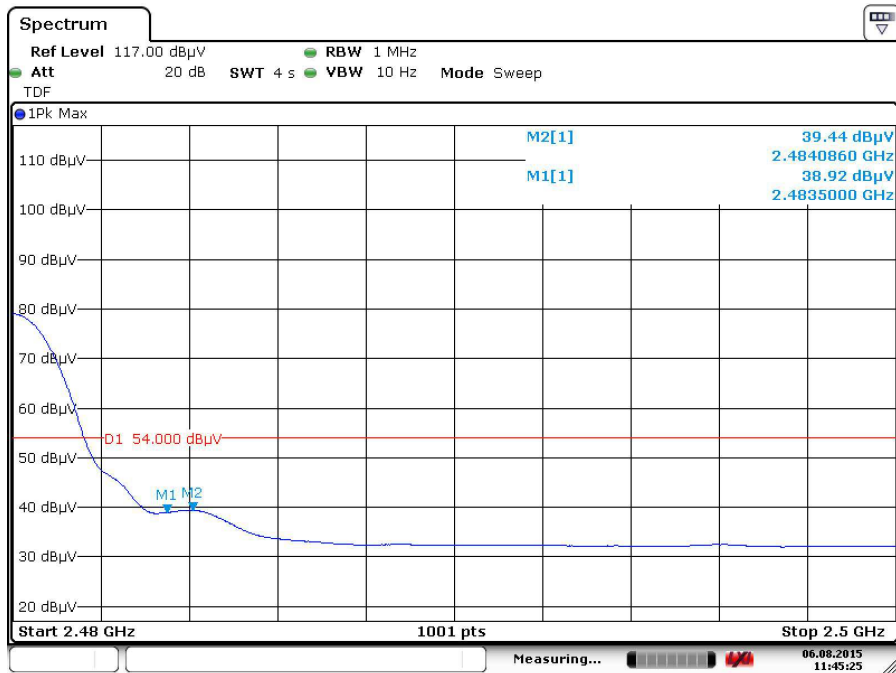


Date: 6.AUG.2015 11:45:26

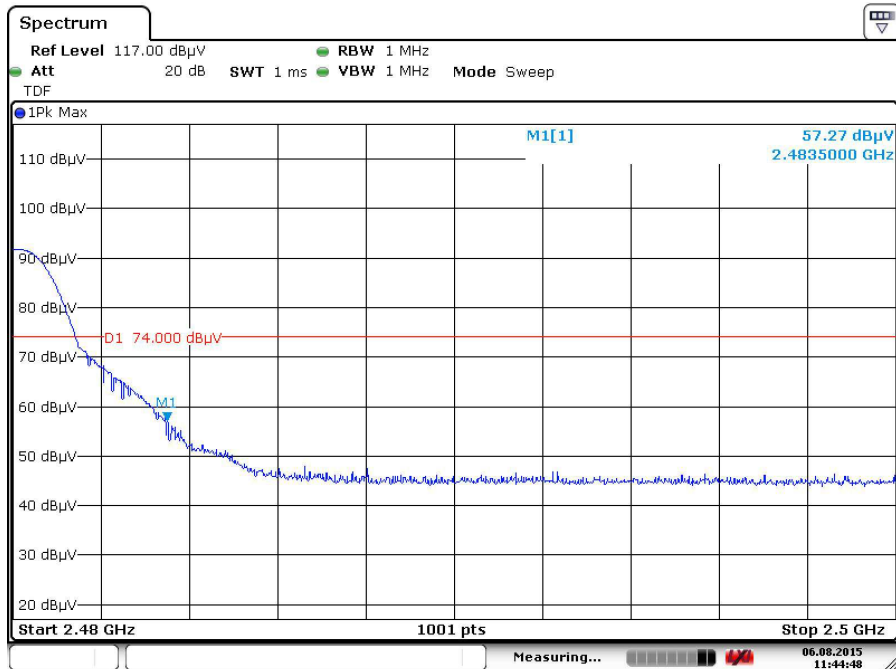


Date: 6.AUG.2015 11:44:48

Spurious Emissions, Band Edge, 2.35-2.5G

High Channel (Ver)

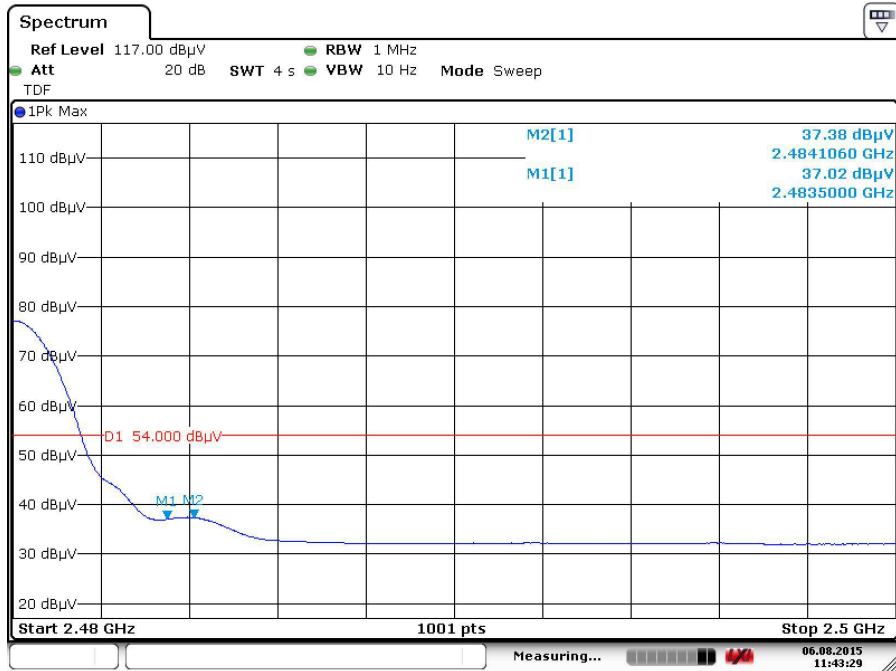

Date: 6.AUG.2015 11:43:29

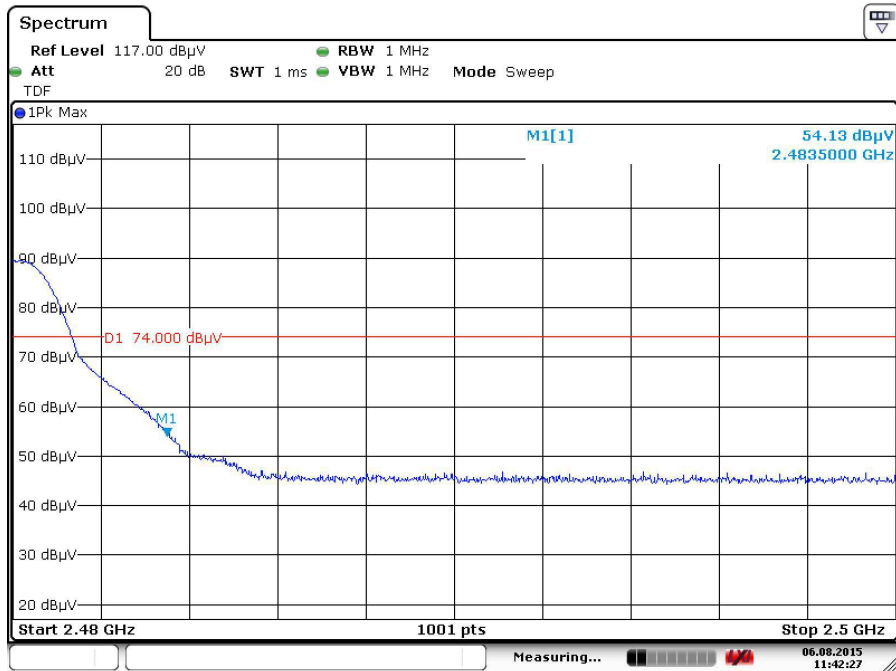


Date: 6.AUG.2015 11:42:28

Spurious Emissions, Band Edge, 2.35-2.5G

Spurious Emissions, TX Mode, 1-18G




TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

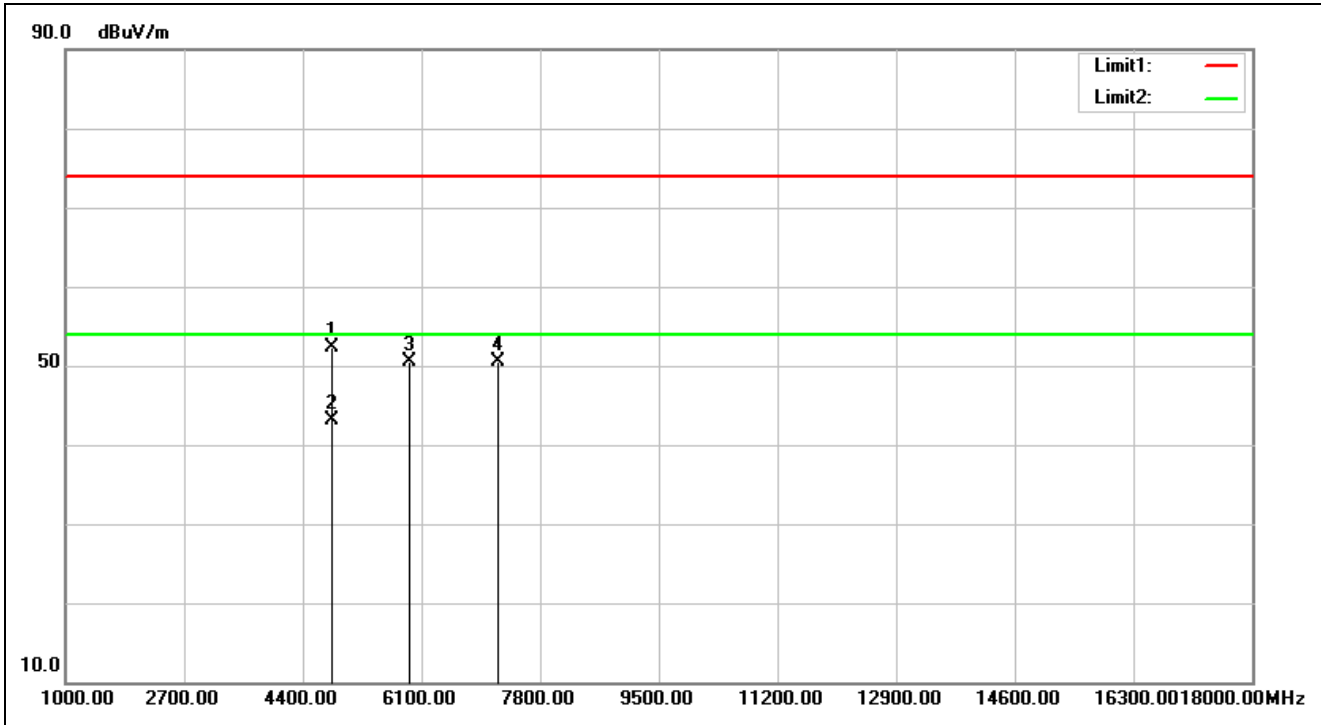


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/8/6 11:48:16
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	TX-1DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	-2.35	54.60	52.25	74.00	-21.75	peak	100	233	
2	4804.000	-2.35	45.46	43.11	54.00	-10.89	AVG	100	233	
3	5930.000	3.62	46.83	50.45	74.00	-23.55	peak	100	247	
4	7206.000	5.78	44.81	50.59	74.00	-23.41	peak		0	

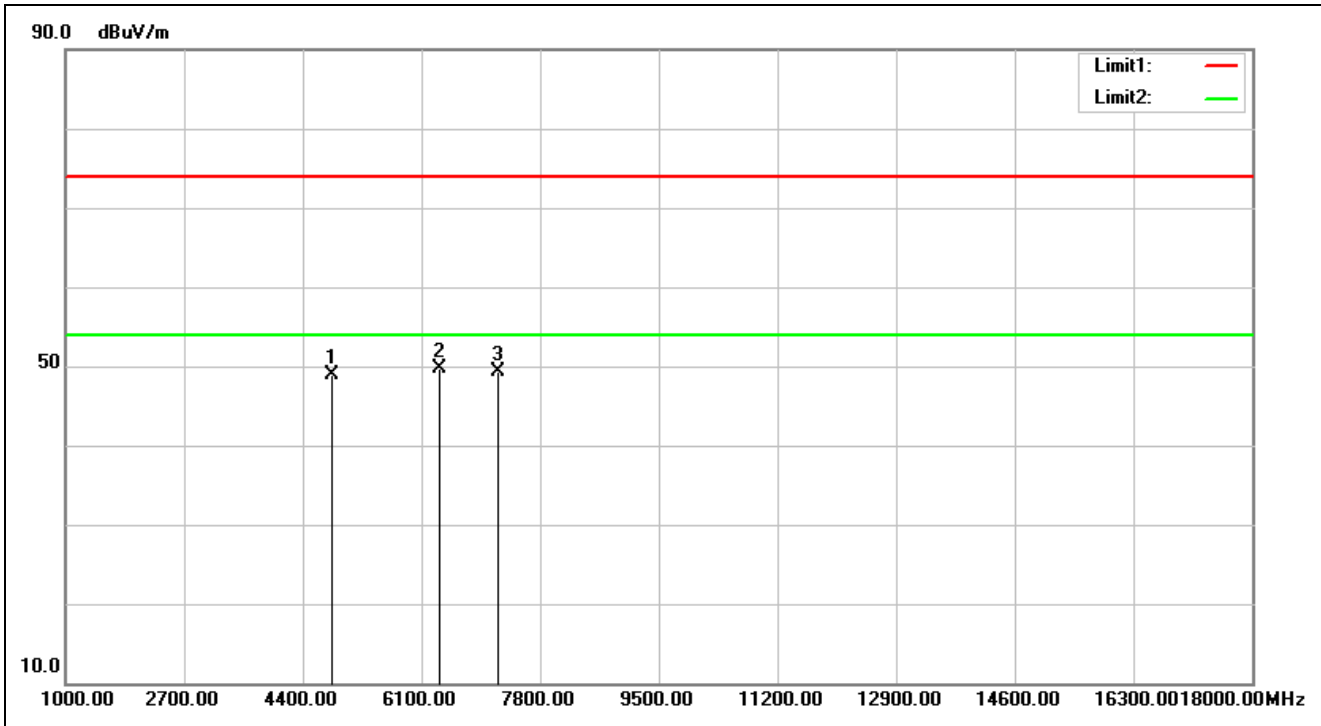


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/8/6 11:49:19
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	TX-1DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	-2.35	51.29	48.94	74.00	-25.06	peak	100	196	
2	6355.000	5.47	44.28	49.75	74.00	-24.25	peak	100	149	
3	7206.000	5.78	43.53	49.31	74.00	-24.69	peak			

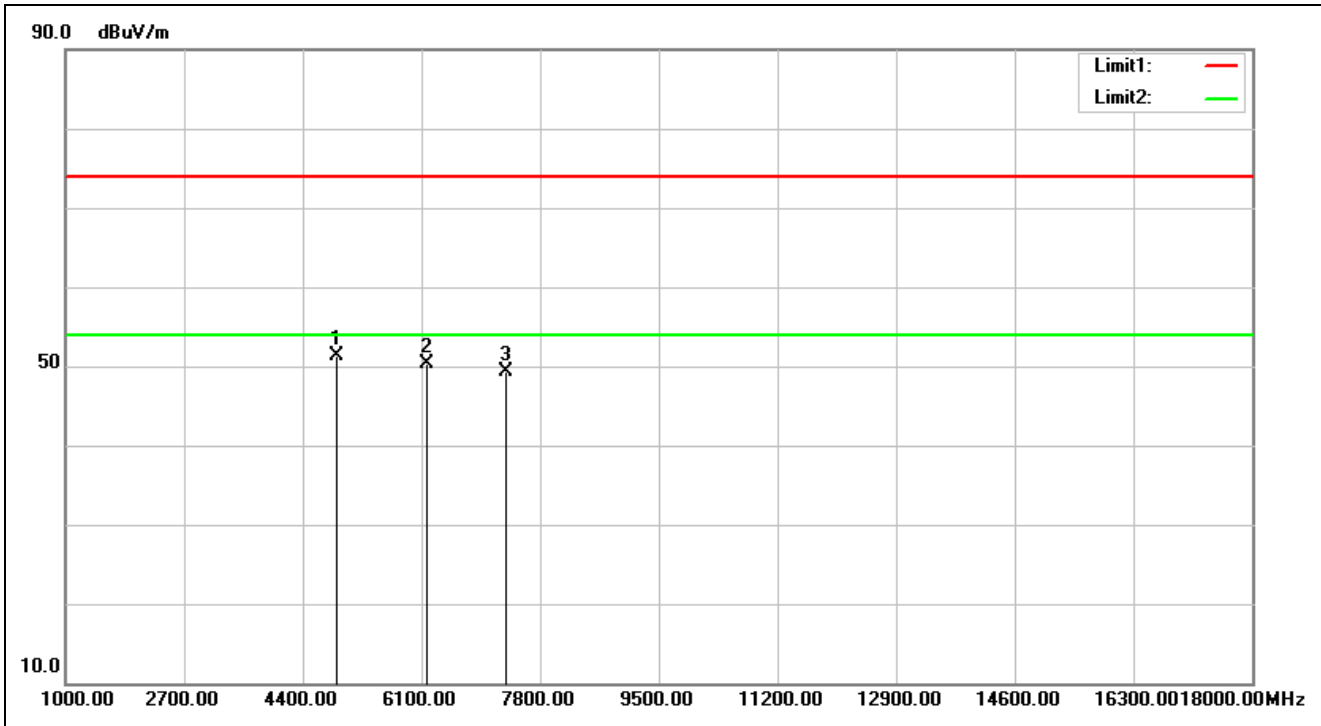


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/8/6 11:58:44
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	TX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4882.000	-2.16	53.47	51.31	74.00	-22.69	peak	100	236	
2	6185.000	4.81	45.47	50.28	74.00	-23.72	peak	100	48	
3	7323.000	6.13	43.08	49.21	74.00	-24.79	peak			

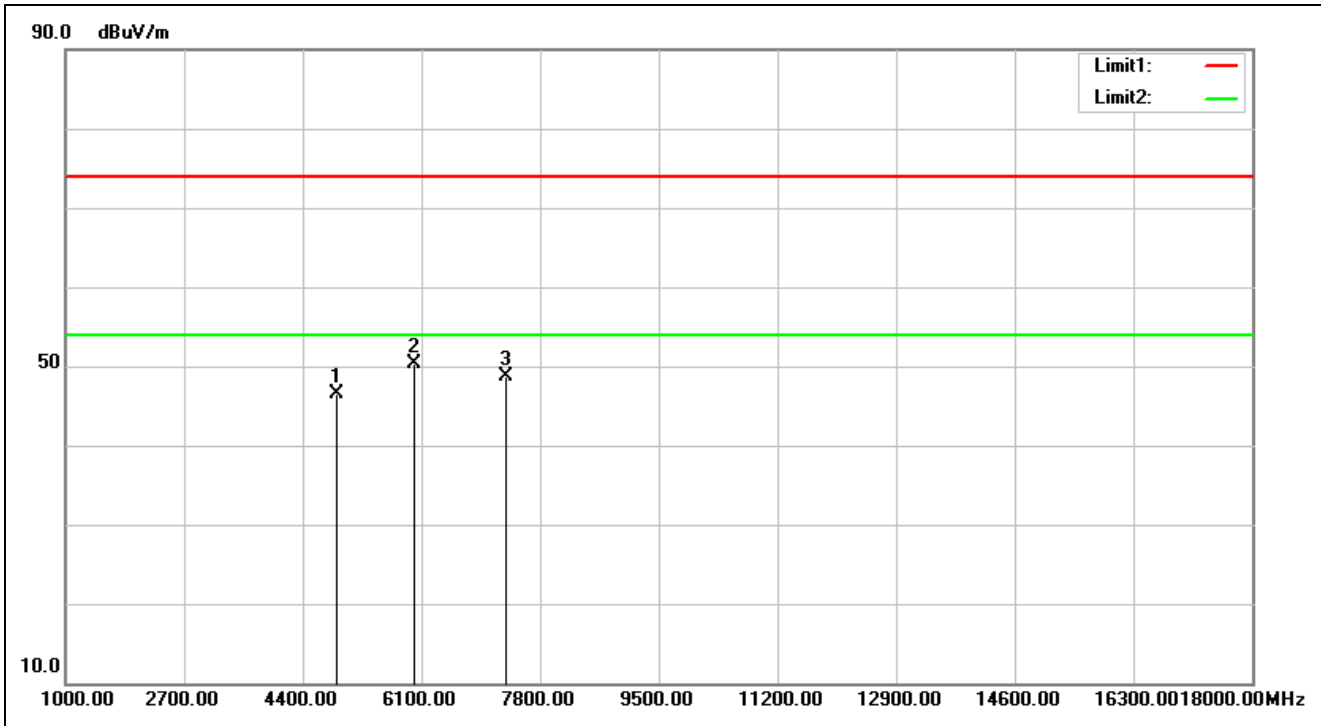


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/8/6 11:59:47
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	TX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4882.000	-2.16	48.59	46.43	74.00	-27.57	peak			
2	5998.000	4.07	46.28	50.35	74.00	-23.65	peak	100	91	
3	7323.000	6.13	42.53	48.66	74.00	-25.34	peak			

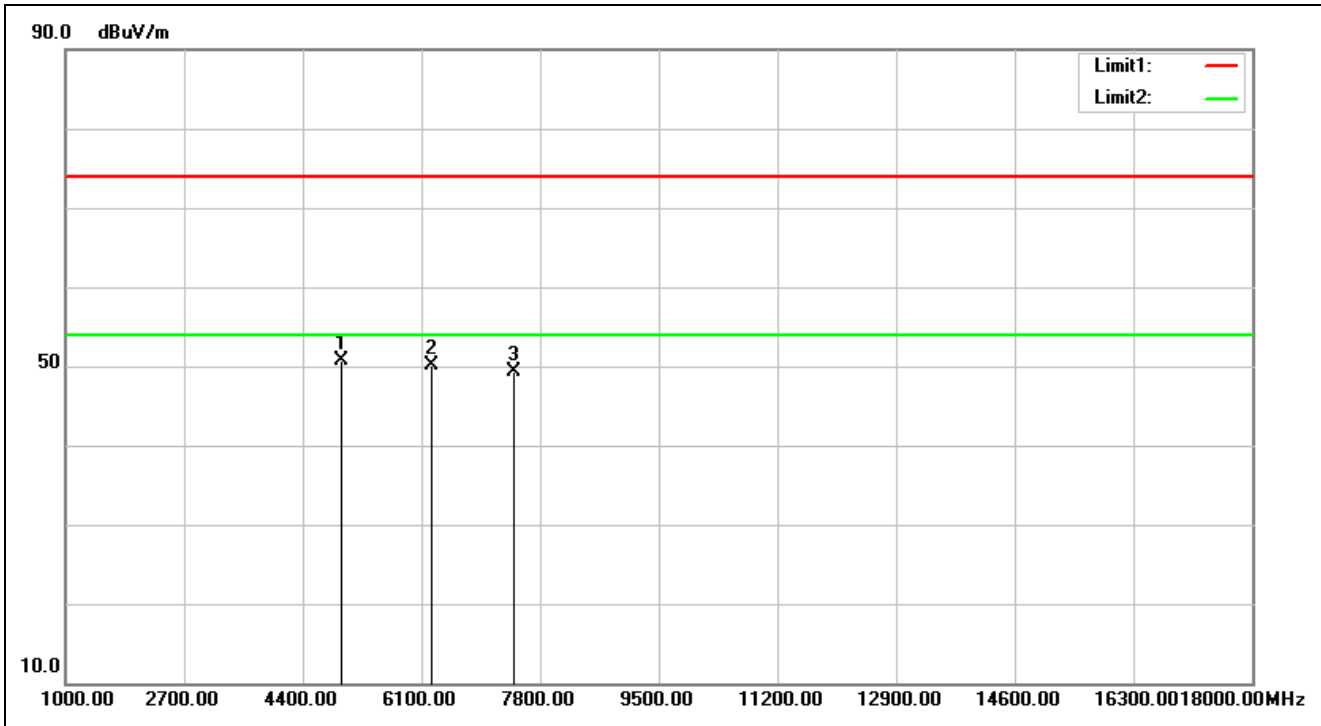

Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/8/6 12:03:08
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	TX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	-1.97	52.64	50.67	74.00	-23.33	peak	100	236	
2	6236.000	5.00	45.04	50.04	74.00	-23.96	peak	100	123	
3	7440.000	6.47	42.85	49.32	74.00	-24.68	peak			

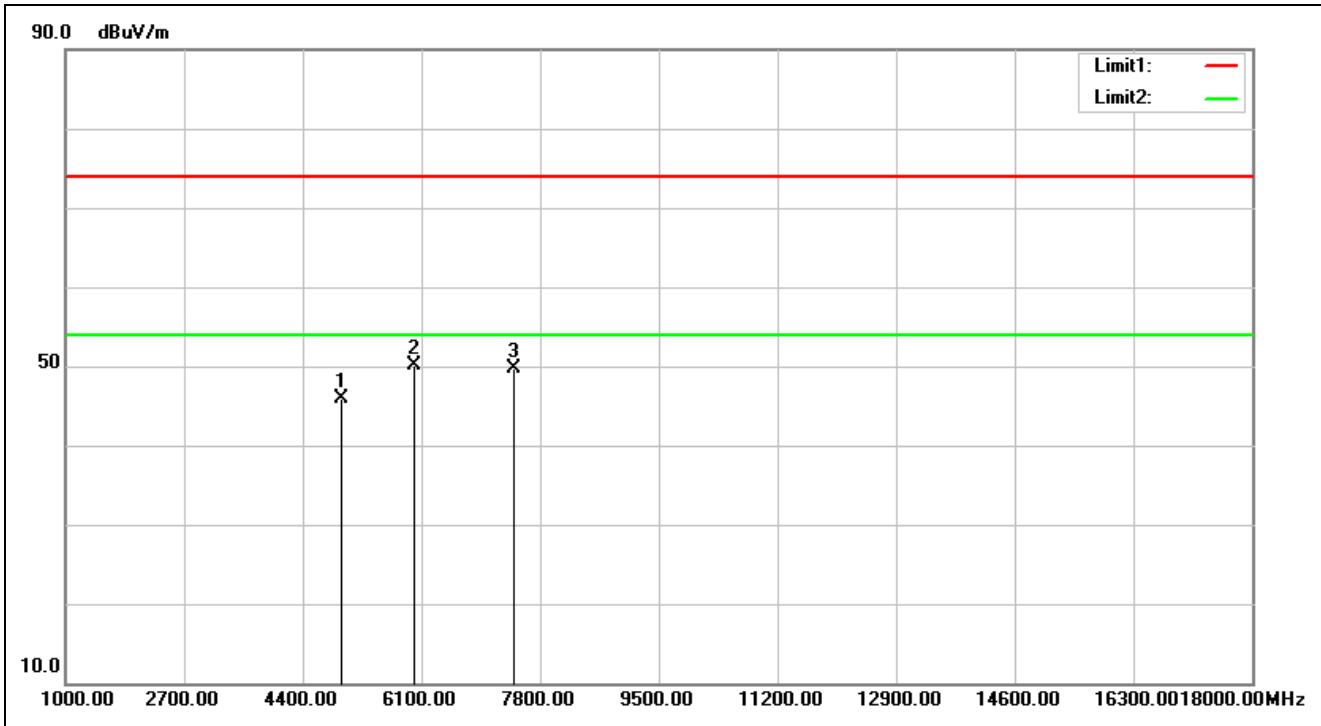


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/8/6 12:04:10
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	TX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	-1.97	47.84	45.87	74.00	-28.13	peak			
2	5998.000	4.07	45.97	50.04	74.00	-23.96	peak	100	58	
3	7440.000	6.47	43.17	49.64	74.00	-24.36	peak			

Spurious Emissions, TX Mode, 18-26G




TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

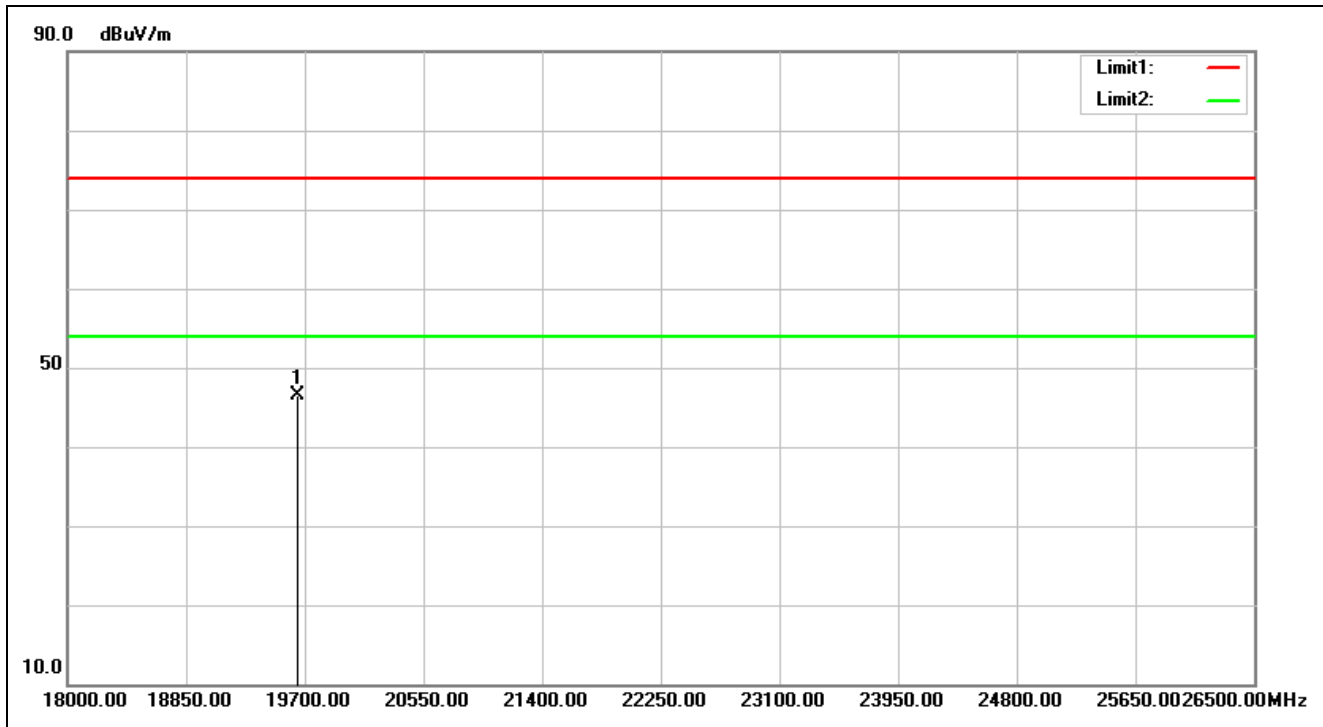


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/8/6 12:13:22
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	TX-1DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19649.000	28.95	17.62	46.57	74.00	-27.43	peak		0	

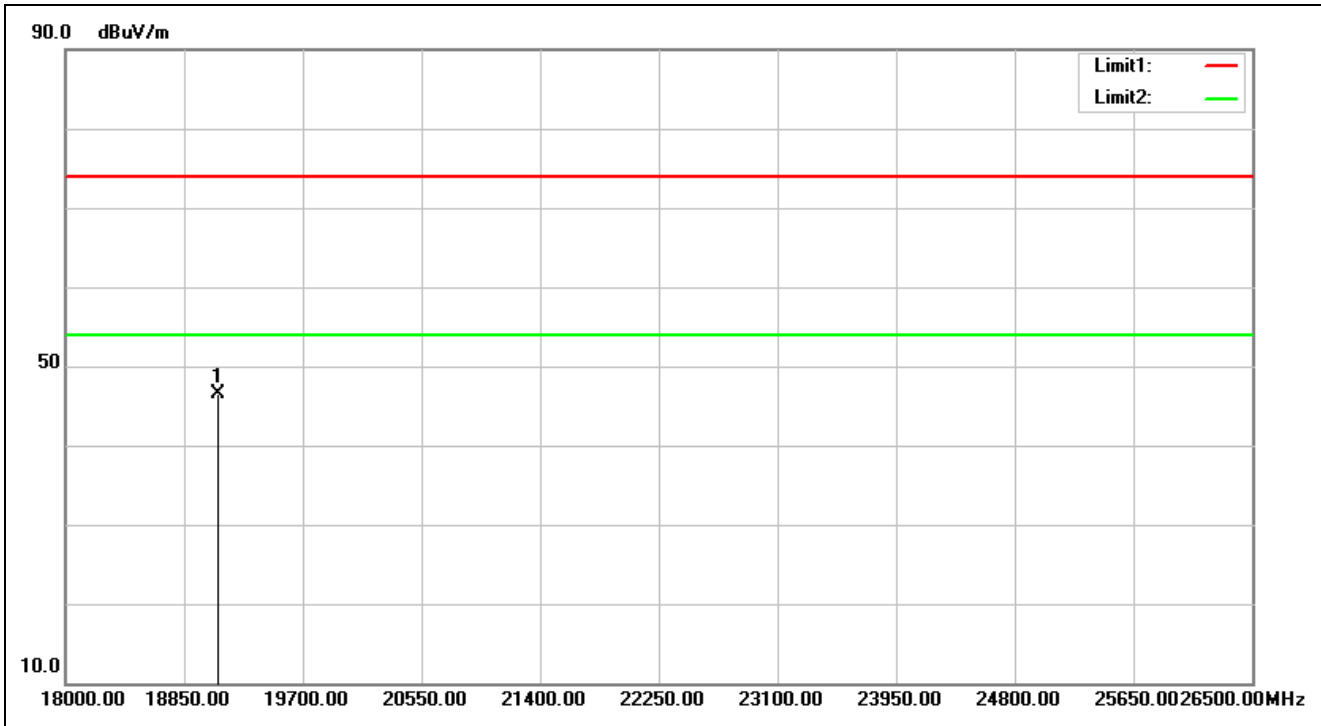


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/8/6 12:13:39
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	TX-1DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19088.000	28.90	17.68	46.58	74.00	-27.42	peak	100	357	

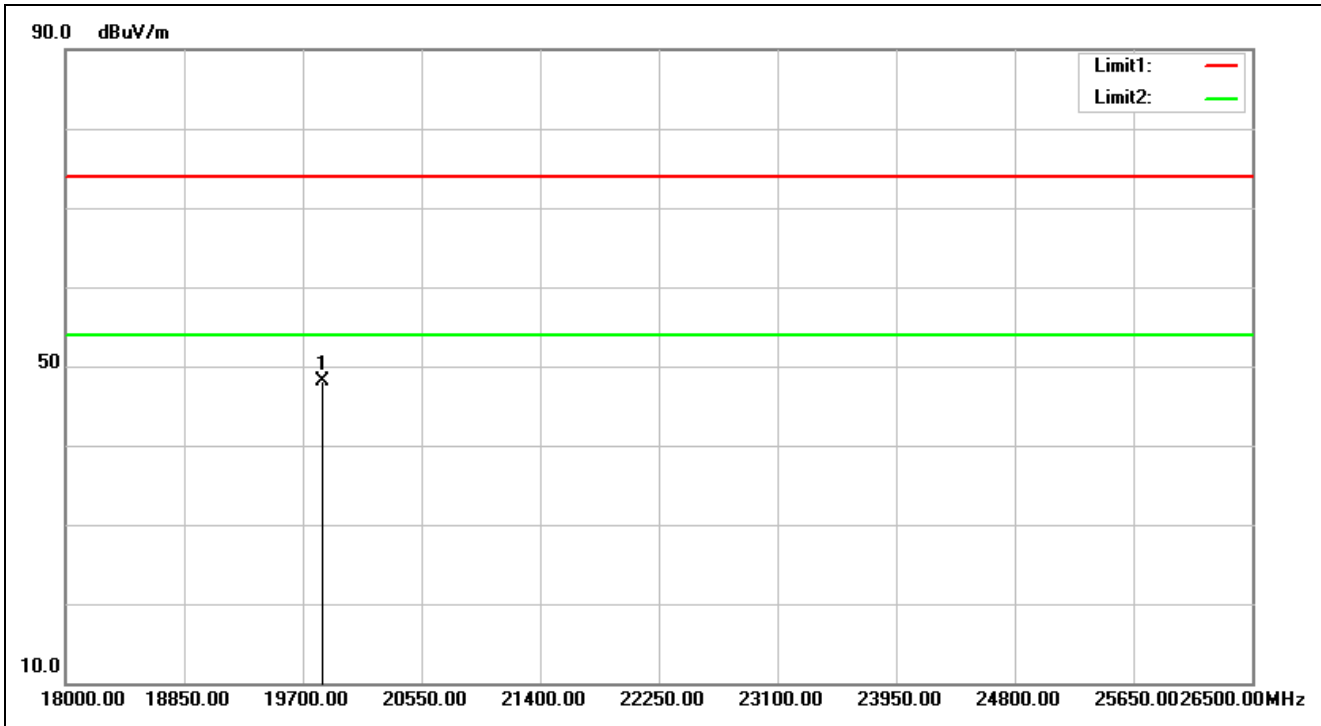


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/8/6 12:14:03
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	TX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19836.000	28.94	19.18	48.12	74.00	-25.88	peak	100	67	

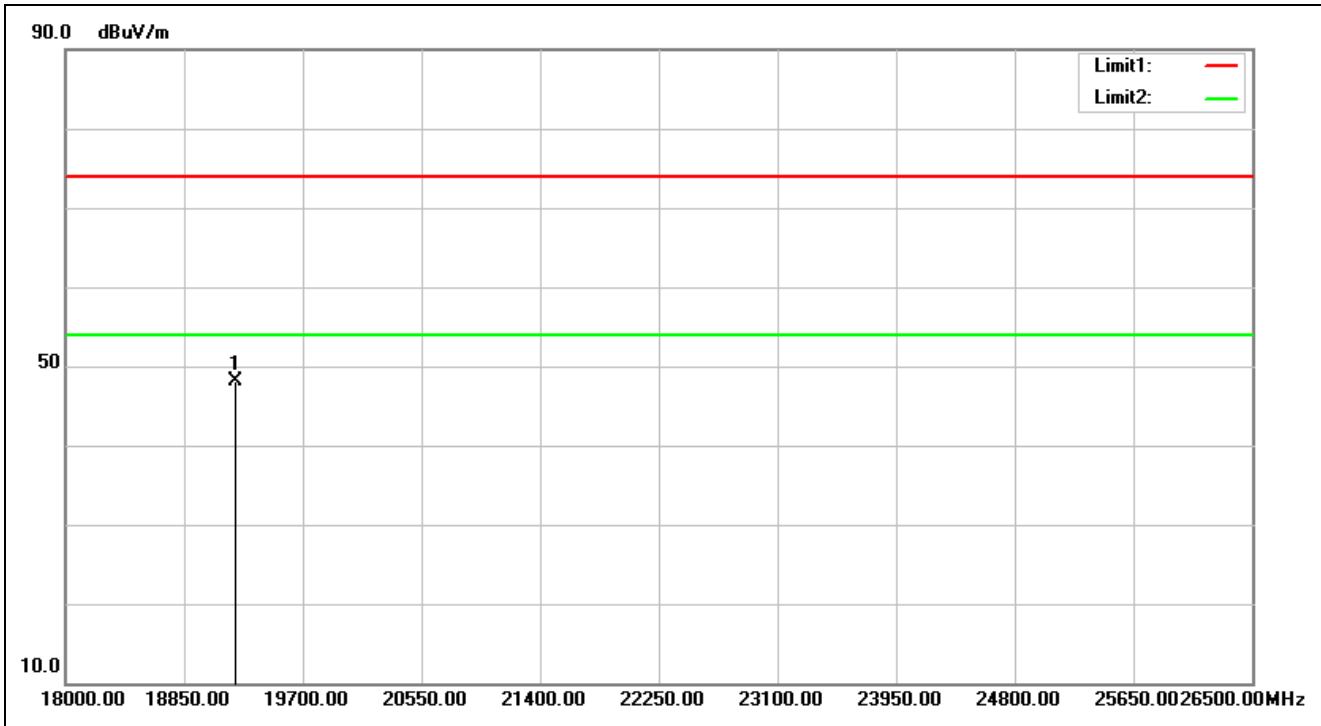


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/8/6 12:14:15
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	TX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19215.500	28.91	19.24	48.15	74.00	-25.85	peak	100	67	

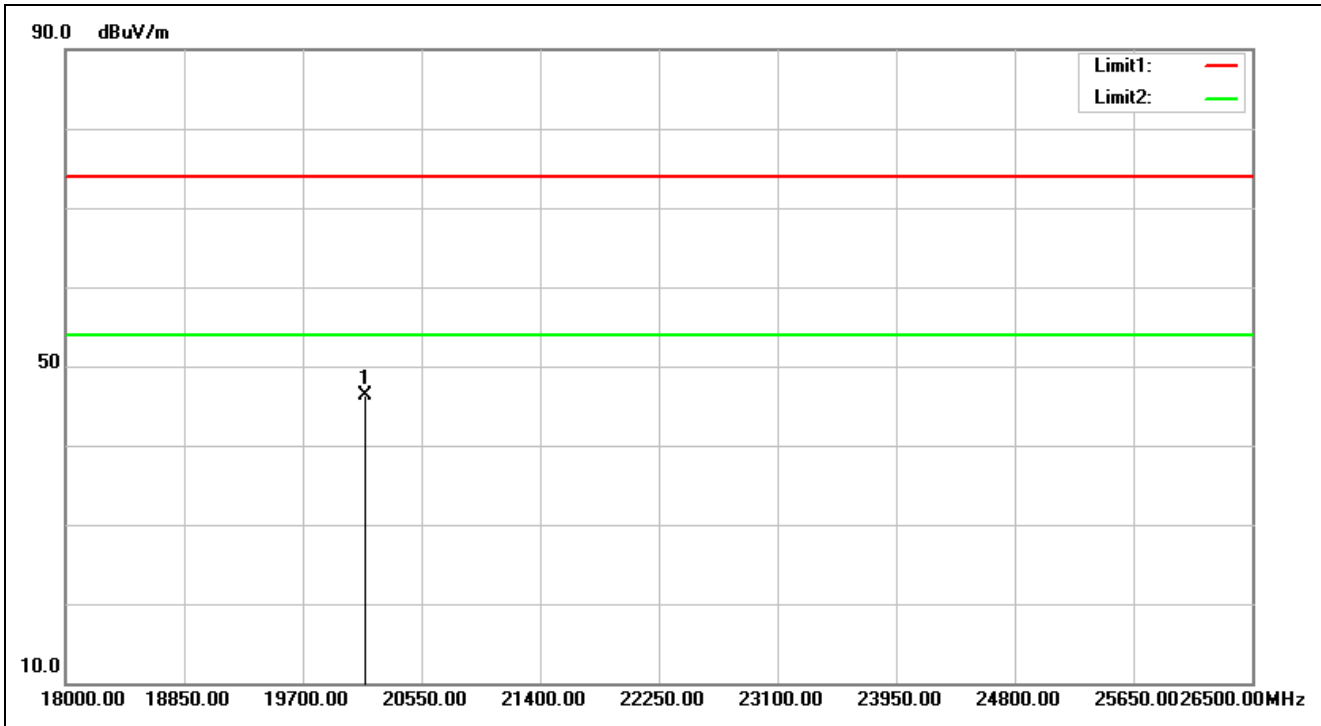

Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/8/6 12:14:36
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	TX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20150.500	29.03	17.24	46.27	74.00	-27.73	peak	100	54	

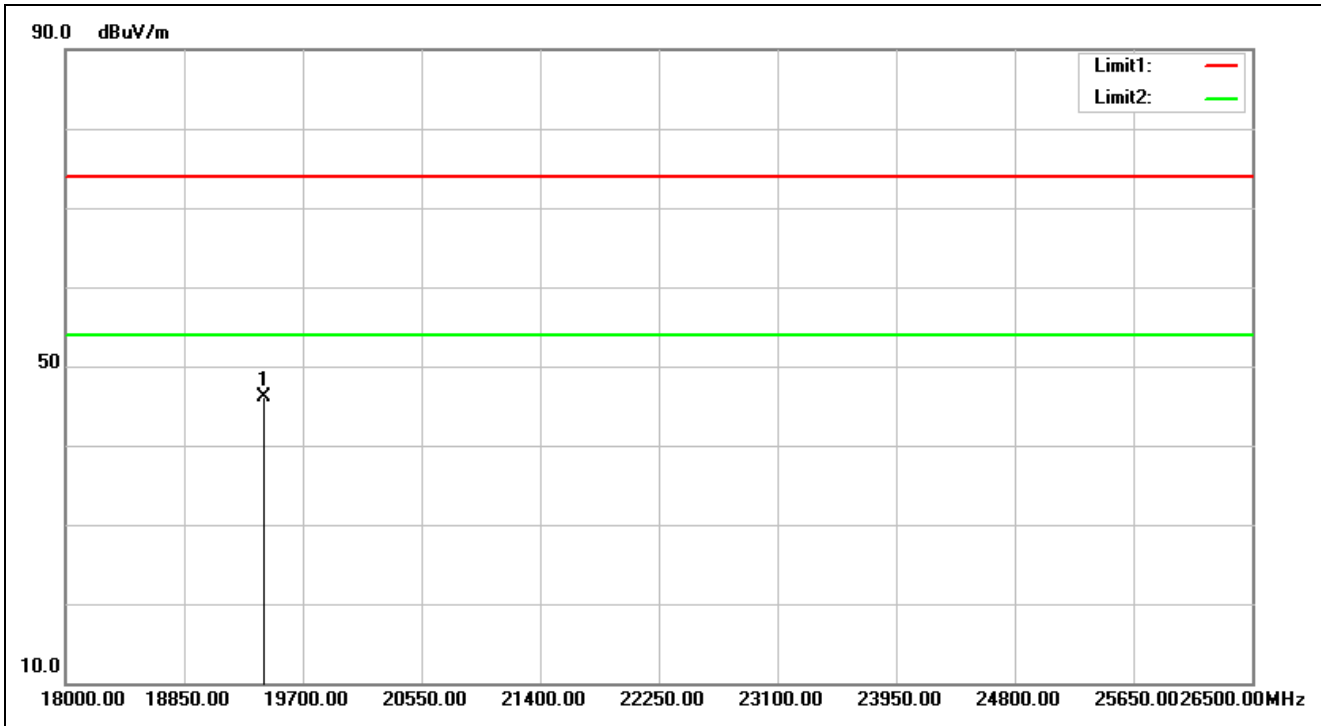

Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/8/6 12:14:47
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	TX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19419.500	28.94	17.22	46.16	74.00	-27.84	peak	100	39	


Spurious Emissions, TX Mode, 30M-1G



TUV Taiwan

11F, No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

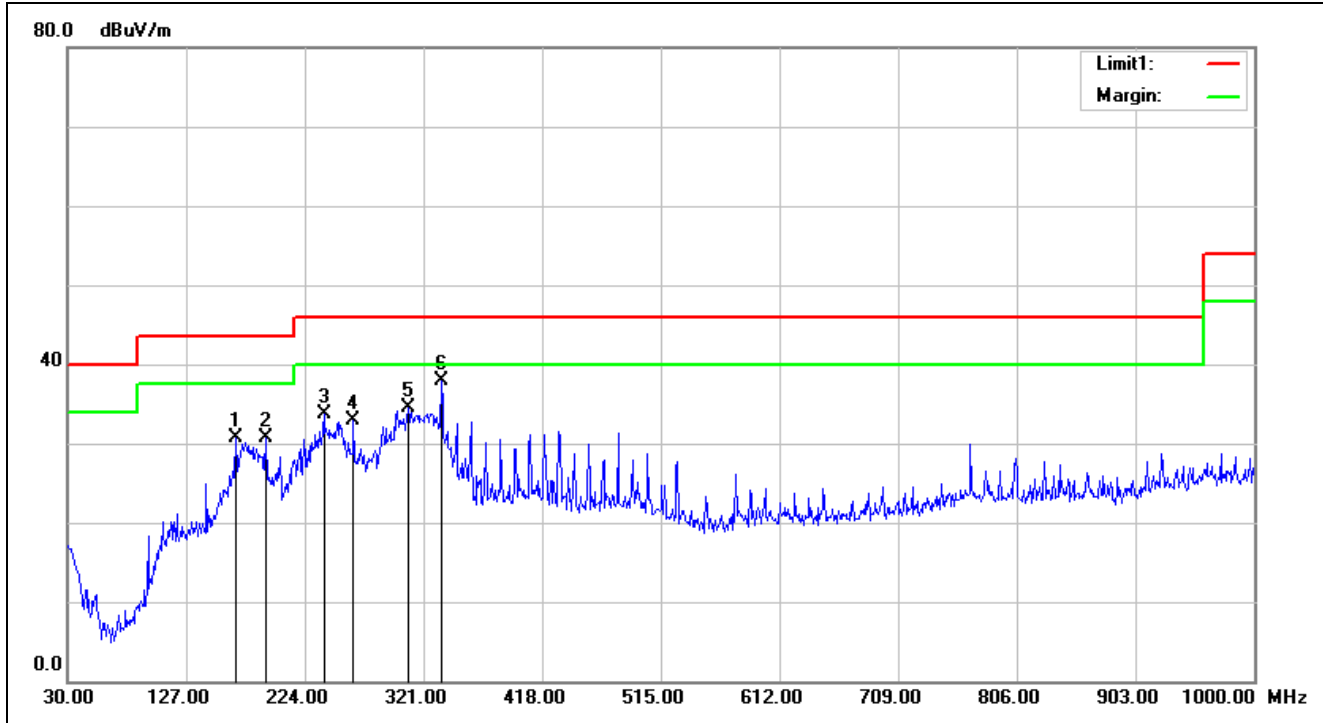

Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/8/6 12:38:34
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	TX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	167.7400	-14.43	45.21	30.78	43.50	-12.72	QP	100	233	
2	191.9900	-15.21	45.88	30.67	43.50	-12.83	QP	100	220	
3	239.5200	-12.63	46.25	33.62	46.00	-12.38	QP	100	163	
4	263.7700	-11.01	43.88	32.87	46.00	-13.13	QP	100	174	
5	308.3900	-10.21	44.62	34.41	46.00	-11.59	QP	100	313	
6	335.5500	-9.59	47.46	37.87	46.00	-8.13	QP	100	171	

Spurious Emissions, RX Mode, 1-18G

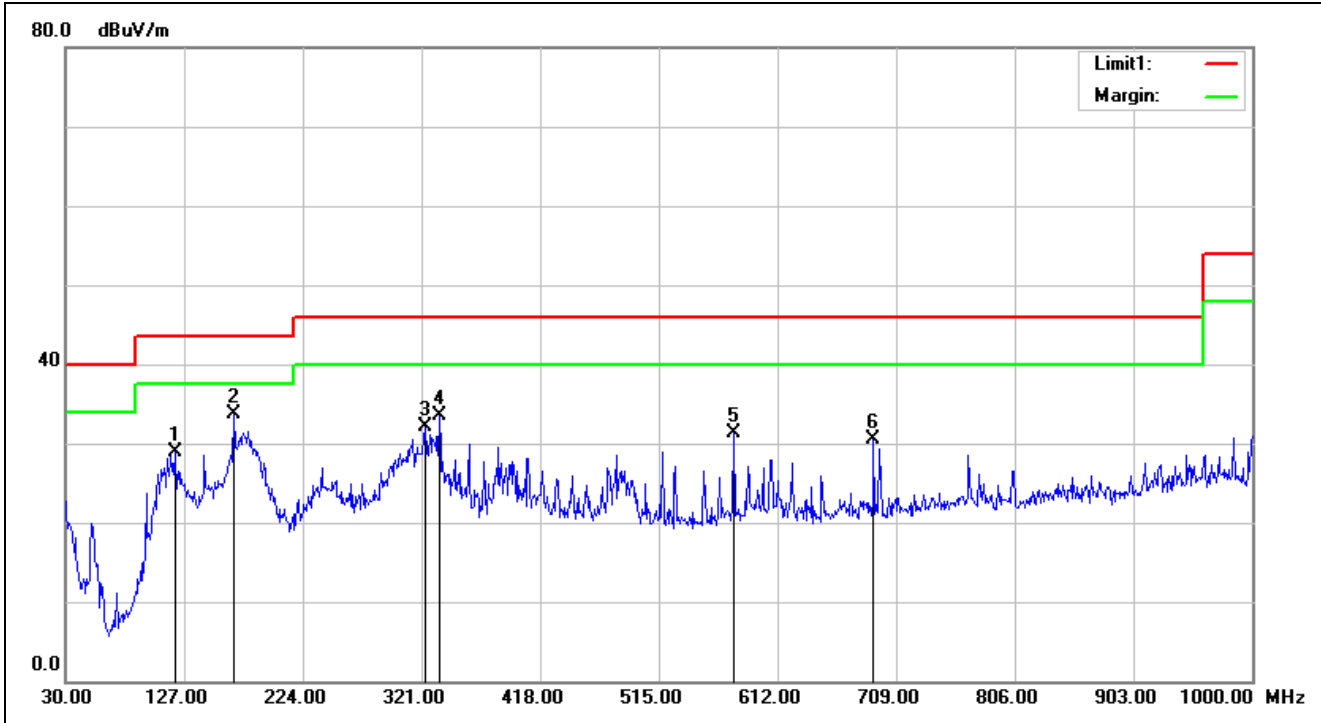


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/8/6 12:39:38
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	TX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	119.2400	-13.03	41.99	28.96	43.50	-14.54	QP	100	83	
2	167.7400	-14.43	48.11	33.68	43.50	-9.82	QP	100	165	
3	323.9100	-9.86	41.95	32.09	46.00	-13.91	QP	100	163	
4	335.5500	-9.59	43.16	33.57	46.00	-12.43	QP	100	194	
5	576.1100	-6.30	37.69	31.39	46.00	-14.61	QP	100	130	
6	690.5700	-4.97	35.46	30.49	46.00	-15.51	QP	100	61	

Spurious Emissions, RX Mode, 1-18G




TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

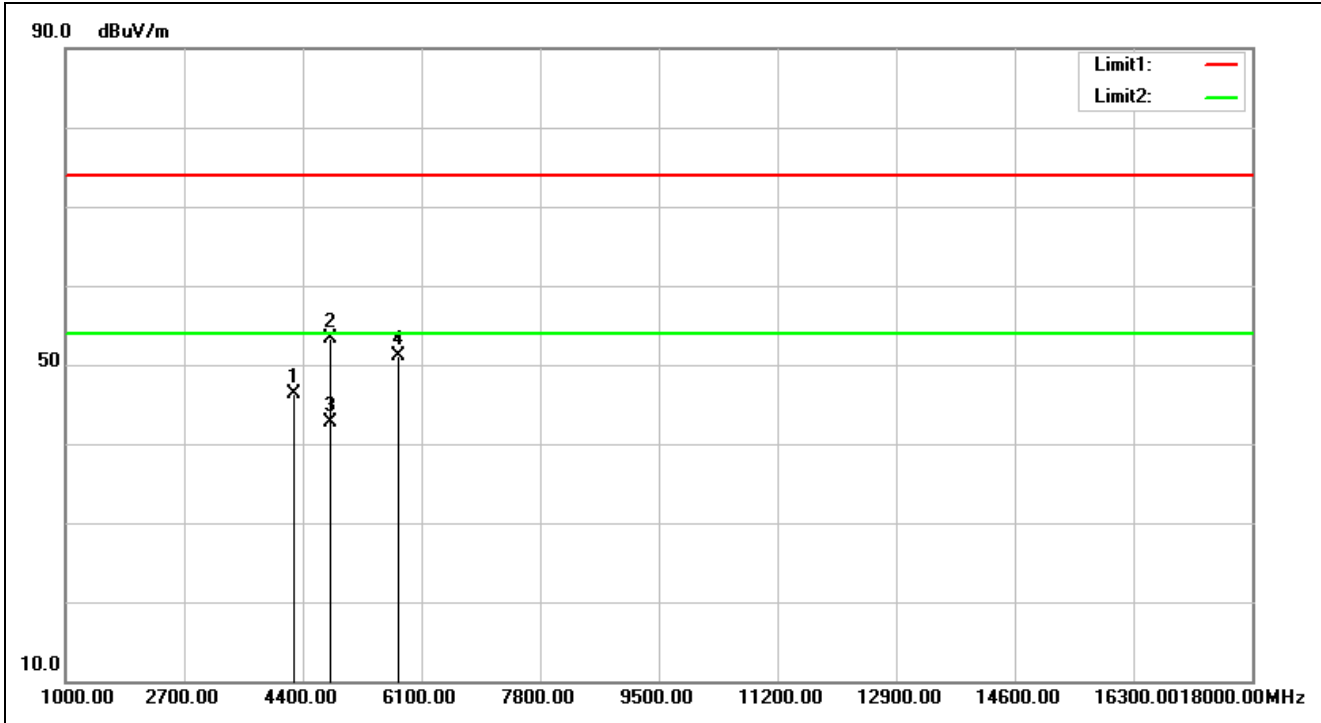

Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/8/6 16:56:52
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	RX-1DH5-2402		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4264.000	-4.02	50.37	46.35	74.00	-27.65	peak	100	175	
2	4791.000	-2.36	55.62	53.26	74.00	-20.74	peak	100	233	
3	4791.000	-2.36	45.07	42.71	54.00	-11.29	AVG	100	233	
4	5760.000	2.51	48.56	51.07	74.00	-22.93	peak	100	51	

Spurious Emissions, RX Mode, 1-18G

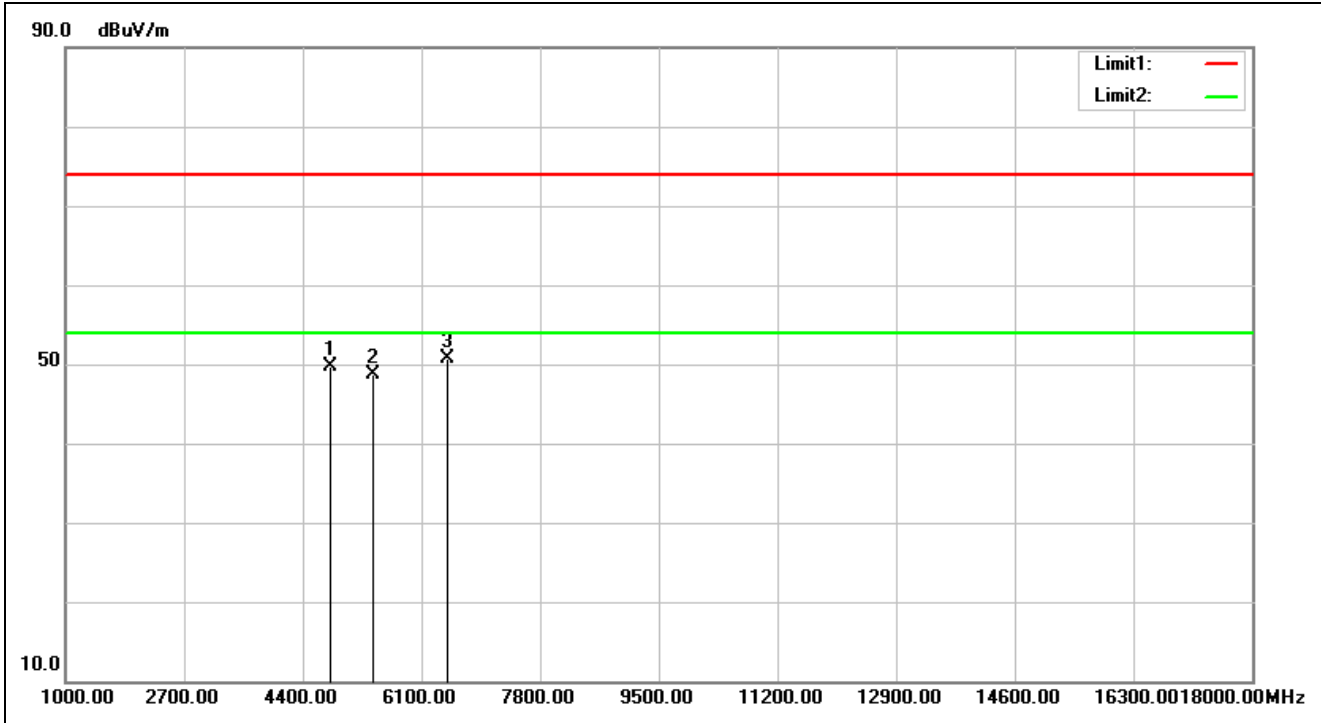


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/8/6 16:57:55
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	RX-1DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4791.000	-2.36	52.04	49.68	74.00	-24.32	peak	100	202	
2	5403.000	0.30	48.33	48.63	74.00	-25.37	peak	100	252	
3	6474.000	5.93	44.69	50.62	74.00	-23.38	peak	100	210	

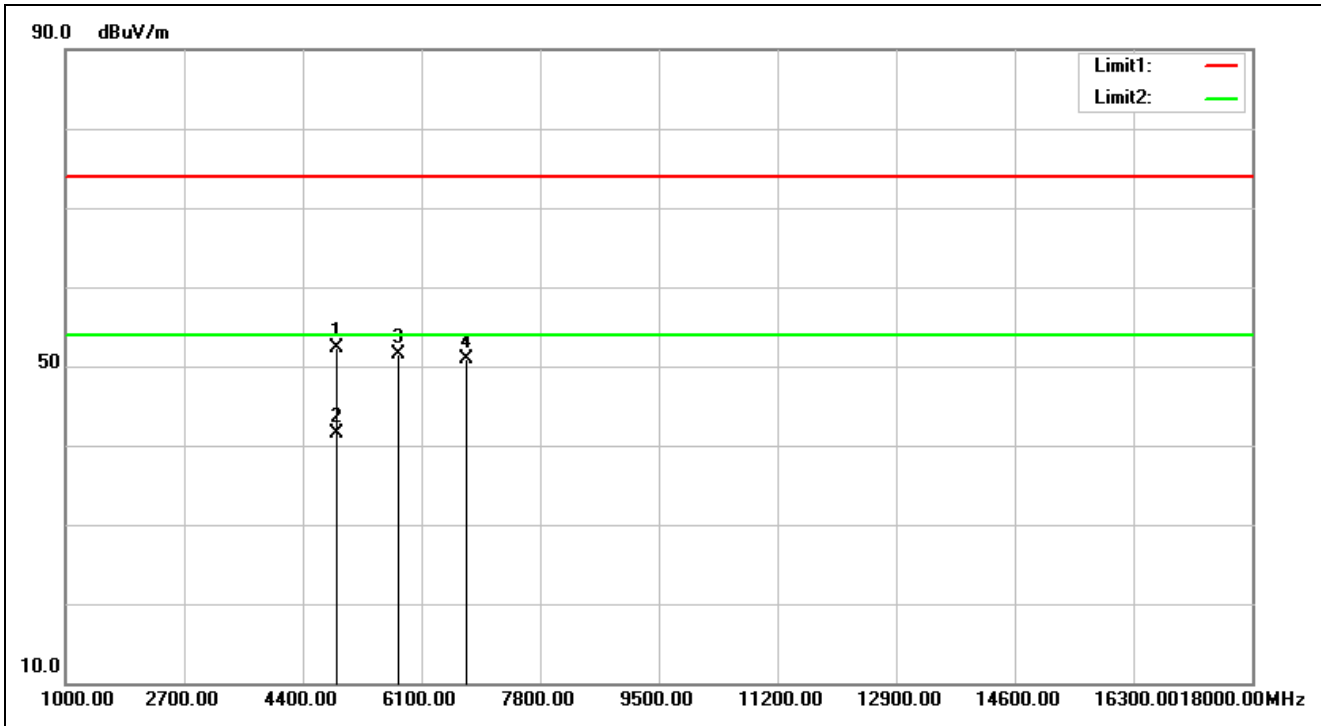


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/8/6 17:02:45
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	RX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4876.000	-2.16	54.45	52.29	74.00	-21.71	peak	100	236	
2	4876.000	-2.16	43.76	41.60	54.00	-12.40	AVG	100	236	
3	5760.000	2.51	49.06	51.57	74.00	-22.43	peak	100	161	
4	6746.000	5.60	45.25	50.85	74.00	-23.15	peak	100	360	

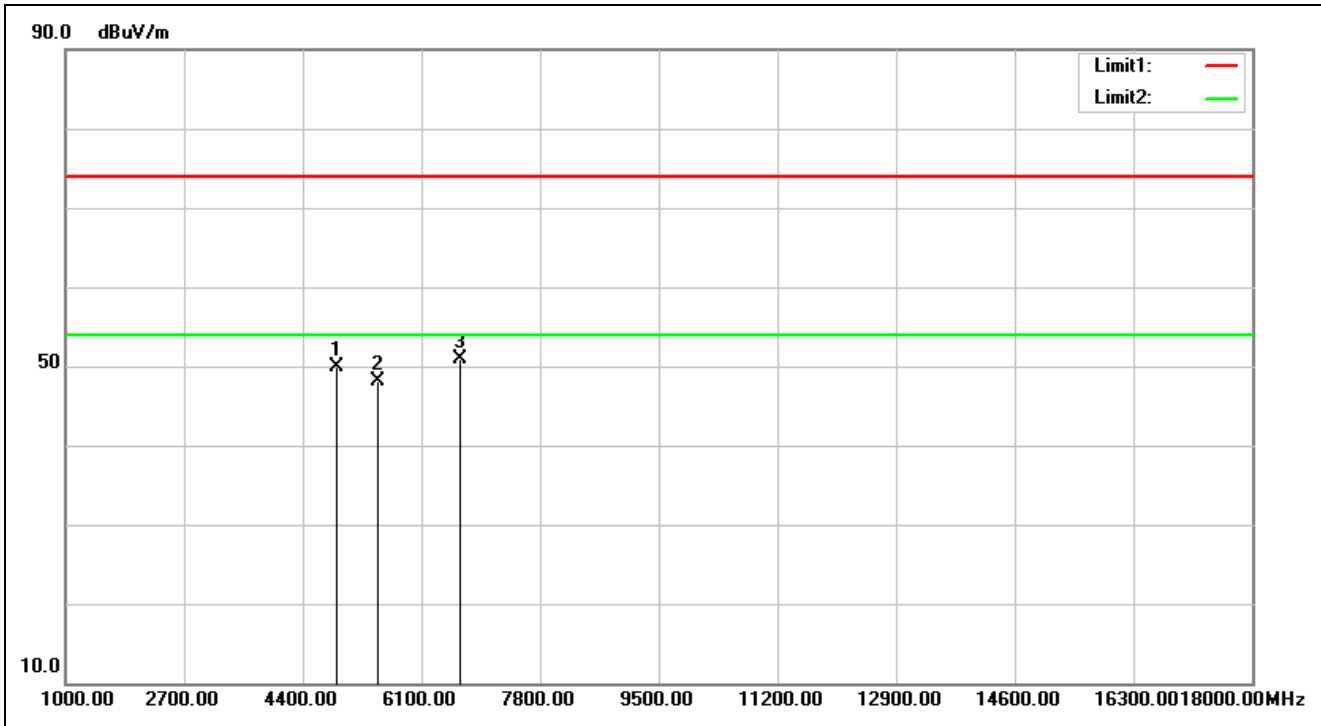


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/8/6 17:03:48
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	RX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4876.000	-2.16	52.00	49.84	74.00	-24.16	peak	100	207	
2	5471.000	0.66	47.49	48.15	74.00	-25.85	peak	100	53	
3	6644.000	5.79	45.05	50.84	74.00	-23.16	peak	100	279	

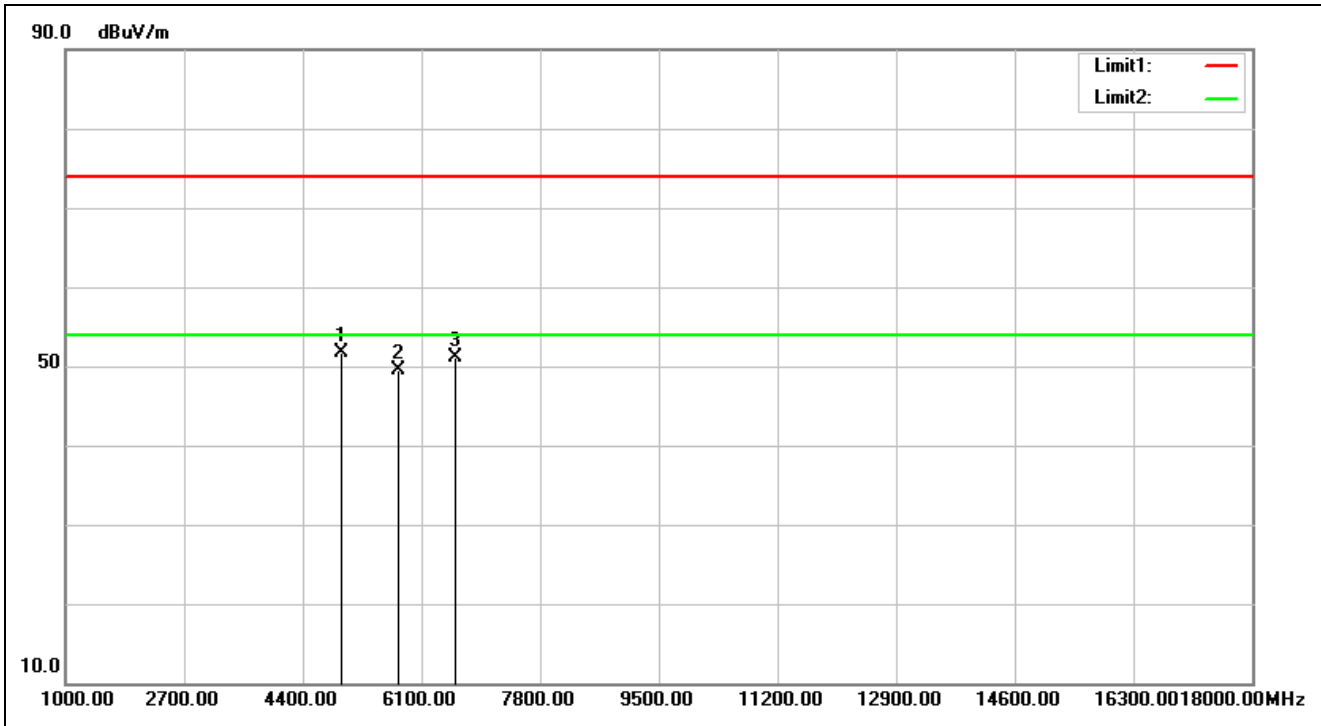

Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/8/6 17:05:48
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	RX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4961.000	-1.97	53.60	51.63	74.00	-22.37	peak	100	230	
2	5760.000	2.51	47.01	49.52	74.00	-24.48	peak	100	47	
3	6593.000	5.87	45.23	51.10	74.00	-22.90	peak	100	136	

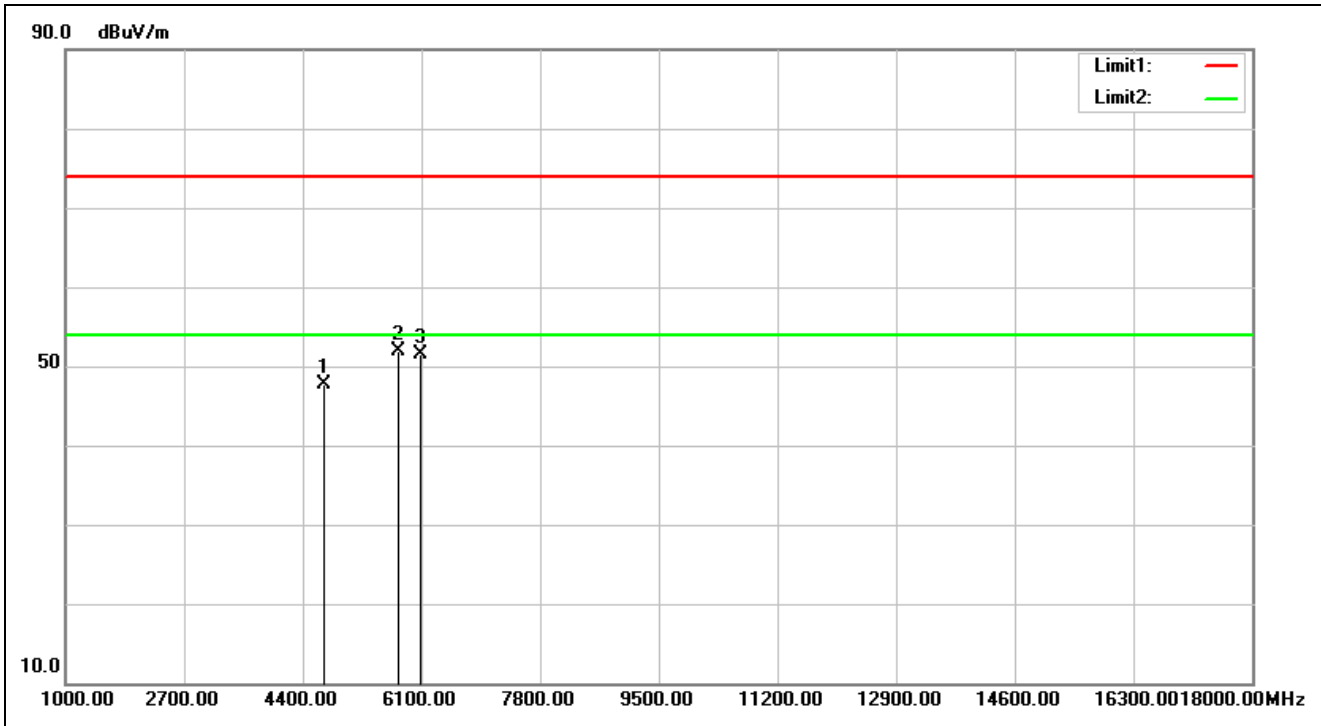


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/8/6 17:06:50
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	RX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4706.000	-2.59	50.27	47.68	74.00	-26.32	peak	100	113	
2	5777.000	2.63	49.36	51.99	74.00	-22.01	peak	100	63	
3	6083.000	4.41	47.15	51.56	74.00	-22.44	peak	100	152	

Spurious Emissions, RX Mode, 18-26G




TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

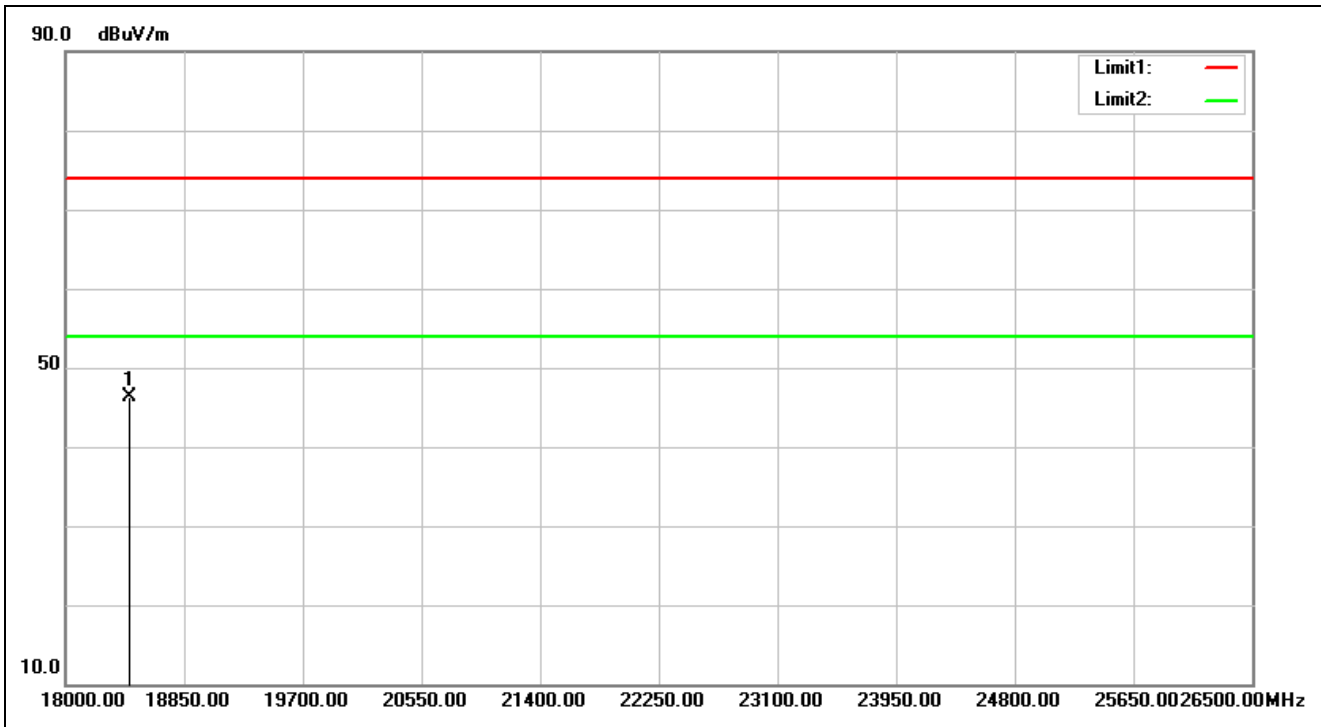


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/8/6 17:11:24
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	RX-1DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18459.000	28.31	18.08	46.39	74.00	-27.61	peak		0	

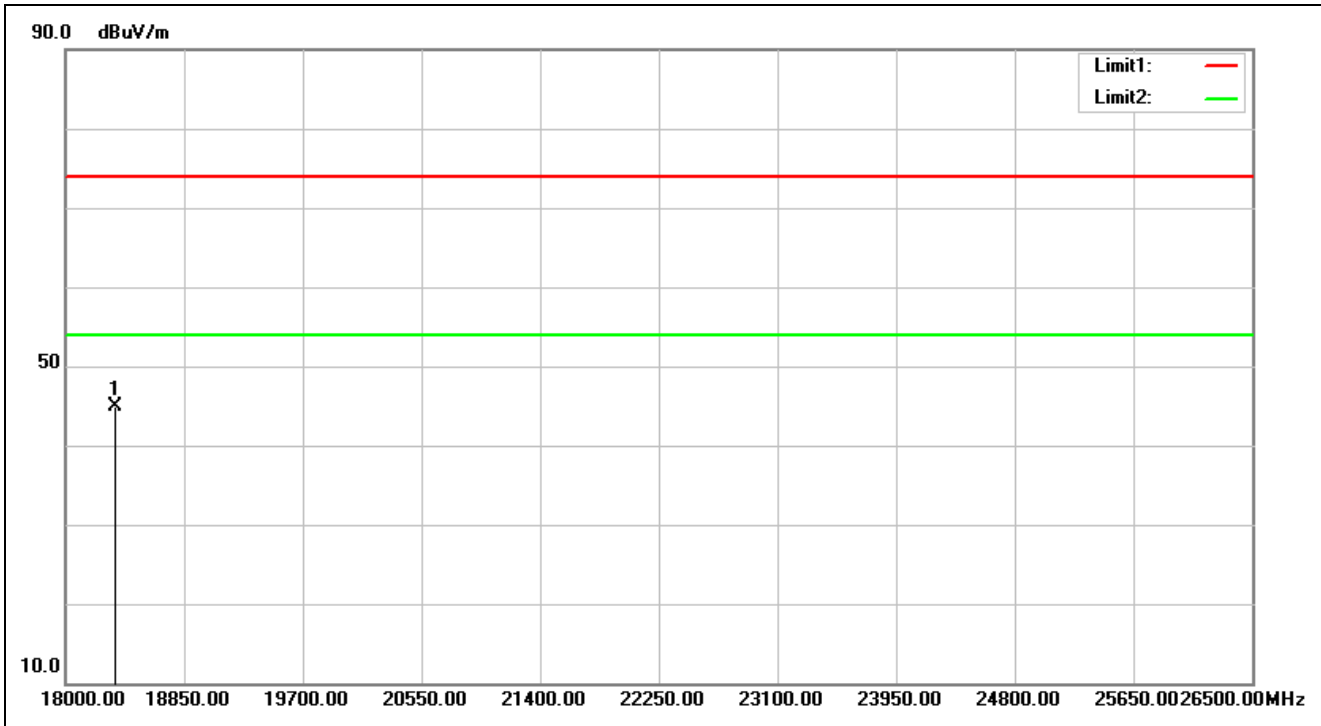


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/8/6 17:13:19
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	RX-1DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18357.000	28.27	16.68	44.95	74.00	-29.05	peak			

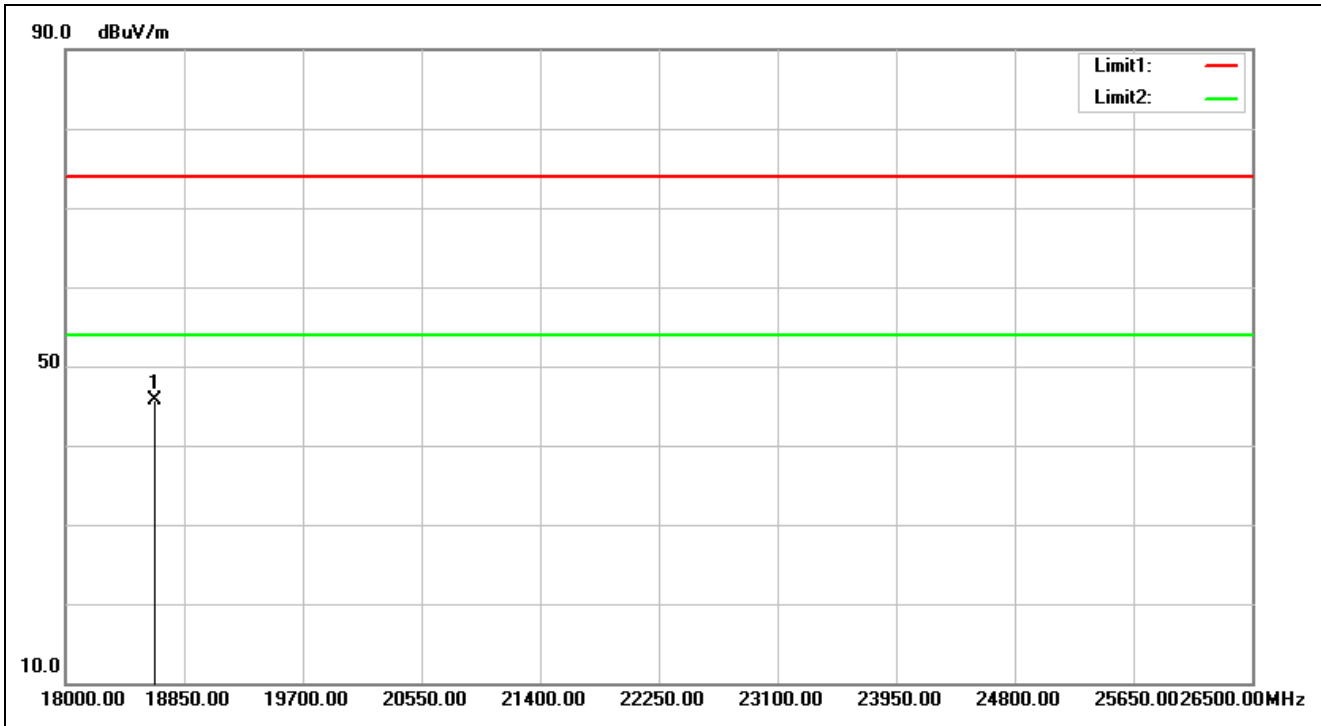


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/8/6 17:16:51
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	RX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18637.500	28.49	17.30	45.79	74.00	-28.21	peak			

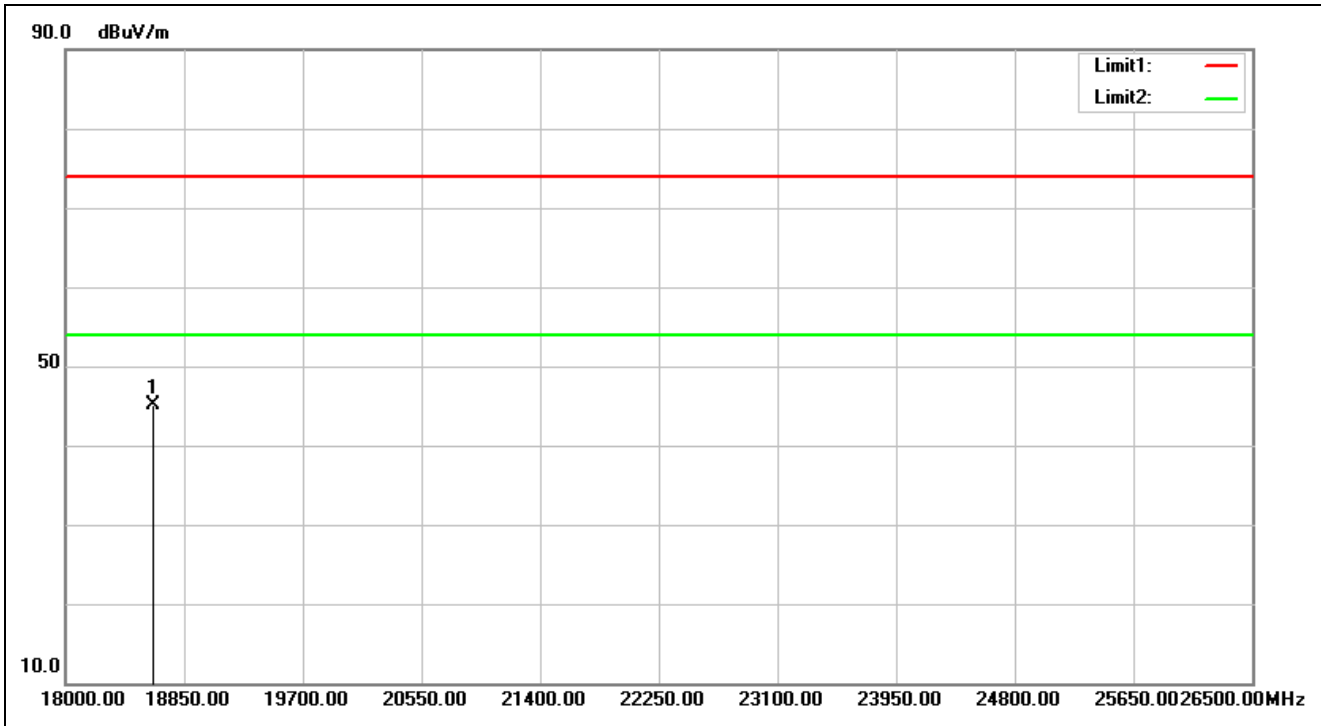


Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/8/6 17:18:22
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	RX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18629.000	28.47	16.56	45.03	74.00	-28.97	peak			

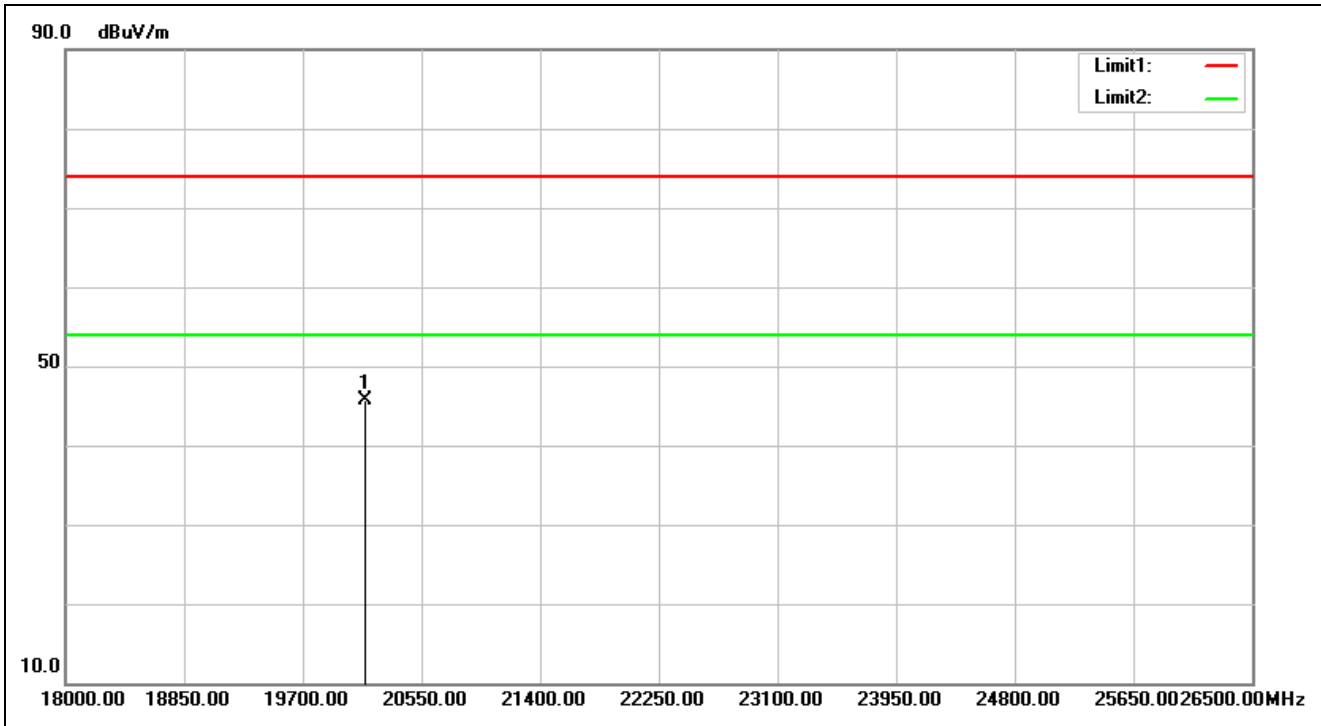

Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/8/6 17:19:31
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	RX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20150.500	29.03	16.74	45.77	74.00	-28.23	peak			

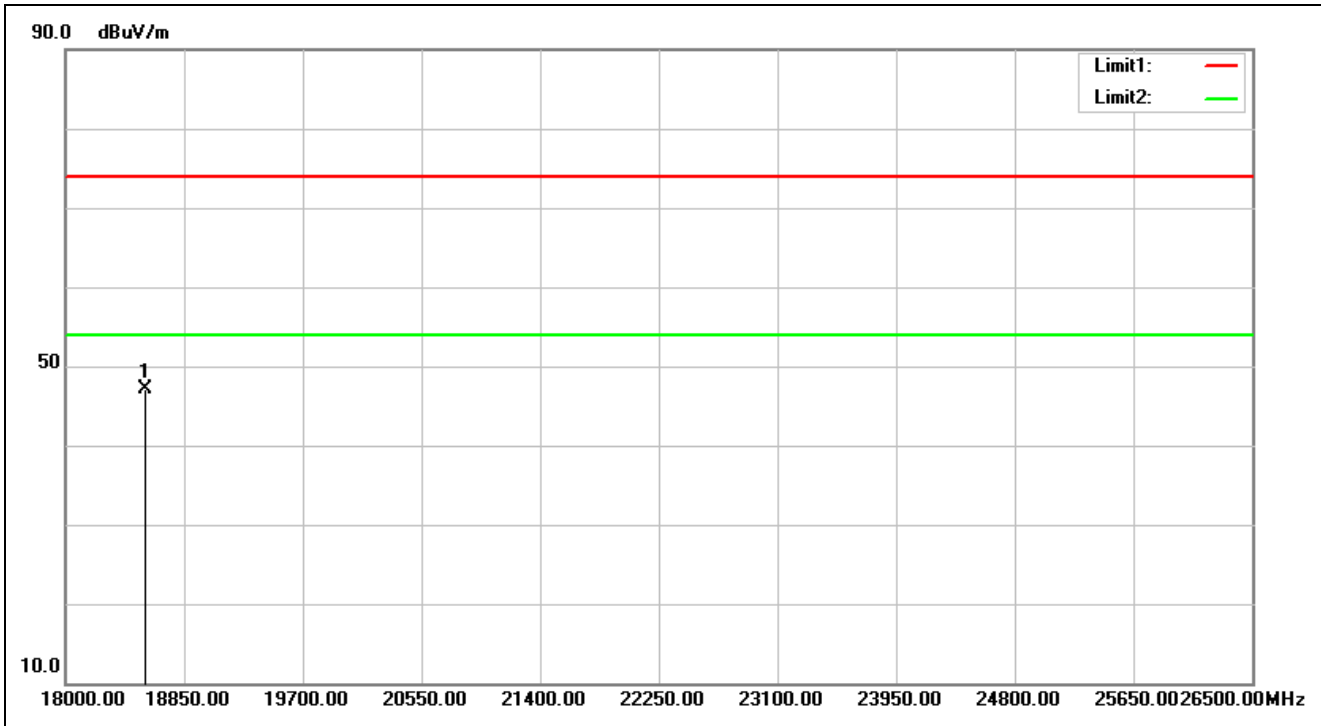

Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/8/6 17:21:29
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	RX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18569.500	28.41	18.63	47.04	74.00	-26.96	peak			


Spurious Emissions, RX Mode, 30M-1G



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

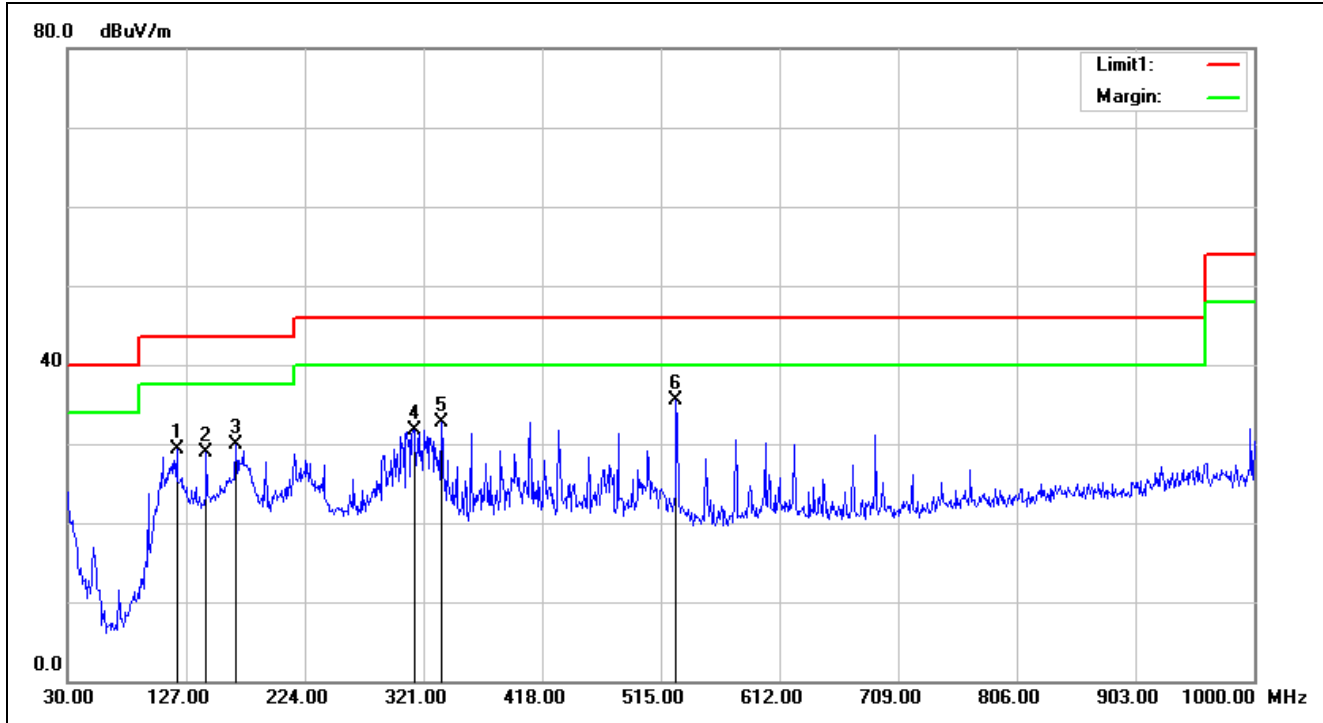

Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/8/6 17:22:41
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	RX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	119.2400	-13.03	42.43	29.40	43.50	-14.10	QP	100	112	
2	143.4900	-12.87	41.73	28.86	43.50	-14.64	QP	100	309	
3	167.7400	-14.43	44.39	29.96	43.50	-13.54	QP	100	152	
4	313.2400	-10.09	41.75	31.66	46.00	-14.34	QP	100	171	
5	335.5500	-9.59	42.27	32.68	46.00	-13.32	QP	100	192	
6	527.6100	-6.97	42.50	35.53	46.00	-10.47	QP	100	187	

Spurious Emissions, Mains, 150kHz - 30MHz

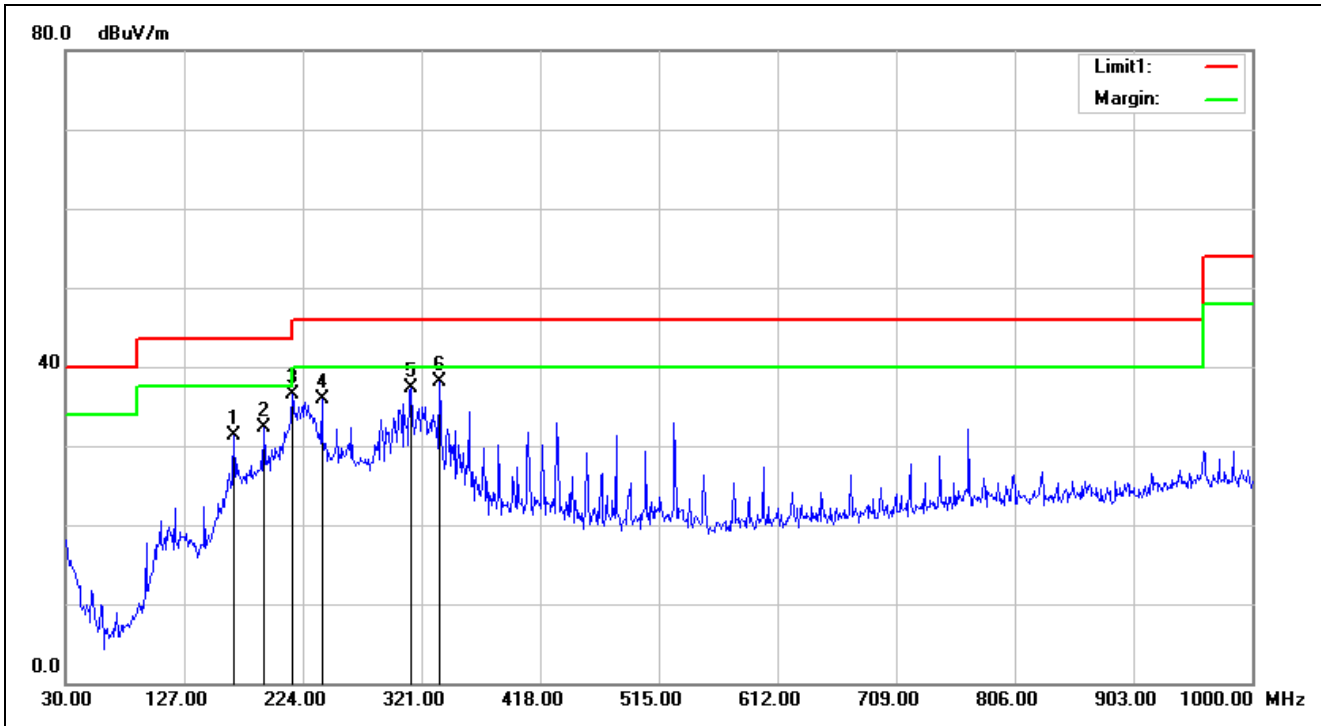

Service No.:	114038577_RF-FCC	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/8/6 17:23:44
Applicant:	CyberPower	Test Rating:	DC 3V
Product:	藍牙自拍器	Temp.(°C)/Hum.(%):	20.1(°C)/50%
Model No.:	BT-300	Test Engineer:	Sam Su
Test Mode:	RX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	167.7400	-14.43	45.69	31.26	43.50	-12.24	QP	100	192	
2	191.9900	-15.21	47.52	32.31	43.50	-11.19	QP	100	181	
3	215.2700	-14.29	50.82	36.53	43.50	-6.97	QP	100	168	
4	239.5200	-12.63	48.54	35.91	46.00	-10.09	QP	100	325	
5	312.2700	-10.12	47.36	37.24	46.00	-8.76	QP	100	304	
6	335.5500	-9.59	47.64	38.05	46.00	-7.95	QP	100	315	