

## ***MPE TEST REPORT***

**Manufacturer: SL CORPORATION**  
**77 Gongdan6-ro, Jillyang-eup, Gyeongsan-si,**  
**Kyeongsangbuk-do, 712-837, Republic of Korea**  
**Attn: Mr.Un-Yong, Jang / Assistant Manager**

**Date of Issue: December 27, 2017**  
**Order Number: GETEC-C1-17-597**  
**Test Report Number: GETEC-E3-17-059**  
**Test Site: GUMI UNIVERSITY EMC CENTER**  
**(FCC Test Firm Registration No.: 269701)**

**FCC ID. : 2AFGCWC-LP10**


**Applicant : SL CORPORATION**

**Rule Part(s) : FCC Part 1**  
**Test Procedure : FCC Part 1, Subpart I, section 1.1310 and KDB 680106 D01 V02**  
**EUT Type : Wireless Charger**  
**Type of Authority : Certification**  
**Model Name : WC-LP10**  
**Trade Mark : SL**

**This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in 47 CFR Part 1, Subpart I, section 1.1310 and KDB 680106 D01 V02**

**I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.**

**Tested by,**

  
**Hyun Kim, Senior Engineer**  
**GUMI UNIVERSITY EMC CENTER**

**Reviewed by,**

  
**Jae-Hoon Jeong, Technical Manager**  
**GUMI UNIVERSITY EMC CENTER**



## CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>3</b>
<b>2. INTRODUCTION .....</b>	<b>4</b>
<b>3. PRODUCT INFORMATION .....</b>	<b>5</b>
<b>3.1 DESCRIPTION OF EUT.....</b>	<b>5</b>
<b>3.2 DEFINITION OF MODELS.....</b>	<b>5</b>
<b>3.3 SUPPORT EQUIPMENT / CABLES USED .....</b>	<b>6</b>
<b>3.4 MODIFICATION ITEM(S).....</b>	<b>6</b>
<b>4. DESCRIPTION OF TESTS.....</b>	<b>7</b>
<b>4.1 TEST CONDITION.....</b>	<b>7</b>
<b>5. TEST EQUIPMENT USED.....</b>	<b>7</b>
<b>6. TEST RESULT .....</b>	<b>8</b>
<b>6.1 TEST SETUP .....</b>	<b>8</b>
<b>6.2 MEASUREMENT PROCEDURE.....</b>	<b>8</b>
<b>6.3 EQUIPMENT APPROVAL CONSIDERATIONS.....</b>	<b>9</b>
<b>6.4 ENVIRONMENTAL EVALUATION AND EXPOSURE LIMIT ACCORDING TO FCC CFR 47 PART 1, 1.1307(B), 1.131010</b>	
<b>6.5 E AND H FIELD STRENGTH .....</b>	<b>11</b>
<b>6.5.1 FIELD STRENGTH MEASURE VALUE AT 10 cm FROM THE EDGES SURROUNDING THE EUT .....</b>	<b>11</b>
<b>7. PHOTOGRAPHS .....</b>	<b>12</b>
<b>7.1 TEST PHOTOGRAPHS.....</b>	<b>12</b>



**Scope:** Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

## 1. General Information

**Applicant:** SL CORPORATION

**Applicant Address:** 77 Gongdan6-ro, Jillyang-eup, Gyeongsan, Kyeongsangbuk-do, 712-837, Republic of Korea

**Applicant:** SL CORPORATION

**Applicant Address:** 77 Gongdan6-ro, Jillyang-eup, Gyeongsan, Kyeongsangbuk-do, 712-837, Republic of Korea

**Contact Person:** Mr.Un-Yong, Jang / Assistant Manager, Regulation & Homologation Team

**Tel. Number:** +82-53-850-8765

**Fax Number:** +82-53-850-8700

- **FCC ID.** 2AFGCWC-LP10
- **EUT Type** Wireless Charger
- **Model Name** WC-LP10
- **Rule Part(s)** FCC Part 1
- **Type of Authority** Certification
- **Test Procedure(s)** FCC Part 1, Subpart I, section 1.1310 and KDB 680106 D01 V02
- **Dates of Test** December 26 , 2017
- **Place of Test** GUMI UNIVERSITY EMC CENTER (FCC Test Firm Registration Number: 269701) 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, South Korea.
- **Test Report Number** GETEC-E3-17-059
- **Dates of Issue** December 27, 2017



## 2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2014) was used in determining radiated and conducted emissions emanating from **SL CORPORATION. Wireless Charger (Model name: WC-LP10)**

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER**.

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, South Korea

This test site is one of the highest point of GUMI UNIVERSITY at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2014)

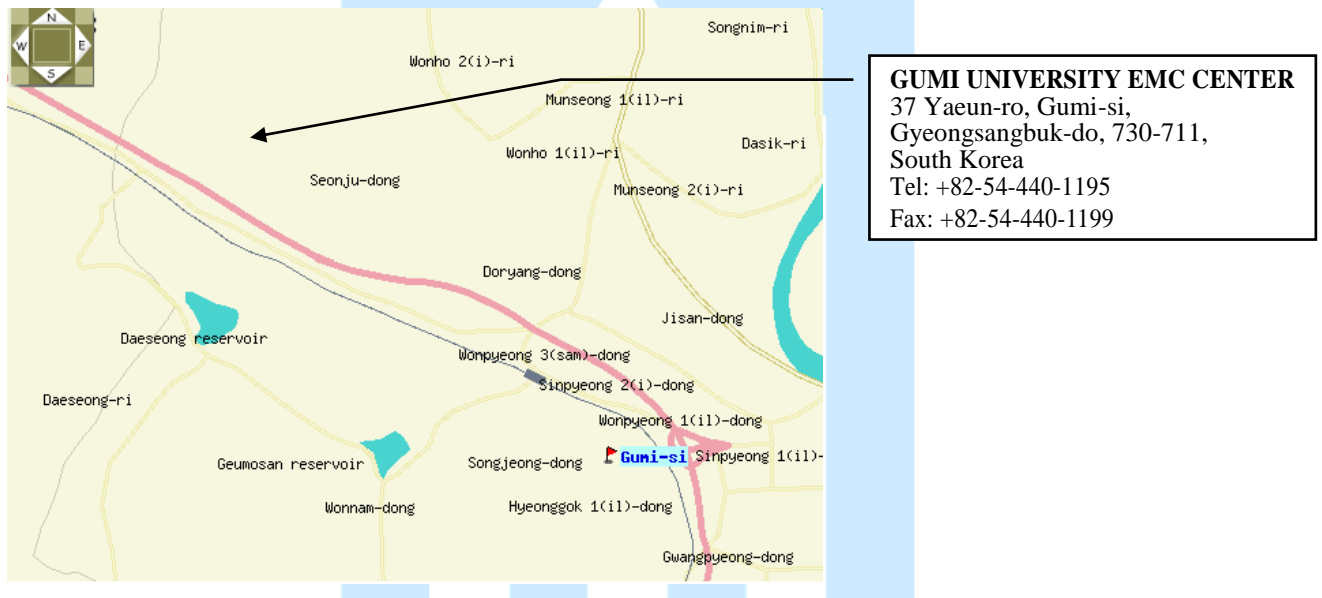


Fig 1. The map above shows the GUMI UNIVERSITY in vicinity area.



### 3. Product Information

#### 3.1 Description of EUT

The Equipment under Test (EUT) is the **SL CORPORATION. Wireless Charger.(Model Name: WC-LP02) FCC ID.: 2AFGCWC-LP10**

Type of Equipment	Wireless Charger
Model Name	WC-LP02
Serial Number	Prototype
RF Frequency	110 kHz $\pm$ 5 kHz
External connector	DC input 1 EA
Rated Voltage	Input : DC 13.5 V
Output Electricity Power	Max 5 W(5 V, 1 A)
Antenna type	A13 Standard Coil
Size(W x H x T)	80.2 (mm) x 147.8 (mm) x 23.2 (mm)
weight	273.9 g

#### 3.2 Definition of models

- None.



### 3.3 Support Equipment / Cables used

#### 3.3.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
LGIT Wireless charger RX module	LG innoteck	-	S/N: None. FCC ID.: None.

See “Appendix E – Test Setup Photographs” for actual system test set-up

#### 3.3.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
None.	-	-	S/N: -. FCC ID.: -..

#### 3.3.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the EUT and DC power supply	1.00 m Unshielded.

### 3.4 Modification Item(s)

-. None



## 4. Description of tests

### 4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used.

The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency: DC 13.5 V
- Operating condition during the test(s) :  
This device has been tested in the configurations of charging mode

Charging Current	Support Equipment	Comment
1 000 mA	LGIT Wireless charger RX module(5W)	

## 5. Test Equipment used


Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESIB26	Rohde & Schwarz	EMI Test Receiver	830482/010	Apr. 18, 2018
■ - HFH2-Z2	Rohde & Schwarz	Loop ANT	100041	Dec. 06, 2019
■ - MCU066	maturo GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	maturo GmbH	Turntable	1390307	N/A
■ - HI-6105	ETS LINDGREN	Electric field Probe	203871	Dec. 21, 2018
■ - ELT-400	Narda	Exposure Level Meter	N-0332	Sep. 09, 2018

All test equipment used is calibrated on a regular basis.



## 6. Test Result

### 6.1 Test Setup

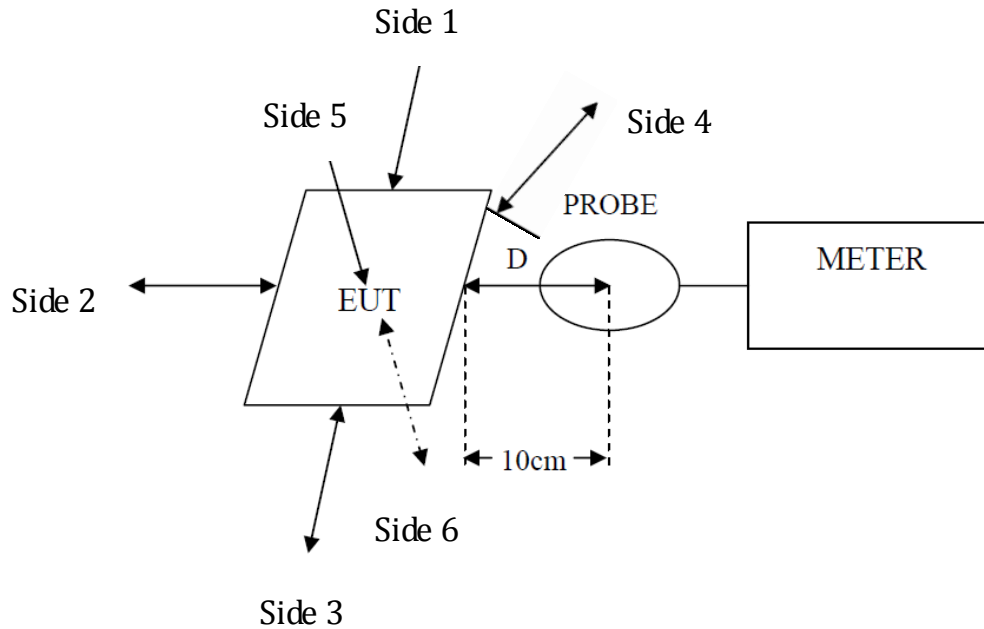

### 6.2 Measurement Procedure

The RF exposure test was performed on 360 degree turn table in anechoic chamber. The measurement probe was placed at test distance ( 10 cm) which is between the edge of the charger and the geometric center of probe. The turn table was rotated 360 degree to search of highest strength. The highest emission level was recorded and compared with limit as soon as measurement of each points (Side 1 ~ 6) were completed. The EUT were measured according to the dictates of KDB 680106 D01v02.






### 6.3 Equipment Approval Considerations.

The EUT does with item 5.2 of KDB 680106 D01v02

- a) Power transfer frequency is less than 1 MHz  
- The device operate in the frequency range from 110 kHz  $\pm$  5 kHz
- b) Output power from each primary coil is less than 5 watts.  
- The maximum field strength of fundamental : 71.78 dB $\mu$ V/m at 3 m. The EIRP calculation is reference to KDB 789033  
\*  $EIRP[dBm] = E[dB\mu V/m] + 20\log(d[meters]) - 104.77 - 4.8 \text{ dB}, d = 3 \text{ m}$   
\*  $71.78 \text{ dB}\mu V/m - 95.2 - 4.8 = -28.22 \text{ dBm EIRP}$   
\* The output power from primary coil is 0.001 5 mW
- c) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils  
- The EUT are consist of 3 charging coils using A13 coil below coupling only between individual pairs of coils

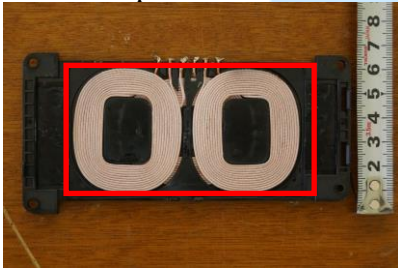

- d) Client device is inserted in or placed directly in contact with the transmitter  
- Client device is placed directly in contact with the transmitter. Refer to following photo.



- e) The maximum coupling surface area of the transmit(charging) device is between 60 cm<sup>2</sup> and 400 cm<sup>2</sup>  
- The EUT coupling surface area: 118.5 cm<sup>2</sup>
- f) Aggregate leakage fields at 10 cm surrounding the device from all simultaneous transmitting coils are demonstrated to be less than 30% of the MPE limit.  
- The EUT field strength levels are compiled to 30 % MPE limits. Refer to following test results.  
- 0.487 A/m (maximum measure value) < 0.489 A/m (30% MPE limit)



#### 6.4 Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

§1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter

Table 1 – LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (minutes)
(A) Limits for Occupational /Control Exposures				
0.3 – 3.0	614	1.63	*(100)	6
3.0 – 30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30 – 300	61.4	6.163	1.0	6
300 – 1 500			f/300	6
1 500 – 100 000			5	6
(B) Limits for General Population / Uncontrol Exposures				
<b>0.3 – 1.34</b>	<b>614</b>	<b>1.63</b>	*(100)	30
1.34 – 30	824/f	2.19	*(180/f <sup>2</sup> )	30
30 – 300	27.5	0.073	0.2	30
300 – 1 500			f/1 500	30
1 500 – 100 000			1.0	30

F=frequency in MHz

\* = Plane wave equivalent power density

Note 1 to Table 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

Note 2 to Table 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.



## 6.5 E and H field strength

Temperature : 23.7 °C  
Relative Humidity : 29.2 % R.H.

Test mode : Wireless charging mode(full load: 1 000 mA state)

### 6.5.1 Field Strength measure value at 10 cm from the edges surrounding the EUT

#### Electric Field Strength

Test Position	Probe Measure Result(V/m)	Limit(V/m)	30 % Limit(V/m)
Side 1	4.296	614	184.2
Side 2	3.482	614	184.2
Side 3	5.139	614	184.2
Side 4	3.576	614	184.2
Side 5	4.467	614	184.2
Side 6	1.697	614	184.2

#### Magnetic Field Strength

Test Position	Probe Measure Result(A/m)	Limit(A/m)	30 % Limit(A/m)
Side 1	0.364	1.63	0.489
Side 2	0.342	1.63	0.489
Side 3	0.373	1.63	0.489
Side 4	0.210	1.63	0.489
Side 5	0.487	1.63	0.489
Side 6	0.190	1.63	0.489



## 7. Photographs

### 7.1 Test Photographs

Test model No.: WC-LP10


Test with full load

Side 1

< Electric field >




< Magnetic field >

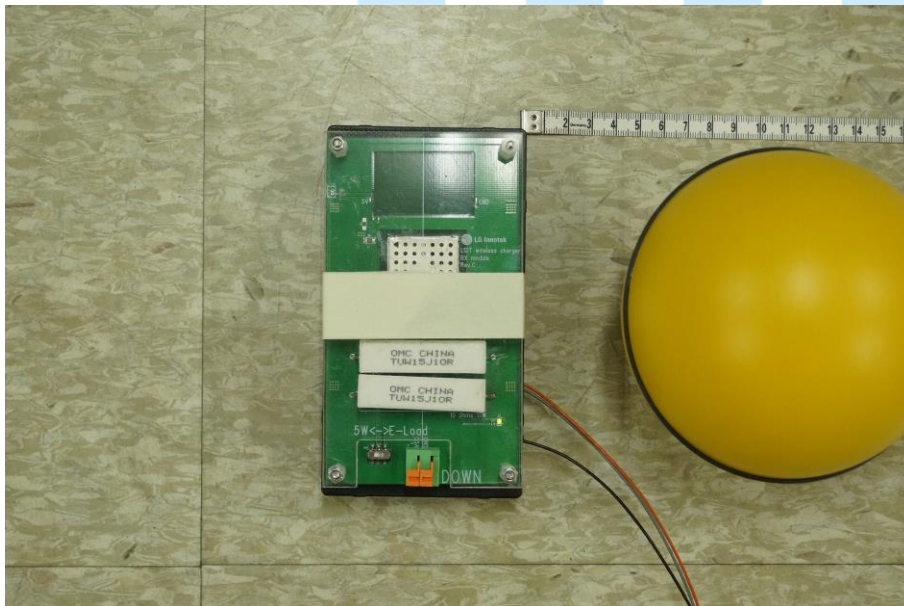




Side 2

< Electric field >

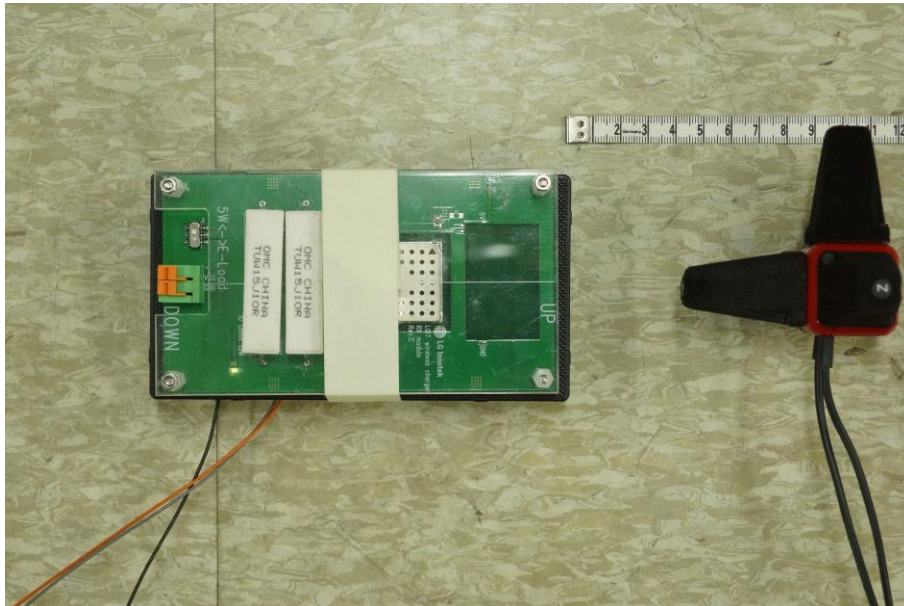

< Magnetic field >

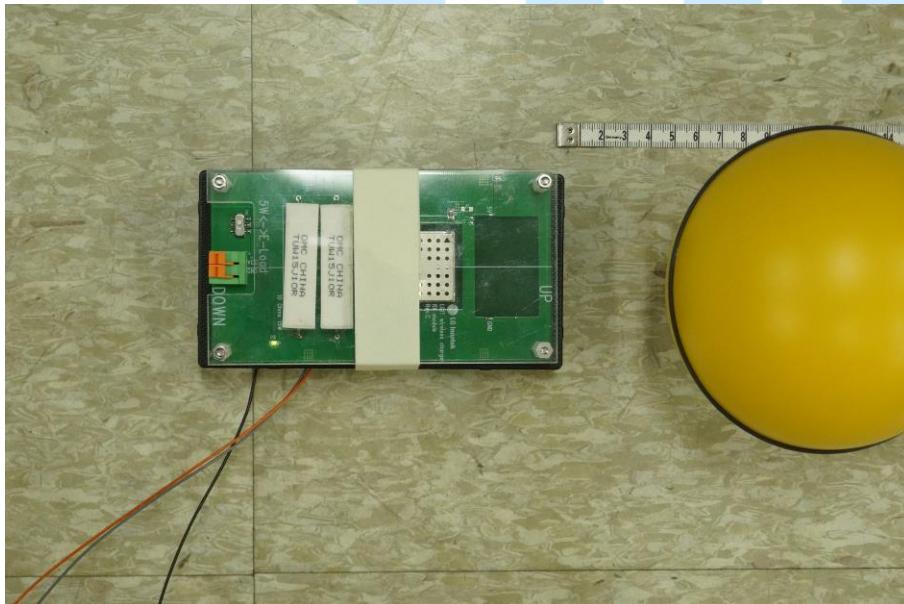







Side 3

< Electric field >

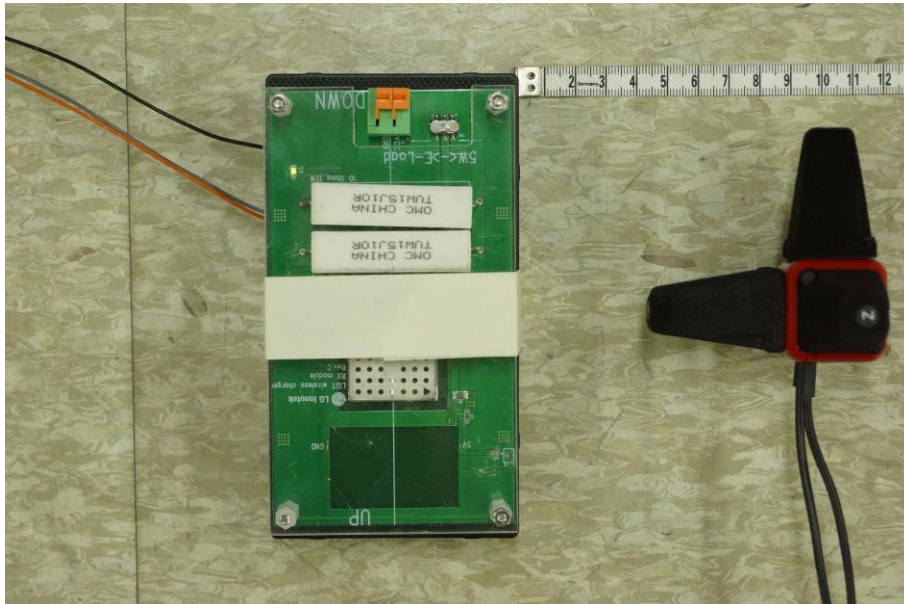

< Magnetic field >

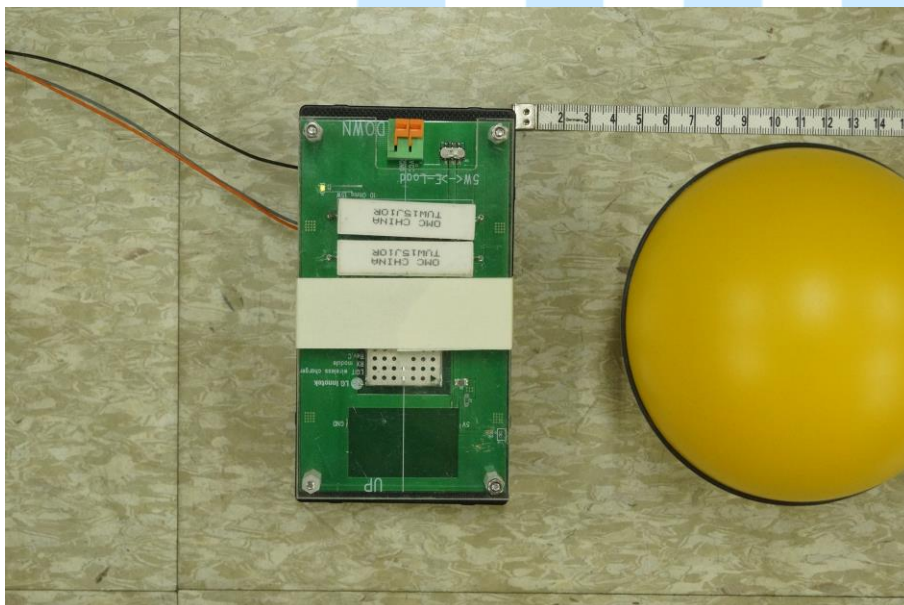



Side 4

< Electric field >




< Magnetic field >






Side 5

< Electric field >

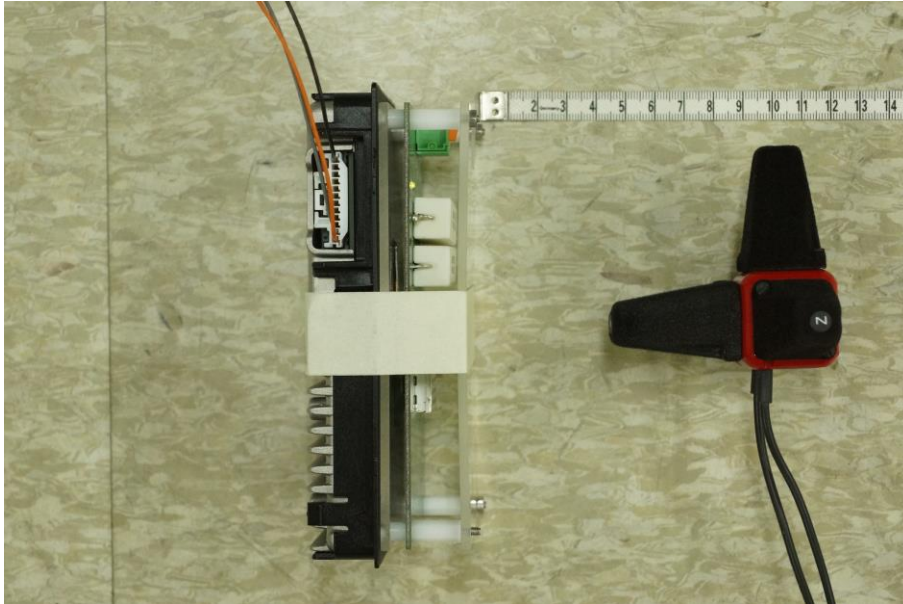

< Magnetic field >

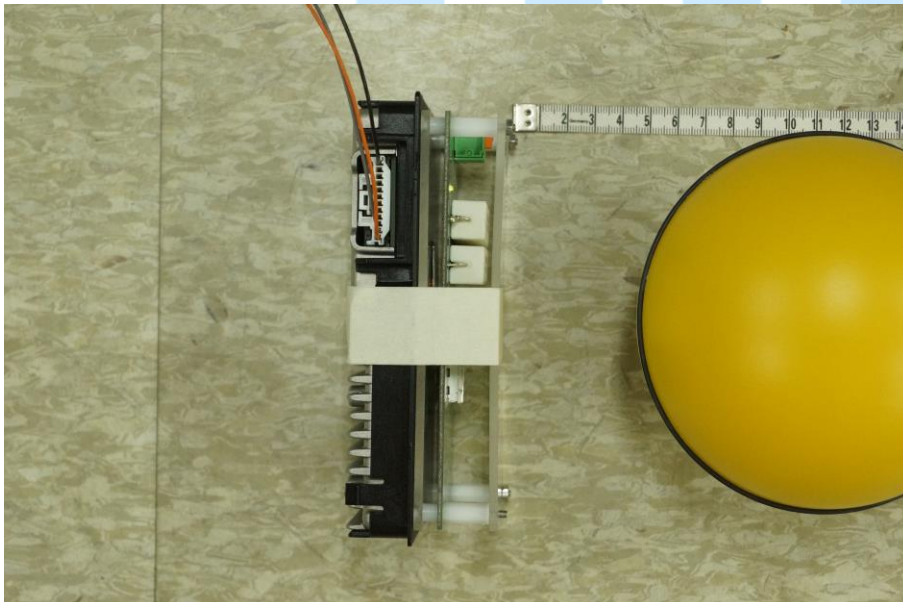







Side 6

< Electric field >

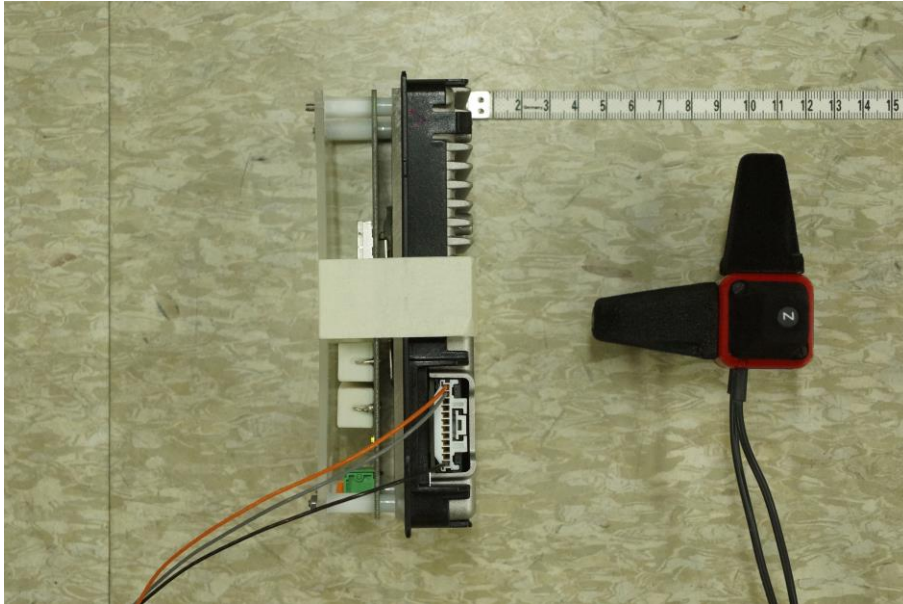

< Magnetic field >

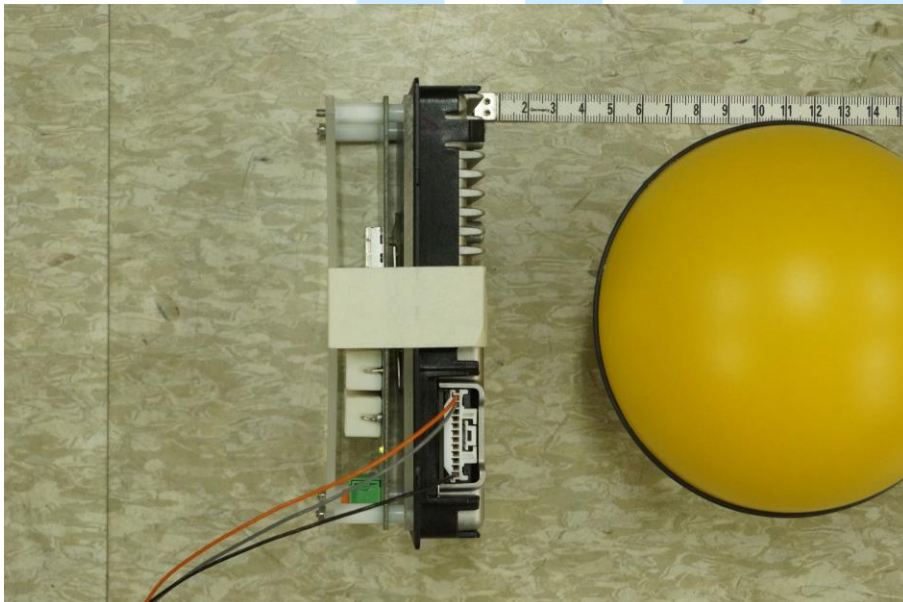

- The end -