


Report No.: 150624061GZU-001
Issued: 2015-07-28

TEST REPORT

Applicant Name &	:	Products Plus LLC
Address		507 STOKELY DR, Deforest, WISCONSIN
Manufacturing Site 1	:	Zhongshan Raytech Electrical Appliances Manufacturing Co., Ltd. Xingpu Road, Huangpu Town, ZhongShan City, Guangdong Province PRC
Manufacturing Site 2	:	Spectrum Brands (Shenzhen) Ltd 13/F., West Pearl Building, 1 Tao Yuan Road, Nan Shan, 518059 Shenzhen, China
Sample Description		
Product	:	Remote Control Vibrator
Model No.	:	RC300, RC30WXYZ (Where W, X, Y and Z denotes 0-9, A-Z or blank; stands for different pattern on the enclosure of product.)
Electrical Rating	:	Vibrator: 5VDC 500mA; Adaptor(SW-050050A): Input 100-240V~ 50/60Hz, 0.2A max.; Output 5.0VDC 500mA
Date Received	:	24 June 2015
Date Test Conducted	:	24 June 2015 to 10 July 2015
Test standards	:	FCC Part 15: 2014 Subpart B
Test Result	:	Pass
Conclusion	:	The submitted samples complied with the above rules/standards.
Remark	:	TRF No.: FCC Part 15 2014 (Subpart B)-a Effective date: 19 April 2015

*****End of Page*****

Prepared and Checked By:

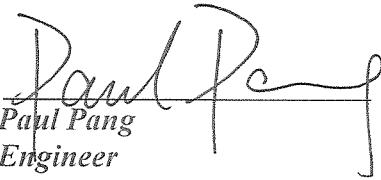
Paul Pang
Engineer
Intertek Guangzhou

Approved By:


Signature
Helen Ma
Team Leader
Intertek Guangzhou
28 July 2015
Date

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. The test report only allows to be revised within three years from its original issued date unless further standard or the requirement was noticed.

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China
Tel / Fax: 86-20-8213 9688/86-20-3205 7538

CONTENT

TEST REPORT	1
CONTENT	2
1 TEST RESULTS SUMMARY	3
2 TEST RESULTS CONCLUSION	4
3 LABORATORY MEASUREMENTS	5
4 TEST RESULTS	6
4.1 CONDUCTED DISTURBANCE VOLTAGE AT MAINS PORTS	6
4.1.1 <i>Used Test Equipment</i>	6
4.1.2 <i>Block Diagram of Test Setup</i>	6
4.1.3 <i>Test Setup and Procedure</i>	6
4.1.4 <i>Limit</i>	7
4.1.5 <i>Test Data</i>	8
4.1.6 <i>Emission Curve</i>	9
4.1.7 <i>Measurement Uncertainty</i>	9
4.2 RADIATED EMISSION (30 MHz -1000 MHz)	10
4.2.1 <i>Used Test Equipment</i>	10
4.2.2 <i>Block Diagram of Test Setup</i>	10
4.2.3 <i>Test Setup and Procedure</i>	10
4.2.4 <i>Limit</i>	11
4.2.5 <i>Test Data</i>	12
4.2.6 <i>Test Curve</i>	13
4.2.7 <i>Measurement uncertainty</i>	14
4.3 RADIATED EMISSION ABOVE 1 GHz	15
4.3.1 <i>Used Test Equipment</i>	15
4.3.2 <i>Block Diagram of Test Setup</i>	15
4.3.3 <i>Test Setup and Procedure</i>	16
4.3.4 <i>Limit</i>	16
4.3.5 <i>Test Data</i>	17
4.3.6 <i>Test Curve</i>	18
4.3.7 <i>Measurement uncertainty</i>	18

1**TEST RESULTS SUMMARY****Classification of EUT: Class B**

Test Item	Standard	Result
Conducted disturbance voltage at mains ports	FCC Part 15: 2014, Subpart B	Pass
Radiated emission (30 MHz–1 GHz)	FCC Part 15: 2014, Subpart B	Pass
Radiated emission (Above 1 GHz)	FCC Part 15: 2014, Subpart B	Pass
Remark: Reference publication is used for methods of measurement: ANSI C63.4:2014		

Remark: 1. The symbol “N/A” in above table means Not Applicable.**2. When determining the test results, measurement uncertainty of tests has been considered.**

2

Test Results Conclusion

(with Justification)

RE: EMC Testing Pursuant to FCC Part 15, Subpart B, Subpart C Performed on the Remote Control Vibrator, Models: RC300, RC30WXYZ.

We tested the Remote Control Vibrator, Model: RC300, to determine if it was in compliance with the relevant FCC rules as marked on the Test Results Summary. We found that the unit met the requirement of FCC Part 15, Subpart B when tested as received. The worst case's test data was presented in this test report.

Model RC300 and model RC30WXYZ are identical, except for model name. Model RC30WXYZ (Where W, X, Y and Z denotes 0-9, A-Z or blank; stands for different pattern on the enclosure of product.).

Conclusion:

The sample as received complied with the FCC Part 15 requirement.

The production units are required to conform to the initial sample as received when the units are placed on the market.

3**LABORATORY MEASUREMENTS****Configuration Information**

Equipment Under Test (EUT):	Remote Control Vibrator
Model:	RC300
Serial No.:	Not Labeled
Support Equipment:	Adaptor (SW-050050A) Input: 100-240V~ 50/60Hz, 0.2A max.; Output: 5.0VDC 500mA
Rated Voltage:	5VDC, 500mA
Condition of Environment:	Temperature : 22~28°C Relative Humidity: 35~60% Atmosphere Pressure 86~106kPa

Notes:

1. The EMI measurements had been made in the operating mode producing the largest emission in the frequency band being investigated consistent with normal applications.
An attempt had been made to maximize the emission by varying the configuration of the EUT.

2. Test Sites:

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch

All tests were performed at:

Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City,
GETDD Guangzhou, China

Except Radiated Disturbance was performed at:

Room 101, Block A, No.11 Jing Ye San Street, Yu Shu Industrial Park, Guangzhou Science City,
GETDD Guangzhou

This test facility and site measurement data have been fully placed on file with the FCC, test firm registration number is 549654.

4 TEST RESULTS


4.1 Conducted Disturbance Voltage at mains ports

Test Result: Pass

4.1.1 Used Test Equipment

Equipment No.	Equipment	Model	Manufacturer
EM004-04	EMC shield Room	8m×3m×3m	Zhongyu
EM080-05	EMI receiver	ESCI	R&S
EM006-05	LISN	ENV216	R&S

4.1.2 Block Diagram of Test Setup

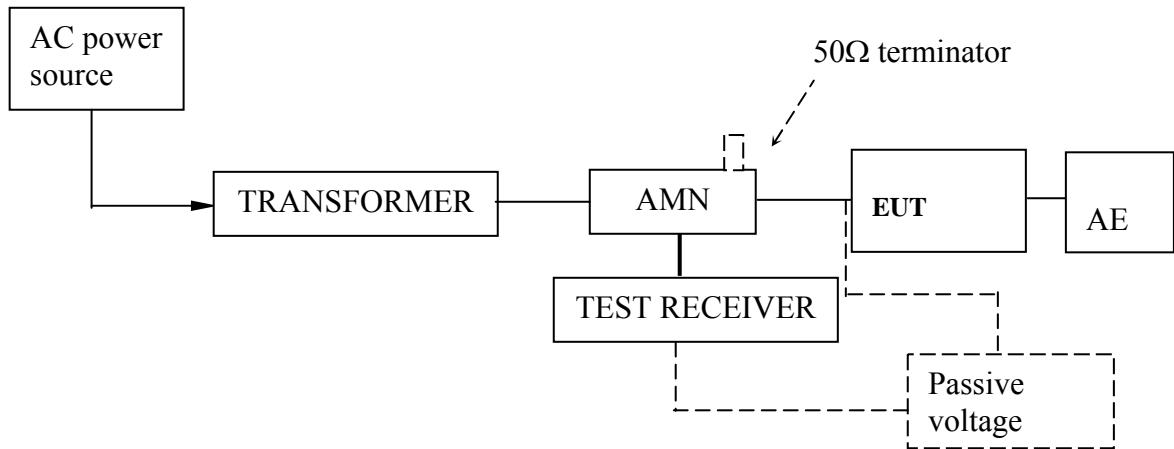

4.1.3 Test Setup and Procedure

Test was performed according to ANSI C63.4: 2014. The EUT was set to achieve the maximum emission level. The mains terminal disturbance voltage was measured with the EUT in a shielded room. The EUT was connected to AC power source through an Artificial Mains Network which provides a 50Ω linear impedance. Artificial hand is used if appropriate (for handheld apparatus). The load/control terminal disturbance voltage was measured with passive voltage probe if appropriate.

The table-top EUT was placed on a 0.8m high non-metallic table above earthed ground plane (Ground Reference Plane). And for floor standing EUT, was placed on a 0.1m high non-metallic supported on GRP. The EUT keeps a distance of at least 0.8m from any other of the metallic surface. The Artificial Mains Network is situated at a distance of 0.8m from the EUT.

During the test, mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m.

The bandwidth of test receiver was set at 9 kHz. The frequency range from 150 kHz to 30MHz was checked.

4.1.4 Limit

Class B

Frequency range MHz	AC mains terminals dB (uV)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

Note 1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The lower limit is applicable at the transition frequency.

4.1.5 Test Data**At main terminal: Pass****Tested Wire: Live****Operation Mode: Charging only**


EDIT PEAK LIST (Final Measurement Results)				
Trace1:	FCC15QP			
Trace2:	FCC15AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB μ V	DELTA	LIMIT dB
1 Quasi Peak	218 kHz	50.80 L1	-12.08	
2 Average	462 kHz	32.76 L1	-13.89	
1 Quasi Peak	174 kHz	50.55 L1	-14.21	
1 Quasi Peak	462 kHz	41.80 L1	-14.85	
1 Quasi Peak	302 kHz	42.00 L1	-18.17	
2 Average	190 kHz	35.59 L1	-18.43	
2 Average	222 kHz	31.56 L1	-21.17	
2 Average	302 kHz	27.15 L1	-23.03	
1 Quasi Peak	574 kHz	32.20 L1	-23.79	

Tested Wire: Neutral**Operation Mode: Charging only**


EDIT PEAK LIST (Final Measurement Results)				
Trace1:	FCC15QP			
Trace2:	FCC15AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB μ V	DELTA	LIMIT dB
1 Quasi Peak	154 kHz	54.00 L1	-11.77	
1 Quasi Peak	218 kHz	49.61 L1	-13.27	
1 Quasi Peak	462 kHz	39.45 L1	-17.19	
1 Quasi Peak	298 kHz	42.80 L1	-17.49	
2 Average	462 kHz	28.86 L1	-17.79	
2 Average	186 kHz	34.36 L1	-19.84	
2 Average	218 kHz	31.75 L1	-21.14	

4.1.6 Emission Curve

Tested Wire: Live

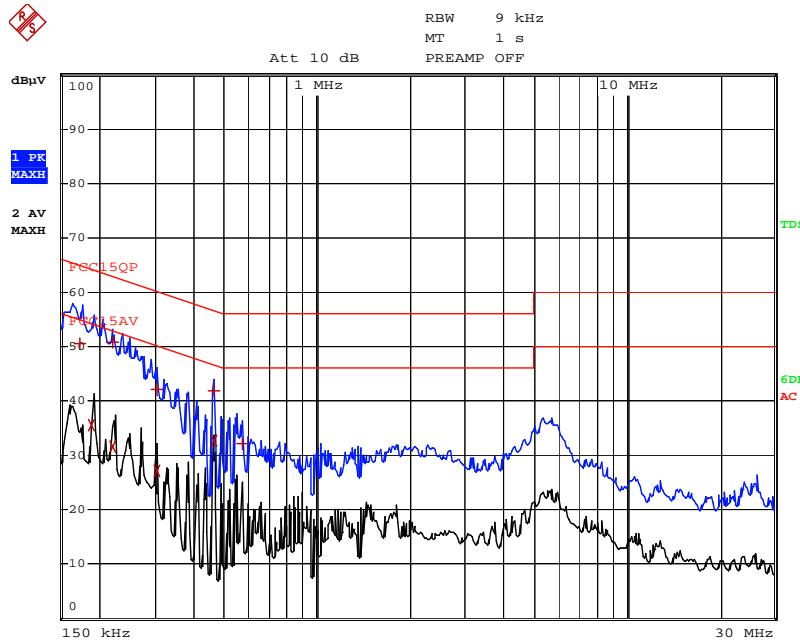

Tested Wire: Neutral

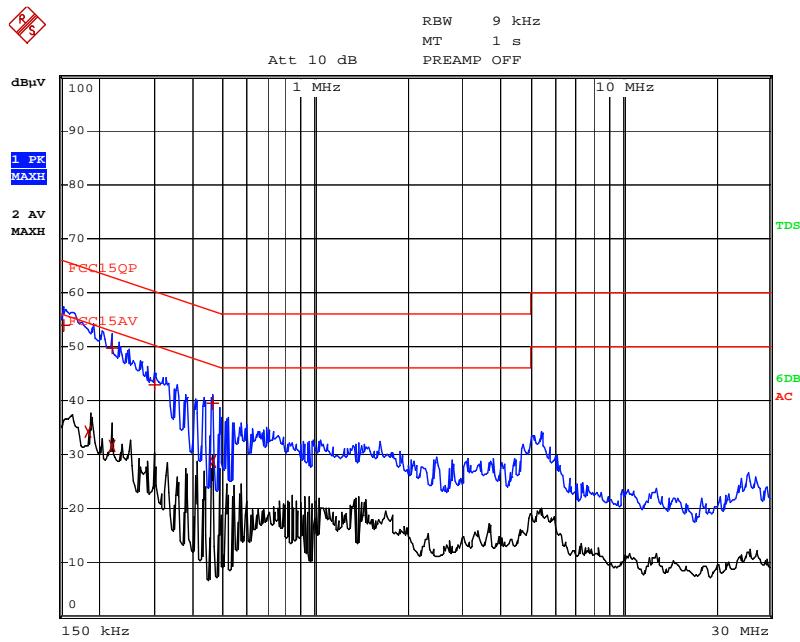

4.1.7 Measurement Uncertainty

Uncertainty: 2.58 dB at a level of confidence of 95%


4.2 Radiated Emission (30 MHz -1000 MHz)

Test Result: Pass

4.2.1 Used Test Equipment

Equip. No.	Equipment	Model	Manufacturer
EM030-01	3m Semi-Anechoic Chamber	9×6×6 m ³	ETS•LINDGREN
EM030-02	Control room for 3m Semi-Anechoic Chamber	4×4×3 m ³	ETS•LINDGREN
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S
EM033-01	TRILOG Super Broadband test Antenna (30 MHz-3 GHz)	VULB 9163	SCHWARZBECK
EM031-02-01	Coaxial cable	/	R&S

4.2.2 Block Diagram of Test Setup

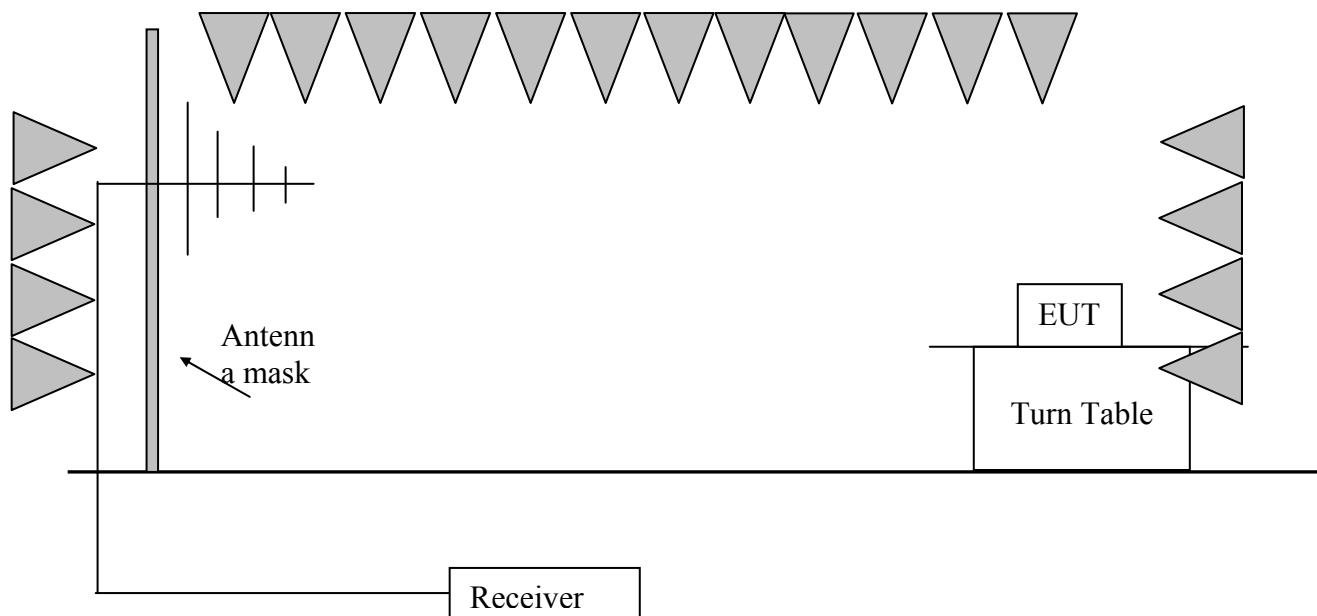

4.2.3 Test Setup and Procedure

The measurement was applied in a 3 m semi-anechoic chamber. The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna

FCC ID: 2AFGP-RC300R

mask. The antenna moved up and down between 1meter to 4 meters to find out the maximum emission level.

Broadband antenna was used as receiving antenna. Both horizontal and vertical polarization of the antenna was set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4: 2014 requirement during radiated test. The bandwidth setting on R&S Test Receiver was 120 kHz. The frequency range from 30MHz to 1000MHz was checked.

For an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper Frequency of Radiated Measurement
Below 1.705 MHz	30MHz
1.705 MHz – 108 MHz	1 GHz
108 MHz – 500 MHz	2 GHz
500 MHz – 1 GHz	5 GHz
Above 1 GHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower.
At transitional frequencies the lower limit applies.	

Remark: Radiated Emission was performed from 30 MHz to 1 GHz and 1GHz to 2GHz.

4.2.4 Limit

Class B limit at 3m test distance:

Frequency range MHz	Quasi-peak limits dB (μ V/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
960 to 1000	54
At transitional frequencies the lower limit applies.	

4.2.5 Test Data**Test Mode: Charging only**

Antenna Polarization	Frequency [MHz]	Measured Net at 3m [dB(µV/m)]	Limit at 3m [dB(µV/m)]
Horizontal	40.0	< 30	40.0
Horizontal	400.0	< 30	46.0
Horizontal	961.0	< 35	54.0
Vertical	36.5	28.5	40.0
Vertical	400.0	< 30	46.0
Vertical	980.0	< 35	54.0


Test Mode: Motor running and receiving mode

Antenna Polarization	Frequency [MHz]	Measured Net at 3m [dB(µV/m)]	Limit at 3m [dB(µV/m)]
Horizontal	40.0	< 30	40.0
Horizontal	400.0	< 30	46.0
Horizontal	961.0	< 35	54.0
Vertical	36.5	< 30	40.0
Vertical	400.0	< 30	46.0
Vertical	980.0	< 35	54.0


4.2.6 Test Curve

Test Mode: Charging only

Horizontal:

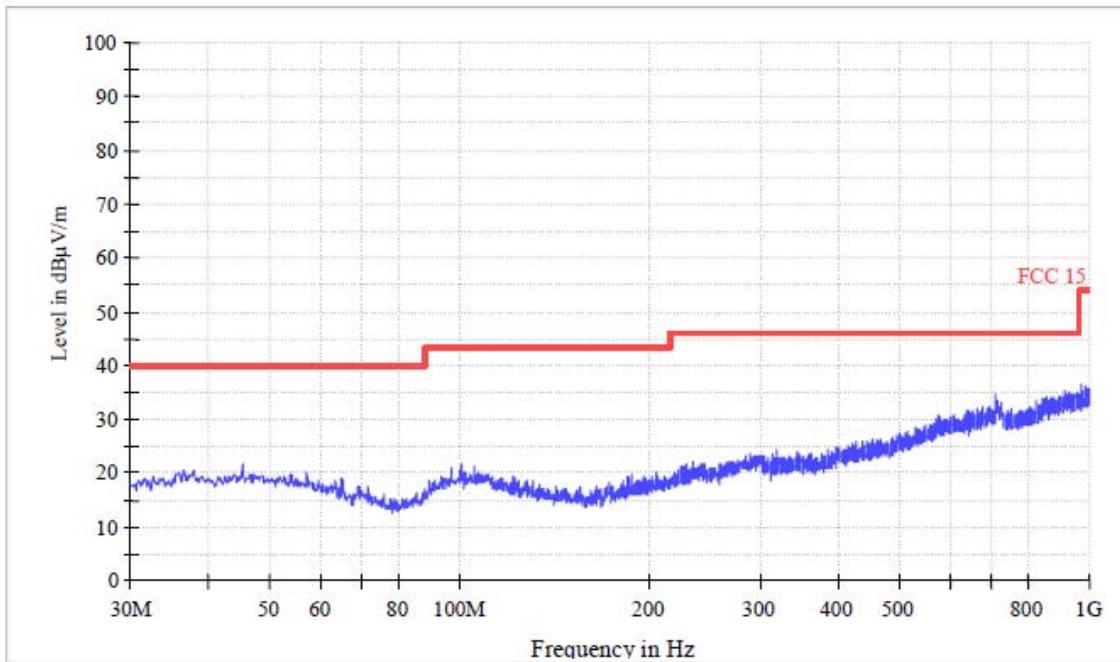


Vertical:

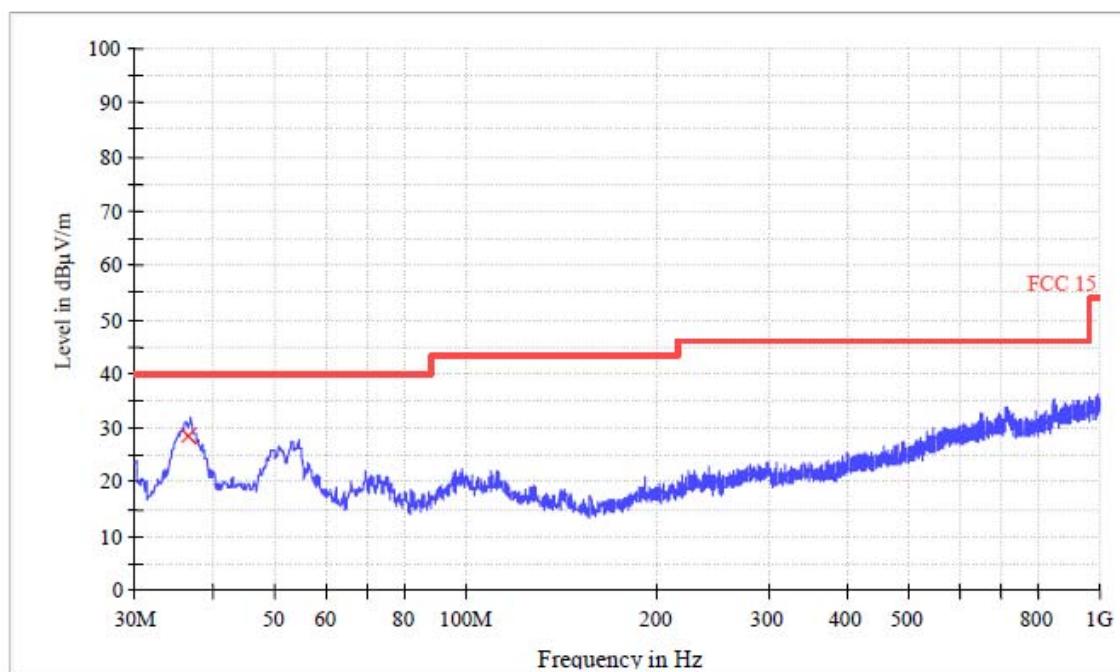


Test Mode: Motor running and receiving mode

Horizontal:

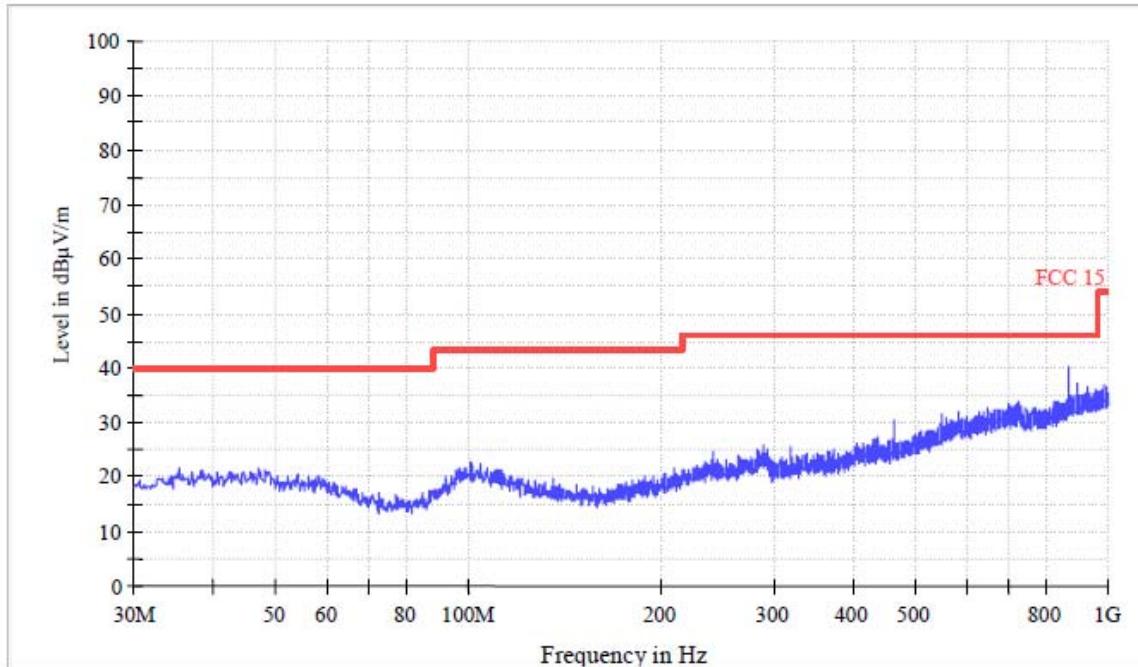

Vertical:

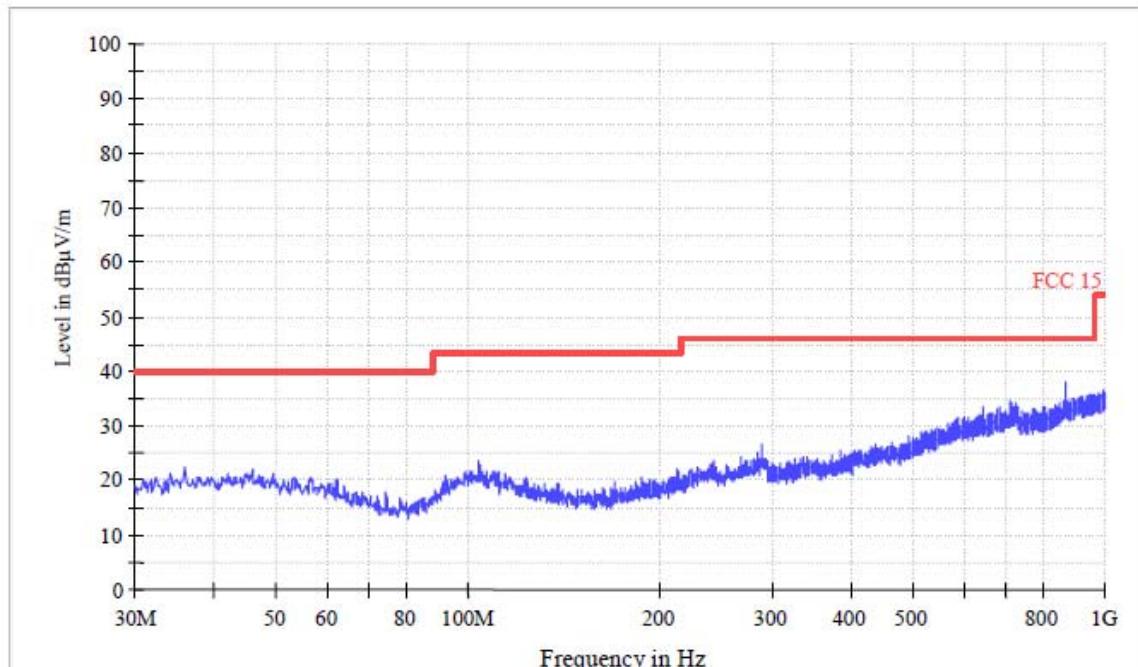

4.2.7 Measurement uncertainty

Uncertainty: 4.87 dB in the frequency range of 30-1000 MHz at a level of confidence of 95%


FCC ID: 2AFGP-RC300R

4.3 Radiated Emission above 1 GHz

4.3.1 Used Test Equipment

Equipment No.	Equipment	Model	Manufacturer
EM030-01	3m Semi-Anechoic Chamber	9×6×6 m3	ETS·LINDGREN
EM030-02	Control room for 3m Semi-Anechoic Chamber	4×4×3 m3	ETS·LINDGREN
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S
EM031-03	Signal and Spectrum Analyzer (10 Hz~40 GHz)	R&S FSV40	R&S
EM033-02	Double-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)	R&S HF907	R&S
EM033-02-02	Coaxial cable	/	R&S

4.3.2 Block Diagram of Test Setup

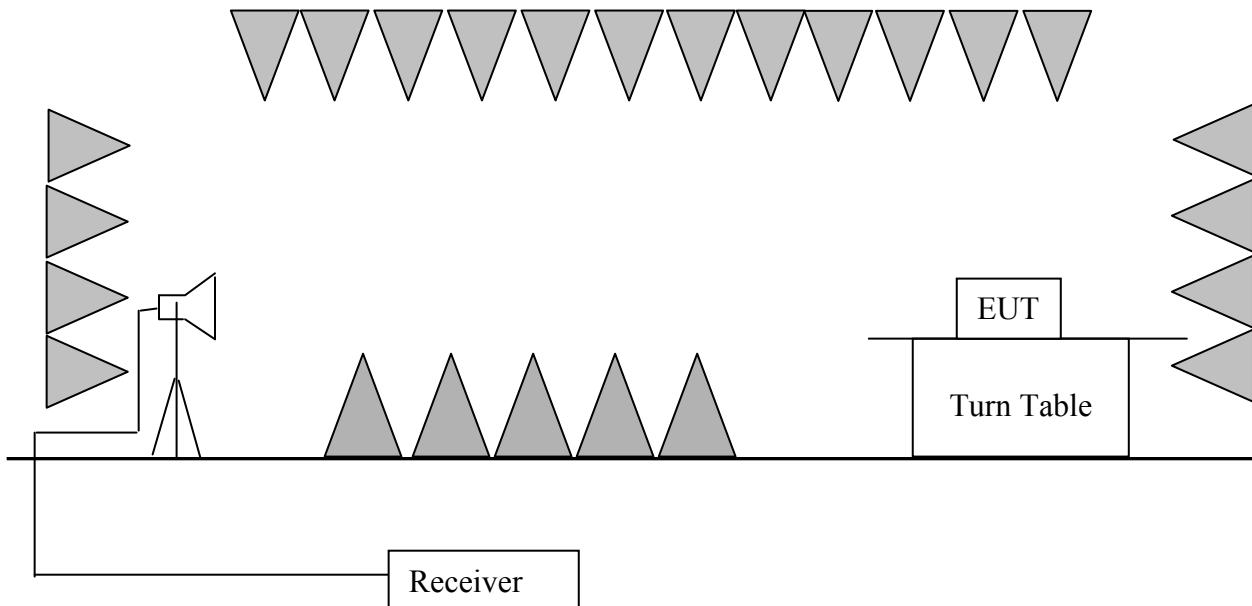

4.3.3 Test Setup and Procedure

The measurement was applied in a semi-anechoic chamber with absorbing material placed on the ground. The EUT were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turntable varied every 30 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna pole. The antenna was set as same as the height of the radiation centre of the EUT.

Horn antenna was used as receiving antenna. Both horizontal and vertical polarization of the antenna was set on measurement. In order to find the maximum emission, all of the interface cables were manipulated during radiated test.

For an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest Frequency Generated or Used in Device	Upper Frequency of Radiated Measurement
Below 1.705 MHz	30MHz
1.705 MHz – 108 MHz	1 GHz
108 MHz – 500 MHz	2 GHz
500 MHz – 1 GHz	5 GHz
Above 1 GHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

At transitional frequencies the lower limit applies.

Remark: Radiated Emission was performed from 1 GHz to 2 GHz since the highest frequency generated from the EUT was 433.92 MHz.

4.3.4 Limit

Class B limit at 3m test distance:

Frequency range MHz	Linear Average Detector dB (μ V/m)	Peak Detector dB (μ V/m)
> 1000	54	74
At transitional frequencies the lower limit applies.		


4.3.5 Test Data**Test Mode: Motor running and receiving mode**

Antenna Polarization	Frequency [MHz]	Measured Net at 3m [dB (μV/m)]	Limit at 3m [dB(μV/m)]
Horizontal	1012.0	37.0	54.0
Horizontal	1706.8	36.0	54.0
Horizontal	1764.8	35.3	54.0
Vertical	1158.8	35.3	54.0
Vertical	1428.0	35.5	54.0
Vertical	1632.0	35.1	54.0


4.3.6 Test Curve

Test Mode: Motor running and receiving mode

Horizontal:

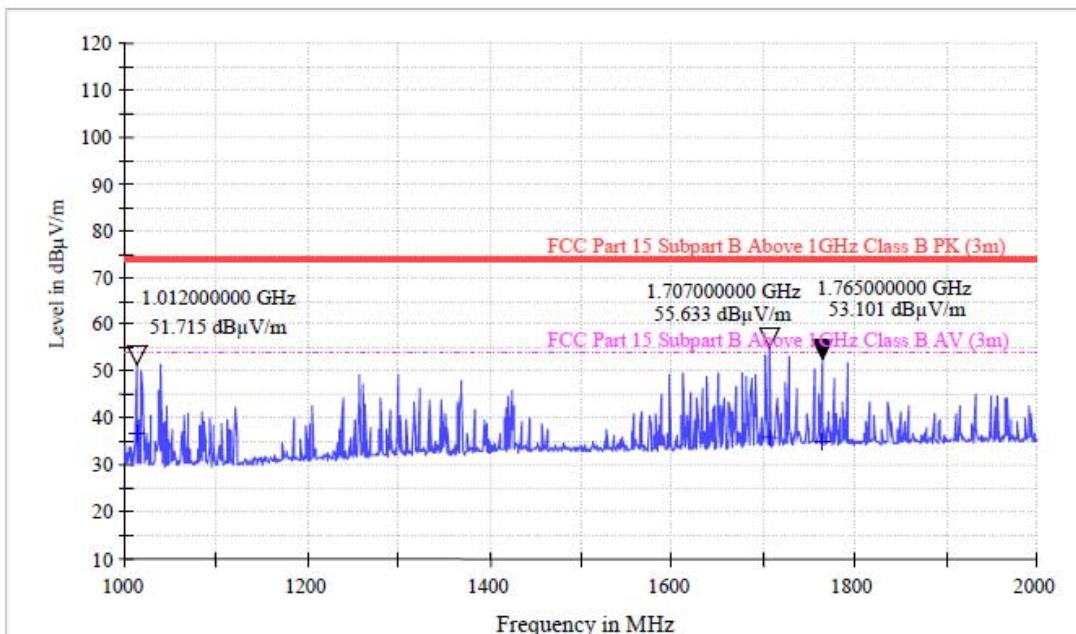

Vertical:

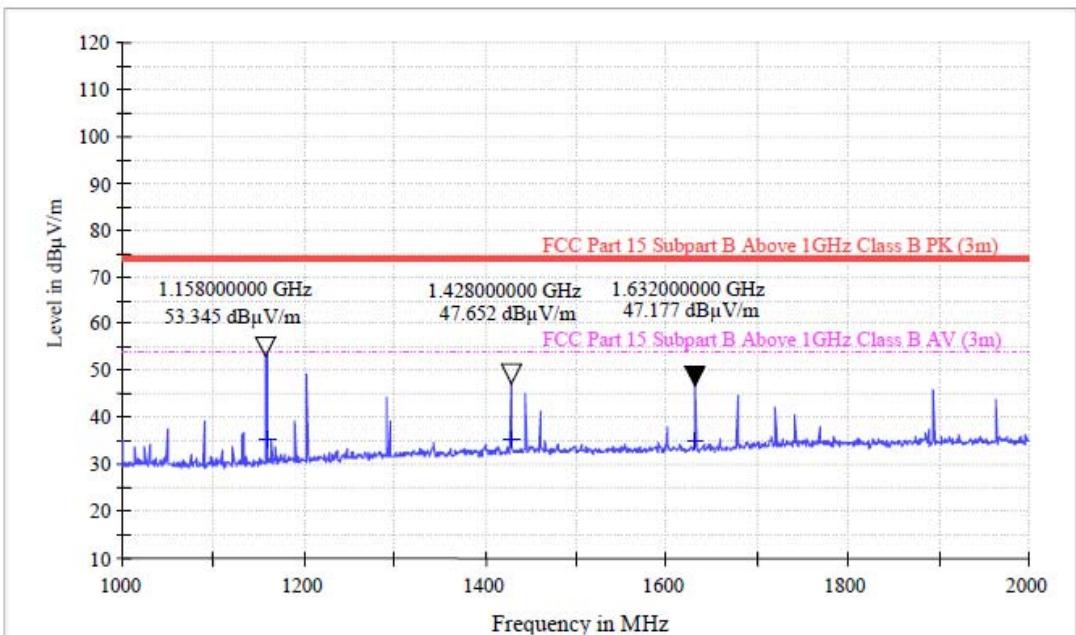

4.3.7 Measurement uncertainty

Measurement uncertainty is under consideration according to CISPR 16-4-2:2003.