


APsystems

Energy Communication Unit
Model:ECU-R

DC Input: 5VDC $\equiv$ 2A Max
USB Interface: 5Vdc-1.4A Output
Enclosure Rating: IP20/NEMA1
Power Consumption: 1.7W
Ambient Temperature Range: -20°C to +65°C








C 259077 US
Certificate No.: SAA203487
FCC ID: 2AFGR-ECUR2
IC: 20481-ECUR2
HVIN: ECU2
CAN ICES-3(B)/NMB-3(B)

IEEE 2030.5
CSIP
CERTIFIED
CS-000012

Altenergy Power System Inc. www.APsystems.com

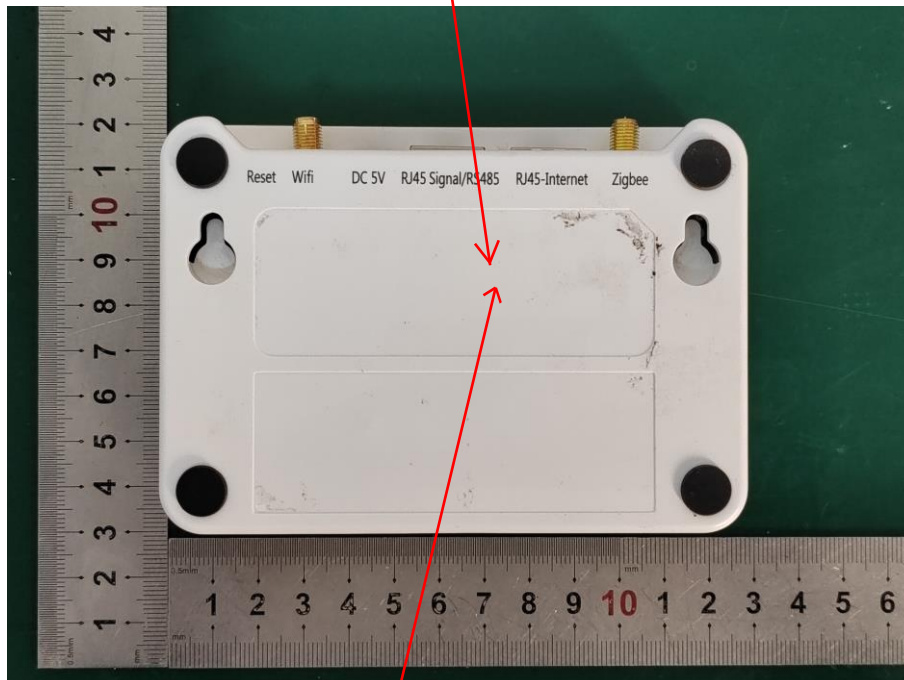


APsystems

Energy Communication Unit
Model:ECU-B

DC Input: 5VDC $\equiv$ 2A Max
USB Interface: 5Vdc-1.4A Output
Enclosure Rating: IP20/NEMA1
Power Consumption: 1.7W
Ambient Temperature Range: -20°C to +65°C







C 259077 US
Certificate No.: SAA203487
FCC ID: 2AFGR-ECUR2
IC: 20481-ECUR2
HVIN: ECU2
CAN ICES-3(B)/NMB-3(B)

Altenergy Power System Inc. www.APsystems.com