



## Shenzhen EBO Testing Center

A506, Financial port building, Xin'an Sixth Road, 82<sup>th</sup> District, Bao'an,  
Shenzhen, China.  
Telephone: +86-755-33126608,  
Email: ebo@ebotest.com

Report No.: EBO1707038-E153  
Page 1 of 25

# FCC REPORT

**Applicant:** RWD INDUSTRIAL CO., LTD  
**Address of Applicant:** 3F, Block1, ChuangXingHong Industrial Zone, DaShuiKeng,  
No1398 GuanGuang RD, GuanLan, Bao'an District, Shenzhen,  
China

### Equipment Under Test (EUT)

Product Name: BLUETOOTH SPEAKER  
Brand Name: LEEDS  
Model No.: RWD-S19Pro, 7198-21BK  
Test Model No.: RWD-S19Pro  
**FCC ID:** 2AFH27198-21S  
**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.249:2016  
**Date of sample receipt:** July 3, 2017  
**Date of Test:** July 3, 2017 to July 12, 2017  
**Date of report issued:** July 12, 2017  
**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Kevin Yu  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707038-E153  
Page 2 of 25

### 2 Version

Version No.	Date	Description
00	June 12, 2017	Original

Prepared by:

Date:

June 12, 2017

Project Engineer

Reviewed by:

Date:

June 12, 2017

Reviewer

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



# Shenzhen EBO Testing Center

Report No.: EBO1707038-E153  
Page 3 of 25

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
4.1 MEASUREMENT UNCERTAINTY .....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION .....	5
5.2 GENERAL DESCRIPTION OF EUT .....	5
5.3 TEST MODE .....	7
5.4 DESCRIPTION OF SUPPORT UNITS .....	7
5.5 TEST FACILITY.....	7
5.6 TEST LOCATION .....	7
6 TEST INSTRUMENTS LIST .....	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT .....	10
7.2 CONDUCTED EMISSIONS .....	11
7.3 RADIATED EMISSION METHOD.....	14
7.3.1 <i>Field Strength of The Fundamental Signal</i> .....	16
7.3.2 <i>Spurious emissions</i> .....	17
7.3.3 <i>Bandedge emissions</i> .....	21
7.4 20dB OCCUPY BANDWIDTH.....	22
8 TEST SETUP PHOTO .....	24
9 EUT CONSTRUCTIONAL DETAILS .....	25

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707038-E153  
Page 4 of 25

### 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

*Pass: The EUT complies with the essential requirements in the standard.*

*Remark: Test according to ANSI C63.4 2014 and ANSI C63.10 2013.*

#### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707038-E153  
Page 5 of 25

### 5 General Information

#### 5.1 Client Information

Applicant:	RWD INDUSTRIAL CO., LTD
Address of Applicant:	3F, Block1, ChuangXingHong Industrial Zone, DaShuiKeng, No1398 GuanGuang RD, GuanLan, Bao'an District, Shenzhen, China
Manufacturer/Factory:	RWD INDUSTRIAL CO., LTD
Address of Manufacturer/Factory:	3F, Block1, ChuangXingHong Industrial Zone, DaShuiKeng, No1398 GuanGuang RD, GuanLan, Bao'an District, Shenzhen, China

#### 5.2 General Description of EUT

Product Name:	BLUETOOTH SPEAKER
Brand Name:	LEEDS
Model No.:	RWD-S19Pro, 7198-21BK
Operation Frequency:	2402MHz~2480MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	PCB Antenna
Antenna gain:	0dBi (declare by Applicant)
Power supply:	DC 3.7V, 550mah Li-ion Battery

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707038-E153  
Page 6 of 25

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707038-E153  
Page 7 of 25

### 5.3 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the duty cycle &gt;98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

#### Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	87.54	90.18	88.08

### 5.4 Description of Support Units

Manufacturer	Description	Model	Serial Number
DELTA	ADAPTER	ADP-60ADT	N/A

### 5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

### 5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707038-E153  
Page 8 of 25

### 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	203	June. 29 2017	June. 28 2018
4	BiConiLog Antenna	SCHWARZBECK MESS- ELEKTRONIK	VULB9163	214	June. 29 2017	June. 28 2018
5	Double -ridged waveguide horn	SCHWARZBECK MESS- ELEKTRONIK	9120D-829	208	June. 29 2017	June. 28 2018
6	Horn Antenna	ETS-LINDGREN	3160	217	June. 29 2017	June. 28 2018
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	213	June. 29 2017	June. 28 2018
9	Coaxial Cable	GTS	N/A	211	June. 29 2017	June. 28 2018
10	Coaxial cable	GTS	N/A	210	June. 29 2017	June. 28 2018
11	Coaxial Cable	GTS	N/A	212	June. 29 2017	June. 28 2018
12	Amplifier(100kHz- 3GHz)	HP	8347A	204	June. 29 2017	June. 28 2018
13	Amplifier(2GHz- 20GHz)	HP	8349B	206	June. 29 2017	June. 28 2018
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	218	June. 29 2017	June. 28 2018
15	Band filter	Amindeon	82346	219	June. 29 2017	June. 28 2018
16	Constant temperature and humidity box	Oregon Scientific	BA-888	248	June. 29 2017	June. 28 2018
17	D.C. Power Supply	Instek	PS-3030	232	June. 29 2017	June. 28 2018
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	588	June. 29 2017	June. 28 2018
19	Splitter	Agilent	11636B	237	June. 29 2017	June. 28 2018

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."





## Shenzhen EBO Testing Center

Report No.: EBO1707038-E153

Page 9 of 25

Disturbance voltages:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	252	Jul. 02 2017	Jul. 01 2018
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	223	Jul. 02 2017	Jul. 01 2018
3	10dB Pulse Limita	Rohde & Schwarz	N/A	224	Jul. 02 2017	Jul. 01 2018
4	Coaxial Switch	ANRITSU CORP	MP59B	225	Jul. 02 2017	Jul. 01 2018
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK8127	226	Jul. 02 2017	Jul. 01 2018
6	Coaxial Cable	GTS	N/A	227	Jul. 02 2017	Jul. 01 2018
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Thermo meter	KTJ	TA328	233	Jul. 02 2017	Jul. 01 2018

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## 7 Test results and Measurement Data

### 7.1 Antenna requirement

<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(c)
<b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>15.247(c) (1)(i) requirement:</b> (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
<b>EUT Antenna:</b>	
<i>The antenna is Ceramic antenna, the best case gain of the antenna is 0dBi</i>	



7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
	Frequency range (MHz)		Limit (dBuV)												
		Quasi-peak	Average												
	0.15-0.5	66 to 56*	56 to 46*												
0.5-5	56	46													
5-30	60	50													
* Decreases with the logarithm of the frequency.															
Test setup:	<p>Reference Plane</p> <p>LISN</p> <p>40cm</p> <p>80cm</p> <p>LISN</p> <p>AUX Equipment</p> <p>E.U.T</p> <p>Filter</p> <p>AC power</p> <p>EMI Receiver</p> <p>Test table/Insulation plane</p> <p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol>														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.3 for details														
Test results:	Pass														

Measurement data:


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



# Shenzhen EBO Testing Center

Report No.: EBO1707038-E153  
Page 12 of 25

Test mode:	Bluetooth mode (BLE)	LINE
------------	----------------------	------

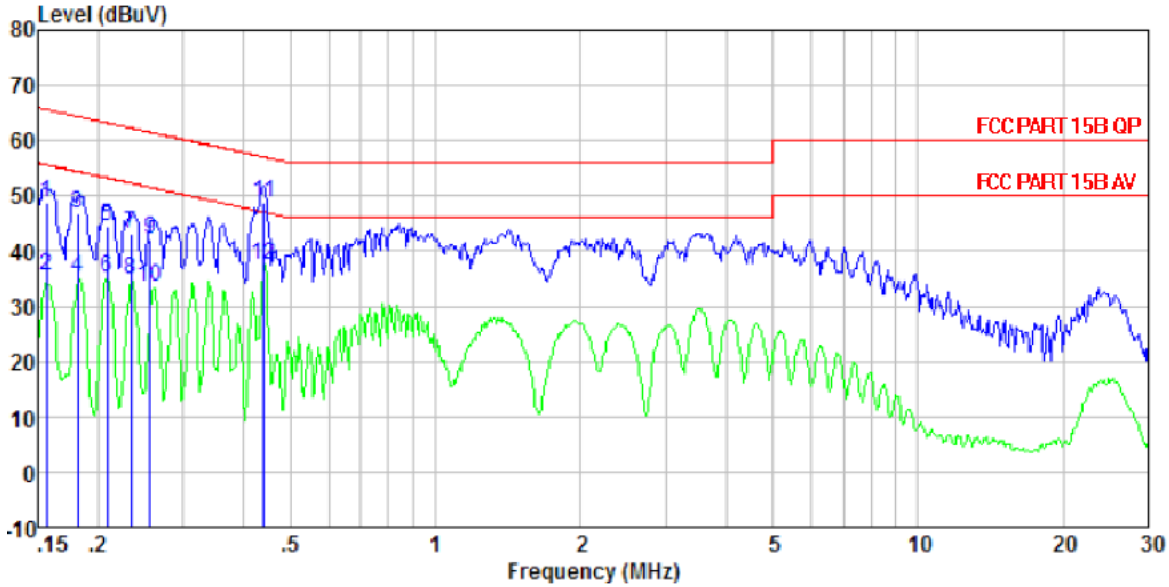

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.156	48.35	48.62	0.15	0.12	65.65	-17.03	QP
2	0.156	35.14	35.41	0.15	0.12	55.65	-20.24	Average
3	0.182	46.53	46.80	0.14	0.13	64.42	-17.62	QP
4	0.182	34.75	35.02	0.14	0.13	54.42	-19.40	Average
5	0.208	44.36	44.62	0.13	0.13	63.27	-18.65	QP
6	0.208	34.82	35.08	0.13	0.13	53.27	-18.19	Average
7	0.234	43.00	43.24	0.12	0.12	62.30	-19.06	QP
8	0.234	34.74	34.98	0.12	0.12	52.30	-17.32	Average
9	0.256	41.98	42.21	0.12	0.11	61.56	-19.35	QP
10	0.256	33.17	33.40	0.12	0.11	51.56	-18.16	Average
11	0.440	48.53	48.76	0.12	0.11	57.07	-8.31	QP
12	0.440	37.38	37.61	0.12	0.11	47.07	-9.46	Average


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707038-E153  
Page 13 of 25

<b>Test mode:</b>	<b>Bluetooth mode (BLE)</b>	<b>NEUTRAL</b>
-------------------	-----------------------------	----------------

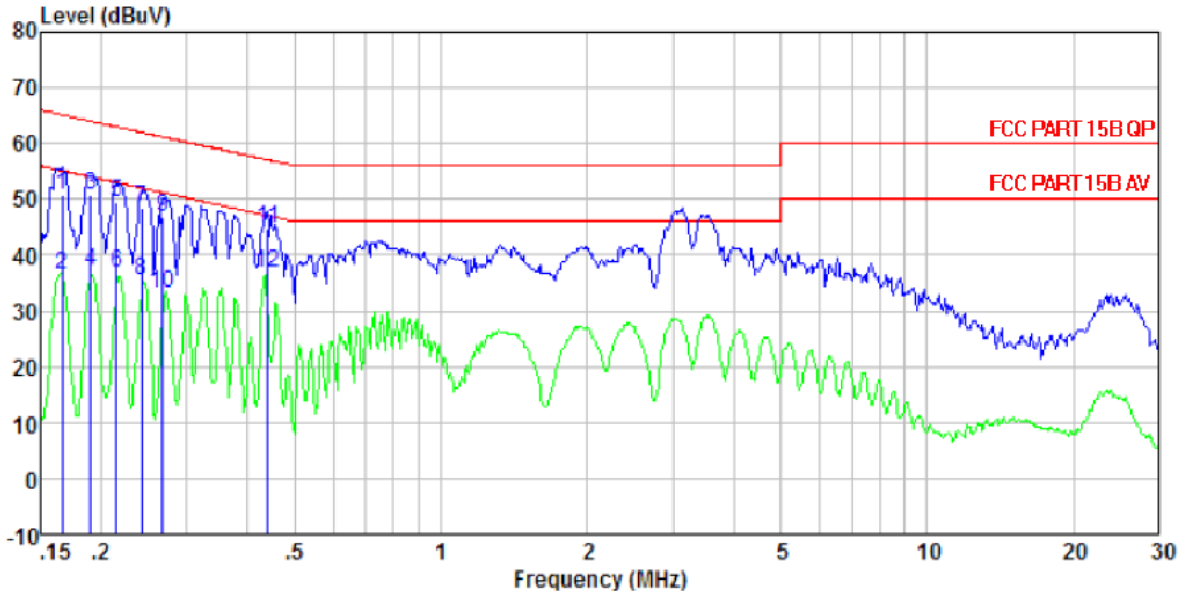


	Read	LISN	Cable	Limit	Over			
Freq	Level	Level	Factor	Line	Limit	Remark		
MHz	dBuV	dBuV	dB	dB	dBuV	dB		
1	0.166	50.69	50.88	0.07	0.12	65.16	-14.28	QP
2	0.166	36.43	36.62	0.07	0.12	55.16	-18.54	Average
3	0.190	50.65	50.85	0.07	0.13	64.02	-13.17	QP
4	0.190	36.93	37.13	0.07	0.13	54.02	-16.89	Average
5	0.215	49.34	49.53	0.06	0.13	63.01	-13.48	QP
6	0.215	36.67	36.86	0.06	0.13	53.01	-16.15	Average
7	0.242	48.35	48.53	0.06	0.12	62.04	-13.51	QP
8	0.242	35.28	35.46	0.06	0.12	52.04	-16.58	Average
9	0.267	46.65	46.82	0.06	0.11	61.20	-14.38	QP
10	0.267	32.94	33.11	0.06	0.11	51.20	-18.09	Average
11	0.440	44.64	44.81	0.06	0.11	57.07	-12.26	QP
12	0.440	36.75	36.92	0.06	0.11	47.07	-10.15	Average

**Notes:**


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

### 7.3 Radiated Emission Method

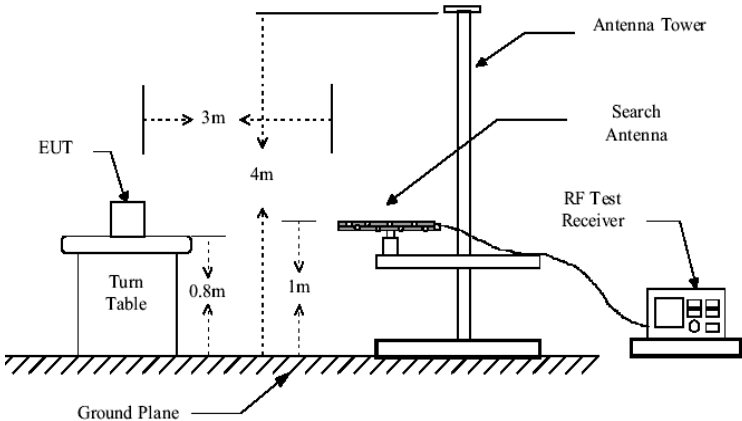Test Requirement:	FCC Part15 C Section 15.209			
Test Method:	ANSI C63.10:2013			
Test Frequency Range:	30MHz to 25GHz			
Test site:	Measurement Distance: 3m			
Receiver setup:	Frequency	Detector	RBW	VBW
	30MHz-1GHz	Quasi-peak	120KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
Peak		1MHz	10Hz	
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz	94.00		Average Value
Limit: (Spurious Emissions)	Frequency	Limit (dBuV/m @3m)		Remark
	30MHz-88MHz	40.00		Quasi-peak Value
	88MHz-216MHz	43.50		Quasi-peak Value
	216MHz-960MHz	46.00		Quasi-peak Value
	960MHz-1GHz	54.00		Quasi-peak Value
	Above 1GHz	74.00		Average Value
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.			
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>			

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

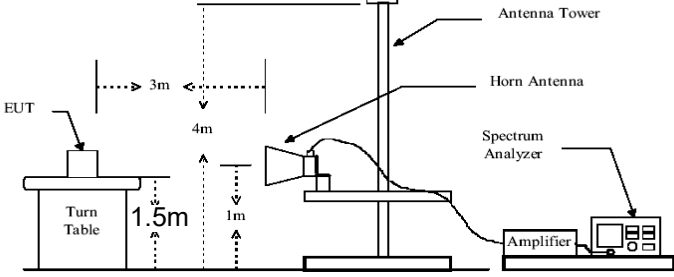	
<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.3 for details</p>
<p>Test results:</p>	<p>Pass</p>

**Measurement data:**

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707038-E153

Page 16 of 25

### 7.3.1 Field Strength of The Fundamental Signal

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	91.01	27.58	5.39	34.01	89.97	114.00	-24.03	Vertical
2402.00	85.71	27.58	5.39	34.01	84.67	114.00	-29.33	Horizontal
2440.00	91.23	27.48	5.43	33.96	90.18	114.00	-23.82	Vertical
2440.00	85.28	27.48	5.43	33.96	84.23	114.00	-29.77	Horizontal
2480.00	90.16	27.52	5.47	33.92	89.23	114.00	-24.77	Vertical
2480.00	84.36	27.52	5.47	33.92	83.43	114.00	-30.57	Horizontal

#### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	81.18	27.58	5.39	34.01	80.14	94.00	-13.86	Vertical
2402.00	76.09	27.58	5.39	34.01	75.05	94.00	-18.95	Horizontal
2440.00	81.32	27.48	5.43	33.96	80.27	94.00	-13.73	Vertical
2440.00	74.70	27.48	5.43	33.96	73.65	94.00	-20.35	Horizontal
2480.00	80.37	27.52	5.47	33.92	79.44	94.00	-14.56	Vertical
2480.00	74.91	27.52	5.47	33.92	73.98	94.00	-20.02	Horizontal

Note: RBW 3MHz VBW 3MHz Peak detector is for PK value , RMS detector is for AV value

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."





## Shenzhen EBO Testing Center

Report No.: EBO1707038-E153  
Page 17 of 25

### 7.3.2 Spurious emissions

#### ■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
59.232	41.51	11.4	0.85	29.93	23.83	40	-16.17	Vertical
133.151	45	7.83	1.46	29.49	24.8	43.5	-18.7	Vertical
185.788	46.85	9.1	1.77	29.25	28.47	43.5	-15.03	Vertical
234.168	48.89	11.36	2.04	29.52	32.77	46	-13.23	Vertical
284.977	52.71	13.01	2.29	29.9	38.11	46	-7.89	Vertical
431.032	44.45	16.11	3	29.43	34.13	46	-11.87	Vertical
120.277	46.5	9.4	1.36	29.57	27.69	43.5	-15.81	Horizontal
172.599	53.27	8.5	1.7	29.31	34.16	43.5	-9.34	Horizontal
231.718	51.96	11.27	2.02	29.49	35.76	46	-10.24	Horizontal
280.024	53.54	12.82	2.27	29.86	38.77	46	-7.23	Horizontal
341.979	49.67	14.32	2.58	29.77	36.8	46	-9.2	Horizontal
431.032	47.2	16.11	3	29.43	36.88	46	-9.12	Horizontal

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707038-E153  
Page 18 of 25

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	37.59	31.78	8.60	32.09	45.88	74.00	-28.12	Vertical
7206.00	32.02	36.15	11.65	32.00	47.82	74.00	-26.18	Vertical
9608.00	31.64	37.95	14.14	31.62	52.11	74.00	-21.89	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	41.93	31.78	8.60	32.09	50.22	74.00	-23.78	Horizontal
7206.00	33.80	36.15	11.65	32.00	49.60	74.00	-24.40	Horizontal
9608.00	31.09	37.95	14.14	31.62	51.56	74.00	-22.44	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	26.35	31.78	8.60	32.09	34.64	54.00	-19.36	Vertical
7206.00	20.67	36.15	11.65	32.00	36.47	54.00	-17.53	Vertical
9608.00	19.73	37.95	14.14	31.62	40.20	54.00	-13.80	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	30.61	31.78	8.60	32.09	38.90	54.00	-15.10	Horizontal
7206.00	22.86	36.15	11.65	32.00	38.66	54.00	-15.34	Horizontal
9608.00	19.49	37.95	14.14	31.62	39.96	54.00	-14.04	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

**Remark:**

1.  $Final\ Level = Receiver\ Read\ level + Antenna\ Factor + Cable\ Loss - Preamplifier\ Factor$
2. “\*”, means this data is the too weak instrument of signal is unable to test.

“This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company’s findings at the time of its intervention only and within the limits of Client’s instructions, if any. The Company’s sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.”



## Shenzhen EBO Testing Center

Report No.: EBO1707038-E153

Page 19 of 25

Test channel:	Middle
---------------	--------

### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	37.04	31.85	8.67	32.12	45.44	74.00	-28.56	Vertical
7320.00	31.66	36.37	11.72	31.89	47.86	74.00	-26.14	Vertical
9760.00	31.31	38.35	14.25	31.62	52.29	74.00	-21.71	Vertical
12200.00	*					74.00		Vertical
14640.00	*					74.00		Vertical
4880.00	41.27	31.85	8.67	32.12	49.67	74.00	-24.33	Horizontal
7320.00	33.39	36.37	11.72	31.89	49.59	74.00	-24.41	Horizontal
9760.00	30.71	38.35	14.25	31.62	51.69	74.00	-22.31	Horizontal
12200.00	*					74.00		Horizontal
14640.00	*					74.00		Horizontal

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	25.92	31.85	8.67	32.12	34.32	54.00	-19.68	Vertical
7320.00	20.38	36.37	11.72	31.89	36.58	54.00	-17.42	Vertical
9760.00	19.47	38.35	14.25	31.62	40.45	54.00	-13.55	Vertical
12200.00	*					54.00		Vertical
14640.00	*					54.00		Vertical
4880.00	30.12	31.85	8.67	32.12	38.52	54.00	-15.48	Horizontal
7320.00	22.54	36.37	11.72	31.89	38.74	54.00	-15.26	Horizontal
9760.00	19.18	38.35	14.25	31.62	40.16	54.00	-13.84	Horizontal
12200.00	*					54.00		Horizontal
14640.00	*					54.00		Horizontal

### Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.

“This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company’s findings at the time of its intervention only and within the limits of Client’s instructions, if any. The Company’s sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.”



## Shenzhen EBO Testing Center

Report No.: EBO1707038-E153

Page 20 of 25

Test channel:	Highest
---------------	---------

### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	35.70	31.93	8.73	32.16	44.20	74.00	-29.83	Vertical
7440.00	30.76	36.59	11.79	31.78	47.36	74.00	-26.66	Vertical
9920.00	30.52	38.81	14.38	31.88	51.83	74.00	-22.19	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	39.66	31.93	8.73	32.16	48.16	74.00	-25.88	Horizontal
7440.00	32.38	36.59	11.79	31.78	48.98	74.00	-25.04	Horizontal
9920.00	29.79	38.81	14.38	31.88	51.10	74.00	-22.92	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	24.85	31.93	8.73	32.16	33.35	54.00	-20.65	Vertical
7440.00	19.66	36.59	11.79	31.78	36.26	54.00	-17.74	Vertical
9920.00	18.83	38.81	14.38	31.88	40.14	54.00	-13.86	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	28.91	31.93	8.73	32.16	37.41	54.00	-16.59	Horizontal
7440.00	21.73	36.59	11.79	31.78	38.33	54.00	-15.67	Horizontal
9920.00	18.43	38.81	14.38	31.88	39.74	54.00	-14.26	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

### Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

“This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company’s findings at the time of its intervention only and within the limits of Client’s instructions, if any. The Company’s sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.”



## Shenzhen EBO Testing Center

Report No.: EBO1707038-E153

Page 21 of 25

### 7.3.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	41.48	27.59	5.38	30.18	44.27	74.00	-29.73	Horizontal
2400.00	44.07	27.58	5.39	30.18	46.86	74.00	-27.14	Horizontal
2390.00	41.89	27.59	5.38	30.18	44.68	74.00	-29.32	Vertical
2400.00	45.95	27.58	5.39	30.18	48.74	74.00	-25.26	Vertical

#### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	32.35	27.59	5.38	30.18	35.14	54.00	-18.86	Horizontal
2400.00	33.50	27.58	5.39	30.18	36.29	54.00	-17.71	Horizontal
2390.00	32.19	27.59	5.38	30.18	34.98	54.00	-19.02	Vertical
2400.00	35.01	27.58	5.39	30.18	37.80	54.00	-16.20	Vertical

Test channel:	Highest channel
---------------	-----------------

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	43.42	27.53	5.47	29.93	46.49	74.00	-27.51	Horizontal
2500.00	42.85	27.55	5.49	29.93	45.96	74.00	-28.04	Horizontal
2483.50	44.03	27.53	5.47	29.93	47.10	74.00	-26.90	Vertical
2500.00	43.72	27.55	5.49	29.93	46.83	74.00	-27.17	Vertical

#### Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	35.16	27.53	5.47	29.93	38.23	54.00	-15.77	Horizontal
2500.00	33.36	27.55	5.49	29.93	36.47	54.00	-17.53	Horizontal
2483.50	36.25	27.53	5.47	29.93	39.32	54.00	-14.68	Vertical
2500.00	33.16	27.55	5.49	29.93	36.27	54.00	-17.73	Vertical

#### Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

### 7.4 20dB Occupancy Bandwidth

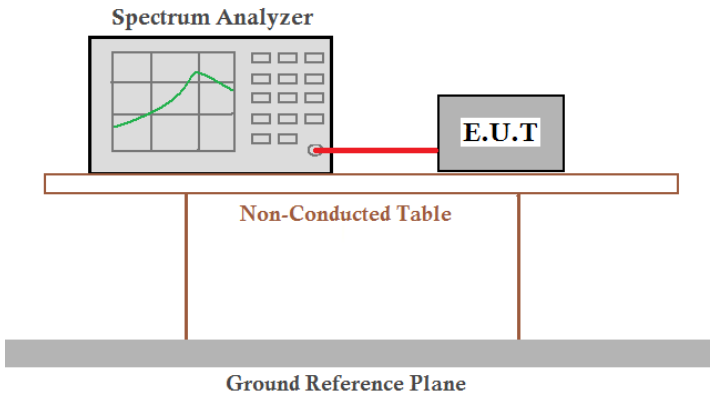Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

### Measurement Data


Test channel	20dB bandwidth(MHz)	Result
Lowest	1.203	Pass
Middle	1.194	Pass
Highest	1.199	Pass




# Shenzhen EBO Testing Center

Report No.: EBO1707038-E153  
Page 23 of 25


Test plot as follows:

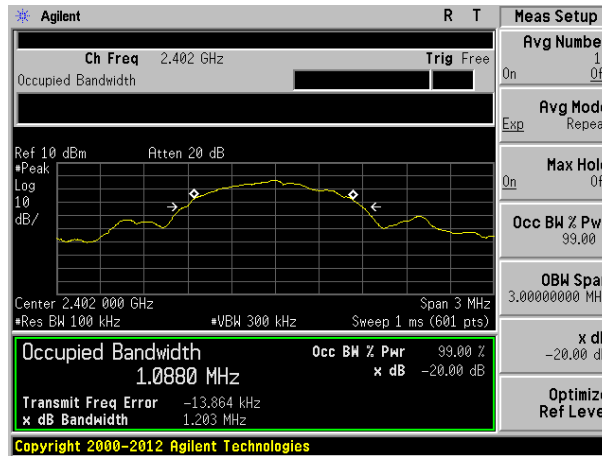

Lowest channel

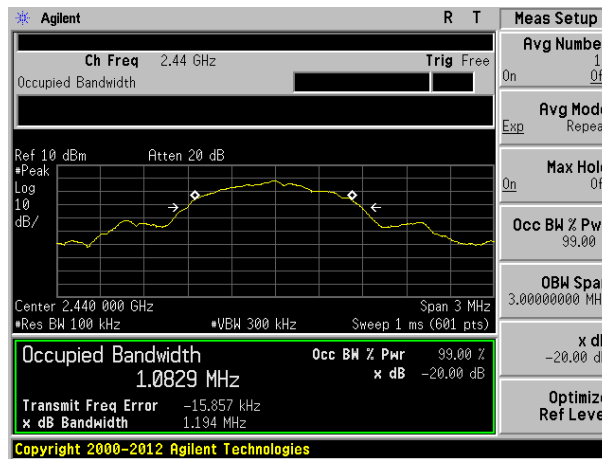

Middle channel


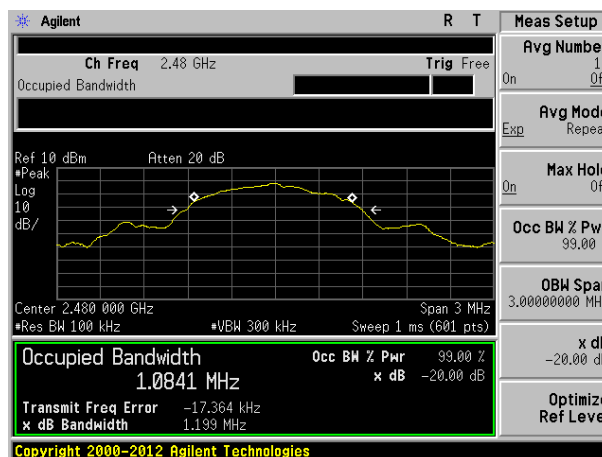


Highest channel

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 8 Test Setup Photo

Radiated Emission

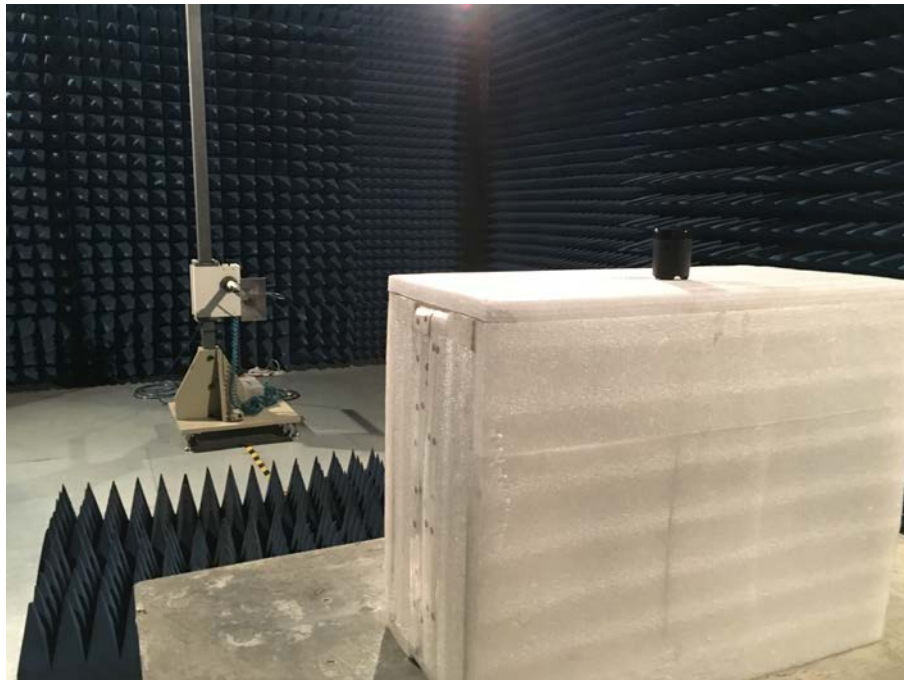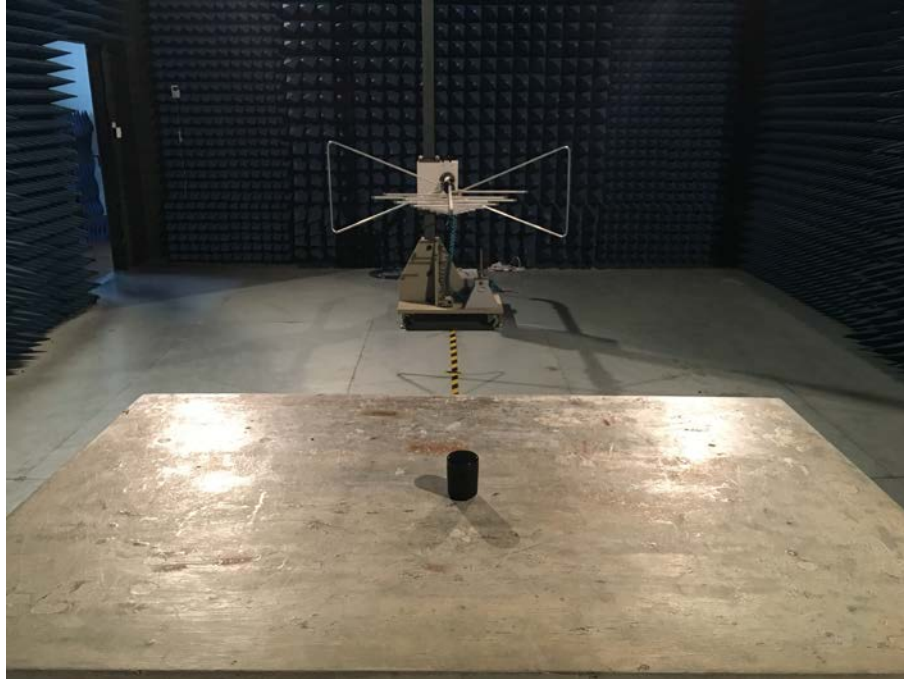

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Conducted Emission



## 9 EUT Constructional Details

Reference to the test report No. EBO1707038-E152

-----End-----