

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

INNOVATIVE TECHNOLOGY ELECTRONICS LLC

MINI STEREO SYSTEM WITH BLUETOOTH

Model Number:VS-115

Additional Model: VS-115XXXX

(Variables X can be 0-9, A-Z or blank, which means appearance colour or pattern)

FCC ID:2AFHW-VS115

| | |
|---------------|---|
| Prepared for: | INNOVATIVE TECHNOLOGY ELECTRONICS LLC |
| | 1 CHANNEL DRIVE,PORT WASHINGTON,New York 11050,United States. |
| | |
| Prepared By: | EST Technology Co., Ltd. |
| | Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China |
| | Tel: 86-769-83081888-808 |




| | |
|-----------------|-------------------------|
| Report Number: | ESTE-R1902037 |
| Date of Test: | Jan. 28 ~ Feb. 26, 2019 |
| Date of Report: | Feb. 28, 2019 |

TABLE OF CONTENTS

| Description | Page |
|---|------|
| TEST REPORT VERIFICATION..... | 3 |
| 1. GENERAL INFORMATION..... | 5 |
| 1.1. Description of Device (EUT)..... | 5 |
| 2. SUMMARY OF TEST..... | 6 |
| 2.1. Summary of test result..... | 6 |
| 2.2. Test Facilities..... | 7 |
| 2.3. Measurement uncertainty..... | 8 |
| 2.4. Assistant equipment used for test..... | 8 |
| 2.5. Block Diagram..... | 8 |
| 2.6. Test mode..... | 9 |
| 2.7. Channel List..... | 9 |
| 2.8. Test Equipment..... | 10 |
| 3. MAXIMUM PEAK OUTPUT POWER..... | 12 |
| 3.1. Limit..... | 12 |
| 3.2. Test Procedure..... | 12 |
| 3.3. Test Result..... | 12 |
| 3.4. Test Data..... | 13 |
| 4. 20 DB BANDWIDTH..... | 17 |
| 4.1. Limit..... | 17 |
| 4.2. Test Procedure..... | 17 |
| 4.3. Test Result..... | 17 |
| 4.4. Test Data..... | 18 |
| 5. CARRIER FREQUENCY SEPARATION..... | 22 |
| 5.1. Limit..... | 22 |
| 5.2. Test Procedure..... | 22 |
| 5.3. Test Result..... | 22 |
| 5.4. Test Data..... | 23 |
| 6. NUMBER OF HOPPING CHANNEL..... | 27 |
| 6.1. Limit..... | 27 |
| 6.2. Test Procedure..... | 27 |
| 6.3. Test Result..... | 27 |
| 6.4. Test Data..... | 28 |
| 7. DWELL TIME..... | 30 |
| 7.1. Limit..... | 30 |
| 7.2. Test Procedure..... | 30 |
| 7.3. Test Result..... | 30 |
| 7.4. Test Data..... | 31 |
| 8. RADIATED EMISSIONS..... | 37 |
| 8.1. Limit..... | 37 |
| 8.2. Block Diagram of Test setup..... | 38 |
| 8.3. Test Procedure..... | 39 |
| 8.4. Test Result..... | 39 |
| 8.5. Test Data..... | 40 |

- 9. BAND EDGE COMPLIANCE 56
 - 9.1. Limit 56
 - 9.2. Block Diagram of Test setup 56
 - 9.3. Test Procedure 56
 - 9.4. Test Result 56
 - 9.5. Test Data 57
- 10. POWER LINE CONDUCTED EMISSIONS 73
 - 10.1. Limit 73
 - 10.2. Test Procedure 73
- 11. ANTENNA REQUIREMENTS 78
 - 11.1. Limit 78
 - 11.2. Result 78
- 12. TEST SETUP PHOTO 79
- 13. PHOTO EUT 81

EST Technology Co., Ltd.

| | | | |
|---|--|---|-------------------------|
| Applicant: | INNOVATIVE TECHNOLOGY ELECTRONICS LLC | | |
| Address: | 1 CHANNEL DRIVE,PORT WASHINGTON,New York 11050,United States. | | |
| Manufacturer: | Guangzhou Panyu Juda Car Audio Equipment Co.,Ltd. | | |
| Address: | Vtrek Dewei Industrial Garden, Shibe Industrial Road, Dashi Town, Panyu Borough, Guangzhou, Guangdong, China | | |
| E.U.T: | MINI STEREO SYSTEM WITH BLUETOOTH | | |
| Model Number: | VS-115 | | |
| Additional Model: | VS-115XXXX(Variables X can be 0-9, A-Z or blank, which means appearance colour or pattern) Note: All models have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction, except the different model number. | | |
| Power Supply: | AC 100-240V ~ 50/60Hz | | |
| Test Voltage: | AC 120V/60Hz AC 240V/60Hz | | |
| Trade Name: | Victrola | Serial No.: | ----- |
| Date of Receipt: | Jan. 28, 2019 | Date of Test: | Jan. 28 ~ Feb. 26, 2019 |
| Test Specification: | FCC Rules and Regulations Part 15 Subpart C:2018 ANSI C63.10:2013 | | |
| Test Result: | The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. <p style="text-align: right;">Date: Feb. 28, 2019</p> | | |
| Prepared by: | Reviewed by: | Approved by: | |
|  _____ Ring / Assistant |  _____ Tony / Engineer |  _____ Iceman Hu / Manager | |
| Other Aspects: | None. | | |
| Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested | | | |
| This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd. | | | |

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

| | | |
|---------------------|---|--|
| Product Name | : | MINI STEREO SYSTEM WITH BLUETOOTH |
| FCC ID | : | 2AFHW-VS115 |
| Model Number | : | VS-115 |
| Operation frequency | : | 2402MHz~2480MHz |
| Number of channel | : | 79 |
| Antenna | : | PCB antenna, 0dBi gain |
| Modulation | : | BT BDR: GFSK BT EDR: $\pi/4$ -DQPSK BT EDR: 8-DPSK |
| Sample Type | : | Prototype production |

2. SUMMARY OF TEST

2.1. Summary of test result

| Description of Test Item | Standard | Results |
|---|---|---------|
| Maximum Peak Output Power | FCC Part 15: 15.247(b)(1) KDB 558074 | PASS |
| 20dB Bandwidth | FCC Part 15: 15.247a1 KDB 558074 | PASS |
| Carrier Frequency Separation | FCC Part 15: 15.247(a)(1) KDB 558074 | PASS |
| Number Of Hopping Channel | FCC Part 15: 15.247(a)(1)(iii) KDB 558074 | PASS |
| Dwell Time | FCC Part 15: 15.247(a)(1)(iii) KDB 558074 | PASS |
| Radiated Emissions | FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2013 KDB 558074 | PASS |
| Band Edge Compliance | FCC Part 15: 15.247(d) KDB 558074 | PASS |
| Power Line Conducted Emissions | FCC Part 15: 15.207 ANSI C63.10:2013 KDB 558074 | PASS |
| Antenna requirement | FCC Part 15: 15.203 | PASS |
| Note: KDB 558074 D01 15.247 Meas Guidance v05 | | |

2.2. Test Facilities

| | | |
|---------------|---|--|
| EMC Lab | : | <p>Certificated by CNAS, CHINA Registration No.: L5288 Date of registration: November 13, 2017</p> <p>Certificated by A2LA, USA Registration No.: 4366.01 Date of registration: November 07, 2017</p> <p>Certificated by FCC, USA Designation Number: CN1215 Registration No.: 722932 Date of registration: November 21, 2017</p> <p>Certificated by Industry Canada CAB identifier No.: CN0035 Date of registration: January 04, 2019</p> <p>Certificated by VCCI, Japan Registration No.: R-13663; C-14103 Date of registration: July 25, 2017 This Certificate is valid until: July 24, 2020</p> <p>Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: February 07, 2015</p> <p>Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011</p> <p>Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L2-64 Date of registration: April 28, 2011</p> <p>Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011</p> |
| Name of Firm | : | EST Technology Co., Ltd. |
| Site Location | : | Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China |

2.3. Measurement uncertainty

| Test Item | Uncertainty |
|---|-----------------------|
| Uncertainty for Conduction emission test | ±3.48dB |
| Uncertainty for spurious emissions test (30MHz-1GHz) | ±4.60 dB(Polarize: H) |
| | ±4.68 dB(Polarize: V) |
| Uncertainty for spurious emissions test (1GHz to 25GHz) | ±4.96dB |
| Uncertainty for radio frequency | 7×10^{-8} |
| Uncertainty for conducted RF Power | 0.20dB |
| Uncertainty for Power density test | 0.26dB |


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.4. Assistant equipment used for test

2.4.1. N/A

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was beset into Bluetooth test mode by software before test.



(EUT: MINI STEREO SYSTEM WITH BLUETOOTH)

2.6. Test mode

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

| Mode | Channel | Frequency |
|--------|---------|-----------|
| GFSK | Low | 2402MHz |
| | Middle | 2441MHz |
| | High | 2480MHz |
| 8-DPSK | Low | 2402MHz |
| | Middle | 2441MHz |
| | High | 2480MHz |

2.7. Channel List

| Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) |
|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|
| 1 | 2402 | 2 | 2403 | 3 | 2404 | 4 | 2405 |
| 5 | 2406 | 6 | 2407 | 7 | 2408 | 8 | 2409 |
| 9 | 2410 | 10 | 2411 | 11 | 2412 | 12 | 2413 |
| 13 | 2414 | 14 | 2415 | 15 | 2416 | 16 | 2417 |
| 17 | 2418 | 18 | 2419 | 19 | 2420 | 20 | 2421 |
| 21 | 2422 | 22 | 2423 | 23 | 2424 | 24 | 2425 |
| 25 | 2426 | 26 | 2427 | 27 | 2428 | 28 | 2429 |
| 29 | 2430 | 30 | 2431 | 31 | 2432 | 32 | 2433 |
| 33 | 2434 | 34 | 2435 | 35 | 2436 | 36 | 2437 |
| 37 | 2438 | 38 | 2439 | 39 | 2440 | 40 | 2441 |
| 41 | 2442 | 42 | 2443 | 43 | 2444 | 44 | 2445 |
| 45 | 2446 | 46 | 2447 | 47 | 2448 | 48 | 2449 |
| 49 | 2450 | 50 | 2451 | 51 | 2452 | 52 | 2453 |
| 53 | 2454 | 54 | 2455 | 55 | 2456 | 56 | 2457 |
| 57 | 2458 | 58 | 2459 | 59 | 2460 | 60 | 2461 |
| 61 | 2462 | 62 | 2463 | 63 | 2464 | 64 | 2465 |
| 65 | 2466 | 66 | 2467 | 67 | 2468 | 68 | 2469 |
| 69 | 2470 | 70 | 2471 | 71 | 2472 | 72 | 2473 |
| 73 | 2474 | 74 | 2475 | 75 | 2476 | 76 | 2477 |
| 77 | 2478 | 78 | 2479 | 79 | 2480 | - | - |

2.8. Test Equipment

2.8.1. For conducted emission test

| Equipment | Manufacturer | Model No. | Serial No. | Calibration Body | Last Cal. | Next Cal. |
|--------------------------|-----------------|--------------|------------|------------------|------------|-----------|
| EMI Test Receiver | Rohde & Schwarz | ESHS30 | 832354 | CEPREI | June 15,18 | 1 Year |
| Artificial Mains Network | Rohde & Schwarz | ENV216 | 101260 | CEPREI | June 15,18 | 1 Year |
| Pulse Limiter | Rohde & Schwarz | ESH3-Z2 | 101100 | CEPREI | June 15,18 | 1 Year |
| Test Software | Audix | e3-6.111221a | N/A | N/A | N/A | N/A |

2.8.2. For radiated emission test(9 kHz-30MHz)

| Equipment | Manufacturer | Model No. | Serial No. | Calibration Body | Last Cal. | Next Cal. |
|---------------------|-----------------|--------------|------------|------------------|------------|-----------|
| EMI Test Receiver | Rohde & Schwarz | ESR7 | 101780 | CEPREI | June 15,18 | 1 Year |
| Active Loop Antenna | SCHWARZB ECK | FMZB 1519B | 1519B-088 | N/A | Aug. 01,18 | 1 Year |
| Test Software | Audix | e3-6.111221a | N/A | N/A | N/A | N/A |

2.8.3. For radiated emissions test (30-1000MHz)

| Equipment | Manufacturer | Model No. | Serial No. | Calibration Body | Last Cal. | Next Cal. |
|-------------------|-----------------|--------------|------------|------------------|------------|-----------|
| EMI Test Receiver | Rohde & Schwarz | ESR7 | 101780 | CEPREI | June 15,18 | 1 Year |
| Bilog Antenna | Teseq | CBL 6111D | 27090 | CEPREI | June 15,18 | 1 Year |
| Test Software | Audix | e3-6.111221a | N/A | N/A | N/A | N/A |

2.8.4. For radiated emission test(above 1GHz)

| Equipment | Manufacturer | Model No. | Serial No. | Calibration Body | Last Cal. | Next Cal. |
|------------------------------|----------------|--------------|----------------|------------------|------------|-----------|
| Horn Antenna | SCHWARZB ECK | BBHA 9120 D | BBHA912 0D1002 | CEPREI | June 18,18 | 1 Year |
| Horn Antenna | SCHWARZB ECK | BBHA9170 | BBHA917 0242 | CEPREI | June 18,18 | 1 Year |
| Signal Amplifier | SCHWARZB ECK | BBV9718 | 9718-212 | CEPREI | June 15,18 | 1 Year |
| Spectrum Analyzer | Rohde &Schwarz | FSV | 103173 | CEPREI | June 15,18 | 1 Year |
| PSA Series Spertrum Analyzer | Agilent | E4447A | MY50180 031 | CEPREI | June 15,18 | 1 Year |
| Test Software | Audix | e3-6.111221a | N/A | N/A | N/A | N/A |

2.8.5. For connect EUT antenna terminal test

| Equipment | Manufacturer | Model No. | Serial No. | Calibration Body | Last Cal. | Next Cal. |
|-------------------|-----------------|-----------|----------------|------------------|------------|-----------|
| Spectrum Analyzer | Rohde & Schwarz | FSV | 103173 | CEPREI | June 15,18 | 1 Year |
| Spectrum Analyzer | Agilent | E4408B | MY44211 139 | CEPREI | June 15,18 | 1 Year |

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset employing at least 75 non-overlapping hopping channels; shall not exceed 0.125 W if the hopset employing at greater than or equal to 15 and less than 75 non-overlapping hopping channels.

3.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.

3.3. Test Result


| EUT: MINI STEREO SYSTEM WITH BLUETOOTH | | | | | |
|--|------------|--------------------|-------|-------------------|------------|
| M/N: VS-115 | | | | | |
| Test date: 2019.02.22 | | Test site: RF site | | Tested by: Viking | |
| Mode | Freq (MHz) | Result (dBm) | Limit | | Conclusion |
| | | | dBm | W | |
| GFSK | 2402 | -3.827 | 30.00 | 1 | Pass |
| | 2441 | -4.295 | 30.00 | 1 | Pass |
| | 2480 | -4.647 | 30.00 | 1 | Pass |
| 8-DPSK | 2402 | -3.890 | 30.00 | 1 | Pass |
| | 2441 | -4.349 | 30.00 | 1 | Pass |
| | 2480 | -4.718 | 30.00 | 1 | Pass |

3.4. Test Data


GFSK 2402 MHz

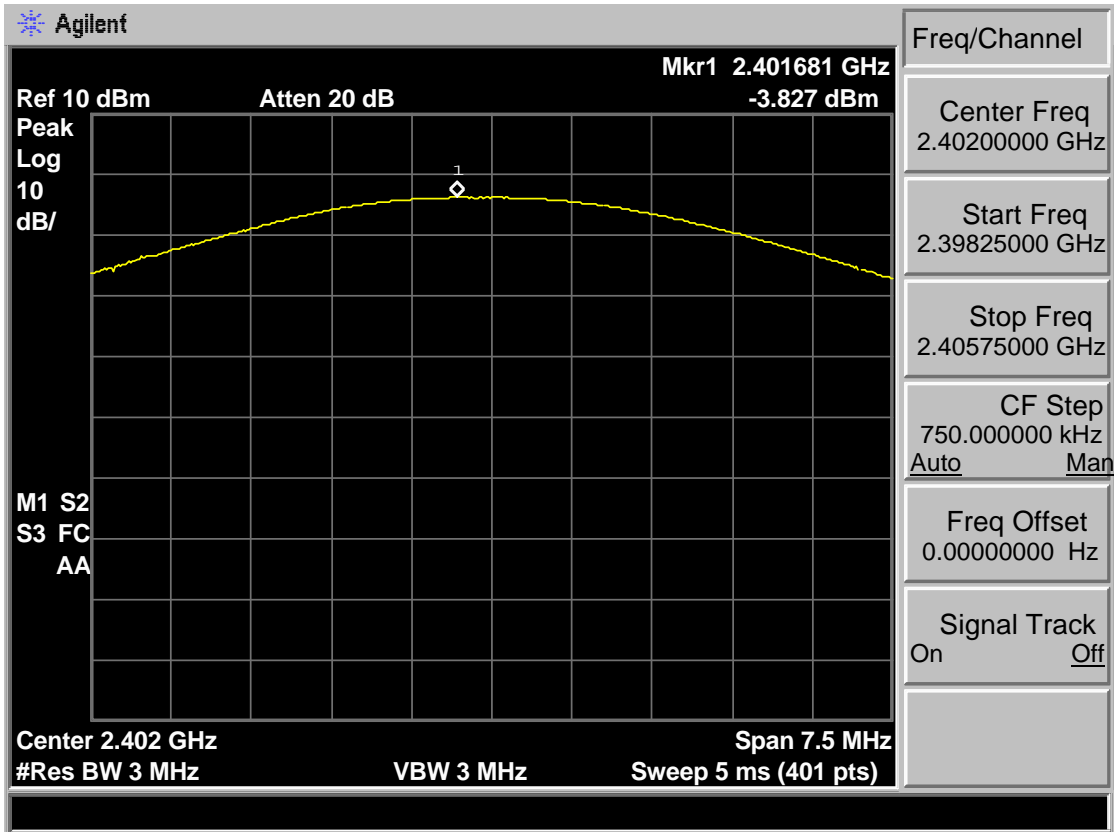


GFSK 2441 MHz

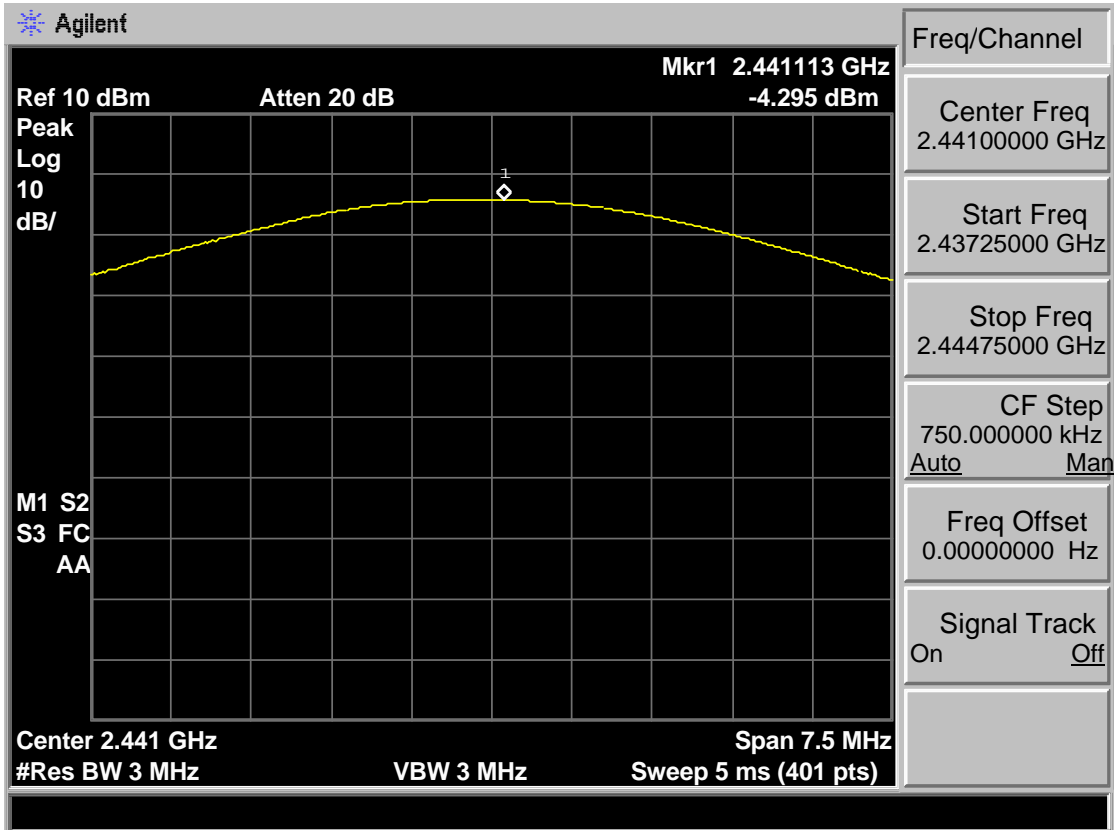


GFSK 2480 MHz

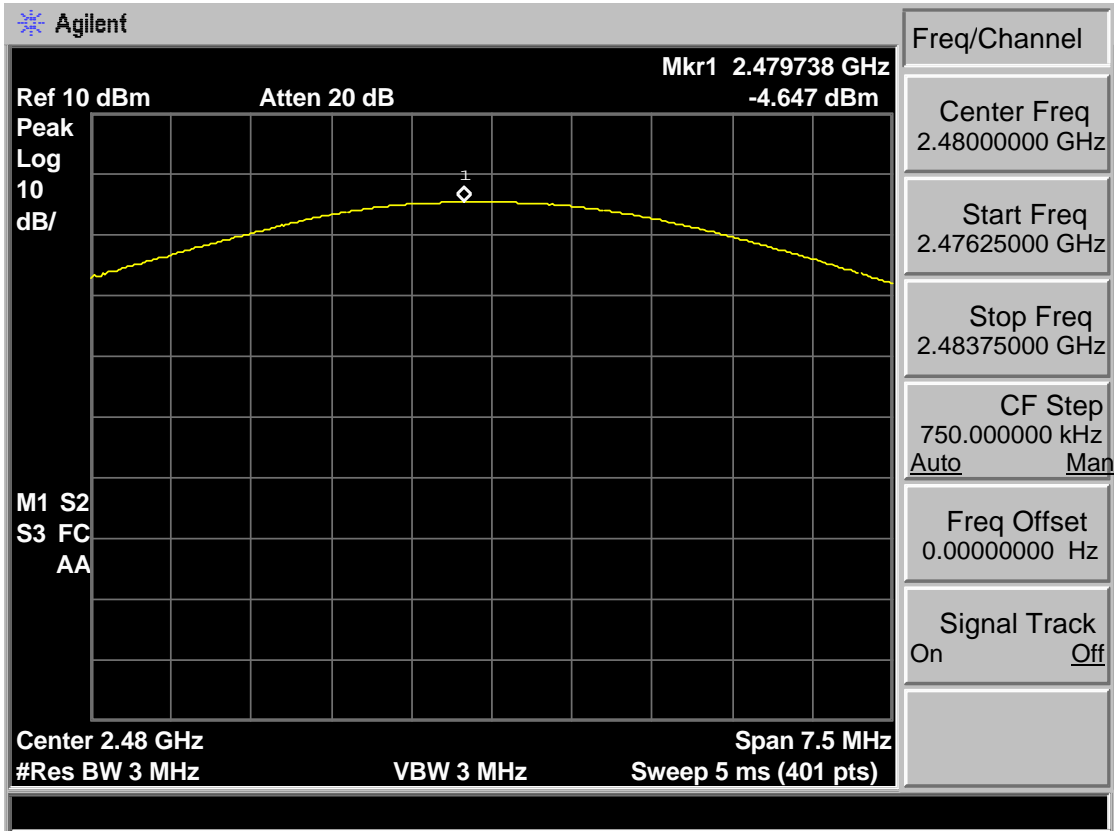


8-DPSK 2402 MHz

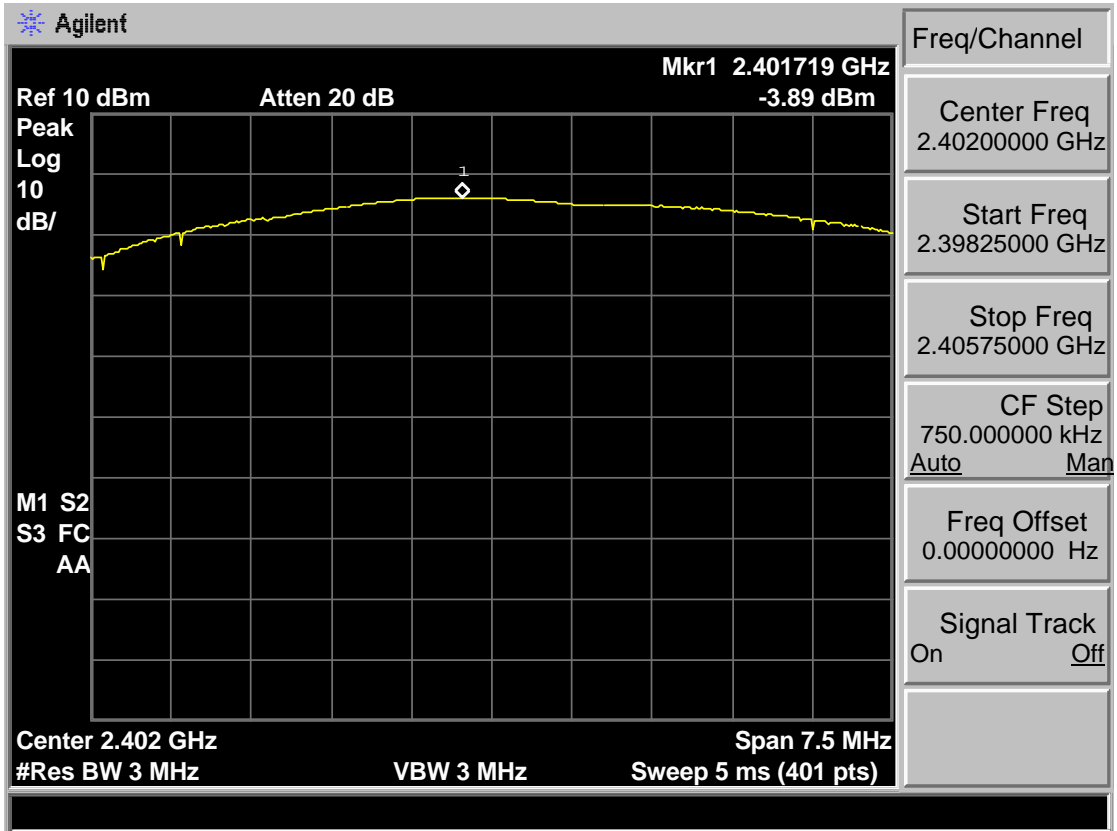

8-DPSK 2441 MHz

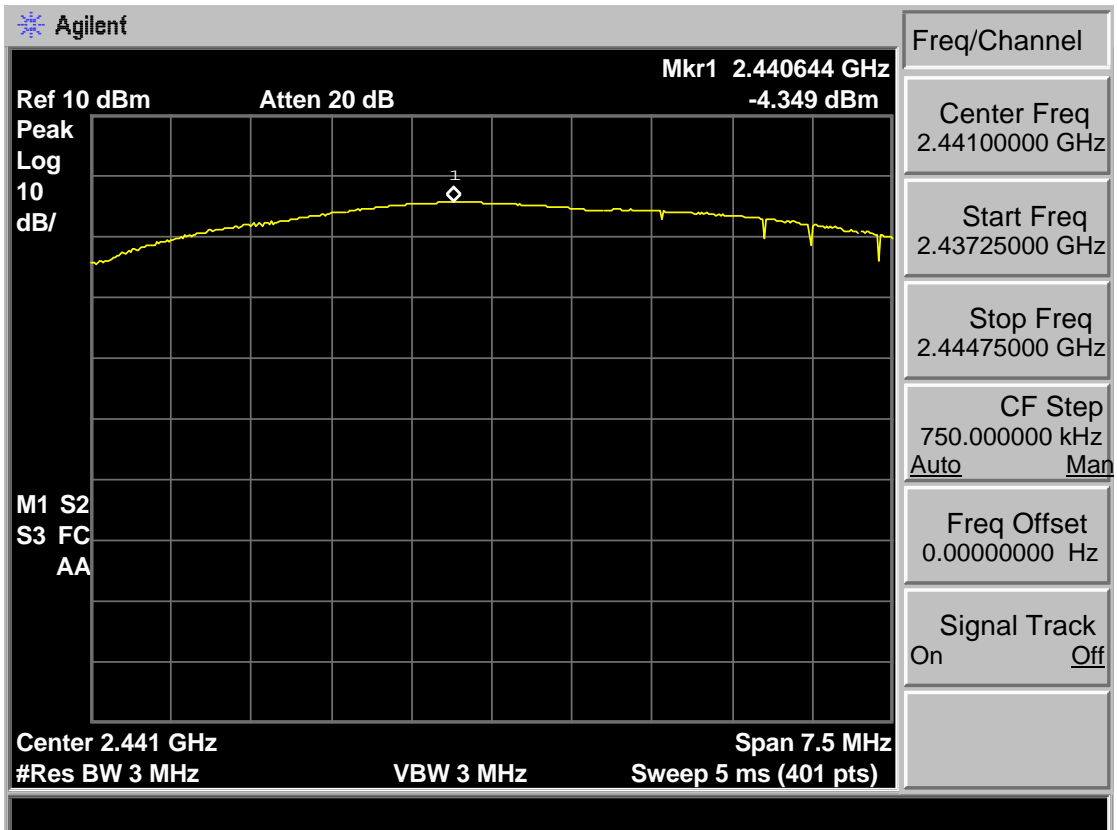

8-DPSK 2480 MHz

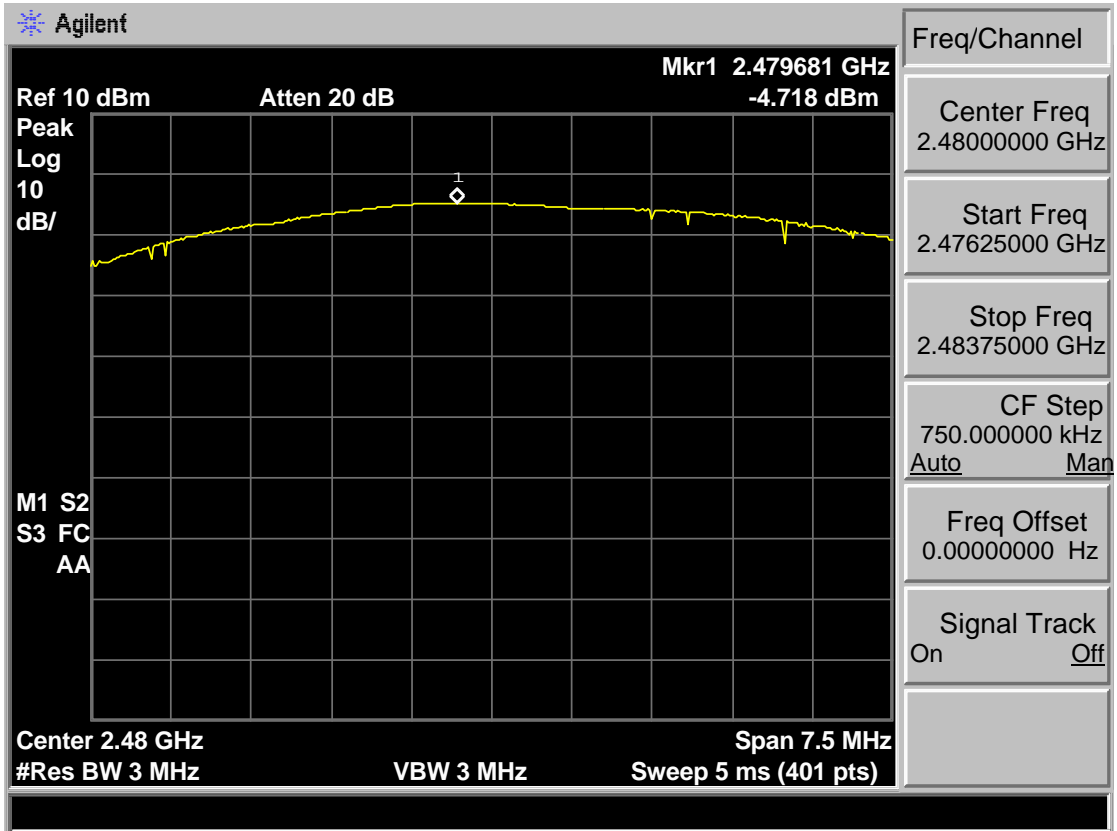

4. 20 DB BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


| EUT: MINI STEREO SYSTEM WITH BLUETOOTH | | | | |
|--|------------|----------------------|-------------|-------------------|
| M/N: VS-115 | | | | |
| Test date: 2019.02.22 | | Test site: RF site | | Tested by: Viking |
| Mode | Freq (MHz) | 20dB Bandwidth (MHz) | Limit (kHz) | Conclusion |
| GFSK | 2402 | 1.044 | / | PASS |
| | 2441 | 1.096 | / | PASS |
| | 2480 | 1.099 | / | PASS |
| 8-DPSK | 2402 | 1.365 | / | PASS |
| | 2441 | 1.364 | / | PASS |
| | 2480 | 1.372 | / | PASS |

4.4. Test Data


GFSK 2402MHz

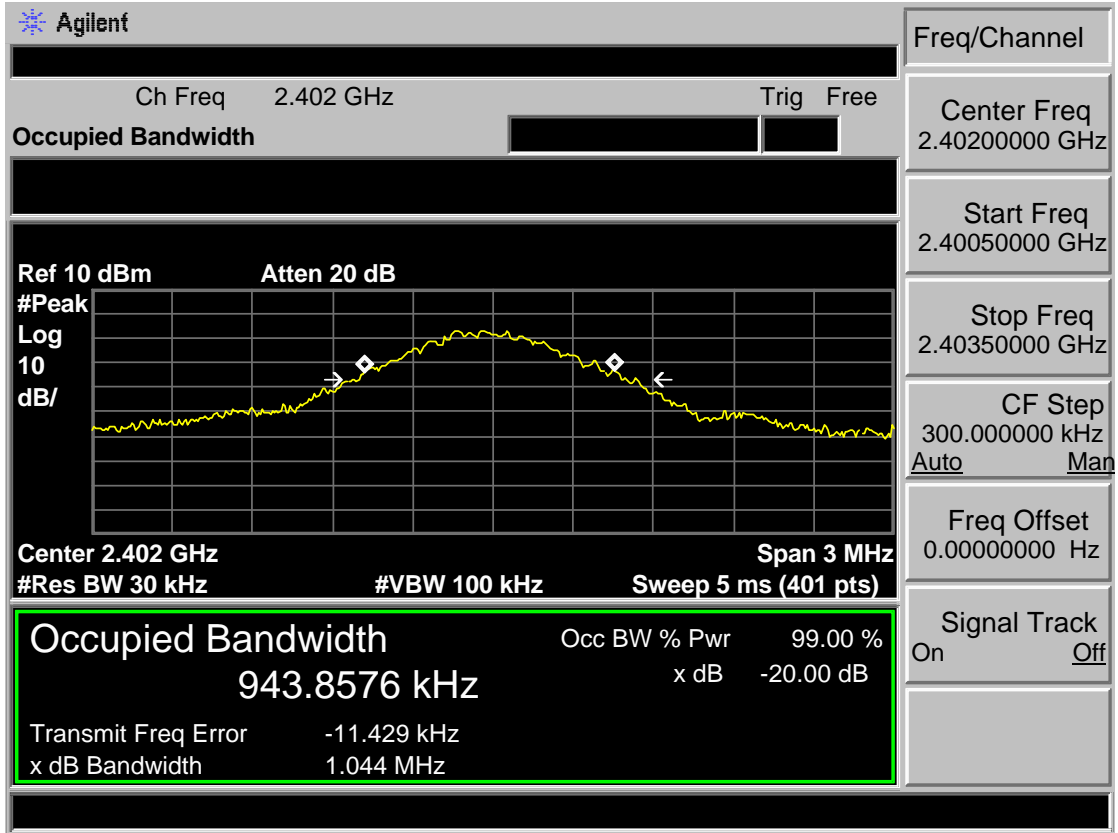


GFSK 2441MHz

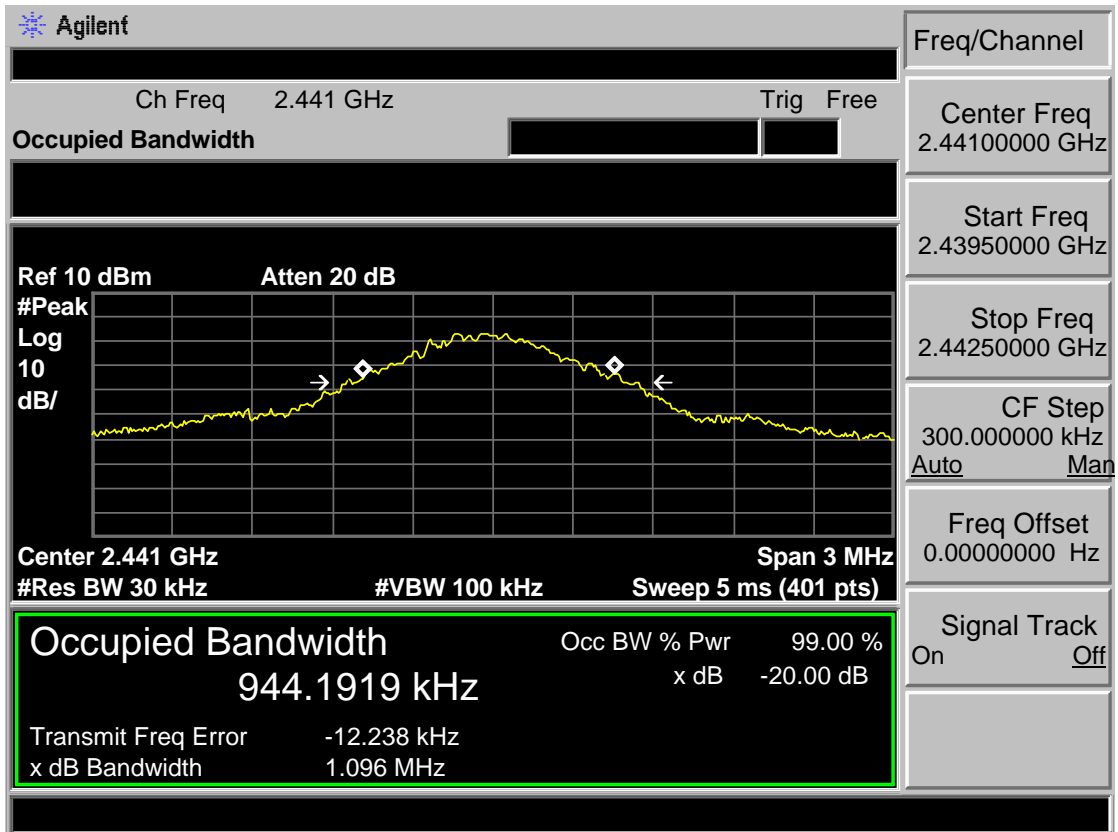


GFSK 2480MHz

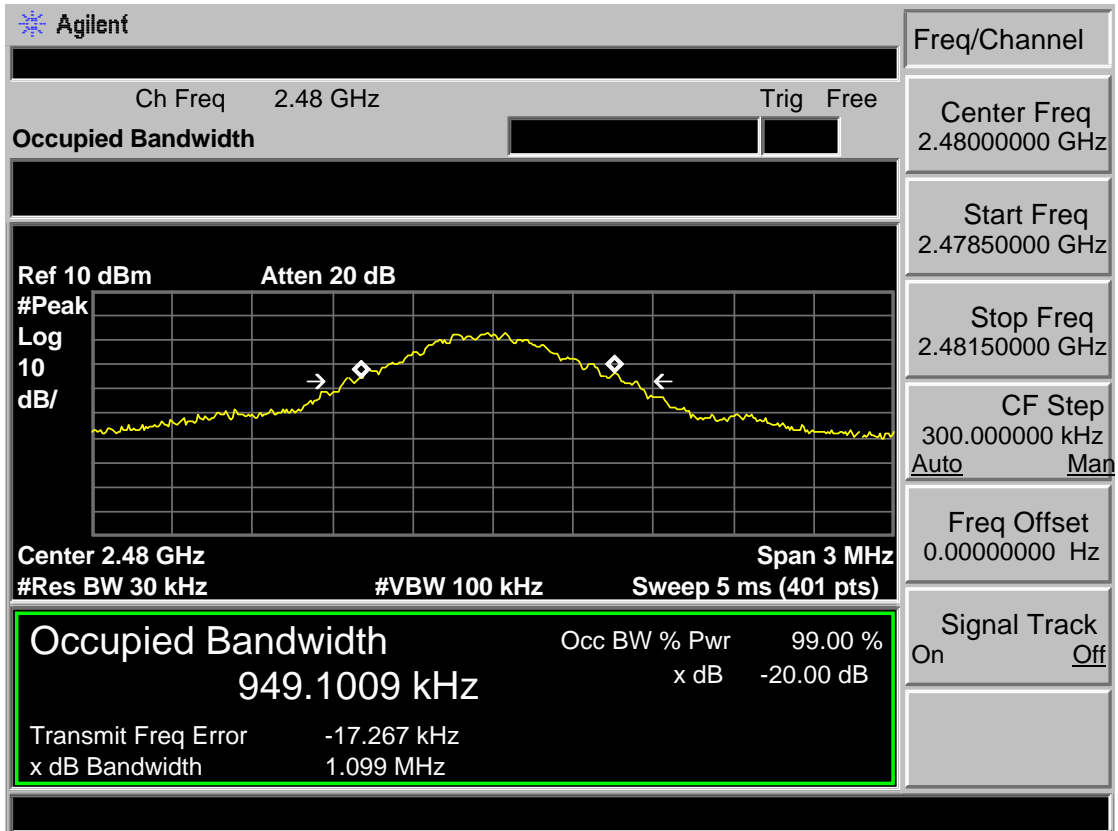


8-DPSK 2402MHz

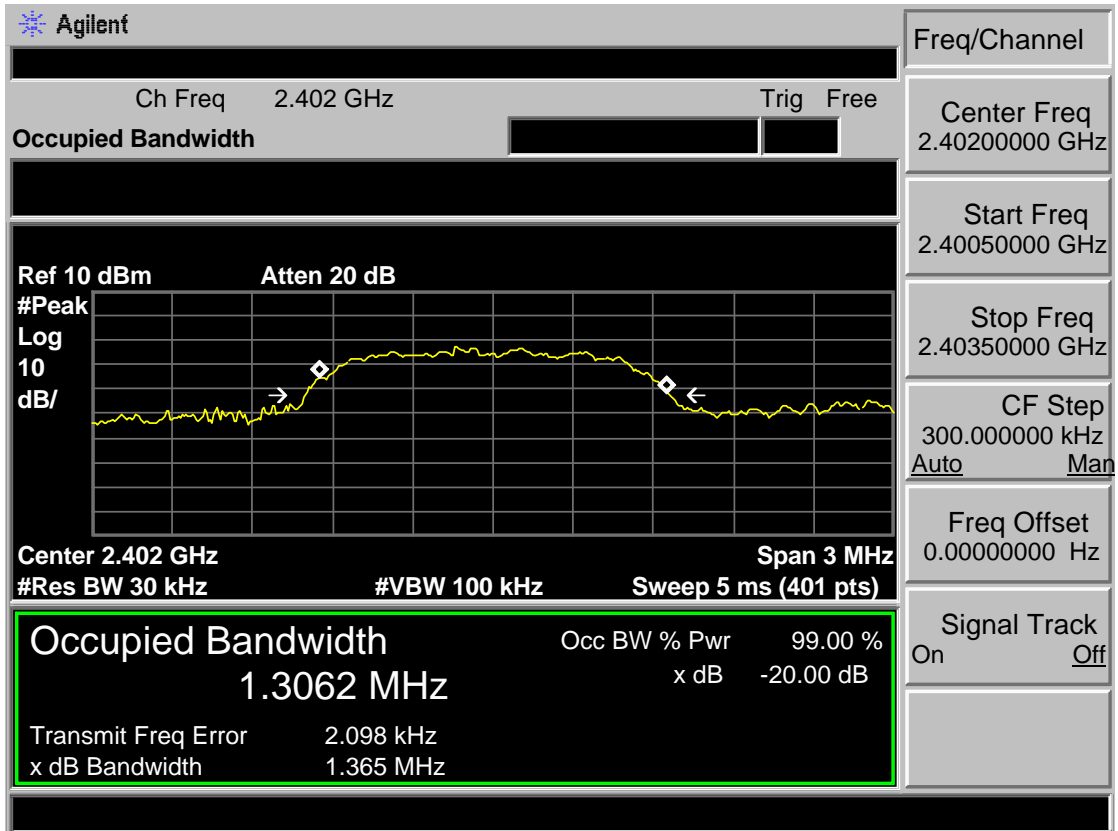

8-DPSK 2441MHz

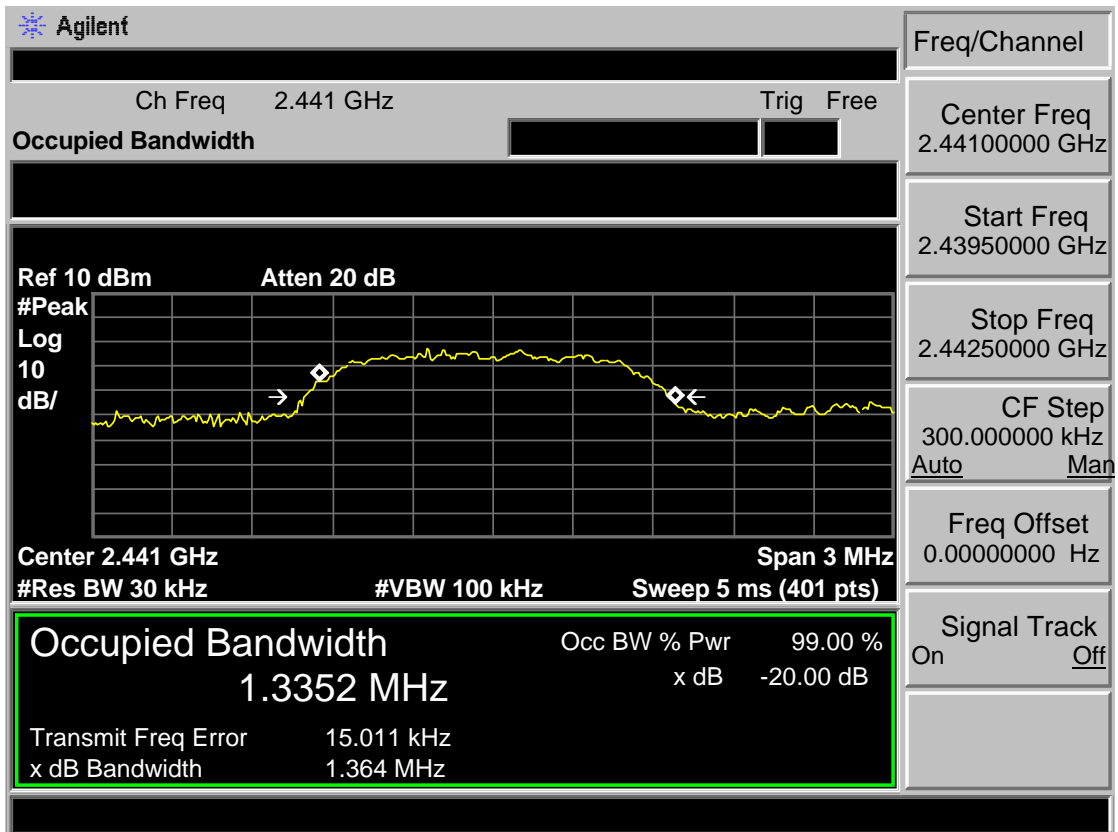

8-DPSK 2480MHz

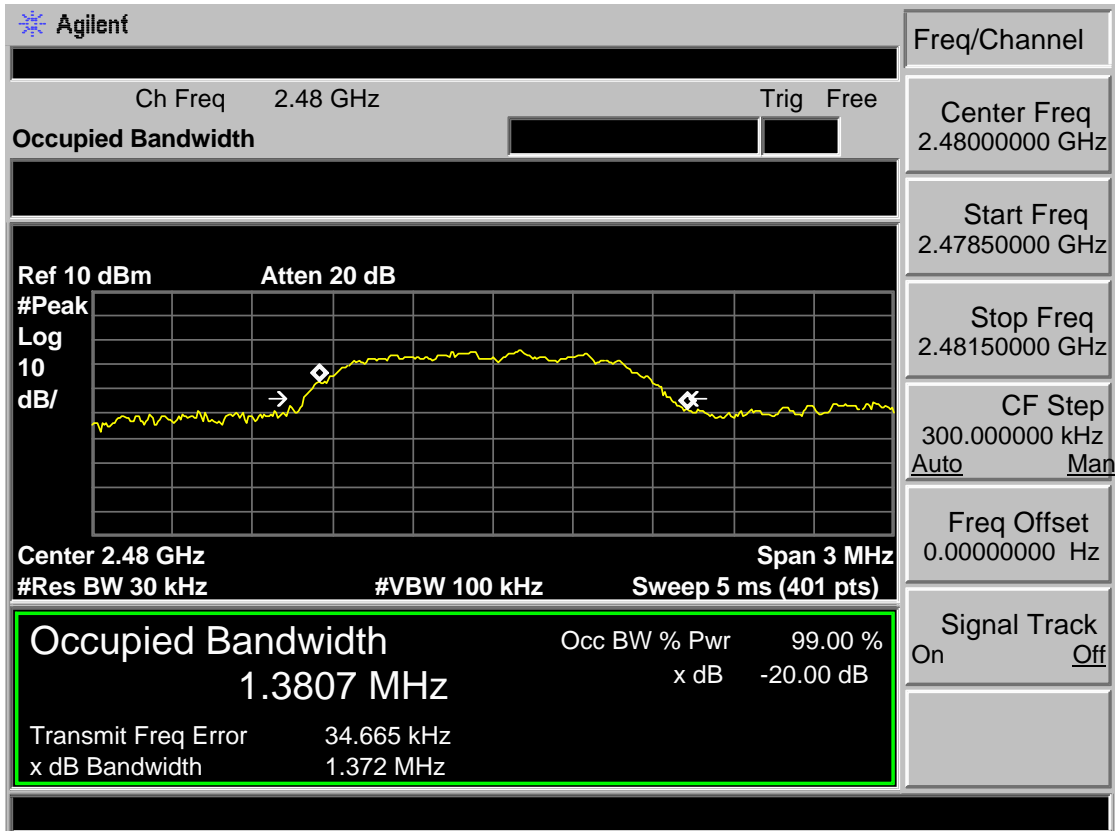

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW.

5.3. Test Result


| EUT: MINI STEREO SYSTEM WITH BLUETOOTH | | | | |
|--|---------|--------------------------|---|-------------------|
| M/N: VS-115 | | | | |
| Test date: 2019.02.22 | | | Test site: RF site | Tested by: Viking |
| Mode | Channel | Channel separation (MHz) | Limit | Conclusion |
| GFSK | Low CH | 1.000 | > 2/3 of the 20dB Bandwidth or 25[kHz](whichever is greater) | PASS |
| | Mid CH | 1.000 | | PASS |
| | High CH | 1.000 | | PASS |
| 8-DPSK | Low CH | 1.000 | | PASS |
| | Mid CH | 1.000 | | PASS |
| | High CH | 1.000 | | PASS |

5.4. Test Data


GFSK
Low Channel

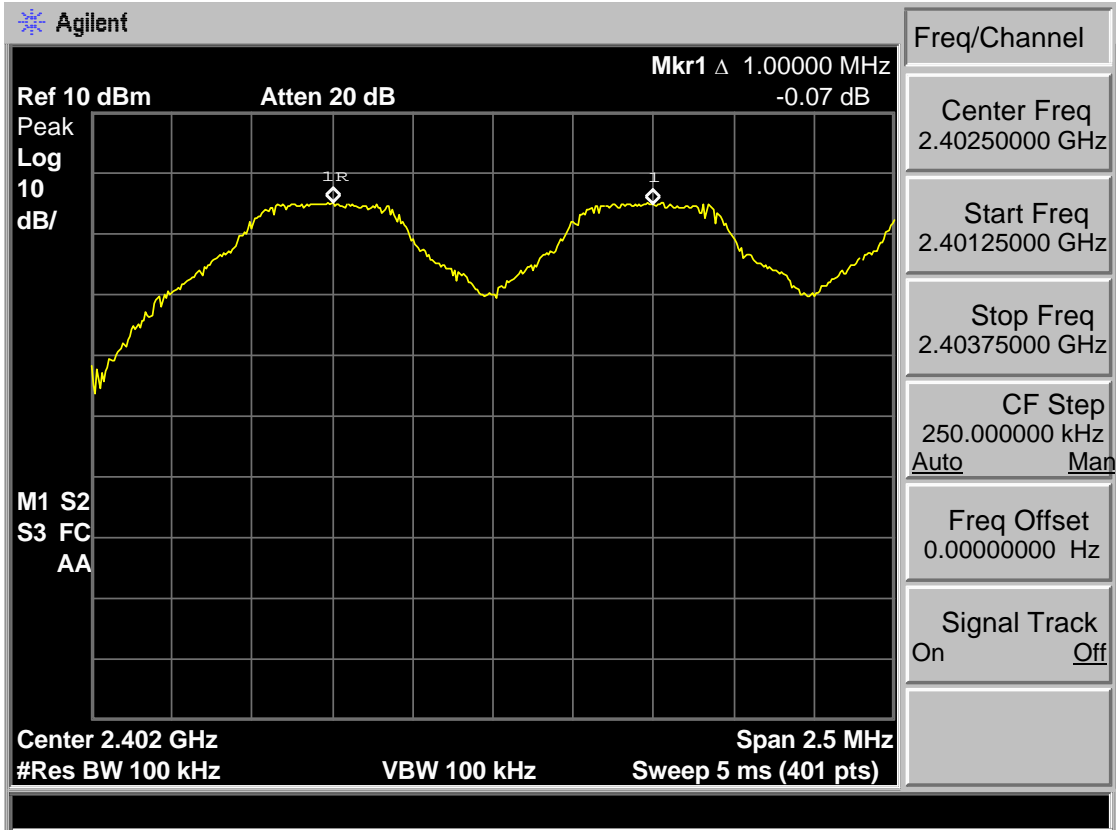


Mid Channel

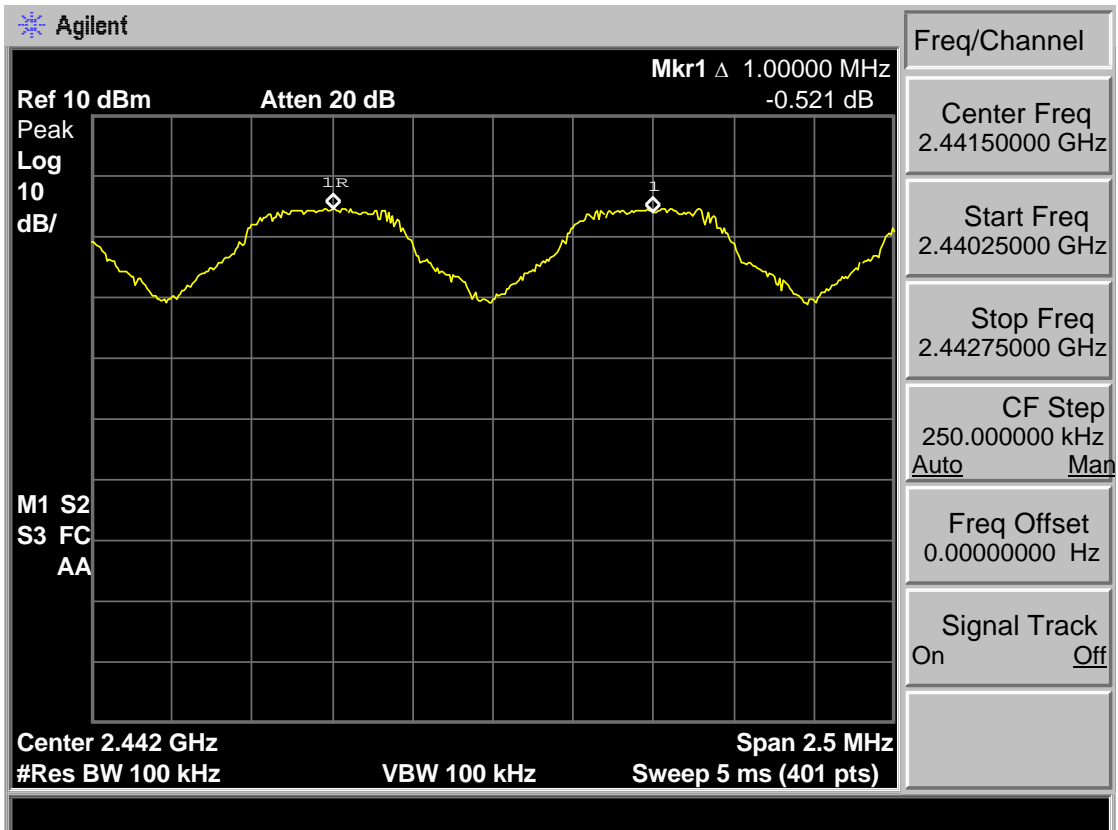


High Channel

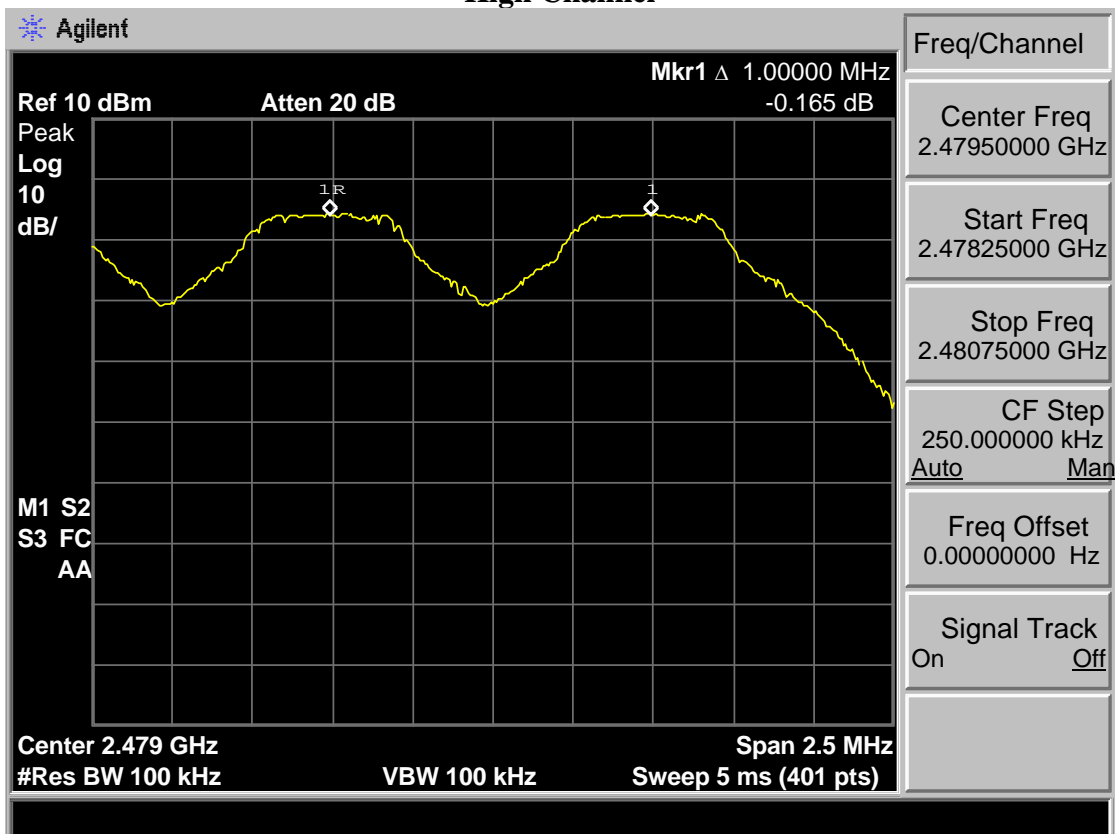


8-DPSK Low Channel

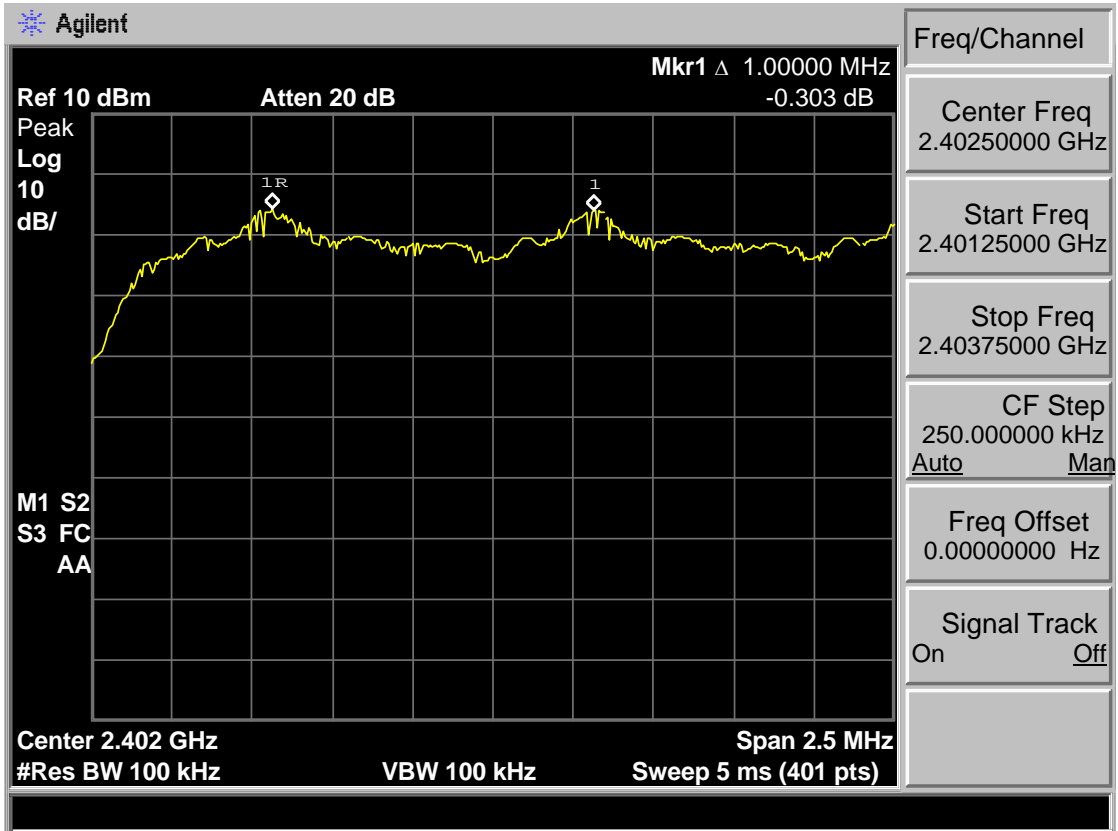

Mid Channel

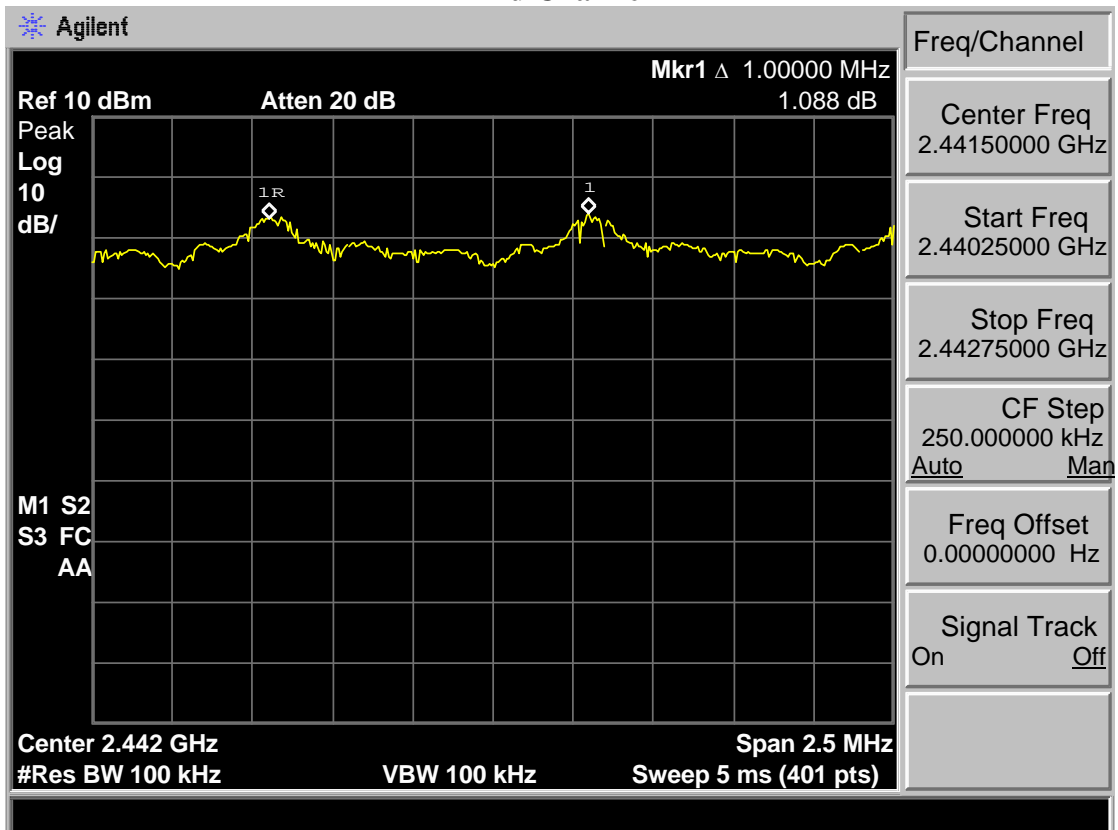

High Channel

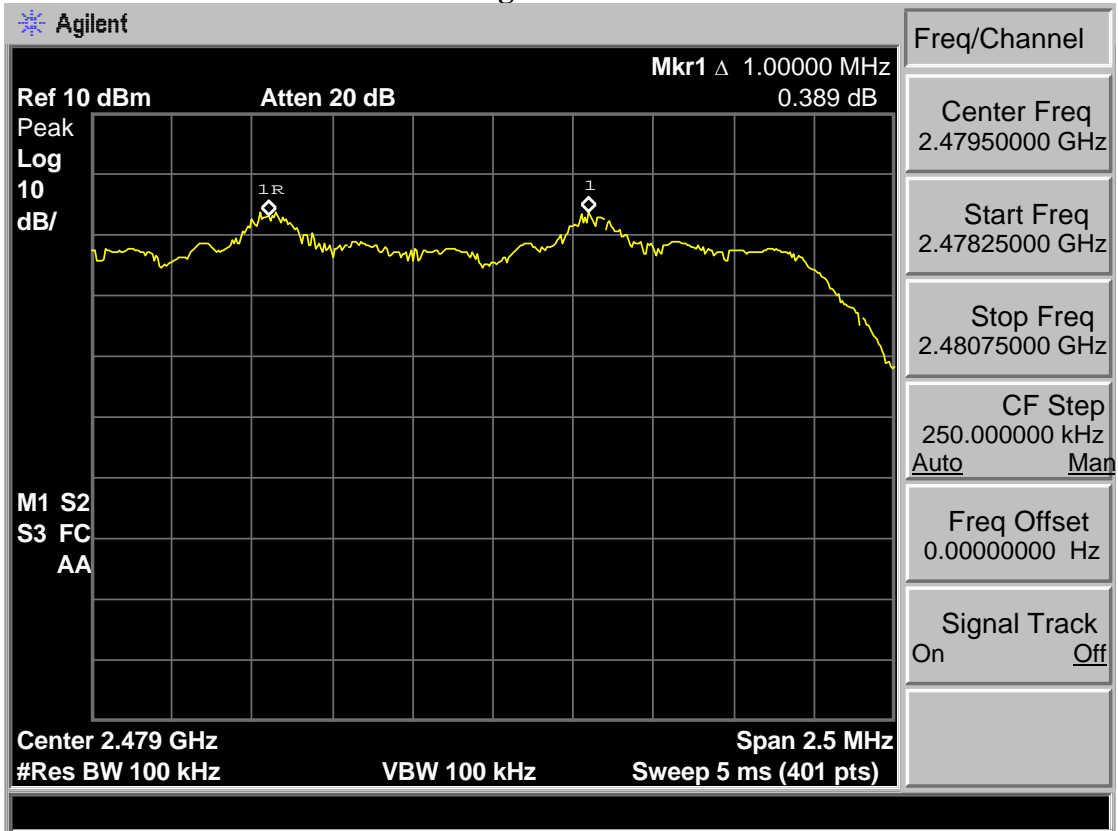

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Procedure




The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable. The number of hopping channel was measured by spectrum analyzer with 300kHz RBW and 300kHz VBW.

6.3. Test Result




| EUT: MINI STEREO SYSTEM WITH BLUETOOTH | | | |
|--|---------------------------|--------------------|-------------------|
| M/N: VS-115 | | | |
| Test date: 2019.02.22 | | Test site: RF site | Tested by: Viking |
| Mode | Number of hopping channel | Limit | Conclusion |
| GFSK | 79 | >15 | PASS |
| 8-DPSK | 79 | >15 | PASS |

6.4. Test Data

GFSK

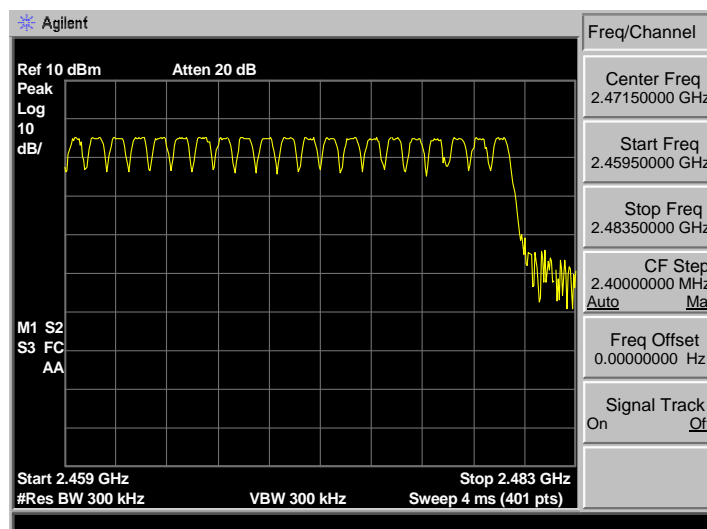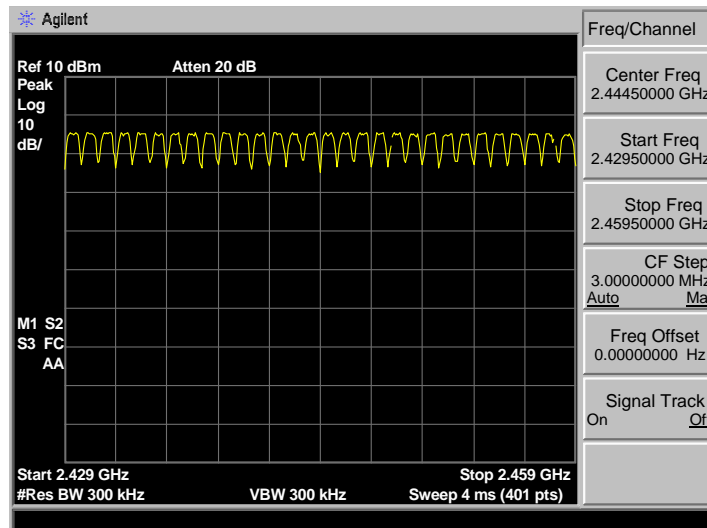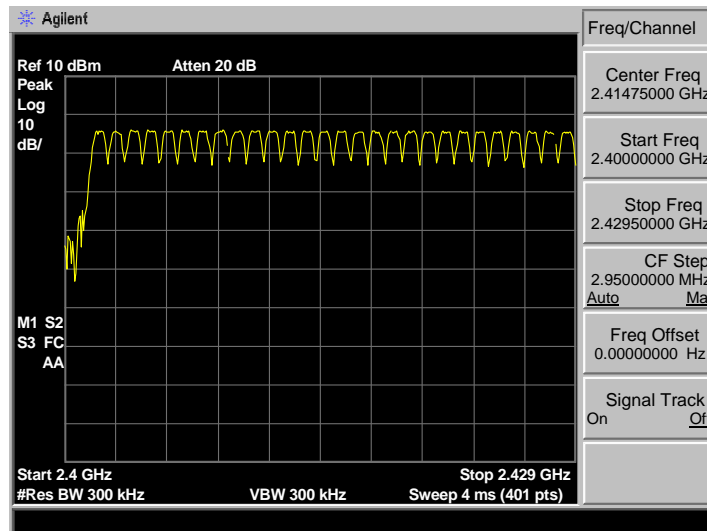

8-DPSK

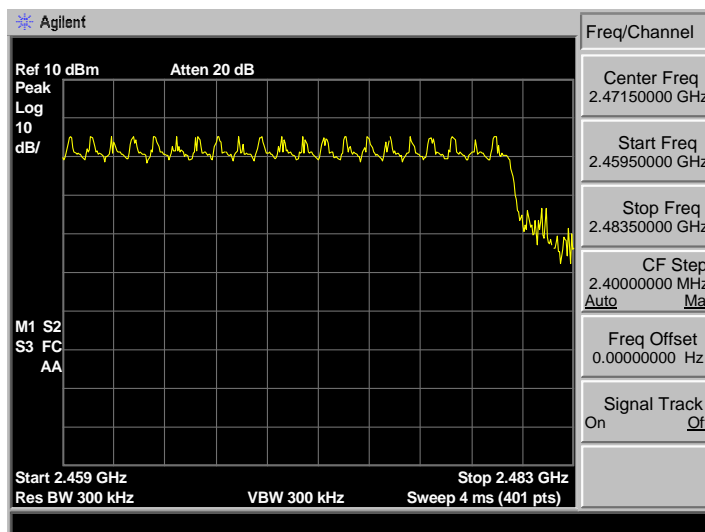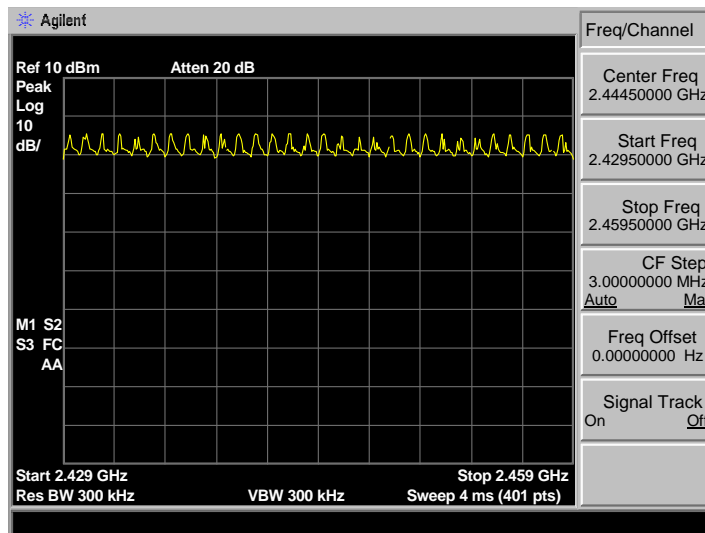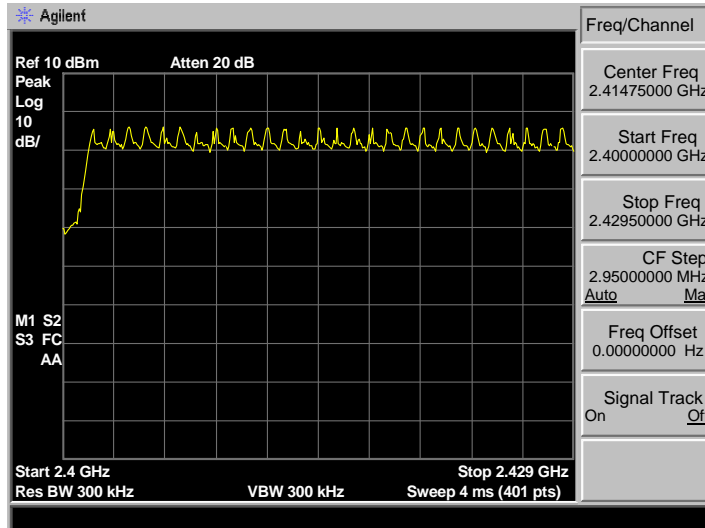

7. DWELL TIME

7.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Procedure



1. The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency = measured channel, RBW = 1MHz, VBW= 1MHz, Frequency Span = 0 Hz.
4. Set sweep time properly to capture the entire dwell time per hopping channel.
5. Set detector type to Peak and trace mode to Max Hold and make the measurement.
6. Repeat step 3-5 until all channels measured were complete.

7.3. Test Result



| EUT: MINI STEREO SYSTEM WITH BLUETOOTH | | | | | | |
|---|----------------|--------------------|--------------------|-------------------|--------|------------|
| M/N: VS-115 | | | | | | |
| Test date: 2019.02.22 | | Test site: RF site | | Tested by: Viking | | |
| Mode | Hopping number | Measure time (s) | Burst on time (ms) | Dwell time (ms) | Limit | Conclusion |
| GFSK DH1 | 47 | 5 | 0.45 | 133.67 | <400ms | PASS |
| GFSK DH3 | 24 | 5 | 1.61 | 244.20 | <400ms | PASS |
| GFSK DH5 | 16 | 5 | 2.81 | 284.15 | <400ms | PASS |
| 8-DPSK 3DH1 | 48 | 5 | 0.43 | 130.44 | <400ms | PASS |
| 8-DPSK 3DH3 | 24 | 5 | 1.62 | 245.72 | <400ms | PASS |
| 8-DPSK 3DH5 | 16 | 5 | 2.77 | 280.10 | <400ms | PASS |
| Dwell time = Hopping number/measure time *0.4*79*burst on time. | | | | | | |

7.4. Test Data



GFSK DH1

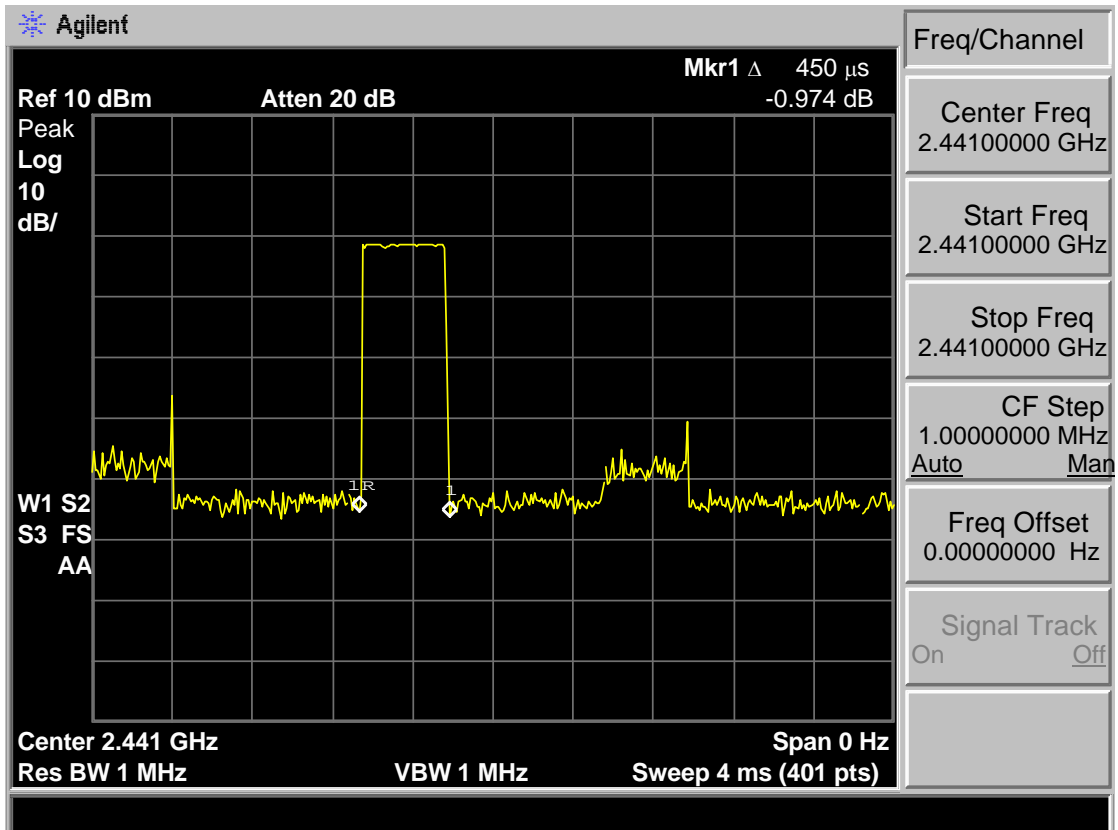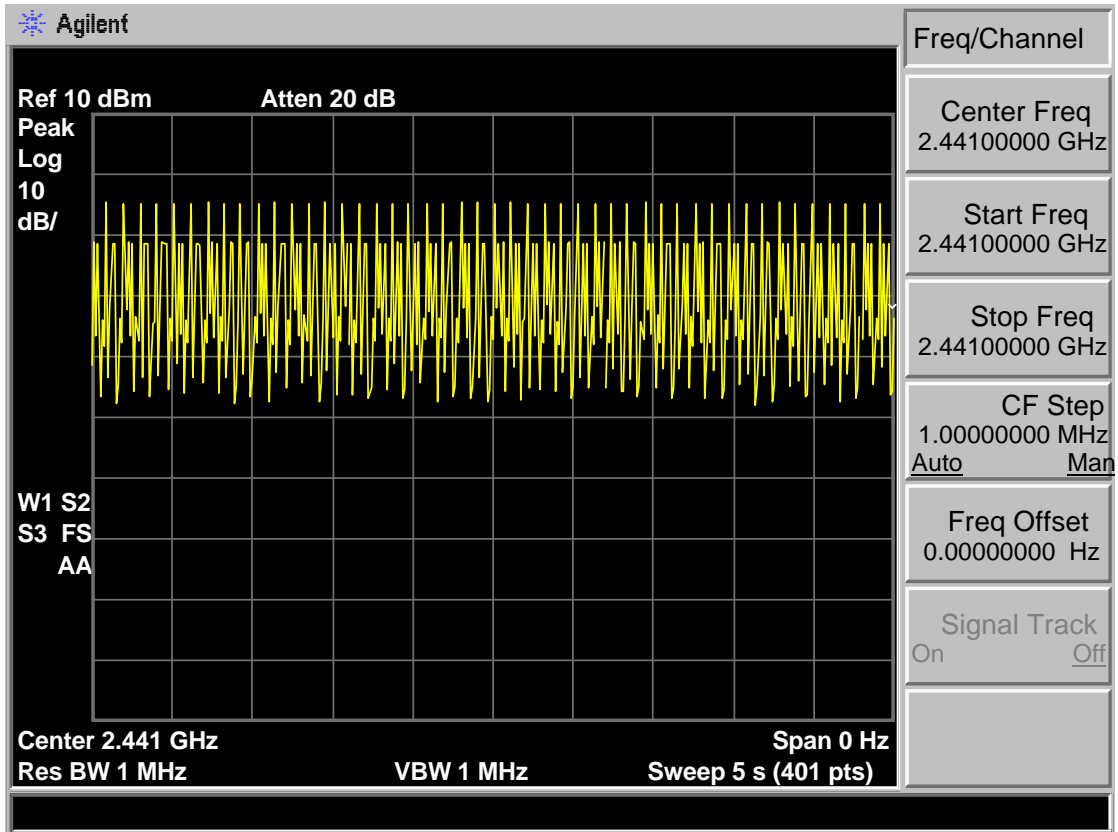



GFSK DH3

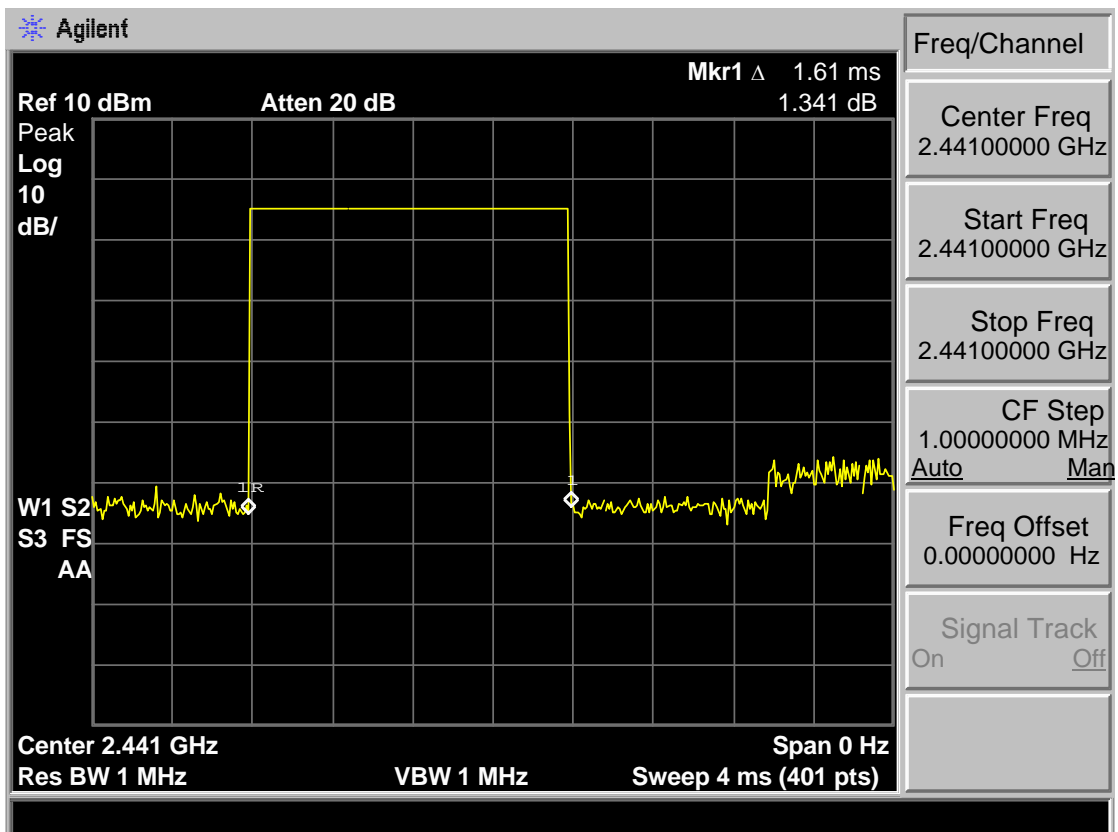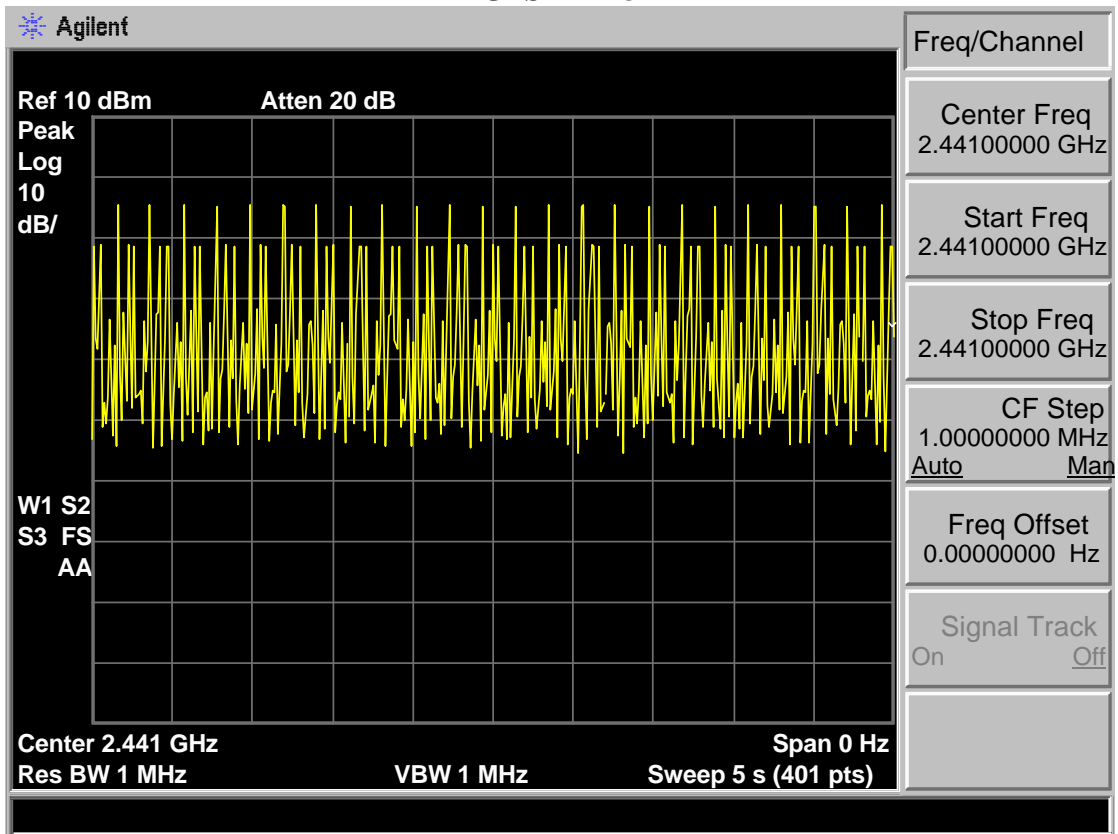



GSKF DH5

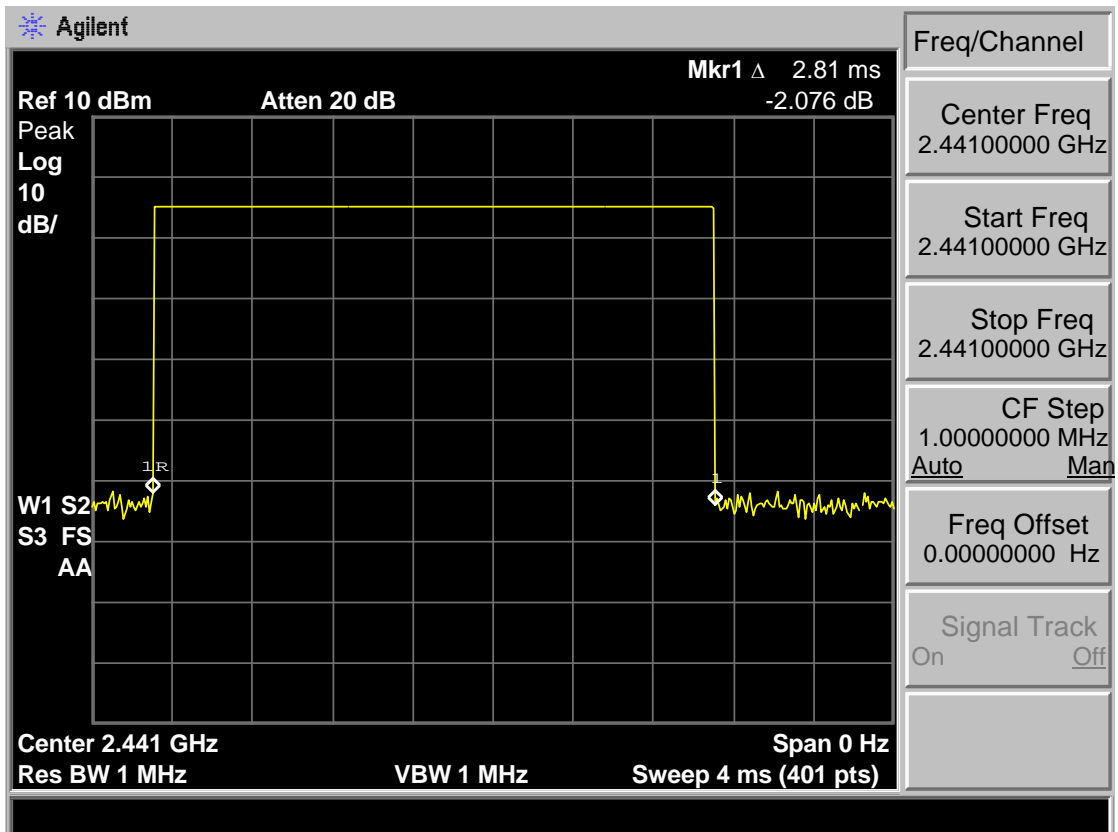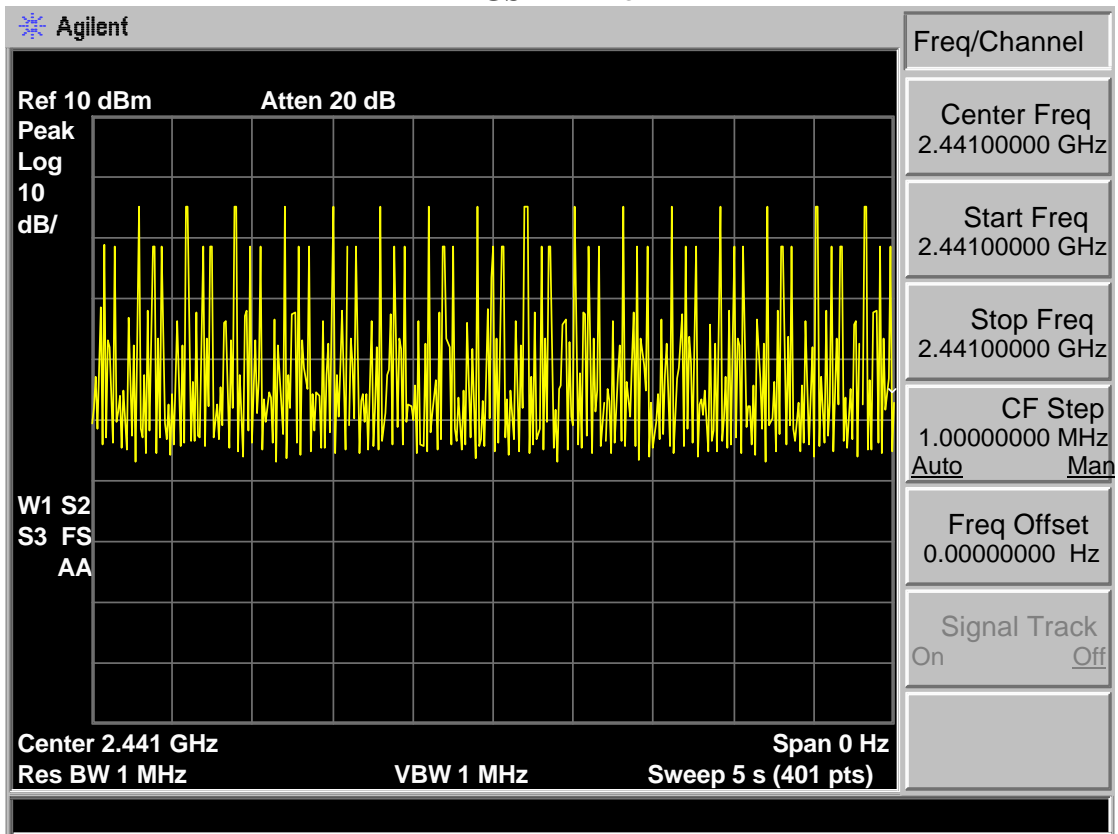



8-DPSK 3DH1

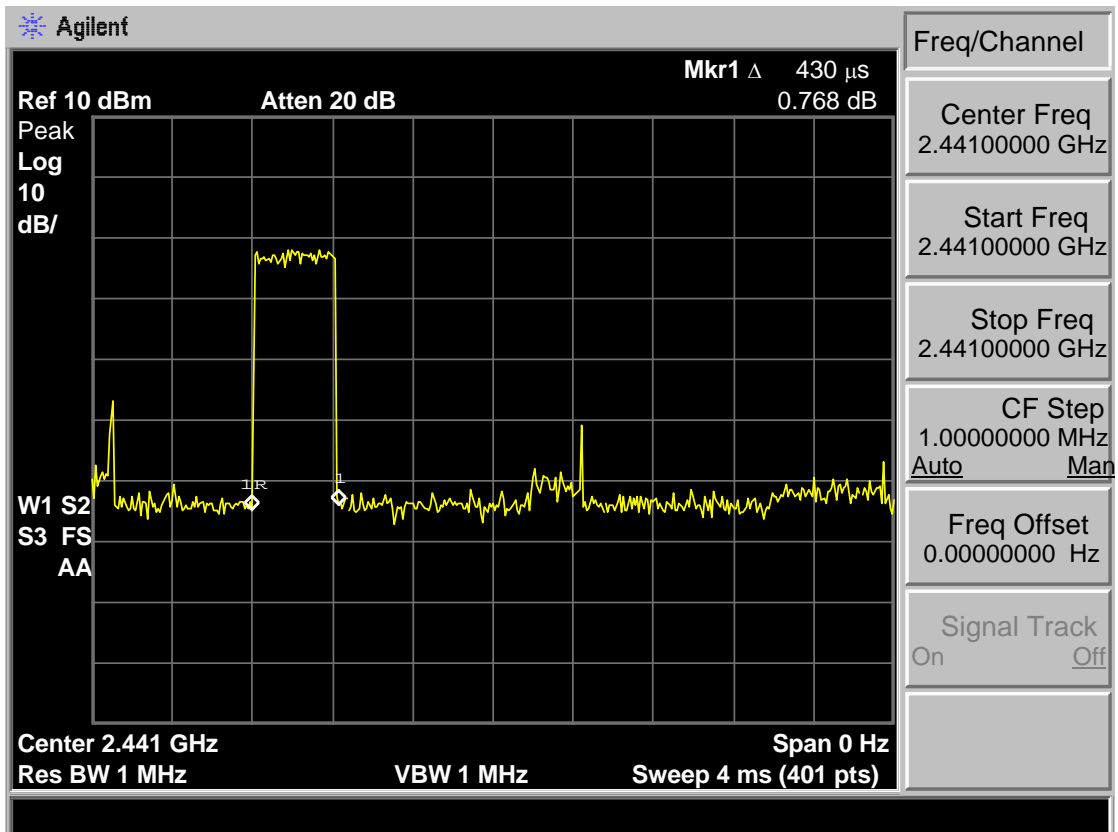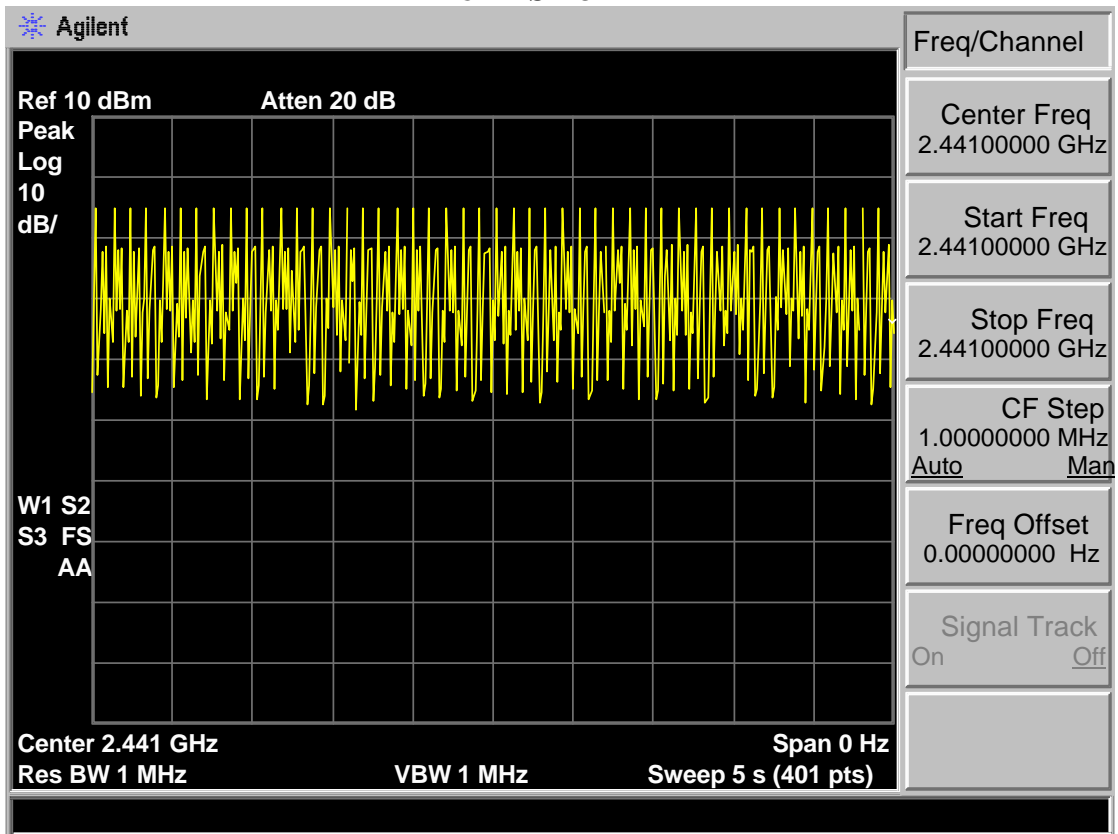

8-DPSK 3DH3

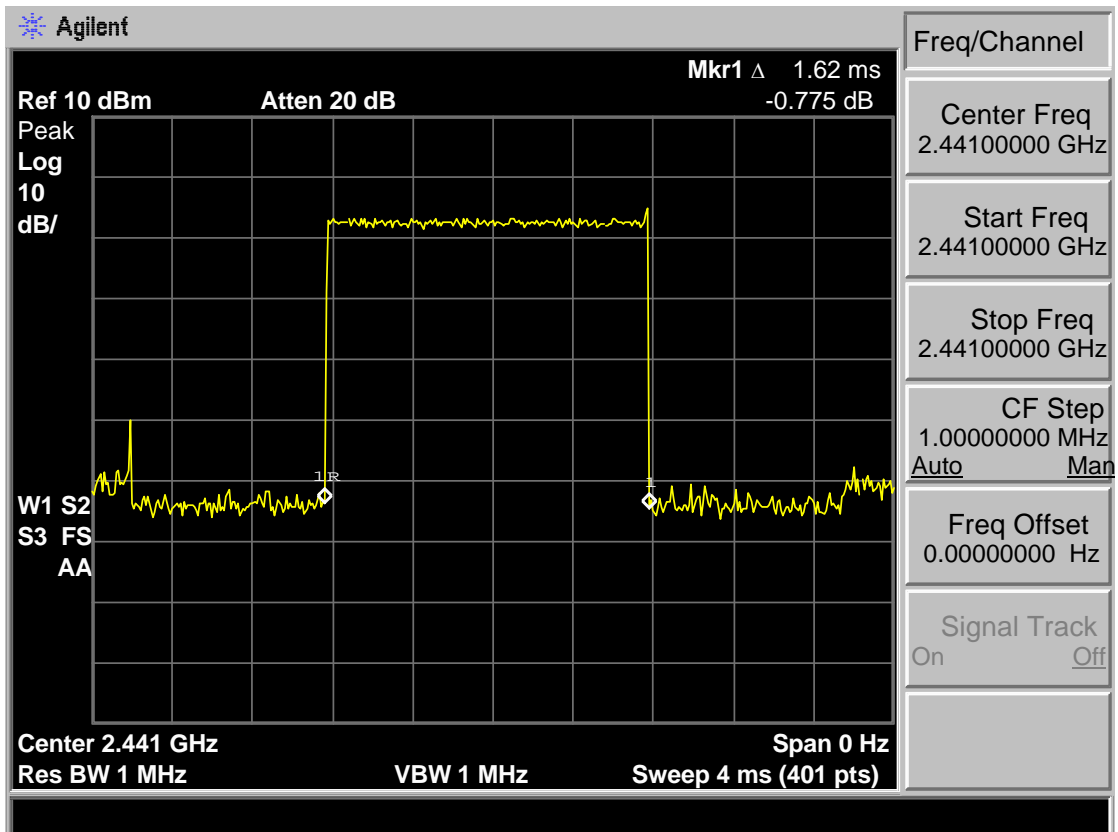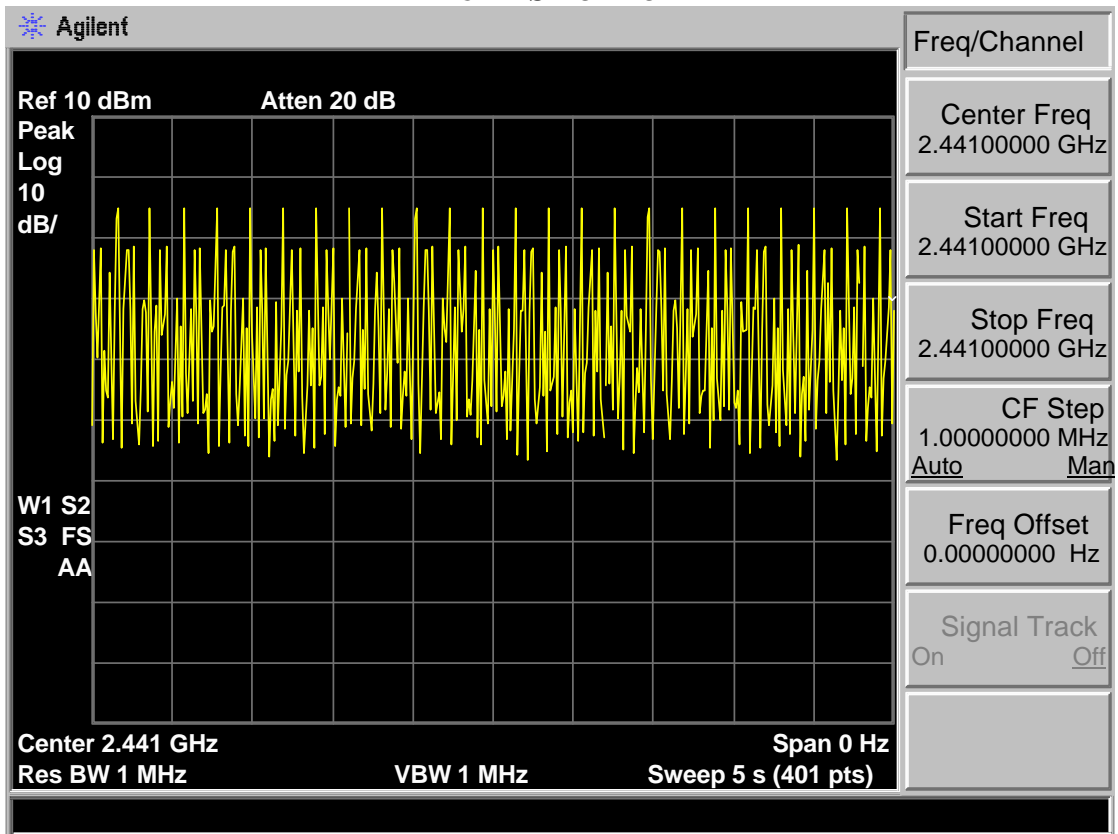

8-DPSK 3DH5

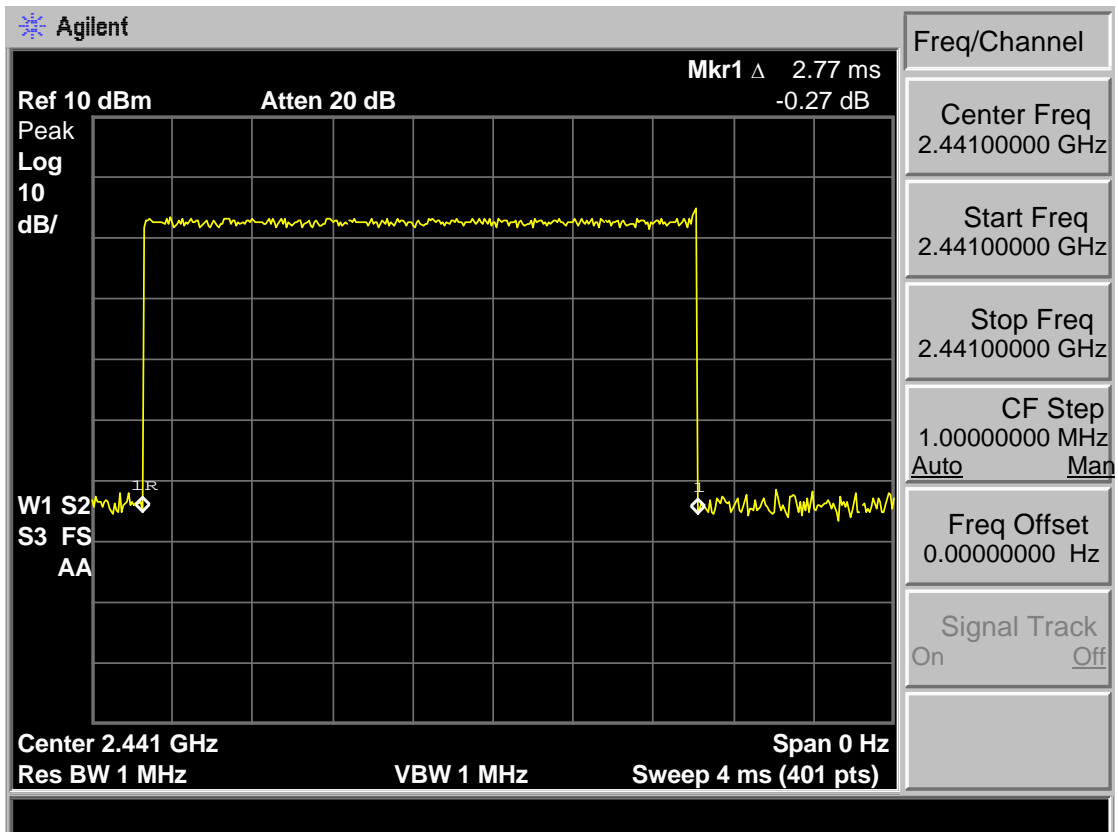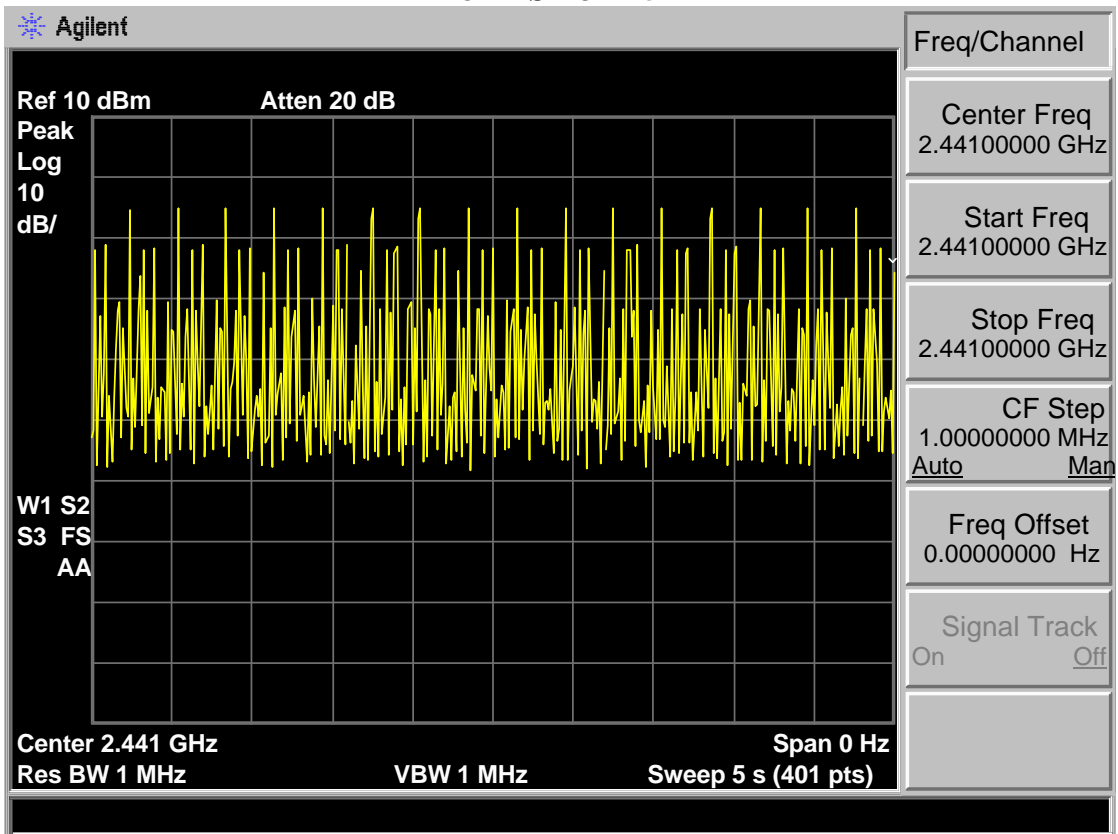

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band




| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |

15.209 Limit

| Frequency (MHz) | Field Strength(μV/m) | Distance(m) |
|-----------------|----------------------|-------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. Block Diagram of Test setup

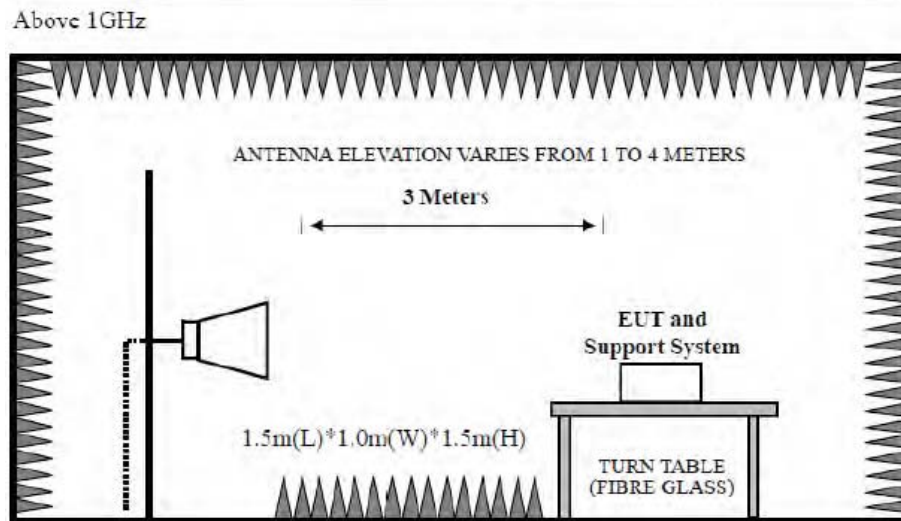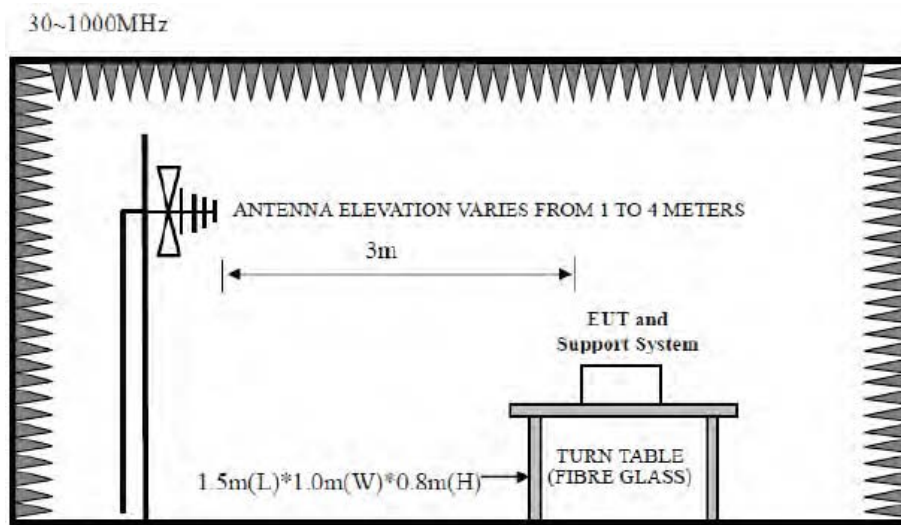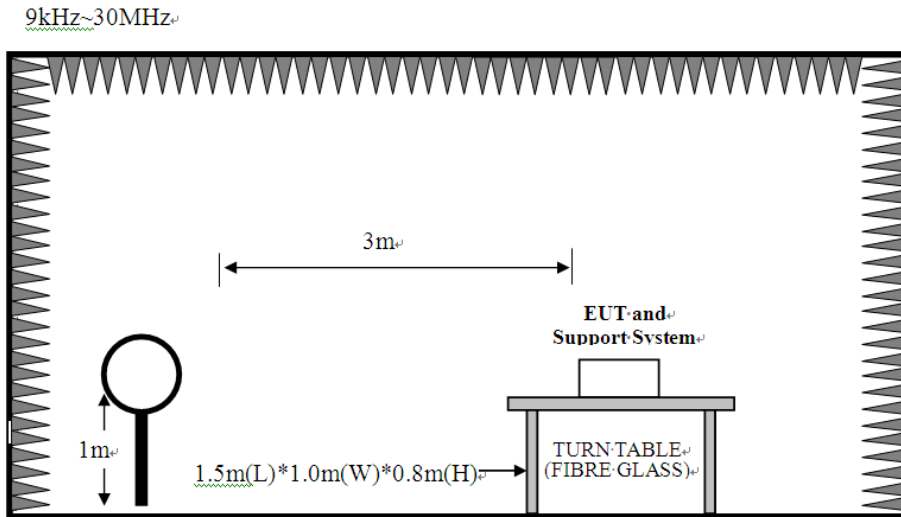

8.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground for 9kHz~1000MHz test, and which is 1.5 meter high above ground for above 1GHz test. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The test frequency analyzer system was set to Peak Detect (300Hz RBW in 9kHz to 150kHz and 10kHz RBW in 150kHz to 30MHz) Function and Specified Bandwidth with Maximum Hold Mode.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

PEAK detector, 1MHz/1MHz for PAEK measurement,

PEAK detector, 1MHz/10Hz for Average measurement

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

8.4. Test Result

Pass

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2402MHz 、2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

8.5. Test Data

9 kHz – 30 MHz


Pass

Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

30 MHz – 1000 MHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

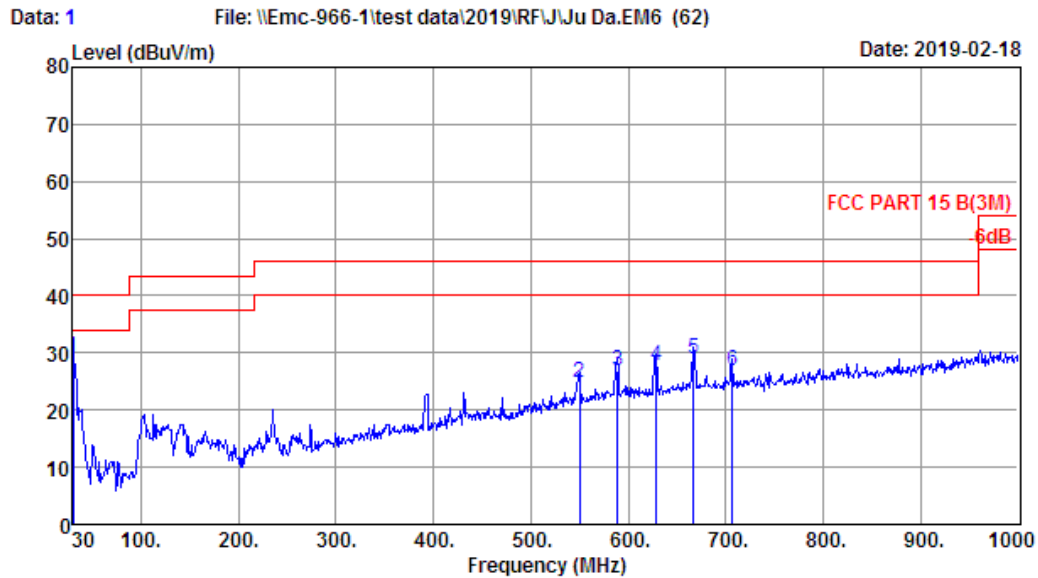


Site no. : 1# 966 Chamber Data no. : 1
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : TX Mode

| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 30.00 | 18.10 | 0.31 | 10.70 | 29.11 | 40.00 | 10.89 | QP |
| 2 | 549.92 | 19.20 | 3.07 | 2.40 | 24.67 | 46.00 | 21.33 | QP |
| 3 | 588.72 | 19.88 | 3.16 | 3.89 | 26.93 | 46.00 | 19.07 | QP |
| 4 | 628.49 | 20.76 | 3.32 | 3.76 | 27.84 | 46.00 | 18.16 | QP |
| 5 | 667.29 | 21.10 | 3.46 | 4.37 | 28.93 | 46.00 | 17.07 | QP |
| 6 | 707.06 | 21.27 | 3.50 | 2.13 | 26.90 | 46.00 | 19.10 | QP |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Data: 2 File: \\Emc-966-1\test data\2019\RF\JJu Da.EM6 (62) Date: 2019-02-18

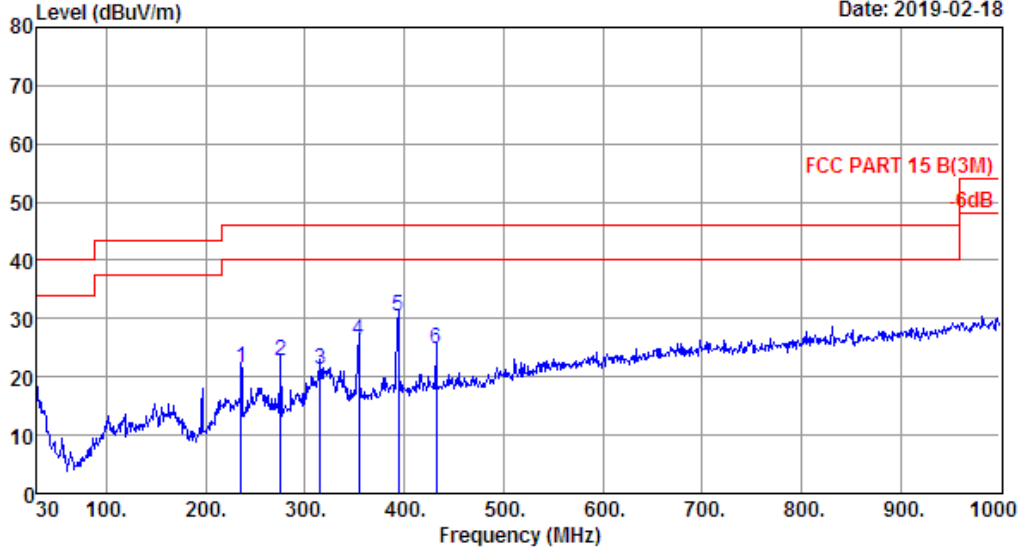

Site no. : 1# 966 Chamber Data no. : 2
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : TX Mode


| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 235.64 | 10.68 | 1.75 | 9.03 | 21.46 | 46.00 | 24.54 | QP |
| 2 | 275.41 | 12.70 | 1.95 | 7.99 | 22.64 | 46.00 | 23.36 | QP |
| 3 | 315.18 | 14.05 | 2.12 | 4.97 | 21.14 | 46.00 | 24.86 | QP |
| 4 | 353.98 | 15.08 | 2.33 | 8.92 | 26.33 | 46.00 | 19.67 | QP |
| 5 | 393.75 | 15.88 | 2.34 | 12.07 | 30.29 | 46.00 | 15.71 | QP |
| 6 | 432.55 | 16.73 | 2.54 | 5.63 | 24.90 | 46.00 | 21.10 | QP |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

1000-18000MHz

EST Technology


Chilingxiang, Qishantou, Santun,
Houjie, Dongguan,Guangdong,China
Tel:+86-769-83081888
Fax:+86-769-83081878

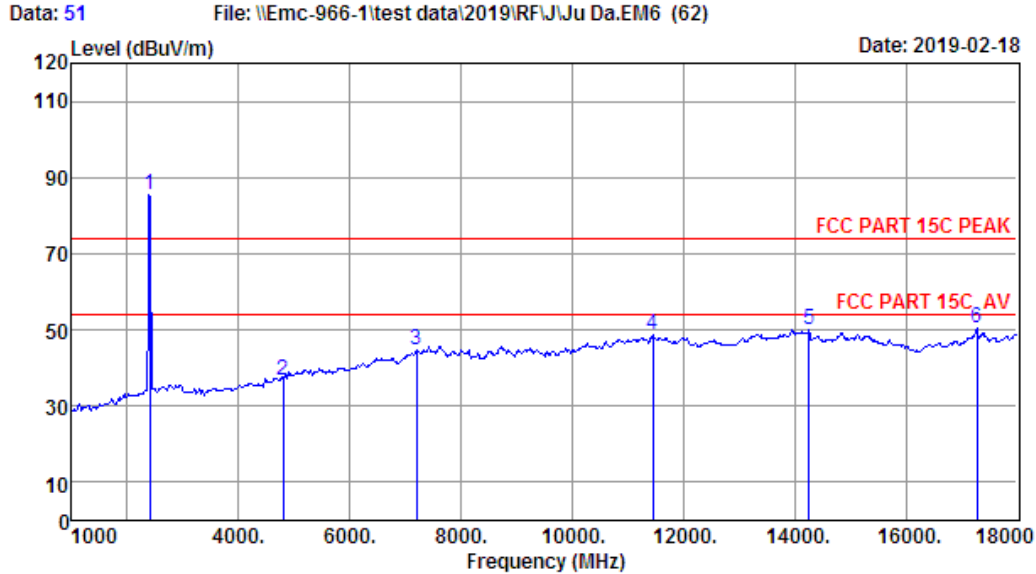

Site no. : 1# 966 Chamber Data no. : 51
 Dis. / Ant. : 3m ANI9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : GFSK TX 2402MHz

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2402.00 | 27.35 | 3.21 | 34.94 | 89.96 | 85.58 | 74.00 | -11.58 | Peak |
| 2 | 4804.00 | 32.06 | 4.67 | 35.06 | 35.10 | 36.77 | 74.00 | 37.23 | Peak |
| 3 | 7206.00 | 36.56 | 5.99 | 33.45 | 35.64 | 44.74 | 74.00 | 29.26 | Peak |
| 4 | 11455.00 | 40.08 | 8.28 | 32.62 | 32.96 | 48.70 | 74.00 | 25.30 | Peak |
| 5 | 14260.00 | 41.44 | 10.16 | 33.20 | 31.70 | 50.10 | 74.00 | 23.90 | Peak |
| 6 | 17286.00 | 42.58 | 11.06 | 31.12 | 28.08 | 50.60 | 74.00 | 23.40 | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

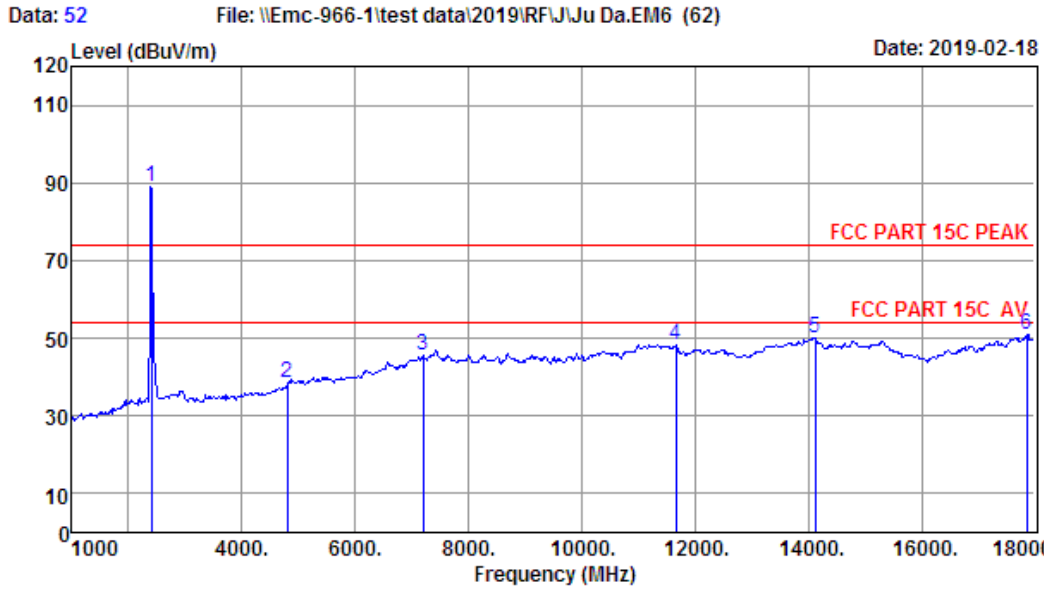

Site no. : 1# 966 Chamber Data no. : 52
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : GFSK TX 2402MHz

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2402.00 | 27.35 | 3.21 | 34.94 | 93.51 | 89.13 | 74.00 | -15.13 | Peak |
| 2 | 4804.00 | 32.06 | 4.67 | 35.06 | 36.80 | 38.47 | 74.00 | 35.53 | Peak |
| 3 | 7206.00 | 36.56 | 5.99 | 33.45 | 36.45 | 45.55 | 74.00 | 28.45 | Peak |
| 4 | 11659.00 | 39.88 | 8.25 | 32.38 | 32.70 | 48.45 | 74.00 | 25.55 | Peak |
| 5 | 14124.00 | 41.58 | 10.14 | 33.04 | 31.56 | 50.24 | 74.00 | 23.76 | Peak |
| 6 | 17864.00 | 44.34 | 12.34 | 31.29 | 25.44 | 50.83 | 74.00 | 23.17 | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

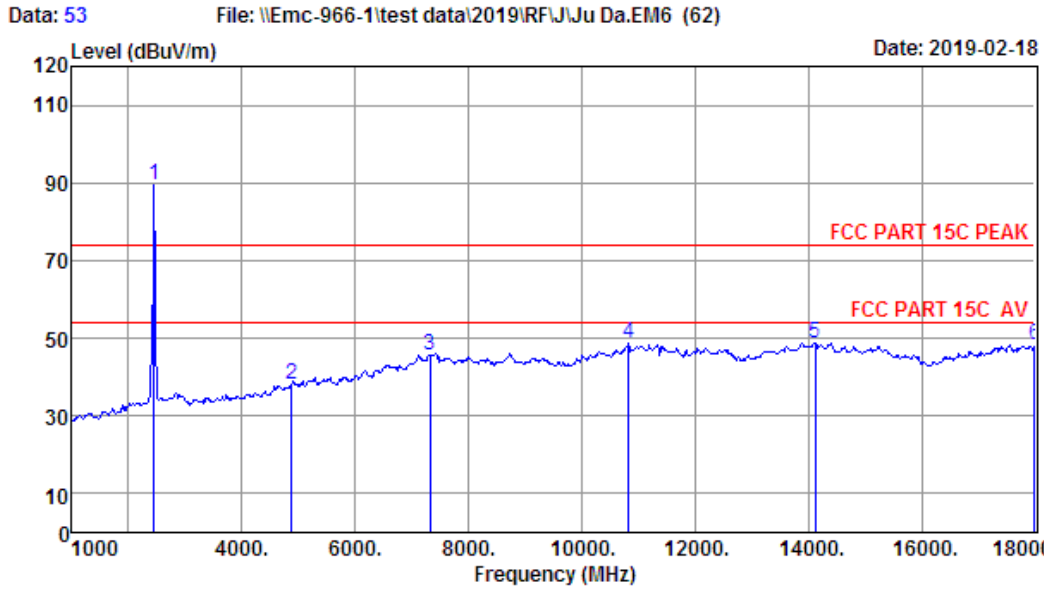

Site no. : 1# 966 Chamber Data no. : 53
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : GFSK TX 2441MHz

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2441.00 | 27.48 | 3.26 | 35.07 | 93.74 | 89.41 | 74.00 | -15.41 | Peak |
| 2 | 4882.00 | 32.18 | 4.73 | 35.14 | 36.29 | 38.06 | 74.00 | 35.94 | Peak |
| 3 | 7323.00 | 36.82 | 6.10 | 33.28 | 35.89 | 45.53 | 74.00 | 28.47 | Peak |
| 4 | 10826.00 | 39.69 | 8.70 | 33.67 | 34.05 | 48.77 | 74.00 | 25.23 | Peak |
| 5 | 14124.00 | 41.58 | 10.14 | 33.04 | 30.25 | 48.93 | 74.00 | 25.07 | Peak |
| 6 | 18000.00 | 44.70 | 12.64 | 31.56 | 22.58 | 48.36 | 74.00 | 25.64 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

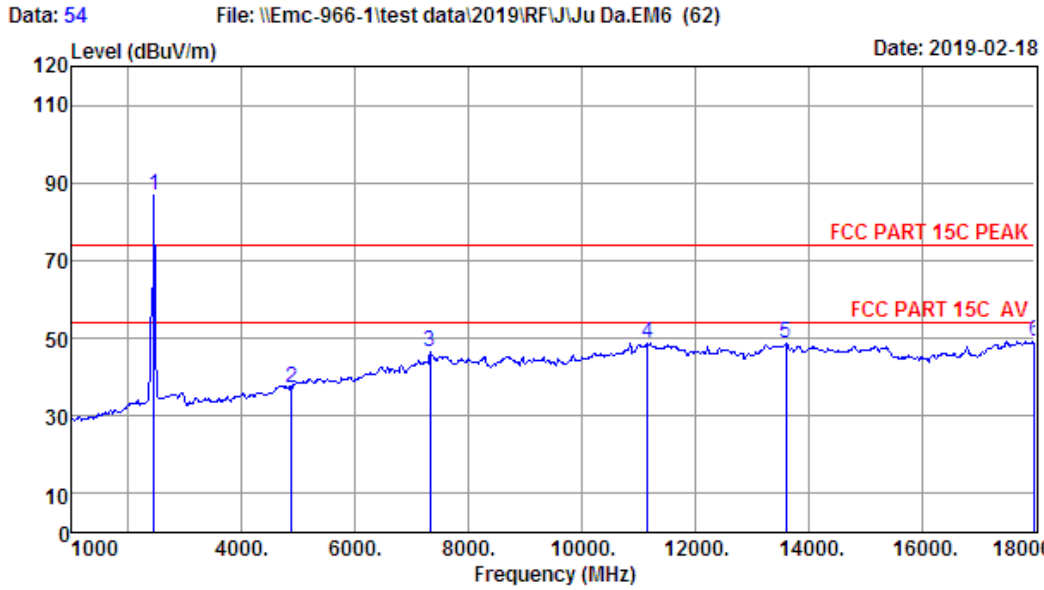


Site no. : 1# 966 Chamber Data no. : 54
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : GFSK TX 2441MHz

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2441.00 | 27.48 | 3.26 | 35.07 | 90.90 | 86.57 | 74.00 | -12.57 | Peak |
| 2 | 4882.00 | 32.18 | 4.73 | 35.14 | 35.64 | 37.41 | 74.00 | 36.59 | Peak |
| 3 | 7323.00 | 36.82 | 6.10 | 33.28 | 36.85 | 46.49 | 74.00 | 27.51 | Peak |
| 4 | 11166.00 | 39.97 | 8.45 | 33.13 | 33.29 | 48.58 | 74.00 | 25.42 | Peak |
| 5 | 13614.00 | 41.39 | 9.82 | 32.59 | 29.97 | 48.59 | 74.00 | 25.41 | Peak |
| 6 | 18000.00 | 44.70 | 12.64 | 31.56 | 23.34 | 49.12 | 74.00 | 24.88 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology


Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

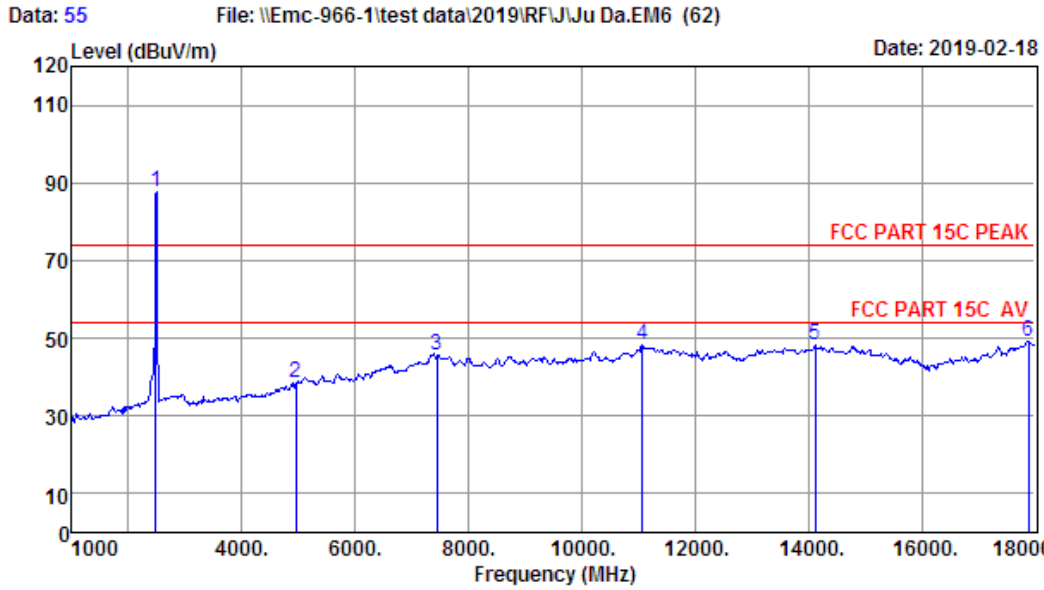

Site no. : 1# 966 Chamber Data no. : 55
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : GFSK TX 2480MHz

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2480.00 | 27.56 | 3.29 | 35.21 | 91.93 | 87.57 | 74.00 | -13.57 | Peak |
| 2 | 4960.00 | 32.34 | 4.80 | 35.24 | 36.69 | 38.59 | 74.00 | 35.41 | Peak |
| 3 | 7440.00 | 37.09 | 6.13 | 33.08 | 35.26 | 45.40 | 74.00 | 28.60 | Peak |
| 4 | 11064.00 | 39.93 | 8.52 | 33.32 | 33.10 | 48.23 | 74.00 | 25.77 | Peak |
| 5 | 14124.00 | 41.58 | 10.14 | 33.04 | 29.45 | 48.13 | 74.00 | 25.87 | Peak |
| 6 | 17881.00 | 44.39 | 12.38 | 31.33 | 23.88 | 49.32 | 74.00 | 24.68 | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

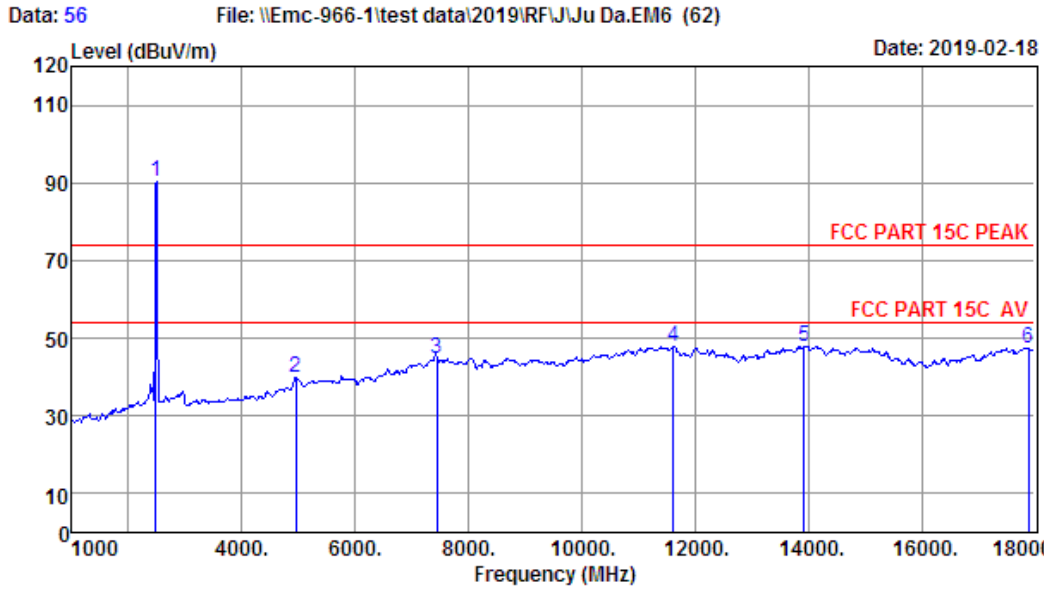

Site no. : 1# 966 Chamber Data no. : 56
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : GFSK TX 2480MHz

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2480.00 | 27.56 | 3.29 | 35.21 | 94.76 | 90.40 | 74.00 | -16.40 | Peak |
| 2 | 4960.00 | 32.34 | 4.80 | 35.24 | 37.75 | 39.65 | 74.00 | 34.35 | Peak |
| 3 | 7440.00 | 37.09 | 6.13 | 33.08 | 34.77 | 44.91 | 74.00 | 29.09 | Peak |
| 4 | 11625.00 | 39.93 | 8.25 | 32.37 | 32.15 | 47.96 | 74.00 | 26.04 | Peak |
| 5 | 13920.00 | 41.63 | 10.11 | 32.83 | 29.04 | 47.95 | 74.00 | 26.05 | Peak |
| 6 | 17881.00 | 44.39 | 12.38 | 31.33 | 21.94 | 47.38 | 74.00 | 26.62 | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

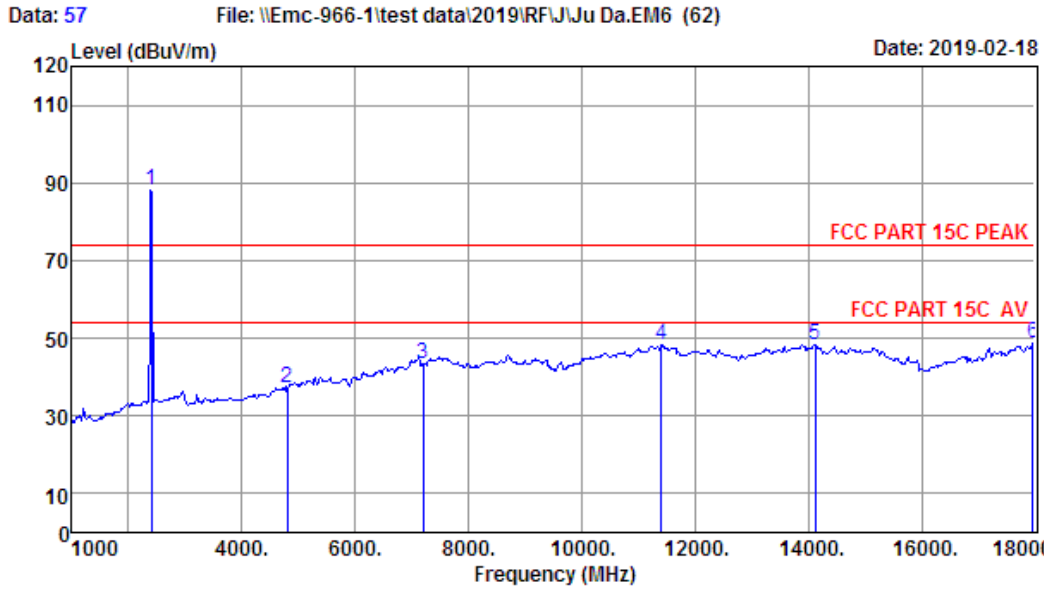

Site no. : 1# 966 Chamber Data no. : 57
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : 8-DPSK TX 2402MHz

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2402.00 | 27.35 | 3.21 | 34.94 | 92.51 | 88.13 | 74.00 | -14.13 | Peak |
| 2 | 4804.00 | 32.06 | 4.67 | 35.06 | 35.59 | 37.26 | 74.00 | 36.74 | Peak |
| 3 | 7206.00 | 36.56 | 5.99 | 33.45 | 34.37 | 43.47 | 74.00 | 30.53 | Peak |
| 4 | 11404.00 | 40.06 | 8.29 | 32.71 | 32.75 | 48.39 | 74.00 | 25.61 | Peak |
| 5 | 14124.00 | 41.58 | 10.14 | 33.04 | 29.80 | 48.48 | 74.00 | 25.52 | Peak |
| 6 | 17966.00 | 44.61 | 12.57 | 31.48 | 22.90 | 48.60 | 74.00 | 25.40 | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

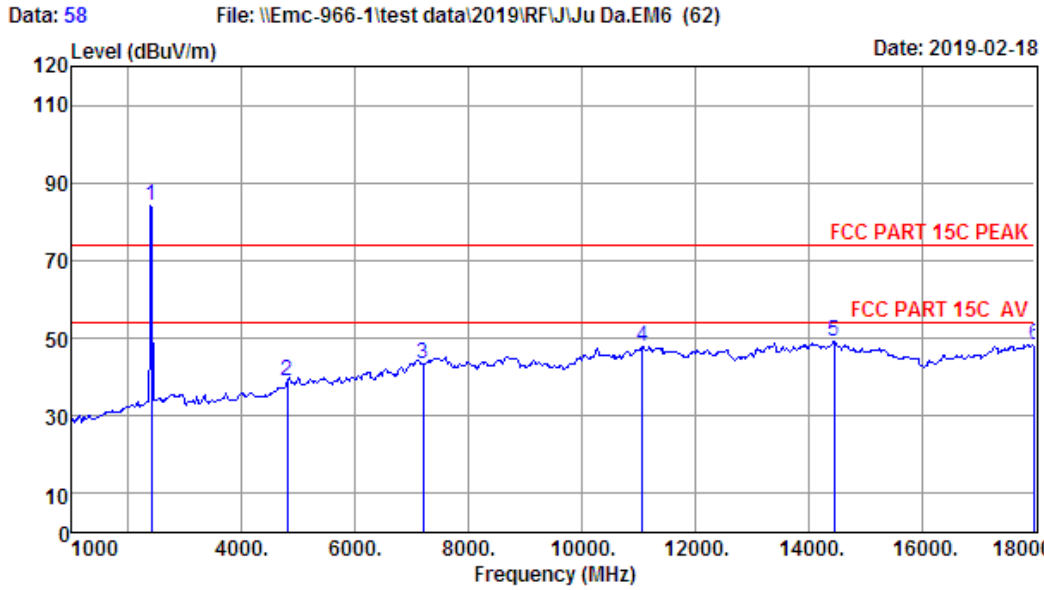

Site no. : 1# 966 Chamber Data no. : 58
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : 8-DPSK TX 2402MHz

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2402.00 | 27.35 | 3.21 | 34.94 | 88.36 | 83.98 | 74.00 | -9.98 | Peak |
| 2 | 4804.00 | 32.06 | 4.67 | 35.06 | 37.17 | 38.84 | 74.00 | 35.16 | Peak |
| 3 | 7206.00 | 36.56 | 5.99 | 33.45 | 34.20 | 43.30 | 74.00 | 30.70 | Peak |
| 4 | 11064.00 | 39.93 | 8.52 | 33.32 | 32.90 | 48.03 | 74.00 | 25.97 | Peak |
| 5 | 14464.00 | 41.23 | 10.19 | 33.47 | 31.12 | 49.07 | 74.00 | 24.93 | Peak |
| 6 | 18000.00 | 44.70 | 12.64 | 31.56 | 22.49 | 48.27 | 74.00 | 25.73 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

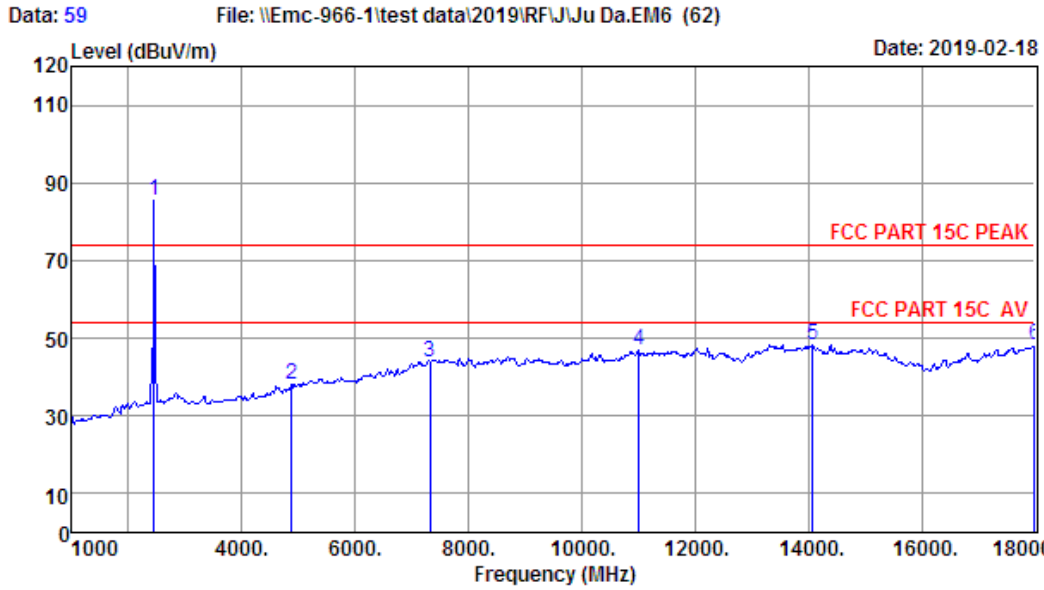


Site no. : 1# 966 Chamber Data no. : 59
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : 8-DPSK TX 2441MHz

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2441.00 | 27.48 | 3.26 | 35.07 | 89.66 | 85.33 | 74.00 | -11.33 | Peak |
| 2 | 4882.00 | 32.18 | 4.73 | 35.14 | 36.24 | 38.01 | 74.00 | 35.99 | Peak |
| 3 | 7323.00 | 36.82 | 6.10 | 33.28 | 34.38 | 44.02 | 74.00 | 29.98 | Peak |
| 4 | 11013.00 | 39.91 | 8.56 | 33.42 | 31.68 | 46.73 | 74.00 | 27.27 | Peak |
| 5 | 14073.00 | 41.63 | 10.14 | 32.97 | 29.64 | 48.44 | 74.00 | 25.56 | Peak |
| 6 | 18000.00 | 44.70 | 12.64 | 31.56 | 22.32 | 48.10 | 74.00 | 25.90 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology


Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

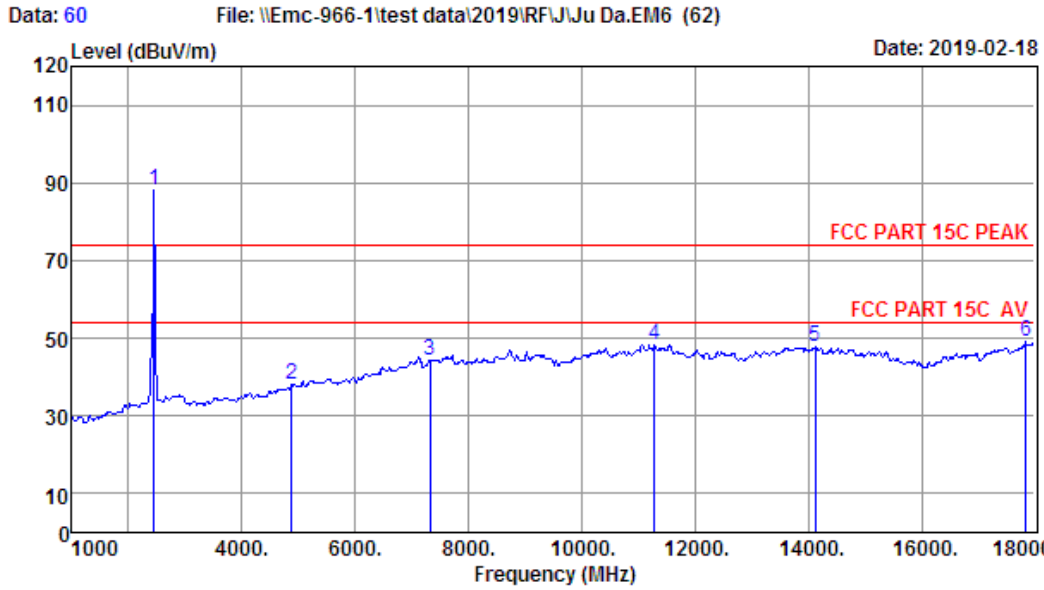

Site no. : 1# 966 Chamber Data no. : 60
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : 8-DPSK TX 2441MHz

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2441.00 | 27.48 | 3.26 | 35.07 | 92.65 | 88.32 | 74.00 | -14.32 | Peak |
| 2 | 4882.00 | 32.18 | 4.73 | 35.14 | 36.31 | 38.08 | 74.00 | 35.92 | Peak |
| 3 | 7323.00 | 36.82 | 6.10 | 33.28 | 34.67 | 44.31 | 74.00 | 29.69 | Peak |
| 4 | 11285.00 | 40.01 | 8.36 | 32.94 | 32.99 | 48.42 | 74.00 | 25.58 | Peak |
| 5 | 14124.00 | 41.58 | 10.14 | 33.04 | 29.07 | 47.75 | 74.00 | 26.25 | Peak |
| 6 | 17847.00 | 44.30 | 12.30 | 31.25 | 23.64 | 48.99 | 74.00 | 25.01 | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

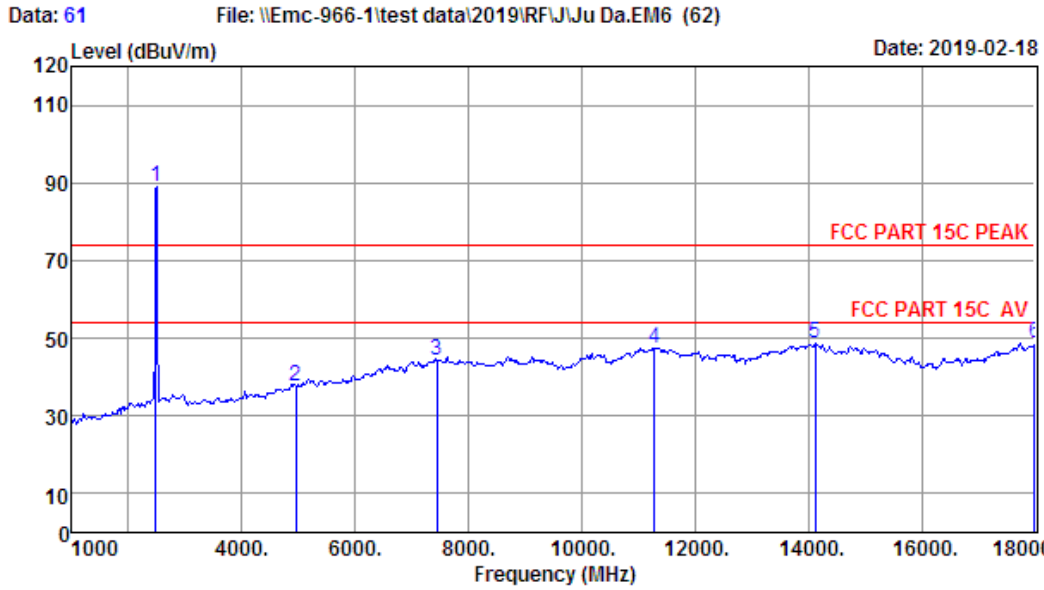

Site no. : 1# 966 Chamber Data no. : 61
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : 8-DPSK TX 2480MHz

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2480.00 | 27.56 | 3.29 | 35.21 | 93.54 | 89.18 | 74.00 | -15.18 | Peak |
| 2 | 4960.00 | 32.34 | 4.80 | 35.24 | 35.85 | 37.75 | 74.00 | 36.25 | Peak |
| 3 | 7440.00 | 37.09 | 6.13 | 33.08 | 34.22 | 44.36 | 74.00 | 29.64 | Peak |
| 4 | 11285.00 | 40.01 | 8.36 | 32.94 | 32.00 | 47.43 | 74.00 | 26.57 | Peak |
| 5 | 14124.00 | 41.58 | 10.14 | 33.04 | 29.95 | 48.63 | 74.00 | 25.37 | Peak |
| 6 | 18000.00 | 44.70 | 12.64 | 31.56 | 23.09 | 48.87 | 74.00 | 25.13 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

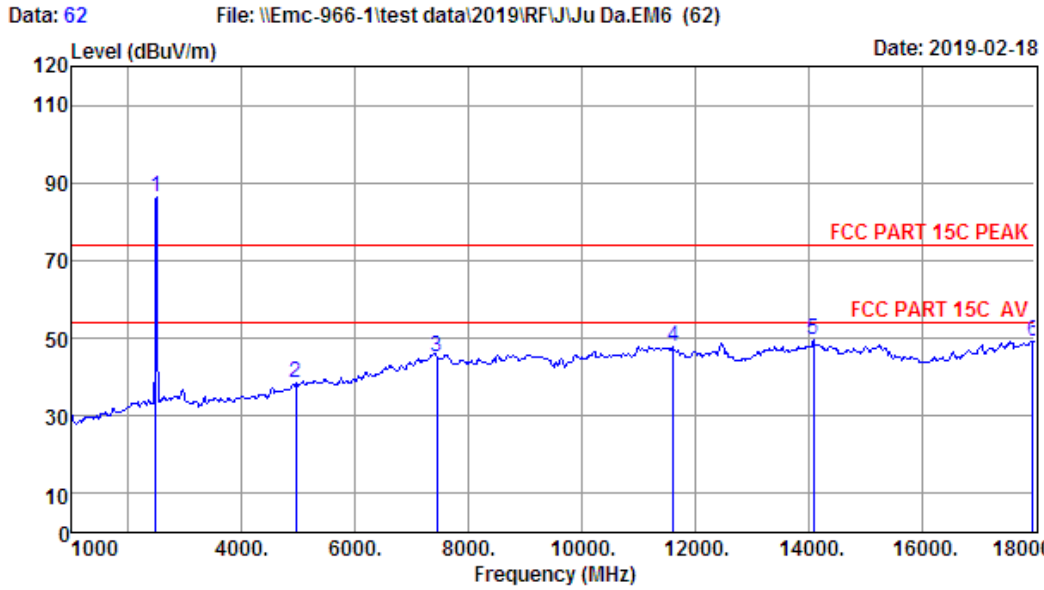

Site no. : 1# 966 Chamber Data no. : 62
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : 8-DPSK TX 2480MHz

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2480.00 | 27.56 | 3.29 | 35.21 | 90.67 | 86.31 | 74.00 | -12.31 | Peak |
| 2 | 4960.00 | 32.34 | 4.80 | 35.24 | 36.44 | 38.34 | 74.00 | 35.66 | Peak |
| 3 | 7440.00 | 37.09 | 6.13 | 33.08 | 35.25 | 45.39 | 74.00 | 28.61 | Peak |
| 4 | 11625.00 | 39.93 | 8.25 | 32.37 | 32.17 | 47.98 | 74.00 | 26.02 | Peak |
| 5 | 14090.00 | 41.61 | 10.14 | 32.99 | 30.77 | 49.53 | 74.00 | 24.47 | Peak |
| 6 | 17966.00 | 44.61 | 12.57 | 31.48 | 23.48 | 49.18 | 74.00 | 24.82 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

18000MHz – 25000MHz

Pass


Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

9. BAND EDGE COMPLIANCE

9.1. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.2. Block Diagram of Test setup

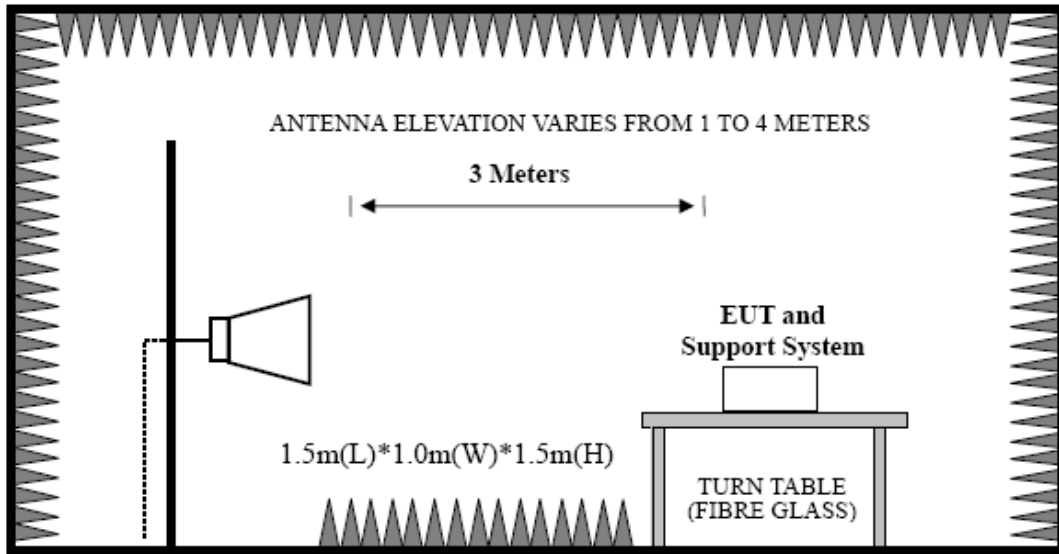

9.3. Test Procedure

EUT was placed on a turn table, which is 1.5 m high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of emissions

Peak : RBW = 1MHz, VBW = 1MHz, Detector=PEAK detector, Sweep time = auto.

AV : RBW = 1MHz, VBW = 10Hz, Detector=PEAK detector, Sweep time = auto.

9.4. Test Result

Pass (The testing data was attached in the next pages.)


Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2402MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

9.5. Test Data

EST Technology


Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

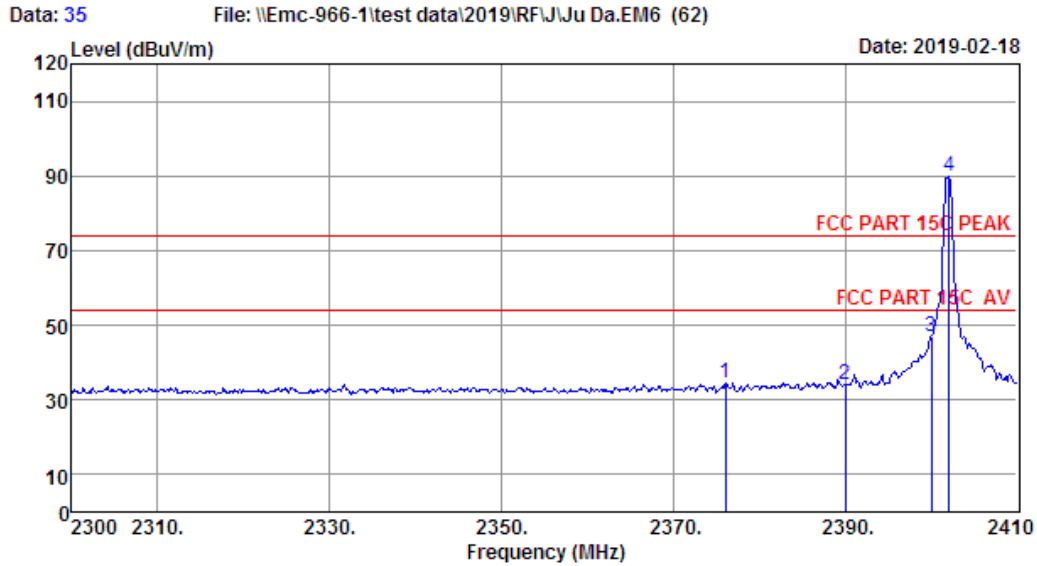

Site no. : 1# 966 Chamber Data no. : 35
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : GFSK TX 2402MHz (No Hopping)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2376.12 | 27.31 | 3.20 | 34.80 | 38.83 | 34.54 | 74.00 | 39.46 | Peak |
| 2 | 2390.00 | 27.35 | 3.21 | 34.87 | 38.48 | 34.17 | 74.00 | 39.83 | Peak |
| 3 | 2400.00 | 27.35 | 3.21 | 34.94 | 51.16 | 46.78 | 74.00 | 27.22 | Peak |
| 4 | 2402.08 | 27.35 | 3.21 | 34.94 | 94.11 | 89.73 | 74.00 | -15.73 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

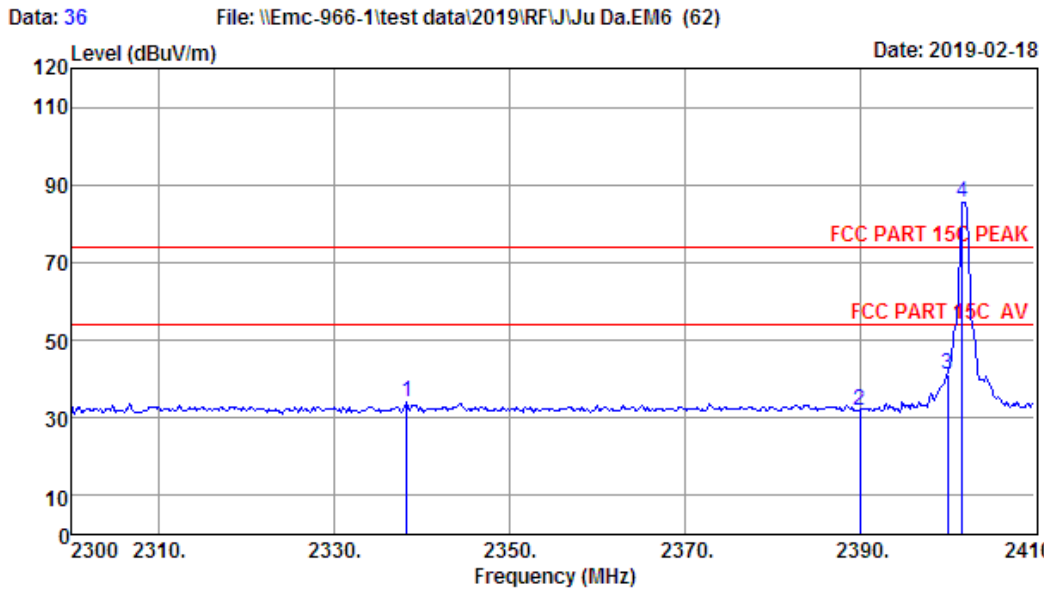


Site no. : 1# 966 Chamber Data no. : 36
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : GFSK TX 2402MHz(No Hopping)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2338.28 | 27.23 | 3.17 | 34.67 | 38.40 | 34.13 | 74.00 | 39.87 | Peak |
| 2 | 2390.00 | 27.35 | 3.21 | 34.87 | 36.21 | 31.90 | 74.00 | 42.10 | Peak |
| 3 | 2400.00 | 27.35 | 3.21 | 34.94 | 45.43 | 41.05 | 74.00 | 32.95 | Peak |
| 4 | 2401.75 | 27.35 | 3.21 | 34.94 | 89.97 | 85.59 | 74.00 | -11.59 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology


Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

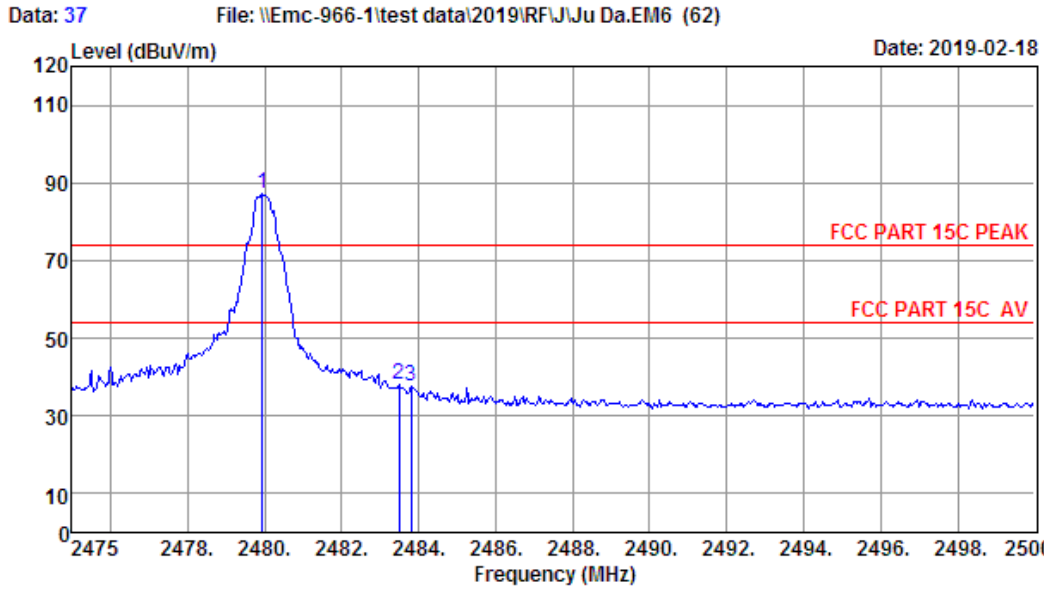

Site no. : 1# 966 Chamber Data no. : 37
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : GFSK TX 2480MHz(No Hopping)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2479.95 | 27.56 | 3.29 | 35.21 | 91.40 | 87.04 | 74.00 | -13.04 | Peak |
| 2 | 2483.50 | 27.56 | 3.29 | 35.21 | 42.36 | 38.00 | 74.00 | 36.00 | Peak |
| 3 | 2483.80 | 27.56 | 3.29 | 35.21 | 41.94 | 37.58 | 74.00 | 36.42 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

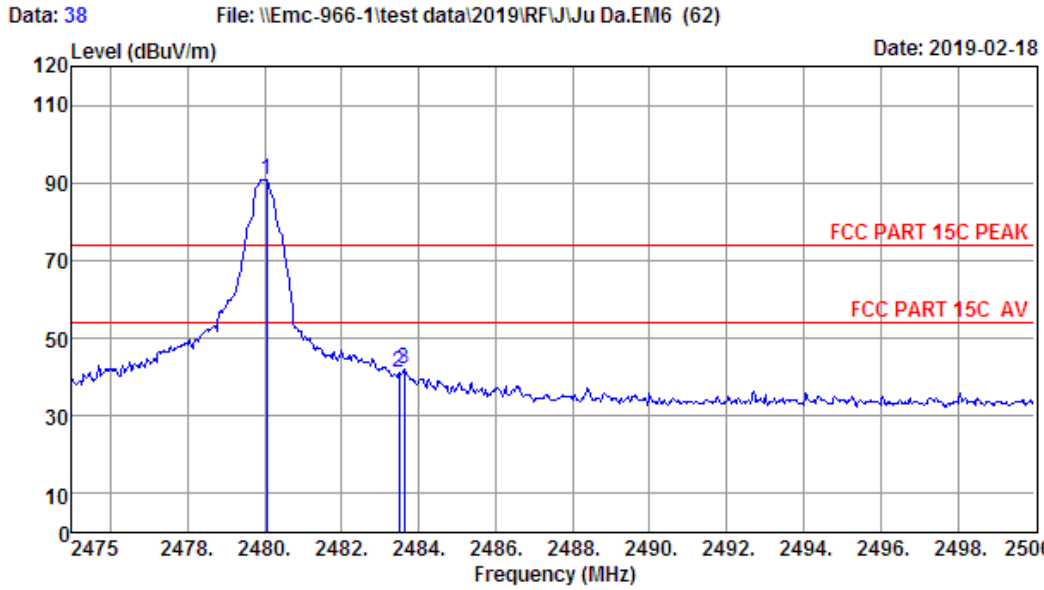


Site no. : 1# 966 Chamber Data no. : 38
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : GFSK TX 2480MHz(No Hopping)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2480.05 | 27.56 | 3.29 | 35.21 | 95.22 | 90.86 | 74.00 | -16.86 | Peak |
| 2 | 2483.50 | 27.56 | 3.29 | 35.21 | 45.70 | 41.34 | 74.00 | 32.66 | Peak |
| 3 | 2483.63 | 27.56 | 3.29 | 35.21 | 46.33 | 41.97 | 74.00 | 32.03 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

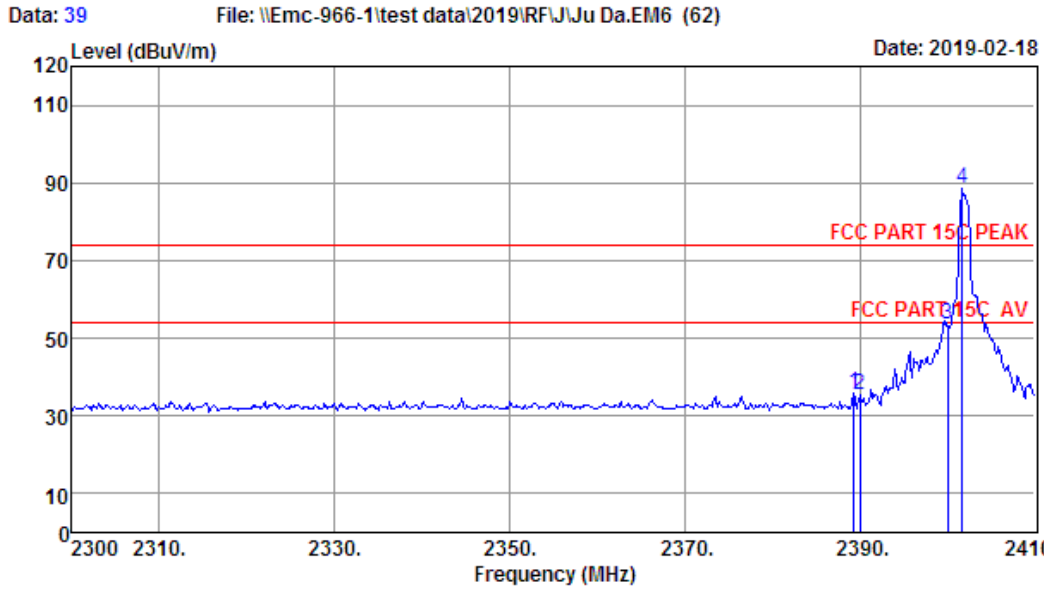


Site no. : 1# 966 Chamber Data no. : 39
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : 8-DPSK TX 2402MHz (No Hopping)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2389.32 | 27.35 | 3.21 | 34.87 | 39.96 | 35.65 | 74.00 | 38.35 | Peak |
| 2 | 2390.00 | 27.35 | 3.21 | 34.87 | 39.81 | 35.50 | 74.00 | 38.50 | Peak |
| 3 | 2400.00 | 27.35 | 3.21 | 34.94 | 57.79 | 53.41 | 74.00 | 20.59 | Peak |
| 4 | 2401.75 | 27.35 | 3.21 | 34.94 | 93.09 | 88.71 | 74.00 | -14.71 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology


Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

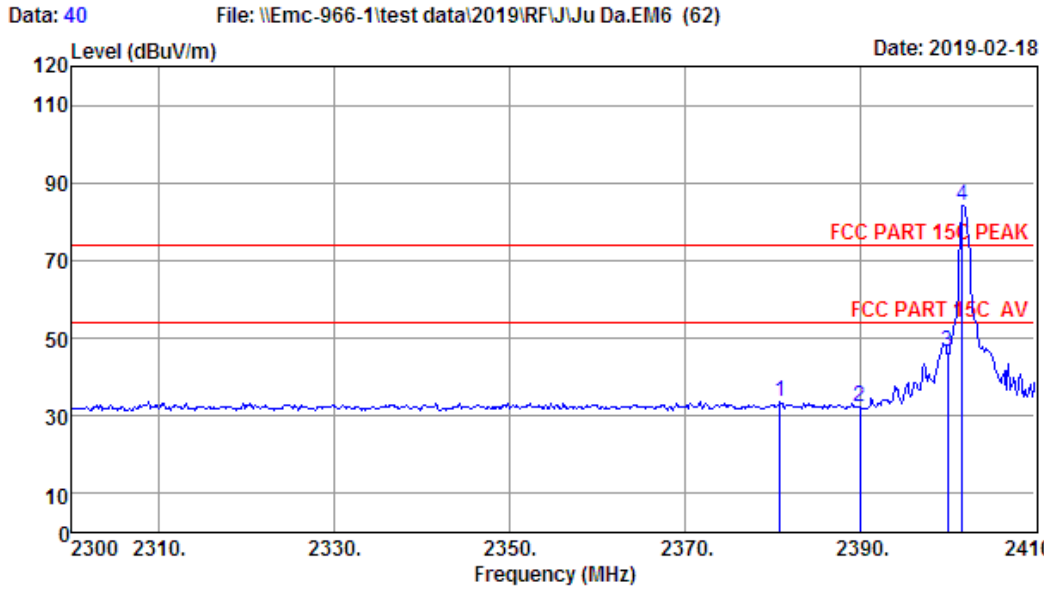

Site no. : site Data no. : 40
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : 8-DPSK TX 2402MHz (No Hopping)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2380.85 | 27.31 | 3.20 | 34.80 | 37.85 | 33.56 | 74.00 | 40.44 | Peak |
| 2 | 2390.00 | 27.35 | 3.21 | 34.87 | 36.72 | 32.41 | 74.00 | 41.59 | Peak |
| 3 | 2400.00 | 27.35 | 3.21 | 34.94 | 50.92 | 46.54 | 74.00 | 27.46 | Peak |
| 4 | 2401.75 | 27.35 | 3.21 | 34.94 | 88.70 | 84.32 | 74.00 | -10.32 | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

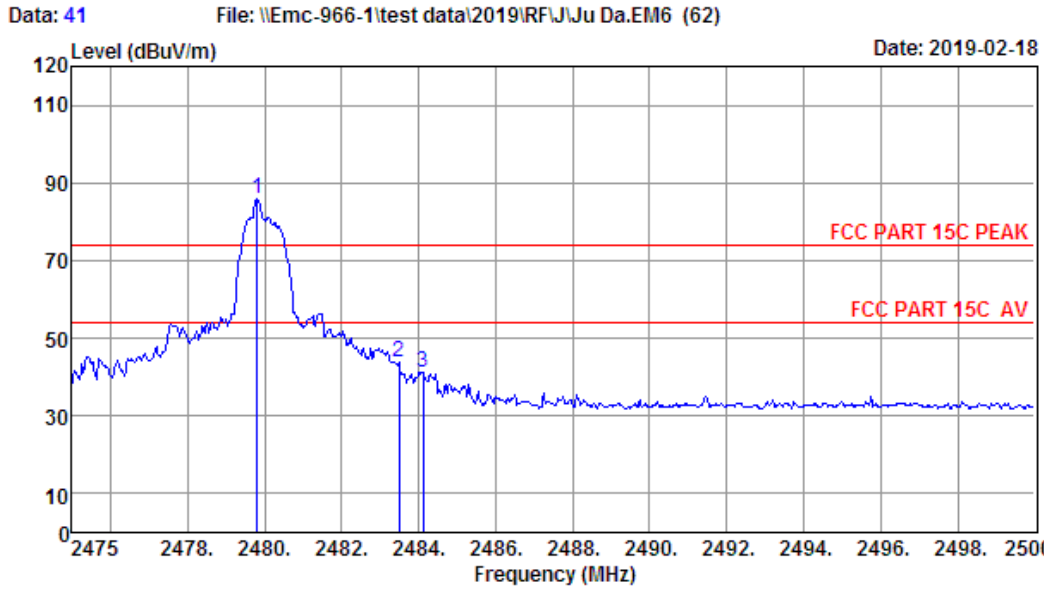

Site no. : 1# 966 Chamber Data no. : 41
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : 8-DPSK TX 2480MHz(No Hopping)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2479.80 | 27.56 | 3.29 | 35.21 | 90.48 | 86.12 | 74.00 | -12.12 | Peak |
| 2 | 2483.50 | 27.56 | 3.29 | 35.21 | 48.14 | 43.78 | 74.00 | 30.22 | Peak |
| 3 | 2484.13 | 27.56 | 3.29 | 35.21 | 45.65 | 41.29 | 74.00 | 32.71 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

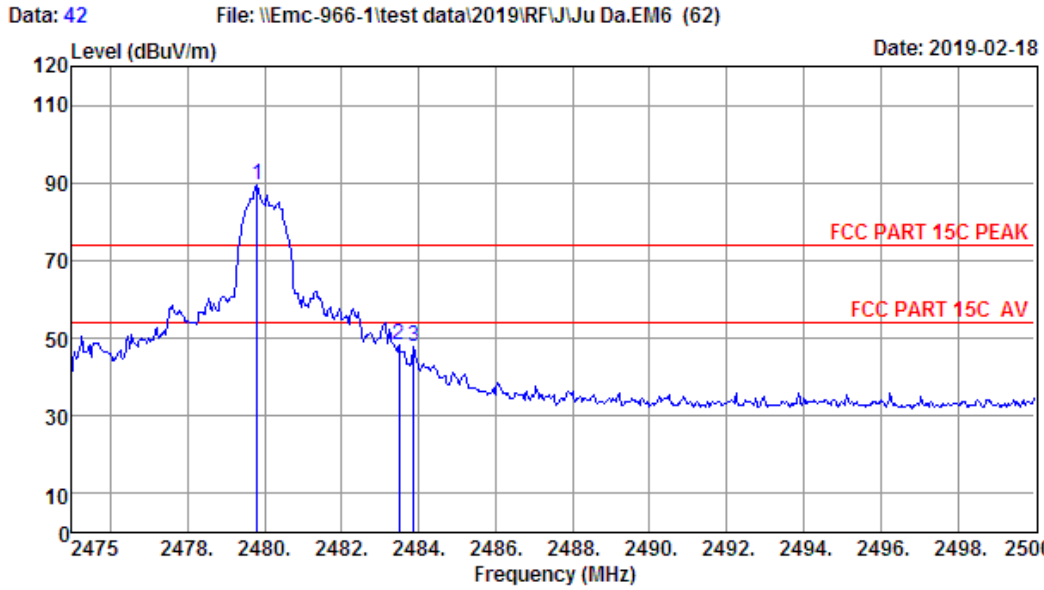


Site no. : 1# 966 Chamber Data no. : 42
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : 8-DPSK TX 2480MHz(No Hopping)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2479.80 | 27.56 | 3.29 | 35.21 | 93.86 | 89.50 | 74.00 | -15.50 | Peak |
| 2 | 2483.50 | 27.56 | 3.29 | 35.21 | 52.59 | 48.23 | 74.00 | 25.77 | Peak |
| 3 | 2483.88 | 27.56 | 3.29 | 35.21 | 52.08 | 47.72 | 74.00 | 26.28 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology


Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

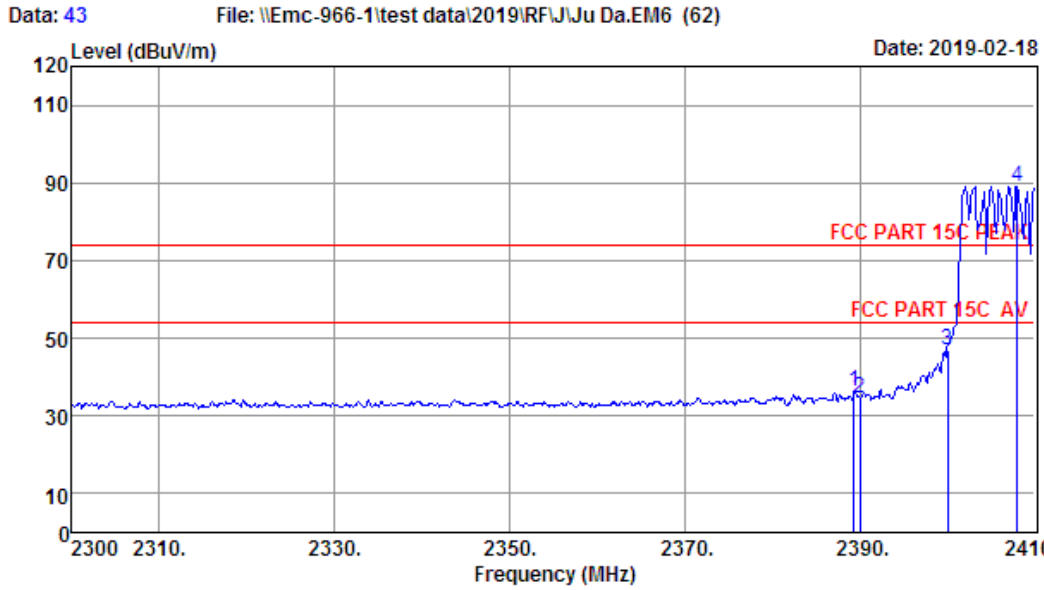

Site no. : 1# 966 Chamber Data no. : 43
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : GFSK TX 2402MHz(Hopping On)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2389.32 | 27.35 | 3.21 | 34.87 | 40.81 | 36.50 | 74.00 | 37.50 | Peak |
| 2 | 2390.00 | 27.35 | 3.21 | 34.87 | 38.83 | 34.52 | 74.00 | 39.48 | Peak |
| 3 | 2400.00 | 27.35 | 3.21 | 34.94 | 51.28 | 46.90 | 74.00 | 27.10 | Peak |
| 4 | 2408.02 | 27.39 | 3.23 | 34.94 | 93.50 | 89.18 | 74.00 | -15.18 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

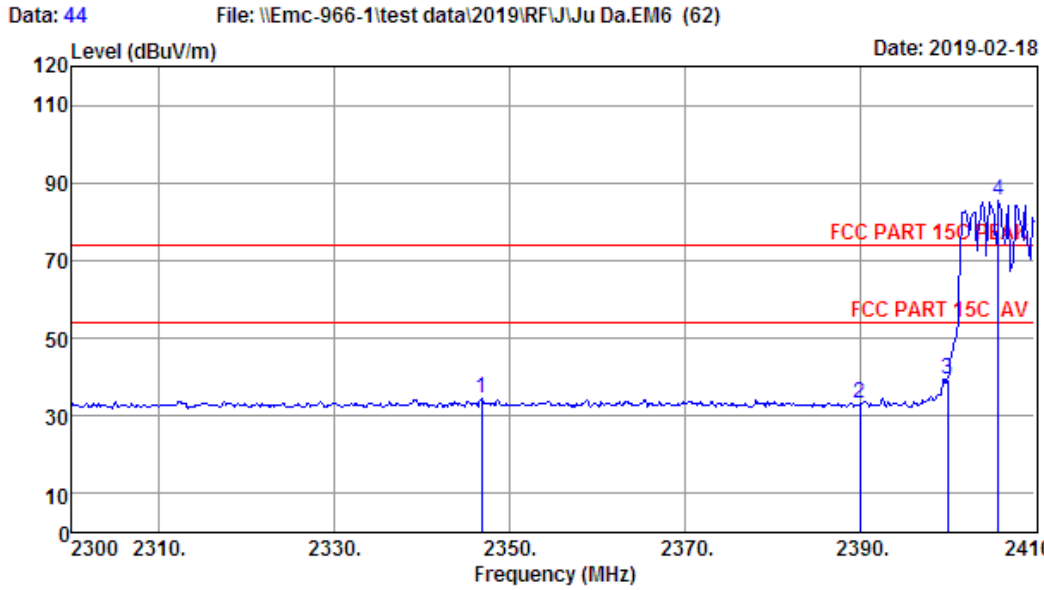


Site no. : 1# 966 Chamber Data no. : 44
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : GFSK TX 2402MHz(Hopping On)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2346.75 | 27.23 | 3.17 | 34.73 | 39.03 | 34.70 | 74.00 | 39.30 | Peak |
| 2 | 2390.00 | 27.35 | 3.21 | 34.87 | 37.31 | 33.00 | 74.00 | 41.00 | Peak |
| 3 | 2400.00 | 27.35 | 3.21 | 34.94 | 43.66 | 39.28 | 74.00 | 34.72 | Peak |
| 4 | 2405.82 | 27.39 | 3.23 | 34.94 | 89.83 | 85.51 | 74.00 | -11.51 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

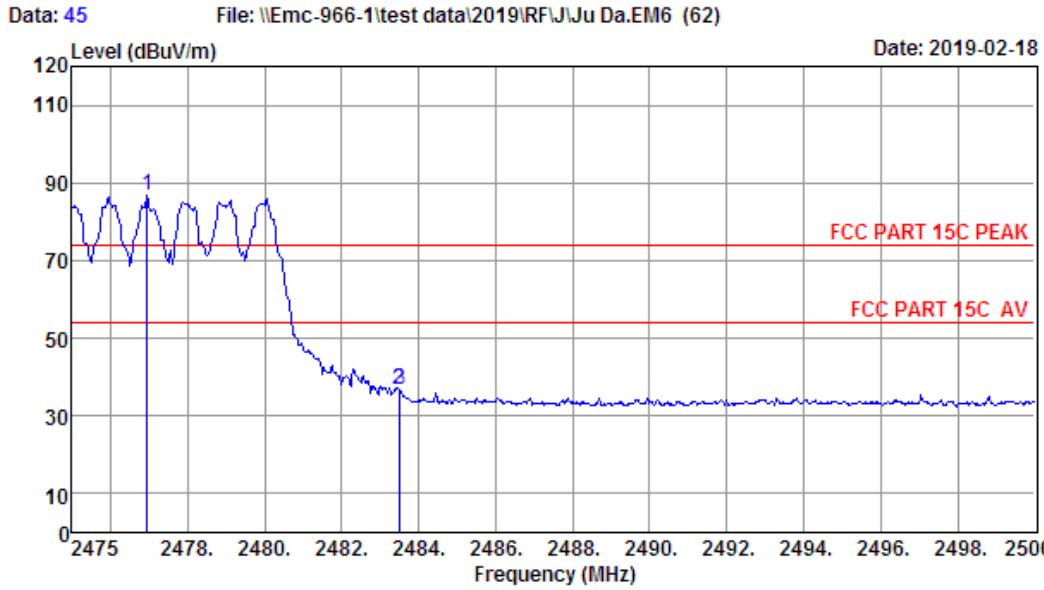


Site no. : 1# 966 Chamber Data no. : 45
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : GFSK TX 2480MHz(Hopping On)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2476.95 | 27.56 | 3.29 | 35.21 | 91.23 | 86.87 | 74.00 | -12.87 | Peak |
| 2 | 2483.50 | 27.56 | 3.29 | 35.21 | 41.32 | 36.96 | 74.00 | 37.04 | Peak |
| 3 | 2483.53 | 27.56 | 3.29 | 35.21 | 41.09 | 36.73 | 74.00 | 37.27 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

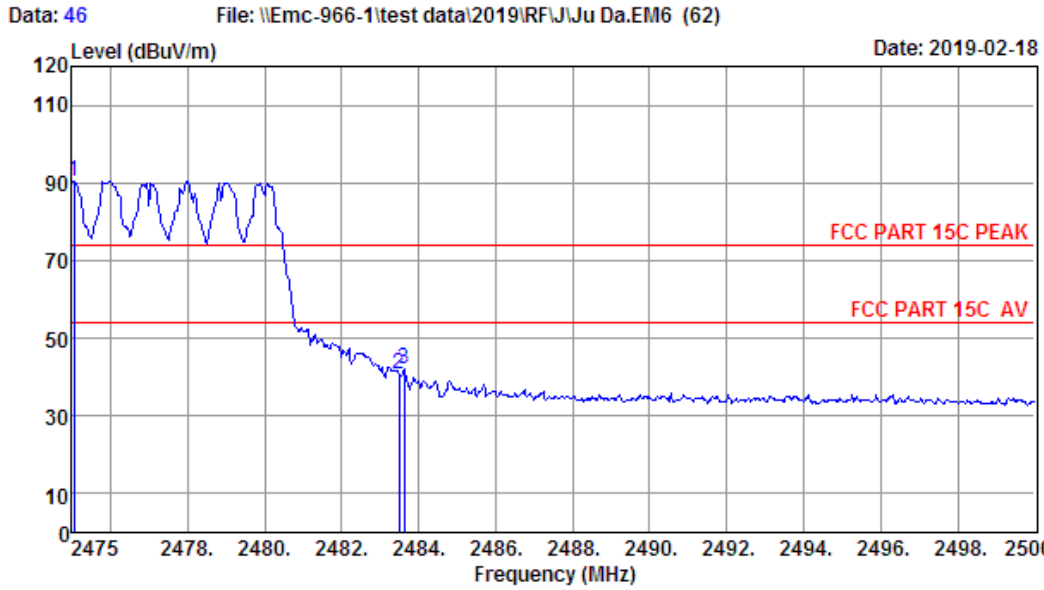


Site no. : 1# 966 Chamber Data no. : 46
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : GFSK TX 2480MHz(Hopping On)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2475.05 | 27.56 | 3.29 | 35.21 | 94.64 | 90.28 | 74.00 | -16.28 | Peak |
| 2 | 2483.50 | 27.56 | 3.29 | 35.21 | 45.12 | 40.76 | 74.00 | 33.24 | Peak |
| 3 | 2483.63 | 27.56 | 3.29 | 35.21 | 46.28 | 41.92 | 74.00 | 32.08 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology


Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

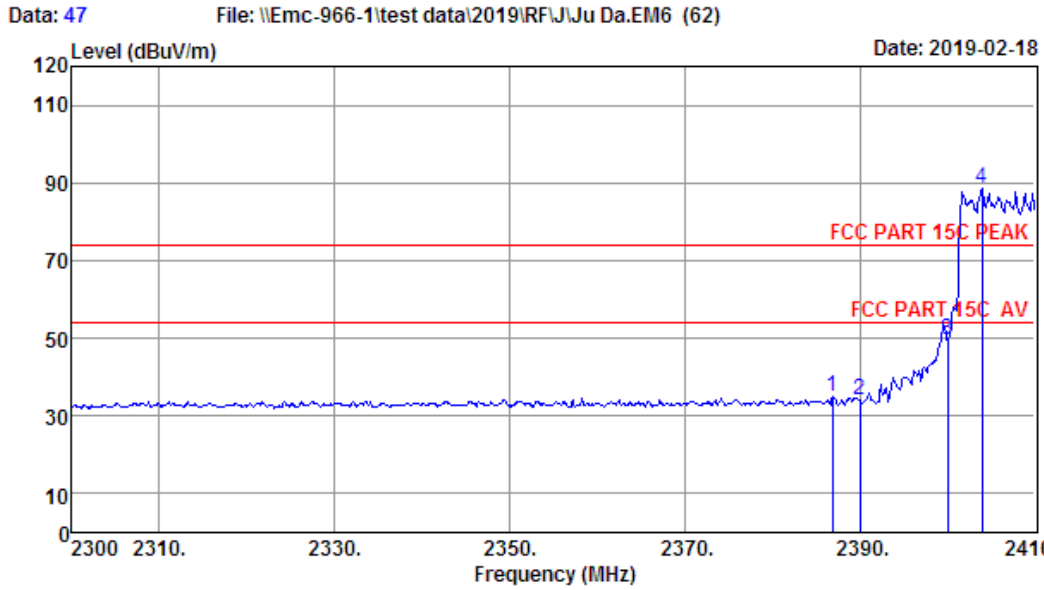

Site no. : 1# 966 Chamber Data no. : 47
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : 8-DPSK TX 2402MHz(Hopping On)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2386.90 | 27.35 | 3.21 | 34.87 | 39.28 | 34.97 | 74.00 | 39.03 | Peak |
| 2 | 2390.00 | 27.35 | 3.21 | 34.87 | 38.47 | 34.16 | 74.00 | 39.84 | Peak |
| 3 | 2400.00 | 27.35 | 3.21 | 34.94 | 54.06 | 49.68 | 74.00 | 24.32 | Peak |
| 4 | 2403.95 | 27.39 | 3.23 | 34.94 | 93.01 | 88.69 | 74.00 | -14.69 | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

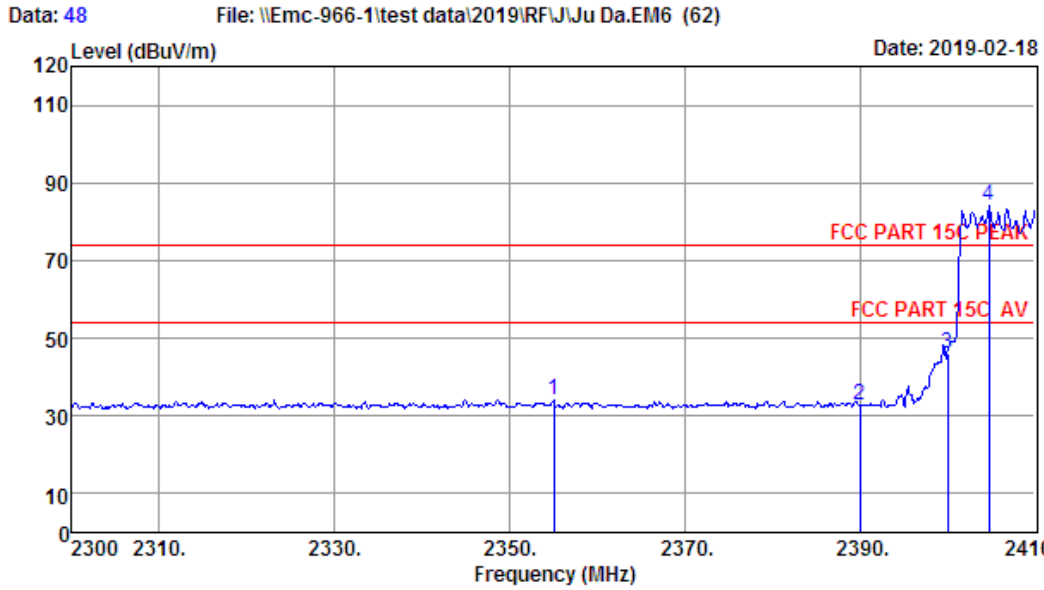

Site no. : 1# 966 Chamber Data no. : 48
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : 8-DPSK TX 2402MHz(Hopping On)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2355.00 | 27.27 | 3.18 | 34.73 | 38.50 | 34.22 | 74.00 | 39.78 | Peak |
| 2 | 2390.00 | 27.35 | 3.21 | 34.87 | 36.87 | 32.56 | 74.00 | 41.44 | Peak |
| 3 | 2400.00 | 27.35 | 3.21 | 34.94 | 50.45 | 46.07 | 74.00 | 27.93 | Peak |
| 4 | 2404.72 | 27.39 | 3.23 | 34.94 | 88.52 | 84.20 | 74.00 | -10.20 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

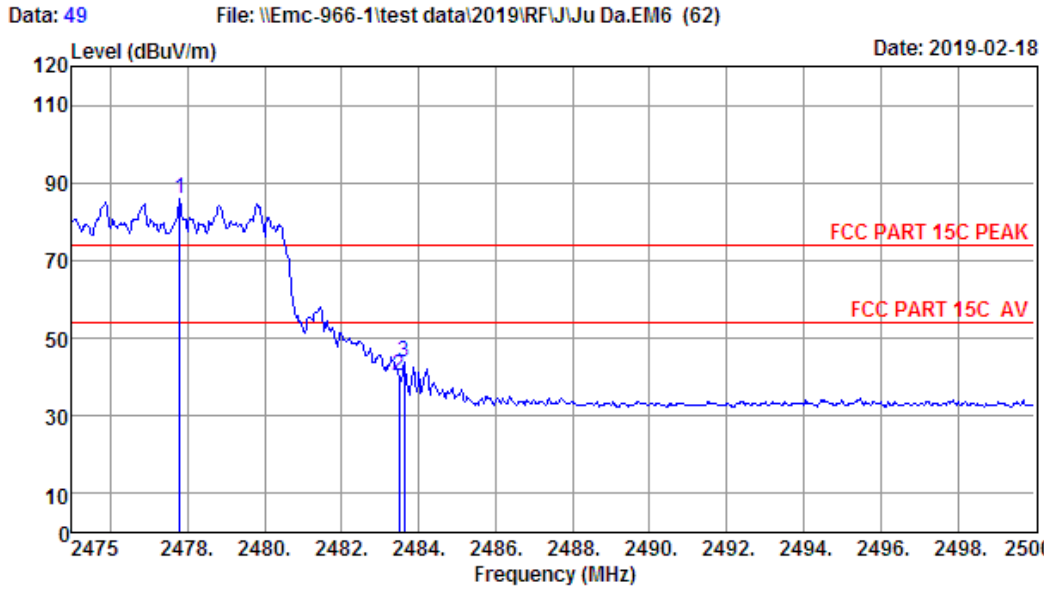


Site no. : 1# 966 Chamber Data no. : 49
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : 8-DPSK TX 2480MHz (Hopping On)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2477.80 | 27.56 | 3.29 | 35.21 | 90.30 | 85.94 | 74.00 | -11.94 | Peak |
| 2 | 2483.50 | 27.56 | 3.29 | 35.21 | 44.53 | 40.17 | 74.00 | 33.83 | Peak |
| 3 | 2483.63 | 27.56 | 3.29 | 35.21 | 48.18 | 43.82 | 74.00 | 30.18 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

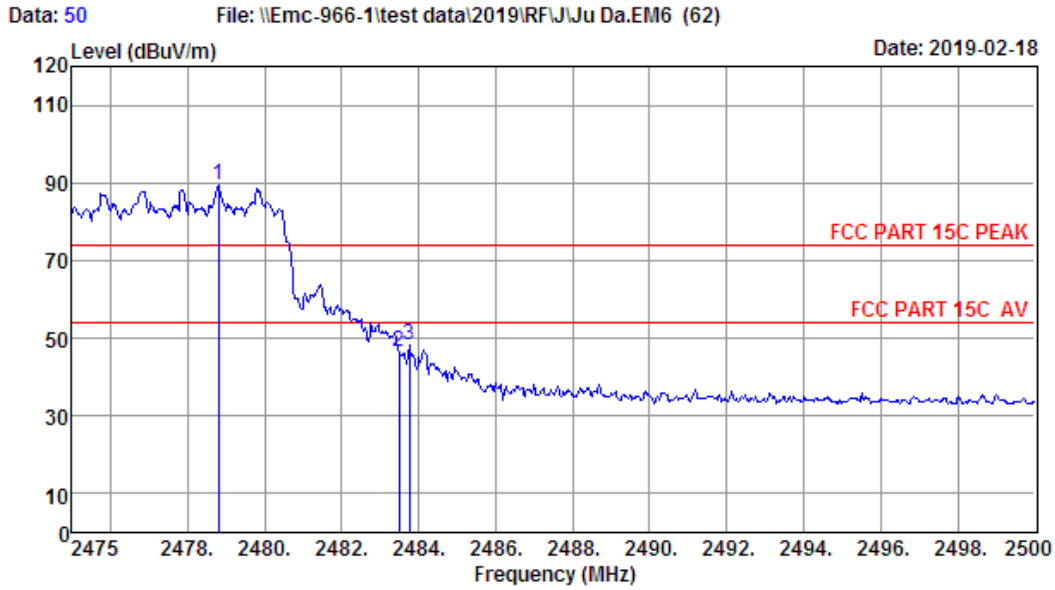

Site no. : 1# 966 Chamber Data no. : 50
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.4';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : 8-DPSK TX 2480MHz (Hopping On)

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2478.80 | 27.56 | 3.29 | 35.21 | 93.89 | 89.53 | 74.00 | -15.53 | Peak |
| 2 | 2483.50 | 27.56 | 3.29 | 35.21 | 50.80 | 46.44 | 74.00 | 27.56 | Peak |
| 3 | 2483.75 | 27.56 | 3.29 | 35.21 | 52.80 | 48.44 | 74.00 | 25.56 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

10. POWER LINE CONDUCTED EMISSIONS

10.1. Limit

| Frequency | Maximum RF Line Voltage | |
|-----------------|----------------------------------|-------------------------------|
| | Quasi-Peak Level dB(μ V) | Average Level dB(μ V) |
| 150kHz ~ 500kHz | 66 ~ 56* | 56 ~ 46* |
| 500kHz ~ 5MHz | 56 | 46 |
| 5MHz ~ 30MHz | 60 | 50 |

Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

10.2. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT was charged from PC's USB port which connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#).. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.


10.3. Test Result

PASS. (All emissions not reported below are too low against the prescribed limits.)

10.4. Test data

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

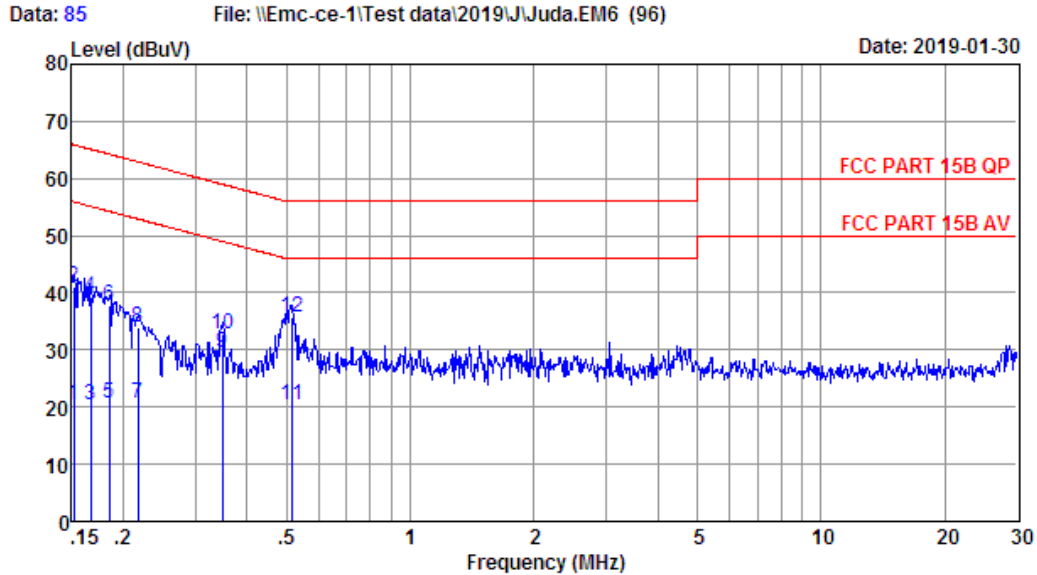


Site no : 844 Shield Room Data no. : 85
 Env. / Ins. : Temp:24.7'C Humi:53% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : TX Mode

| | Freq. (MHz) | LISN Factor (dB) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV) | Limits (dBuV) | Margin (dB) | Remark |
|----|----------------|------------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1 | 0.152 | 9.59 | 9.69 | 1.20 | 20.48 | 55.91 | 35.43 | Average |
| 2 | 0.152 | 9.59 | 9.69 | 21.73 | 41.01 | 65.91 | 24.90 | QP |
| 3 | 0.167 | 9.59 | 9.69 | 1.20 | 20.48 | 55.12 | 34.64 | Average |
| 4 | 0.167 | 9.59 | 9.69 | 19.89 | 39.17 | 65.12 | 25.95 | QP |
| 5 | 0.185 | 9.60 | 9.77 | 1.43 | 20.80 | 54.24 | 33.44 | Average |
| 6 | 0.185 | 9.60 | 9.77 | 18.32 | 37.69 | 64.24 | 26.55 | QP |
| 7 | 0.217 | 9.61 | 9.84 | 1.17 | 20.62 | 52.92 | 32.30 | Average |
| 8 | 0.217 | 9.61 | 9.84 | 14.50 | 33.95 | 62.92 | 28.97 | QP |
| 9 | 0.348 | 9.62 | 9.92 | 9.87 | 29.41 | 49.00 | 19.59 | Average |
| 10 | 0.348 | 9.62 | 9.92 | 13.24 | 32.78 | 59.00 | 26.22 | QP |
| 11 | 0.516 | 9.63 | 9.92 | 0.93 | 20.48 | 46.00 | 25.52 | Average |
| 12 | 0.516 | 9.63 | 9.92 | 16.28 | 35.83 | 56.00 | 20.17 | QP |

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.




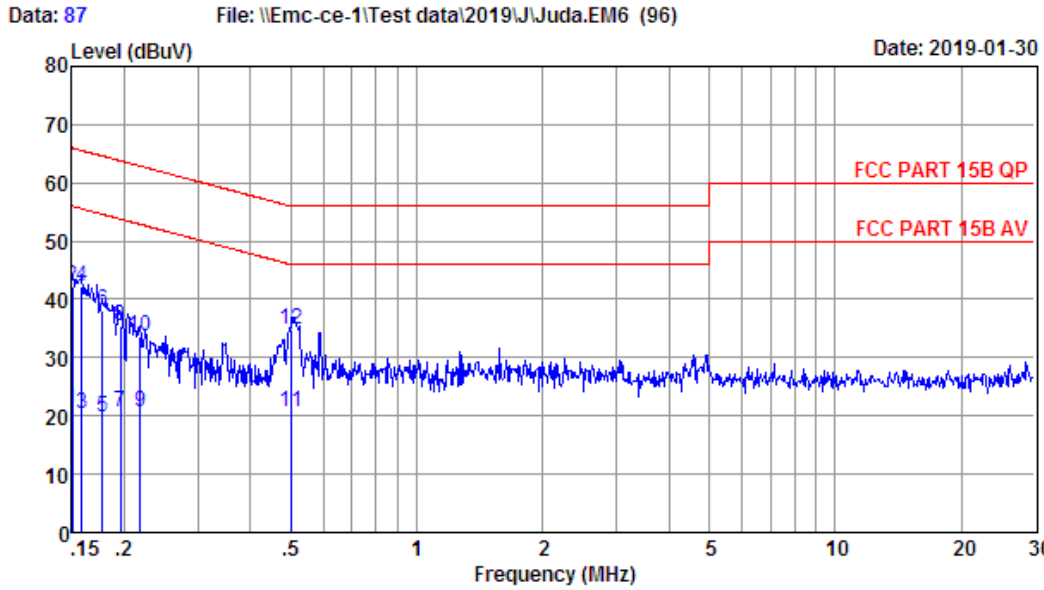

Site no : 844 Shield Room Data no. : 87
 Env. / Ins. : Temp:24.7'C Humi:53% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 120V/60Hz
 M/N : VS-115
 Test Mode : TX Mode

| | Freq. (MHz) | LISN Factor (dB) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV) | Limits (dBuV) | Margin (dB) | Remark |
|----|----------------|------------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1 | 0.150 | 9.50 | 9.69 | 2.20 | 21.39 | 56.00 | 34.61 | Average |
| 2 | 0.150 | 9.50 | 9.69 | 23.16 | 42.35 | 66.00 | 23.65 | QP |
| 3 | 0.158 | 9.50 | 9.69 | 1.20 | 20.39 | 55.56 | 35.17 | Average |
| 4 | 0.158 | 9.50 | 9.69 | 22.96 | 42.15 | 65.56 | 23.41 | QP |
| 5 | 0.178 | 9.53 | 9.77 | 0.43 | 19.73 | 54.59 | 34.86 | Average |
| 6 | 0.178 | 9.53 | 9.77 | 18.91 | 38.21 | 64.59 | 26.38 | QP |
| 7 | 0.195 | 9.53 | 9.77 | 1.43 | 20.73 | 53.80 | 33.07 | Average |
| 8 | 0.195 | 9.53 | 9.77 | 16.09 | 35.39 | 63.80 | 28.41 | QP |
| 9 | 0.219 | 9.53 | 9.84 | 1.42 | 20.79 | 52.88 | 32.09 | Average |
| 10 | 0.219 | 9.53 | 9.84 | 14.16 | 33.53 | 62.88 | 29.35 | QP |
| 11 | 0.502 | 9.55 | 9.92 | 1.07 | 20.54 | 46.00 | 25.46 | Average |
| 12 | 0.502 | 9.55 | 9.92 | 15.48 | 34.95 | 56.00 | 21.05 | QP |


Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

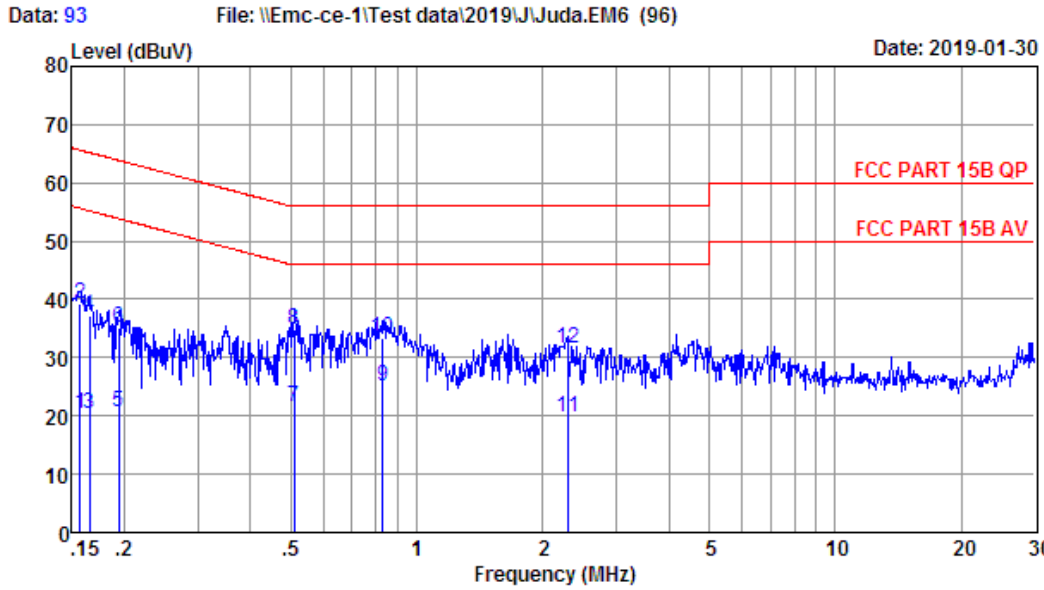

Site no : 844 Shield Room Data no. : 93
 Env. / Ins. : Temp:24.7'C Humi:53% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 240V/60Hz
 M/N : VS-115
 Test Mode : TX Mode

| | Freq. (MHz) | LISN Factor (dB) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV) | Limits (dBuV) | Margin (dB) | Remark |
|----|----------------|------------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1 | 0.156 | 9.59 | 9.69 | 1.20 | 20.48 | 55.65 | 35.17 | Average |
| 2 | 0.156 | 9.59 | 9.69 | 20.09 | 39.37 | 65.65 | 26.28 | QP |
| 3 | 0.165 | 9.59 | 9.69 | 1.20 | 20.48 | 55.21 | 34.73 | Average |
| 4 | 0.165 | 9.59 | 9.69 | 18.03 | 37.31 | 65.21 | 27.90 | QP |
| 5 | 0.194 | 9.60 | 9.77 | 1.43 | 20.80 | 53.84 | 33.04 | Average |
| 6 | 0.194 | 9.60 | 9.77 | 15.64 | 35.01 | 63.84 | 28.83 | QP |
| 7 | 0.510 | 9.63 | 9.92 | 1.93 | 21.48 | 46.00 | 24.52 | Average |
| 8 | 0.510 | 9.63 | 9.92 | 15.40 | 34.95 | 56.00 | 21.05 | QP |
| 9 | 0.830 | 9.63 | 9.93 | 5.67 | 25.23 | 46.00 | 20.77 | Average |
| 10 | 0.830 | 9.63 | 9.93 | 13.77 | 33.33 | 56.00 | 22.67 | QP |
| 11 | 2.297 | 9.66 | 9.96 | 0.21 | 19.83 | 46.00 | 26.17 | Average |
| 12 | 2.297 | 9.66 | 9.96 | 11.95 | 31.57 | 56.00 | 24.43 | QP |

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

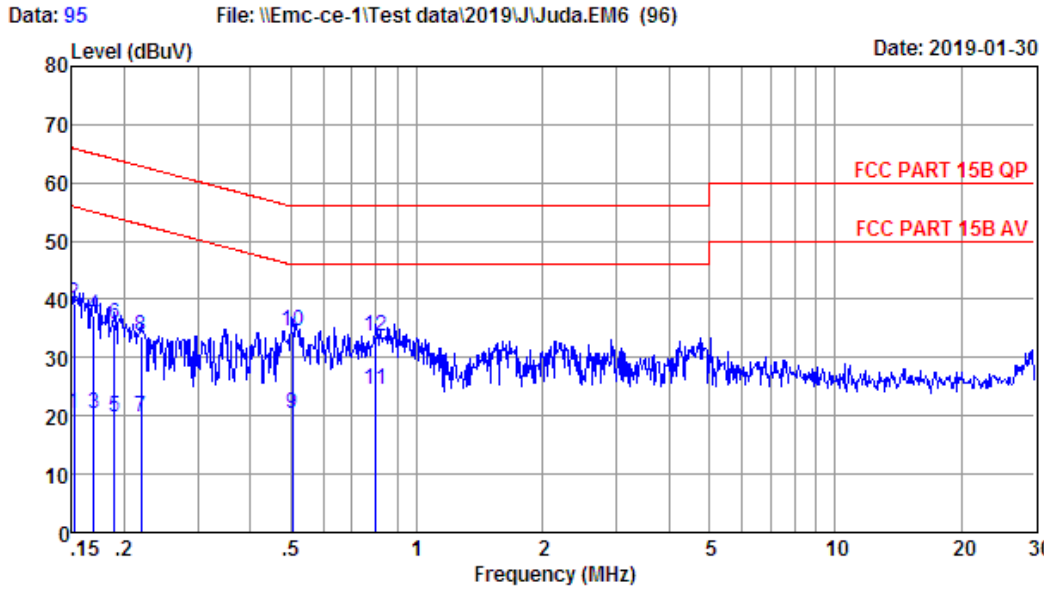

Site no : 844 Shield Room Data no. : 95
 Env. / Ins. : Temp:24.7'C Humi:53% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : MINI STEREO SYSTEM WITH BLUETOOTH
 Power : AC 240V/60Hz
 M/N : VS-115
 Test Mode : TX Mode

| | Freq. (MHz) | LISN Factor (dB) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV) | Limits (dBuV) | Margin (dB) | Remark |
|----|----------------|------------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1 | 0.152 | 9.50 | 9.69 | 1.20 | 20.39 | 55.91 | 35.52 | Average |
| 2 | 0.152 | 9.50 | 9.69 | 20.06 | 39.25 | 65.91 | 26.66 | QP |
| 3 | 0.169 | 9.50 | 9.69 | 1.20 | 20.39 | 54.99 | 34.60 | Average |
| 4 | 0.169 | 9.50 | 9.69 | 18.08 | 37.27 | 64.99 | 27.72 | QP |
| 5 | 0.189 | 9.53 | 9.77 | 0.43 | 19.73 | 54.06 | 34.33 | Average |
| 6 | 0.189 | 9.53 | 9.77 | 16.35 | 35.65 | 64.06 | 28.41 | QP |
| 7 | 0.220 | 9.53 | 9.84 | 0.42 | 19.79 | 52.83 | 33.04 | Average |
| 8 | 0.220 | 9.53 | 9.84 | 14.32 | 33.69 | 62.83 | 29.14 | QP |
| 9 | 0.505 | 9.55 | 9.92 | 0.79 | 20.26 | 46.00 | 25.74 | Average |
| 10 | 0.505 | 9.55 | 9.92 | 15.00 | 34.47 | 56.00 | 21.53 | QP |
| 11 | 0.800 | 9.56 | 9.93 | 4.93 | 24.42 | 46.00 | 21.58 | Average |
| 12 | 0.800 | 9.56 | 9.93 | 14.10 | 33.59 | 56.00 | 22.41 | QP |

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

11. ANTENNA REQUIREMENTS

11.1. Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result


The antennas used for this product are PCB antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 0dBi.

12. TEST SETUP PHOTO

Conducted Test

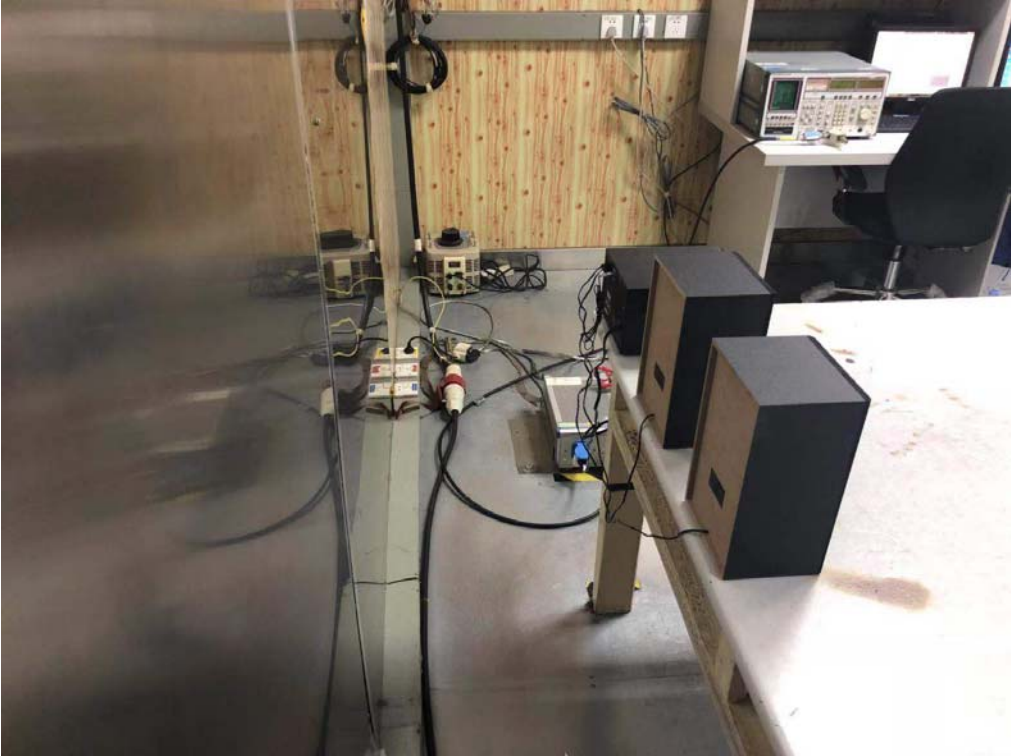

Radiated Test (30-1000 MHz)

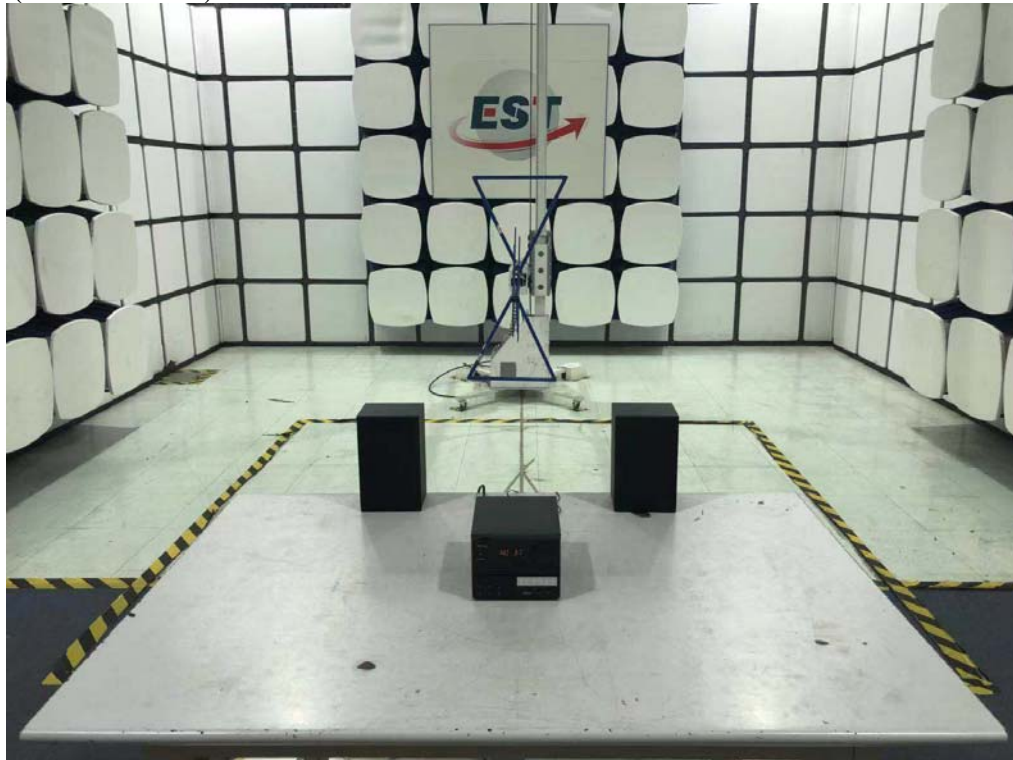

Radiated Test (Above 1GHz)




13.PHOTO EUT



External Photos
M/N: VS-115




External Photos
M/N: VS-115

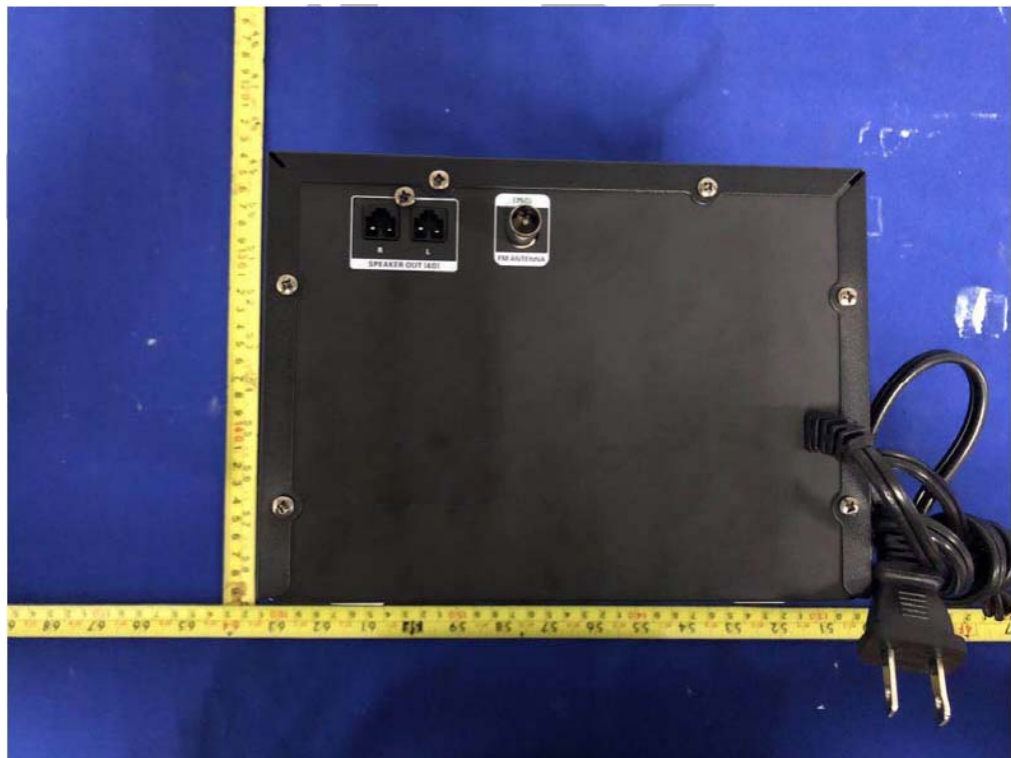

External Photos
M/N: VS-115

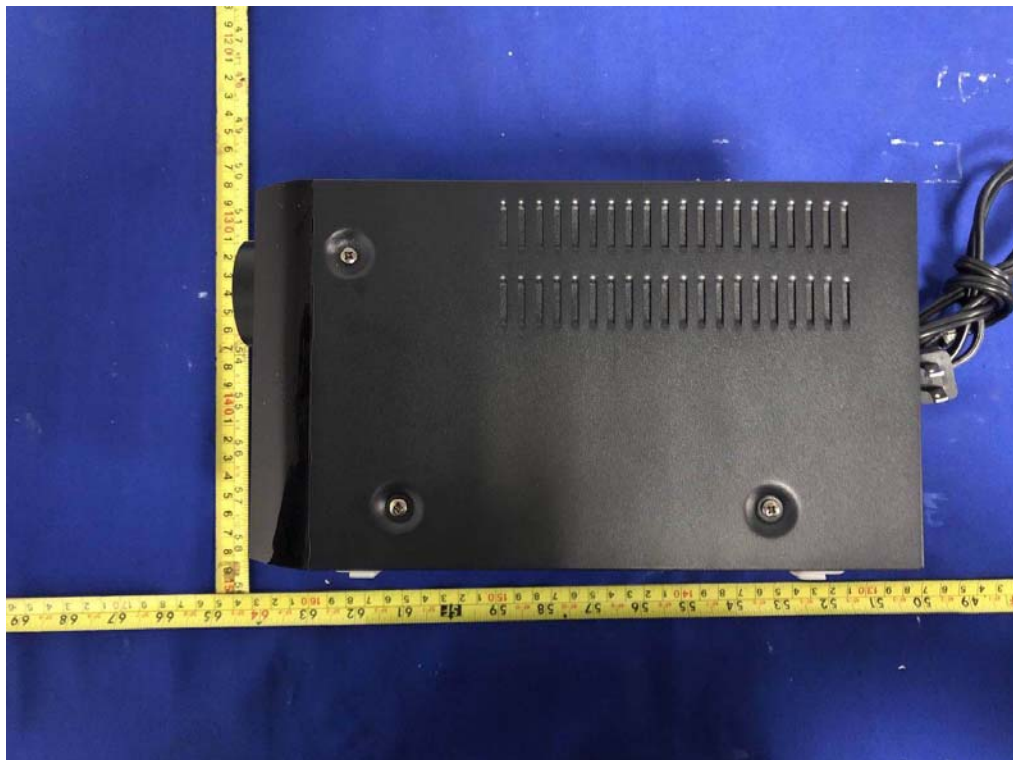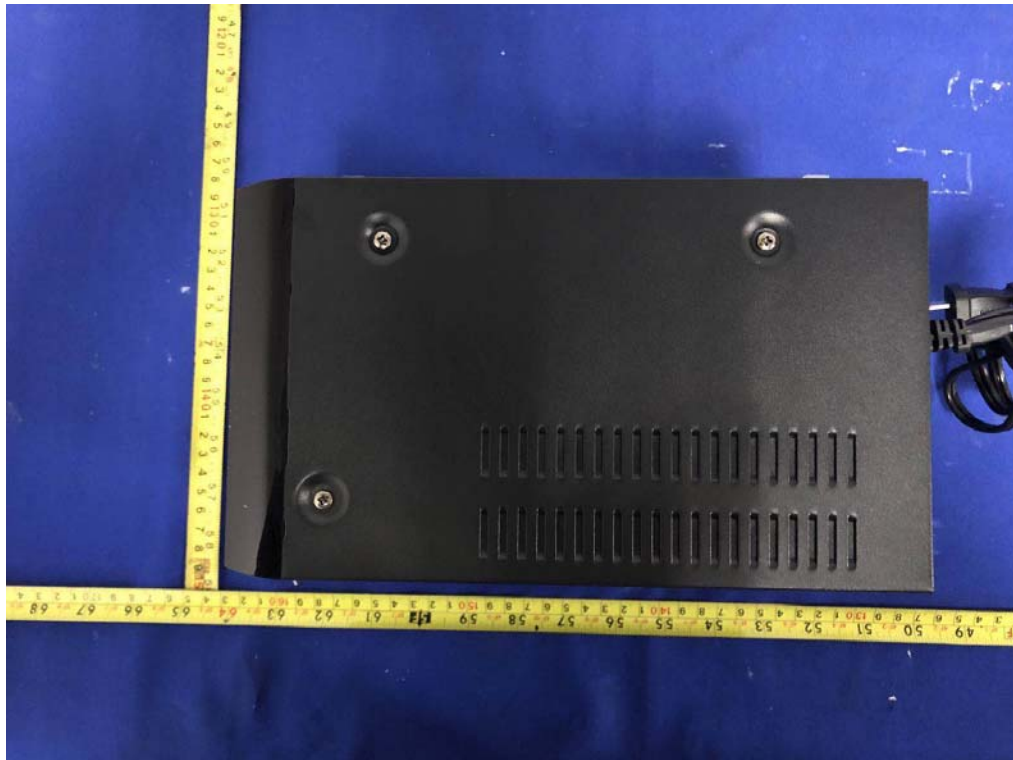


External Photos
M/N: VS-115

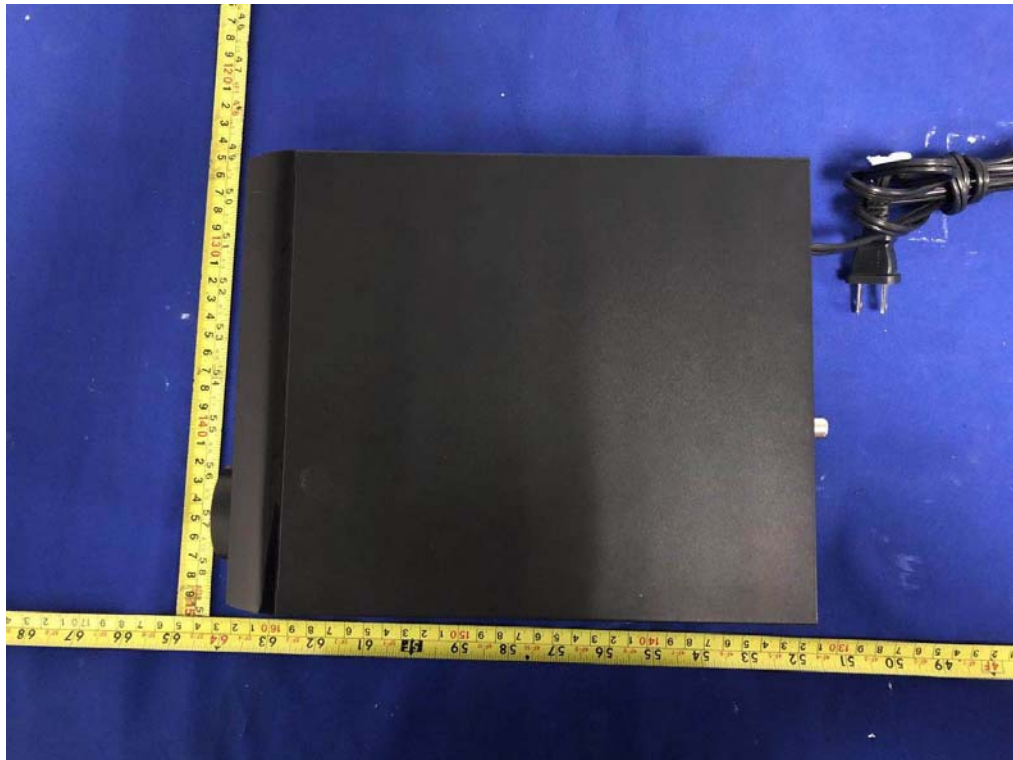



External Photos
M/N: VS-115





Internal Photos
M/N: VS-115

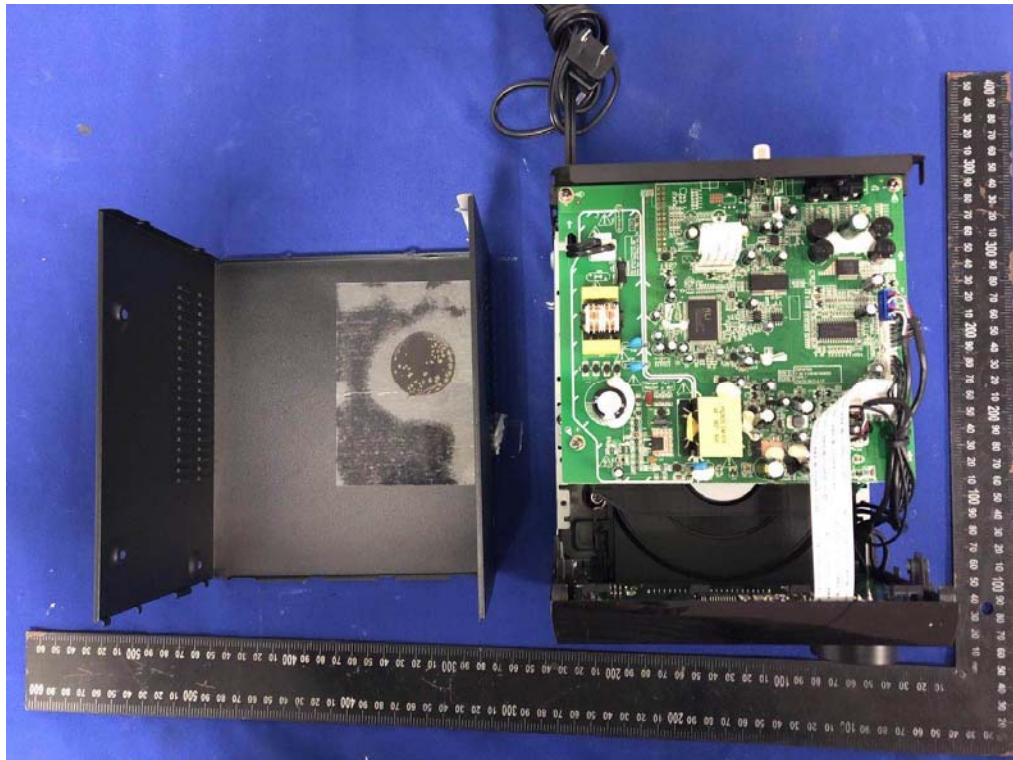


Internal Photos
M/N: VS-115

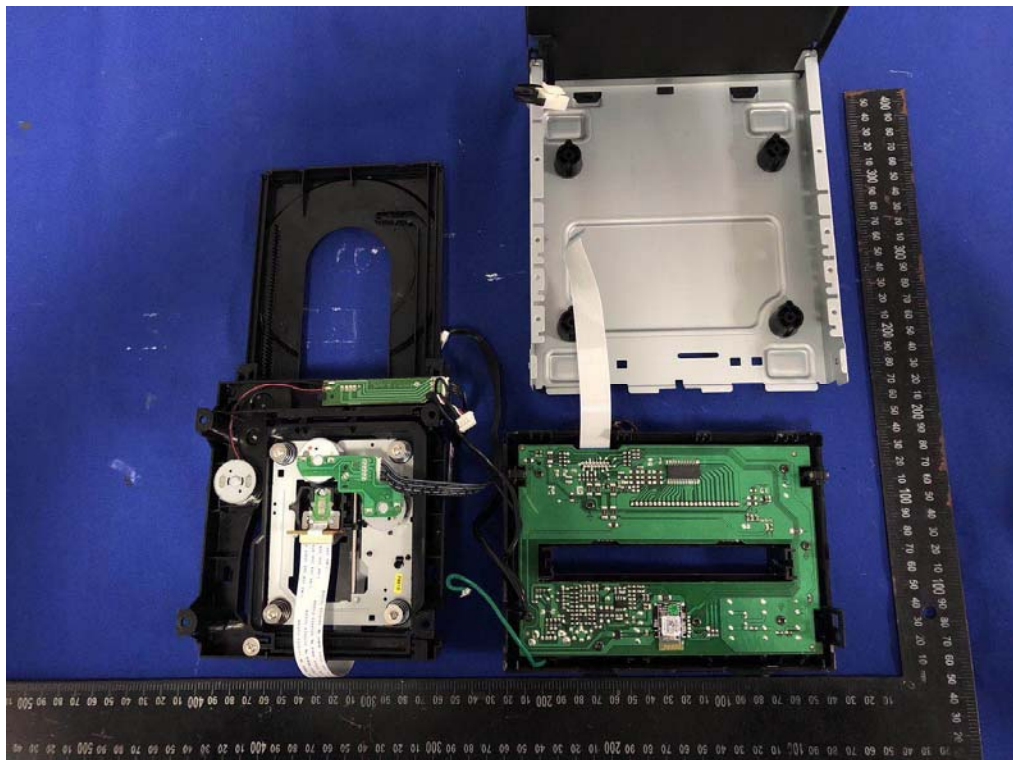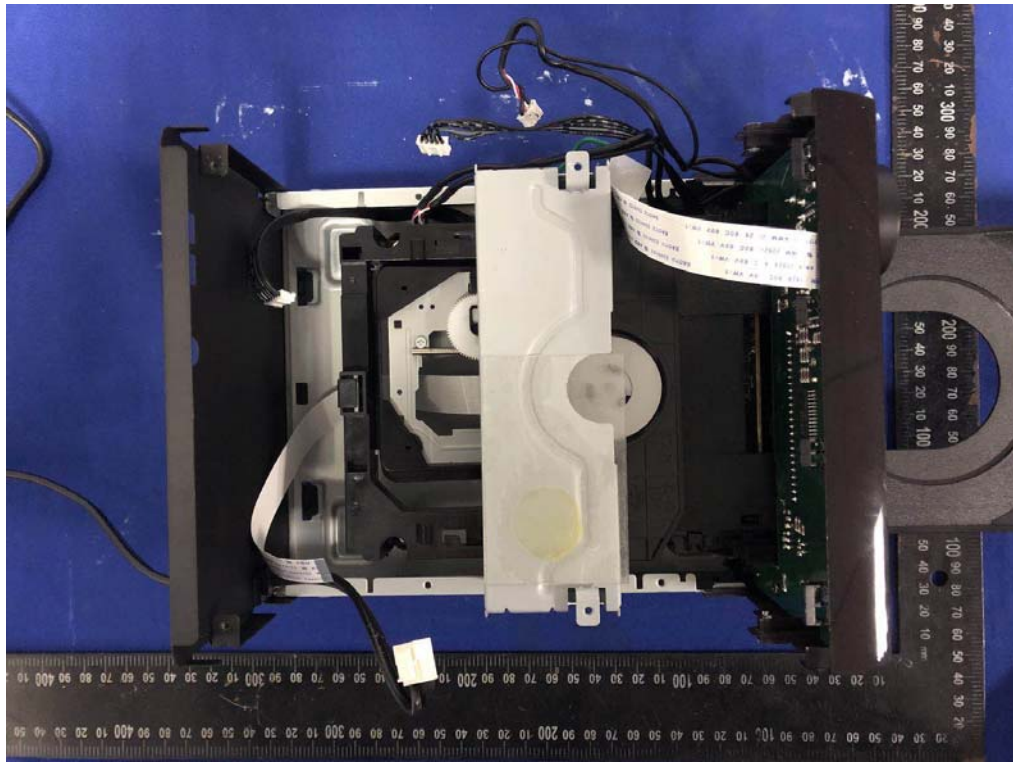



Internal Photos
M/N: VS-115

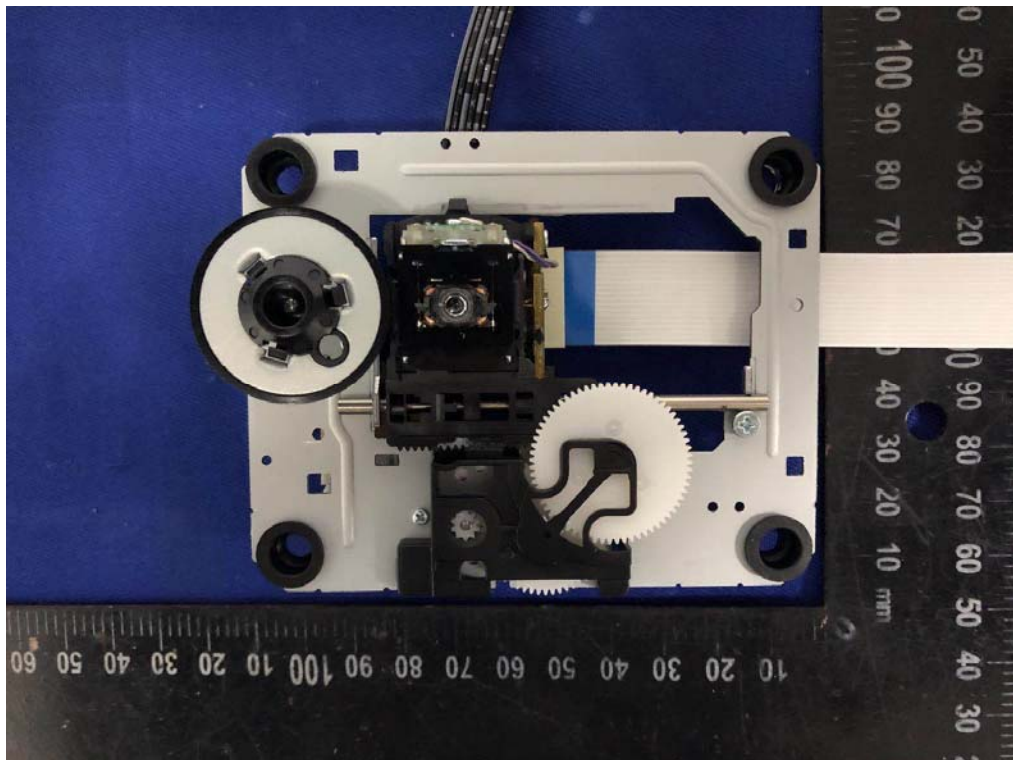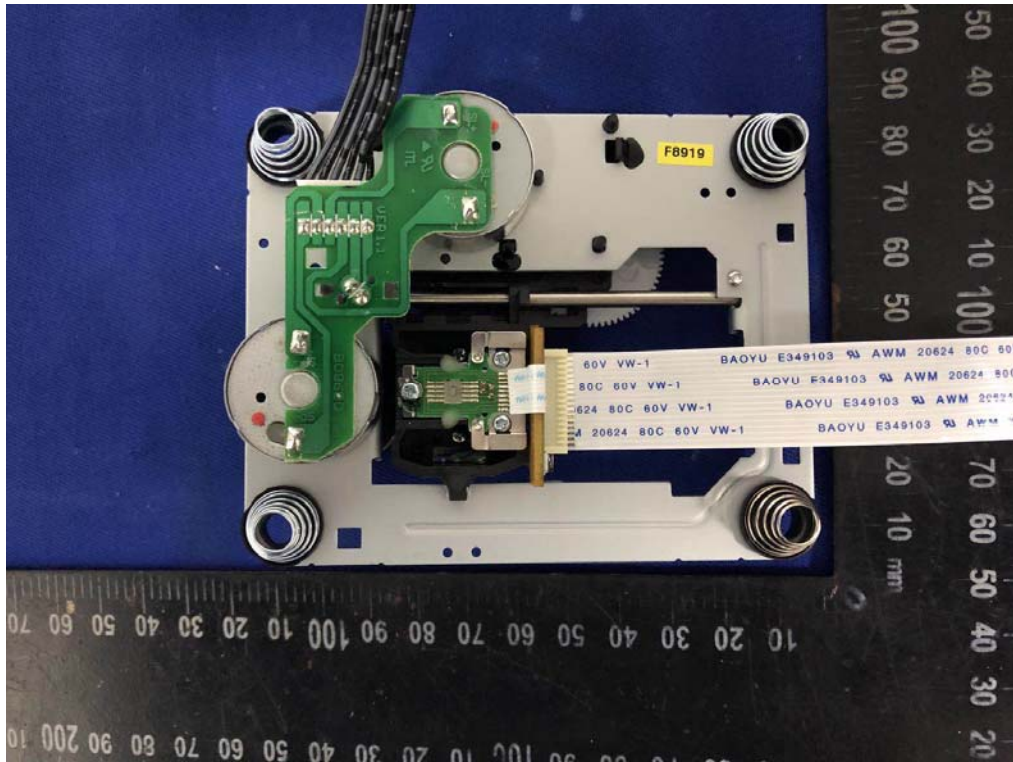


Internal Photos
M/N: VS-115

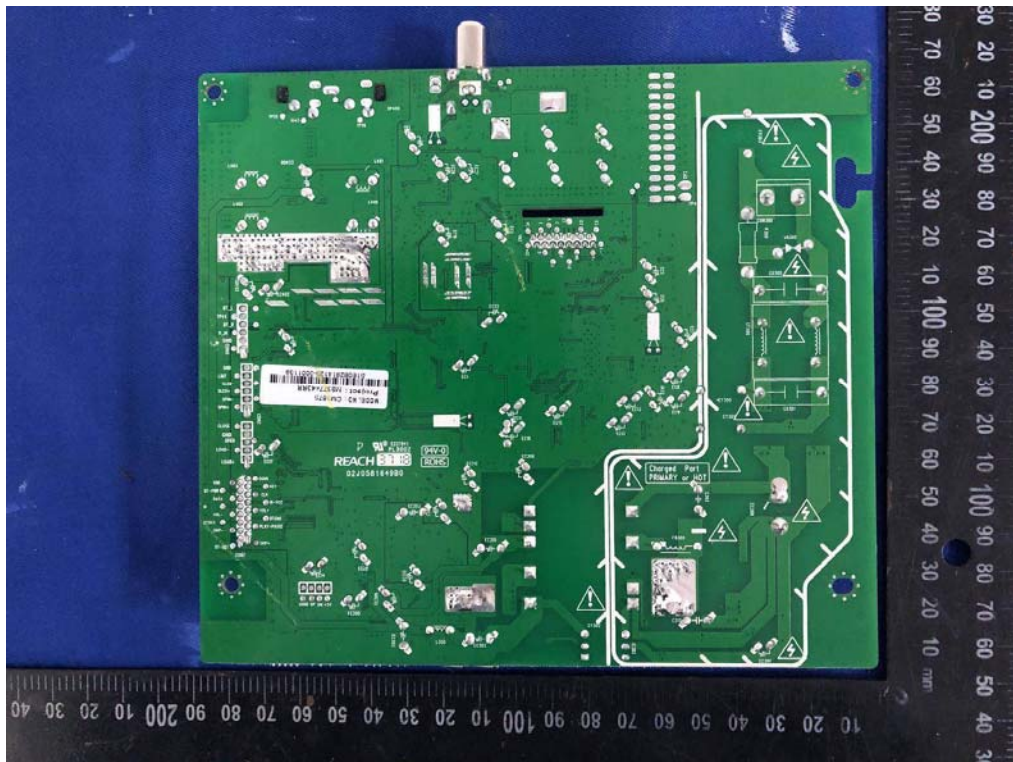

Internal Photos
M/N: VS-115

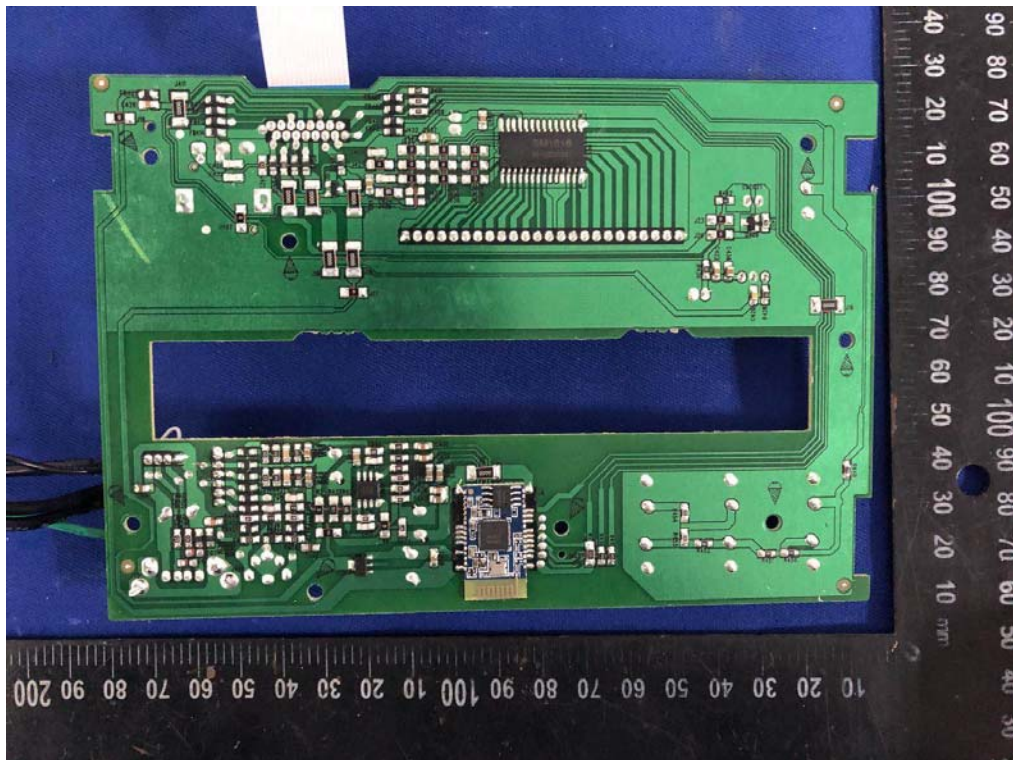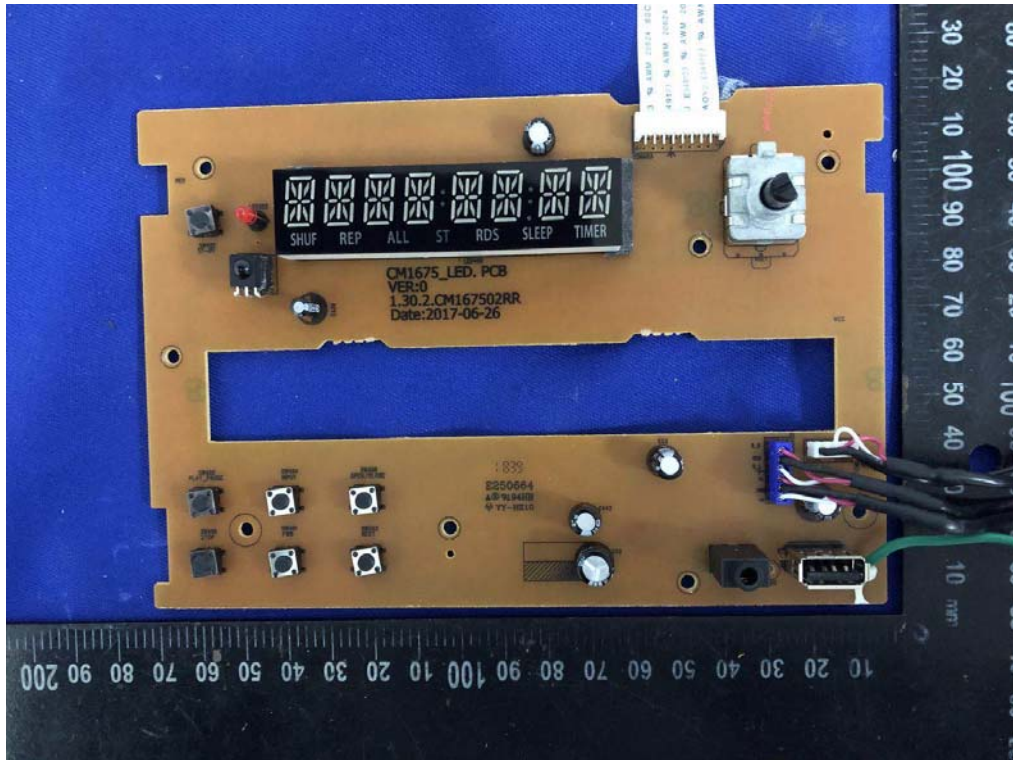

Internal Photos
M/N: VS-115

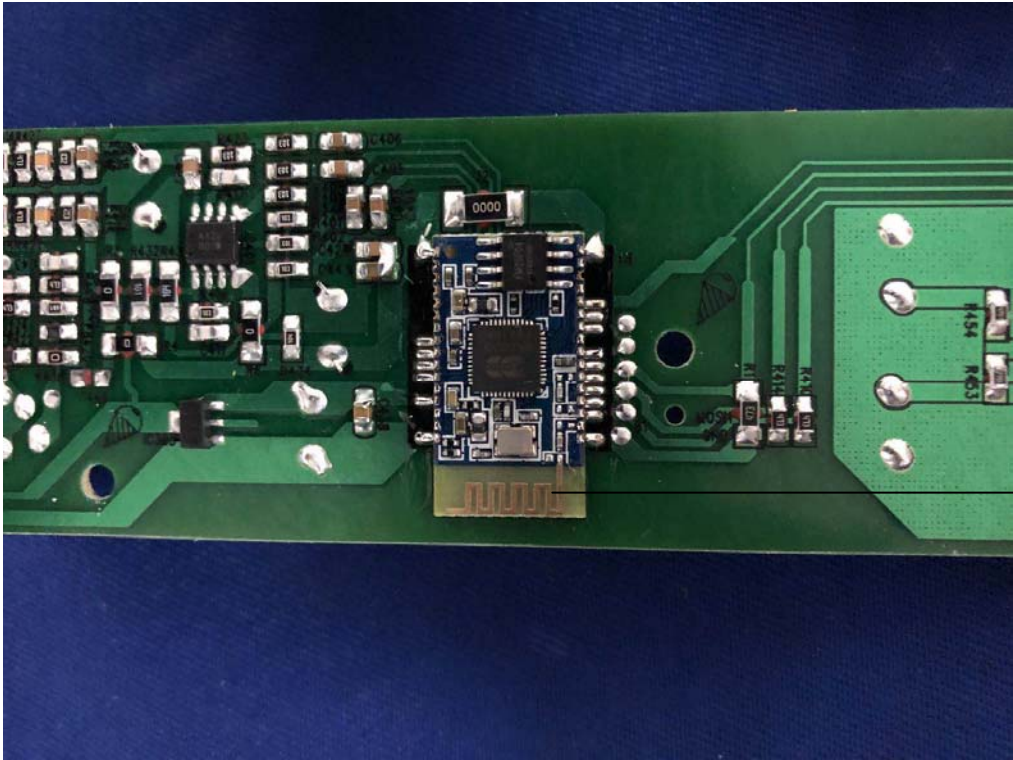

Bluetooth Antenna