

# FCC 47 CFR PART 15 SUBPART C

## TEST REPORT

For

Product Name: YI Dome Camera 1080P

Brand Name: YI

Model No.: YHS.2016

Series Model.: N/A

FCC ID: 2AFIB-YHS2016

Test Report Number:

C160926R01-RPW

Issued for

Shanghai Xiaoyi Technology Co., Ltd.

6F,Building E,No.2889,Jinke Road,Shanghai,China

Issued by

Compliance Certification Services Inc.

Kun shan Laboratory

No.10 Weiye Rd., Innovation park, Eco&Tec,  
Development Zone, Kunshan City, Jiangsu, China

TEL: 86-512-57355888

FAX: 86-512-57370818



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.

## TABLE OF CONTENTS

|           |   |           |
|-----------|---|-----------|
| <b>1.</b> | <b>TEST RESULT CERTIFICATION.....</b>               | <b>4</b>  |
| <b>2.</b> | <b>EUT DESCRIPTION.....</b>                         | <b>5</b>  |
| <b>3.</b> | <b>TEST METHODOLOGY .....</b>                       | <b>6</b>  |
| 3.1.      | EUT CONFIGURATION .....                             | 6         |
| 3.2.      | EUT EXERCISE .....                                  | 6         |
| 3.3.      | GENERAL TEST PROCEDURES.....                        | 6         |
| 3.4.      | FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS..... | 7         |
| 3.5.      | DESCRIPTION OF TEST MODES.....                      | 8         |
| 3.6.      | ANTENNA DESCRIPTION .....                           | 9         |
| <b>4.</b> | <b>INSTRUMENT CALIBRATION.....</b>                  | <b>10</b> |
| 4.1.      | MEASURING INSTRUMENT CALIBRATION .....              | 10        |
| <b>5.</b> | <b>FACILITIES AND ACCREDITATIONS .....</b>          | <b>12</b> |
| 5.1.      | FACILITIES .....                                    | 12        |
| 5.2.      | EQUIPMENT.....                                      | 12        |
| 5.3.      | LABORATORY ACCREDITATIONS AND LISTING .....         | 12        |
| 5.4.      | TABLE OF ACCREDITATIONS AND LISTINGS .....          | 13        |
| <b>6.</b> | <b>SETUP OF EQUIPMENT UNDER TEST.....</b>           | <b>14</b> |
| 6.1.      | SETUP CONFIGURATION OF EUT.....                     | 14        |
| 6.2.      | SUPPORT EQUIPMENT.....                              | 14        |
| <b>7.</b> | <b>FCC PART 15.247 REQUIREMENTS.....</b>            | <b>15</b> |
| 7.1.      | 6DB BANDWIDTH .....                                 | 15        |
| 7.2.      | PEAK POWER .....                                    | 22        |
| 7.3.      | PEAK POWER SPECTRAL DENSITY .....                   | 24        |
| 7.4.      | SPURIOUS EMISSIONS .....                            | 32        |
| 7.5.      | RADIATED EMISSIONS.....                             | 55        |
| 7.6.      | POWERLINE CONDUCTED EMISSIONS .....                 | 73        |



### Revision History

| Rev. | Issue Date       | Report NO.     | Effect Page | Contents |
|------|------------------|----------------|-------------|----------|
| 00   | October 31, 2016 | C160926R01-RPW | ALL         | N/A      |
|      |                  |                |             |          |

**1. TEST RESULT CERTIFICATION**

|                               |  |
|-------------------------------|--|
| <b>Product Name:</b>          | YI Dome Camera 1080P   |
| <b>Trade Name:</b>            | YI   |
| <b>Model Name.:</b>           | YHS.2016   |
| <b>Series Model:</b>          | N/A  |
| <b>Applicant Discrepancy:</b> | Initial  |
| <b>Device Category:</b>       | Mobile unit  |
| <b>Date of Test:</b>          | September 27, 2016 ~ October 28, 2016  |
| <b>Applicant:</b>             | <b>Shanghai Xiaoyi Technology Co., Ltd.</b><br>6F,Building E,No.2889,Jinke Road,Shanghai,China |
| <b>Manufacturer:</b>          | <b>Shanghai Xiaoyi Technology Co., Ltd.</b><br>6F,Building E,No.2889,Jinke Road,Shanghai,China |
| <b>Application Type:</b>      | Certification  |

| APPLICABLE STANDARDS         |                         |
|------------------------------|-------------------------|
| STANDARD                     | TEST RESULT             |
| FCC 47 CFR Part 15 Subpart C | No non-compliance noted |


**We hereby certify that:**

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:**

**Tested by:**

Jeff.Fang  
 RF Manager  
 Compliance Certification Service Inc.

Lily.Wang  
 Test Engineer  
 Compliance Certification Service Inc.

**2. EUT DESCRIPTION**

|                               |   |
|-------------------------------|---|
| <b>Product Name:</b>          | YI Dome Camera 1080P  |
| <b>Brand Name:</b>            | YI  |
| <b>Model Name:</b>            | YHS.2016  |
| <b>Series Model:</b>          | N/A   |
| <b>Model Discrepancy:</b>     | N/A   |
| <b>Power Adapter:</b>         | Model:A8-501000<br>INPUT: 100-240V~50/60Hz 0.2A Max<br>OUTPUT : 5 V $\overline{\overline{=}}$ 1.0A  |
| <b>Frequency Range:</b>       | IEEE 802.11b/g: 2412MHz to 2462 MHz<br>IEEE 802.11n HT20: 2412MHz to 2462 MHz<br>IEEE 802.11n HT40: 2422MHz to 2452 MHz   |
| <b>Transmit Power:</b>        | IEEE 802.11b mode: 18.97dBm<br>IEEE 802.11g mode: 17.52 dBm<br>IEEE 802.11n HT20 mode: 16.83dBm<br>IEEE 802.11n HT40 mode: 16.61 dBm  |
| <b>Modulation Technique:</b>  | IEEE802.11b mode: DSSS (1,2,5.5 and 11 Mbps)<br>IEEE802.11g mode: DSSS /OFDM (6,9,12,18,24,36,48 and 54 Mbps)<br>IEEE802.11n HT20 mode: OFDM (MCS0~MCS7)<br>IEEE802.11n HT40 mode: OFDM (MCS0~MCS7) |
| <b>Number of Channels:</b>    | IEEE 802.11b/g mode: 11 Channels<br>IEEE 802.11n HT20 : 11 Channels<br>IEEE 802.11n HT40 : 9 Channels   |
| <b>Antenna Specification:</b> | PIFA Antenna Gain: 2.45 dBi   |

**Remark:**

1.The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2.This submittal(s) (test report) is intended for **FCC ID: 2AFIB-YHS2016** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.10 2013 and FCC CFR 47 15.207, 15.209 and 15.247.

#### **3.1.EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2.EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3.GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10 2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

Under 1GHz

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

Above 1GHz

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

### 3.4.FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2655 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |
| 13.36 - 13.41              |                       |                 |                  |

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 3.5.DESRIPTION OF TEST MODES

The worst-case data rates:

IEEE802.11b mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 1Mbps data rate was chosen for full testing.

IEEE802.11g mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 6Mbps data rate was chosen for full testing.

IEEE 802.11n HT20 MHz Channel mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with MCS0 data rate was chosen for full testing.

IEEE 802.11n HT40 MHz Channel mode:

Channel Low (2422MHz)

Channel Mid (2437MHz)

Channel High (2452MHz) with MCS0 data rate was chosen for full testing.




### 3.6.ANTENNA DESCRIPTION

an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section”

\* the antenna of this EUT is a unique(PIFA Antenna for WiFi).

\* the EUT complies with the requirement of 15.203.

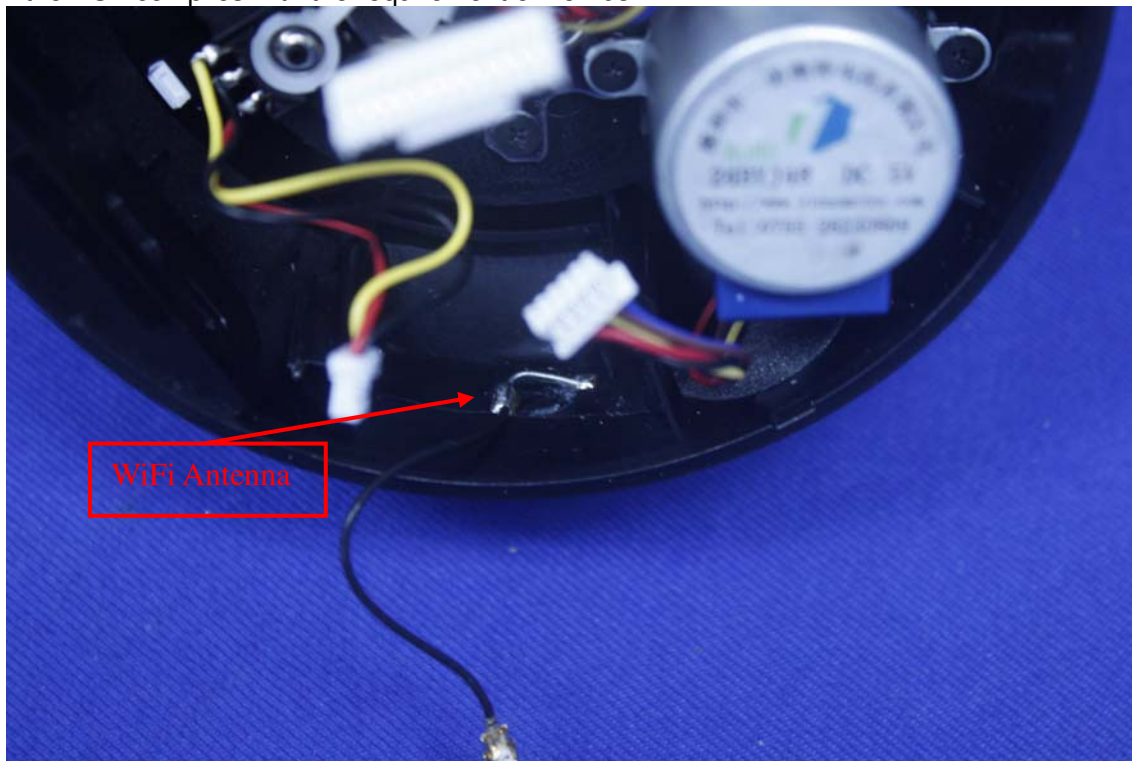

## 4. INSTRUMENT CALIBRATION

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

#### Equipment Used for Emissions Measurement

| Conducted Emissions Test Site |               |          |               |                  |                 |
|-------------------------------|---------------|----------|---------------|------------------|-----------------|
| Name of Equipment             | Manufacturer  | Model    | Serial Number | Calibration Date | Calibration Due |
| Spectrum Analyzer             | Agilent       | E4446A   | US44300398    | 2016-7-21        | 2017-7-20       |
| Spectrum Analyzer             | RS            | FSU26    | 200789        | 2016-7-21        | 2017-7-20       |
| OSCILLOSCOPE                  | Agilent       | DSO6104A | MY44002585    | 2016-3-2         | 2017-3-1        |
| Power meter                   | Anritsu       | ML2495A  | 1445010       | 2016-5-16        | 2017-5-15       |
| Power sensor                  | Anritsu       | MA2411B  | 1339220       | 2016-5-16        | 2017-5-15       |
| Power SPLITTER                | Mini-Circuits | ZN2PD-9G | SF078500430   | N.C.R            | N.C.R           |
| DC Power Supply               | AGILENT       | E3632A   | MY50340053    | N.C.R            | N.C.R           |
| Temp. / Humidity Gauge        | Anymetre      | TH603    | CCS007        | 2015-11-4        | 2016-11-3       |
| Test Software                 |               |          | EZ-EMC        |                  |                 |

| 977 Chamber       |              |                     |               |                  |                 |
|-------------------|--------------|---------------------|---------------|------------------|-----------------|
| Name of Equipment | Manufacturer | Model               | Serial Number | Calibration Date | Calibration Due |
| Spectrum Analyzer | Agilent      | E4446A              | US44300398    | 2016-7-21        | 2017-7-20       |
| Spectrum Analyzer | RS           | FSU26               | 200789        | 2016-7-21        | 2017-7-20       |
| EMI Test Receiver | R&S          | ESCI                | 101378        | 2016-1-6         | 2017-1-5        |
| Amplifier         | MITEQ        | AMF-6F-260400-40-8P | 1037496       | 2016-9-10        | 2017-9-9        |
| Bilog Antenna     | Sunol        | JB1                 | A062604       | 2016-5-29        | 2017-5-28       |
| Bilog Antenna     | Sunol        | JB1                 | A110204-1     | 2016-7-16        | 2017-7-15       |
| Loop Antenna      | SCHWARZBECK  | HXYZ9170            | 9170-108      | 2016-4-7         | 2017-4-6        |
| Horn-antenna      | SCHWARZBECK  | 9120D               | D:266         | 2016-3-6         | 2017-3-5        |
| Horn-antenna      | SCHWARZBECK  | 9120D               | D:267         | 2015-11-10       | 2016-11-9       |
| Turn Table        | CT           | CT123               | 4165          | N.C.R            | N.C.R           |
| Antenna Tower     | CT           | CTERG23             | 3256          | N.C.R            | N.C.R           |
| Controller        | CT           | CT100               | 95637         | N.C.R            | N.C.R           |
| Test Software     |              |                     | EZ-EMC        |                  |                 |

| Conducted Emission |              |           |               |                  |                 |
|--------------------|--------------|-----------|---------------|------------------|-----------------|
| Name of Equipment  | Manufacturer | Model     | Serial Number | Calibration Date | Calibration Due |
| EMI TEST RECEIVER  | R&S          | ESCI      | 100781        | 2016-3-2         | 2017-3-1        |
| V (V-LISN)         | SCHWARZBECK  | NNLK 8129 | 8129-143      | 2015-11-2        | 2016-11-1       |
| TWO-LINE V-NETWORK | R&S          | ENV216    | 101604        | 2015-11-2        | 2016-11-1       |
| Pulse LIMITER      | R&S          | ESH3-Z2   | 100524        | 2016-1-6         | 2017-1-5        |
| Test Software      |              |           | EZ-EMC        |                  |                 |

**Remark:** The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Expanded Uncertainty (95% CONFIDENCE INTERVAL): K=2

## **5. FACILITIES AND ACCREDITATIONS**

### **5.1.FACILITIES**

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone

Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 2013 and CISPR Publication 22.

### **5.2.EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.



Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### **5.3.LABORATORY ACCREDITATIONS AND LISTING**

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 200581-0 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, 2324E-1 for 10m chamber 10m, 2324E-2 for 10m chamber 3m; the test facilities are listed with USA, Certification and Engineering Bureau, 424105 for 10m chamber 10m, 238958 for 10m chamber 3m.

**5.4. TABLE OF ACCREDITATIONS AND LISTINGS**

| Country | Agency | Scope of Accreditation  | Logo   |
|---------|--------|---|--|
| USA     | A2LA   | 47 CFR FCC Part 15/18 (using ANSI C63.10 :2013); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1 :2000+A2 :2002; EN 55022:2006; EN55022 :1998 +A1 :2001+A2 :2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24 |                   |
| USA     | FCC    | 3/10 meter Sites to perform FCC Part 15/18 measurements   | <br>93105, 90471 |
| Japan   | VCCI   | 3/10 meter Sites and conducted test sites to perform radiated/conducted measurements  | <b>VCCI</b><br>R-1600<br>C-1707<br>G-216   |

*\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*

## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1.SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 6.2.SUPPORT EQUIPMENT

| No. | Device Type | Brand | Model | Series No. | FCC ID |
|-----|-------------|-------|-------|------------|--------|
| 1.  | N/A         |       |       |            |        |

**Remark:**

2. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
3. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


## 7. FCC PART 15.247 REQUIREMENTS

### 7.1.6DB BANDWIDTH

#### LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, and 2400 - 2483.5 MHz bands, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

#### Test Configuration



#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW set as 100kHz., The VBW set as 3 times the RBW, set detector as Peak, the sweep time is auto.

#### TEST RESULTS

No non-compliance noted

##### Test Data

##### IEEE 802.11b mode

| Channel | Frequency (MHz) | Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------|-------------|--------|
| Low     | 2412            | 9.904           | >500        | PASS   |
| Mid     | 2437            | 9.952           |             | PASS   |
| High    | 2462            | 9.856           |             | PASS   |

##### IEEE 802.11g mode

| Channel | Frequency (MHz) | Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------|-------------|--------|
| Low     | 2412            | 16.538          | >500        | PASS   |
| Mid     | 2437            | 16.538          |             | PASS   |
| High    | 2462            | 16.538          |             | PASS   |

##### IEEE 802.11n HT20 mode

| Channel | Frequency (MHz) | Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------|-------------|--------|
| Low     | 2412            | 17.644          | >500        | PASS   |
| Mid     | 2437            | 17.692          |             | PASS   |
| High    | 2462            | 17.692          |             | PASS   |


##### IEEE 802.11n HT40 mode

| Channel | Frequency (MHz) | Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------|-------------|--------|
| Low     | 2422            | 36.538          | >500        | PASS   |
| Mid     | 2437            | 36.538          |             | PASS   |
| High    | 2452            | 36.538          |             | PASS   |


**Test Plot**

**IEEE 802.11b MODE**

**6dB Bandwidth (CH Low)**

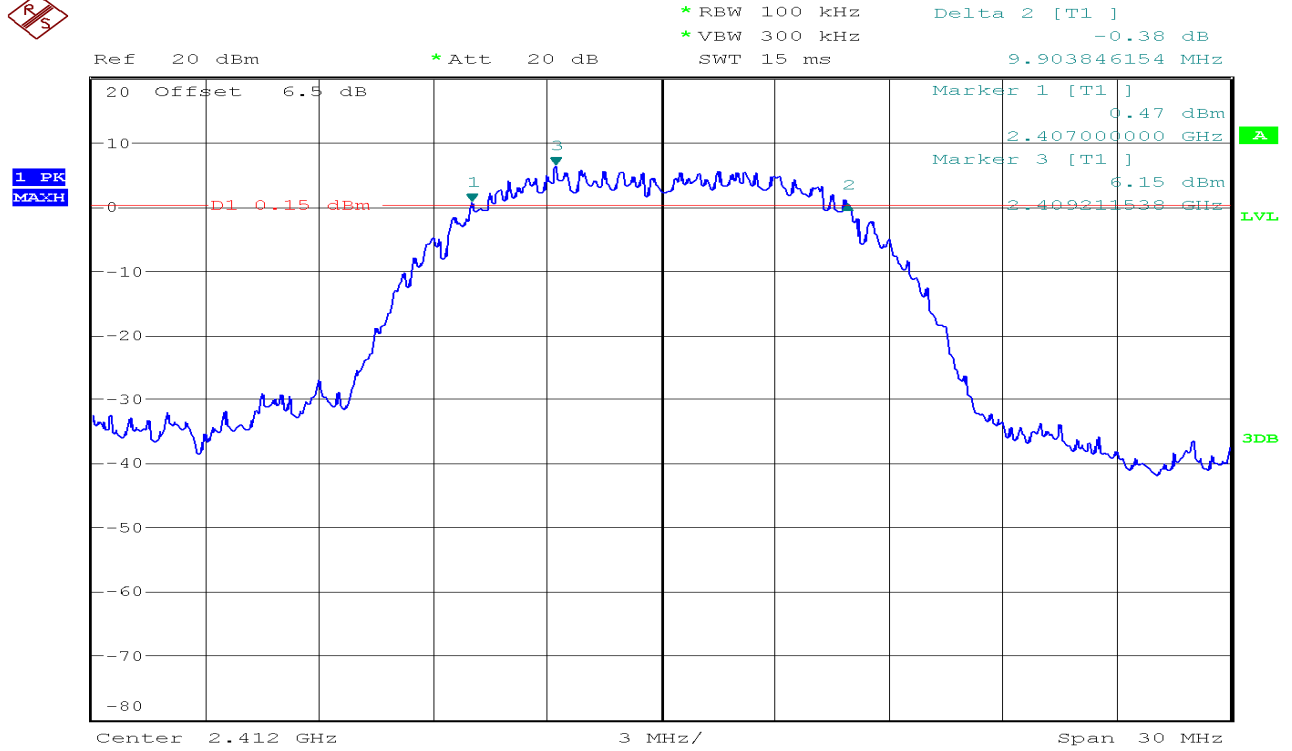


**6dB Bandwidth (CH Mid)**

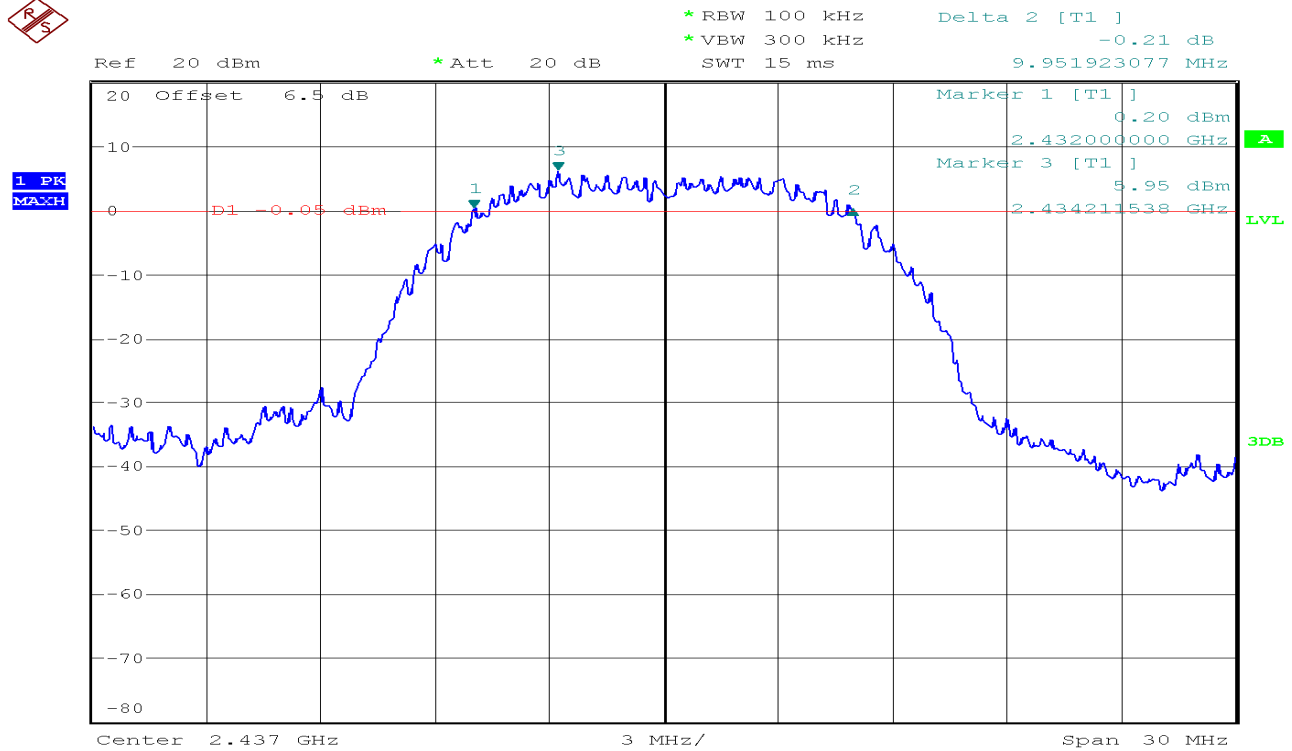




**6dB Bandwidth (CH High)**

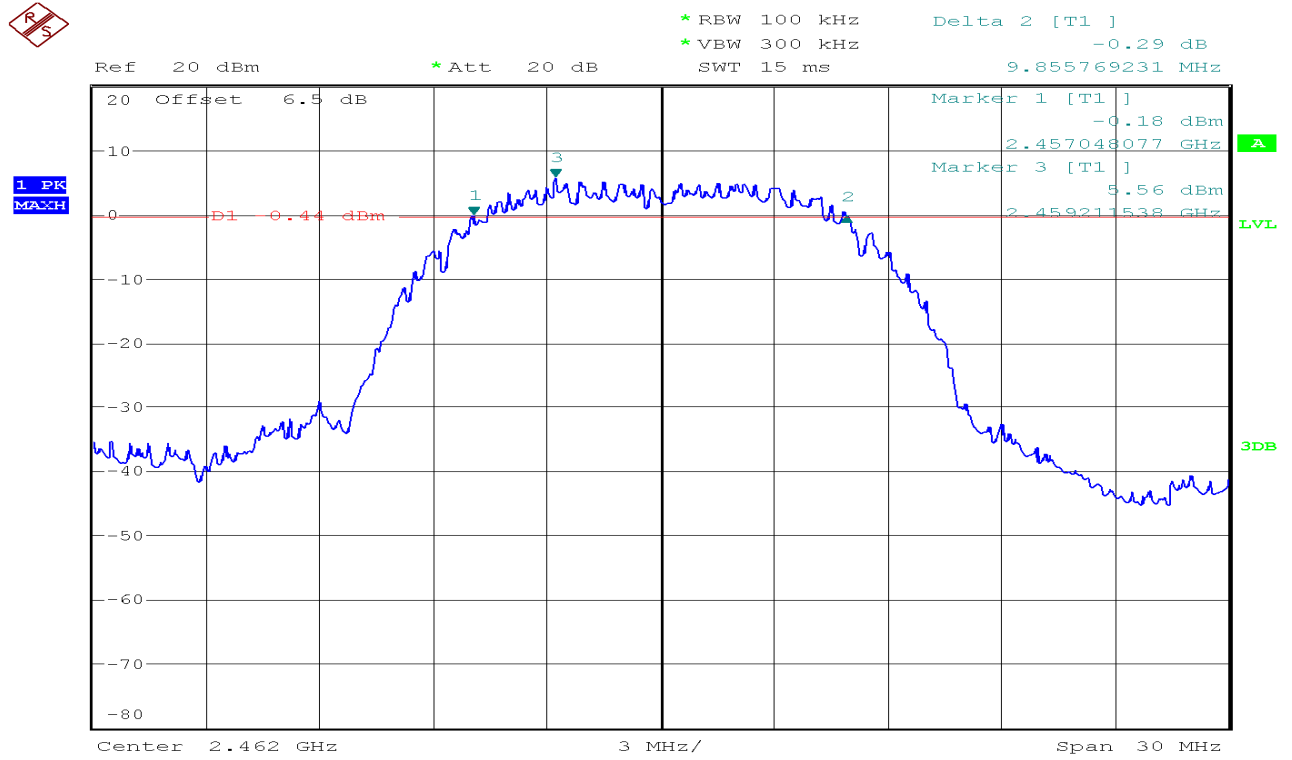

**IEEE 802.11g MODE**

**6dB Bandwidth (CH Low)**

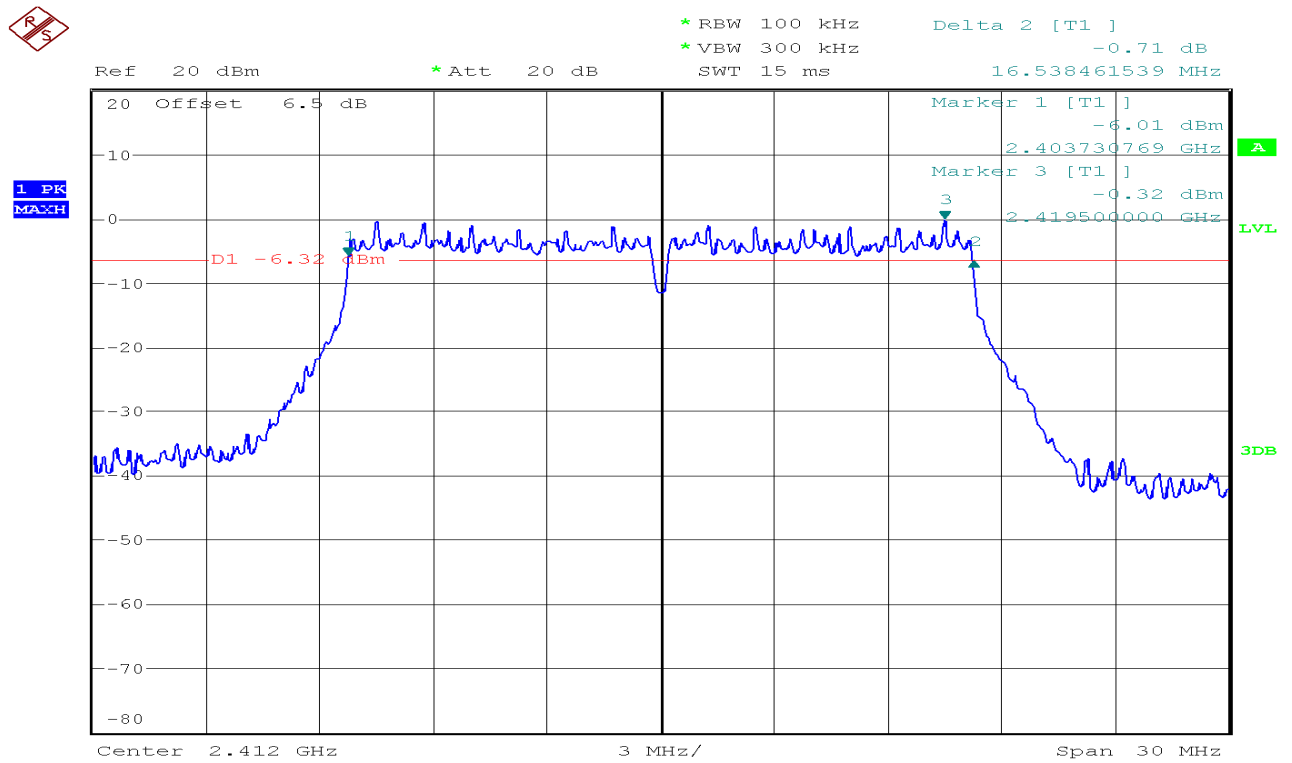


**6dB Bandwidth (CH Mid)**



Ref 20 dBm      \*Att 20 dB      \*RBW 100 kHz      Delta 2 [T1 ]      0.25 dB  
 \*VBW 300 kHz      SWT 15 ms      16.538461538 MHz

1 PK  
MAXH

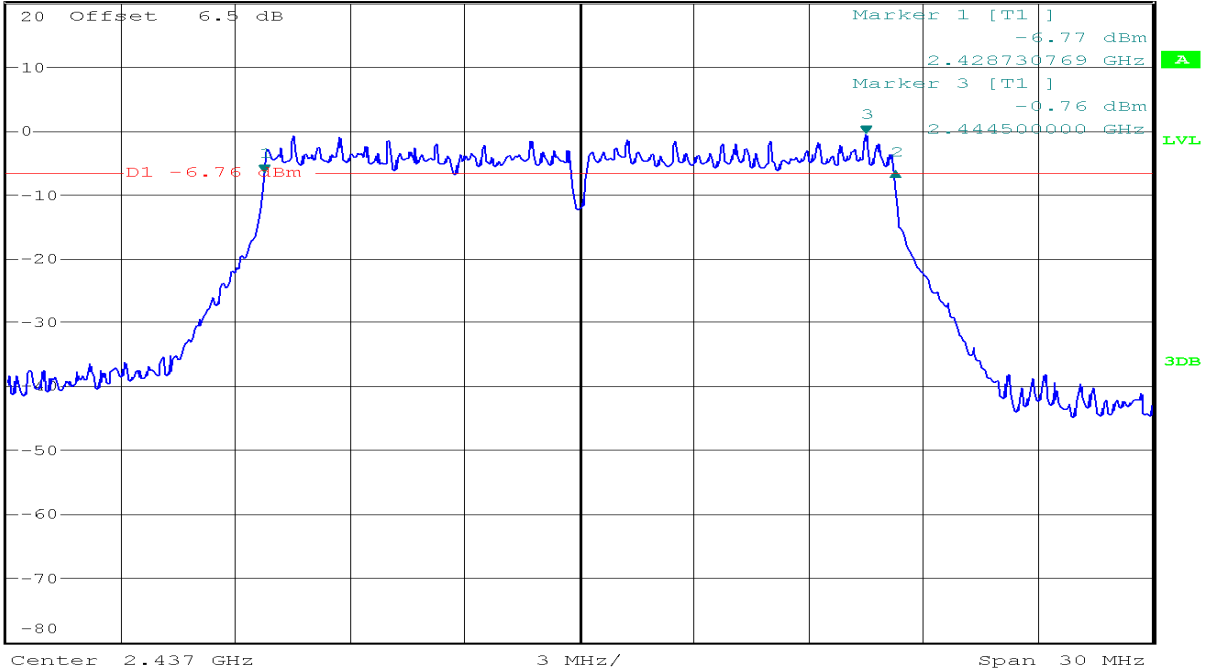


**6dB Bandwidth (CH High)**




Ref 20 dBm      \*Att 20 dB      \*RBW 100 kHz      Delta 2 [T1 ]      0.03 dB  
 \*VBW 300 kHz      SWT 15 ms      16.538461538 MHz


1 PK  
MAXH

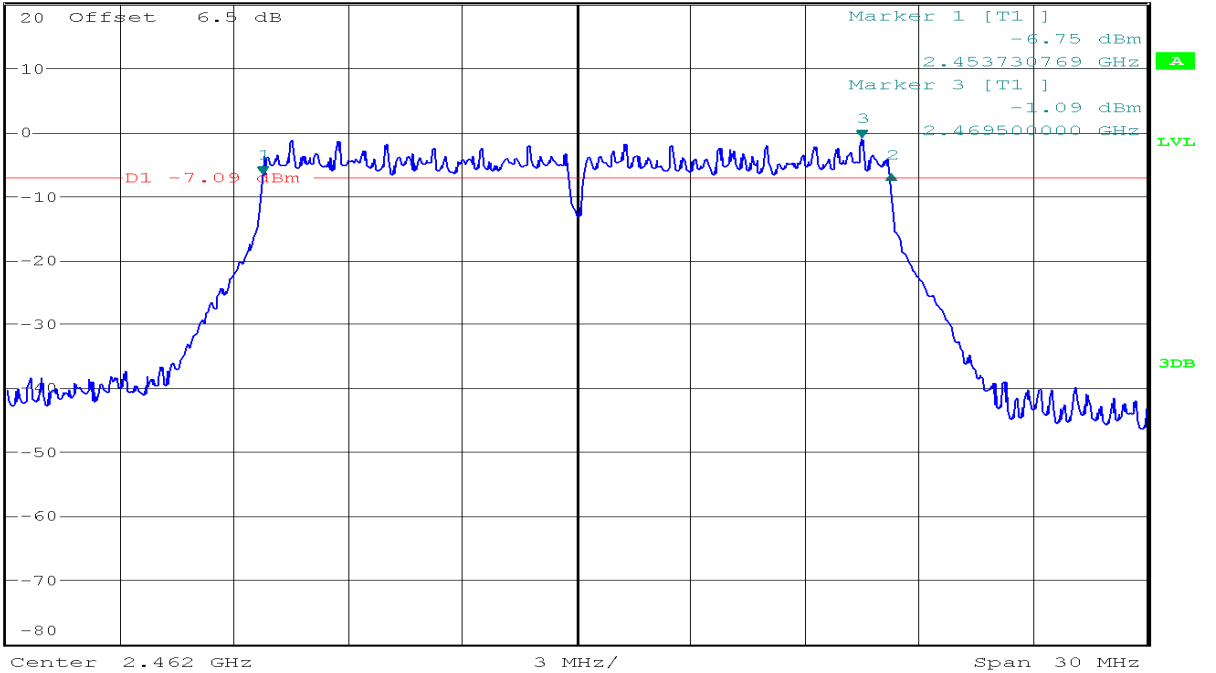

**IEEE 802.11n HT20 mode**  
**6dB Bandwidth (CH Low)**

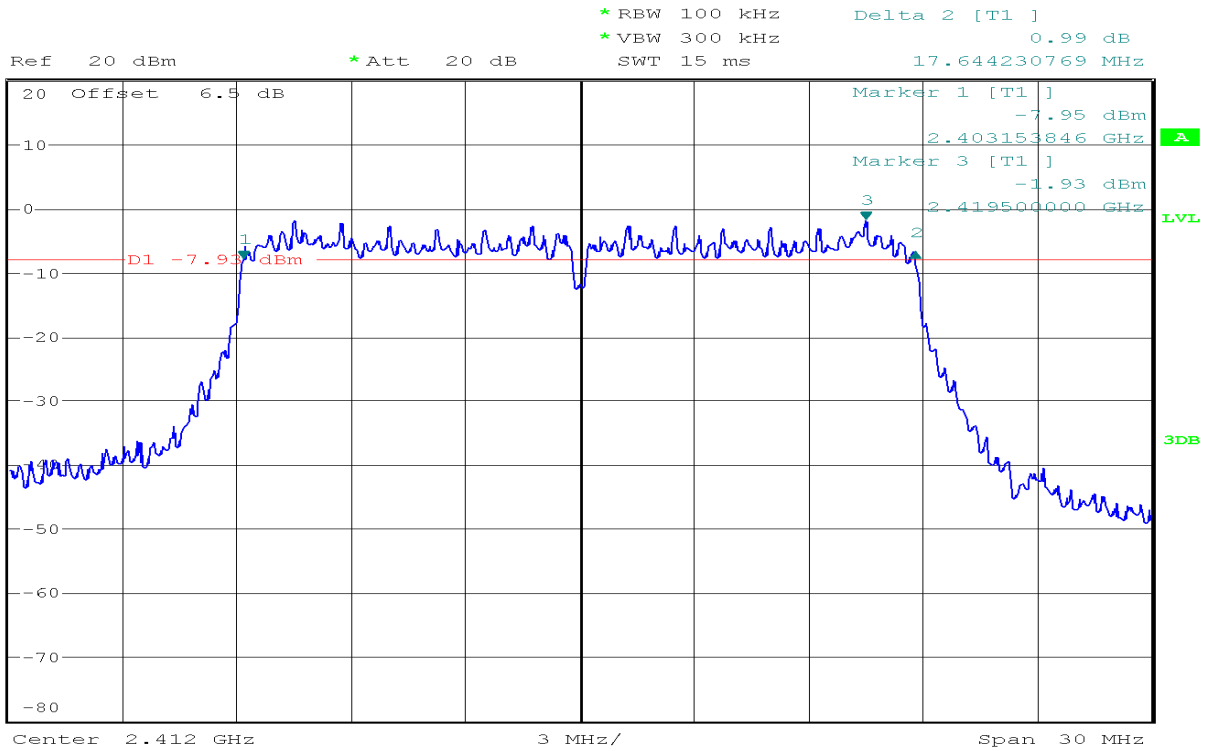


**6dB Bandwidth (CH Mid)**

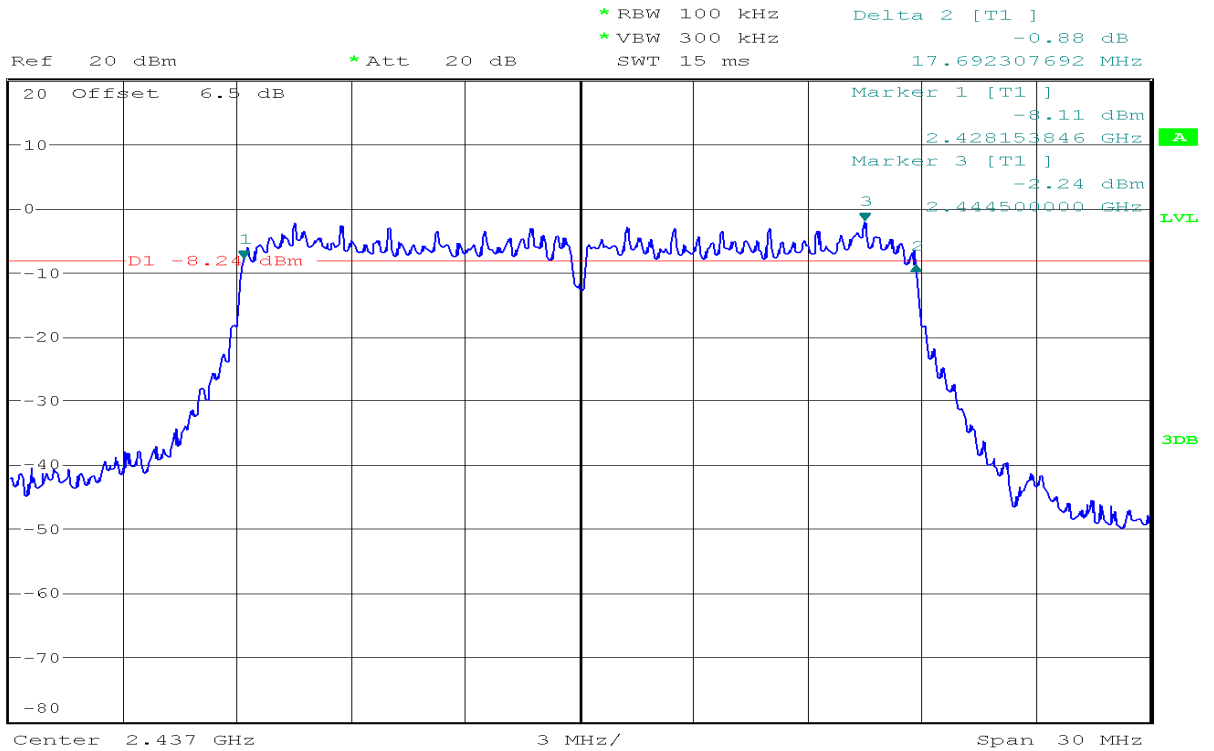

**6dB Bandwidth (CH High)**



1 PK  
MAXH

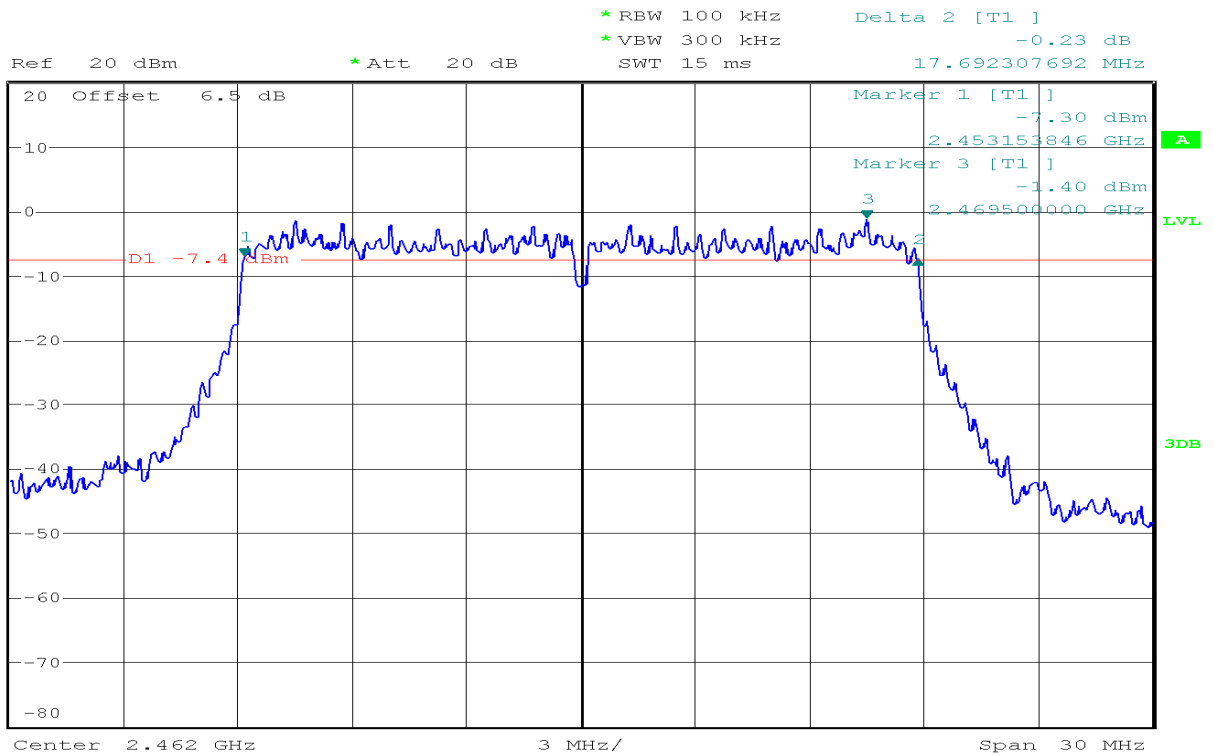


**IEEE 802.11n HT40 mode**

**6dB Bandwidth (CH Low)**




1 PK  
MAXH

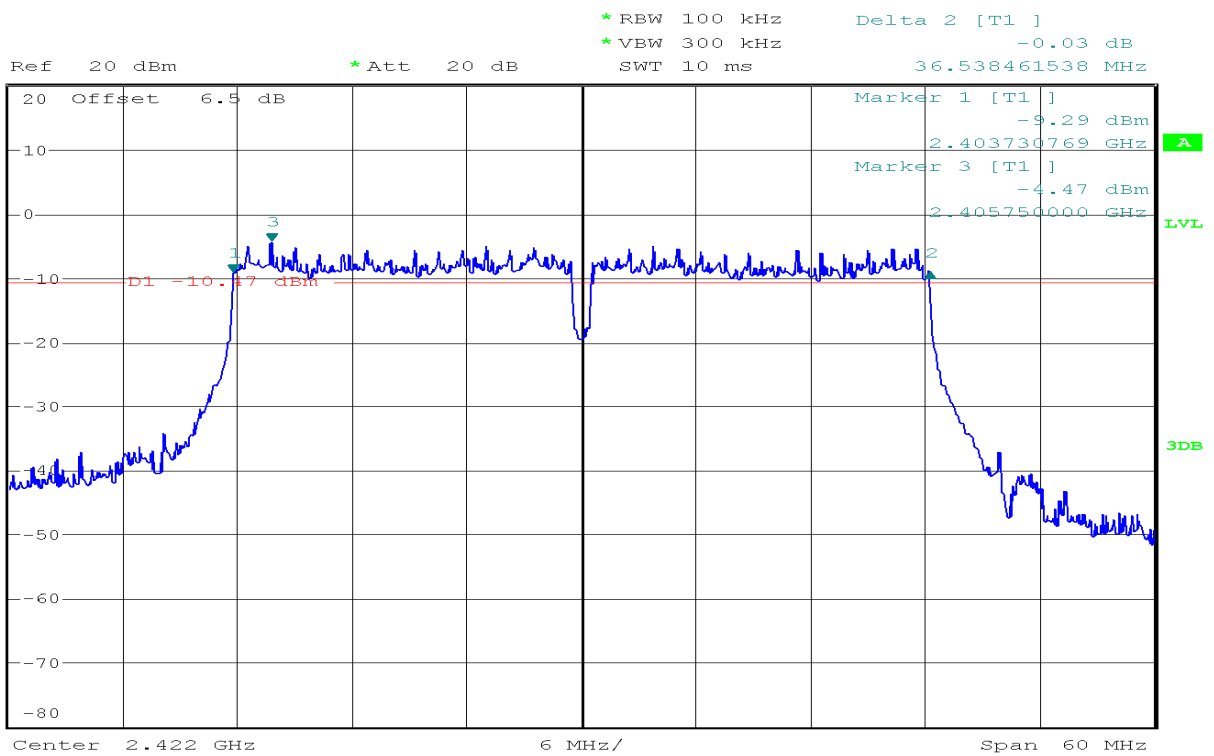

**6dB Bandwidth (CH Mid)**




1 PK  
MAXH

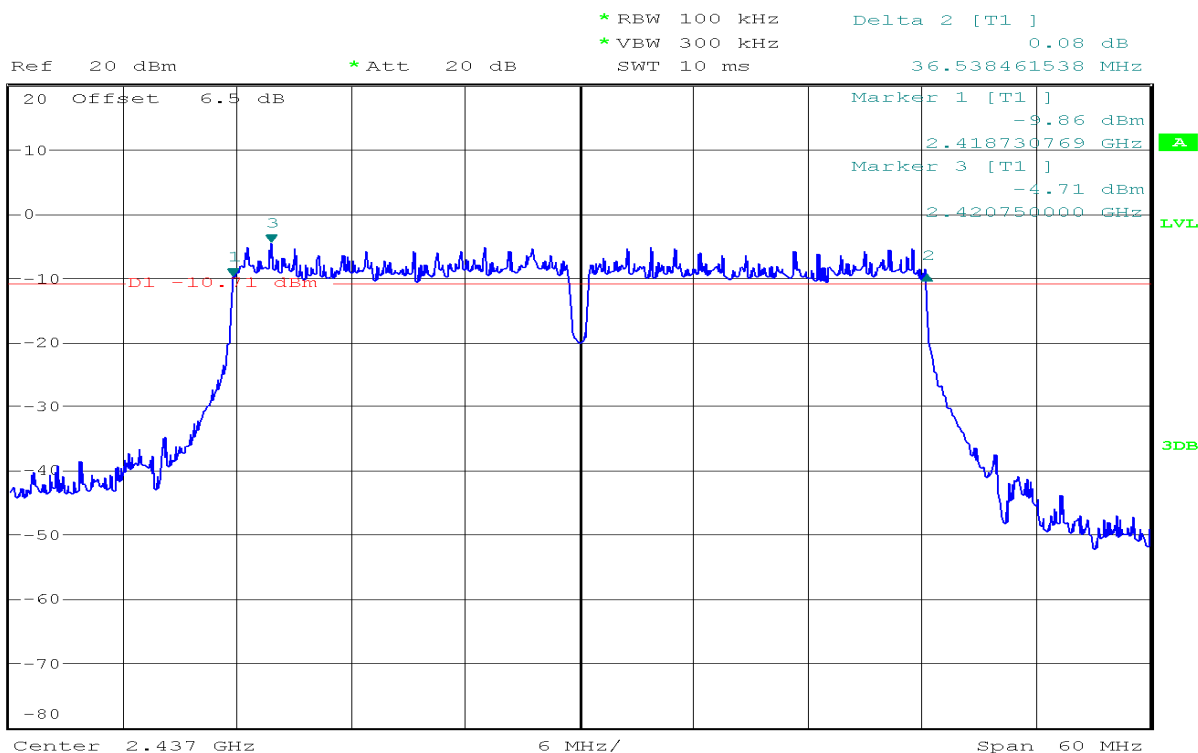

**6dB Bandwidth (CH High)**



1 PK  
MAXH

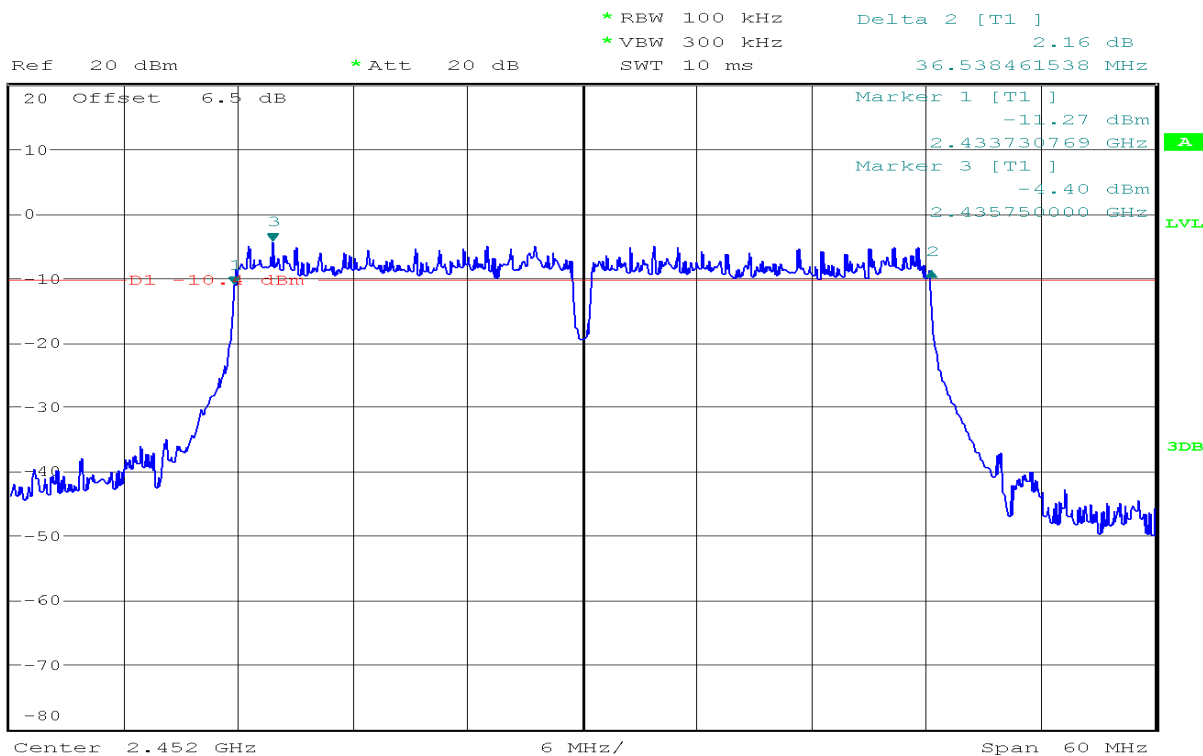


## 7.2. PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, and 2400-2483.5 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Configuration



### TEST PROCEDURE

1. The EUT transmitter output is connected to the Power meter.  
The Power meter is set to the peak power detection.
2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas.
3. Guidance v03r05. 9.1.2 PKPM1 Peak power meter method.

### TEST RESULTS

*No non-compliance noted*

**Test Data****Test mode: IEEE 802.11b mode**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------|-------------|
| Low     | 2412            | 18.97              | 30.00       |
| Mid     | 2437            | 18.63              | 30.00       |
| High    | 2462            | 18.28              | 30.00       |

**Test mode: IEEE 802.11g mode**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------|-------------|
| Low     | 2412            | 17.40              | 30.00       |
| Mid     | 2437            | 17.52              | 30.00       |
| High    | 2462            | 17.13              | 30.00       |

**Test mode: IEEE 802.11n HT20 mode**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------|-------------|
| Low     | 2412            | 16.79              | 30.00       |
| Mid     | 2437            | 16.43              | 30.00       |
| High    | 2462            | 16.83              | 30.00       |

**Test mode: IEEE 802.11n HT40 mode**


| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------|-------------|
| Low     | 2422            | 16.50              | 30.00       |
| Mid     | 2437            | 16.24              | 30.00       |
| High    | 2452            | 16.61              | 30.00       |

### 7.3. PEAK POWER SPECTRAL DENSITY

#### LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 1.5 times the DTS bandwidth, Sweep = auto
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

#### TEST RESULTS

*No non-compliance noted*



**Test Data****Test mode: IEEE 802.11b mode**

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------|-------------|--------|
| Low     | 2412            | -7.13      | 8.00        | PASS   |
| Mid     | 2437            | -7.56      | 8.00        | PASS   |
| High    | 2462            | -7.95      | 8.00        | PASS   |

**Test mode: IEEE 802.11g mode**

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------|-------------|--------|
| Low     | 2412            | -15.60     | 8.00        | PASS   |
| Mid     | 2437            | -15.92     | 8.00        | PASS   |
| High    | 2462            | -16.97     | 8.00        | PASS   |

**Test mode: IEEE 802.11n HT20 mode**

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------|-------------|--------|
| Low     | 2412            | -17.44     | 8.00        | PASS   |
| Mid     | 2437            | -18.07     | 8.00        | PASS   |
| High    | 2462            | -17.30     | 8.00        | PASS   |

**Test mode: IEEE 802.11n HT40 mode**

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------|-------------|--------|
| Low     | 2422            | -21.78     | 8.00        | PASS   |
| Mid     | 2437            | -22.29     | 8.00        | PASS   |
| High    | 2452            | -22.22     | 8.00        | PASS   |


**Test Plot**

**IEEE 802.11b mode**

**PPSD (CH Low)**




1 PK  
MAXH

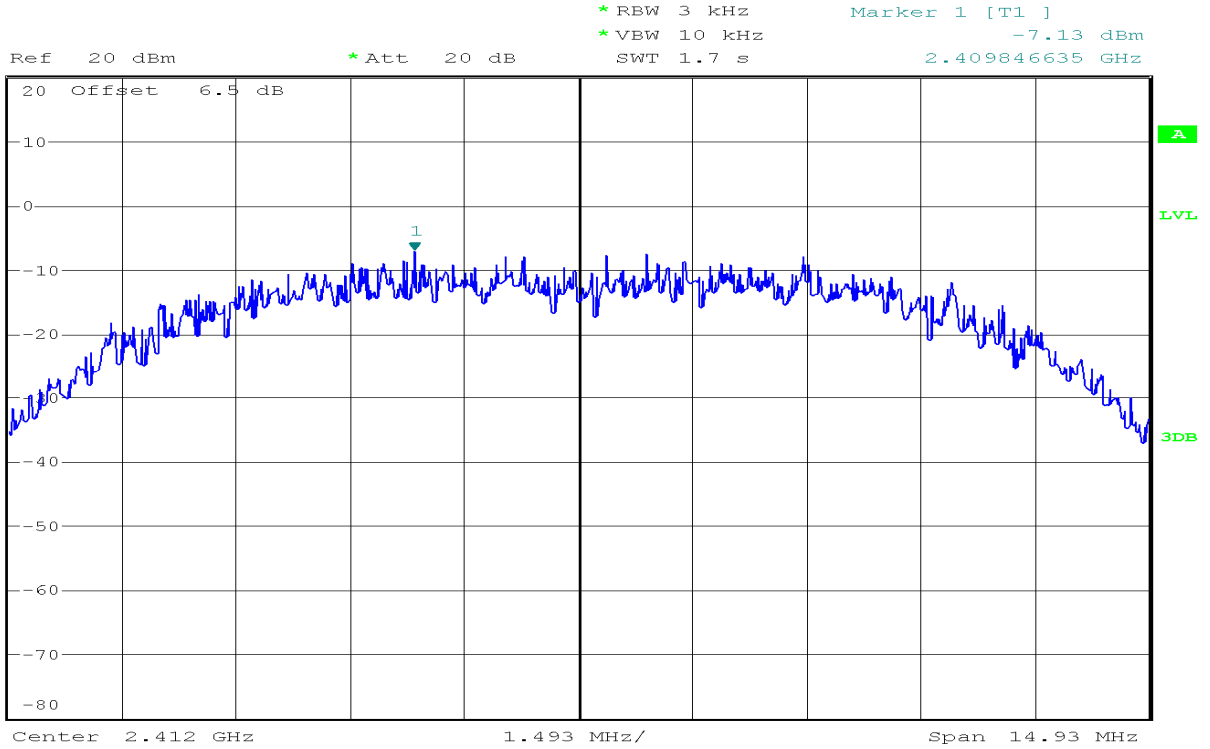


**PPSD(CH Mid)**



1 PK  
MAXH

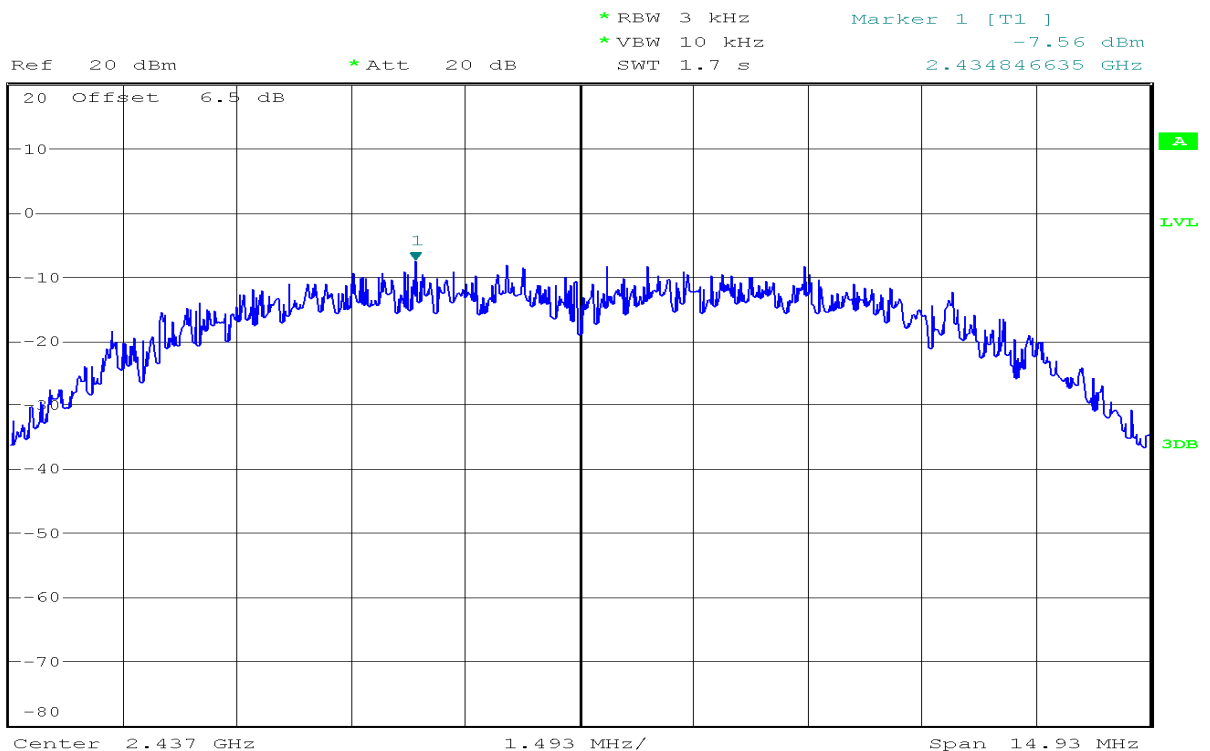


**PPSD (CH High)**

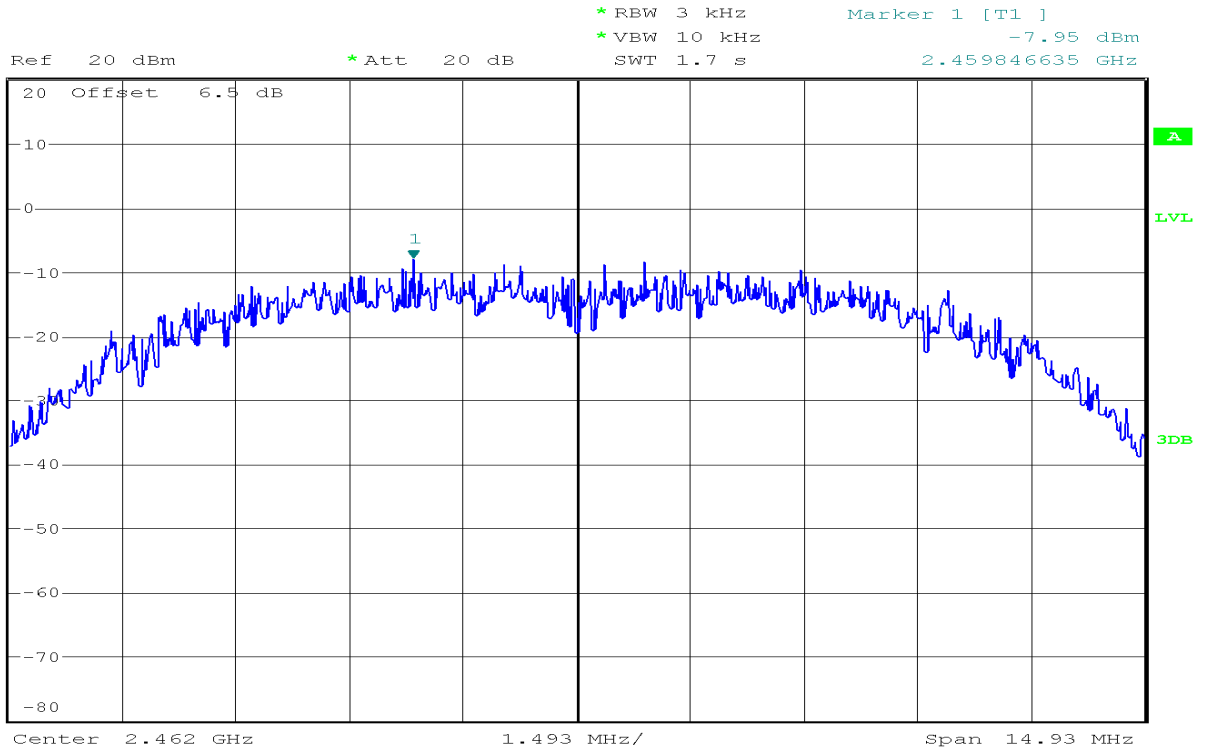

**IEEE 802.11g mode**


**PPSD (CH Low)**

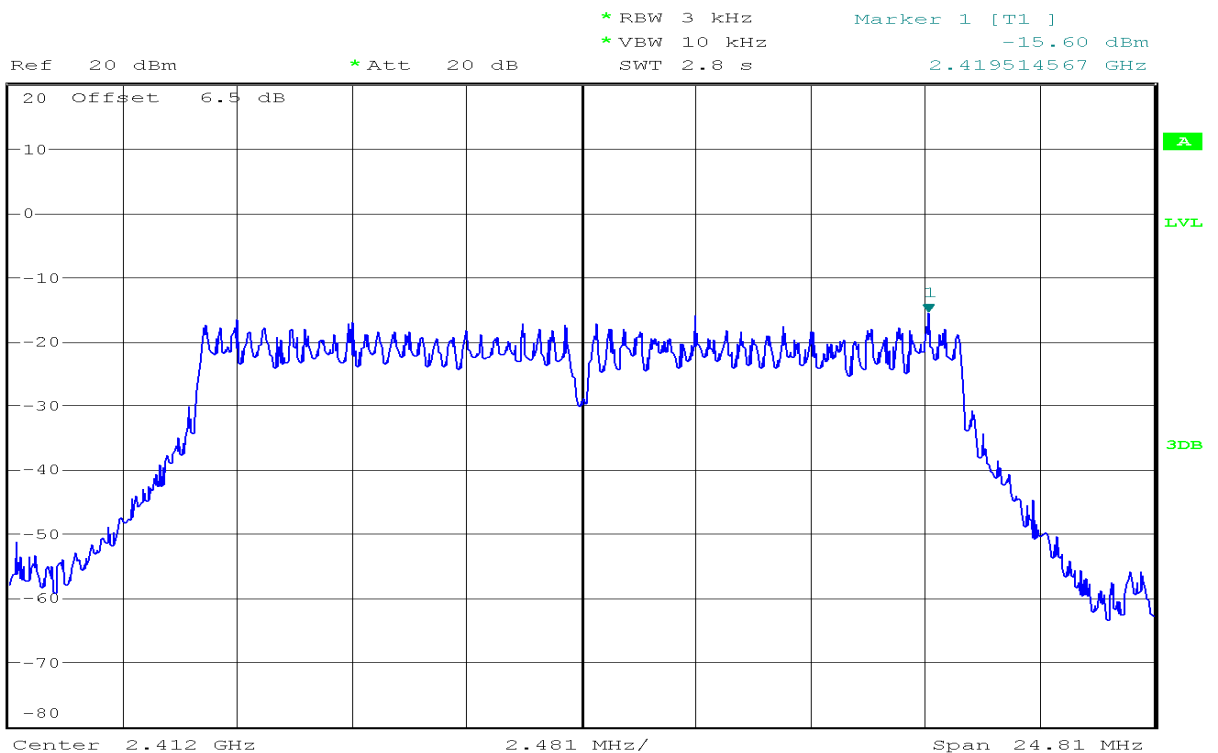

**PPSD (CH Mid)**




\* RBW 3 kHz  
 \* VBW 10 kHz  
 SWT 2.8 s  
 Marker 1 [T1 ]  
 -15.92 dBm  
 2.444514567 GHz

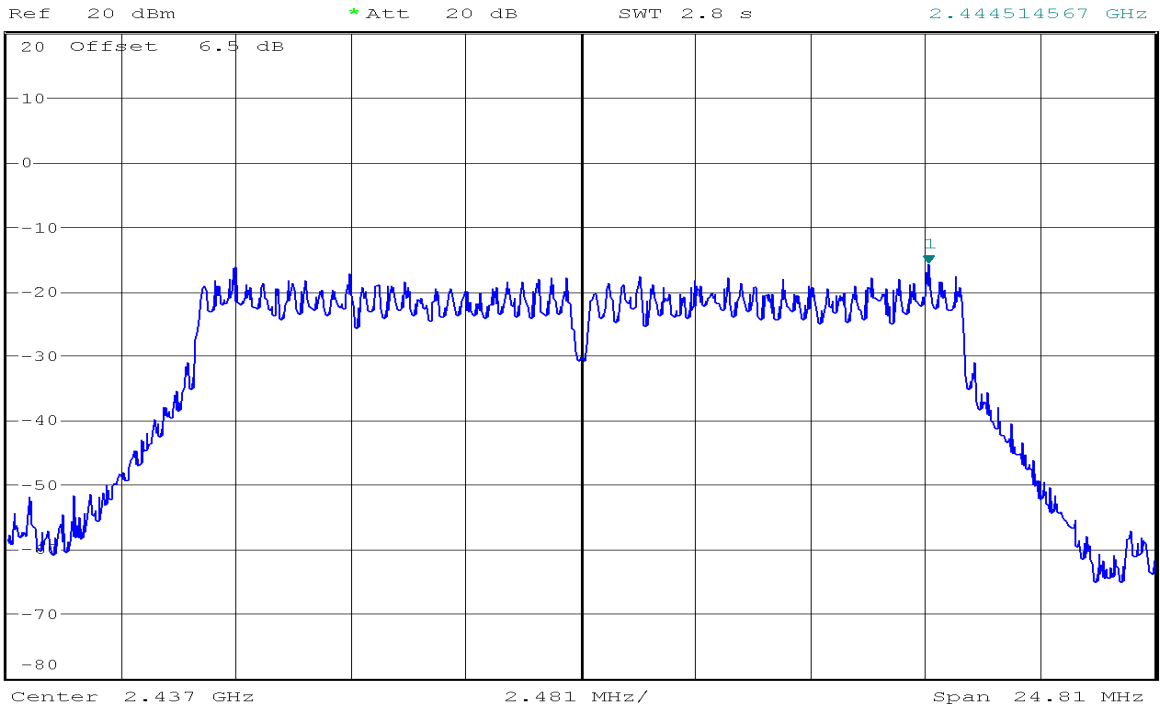

**PPSD (CH High)**




\* RBW 3 kHz  
 \* VBW 10 kHz  
 SWT 2.8 s  
 Marker 1 [T1 ]  
 -16.97 dBm  
 2.469474808 GHz

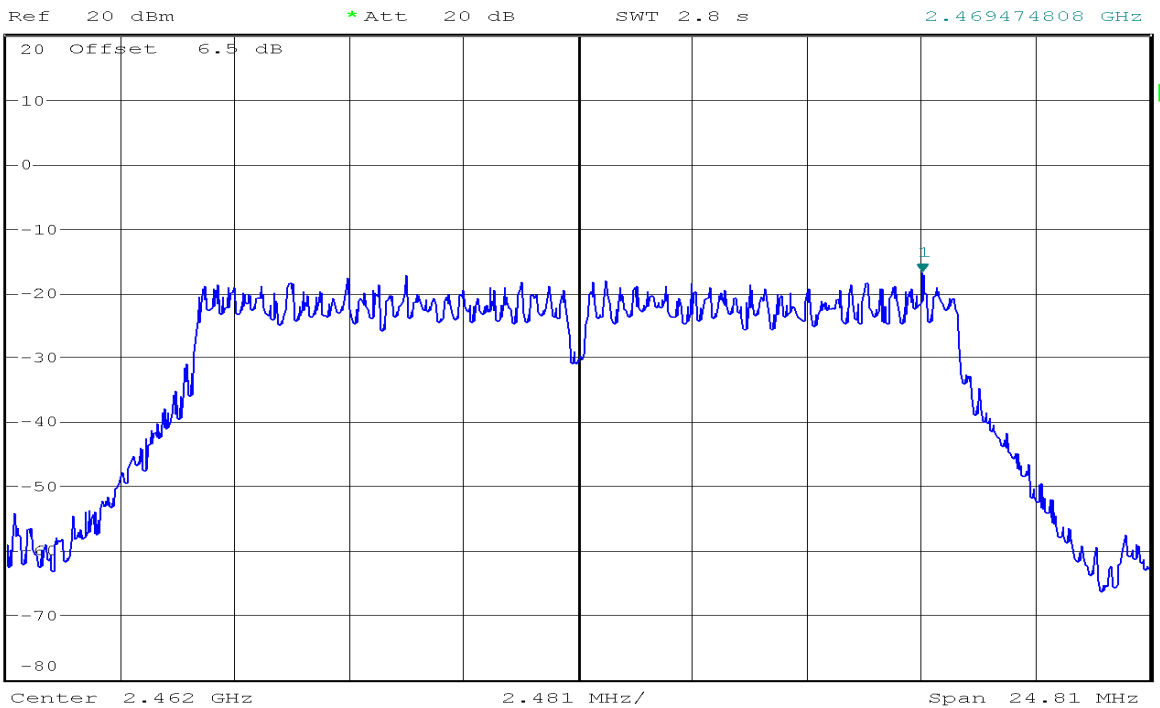


IEEE 802.11n HT20 mode

PPSD (CH Low)

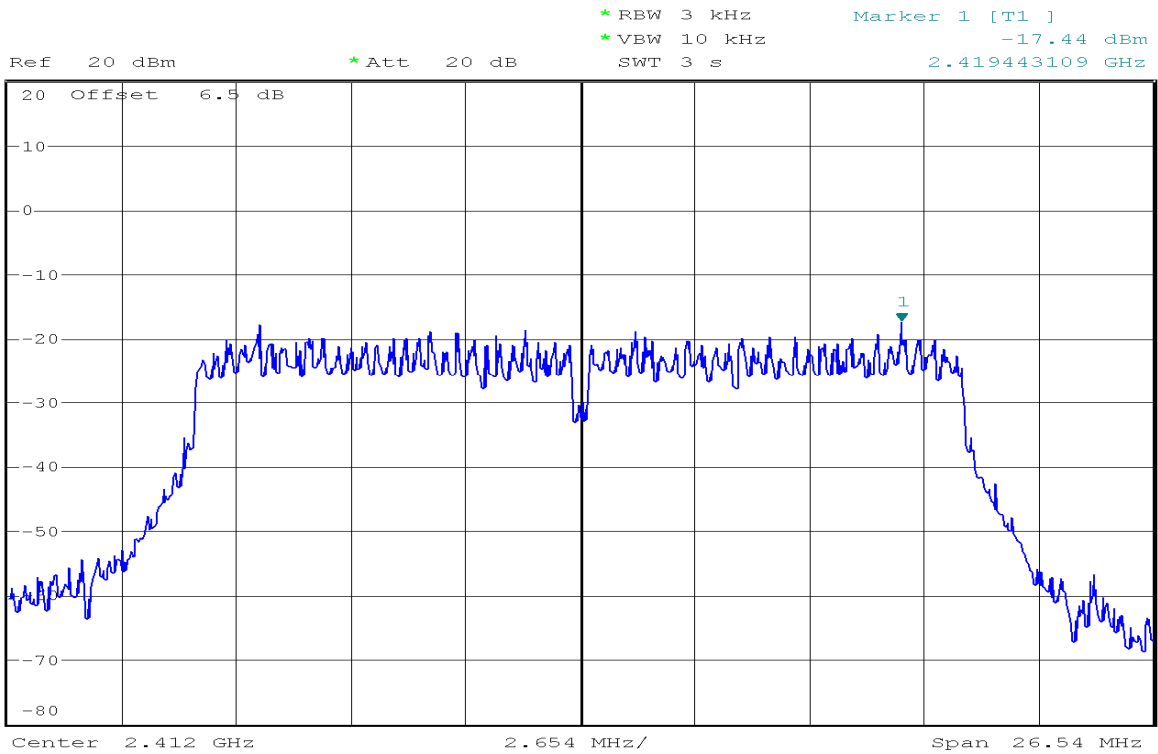

PPSD (CH Mid)

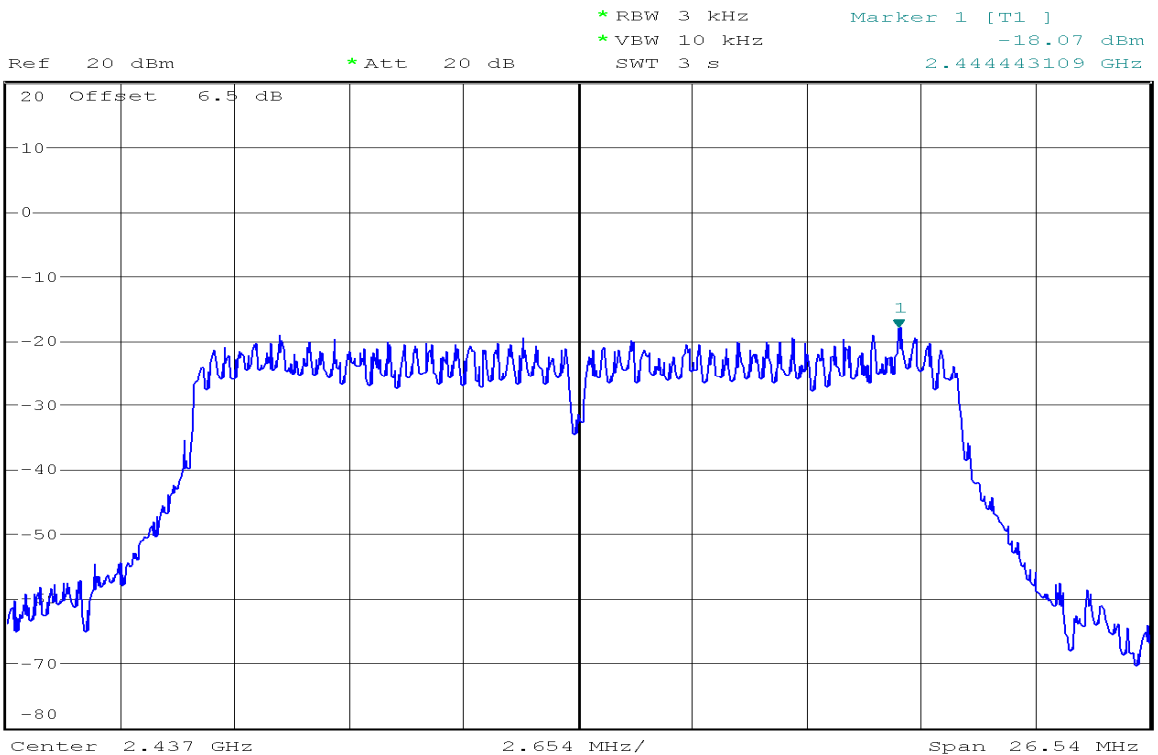


**PPSD (CH High)**



Ref 20 dBm      \*Att 20 dB      \*RBW 3 kHz      Marker 1 [T1 ]  
 \*VBW 10 kHz      -17.30 dBm  
 SWT 3 s      2.465742821 GHz

1 PK  
 MAXH

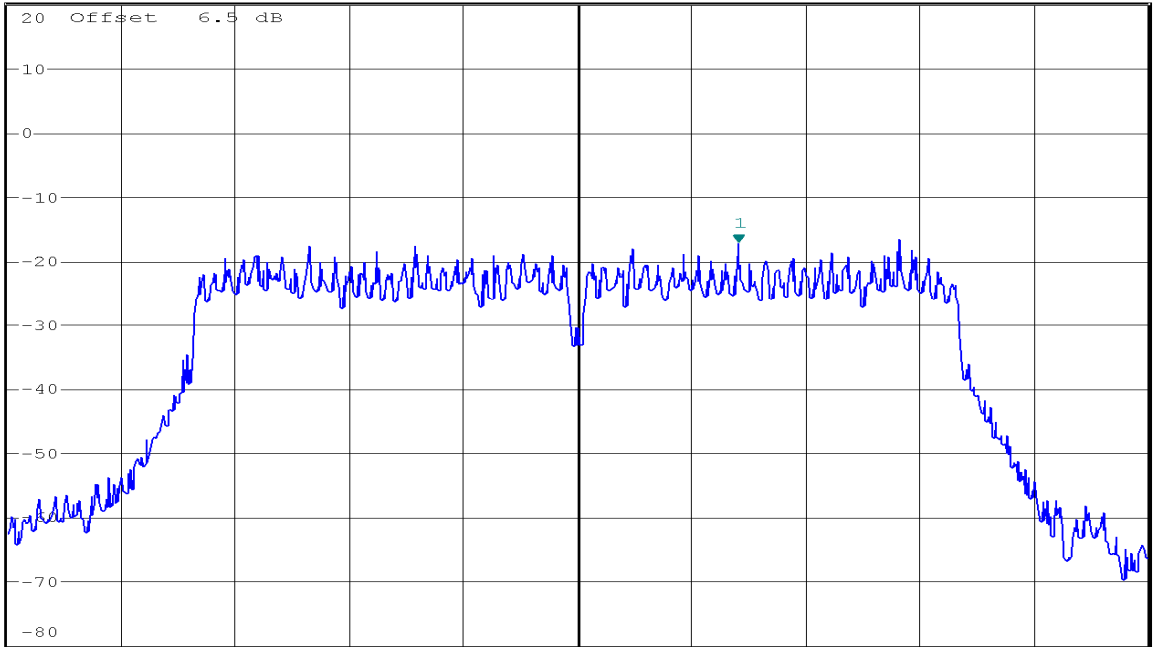


**IEEE 802.11n HT40 mode**

**PPSD (CH Low)**




Ref 20 dBm      \*Att 20 dB      \*RBW 3 kHz      Marker 1 [T1 ]  
 \*VBW 10 kHz      -21.78 dBm  
 SWT 6.2 s      2.416993317 GHz


1 PK  
 MAXH

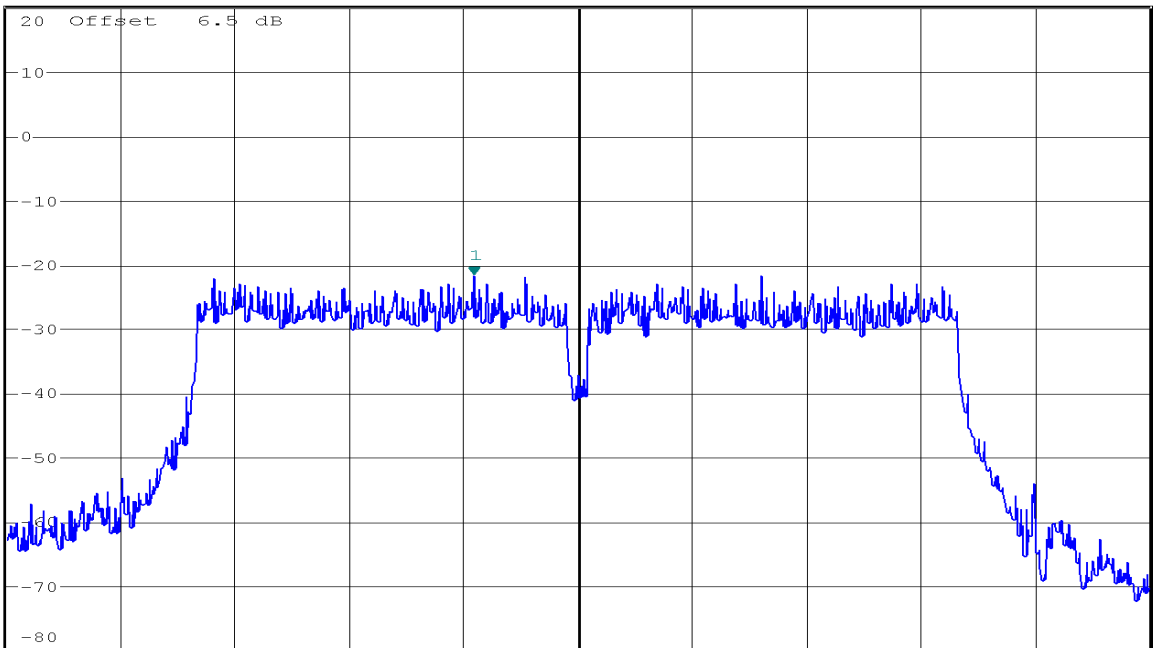

PPSD (CH Mid)

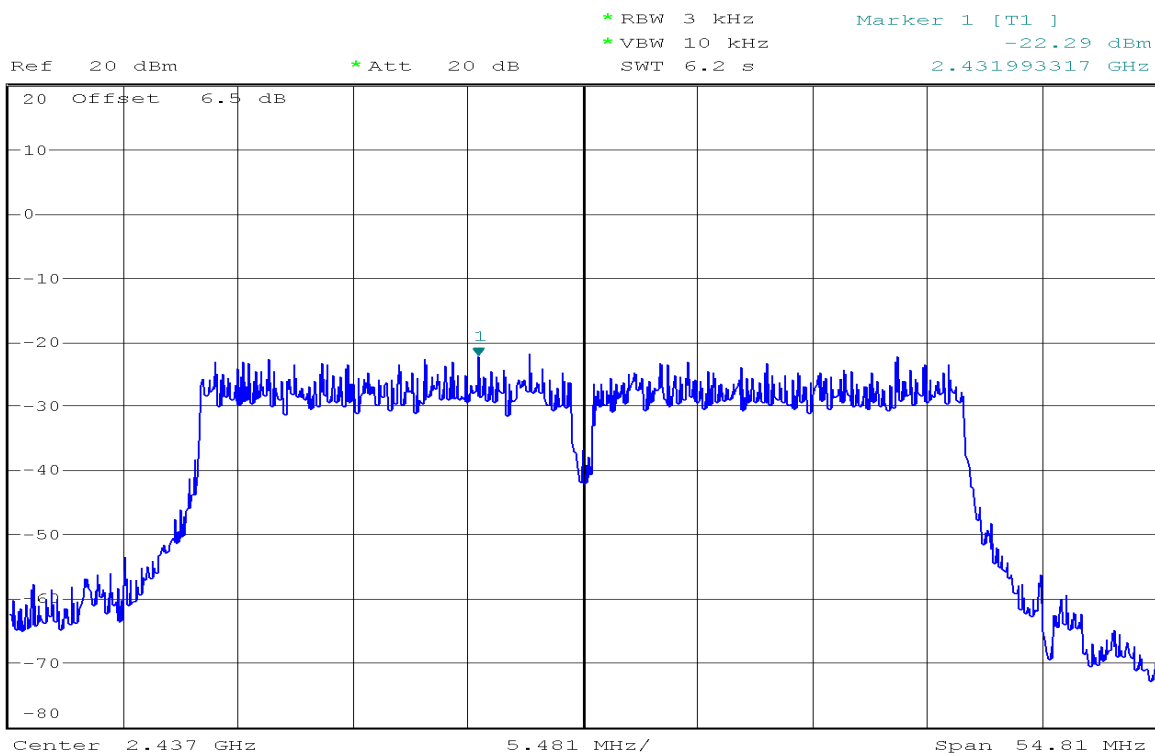

PPSD (CH High)

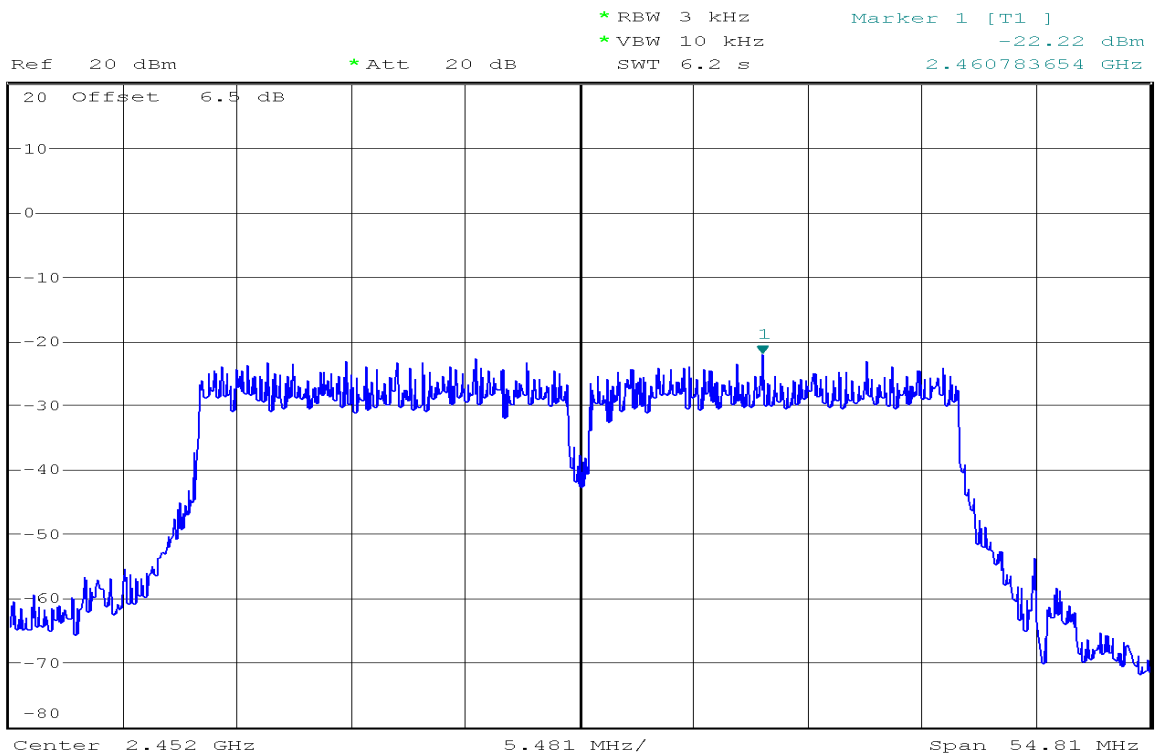


## **7.4.SPURIOUS EMISSIONS**

### **Conducted Measurement**

#### **LIMIT**

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### **Test Configuration**



#### **TEST PROCEDURE**

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 40GHz range with the transmitter set to the lowest, middle, and highest channels.

#### **TEST RESULTS**

*No non-compliance noted*



#### **Test Plot**





**OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT**

**IEEE 802.11b mode**

**CH Low**

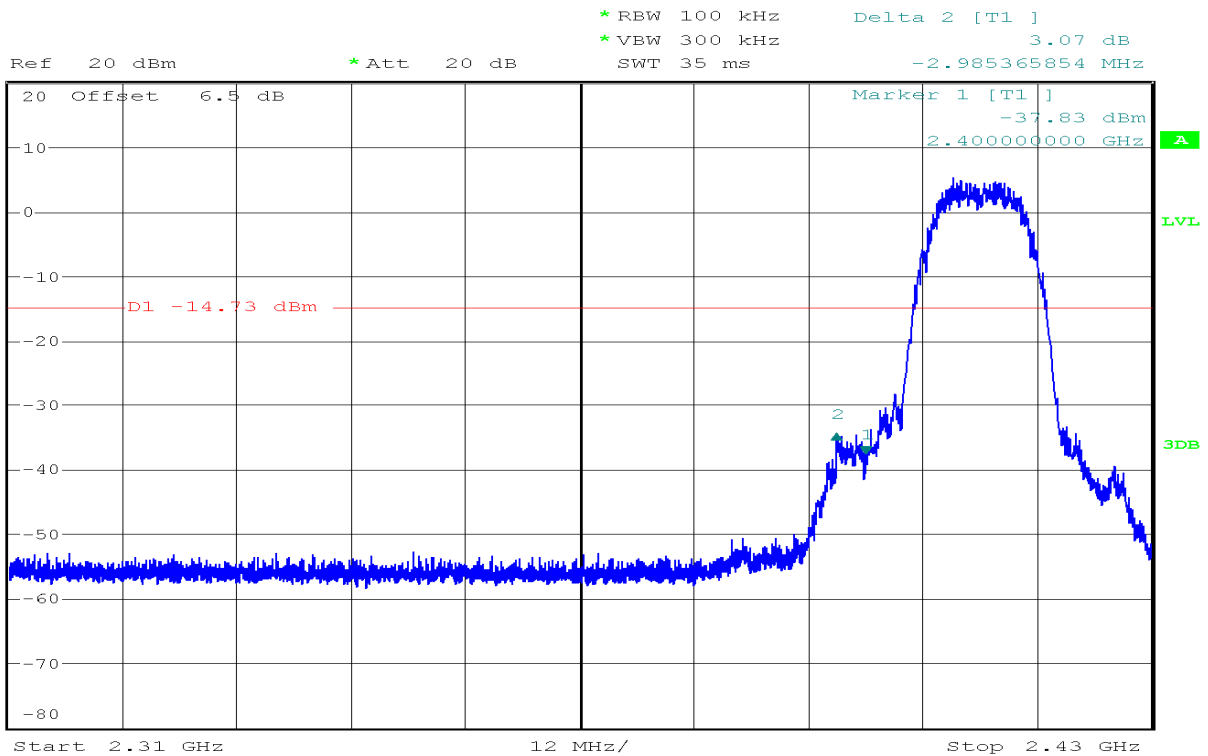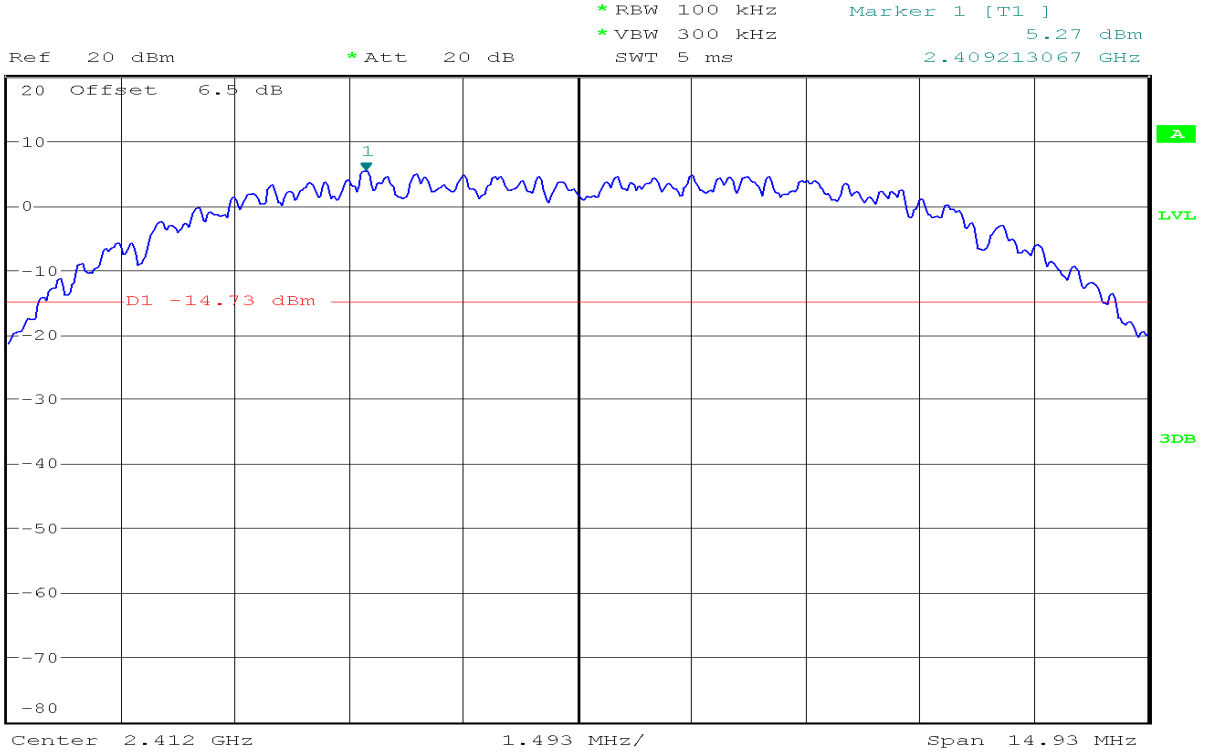


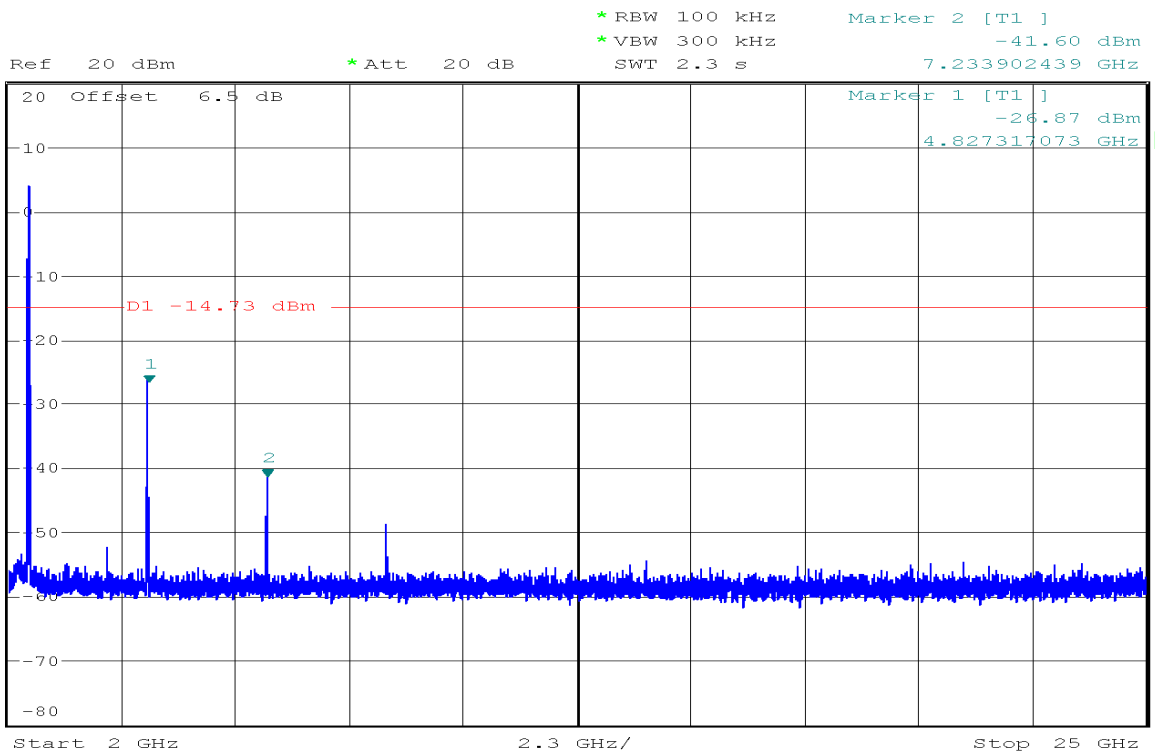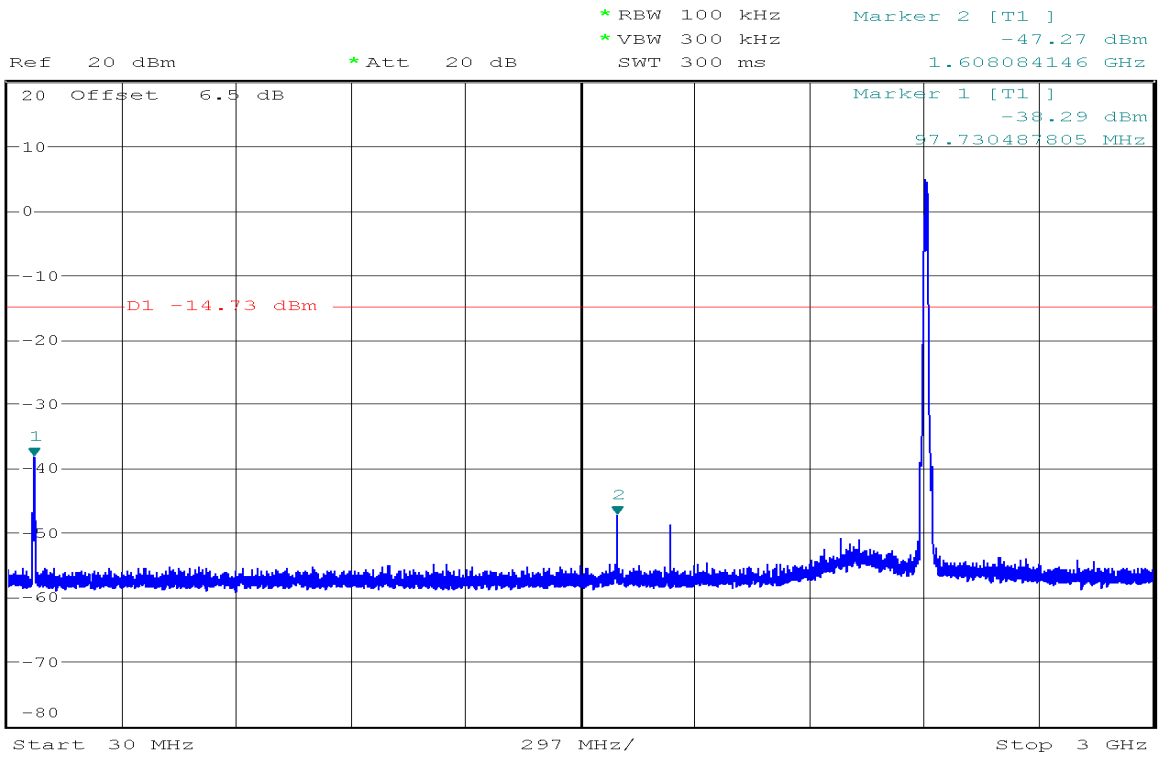


CH Mid



Ref 20 dBm \*Att 20 dB RBW 100 kHz Marker 1 [T1] 4.81 dBm  
 \*VBW 300 kHz 2.434213067 GHz  
 SWT 5 ms

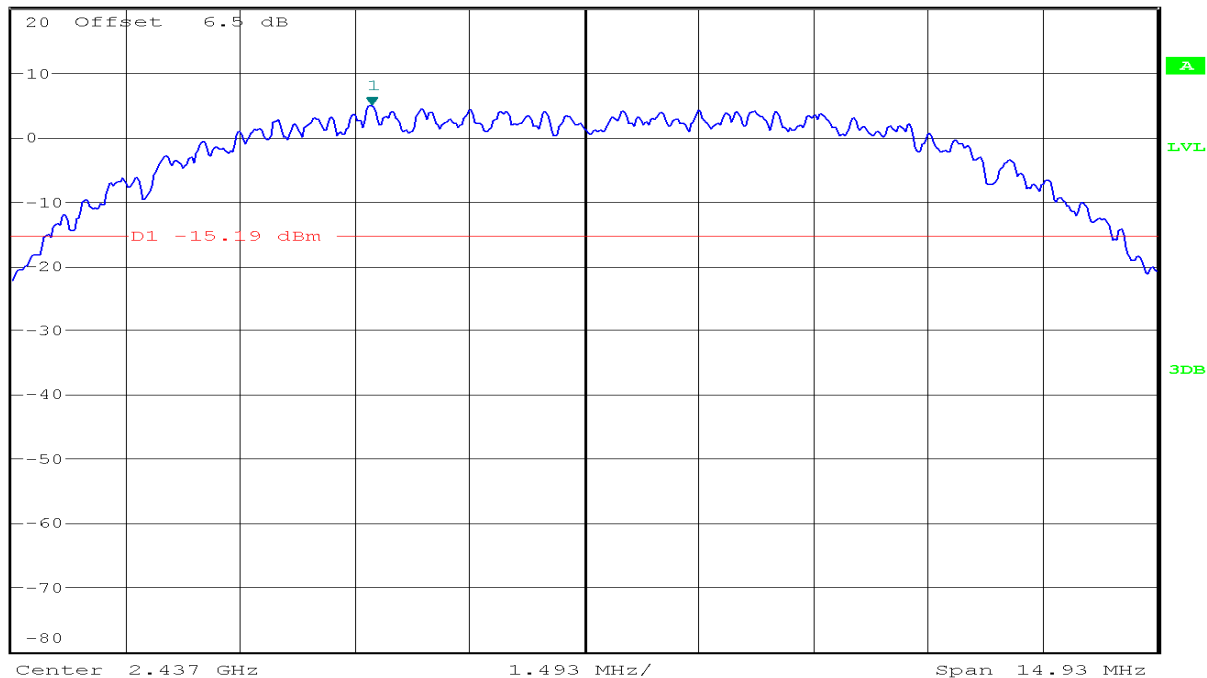


Ref 20 dBm \*Att 20 dB RBW 100 kHz Marker 2 [T1] -52.54 dBm  
 \*VBW 300 kHz 1.624745122 GHz  
 SWT 300 ms

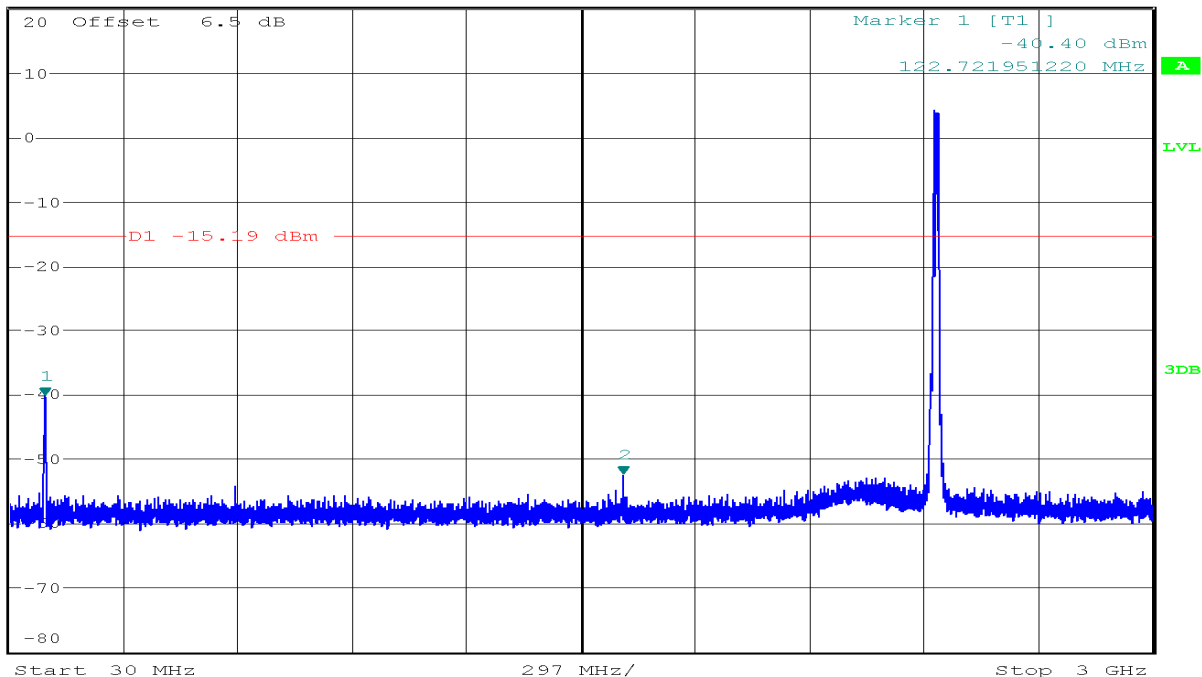




\* RBW 100 kHz      Marker 2 [T1 ]  
 \* VBW 300 kHz      -41.10 dBm  
 SWT 2.3 s      7.309634146 GHz


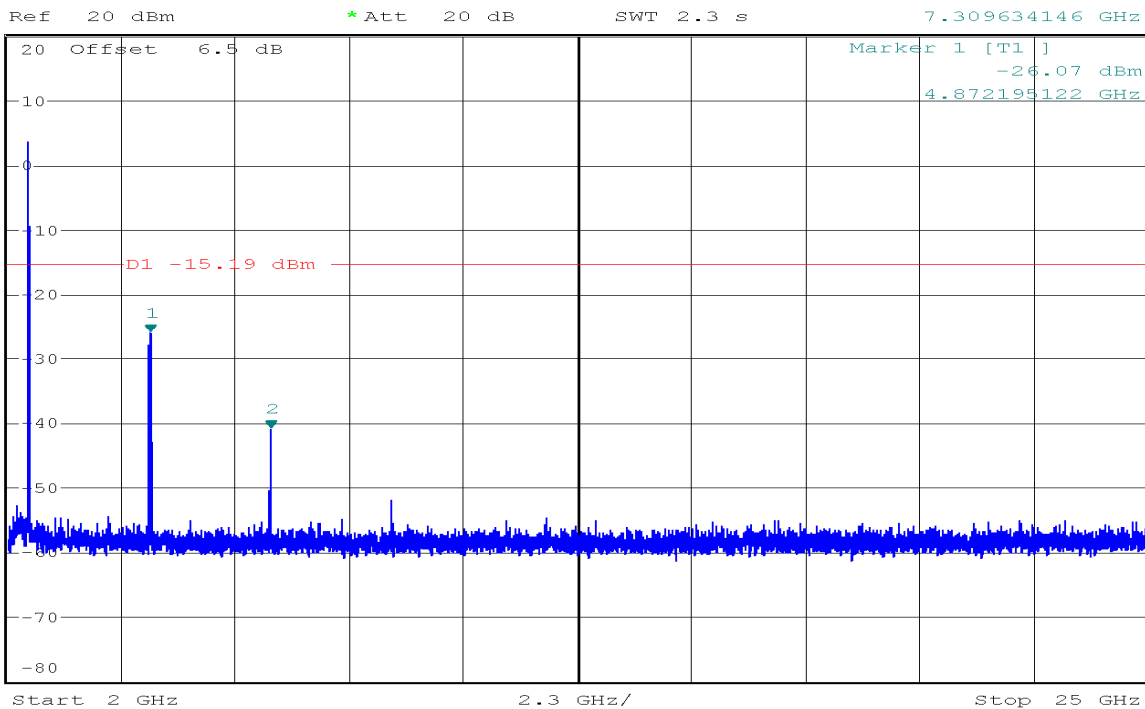


**CH High**



\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      4.27 dBm  
 SWT 5 ms      2.459213067 GHz

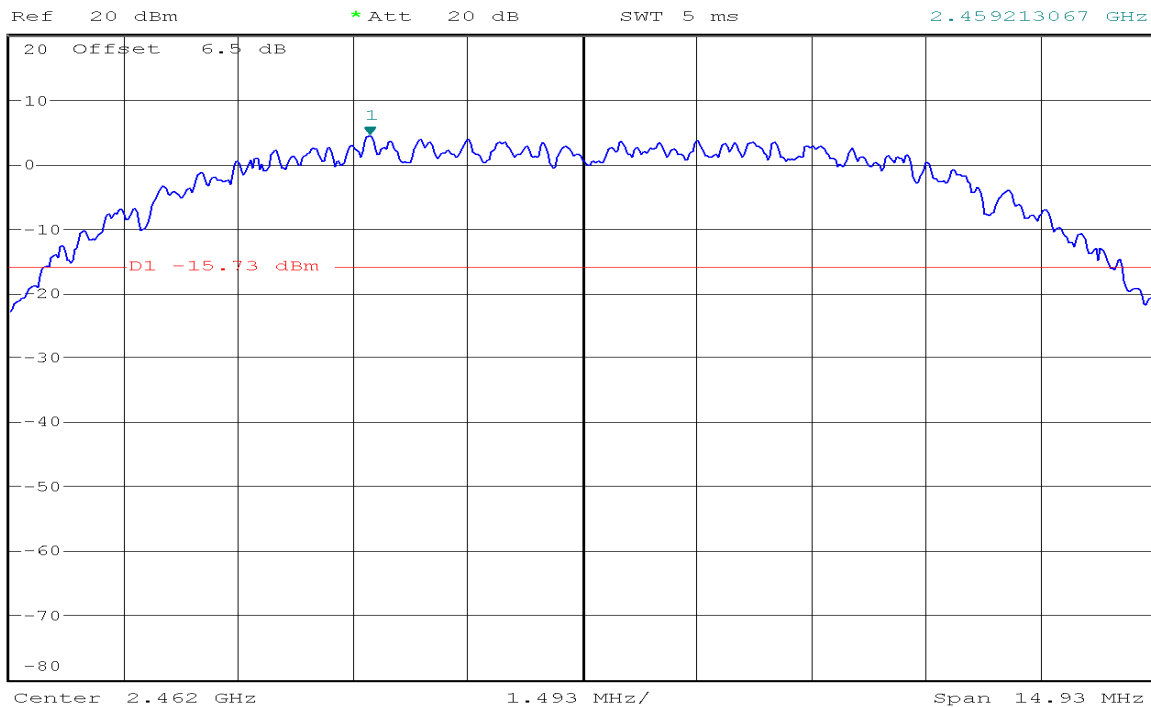


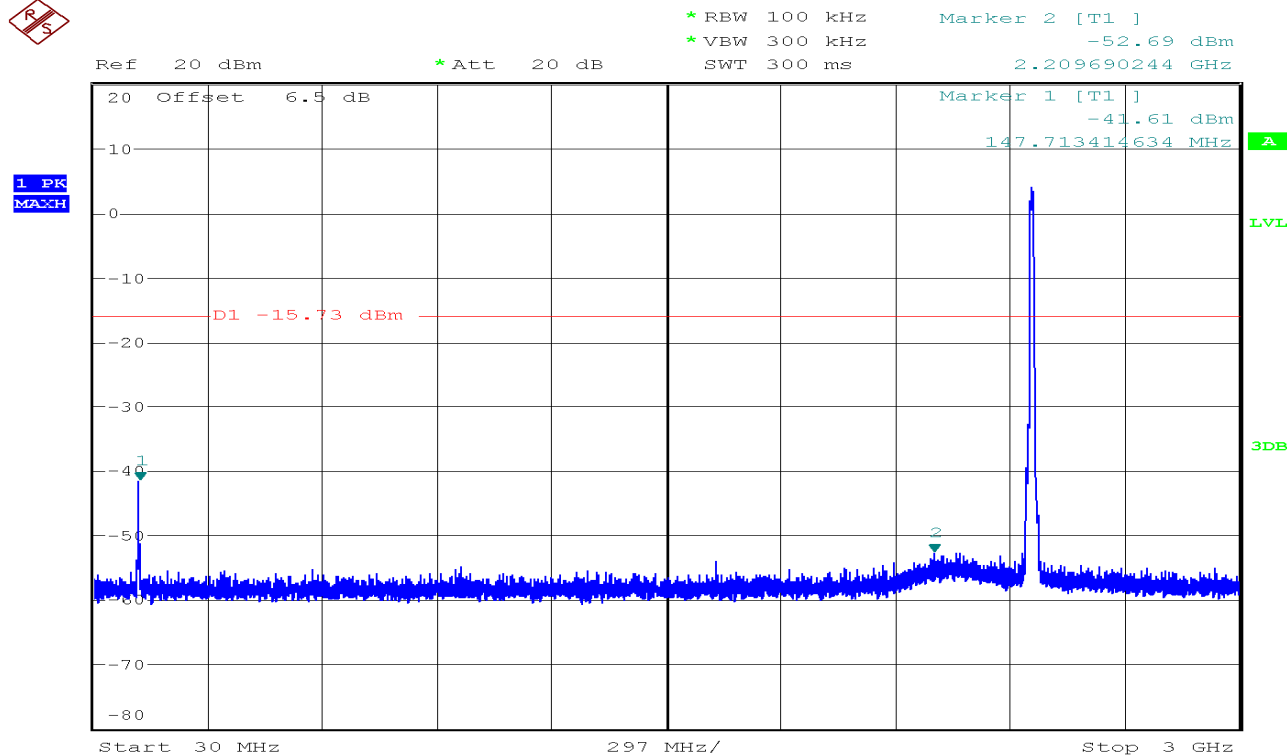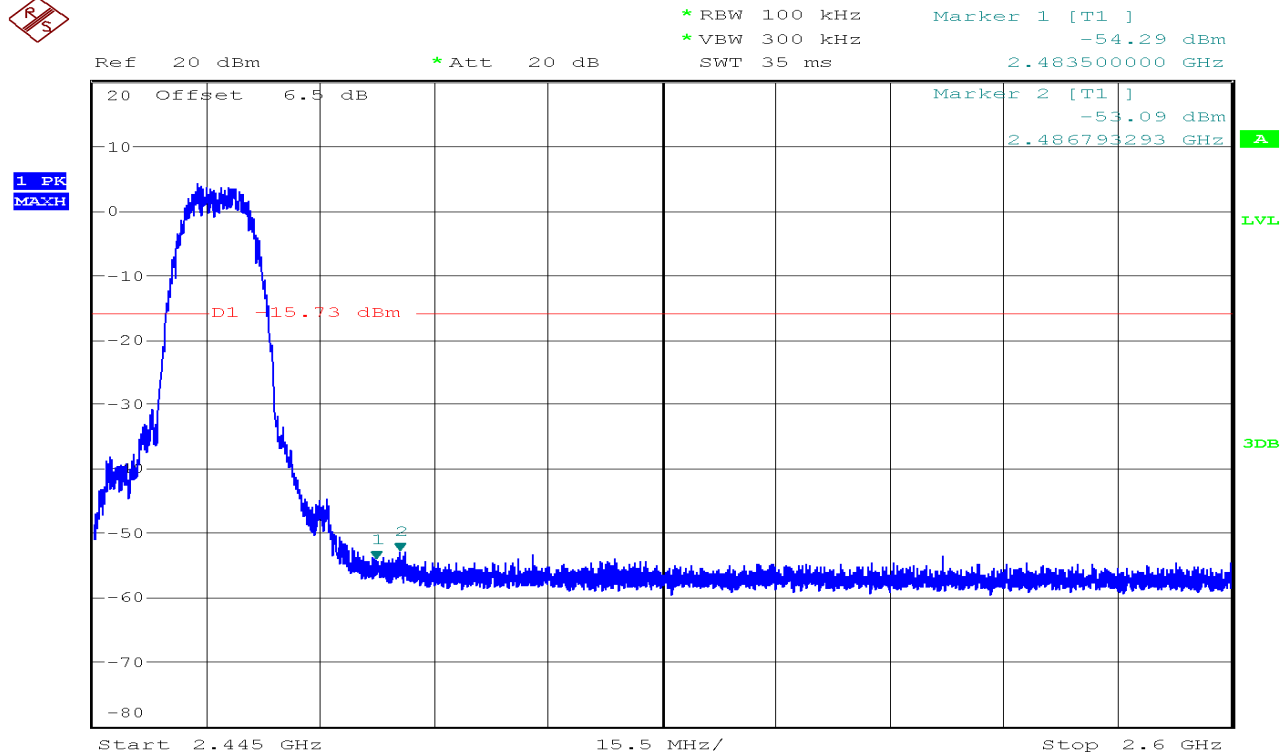



Ref 20 dBm      \* Att 20 dB      \* RBW 100 kHz      Marker 2 [T1 ]      -44.44 dBm  
 \* VBW 300 kHz      7.388170732 GHz  
 SWT 2.3 s

1 PK  
MAXH

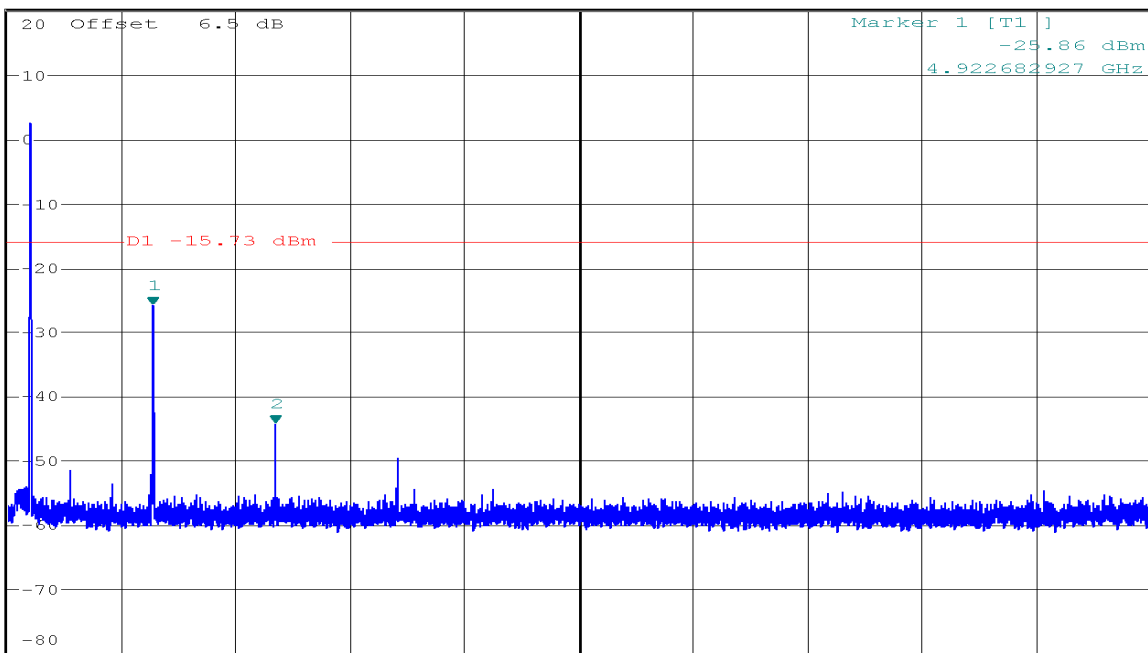

Start 2 GHz      2.3 GHz/      Stop 25 GHz


**IEEE 802.11g mode**

**CH Low**



Ref 20 dBm      \* Att 20 dB      \* RBW 100 kHz      Marker 1 [T1 ]      -0.54 dBm  
 \* VBW 300 kHz      2.419525700 GHz  
 SWT 10 ms

1 PK  
MAXH

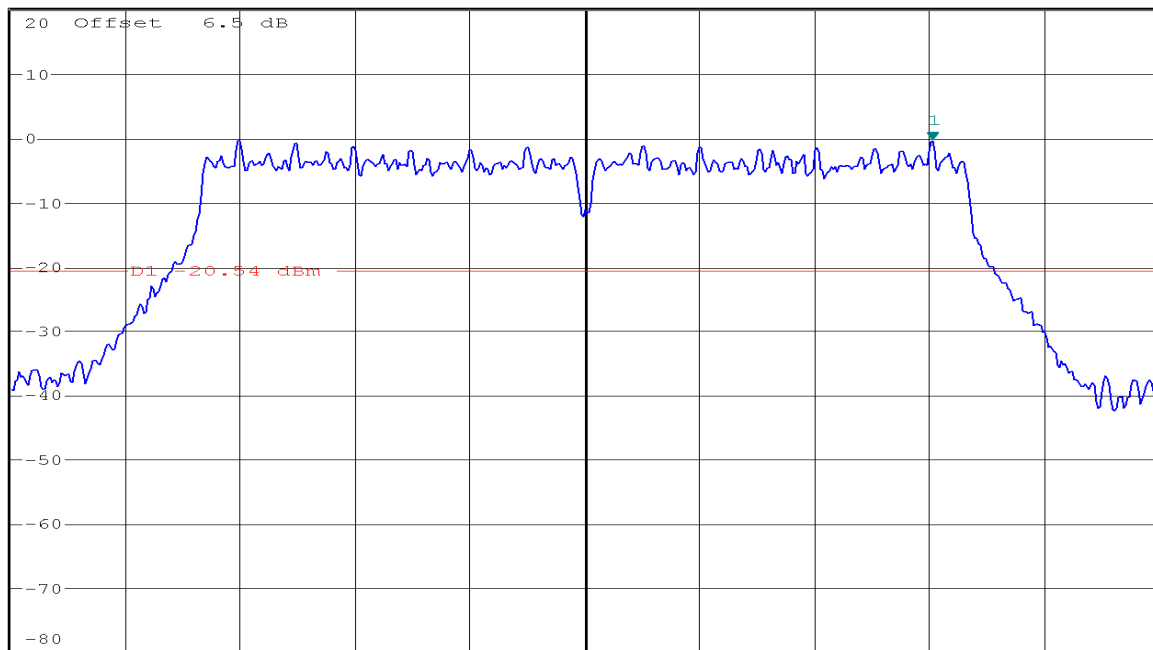


Center 2.412 GHz      2.481 MHz/      Span 24.81 MHz



\* RBW 100 kHz  
\* VBW 300 kHz  
SWT 35 ms

Marker 2 [T1 ]  
-36.41 dBm  
2.399233735 GHz


Ref 20 dBm \* Att 20 dB

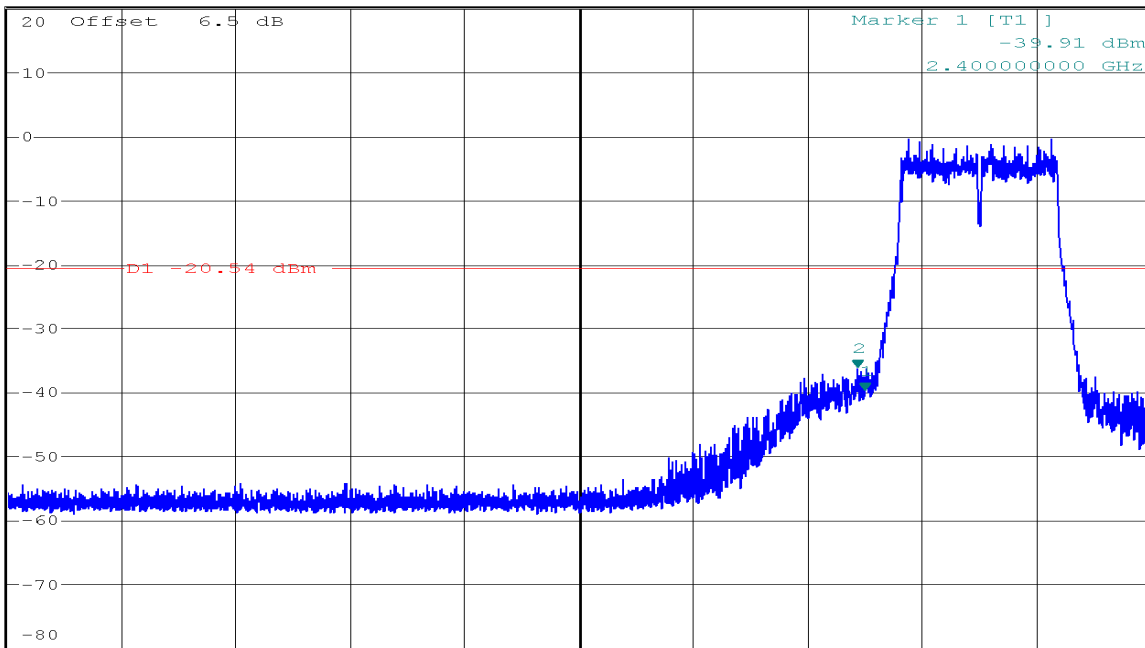


\* RBW 100 kHz  
\* VBW 300 kHz  
SWT 300 ms


Marker 1 [T1 ]  
-53.25 dBm  
96.914457831 MHz

Ref 20 dBm \* Att 20 dB

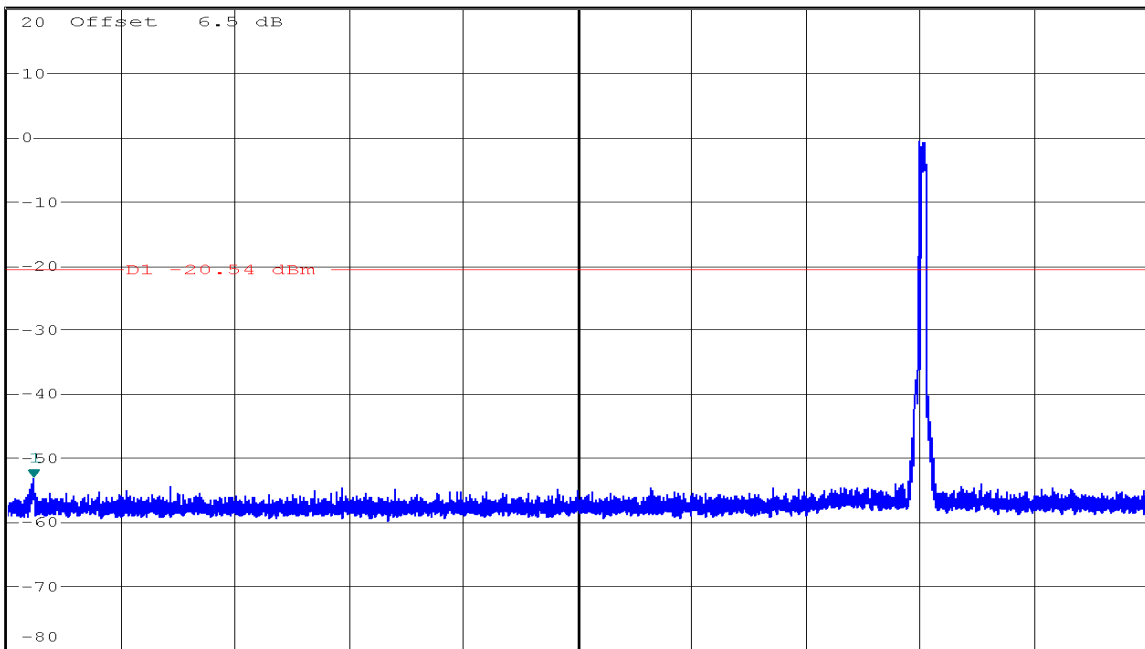

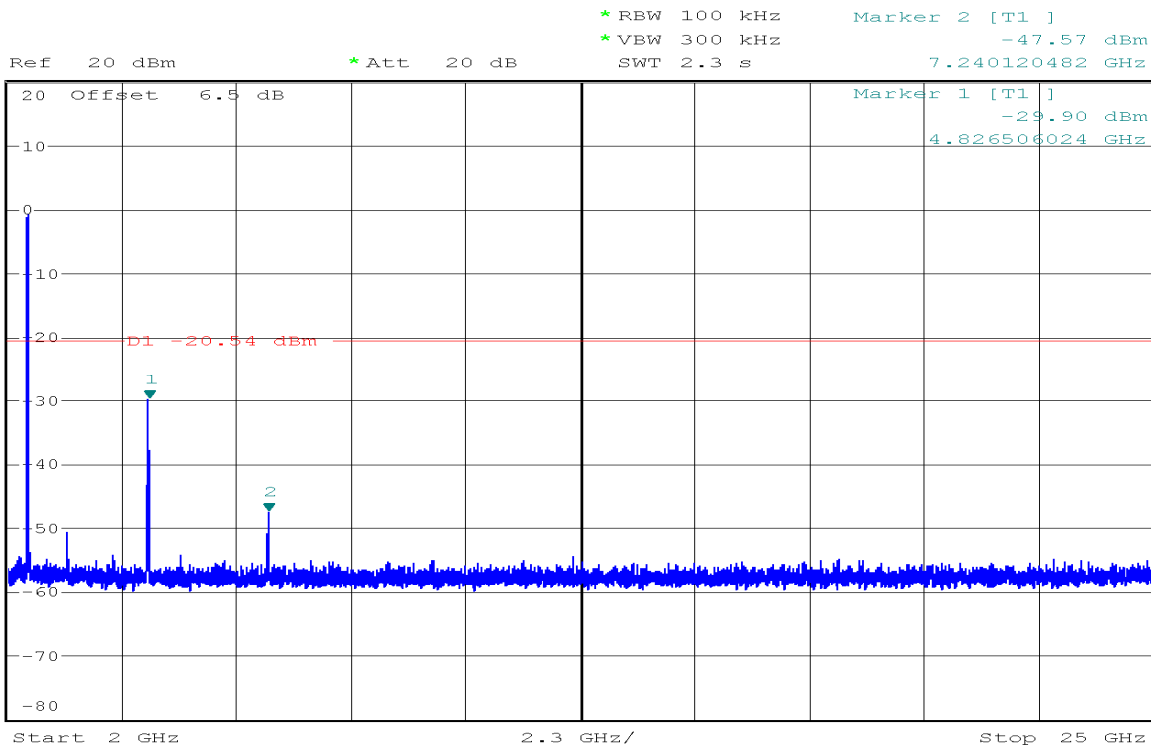


CH Mid

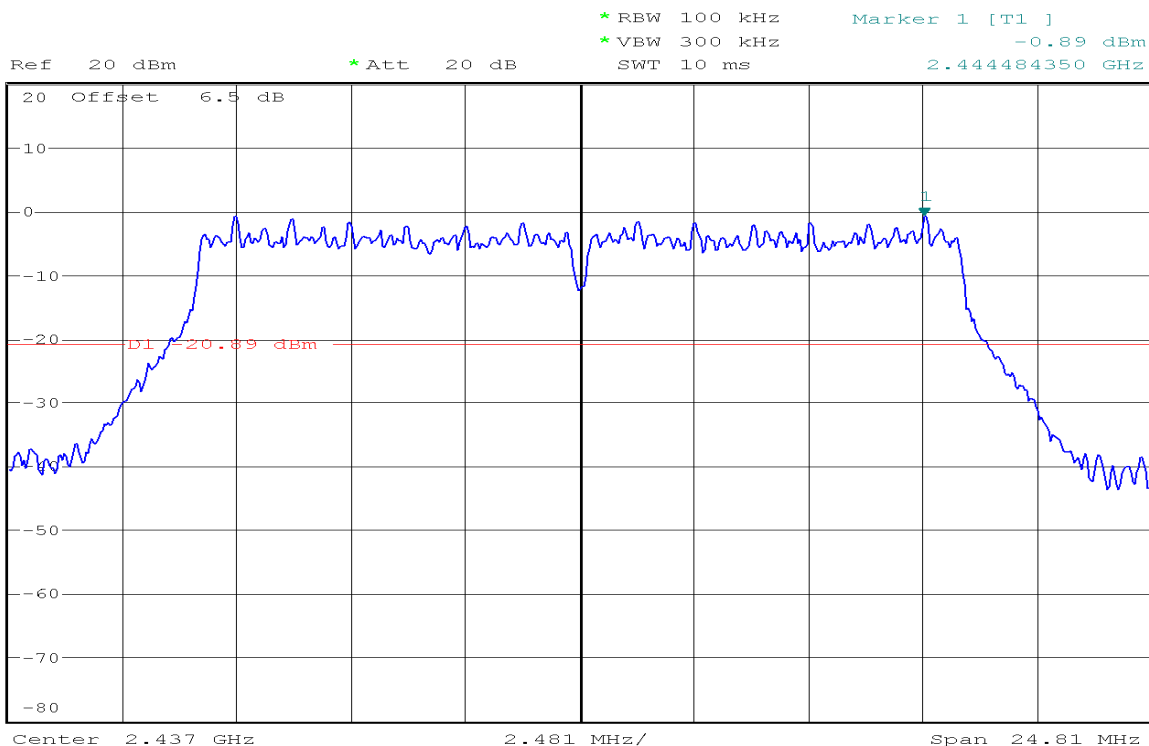






Ref 20 dBm \* Att 20 dB \* RBW 100 kHz Marker 1 [T1] -54.16 dBm  
\* VBW 300 kHz 2.310742683 GHz  
SWT 300 ms

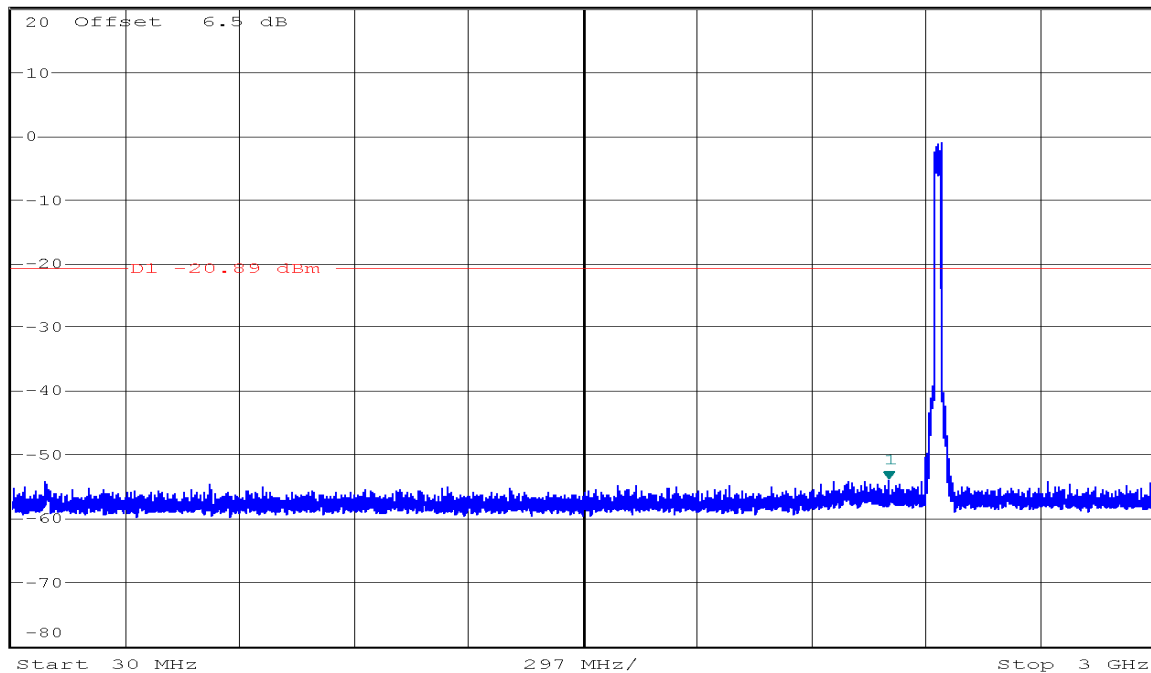


Ref 20 dBm \* Att 20 dB \* RBW 100 kHz Marker 2 [T1] -49.56 dBm  
\* VBW 300 kHz 7.306829268 GHz  
SWT 2.3 s

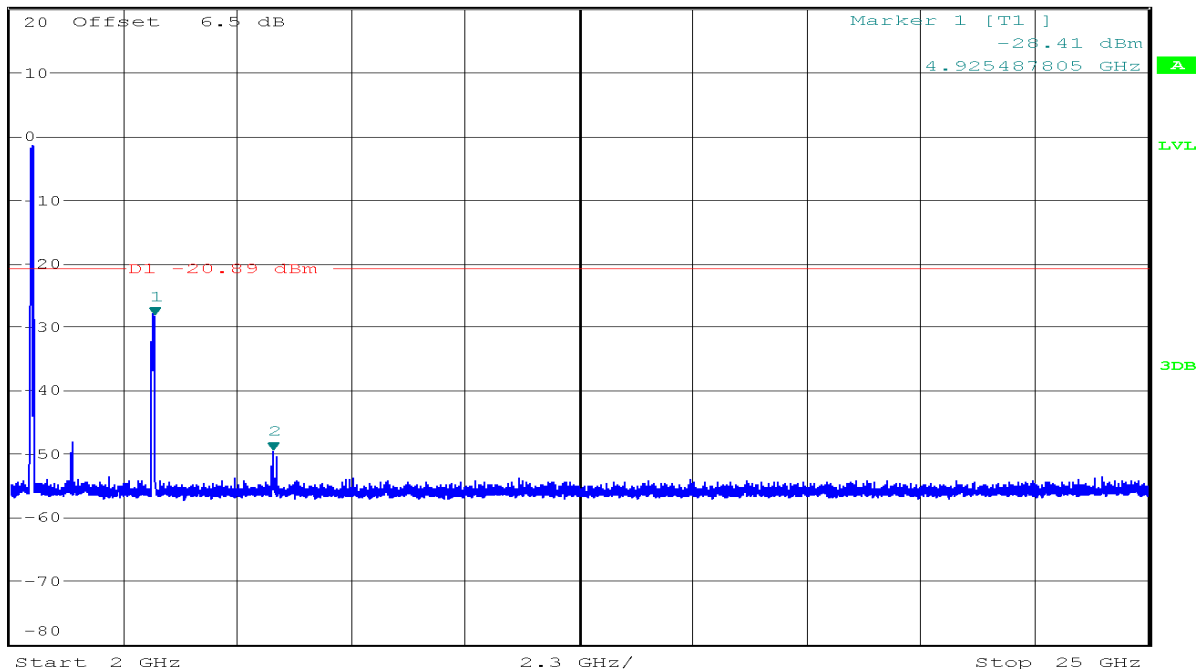


CH High



\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -1.33 dBm  
 SWT 10 ms      2.469525700 GHz

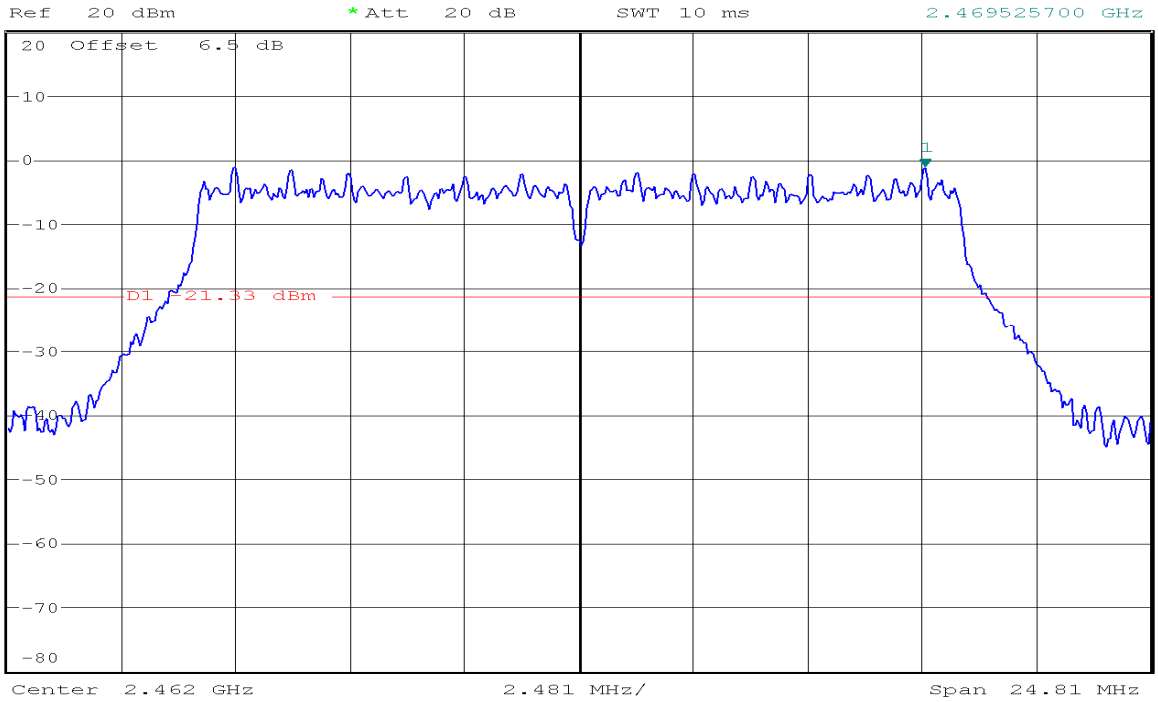


\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -45.41 dBm  
 SWT 35 ms      2.483500000 GHz

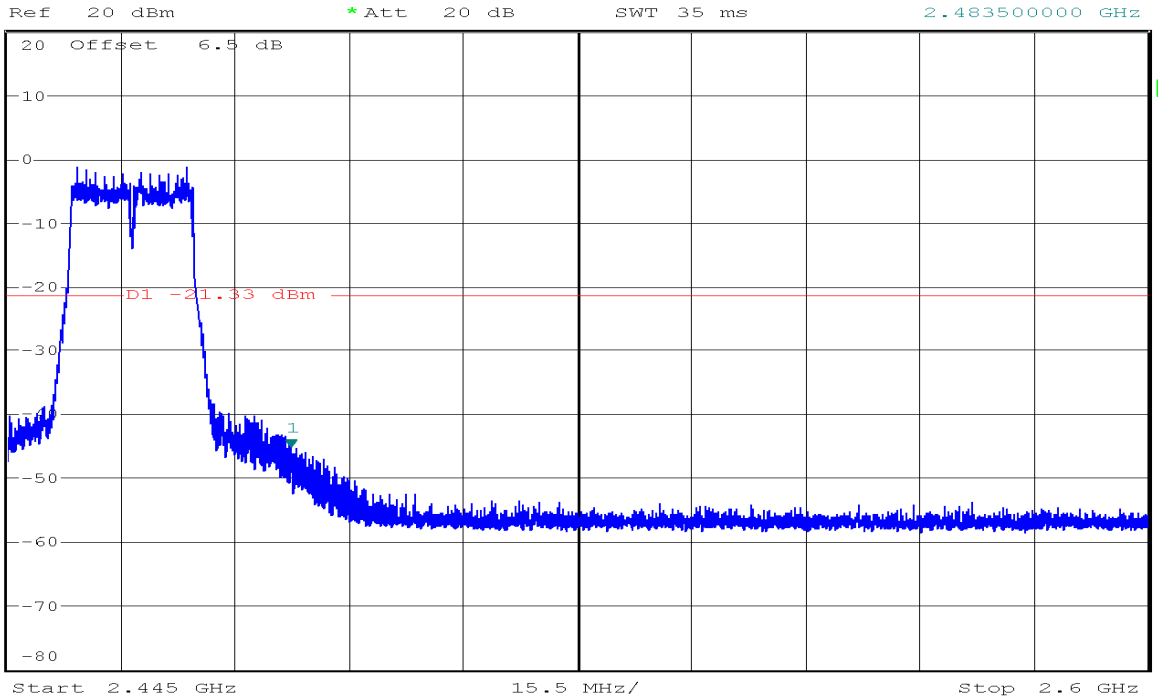




\* RBW 100 kHz  
 \* VBW 300 kHz  
 SWT 300 ms

Marker 1 [T1 ]  
 -53.68 dBm  
 1.850392683 GHz

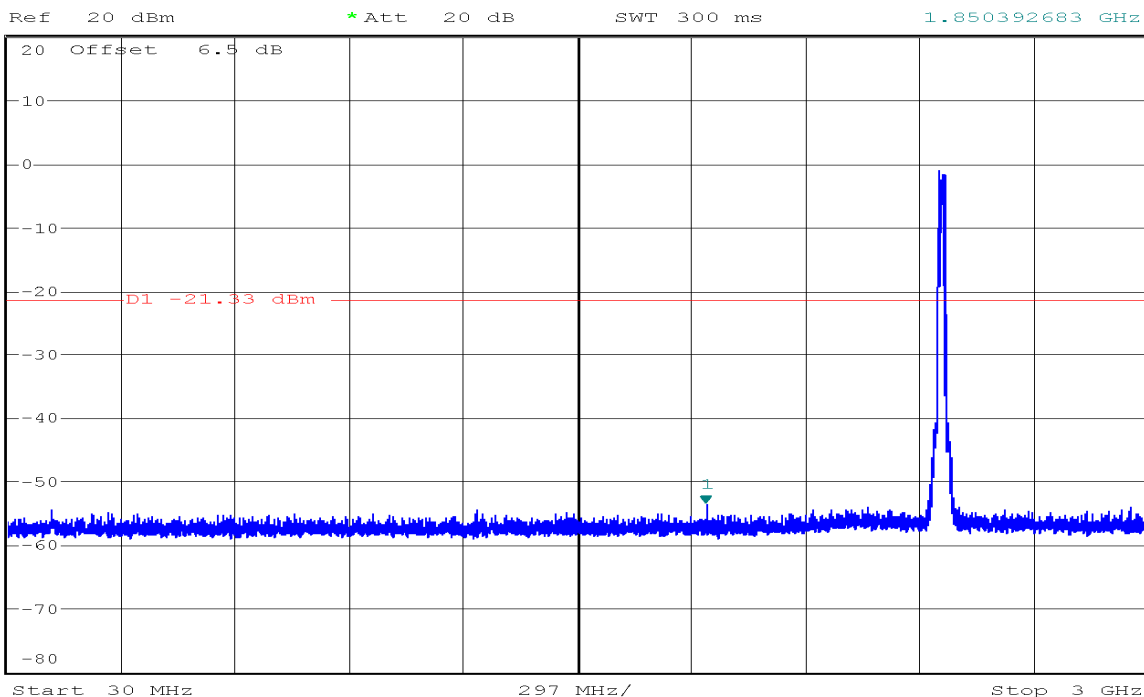

\* RBW 100 kHz  
 \* VBW 300 kHz  
 SWT 2.3 s

Marker 2 [T1 ]  
 -50.71 dBm  
 7.388170732 GHz

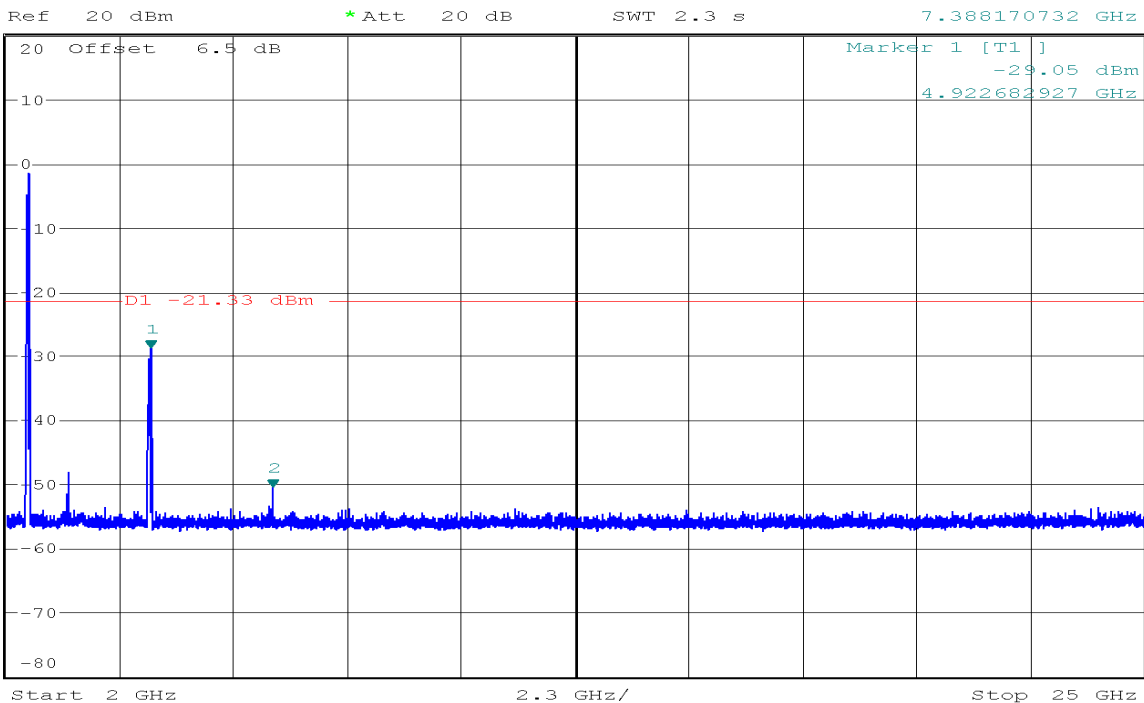


IEEE 802.11n HT20 mode


CH Low



Ref 20 dBm      \*Att 20 dB      \*RBW 100 kHz      Marker 1 [T1 ]  
 \*VBW 300 kHz      -1.84 dBm  
 SWT 10 ms      2.404480333 GHz

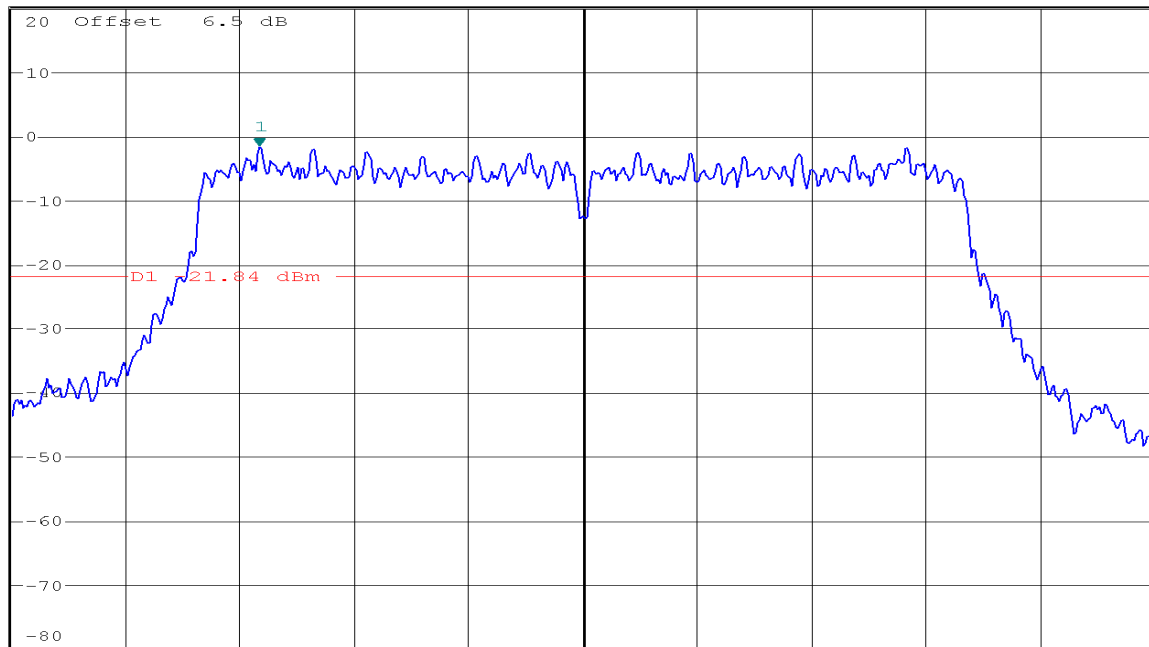


Ref 20 dBm      \*Att 20 dB      \*RBW 100 kHz      Marker 2 [T1 ]  
 \*VBW 300 kHz      -40.36 dBm  
 SWT 35 ms      2.395434146 GHz

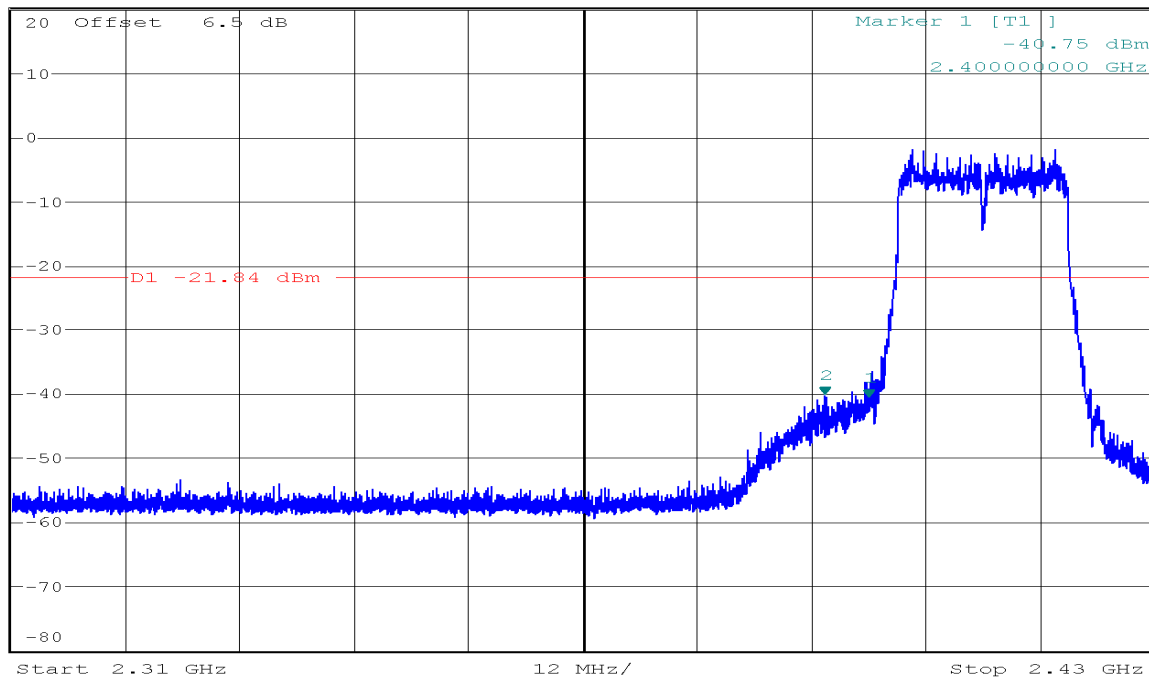




\* RBW 100 kHz  
 \* VBW 300 kHz  
 SWT 300 ms

Marker 1 [T1 ]  
 -53.89 dBm  
 2.357103659 GHz

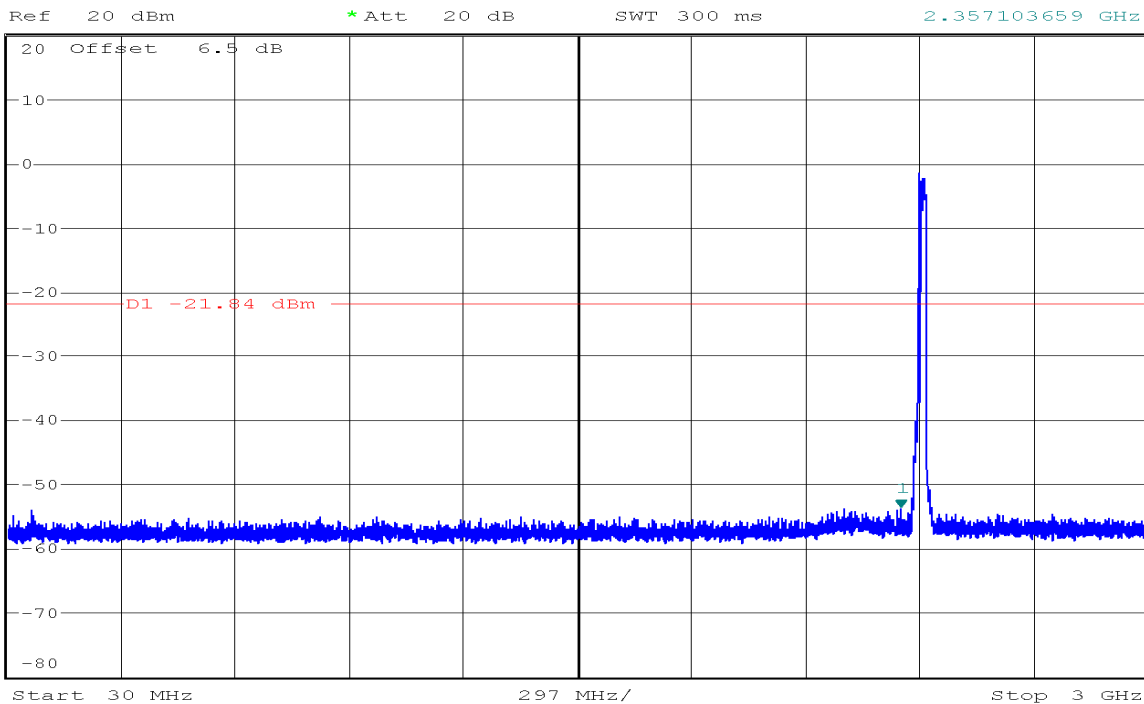

\* RBW 100 kHz  
 \* VBW 300 kHz  
 SWT 2.3 s


Marker 2 [T1 ]  
 -49.56 dBm  
 7.306829268 GHz

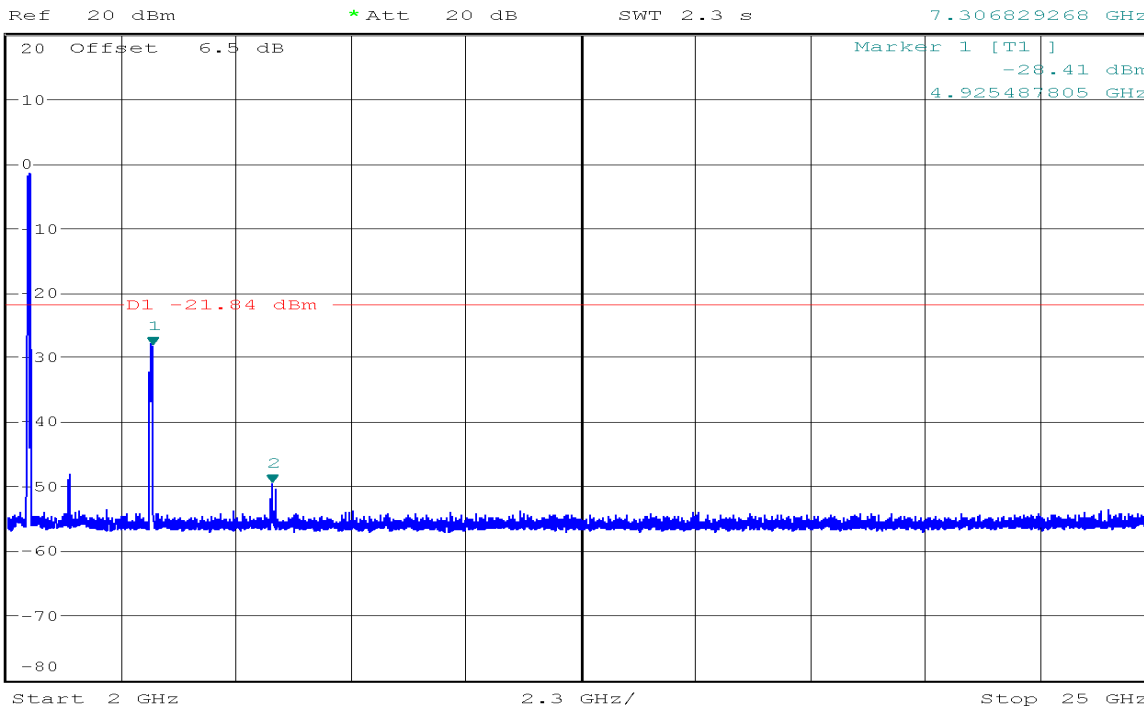


CH Mid




\* RBW 100 kHz      Marker 1 [T1 ]  
 VBW 300 kHz      -1.94 dBm  
 SWT 10 ms      2.444519667 GHz

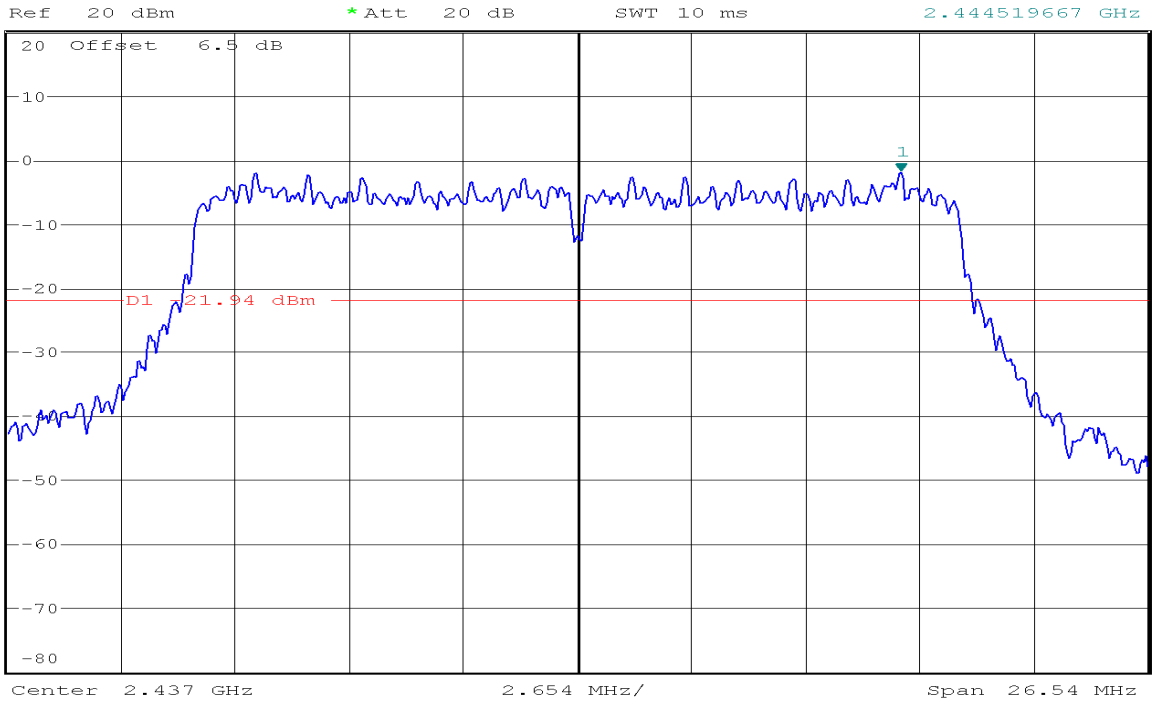




\* RBW 100 kHz      Marker 1 [T1 ]  
 VBW 300 kHz      -53.84 dBm  
 SWT 300 ms      2.226351220 GHz

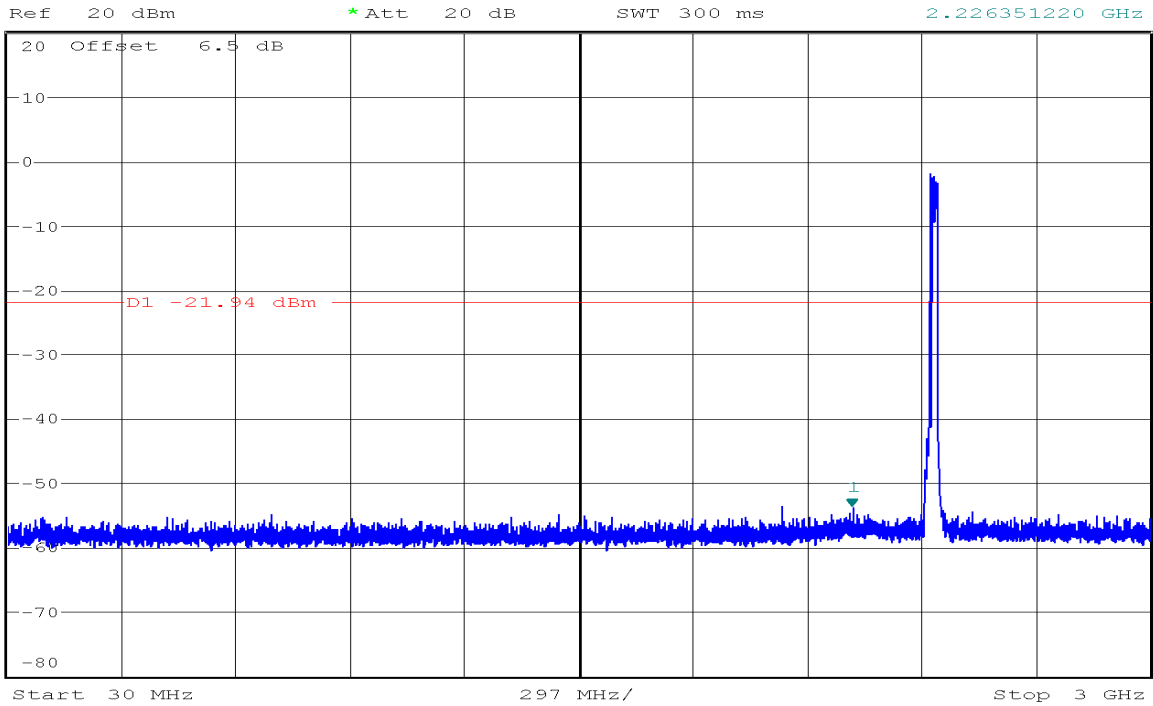

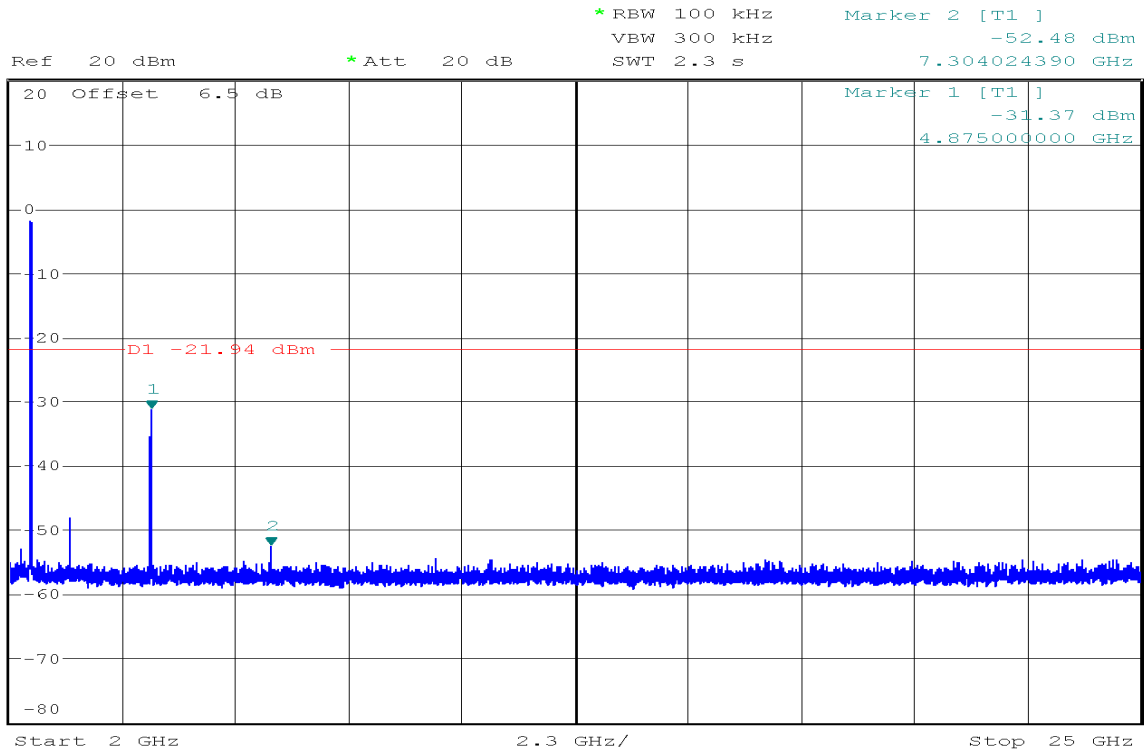


CH High

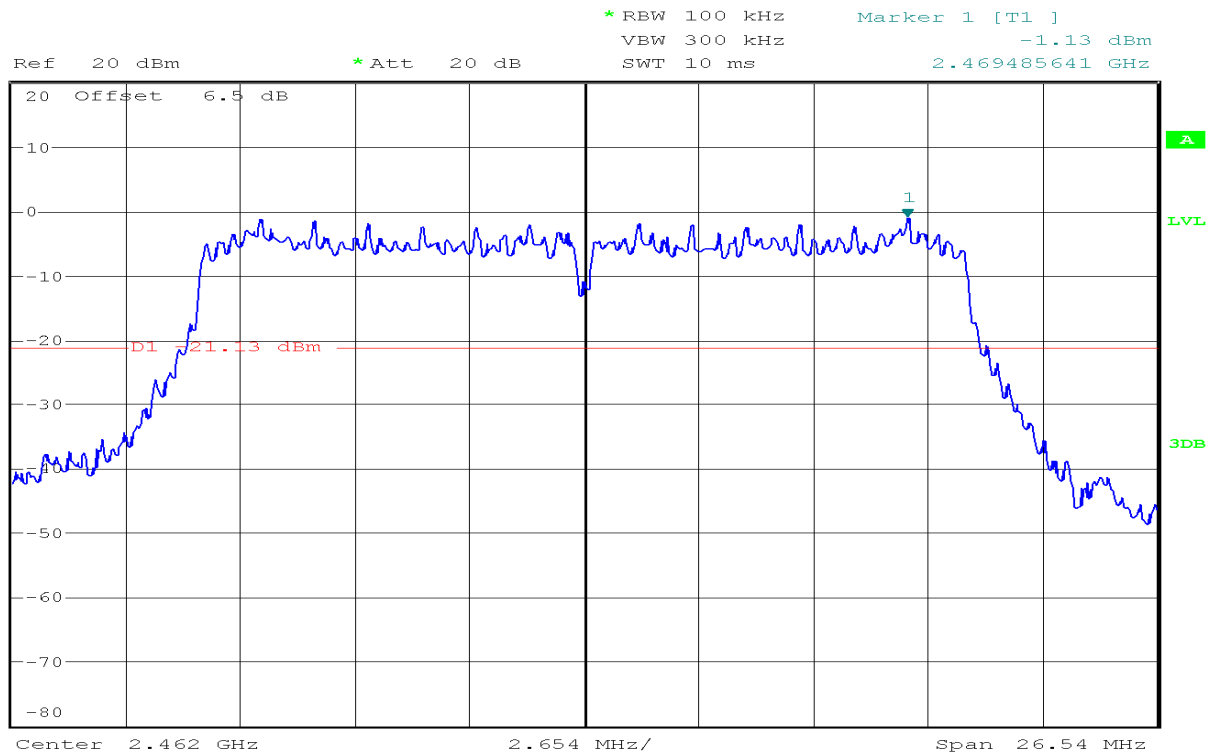

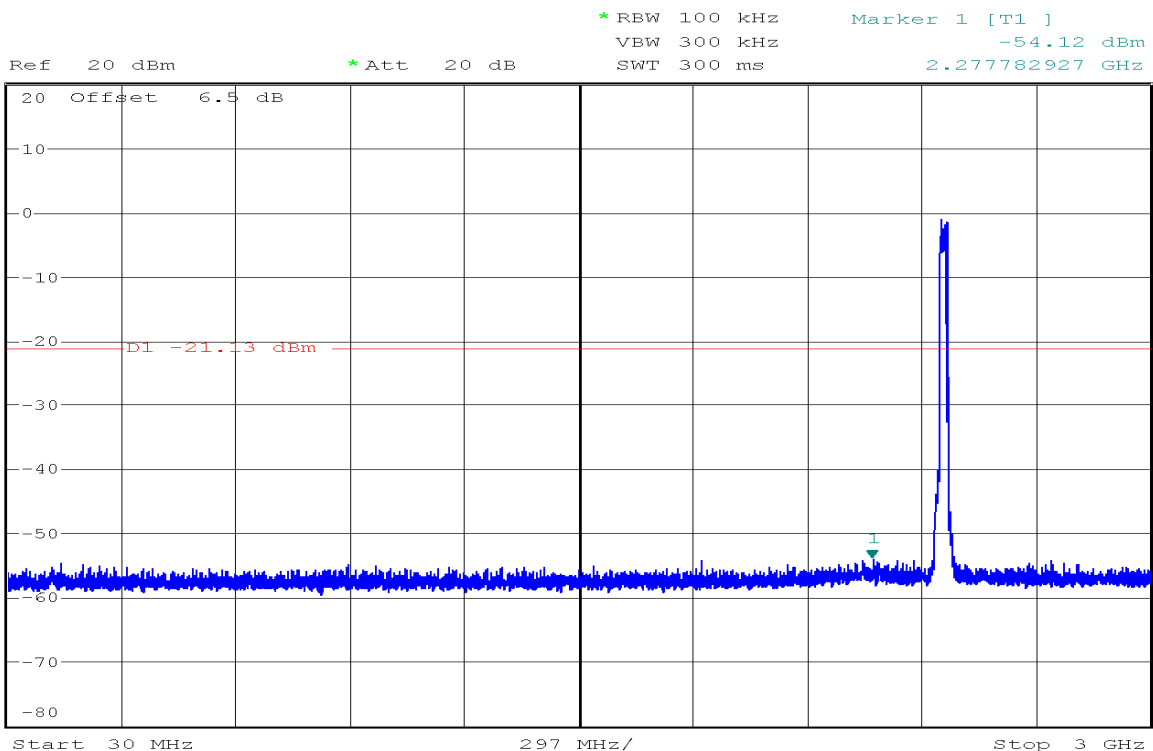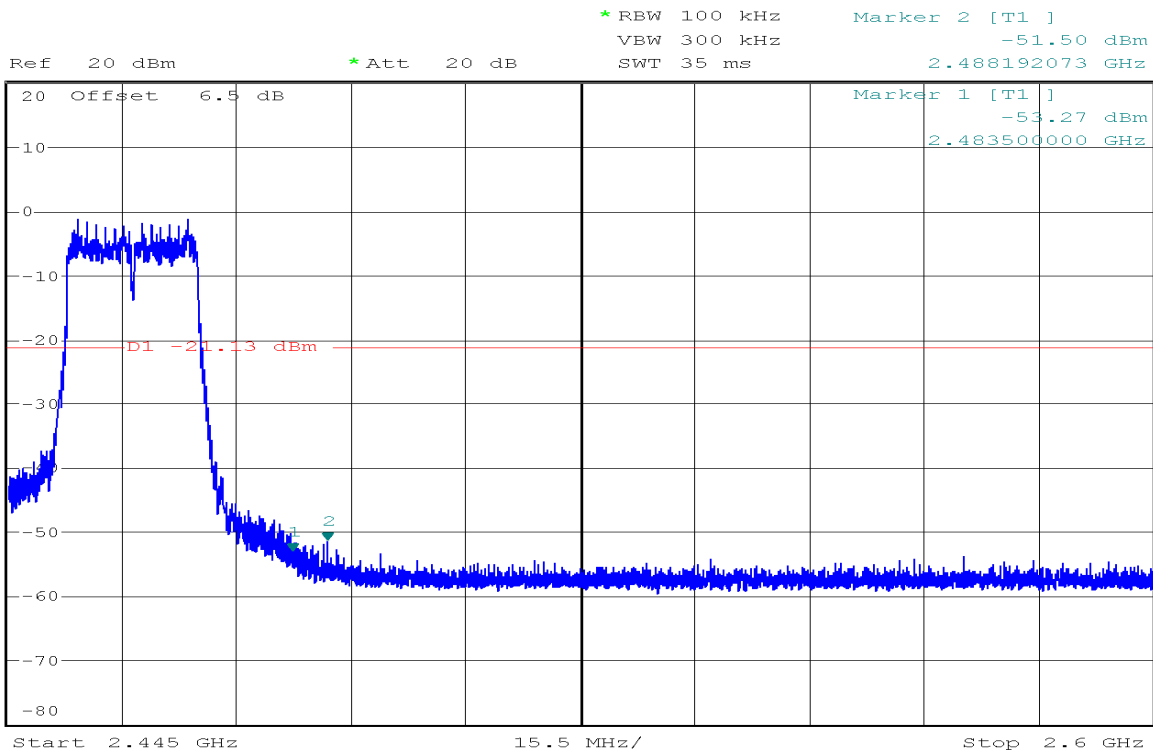






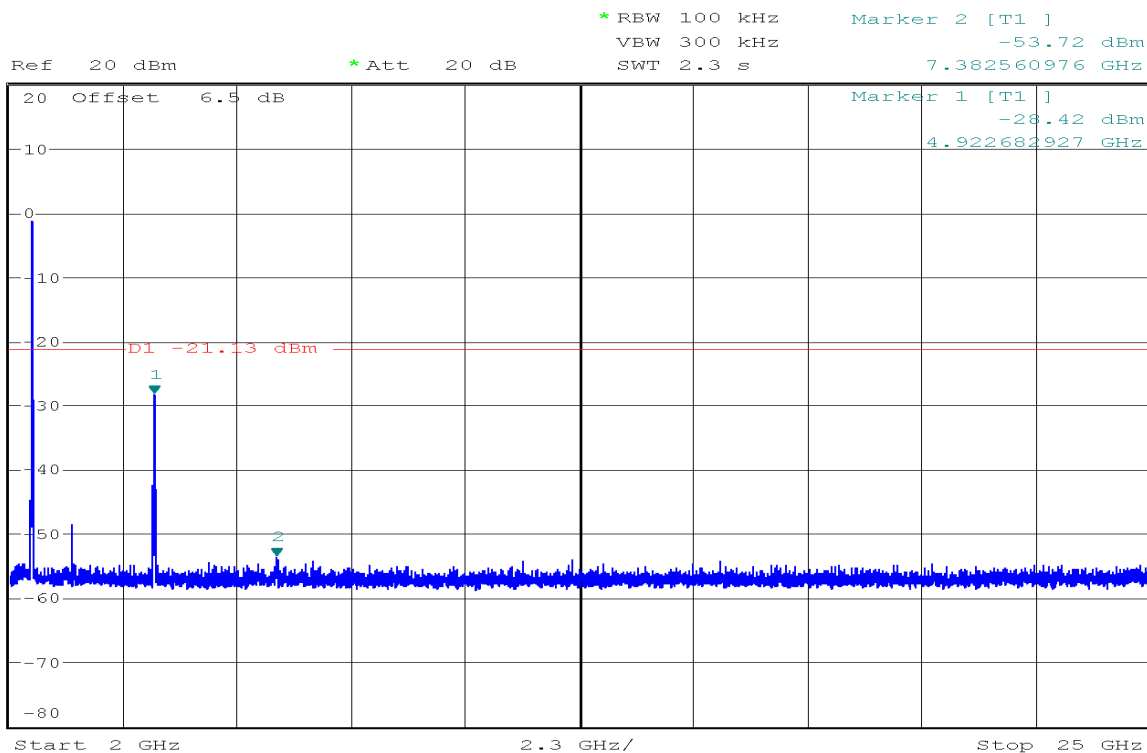

**IEEE 802.11n HT40 mode**

**CH Low**

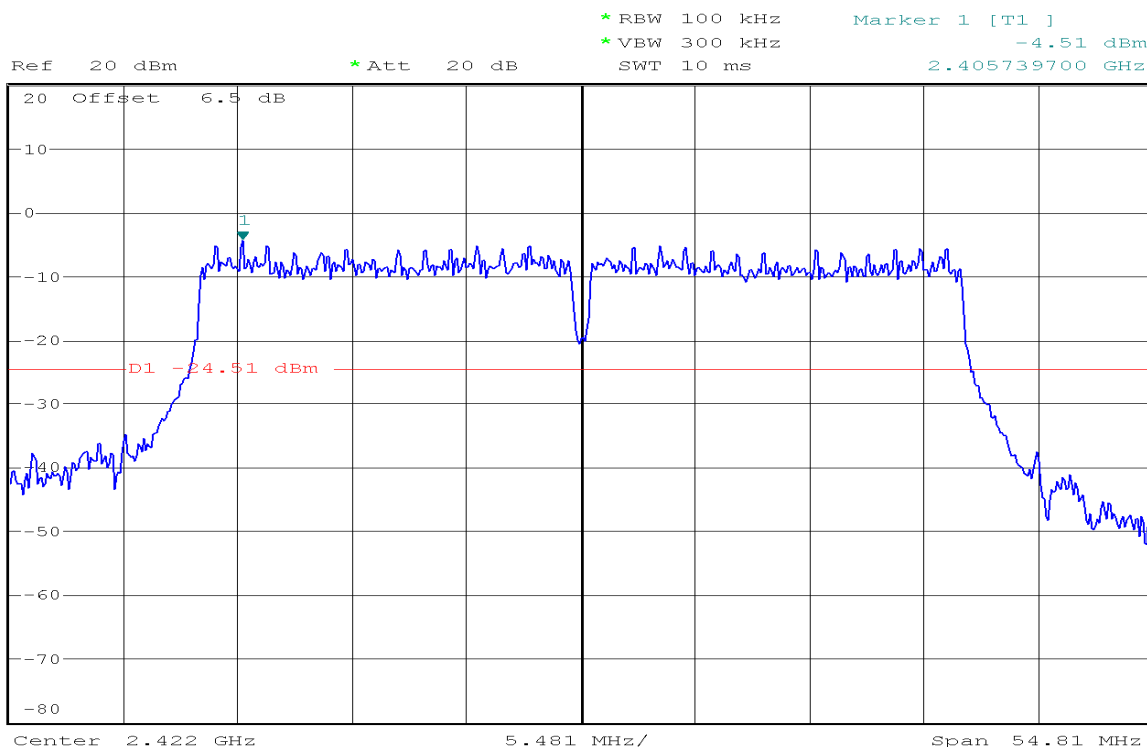


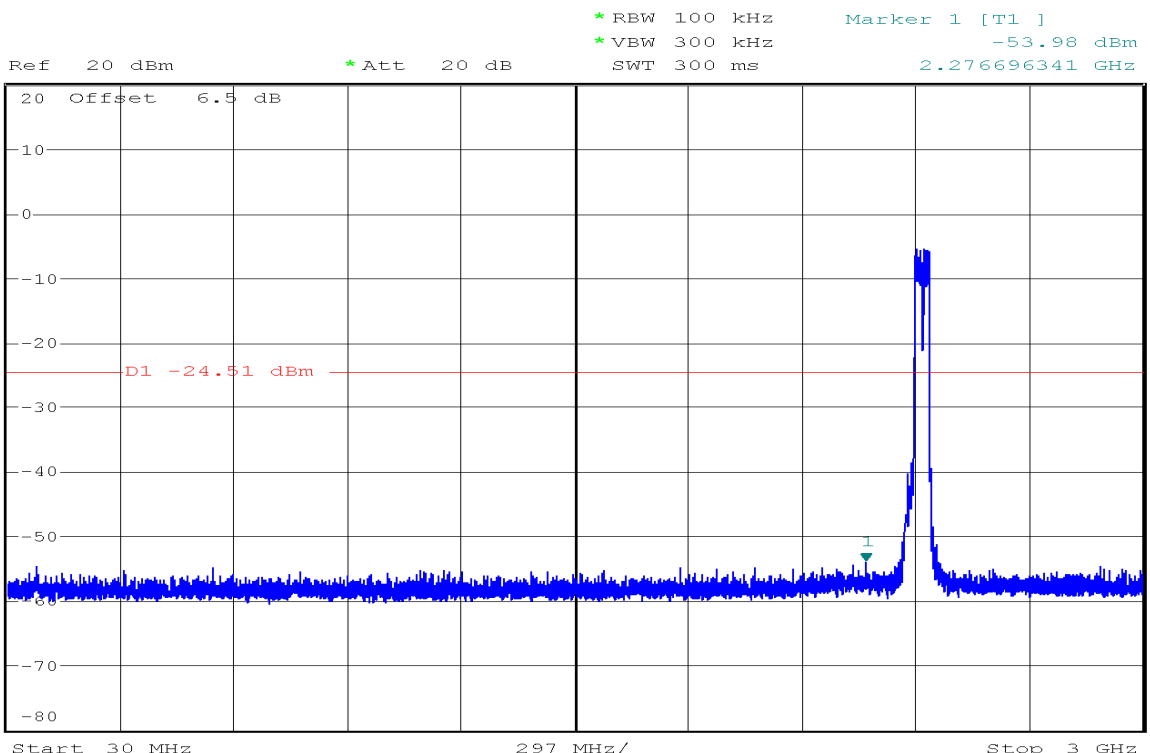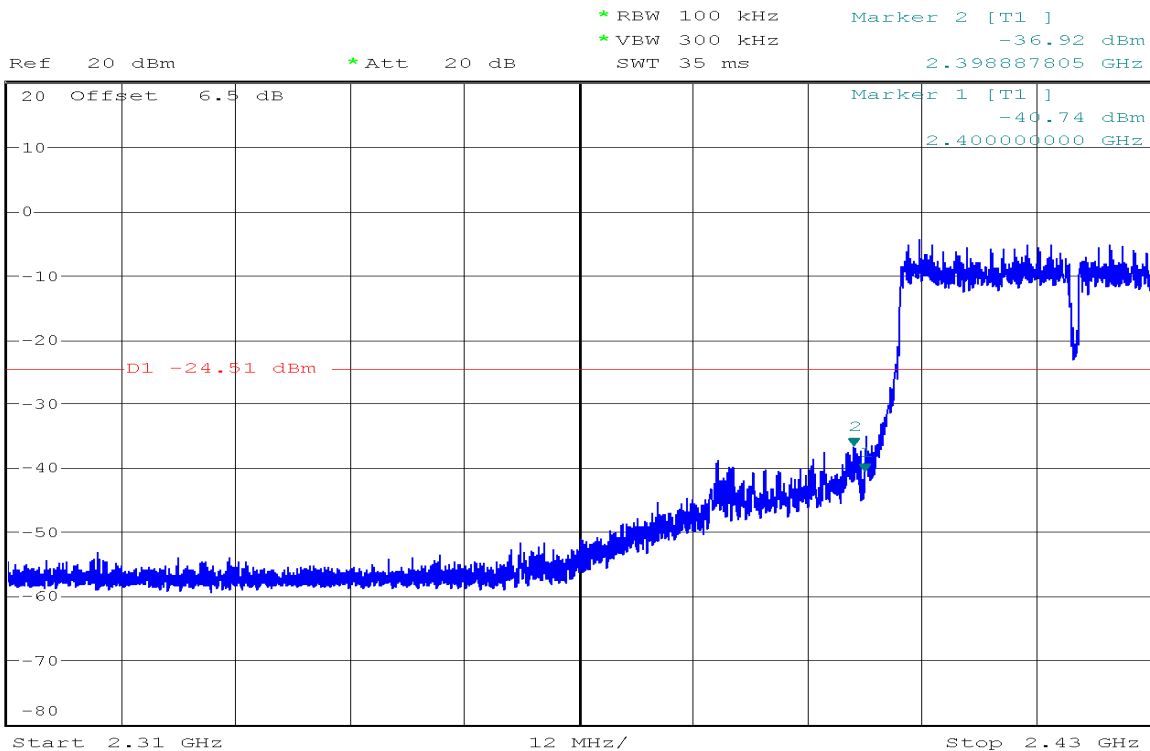



Ref 20 dBm \* Att 20 dB \* RBW 100 kHz Marker 2 [T1 ] -52.88 dBm  
 \* VBW 300 kHz 7.278780488 GHz  
 SWT 2.3 s

1 PK  
 MAXH

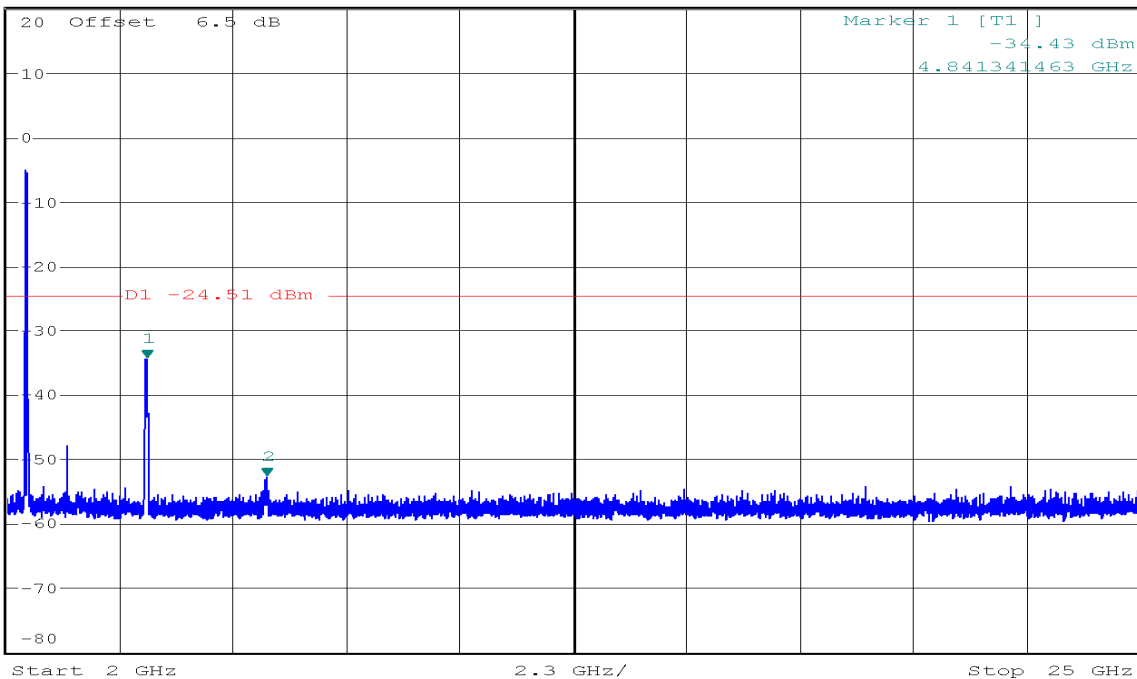


CH Mid




Ref 20 dBm \* Att 20 dB \* RBW 100 kHz Marker 1 [T1 ] -4.84 dBm  
 \* VBW 300 kHz 2.420739700 GHz  
 SWT 10 ms

1 PK  
 MAXH

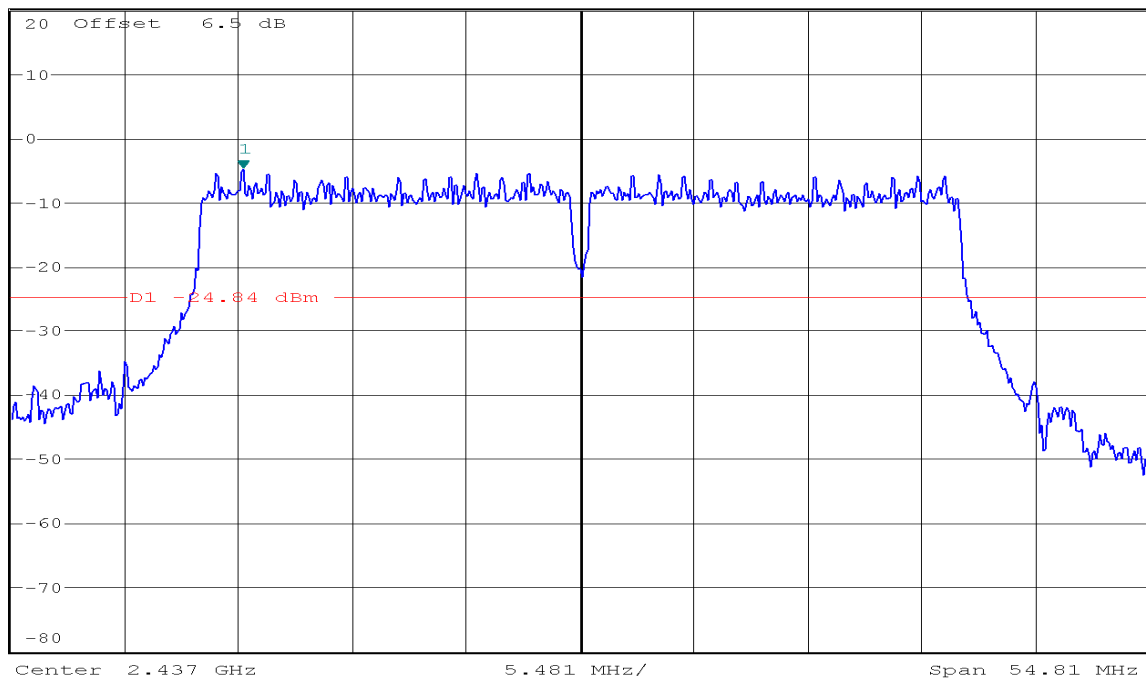






Ref 20 dBm \* Att 20 dB \* RBW 100 kHz Marker 1 [T1] -53.77 dBm  
 \* VBW 300 kHz 2.254602439 GHz  
 SWT 300 ms

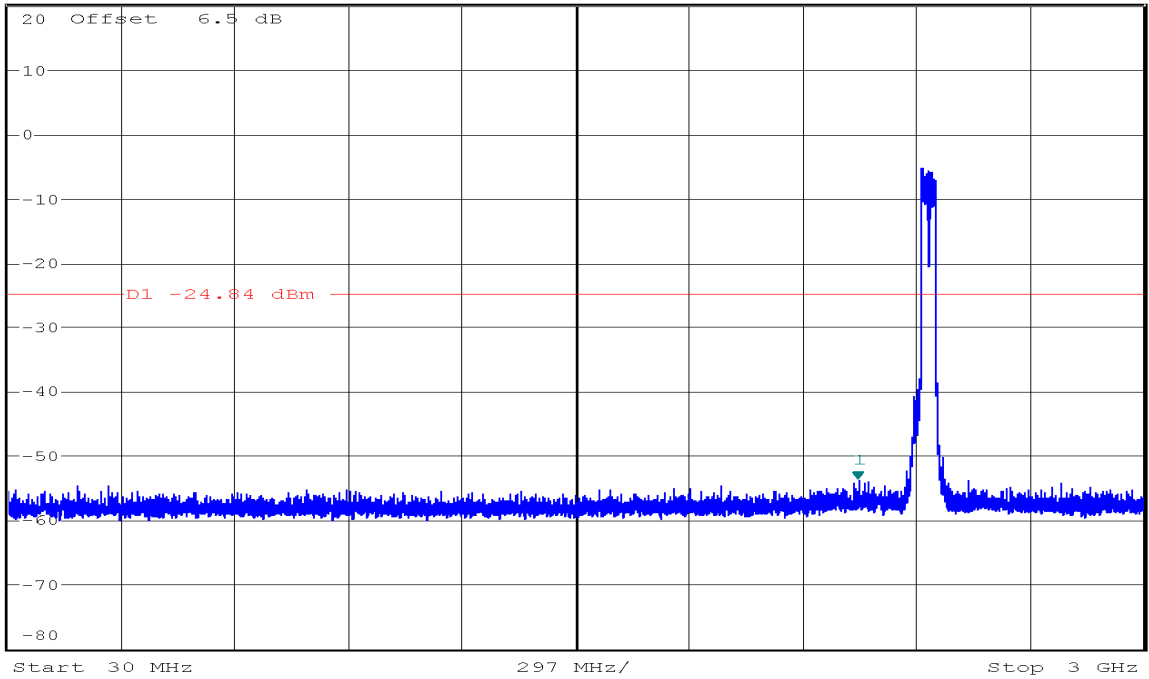

Ref 20 dBm \* Att 20 dB \* RBW 100 kHz Marker 2 [T1] -51.99 dBm  
 \* VBW 300 kHz 7.304024390 GHz  
 SWT 2.3 s

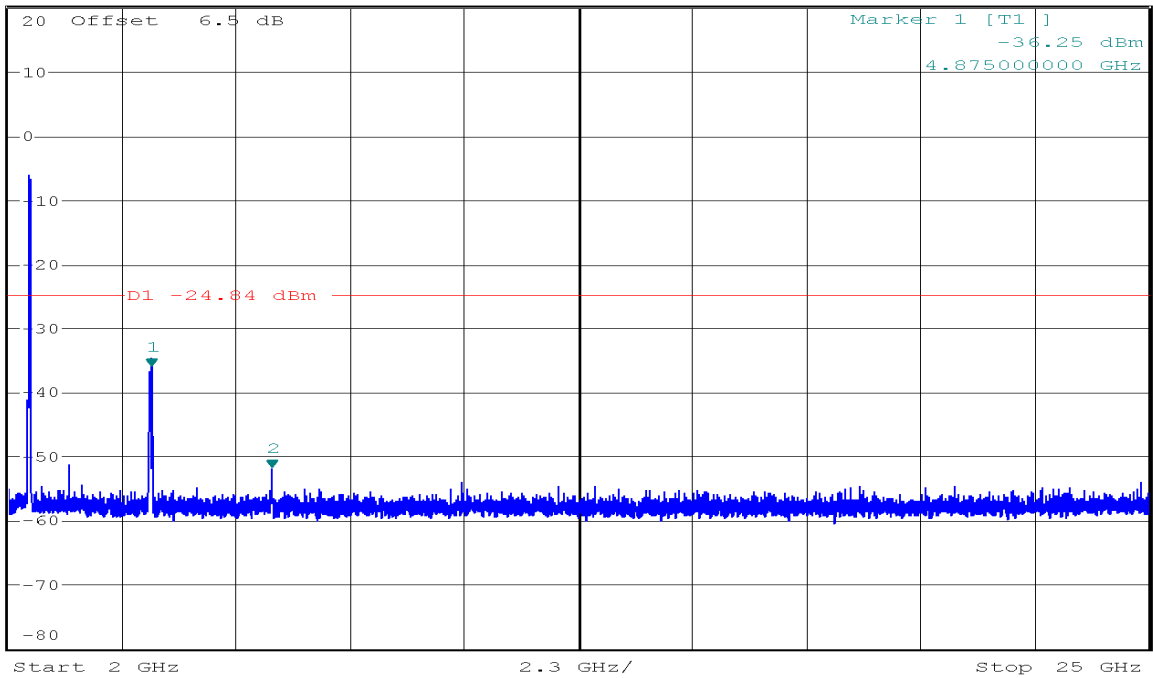


CH High

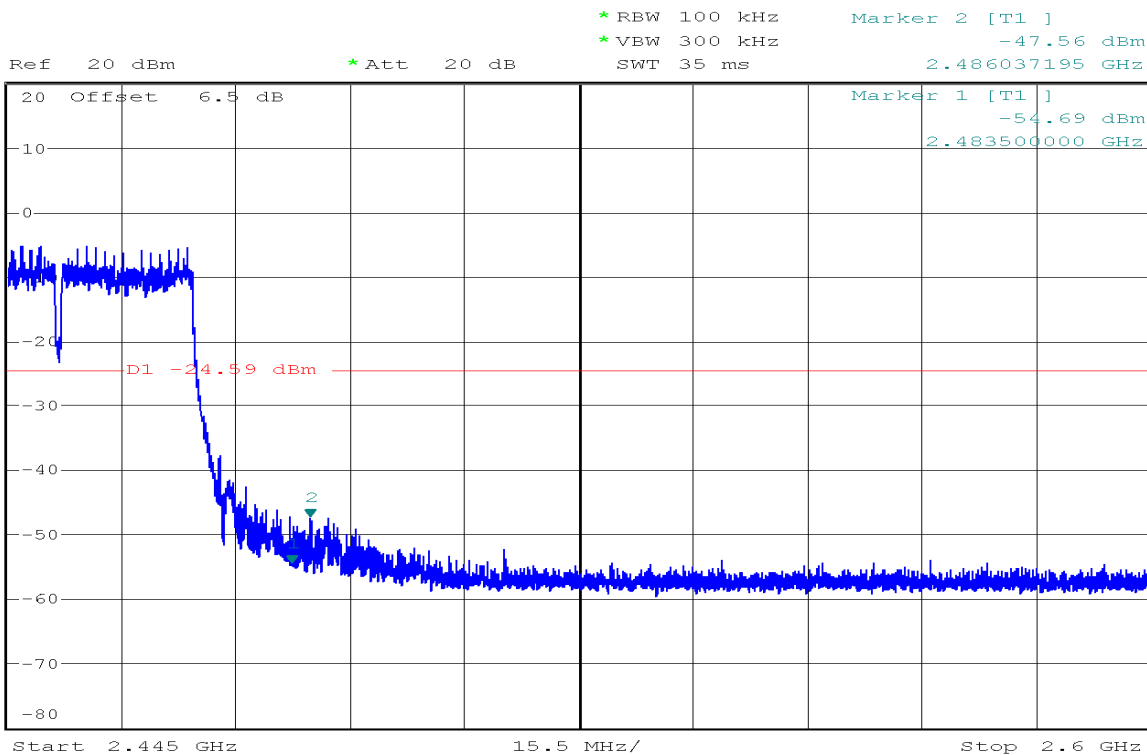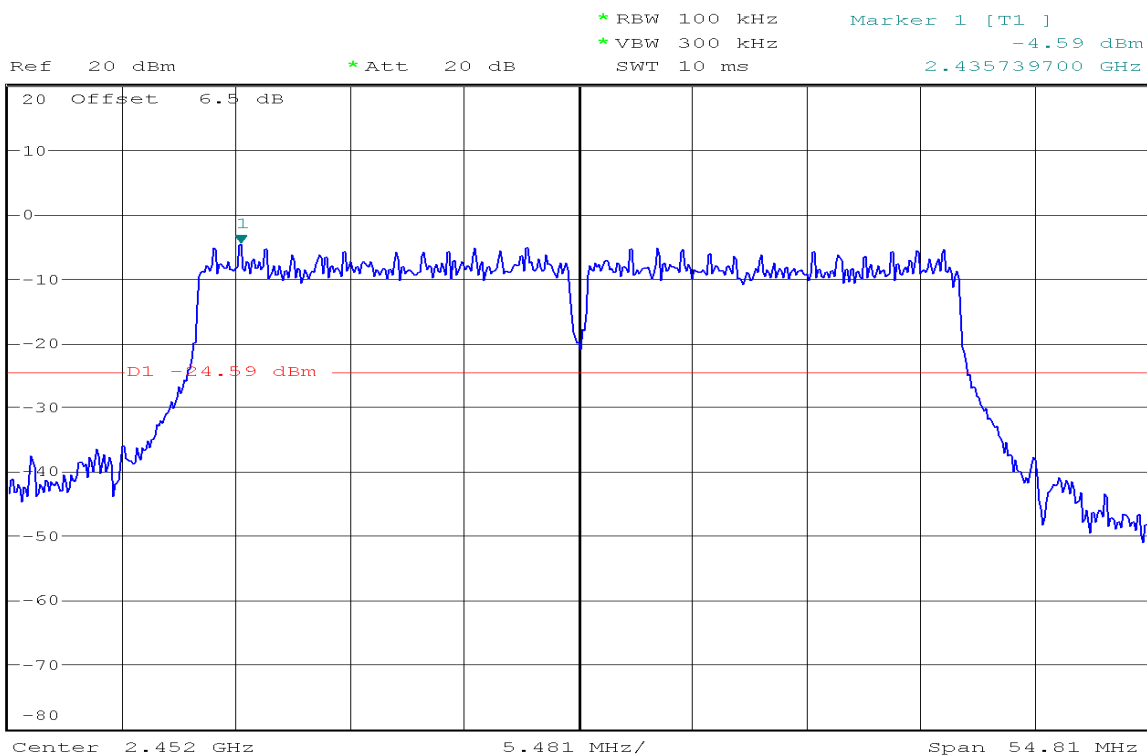




Ref 20 dBm \* Att 20 dB \* RBW 100 kHz Marker 1 [T1 ]  
 \* VBW 300 kHz -54.46 dBm  
 SWT 300 ms 2.147030488 GHz

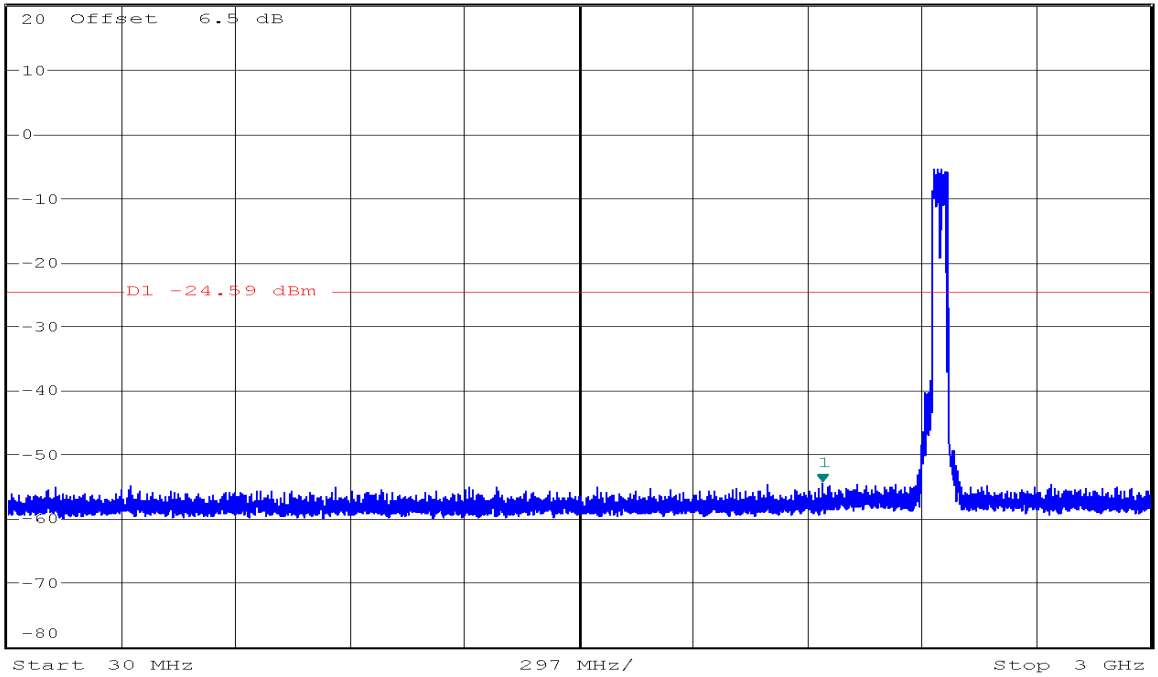

Ref 20 dBm \* Att 20 dB \* RBW 100 kHz Marker 2 [T1 ]  
 \* VBW 300 kHz -53.40 dBm  
 SWT 2.3 s 7.334878049 GHz

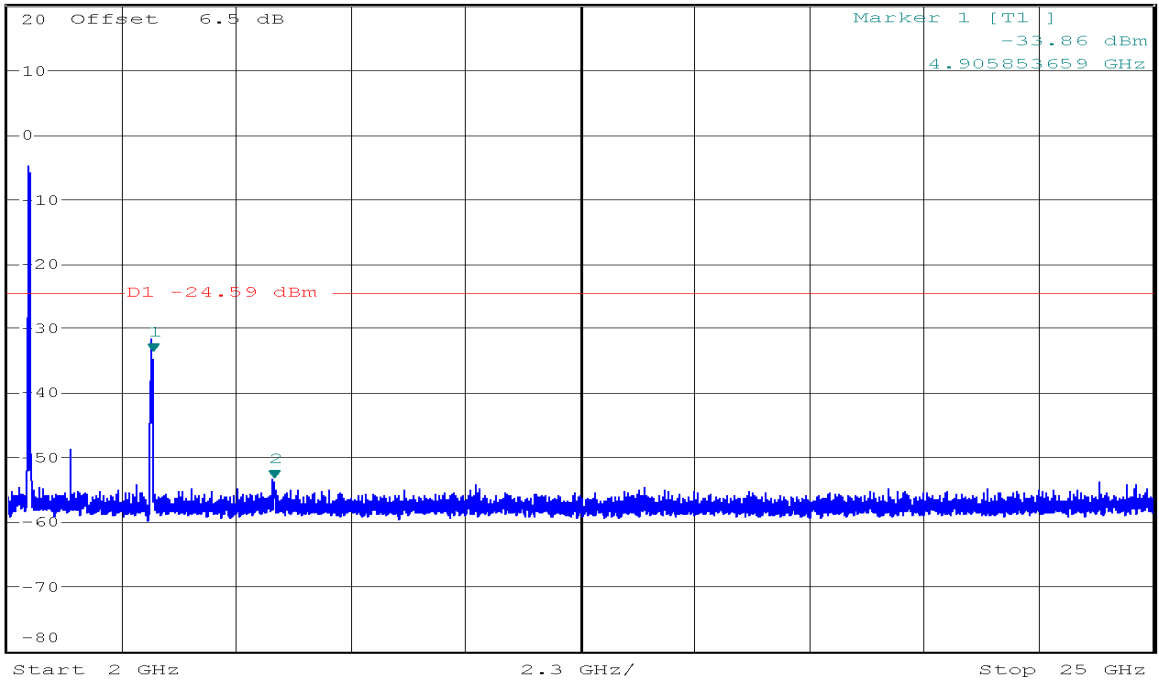

## 7.5.RADIATED EMISSIONS

### LIMIT

Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013. The EUT was placed above the ground plane, 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| FREQUENCIES(MHz) | FIELD STRENGTH<br>(microvolts/meter) | MEASUREMENT<br>DISTANCE(meters) |
|------------------|--------------------------------------|---------------------------------|
| 0.009~0.490      | 2400/F(kHz)                          | 300                             |
| 0.490~1.705      | 24000/F(kHz)                         | 30                              |
| 1.705~30.0       | 30                                   | 30                              |
| 30~88            | 100                                  | 3                               |
| 88~216           | 150                                  | 3                               |
| 216~960          | 200                                  | 3                               |
| Above 960        | 500                                  | 3                               |


**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


| Frequency<br>(MHz) | Field Strength<br>( $\mu$ V/m at 3-meter) | Field Strength<br>(dB $\mu$ V/m at 3-meter) |
|--------------------|---|---|
| 30-88              | 100                                       | 40  |
| 88-216             | 150                                       | 43.5  |
| 216-960            | 200                                       | 46  |
| Above 960          | 500                                       | 54  |

### Test Configuration

**Below 30MHz**

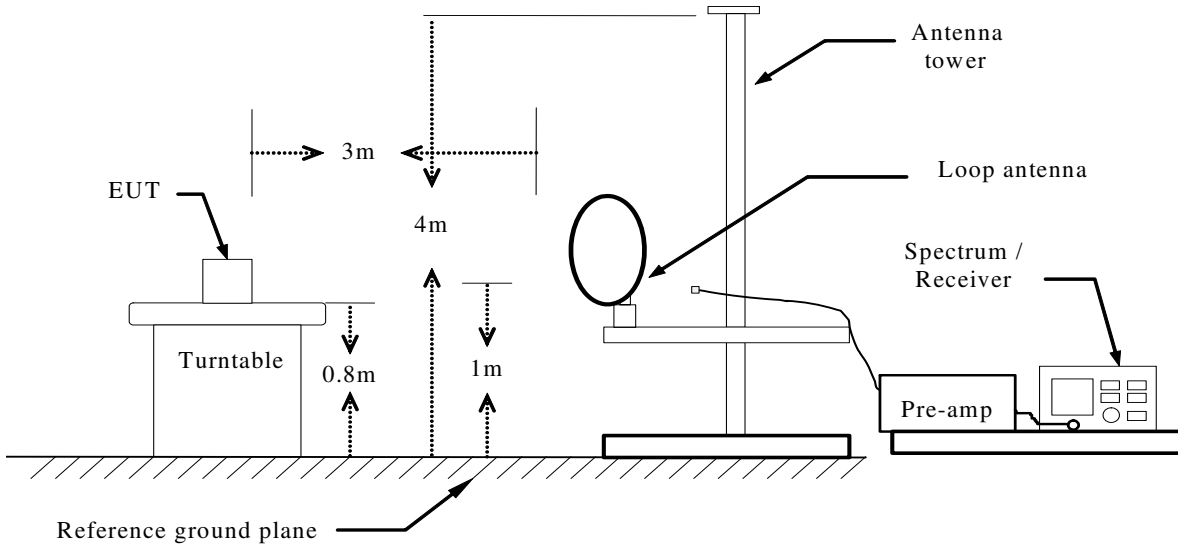


**Below 1 GHz**

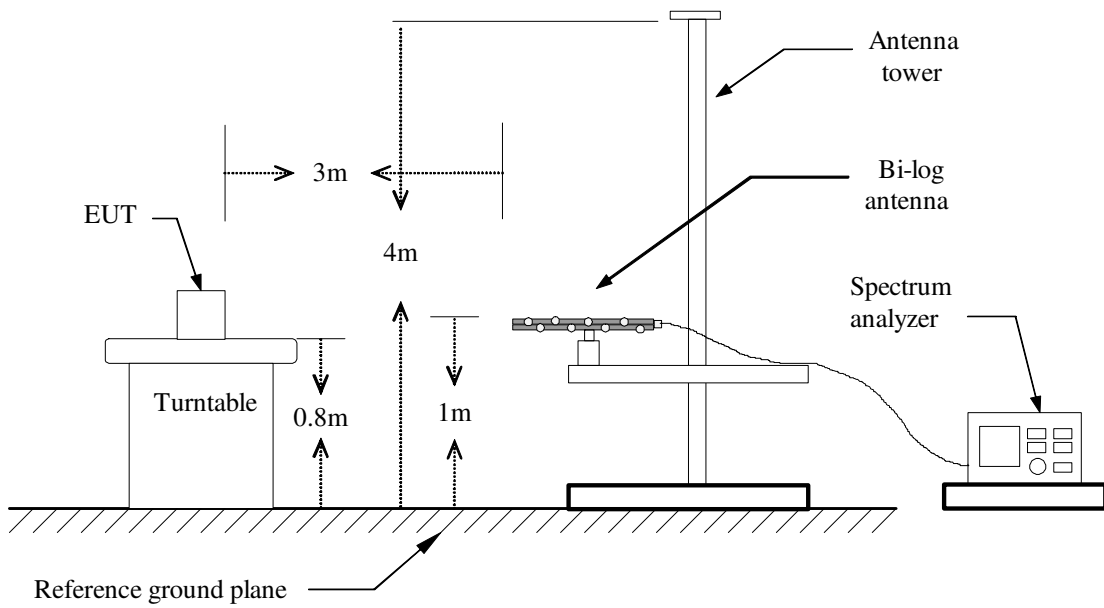



## Above 1 GHz

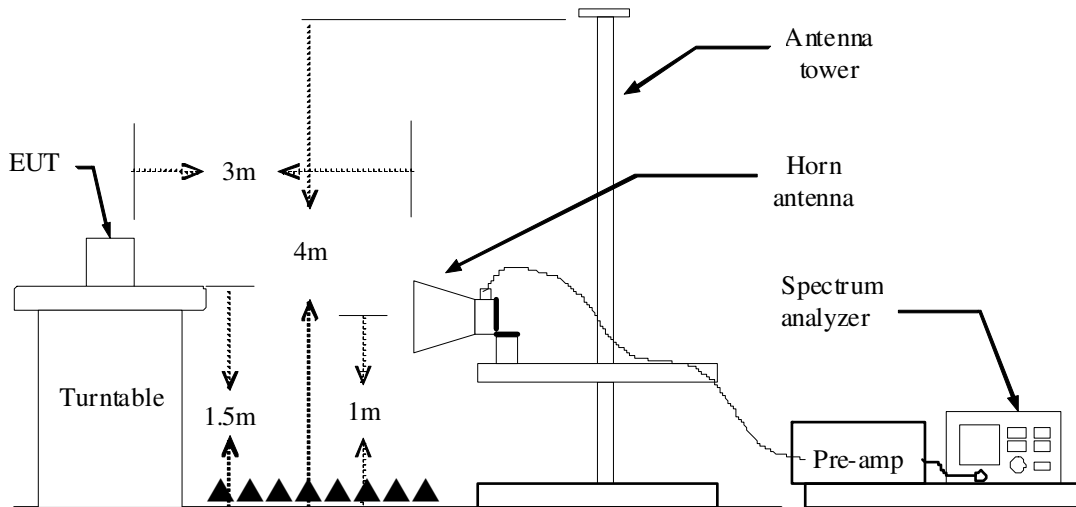

## TEST PROCEDURE

1. The EUT is placed on a turntable above ground plane, which is 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

PEAK: RBW=VBW=1MHz / Sweep=AUTO


AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

## TEST RESULTS

**RESTRICTED BANDEDGE (b Mode, Low Channel, Horizontal)**


100.0 dBuV/m

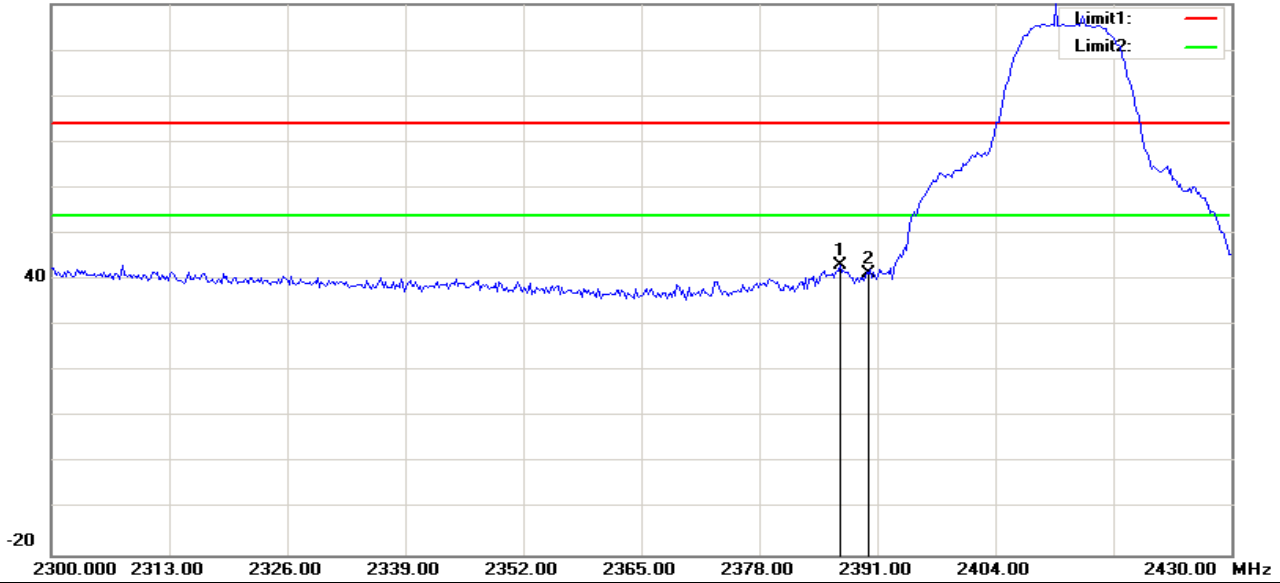

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2386.875        | 51.86          | -8.82                | 43.04           | 74.00          | -30.96      | 100         | 25            | peak   |
| 2   | 2390.000        | 50.16          | -8.81                | 41.35           | 74.00          | -32.65      | 100         | 203           | peak   |

**RESTRICTED BANDEDGE (b Mode, Low Channel, Vertical)**


110.0 dBuV/m

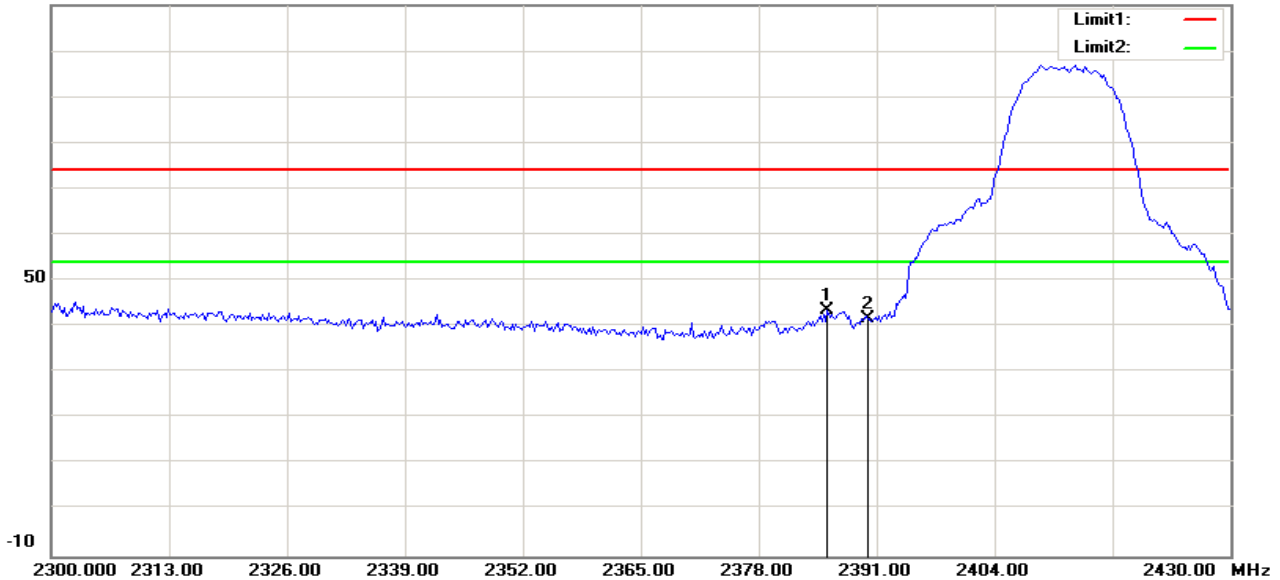

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2385.625        | 52.28          | -8.83                | 43.45           | 74.00          | -30.55      | 100         | 1             | peak   |
| 2   | 2390.000        | 50.44          | -8.81                | 41.63           | 74.00          | -32.37      | 100         | 350           | peak   |

**RESTRICTED BANDEDGE (b Mode, High Channel, Horizontal)**


110.0 dBuV/m

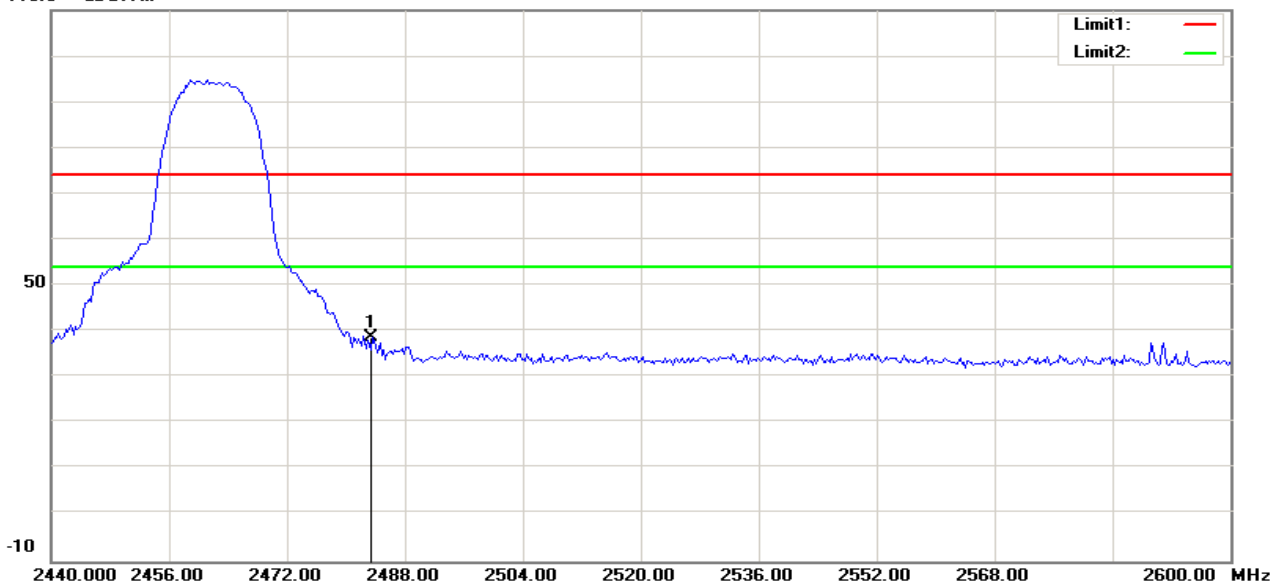

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2483.500        | 47.29          | -8.47                | 38.82           | 74.00          | -35.18      | 100         | 160           | peak   |

**RESTRICTED BANDEDGE (b Mode, High Channel, Vertical)**


110.0 dBuV/m

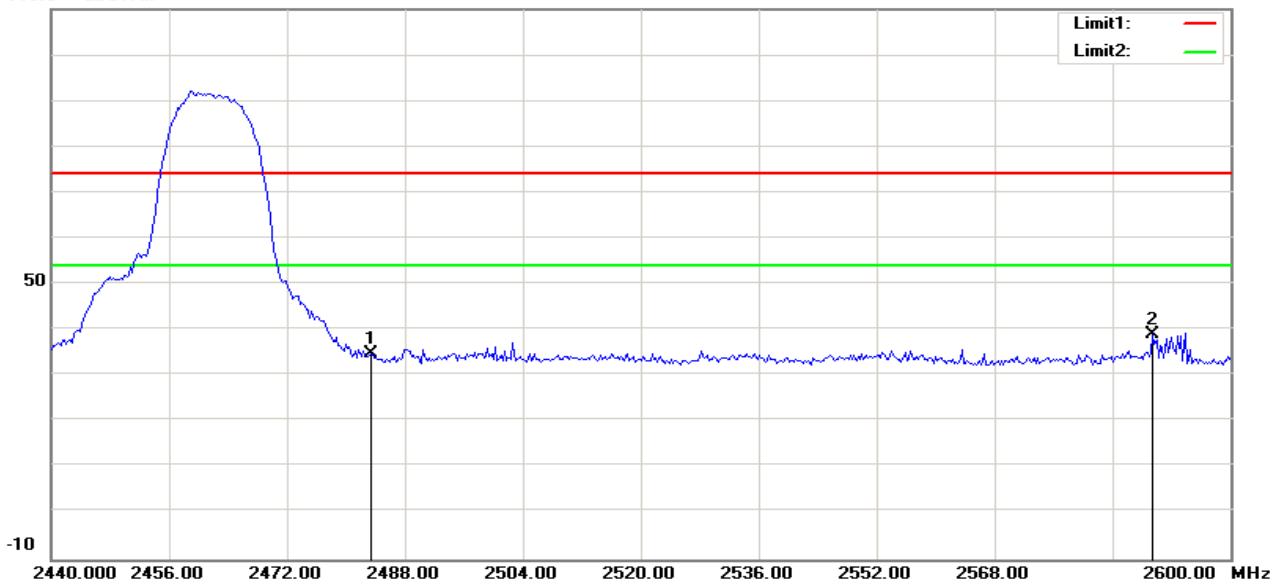

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2483.500        | 43.17          | -8.47                | 34.70           | 74.00          | -39.30      | 100         | 137           | peak   |
| 2   | 2589.487        | 46.96          | -8.04                | 38.92           | 74.00          | -35.08      | 100         | 340           | peak   |

**RESTRICTED BANDEDGE (g Mode, Low Channel, Horizontal)**


110.0 dBuV/m

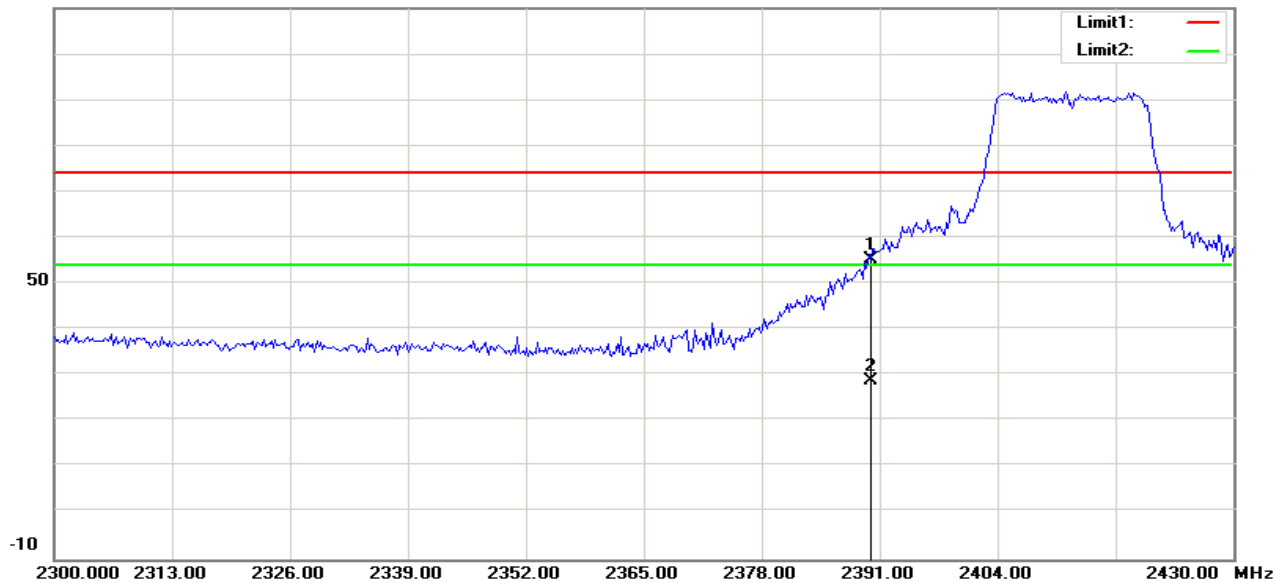

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2390.000        | 64.20          | -8.81                | 55.39           | 74.00          | -18.61      | 100         | 51            | peak   |
| 2   | 2390.000        | 37.64          | -8.81                | 28.83           | 54.00          | -25.17      | 100         | 51            | AVG    |

**RESTRICTED BANDEDGE (g Mode, Low Channel, Vertical)**


110.0 dBuV/m

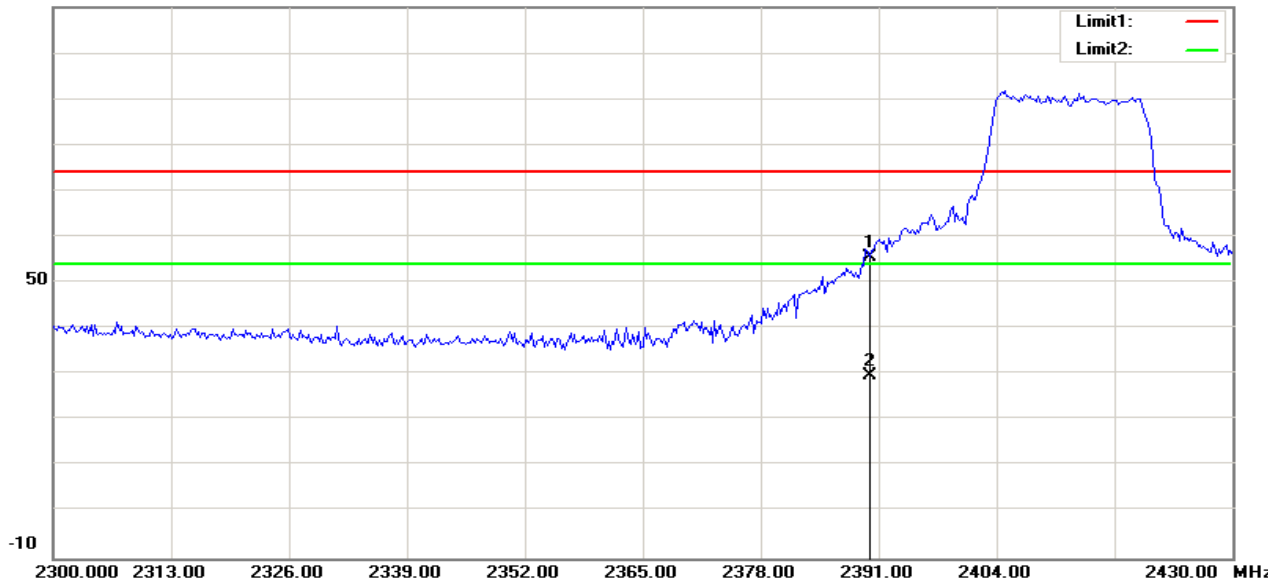

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2390.000        | 64.40          | -8.81                | 55.59           | 74.00          | -18.41      | 100         | 359           | peak   |
| 2   | 2390.000        | 38.64          | -8.81                | 29.83           | 54.00          | -24.17      | 100         | 359           | AVG    |

**RESTRICTED BANDEDGE (g Mode, High Channel, Horizontal)**


110.0 dBuV/m

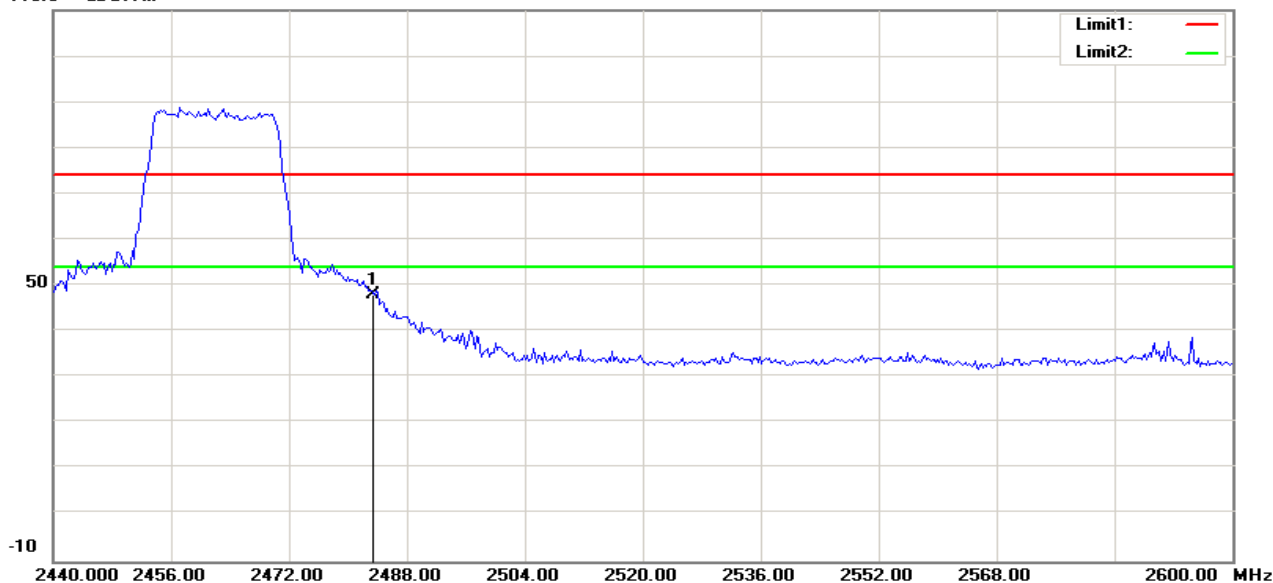

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2483.500        | 56.50          | -8.47                | 48.03           | 74.00          | -25.97      | 100         | 172           | peak   |

**RESTRICTED BANDEDGE (g Mode, High Channel, Vertical)**


110.0 dBuV/m

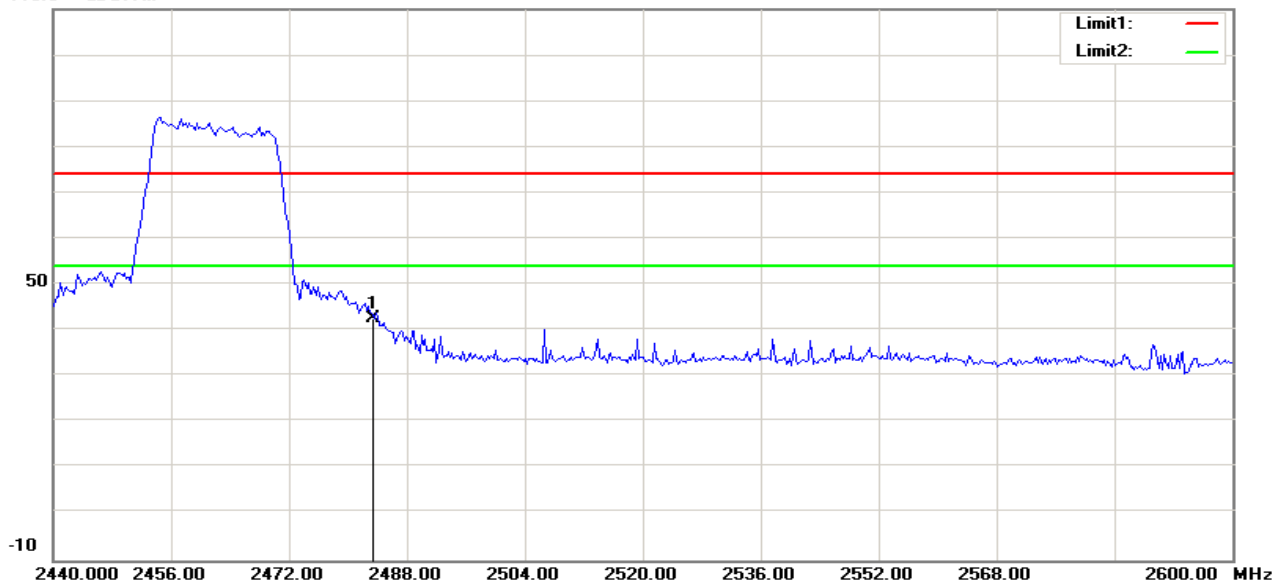

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2483.500        | 51.06          | -8.47                | 42.59           | 74.00          | -31.41      | 100         | 333           | peak   |

**RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Horizontal)**


110.0 dBuV/m

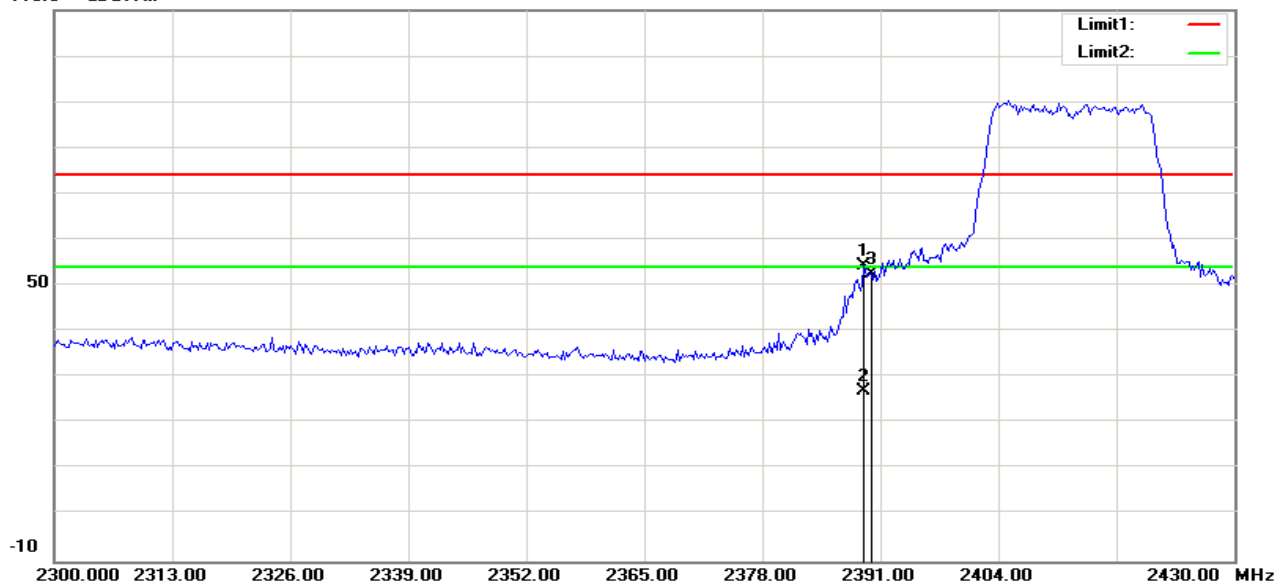

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2389.167        | 63.03          | -8.82                | 54.21           | 74.00          | -19.79      | 100         | 44            | peak   |
| 2   | 2389.167        | 35.78          | -8.82                | 26.96           | 54.00          | -27.04      | 100         | 44            | AVG    |
| 3   | 2390.000        | 61.39          | -8.81                | 52.58           | 74.00          | -21.42      | 100         | 0             | peak   |

**RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Vertical)**


110.0 dBuV/m

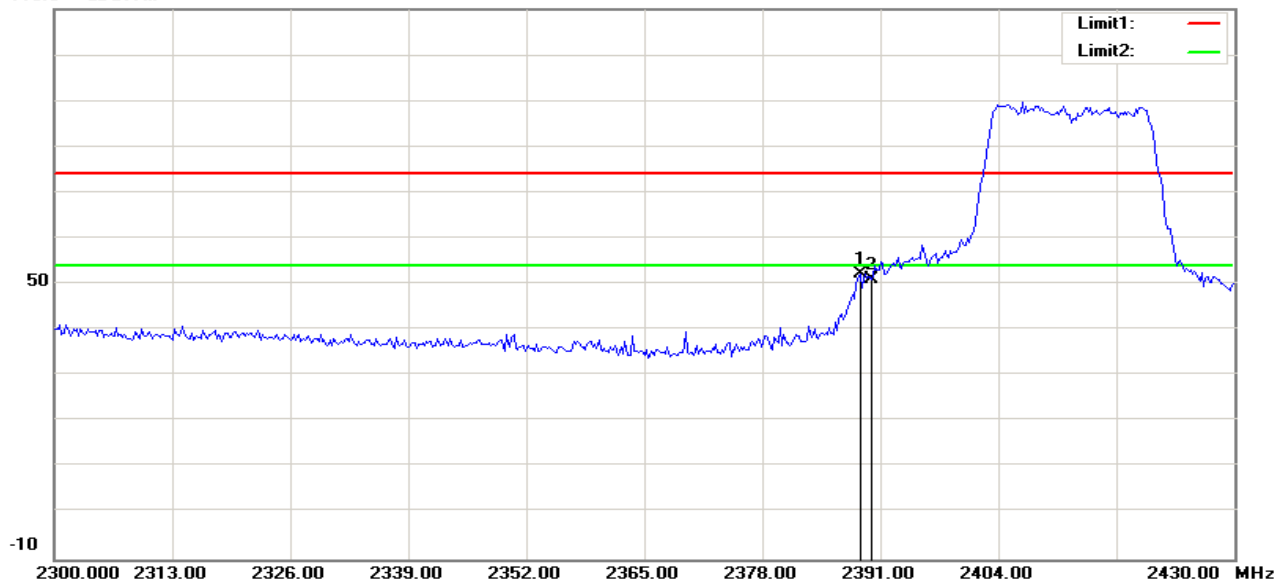

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2388.750        | 61.06          | -8.82                | 52.24           | 74.00          | -21.76      | 100         | 1             | peak   |
| 2   | 2390.000        | 60.00          | -8.81                | 51.19           | 74.00          | -22.81      | 100         | 339           | peak   |

**RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Horizontal)**


110.0 dBuV/m

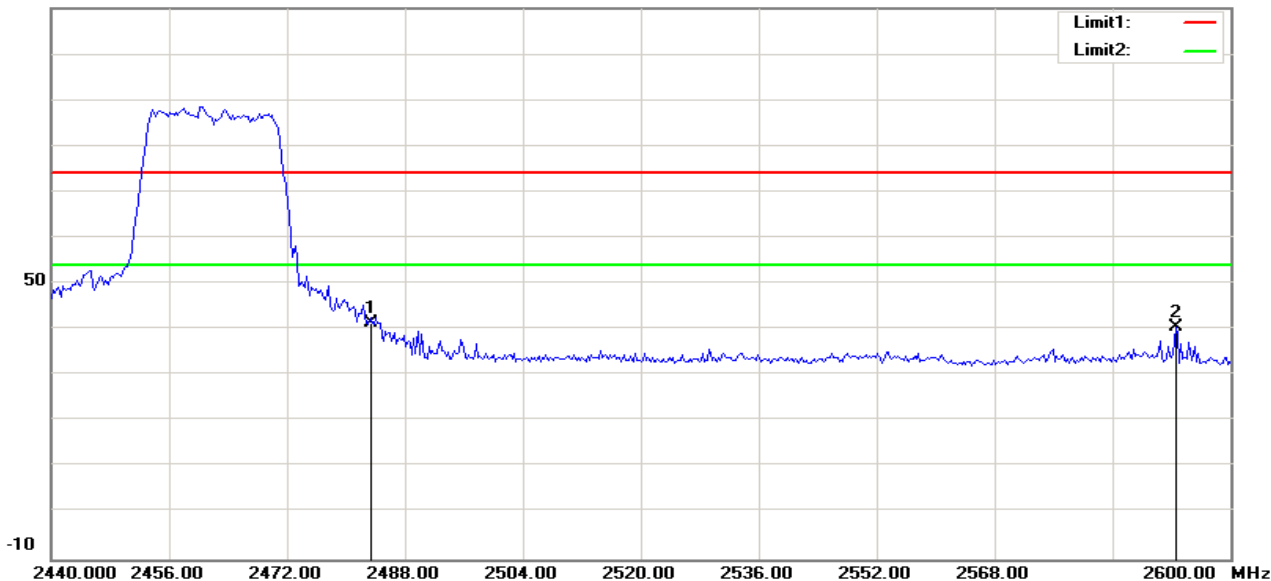

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2483.500        | 49.98          | -8.47                | 41.51           | 74.00          | -32.49      | 100         | 121           | peak   |
| 2   | 2592.564        | 48.58          | -8.03                | 40.55           | 74.00          | -33.45      | 100         | 354           | peak   |

**RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Vertical)**

110.0 dBuV/m

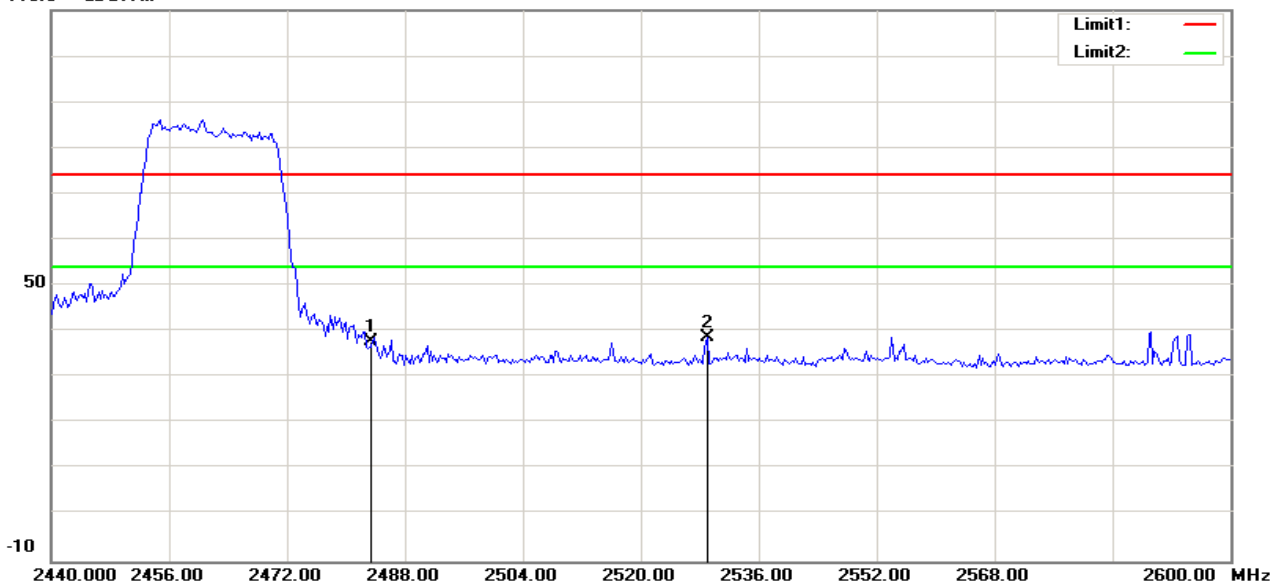


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2483.500        | 46.26          | -8.47                | 37.79           | 74.00          | -36.21      | 100         | 345           | peak   |
| 2   | 2528.974        | 46.90          | -8.29                | 38.61           | 74.00          | -35.39      | 100         | 86            | peak   |

**RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, Low Channel, Horizontal)**



| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2385.000        | 68.08          | -8.83                | 59.25           | 74.00          | -14.75      | 100         | 43            | peak   |
| 2   | 2385.000        | 37.67          | -8.83                | 28.84           | 54.00          | -25.16      | 100         | 43            | AVG    |
| 3   | 2390.000        | 65.82          | -8.81                | 57.01           | 74.00          | -16.99      | 100         | 49            | peak   |
| 4   | 2390.000        | 36.91          | -8.81                | 28.10           | 54.00          | -25.90      | 100         | 49            | AVG    |

**RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, Low Channel, Vertical)**

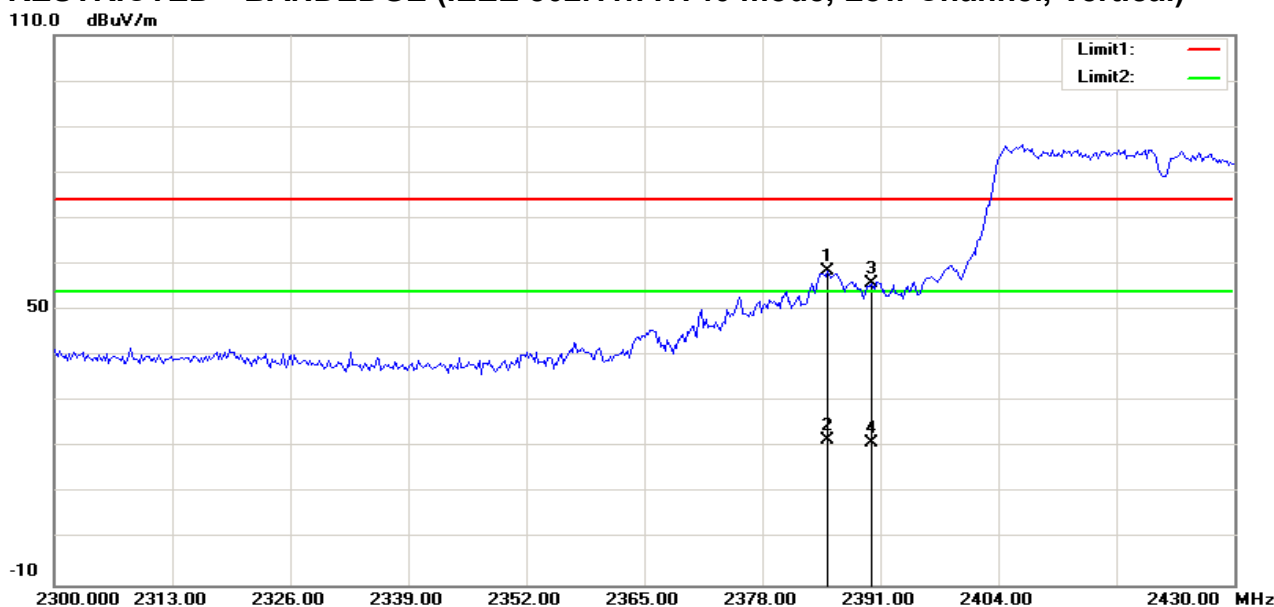


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2385.208        | 67.28          | -8.83                | 58.45           | 74.00          | -15.55      | 100         | 338           | peak   |
| 2   | 2385.208        | 30.60          | -8.83                | 21.77           | 54.00          | -32.23      | 100         | 338           | AVG    |
| 3   | 2390.000        | 64.77          | -8.81                | 55.96           | 74.00          | -18.04      | 100         | 343           | peak   |
| 4   | 2390.000        | 29.92          | -8.81                | 21.11           | 54.00          | -32.89      | 100         | 343           | AVG    |



**RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, High Channel, Horizontal)**


110.0 dBuV/m

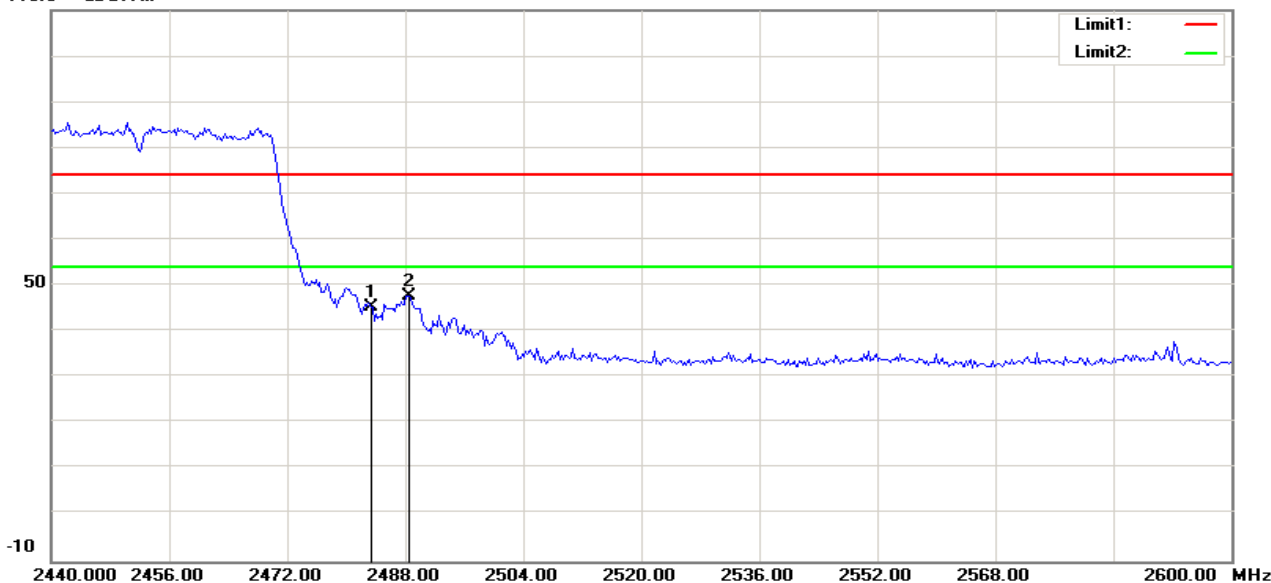

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2483.500        | 53.76          | -8.47                | 45.29           | 74.00          | -28.71      | 100         | 251           | peak   |
| 2   | 2488.461        | 56.32          | -8.45                | 47.87           | 74.00          | -26.13      | 100         | 50            | peak   |

**RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, High Channel, Vertical)**

110.0 dBuV/m

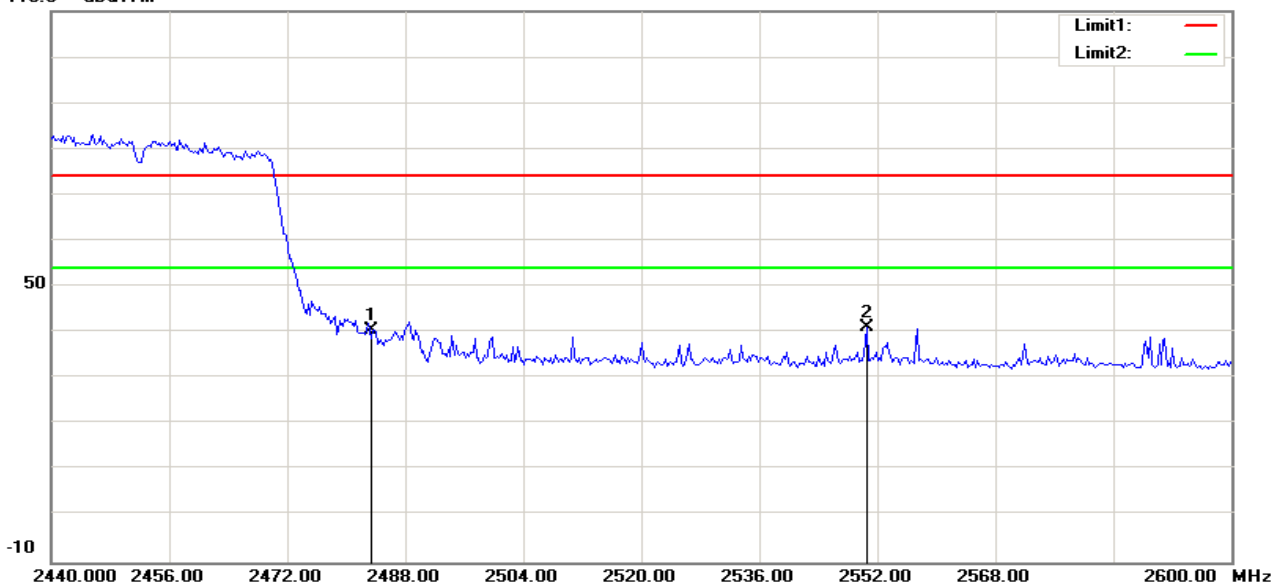

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 2483.500        | 49.03          | -8.47                | 40.56           | 74.00          | -33.44      | 100         | 312           | peak   |
| 2   | 2550.513        | 49.48          | -8.20                | 41.28           | 74.00          | -32.72      | 100         | 70            | peak   |

**Test Result of Radiated Emission****Below 30MHz**

The interference of the frequency value is lower than the limit below 20 db, measured as the background noise values and will not be recorded.

**30MHz-1GHz**

|                        |             |                   |             |
|------------------------|-------------|-------------------|-------------|
| <b>Operation Mode:</b> | Normal Link | <b>Test Date:</b> | 2016-10-28  |
| <b>Temperature:</b>    | 25°C        | <b>Tested by:</b> | Lily.Wang   |
| <b>Humidity:</b>       | 48% RH      | <b>Polarity:</b>  | Ver. / Hor. |

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------|
| 35.8200         | V               | 16.38          | 18.99                    | 35.37           | 40.00          | -4.63       | peak   |
| 180.3500        | V               | 13.52          | 15.40                    | 28.92           | 43.50          | -14.58      | peak   |
| 475.2300        | V               | 16.31          | 20.99                    | 37.30           | 46.00          | -8.70       | peak   |
| 742.5245        | V               | 18.75          | 24.75                    | 43.50           | 46.00          | -2.50       | QP     |
| 792.4200        | V               | 7.86           | 25.36                    | 33.22           | 46.00          | -12.78      | peak   |
| 891.3600        | V               | 10.19          | 25.77                    | 35.96           | 46.00          | -10.04      | peak   |
| 74.6200         | H               | 17.84          | 10.79                    | 28.63           | 40.00          | -11.37      | peak   |
| 202.6600        | H               | 13.69          | 16.22                    | 29.91           | 43.50          | -13.59      | peak   |
| 445.1600        | H               | 13.53          | 20.75                    | 34.28           | 46.00          | -11.72      | peak   |
| 742.5147        | H               | 19.94          | 24.75                    | 44.69           | 46.00          | -1.31       | QP     |
| 792.4200        | H               | 9.11           | 25.36                    | 34.47           | 46.00          | -11.53      | peak   |
| 891.3600        | H               | 9.32           | 25.77                    | 35.09           | 46.00          | -10.91      | peak   |

**Remark:**

1. Measuring frequencies from 30 MHz to the 1GHz (No emission found between lowest internal used/generated frequency to 30 MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

**Above 1 GHz**
**Operation Mode:** TX / IEEE 802.11b / CH Low

**Test Date:** 2016-10-9

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4814.103           | 68.76             | -1.35                   | 67.41              | 74.00             | -6.59          | 100            | 0                | peak   |
| 2   | 4814.103           | 42.60             | -1.35                   | 41.25              | 54.00             | -12.75         | 100            | 0                | AVG    |
| 3   | 7238.782           | 59.47             | 5.33                    | 64.80              | 74.00             | -9.20          | 100            | 55               | peak   |
| 4   | 7238.782           | 28.23             | 5.33                    | 33.56              | 54.00             | -20.44         | 100            | 55               | AVG    |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |

**Vertical**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4814.103           | 68.43             | -1.35                   | 67.08              | 74.00             | -6.92          | 100            | 251              | peak   |
| 2   | 4814.103           | 40.61             | -1.35                   | 39.26              | 54.00             | -14.74         | 100            | 251              | AVG    |
| 3   | 7238.782           | 54.26             | 5.33                    | 59.59              | 74.00             | -14.41         | 100            | 142              | peak   |
| 4   | 7238.782           | 44.90             | 5.33                    | 50.23              | 54.00             | -3.77          | 100            | 142              | AVG    |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |

**Operation Mode:** TX / IEEE 802.11b / CH Mid

**Test Date:** 2016-10-9

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4868.590           | 71.28             | -1.37                   | 69.91              | 74.00             | -4.09          | 100            | 0                | peak   |
| 2   | 4868.590           | 48.24             | -1.37                   | 46.87              | 54.00             | -7.13          | 100            | 0                | AVG    |
| 3   | 7293.269           | 54.06             | 5.35                    | 59.41              | 74.00             | -14.59         | 100            | 48               | peak   |
| 4   | 7293.269           | 28.76             | 5.35                    | 34.11              | 54.00             | -19.89         | 100            | 48               | AVG    |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |

**Vertical**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4868.590           | 65.79             | -1.37                   | 64.42              | 74.00             | -9.58          | 100            | 293              | peak   |
| 2   | 4868.590           | 43.61             | -1.37                   | 42.24              | 54.00             | -11.76         | 100            | 293              | AVG    |
| 3   | 7320.513           | 54.94             | 5.36                    | 60.30              | 74.00             | -13.70         | 100            | 152              | peak   |
| 4   | 7320.513           | 38.84             | 5.36                    | 44.20              | 54.00             | -9.80          | 100            | 152              | AVG    |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |

**Operation Mode:** TX / IEEE 802.11b / CH High

**Test Date:** 2016-10-9

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

### Horizontal

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 4923.077        | 70.72          | -1.40                | 69.32           | 74.00          | -4.68       | 100         | 324           | peak   |
| 2   | 4923.077        | 50.97          | -1.40                | 49.57           | 54.00          | -4.43       | 100         | 324           | AVG    |
| 3   | 7375.000        | 48.76          | 5.38                 | 54.14           | 74.00          | -19.86      | 100         | 301           | peak   |
| 4   | 7375.000        | 28.10          | 5.38                 | 33.48           | 54.00          | -20.52      | 100         | 301           | AVG    |
| N/A |                 |                |                      |                 |                |             |             |               |        |

### Vertical

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 4923.077        | 64.71          | -1.40                | 63.31           | 74.00          | -10.69      | 100         | 290           | peak   |
| 2   | 4923.077        | 49.83          | -1.40                | 48.43           | 54.00          | -5.57       | 100         | 290           | AVG    |
| 3   | 7375.000        | 52.98          | 5.38                 | 58.36           | 74.00          | -15.64      | 100         | 140           | peak   |
| 4   | 7375.000        | 35.52          | 5.38                 | 40.90           | 54.00          | -13.10      | 100         | 140           | AVG    |
| N/A |                 |                |                      |                 |                |             |             |               |        |

**Operation Mode:** TX / IEEE 802.11g / CH Low

**Test Date:** 2016-10-9

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

### Horizontal

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 4814.103        | 60.45          | -1.35                | 59.10           | 74.00          | -14.90      | 100         | 353           | peak   |
| 2   | 4814.103        | 36.22          | -1.35                | 34.87           | 54.00          | -19.13      | 100         | 353           | AVG    |
| 3   | 7238.782        | 51.39          | 5.33                 | 56.72           | 74.00          | -17.28      | 100         | 39            | peak   |
| 4   | 7238.782        | 33.37          | 5.33                 | 38.70           | 54.00          | -15.30      | 100         | 39            | AVG    |
| N/A |                 |                |                      |                 |                |             |             |               |        |

### Vertical

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 4814.103        | 57.87          | -1.35                | 56.52           | 74.00          | -17.48      | 100         | 26            | peak   |
| 2   | 4814.103        | 34.71          | -1.35                | 33.36           | 54.00          | -20.64      | 100         | 26            | AVG    |
| 3   | 7238.782        | 48.51          | 5.33                 | 53.84           | 74.00          | -20.16      | 100         | 157           | peak   |
| N/A |                 |                |                      |                 |                |             |             |               |        |

**Operation Mode:** TX / IEEE 802.11g / CH Mid

**Test Date:** 2016-10-9

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4868.590           | 60.34             | -1.37                   | 58.97              | 74.00             | -15.03         | 100            | 343              | peak   |
| 2   | 4868.590           | 36.83             | -1.37                   | 35.46              | 54.00             | -18.54         | 100            | 343              | AVG    |
| 3   | 7293.269           | 46.77             | 5.35                    | 52.12              | 74.00             | -21.88         | 100            | 50               | peak   |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |

**Vertical**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4868.590           | 53.60             | -1.37                   | 52.23              | 74.00             | -21.77         | 100            | 292              | peak   |
| 2   | 7320.513           | 47.23             | 5.36                    | 52.59              | 74.00             | -21.41         | 100            | 144              | peak   |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |

**Operation Mode:** TX / IEEE 802.11g / CH High

**Test Date:** 2016-10-9

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4923.077           | 58.51             | -1.40                   | 57.11              | 74.00             | -16.89         | 100            | 342              | peak   |
| 2   | 4923.077           | 37.85             | -1.40                   | 36.45              | 54.00             | -17.55         | 100            | 342              | AVG    |
| 3   | 7402.244           | 41.56             | 5.39                    | 46.95              | 74.00             | -27.05         | 100            | 300              | peak   |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |

**Vertical**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4923.077           | 53.85             | -1.40                   | 52.45              | 74.00             | -21.55         | 100            | 312              | peak   |
| 2   | 7375.000           | 44.51             | 5.38                    | 49.89              | 74.00             | -24.11         | 100            | 154              | peak   |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |

**Operation Mode:** TX / IEEE 802.11n HT20 mode / CH Low

**Test Date:** 2016-10-9

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 4814.103        | 53.18          | -1.35                | 51.83           | 74.00          | -22.17      | 100         | 291           | peak   |
| 2   | 7238.782        | 43.70          | 5.33                 | 49.03           | 74.00          | -24.97      | 100         | 40            | peak   |
| N/A |                 |                |                      |                 |                |             |             |               |        |
|     |                 |                |                      |                 |                |             |             |               |        |
|     |                 |                |                      |                 |                |             |             |               |        |

**Vertical**

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 4814.103        | 47.82          | -1.35                | 46.47           | 74.00          | -27.53      | 100         | 228           | peak   |
| 2   | 7184.295        | 42.07          | 5.30                 | 47.37           | 74.00          | -26.63      | 100         | 194           | peak   |
| N/A |                 |                |                      |                 |                |             |             |               |        |
|     |                 |                |                      |                 |                |             |             |               |        |
|     |                 |                |                      |                 |                |             |             |               |        |

**Operation Mode:** TX / IEEE 802.11n HT20 mode / CH Mid

**Test Date:** 2016-10-9

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 4868.590        | 50.72          | -1.37                | 49.35           | 74.00          | -24.65      | 100         | 2             | peak   |
| 2   | 7293.269        | 41.64          | 5.35                 | 46.99           | 74.00          | -27.01      | 100         | 80            | peak   |
| N/A |                 |                |                      |                 |                |             |             |               |        |
|     |                 |                |                      |                 |                |             |             |               |        |
|     |                 |                |                      |                 |                |             |             |               |        |

**Vertical**

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1   | 4868.590        | 47.20          | -1.37                | 45.83           | 74.00          | -28.17      | 100         | 251           | peak   |
| 2   | 7157.051        | 41.71          | 5.29                 | 47.00           | 74.00          | -27.00      | 100         | 113           | peak   |
| N/A |                 |                |                      |                 |                |             |             |               |        |
|     |                 |                |                      |                 |                |             |             |               |        |
|     |                 |                |                      |                 |                |             |             |               |        |

**Operation Mode:** TX / IEEE 802.11n HT20 mode / CH High **Test Date:** 2016-10-9

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4895.833           | 50.51             | -1.38                   | 49.13              | 74.00             | -24.87         | 100            | 360              | peak   |
| 2   | 7157.051           | 41.89             | 5.29                    | 47.18              | 74.00             | -26.82         | 100            | 123              | peak   |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |

**Vertical**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4923.077           | 46.78             | -1.40                   | 45.38              | 74.00             | -28.62         | 100            | 263              | peak   |
| 2   | 7320.513           | 41.54             | 5.36                    | 46.90              | 74.00             | -27.10         | 100            | 153              | peak   |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |

**Operation Mode:** TX / IEEE 802.11n HT40 mode / CH Low

**Test Date:** 2016-10-9

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4841.346           | 55.28             | -1.36                   | 53.92              | 74.00             | -20.08         | 100            | 1                | peak   |
| 2   | 7238.782           | 47.12             | 5.33                    | 52.45              | 74.00             | -21.55         | 100            | 62               | peak   |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |

**Vertical**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4841.346           | 51.29             | -1.36                   | 49.93              | 74.00             | -24.07         | 100            | 250              | peak   |
| 2   | 7266.026           | 43.89             | 5.34                    | 49.23              | 74.00             | -24.77         | 100            | 150              | peak   |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |

**Operation Mode:** TX / IEEE 802.11n HT40 mode / CH Mid

**Test Date:** 2016-10-9

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4868.590           | 49.53             | -1.37                   | 48.16              | 74.00             | -25.84         | 100            | 360              | peak   |
| 2   | 7266.026           | 41.12             | 5.34                    | 46.46              | 74.00             | -27.54         | 100            | 38               | peak   |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |

**Vertical**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4868.590           | 44.98             | -1.37                   | 43.61              | 74.00             | -30.39         | 100            | 293              | peak   |
| 2   | 7238.782           | 41.57             | 5.33                    | 46.90              | 74.00             | -27.10         | 100            | 221              | peak   |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |

**Operation Mode:** TX / IEEE 802.11n HT40 mode / CH High **Test Date:** 2016-10-9

**Temperature:** 24°C

**Tested by:** Lily.Wang

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

**Horizontal**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4895.833           | 49.19             | -1.38                   | 47.81              | 74.00             | -26.19         | 100            | 357              | peak   |
| 2   | 7266.026           | 40.27             | 5.34                    | 45.61              | 74.00             | -28.39         | 100            | 130              | peak   |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |

**Vertical**

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1   | 4895.833           | 43.87             | -1.38                   | 42.49              | 74.00             | -31.51         | 100            | 232              | peak   |
| 2   | 7157.051           | 41.25             | 5.29                    | 46.54              | 74.00             | -27.46         | 100            | 26               | peak   |
| N/A |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |
|     |                    |                   |                         |                    |                   |                |                |                  |        |



## 7.6.POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency Range<br>(MHz) | Limits<br>(dB $\mu$ V) |           |
|--------------------------|------------------------|-----------|
|                          | Quasi-peak             | Average   |
| 0.15 to 0.50             | 66 to 56*              | 56 to 46* |
| 0.50 to 5                | 56                     | 46        |
| 5 to 30                  | 60                     | 50        |

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE


- 1.The EUT was placed on a table, which is 0.8m above ground plane.
- 2.Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3.Repeat above procedures until all frequency measured were complete.

### TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### TEST DATA


|            |                 |                   |              |
|------------|-----------------|-------------------|--------------|
| Job No.:   | C160926R01      | Date:             | 2016-10-8    |
| Model No.: | YHS.2016        | Time:             | AM 11:38:51  |
| Standard:  | FCC Class B     | Temp.(C)/Hum.(%): | 22(C)/41%    |
| Test item: | Conduction test | Test By:          | Lily.Wang    |
| Line:      | L1              | Test Voltage:     | AC 120V/60Hz |
| Model:     |                 | Description:      |              |

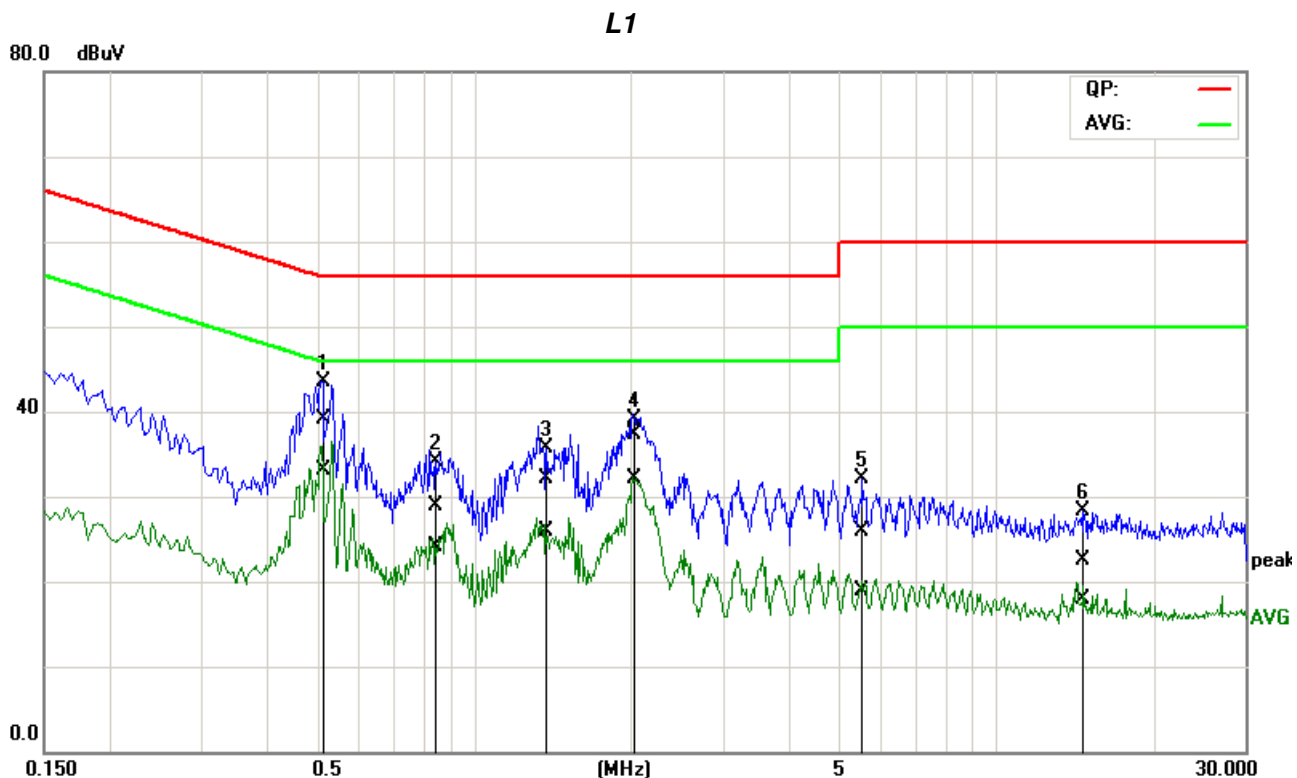

| No. | Frequency (MHz) | QuasiPeak reading (dBuV) | Average reading (dBuV) | Correction factor (dB) | QuasiPeak result (dBuV) | Average result (dBuV) | QuasiPeak limit (dBuV) | Average limit (dBuV) | QuasiPeak margin (dB) | Average margin (dB) | Remark |
|-----|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------|
| 1*  | 0.5131          | 19.39                    | 13.25                  | 19.81                  | 39.20                   | 33.06                 | 56.00                  | 46.00                | -16.80                | -12.94              | Pass   |
| 2   | 0.8307          | 9.10                     | 4.22                   | 19.80                  | 28.90                   | 24.02                 | 56.00                  | 46.00                | -27.10                | -21.98              | Pass   |
| 3   | 1.3631          | 12.27                    | 6.06                   | 19.81                  | 32.08                   | 25.87                 | 56.00                  | 46.00                | -23.92                | -20.13              | Pass   |
| 4   | 2.0410          | 17.54                    | 12.22                  | 19.84                  | 37.38                   | 32.06                 | 56.00                  | 46.00                | -18.62                | -13.94              | Pass   |
| 5   | 5.5765          | 5.92                     | -1.01                  | 19.93                  | 25.85                   | 18.92                 | 60.00                  | 50.00                | -34.15                | -31.08              | Pass   |
| 6   | 14.6982         | 2.51                     | -2.09                  | 20.03                  | 22.54                   | 17.94                 | 60.00                  | 50.00                | -37.46                | -32.06              | Pass   |

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).


|            |                 |                   |              |
|------------|-----------------|-------------------|--------------|
| Job No.:   | C160926R01      | Date:             | 2016-10-8    |
| Model No.: | YHS.2016        | Time:             | AM 11:46:04  |
| Standard:  | FCC Class B     | Temp.(C)/Hum.(%): | 22(C)/41%    |
| Test item: | Conduction test | Test By:          | Lily.Wang    |
| Line:      | L2              | Test Voltage:     | AC 120V/60Hz |
| Model:     |                 | Description:      |              |

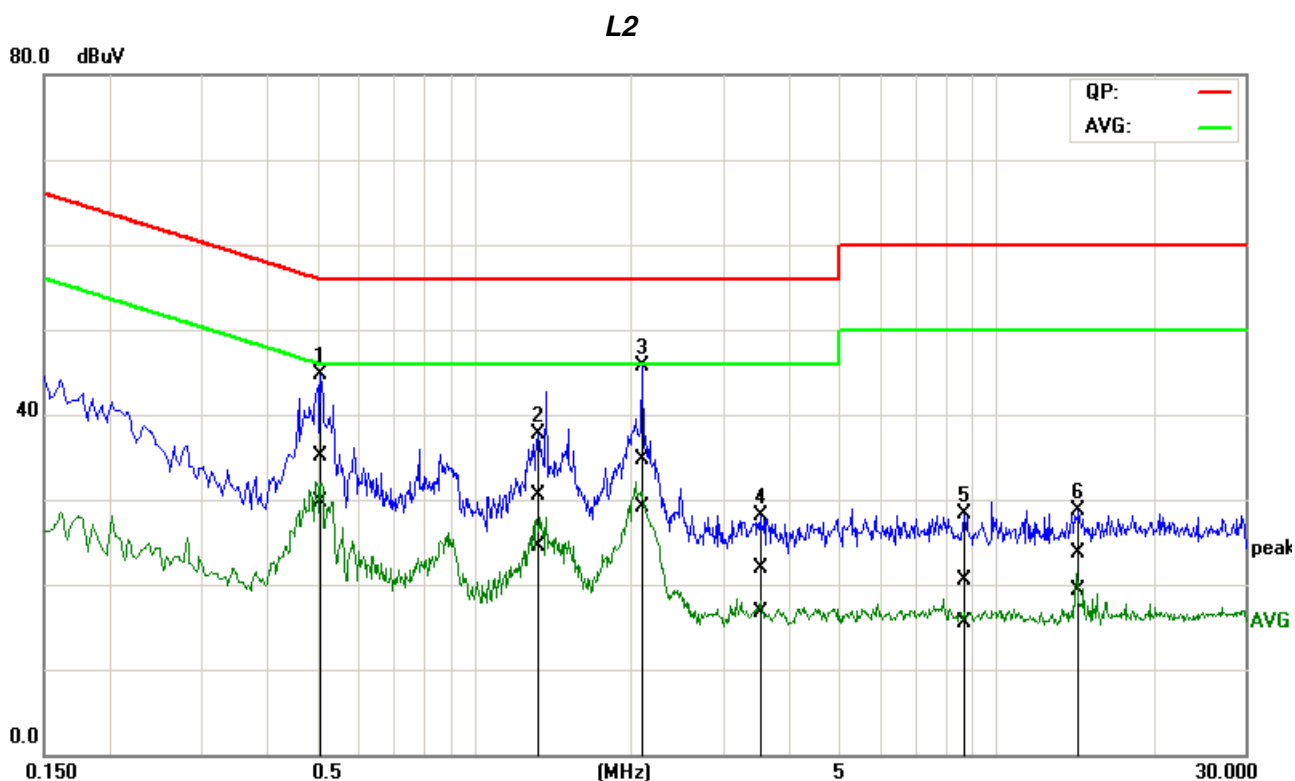

| No. | Frequency (MHz) | QuasiPeak reading (dBuV) | Average reading (dBuV) | Correction factor (dB) | QuasiPeak result (dBuV) | Average result (dBuV) | QuasiPeak limit (dBuV) | Average limit (dBuV) | QuasiPeak margin (dB) | Average margin (dB) | Remark |
|-----|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------|
| 1*  | 0.5068          | 15.38                    | 9.88                   | 19.75                  | 35.13                   | 29.63                 | 56.00                  | 46.00                | -20.87                | -16.37              | Pass   |
| 2   | 1.3177          | 10.67                    | 4.71                   | 19.75                  | 30.42                   | 24.46                 | 56.00                  | 46.00                | -25.58                | -21.54              | Pass   |
| 3   | 2.0734          | 15.02                    | 9.32                   | 19.77                  | 34.79                   | 29.09                 | 56.00                  | 46.00                | -21.21                | -16.91              | Pass   |
| 4   | 3.5472          | 2.18                     | -3.16                  | 19.80                  | 21.98                   | 16.64                 | 56.00                  | 46.00                | -34.02                | -29.36              | Pass   |
| 5   | 8.6806          | 0.50                     | -4.57                  | 20.03                  | 20.53                   | 15.46                 | 60.00                  | 50.00                | -39.47                | -34.54              | Pass   |
| 6   | 14.3373         | 3.49                     | -0.93                  | 20.30                  | 23.79                   | 19.37                 | 60.00                  | 50.00                | -36.21                | -30.63              | Pass   |

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).


|            |                 |                   |              |
|------------|-----------------|-------------------|--------------|
| Job No.:   | C160926R01      | Date:             | 2016-10-8    |
| Model No.: | YHS.2016        | Time:             | PM 01:12:17  |
| Standard:  | FCC Class B     | Temp.(C)/Hum.(%): | 22(C)/41%    |
| Test item: | Conduction test | Test By:          | Lily.Wang    |
| Line:      | L1              | Test Voltage:     | AC 240V/60Hz |
| Model:     |                 | Description:      |              |

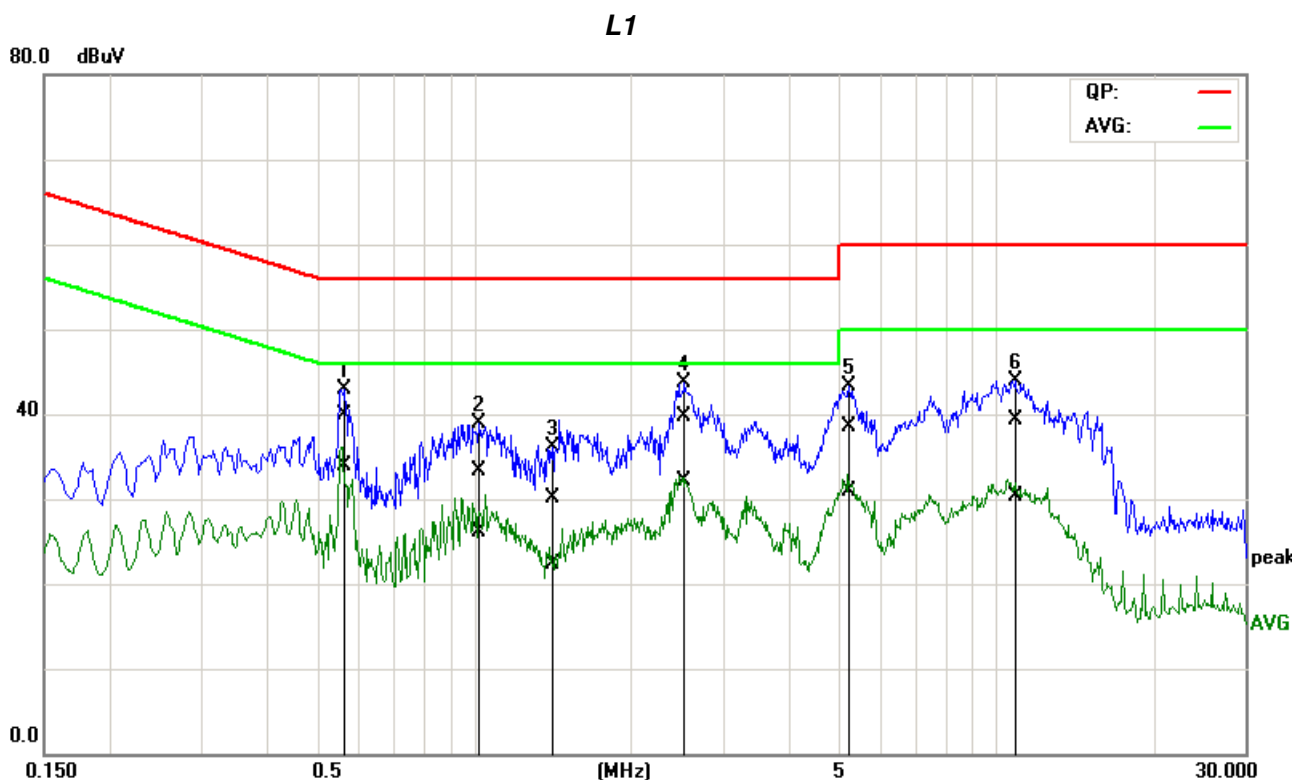

| No. | Frequency (MHz) | QuasiPeak reading (dBuV) | Average reading (dBuV) | Correction factor (dB) | QuasiPeak result (dBuV) | Average result (dBuV) | QuasiPeak limit (dBuV) | Average limit (dBuV) | QuasiPeak margin (dB) | Average margin (dB) | Remark |
|-----|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------|
| 1*  | 0.5620          | 20.17                    | 14.13                  | 19.81                  | 39.98                   | 33.94                 | 56.00                  | 46.00                | -16.02                | -12.06              | Pass   |
| 2   | 1.0192          | 13.44                    | 6.40                   | 19.79                  | 33.23                   | 26.19                 | 56.00                  | 46.00                | -22.77                | -19.81              | Pass   |
| 3   | 1.3901          | 10.27                    | 2.58                   | 19.81                  | 30.08                   | 22.39                 | 56.00                  | 46.00                | -25.92                | -23.61              | Pass   |
| 4   | 2.5097          | 19.89                    | 12.31                  | 19.87                  | 39.76                   | 32.18                 | 56.00                  | 46.00                | -16.24                | -13.82              | Pass   |
| 5   | 5.1660          | 18.55                    | 11.03                  | 19.93                  | 38.48                   | 30.96                 | 60.00                  | 50.00                | -21.52                | -19.04              | Pass   |
| 6   | 10.8574         | 19.33                    | 10.33                  | 19.97                  | 39.30                   | 30.30                 | 60.00                  | 50.00                | -20.70                | -19.70              | Pass   |

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

|            |                 |                   |              |
|------------|-----------------|-------------------|--------------|
| Job No.:   | C160926R01      | Date:             | 2016-10-8    |
| Model No.: | YHS.2016        | Time:             | PM 01:17:12  |
| Standard:  | FCC Class B     | Temp.(C)/Hum.(%): | 22(C)/41%    |
| Test item: | Conduction test | Test By:          | Lily.Wang    |
| Line:      | L2              | Test Voltage:     | AC 240V/60Hz |
| Model:     |                 | Description:      |              |

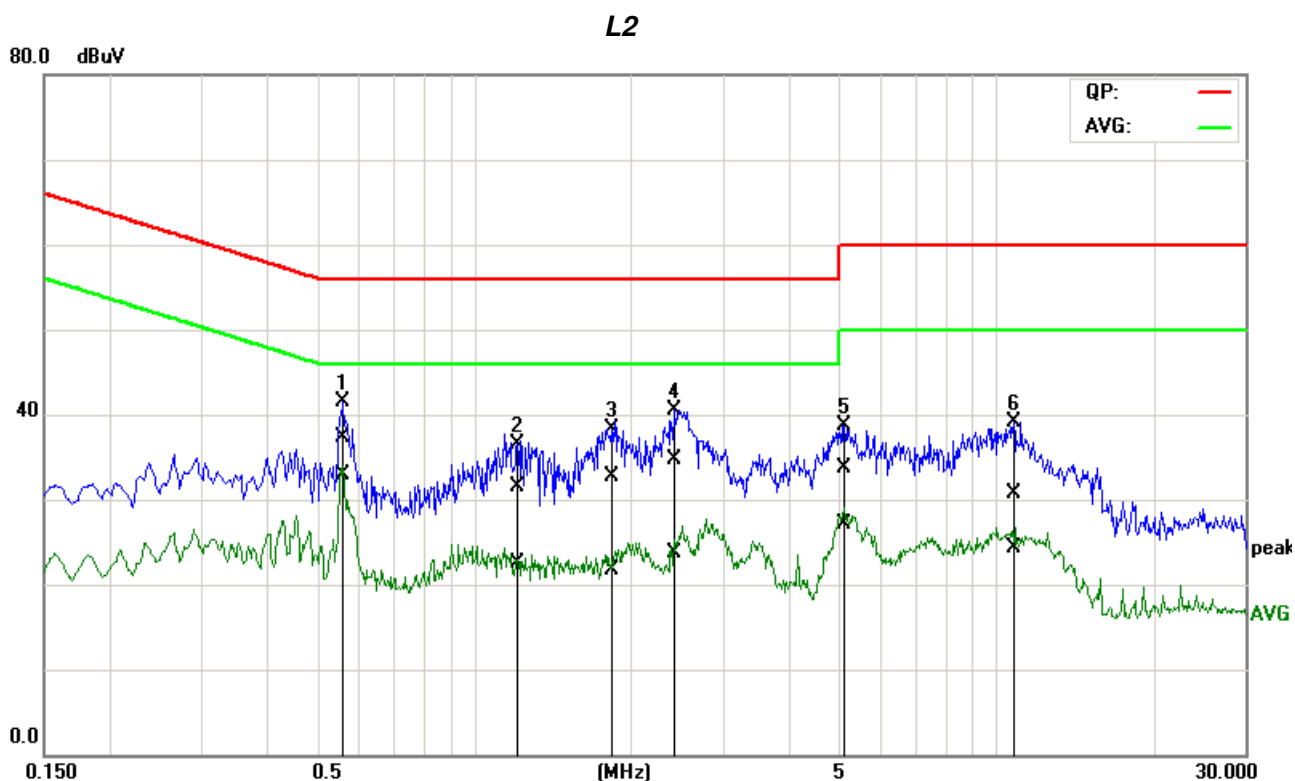

| No. | Frequency (MHz) | QuasiPeak reading (dBuV) | Average reading (dBuV) | Correction factor (dB) | QuasiPeak result (dBuV) | Average result (dBuV) | QuasiPeak limit (dBuV) | Average limit (dBuV) | QuasiPeak margin (dB) | Average margin (dB) | Remark |
|-----|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------|
| 1*  | 0.5639          | 17.54                    | 13.11                  | 19.75                  | 37.29                   | 32.86                 | 56.00                  | 46.00                | -18.71                | -13.14              | Pass   |
| 2   | 1.2020          | 11.68                    | 2.86                   | 19.74                  | 31.42                   | 22.60                 | 56.00                  | 46.00                | -24.58                | -23.40              | Pass   |
| 3   | 1.8098          | 12.87                    | 2.00                   | 19.76                  | 32.63                   | 21.76                 | 56.00                  | 46.00                | -23.37                | -24.24              | Pass   |
| 4   | 2.4419          | 14.88                    | 3.86                   | 19.78                  | 34.66                   | 23.64                 | 56.00                  | 46.00                | -21.34                | -22.36              | Pass   |
| 5   | 5.1341          | 13.90                    | 7.37                   | 19.83                  | 33.73                   | 27.20                 | 60.00                  | 50.00                | -26.27                | -22.80              | Pass   |
| 6   | 10.8356         | 10.52                    | 4.17                   | 20.17                  | 30.69                   | 24.34                 | 60.00                  | 50.00                | -29.31                | -25.66              | Pass   |

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

**Remark:**

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. "----" denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

**END OF REPORT**