

FCC

RF

TEST REPORT

ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.




FOR

AC1300 Wireless Travel Router

ISSUED TO  
GL Technologies (Hong Kong) Limited

FLAT/RM 203 2/F BUILDING 19W 19 SCIENCE PARK WEST AVENUE  
SHATIN NT

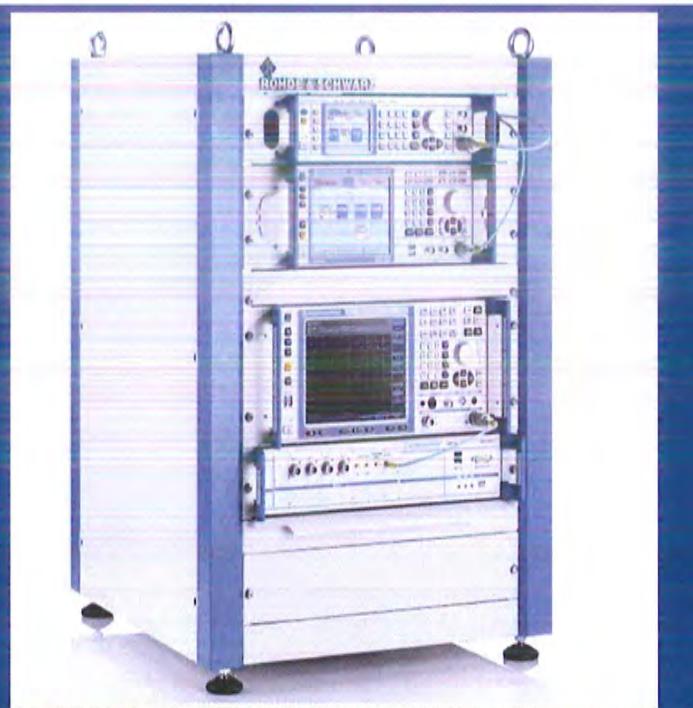

Tested by:	Ye Hongji
Date	Oct. 10 2020
Approved by:	Hanson Lin
(Vice General Manager)	Hanson Lin
Date	Oct. 20, 2020

Report No.:	BL-SZ2090067-602
EUT Name:	AC1300 Wireless Travel Router
Model Name:	GL-MT1300
Brand Name:	GL.iNET
Test Standard:	47 CFR Part 15 Subpart C
FCC ID:	2AFIW-MT1300
Test Conclusion:	Pass
Test Date:	Sep. 11, 2020 ~ Sep. 30, 2020
Date of Issue:	Oct. 20, 2020

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

## Revision History

Version	Issue Date	Revisions Content
<u>Rev.01</u>	<u>Oct. 16, 2020</u>	<u>Initial Issue</u>
<u>Rev.02</u>	<u>Oct. 20, 2020</u>	<u>Add MIMO data,</u> <u>Delete 802.11 ac mode data</u>

## TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION) .....	5
1.1	Identification of the Testing Laboratory .....	5
1.2	Identification of the Responsible Testing Location .....	5
1.3	Laboratory Condition .....	5
1.4	Announce .....	6
2	PRODUCT INFORMATION.....	7
2.1	Applicant Information.....	7
2.2	Manufacturer Information .....	7
2.3	Factory Information .....	7
2.4	General Description for Equipment under Test (EUT) .....	7
2.5	Technical Information .....	8
2.6	Additional Instructions .....	11
3	SUMMARY OF TEST RESULTS.....	13
3.1	Test Standards .....	13
3.2	Verdict .....	13
4	GENERAL TEST CONFIGURATIONS.....	14
4.1	Test Environments .....	14
4.2	Test Equipment List.....	14
4.3	Measurement Uncertainty .....	15
4.4	Description of Test Setup .....	16
4.4.1	For Antenna Port Test .....	16
4.4.2	For AC Power Supply Port Test .....	16
4.4.3	For Radiated Test (Below 30 MHz) .....	17
4.4.4	For Radiated Test (30 MHz-1 GHz) .....	17
4.4.5	For Radiated Test (Above 1 GHz).....	18

4.5	Measurement Results Explanation Example.....	19
4.5.1	For conducted test items: .....	19
4.5.2	For radiated band edges and spurious emission test:.....	19
5	TEST ITEMS.....	20
5.1	Antenna Requirements.....	20
5.1.1	Relevant Standards.....	20
5.1.2	Antenna Anti-Replacement Construction .....	20
5.1.3	Antenna Gain .....	20
5.2	Output Power .....	21
5.2.1	Test Limit.....	21
5.2.2	Test Setup .....	21
5.2.3	Test Procedure.....	21
5.2.4	Test Result .....	22
5.3	6dB Bandwidth .....	23
5.3.1	Limit.....	23
5.3.2	Test Setup .....	23
5.3.3	Test Procedure.....	23
5.3.4	Test Result .....	23
5.4	Conducted Spurious Emission .....	24
5.4.1	Limit.....	24
5.4.2	Test Setup .....	24
5.4.3	Test Procedure.....	24
5.4.4	Test Result .....	25
5.5	Band Edge (Authorized-band band-edge).....	26
5.5.1	Limit.....	26
5.5.2	Test Setup .....	26
5.5.3	Test Procedure.....	26
5.5.4	Test Result .....	27
5.6	Conducted Emission .....	28
5.6.1	Limit.....	28
5.6.2	Test Setup .....	28
5.6.3	Test Procedure.....	28

5.6.4	Test Result .....	28
5.7	Radiated Spurious Emission .....	29
5.7.1	Limit.....	29
5.7.2	Test Setup .....	29
5.7.3	Test Procedure.....	29
5.7.4	Test Result .....	32
5.8	Band Edge (Restricted-band band-edge).....	33
5.8.1	Limit.....	33
5.8.2	Test Setup .....	33
5.8.3	Test Procedure.....	33
5.8.4	Test Result .....	33
5.9	Power Spectral density (PSD).....	34
5.9.1	Limit.....	34
5.9.2	Test Setup .....	34
5.9.3	Test Procedure.....	34
5.9.4	Test Result .....	34
ANNEX A	TEST RESULT .....	35
A.1	Output Power .....	35
A.2	Bandwidth.....	41
A.3	Conducted Spurious Emissions .....	51
A.4	Band Edge (Authorized-band band-edge).....	78
A.5	Conducted Emissions.....	90
A.6	Radiated Emission .....	92
A.7	Band Edge (Restricted-band band-edge).....	154
A.8	Power Spectral Density (PSD) .....	166
ANNEX B	TEST SETUP PHOTOS .....	175
ANNEX C	EUT EXTERNAL PHOTOS .....	175
ANNEX D	EUT INTERNAL PHOTOS .....	175

## 1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

### 1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

### 1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025. The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

### 1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

## 1.4 Announce

- (1) The test report reference to the report template version v6.4.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	GL Technologies (Hong Kong) Limited
Address	FLAT/RM 203 2/F BUILDING 19W 19 SCIENCE PARK WEST AVENUE SHATIN NT

### 2.2 Manufacturer Information

Manufacturer	Shenzhen Guanglianzhitong Tech Co., Ltd
Address	Room 305-306, Skyworth Digital Building, Shiyan Street, Baoan District, Shenzhen, China

### 2.3 Factory Information

Factory	N/A
Address	N/A

### 2.4 General Description for Equipment under Test (EUT)

EUT Name	AC1300 Wireless Travel Router
Model Name Under Test	GL-MT1300
Series Model Name	N/A
Description of Model name differentiation	N/A
Serial Number	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

## 2.5 Technical Information

Network and Wireless connectivity	Bluetooth(BLE) 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/HT40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80) U-NII-1/3
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	802.11b/g/n(20 MHz): 2.412 GHz - 2.462 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$ , where - $f_c$ = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11. 802.11n(40 MHz): 2.422 GHz - 2.452 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$ , where - $f_c$ = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 3 to 9.
Modulation Type	DSSS, OFDM
Product Type	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Antenna System (eg., MIMO, Smart Antenna)	Cyclic Delay Diversity (CDD)
Categorization as Correlated or Completely Uncorrelated	Categorization as Correlated
Antenna Type	Main Antenna Aux. Antenna
Antenna Gain	Main Antenna Aux. Antenna
Total directional gain	For power spectral density(PSD) measurements 6.5dBi Formulas: Directional gain = GANT + Array Gain, $\text{Array Gain} = 10 \log(NANT/NSS) \text{ dB}$ . NSS =1, GANT set equal to the gain of the antenna having the highest gain. For power measurements 3.5 dBi Formulas: Directional gain = GANT + Array Gain, $\text{Array Gain} = 0$ , GANT set equal to the gain of the antenna having the highest gain. For Conducted Out-of-Band and Spurious Measurements 6.5 dBi Formulas: Directional gain = GANT + Array Gain, $\text{Array Gain} = 10 \log(NANT/NSS) \text{ dB}$ . NSS =1, GANT set equal to the gain of the antenna having the highest gain.
About the Product	The equipment is AC1300 Wireless Travel Router, intended for used with information technology equipment.

Mode	Antenna				
	Main Antenna	Aux. Antenna	MIMO - Main Antenna	MIMO - Aux. Antenna	MIMO
802.11b	√	√	--	--	--
802.11g	√	√	--	--	--
802.11n20	√	√	√	√	√
802.11n40	√	√	√	√	√

Note: All the configurations were tested, but only the worst data was shown in this report.

Modulation technology	Modulation Type	Transfer Rate (Mbps)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/11
OFDM (802.11g)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48 / 54
OFDM (802.11n-20MHz)	BPSK	6.5/7.2
	QPSK	13/19.5/14.4/21.7
	16QAM	26/39/28.9/43.3
	64QAM	52/58.5/65/57.8/65/72.2
OFDM (802.11n-40MHz)	BPSK	13.5/15
	QPSK	27/40.5/30/45
	16QAM	54/81/60/90
	64QAM	108/121.5/135/120/150

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	
Output Power	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
6dB Bandwidth	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Radiated Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Band Edge	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Power spectral density (PSD)	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9

Note: The above EUT information in section 2.4 and 2.6 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

## 2.6 Additional Instructions


EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software					
Test Software Version	MT7615 QA 0.0.1.91				
Support Units (Software installation media)	Description	Manufacturer		Model	
	Notebook	Dell		N/A	
Mode	Channel	Soft Set			
		Main Antenna	Aux. Antenna	MIMO-Main Antenna	MIMO-Aux. Antenna
802.11 b	1	21	22	--	--
	6	21	22	--	--
	11	20	21	--	--
802.11 g	1	1D	1E	--	--
	6	27	25	--	--
	11	1F	1D	--	--
802.11 n20	1	1D	1D	17	17
	6	25	22	1C	1C
	11	1D	1C	1B	1B
802.11 n40	3	17	18	13	13
	6	24	22	1C	1C
	9	17	19	16	16

Run software:

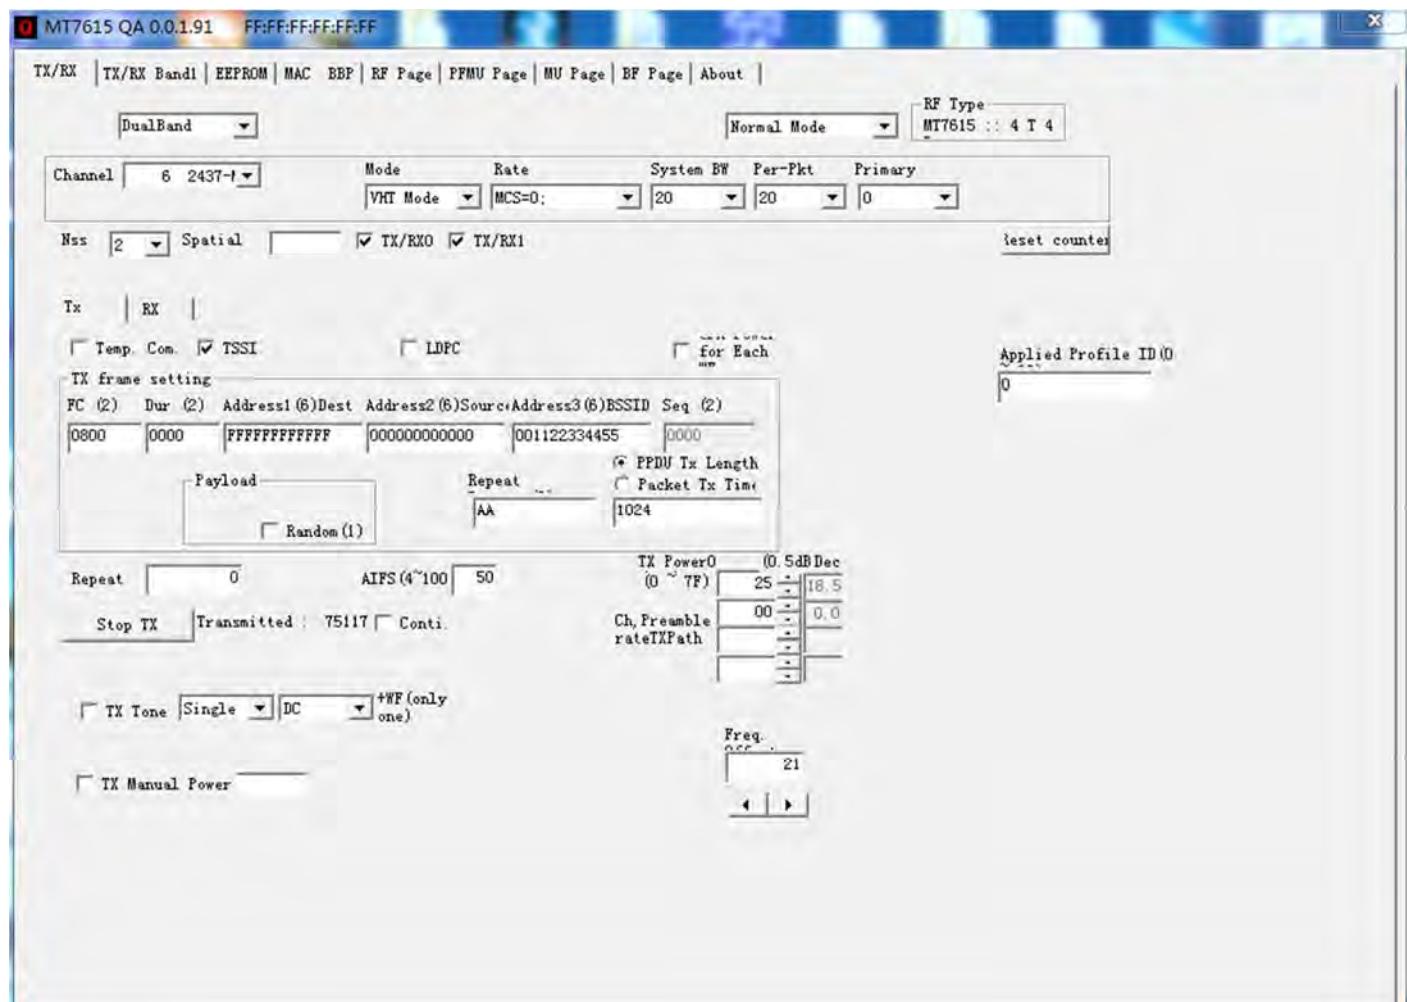

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
3	KDB Publication 662911 D01v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
4	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

#### 3.2 Verdict

No.	Description	FCC PART No.	Test Result	Verdict
1	Antenna Requirement	15.203; 15.247(b)	N/A	Pass <sup>Note 1</sup>
2	Output Power	15.247(b)	ANNEX A.1	Pass
3	6dB Bandwidth	15.247(a)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.209; 15.247(d)	ANNEX A.4	Pass
6	Conducted Emission	15.207	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247(d)	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247(d)	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	ANNEX A.8	Pass
10	Receiver Spurious Emissions	N/A	N/A	N/A <sup>Note 2</sup>

Note <sup>1</sup>: Please refer to section 5.1.

Note <sup>2</sup>: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%				
Atmospheric Pressure	100 kPa - 102 kPa				
Temperature	NT (Normal Temperature)				+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)				5 V

### 4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2020.06.08	2021.06.07
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2020.06.08	2021.06.07
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2020.06.09	2021.06.08
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2020.06.09	2021.06.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2020.06.09	2021.06.08
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2020.06.08	2021.06.07
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2020.06.08	2021.06.07
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2020.06.08	2021.06.07
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
Temperature Chamber	AHK	SP20	1412	2020.06.10	2021.06.09
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2021.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2021.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2019.01.06	2021.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	N/A	2018.08.08	2021.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2020.06.08	2021.06.07
Power Amplifier	OPHIR RF	5225F	1037	2020.02.19	2021.02.18
Power Amplifier	OPHIR RF	5273F	1016	2020.02.19	2021.02.18
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Sound Level Meter	B&K	NL-20	00844023	2019.11.12	2020.11.11
Ear Simulator	B&K	4185	2409449	2019.11.12	2020.11.11

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Ear Simulator	B&K	4195	2418189	2019.11.12	2020.11.11
Audio analyzer	B&K	UPL 16	100129	2019.11.12	2020.11.11

#### 4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Occupied Channel Bandwidth	±4%
RF output power, conducted	±1.4 dB
Power Spectral Density, conducted	±2.5 dB
Unwanted Emissions, conducted	±2.8 dB
All emissions, radiated	±5.4 dB
Temperature	±1°C
Humidity	±4%


## 4.4 Description of Test Setup

### 4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

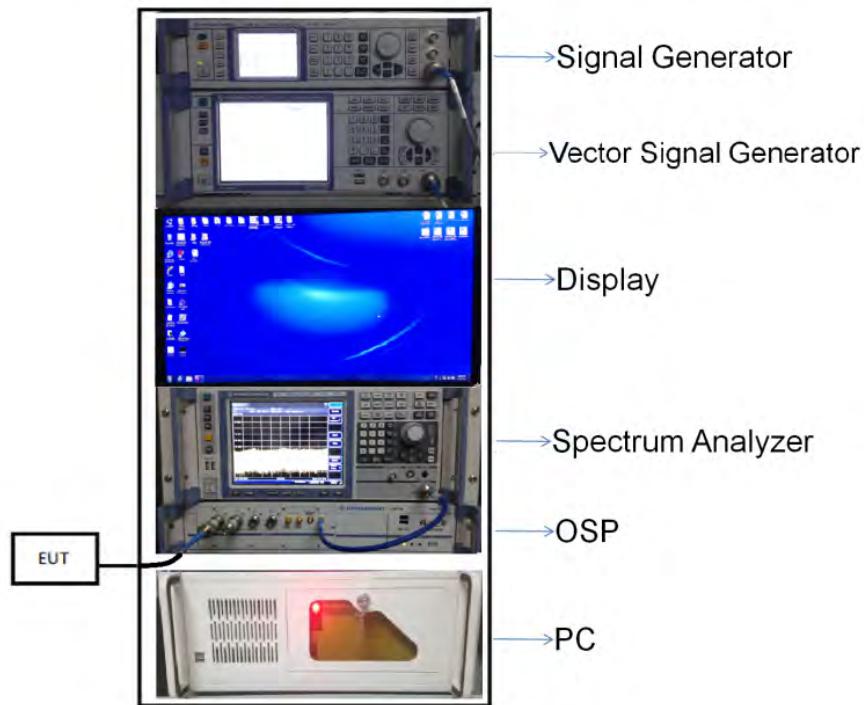


(Diagram 1)

### 4.4.2 For AC Power Supply Port Test

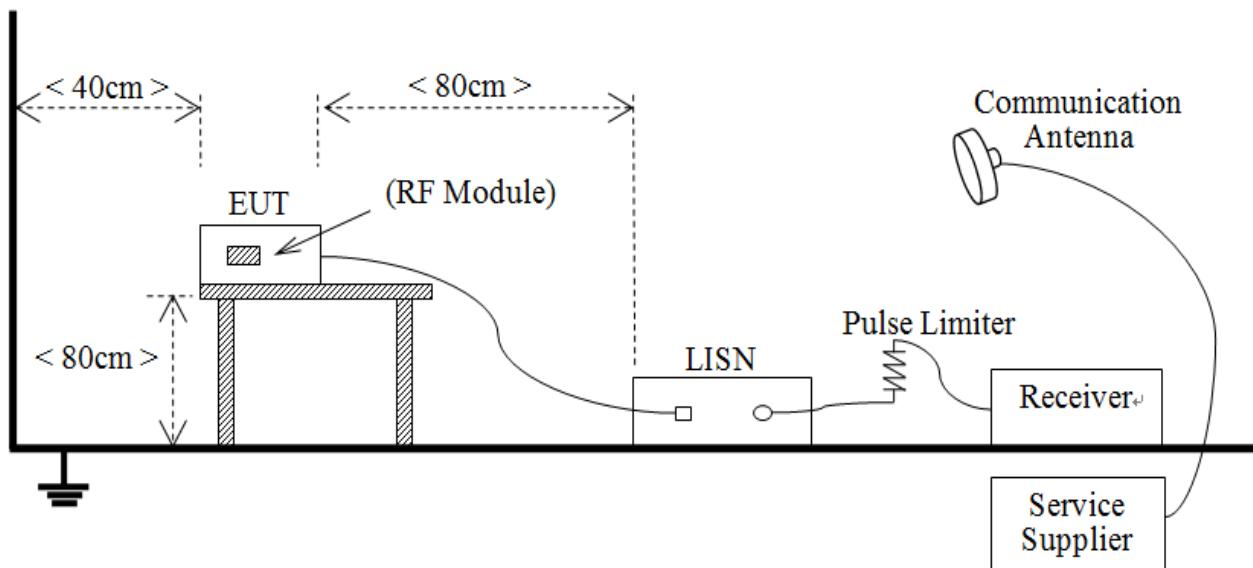


(Diagram 2)

#### 4.4.3 For Radiated Test (Below 30 MHz)

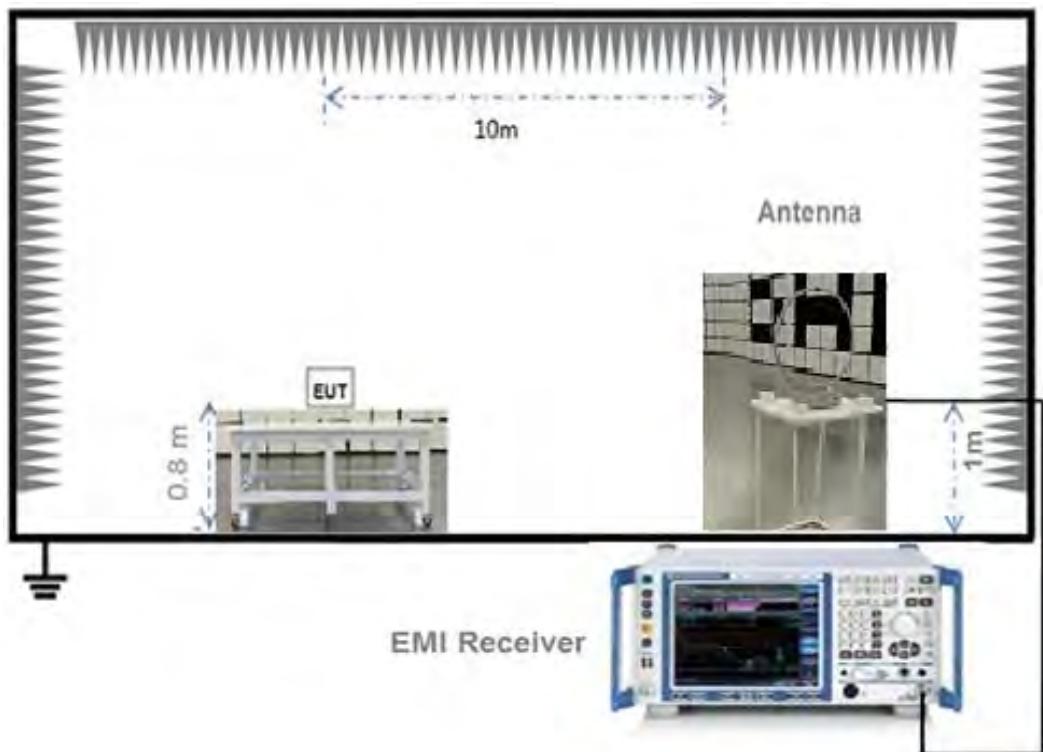


(Diagram 3)

#### 4.4.4 For Radiated Test (30 MHz-1 GHz)

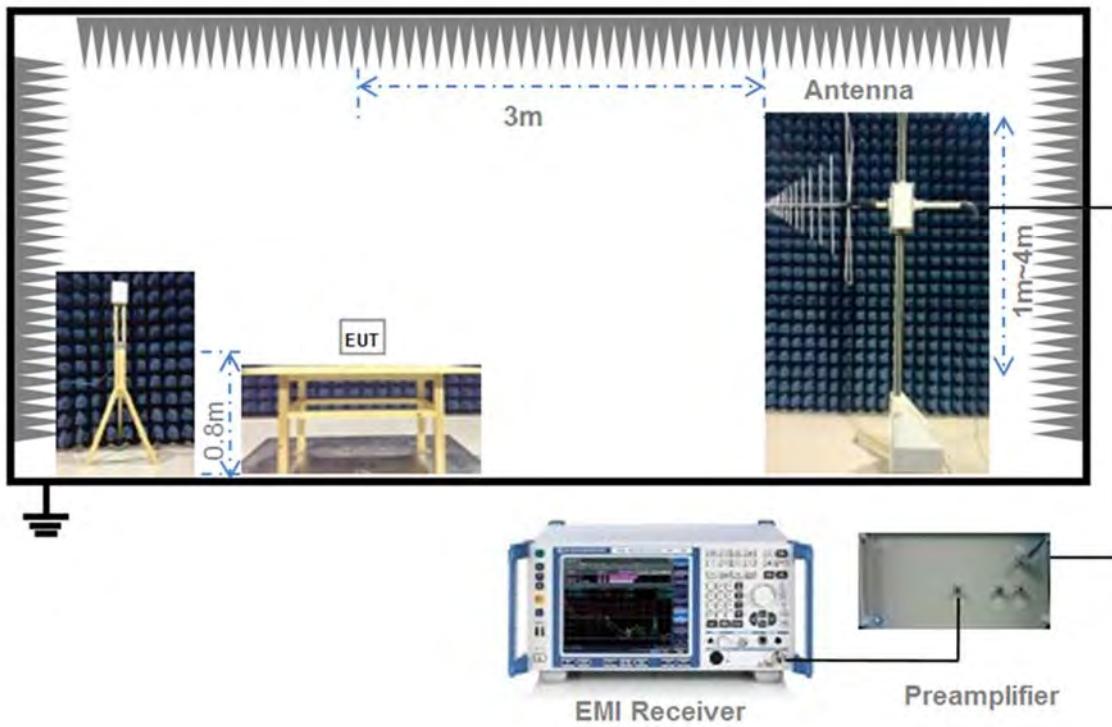

(Diagram 4)

## 4.4.5 For Radiated Test (Above 1 GHz)

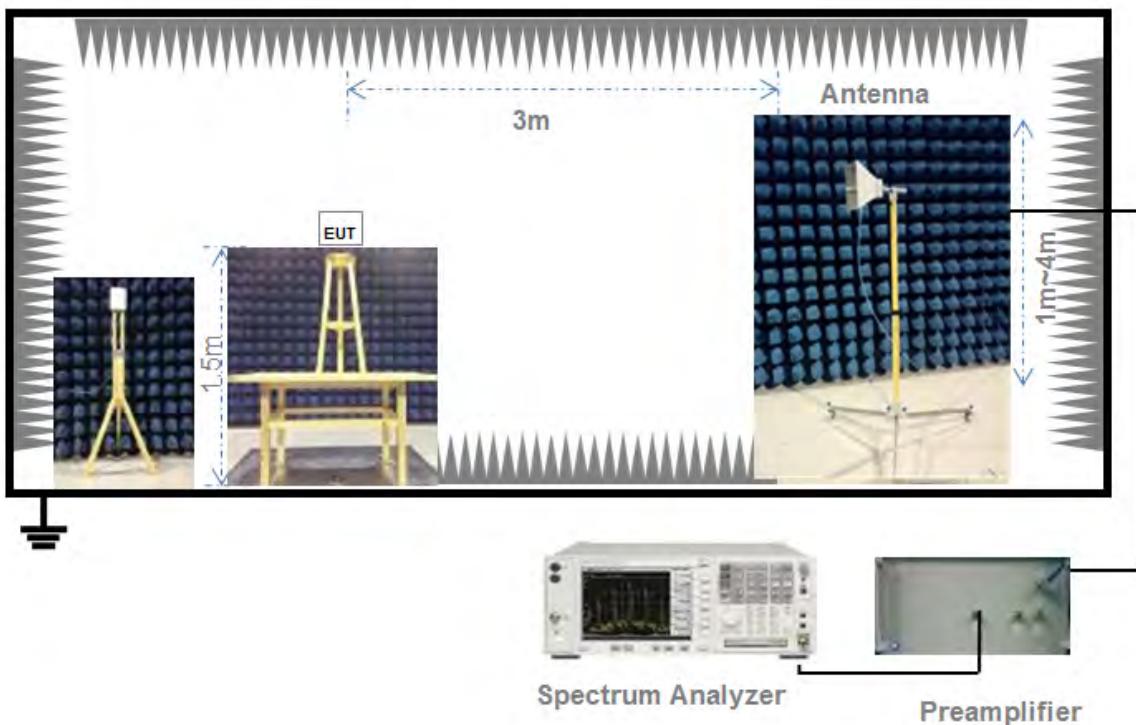

(Diagram 5)

## 4.5 Measurement Results Explanation Example

### 4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

### 4.5.2 For radiated band edges and spurious emission test:

$$E = EIRP - 20\log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP= Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

## 5 TEST ITEMS

### 5.1 Antenna Requirements

#### 5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

#### 5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 5.2 Output Power

### 5.2.1 Test Limit

FCC § 15.247(b); RSS-247, 5.4 (d)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

### 5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.2.3 Test Procedure

#### Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

#### Maximum conducted (average) output power (Reporting Only)

- a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
  - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
  - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
  - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle ( $x$ ) of the transmitter output signal as described in Section 6.0.
- c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- d) Adjust the measurement in dBm by adding  $10\log(1/x)$ , where  $x$  is the duty cycle to the measurement result.

#### Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW  $\geq$  OBW if possible; otherwise, set RBW to the largest available value.

Set VBW  $\geq$  RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

#### 5.2.4 Test Result

Please refer to ANNEX A.1.

## 5.3 6dB Bandwidth

### 5.3.1 Limit

FCC §15.247(a); RSS-GEN, 6.7

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

### 5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW)  $\geq 3$  RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.3.4 Test Result

Please refer to ANNEX A.2.

## 5.4 Conducted Spurious Emission

### 5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

#### Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to  $\geq$  1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW  $\geq$  3 x RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

### Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

#### 5.4.4 Test Result

Please refer to ANNEX A.3.

## 5.5 Band Edge (Authorized-band band-edge)

### 5.5.1 Limit

FCC §15.247(d); RSS-GEN, 8.9, RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle  $\geq 98\%$ ). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency ( $f_{\text{emission}}$ )  $\pm 0.5$  MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by  $f_{\text{emission}} \pm 0.5$  MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

#### 5.5.4 Test Result

Please refer to ANNEX A.4.

## 5.6 Conducted Emission

### 5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

### 5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

### 5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

### 5.6.4 Test Result

Please refer to ANNEX A.5.

## 5.7 Radiated Spurious Emission

### 5.7.1 Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dB<sub>UV</sub>/m@3m (AV) and 74dB<sub>UV</sub>/m@3m (PK).

### 5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

#### General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).

- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq$  30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $>$  1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in  $\text{dB}\mu\text{V/m}$ ,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

#### Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

#### Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW  $\geq$  3 x RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz

> 1000 MHz	1 MHz
------------	-------

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

#### Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle  $\geq$  98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than  $\pm$  2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle,  $x$ , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW  $\geq 3 \times$  RBW.
- e) Detector = RMS, if span/(# of points in sweep)  $\leq$  (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is  $10 \log(1/x)$ , where  $x$  is the duty cycle.
  - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is  $20 \log(1/x)$ , where  $x$  is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq$  98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

#### Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

#### Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

#### 5.7.4 Test Result

Please refer to ANNEX A.6.

## 5.8 Band Edge (Restricted-band band-edge)

### 5.8.1 Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

### 5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

### 5.8.4 Test Result

Please refer to ANNEX A.7.

## 5.9 Power Spectral density (PSD)

### 5.9.1 Limit

FCC §15.247(d); RSS-247, 5.2 (b)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

### 5.9.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .

Set the VBW  $\geq 3 \text{ RBW}$ .

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.9.4 Test Result

Please refer to ANNEX A.8.

## ANNEX A TEST RESULT

### A.1 Output Power

#### Duty Cycle

Test Mode	Duty Cycle	T (ms)	1/T(kHz)
802.11b	98.08%	8.31520	0.12
802.11g	95.16%	1.38522	0.72
802.11n-20 MHz	95.44%	1.30000	0.77
802.11n-40 MHz	92.12%	0.64348	1.55

#### Peak Power Test Data

##### Main Antenna

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.35	136.46	30	1000	Pass
Middle	21.43	139.00			Pass
High	22.18	165.20			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	23.40	218.78	30	1000	Pass
Middle	27.95	623.73			Pass
High	25.76	376.70			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.21	166.34	30	1000	Pass
Middle	25.82	381.94			Pass
High	23.68	233.35			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.65	92.26	30	1000	Pass
Middle	26.39	435.51			Pass
High	22.00	158.49			Pass

Aux. Antenna

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.45	175.79	30	1000	Pass
Middle	22.57	180.72			Pass
High	22.55	179.89			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	25.17	328.85	30	1000	Pass
Middle	28.30	676.08			Pass
High	25.19	330.37			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	23.45	221.31	30	1000	Pass
Middle	26.11	408.32			Pass
High	23.40	218.78			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.25	133.35	30	1000	Pass
Middle	26.35	431.52			Pass
High	22.34	171.40			Pass

MIMO-Main Antenna

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.35	86.10	30	1000	Pass
Middle	23.10	204.17			Pass
High	23.14	206.06			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.77	59.84	30	1000	Pass
Middle	22.93	196.34			Pass
High	21.64	145.88			Pass

MIMO-Aux. Antenna

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.35	136.46	30	1000	Pass
Middle	22.47	176.60			Pass
High	22.53	179.06			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.57	90.57	30	1000	Pass
Middle	22.68	185.35			Pass
High	21.52	141.91			Pass

MIMO

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	23.47	222.56	30	1000	Pass
Middle	25.81	380.78			Pass
High	25.86	385.12			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.77	150.41	30	1000	Pass
Middle	25.82	381.69			Pass
High	24.59	287.79			Pass

Average Power Test Data
Main Antenna

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.86	76.91	30	1000	Pass
Middle	19.04	80.17			Pass
High	19.68	92.90			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	15.87	38.64	30	1000	Pass
Middle	19.85	96.61			Pass
High	17.96	62.52			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.90	30.90	30	1000	Pass
Middle	17.93	62.09			Pass
High	15.92	39.08			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.30	21.38	30	1000	Pass
Middle	17.92	61.94			Pass
High	15.88	38.73			Pass

Aux. Antenna

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.84	96.38	30	1000	Pass
Middle	19.85	96.61			Pass
High	19.89	97.50			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.98	49.89	30	1000	Pass
Middle	19.91	97.95			Pass
High	16.95	49.55			Pass

## 802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.85	19.28	30	1000	Pass
Middle	17.73	59.29			Pass
High	15.92	39.08			Pass

## 802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.51	22.44	30	1000	Pass
Middle	17.87	61.24			Pass
High	15.29	33.81			Pass

MIMO-Main Antenna

## 802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.03	15.96	30	1000	Pass
Middle	14.22	26.42			Pass
High	14.88	30.76			Pass

## 802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	9.88	9.73	30	1000	Pass
Middle	14.59	28.77			Pass
High	13.94	24.77			Pass

MIMO-Aux. Antenna

## 802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.53	17.91	30	1000	Pass
Middle	14.93	31.12			Pass
High	14.91	30.97			Pass

## 802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.89	12.27	30	1000	Pass
Middle	14.91	30.97			Pass
High	13.88	24.43			Pass

MIMO

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	15.30	33.86	30	1000	Pass
Middle	17.60	57.54			Pass
High	17.91	61.74			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.42	22.00	30	1000	Pass
Middle	17.76	59.75			Pass
High	16.92	49.21			Pass

## A.2 Bandwidth

### Test Data

#### Main Antenna

802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	9.161621	13.835022	≥500
Middle	9.161621	13.892909	≥500
High	9.161621	14.356006	≥500

802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	15.269043	17.424023	≥500
Middle	15.269043	22.981187	≥500
High	15.218994	17.945007	≥500

802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	15.218994	18.176556	≥500
Middle	15.218994	20.492041	≥500
High	15.218994	18.292330	≥500

802.11n-40MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	35.171875	36.000000	≥500
Middle	33.921143	38.000000	≥500
High	35.171875	36.100000	≥500

### Aux. Antenna

802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	8.660889	13.545586	≥500
Middle	9.161621	13.487699	≥500
High	9.161621	13.603473	≥500

802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	15.218994	16.903039	≥500
Middle	15.269043	17.481910	≥500
High	15.269043	16.903039	≥500

802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	15.218994	18.118669	≥500
Middle	15.218994	18.292330	≥500
High	15.218994	18.002894	≥500

802.11n-40MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	35.171875	36.000000	≥500
Middle	35.171875	36.200000	≥500
High	35.171875	36.000000	≥500

## Test plots

### Main Antenna

#### 6 dB Bandwidth

##### 802.11b LOW CHANNEL




##### 802.11b MIDDLE CHANNEL




##### 802.11b HIGH CHANNEL




##### 802.11g LOW CHANNEL

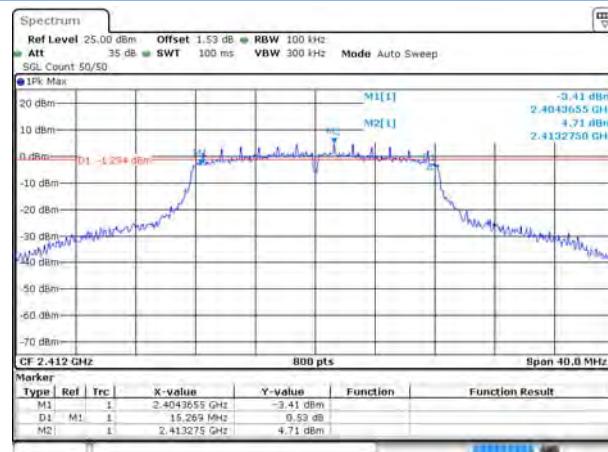


##### 802.11g MIDDLE CHANNEL

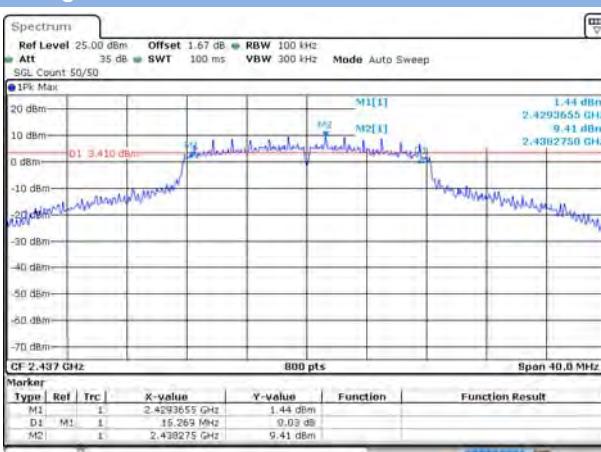


##### 802.11g HIGH CHANNEL

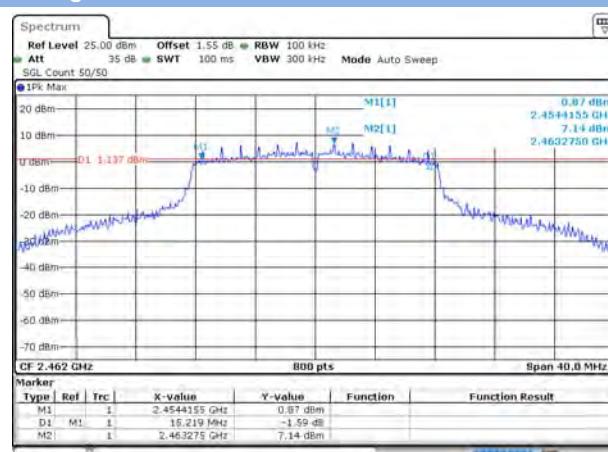


### 802.11n-20 MHz LOW CHANNEL

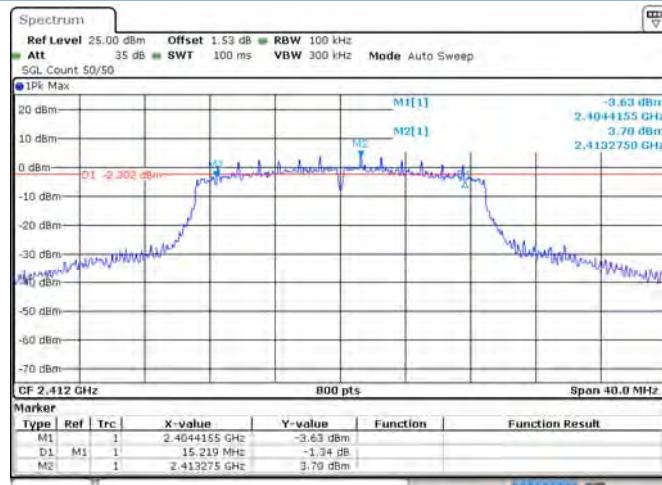


### 802.11n-20 MHz MIDDLE CHANNEL

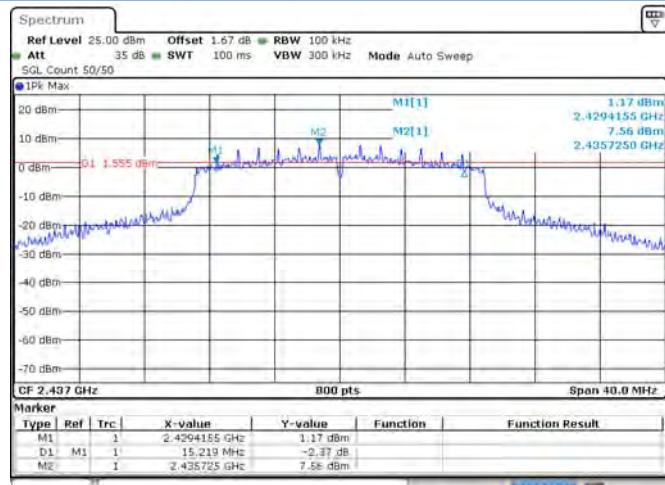


### 802.11n-20 MHz HIGH CHANNEL

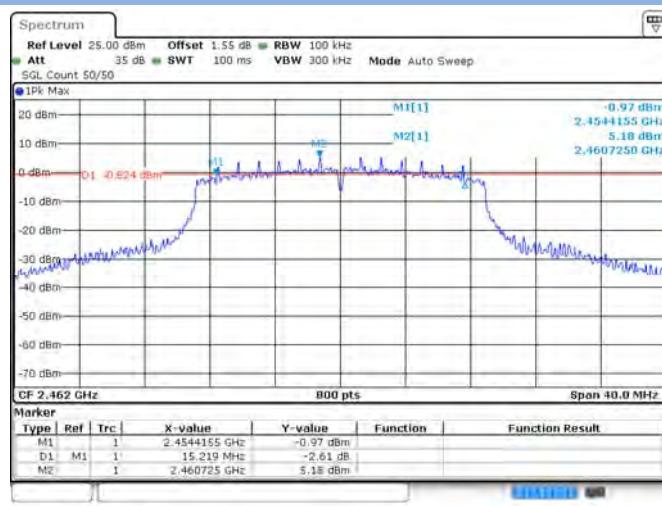


### 802.11n-40 MHz LOW CHANNEL

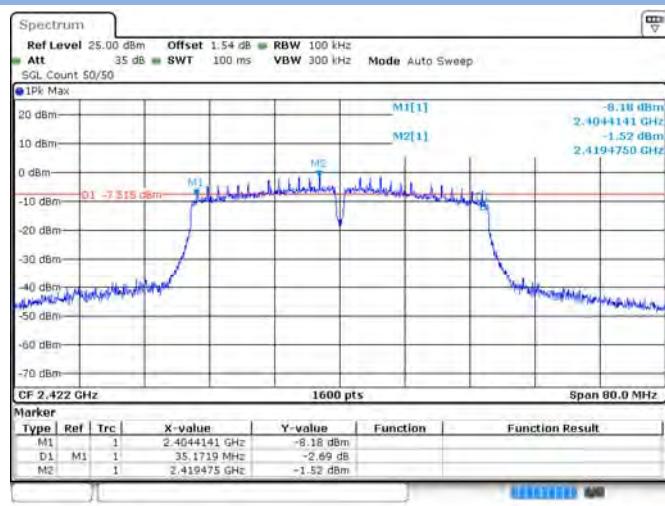

### 802.11n-40 MHz MIDDLE CHANNEL

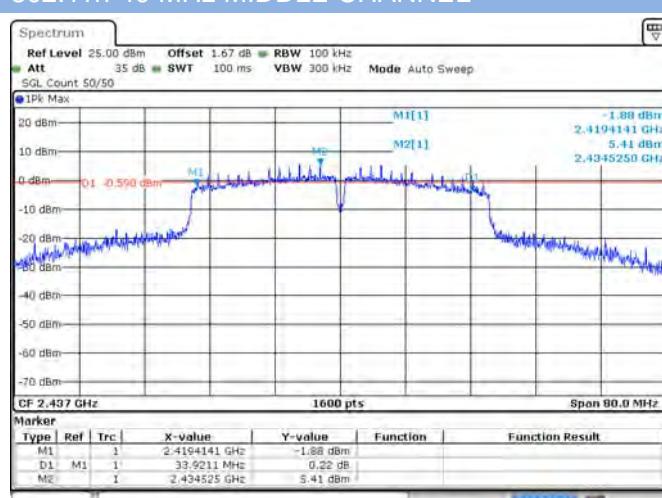


### 802.11n-40 MHz HIGH CHANNEL

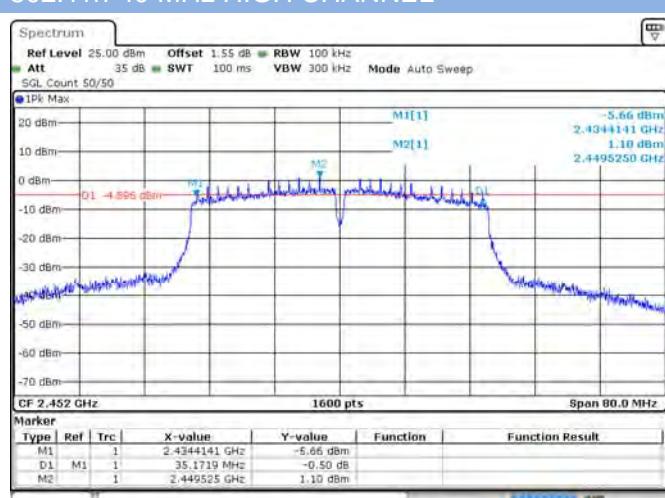


## 99% Bandwidth

### 802.11b LOW CHANNEL

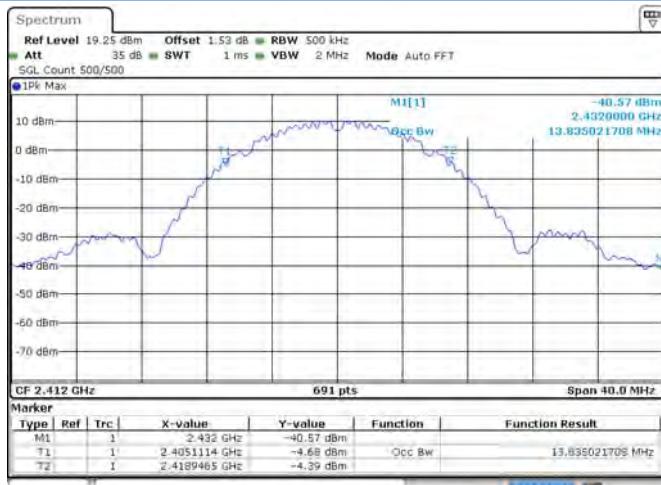


Date: 29 SEP 2020 21:15:20

### 802.11b MIDDLE CHANNEL

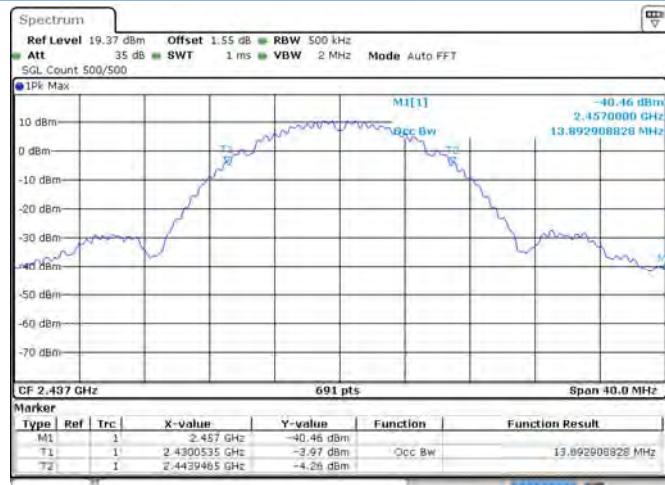


Date: 29 SEP 2020 21:18:44

### 802.11b HIGH CHANNEL

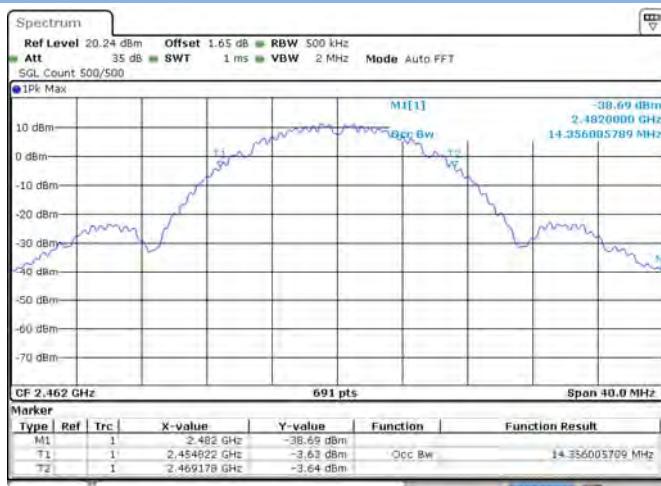


Date: 17 SEP 2020 21:10:03

### 802.11g LOW CHANNEL

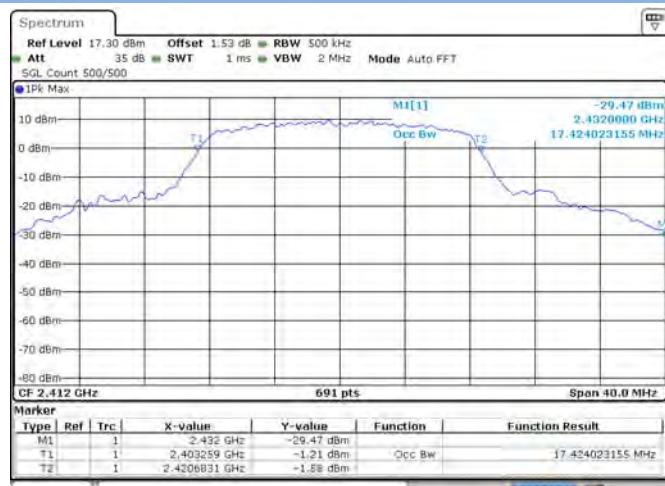

Date: 29 SEP 2020 21:22:50

### 802.11g MIDDLE CHANNEL

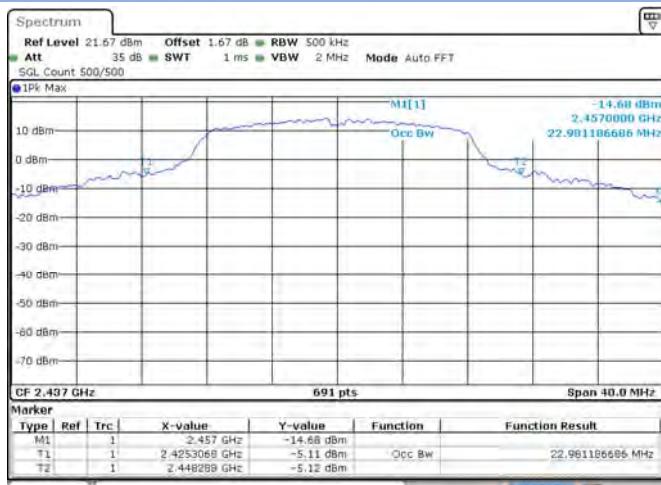

Date: 17 SEP 2020 21:27:46

### 802.11g HIGH CHANNEL




Date: 29 SEP 2020 21:27:31

### 802.11n-20 MHz LOW CHANNEL



Date: 29 SEP 2020 21:30:02

### 802.11n-20 MHz MIDDLE CHANNEL

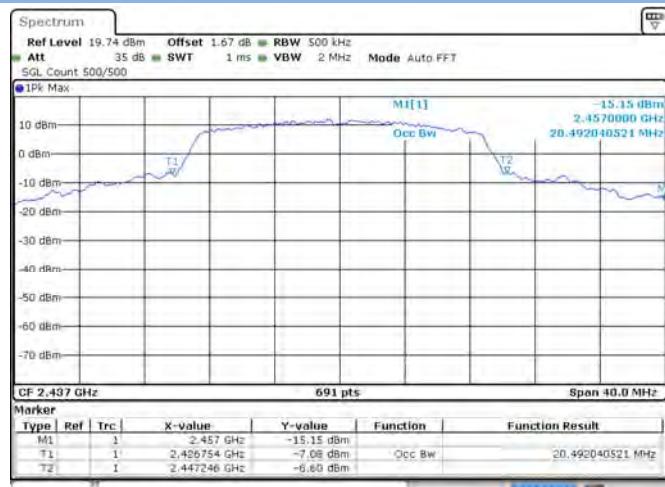


Date: 29 SEP 2020 21:35:37

### 802.11n-20 MHz HIGH CHANNEL



Date: 29 SEP 2020 21:33:29

### 802.11n-40 MHz LOW CHANNEL

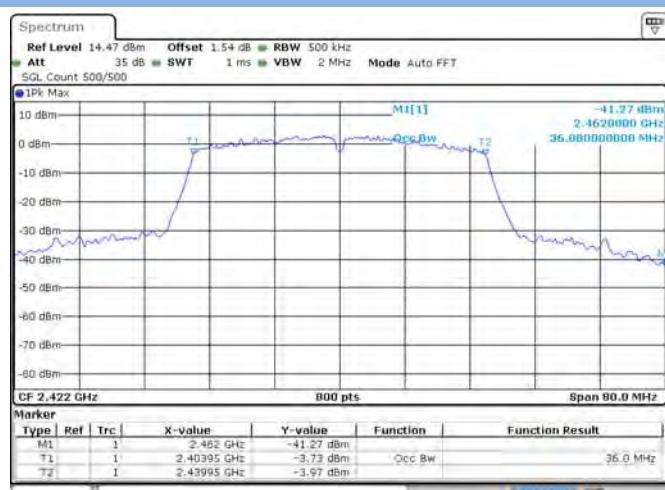

Date: 29 SEP 2020 21:35:45

### 802.11n-40 MHz MIDDLE CHANNEL



Date: 29 SEP 2020 21:43:34

### 802.11n-40 MHz HIGH CHANNEL






Date: 29 SEP 2020 21:39:28


Aux. Antenna
6 dB Bandwidth
**802.11b LOW CHANNEL**

**802.11b MIDDLE CHANNEL**

**802.11b HIGH CHANNEL**

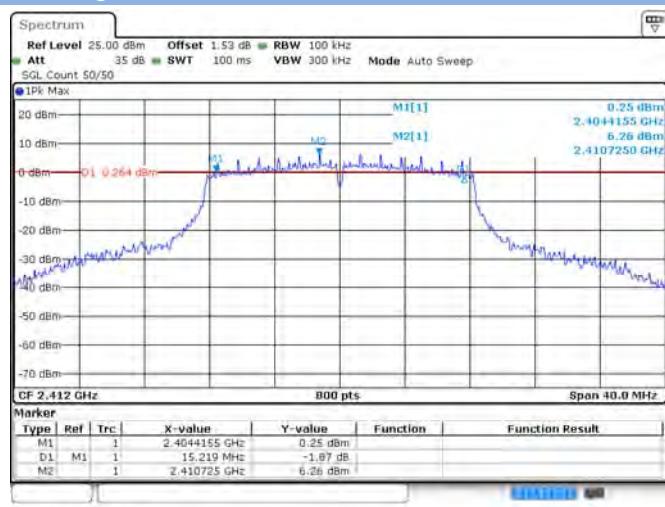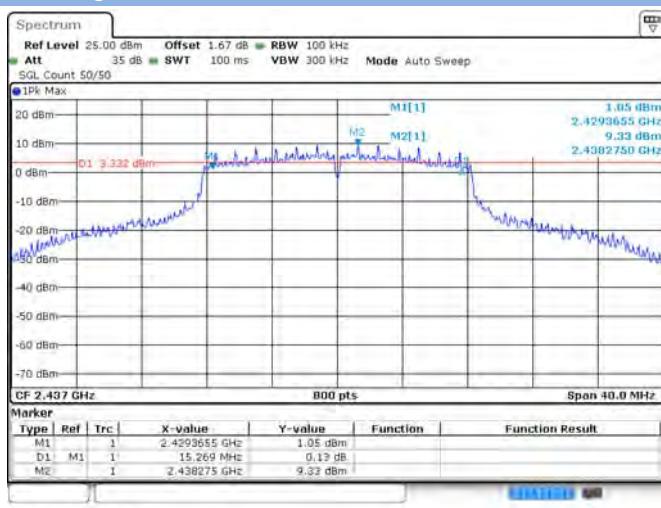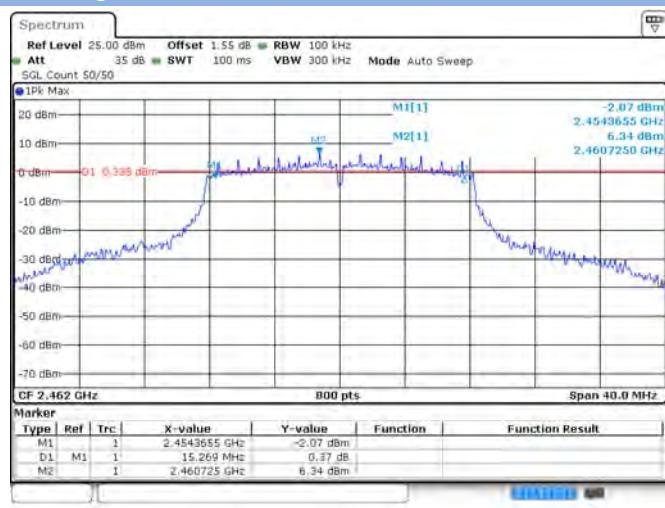
**802.11g LOW CHANNEL**

**802.11g MIDDLE CHANNEL**

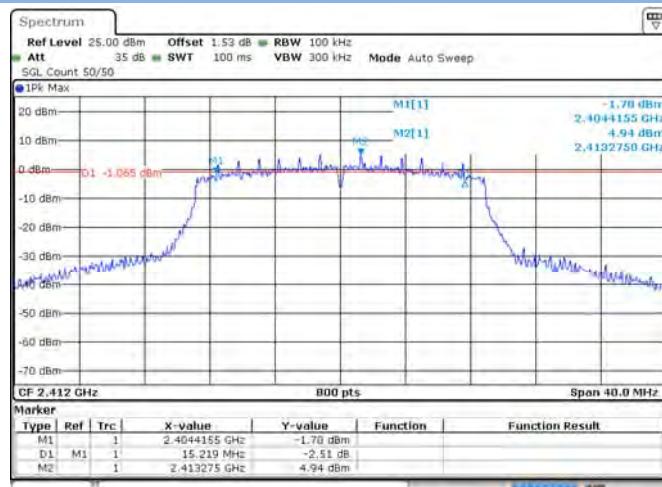**802.11g HIGH CHANNEL**


### 802.11n-20 MHz LOW CHANNEL

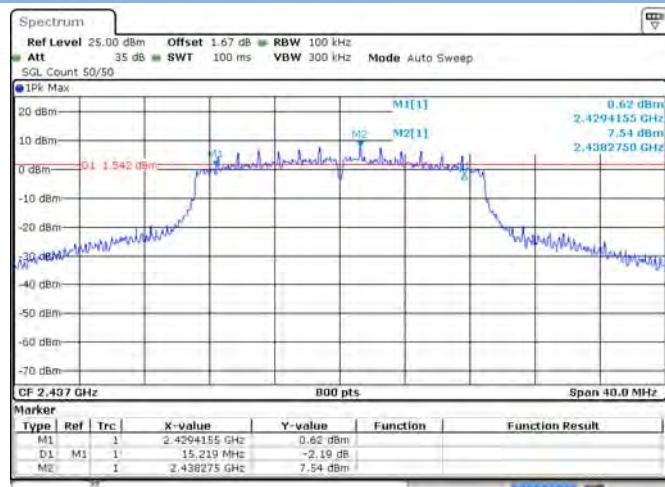


Date: 30 SEP 2020 09:36:16

### 802.11n-20 MHz MIDDLE CHANNEL




Date: 30 SEP 2020 18:47:29

### 802.11n-20 MHz HIGH CHANNEL

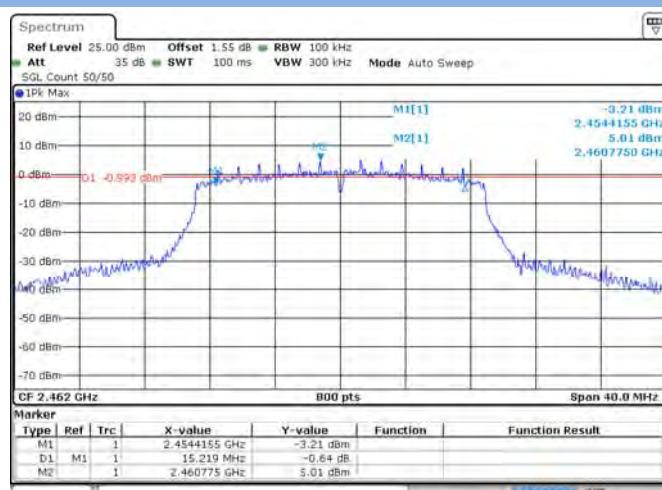


Date: 30 SEP 2020 09:42:17

### 802.11n-40 MHz LOW CHANNEL

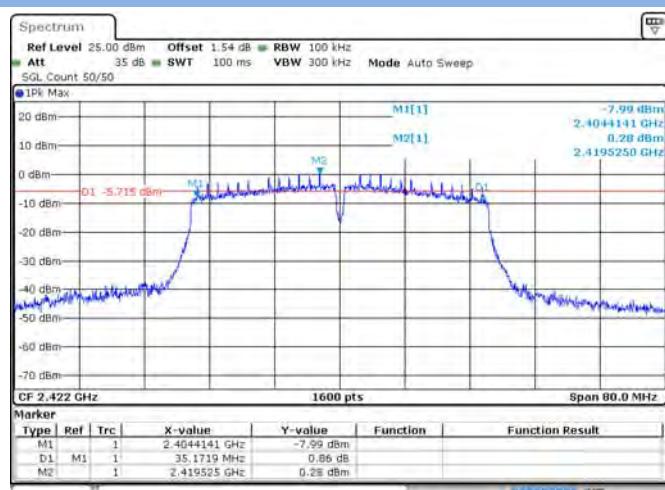


Date: 30 SEP 2020 09:45:16

### 802.11n-40 MHz MIDDLE CHANNEL

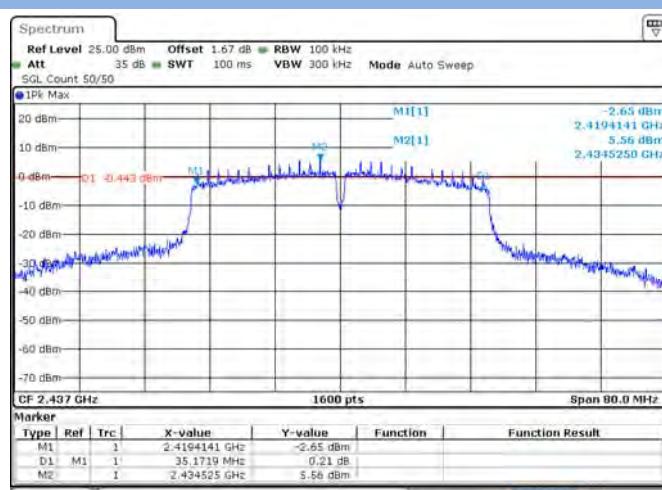

Date: 30 SEP 2020 18:55:19

### 802.11n-40 MHz HIGH CHANNEL

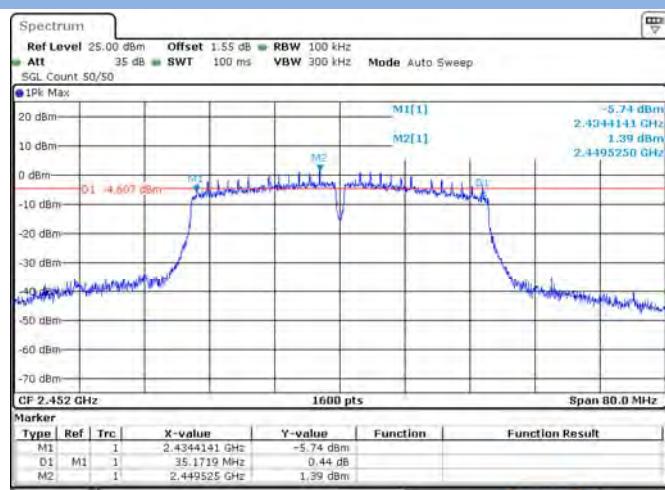


Date: 30 SEP 2020 09:52:00

## 99% Bandwidth

### 802.11b LOW CHANNEL




### 802.11b MIDDLE CHANNEL

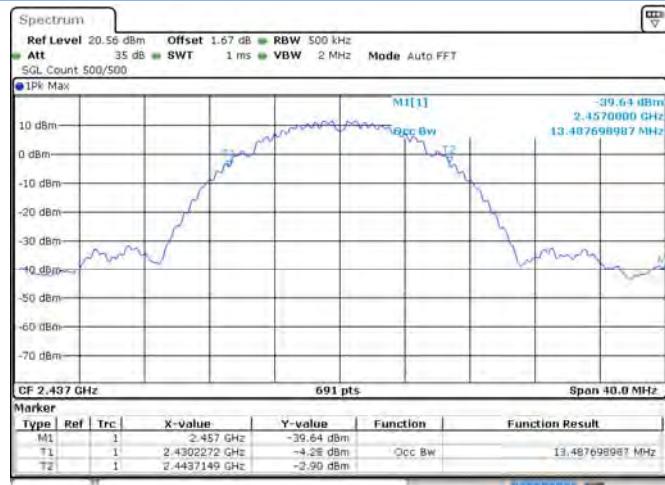

### 802.11b HIGH CHANNEL



### 802.11g LOW CHANNEL

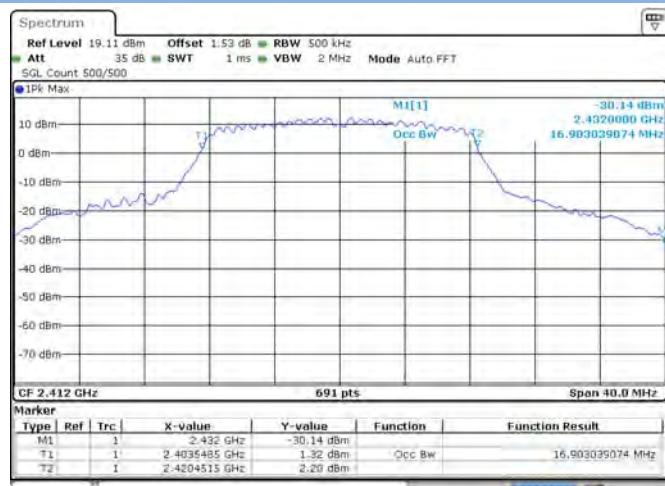


### 802.11g MIDDLE CHANNEL



### 802.11g HIGH CHANNEL



### 802.11n-20 MHz LOW CHANNEL

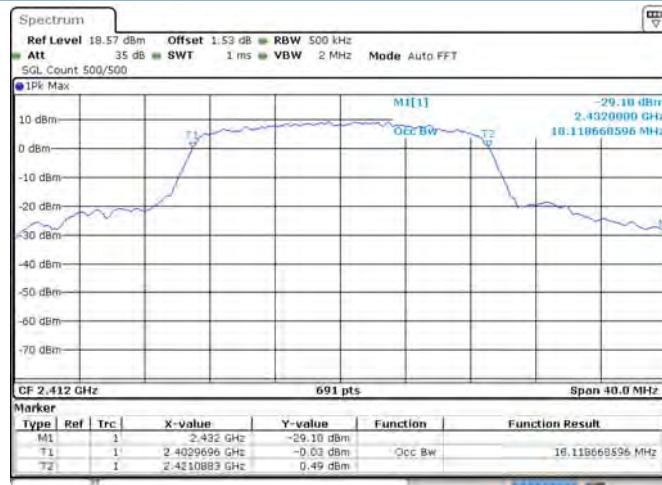

### 802.11n-20 MHz MIDDLE CHANNEL




### 802.11n-20 MHz HIGH CHANNEL




### 802.11n-40 MHz LOW CHANNEL



### 802.11n-40 MHz MIDDLE CHANNEL

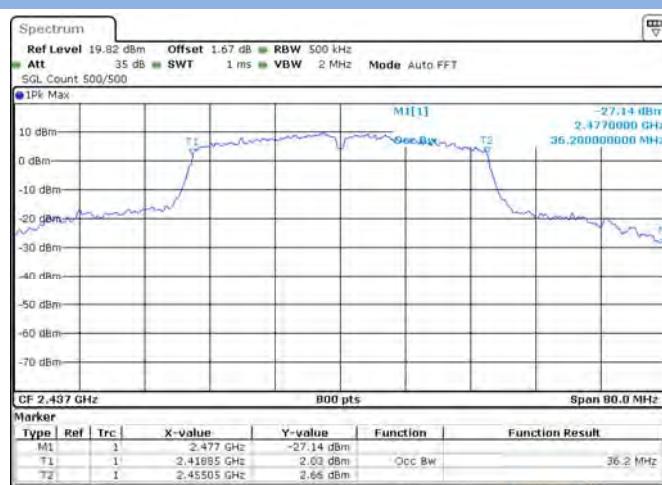

### 802.11n-40 MHz HIGH CHANNEL

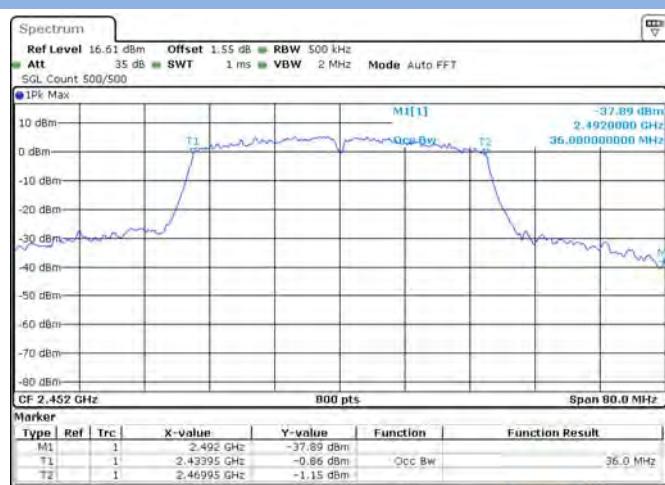

### A.3 Conducted Spurious Emissions

#### Test Data

##### Main Antenna

802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-39.21	8.49	-11.51	Pass
Middle	-39.13	8.35	-11.65	Pass
High	-35.79	9.55	-10.45	Pass

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-43.71	4.76	-15.24	Pass
Middle	-36.61	9.73	-10.27	Pass
High	-36.61	7.00	-13.00	Pass

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-44.05	3.87	-16.13	Pass
Middle	-46.61	7.47	-12.53	Pass
High	-46.31	5.33	-14.67	Pass

802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-43.74	-1.12	-21.12	Pass
Middle	-40.98	5.67	-14.33	Pass
High	-46.20	1.00	-19.00	Pass

Aux. Antenna

802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-30.78	10.26	-9.74	Pass
Middle	-30.33	10.28	-9.72	Pass
High	-30.35	10.04	-9.96	Pass

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-35.82	6.62	-13.38	Pass
Middle	-35.79	10.06	-9.94	Pass
High	-40.56	6.41	-13.59	Pass

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-50.14	5.12	-14.88	Pass
Middle	-36.21	8.27	-11.73	Pass
High	-51.00	5.12	-14.88	Pass

802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-51.02	0.42	-19.58	Pass
Middle	-35.00	5.92	-14.08	Pass
High	-49.35	1.48	-18.52	Pass

MIMO-Main Antenna

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-43.48	0.97	-19.03	Pass
Middle	-46.50	5.05	-14.95	Pass
High	-47.14	4.96	-15.04	Pass

802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-43.59	-3.28	-23.28	Pass
Middle	-45.44	2.42	-17.58	Pass
High	-46.19	0.83	-19.17	Pass

MIMO-Aux. Antenna

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-50.79	2.22	-17.78	Pass
Middle	-49.83	4.86	-15.14	Pass
High	-50.44	4.87	-15.13	Pass

802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-50.91	-1.62	-21.62	Pass
Middle	-50.59	2.92	-17.08	Pass
High	-49.98	0.08	-19.92	Pass


## Test Plots

### Main Antenna


#### 802.11b LOW CHANNEL CARRIER LEVEL




#### 802.11b LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

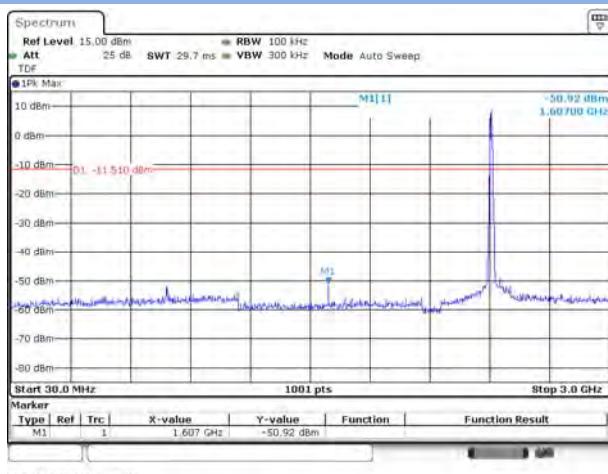


#### 802.11b LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

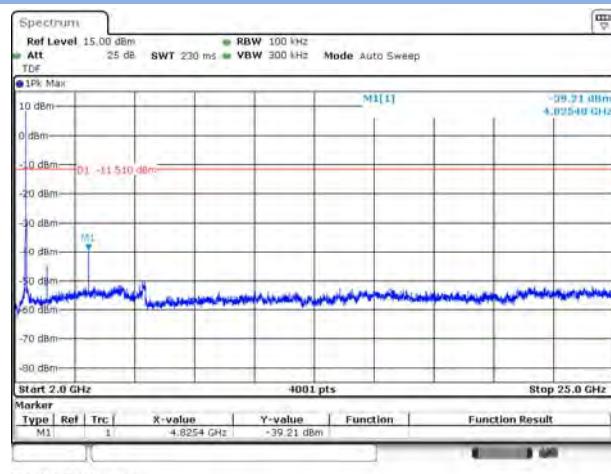


#### 802.11b MIDDLE CHANNEL CARRIER LEVEL

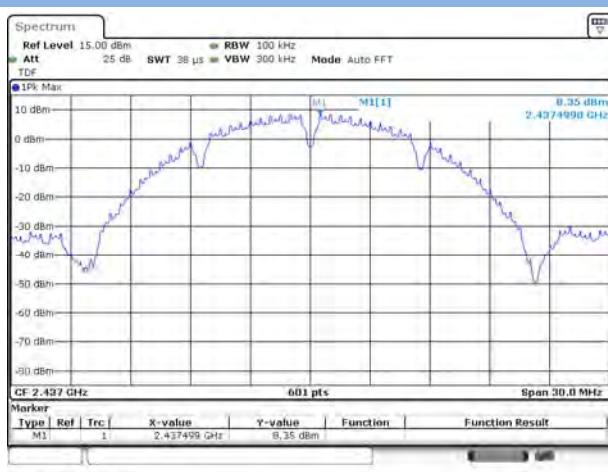


## 802.11b MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

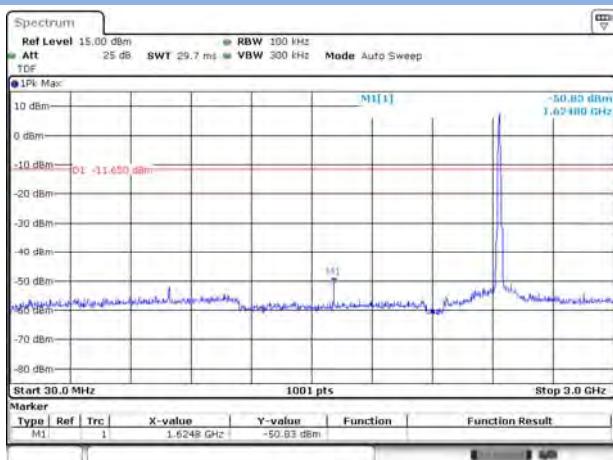


## 802.11b MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

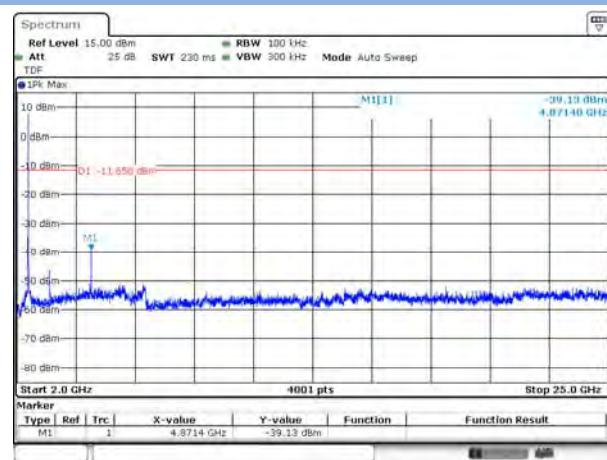


## 802.11b HIGH CHANNEL CARRIER LEVEL

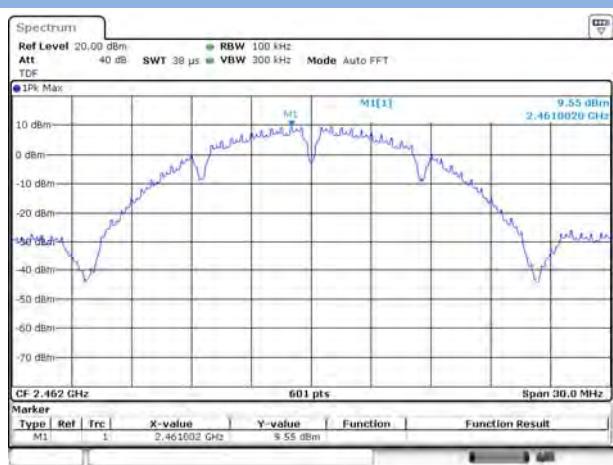


## 802.11b HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

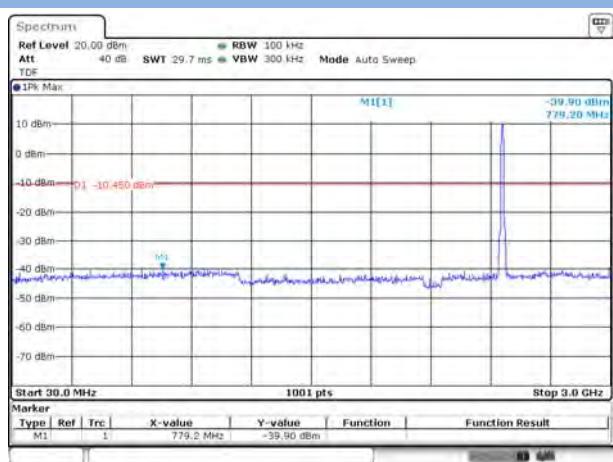


## 802.11b HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

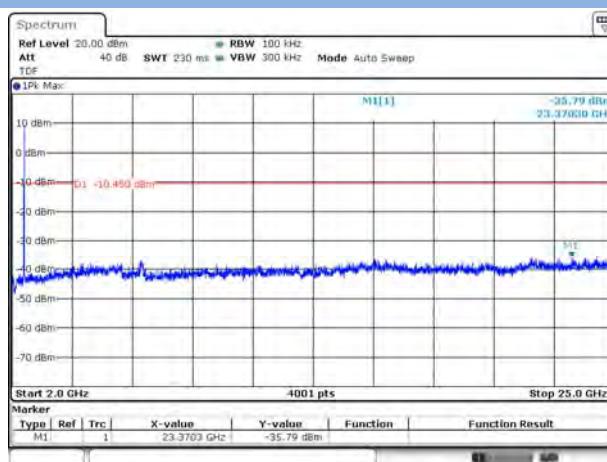


## 802.11g LOW CHANNEL CARRIER LEVEL

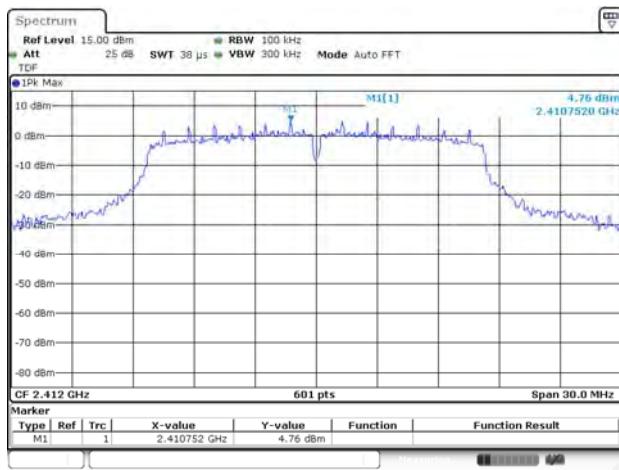


## 802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

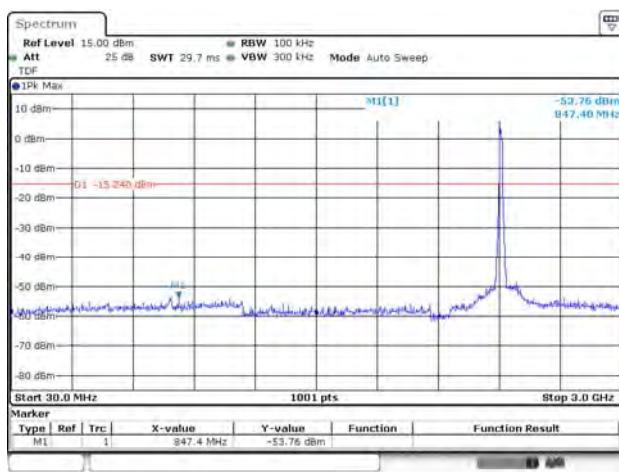


## 802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

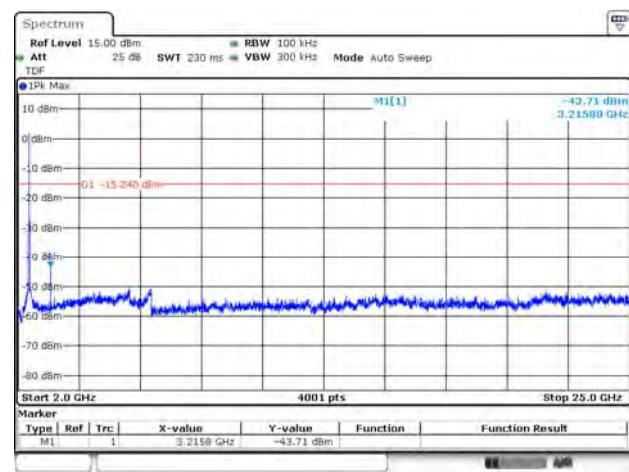


## 802.11g MIDDLE CHANNEL CARRIER LEVEL

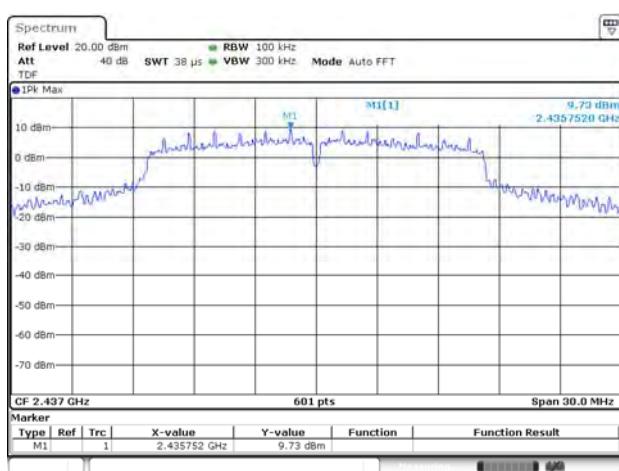


## 802.11g MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

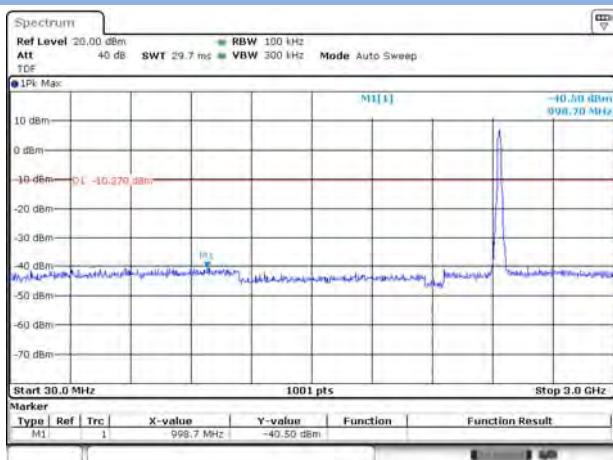


## 802.11g MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

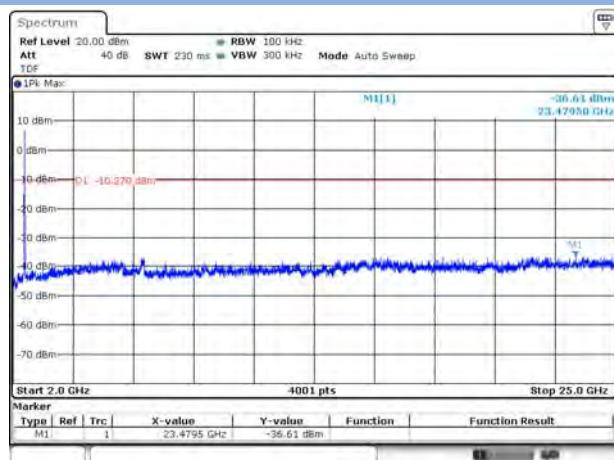


## 802.11g HIGH CHANNEL CARRIER LEVEL

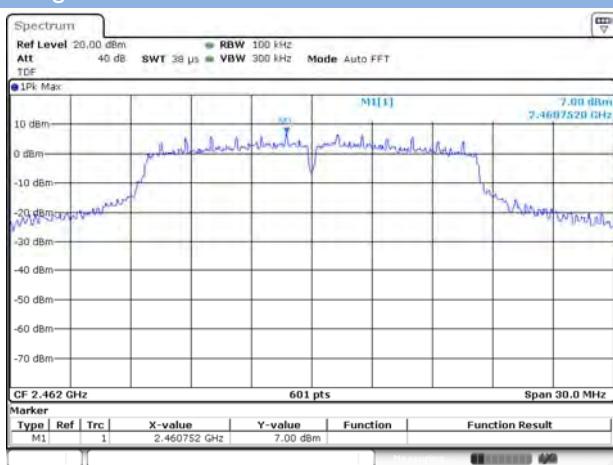


## 802.11g HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

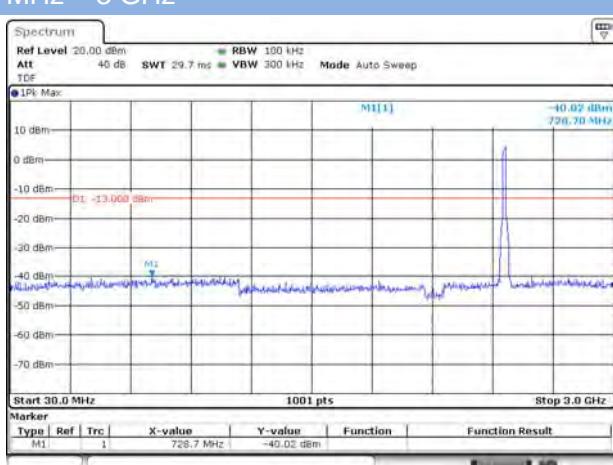


## 802.11g HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

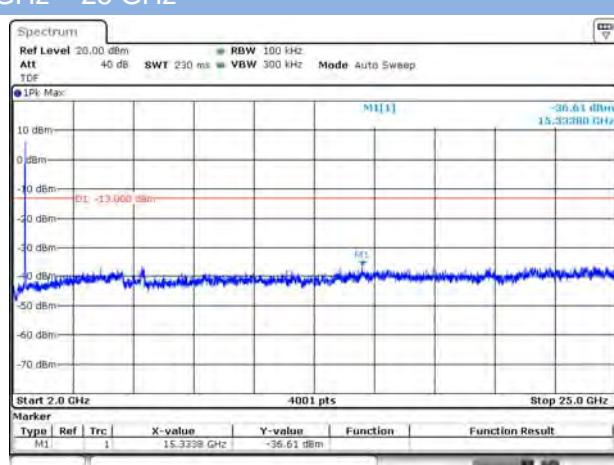


## 802.11n-20 LOW CHANNEL CARRIER LEVEL

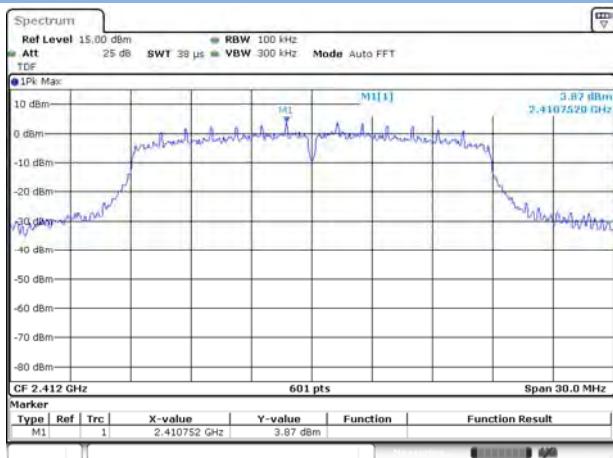


## 802.11n-20 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

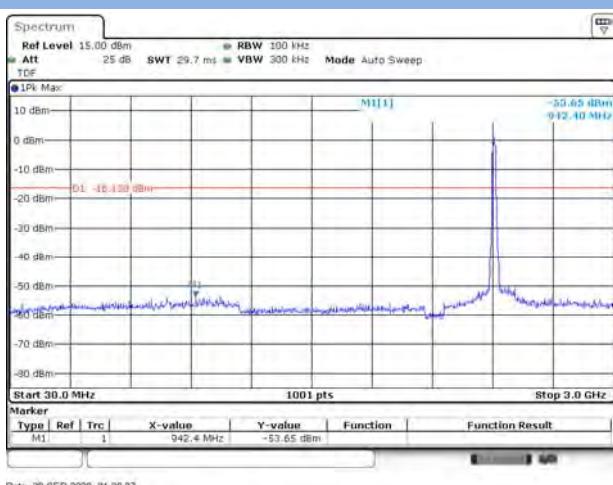


## 802.11n-20 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

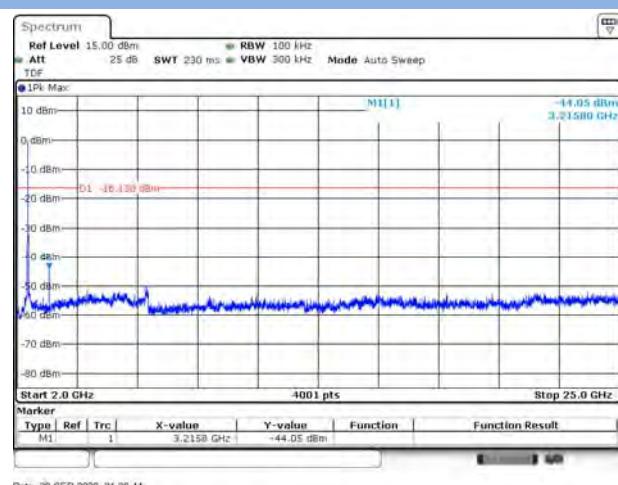


## 802.11n-20 MIDDLE CHANNEL CARRIER LEVEL

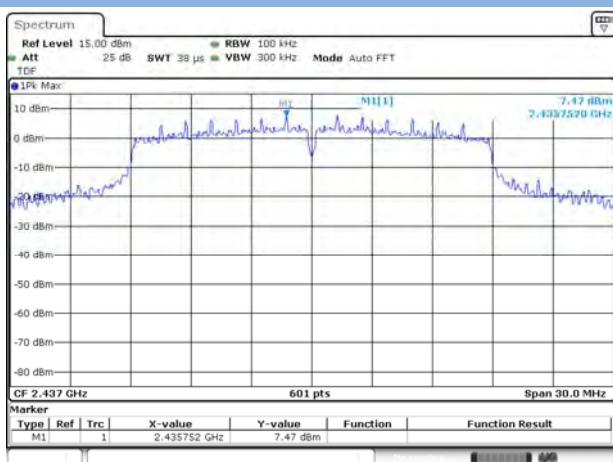


## 802.11n-20 MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

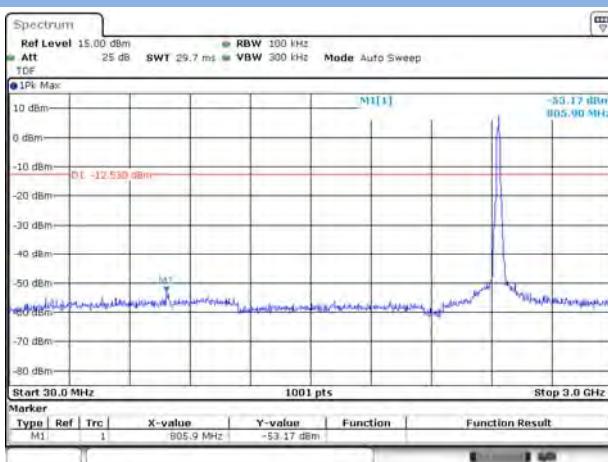


## 802.11n-20 MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

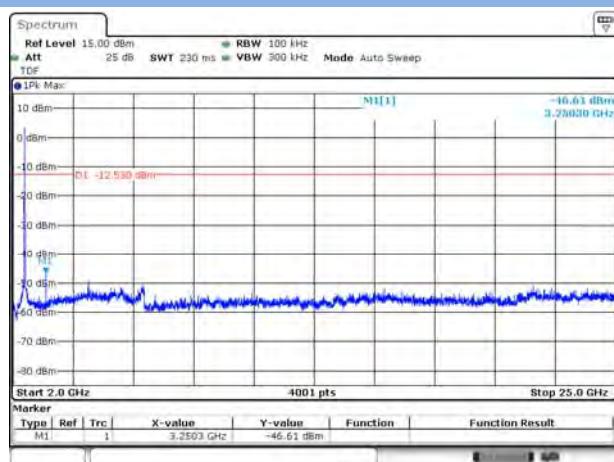


## 802.11n-20 HIGH CHANNEL CARRIER LEVEL

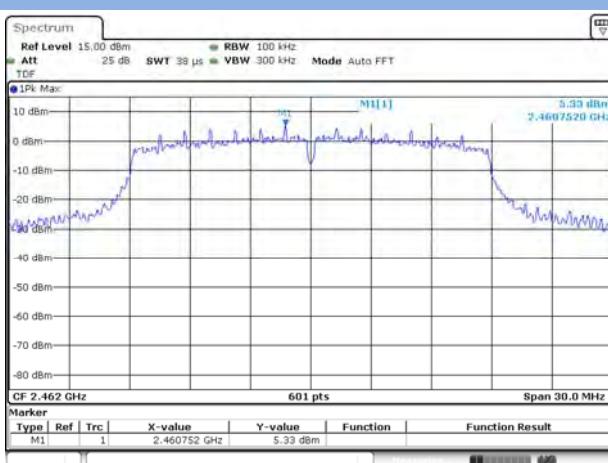


## 802.11n-20 HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

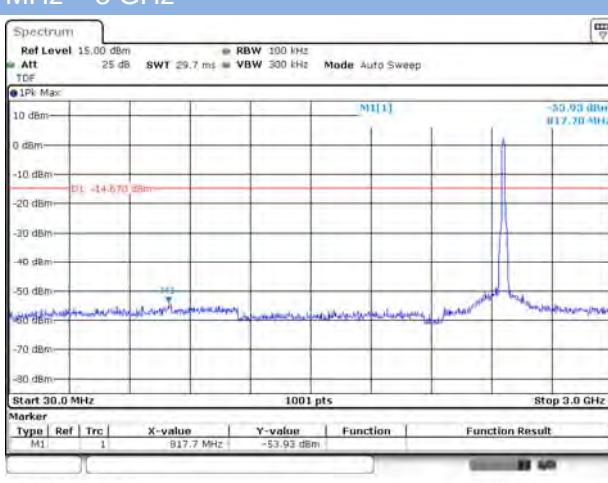


## 802.11n-20 HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

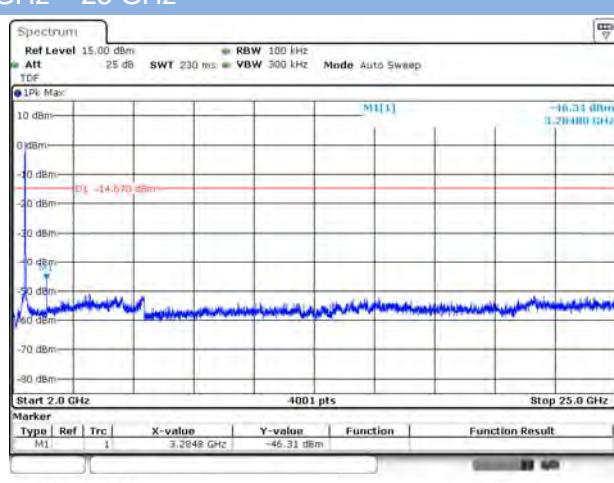


## 802.11n-40 LOW CHANNEL CARRIER LEVEL

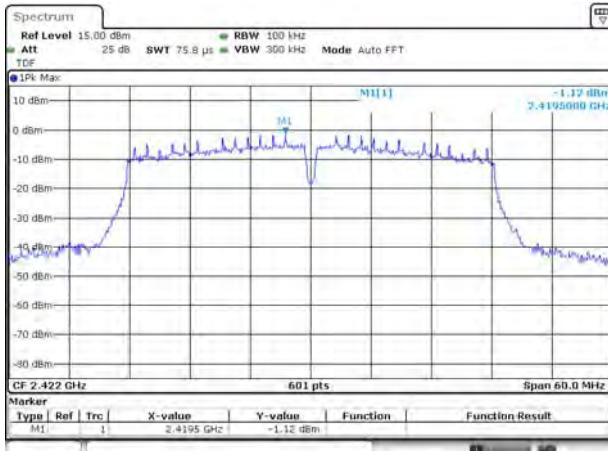


## 802.11n-40 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

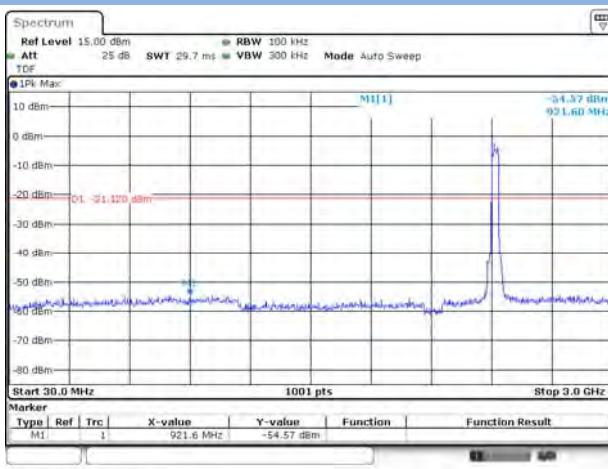


## 802.11n-40 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

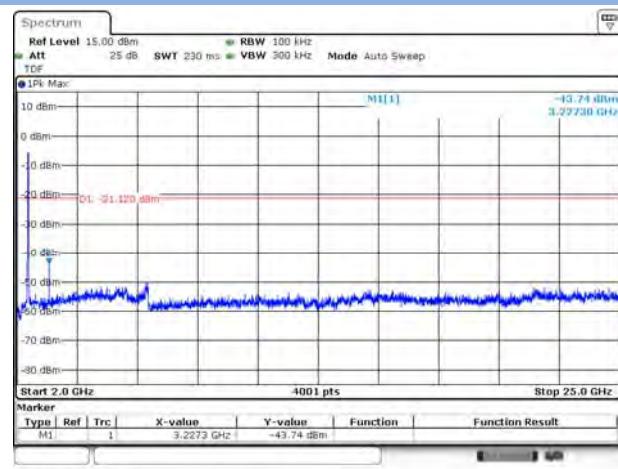


## 802.11n-40 MIDDLE CHANNEL CARRIER LEVEL

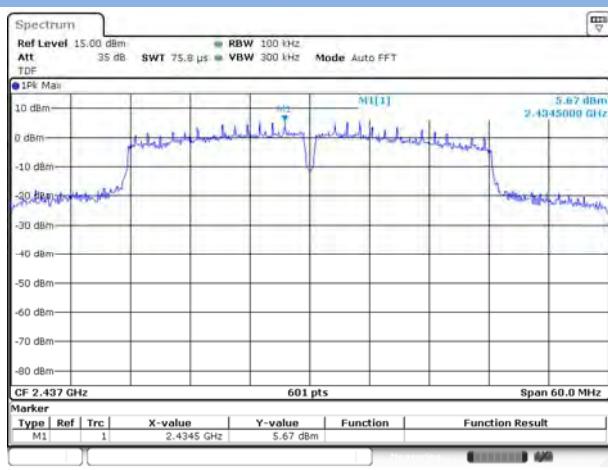


## 802.11n-40 MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

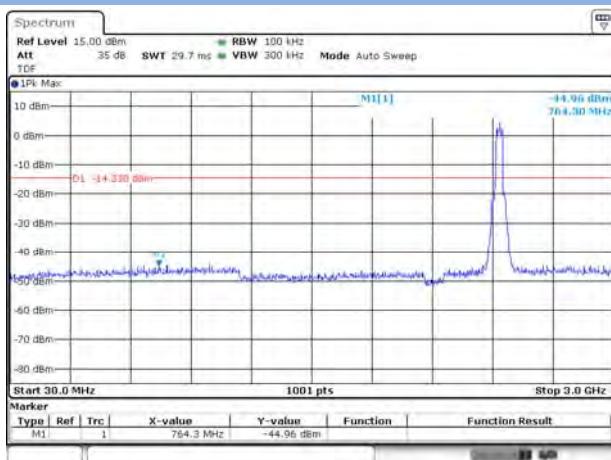


## 802.11n-40 MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

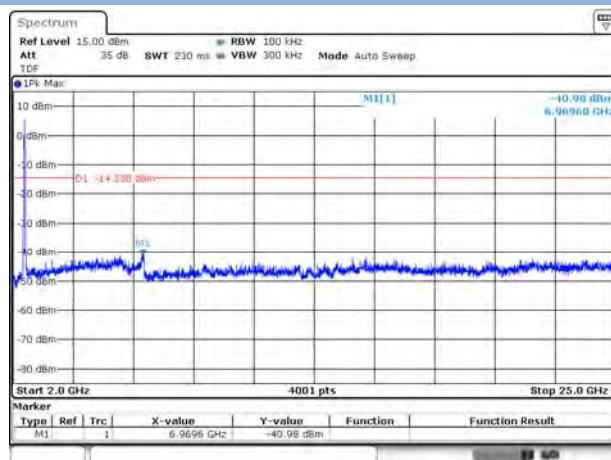


## 802.11n-40 HIGH CHANNEL CARRIER LEVEL

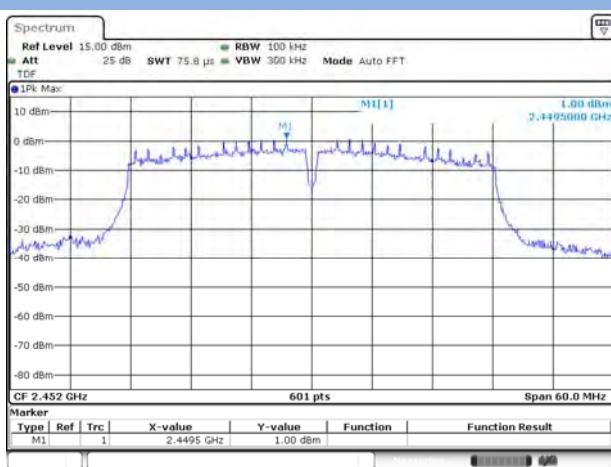

## 802.11n-40 HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

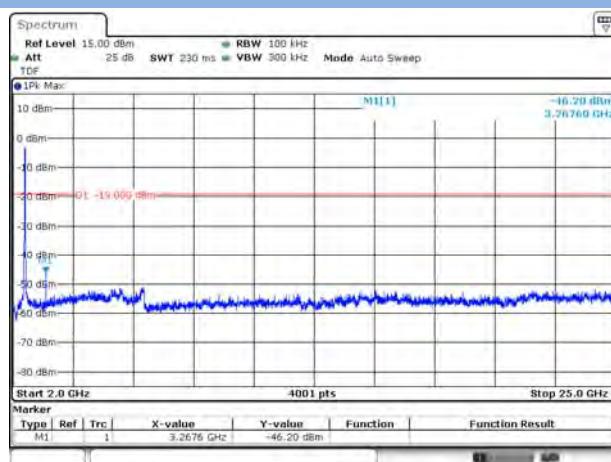


## 802.11n-40 HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

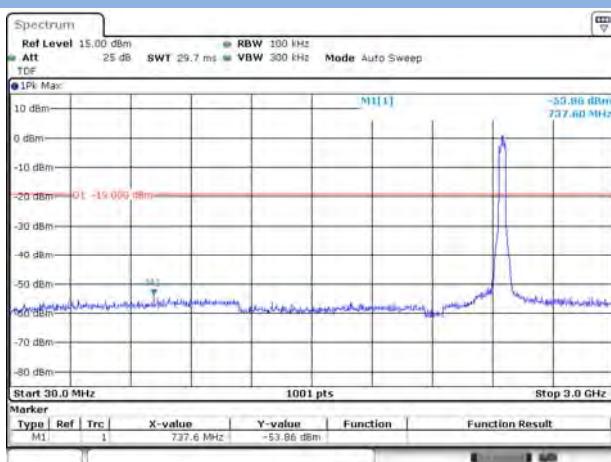


## Aux. Antenna


### 802.11b LOW CHANNEL CARRIER LEVEL

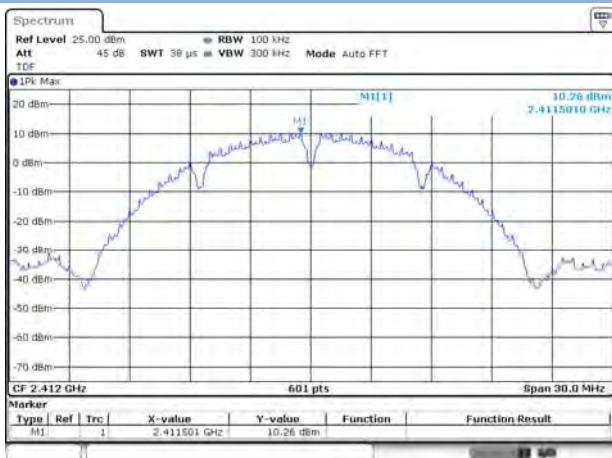


### 802.11b LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

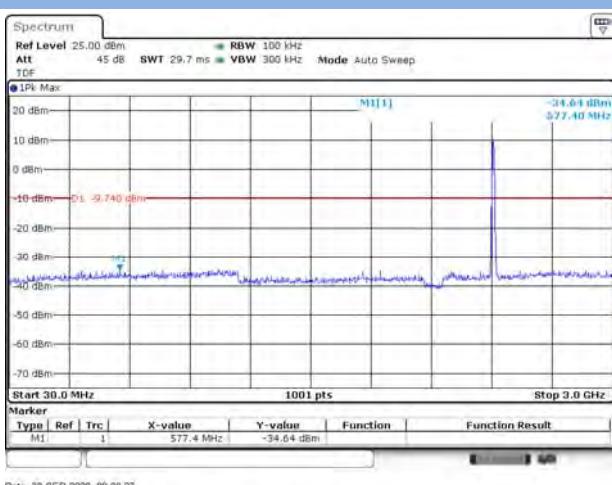


### 802.11b LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

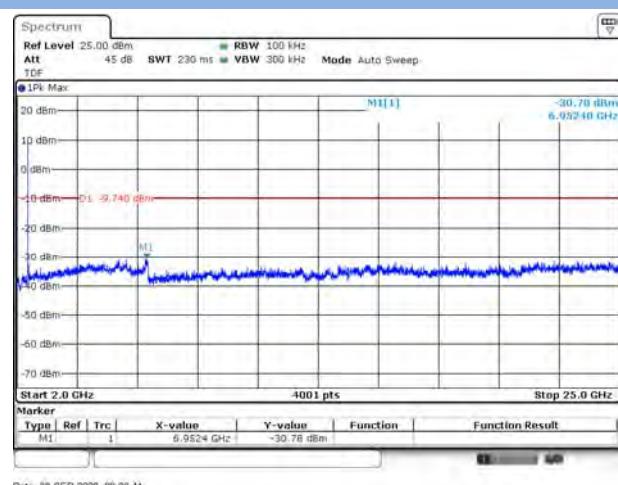


### 802.11b MIDDLE CHANNEL CARRIER LEVEL

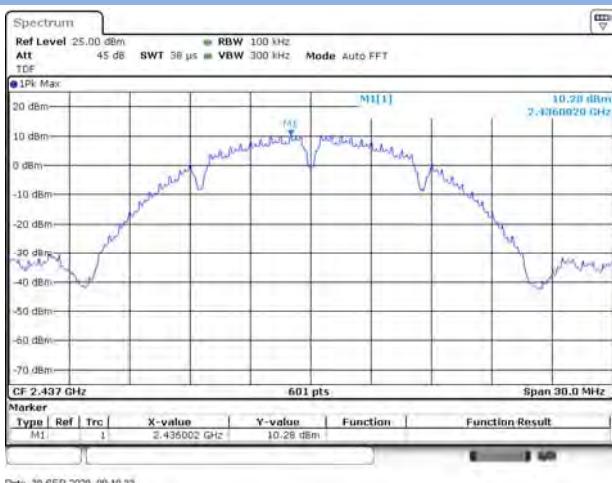


## 802.11b MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

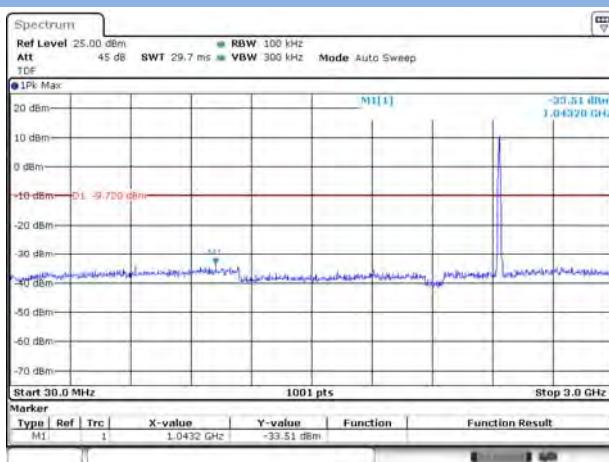


## 802.11b MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

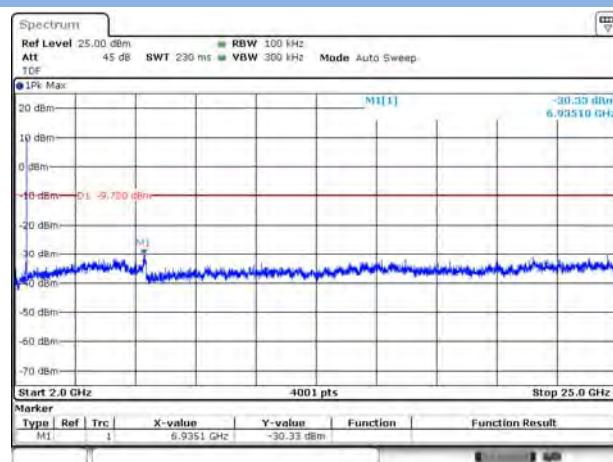


## 802.11b HIGH CHANNEL CARRIER LEVEL

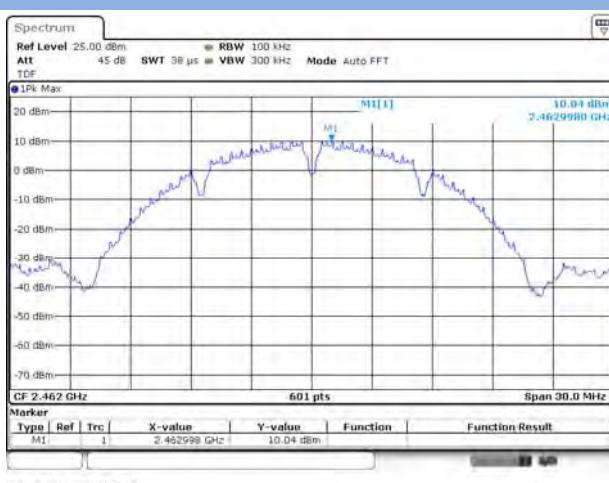


## 802.11b HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

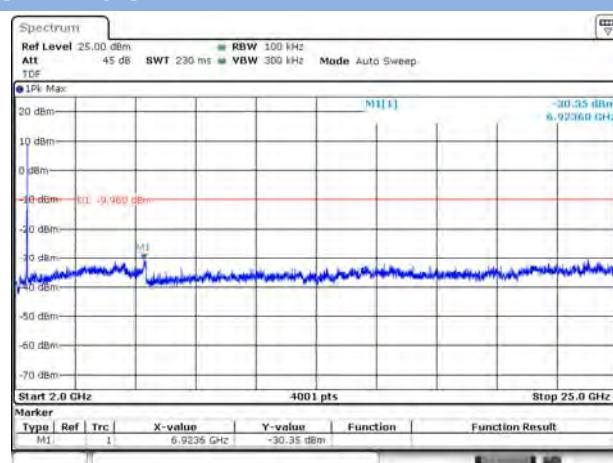


## 802.11b HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

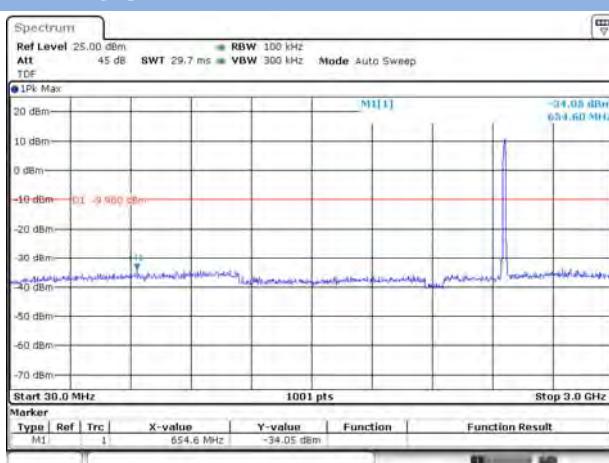


### 802.11g LOW CHANNEL CARRIER LEVEL

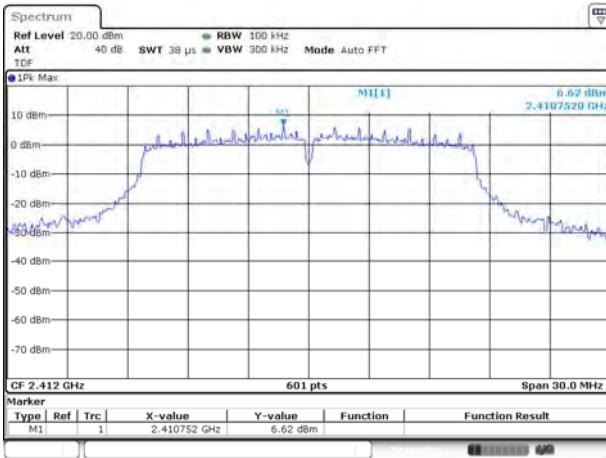


### 802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

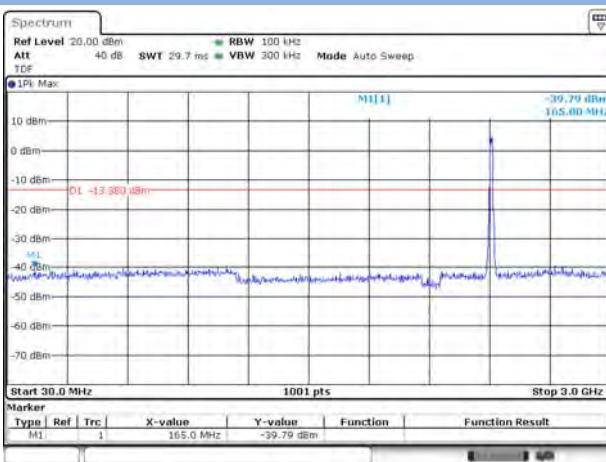


### 802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

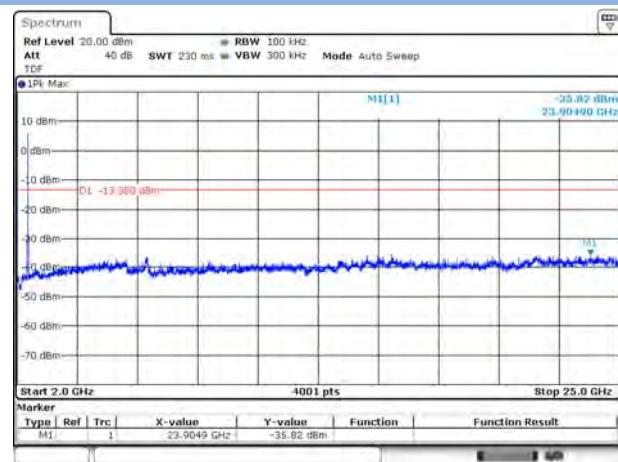


### 802.11g MIDDLE CHANNEL CARRIER LEVEL

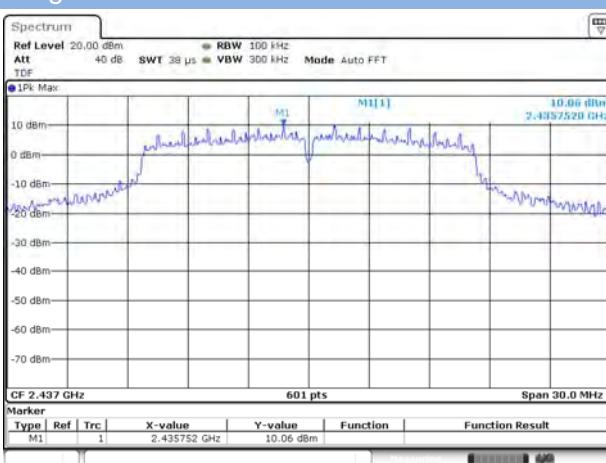


## 802.11g MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

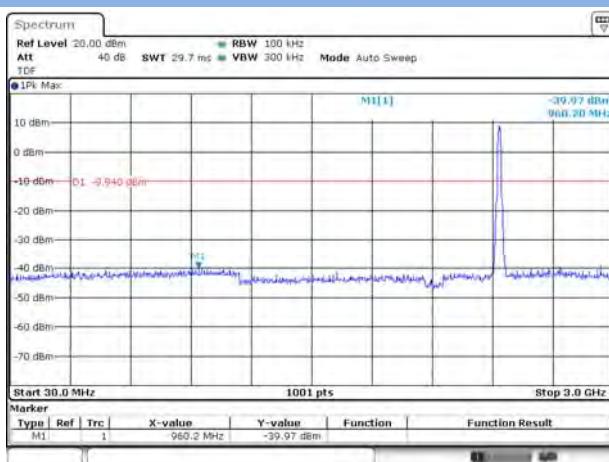


## 802.11g MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

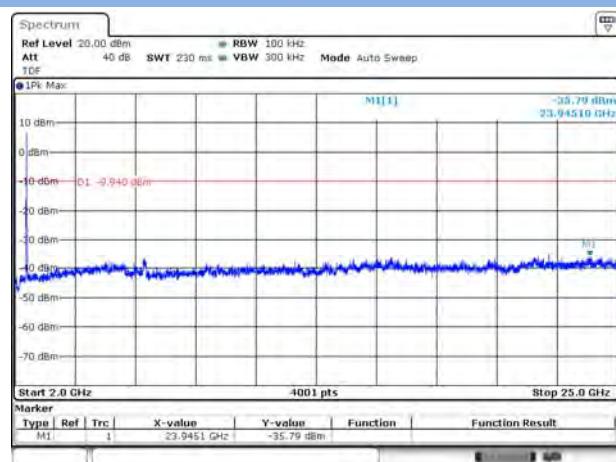


## 802.11g HIGH CHANNEL CARRIER LEVEL

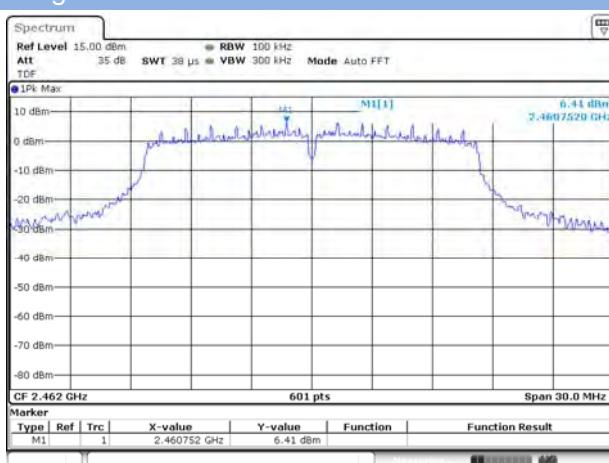


## 802.11g HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

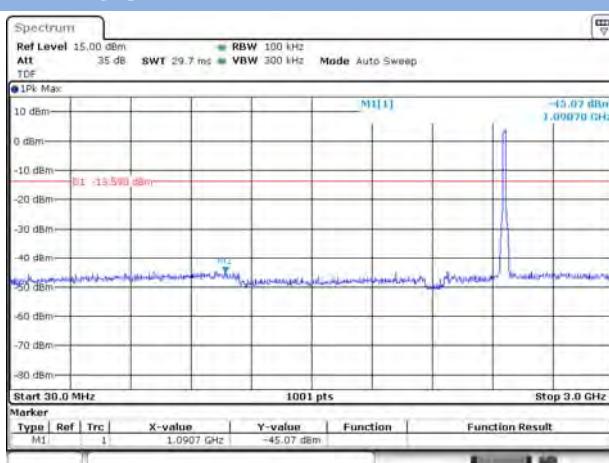


## 802.11g HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

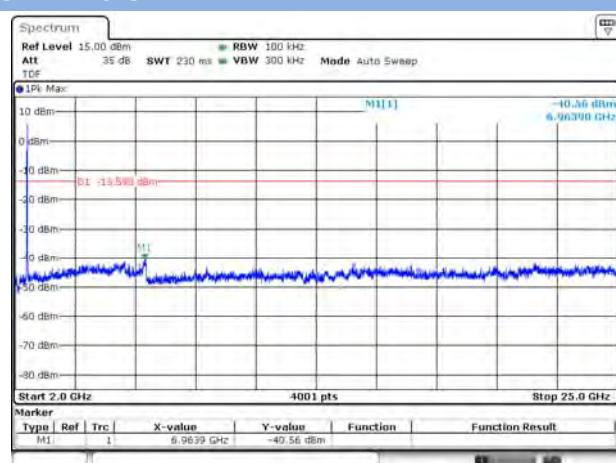


### 802.11n-20 LOW CHANNEL CARRIER LEVEL

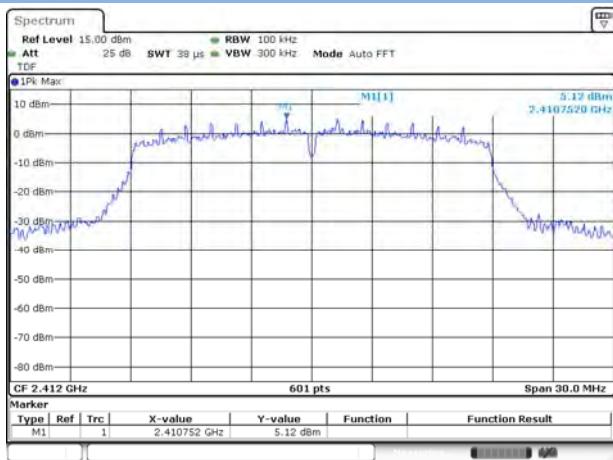


### 802.11n-20 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

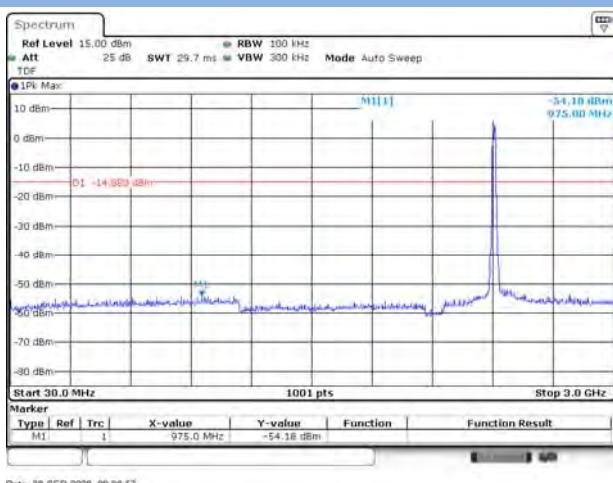


### 802.11n-20 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

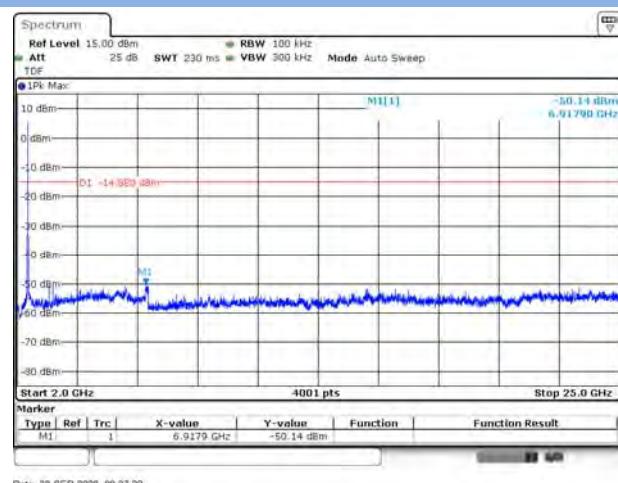


### 802.11n-20 MIDDLE CHANNEL CARRIER LEVEL

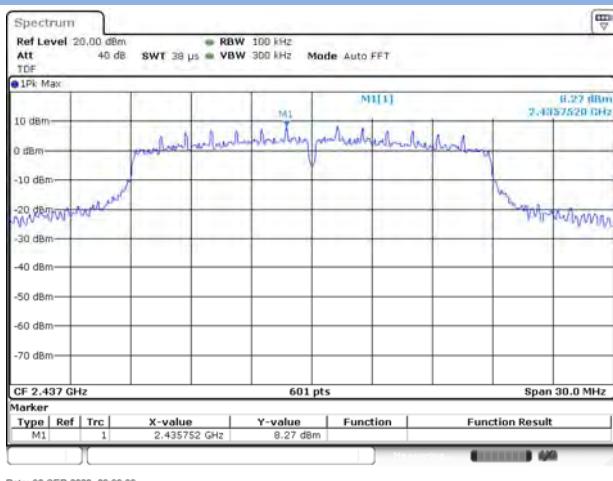


## 802.11n-20 MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

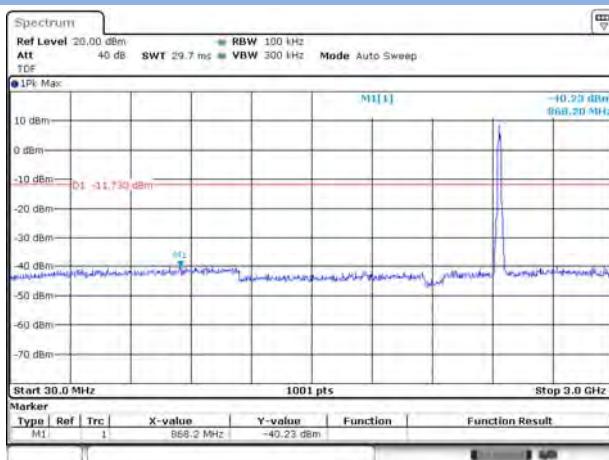


## 802.11n-20 MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

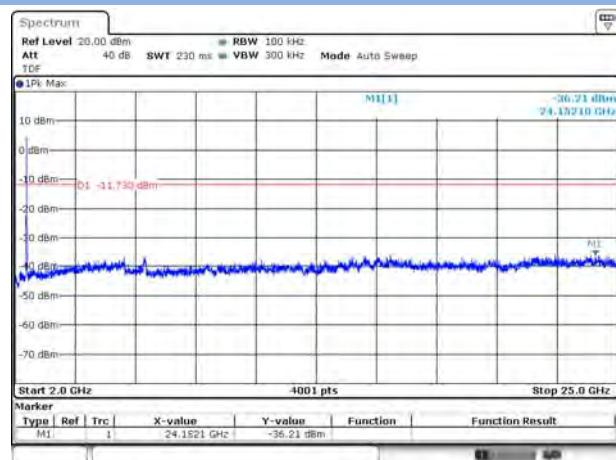


## 802.11n-20 HIGH CHANNEL CARRIER LEVEL

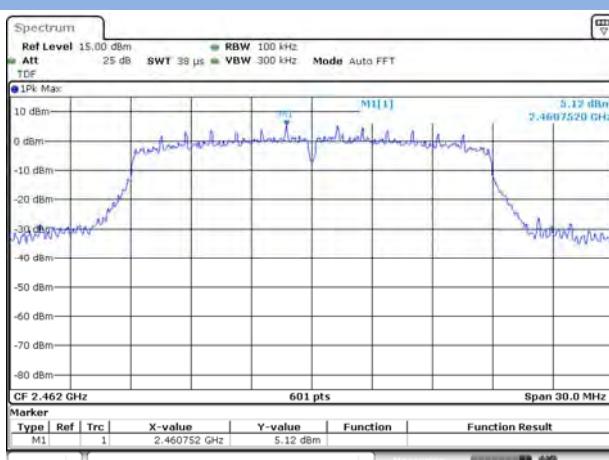


## 802.11n-20 HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

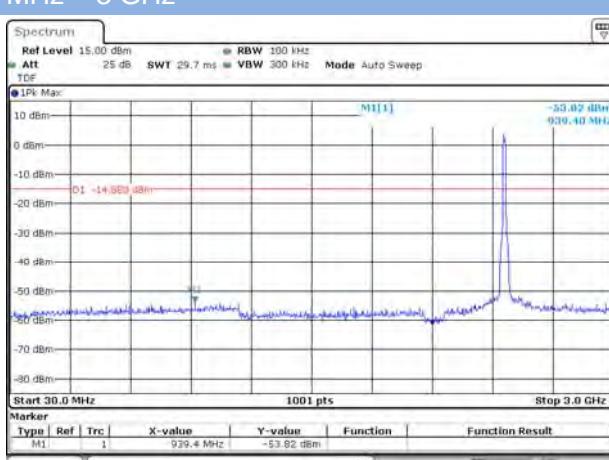


## 802.11n-20 HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

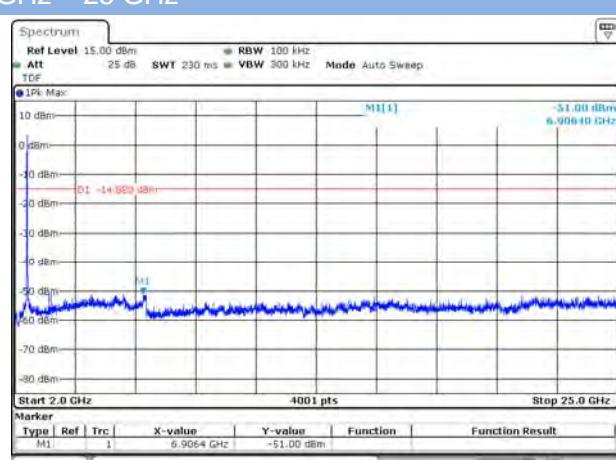


### 802.11n-40 LOW CHANNEL CARRIER LEVEL

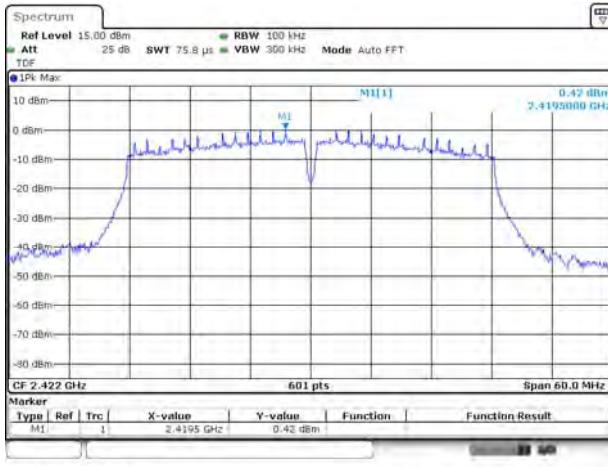


### 802.11n-40 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

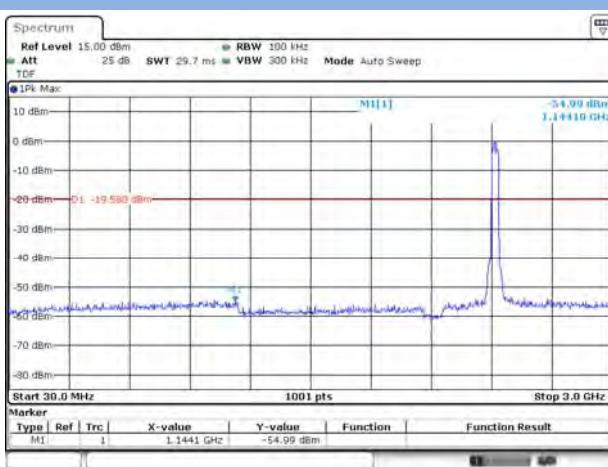


### 802.11n-40 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

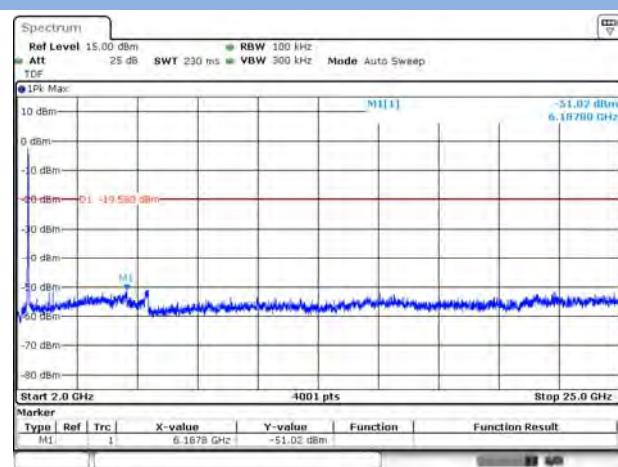


### 802.11n-40 MIDDLE CHANNEL CARRIER LEVEL

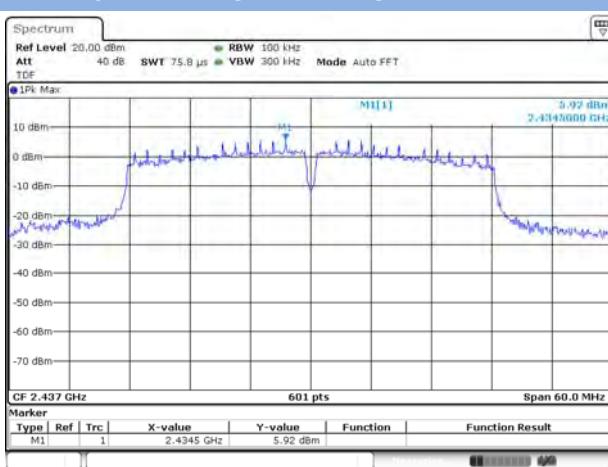


## 802.11n-40 MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

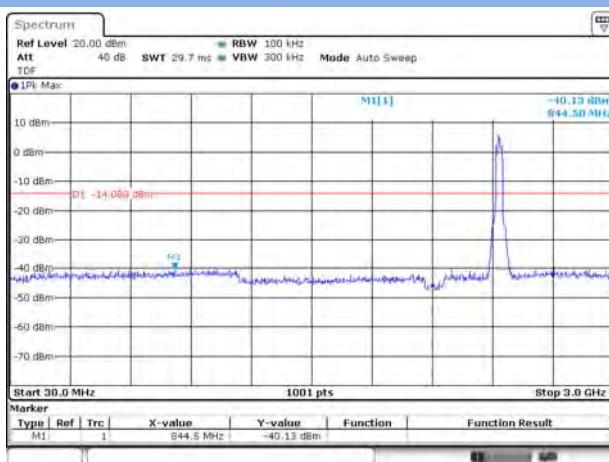


## 802.11n-40 MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

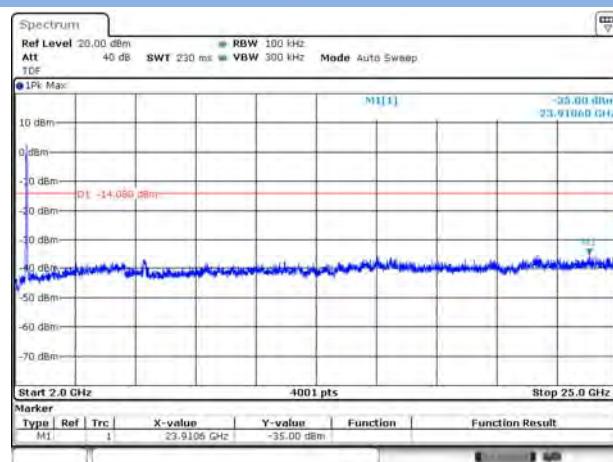


## 802.11n-40 HIGH CHANNEL CARRIER LEVEL

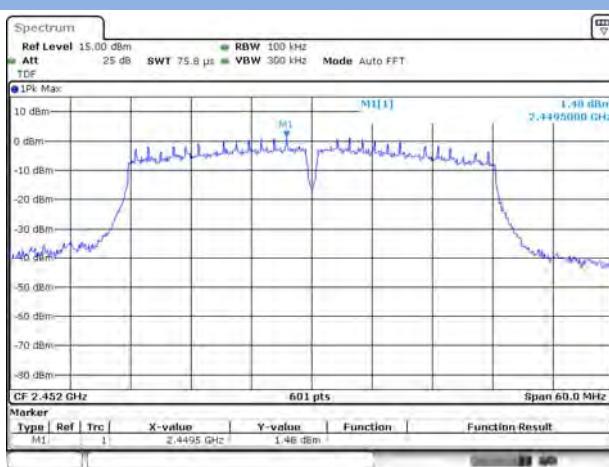

## 802.11n-40 HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

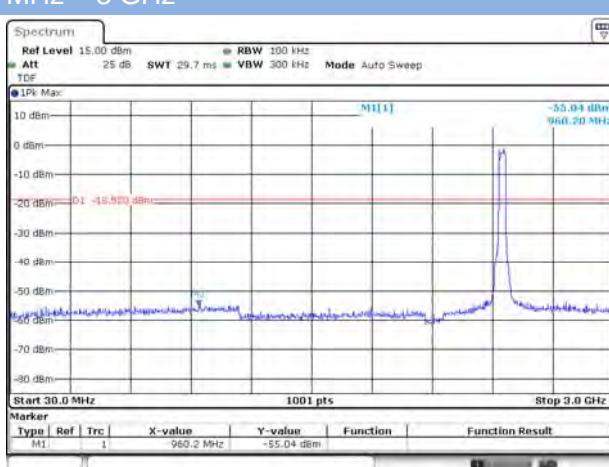


## 802.11n-40 HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

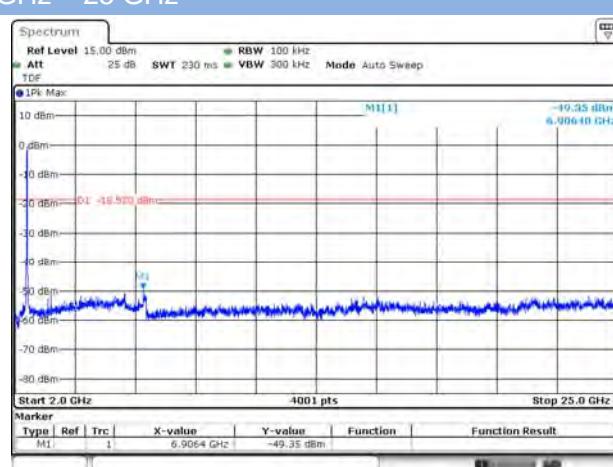


## MIMO-Main Antenna


### 802.11n-20 LOW CHANNEL CARRIER LEVEL

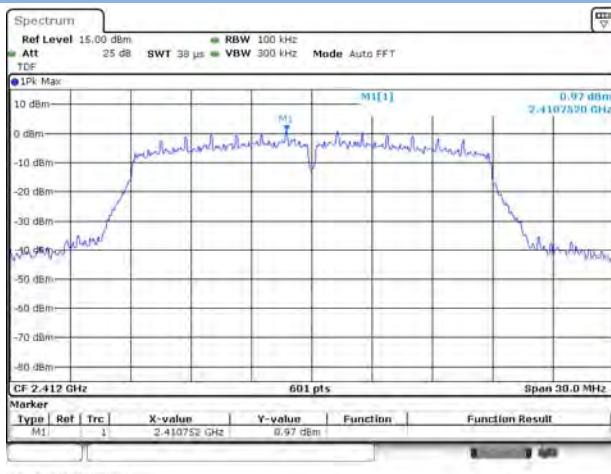


### 802.11n-20 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

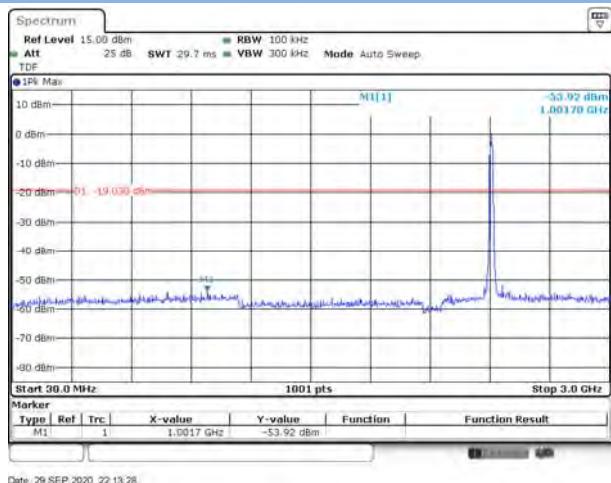


### 802.11n-20 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

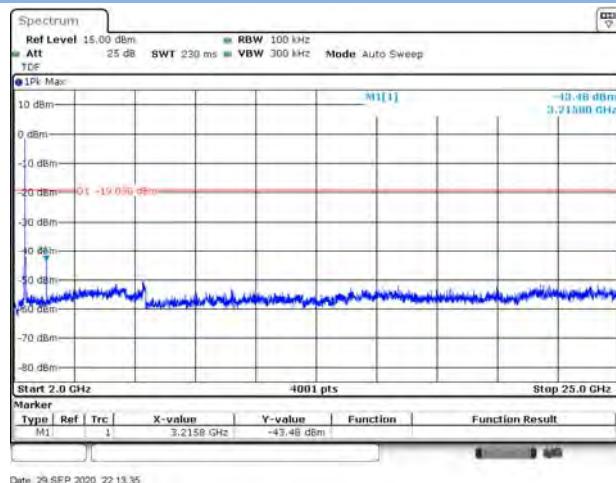


### 802.11n-20 MIDDLE CHANNEL CARRIER LEVEL

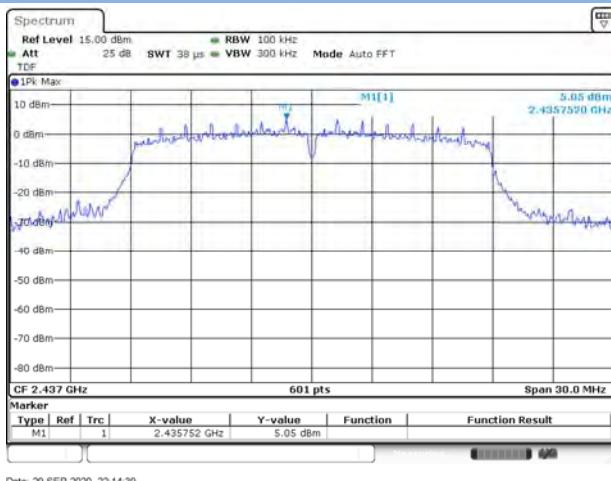


## 802.11n-20 MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

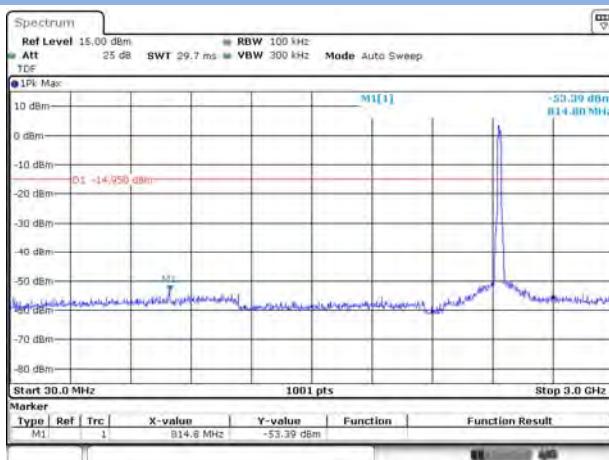


## 802.11n-20 MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

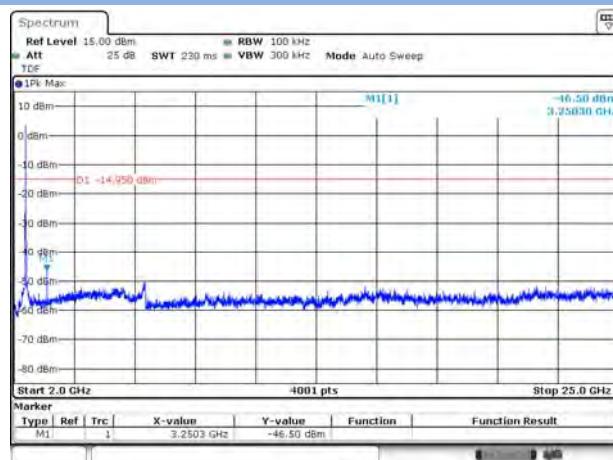


## 802.11n-20 HIGH CHANNEL CARRIER LEVEL

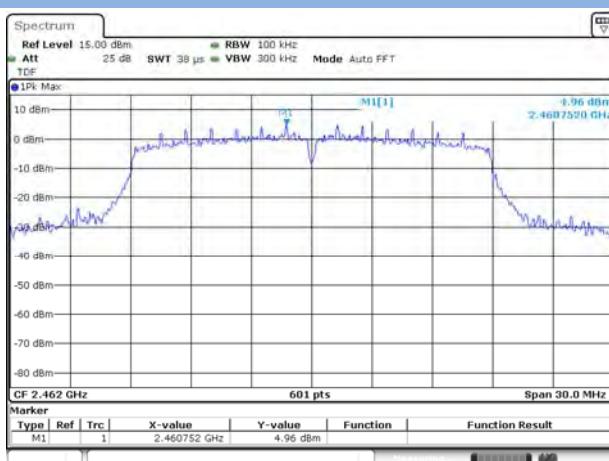


## 802.11n-20 HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

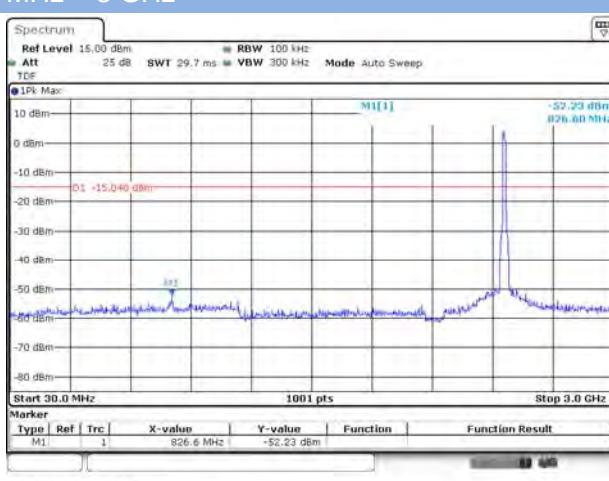


## 802.11n-20 HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

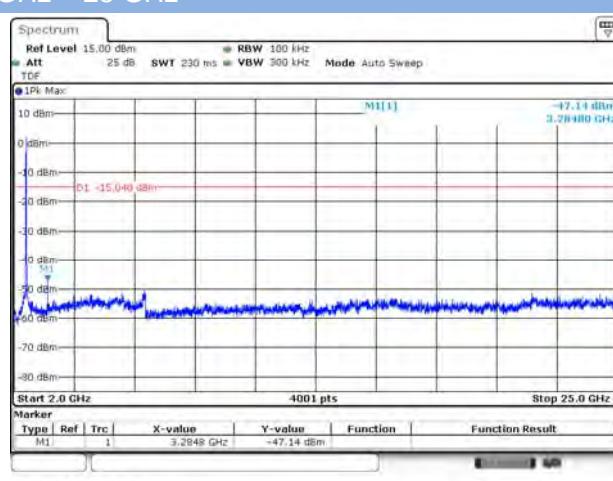


### 802.11n-40 LOW CHANNEL CARRIER LEVEL

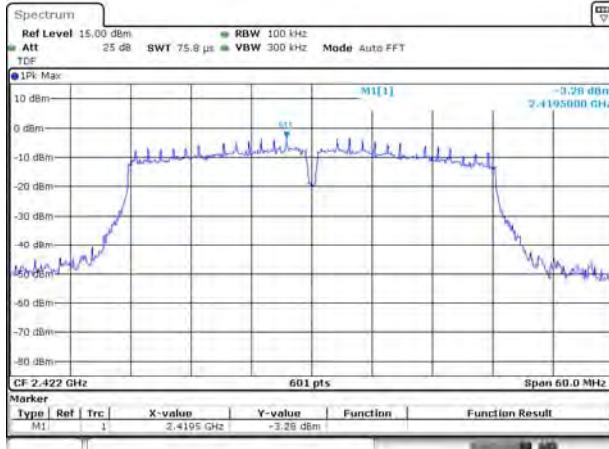


### 802.11n-40 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

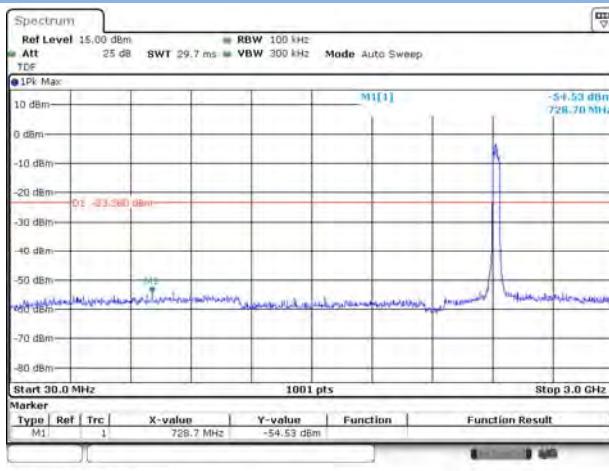


### 802.11n-40 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

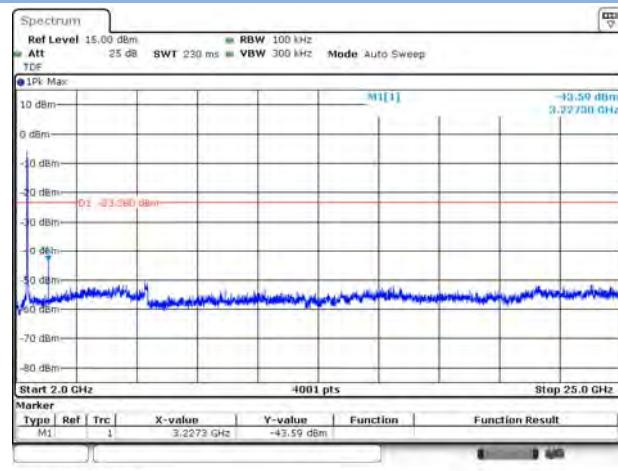


### 802.11n-40 MIDDLE CHANNEL CARRIER LEVEL

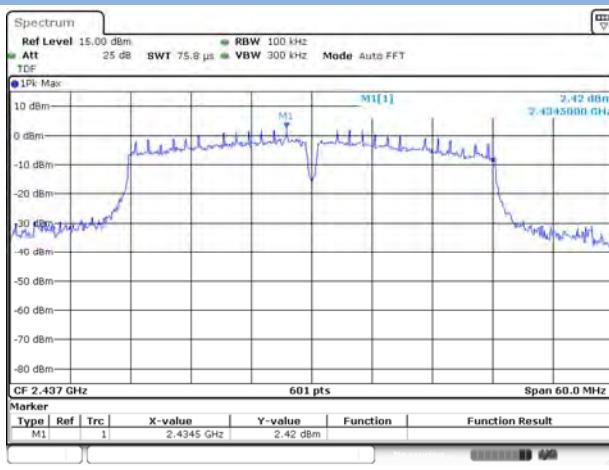


## 802.11n-40 MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

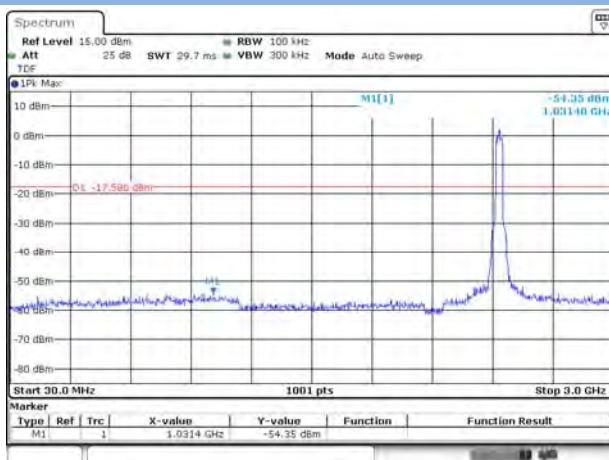


## 802.11n-40 MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

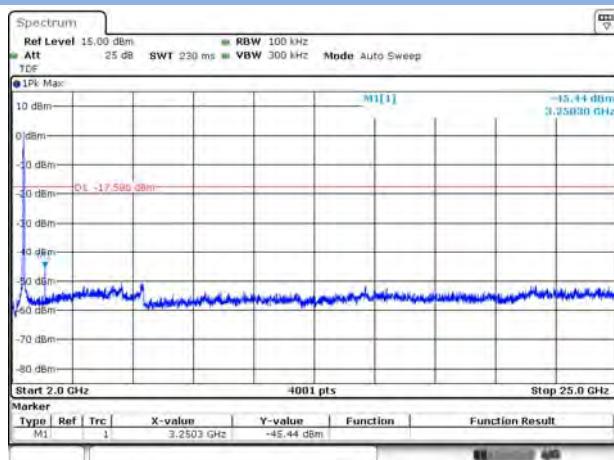


## 802.11n-40 HIGH CHANNEL CARRIER LEVEL

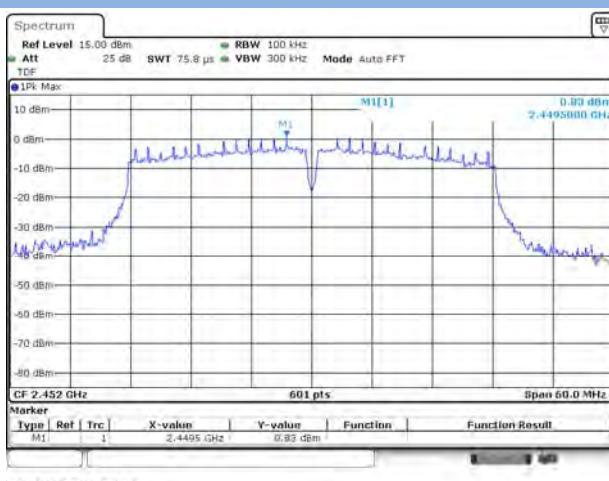

## 802.11n-40 HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

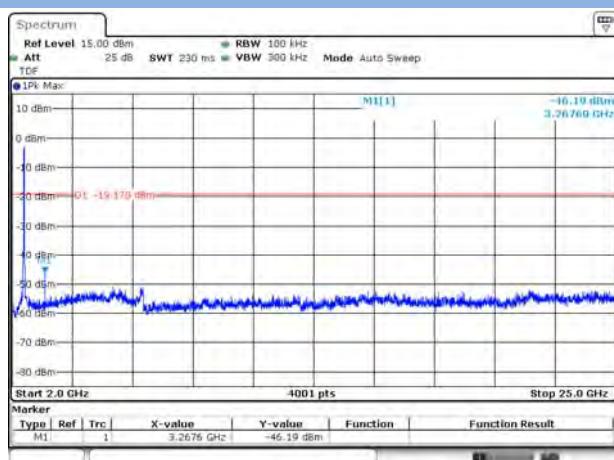


## 802.11n-40 HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

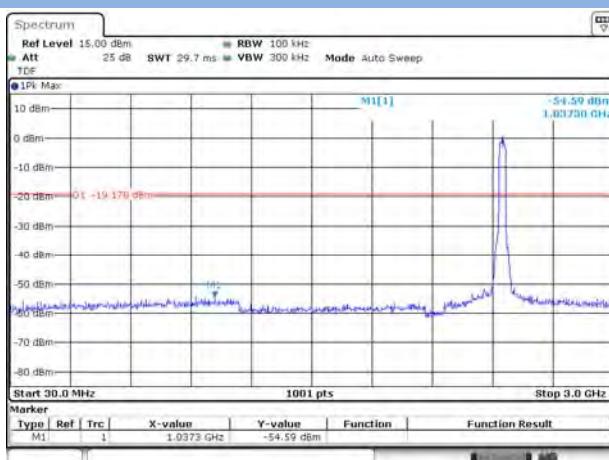


## MIMO-Aux. Antenna


### 802.11n-20 LOW CHANNEL CARRIER LEVEL

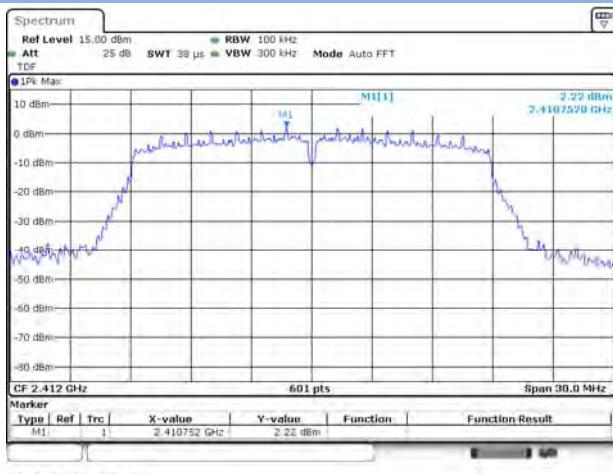


### 802.11n-20 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

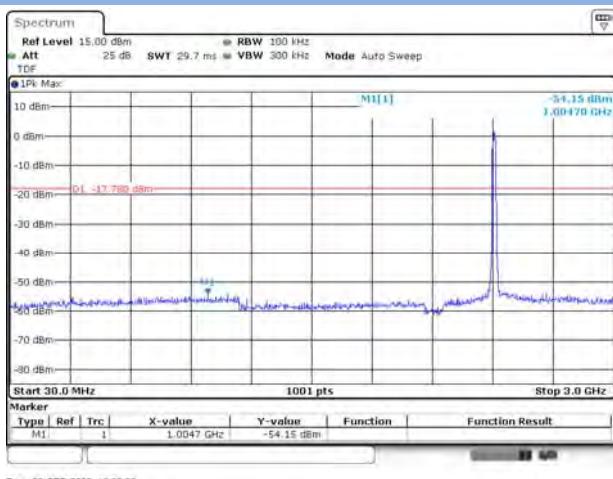


### 802.11n-20 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

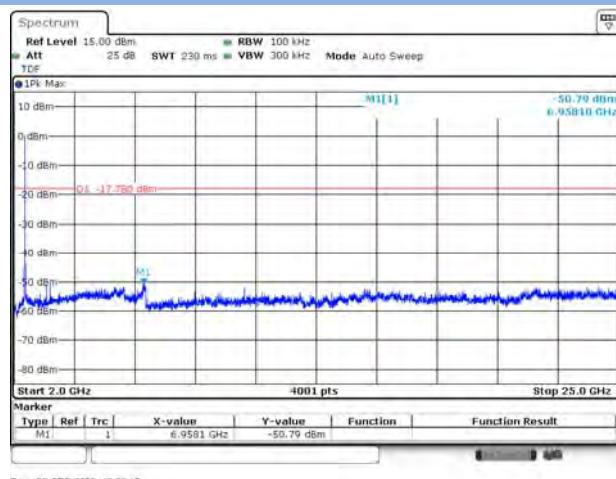


### 802.11n-20 MIDDLE CHANNEL CARRIER LEVEL

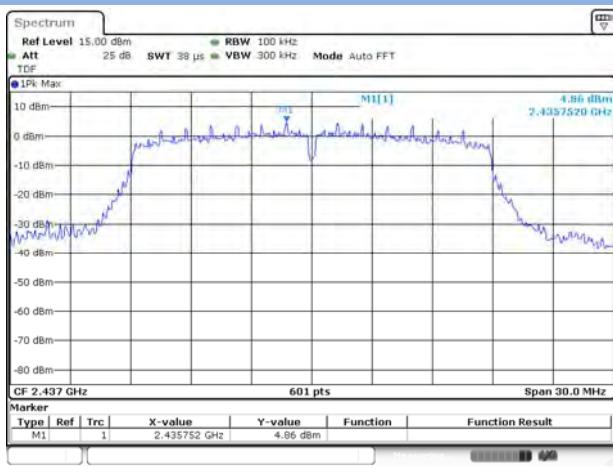


## 802.11n-20 MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

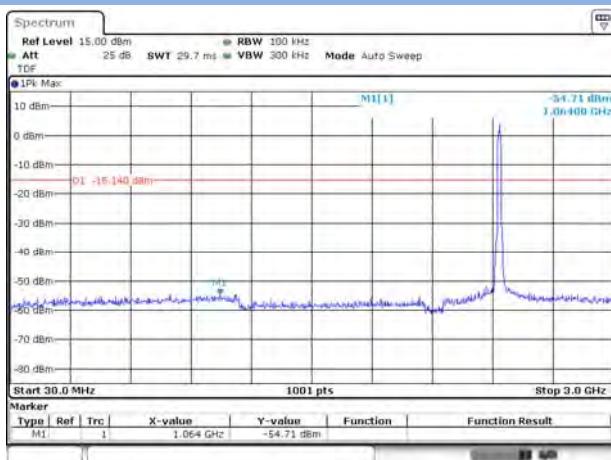


## 802.11n-20 MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

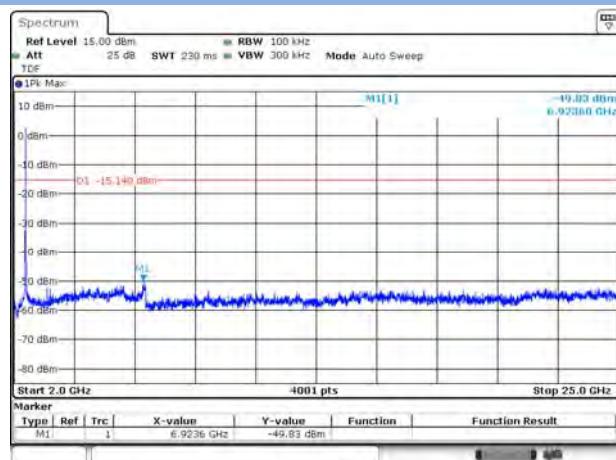


## 802.11n-20 HIGH CHANNEL CARRIER LEVEL

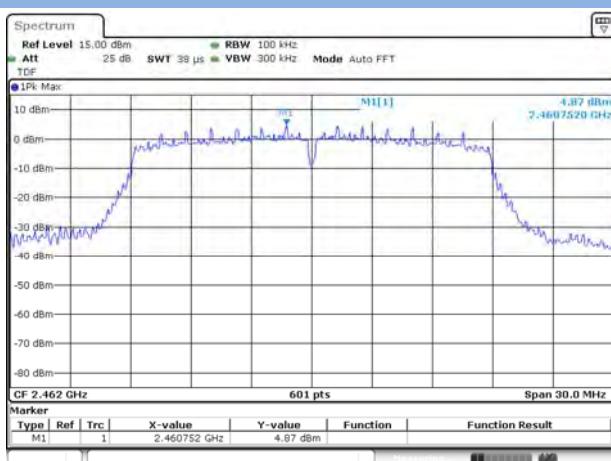


## 802.11n-20 HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

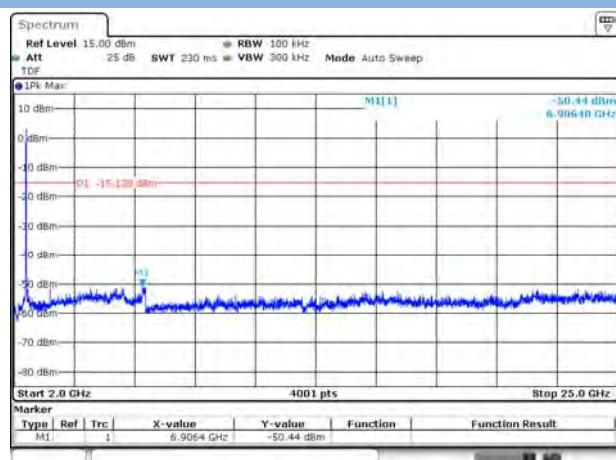


## 802.11n-20 HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

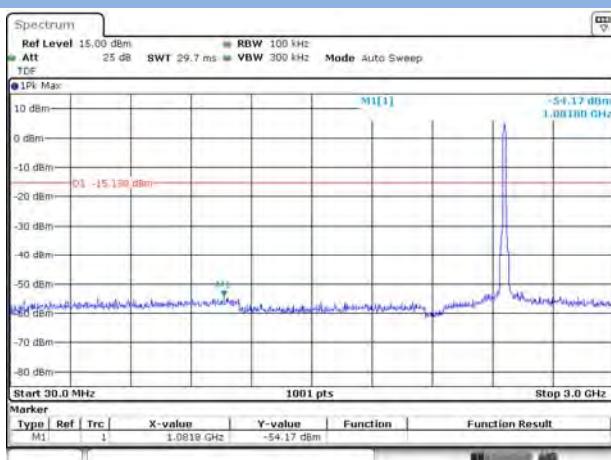


### 802.11n-40 LOW CHANNEL CARRIER LEVEL

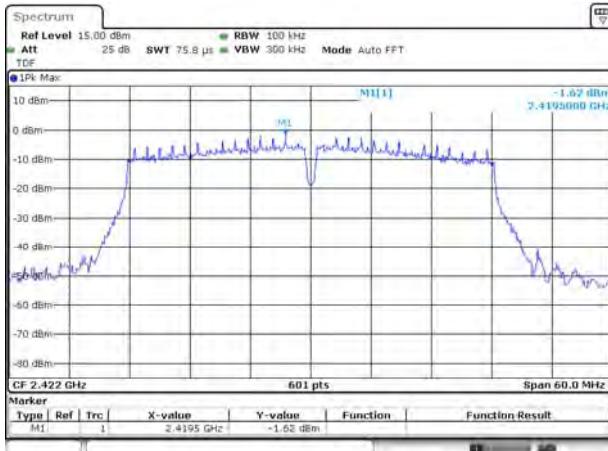


### 802.11n-40 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

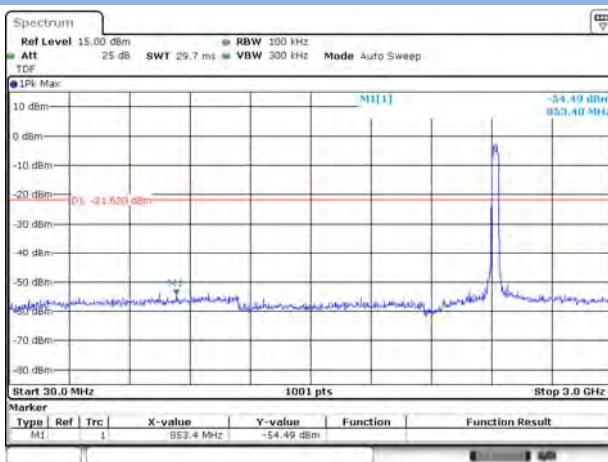


### 802.11n-40 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

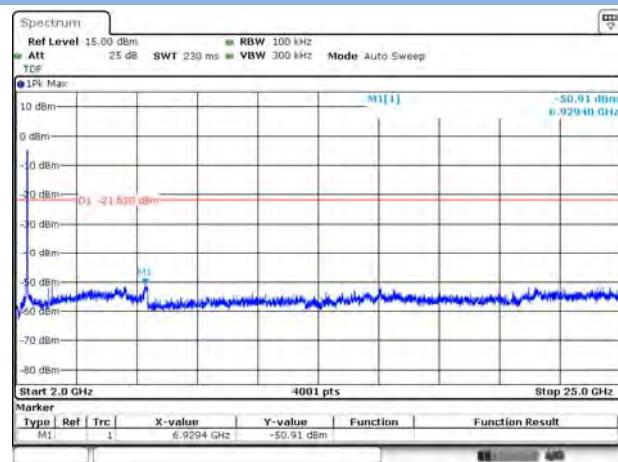


### 802.11n-40 MIDDLE CHANNEL CARRIER LEVEL

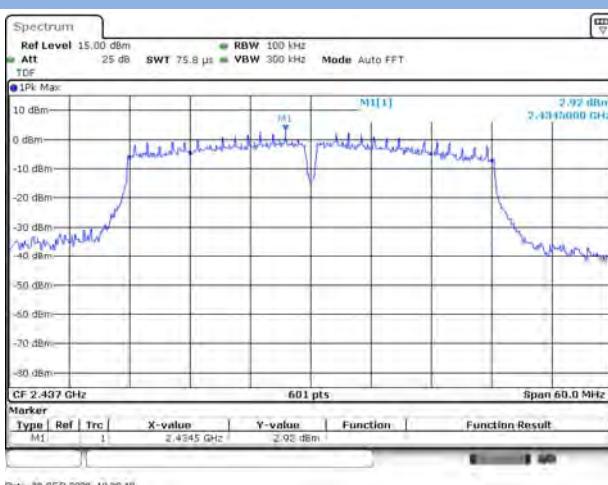


### 802.11n-40 MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

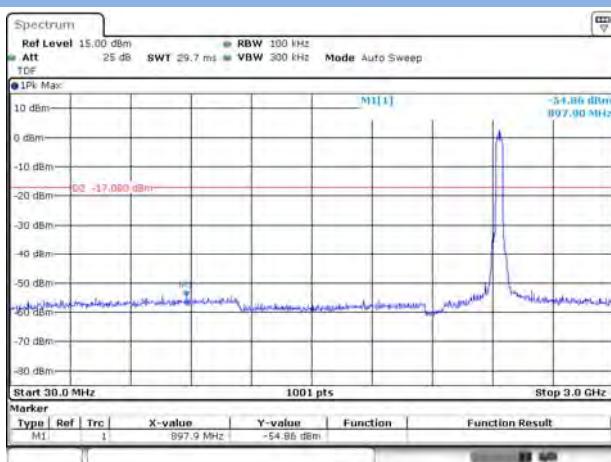


### 802.11n-40 MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

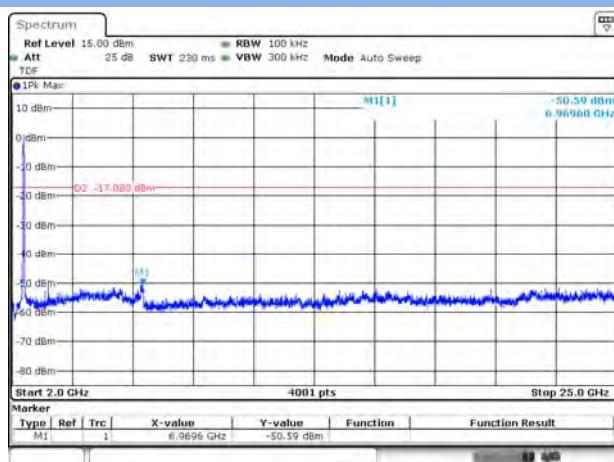


### 802.11n-40 HIGH CHANNEL CARRIER LEVEL

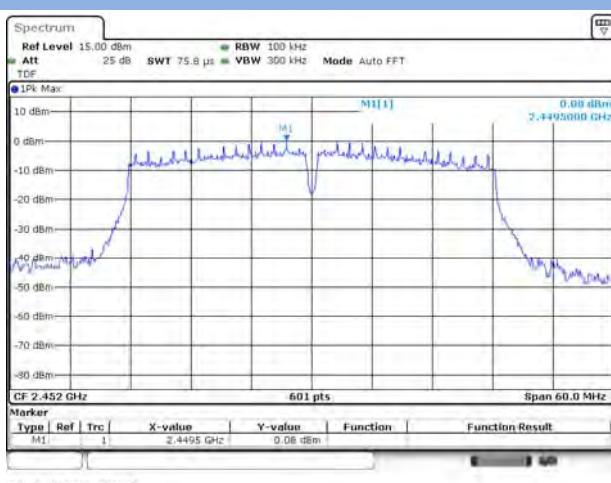

### 802.11n-40 HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

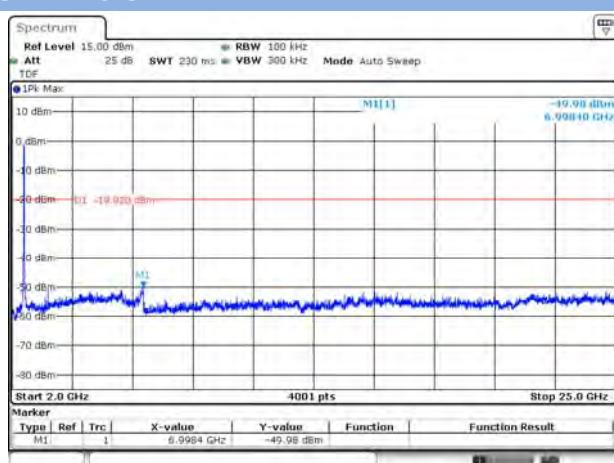

### 802.11n-40 HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

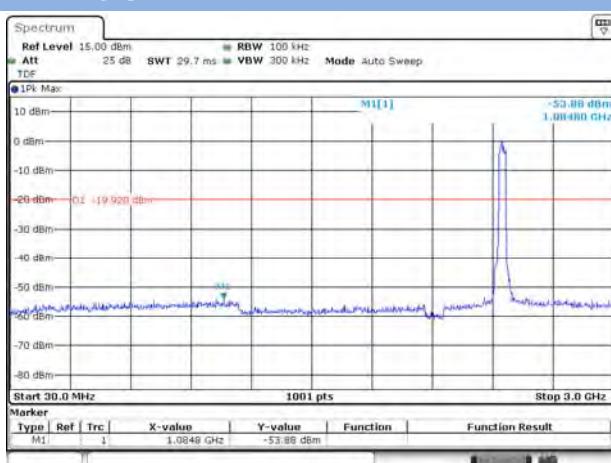

## A.4 Band Edge (Authorized-band band-edge)

### Test Data

Note: The 99% OBW of the fundamental emission is without 2 MHz of the authorized band.

### Main Antenna

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-30.15	8.49	-11.51	Pass
High Channel	-46.45	9.55	-10.45	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-26.86	4.76	-15.24	Pass
High Channel	-36.00	7.00	-13.00	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-27.08	3.87	-16.13	Pass
High Channel	-37.88	5.33	-14.67	Pass

802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-37.86	-1.12	-21.12	Pass
High Channel	-37.43	1.00	-19.00	Pass

Aux. Antenna

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-34.54	10.26	-9.74	Pass
High Channel	-43.86	10.04	-9.96	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-23.70	6.62	-13.38	Pass
High Channel	-40.27	6.41	-13.59	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-27.27	5.12	-14.88	Pass
High Channel	-42.92	5.12	-14.88	Pass

802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-37.36	0.42	-19.58	Pass
High Channel	-39.90	1.48	-18.52	Pass

MIMO-Main Antenna

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-35.45	0.97	-19.03	Pass
High Channel	-38.50	4.96	-15.04	Pass

802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-41.35	-3.28	-23.28	Pass
High Channel	-37.88	0.83	-19.17	Pass

MIMO-Aux. Antenna

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-37.04	2.22	-17.78	Pass
High Channel	-47.47	4.87	-15.13	Pass

802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-41.67	-1.62	-21.62	Pass
High Channel	-43.57	0.08	-19.92	Pass


## Test Plots

### Main Antenna

#### 802.11b LOW CHANNEL, Carrier level



#### 802.11b LOW CHANNEL, Reference level

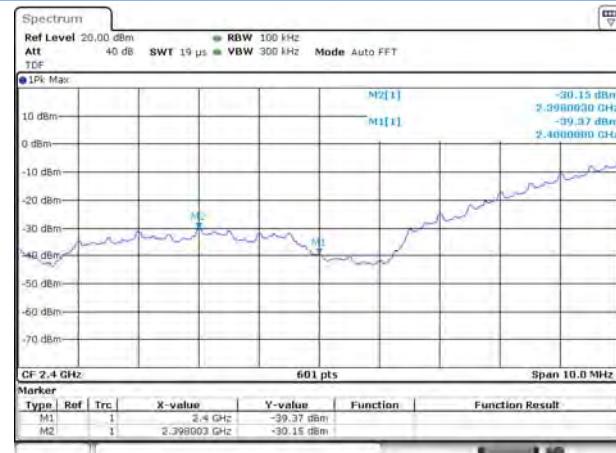


#### 802.11b HIGH CHANNEL, Carrier level




#### 802.11b HIGH CHANNEL, Reference level




#### 802.11g LOW CHANNEL, Carrier level

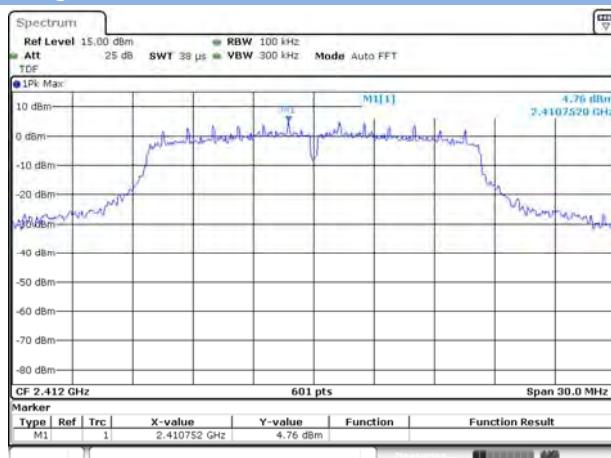


#### 802.11g LOW CHANNEL, Reference level

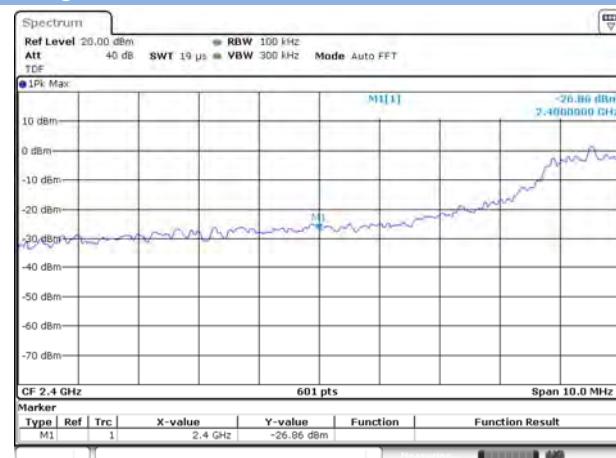


### 802.11g HIGH CHANNEL, Carrier level

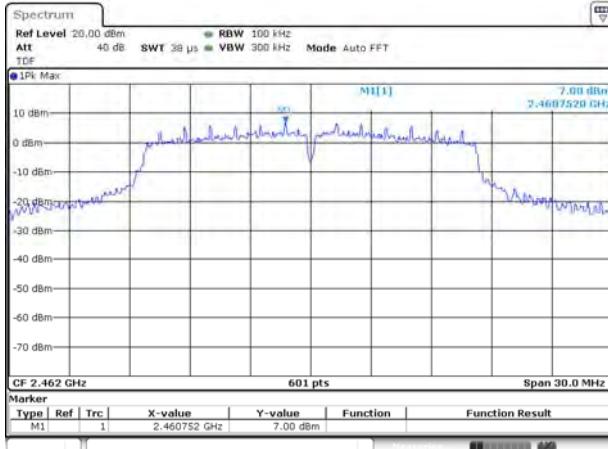

### 802.11g HIGH CHANNEL, Reference level

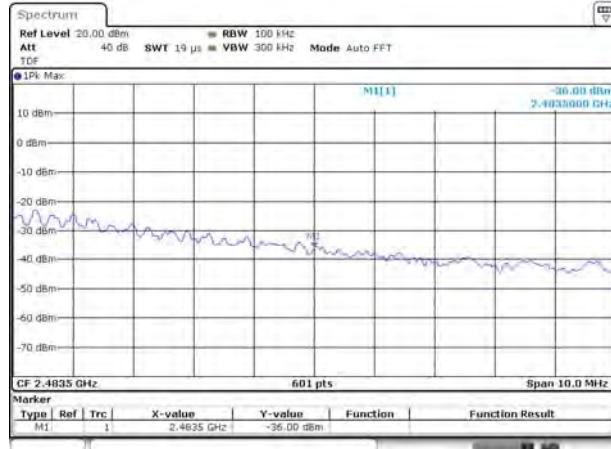


### 802.11n-20 MHz LOW CHANNEL, Carrier level

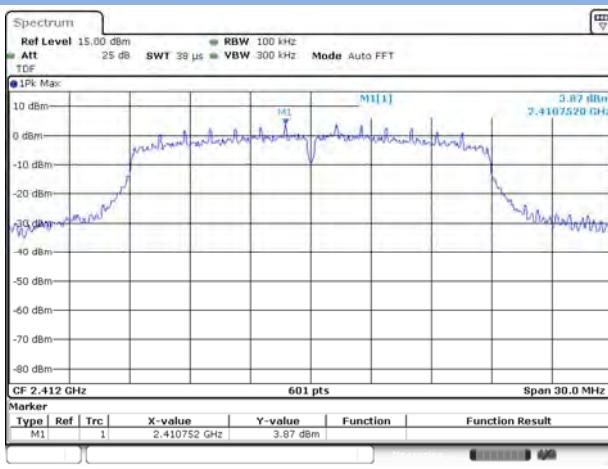


### 802.11n-20 MHz LOW CHANNEL, Reference level




### 802.11n-20 MHz HIGH CHANNEL, Carrier level

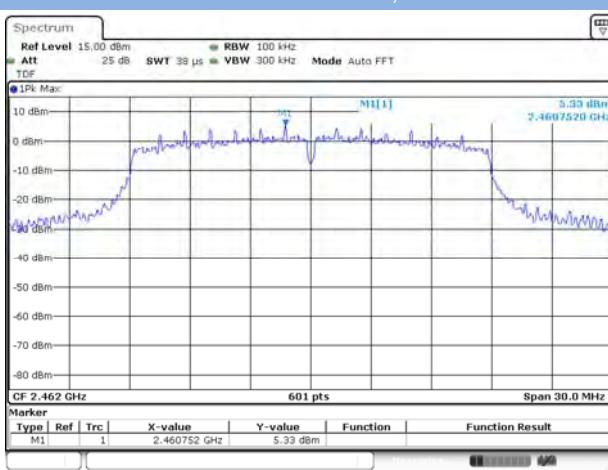


### 802.11n-20 MHz HIGH CHANNEL, Reference level

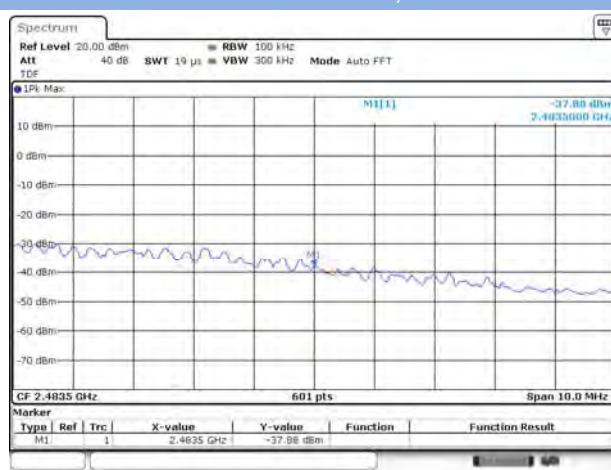


## 802.11n-40 MHz LOW CHANNEL, Carrier level

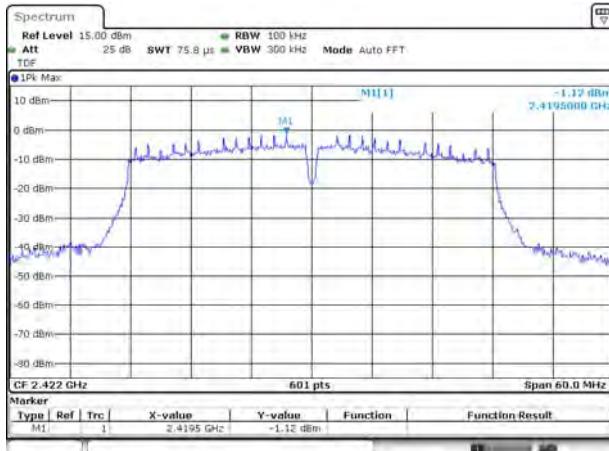


## 802.11n-40 MHz LOW CHANNEL, Reference level

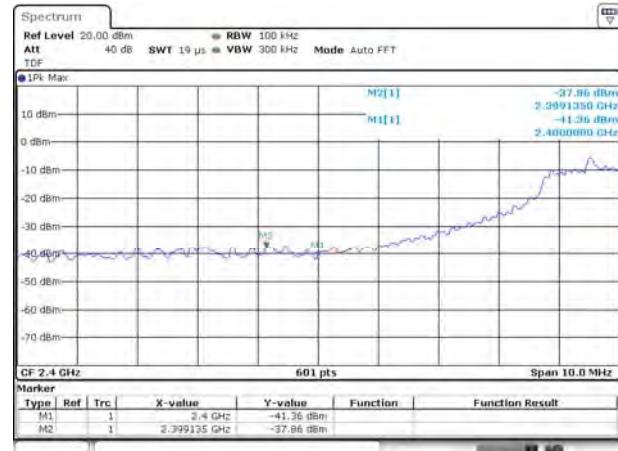

## 802.11n-40 MHz HIGH CHANNEL, Carrier level

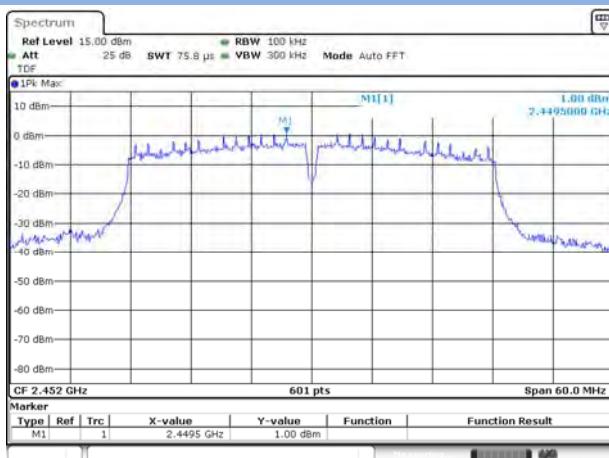


## 802.11n-40 MHz HIGH CHANNEL, Reference level

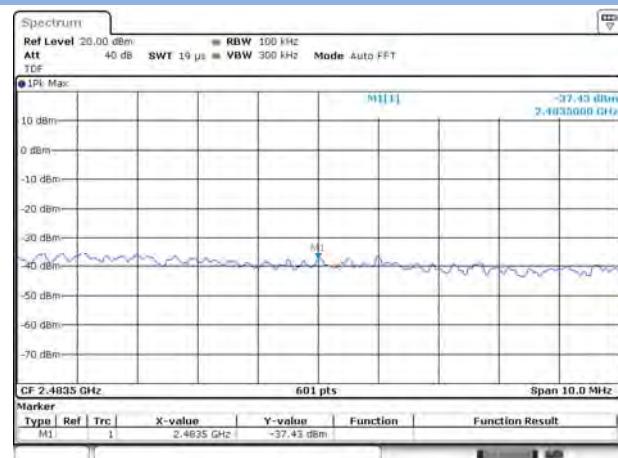


## Aux. Antenna


### 802.11b LOW CHANNEL, Carrier level

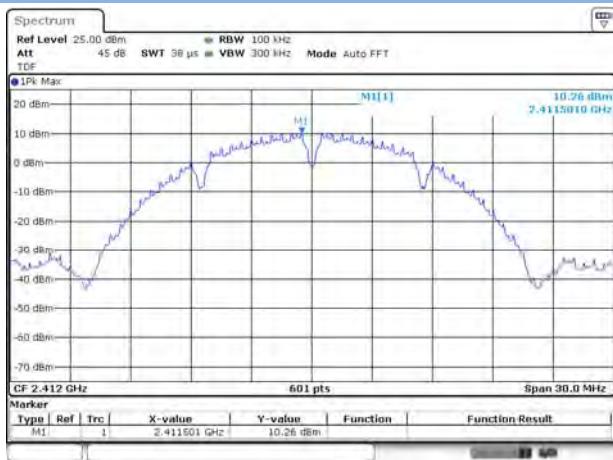


### 802.11b LOW CHANNEL, Reference level

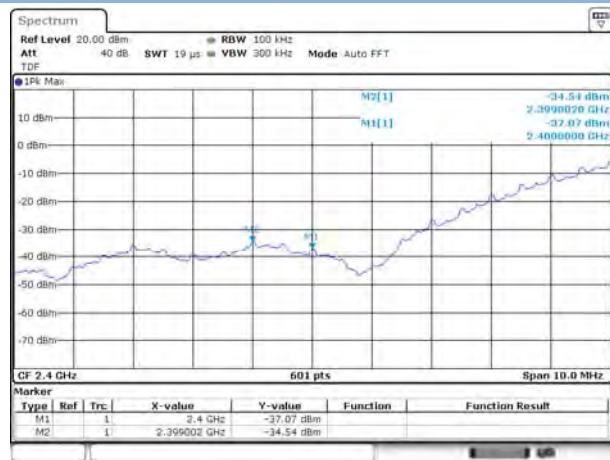


### 802.11b HIGH CHANNEL, Carrier level

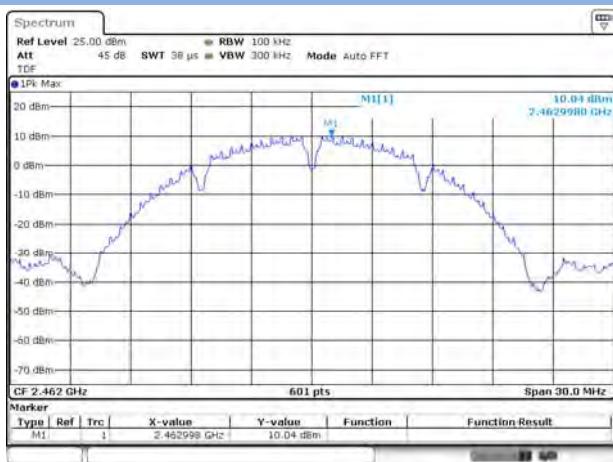


### 802.11b HIGH CHANNEL, Reference level

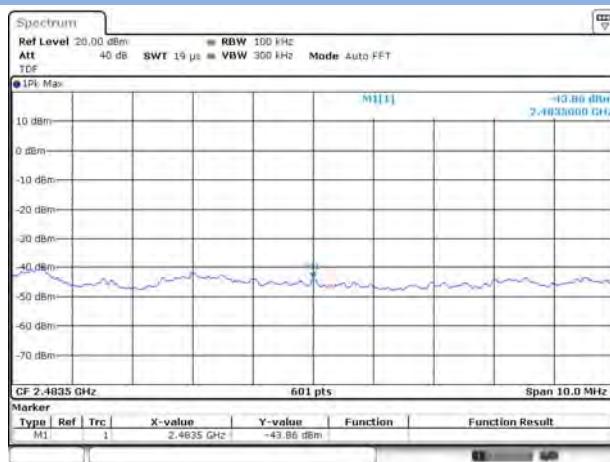


### 802.11g LOW CHANNEL, Carrier level

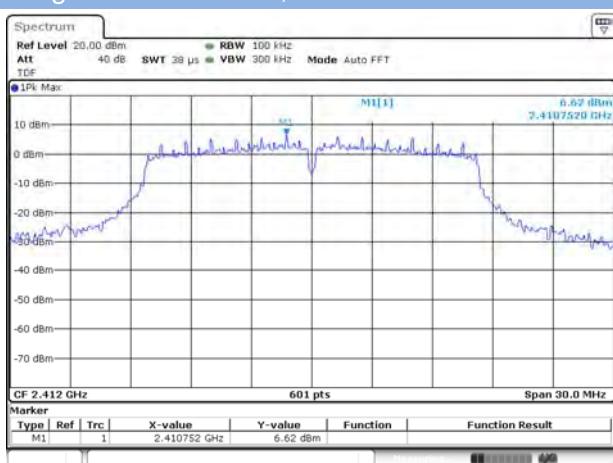


### 802.11g LOW CHANNEL, Reference level

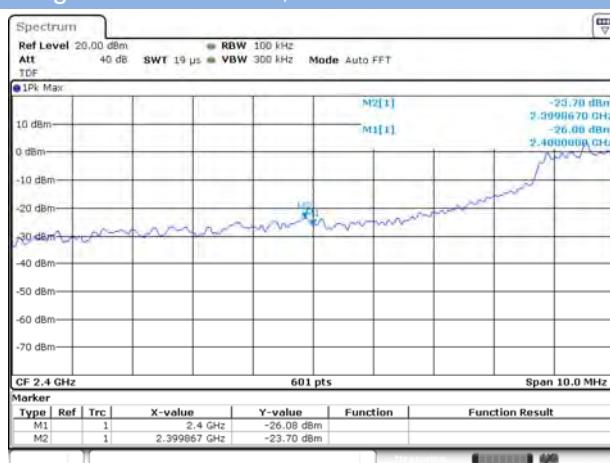


### 802.11g HIGH CHANNEL, Carrier level

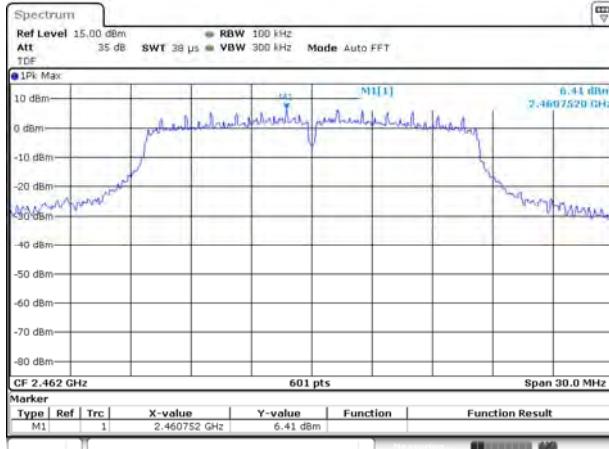


### 802.11g HIGH CHANNEL, Reference level

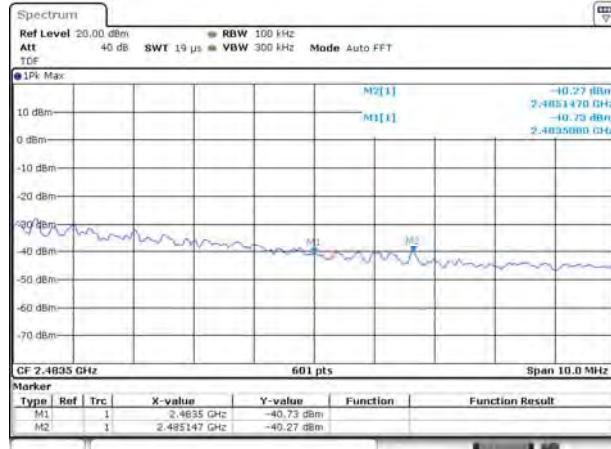


### 802.11n-20 MHz LOW CHANNEL, Carrier level

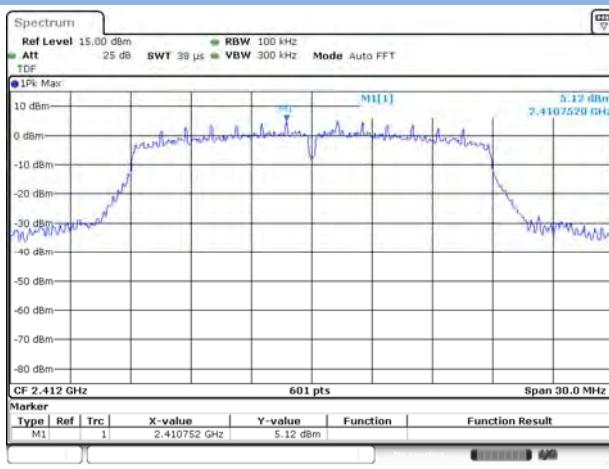


### 802.11n-20 MHz LOW CHANNEL, Reference level

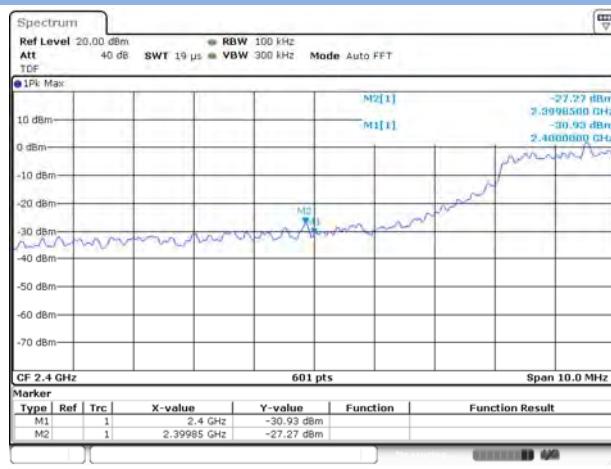


### 802.11n-20 MHz HIGH CHANNEL, Carrier level

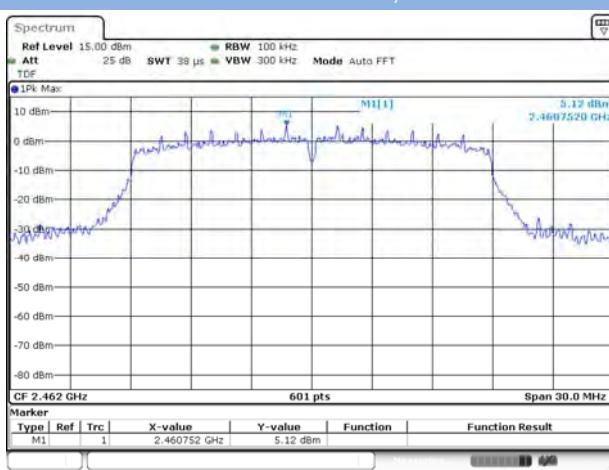


### 802.11n-20 MHz HIGH CHANNEL, Reference level

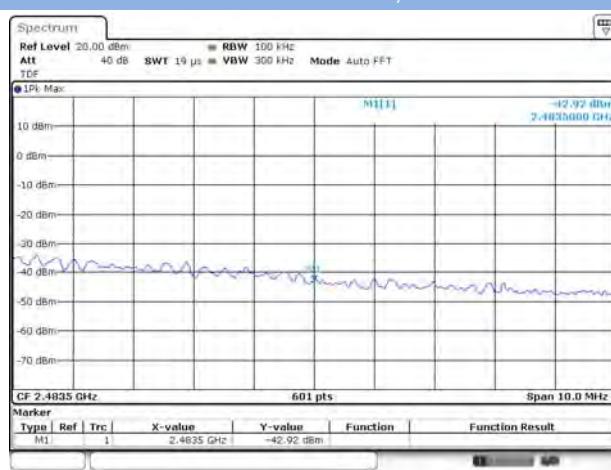


### 802.11n-40 MHz LOW CHANNEL, Carrier level

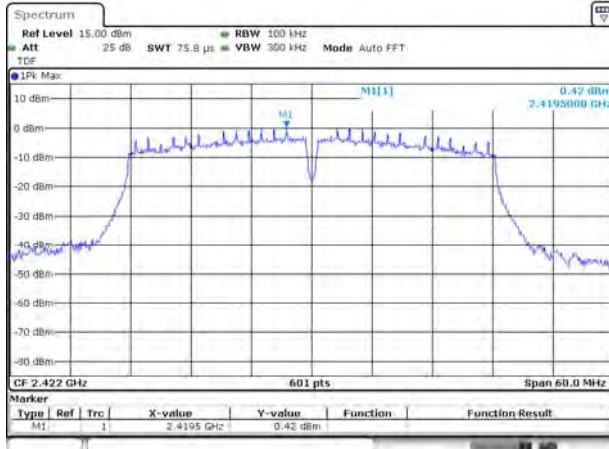


### 802.11n-40 MHz LOW CHANNEL, Reference level

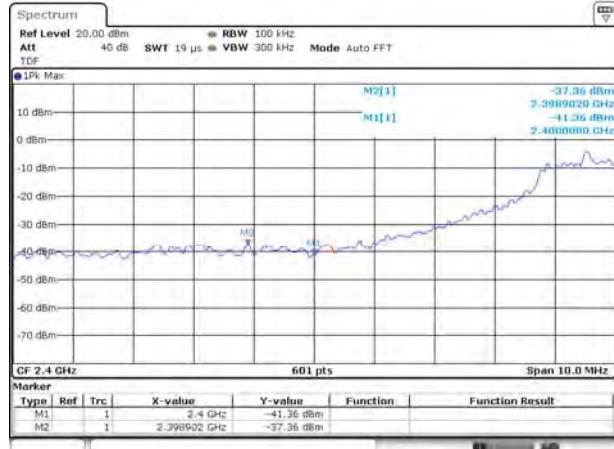

### 802.11n-40 MHz HIGH CHANNEL, Carrier level

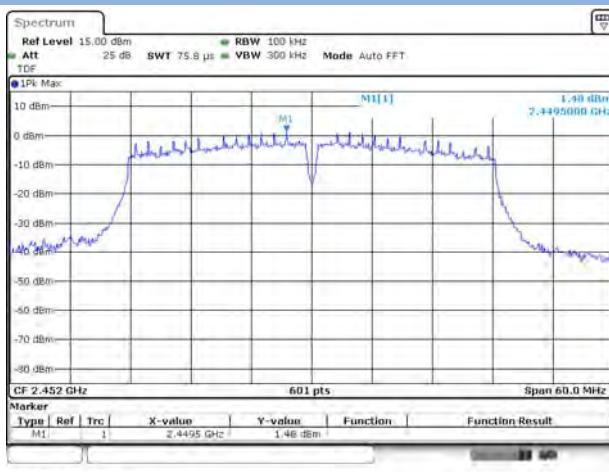


### 802.11n-40 MHz HIGH CHANNEL, Reference level

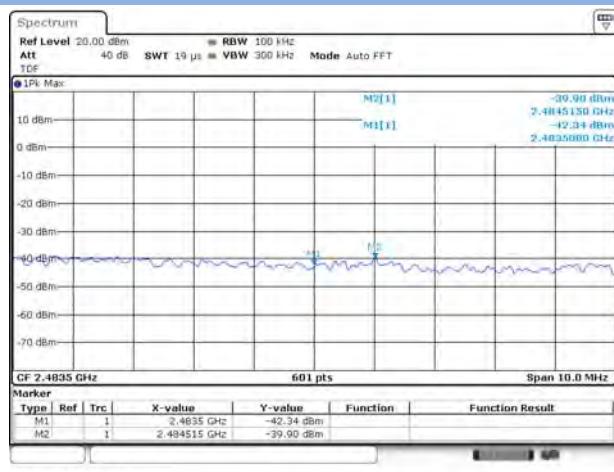


### MIMO-Main Antenna


#### 802.11n-20 MHz LOW CHANNEL, Carrier level

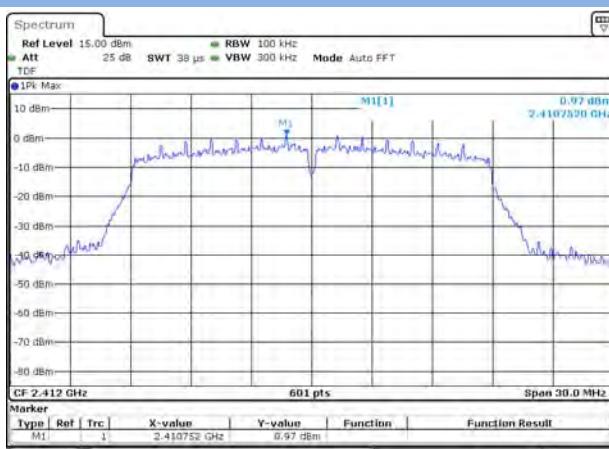


#### 802.11n-20 MHz LOW CHANNEL, Reference level

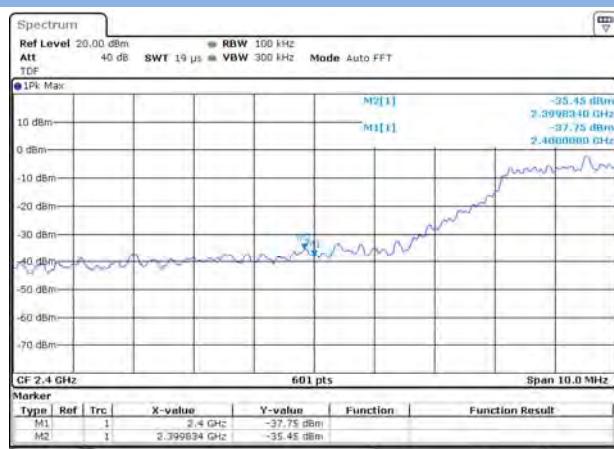


### 802.11n-20 MHz HIGH CHANNEL, Carrier level

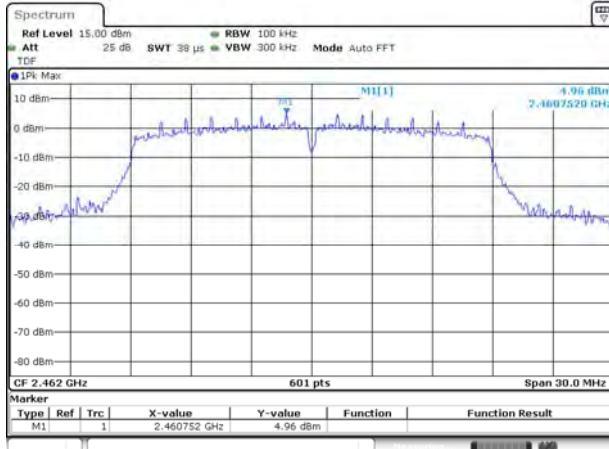

### 802.11n-20 MHz HIGH CHANNEL, Reference level

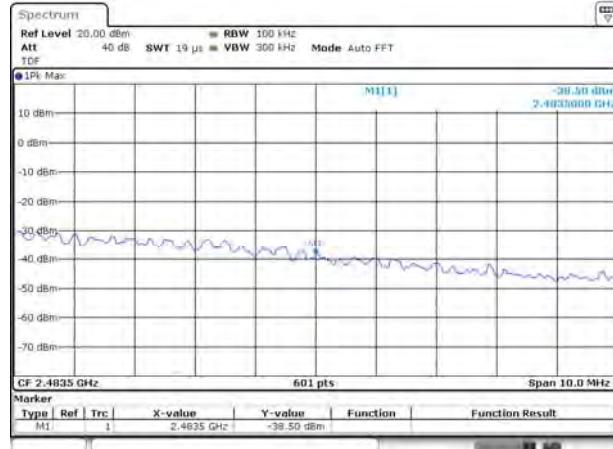


### 802.11n-40 MHz LOW CHANNEL, Carrier level

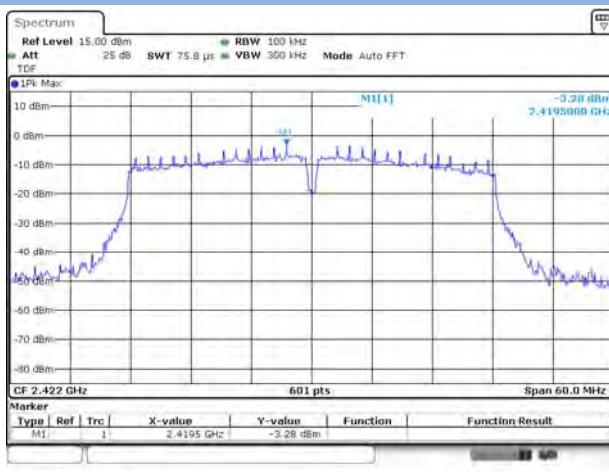


### 802.11n-40 MHz LOW CHANNEL, Reference level



### 802.11n-40 MHz HIGH CHANNEL, Carrier level

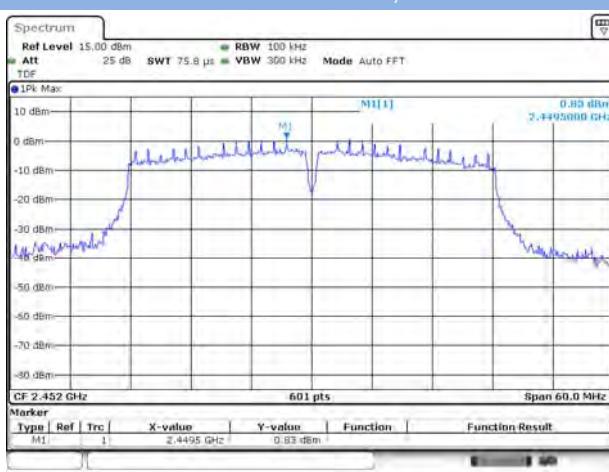


### 802.11n-40 MHz HIGH CHANNEL, Reference level

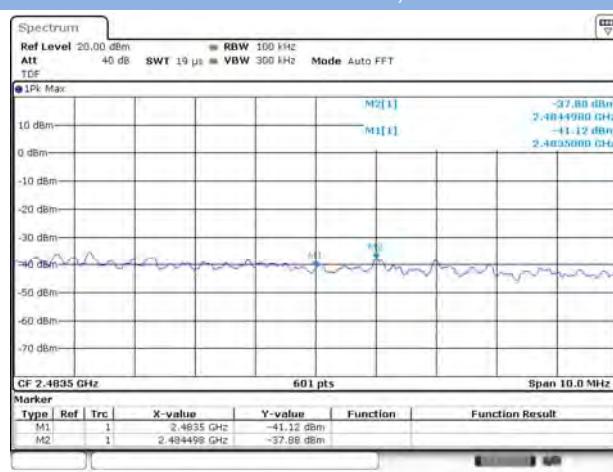

## MIMO-Aux. Antenna


### 802.11n-20 MHz LOW CHANNEL, Carrier level

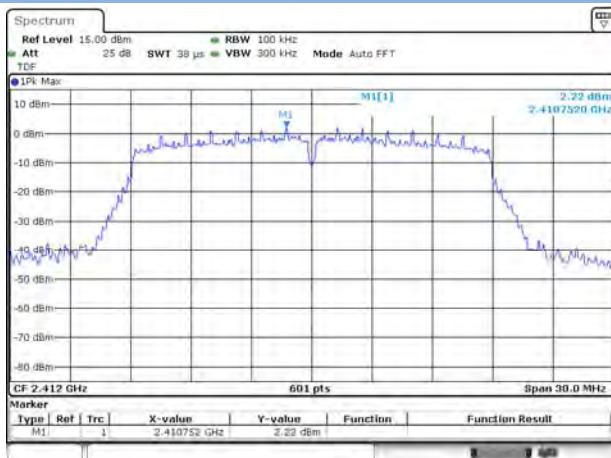


### 802.11n-20 MHz LOW CHANNEL, Reference level




### 802.11n-20 MHz HIGH CHANNEL, Carrier level

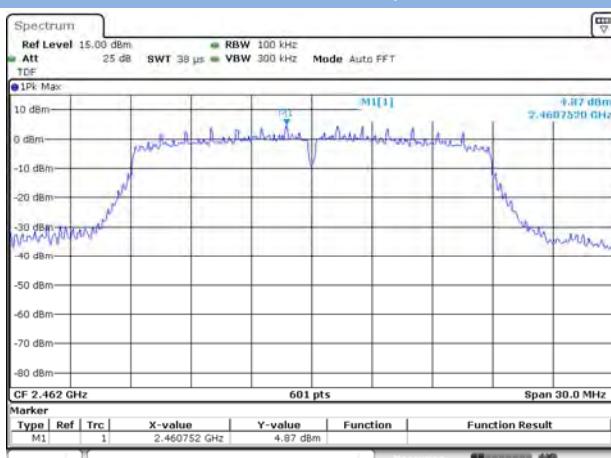


### 802.11n-20 MHz HIGH CHANNEL, Reference level

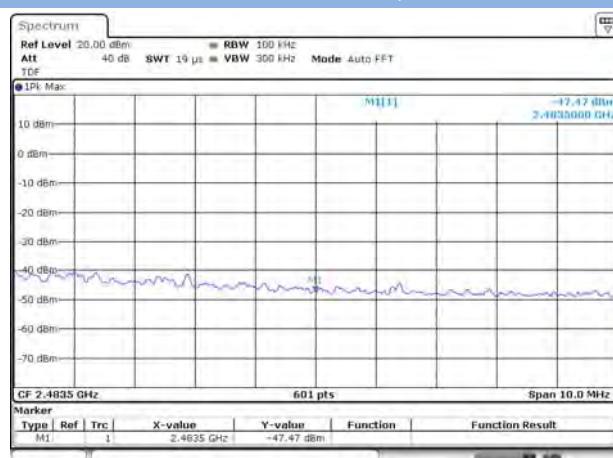


### 802.11n-40 MHz LOW CHANNEL, Carrier level

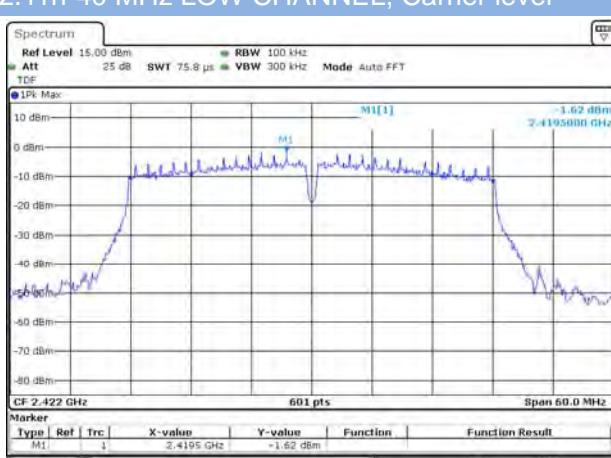


### 802.11n-40 MHz LOW CHANNEL, Reference level

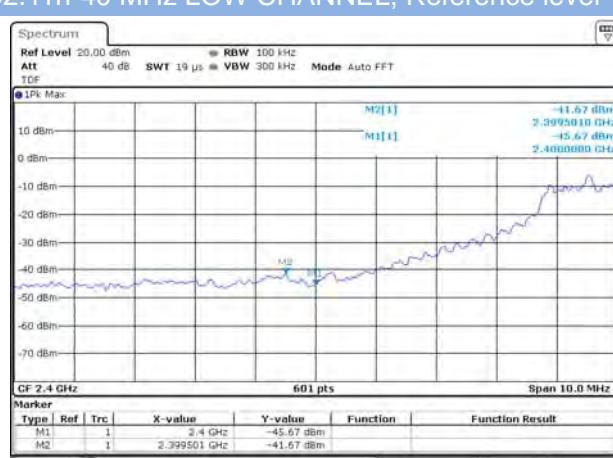

## 802.11n-40 MHz HIGH CHANNEL, Carrier level

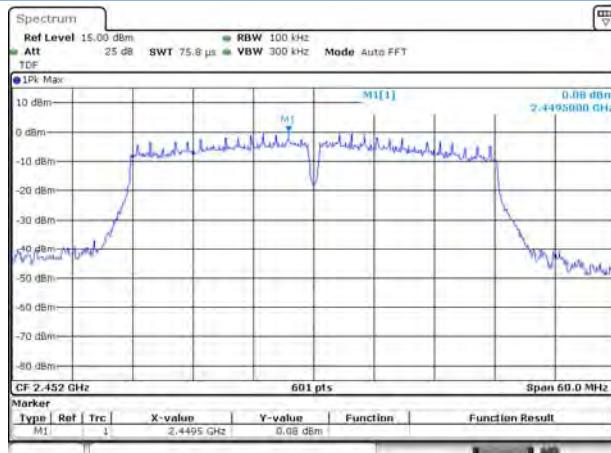

## 802.11n-40 MHz HIGH CHANNEL, Reference level

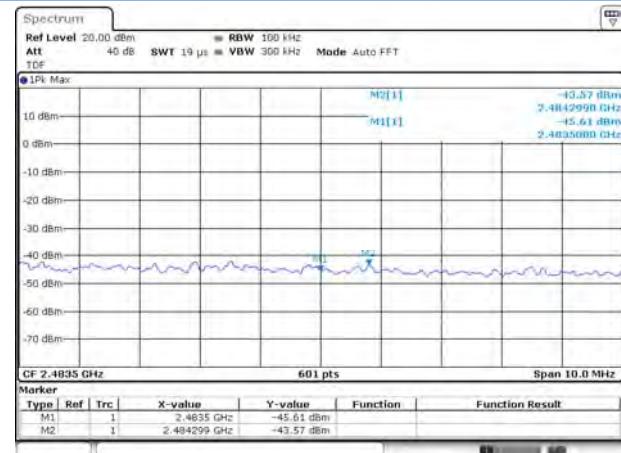


## A.5 Conducted Emissions

Note <sup>1</sup>: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note <sup>2</sup>: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz ) shown here.


### Test Data and Plots

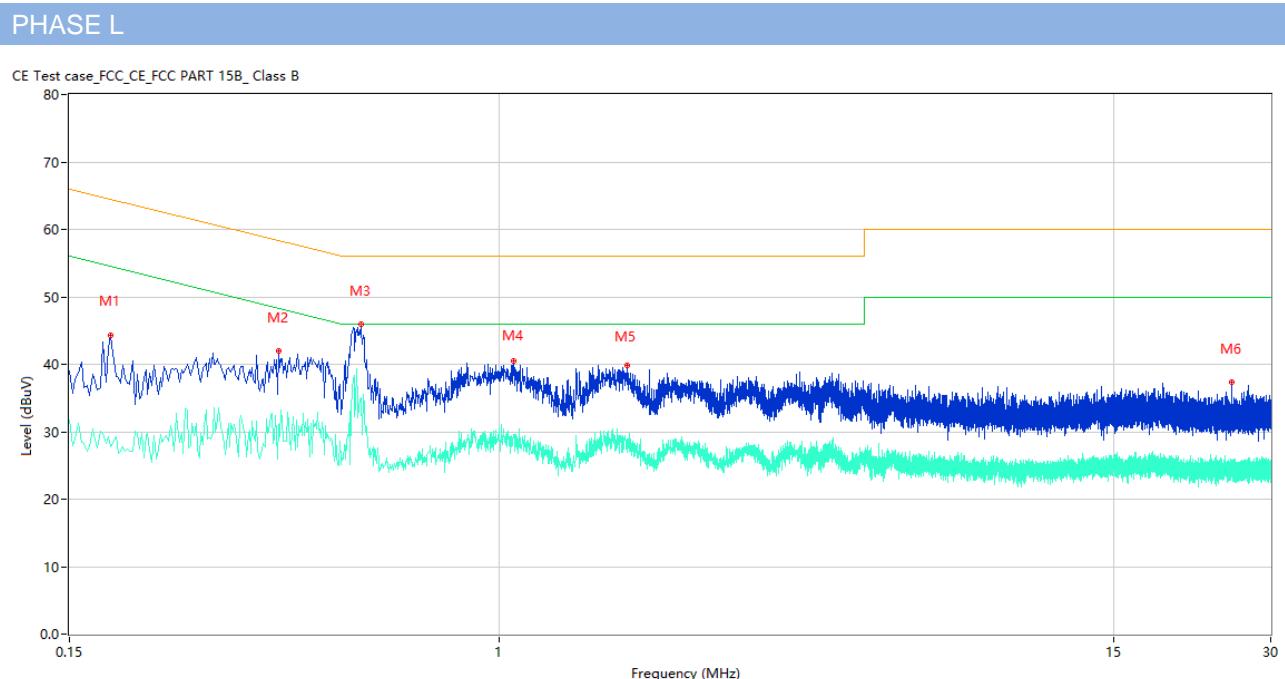

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.180	44.34	10.39	64.49	-20.15	Peak	L	Pass
1**	0.180	27.81	10.39	54.49	-26.68	AV	L	Pass
2	0.378	41.91	10.30	58.32	-16.41	Peak	L	Pass
2**	0.378	31.14	10.30	48.32	-17.18	AV	L	Pass
3	0.542	45.95	10.29	56.00	-10.05	Peak	L	Pass
3**	0.542	34.96	10.29	46.00	-11.04	AV	L	Pass
4	1.062	40.44	10.23	56.00	-15.56	Peak	L	Pass
4**	1.062	29.59	10.23	46.00	-16.41	AV	L	Pass
5	1.752	39.85	10.25	56.00	-16.15	Peak	L	Pass
5**	1.752	28.59	10.25	46.00	-17.41	AV	L	Pass
6	25.228	37.38	10.66	60.00	-22.62	Peak	L	Pass
6**	25.228	25.12	10.66	50.00	-24.88	AV	L	Pass

**PHASE N**

CE Test case\_FCC\_CE\_FCC PART 15B\_Class B

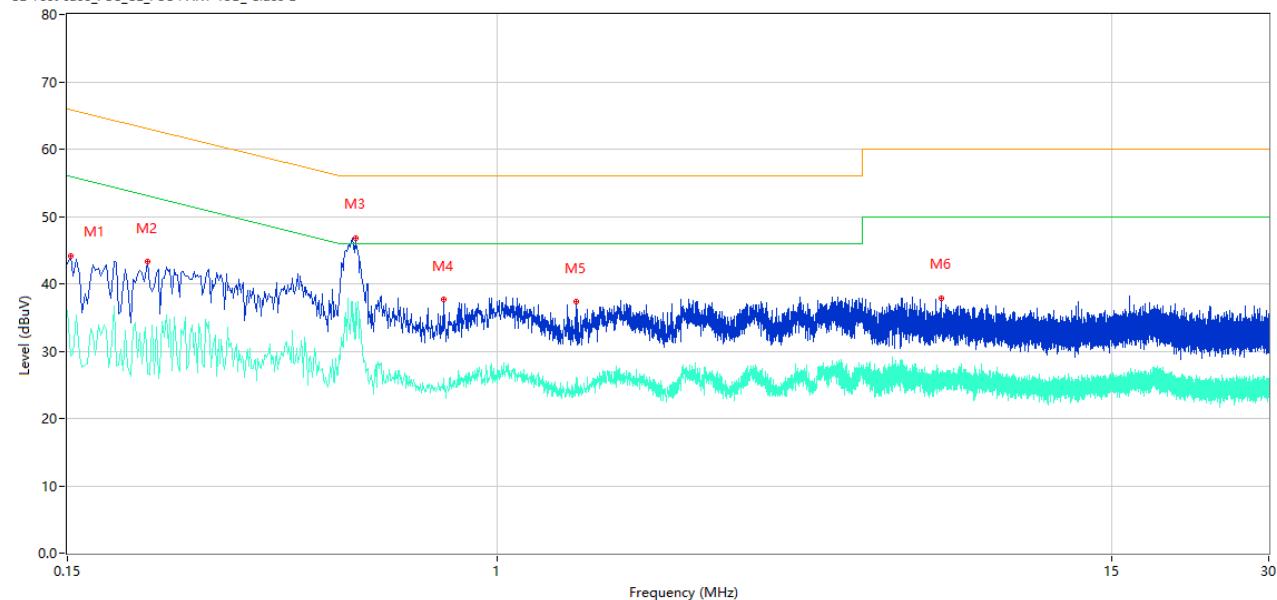

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	42.93	10.41	66.00	-23.07	Peak	N	Pass
1**	0.150	35.95	10.41	56.00	-20.05	AV	N	Pass
2	0.214	43.32	10.38	63.05	-19.73	Peak	N	Pass
2**	0.214	26.68	10.38	53.05	-26.37	AV	N	Pass
3	0.534	46.86	10.29	56.00	-9.14	Peak	N	Pass
3**	0.534	37.11	10.29	46.00	-8.89	AV	N	Pass
4	0.788	37.67	10.27	56.00	-18.33	Peak	N	Pass
4**	0.788	25.95	10.27	46.00	-20.05	AV	N	Pass
5	1.416	37.29	10.25	56.00	-18.71	Peak	N	Pass
5**	1.416	25.90	10.25	46.00	-20.10	AV	N	Pass
6	7.086	37.81	10.33	60.00	-22.19	Peak	N	Pass
6**	7.086	26.23	10.33	50.00	-23.77	AV	N	Pass

## A.6 Radiated Emission

Note <sup>1</sup>: The symbol of “--” in the table which means not application.


Note <sup>2</sup>: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note <sup>3</sup>: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note <sup>4</sup>: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.


### Test Data and Plots

#### 30 MHz to 1 GHz, ANT H

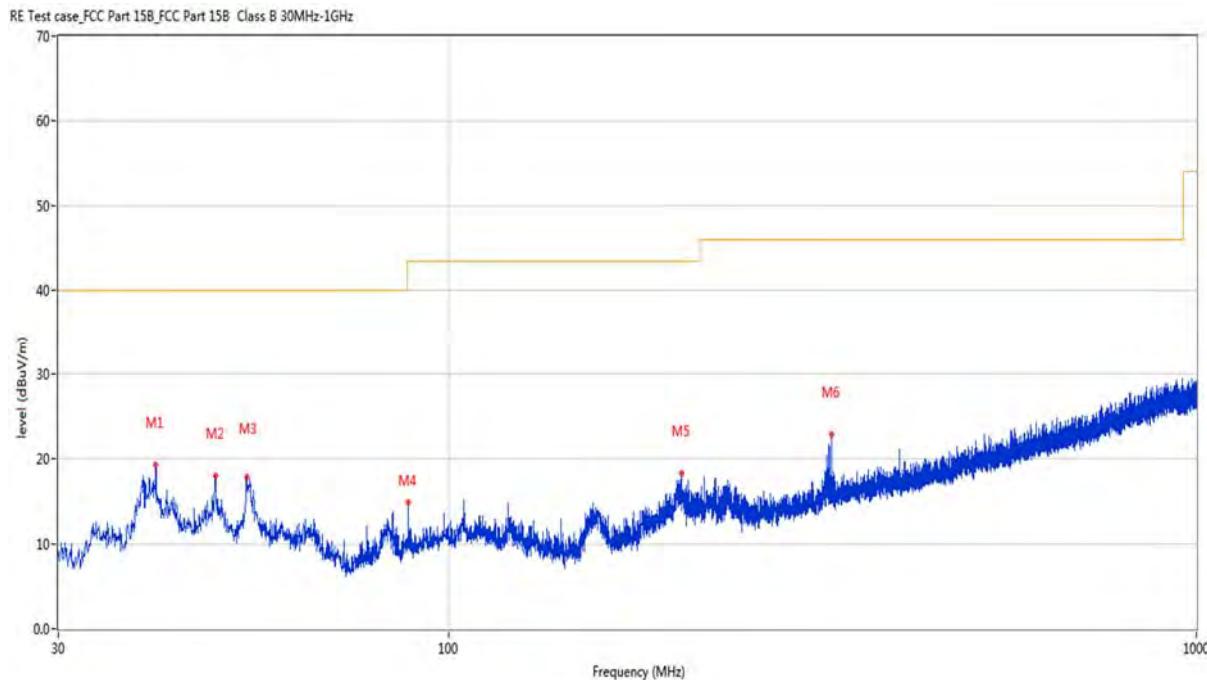

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	40.476	19.27	-23.98	40.0	-20.73	Peak	170.40	100	Horizontal	Pass
2	48.672	18.05	-22.50	40.0	-21.95	Peak	297.10	200	Horizontal	Pass
3	53.571	17.86	-22.94	40.0	-22.14	Peak	196.00	100	Horizontal	Pass
4	88.151	14.90	-26.46	43.5	-28.60	Peak	165.40	200	Horizontal	Pass
5	204.648	18.32	-23.76	43.5	-25.18	Peak	284.40	200	Horizontal	Pass
6	325.122	22.91	-20.87	46.0	-23.09	Peak	289.70	100	Horizontal	Pass

## 30 MHz to 1 GHz, ANT V

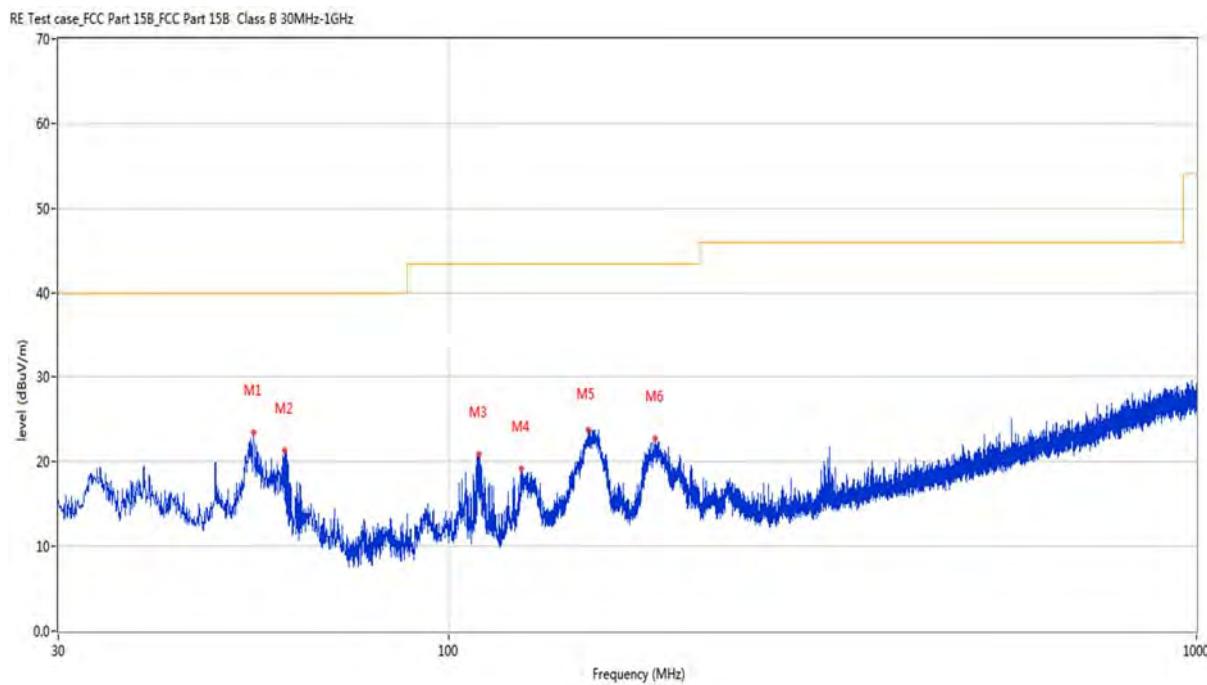

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	54.687	23.46	-23.14	40.0	-16.54	Peak	313.80	100	Vertical	Pass
2	60.167	21.30	-24.06	40.0	-18.70	Peak	309.60	100	Vertical	Pass
3	109.589	20.87	-24.42	43.5	-22.63	Peak	0.00	200	Vertical	Pass
4	125.011	19.19	-26.53	43.5	-24.31	Peak	225.80	100	Vertical	Pass
5	153.529	23.75	-27.50	43.5	-19.75	Peak	47.30	100	Vertical	Pass
6	188.837	22.75	-25.33	43.5	-20.75	Peak	254.90	100	Vertical	Pass


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

### Main Antenna

#### 1 GHz to 18 GHz, ANT H 802.11b Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

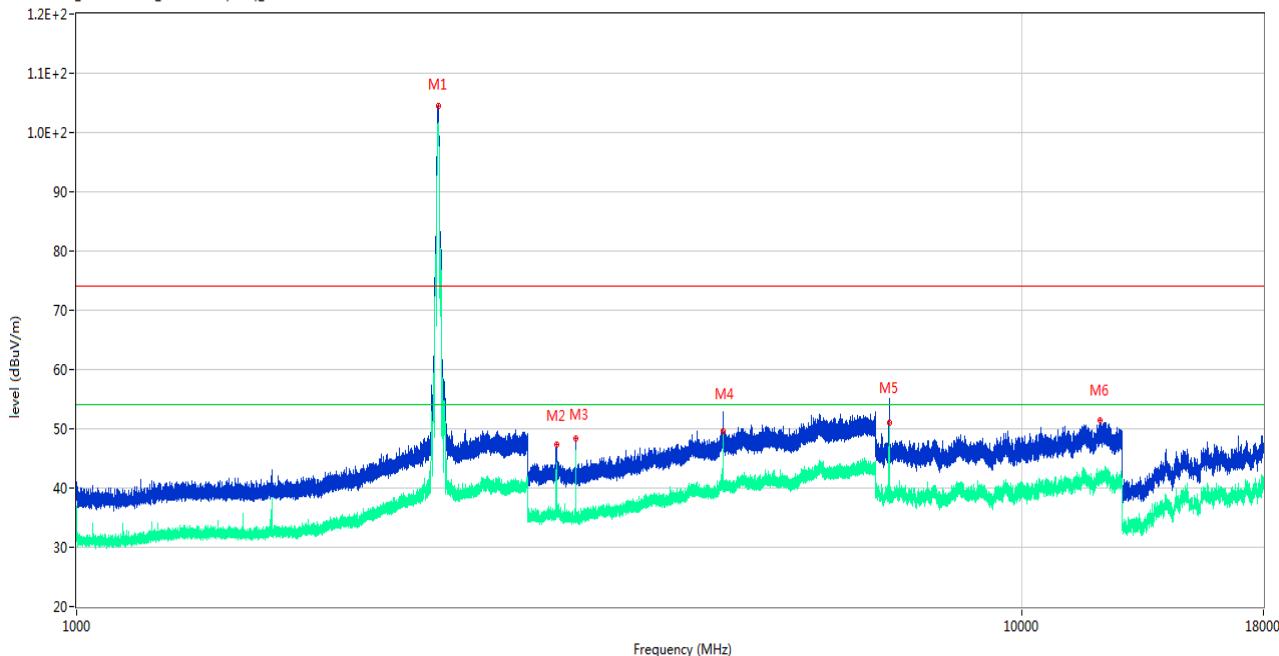

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2413.300	104.39	-13.52	74.0	30.39	Peak	242.00	150	Horizontal	N/A
1**	2413.300	101.56	-13.52	54.0	47.56	AV	242.00	150	Horizontal	N/A
2	3216.000	47.30	-8.51	74.0	-26.70	Peak	267.00	150	Horizontal	Pass
2**	3216.000	43.73	-8.51	54.0	-10.27	AV	267.00	150	Horizontal	Pass
3	3370.000	48.43	-9.38	74.0	-25.57	Peak	240.00	150	Horizontal	Pass
3**	3370.000	45.43	-9.38	54.0	-8.57	AV	240.00	150	Horizontal	Pass
4	4824.000	52.36	-4.05	74.0	-21.64	Peak	267.00	150	Horizontal	Pass
4**	4824.000	49.60	-4.05	54.0	-4.40	AV	267.00	150	Horizontal	Pass
5	7235.175	54.62	-4.43	74.0	-19.38	Peak	36.00	150	Horizontal	Pass
5**	7235.175	50.99	-4.43	54.0	-3.01	AV	36.00	150	Horizontal	Pass
6	12103.700	51.48	-0.96	74.0	-22.52	Peak	163.00	150	Horizontal	Pass
6**	12103.700	41.66	-0.96	54.0	-12.34	AV	163.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11b Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

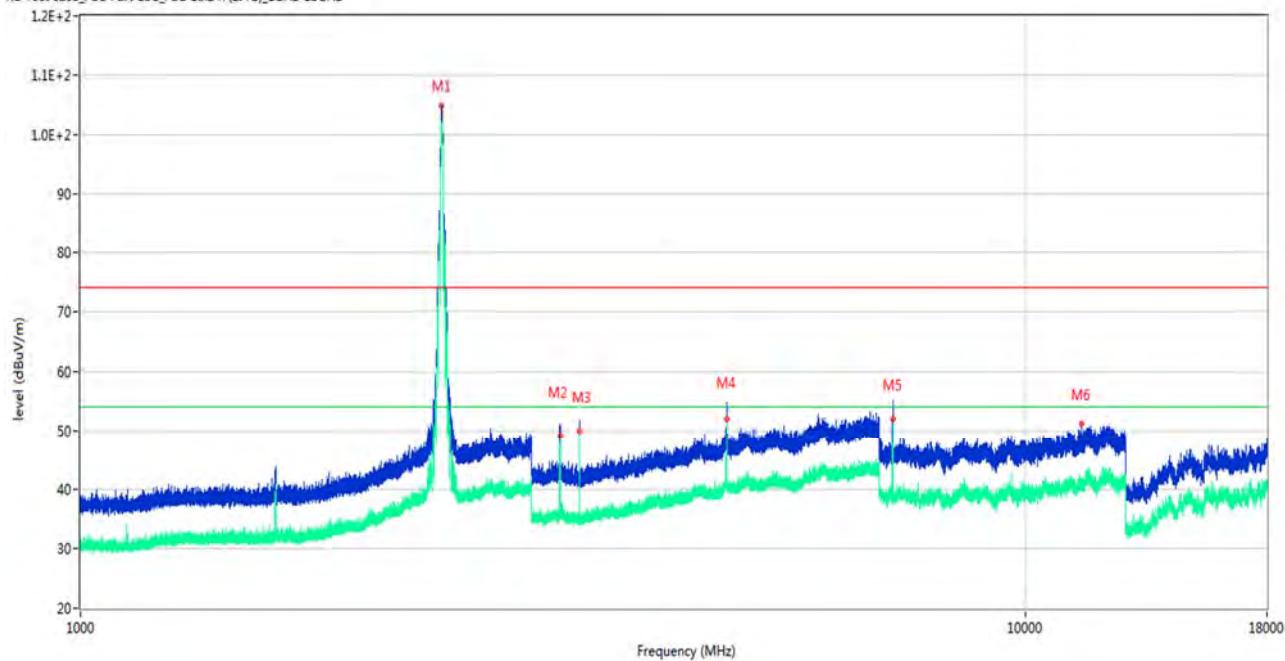

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2410.300	104.80	-13.43	74.0	30.80	Peak	263.00	150	Vertical	N/A
1**	2410.300	101.85	-13.43	54.0	47.85	AV	263.00	150	Vertical	N/A
2	3216.200	50.47	-8.48	74.0	-23.53	Peak	22.00	150	Vertical	Pass
2**	3216.200	49.11	-8.48	54.0	-4.89	AV	22.00	150	Vertical	Pass
3	3370.200	51.83	-9.38	74.0	-22.17	Peak	35.00	150	Vertical	Pass
3**	3370.200	49.95	-9.38	54.0	-4.05	AV	35.00	150	Vertical	Pass
4	4824.200	55.26	-4.06	74.0	-18.74	Peak	339.00	150	Vertical	Pass
4**	4824.200	52.05	-4.06	54.0	-1.95	AV	339.00	150	Vertical	Pass
5	7235.175	56.19	-4.43	74.0	-17.81	Peak	0.00	150	Vertical	Pass
5**	7235.175	51.85	-4.43	54.0	-2.15	AV	0.00	150	Vertical	Pass
6	11459.125	51.15	-1.38	74.0	-22.85	Peak	273.00	150	Vertical	Pass
6**	11459.125	40.77	-1.38	54.0	-13.23	AV	273.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11b Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

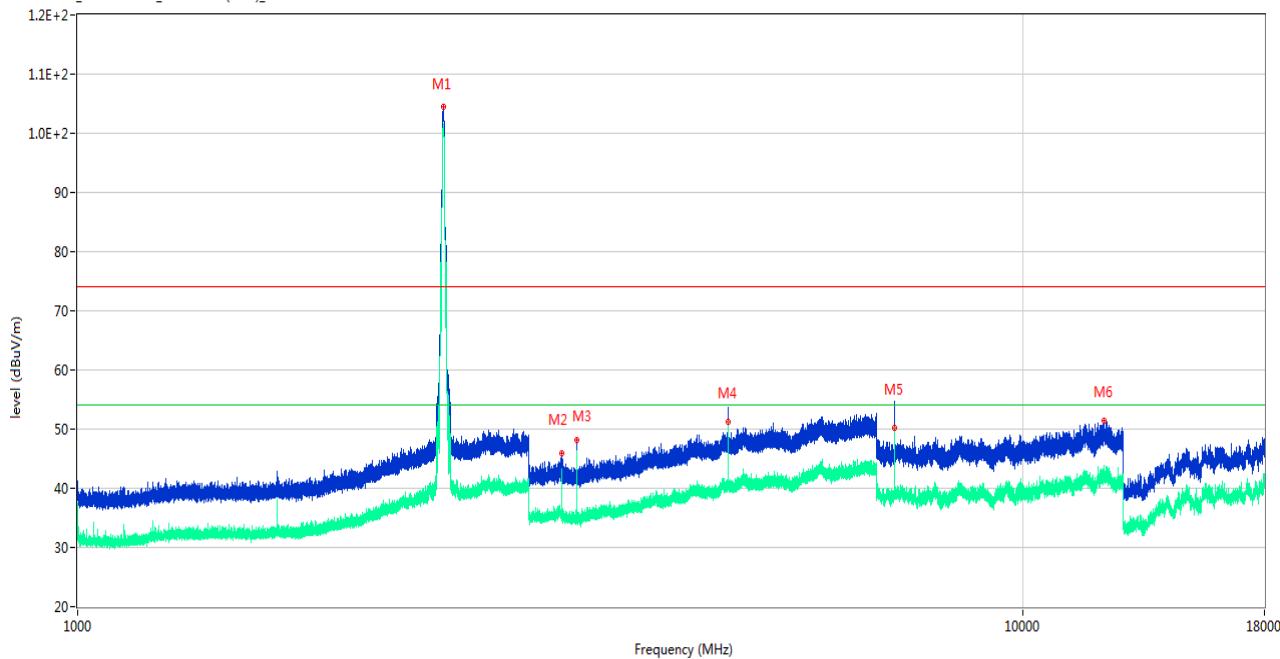

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2435.800	104.47	-13.51	74.0	30.47	Peak	73.00	150	Horizontal	N/A
1**	2435.800	101.56	-13.51	54.0	47.56	AV	73.00	150	Horizontal	N/A
2	3249.400	45.99	-8.70	74.0	-28.01	Peak	74.00	150	Horizontal	Pass
2**	3249.400	43.27	-8.70	54.0	-10.73	AV	74.00	150	Horizontal	Pass
3	3369.800	48.22	-9.39	74.0	-25.78	Peak	113.00	150	Horizontal	Pass
3**	3369.800	43.95	-9.39	54.0	-10.05	AV	113.00	150	Horizontal	Pass
4	4874.200	53.05	-4.02	74.0	-20.95	Peak	334.00	150	Horizontal	Pass
4**	4874.200	51.23	-4.02	54.0	-2.77	AV	334.00	150	Horizontal	Pass
5	7310.213	53.92	-5.14	74.0	-20.08	Peak	35.00	150	Horizontal	Pass
5**	7310.213	50.17	-5.14	54.0	-3.83	AV	35.00	150	Horizontal	Pass
6	12184.776	51.36	-0.93	74.0	-22.64	Peak	141.00	150	Horizontal	Pass
6**	12184.776	42.98	-0.93	54.0	-11.02	AV	141.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11b Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

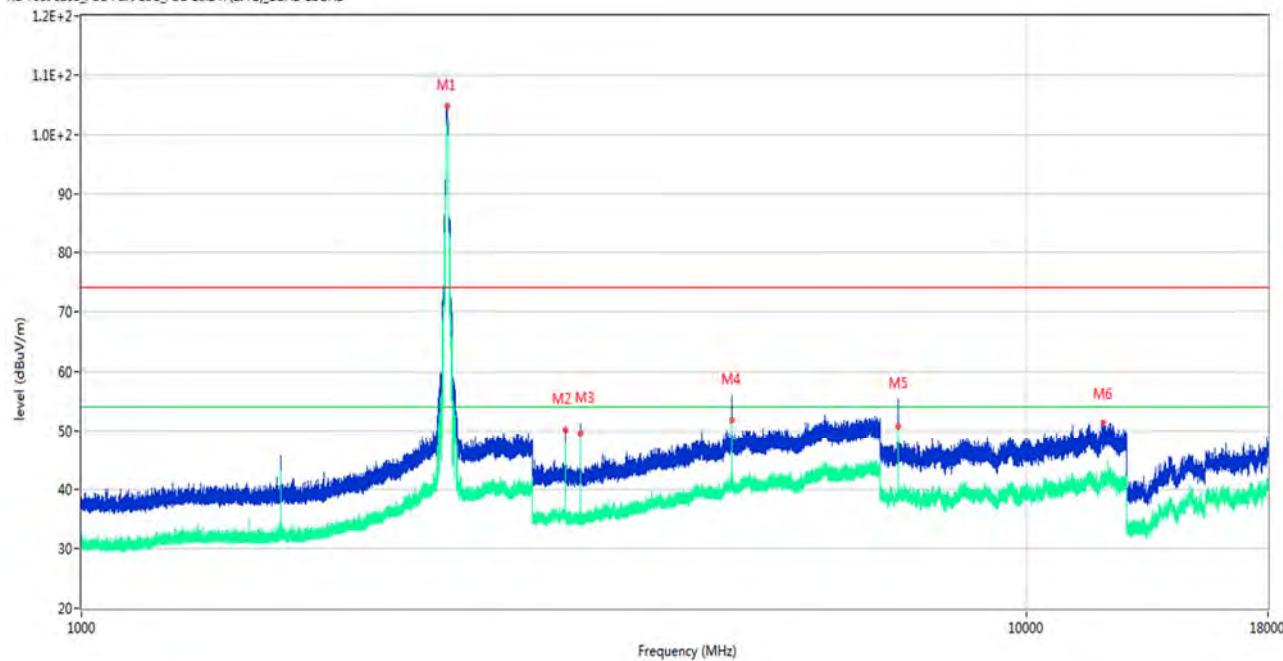

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2435.600	104.94	-13.53	74.0	30.94	Peak	211.00	150	Vertical	N/A
1**	2435.600	102.09	-13.53	54.0	48.09	AV	211.00	150	Vertical	N/A
2	3249.400	50.17	-8.70	74.0	-23.83	Peak	360.00	150	Vertical	Pass
2**	3249.400	47.35	-8.70	54.0	-6.65	AV	360.00	150	Vertical	Pass
3	3370.200	51.18	-9.38	74.0	-22.82	Peak	328.00	150	Vertical	Pass
3**	3370.200	49.67	-9.38	54.0	-4.33	AV	328.00	150	Vertical	Pass
4	4874.200	55.33	-4.02	74.0	-18.67	Peak	328.00	150	Vertical	Pass
4**	4874.200	52.24	-4.02	54.0	-1.76	AV	328.00	150	Vertical	Pass
5	7312.225	56.82	-5.12	74.0	-17.18	Peak	346.00	150	Vertical	Pass
5**	7312.225	51.05	-5.12	54.0	-2.95	AV	346.00	150	Vertical	Pass
6	12069.488	51.42	-1.42	74.0	-22.58	Peak	360.00	150	Vertical	Pass
6**	12069.488	42.16	-1.42	54.0	-11.84	AV	360.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11b High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

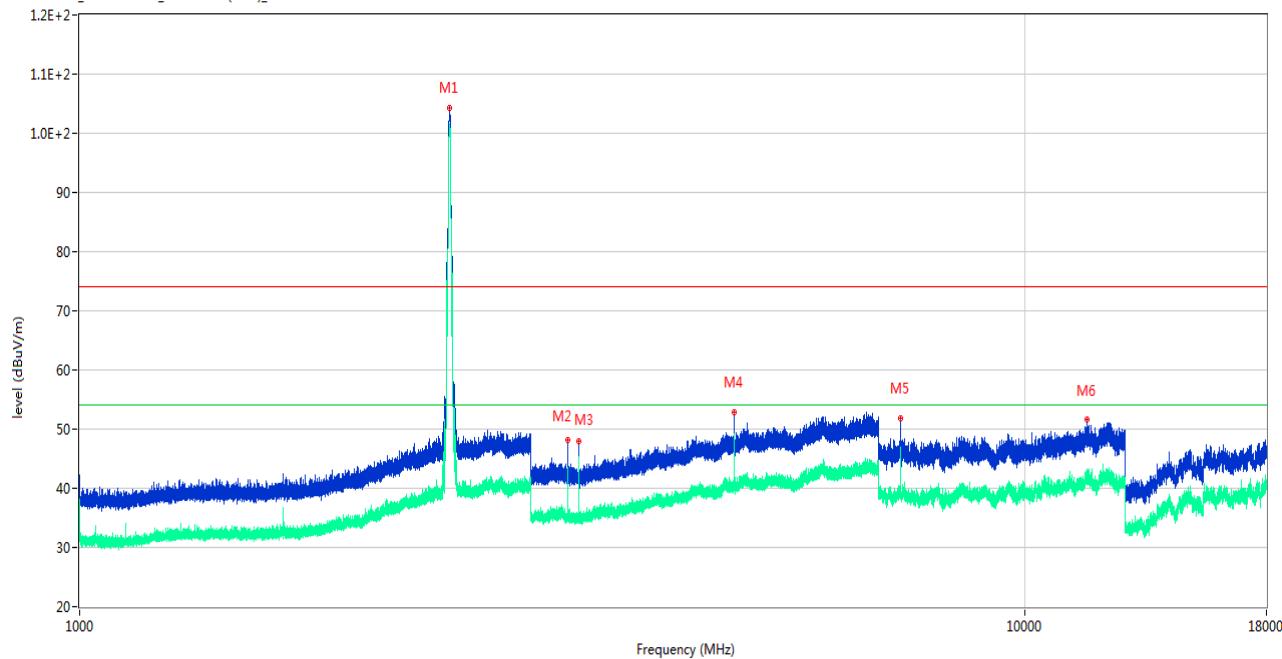

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2460.400	104.21	-13.91	74.0	30.21	Peak	241.00	150	Horizontal	N/A
1**	2460.400	101.27	-13.91	54.0	47.27	AV	241.00	150	Horizontal	N/A
2	3283.000	48.18	-9.15	74.0	-25.82	Peak	79.00	150	Horizontal	Pass
2**	3283.000	43.50	-9.15	54.0	-10.50	AV	79.00	150	Horizontal	Pass
3	3369.800	48.05	-9.39	74.0	-25.95	Peak	235.00	150	Horizontal	Pass
3**	3369.800	43.91	-9.39	54.0	-10.09	AV	235.00	150	Horizontal	Pass
4	4924.400	52.86	-4.12	74.0	-21.14	Peak	347.00	150	Horizontal	Pass
4**	4924.400	48.50	-4.12	54.0	-5.50	AV	347.00	150	Horizontal	Pass
5	7384.675	51.91	-4.59	74.0	-22.09	Peak	31.00	150	Horizontal	Pass
5**	7384.675	46.14	-4.59	54.0	-7.86	AV	31.00	150	Horizontal	Pass
6	11620.987	51.60	-0.17	74.0	-22.40	Peak	136.00	150	Horizontal	Pass
6**	11620.987	41.68	-0.17	54.0	-12.32	AV	136.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11b High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

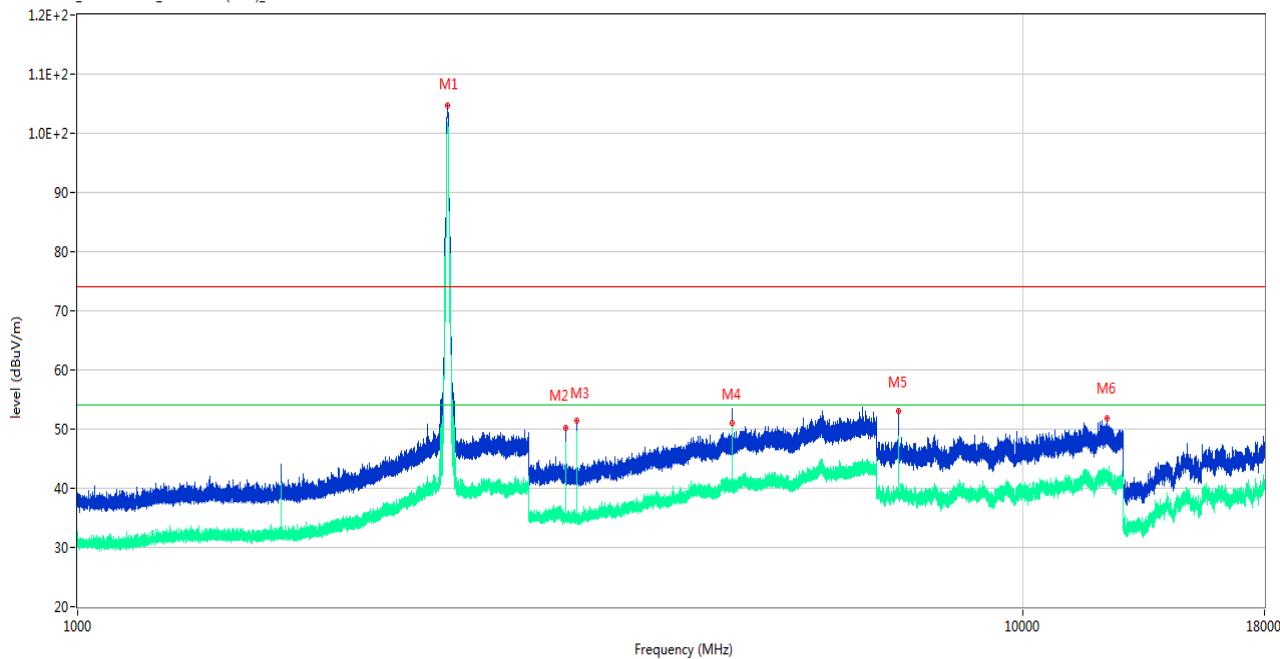

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2460.800	104.69	-13.91	74.0	30.69	Peak	247.00	150	Vertical	N/A
1**	2460.800	101.78	-13.91	54.0	47.78	AV	247.00	150	Vertical	N/A
2	3282.600	50.24	-9.14	74.0	-23.76	Peak	360.00	150	Vertical	Pass
2**	3282.600	46.95	-9.14	54.0	-7.05	AV	360.00	150	Vertical	Pass
3	3369.800	51.47	-9.39	74.0	-22.53	Peak	315.00	150	Vertical	Pass
3**	3369.800	47.82	-9.39	54.0	-6.18	AV	315.00	150	Vertical	Pass
4	4924.200	53.25	-4.12	74.0	-20.75	Peak	315.00	150	Vertical	Pass
4**	4924.200	50.95	-4.12	54.0	-3.05	AV	315.00	150	Vertical	Pass
5	7384.100	53.03	-4.58	74.0	-20.97	Peak	360.00	150	Vertical	Pass
5**	7384.100	46.75	-4.58	54.0	-7.25	AV	360.00	150	Vertical	Pass
6	12267.862	51.75	0.06	74.0	-22.25	Peak	242.00	150	Vertical	Pass
6**	12267.862	41.84	0.06	54.0	-12.16	AV	242.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11g Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

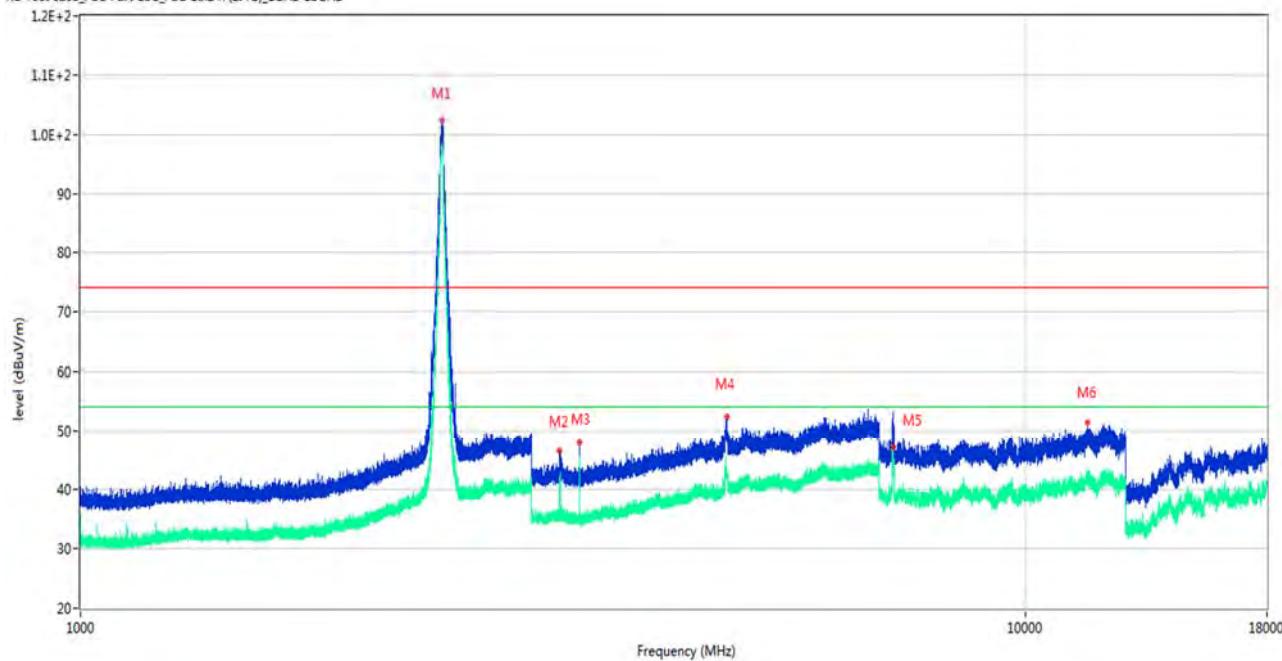

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2412.800	103.57	-13.52	74.0	29.57	Peak	251.00	150	Horizontal	N/A
1**	2412.800	97.77	-13.52	54.0	43.77	AV	251.00	150	Horizontal	N/A
2	3215.800	46.62	-8.53	74.0	-27.38	Peak	245.00	150	Horizontal	Pass
2**	3215.800	41.28	-8.53	54.0	-12.72	AV	245.00	150	Horizontal	Pass
3	3370.200	47.95	-9.38	74.0	-26.05	Peak	219.00	150	Horizontal	Pass
3**	3370.200	45.15	-9.38	54.0	-8.85	AV	219.00	150	Horizontal	Pass
4	4823.000	53.72	-4.13	74.0	-20.28	Peak	325.00	150	Horizontal	Pass
4**	4823.000	44.43	-4.13	54.0	-9.57	AV	325.00	150	Horizontal	Pass
5	7236.325	53.73	-4.44	74.0	-20.27	Peak	50.00	150	Horizontal	Pass
5**	7236.325	48.38	-4.44	54.0	-5.62	AV	50.00	150	Horizontal	Pass
6	11623.576	51.46	-0.20	74.0	-22.54	Peak	50.00	150	Horizontal	Pass
6**	11623.576	41.64	-0.20	54.0	-12.36	AV	50.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11g Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

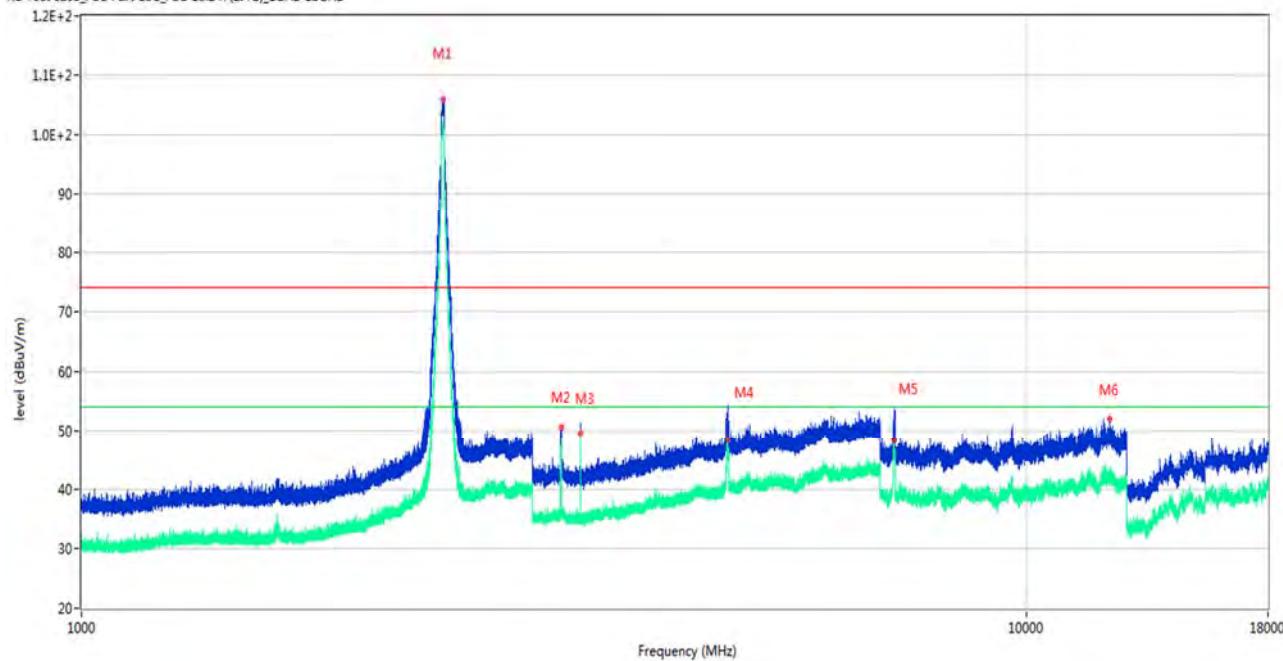

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2413.000	106.76	-13.52	74.0	32.76	Peak	257.00	150	Vertical	N/A
1**	2413.000	101.78	-13.52	54.0	47.78	AV	257.00	150	Vertical	N/A
2	3216.200	50.64	-8.48	74.0	-23.36	Peak	231.00	150	Vertical	Pass
2**	3216.200	48.50	-8.48	54.0	-5.50	AV	231.00	150	Vertical	Pass
3	3370.200	51.20	-9.38	74.0	-22.80	Peak	352.00	150	Vertical	Pass
3**	3370.200	49.54	-9.38	54.0	-4.46	AV	352.00	150	Vertical	Pass
4	4825.800	54.83	-4.13	74.0	-19.17	Peak	315.00	150	Vertical	Pass
4**	4825.800	48.52	-4.13	54.0	-57.48	AV	315.00	150	Vertical	Pass
5	7232.587	53.69	-4.47	74.0	-20.31	Peak	360.00	150	Vertical	Pass
5**	7232.587	48.98	-4.47	54.0	-5.02	AV	360.00	150	Vertical	Pass
6	12239.974	52.13	-0.32	74.0	-21.87	Peak	300.00	150	Vertical	Pass
6**	12239.974	42.39	-0.32	54.0	-11.61	AV	300.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11g Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

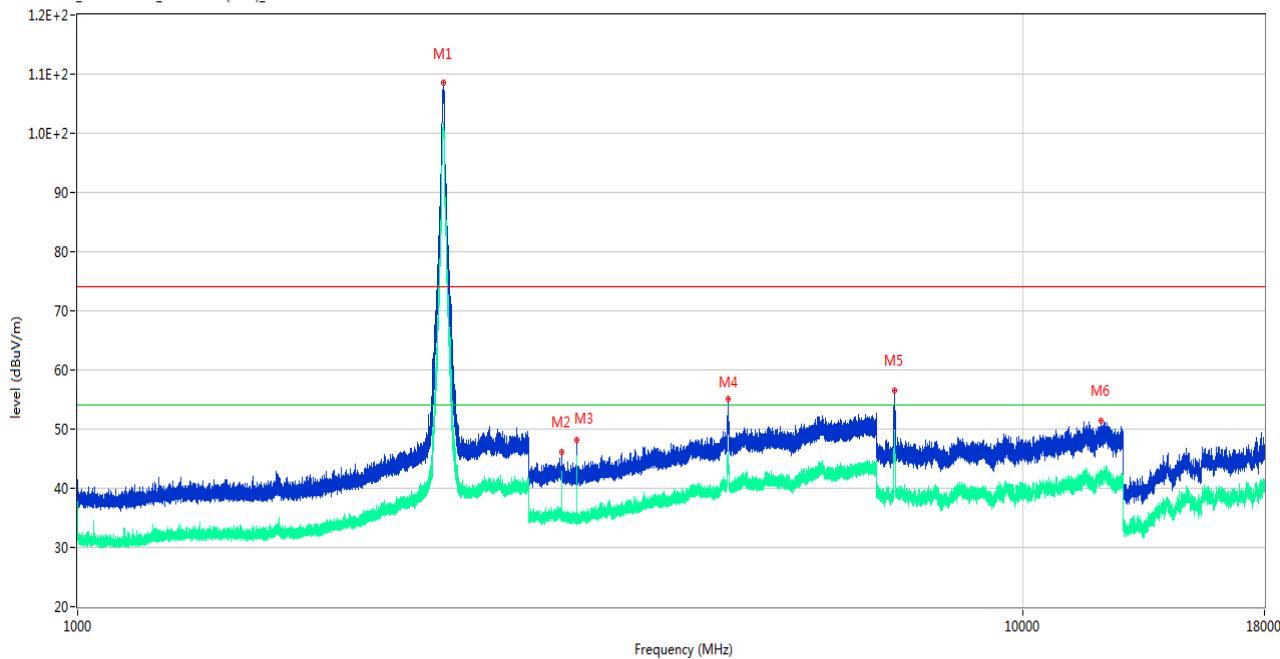

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2437.900	108.54	-13.36	74.0	34.54	Peak	254.00	150	Horizontal	N/A
1**	2437.900	100.60	-13.36	54.0	46.60	AV	254.00	150	Horizontal	N/A
2	3249.000	46.16	-8.67	74.0	-27.84	Peak	253.00	150	Horizontal	Pass
2**	3249.000	39.36	-8.67	54.0	-14.64	AV	253.00	150	Horizontal	Pass
3	3370.000	48.11	-9.38	74.0	-25.89	Peak	104.00	150	Horizontal	Pass
3**	3370.000	45.19	-9.38	54.0	-8.81	AV	104.00	150	Horizontal	Pass
4	4873.000	55.18	-3.97	74.0	-18.82	Peak	326.00	150	Horizontal	Pass
4**	4873.000	44.47	-3.97	54.0	-9.53	AV	326.00	150	Horizontal	Pass
5	7315.100	56.57	-5.00	74.0	-17.43	Peak	50.00	150	Horizontal	Pass
5**	7315.100	46.99	-5.00	54.0	-7.01	AV	50.00	150	Horizontal	Pass
6	12105.713	51.49	-0.92	74.0	-22.51	Peak	280.00	150	Horizontal	Pass
6**	12105.713	42.81	-0.92	54.0	-11.19	AV	280.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11g Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

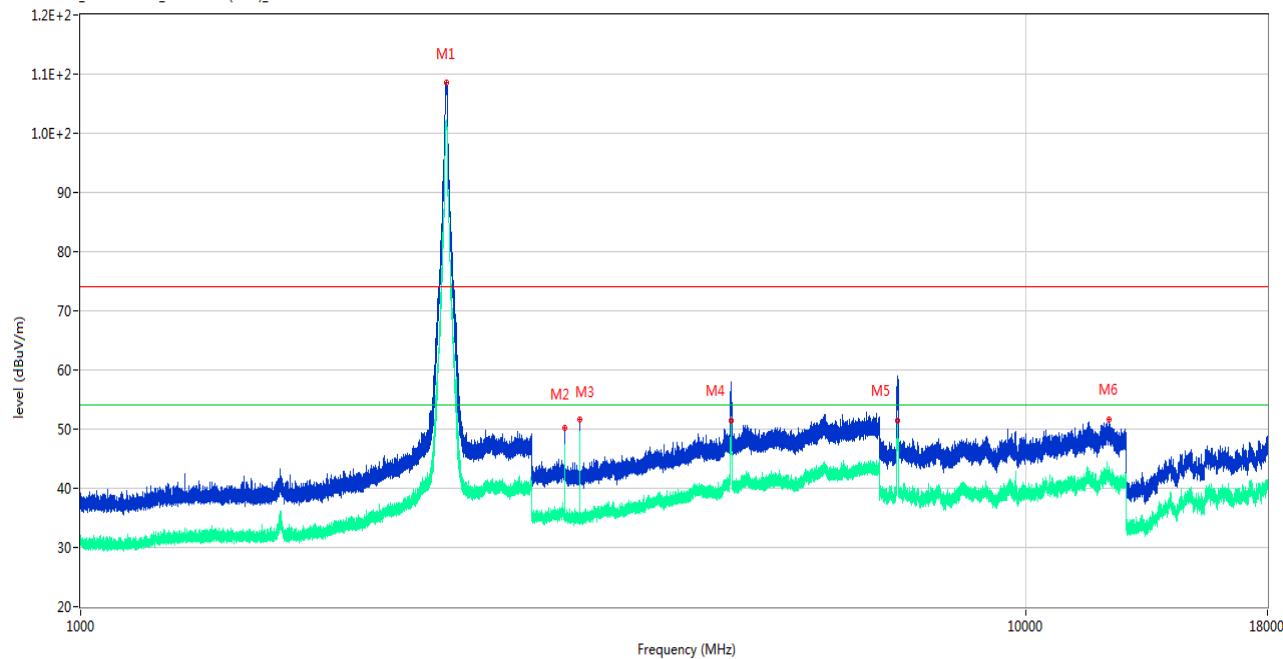

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2438.000	108.56	-13.36	74.0	34.56	Peak	255.00	150	Vertical	N/A
1**	2438.000	101.64	-13.36	54.0	47.64	AV	255.00	150	Vertical	N/A
2	3249.600	50.12	-8.70	74.0	-23.88	Peak	264.00	150	Vertical	Pass
2**	3249.600	46.95	-8.70	54.0	-7.05	AV	264.00	150	Vertical	Pass
3	3370.200	51.64	-9.38	74.0	-22.36	Peak	11.00	150	Vertical	Pass
3**	3370.200	49.58	-9.38	54.0	-4.42	AV	11.00	150	Vertical	Pass
4	4871.800	56.02	-3.92	74.0	-17.98	Peak	313.00	150	Vertical	Pass
4**	4871.800	51.35	-3.92	54.0	-2.65	AV	313.00	150	Vertical	Pass
5	7311.075	57.56	-5.13	74.0	-16.44	Peak	0.00	150	Vertical	Pass
5**	7311.075	51.44	-5.13	54.0	-2.56	AV	0.00	150	Vertical	Pass
6	12238.250	51.62	-0.32	74.0	-22.38	Peak	360.00	150	Vertical	Pass
6**	12238.250	42.74	-0.32	54.0	-11.26	AV	360.00	150	Vertical	Pass


## 1 GHz to 18 GHz, ANT H 802.11g High Channel

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

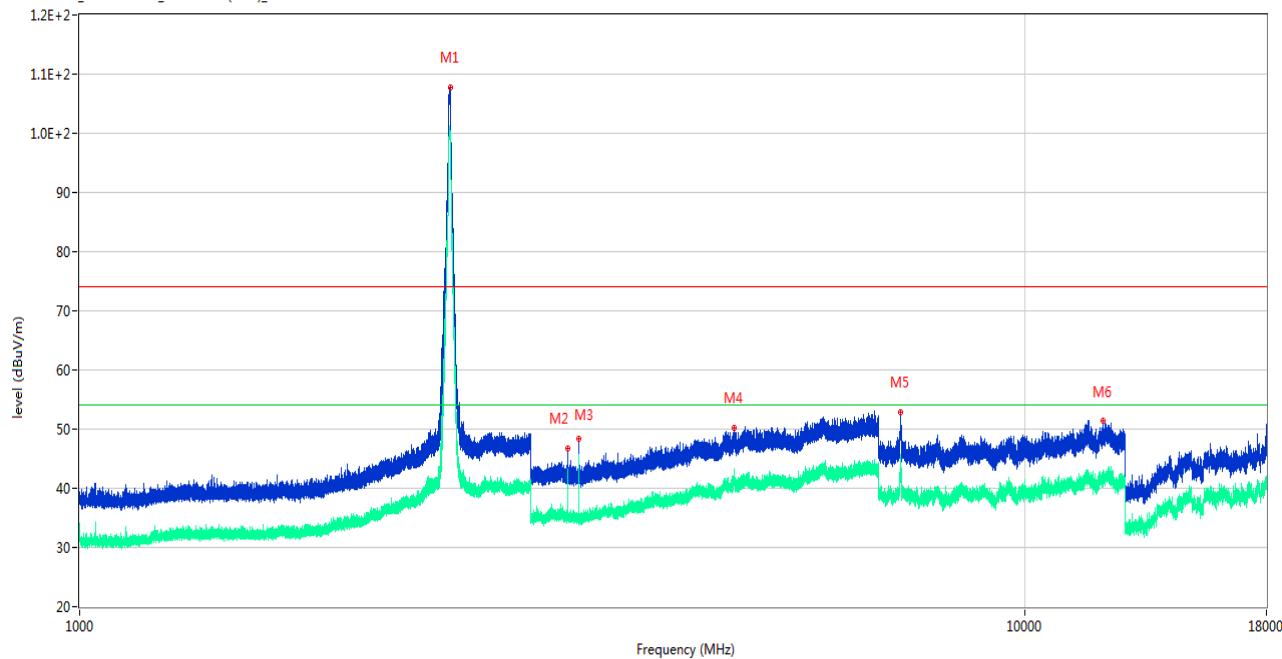

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2465.000	107.78	-13.73	74.0	33.78	Peak	256.00	150	Horizontal	N/A
1**	2465.000	100.22	-13.73	54.0	46.22	AV	256.00	150	Horizontal	N/A
2	3282.800	46.77	-9.14	74.0	-27.23	Peak	60.00	150	Horizontal	Pass
2**	3282.800	42.99	-9.14	54.0	-11.01	AV	60.00	150	Horizontal	Pass
3	3370.000	48.37	-9.38	74.0	-25.63	Peak	110.00	150	Horizontal	Pass
3**	3370.000	45.06	-9.38	54.0	-8.94	AV	110.00	150	Horizontal	Pass
4	4924.600	50.27	-4.12	74.0	-23.73	Peak	135.00	150	Horizontal	Pass
4**	4924.600	41.60	-4.12	54.0	-12.40	AV	135.00	150	Horizontal	Pass
5	7387.262	52.87	-4.47	74.0	-21.13	Peak	52.00	150	Horizontal	Pass
5**	7387.262	45.66	-4.47	54.0	-8.34	AV	52.00	150	Horizontal	Pass
6	12099.100	51.40	-1.04	74.0	-22.60	Peak	179.00	150	Horizontal	Pass
6**	12099.100	42.48	-1.04	54.0	-11.52	AV	179.00	150	Horizontal	Pass


## 1 GHz to 18 GHz, ANT V 802.11g High Channel

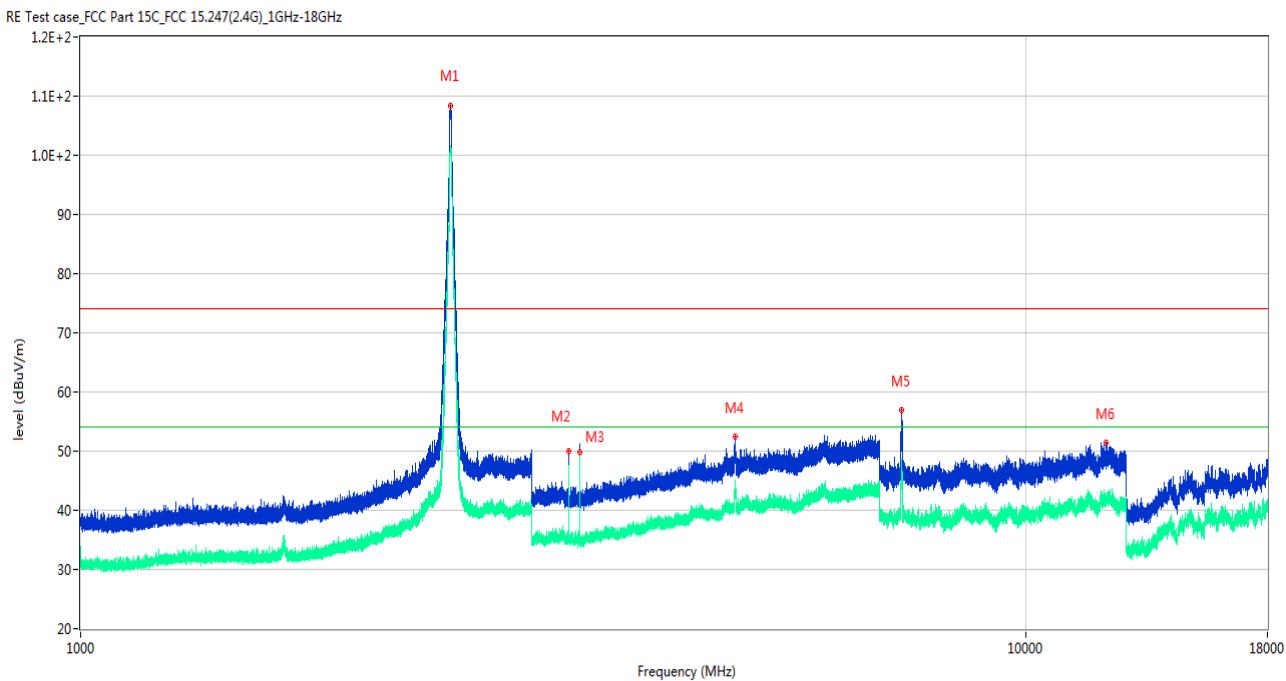

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2463.200	108.47	-13.87	74.0	34.47	Peak	175.00	150	Vertical	N/A
1**	2463.200	101.36	-13.87	54.0	47.36	AV	175.00	150	Vertical	N/A
2	3282.800	50.06	-9.14	74.0	-23.94	Peak	360.00	150	Vertical	Pass
2**	3282.800	47.65	-9.14	54.0	-6.35	AV	360.00	150	Vertical	Pass
3	3370.200	50.93	-9.38	74.0	-23.07	Peak	345.00	150	Vertical	Pass
3**	3370.200	49.80	-9.38	54.0	-4.20	AV	345.00	150	Vertical	Pass
4	4929.600	52.42	-4.10	74.0	-21.58	Peak	321.00	150	Vertical	Pass
4**	4929.600	42.45	-4.10	54.0	-11.55	AV	321.00	150	Vertical	Pass
5	7387.837	56.95	-4.40	74.0	-17.05	Peak	360.00	150	Vertical	Pass
5**	7387.837	47.61	-4.40	54.0	-6.39	AV	360.00	150	Vertical	Pass
6	12164.362	51.38	-0.91	74.0	-22.62	Peak	198.00	150	Vertical	Pass
6**	12164.362	42.16	-0.91	54.0	-11.84	AV	198.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

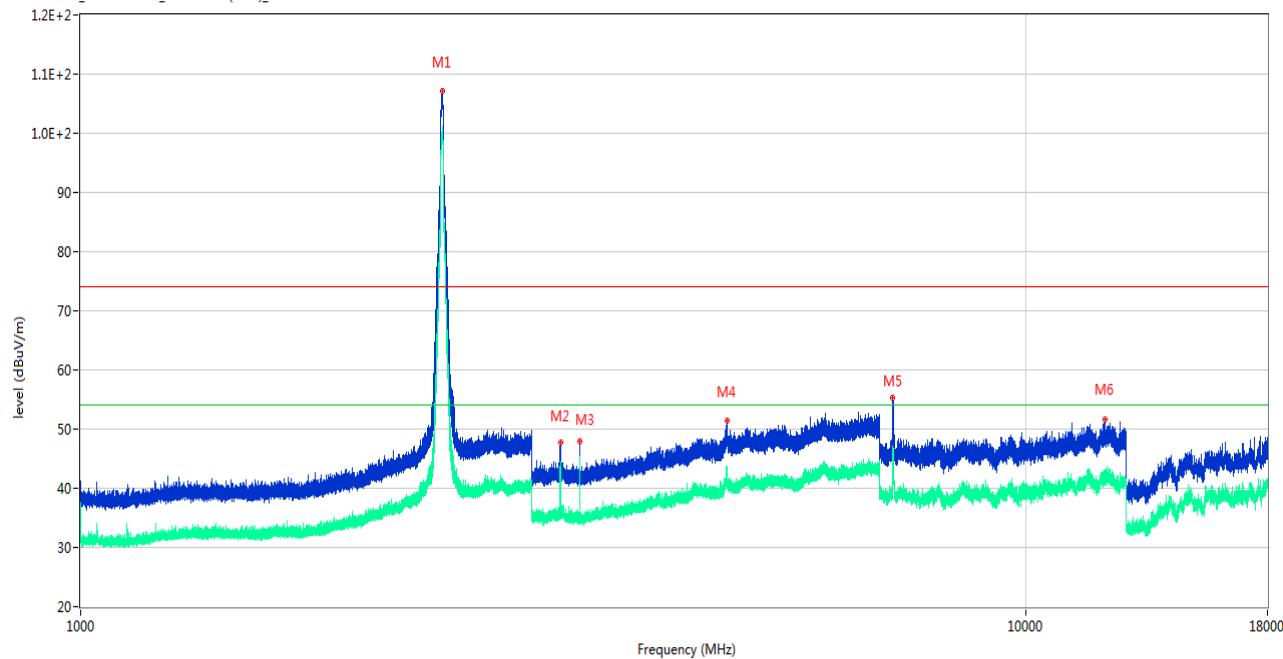

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2414.900	107.11	-13.49	74.0	33.11	Peak	229.00	150	Horizontal	N/A
1**	2414.900	99.50	-13.49	54.0	45.50	AV	229.00	150	Horizontal	N/A
2	3216.000	47.82	-8.51	74.0	-26.18	Peak	58.00	150	Horizontal	Pass
2**	3216.000	43.98	-8.51	54.0	-10.02	AV	58.00	150	Horizontal	Pass
3	3370.200	47.96	-9.38	74.0	-26.04	Peak	109.00	150	Horizontal	Pass
3**	3370.200	45.10	-9.38	54.0	-8.90	AV	109.00	150	Horizontal	Pass
4	4825.000	51.46	-4.09	74.0	-22.54	Peak	340.00	150	Horizontal	Pass
4**	4825.000	41.87	-4.09	54.0	-12.13	AV	340.00	150	Horizontal	Pass
5	7232.300	55.24	-4.48	74.0	-18.76	Peak	70.00	150	Horizontal	Pass
5**	7232.300	47.16	-4.48	54.0	-6.84	AV	70.00	150	Horizontal	Pass
6	12108.588	51.62	-0.87	74.0	-22.38	Peak	291.00	150	Horizontal	Pass
6**	12108.588	42.23	-0.87	54.0	-11.77	AV	291.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

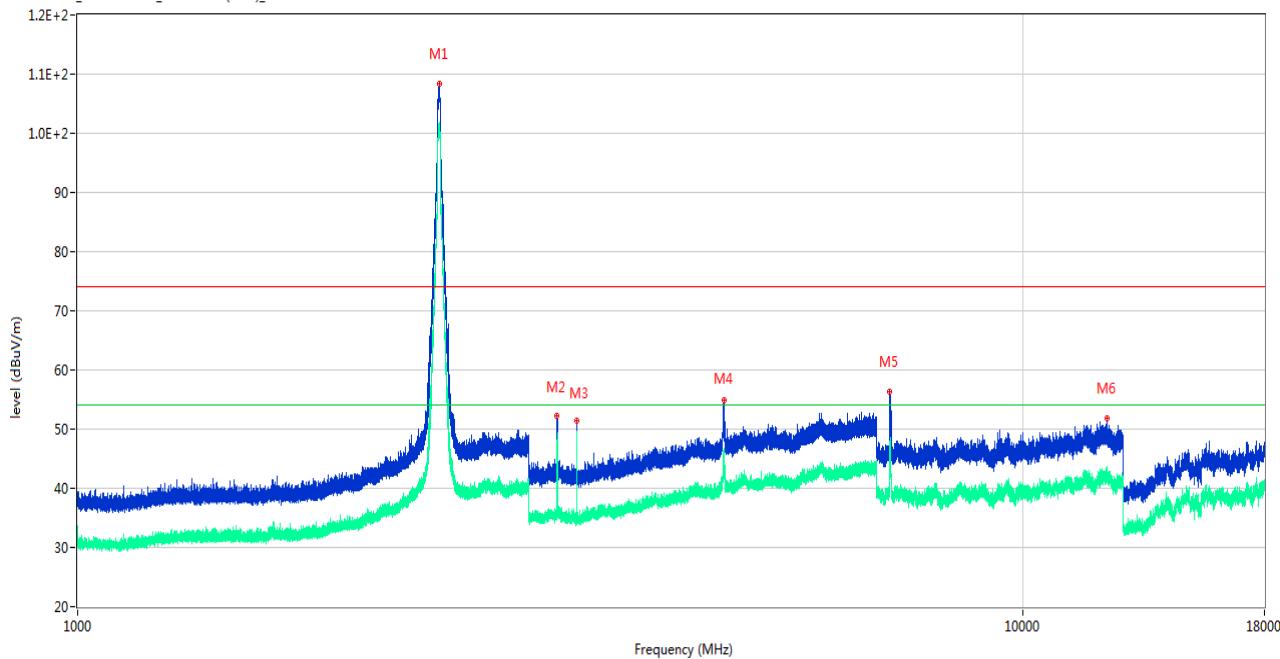

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2413.300	108.45	-13.52	74.0	34.45	Peak	180.00	150	Vertical	N/A
1**	2413.300	101.16	-13.52	54.0	47.16	AV	180.00	150	Vertical	N/A
2	3215.600	52.24	-8.55	74.0	-21.76	Peak	309.00	150	Vertical	Pass
2**	3215.600	45.52	-8.55	54.0	-8.48	AV	309.00	150	Vertical	Pass
3	3369.800	51.42	-9.39	74.0	-22.58	Peak	20.00	150	Vertical	Pass
3**	3369.800	48.00	-9.39	54.0	-6.00	AV	20.00	150	Vertical	Pass
4	4824.800	54.93	-4.08	74.0	-19.07	Peak	324.00	150	Vertical	Pass
4**	4824.800	45.47	-4.08	54.0	-8.53	AV	324.00	150	Vertical	Pass
5	7232.013	56.39	-4.48	74.0	-17.61	Peak	16.00	150	Vertical	Pass
5**	7232.013	46.19	-4.48	54.0	-7.81	AV	16.00	150	Vertical	Pass
6	12268.438	51.83	0.06	74.0	-22.17	Peak	222.00	150	Vertical	Pass
6**	12268.438	42.80	0.06	54.0	-11.20	AV	222.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

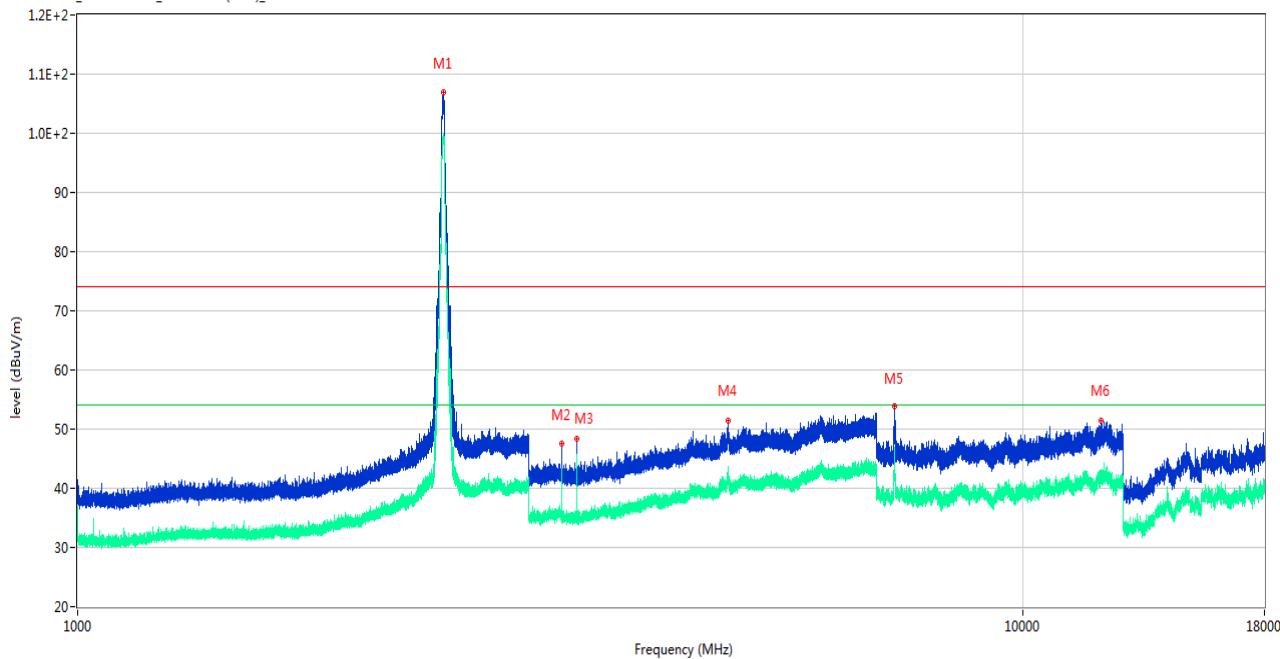

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2439.700	106.91	-13.41	74.0	32.91	Peak	251.00	150	Horizontal	N/A
1**	2439.700	98.68	-13.41	54.0	44.68	AV	251.00	150	Horizontal	N/A
2	3249.000	47.48	-8.67	74.0	-26.52	Peak	202.00	150	Horizontal	Pass
2**	3249.000	42.09	-8.67	54.0	-11.91	AV	202.00	150	Horizontal	Pass
3	3370.000	48.41	-9.38	74.0	-25.59	Peak	217.00	150	Horizontal	Pass
3**	3370.000	45.09	-9.38	54.0	-8.91	AV	217.00	150	Horizontal	Pass
4	4874.400	51.45	-4.03	74.0	-22.55	Peak	320.00	150	Horizontal	Pass
4**	4874.400	42.52	-4.03	54.0	-11.48	AV	320.00	150	Horizontal	Pass
5	7316.537	53.86	-5.03	74.0	-20.14	Peak	52.00	150	Horizontal	Pass
5**	7316.537	44.66	-5.03	54.0	-9.34	AV	52.00	150	Horizontal	Pass
6	12097.662	51.33	-1.06	74.0	-22.67	Peak	167.00	150	Horizontal	Pass
6**	12097.662	42.05	-1.06	54.0	-11.95	AV	167.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

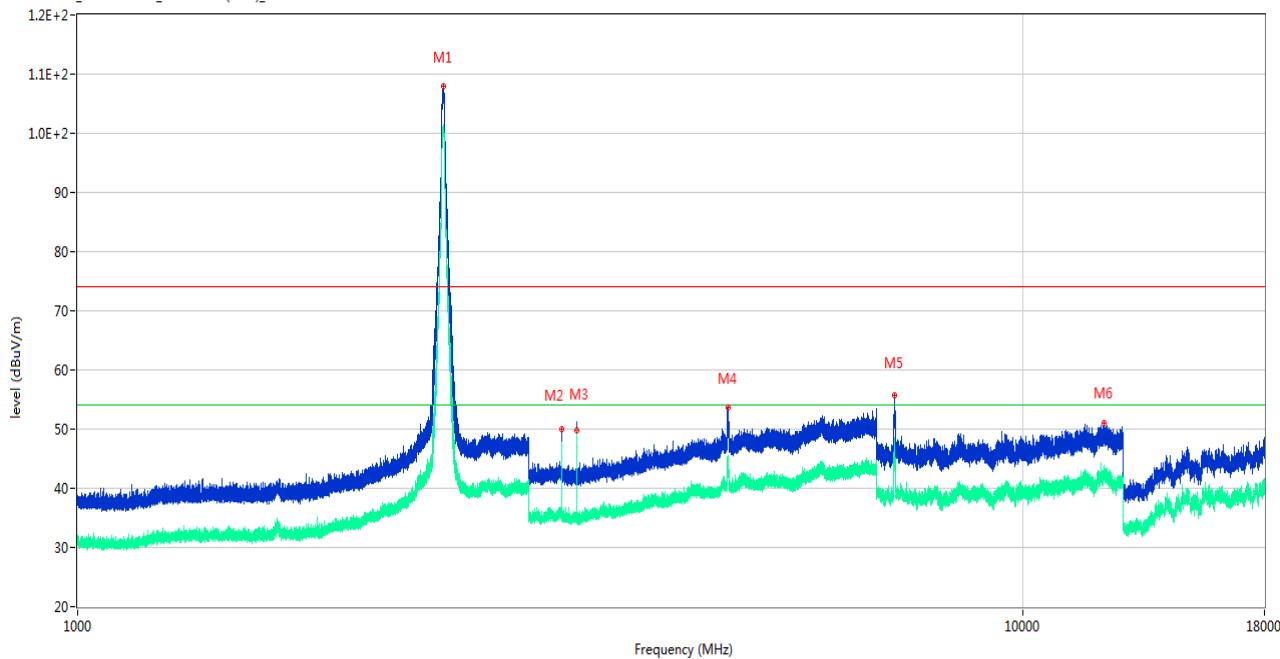

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2436.100	107.91	-13.49	74.0	33.91	Peak	185.00	150	Vertical	N/A
1**	2436.100	100.38	-13.49	54.0	46.38	AV	185.00	150	Vertical	N/A
2	3249.200	49.91	-8.68	74.0	-24.09	Peak	0.00	150	Vertical	Pass
2**	3249.200	46.33	-8.68	54.0	-7.67	AV	0.00	150	Vertical	Pass
3	3370.200	51.25	-9.38	74.0	-22.75	Peak	15.00	150	Vertical	Pass
3**	3370.200	49.70	-9.38	54.0	-4.30	AV	15.00	150	Vertical	Pass
4	4876.600	53.61	-4.03	74.0	-20.39	Peak	323.00	150	Vertical	Pass
4**	4876.600	43.94	-4.03	54.0	-10.06	AV	323.00	150	Vertical	Pass
5	7308.200	55.80	-4.97	74.0	-18.20	Peak	0.00	150	Vertical	Pass
5**	7308.200	45.72	-4.97	54.0	-8.28	AV	0.00	150	Vertical	Pass
6	12169.825	50.96	-0.93	74.0	-23.04	Peak	291.00	150	Vertical	Pass
6**	12169.825	41.65	-0.93	54.0	-12.35	AV	291.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

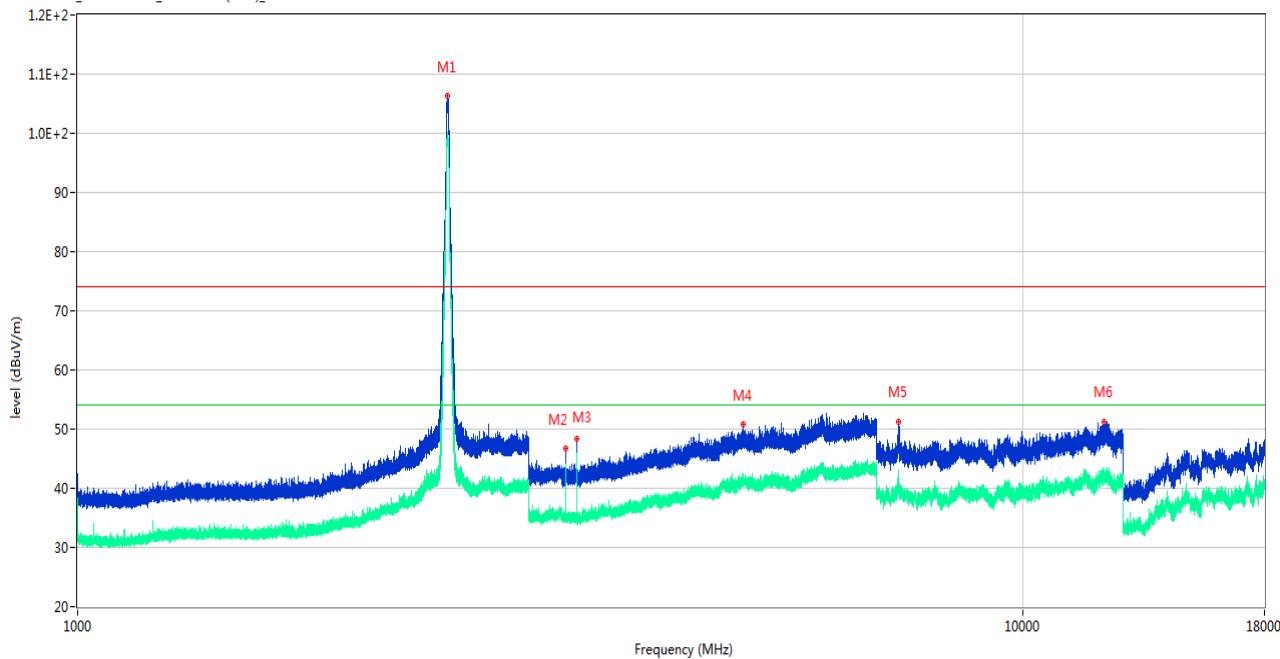

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2460.700	106.27	-13.91	74.0	32.27	Peak	236.00	150	Horizontal	N/A
1**	2460.700	99.16	-13.91	54.0	45.16	AV	236.00	150	Horizontal	N/A
2	3282.400	46.69	-9.13	74.0	-27.31	Peak	65.00	150	Horizontal	Pass
2**	3282.400	42.05	-9.13	54.0	-11.95	AV	65.00	150	Horizontal	Pass
3	3370.000	48.27	-9.38	74.0	-25.73	Peak	215.00	150	Horizontal	Pass
3**	3370.000	45.14	-9.38	54.0	-8.86	AV	215.00	150	Horizontal	Pass
4	5054.000	50.72	-3.62	74.0	-23.28	Peak	215.00	150	Horizontal	Pass
4**	5054.000	41.75	-3.62	54.0	-12.25	AV	215.00	150	Horizontal	Pass
5	7390.712	51.29	-4.34	74.0	-22.71	Peak	53.00	150	Horizontal	Pass
5**	7390.712	41.44	-4.34	54.0	-12.56	AV	53.00	150	Horizontal	Pass
6	12182.762	51.26	-0.95	74.0	-22.74	Peak	125.00	150	Horizontal	Pass
6**	12182.762	41.41	-0.95	54.0	-12.59	AV	125.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

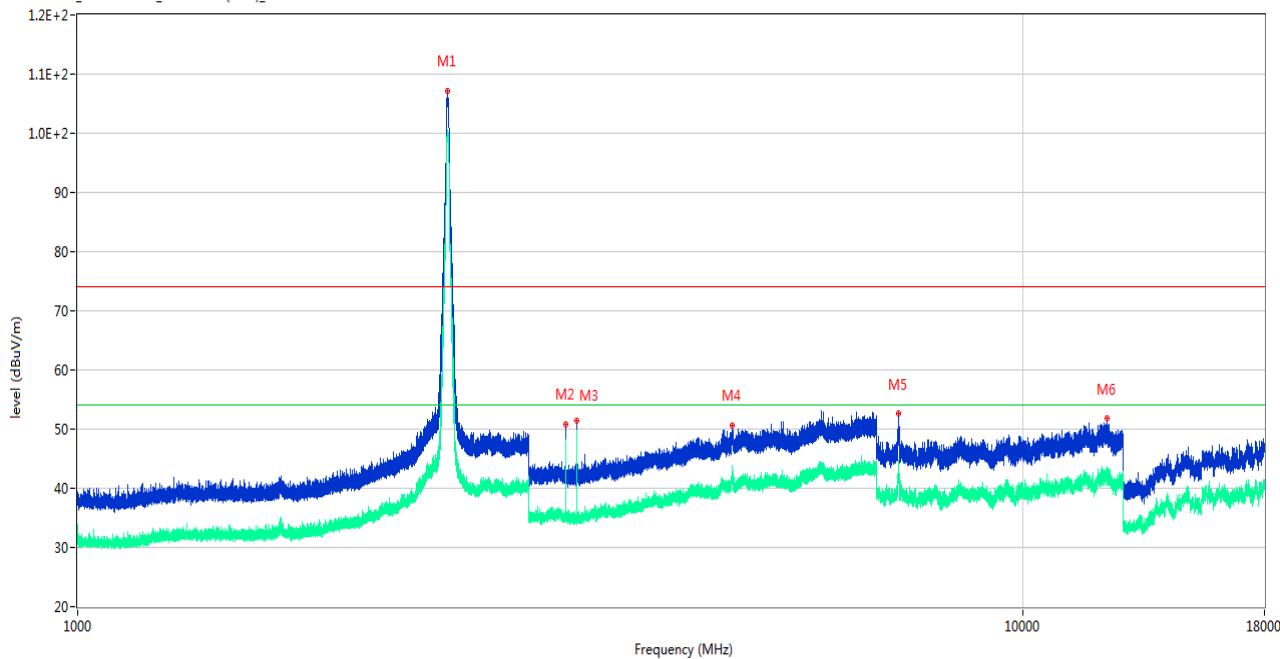

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2461.200	107.20	-13.90	74.0	33.20	Peak	175.00	150	Vertical	N/A
1**	2461.200	100.22	-13.90	54.0	46.22	AV	175.00	150	Vertical	N/A
2	3282.600	50.85	-9.14	74.0	-23.15	Peak	3.00	150	Vertical	Pass
2**	3282.600	47.96	-9.14	54.0	-6.04	AV	3.00	150	Vertical	Pass
3	3370.000	51.46	-9.38	74.0	-22.54	Peak	350.00	150	Vertical	Pass
3**	3370.000	49.50	-9.38	54.0	-4.50	AV	350.00	150	Vertical	Pass
4	4919.000	50.53	-4.22	74.0	-23.47	Peak	303.00	150	Vertical	Pass
4**	4919.000	42.00	-4.22	54.0	-12.00	AV	303.00	150	Vertical	Pass
5	7387.837	52.74	-4.40	74.0	-21.26	Peak	360.00	150	Vertical	Pass
5**	7387.837	42.78	-4.40	54.0	-11.22	AV	360.00	150	Vertical	Pass
6	12277.638	51.89	0.08	74.0	-22.11	Peak	308.00	150	Vertical	Pass
6**	12277.638	42.54	0.08	54.0	-11.46	AV	308.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

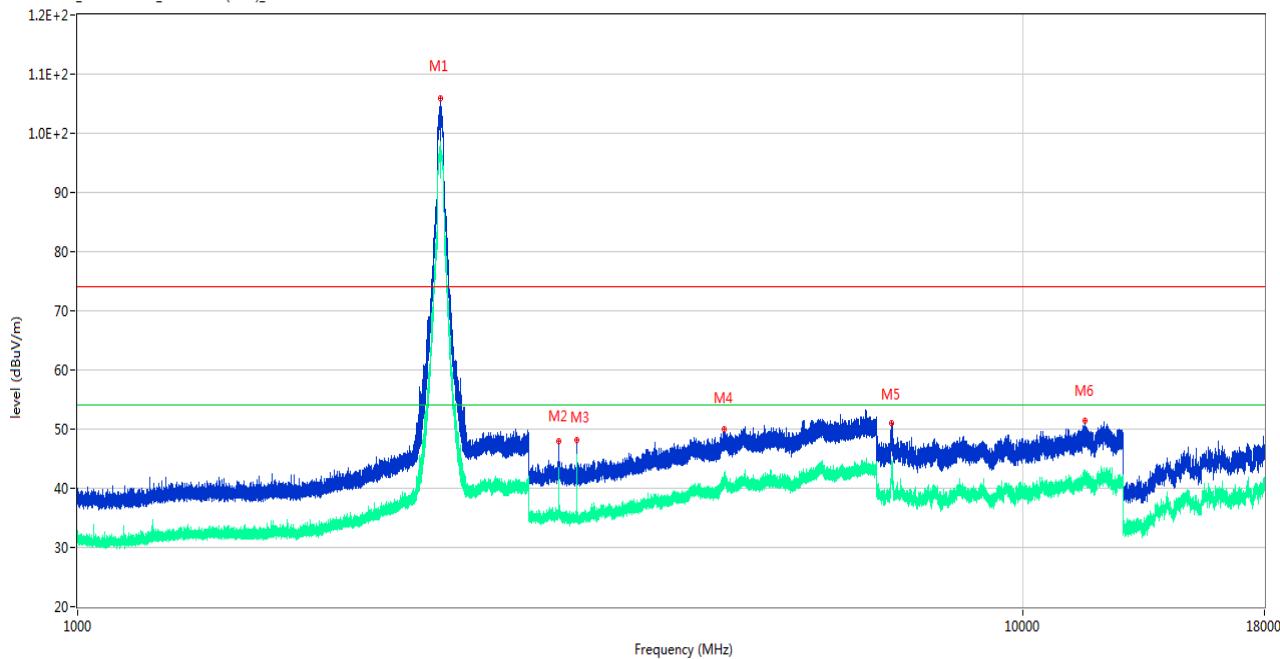

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2420.400	105.85	-13.66	74.0	31.85	Peak	240.00	150	Horizontal	N/A
1**	2420.400	98.14	-13.66	54.0	44.14	AV	240.00	150	Horizontal	N/A
2	3229.400	47.92	-7.52	74.0	-26.08	Peak	239.00	150	Horizontal	Pass
2**	3229.400	43.48	-7.52	54.0	-10.52	AV	239.00	150	Horizontal	Pass
3	3370.000	48.10	-9.38	74.0	-25.90	Peak	103.00	150	Horizontal	Pass
3**	3370.000	45.01	-9.38	54.0	-8.99	AV	103.00	150	Horizontal	Pass
4	4832.400	49.96	-4.25	74.0	-24.04	Peak	326.00	150	Horizontal	Pass
4**	4832.400	41.29	-4.25	54.0	-12.71	AV	326.00	150	Horizontal	Pass
5	7258.462	50.97	-4.51	74.0	-23.03	Peak	67.00	150	Horizontal	Pass
5**	7258.462	44.41	-4.51	54.0	-9.59	AV	67.00	150	Horizontal	Pass
6	11623.000	51.49	-0.19	74.0	-22.51	Peak	206.00	150	Horizontal	Pass
6**	11623.000	41.57	-0.19	54.0	-12.43	AV	206.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

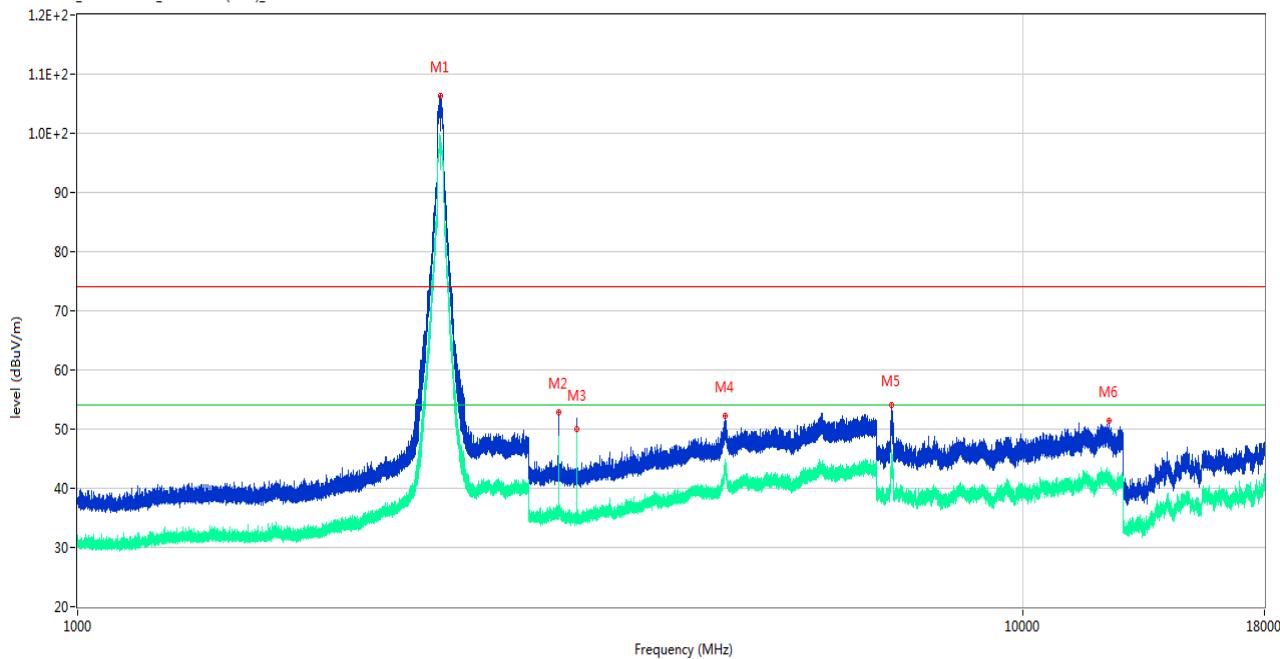

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2420.700	106.32	-13.67	74.0	32.32	Peak	248.00	150	Vertical	N/A
1**	2420.700	97.99	-13.67	54.0	43.99	AV	248.00	150	Vertical	N/A
2	3229.000	52.84	-7.50	74.0	-21.16	Peak	314.00	150	Vertical	Pass
2**	3229.000	45.63	-7.50	54.0	-8.37	AV	314.00	150	Vertical	Pass
3	3370.200	51.29	-9.38	74.0	-22.71	Peak	22.00	150	Vertical	Pass
3**	3370.200	49.91	-9.38	54.0	-4.09	AV	22.00	150	Vertical	Pass
4	4845.000	52.24	-3.87	74.0	-21.76	Peak	314.00	150	Vertical	Pass
4**	4845.000	44.92	-3.87	54.0	-9.08	AV	314.00	150	Vertical	Pass
5	7257.888	54.15	-4.52	74.0	-19.85	Peak	360.00	150	Vertical	Pass
5**	7257.888	44.73	-4.52	54.0	-9.27	AV	360.00	150	Vertical	Pass
6	12332.838	51.47	-0.76	74.0	-22.53	Peak	224.00	150	Vertical	Pass
6**	12332.838	42.11	-0.76	54.0	-11.89	AV	224.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

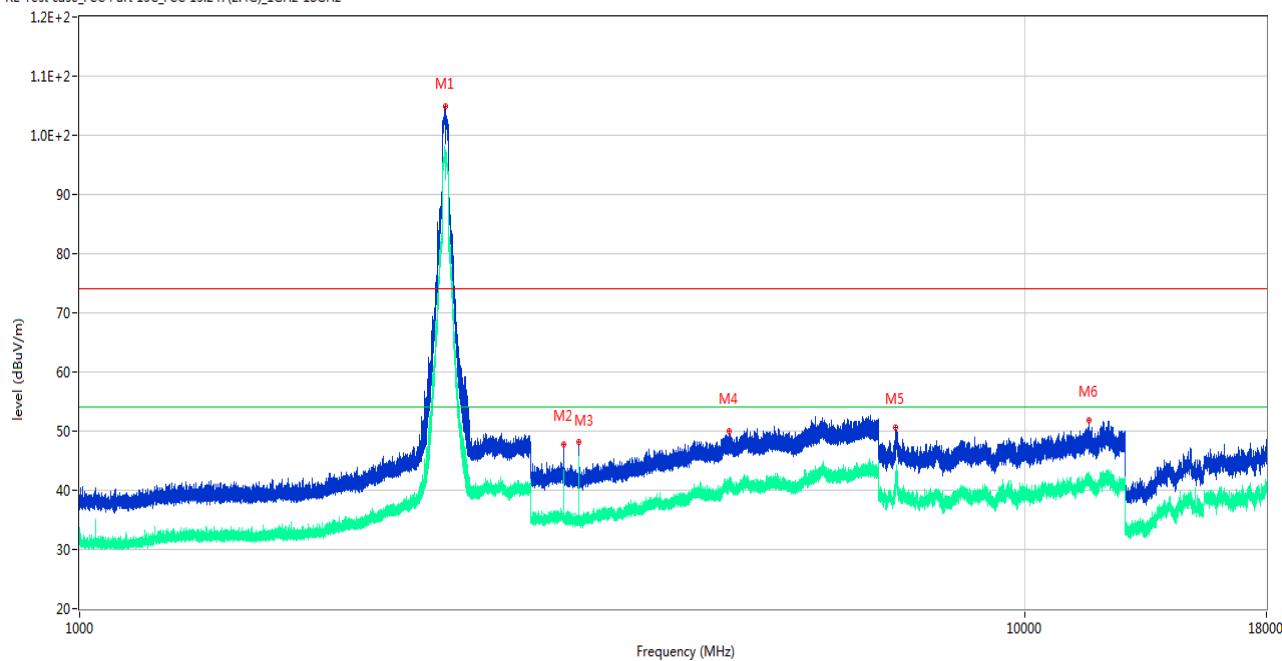

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2435.600	104.94	-13.53	74.0	30.94	Peak	76.00	150	Horizontal	N/A
1**	2435.600	97.27	-13.53	54.0	43.27	AV	76.00	150	Horizontal	N/A
2	3249.400	47.72	-8.70	74.0	-26.28	Peak	260.00	150	Horizontal	Pass
2**	3249.400	43.34	-8.70	54.0	-10.66	AV	260.00	150	Horizontal	Pass
3	3370.000	48.13	-9.38	74.0	-25.87	Peak	236.00	150	Horizontal	Pass
3**	3370.000	45.18	-9.38	54.0	-8.82	AV	236.00	150	Horizontal	Pass
4	4861.800	49.94	-3.61	74.0	-24.06	Peak	331.00	150	Horizontal	Pass
4**	4861.800	41.14	-3.61	54.0	-12.86	AV	331.00	150	Horizontal	Pass
5	7297.850	50.56	-4.89	74.0	-23.44	Peak	45.00	150	Horizontal	Pass
5**	7297.850	40.71	-4.89	54.0	-13.29	AV	45.00	150	Horizontal	Pass
6	11683.951	51.76	-0.92	74.0	-22.24	Peak	274.00	150	Horizontal	Pass
6**	11683.951	41.55	-0.92	54.0	-12.45	AV	274.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

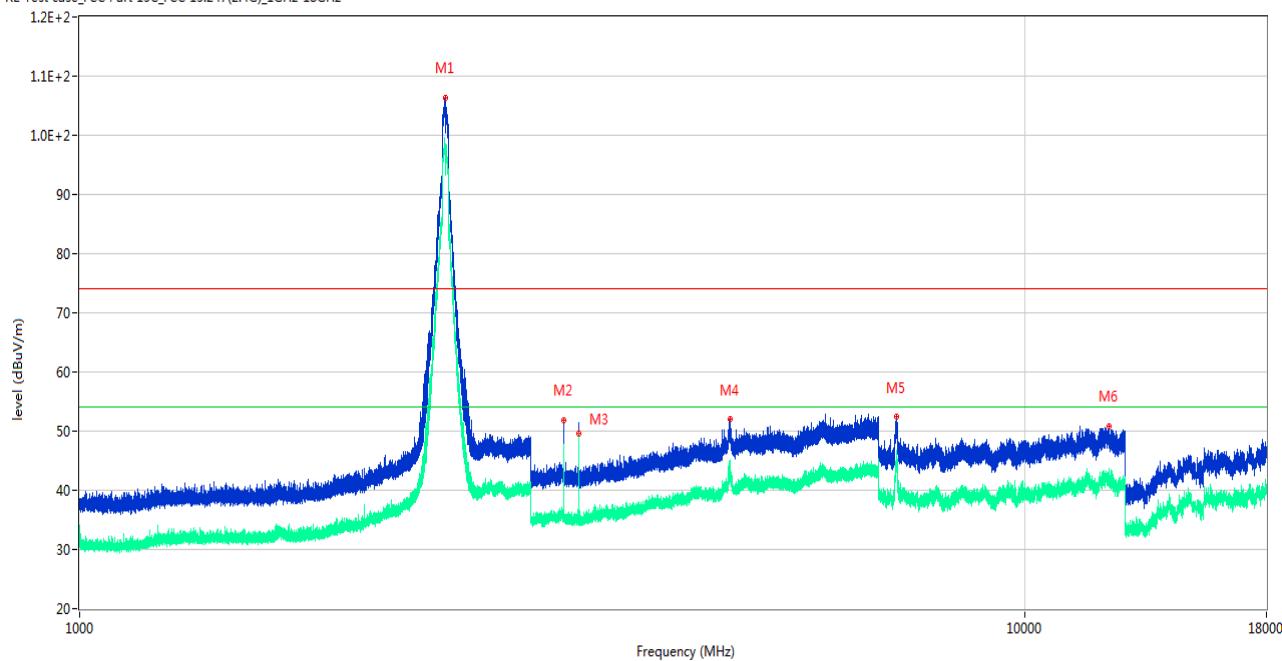

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2435.500	106.36	-13.54	74.0	32.36	Peak	225.00	150	Vertical	N/A
1**	2435.500	97.57	-13.54	54.0	43.57	AV	225.00	150	Vertical	N/A
2	3249.400	51.93	-8.70	74.0	-22.07	Peak	303.00	150	Vertical	Pass
2**	3249.400	47.58	-8.70	54.0	-6.42	AV	303.00	150	Vertical	Pass
3	3370.200	51.34	-9.38	74.0	-22.66	Peak	8.00	150	Vertical	Pass
3**	3370.200	49.52	-9.38	54.0	-4.48	AV	8.00	150	Vertical	Pass
4	4870.200	52.01	-3.86	74.0	-21.99	Peak	328.00	150	Vertical	Pass
4**	4870.200	43.42	-3.86	54.0	-10.58	AV	328.00	150	Vertical	Pass
5	7314.237	52.44	-4.99	74.0	-21.56	Peak	0.00	150	Vertical	Pass
5**	7314.237	44.82	-4.99	54.0	-9.18	AV	0.00	150	Vertical	Pass
6	12277.925	50.72	0.08	74.0	-23.28	Peak	42.00	150	Vertical	Pass
6**	12277.925	41.20	0.08	54.0	-12.80	AV	42.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

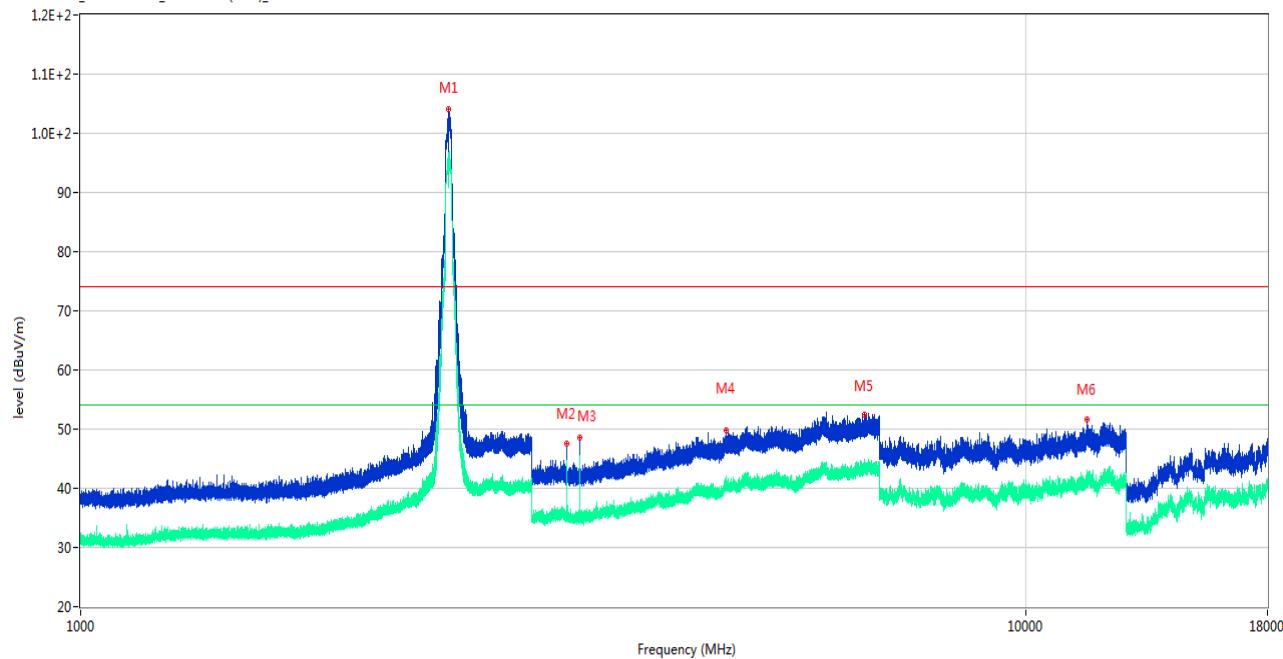

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2450.300	104.01	-13.55	74.0	30.01	Peak	241.00	150	Horizontal	N/A
1**	2450.300	96.04	-13.55	54.0	42.04	AV	241.00	150	Horizontal	N/A
2	3269.400	47.64	-9.07	74.0	-26.36	Peak	61.00	150	Horizontal	Pass
2**	3269.400	44.44	-9.07	54.0	-9.56	AV	61.00	150	Horizontal	Pass
3	3370.000	48.48	-9.38	74.0	-25.52	Peak	112.00	150	Horizontal	Pass
3**	3370.000	44.91	-9.38	54.0	-9.09	AV	112.00	150	Horizontal	Pass
4	4811.400	49.73	-3.75	74.0	-24.27	Peak	213.00	150	Horizontal	Pass
4**	4811.400	40.94	-3.75	54.0	-13.06	AV	213.00	150	Horizontal	Pass
5	6753.800	52.44	-1.48	74.0	-21.56	Peak	150.00	150	Horizontal	Pass
5**	6753.800	43.19	-1.48	54.0	-10.81	AV	150.00	150	Horizontal	Pass
6	11593.675	51.70	-0.10	74.0	-22.30	Peak	14.00	150	Horizontal	Pass
6**	11593.675	41.66	-0.10	54.0	-12.34	AV	14.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

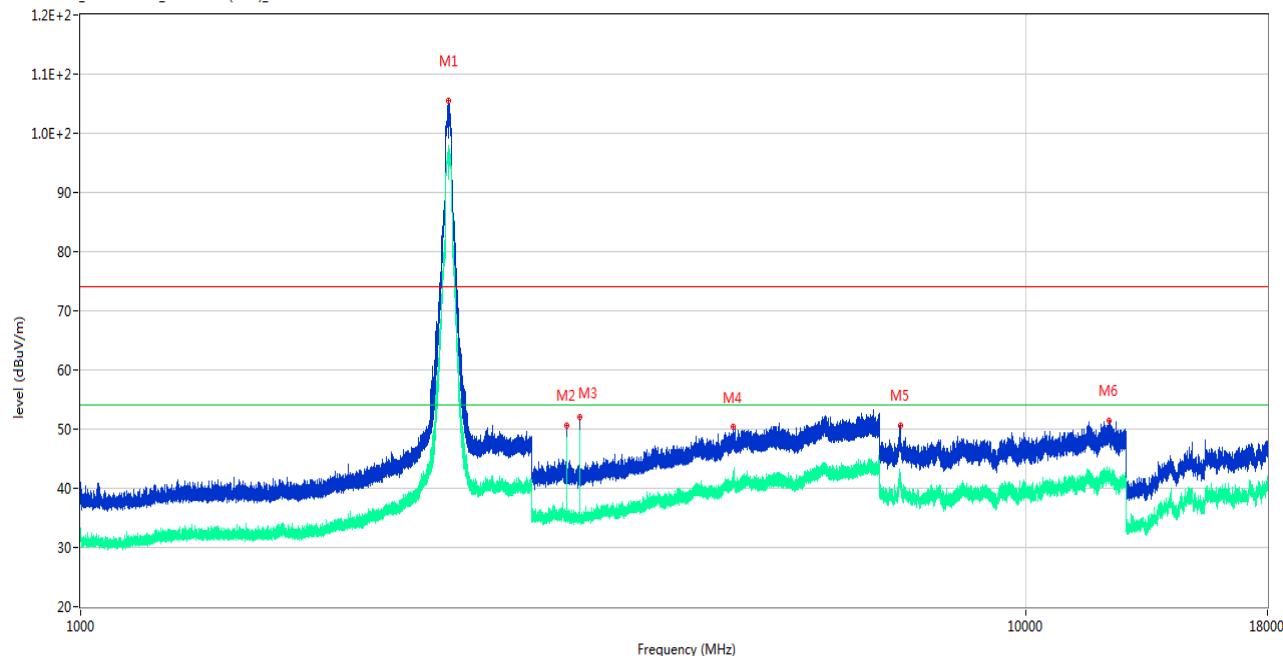

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2450.600	105.43	-13.56	74.0	31.43	Peak	242.00	150	Vertical	N/A
1**	2450.600	97.34	-13.56	54.0	43.34	AV	242.00	150	Vertical	N/A
2	3269.400	50.63	-9.07	74.0	-23.37	Peak	292.00	150	Vertical	Pass
2**	3269.400	48.38	-9.07	54.0	-5.62	AV	292.00	150	Vertical	Pass
3	3369.800	52.06	-9.39	74.0	-21.94	Peak	15.00	150	Vertical	Pass
3**	3369.800	48.11	-9.39	54.0	-5.89	AV	15.00	150	Vertical	Pass
4	4899.200	50.40	-4.38	74.0	-23.60	Peak	327.00	150	Vertical	Pass
4**	4899.200	40.95	-4.38	54.0	-13.05	AV	327.00	150	Vertical	Pass
5	7360.237	50.67	-4.91	74.0	-23.33	Peak	0.00	150	Vertical	Pass
5**	7360.237	41.60	-4.91	54.0	-12.40	AV	0.00	150	Vertical	Pass
6	12241.700	51.47	-0.28	74.0	-22.53	Peak	360.00	150	Vertical	Pass
6**	12241.700	42.71	-0.28	54.0	-11.29	AV	360.00	150	Vertical	Pass

Aux. Antenna
**1 GHz to 18 GHz, ANT H 802.11b Low Channel**


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

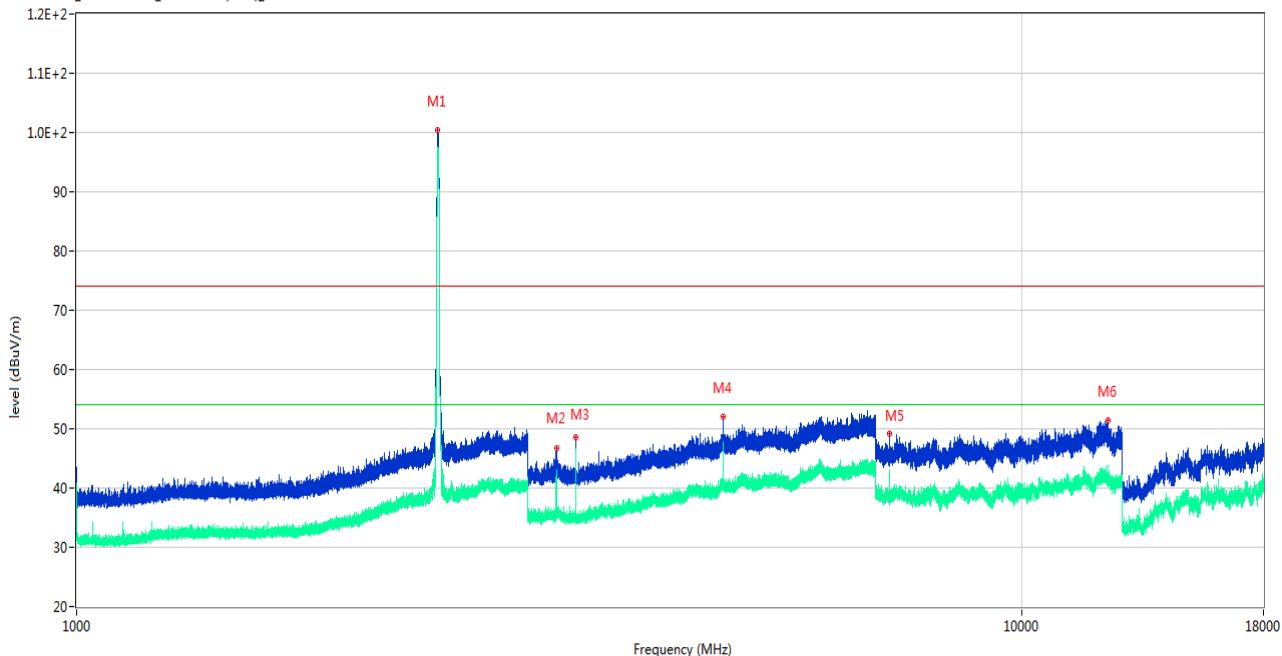

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2410.800	100.31	-13.45	74.0	26.31	Peak	354.00	150	Horizontal	N/A
1**	2410.800	97.40	-13.45	54.0	43.40	AV	354.00	150	Horizontal	N/A
2	3216.000	46.75	-8.51	74.0	-27.25	Peak	65.00	150	Horizontal	Pass
2**	3216.000	41.94	-8.51	54.0	-12.06	AV	65.00	150	Horizontal	Pass
3	3370.000	48.58	-9.38	74.0	-25.42	Peak	110.00	150	Horizontal	Pass
3**	3370.000	45.99	-9.38	54.0	-8.01	AV	110.00	150	Horizontal	Pass
4	4823.800	52.06	-4.05	74.0	-21.94	Peak	320.00	150	Horizontal	Pass
4**	4823.800	45.75	-4.05	54.0	-8.25	AV	320.00	150	Horizontal	Pass
5	7236.038	49.18	-4.43	74.0	-24.82	Peak	270.00	150	Horizontal	Pass
5**	7236.038	40.47	-4.43	54.0	-13.53	AV	270.00	150	Horizontal	Pass
6	12328.813	51.43	-0.64	74.0	-22.57	Peak	215.00	150	Horizontal	Pass
6**	12328.813	41.32	-0.64	54.0	-12.68	AV	215.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11b Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

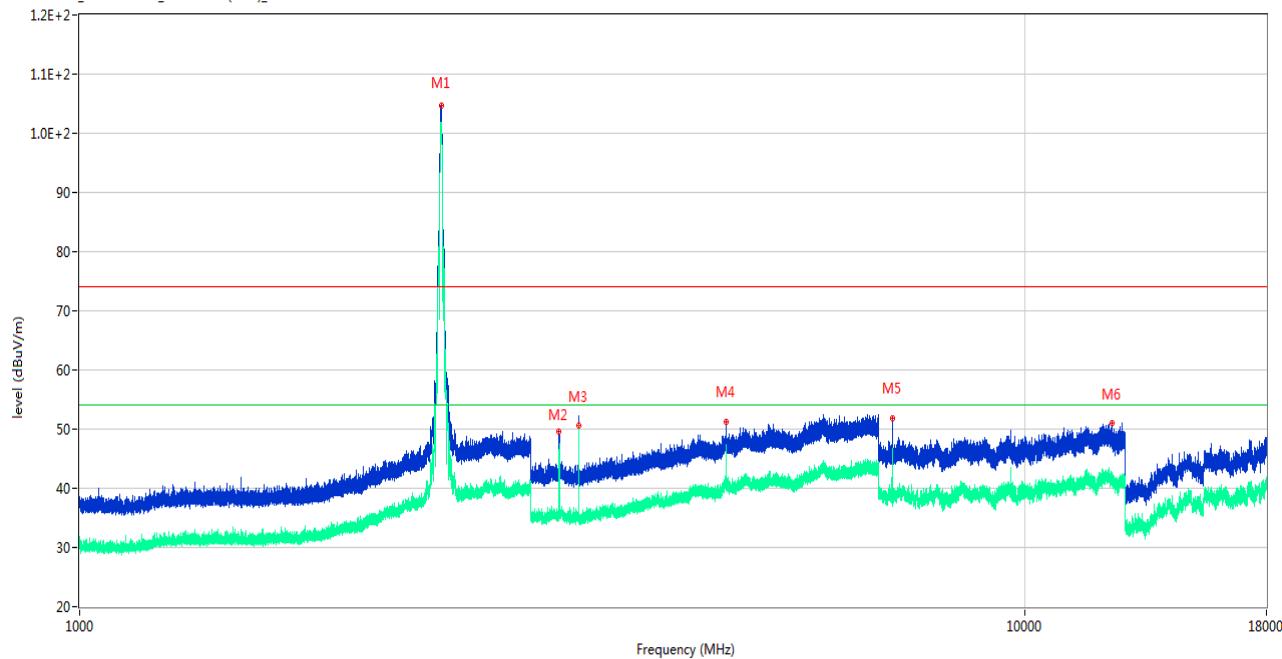

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2413.100	104.59	-13.52	74.0	30.59	Peak	241.00	150	Vertical	N/A
1**	2413.100	101.83	-13.52	54.0	47.83	AV	241.00	150	Vertical	N/A
2	3215.800	49.55	-8.53	74.0	-24.45	Peak	275.00	150	Vertical	Pass
2**	3215.800	46.18	-8.53	54.0	-7.82	AV	275.00	150	Vertical	Pass
3	3370.200	51.77	-9.38	74.0	-22.23	Peak	339.00	150	Vertical	Pass
3**	3370.200	50.54	-9.38	54.0	-3.46	AV	339.00	150	Vertical	Pass
4	4824.000	51.19	-4.05	74.0	-22.81	Peak	152.00	150	Vertical	Pass
4**	4824.000	47.22	-4.05	54.0	-6.78	AV	152.00	150	Vertical	Pass
5	7236.900	51.76	-4.47	74.0	-22.24	Peak	309.00	150	Vertical	Pass
5**	7236.900	46.33	-4.47	54.0	-7.67	AV	309.00	150	Vertical	Pass
6	12360.438	51.08	-1.51	74.0	-22.92	Peak	0.00	150	Vertical	Pass
6**	12360.438	41.91	-1.51	54.0	-12.09	AV	0.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11b Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

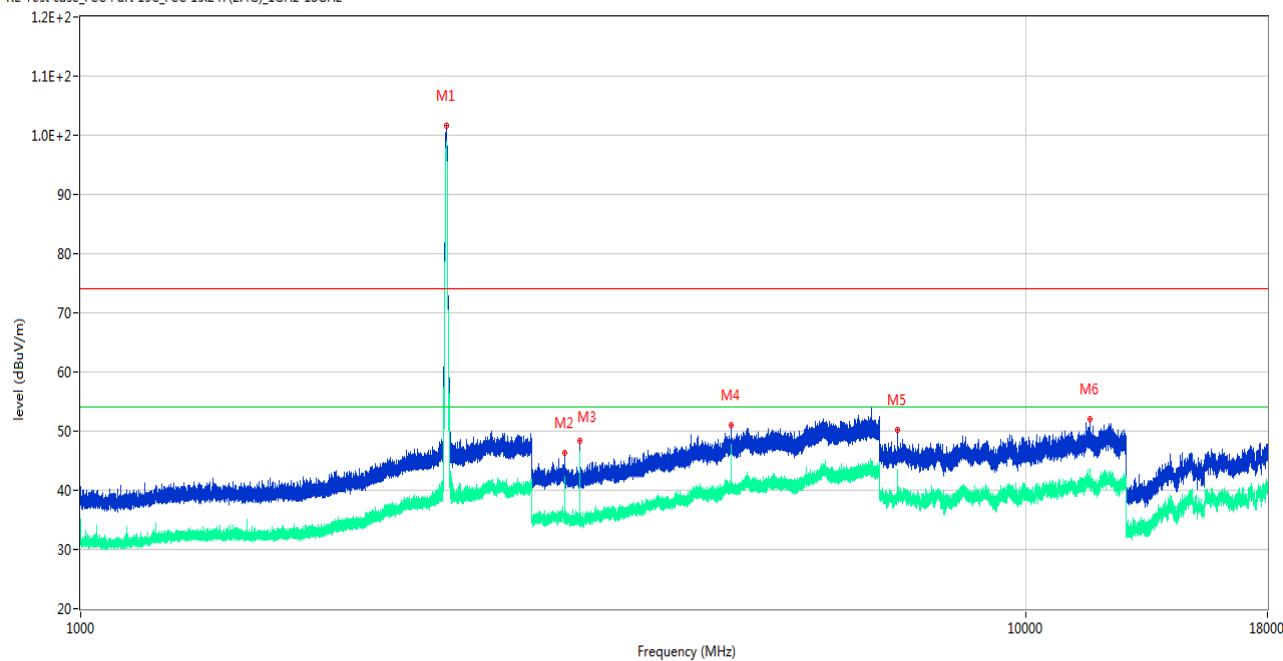

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2435.900	101.67	-13.51	74.0	27.67	Peak	343.00	150	Horizontal	N/A
1**	2435.900	98.86	-13.51	54.0	44.86	AV	343.00	150	Horizontal	N/A
2	3249.200	46.34	-8.68	74.0	-27.66	Peak	84.00	150	Horizontal	Pass
2**	3249.200	41.17	-8.68	54.0	-12.83	AV	84.00	150	Horizontal	Pass
3	3370.000	48.40	-9.38	74.0	-25.60	Peak	122.00	150	Horizontal	Pass
3**	3370.000	45.93	-9.38	54.0	-8.07	AV	122.00	150	Horizontal	Pass
4	4874.200	51.02	-4.02	74.0	-22.98	Peak	342.00	150	Horizontal	Pass
4**	4874.200	47.72	-4.02	54.0	-6.28	AV	342.00	150	Horizontal	Pass
5	7312.800	50.21	-5.08	74.0	-23.79	Peak	236.00	150	Horizontal	Pass
5**	7312.800	42.64	-5.08	54.0	-11.36	AV	236.00	150	Horizontal	Pass
6	11672.162	52.14	-0.77	74.0	-21.86	Peak	326.00	150	Horizontal	Pass
6**	11672.162	41.91	-0.77	54.0	-12.09	AV	326.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11b Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

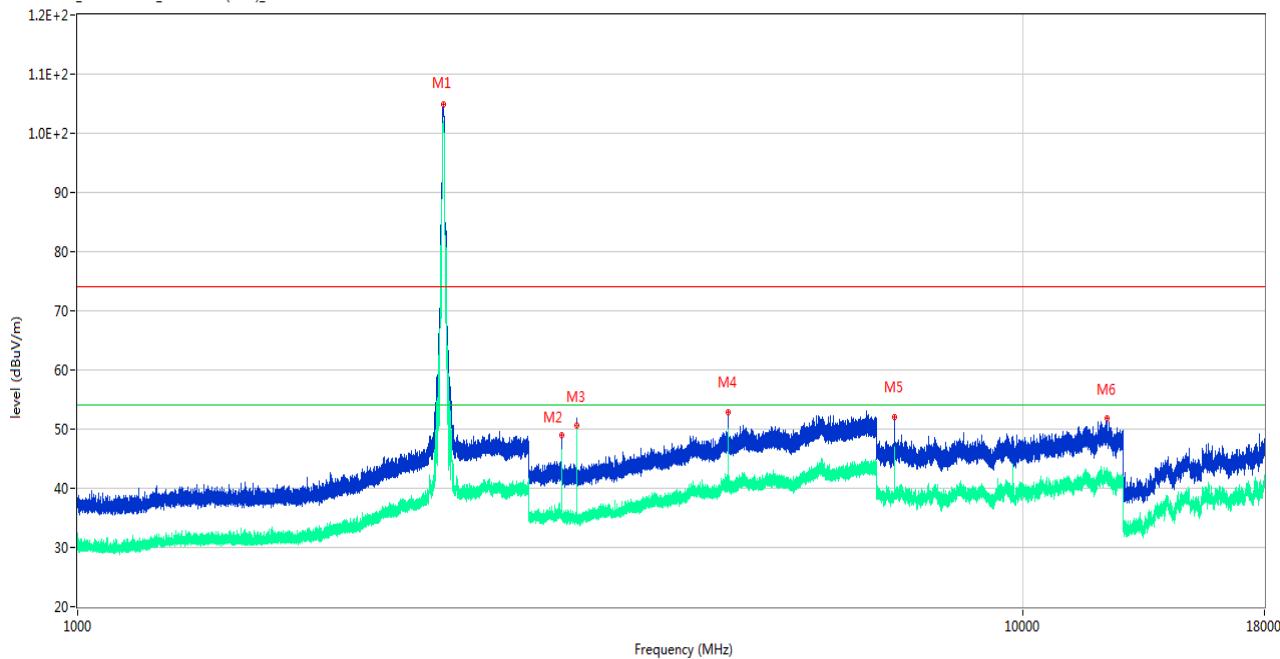

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2435.800	104.90	-13.51	74.0	30.90	Peak	0.00	150	Vertical	N/A
1**	2435.800	102.02	-13.51	54.0	48.02	AV	0.00	150	Vertical	N/A
2	3249.400	49.08	-8.70	74.0	-24.92	Peak	0.00	150	Vertical	Pass
2**	3249.400	46.53	-8.70	54.0	-7.47	AV	0.00	150	Vertical	Pass
3	3370.200	51.59	-9.38	74.0	-22.41	Peak	339.00	150	Vertical	Pass
3**	3370.200	50.61	-9.38	54.0	-3.39	AV	339.00	150	Vertical	Pass
4	4874.000	52.95	-4.01	74.0	-21.05	Peak	197.00	150	Vertical	Pass
4**	4874.000	49.41	-4.01	54.0	-4.59	AV	197.00	150	Vertical	Pass
5	7309.925	52.03	-5.13	74.0	-21.97	Peak	302.00	150	Vertical	Pass
5**	7309.925	46.60	-5.13	54.0	-7.40	AV	302.00	150	Vertical	Pass
6	12260.963	51.88	0.04	74.0	-22.12	Peak	268.00	150	Vertical	Pass
6**	12260.963	42.51	0.04	54.0	-11.49	AV	268.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11b High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

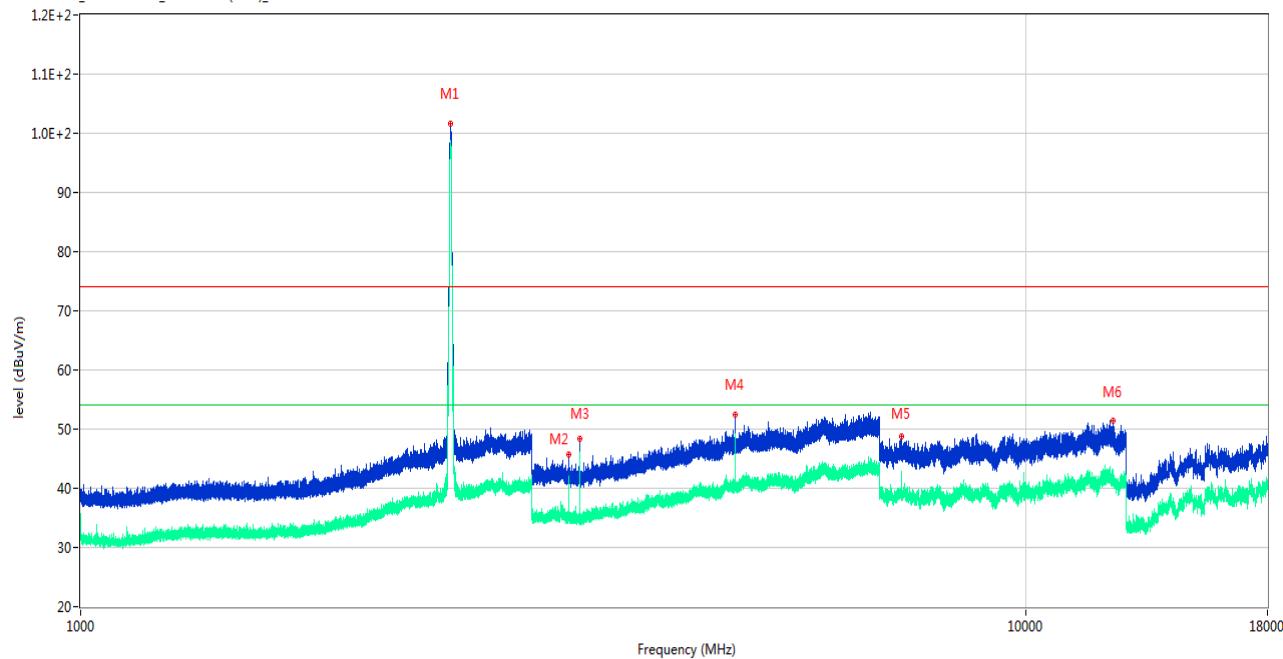

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2463.200	101.63	-13.87	74.0	27.63	Peak	339.00	150	Horizontal	N/A
1**	2463.200	98.74	-13.87	54.0	44.74	AV	339.00	150	Horizontal	N/A
2	3282.600	45.73	-9.14	74.0	-28.27	Peak	88.00	150	Horizontal	Pass
2**	3282.600	41.89	-9.14	54.0	-12.11	AV	88.00	150	Horizontal	Pass
3	3370.000	48.27	-9.38	74.0	-25.73	Peak	113.00	150	Horizontal	Pass
3**	3370.000	46.04	-9.38	54.0	-7.96	AV	113.00	150	Horizontal	Pass
4	4923.800	52.47	-4.13	74.0	-21.53	Peak	344.00	150	Horizontal	Pass
4**	4923.800	46.95	-4.13	54.0	-7.05	AV	344.00	150	Horizontal	Pass
5	7388.125	48.87	-4.36	74.0	-25.13	Peak	233.00	150	Horizontal	Pass
5**	7388.125	42.23	-4.36	54.0	-11.77	AV	233.00	150	Horizontal	Pass
6	12354.113	51.52	-1.35	74.0	-22.48	Peak	289.00	150	Horizontal	Pass
6**	12354.113	41.80	-1.35	54.0	-12.20	AV	289.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11b High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

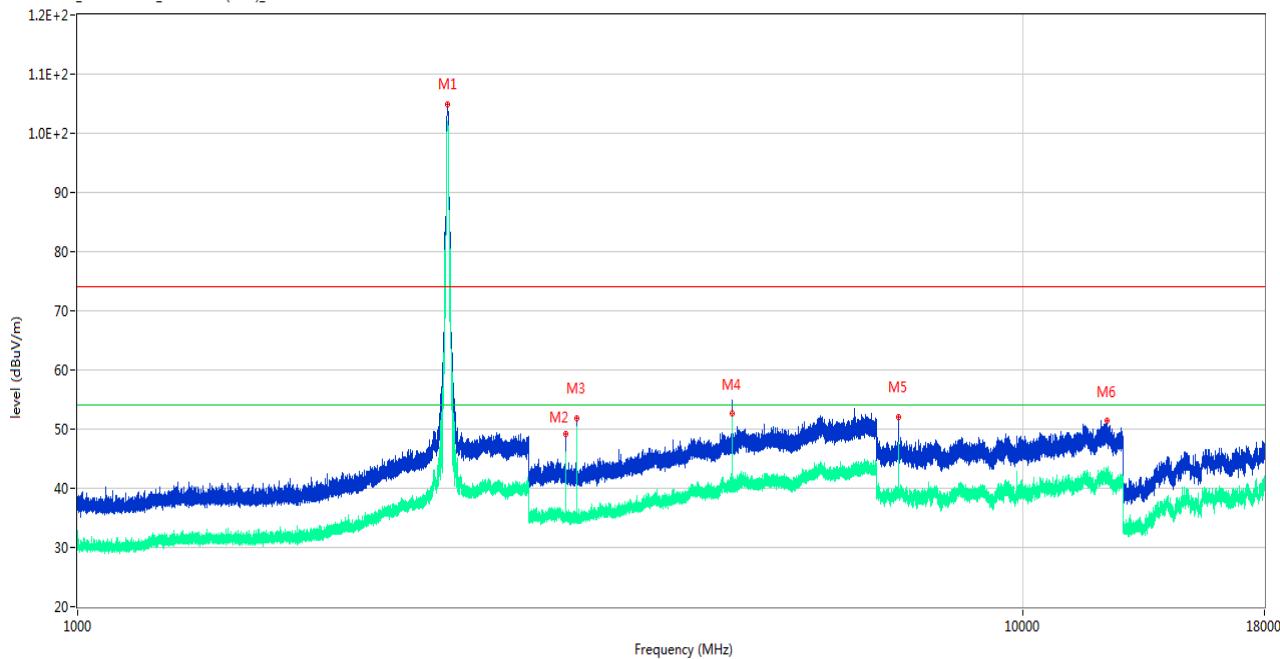

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2460.800	104.82	-13.91	74.0	30.82	Peak	220.00	150	Vertical	N/A
1**	2460.800	101.91	-13.91	54.0	47.91	AV	220.00	150	Vertical	N/A
2	3282.800	49.28	-9.14	74.0	-24.72	Peak	360.00	150	Vertical	Pass
2**	3282.800	46.11	-9.14	54.0	-7.89	AV	360.00	150	Vertical	Pass
3	3370.000	51.87	-9.38	74.0	-22.13	Peak	344.00	150	Vertical	Pass
3**	3370.000	50.06	-9.38	54.0	-3.94	AV	344.00	150	Vertical	Pass
4	4924.200	54.30	-4.12	74.0	-19.70	Peak	344.00	150	Vertical	Pass
4**	4924.200	52.57	-4.12	54.0	-1.43	AV	344.00	150	Vertical	Pass
5	7383.813	52.13	-4.58	74.0	-21.87	Peak	288.00	150	Vertical	Pass
5**	7383.813	45.87	-4.58	54.0	-8.13	AV	288.00	150	Vertical	Pass
6	12269.013	51.39	0.06	74.0	-22.61	Peak	103.00	150	Vertical	Pass
6**	12269.013	42.09	0.06	54.0	-11.91	AV	103.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11g Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

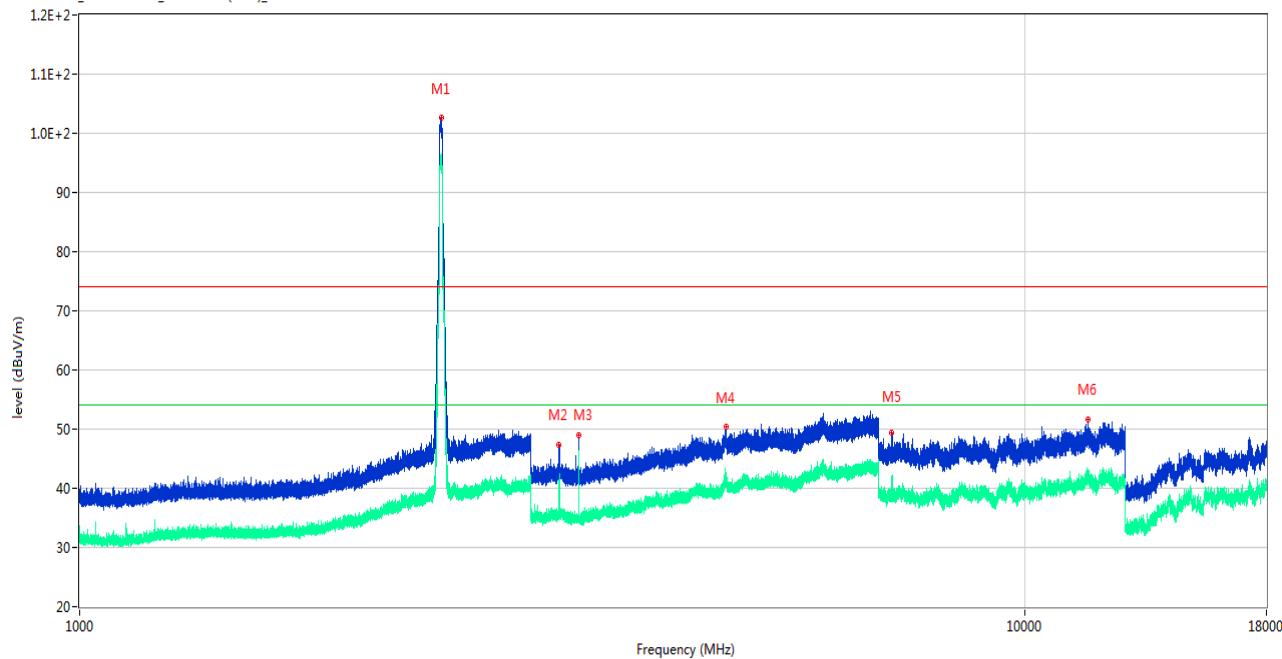

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2411.100	102.62	-13.46	74.0	28.62	Peak	339.00	150	Horizontal	N/A
1**	2411.100	96.48	-13.46	54.0	42.48	AV	339.00	150	Horizontal	N/A
2	3215.800	47.41	-8.53	74.0	-26.59	Peak	264.00	150	Horizontal	Pass
2**	3215.800	40.85	-8.53	54.0	-13.15	AV	264.00	150	Horizontal	Pass
3	3370.200	49.04	-9.38	74.0	-24.96	Peak	124.00	150	Horizontal	Pass
3**	3370.200	46.16	-9.38	54.0	-7.84	AV	124.00	150	Horizontal	Pass
4	4829.000	50.32	-4.12	74.0	-23.68	Peak	66.00	150	Horizontal	Pass
4**	4829.000	42.16	-4.12	54.0	-11.84	AV	66.00	150	Horizontal	Pass
5	7232.013	49.42	-4.48	74.0	-24.58	Peak	246.00	150	Horizontal	Pass
5**	7232.013	40.55	-4.48	54.0	-13.45	AV	246.00	150	Horizontal	Pass
6	11659.225	51.69	-0.46	74.0	-22.31	Peak	360.00	150	Horizontal	Pass
6**	11659.225	41.45	-0.46	54.0	-12.55	AV	360.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11g Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

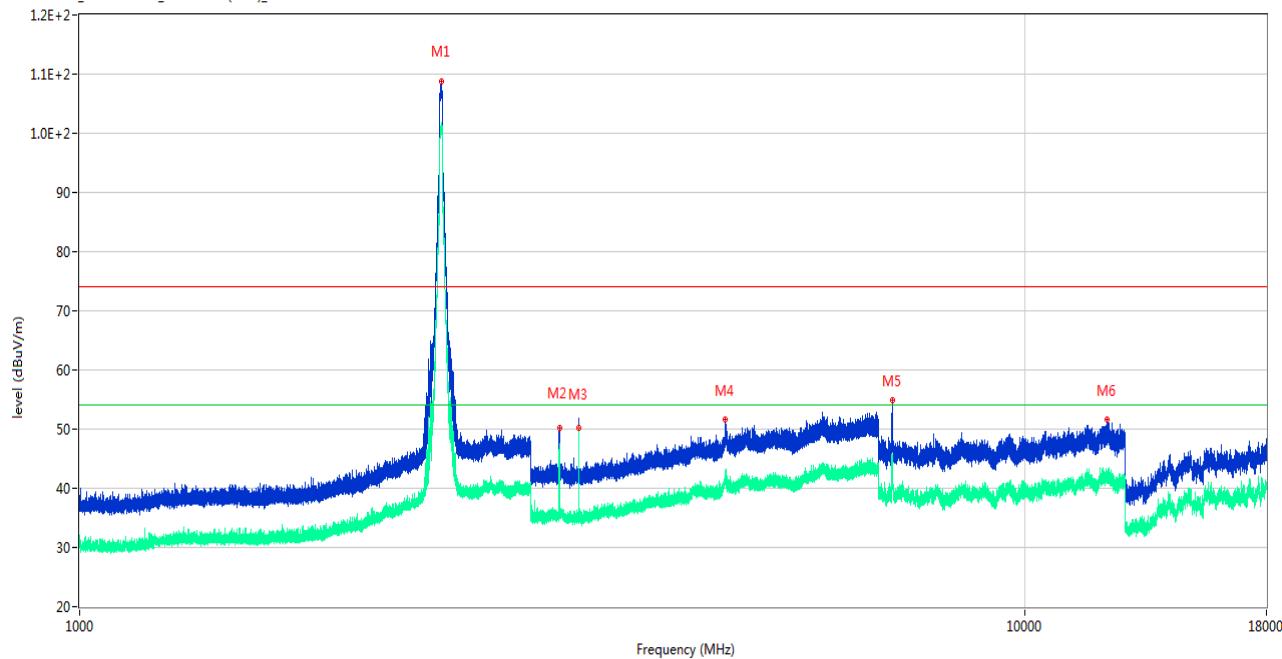

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2413.200	108.86	-13.52	74.0	34.86	Peak	226.00	150	Vertical	N/A
1**	2413.200	101.45	-13.52	54.0	47.45	AV	226.00	150	Vertical	N/A
2	3216.200	50.30	-8.48	74.0	-23.70	Peak	115.00	150	Vertical	Pass
2**	3216.200	47.55	-8.48	54.0	-6.45	AV	115.00	150	Vertical	Pass
3	3370.000	51.63	-9.38	74.0	-22.37	Peak	360.00	150	Vertical	Pass
3**	3370.000	50.21	-9.38	54.0	-3.79	AV	360.00	150	Vertical	Pass
4	4819.400	51.57	-4.24	74.0	-22.43	Peak	307.00	150	Vertical	Pass
4**	4819.400	41.85	-4.24	54.0	-12.15	AV	307.00	150	Vertical	Pass
5	7237.475	54.96	-4.49	74.0	-19.04	Peak	281.00	150	Vertical	Pass
5**	7237.475	42.53	-4.49	54.0	-11.47	AV	281.00	150	Vertical	Pass
6	12208.638	51.56	-0.54	74.0	-22.44	Peak	75.00	150	Vertical	Pass
6**	12208.638	41.96	-0.54	54.0	-12.04	AV	75.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11g Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

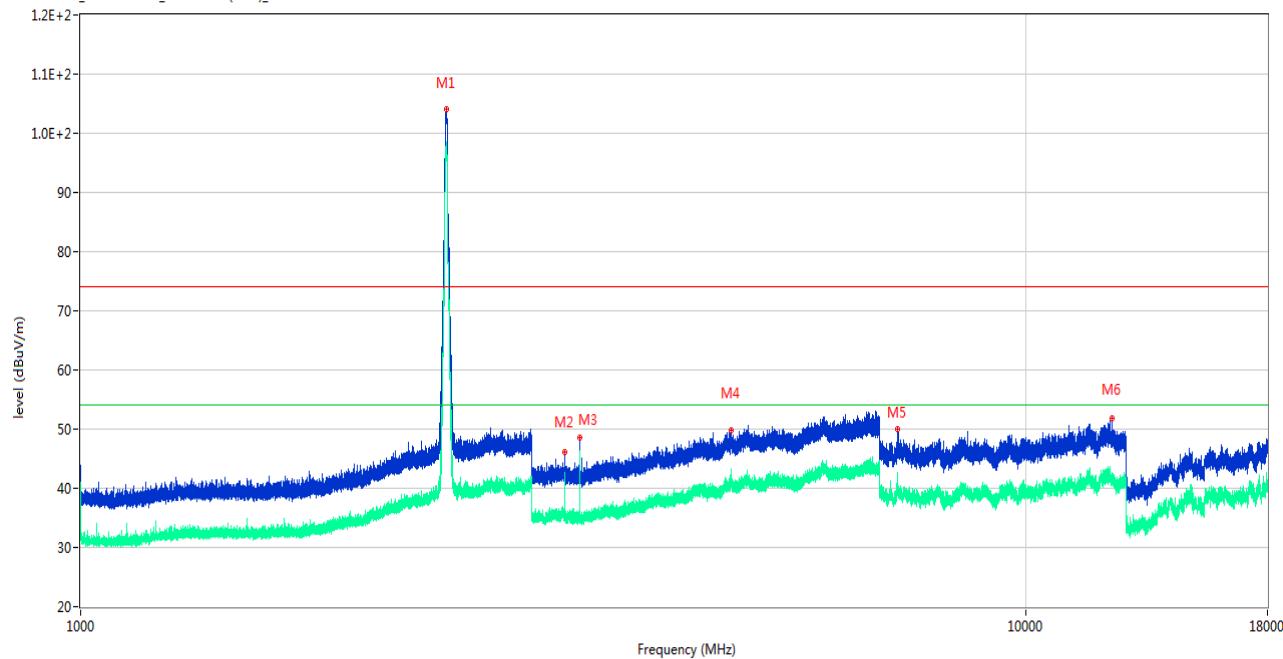

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2438.500	104.11	-13.38	74.0	30.11	Peak	0.00	150	Horizontal	N/A
1**	2438.500	96.99	-13.38	54.0	42.99	AV	0.00	150	Horizontal	N/A
2	3249.400	46.15	-8.70	74.0	-27.85	Peak	72.00	150	Horizontal	Pass
2**	3249.400	42.56	-8.70	54.0	-11.44	AV	72.00	150	Horizontal	Pass
3	3370.000	48.65	-9.38	74.0	-25.35	Peak	130.00	150	Horizontal	Pass
3**	3370.000	45.96	-9.38	54.0	-8.04	AV	130.00	150	Horizontal	Pass
4	4876.800	49.86	-4.03	74.0	-24.14	Peak	261.00	150	Horizontal	Pass
4**	4876.800	42.47	-4.03	54.0	-11.53	AV	261.00	150	Horizontal	Pass
5	7309.350	49.94	-5.07	74.0	-24.06	Peak	235.00	150	Horizontal	Pass
5**	7309.350	39.92	-5.07	54.0	-14.08	AV	235.00	150	Horizontal	Pass
6	12336.287	51.84	-0.86	74.0	-22.16	Peak	117.00	150	Horizontal	Pass
6**	12336.287	42.10	-0.86	54.0	-11.90	AV	117.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11g Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

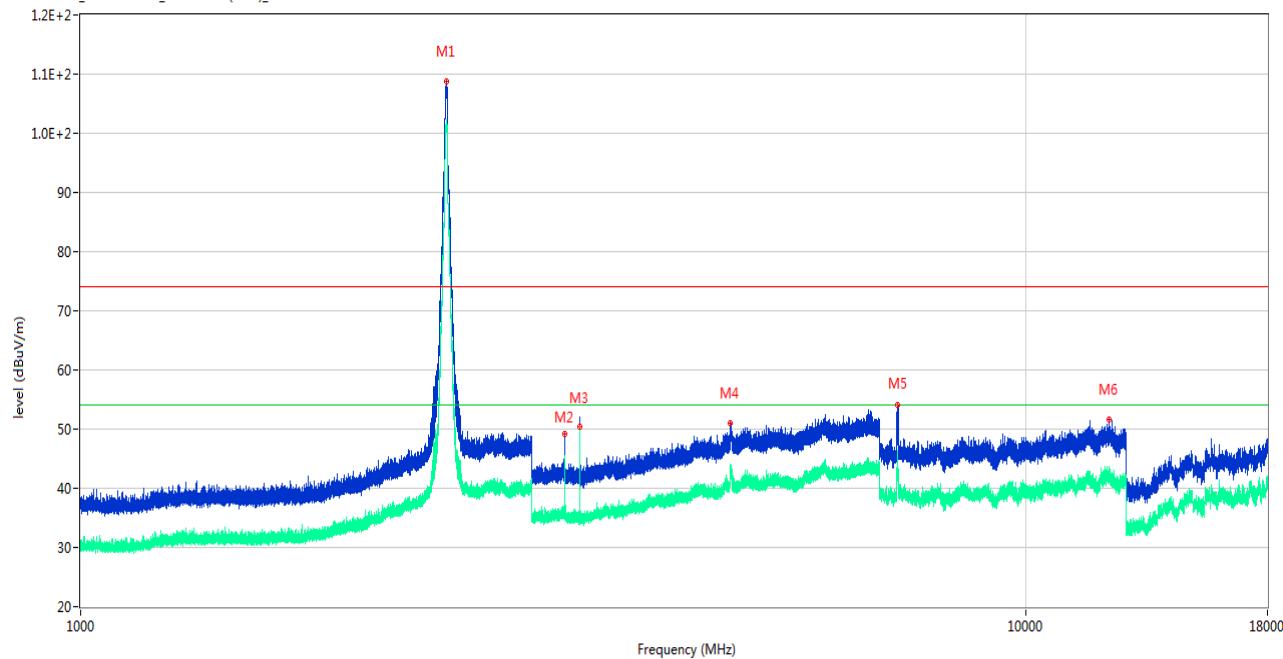

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2438.500	108.86	-13.38	74.0	34.86	Peak	350.00	150	Vertical	N/A
1**	2438.500	101.67	-13.38	54.0	47.67	AV	350.00	150	Vertical	N/A
2	3249.400	49.09	-8.70	74.0	-24.91	Peak	360.00	150	Vertical	Pass
2**	3249.400	45.56	-8.70	54.0	-8.44	AV	360.00	150	Vertical	Pass
3	3370.400	51.07	-9.37	74.0	-22.93	Peak	340.00	150	Vertical	Pass
3**	3370.400	50.32	-9.37	54.0	-3.68	AV	340.00	150	Vertical	Pass
4	4867.800	51.08	-3.80	74.0	-22.92	Peak	25.00	150	Vertical	Pass
4**	4867.800	43.41	-3.80	54.0	-10.59	AV	25.00	150	Vertical	Pass
5	7314.812	54.12	-5.00	74.0	-19.88	Peak	285.00	150	Vertical	Pass
5**	7314.812	45.31	-5.00	54.0	-8.69	AV	285.00	150	Vertical	Pass
6	12246.587	51.63	-0.17	74.0	-22.37	Peak	99.00	150	Vertical	Pass
6**	12246.587	42.13	-0.17	54.0	-11.87	AV	99.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11g High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

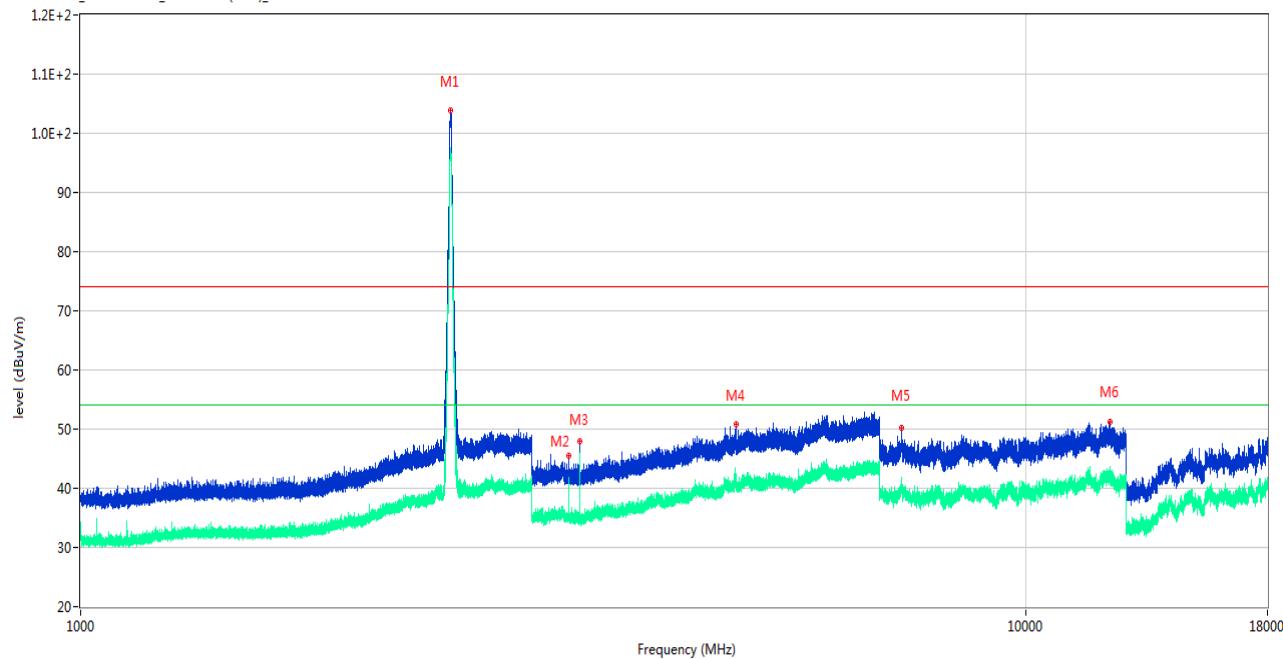

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2463.600	103.85	-13.84	74.0	29.85	Peak	331.00	150	Horizontal	N/A
1**	2463.600	96.31	-13.84	54.0	42.31	AV	331.00	150	Horizontal	N/A
2	3282.600	45.50	-9.14	74.0	-28.50	Peak	83.00	150	Horizontal	Pass
2**	3282.600	41.84	-9.14	54.0	-12.16	AV	83.00	150	Horizontal	Pass
3	3369.800	48.04	-9.39	74.0	-25.96	Peak	120.00	150	Horizontal	Pass
3**	3369.800	44.93	-9.39	54.0	-9.07	AV	120.00	150	Horizontal	Pass
4	4930.800	50.80	-4.08	74.0	-23.20	Peak	342.00	150	Horizontal	Pass
4**	4930.800	40.45	-4.08	54.0	-13.55	AV	342.00	150	Horizontal	Pass
5	7388.700	50.15	-4.30	74.0	-23.85	Peak	239.00	150	Horizontal	Pass
5**	7388.700	41.90	-4.30	54.0	-12.10	AV	239.00	150	Horizontal	Pass
6	12264.700	51.30	0.05	74.0	-22.70	Peak	115.00	150	Horizontal	Pass
6**	12264.700	41.55	0.05	54.0	-12.45	AV	115.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11g High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

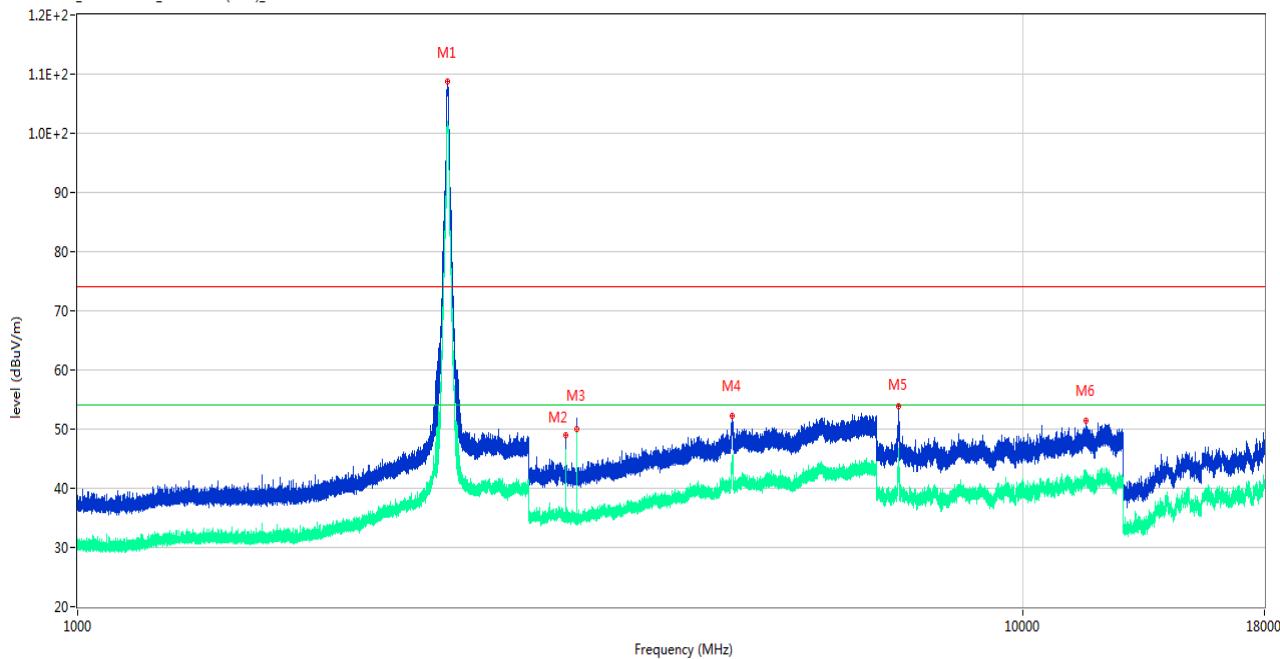

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2462.900	108.77	-13.88	74.0	34.77	Peak	41.00	150	Vertical	N/A
1**	2462.900	101.06	-13.88	54.0	47.06	AV	41.00	150	Vertical	N/A
2	3282.600	48.96	-9.14	74.0	-25.04	Peak	0.00	150	Vertical	Pass
2**	3282.600	46.07	-9.14	54.0	-7.93	AV	0.00	150	Vertical	Pass
3	3370.000	51.78	-9.38	74.0	-22.22	Peak	330.00	150	Vertical	Pass
3**	3370.000	50.00	-9.38	54.0	-4.00	AV	330.00	150	Vertical	Pass
4	4922.600	52.29	-4.14	74.0	-21.71	Peak	34.00	150	Vertical	Pass
4**	4922.600	44.16	-4.14	54.0	-9.84	AV	34.00	150	Vertical	Pass
5	7387.550	53.88	-4.44	74.0	-20.12	Peak	293.00	150	Vertical	Pass
5**	7387.550	44.82	-4.44	54.0	-9.18	AV	293.00	150	Vertical	Pass
6	11654.050	51.34	-0.39	74.0	-22.66	Peak	116.00	150	Vertical	Pass
6**	11654.050	42.35	-0.39	54.0	-11.65	AV	116.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

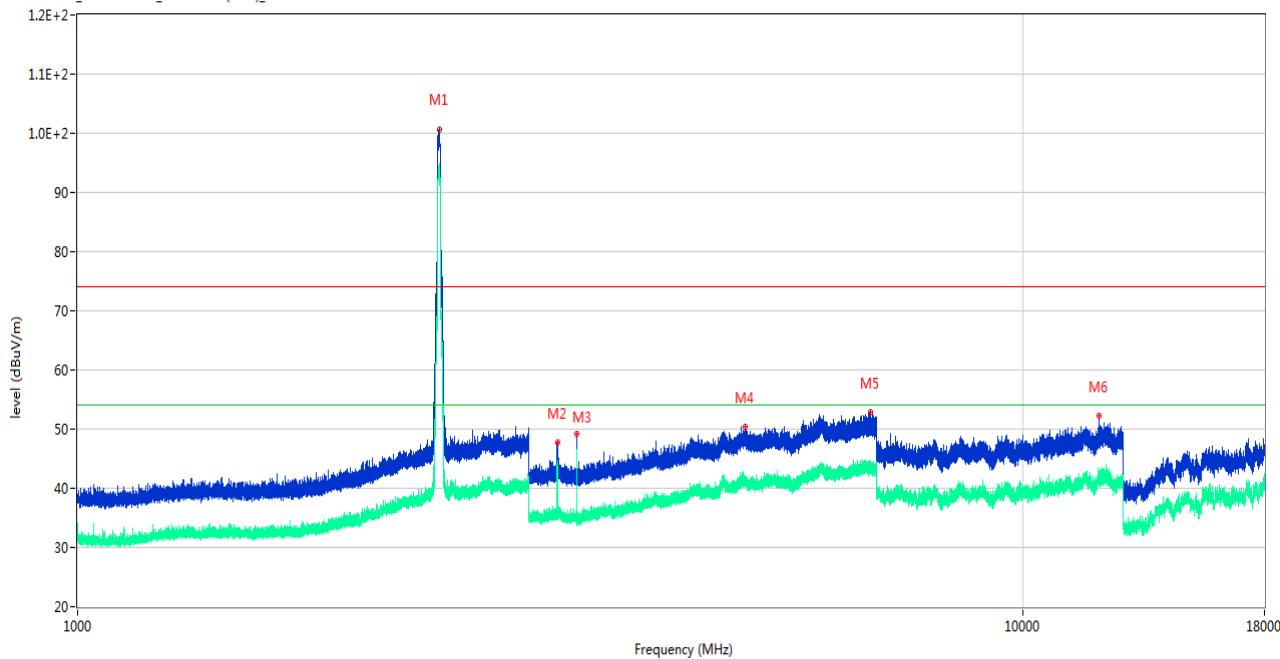

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2411.100	100.57	-13.46	74.0	26.57	Peak	341.00	150	Horizontal	N/A
1**	2411.100	94.96	-13.46	54.0	40.96	AV	341.00	150	Horizontal	N/A
2	3216.000	47.66	-8.51	74.0	-26.34	Peak	248.00	150	Horizontal	Pass
2**	3216.000	44.01	-8.51	54.0	-9.99	AV	248.00	150	Horizontal	Pass
3	3370.000	49.10	-9.38	74.0	-24.90	Peak	121.00	150	Horizontal	Pass
3**	3370.000	45.74	-9.38	54.0	-8.26	AV	121.00	150	Horizontal	Pass
4	5083.000	50.39	-3.57	74.0	-23.61	Peak	360.00	150	Horizontal	Pass
4**	5083.000	41.37	-3.57	54.0	-12.63	AV	360.00	150	Horizontal	Pass
5	6903.600	52.80	-2.06	74.0	-21.20	Peak	35.00	150	Horizontal	Pass
5**	6903.600	43.96	-2.06	54.0	-10.04	AV	35.00	150	Horizontal	Pass
6	12021.474	52.17	-1.20	74.0	-21.83	Peak	221.00	150	Horizontal	Pass
6**	12021.474	41.28	-1.20	54.0	-12.72	AV	221.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

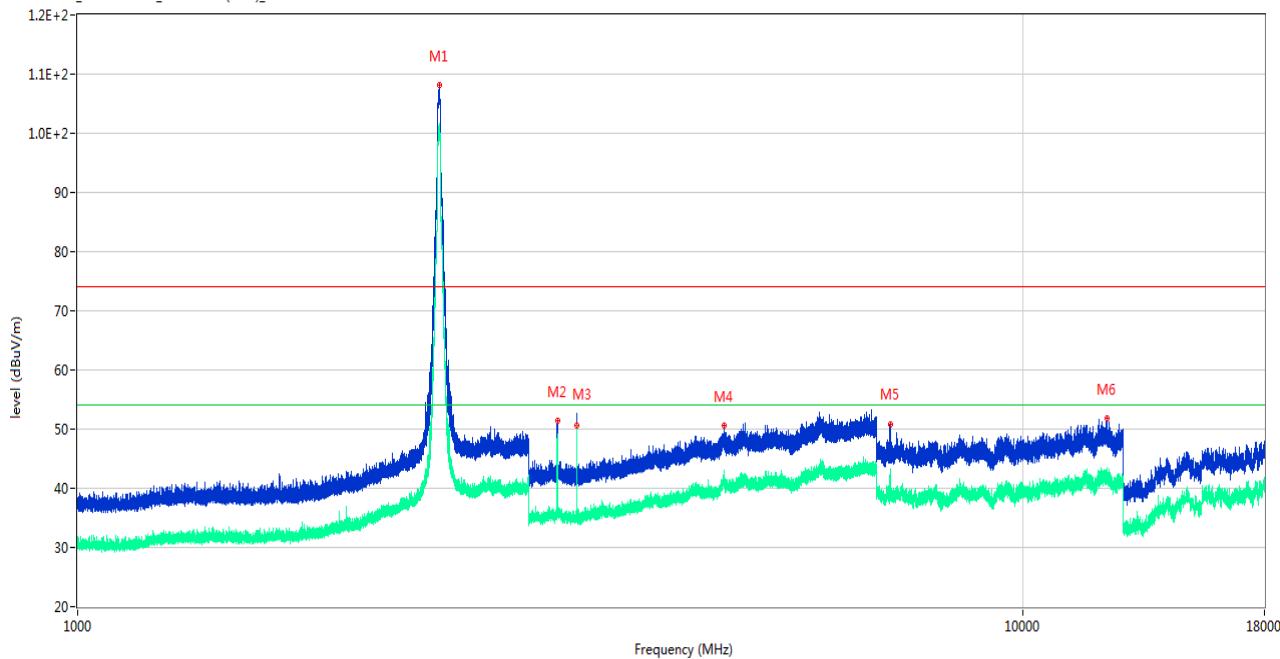

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2413.000	108.09	-13.52	74.0	34.09	Peak	46.00	150	Vertical	N/A
1**	2413.000	100.54	-13.52	54.0	46.54	AV	46.00	150	Vertical	N/A
2	3216.000	51.41	-8.51	74.0	-22.59	Peak	21.00	150	Vertical	Pass
2**	3216.000	49.10	-8.51	54.0	-4.90	AV	21.00	150	Vertical	Pass
3	3370.200	51.57	-9.38	74.0	-22.43	Peak	343.00	150	Vertical	Pass
3**	3370.200	50.58	-9.38	54.0	-3.42	AV	343.00	150	Vertical	Pass
4	4828.200	50.53	-4.14	74.0	-23.47	Peak	196.00	150	Vertical	Pass
4**	4828.200	41.20	-4.14	54.0	-12.80	AV	196.00	150	Vertical	Pass
5	7232.587	50.88	-4.47	74.0	-23.12	Peak	293.00	150	Vertical	Pass
5**	7232.587	40.90	-4.47	54.0	-13.10	AV	293.00	150	Vertical	Pass
6	12269.013	51.90	0.06	74.0	-22.10	Peak	184.00	150	Vertical	Pass
6**	12269.013	42.32	0.06	54.0	-11.68	AV	184.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

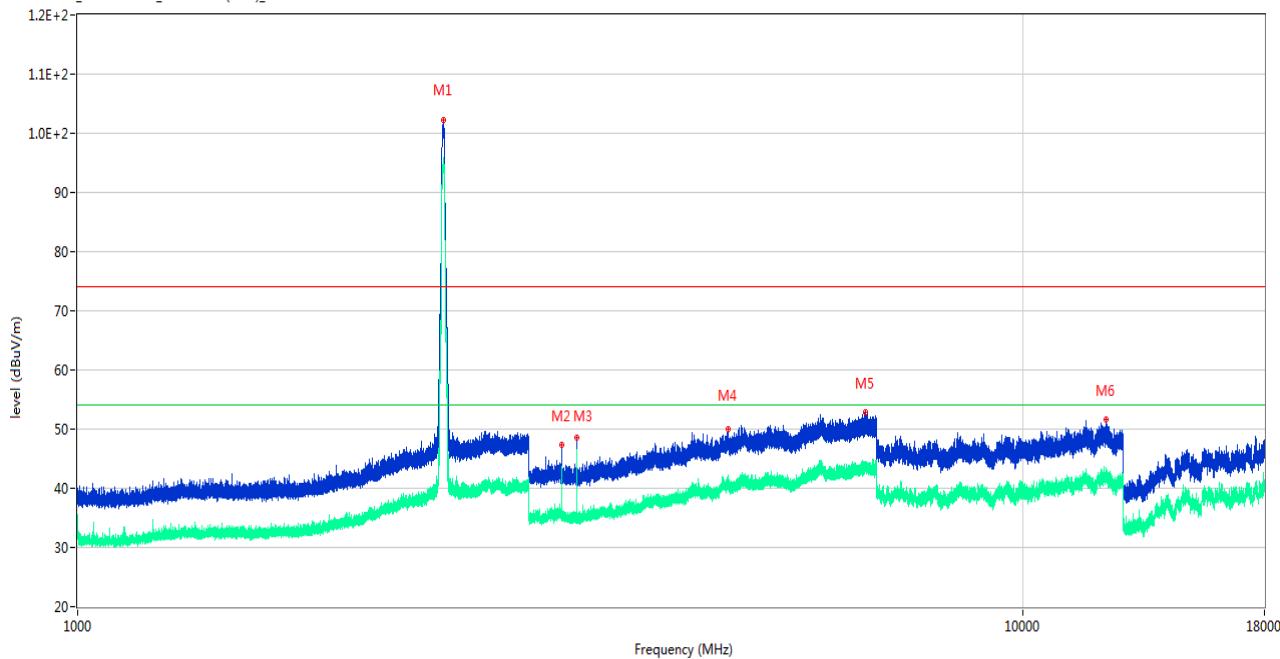

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2435.800	102.28	-13.51	74.0	28.28	Peak	340.00	150	Horizontal	N/A
1**	2435.800	95.89	-13.51	54.0	41.89	AV	340.00	150	Horizontal	N/A
2	3249.200	47.30	-8.68	74.0	-26.70	Peak	248.00	150	Horizontal	Pass
2**	3249.200	42.89	-8.68	54.0	-11.11	AV	248.00	150	Horizontal	Pass
3	3370.000	48.65	-9.38	74.0	-25.35	Peak	121.00	150	Horizontal	Pass
3**	3370.000	46.53	-9.38	54.0	-7.47	AV	121.00	150	Horizontal	Pass
4	4878.800	50.05	-4.07	74.0	-23.95	Peak	59.00	150	Horizontal	Pass
4**	4878.800	40.81	-4.07	54.0	-13.19	AV	59.00	150	Horizontal	Pass
5	6814.400	52.80	-1.33	74.0	-21.20	Peak	310.00	150	Horizontal	Pass
5**	6814.400	44.16	-1.33	54.0	-9.84	AV	310.00	150	Horizontal	Pass
6	12234.512	51.69	-0.31	74.0	-22.31	Peak	346.00	150	Horizontal	Pass
6**	12234.512	41.28	-0.31	54.0	-12.72	AV	346.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

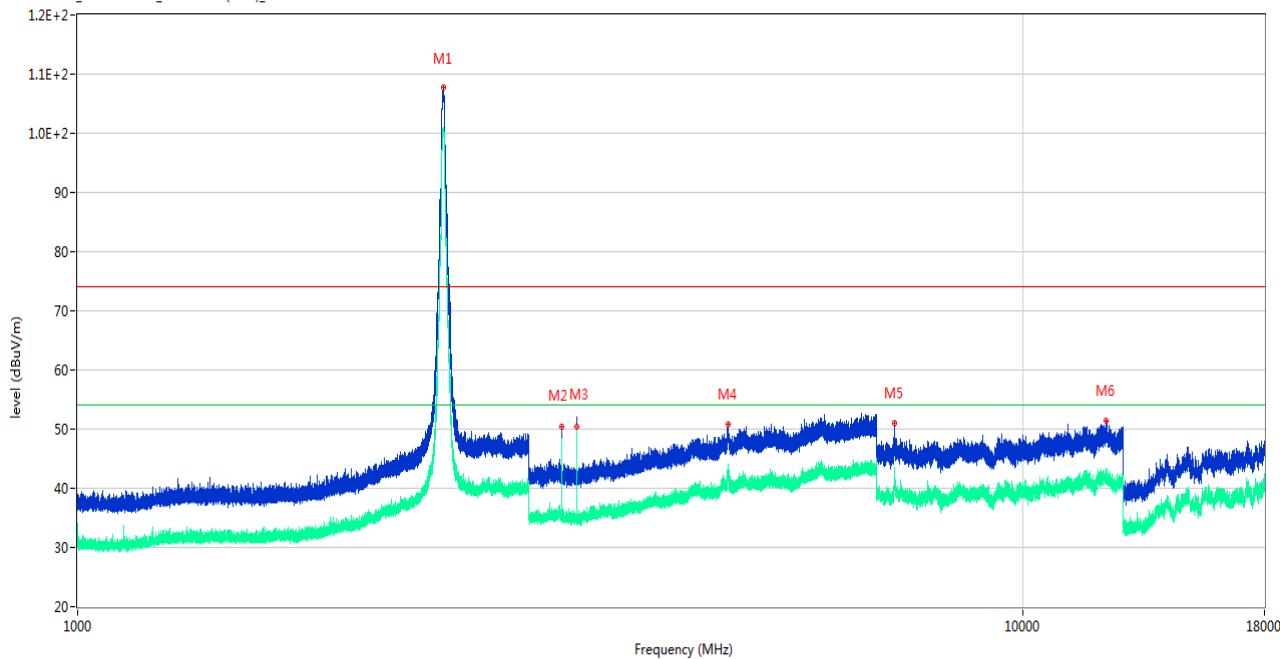

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2438.400	107.73	-13.37	74.0	33.73	Peak	53.00	150	Vertical	N/A
1**	2438.400	100.31	-13.37	54.0	46.31	AV	53.00	150	Vertical	N/A
2	3249.000	50.40	-8.67	74.0	-23.60	Peak	34.00	150	Vertical	Pass
2**	3249.000	44.88	-8.67	54.0	-9.12	AV	34.00	150	Vertical	Pass
3	3370.200	51.37	-9.38	74.0	-22.63	Peak	349.00	150	Vertical	Pass
3**	3370.200	50.36	-9.38	54.0	-3.64	AV	349.00	150	Vertical	Pass
4	4871.800	50.86	-3.92	74.0	-23.14	Peak	349.00	150	Vertical	Pass
4**	4871.800	43.12	-3.92	54.0	-10.88	AV	349.00	150	Vertical	Pass
5	7308.200	51.11	-4.97	74.0	-22.89	Peak	292.00	150	Vertical	Pass
5**	7308.200	41.69	-4.97	54.0	-12.31	AV	292.00	150	Vertical	Pass
6	12231.063	51.49	-0.30	74.0	-22.51	Peak	146.00	150	Vertical	Pass
6**	12231.063	42.63	-0.30	54.0	-11.37	AV	146.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

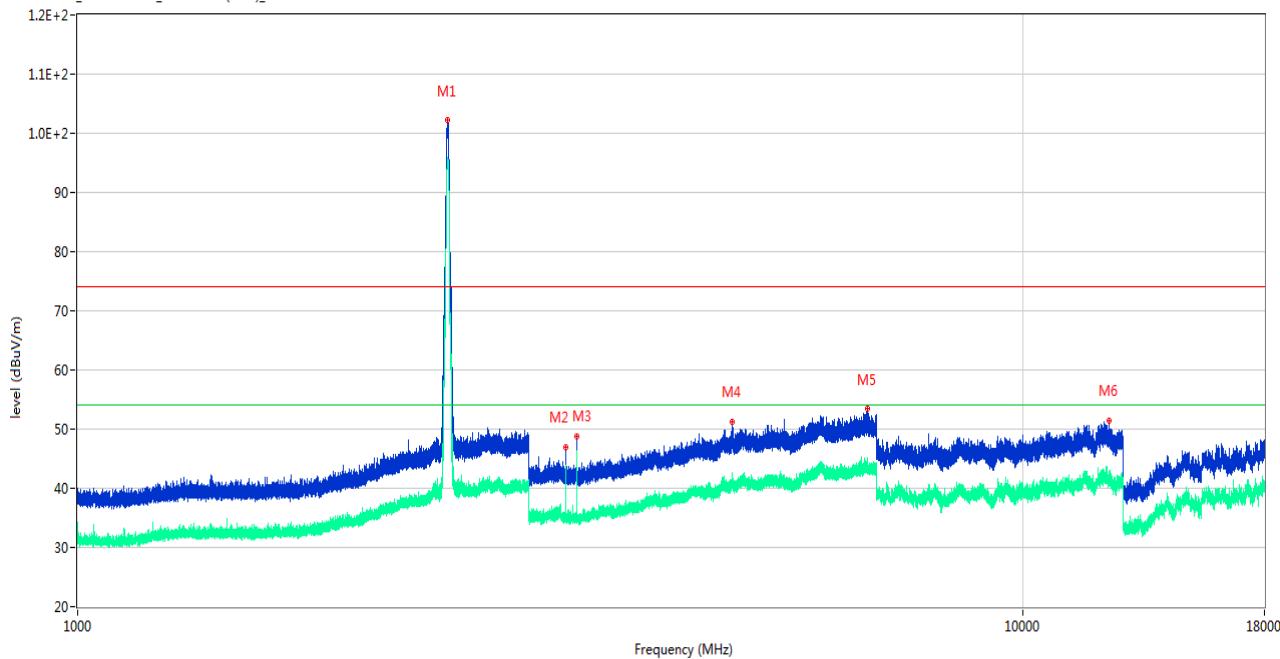

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2462.900	102.15	-13.88	74.0	28.15	Peak	316.00	150	Horizontal	N/A
1**	2462.900	95.04	-13.88	54.0	41.04	AV	316.00	150	Horizontal	N/A
2	3282.800	46.88	-9.14	74.0	-27.12	Peak	83.00	150	Horizontal	Pass
2**	3282.800	43.86	-9.14	54.0	-10.14	AV	83.00	150	Horizontal	Pass
3	3370.000	48.70	-9.38	74.0	-25.30	Peak	132.00	150	Horizontal	Pass
3**	3370.000	46.32	-9.38	54.0	-7.68	AV	132.00	150	Horizontal	Pass
4	4928.800	51.26	-4.10	74.0	-22.74	Peak	256.00	150	Horizontal	Pass
4**	4928.800	42.16	-4.10	54.0	-11.84	AV	256.00	150	Horizontal	Pass
5	6848.000	53.41	-1.41	74.0	-20.59	Peak	330.00	150	Horizontal	Pass
5**	6848.000	42.93	-1.41	54.0	-11.07	AV	330.00	150	Horizontal	Pass
6	12329.099	51.42	-0.65	74.0	-22.58	Peak	202.00	150	Horizontal	Pass
6**	12329.099	42.06	-0.65	54.0	-11.94	AV	202.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

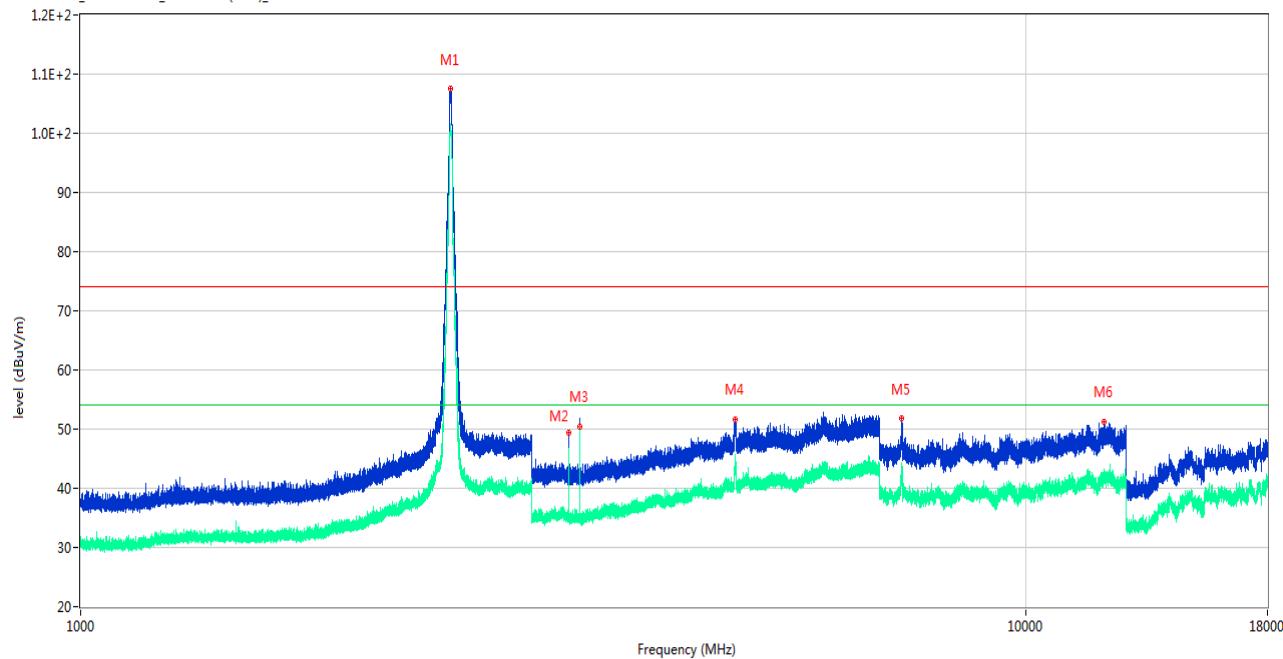

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2460.700	107.55	-13.91	74.0	33.55	Peak	63.00	150	Vertical	N/A
1**	2460.700	100.44	-13.91	54.0	46.44	AV	63.00	150	Vertical	N/A
2	3282.800	49.34	-9.14	74.0	-24.66	Peak	9.00	150	Vertical	Pass
2**	3282.800	46.50	-9.14	54.0	-7.50	AV	9.00	150	Vertical	Pass
3	3370.200	51.23	-9.38	74.0	-22.77	Peak	355.00	150	Vertical	Pass
3**	3370.200	50.39	-9.38	54.0	-3.61	AV	355.00	150	Vertical	Pass
4	4920.400	51.65	-4.19	74.0	-22.35	Peak	355.00	150	Vertical	Pass
4**	4920.400	42.72	-4.19	54.0	-11.28	AV	355.00	150	Vertical	Pass
5	7375.475	51.82	-4.84	74.0	-22.18	Peak	292.00	150	Vertical	Pass
5**	7375.475	40.60	-4.84	54.0	-13.40	AV	292.00	150	Vertical	Pass
6	12104.849	51.31	-0.94	74.0	-22.69	Peak	292.00	150	Vertical	Pass
6**	12104.849	42.47	-0.94	54.0	-11.53	AV	292.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

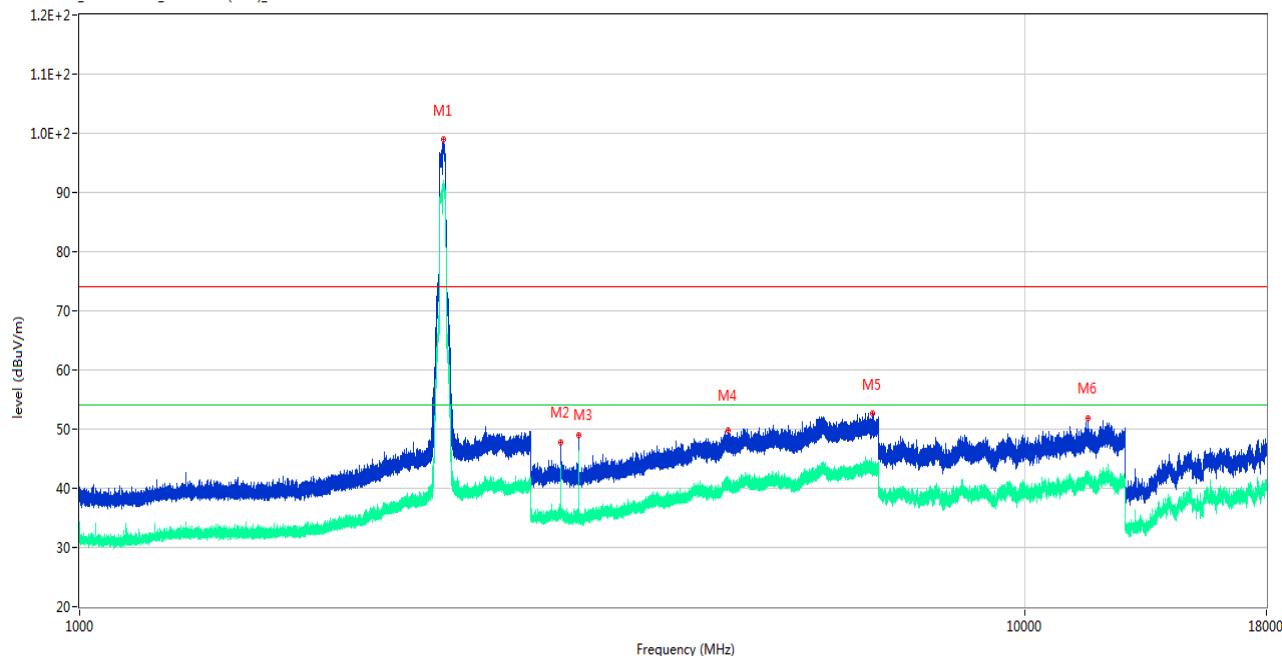

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2424.100	98.92	-13.72	74.0	24.92	Peak	334.00	150	Horizontal	N/A
1**	2424.100	91.55	-13.72	54.0	37.55	AV	334.00	150	Horizontal	N/A
2	3229.000	47.85	-7.50	74.0	-26.15	Peak	259.00	150	Horizontal	Pass
2**	3229.000	41.20	-7.50	54.0	-12.80	AV	259.00	150	Horizontal	Pass
3	3370.200	48.98	-9.38	74.0	-25.02	Peak	122.00	150	Horizontal	Pass
3**	3370.200	46.34	-9.38	54.0	-7.66	AV	122.00	150	Horizontal	Pass
4	4846.400	49.82	-3.83	74.0	-24.18	Peak	337.00	150	Horizontal	Pass
4**	4846.400	40.39	-3.83	54.0	-13.61	AV	337.00	150	Horizontal	Pass
5	6902.800	52.70	-2.07	74.0	-21.30	Peak	134.00	150	Horizontal	Pass
5**	6902.800	43.38	-2.07	54.0	-10.62	AV	134.00	150	Horizontal	Pass
6	11656.350	51.88	-0.42	74.0	-22.12	Peak	75.00	150	Horizontal	Pass
6**	11656.350	42.11	-0.42	54.0	-11.89	AV	75.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

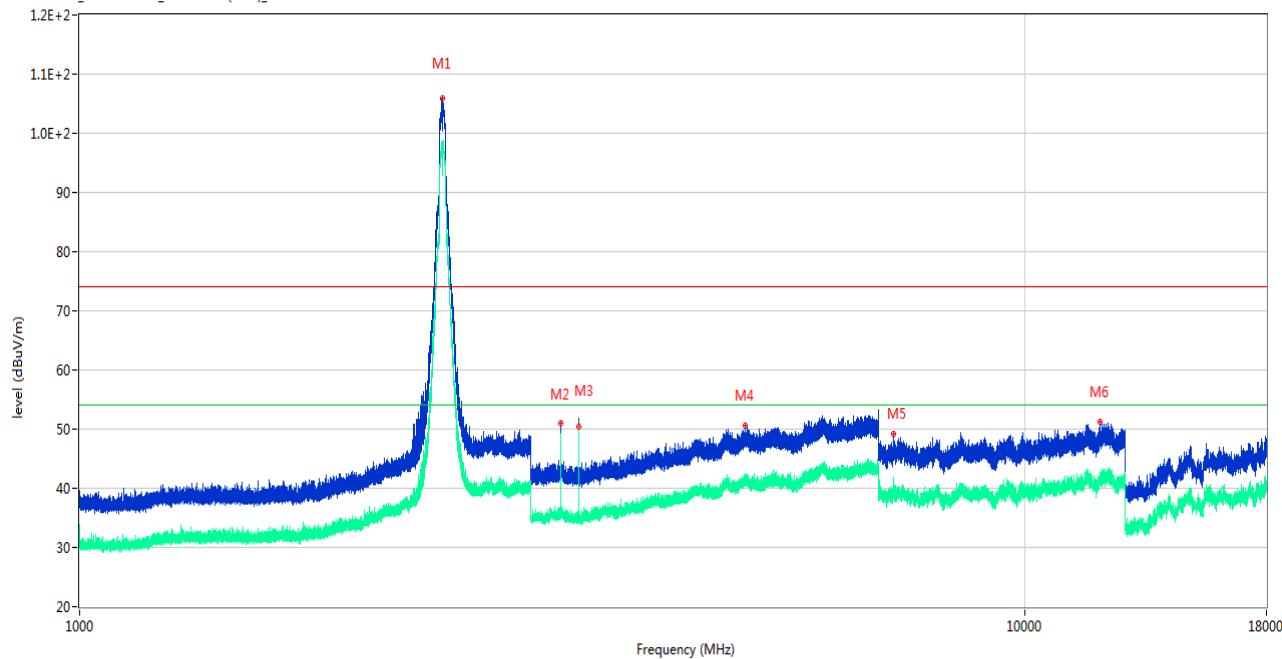

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2420.600	105.84	-13.68	74.0	31.84	Peak	220.00	150	Vertical	N/A
1**	2420.600	97.46	-13.68	54.0	43.46	AV	220.00	150	Vertical	N/A
2	3229.200	51.00	-7.51	74.0	-23.00	Peak	37.00	150	Vertical	Pass
2**	3229.200	47.94	-7.51	54.0	-6.06	AV	37.00	150	Vertical	Pass
3	3370.200	51.62	-9.38	74.0	-22.38	Peak	341.00	150	Vertical	Pass
3**	3370.200	50.38	-9.38	54.0	-3.62	AV	341.00	150	Vertical	Pass
4	5063.600	50.59	-3.39	74.0	-23.41	Peak	10.00	150	Vertical	Pass
4**	5063.600	41.19	-3.39	54.0	-12.81	AV	10.00	150	Vertical	Pass
5	7261.625	49.15	-4.52	74.0	-24.85	Peak	292.00	150	Vertical	Pass
5**	7261.625	39.27	-4.52	54.0	-14.73	AV	292.00	150	Vertical	Pass
6	12011.700	51.27	-1.23	74.0	-22.73	Peak	7.00	150	Vertical	Pass
6**	12011.700	41.69	-1.23	54.0	-12.31	AV	7.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

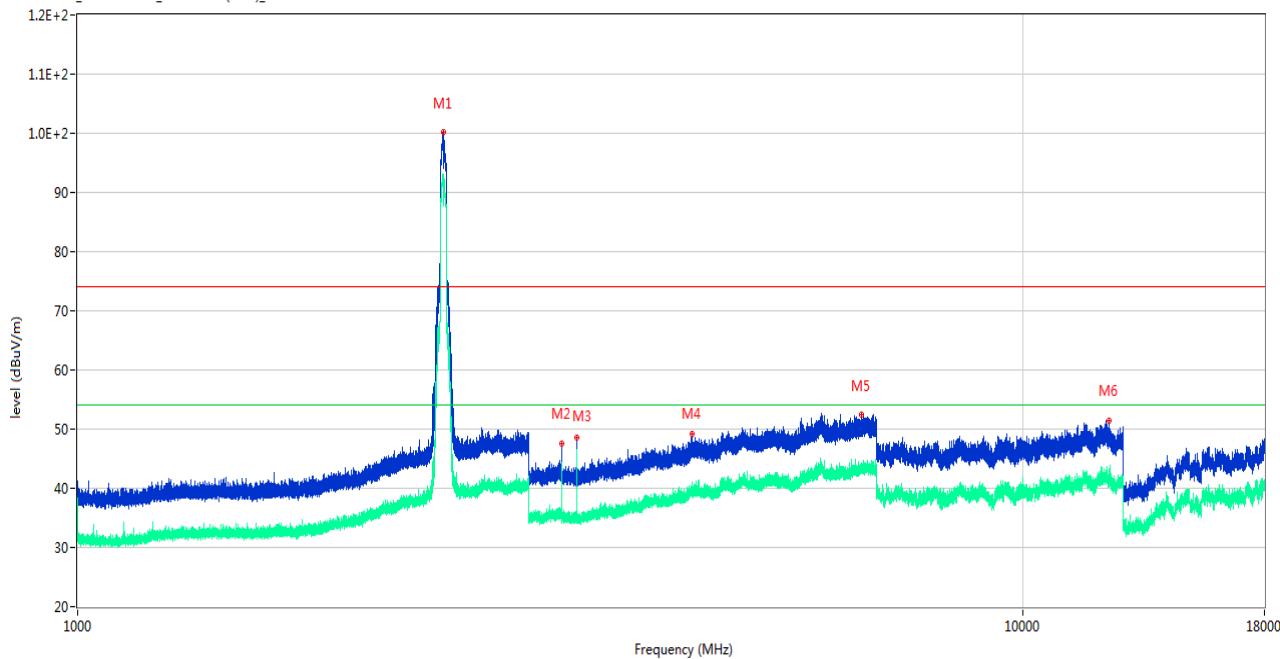

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2435.300	100.18	-13.54	74.0	26.18	Peak	336.00	150	Horizontal	N/A
1**	2435.300	92.53	-13.54	54.0	38.53	AV	336.00	150	Horizontal	N/A
2	3249.200	47.59	-8.68	74.0	-26.41	Peak	85.00	150	Horizontal	Pass
2**	3249.200	43.41	-8.68	54.0	-10.59	AV	85.00	150	Horizontal	Pass
3	3369.800	48.53	-9.39	74.0	-25.47	Peak	134.00	150	Horizontal	Pass
3**	3369.800	44.94	-9.39	54.0	-9.06	AV	134.00	150	Horizontal	Pass
4	4466.400	49.21	-4.80	74.0	-24.79	Peak	207.00	150	Horizontal	Pass
4**	4466.400	39.68	-4.80	54.0	-14.32	AV	207.00	150	Horizontal	Pass
5	6751.200	52.52	-1.49	74.0	-21.48	Peak	96.00	150	Horizontal	Pass
5**	6751.200	43.38	-1.49	54.0	-10.62	AV	96.00	150	Horizontal	Pass
6	12337.438	51.51	-0.89	74.0	-22.49	Peak	76.00	150	Horizontal	Pass
6**	12337.438	41.72	-0.89	54.0	-12.28	AV	76.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

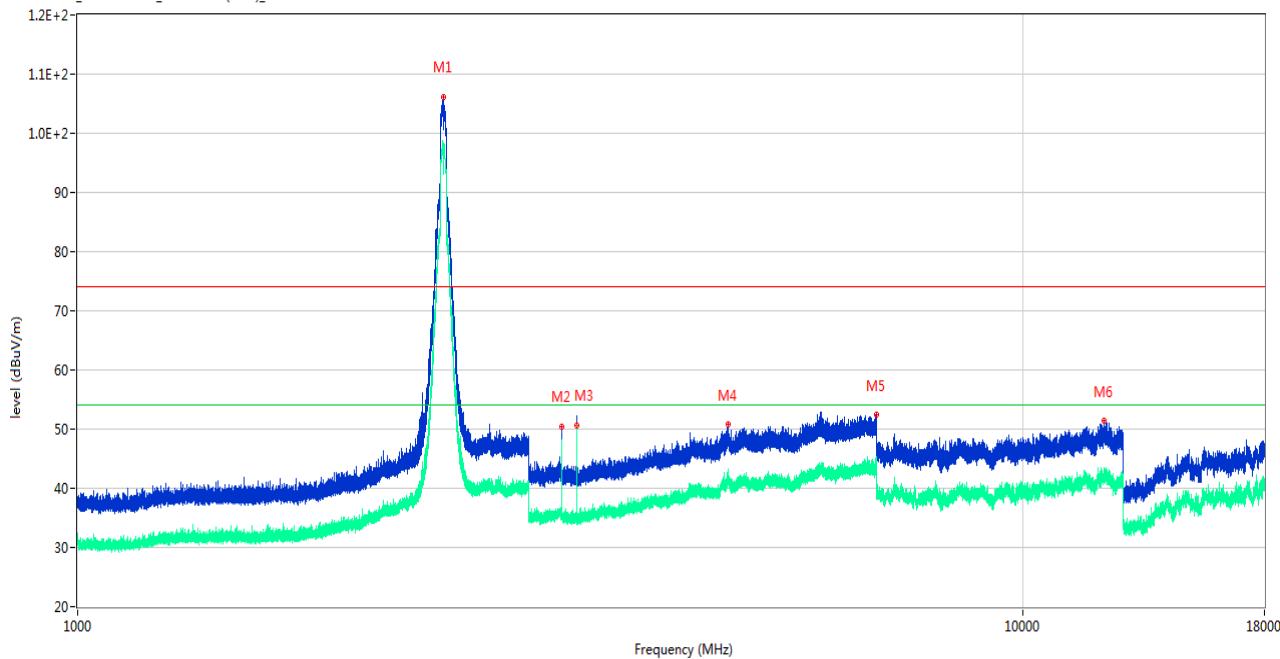

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2435.400	106.02	-13.54	74.0	32.02	Peak	341.00	150	Vertical	N/A
1**	2435.400	97.76	-13.54	54.0	43.76	AV	341.00	150	Vertical	N/A
2	3249.600	50.42	-8.70	74.0	-23.58	Peak	35.00	150	Vertical	Pass
2**	3249.600	48.07	-8.70	54.0	-5.93	AV	35.00	150	Vertical	Pass
3	3370.200	51.50	-9.38	74.0	-22.50	Peak	360.00	150	Vertical	Pass
3**	3370.200	50.53	-9.38	54.0	-3.47	AV	360.00	150	Vertical	Pass
4	4876.200	50.73	-4.04	74.0	-23.27	Peak	214.00	150	Vertical	Pass
4**	4876.200	40.93	-4.04	54.0	-13.07	AV	214.00	150	Vertical	Pass
5	6995.400	52.50	-1.26	74.0	-21.50	Peak	73.00	150	Vertical	Pass
5**	6995.400	43.36	-1.26	54.0	-10.64	AV	73.00	150	Vertical	Pass
6	12193.688	51.35	-0.82	74.0	-22.65	Peak	1.00	150	Vertical	Pass
6**	12193.688	41.43	-0.82	54.0	-12.57	AV	1.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

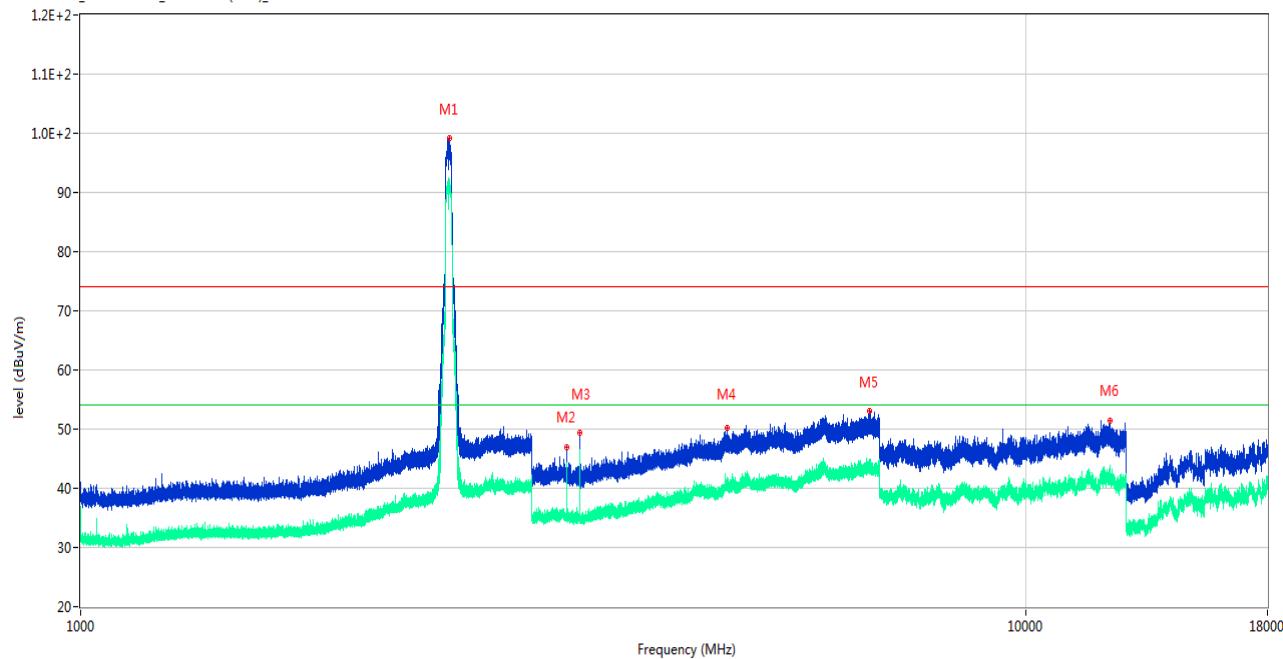

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2454.300	99.14	-13.76	74.0	25.14	Peak	326.00	150	Horizontal	N/A
1**	2454.300	91.52	-13.76	54.0	37.52	AV	326.00	150	Horizontal	N/A
2	3269.400	47.03	-9.07	74.0	-26.97	Peak	67.00	150	Horizontal	Pass
2**	3269.400	44.30	-9.07	54.0	-9.70	AV	67.00	150	Horizontal	Pass
3	3369.800	49.42	-9.39	74.0	-24.58	Peak	120.00	150	Horizontal	Pass
3**	3369.800	44.93	-9.39	54.0	-9.07	AV	120.00	150	Horizontal	Pass
4	4828.600	50.17	-4.13	74.0	-23.83	Peak	148.00	150	Horizontal	Pass
4**	4828.600	39.60	-4.13	54.0	-14.40	AV	148.00	150	Horizontal	Pass
5	6826.800	53.08	-1.53	74.0	-20.92	Peak	175.00	150	Horizontal	Pass
5**	6826.800	44.17	-1.53	54.0	-9.83	AV	175.00	150	Horizontal	Pass
6	12269.587	51.51	0.06	74.0	-22.49	Peak	201.00	150	Horizontal	Pass
6**	12269.587	42.71	0.06	54.0	-11.29	AV	201.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 High Channel

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

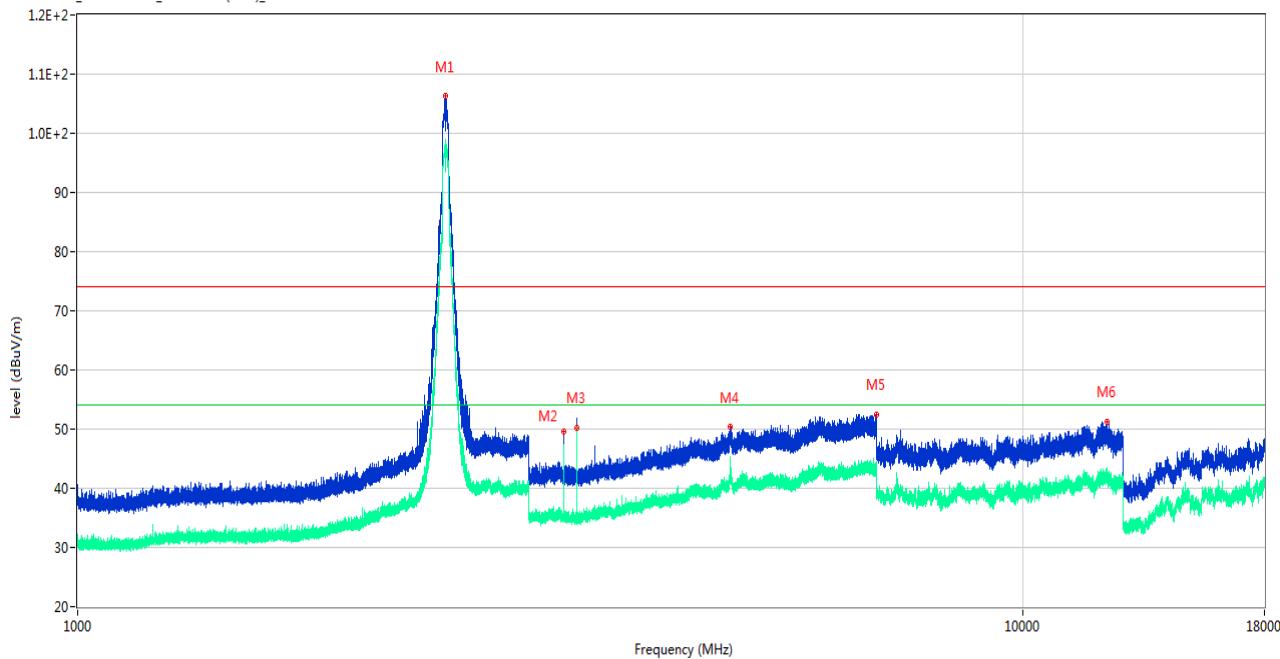


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2450.500	106.29	-13.56	74.0	32.29	Peak	72.00	150	Vertical	N/A
1**	2450.500	98.17	-13.56	54.0	44.17	AV	72.00	150	Vertical	N/A
2	3269.400	49.55	-9.07	74.0	-24.45	Peak	309.00	150	Vertical	Pass
2**	3269.400	47.40	-9.07	54.0	-6.60	AV	309.00	150	Vertical	Pass
3	3370.000	51.86	-9.38	74.0	-22.14	Peak	360.00	150	Vertical	Pass
3**	3370.000	50.17	-9.38	54.0	-3.83	AV	360.00	150	Vertical	Pass
4	4902.000	50.40	-4.31	74.0	-23.60	Peak	21.00	150	Vertical	Pass
4**	4902.000	42.36	-4.31	54.0	-11.64	AV	21.00	150	Vertical	Pass
5	6994.600	52.51	-1.19	74.0	-21.49	Peak	9.00	150	Vertical	Pass
5**	6994.600	43.23	-1.19	54.0	-10.77	AV	9.00	150	Vertical	Pass
6	12272.463	51.17	0.07	74.0	-22.83	Peak	234.00	150	Vertical	Pass
6**	12272.463	42.98	0.07	54.0	-11.02	AV	234.00	150	Vertical	Pass

## MIMO Antenna

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

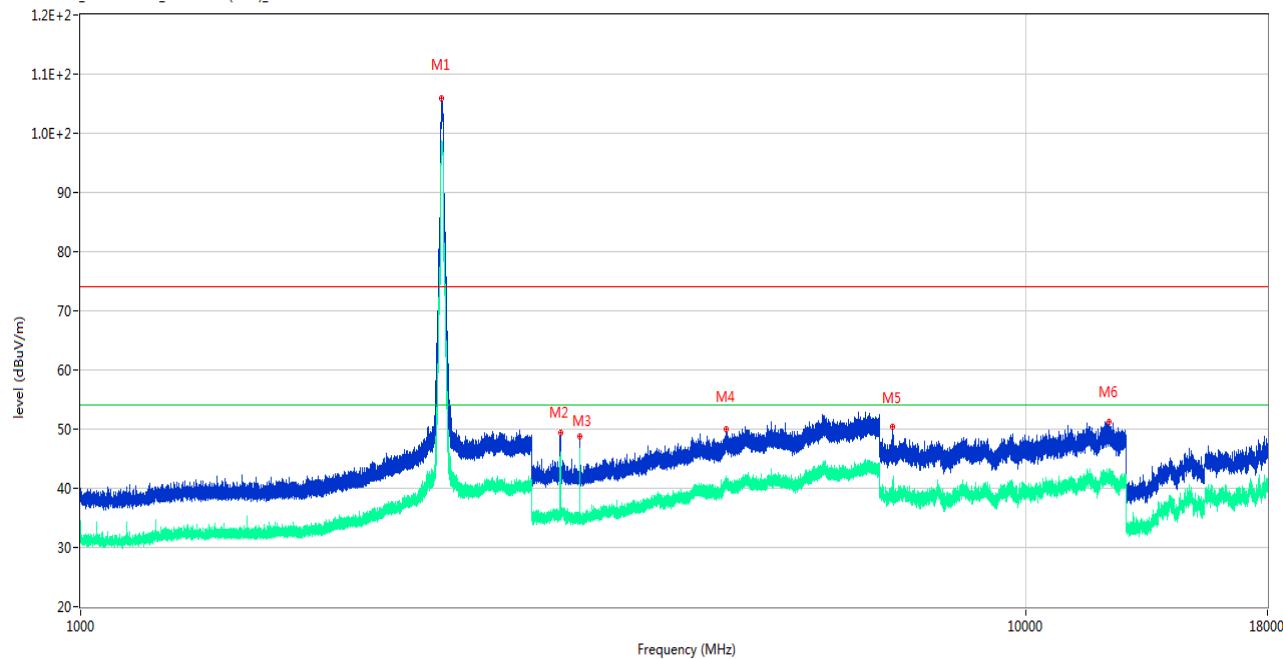

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2410.800	105.86	-13.45	74.0	31.86	Peak	256.00	150	Horizontal	N/A
1**	2410.800	98.02	-13.45	54.0	44.02	AV	256.00	150	Horizontal	N/A
2	3216.400	49.29	-8.46	74.0	-24.71	Peak	250.00	150	Horizontal	Pass
2**	3216.400	45.41	-8.46	54.0	-8.59	AV	250.00	150	Horizontal	Pass
3	3369.800	48.74	-9.39	74.0	-25.26	Peak	226.00	150	Horizontal	Pass
3**	3369.800	43.52	-9.39	54.0	-10.48	AV	226.00	150	Horizontal	Pass
4	4817.000	49.90	-4.08	74.0	-24.10	Peak	37.00	150	Horizontal	Pass
4**	4817.000	40.62	-4.08	54.0	-13.38	AV	37.00	150	Horizontal	Pass
5	7232.300	50.37	-4.48	74.0	-23.63	Peak	51.00	150	Horizontal	Pass
5**	7232.300	40.37	-4.48	54.0	-13.63	AV	51.00	150	Horizontal	Pass
6	12254.063	51.28	-0.04	74.0	-22.72	Peak	103.00	150	Horizontal	Pass
6**	12254.063	43.32	-0.04	54.0	-10.68	AV	103.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

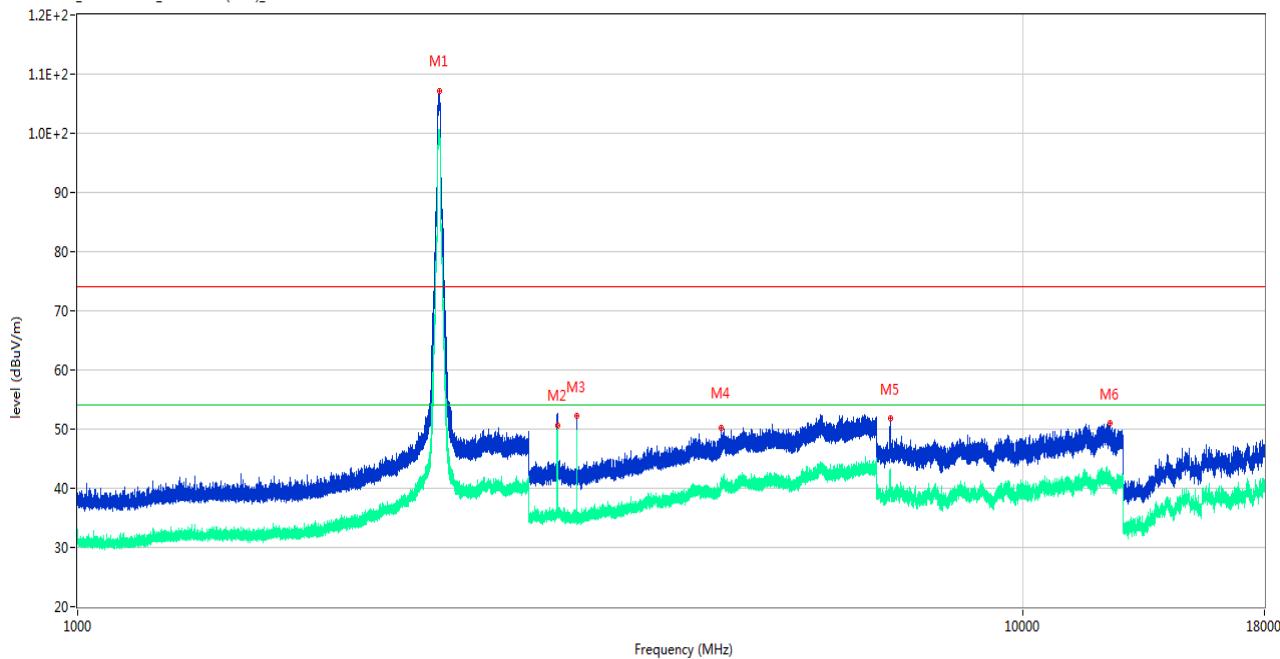

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2413.100	107.12	-13.52	74.0	33.12	Peak	239.00	150	Vertical	N/A
1**	2413.100	100.05	-13.52	54.0	46.05	AV	239.00	150	Vertical	N/A
2	3216.000	52.67	-8.51	74.0	-21.33	Peak	298.00	150	Vertical	Pass
2**	3216.000	50.53	-8.51	54.0	-3.47	AV	298.00	150	Vertical	Pass
3	3370.200	52.22	-9.38	74.0	-21.78	Peak	11.00	150	Vertical	Pass
3**	3370.200	49.86	-9.38	54.0	-4.14	AV	11.00	150	Vertical	Pass
4	4793.600	50.11	-3.84	74.0	-23.89	Peak	11.00	150	Vertical	Pass
4**	4793.600	41.03	-3.84	54.0	-12.97	AV	11.00	150	Vertical	Pass
5	7233.450	51.77	-4.47	74.0	-22.23	Peak	0.00	150	Vertical	Pass
5**	7233.450	41.06	-4.47	54.0	-12.94	AV	0.00	150	Vertical	Pass
6	12346.925	51.11	-1.16	74.0	-22.89	Peak	14.00	150	Vertical	Pass
6**	12346.925	41.36	-1.16	54.0	-12.64	AV	14.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

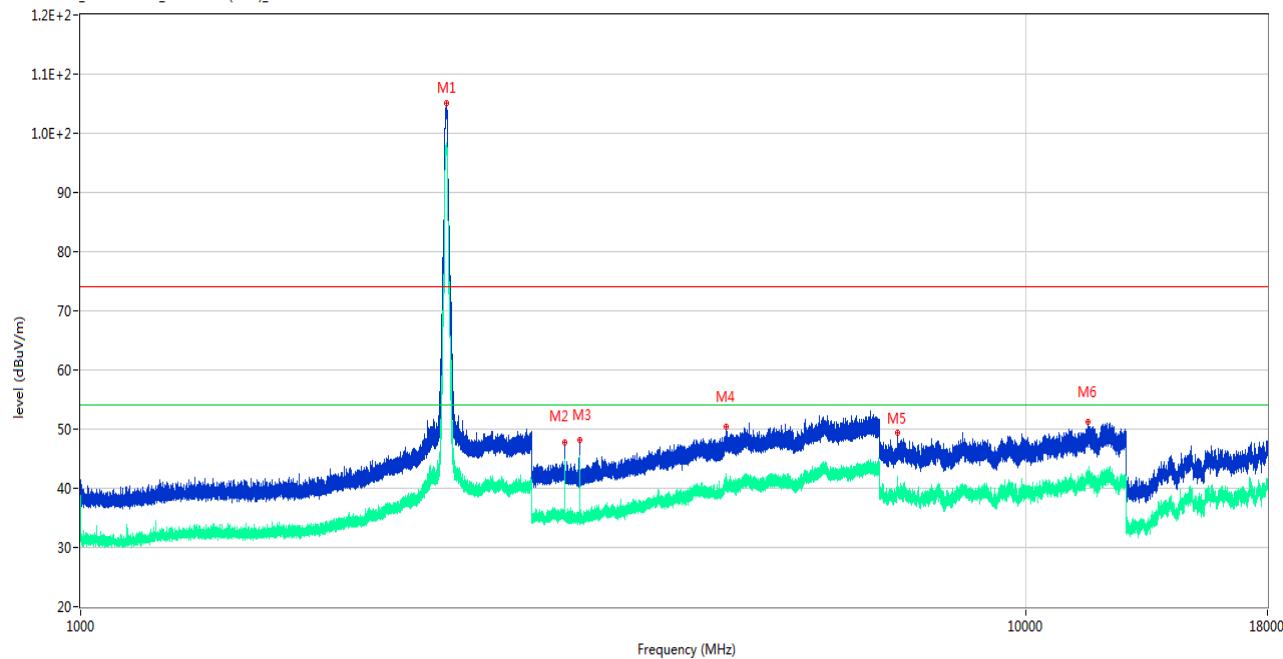

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2436.000	105.14	-13.50	74.0	31.14	Peak	256.00	150	Horizontal	N/A
1**	2436.000	98.01	-13.50	54.0	44.01	AV	256.00	150	Horizontal	N/A
2	3249.200	47.72	-8.68	74.0	-26.28	Peak	239.00	150	Horizontal	Pass
2**	3249.200	43.84	-8.68	54.0	-10.16	AV	239.00	150	Horizontal	Pass
3	3370.200	48.20	-9.38	74.0	-25.80	Peak	118.00	150	Horizontal	Pass
3**	3370.200	45.34	-9.38	54.0	-8.66	AV	118.00	150	Horizontal	Pass
4	4819.400	50.40	-4.24	74.0	-23.60	Peak	33.00	150	Horizontal	Pass
4**	4819.400	40.46	-4.24	54.0	-13.54	AV	33.00	150	Horizontal	Pass
5	7310.788	49.48	-5.13	74.0	-24.52	Peak	66.00	150	Horizontal	Pass
5**	7310.788	39.32	-5.13	54.0	-14.68	AV	66.00	150	Horizontal	Pass
6	11616.675	51.15	-0.16	74.0	-22.85	Peak	303.00	150	Horizontal	Pass
6**	11616.675	41.54	-0.16	54.0	-12.46	AV	303.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

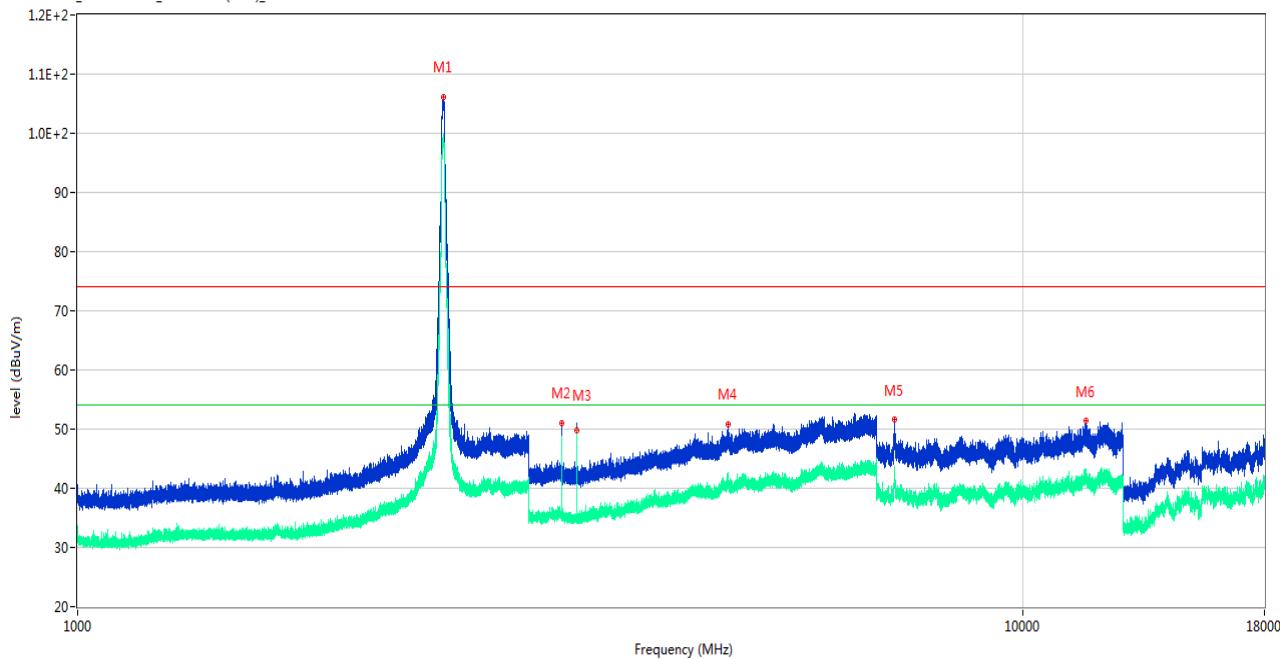

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2435.500	106.16	-13.54	74.0	32.16	Peak	217.00	150	Vertical	N/A
1**	2435.500	98.77	-13.54	54.0	44.77	AV	217.00	150	Vertical	N/A
2	3249.400	51.03	-8.70	74.0	-22.97	Peak	289.00	150	Vertical	Pass
2**	3249.400	48.75	-8.70	54.0	-5.25	AV	289.00	150	Vertical	Pass
3	3370.200	51.04	-9.38	74.0	-22.96	Peak	1.00	150	Vertical	Pass
3**	3370.200	49.70	-9.38	54.0	-4.30	AV	1.00	150	Vertical	Pass
4	4872.600	50.90	-3.96	74.0	-23.10	Peak	301.00	150	Vertical	Pass
4**	4872.600	41.68	-3.96	54.0	-12.32	AV	301.00	150	Vertical	Pass
5	7307.625	51.53	-4.96	74.0	-22.47	Peak	356.00	150	Vertical	Pass
5**	7307.625	41.56	-4.96	54.0	-12.44	AV	356.00	150	Vertical	Pass
6	11652.612	51.37	-0.38	74.0	-22.63	Peak	84.00	150	Vertical	Pass
6**	11652.612	40.99	-0.38	54.0	-13.01	AV	84.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

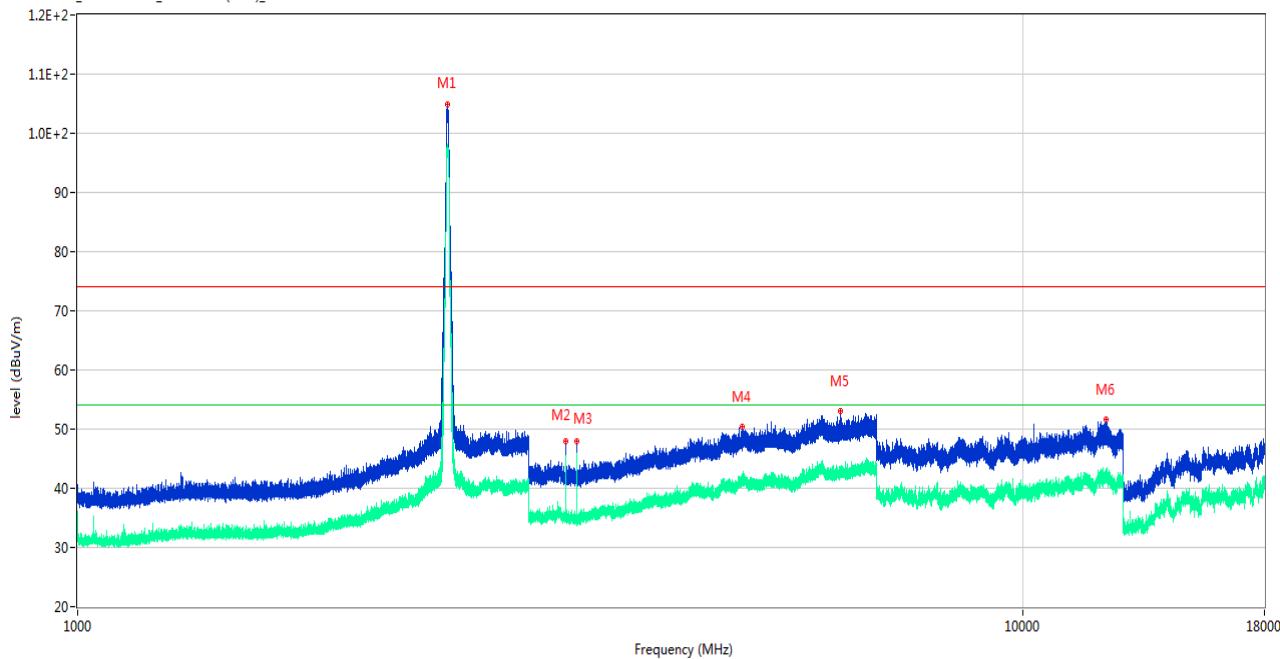

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2463.200	104.85	-13.87	74.0	30.85	Peak	255.00	150	Horizontal	N/A
1**	2463.200	97.23	-13.87	54.0	43.23	AV	255.00	150	Horizontal	N/A
2	3282.600	48.00	-9.14	74.0	-26.00	Peak	251.00	150	Horizontal	Pass
2**	3282.600	43.75	-9.14	54.0	-10.25	AV	251.00	150	Horizontal	Pass
3	3369.800	48.04	-9.39	74.0	-25.96	Peak	103.00	150	Horizontal	Pass
3**	3369.800	43.82	-9.39	54.0	-10.18	AV	103.00	150	Horizontal	Pass
4	5042.800	50.46	-3.83	74.0	-23.54	Peak	251.00	150	Horizontal	Pass
4**	5042.800	41.30	-3.83	54.0	-12.70	AV	251.00	150	Horizontal	Pass
5	6403.400	52.98	-2.05	74.0	-21.02	Peak	360.00	150	Horizontal	Pass
5**	6403.400	42.68	-2.05	54.0	-11.32	AV	360.00	150	Horizontal	Pass
6	12235.662	51.54	-0.31	74.0	-22.46	Peak	160.00	150	Horizontal	Pass
6**	12235.662	42.27	-0.31	54.0	-11.73	AV	160.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

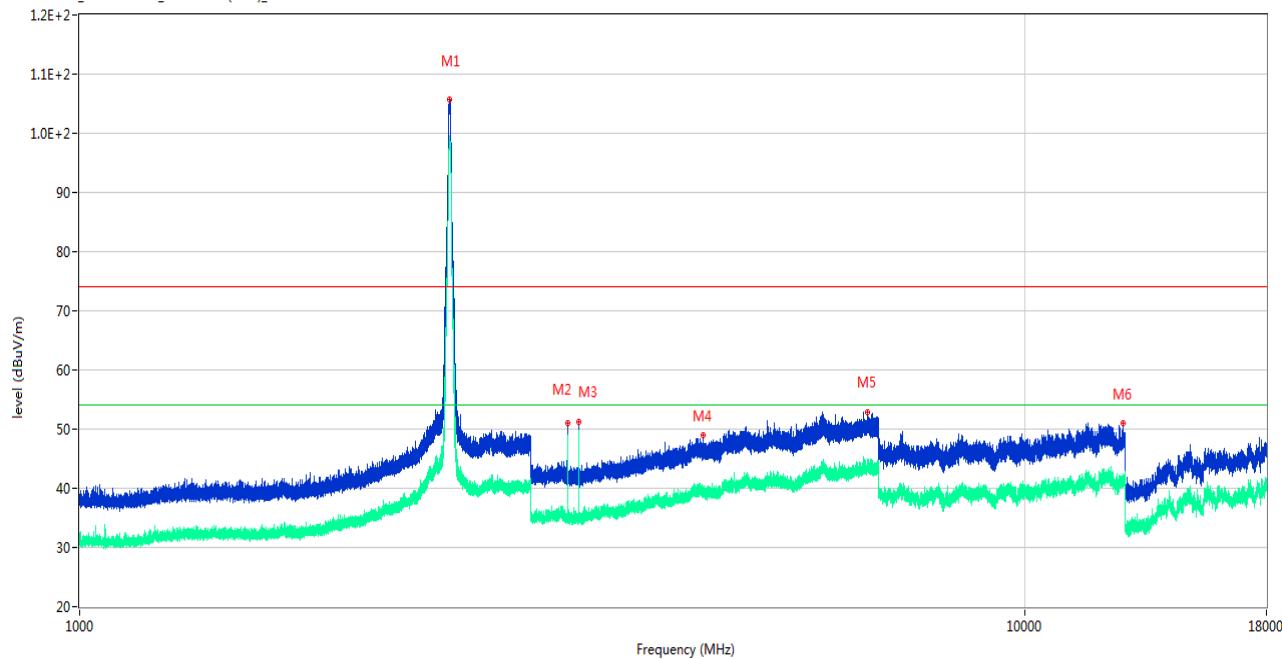

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2460.500	105.73	-13.91	74.0	31.73	Peak	253.00	150	Vertical	N/A
1**	2460.500	98.53	-13.91	54.0	44.53	AV	253.00	150	Vertical	N/A
2	3282.800	51.06	-9.14	74.0	-22.94	Peak	360.00	150	Vertical	Pass
2**	3282.800	48.92	-9.14	54.0	-5.08	AV	360.00	150	Vertical	Pass
3	3370.000	51.23	-9.38	74.0	-22.77	Peak	7.00	150	Vertical	Pass
3**	3370.000	49.32	-9.38	54.0	-4.68	AV	7.00	150	Vertical	Pass
4	4570.000	48.96	-5.20	74.0	-25.04	Peak	249.00	150	Vertical	Pass
4**	4570.000	38.37	-5.20	54.0	-15.63	AV	249.00	150	Vertical	Pass
5	6818.600	52.77	-1.30	74.0	-21.23	Peak	236.00	150	Vertical	Pass
5**	6818.600	43.59	-1.30	54.0	-10.41	AV	236.00	150	Vertical	Pass
6	12696.526	51.11	-1.98	74.0	-22.89	Peak	360.00	150	Vertical	Pass
6**	12696.526	41.54	-1.98	54.0	-12.46	AV	360.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

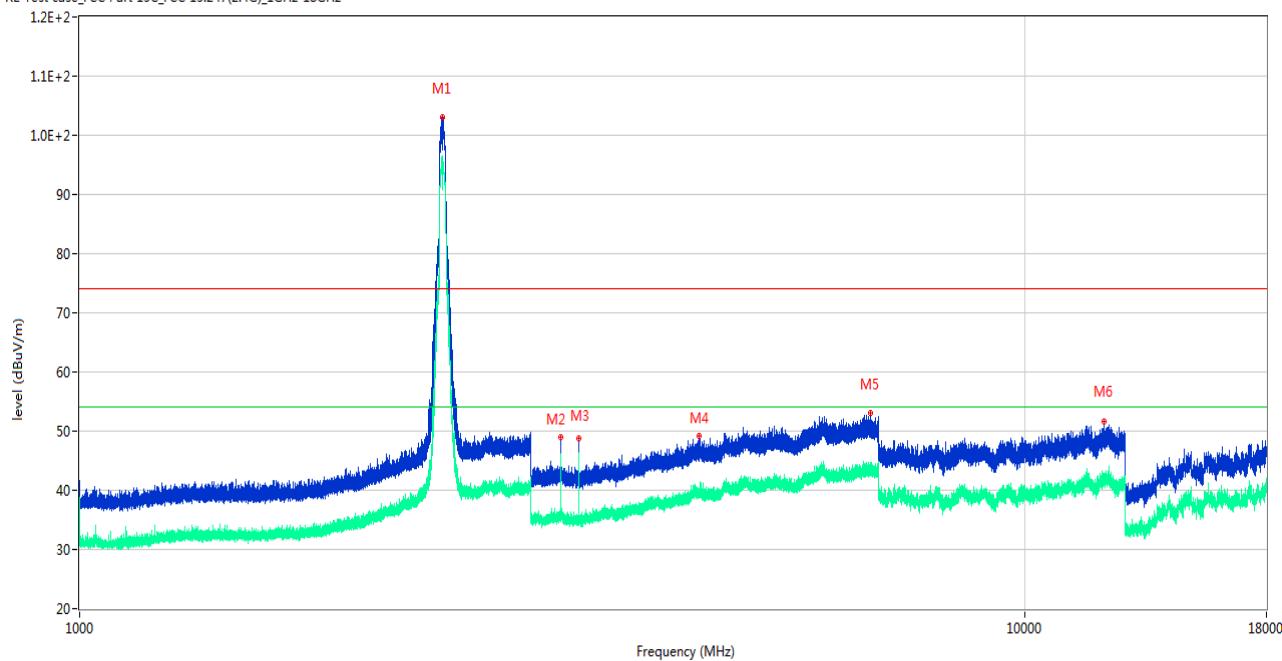

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2417.800	103.13	-13.49	74.0	29.13	Peak	260.00	150	Horizontal	N/A
1**	2417.800	95.52	-13.49	54.0	41.52	AV	260.00	150	Horizontal	N/A
2	3229.400	48.88	-7.52	74.0	-25.12	Peak	250.00	150	Horizontal	Pass
2**	3229.400	46.10	-7.52	54.0	-7.90	AV	250.00	150	Horizontal	Pass
3	3370.200	48.74	-9.38	74.0	-25.26	Peak	224.00	150	Horizontal	Pass
3**	3370.200	46.41	-9.38	54.0	-7.59	AV	224.00	150	Horizontal	Pass
4	4518.800	49.17	-4.35	74.0	-24.83	Peak	160.00	150	Horizontal	Pass
4**	4518.800	39.98	-4.35	54.0	-14.02	AV	160.00	150	Horizontal	Pass
5	6858.600	53.05	-1.56	74.0	-20.95	Peak	275.00	150	Horizontal	Pass
5**	6858.600	44.33	-1.56	54.0	-9.67	AV	275.00	150	Horizontal	Pass
6	12108.300	51.53	-0.88	74.0	-22.47	Peak	142.00	150	Horizontal	Pass
6**	12108.300	42.09	-0.88	54.0	-11.91	AV	142.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 Low Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

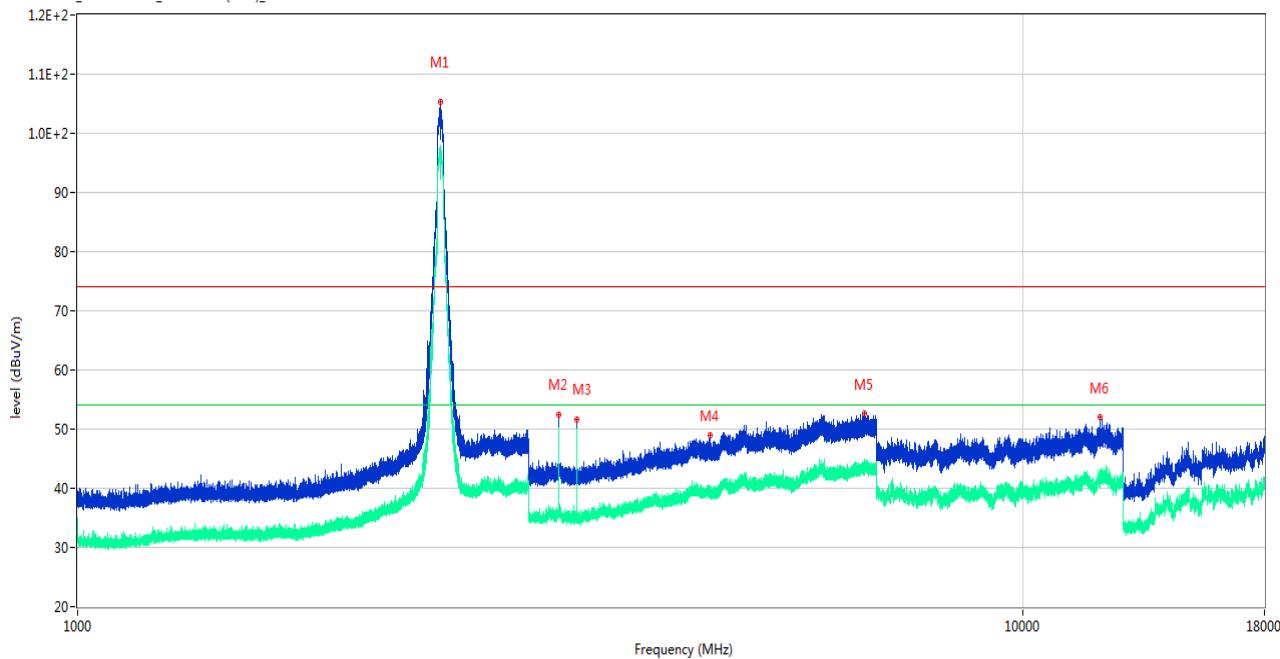

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2420.500	105.38	-13.67	74.0	31.38	Peak	256.00	150	Vertical	N/A
1**	2420.500	96.66	-13.67	54.0	42.66	AV	256.00	150	Vertical	N/A
2	3229.200	52.46	-7.51	74.0	-21.54	Peak	301.00	150	Vertical	Pass
2**	3229.200	49.17	-7.51	54.0	-4.83	AV	301.00	150	Vertical	Pass
3	3370.000	51.70	-9.38	74.0	-22.30	Peak	6.00	150	Vertical	Pass
3**	3370.000	49.45	-9.38	54.0	-4.55	AV	6.00	150	Vertical	Pass
4	4665.000	48.92	-4.82	74.0	-25.08	Peak	155.00	150	Vertical	Pass
4**	4665.000	39.25	-4.82	54.0	-14.75	AV	155.00	150	Vertical	Pass
5	6799.200	52.63	-1.51	74.0	-21.37	Peak	143.00	150	Vertical	Pass
5**	6799.200	42.99	-1.51	54.0	-11.01	AV	143.00	150	Vertical	Pass
6	12075.525	51.96	-1.37	74.0	-22.04	Peak	120.00	150	Vertical	Pass
6**	12075.525	42.52	-1.37	54.0	-11.48	AV	120.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

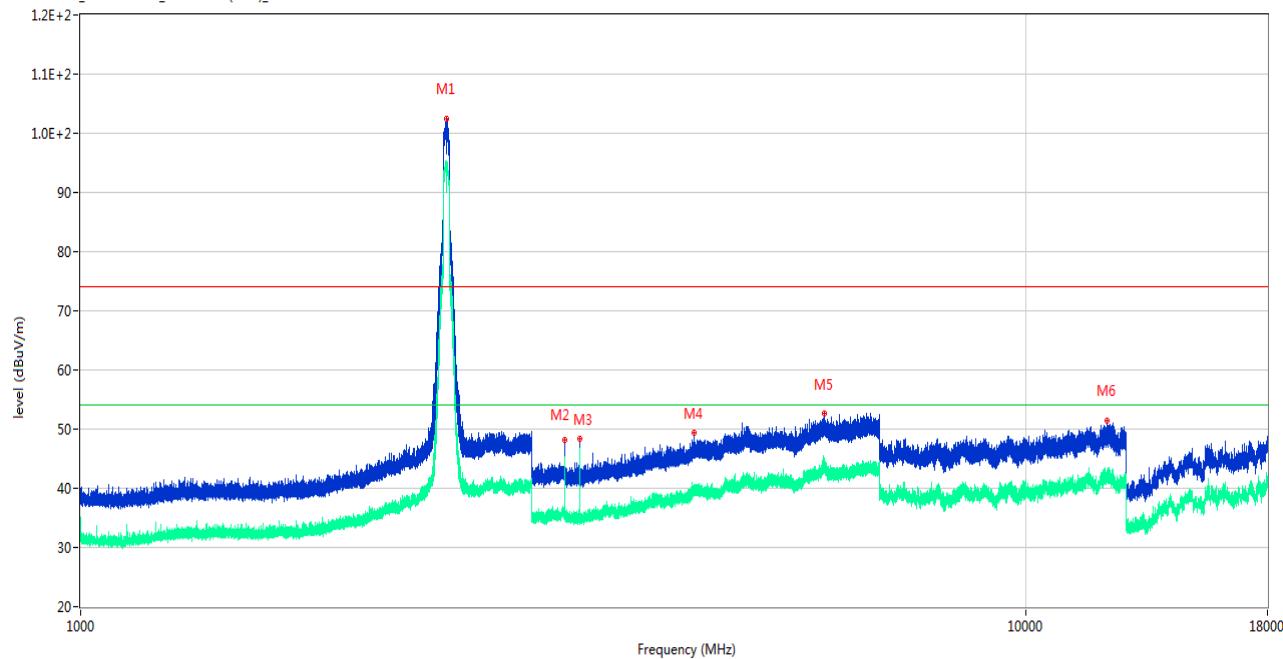

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2435.300	102.47	-13.54	74.0	28.47	Peak	92.00	150	Horizontal	N/A
1**	2435.300	94.71	-13.54	54.0	40.71	AV	92.00	150	Horizontal	N/A
2	3249.400	48.24	-8.70	74.0	-25.76	Peak	260.00	150	Horizontal	Pass
2**	3249.400	45.21	-8.70	54.0	-8.79	AV	260.00	150	Horizontal	Pass
3	3370.000	48.29	-9.38	74.0	-25.71	Peak	222.00	150	Horizontal	Pass
3**	3370.000	45.42	-9.38	54.0	-8.58	AV	222.00	150	Horizontal	Pass
4	4458.400	49.31	-4.66	74.0	-24.69	Peak	82.00	150	Horizontal	Pass
4**	4458.400	39.96	-4.66	54.0	-14.04	AV	82.00	150	Horizontal	Pass
5	6121.800	52.65	-1.32	74.0	-21.35	Peak	274.00	150	Horizontal	Pass
5**	6121.800	43.02	-1.32	54.0	-10.98	AV	274.00	150	Horizontal	Pass
6	12166.088	51.46	-0.91	74.0	-22.54	Peak	67.00	150	Horizontal	Pass
6**	12166.088	41.97	-0.91	54.0	-12.03	AV	67.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 Middle Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

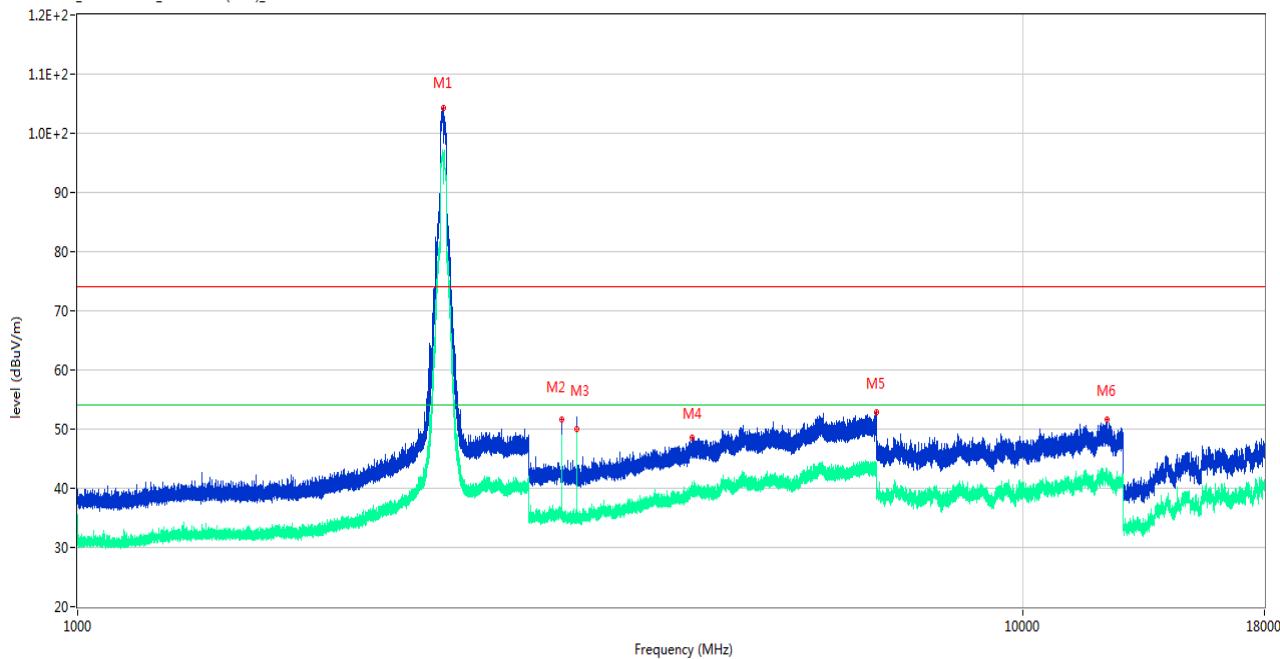

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2435.500	104.25	-13.54	74.0	30.25	Peak	249.00	150	Vertical	N/A
1**	2435.500	96.34	-13.54	54.0	42.34	AV	249.00	150	Vertical	N/A
2	3249.000	51.68	-8.67	74.0	-22.32	Peak	269.00	150	Vertical	Pass
2**	3249.000	46.12	-8.67	54.0	-7.88	AV	269.00	150	Vertical	Pass
3	3370.200	51.64	-9.38	74.0	-22.36	Peak	23.00	150	Vertical	Pass
3**	3370.200	50.00	-9.38	54.0	-4.00	AV	23.00	150	Vertical	Pass
4	4462.800	48.51	-4.84	74.0	-25.49	Peak	255.00	150	Vertical	Pass
4**	4462.800	39.78	-4.84	54.0	-14.22	AV	255.00	150	Vertical	Pass
5	6997.400	52.89	-1.17	74.0	-21.11	Peak	269.00	150	Vertical	Pass
5**	6997.400	43.24	-1.17	54.0	-10.76	AV	269.00	150	Vertical	Pass
6	12265.850	51.60	0.05	74.0	-22.40	Peak	255.00	150	Vertical	Pass
6**	12265.850	42.74	0.05	54.0	-11.26	AV	255.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 High Channel


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

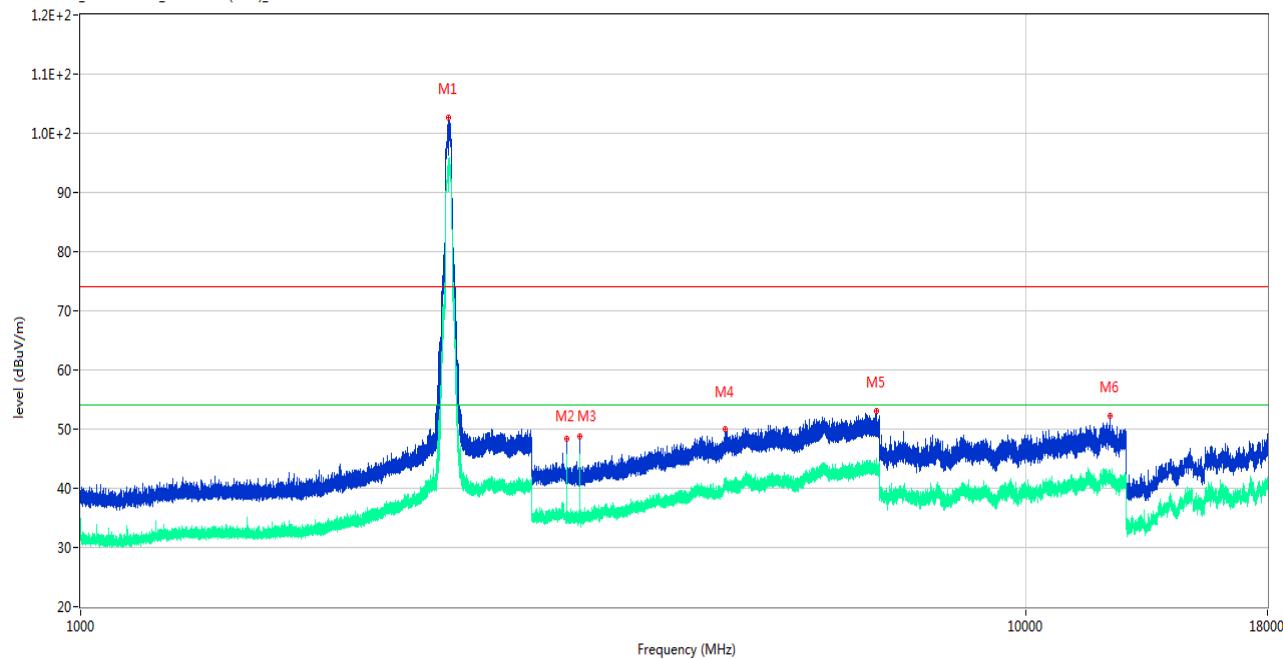

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2450.400	102.62	-13.55	74.0	28.62	Peak	258.00	150	Horizontal	N/A
1**	2450.400	95.14	-13.55	54.0	41.14	AV	258.00	150	Horizontal	N/A
2	3269.200	48.43	-9.05	74.0	-25.57	Peak	244.00	150	Horizontal	Pass
2**	3269.200	44.04	-9.05	54.0	-9.96	AV	244.00	150	Horizontal	Pass
3	3370.000	48.73	-9.38	74.0	-25.27	Peak	232.00	150	Horizontal	Pass
3**	3370.000	45.79	-9.38	54.0	-8.21	AV	232.00	150	Horizontal	Pass
4	4809.400	49.99	-3.79	74.0	-24.01	Peak	46.00	150	Horizontal	Pass
4**	4809.400	40.20	-3.79	54.0	-13.80	AV	46.00	150	Horizontal	Pass
5	6949.600	53.02	-0.87	74.0	-20.98	Peak	165.00	150	Horizontal	Pass
5**	6949.600	45.05	-0.87	54.0	-8.95	AV	165.00	150	Horizontal	Pass
6	12263.550	52.24	0.05	74.0	-21.76	Peak	305.00	150	Horizontal	Pass
6**	12263.550	42.17	0.05	54.0	-11.83	AV	305.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 High Channel

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

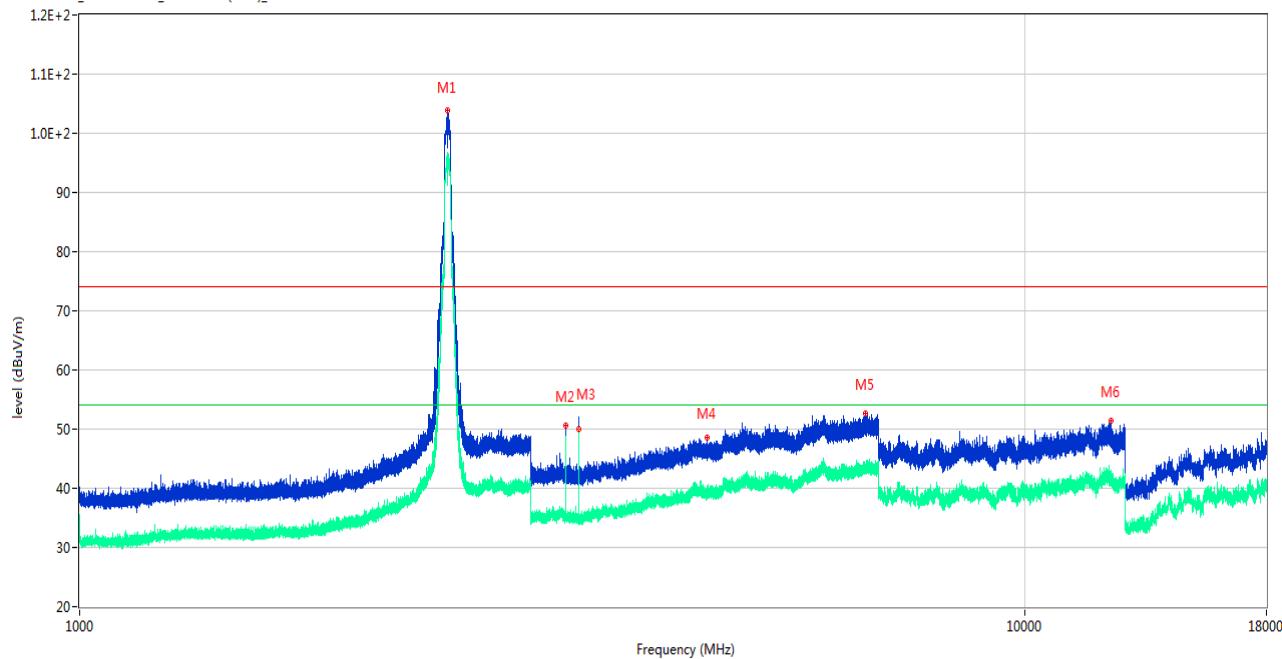

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2449.300	103.88	-13.55	74.0	29.88	Peak	253.00	150	Vertical	N/A
1**	2449.300	96.18	-13.55	54.0	42.18	AV	253.00	150	Vertical	N/A
2	3269.200	50.61	-9.05	74.0	-23.39	Peak	280.00	150	Vertical	Pass
2**	3269.200	47.70	-9.05	54.0	-6.30	AV	280.00	150	Vertical	Pass
3	3370.200	51.16	-9.38	74.0	-22.84	Peak	11.00	150	Vertical	Pass
3**	3370.200	49.92	-9.38	54.0	-4.08	AV	11.00	150	Vertical	Pass
4	4611.800	48.62	-5.23	74.0	-25.38	Peak	309.00	150	Vertical	Pass
4**	4611.800	38.55	-5.23	54.0	-15.45	AV	309.00	150	Vertical	Pass
5	6780.400	52.68	-1.63	74.0	-21.32	Peak	25.00	150	Vertical	Pass
5**	6780.400	43.17	-1.63	54.0	-10.83	AV	25.00	150	Vertical	Pass
6	12337.438	51.44	-0.89	74.0	-22.56	Peak	15.00	150	Vertical	Pass
6**	12337.438	41.06	-0.89	54.0	-12.94	AV	15.00	150	Vertical	Pass

## A.7 Band Edge (Restricted-band band-edge)

### Test Data

Note <sup>1</sup>: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note <sup>2</sup>: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note <sup>3</sup>: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

### Main Antenna

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11b	Low	2390	56.373	32.61	74	17.627	PEAK	Pass
		2390	49.348	32.61	54	4.652	AVERAGE	Pass
	HIGH	2483.5	57.093	32.54	74	16.907	PEAK	Pass
		2483.5	49.328	32.54	54	4.672	AVERAGE	Pass
802.11g	Low	2390	65.207	32.61	74	8.793	PEAK	Pass
		2390	52.187	32.61	54	1.813	AVERAGE	Pass
	HIGH	2483.5	67.457	32.54	74	6.543	PEAK	Pass
		2483.5	52.146	32.54	54	1.854	AVERAGE	Pass
802.11n20	Low	2390	68.799	32.61	74	5.201	PEAK	Pass
		2390	52.651	32.61	54	1.349	AVERAGE	Pass
	HIGH	2483.5	67.195	32.54	74	6.805	PEAK	Pass
		2483.5	51.766	32.54	54	2.234	AVERAGE	Pass
802.11n40	Low	2390	66.933	32.61	74	7.067	PEAK	Pass
		2390	51.854	32.61	54	2.146	AVERAGE	Pass
	HIGH	2483.5	68.071	32.54	74	5.929	PEAK	Pass
		2483.5	51.601	32.54	54	2.399	AVERAGE	Pass

Aux. Antenna

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11b	Low	2390	57.766	32.61	74	16.234	PEAK	Pass
		2390	49.328	32.61	54	4.672	AVERAGE	Pass
	HIGH	2483.5	57.765	32.54	74	16.235	PEAK	Pass
		2483.5	49.318	32.54	54	4.682	AVERAGE	Pass
802.11g	Low	2390	65.619	32.61	74	8.381	PEAK	Pass
		2390	52.515	32.61	54	1.485	AVERAGE	Pass
	HIGH	2483.5	66.389	32.54	74	7.611	PEAK	Pass
		2483.5	52.436	32.54	54	1.564	AVERAGE	Pass
802.11n20	Low	2390	68.140	32.61	74	5.86	PEAK	Pass
		2390	52.157	32.61	54	1.843	AVERAGE	Pass
	HIGH	2483.5	67.007	32.54	74	6.993	PEAK	Pass
		2483.5	52.283	32.54	54	1.717	AVERAGE	Pass
802.11n40	Low	2390	68.546	32.61	74	5.454	PEAK	Pass
		2390	52.471	32.61	54	1.529	AVERAGE	Pass
	HIGH	2483.5	70.780	32.54	74	3.22	PEAK	Pass
		2483.5	52.646	32.54	54	1.354	AVERAGE	Pass

MIMO Antenna


Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11n20	Low	2390	67.755	32.61	74	6.245	PEAK	Pass
		2390	51.779	32.61	54	2.221	AVERAGE	Pass
	HIGH	2483.5	66.297	32.54	74	7.703	PEAK	Pass
		2483.5	52.782	32.54	54	1.218	AVERAGE	Pass
802.11n40	Low	2390	68.278	32.61	74	5.722	PEAK	Pass
		2390	52.937	32.61	54	1.063	AVERAGE	Pass
	HIGH	2483.5	67.905	32.54	74	6.095	PEAK	Pass
		2483.5	51.571	32.54	54	2.429	AVERAGE	Pass

## Test plots

### Main Antenna

802.11b Mode:

#### LOW CHANNEL, PEAK

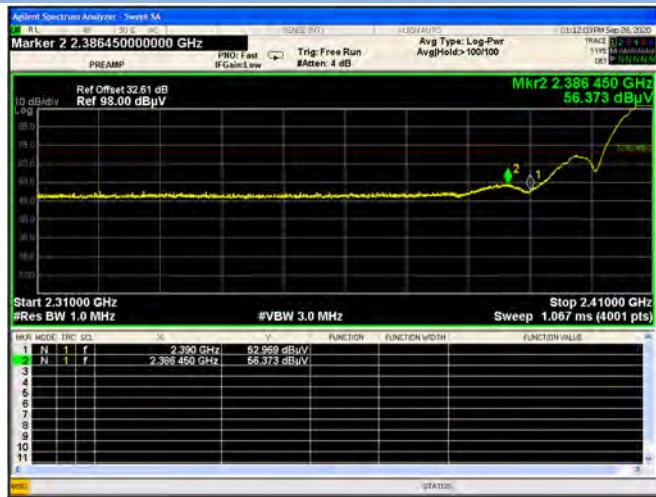

#### HIGH CHANNEL, PEAK




#### LOW CHANNEL, AV



#### HIGH CHANNEL, AV



#### HIGH CHANNEL, AV

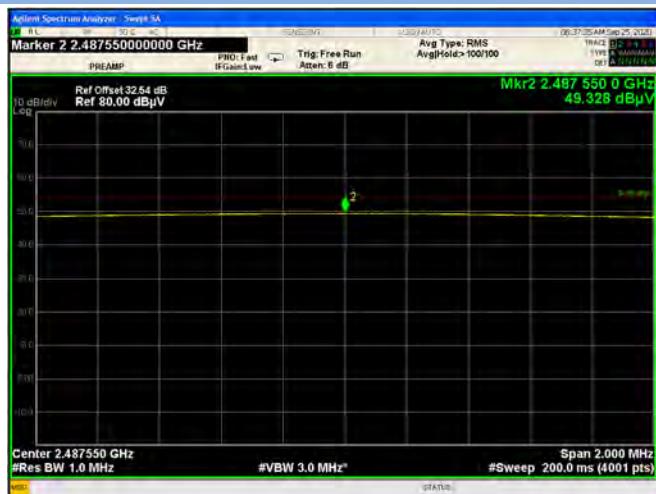

802.11g Mode:

LOW CHANNEL, PEAK



HIGH CHANNEL, PEAK



LOW CHANNEL, AV



HIGH CHANNEL, AV



HIGH CHANNEL, AV



## 802.11n-20 MHz Mode:

### LOW CHANNEL, PEAK



### HIGH CHANNEL, PEAK



### LOW CHANNEL, AV



### LOW CHANNEL, AV



### HIGH CHANNEL, V



### HIGH CHANNEL, V



## 802.11n-40 MHz Mode:

### LOW CHANNEL, PEAK



### HIGH CHANNEL, PEAK



### LOW CHANNEL, AV



### LOW CHANNEL, AV



### HIGH CHANNEL, AV



### HIGH CHANNEL, AV



Aux. Antenna

802.11b Mode:

LOW CHANNEL, PEAK



HIGH CHANNEL, PEAK



LOW CHANNEL, AV



LOW CHANNEL, AV



HIGH CHANNEL, AV



HIGH CHANNEL, AV



802.11g Mode:

LOW CHANNEL, PEAK



HIGH CHANNEL, PEAK



LOW CHANNEL, AV



LOW CHANNEL, AV



HIGH CHANNEL, AV



HIGH CHANNEL, AV



## 802.11n-20 MHz Mode:

### LOW CHANNEL, PEAK



### HIGH CHANNEL, PEAK



### LOW CHANNEL, AV



### LOW CHANNEL, AV



### HIGH CHANNEL, V



### HIGH CHANNEL, V



802.11n-40 MHz Mode:

LOW CHANNEL, PEAK



HIGH CHANNEL, PEAK



LOW CHANNEL, AV



HIGH CHANNEL, AV



## MIMO Antenna

802.11n-20 MHz Mode:

LOW CHANNEL, PEAK



HIGH CHANNEL, PEAK



LOW CHANNEL, AV



LOW CHANNEL, AV



HIGH CHANNEL, V



## 802.11n-40 MHz Mode:

### LOW CHANNEL, PEAK



### HIGH CHANNEL, PEAK



### LOW CHANNEL, AV



### HIGH CHANNEL, AV



### HIGH CHANNEL, AV



## A.8 Power Spectral Density (PSD)

### Test Data

#### Main Antenna

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-14.37	8
Middle	-14.18	8
High	-13.82	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-19.14	8
Middle	-14.51	8
High	-16.80	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-20.36	8
Middle	-16.52	8
High	-18.88	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-25.58	8
Middle	-18.97	8
High	-23.26	8

Aux. Antenna

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-13.36	8
Middle	-13.24	8
High	-13.18	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-17.32	8
Middle	-14.21	8
High	-17.46	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-19.08	8
Middle	-16.54	8
High	-19.14	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-24.01	8
Middle	-18.94	8
High	-22.77	8

MIMO-Main Antenna

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-22.96	8
Middle	-19.56	8
High	-19.38	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-27.73	8
Middle	-22.29	8
High	-23.95	8

MIMO-Aux. Antenna

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-21.88	8
Middle	-20.58	8
High	-20.64	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-25.88	8
Middle	-22.79	8
High	-24.30	8

MIMO

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-19.38	8
Middle	-17.03	8
High	-16.95	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-23.70	8
Middle	-19.52	8
High	-21.11	8

## Test plots

### Main Antenna

#### 802.11b LOW CHANNEL




#### 802.11b MIDDLE CHANNEL




#### 802.11b HIGH CHANNEL




#### 802.11g LOW CHANNEL

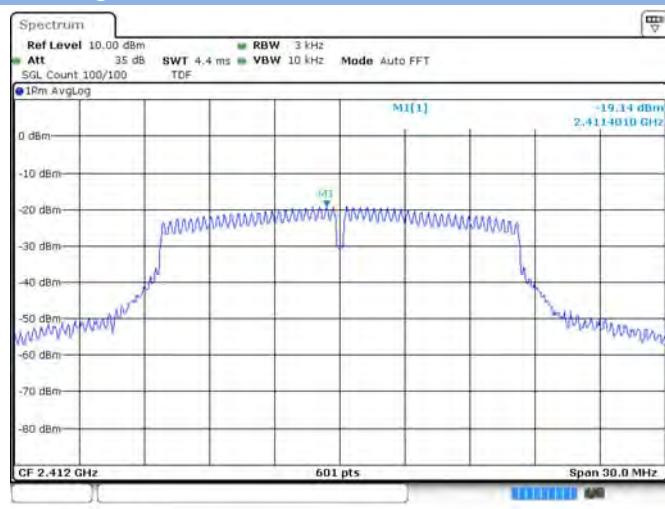


#### 802.11g MIDDLE CHANNEL

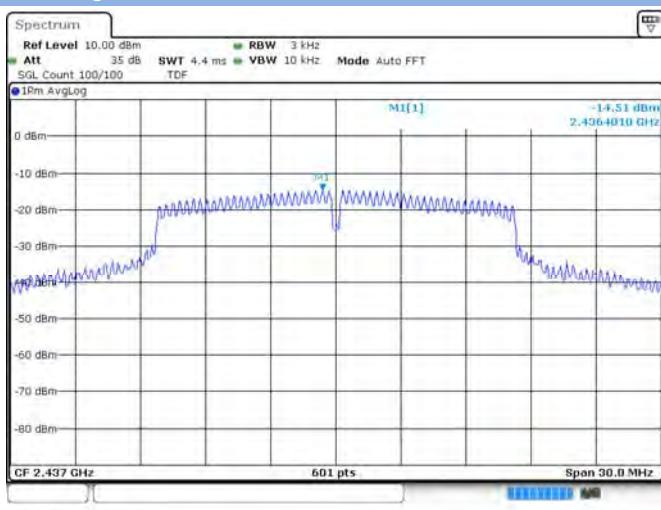

#### 802.11g HIGH CHANNEL

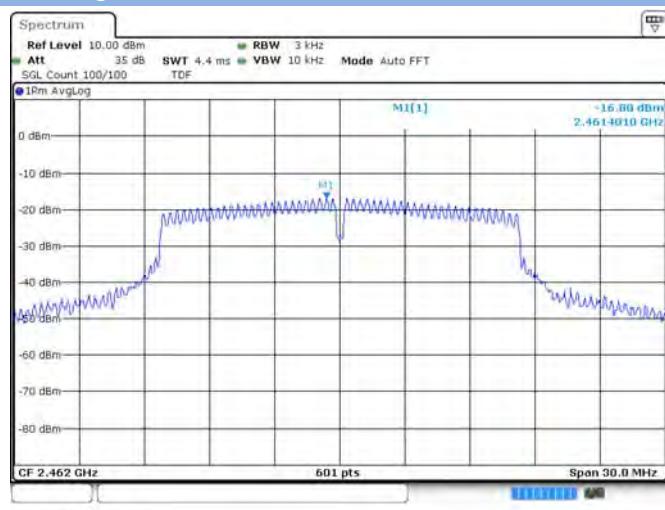


### 802.11n-20 MHz LOW CHANNEL

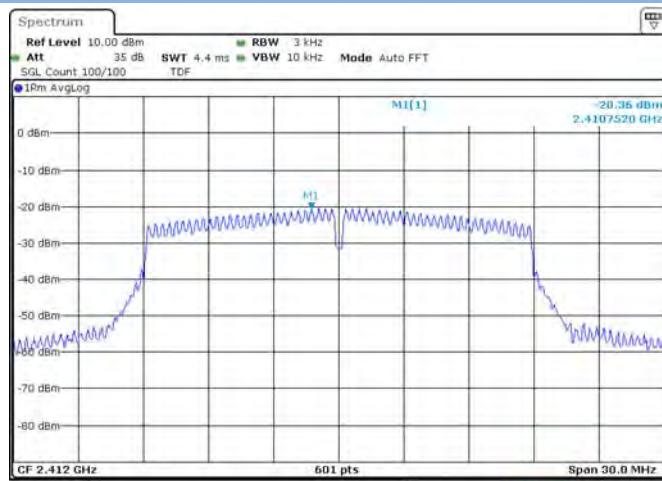


Date: 29 SEP 2020 21:31:15

### 802.11 n-20 MHz MIDDLE CHANNEL

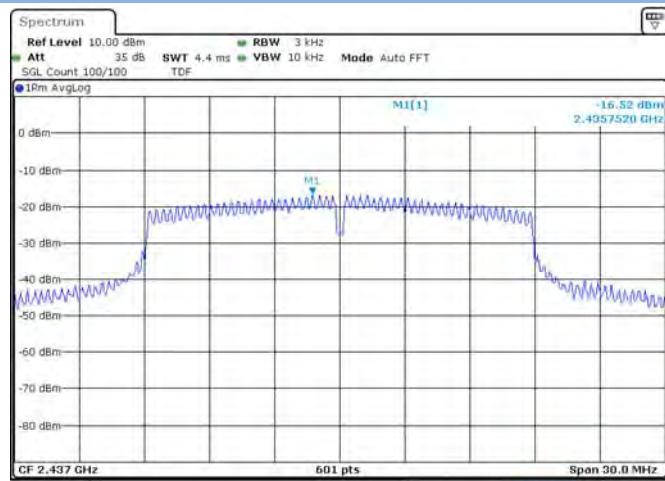


Date: 17 SEP 2020 21:36:37

### 802.11n-20 MHz HIGH CHANNEL

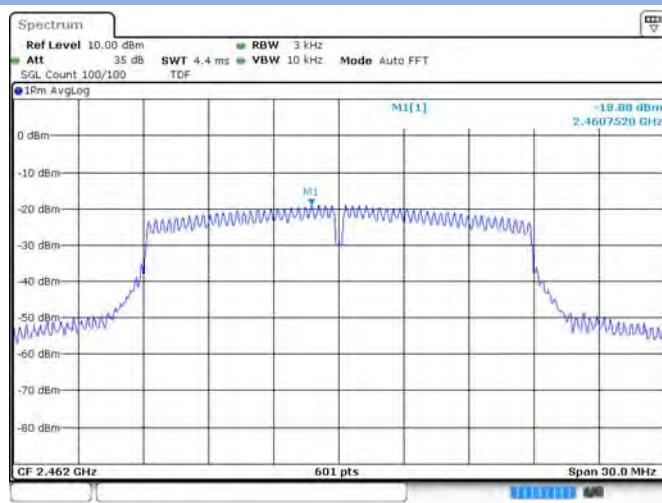


Date: 29 SEP 2020 21:34:28

### 802.11n-40 MHz LOW CHANNEL

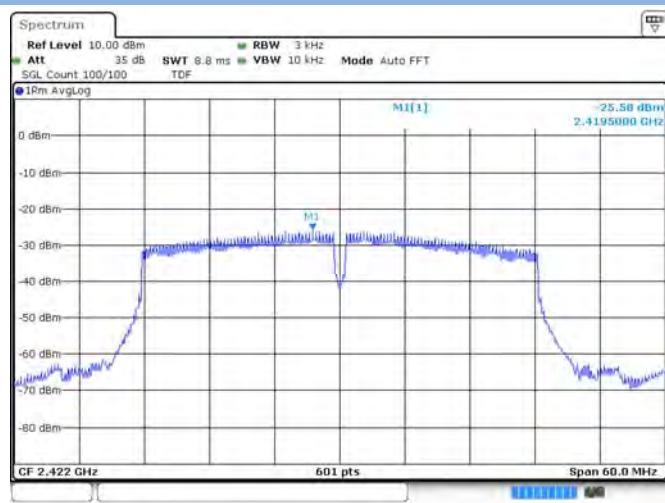


Date: 29 SEP 2020 21:36:56

### 802.11n-40 MHz MIDDLE CHANNEL

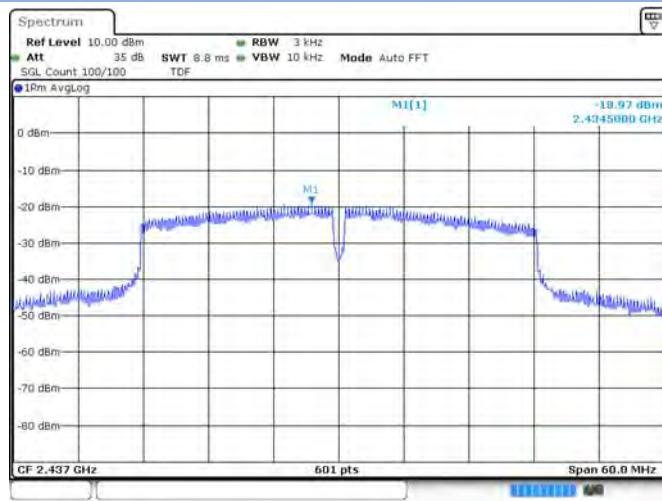

Date: 17 SEP 2020 21:44:47

### 802.11n-40 MHz HIGH CHANNEL

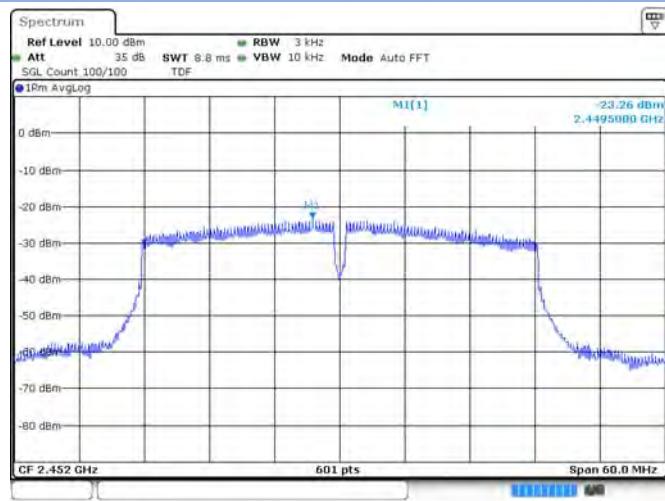

Date: 29 SEP 2020 21:40:33

Aux. Antenna

## 802.11b LOW CHANNEL




## 802.11b MIDDLE CHANNEL




## 802.11b HIGH CHANNEL




## 802.11g LOW CHANNEL

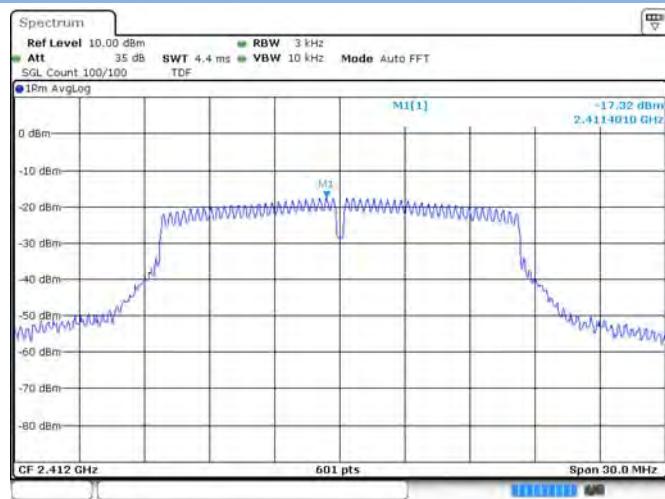


## 802.11g MIDDLE CHANNEL

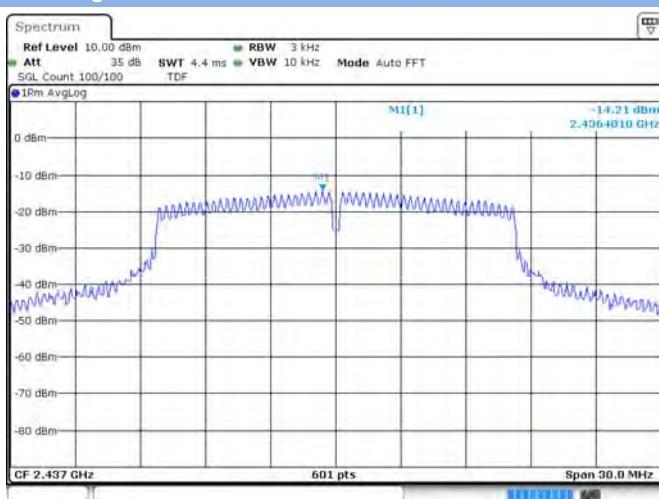

## 802.11g HIGH CHANNEL

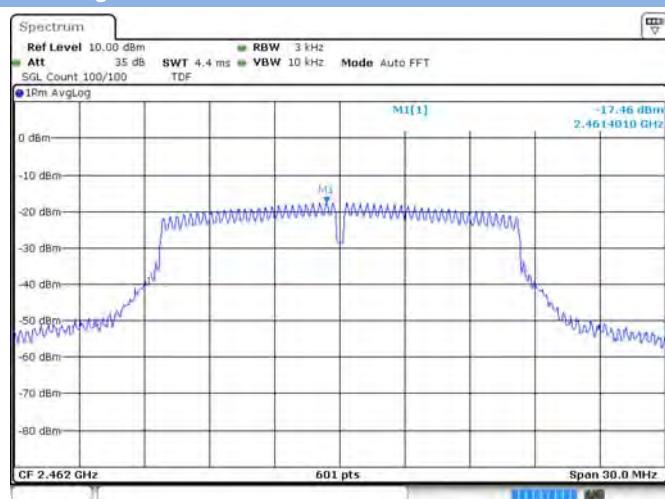


### 802.11n-20 MHz LOW CHANNEL

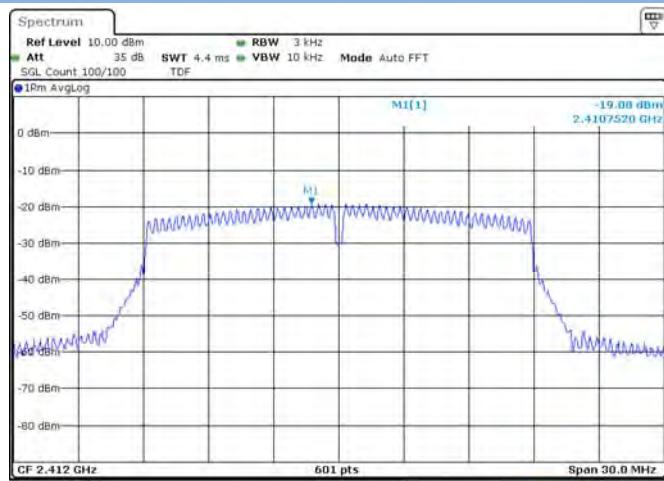


Date: 30.SEP.2020 09:38:27

### 802.11 n-20 MHz MIDDLE CHANNEL

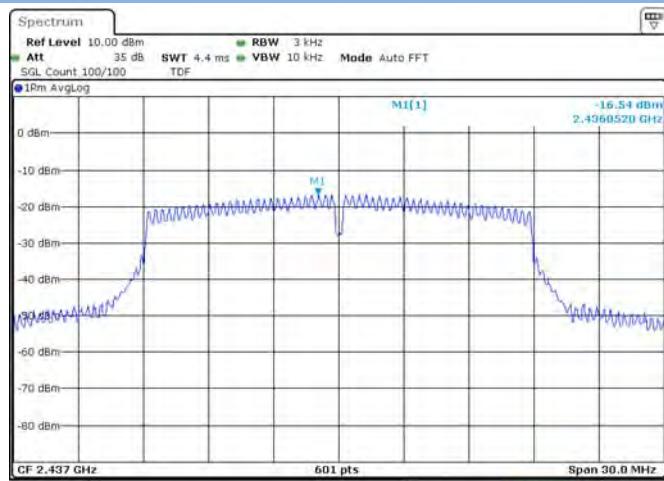


Date: 30.SEP.2020 18:48:34

### 802.11n-20 MHz HIGH CHANNEL

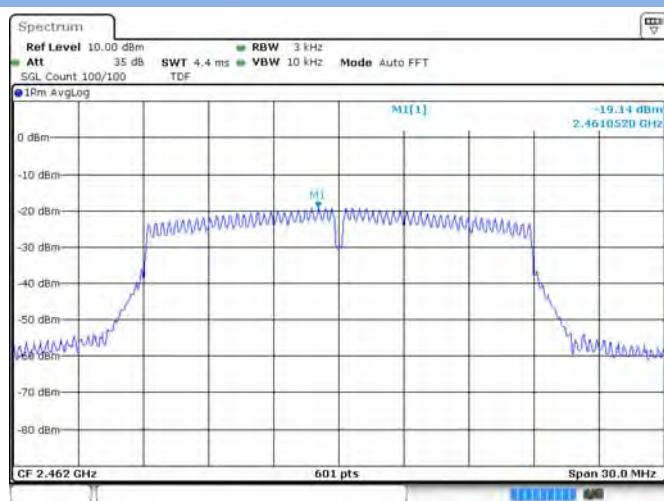


Date: 30.SEP.2020 09:43:38

### 802.11n-40 MHz LOW CHANNEL

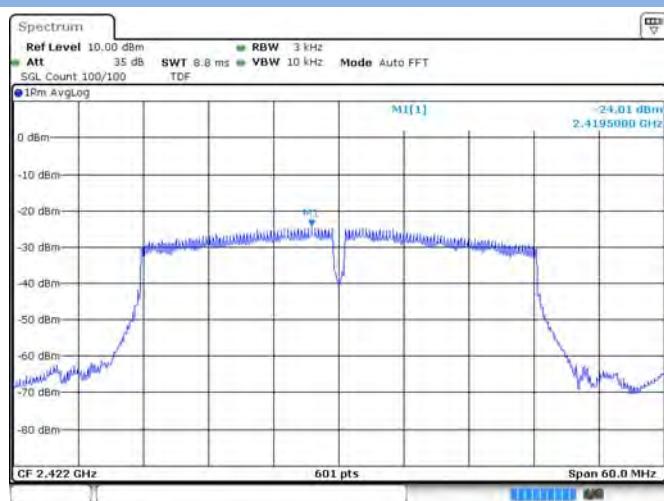


Date: 30.SEP.2020 09:47:14

### 802.11n-40 MHz MIDDLE CHANNEL

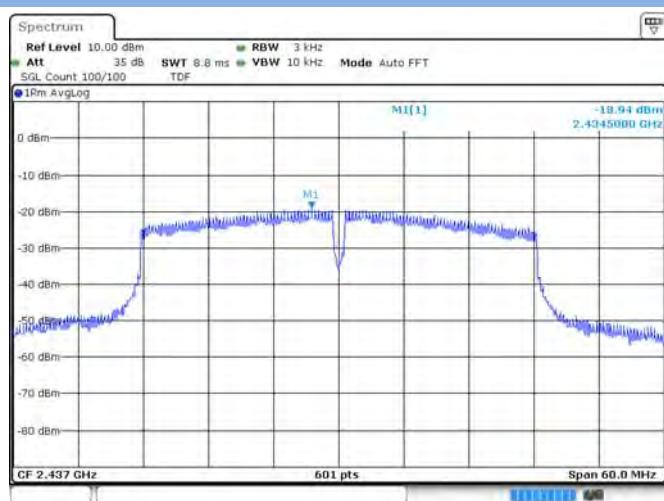

Date: 30.SEP.2020 18:56:30


### 802.11n-40 MHz HIGH CHANNEL

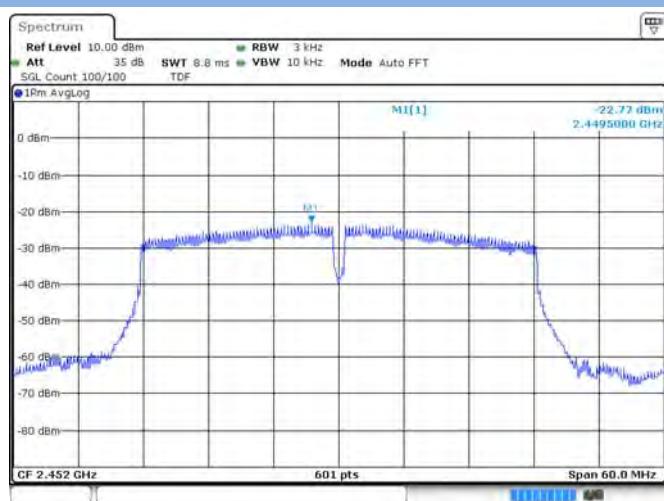

Date: 30.SEP.2020 09:53:32


## MIMO-Main Antenna

### 802.11n-20 MHz LOW CHANNEL

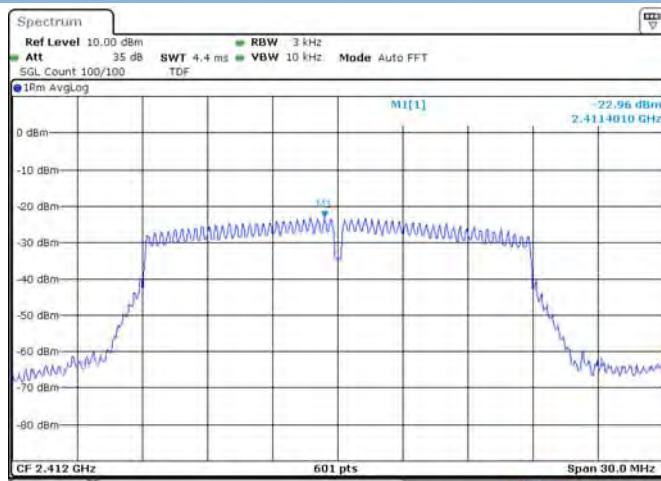


Date: 29 SEP 2020 22:14:07

### 802.11 n-20 MHz MIDDLE CHANNEL

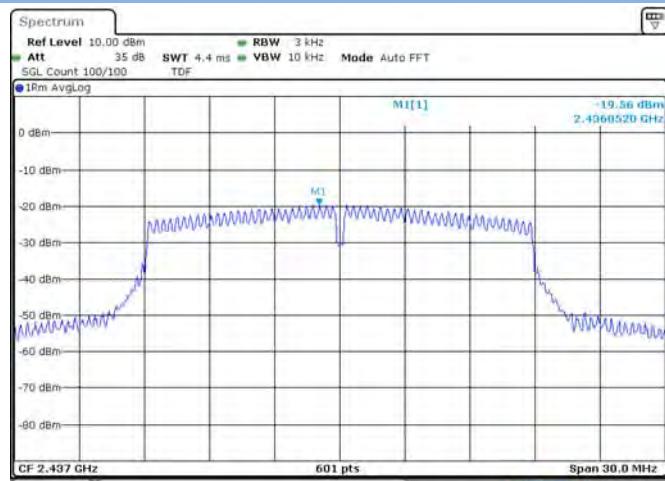

Date: 17 SEP 2020 21:53:46

### 802.11n-20 MHz HIGH CHANNEL

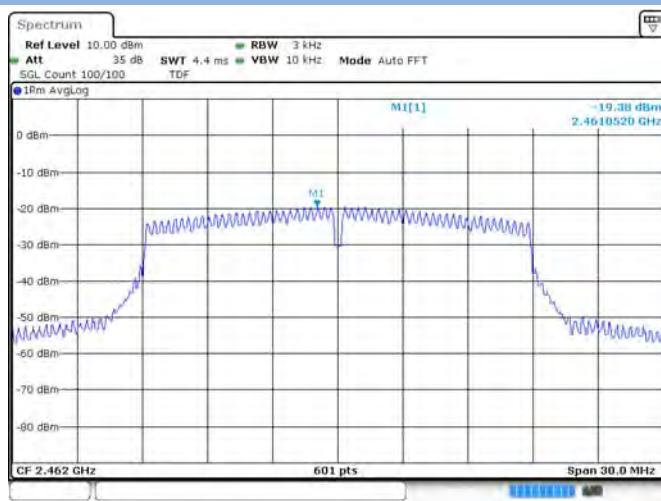


Date: 17 SEP 2020 21:55:40

### 802.11n-40 MHz LOW CHANNEL




Date: 29 SEP 2020 22:18:31

### 802.11n-40 MHz MIDDLE CHANNEL

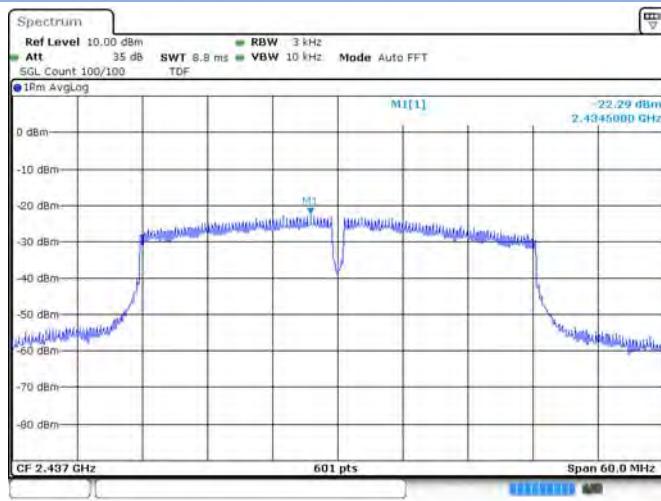

Date: 17 SEP 2020 21:59:39


### 802.11n-40 MHz HIGH CHANNEL

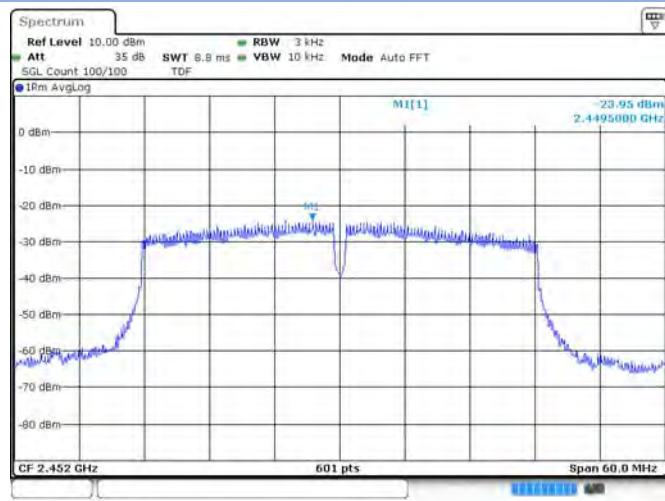


Date: 29 SEP 2020 22:21:36

## MIMO-Aux. Antenna


### 802.11n-20 MHz LOW CHANNEL

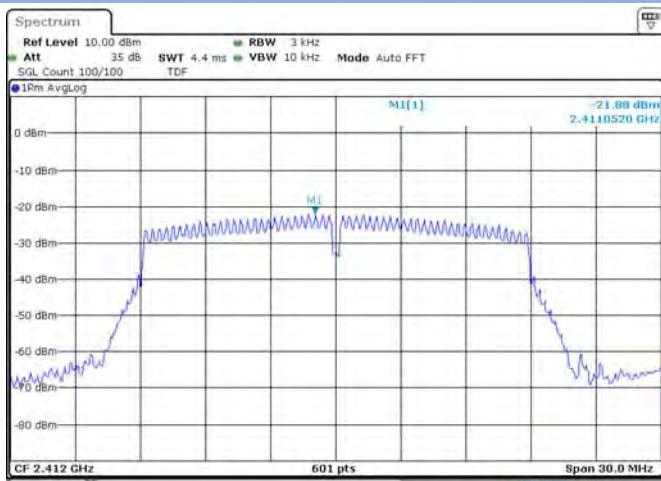


### 802.11 n-20 MHz MIDDLE CHANNEL

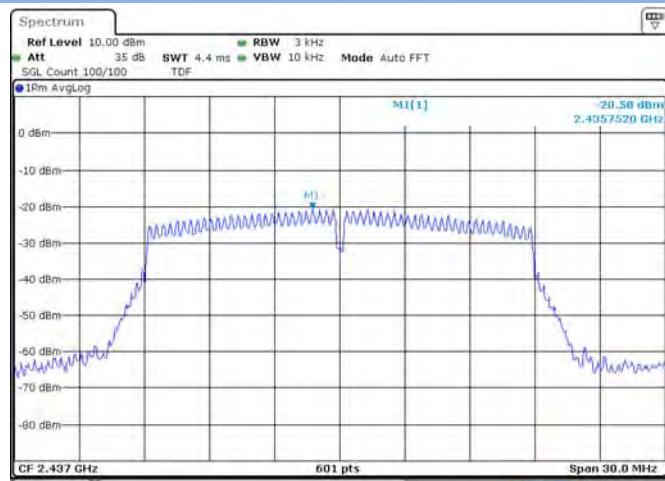


### 802.11n-20 MHz HIGH CHANNEL

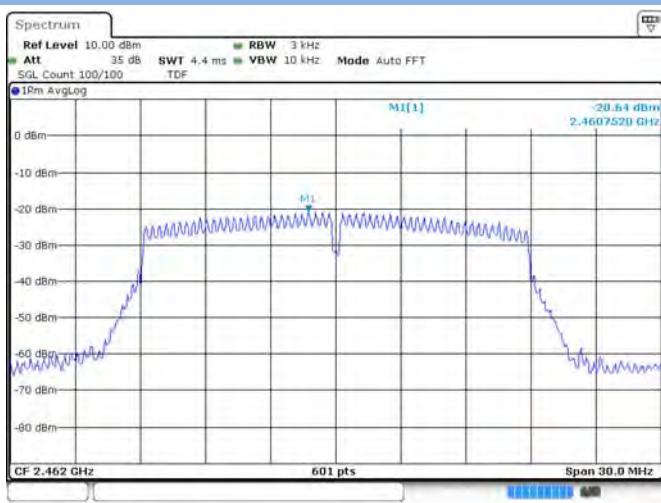


### 802.11n-40 MHz LOW CHANNEL

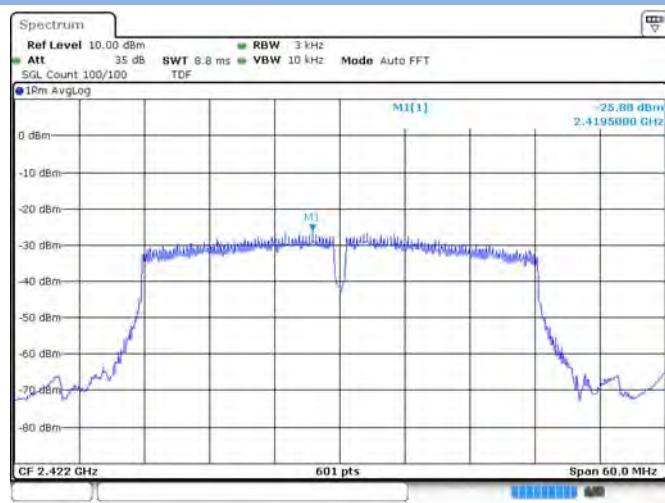

### 802.11n-40 MHz MIDDLE CHANNEL

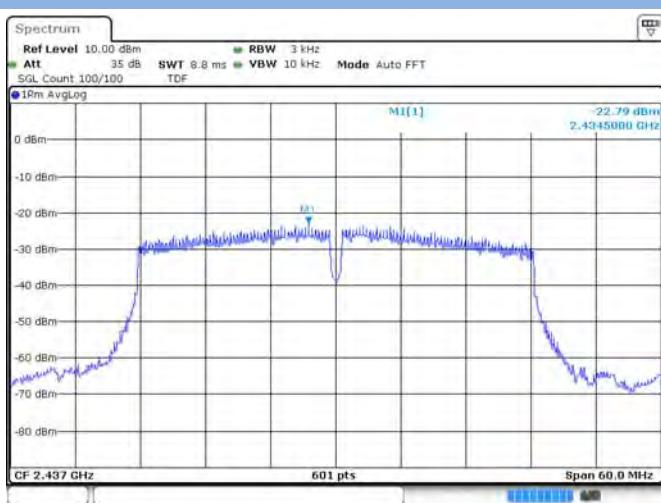

### 802.11n-40 MHz HIGH CHANNEL

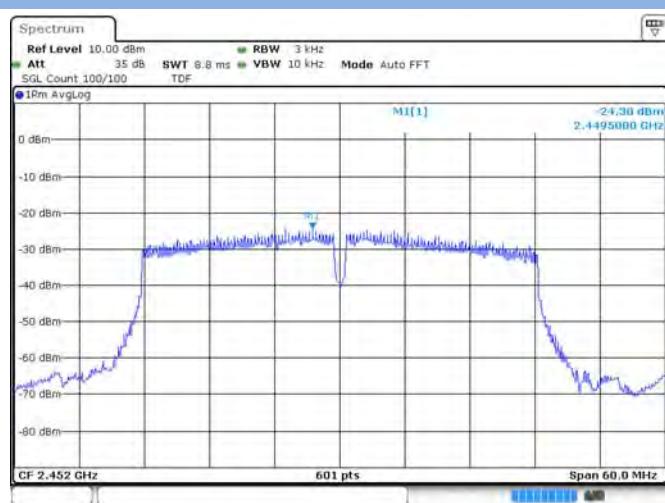

## **ANNEX B TEST SETUP PHOTOS**

Please refer the document "BL-SZ2090067-AR.pdf".

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer the document "BL-SZ2090067-AW.pdf".

## **ANNEX D EUT INTERNAL PHOTOS**

Please refer the document "BL-SZ2090067-AI.pdf".

--END OF REPORT--