
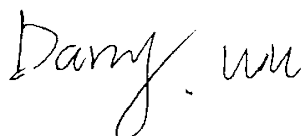





## TEST REPORT

<b>Report No.:</b>	<b>E20190417601701-6</b>	<b>Application No.:</b>	<b>E20190417601701</b>
<b>Applicant:</b>	GL Technologies (HongKong) Limited		
<b>Address:</b>	Unit 210D ,2/F Enterprise Place HongKong Science Park Shatin,N.T. Hong Kong, China		
<b>Sample Description:</b>	Spitz 4G LTE Smart Router		
<b>Model:</b>	GL-X750C4		
<b>Adding Model:</b>	/		
<b>FCC ID:</b>	2AFIW-X750C4		
<b>Test Specification:</b>	FCC 47 CFR Part 15 Subpart C		
<b>Test Date:</b>	2019-04-22 to 2019-06-13		
<b>Issue Date:</b>	2019-06-13		
<b>Test Result:</b>	PASS		
<b>Prepared By:</b>	<b>Reviewed By:</b>	<b>Approved By:</b>	
Darry Wu / Test Engineer	Eve Wang / Technical Manager	Tony Han / Manager	
			
Date: 2019-06-13	Date: 2019-06-13	Date: 2019-06-13	
<b>Other Aspects:</b>			
/			
<b>Abbreviations:</b> ok / P = passed; fail / F = failed; n.a. / N = not applicable			
<b>The test result in this test report refers exclusively to the presented test sample. This report shall not be reproduced except in full, without the written approval of GRGT.</b>			

GRG METROLOGY & TEST (SHENZHEN) CO., LTD

Address: No. 1301, Guanguang Road, Xinlan Community, Guanlan Street, Longhua District, Shenzhen, 518110, People's Republic of China

Tel:+86-755-61180008

Email: szgrgt@grgtest.com

http://www.grgtest.com

Identifying code: 481978

## **DIRECTIONS OF TEST**

1. This company carries out test task according to the national regulation of verifications which can be traced to National Primary Standards and BIPM.
2. The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.
3. If there is any objection concerning the test, the client should inform the laboratory within 15 days from the date of receiving the test report.

## TABLE OF CONTENTS

<b>1. TEST RESULT SUMMARY .....</b>	<b>5</b>
<b>2. GENERAL DESCRIPTION OF EUT.....</b>	<b>6</b>
2.1. APPLICANT .....	6
2.2. MANUFACTURER .....	6
2.3. FACTORY .....	6
2.4. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST .....	6
2.5. TEST OPERATION MODE .....	7
2.6. LOCAL SUPPORTIVE INSTRUMENTS .....	8
<b>3. LABORATORY AND ACCREDITATIONS .....</b>	<b>9</b>
3.1. LABORATORY .....	9
3.2. ACCREDITATIONS .....	9
3.3. MEASUREMENT UNCERTAINTY .....	9
<b>4. LIST OF USED TEST EQUIPMENT AT GRGT.....</b>	<b>10</b>
<b>5. ANTENNA REQUIREMENT .....</b>	<b>11</b>
<b>6. CONDUCTED EMISSION MEASUREMENT .....</b>	<b>12</b>
6.1. LIMITS.....	12
6.2. TEST PROCEDURES.....	12
6.3. TEST SETUP .....	13
6.4. DATA SAMPLE .....	13
6.5. TEST RESULTS .....	14
<b>7. RADIATED SPURIOUS EMISSIONS .....</b>	<b>18</b>
7.1. LIMITS.....	18
7.2. TEST PROCEDURES (PLEASE REFER TO MEASUREMENT STANDARD).....	18
7.3. TEST SETUP .....	22
7.4. DATA SAMPLE .....	23
7.5. TEST RESULTS .....	24
<b>8. 6DB BANDWIDTH.....</b>	<b>35</b>
8.1. LIMITS.....	35
8.2. TEST PROCEDURES.....	35
8.3. TEST SETUP .....	35
8.4. TEST RESULTS .....	36
<b>9. MAXIMUM PEAK OUTPUT POWER.....</b>	<b>49</b>
9.1. LIMITS.....	49
9.2. TEST PROCEDURES.....	49
9.3. TEST SETUP .....	49
9.4. TEST RESULTS .....	50
<b>10. POWER SPECTRAL DENSITY.....</b>	<b>52</b>
10.1. LIMITS.....	52
10.2. TEST PROCEDURES.....	52
10.3. TEST SETUP .....	52
10.4. TEST RESULTS .....	53
<b>11. CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS .....</b>	<b>66</b>
11.1. LIMITS.....	66
11.2. TEST PROCEDURES.....	66
11.3. TEST SETUP .....	66
11.4. TEST RESULTS .....	67
<b>12. RESTRICTED BANDS OF OPERATION.....</b>	<b>91</b>
12.1. LIMITS.....	91
12.2. TEST PROCEDURES.....	91
12.3. TEST SETUP .....	92

12.4. TEST RESULTS .....93

**APPENDIX A: PHOTOGRAPH OF THE TEST ARRANGEMENT.....117**

**1. TEST RESULT SUMMARY**

<b>Section B of FCC Part 15.247:2012</b>			
<b>Standard</b>	<b>Item</b>	<b>Limit / Severity</b>	<b>Result</b>
FCC Part 15, Subpart C (15.247)	Antenna Requirement	§15.203	PASS
	Conducted Emissions	§15.207 (a)	PASS
	Radiated Spurious Emission	§15.247(d)	PASS
	6 dB Bandwidth	§15.247 (a)(2)	PASS
	Maximum Peak Output Power	§15.247(b)(3)	PASS
	Power Spectral Density	§15.247(e)	PASS
	Conducted band edges and Spurious Emission	§15.247(d)	PASS
	Restricted bands of operation	§15.205	PASS

## 2. GENERAL DESCRIPTION OF EUT

### 2.1. APPLICANT

Name: GL Technologies (HongKong) Limited  
Address: Unit 210D ,2/F Enterprise Place HongKong Science Park Shatin,N.T.  
Hong Kong, China

### 2.2. MANUFACTURER

Name: GL Technologies (HongKong) Limited  
Address: Unit 210D ,2/F Enterprise Place HongKong Science Park Shatin,N.T.  
Hong Kong, China

### 2.3. FACTORY

Name: Shenzhen Guanglianzhitong Tech Co.,Ltd  
Address: Room 305-306, Skyworth Digital Building , Shiyan Street, Baoan  
District, Shenzhen, China

### 2.4. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

Equipment: Spitz 4G LTE Smart Router  
Model No.: GL-X750C4  
Adding Model /  
Model /  
Discrepancy:  
Trade Name: GL.iNET  
Power supply: DC12V supplied by the adapter  
Adapter 1 MOSO POWER SUPPLY TECHNOLOGY CO.,LTD.  
specification: Model: MSA-C1500IC12.0-18P-zz  
Input: AC100-240V~50/60Hz 0.7A Max.  
Output: 12V, 1.5A  
DC cable: Unshielded, 1.00m  
Adapter 2 Shenzhen Jiuzhou Power Technology Co.,Ltd  
specification: Model: JZB024-120150X  
Input: AC100-240V, 50-60Hz 0.7A  
Output: 12V, 1.5A  
DC cable: Unshielded, 1.40m(with a core)  
Frequency 2412MHz~2462MHz: 802.11b; 802.11g; 802.11n(HT20)  
Range 2422MHz~2452MHz: 802.11n(HT40);  
Transmit 14.53dBm for 802.11b mode (antenna 0)  
Power: 12.72dBm for 802.11b mode (antenna 1)  
26.14dBm for 802.11g mode (antenna 0)  
25.37dBm for 802.11g mode (antenna 1)  
combine with antenna 0 and antenna 1:  
25.97dBm for 802.11n HT20 mode  
23.49dBm for 802.11n HT40 mode

Modulation type: DSSS for 802.11b mode;  
OFDM for 802.11g mode;  
OFDM for 802.11n mode.

Channel space: 5MHz

Antenna Specification: Internal antenna 0 with 2.78dBi gain (Max.)  
Internal antenna 1 with 2.86dBi gain (Max)

Temperature Range: -20°C ~+40°C

Hardware Version: V1.0

Software Version: V3.009

Note: /

## 2.5. TEST OPERATION MODE

Test Item	Mode No.	Description of the modes
Conducted Emission	1	Full system with adapter 1(AC120V/60Hz)
	2	Full system with adapter 1(AC240V/50Hz)
	3	Full system with adapter 2(AC120V/60Hz)
	4	Full system with adapter 2(AC240V/50Hz)
Radiated Emission	1	WLAN+BT+Celluar
	2	WLAN+BT
	3	WLAN+Celluar

## 2.6. LOCAL SUPPORTIVE INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Note
Notebook	acer	MS2392	NXMPGCN0155031 1F8C6600	/
adapter	acer	A13-45N2A	F258341423005687	/
Notebook	LENOVO	Thinkpad X270	N/A	/
SIM Card	N/A	N/A	N/A	/
TF Card	SAMSUNG	MB-MP16DA	N/A	/
HDD3.0	WD	WDBUZG0010B BL-CESN	WXC1A176SC9Z	/
Notebook (RF)	LENOVO	B475	WB04861612	/
<b>Cable</b>				
Power cable	/	/	/	Unshielded 1.50m
AC cable*1	/	/	/	Unshielded, 1.50m
AC cable*1				Unshielded, 1.00m
DC cable*2	/	/	/	Shielded, 1.80m
USB cable	/	/	/	Shielded, 0.50m
RJ45 cable*1	/	/	/	Unshielded, 1.50m

### Test software:

Software version	Test level	
Atheros Radio Test 2 (ART2-GUI)	Antenna 0 802.11b: 9 802.11g: 15 802.11n HT20: 13.5 802.11n HT40: 10.5	Antenna 1 802.11b: 9 802.11g: 16.5 802.11n HT20: 13.5 802.11n HT40: 10.5



### 3. LABORATORY AND ACCREDITATIONS

#### 3.1. LABORATORY

The tests and measurements refer to this report were performed by EMC Laboratory of GRG METROLOGY & TEST (SHENZHEN) CO., LTD

Add. : No. 1301, Guanguang Road, Xinlan Community, Guanlan Street, Longhua District, Shenzhen, 518110, People's Republic of China

Telephone : +86-755-61180008

Fax : /

#### 3.2. ACCREDITATIONS

A2LA	Certificate Number 2861.01
------	----------------------------

#### 3.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement		Frequency	Uncertainty
Radiated Emission	Horizontal	30MHz~1000MHz	4.3dB
		1GHz~18GHz	5.6dB
	Vertical	30MHz~1000MHz	4.3dB
		1GHz~18GHz	5.6dB
Conducted Emission		9kHz~30MHz	2.6dB

This uncertainty represents an expanded uncertainty factor of  $k=2$ .


**4. LIST OF USED TEST EQUIPMENT AT GRGT**

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
<b>Conducted Emissions</b>				
EMI TEST Receiver	ROHDE&SCHWARZ	ESCI	100783	2020-01-10
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543	2020-01-10
Hygrothermograph	VICTOR	HTC-1	N/A	2019-12-25
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE		
<b>Radiated Spurious Emission&amp; Restricted bands of operation</b>				
EMI TEST Receiver	ROHDE&SCHWARZ	ESCI	100783	2020-01-10
EXA signal analyzer	Agilent	N9010A	MY52221469	2020-01-10
Wideband radio Communication Tester	ROHDE&SCHWARZ	ESCI	100783	2020-01-09
Bilog Antenna	Schwarzbeck	VULB 9160	9160-3401	2019-12-21
Horn Antenna	Schwarzbeck	BBHA9120	D286	2019-12-21
Board-Band Horn Antenna	Schwarzbeck	BBHA9170	9170-497	2020-01-15
Active Loop Antenna	COM-POWER	AL-130	121044	2019-12-27
Amplifier	EM Electronics Corporation	EM330	060661	2019-12-21
High Noise Amplifier	Agilent	8449B	3008A02060	2019-12-21
Hygrothermograph	VICTOR	HTC-1	NA	2019-12-24
Test SW	FARAD	EZ-EMC/ CCS-3A1-CE		
<b>6 dB Bandwidth</b>				
EXA signal analyzer	Agilent	N9010A	MY52221469	2020-01-10
<b>Maximum Peak Output Power</b>				
EXA signal analyzer	Agilent	N9010A	MY52221469	2020-01-10
<b>Conducted band edges and Spurious Emission</b>				
EXA signal analyzer	Agilent	N9010A	MY52221469	2020-01-10
<b>Power Spectral Density</b>				
EXA signal analyzer	Agilent	N9010A	MY52221469	2020-01-10

## 5. ANTENNA REQUIREMENT

The EUT has two antennas. The antennas are internal antennas.

The max gain of antenna 0 is 2.78dBi and the max gain of antenna 1 is 2.86dBi. which accordance 15.203.is considered sufficient to comply with the provisions of this section

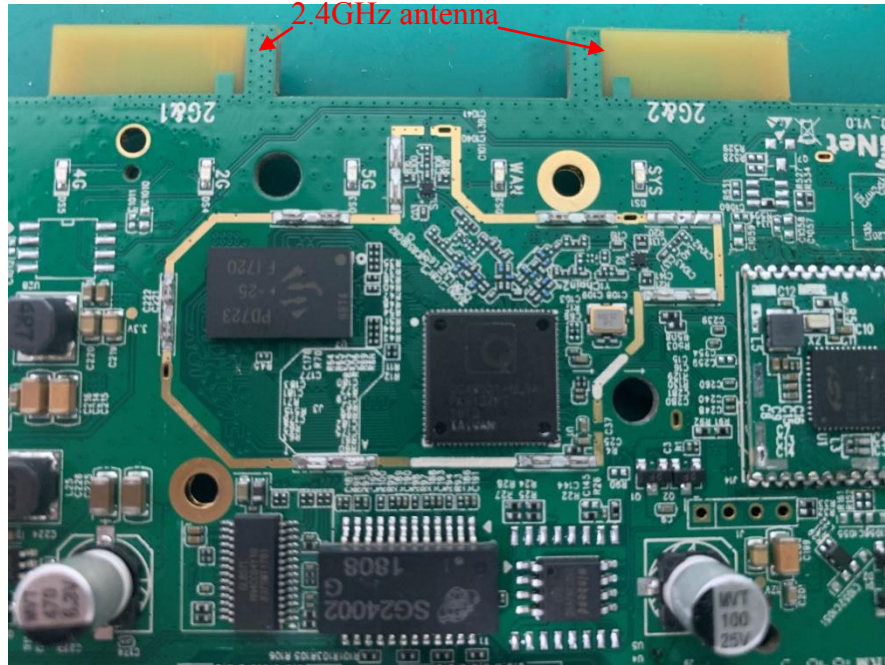

## 6. CONDUCTED EMISSION MEASUREMENT

### 6.1. LIMITS

Frequency range	Limits (dB $\mu$ V)	
	Quasi-peak	Average
150kHz ~ 0.5MHz	66~56	56~46
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

**NOTE:** (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases in line with the logarithm of the frequency in the range of 150 kHz to 0.5MHz.

### 6.2. TEST PROCEDURES

#### Procedure of Preliminary Test

Test procedures follow ANSI C63.4:2014.

For measurement of the disturbance voltage the equipment under test (EUT) is connected to the power supply mains and any other extended network via one or more artificial network(s). An EUT, whether intended to be grounded or not, and which is to be used on a table is configured as follows:


- Either the bottom or the rear of the EUT shall be at a controlled distance of 40 cm from a reference ground plane. This ground plane is normally the wall or floor of a shielded room. It may also be a grounded metal plane of at least 2 m by 2 m. This is physically accomplished as follows:
  - 1) place the EUT on a table of non-conducting material which is at least 80 cm high. Place the EUT so that it is 40 cm from the wall of the shielded room, or
  - 2) place the EUT on a table of non-conducting material which is 40 cm high so that the bottom of the EUT is 40 cm above the ground plane;
- All other conductive surfaces of the EUT shall be at least 80 cm from the reference ground plane;
- The EUT are placed on the floor that one side of the housings is 40 cm from the vertical reference ground plane and other metallic parts;
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth forming a bundle 30 cm to 40 cm long, hanging approximately in the middle between the ground plane and the table.
- I/O cables that are connected to a peripheral shall be bundled in the centre. The end of the cable may be terminated if required using correct terminating impedance. The total length shall not exceed 1 m.

The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT configuration and cable configuration of the above highest emission levels were recorded for reference of the final test.

#### Procedure of Final Test

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test. A scan was taken on both power lines, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded.

### 6.3. TEST SETUP

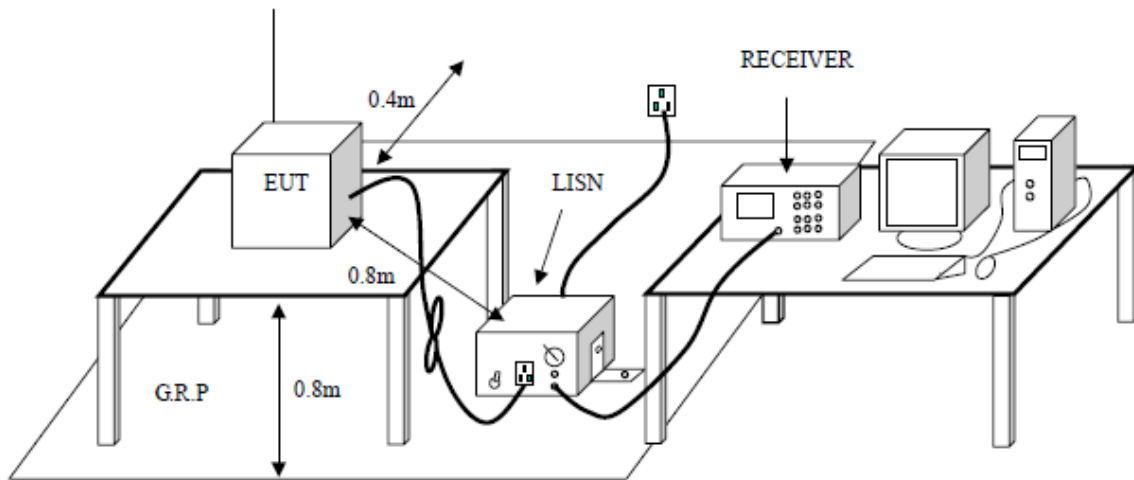

### 6.4. DATA SAMPLE


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

Factor = Insertion loss of LISN + Cable Loss  
 Result = Quasi-peak Reading/ Average Reading + Factor  
 Limit = Limit stated in standard  
 Margin = Result (dBuV) – Limit (dBuV)

### 6.5. TEST RESULTS

Pre-test Mode 1~ Mode 4, found that Mode 1, Mode 2 are the worst case.


<b>Model No.</b>	GL-X750C4	<b>RBW,VBW</b>	9 kHz
<b>Environmental Conditions</b>	26.1°C, 60% RH	<b>Test Mode</b>	Mode 1
<b>Tested by</b>	Luja Huang	<b>Line</b>	L
<b>Tested Date</b>	2019-04-22	<b>Test Voltage</b>	AC120V/60Hz

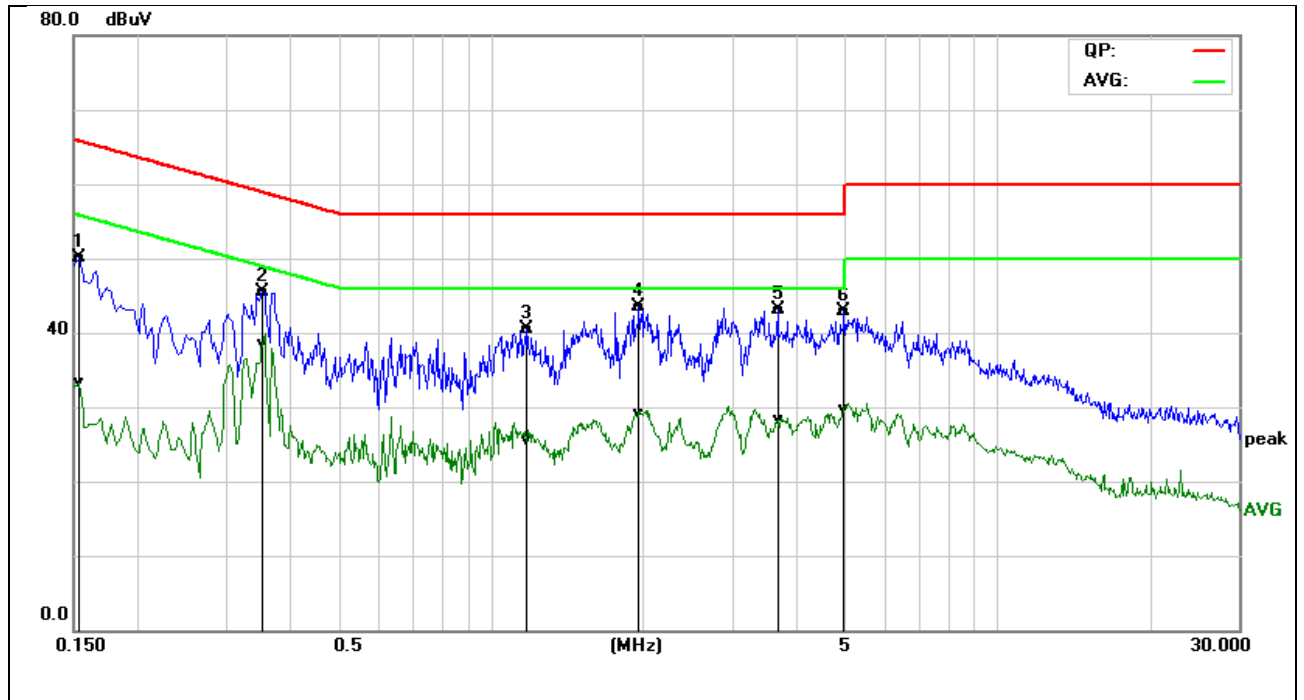

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1539	30.16	13.47	19.88	50.04	33.35	65.78	55.79	-15.74	-22.44	Pass
0.3540	25.64	18.69	19.83	45.47	38.52	58.87	48.87	-13.40	-10.35	Pass
1.1820	20.73	5.64	19.85	40.58	25.49	56.00	46.00	-15.42	-20.51	Pass
1.9620	23.55	9.11	19.92	43.47	29.03	56.00	46.00	-12.53	-16.97	Pass
3.6980	23.18	8.30	19.93	43.11	28.23	56.00	46.00	-12.89	-17.77	Pass
4.9940	22.88	9.75	19.93	42.81	29.68	56.00	46.00	-13.19	-16.32	Pass

REMARKS: L= Live Line


<b>Model No.</b>	GL-X750C4	<b>RBW,VBW</b>	9 kHz
<b>Environmental Conditions</b>	26.1°C, 60% RH	<b>Test Mode</b>	Mode 1
<b>Tested by</b>	Luja Huang	<b>Line</b>	N
<b>Tested Date</b>	2019-04-22	<b>Test Voltage</b>	AC120V/60Hz

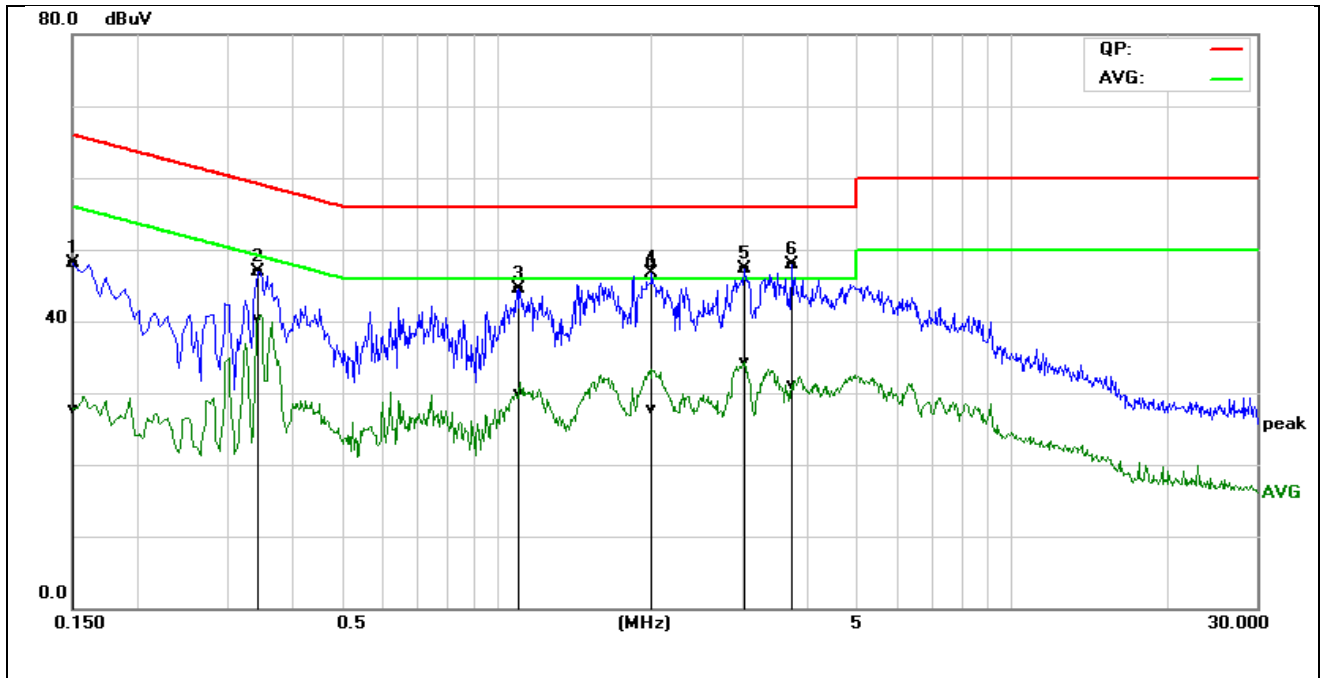

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	28.25	7.91	19.87	48.12	27.78	65.99	56.00	-17.87	-28.22	Pass
0.3460	27.05	20.55	19.83	46.88	40.38	59.06	49.06	-12.18	-8.68	Pass
1.1060	24.71	10.15	19.85	44.56	30.00	56.00	46.00	-11.44	-16.00	Pass
2.0100	28.21	7.87	19.91	48.12	27.78	56.00	46.00	-7.88	-18.22	Pass
3.0260	27.32	14.45	19.91	47.23	34.36	56.00	46.00	-8.77	-11.64	Pass
3.7540	27.92	11.21	19.92	47.84	31.13	56.00	46.00	-8.16	-14.87	Pass

**REMARKS:** N= Neutral Line

<b>Model No.</b>	GL-X750C4	<b>RBW,VBW</b>	9 kHz
<b>Environmental Conditions</b>	26.1°C, 60% RH	<b>Test Mode</b>	Mode 2
<b>Tested by</b>	Luja Huang	<b>Line</b>	L
<b>Tested Date</b>	2019-04-22	<b>Test Voltage</b>	AC240V/50Hz

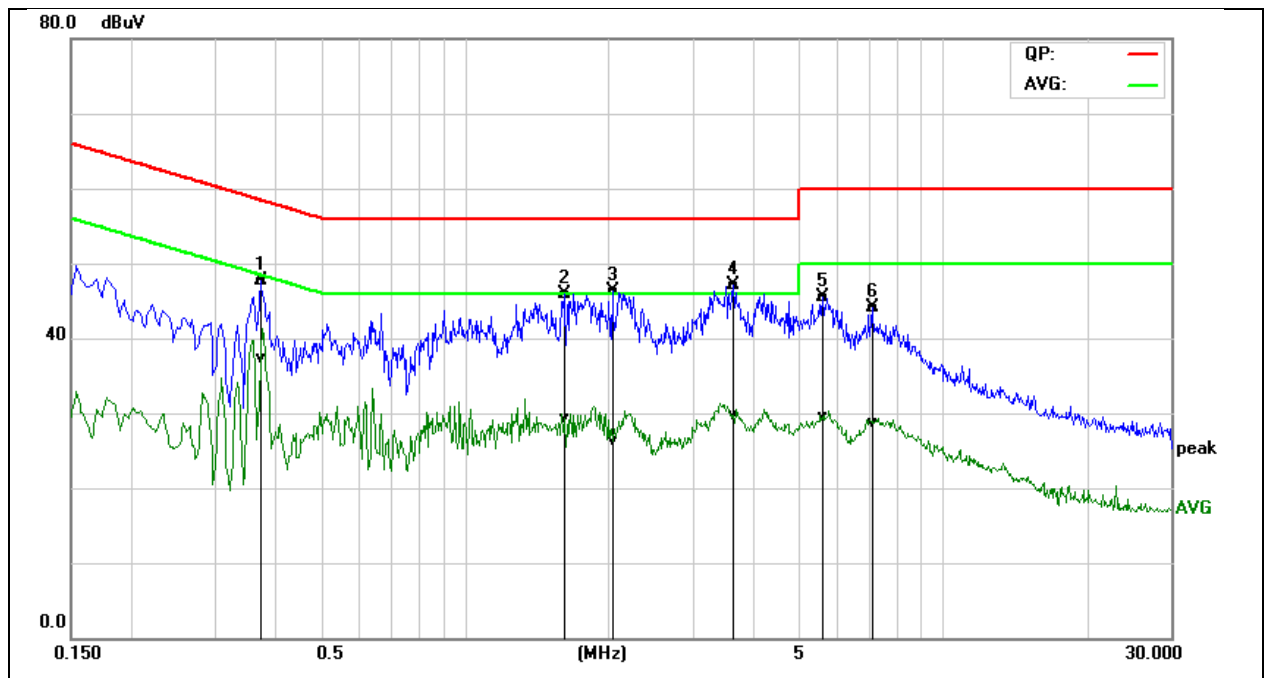


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.3740	27.80	17.50	19.83	47.63	37.33	58.41	48.41	-10.78	-11.08	Pass
1.6180	26.08	9.39	19.89	45.97	29.28	56.00	46.00	-10.03	-16.72	Pass
2.0380	26.36	6.37	19.92	46.28	26.29	56.00	46.00	-9.72	-19.71	Pass
3.6540	27.10	9.70	19.93	47.03	29.63	56.00	46.00	-8.97	-16.37	Pass
5.6100	25.65	9.57	19.93	45.58	29.50	60.00	50.00	-14.42	-20.50	Pass
7.1180	24.23	8.79	19.94	44.17	28.73	60.00	50.00	-15.83	-21.27	Pass

**REMARKS:** L = Live Line



<b>Model No.</b>	GL-X750C4	<b>RBW,VBW</b>	9 kHz
<b>Environmental Conditions</b>	26.1°C, 60% RH	<b>Test Mode</b>	Mode 2
<b>Tested by</b>	Luja Huang	<b>Line</b>	N
<b>Tested Date</b>	2019-04-22	<b>Test Voltage</b>	AC240V/50Hz

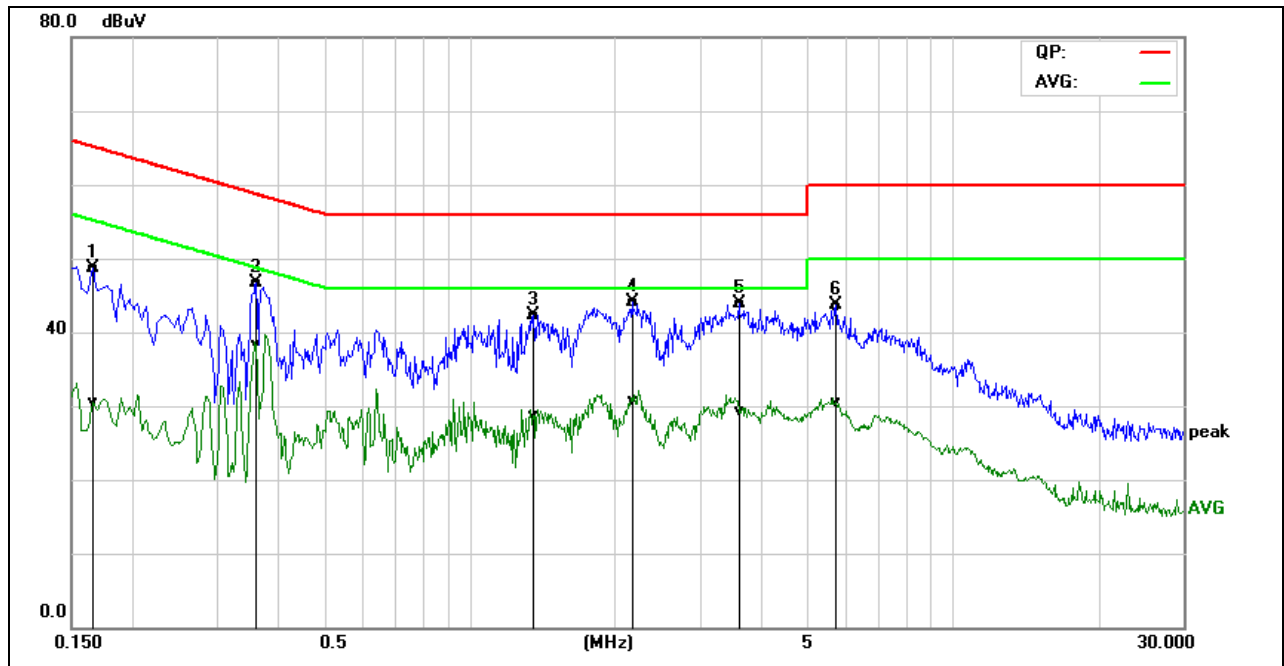

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1660	28.76	10.57	19.86	48.62	30.43	65.15	55.16	-16.53	-24.73	Pass
0.3620	26.87	18.44	19.83	46.70	38.27	58.68	48.68	-11.98	-10.41	Pass
1.3580	22.47	8.76	19.86	42.33	28.62	56.00	46.00	-13.67	-17.38	Pass
2.1780	24.17	10.77	19.91	44.08	30.68	56.00	46.00	-11.92	-15.32	Pass
3.6220	23.98	9.44	19.92	43.90	29.36	56.00	46.00	-12.10	-16.64	Pass
5.7300	23.68	10.54	19.92	43.60	30.46	60.00	50.00	-16.40	-19.54	Pass

**REMARKS:** N= Neutral Line

## 7. RADIATED SPURIOUS EMISSIONS

### 7.1. LIMITS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Frequency (MHz)	Quasi-peak( $\mu\text{V}/\text{m}$ )	Measurement distance(m)	Quasi-peak( $\text{dB}\mu\text{V}/\text{m}$ )@distance 3m
0.009-0.490	2400/F(kHz)	300	53.8~88.5
0.490-1.705	24000/F(kHz)	30	43~53.8
1.705-30.0	30	30	49.5
30 ~ 88	100	3	40
88~216	150	3	43.5
216 ~ 960	200	3	46
Above 960	500	3	54

NOTE: (1) The lower limit shall apply at the transition frequencies.

### 7.2. TEST PROCEDURES (please refer to measurement standard)

#### 1) Sequence of testing 9 kHz to 30 MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

**Final measurement:**

- Identified emissions during the pre measurement the software maximizes by rotating the turntable position ( $0^{\circ}$  to  $360^{\circ}$ ) and by rotating the elevation axes ( $0^{\circ}$  to  $360^{\circ}$ ).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

**2) Sequence of testing 30 MHz to 1 GHz****Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

**Pre measurement:**

- The turntable rotates from  $0^{\circ}$  to  $315^{\circ}$  using  $45^{\circ}$  steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

**Final measurement:**

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

**3) Sequence of testing 1 GHz to 18 GHz****Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

**Pre measurement:**

- The turntable rotates from  $0^\circ$  to  $315^\circ$  using  $45^\circ$  steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

**Final measurement:**

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

**4) Sequence of testing above 18 GHz****Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

**Pre measurement:**

- The antenna is moved spherical over the EUT in different polarisations of the antenna.

**Final measurement:**

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).

### 1.3. TEST SETUP

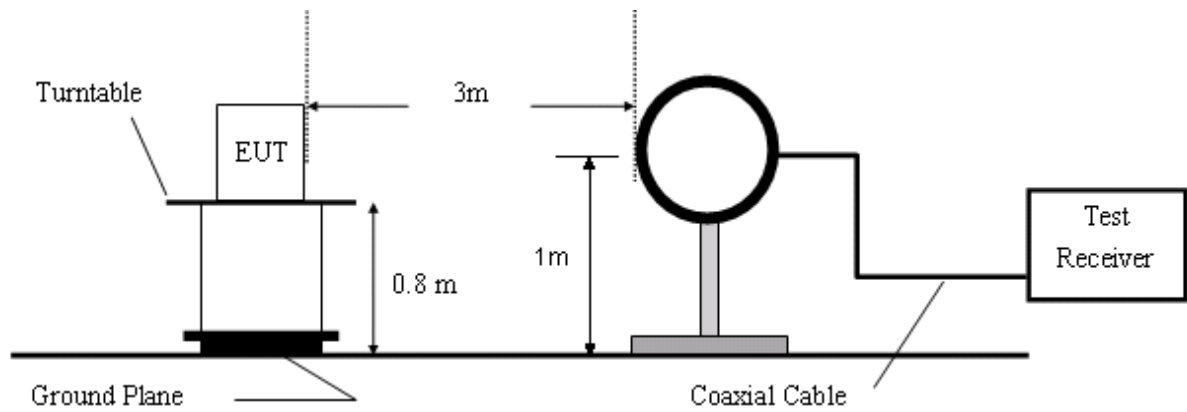


Figure 1. 9KHz to 30MHz radiated emissions test configuration

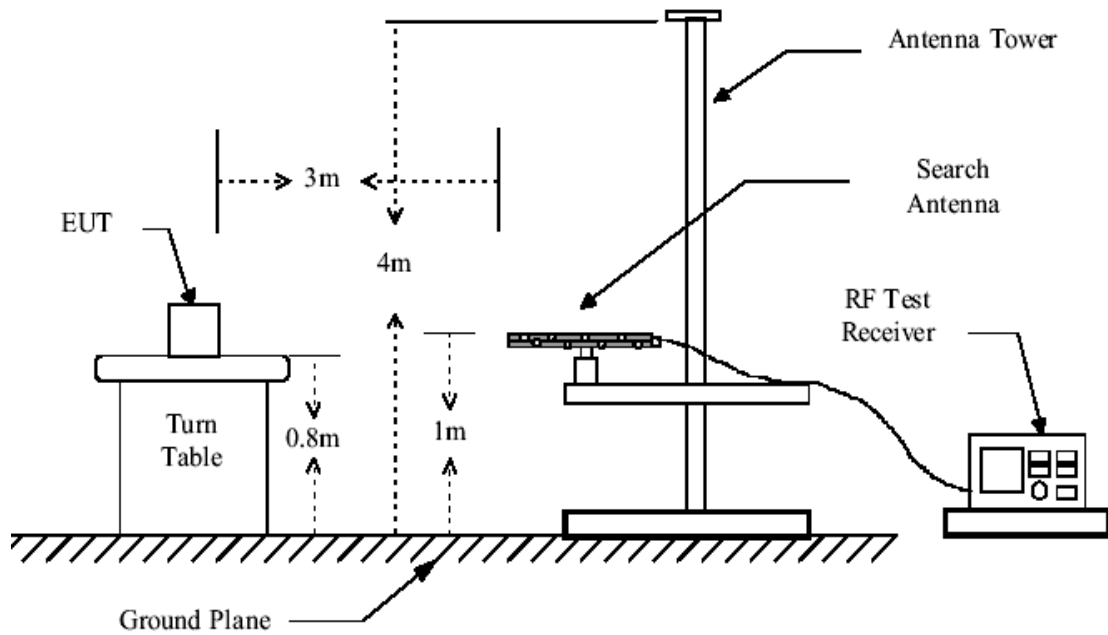


Figure 2. 30MHz to 1GHz radiated emissions test configuration

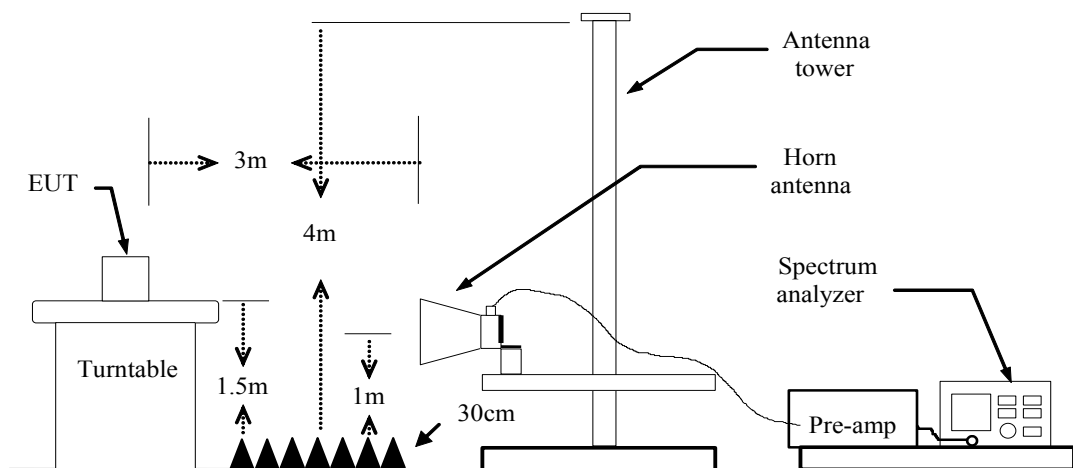


Figure 3. Above 1GHz radiated emissions test configuration

### 7.3. DATA SAMPLE

#### 30MHz to 1GHz

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
xxx	xxx	37.06	-15.48	21.58	40.00	-18.42	QP	Vertical

#### Above 1 GHz

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
xxx	xxx	65.45	-11.12	54.33	74.00	-19.67	peak	Vertical
xxx	xxx	63.00	-11.12	51.88	54.00	-2.12	AVG	Vertical

Frequency (MHz)	= Emission frequency in MHz
Ant.Pol. (H/V)	= Antenna polarization
Reading (dBuV)	= Uncorrected Analyzer / Receiver reading
Correction Factor (dB/m)	= Antenna factor + Cable loss – Amplifier gain
Result (dBuV/m)	= Reading (dBuV) + Correction Factor (dB/m)
Limit (dBuV/m)	= Limit stated in standard
Margin (dB)	= Remark Result (dBuV/m) – Limit (dBuV/m)
Peak	= Peak Reading
QP	= Quasi-peak Reading
AVG	= Average Reading

### 7.4. TEST RESULTS


#### 30MHz to 1GHz

Pre-scan all modes and recorded the worst case mode 1 results in this report (IEEE 802.11g (Lowest channel))

Mode: TX/ IEEE 802.11g

Lowest channel (2412MHz)

Date: 2019-05-22

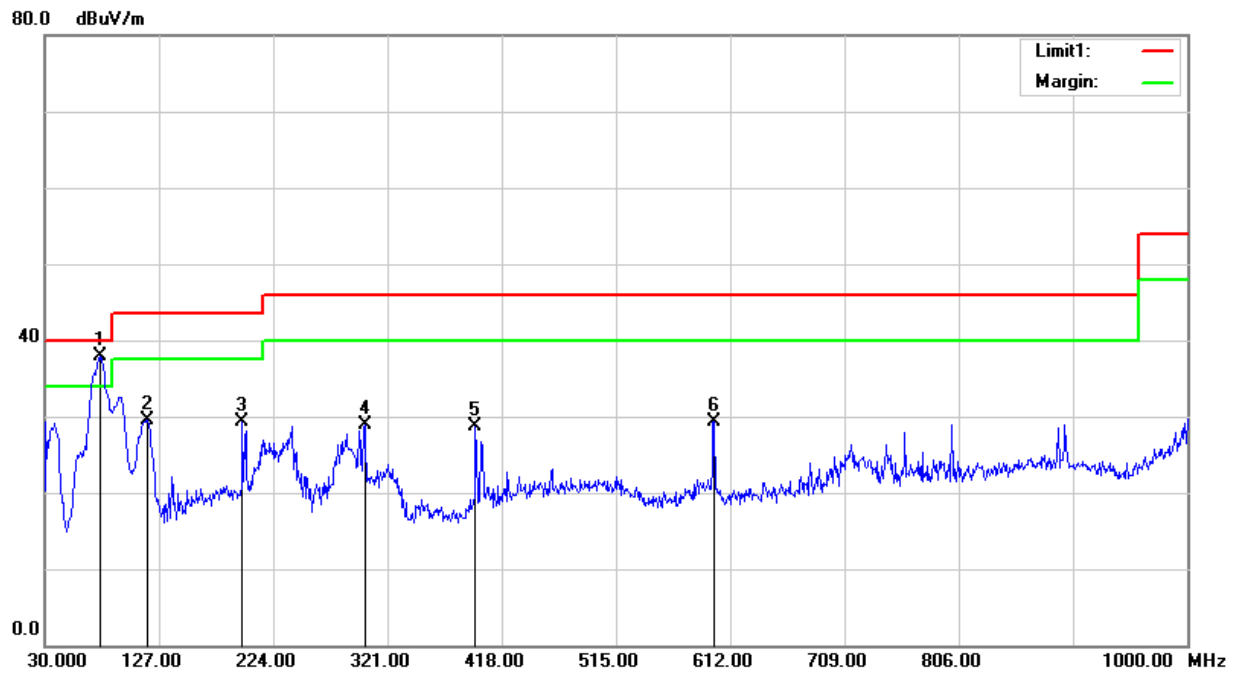


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	76.5600	58.06	-20.22	37.84	40.00	-2.16	QP	Vertical
2	117.3000	46.94	-17.43	29.51	43.50	-13.99	QP	Vertical
3	197.8100	47.31	-18.00	29.31	43.50	-14.19	QP	Vertical
4	301.6000	44.76	-15.93	28.83	46.00	-17.17	QP	Vertical
5	395.6900	42.12	-13.42	28.70	46.00	-17.30	QP	Vertical
6	598.4200	37.74	-8.48	29.26	46.00	-16.74	QP	Vertical



Mode: TX/ IEEE 802.11g  
 Lowest channel (2412MHz)

Date: 2019-05-22

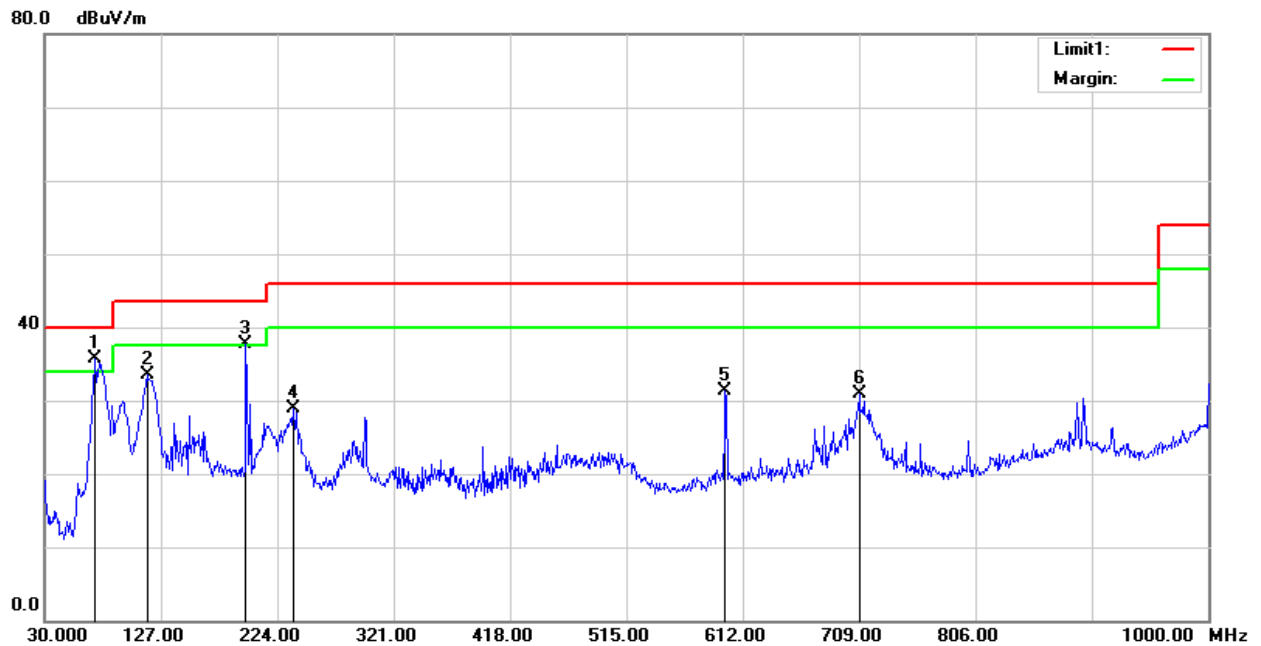

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	71.7100	55.13	-19.35	35.78	40.00	-4.22	QP	Horizontal
2	115.3600	50.91	-17.46	33.45	43.50	-10.05	QP	Horizontal
3	197.8100	55.73	-18.00	37.73	43.50	-5.77	QP	Horizontal
4	237.5800	46.13	-17.18	28.95	46.00	-17.05	QP	Horizontal
5	597.4500	39.90	-8.52	31.38	46.00	-14.62	QP	Horizontal
6	709.0000	37.32	-6.43	30.89	46.00	-15.11	QP	Horizontal

**Remark:**

- 1 No emission found between lowest internal used/generated frequency to 30MHz.
- 2 Radiated emissions measured in frequency range from 9 kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
- 3 Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of Receiver between 30MHz to 1GHz was 120 kHz.

**Above 1GHz:**

Pre-scan all modes and recorded the worst case mode 1 results in this report

Mode: TX / IEEE 802.11b (antenna 0)

Lowest channel (2412MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1918.000	54.29	-2.84	51.45	74.00	-22.55	peak	Vertical
2	1918.000	50.36	-2.84	47.52	54.00	-6.48	AVG	Vertical
3	2071.000	49.13	-2.19	46.94	74.00	-27.06	peak	Vertical
4	4825.000	51.62	2.34	53.96	74.00	-20.04	peak	Vertical
5	4825.000	49.41	2.34	51.75	54.00	-2.25	AVG	Vertical
6	5005.000	45.05	2.24	47.29	74.00	-26.71	peak	Vertical
7	5761.000	44.03	4.50	48.53	74.00	-25.47	peak	Vertical
8	6013.000	43.92	5.28	49.20	74.00	-24.80	peak	Vertical
9	1324.000	50.36	-5.80	44.56	74.00	-29.44	peak	Horizontal
10	1918.000	56.38	-2.84	53.54	74.00	-20.46	peak	Horizontal
11	1918.000	53.01	-2.84	50.17	54.00	-3.83	AVG	Horizontal
12	4825.000	51.99	2.34	54.33	74.00	-19.67	peak	Horizontal
13	4825.000	49.02	2.34	51.36	54.00	-2.64	AVG	Horizontal
14	5635.000	42.30	4.09	46.39	74.00	-27.61	peak	Horizontal
15	6400.000	41.74	5.86	47.60	74.00	-26.40	peak	Horizontal
16	7489.000	41.86	8.25	50.11	74.00	-23.89	peak	Horizontal

Mode: TX/ IEEE 802.11b (antenna 0)

Middle channel (2437 MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1918.000	54.61	-2.84	51.77	74.00	-22.23	peak	Vertical
2	3250.000	46.03	0.92	46.95	74.00	-27.05	peak	Vertical
3	4870.000	46.54	2.31	48.85	74.00	-25.15	peak	Vertical
4	4996.000	44.14	2.23	46.37	74.00	-27.63	peak	Vertical
5	5761.000	43.31	4.50	47.81	74.00	-26.19	peak	Vertical
6	6013.000	43.63	5.28	48.91	74.00	-25.09	peak	Vertical
7	1918.000	56.29	-2.84	53.45	74.00	-20.55	peak	Horizontal
8	1918.000	50.00	-2.84	47.16	54.00	-6.84	AVG	Horizontal
9	2134.000	48.36	-2.06	46.30	74.00	-27.70	peak	Horizontal
10	4870.000	50.38	2.31	52.69	74.00	-21.31	peak	Horizontal
11	4870.000	49.67	2.31	51.98	54.00	-2.02	AVG	Horizontal
12	4996.000	44.32	2.23	46.55	74.00	-27.45	peak	Horizontal
13	6733.000	41.60	6.50	48.10	74.00	-25.90	peak	Horizontal
14	7165.000	41.87	7.46	49.33	74.00	-24.67	peak	Horizontal

Mode: TX/ IEEE 802.11b (antenna 0)

Highest channel (2462MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1918.000	53.51	-2.84	50.67	74.00	-23.33	peak	Vertical
2	2125.000	47.02	-2.07	44.95	74.00	-29.05	peak	Vertical
3	4924.000	45.46	2.28	47.74	74.00	-26.26	peak	Vertical
4	4996.000	45.58	2.23	47.81	74.00	-26.19	peak	Vertical
5	5761.000	42.99	4.50	47.49	74.00	-26.51	peak	Vertical
6	6013.000	44.02	5.28	49.30	74.00	-24.70	peak	Vertical
7	1918.000	56.99	-2.84	54.15	74.00	-19.85	peak	Horizontal
8	1918.000	52.35	-2.84	49.51	54.00	-4.49	AVG	Horizontal
9	2116.000	46.11	-2.09	44.02	74.00	-29.98	peak	Horizontal
10	3484.000	44.30	0.92	45.22	74.00	-28.78	peak	Horizontal
11	4924.000	46.98	2.28	49.26	74.00	-24.74	peak	Horizontal
12	6013.000	42.81	5.28	48.09	74.00	-25.91	peak	Horizontal
13	8542.000	41.64	8.93	50.57	74.00	-23.43	peak	Horizontal

Mode: TX / IEEE 802.11b (antenna 1)

Lowest channel (2412MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1918.000	54.47	-2.84	51.63	74.00	-22.37	peak	Vertical
2	3223.000	44.84	0.91	45.75	74.00	-28.25	peak	Vertical
3	4825.000	45.69	2.34	48.03	74.00	-25.97	peak	Vertical
4	4996.000	44.46	2.23	46.69	74.00	-27.31	peak	Vertical
5	5761.000	42.58	4.50	47.08	74.00	-26.92	peak	Vertical
6	6013.000	44.43	5.28	49.71	74.00	-24.29	peak	Vertical
7	1378.000	47.89	-5.67	42.22	74.00	-31.78	peak	Horizontal
8	1918.000	56.50	-2.84	53.66	74.00	-20.34	peak	Horizontal
9	1918.000	50.55	-2.84	47.71	54.00	-6.29	AVG	Horizontal
10	4825.000	43.17	2.34	45.51	74.00	-28.49	peak	Horizontal
11	6013.000	42.00	5.28	47.28	74.00	-26.72	peak	Horizontal
12	7678.000	41.01	8.60	49.61	74.00	-24.39	peak	Horizontal
13	8146.000	41.65	9.11	50.76	74.00	-23.24	peak	Horizontal

Mode: TX/ IEEE 802.11b (antenna 1)

Middle channel (2437 MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1918.000	53.48	-2.84	50.64	74.00	-23.36	peak	Vertical
2	2512.000	46.41	-1.19	45.22	74.00	-28.78	peak	Vertical
3	4870.000	46.22	2.31	48.53	74.00	-25.47	peak	Vertical
4	5761.000	44.10	4.50	48.60	74.00	-25.40	peak	Vertical
5	6013.000	44.63	5.28	49.91	74.00	-24.09	peak	Vertical
6	7444.000	41.41	8.14	49.55	74.00	-24.45	peak	Vertical
7	1918.000	56.25	-2.84	53.41	74.00	-20.59	peak	Horizontal
8	1918.000	51.20	-2.84	48.36	54.00	-5.64	AVG	Horizontal
9	3088.000	43.81	0.90	44.71	74.00	-29.29	peak	Horizontal
10	4870.000	43.64	2.31	45.95	74.00	-28.05	peak	Horizontal
11	6013.000	41.38	5.28	46.66	74.00	-27.34	peak	Horizontal
12	6247.000	41.08	5.63	46.71	74.00	-27.29	peak	Horizontal
13	9811.000	40.81	10.76	51.57	74.00	-22.43	peak	Horizontal

Mode: TX/ IEEE 802.11b (antenna 1)

Highest channel (2462MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1918.000	53.28	-2.84	50.44	74.00	-23.56	peak	Vertical
2	2071.000	48.98	-2.19	46.79	74.00	-27.21	peak	Vertical
3	4924.000	50.21	2.28	52.49	74.00	-21.51	peak	Vertical
4	4924.000	49.34	2.28	51.62	54.00	-2.38	AVG	Vertical
5	4996.000	45.07	2.23	47.30	74.00	-26.70	peak	Vertical
6	6013.000	42.97	5.28	48.25	74.00	-25.75	peak	Vertical
7	7885.000	40.89	8.99	49.88	74.00	-24.12	peak	Vertical
8	1918.000	56.51	-2.84	53.67	74.00	-20.33	peak	Horizontal
9	1918.000	49.93	-2.84	47.09	54.00	-6.91	AVG	Horizontal
10	2521.000	47.08	-1.15	45.93	74.00	-28.07	peak	Horizontal
11	4924.000	52.58	2.28	54.86	74.00	-19.14	peak	Horizontal
12	4924.000	49.70	2.28	51.98	54.00	-2.02	AVG	Horizontal
13	6013.000	41.80	5.28	47.08	74.00	-26.92	peak	Horizontal
14	6517.000	42.36	6.04	48.40	74.00	-25.60	peak	Horizontal
15	7300.000	40.90	7.79	48.69	74.00	-25.31	peak	Horizontal

Mode: TX / IEEE 802.11g (antenna 0)

Lowest channel (2412MHz)

Date: 2019-05-22

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	1918.000	53.34	-2.84	50.50	74.00	-23.50	peak	Vertical
2	4816.000	61.33	2.35	63.68	74.00	-10.32	peak	Vertical
3	4816.000	47.30	2.35	49.65	54.00	-4.35	AVG	Vertical
4	4996.000	44.62	2.23	46.85	74.00	-27.15	peak	Vertical
5	5761.000	42.07	4.50	46.57	74.00	-27.43	peak	Vertical
6	7543.000	40.68	8.35	49.03	74.00	-24.97	peak	Vertical
7	9649.000	41.01	10.52	51.53	74.00	-22.47	peak	Vertical
8	1918.000	56.04	-2.84	53.20	74.00	-20.80	peak	Horizontal
9	1918.000	52.46	-2.84	49.62	54.00	-4.38	AVG	Horizontal
10	3061.000	44.44	0.92	45.36	74.00	-28.64	peak	Horizontal
11	3484.000	44.35	0.92	45.27	74.00	-28.73	peak	Horizontal
12	4825.000	61.73	2.34	64.07	74.00	-9.93	peak	Horizontal
13	4825.000	48.41	2.34	50.75	54.00	-3.25	AVG	Horizontal
14	6355.000	41.41	5.80	47.21	74.00	-26.79	peak	Horizontal
15	7660.000	41.14	8.58	49.72	74.00	-24.28	peak	Horizontal

Mode: TX / IEEE 802.11g (antenna 0)

Middle channel (2437 MHz)

Date: 2019-05-22

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
1	1918.000	53.30	-2.84	50.46	74.00	-23.54	peak	Vertical
2	3250.000	45.48	0.92	46.40	74.00	-27.60	peak	Vertical
3	4879.000	55.77	2.31	58.08	74.00	-15.92	peak	Vertical
4	4879.000	45.44	2.31	47.75	54.00	-6.25	AVG	Vertical
5	4996.000	45.36	2.23	47.59	74.00	-26.41	peak	Vertical
6	5761.000	43.66	4.50	48.16	74.00	-25.84	peak	Vertical
7	6013.000	44.12	5.28	49.40	74.00	-24.60	peak	Vertical
8	1639.000	48.52	-4.51	44.01	74.00	-29.99	peak	Horizontal
9	1918.000	56.31	-2.84	53.47	74.00	-20.53	peak	Horizontal
10	1918.000	49.99	-2.84	47.15	54.00	-6.85	AVG	Horizontal
11	3484.000	44.10	0.92	45.02	74.00	-28.98	peak	Horizontal
12	4870.000	60.67	2.31	62.98	74.00	-11.02	peak	Horizontal
13	4870.000	48.32	2.31	50.63	54.00	-3.37	AVG	Horizontal
14	5581.000	42.35	3.93	46.28	74.00	-27.72	peak	Horizontal
15	6499.000	41.70	6.02	47.72	74.00	-26.28	peak	Horizontal

Mode: TX/ IEEE 802.11g (antenna 0)

Highest channel (2462MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1918.000	54.10	-2.84	51.26	74.00	-22.74	peak	Vertical
2	2530.000	47.17	-1.10	46.07	74.00	-27.93	peak	Vertical
3	4825.000	59.44	2.34	61.78	74.00	-12.22	peak	Vertical
4	4825.000	46.49	2.34	48.83	54.00	-5.17	AVG	Vertical
5	4996.000	45.10	2.23	47.33	74.00	-26.67	peak	Vertical
6	5761.000	42.93	4.50	47.43	74.00	-26.57	peak	Vertical
7	6013.000	44.16	5.28	49.44	74.00	-24.56	peak	Vertical
8	1333.000	48.40	-5.78	42.62	74.00	-31.38	peak	Horizontal
9	1918.000	55.91	-2.84	53.07	74.00	-20.93	peak	Horizontal
10	1918.000	50.57	-2.84	47.73	54.00	-6.27	AVG	Horizontal
11	3484.000	45.57	0.92	46.49	74.00	-27.51	peak	Horizontal
12	4825.000	61.46	2.34	63.80	74.00	-10.20	peak	Horizontal
13	4825.000	46.32	2.34	48.66	54.00	-5.34	AVG	Horizontal
14	6013.000	43.23	5.28	48.51	74.00	-25.49	peak	Horizontal
15	7228.000	42.30	7.61	49.91	74.00	-24.09	peak	Horizontal

Mode: TX / IEEE 802.11g (antenna 1)

Lowest channel (2412MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1918.000	53.33	-2.84	50.49	74.00	-23.51	peak	Vertical
2	3808.000	44.16	1.34	45.50	74.00	-28.50	peak	Vertical
3	4825.000	58.57	2.34	60.91	74.00	-13.09	peak	Vertical
4	4825.000	46.22	2.34	48.56	54.00	-5.44	AVG	Vertical
5	5005.000	44.74	2.24	46.98	74.00	-27.02	peak	Vertical
6	5761.000	43.48	4.50	47.98	74.00	-26.02	peak	Vertical
7	6013.000	46.00	5.28	51.28	74.00	-22.72	peak	Vertical
8	9028.000	41.81	9.36	51.17	74.00	-22.83	peak	Vertical
9	1918.000	56.67	-2.84	53.83	74.00	-20.17	peak	Horizontal
10	1918.000	49.21	-2.84	46.37	54.00	-7.63	AVG	Horizontal
11	3232.000	43.80	0.91	44.71	74.00	-29.29	peak	Horizontal
12	4816.000	51.47	2.35	53.82	74.00	-20.18	peak	Horizontal
13	4816.000	47.24	2.35	49.59	54.00	-4.41	AVG	Horizontal
14	4996.000	43.56	2.23	45.79	74.00	-28.21	peak	Horizontal
15	6013.000	42.76	5.28	48.04	74.00	-25.96	peak	Horizontal
16	7201.000	41.67	7.55	49.22	74.00	-24.78	peak	Horizontal

Mode: TX/ IEEE 802.11g (antenna 1)

Middle channel (2437 MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1918.000	53.37	-2.84	50.53	74.00	-23.47	peak	Vertical
2	4879.000	61.12	2.31	63.43	74.00	-10.57	peak	Vertical
3	4879.000	49.48	2.31	51.79	54.00	-2.21	AVG	Vertical
4	5005.000	44.50	2.24	46.74	74.00	-27.26	peak	Vertical
5	5761.000	43.11	4.50	47.61	74.00	-26.39	peak	Vertical
6	6013.000	44.94	5.28	50.22	74.00	-23.78	peak	Vertical
7	7723.000	41.15	8.69	49.84	74.00	-24.16	peak	Vertical
8	1315.000	50.28	-5.83	44.45	74.00	-29.55	peak	Horizontal
9	1918.000	56.13	-2.84	53.29	74.00	-20.71	peak	Horizontal
10	1918.000	50.56	-2.84	47.72	54.00	-6.28	AVG	Horizontal
11	4879.000	59.21	2.31	61.52	74.00	-12.48	peak	Horizontal
12	4879.000	48.14	2.31	50.45	54.00	-3.55	AVG	Horizontal
13	5428.000	42.65	3.45	46.10	74.00	-27.90	peak	Horizontal
14	6013.000	42.68	5.28	47.96	74.00	-26.04	peak	Horizontal
15	7759.000	41.42	8.74	50.16	74.00	-23.84	peak	Horizontal

Mode: TX/ IEEE 802.11g (antenna 1)

Highest channel (2462MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1603.000	50.83	-4.72	46.11	74.00	-27.89	peak	Vertical
2	1918.000	53.41	-2.84	50.57	74.00	-23.43	peak	Vertical
3	4924.000	63.25	2.28	65.53	74.00	-8.47	peak	Vertical
4	4924.000	49.61	2.28	51.89	54.00	-2.11	AVG	Vertical
5	5761.000	43.21	4.50	47.71	74.00	-26.29	peak	Vertical
6	6013.000	45.04	5.28	50.32	74.00	-23.68	peak	Vertical
7	8101.000	41.75	9.14	50.89	74.00	-23.11	peak	Vertical
8	1918.000	56.64	-2.84	53.80	74.00	-20.20	peak	Horizontal
9	1918.000	50.57	-2.84	47.73	54.00	-6.27	AVG	Horizontal
10	3070.000	44.51	0.91	45.42	74.00	-28.58	peak	Horizontal
11	4924.000	60.22	2.28	62.50	74.00	-11.50	peak	Horizontal
12	4924.000	48.67	2.28	50.95	54.00	-3.05	AVG	Horizontal
13	5131.000	42.96	2.61	45.57	74.00	-28.43	peak	Horizontal
14	6292.000	41.91	5.70	47.61	74.00	-26.39	peak	Horizontal
15	7642.000	41.60	8.54	50.14	74.00	-23.86	peak	Horizontal

Mode: TX / IEEE 802.11n HT20 (combine with antenna 0 and antenna 1)

Lowest channel (2412MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1918.000	54.45	-2.84	51.61	74.00	-22.39	peak	Vertical
2	3214.000	44.84	0.92	45.76	74.00	-28.24	peak	Vertical
3	4816.000	57.98	2.35	60.33	74.00	-13.67	peak	Vertical
4	4816.000	46.93	2.35	49.28	54.00	-4.72	AVG	Vertical
5	4996.000	45.18	2.23	47.41	74.00	-26.59	peak	Vertical
6	5761.000	42.95	4.50	47.45	74.00	-26.55	peak	Vertical
7	6013.000	44.68	5.28	49.96	74.00	-24.04	peak	Vertical
8	1918.000	56.79	-2.84	53.95	74.00	-20.05	peak	Horizontal
9	1918.000	52.70	-2.84	49.86	54.00	-4.14	AVG	Horizontal
10	3349.000	45.03	0.92	45.95	74.00	-28.05	peak	Horizontal
11	4339.000	43.70	2.24	45.94	74.00	-28.06	peak	Horizontal
12	4825.000	56.69	2.34	59.03	74.00	-14.97	peak	Horizontal
13	4825.000	47.22	2.34	49.56	54.00	-4.44	AVG	Horizontal
14	5617.000	42.25	4.03	46.28	74.00	-27.72	peak	Horizontal
15	6013.000	42.58	5.28	47.86	74.00	-26.14	peak	Horizontal

Mode: TX / IEEE 802.11n HT20 (combine with antenna 0 and antenna 1)

Middle channel (2437 MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1918.000	54.02	-2.84	51.18	74.00	-22.82	peak	Vertical
2	3250.000	45.92	0.92	46.84	74.00	-27.16	peak	Vertical
3	4870.000	58.10	2.31	60.41	74.00	-13.59	peak	Vertical
4	4870.000	45.60	2.31	47.91	54.00	-6.09	AVG	Vertical
5	5761.000	43.57	4.50	48.07	74.00	-25.93	peak	Vertical
6	6013.000	44.11	5.28	49.39	74.00	-24.61	peak	Vertical
7	7777.000	42.21	8.78	50.99	74.00	-23.01	peak	Vertical
8	1918.000	56.97	-2.84	54.13	74.00	-19.87	peak	Horizontal
9	1918.000	50.67	-2.84	47.83	54.00	-6.17	AVG	Horizontal
10	3349.000	44.91	0.92	45.83	74.00	-28.17	peak	Horizontal
11	4312.000	43.65	2.18	45.83	74.00	-28.17	peak	Horizontal
12	4879.000	58.39	2.31	60.70	74.00	-13.30	peak	Horizontal
13	4879.000	46.95	2.31	49.26	54.00	-4.74	AVG	Horizontal
14	6013.000	42.19	5.28	47.47	74.00	-26.53	peak	Horizontal
15	7192.000	41.72	7.52	49.24	74.00	-24.76	peak	Horizontal



Mode: TX/ IEEE 802.11n HT20 (combine with antenna 0 and antenna 1)

Highest channel (2462MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1918.000	53.91	-2.84	51.07	74.00	-22.93	peak	Vertical
2	3214.000	44.29	0.92	45.21	74.00	-28.79	peak	Vertical
3	4924.000	59.24	2.28	61.52	74.00	-12.48	peak	Vertical
4	4924.000	49.16	2.28	51.44	54.00	-2.56	AVG	Vertical
5	5761.000	43.08	4.50	47.58	74.00	-26.42	peak	Vertical
6	6013.000	44.87	5.28	50.15	74.00	-23.85	peak	Vertical
7	8038.000	41.51	9.17	50.68	74.00	-23.32	peak	Vertical
8	1333.000	49.44	-5.78	43.66	74.00	-30.34	peak	Horizontal
9	1918.000	56.19	-2.84	53.35	74.00	-20.65	peak	Horizontal
10	1918.000	48.92	-2.84	46.08	54.00	-7.92	AVG	Horizontal
11	3061.000	44.62	0.92	45.54	74.00	-28.46	peak	Horizontal
12	4924.000	56.47	2.28	58.75	74.00	-15.25	peak	Horizontal
13	4924.000	48.97	2.28	51.25	54.00	-2.75	AVG	Horizontal
14	6013.000	42.45	5.28	47.73	74.00	-26.27	peak	Horizontal
15	7993.000	41.26	9.18	50.44	74.00	-23.56	peak	Horizontal

Mode: TX / IEEE 802.11n HT40 (combine with antenna 0 and antenna 1)

Lowest channel (2422MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1918.000	54.32	-2.84	51.48	74.00	-22.52	peak	Vertical
2	4852.000	50.56	2.32	52.88	74.00	-21.12	peak	Vertical
3	4852.000	45.06	2.32	47.38	54.00	-6.62	AVG	Vertical
4	5005.000	44.47	2.24	46.71	74.00	-27.29	peak	Vertical
5	5761.000	43.32	4.50	47.82	74.00	-26.18	peak	Vertical
6	6013.000	44.10	5.28	49.38	74.00	-24.62	peak	Vertical
7	9019.000	42.05	9.35	51.40	74.00	-22.60	peak	Vertical
8	1918.000	56.41	-2.84	53.57	74.00	-20.43	peak	Horizontal
9	1918.000	49.27	-2.84	46.43	54.00	-7.57	AVG	Horizontal
10	4393.000	43.13	2.34	45.47	74.00	-28.53	peak	Horizontal
11	4825.000	51.83	2.34	54.17	74.00	-19.83	peak	Horizontal
12	4825.000	46.05	2.34	48.39	54.00	-5.61	AVG	Horizontal
13	6013.000	41.47	5.28	46.75	74.00	-27.25	peak	Horizontal
14	6310.000	41.47	5.73	47.20	74.00	-26.80	peak	Horizontal
15	7876.000	41.26	8.96	50.22	74.00	-23.78	peak	Horizontal

Mode: TX/ IEEE 802.11n HT40 (combine with antenna 0 and antenna 1)

Middle channel (2437 MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1918.000	52.83	-2.84	49.99	74.00	-24.01	peak	Vertical
2	3250.000	44.85	0.92	45.77	74.00	-28.23	peak	Vertical
3	4870.000	50.17	2.31	52.48	74.00	-21.52	peak	Vertical
4	4870.000	44.95	2.31	47.26	54.00	-6.74	AVG	Vertical
5	5761.000	43.89	4.50	48.39	74.00	-25.61	peak	Vertical
6	6013.000	45.48	5.28	50.76	74.00	-23.24	peak	Vertical
7	7147.000	41.83	7.41	49.24	74.00	-24.76	peak	Vertical
8	1918.000	56.58	-2.84	53.74	74.00	-20.26	peak	Horizontal
9	1918.000	49.88	-2.84	47.04	54.00	-6.96	AVG	Horizontal
10	3673.000	43.96	1.15	45.11	74.00	-28.89	peak	Horizontal
11	4861.000	50.85	2.32	53.17	74.00	-20.83	peak	Horizontal
12	4861.000	44.87	2.32	47.19	54.00	-6.81	AVG	Horizontal
13	6013.000	41.30	5.28	46.58	74.00	-27.42	peak	Horizontal
14	7948.000	41.31	9.10	50.41	74.00	-23.59	peak	Horizontal
15	8407.000	41.98	8.96	50.94	74.00	-23.06	peak	Horizontal

Mode: TX/ IEEE 802.11n HT40 (combine with antenna 0 and antenna 1)

Highest channel (2452MHz)

Date: 2019-05-22

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	1594.000	49.42	-4.77	44.65	74.00	-29.35	peak	Vertical
2	1918.000	54.26	-2.84	51.42	74.00	-22.58	peak	Vertical
3	2512.000	46.83	-1.19	45.64	74.00	-28.36	peak	Vertical
4	4915.000	49.48	2.28	51.76	74.00	-22.24	peak	Vertical
5	6013.000	44.10	5.28	49.38	74.00	-24.62	peak	Vertical
6	7372.000	42.16	7.96	50.12	74.00	-23.88	peak	Vertical
7	1918.000	56.30	-2.84	53.46	74.00	-20.54	peak	Horizontal
8	1918.000	51.12	-2.84	48.28	54.00	-5.72	AVG	Horizontal
9	2530.000	46.77	-1.10	45.67	74.00	-28.33	peak	Horizontal
10	4906.000	50.08	2.29	52.37	74.00	-21.63	peak	Horizontal
11	4906.000	41.49	2.29	43.78	54.00	-10.22	AVG	Horizontal
12	5608.000	42.26	4.00	46.26	74.00	-27.74	peak	Horizontal
13	6013.000	41.77	5.28	47.05	74.00	-26.95	peak	Horizontal
14	8713.000	41.71	9.08	50.79	74.00	-23.21	peak	Horizontal

**Remark:**

- 1 Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2 Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3 Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4 Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

## 8. 6DB BANDWIDTH


### 8.1. LIMITS

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 8.2. TEST PROCEDURES

- 1) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
- 2) Set resolution bandwidth (RBW) = 100kHz. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW. Detector = Peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize, record 6dB bandwidth value.
- 3) Repeat above procedures until all frequencies measured were complete.

### 8.3. TEST SETUP



**8.4. TEST RESULTS****Test mode: IEEE 802.11b**

Channel No.	Frequency (MHz)	Bandwidth (kHz)		Limit (kHz)	Test Result
		antenna 0	antenna 1		
1	2412	9581	10060	>500	PASS
6	2437	10050	10060		PASS
11	2462	10040	9559		PASS

**Test mode: IEEE 802.11g**

Channel No.	Frequency (MHz)	Bandwidth (kHz)		Limit (kHz)	Test Result
		antenna 0	antenna 1		
1	2412	15110	15120	>500	PASS
6	2437	15120	15110		PASS
11	2462	15120	15100		PASS


**Test mode: IEEE 802.11n HT20**

Channel No.	Frequency (MHz)	Bandwidth (kHz)		Limit (kHz)	Test Result
		antenna 0	antenna 1		
1	2412	15130	15120	>500	PASS
6	2437	15130	15140		PASS
11	2462	15110	15080		PASS


**Test mode: IEEE 802.11n HT40**

Channel No.	Frequency (MHz)	Bandwidth (kHz)		Limit (kHz)	Test Result
		antenna 0	antenna 1		
3	2422	33880	33890	>500	PASS
6	2437	32600	33840		PASS
9	2452	35030	33840		PASS


802.11b mode (antenna 0):  
Channel 2412MHz

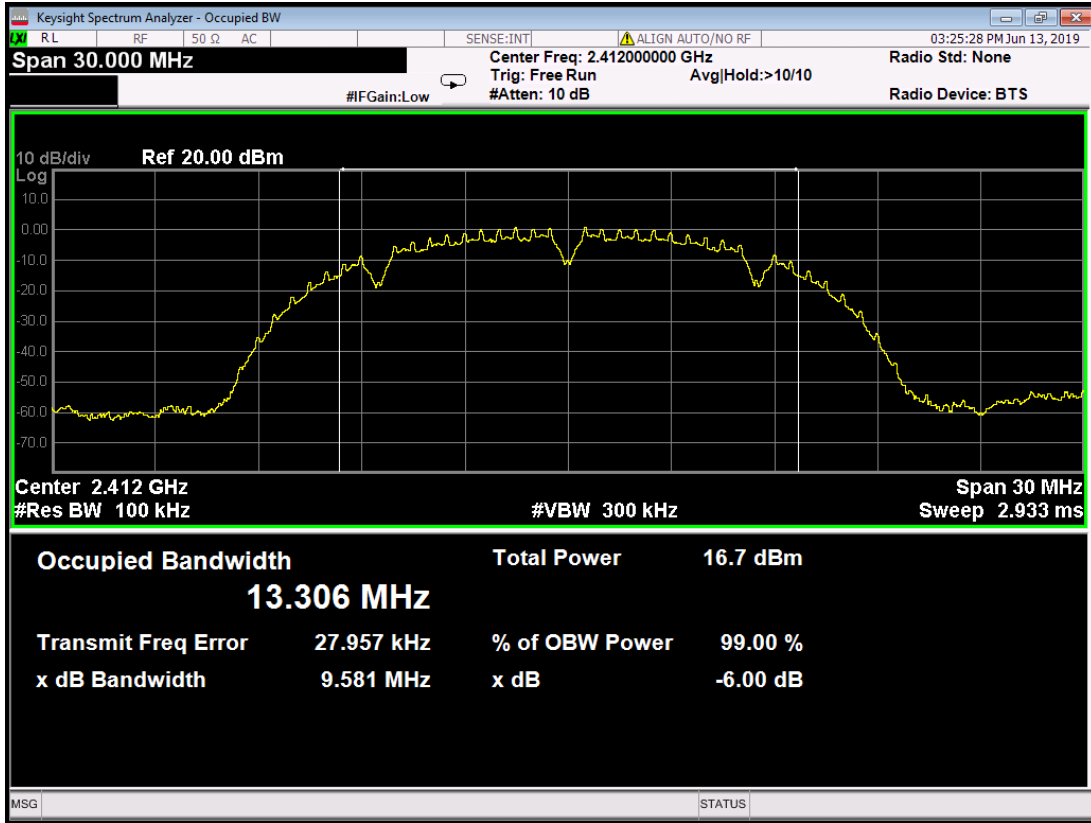

Channel 2437MHz

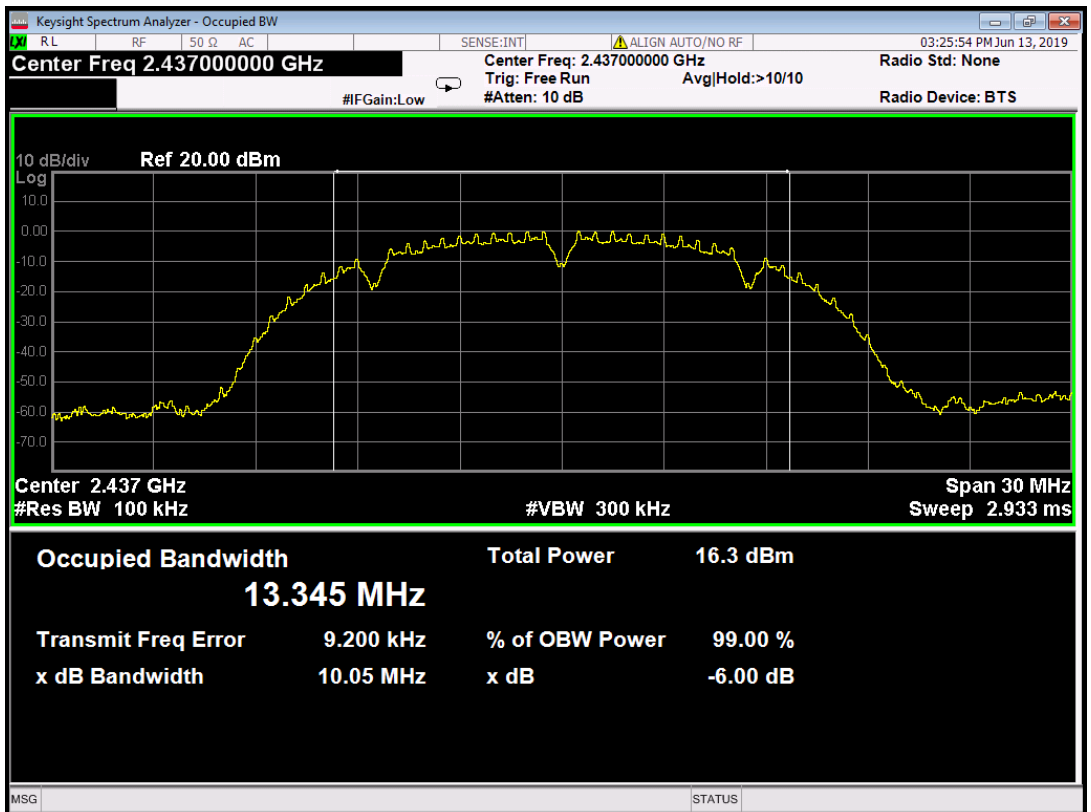


Channel 2462MHz

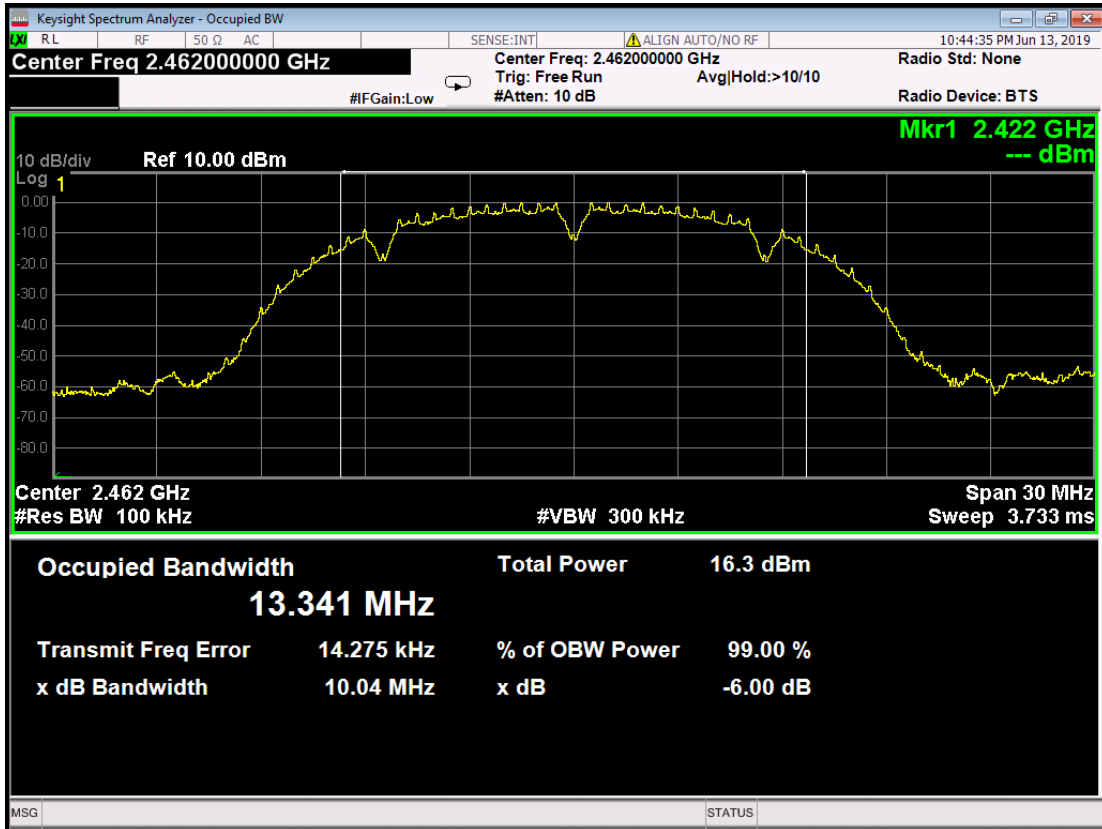


802.11b mode (antenna 1):


Channel 2412MHz

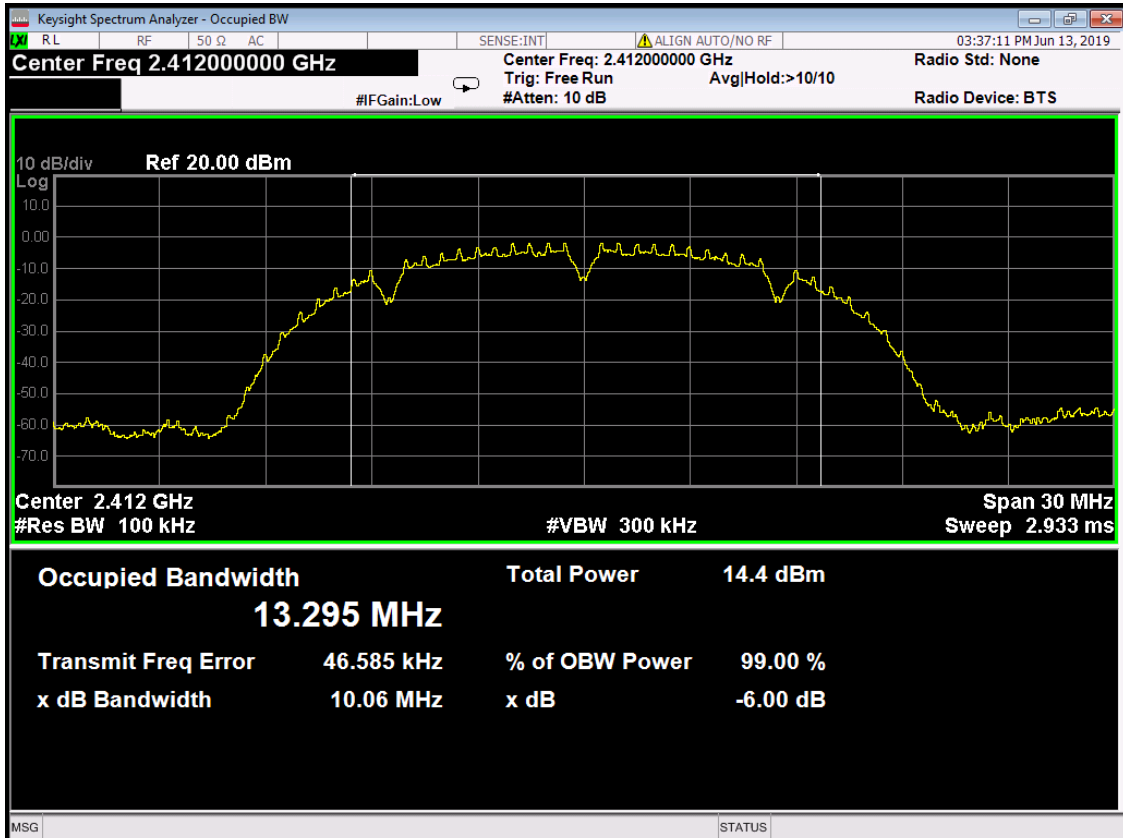


Channel 2437MHz

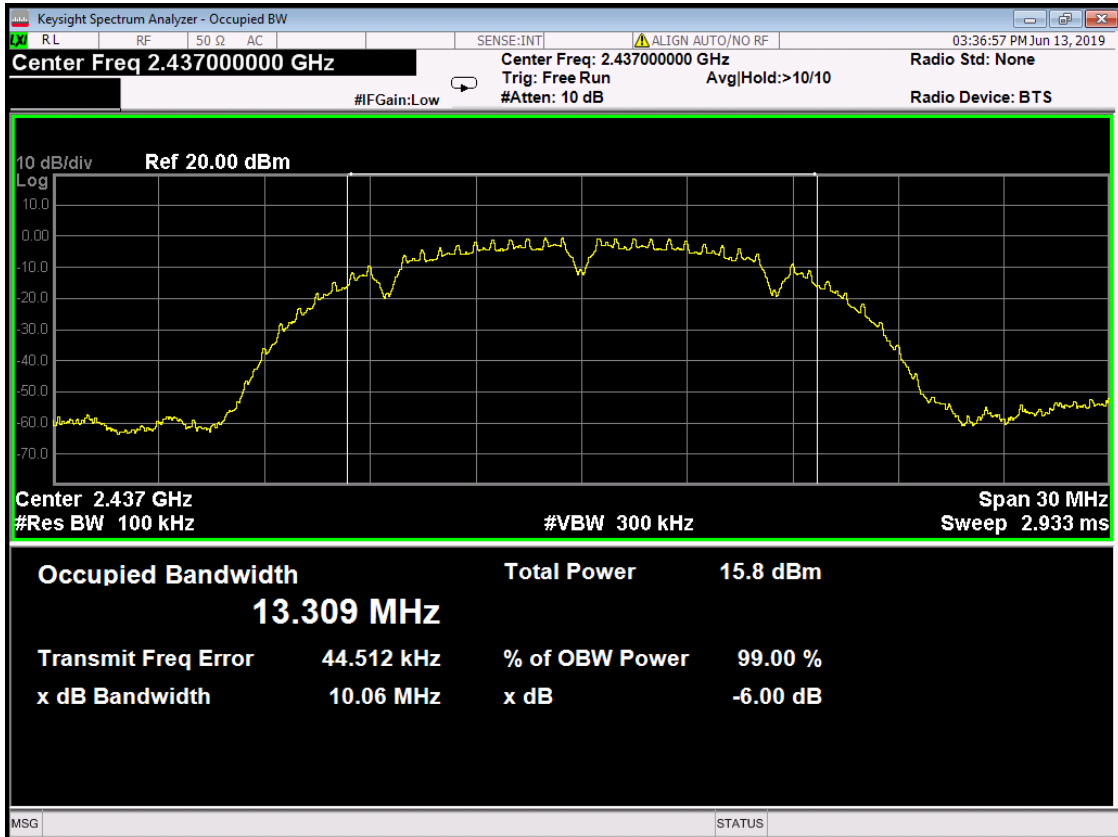


Channel 2462MHz

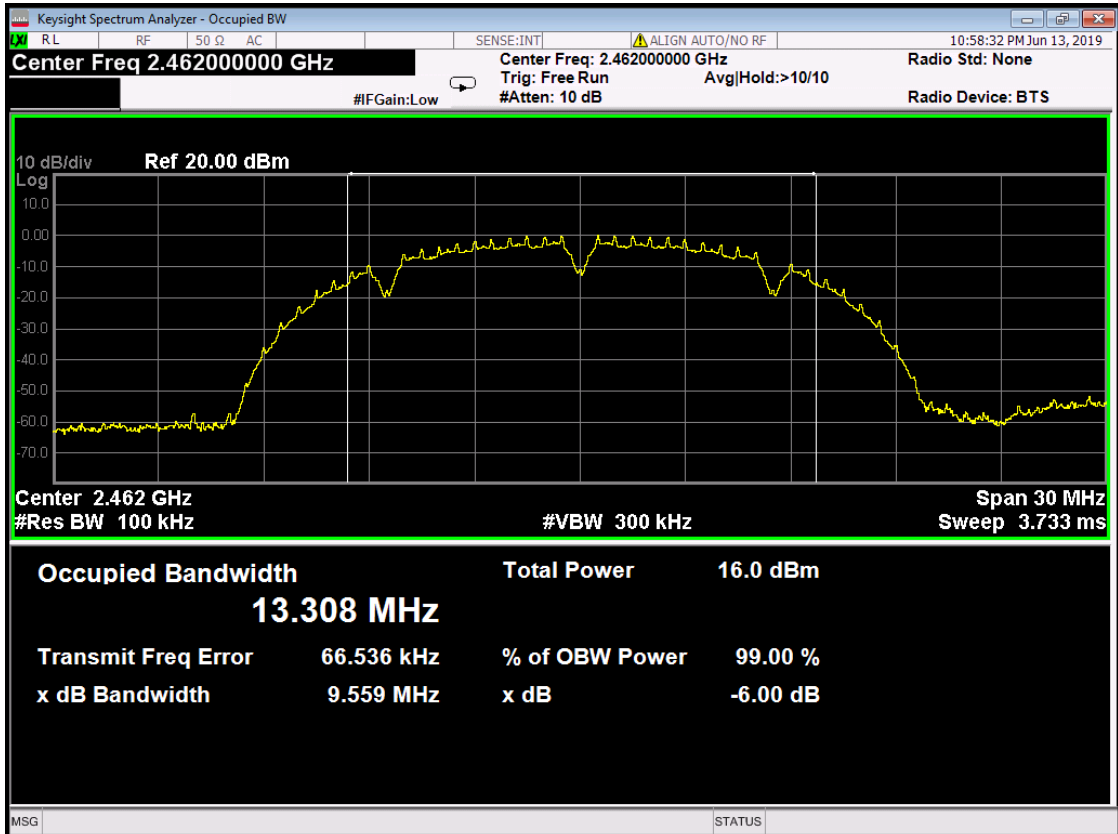

802.11g mode (antenna 0):  
Channel 2412MHz

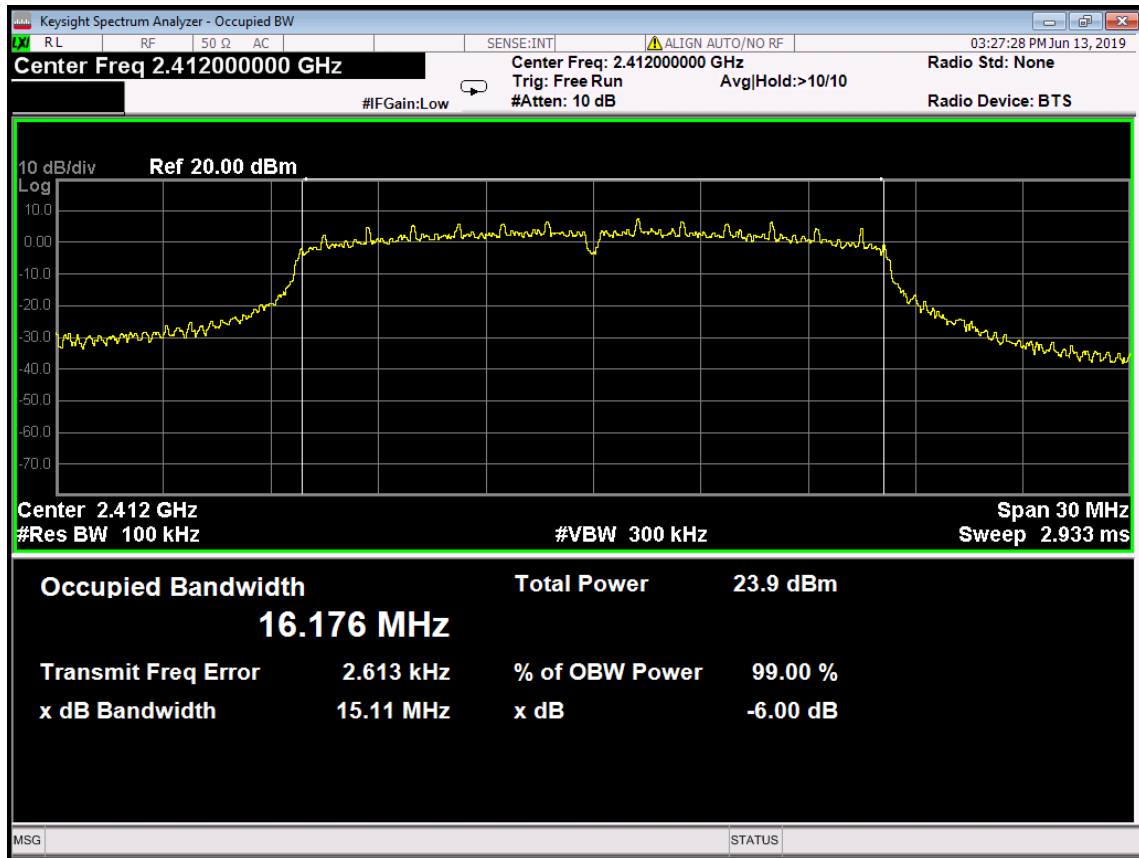


Channel 2437MHz

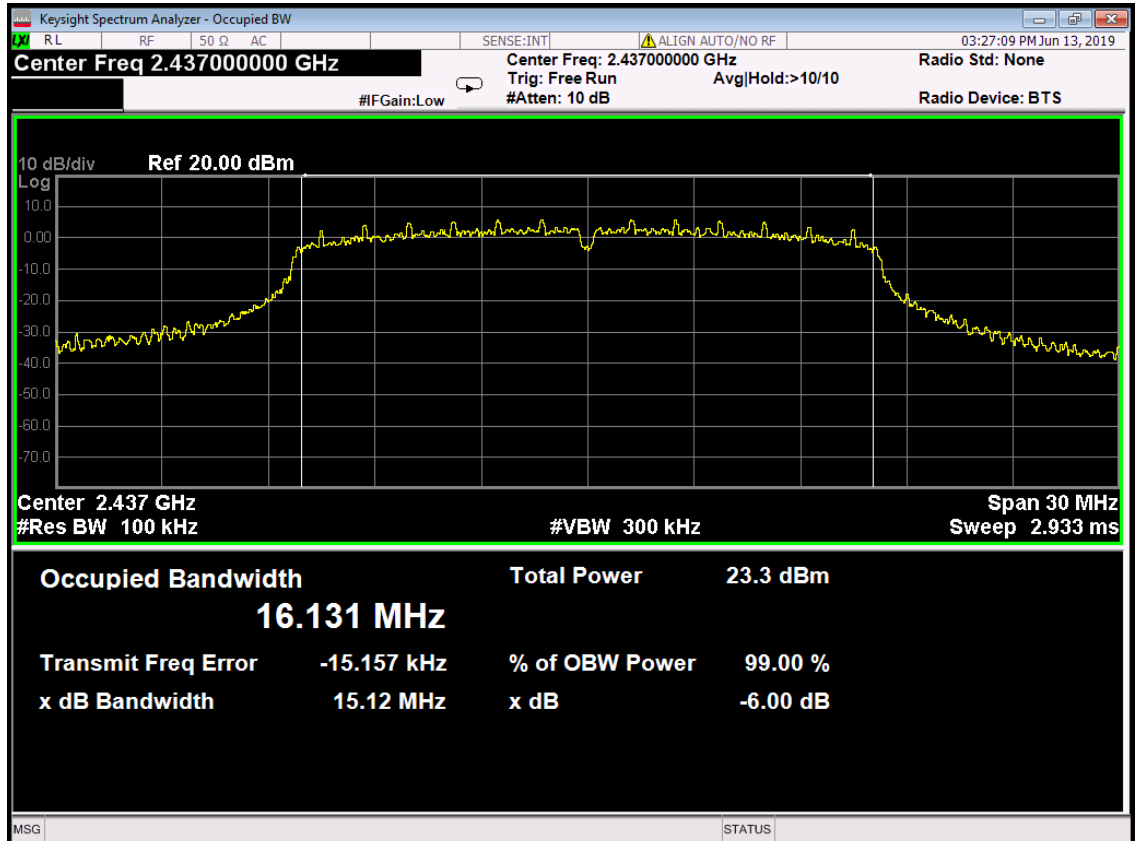




Channel 2462MHz

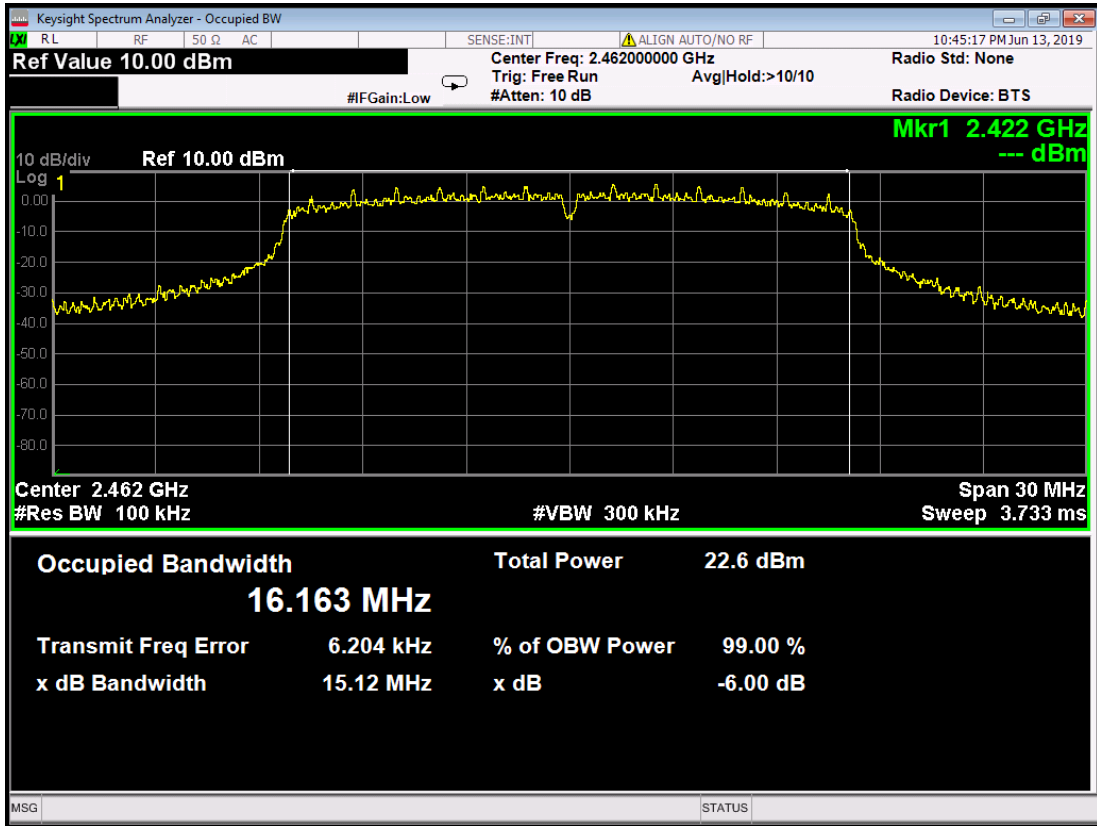


802.11g mode (antenna 1):


Channel 2412MHz

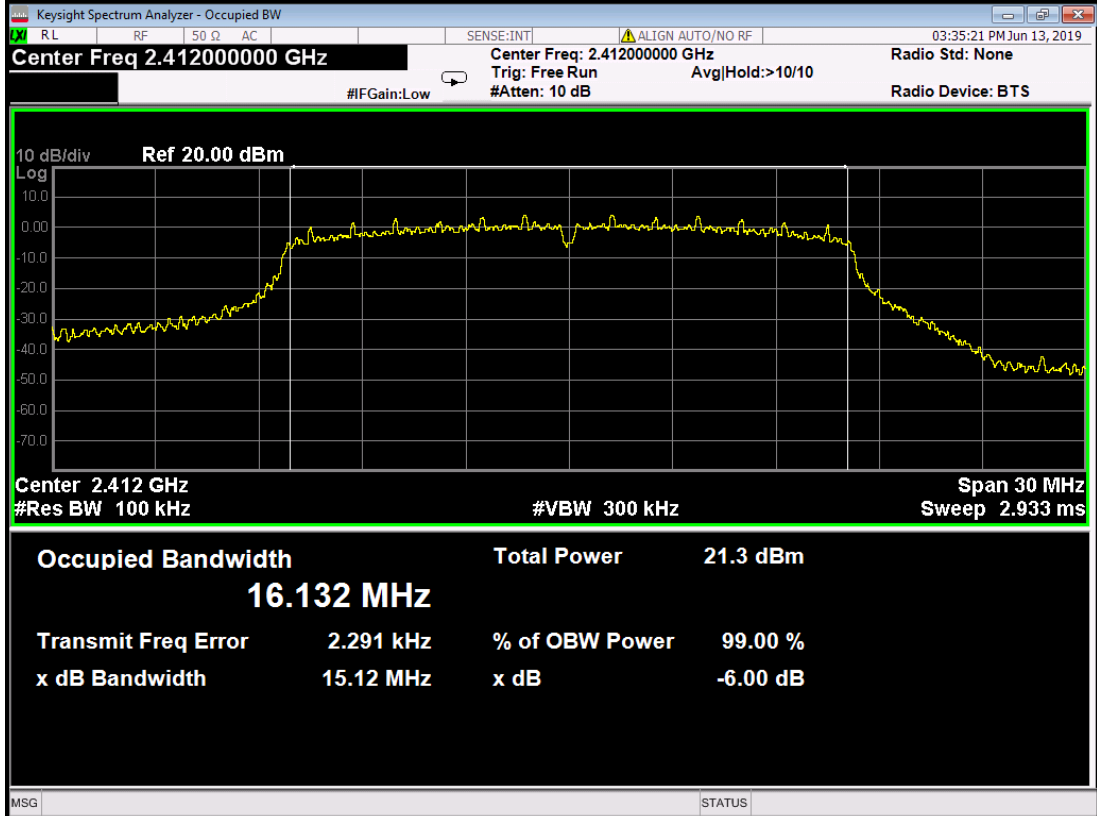


Channel 2437MHz

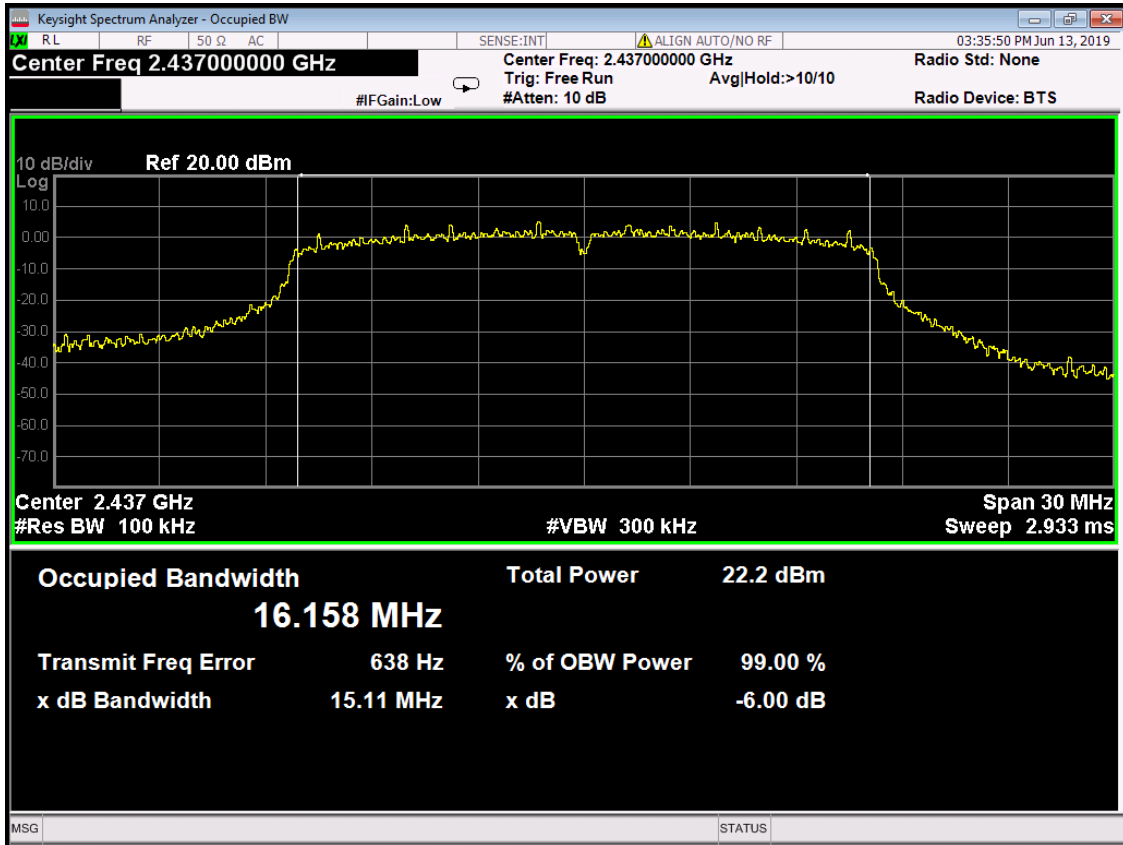


Channel 2462MHz

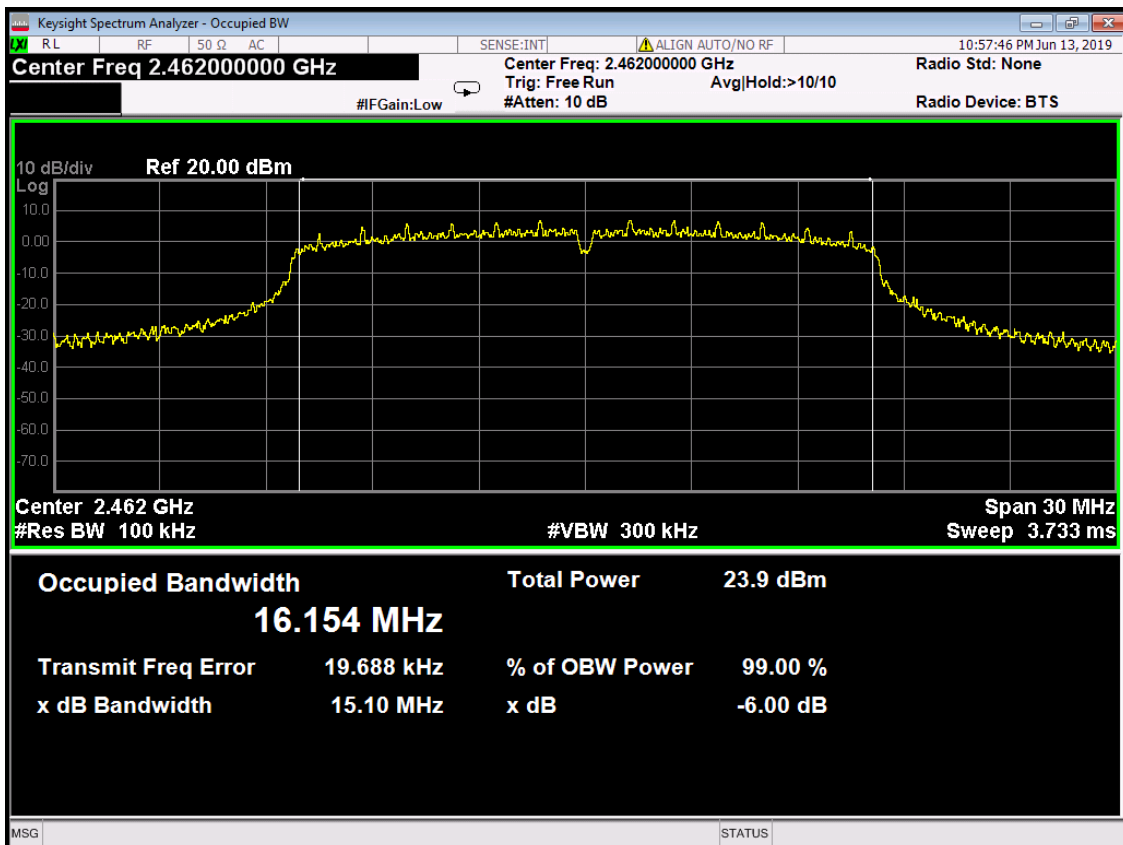


802.11n HT20 mode (antenna 0):  
Channel 2412MHz

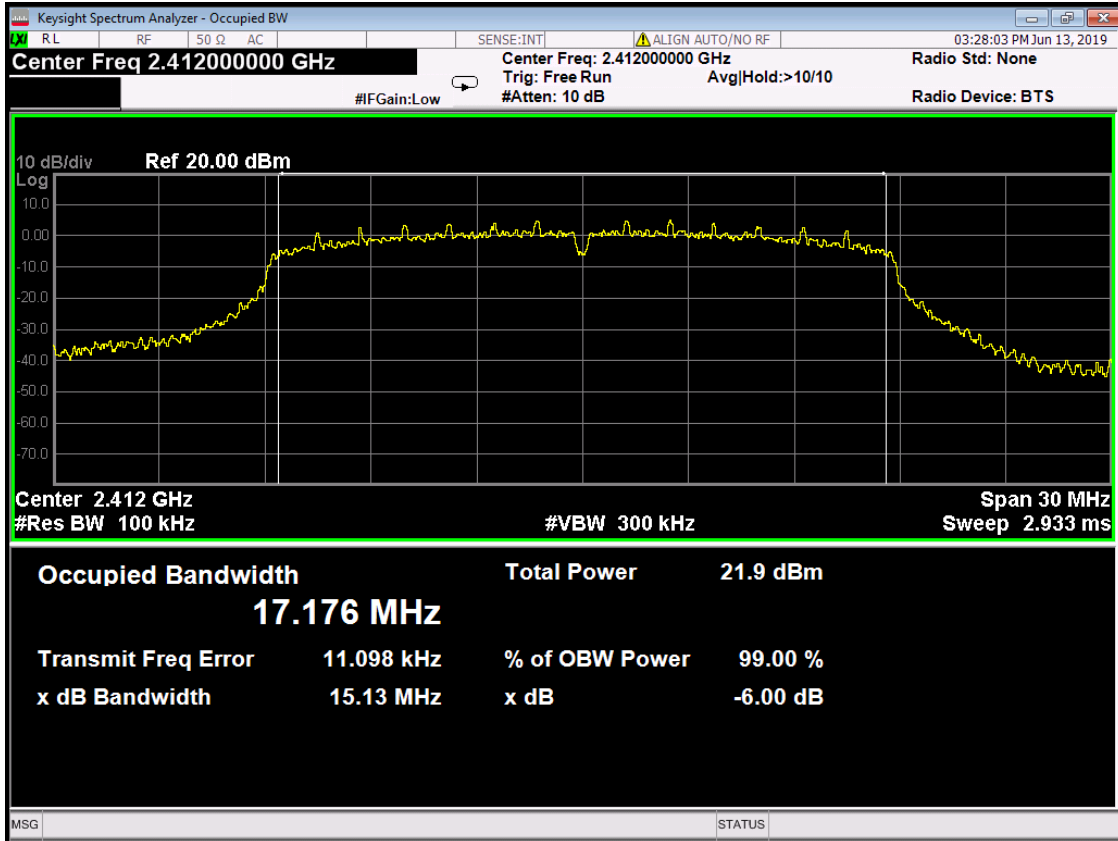

Channel 2437MHz

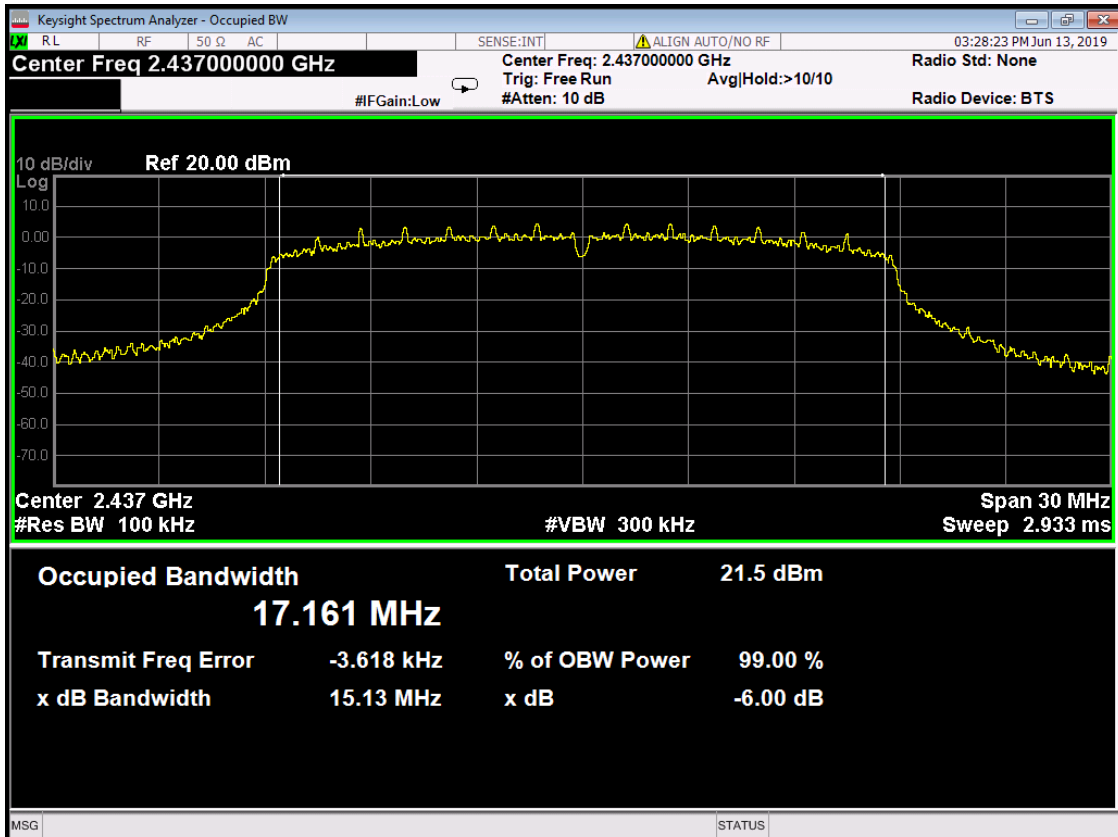


Channel 2462MHz

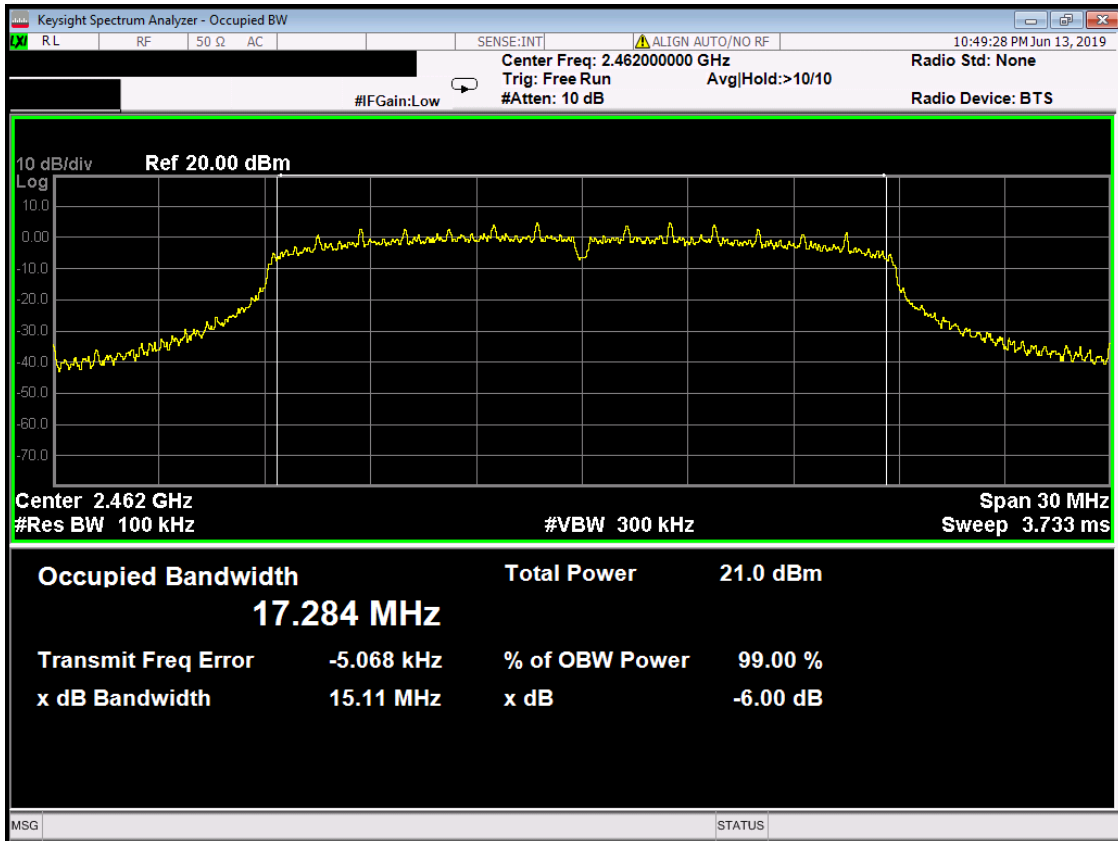


802.11n HT20 mode (antenna 1):


Channel 2412MHz

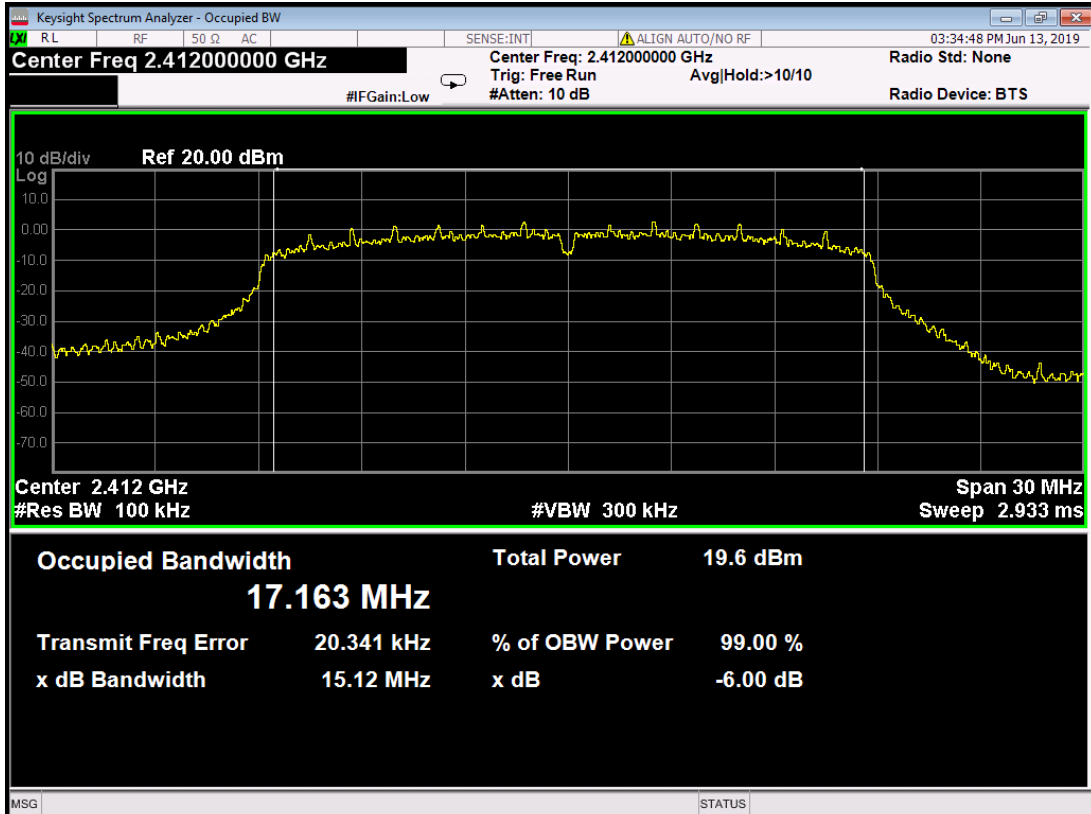


Channel 2437MHz

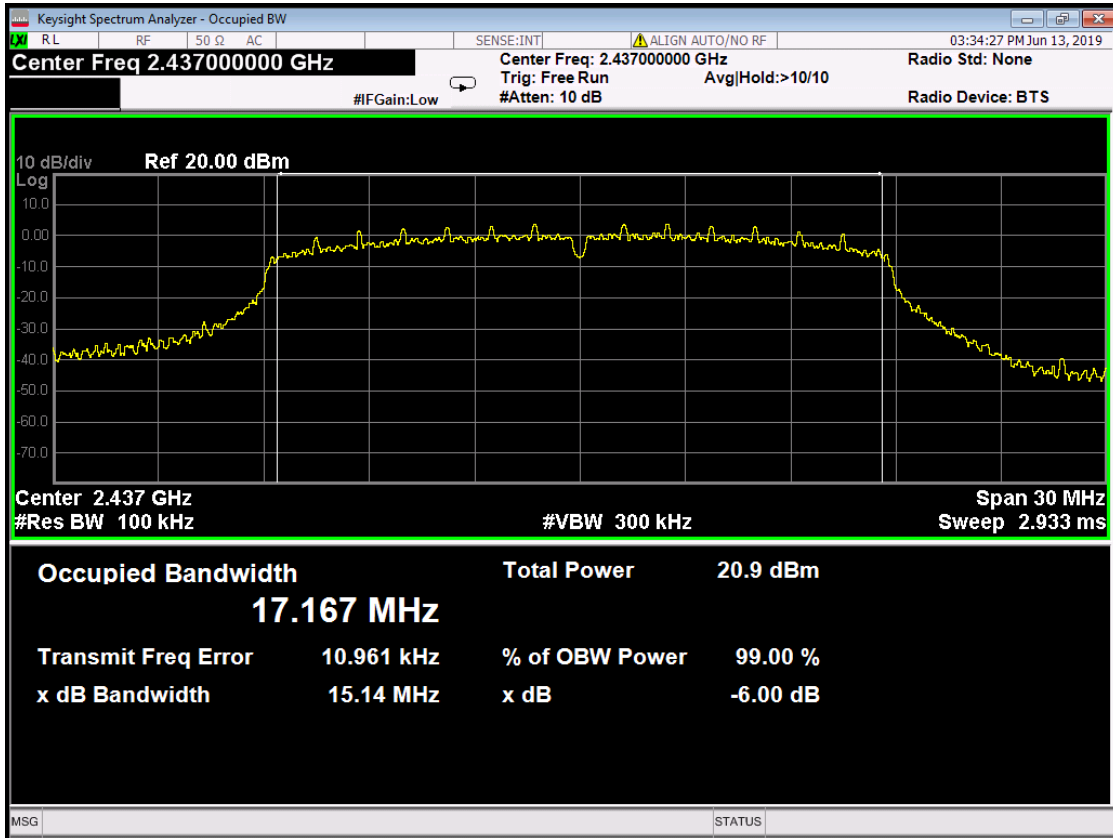


Channel 2462MHz

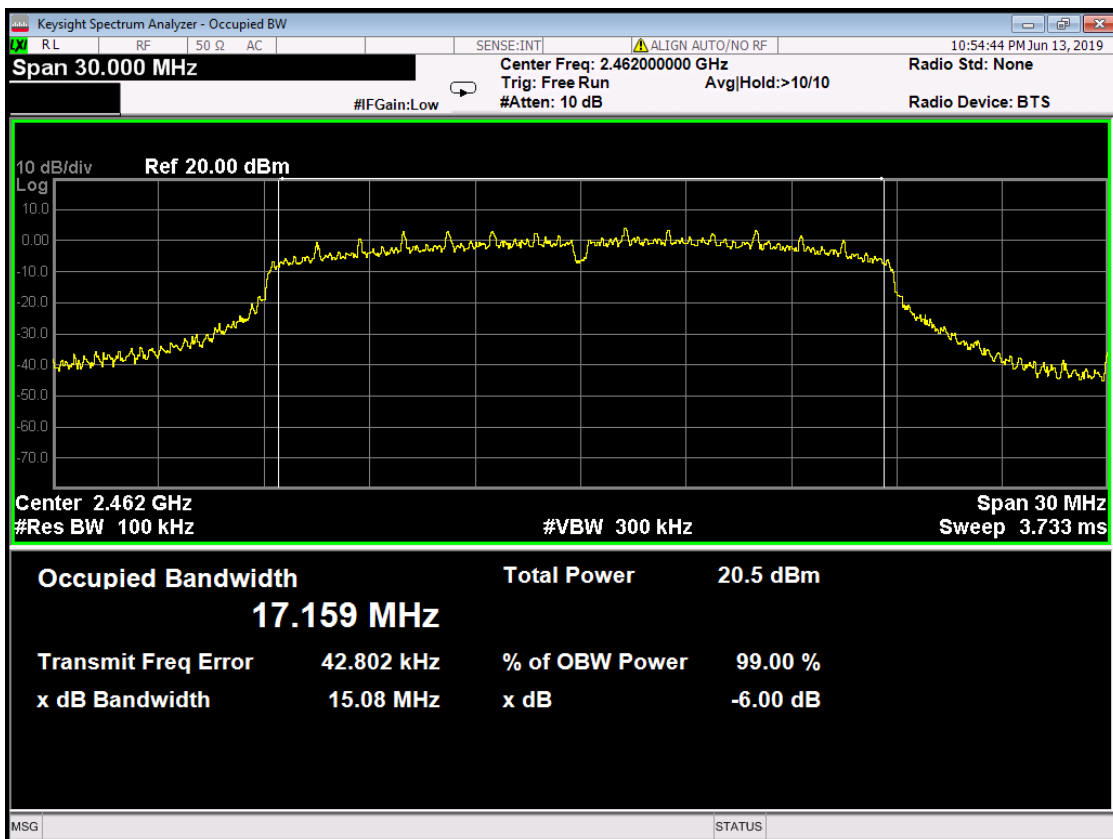


802.11n HT40 mode (antenna 0):  
Channel 2422MHz

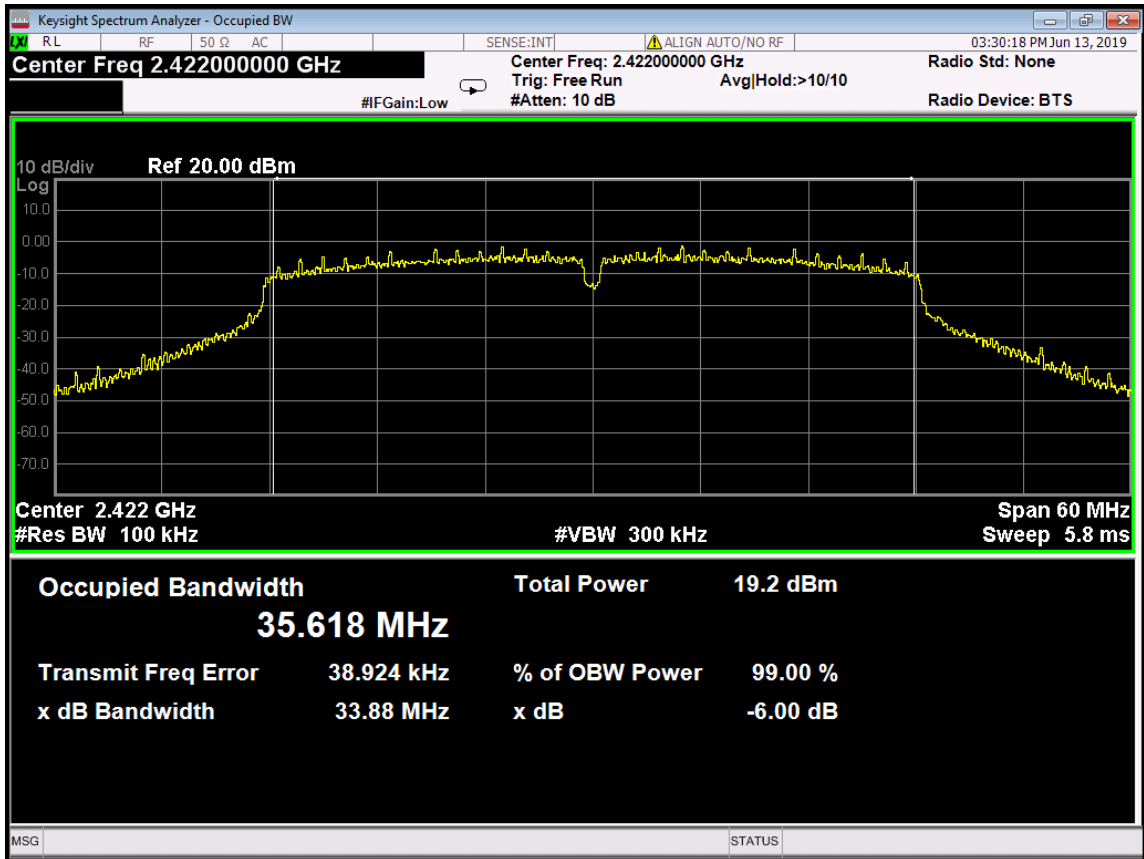

Channel 2437MHz

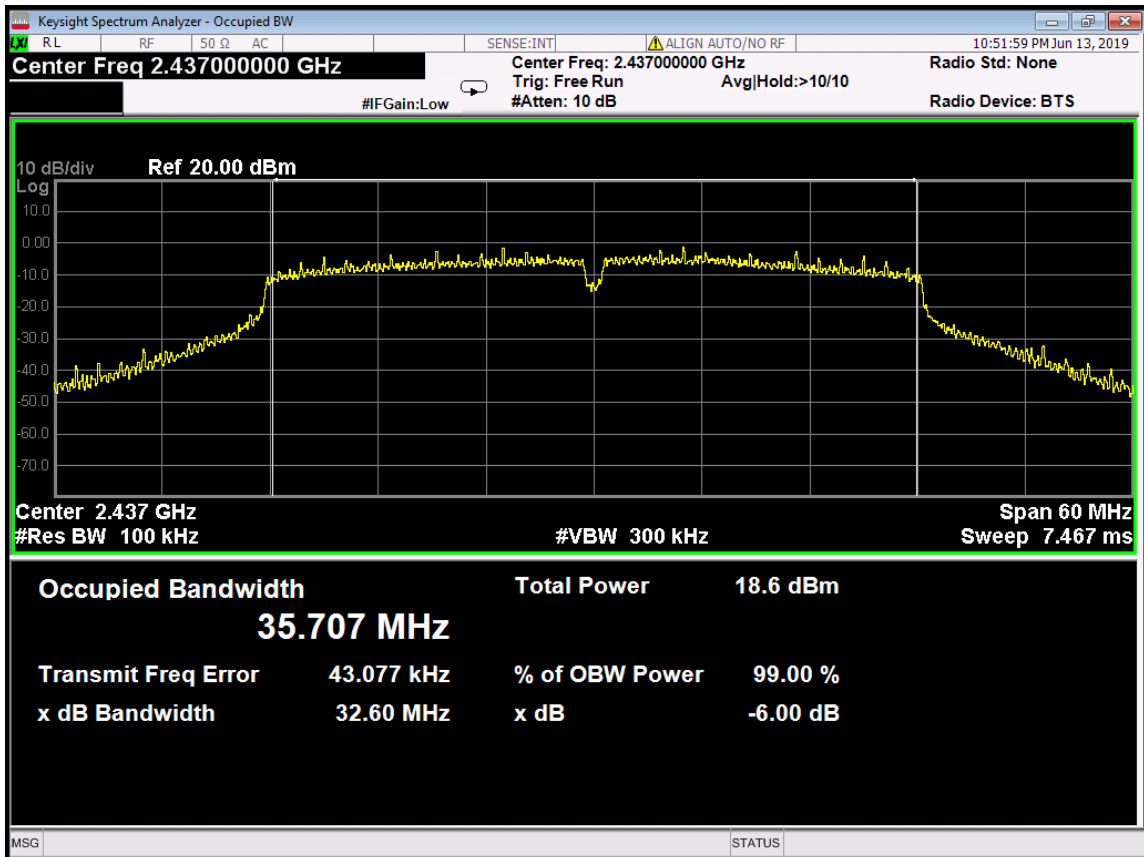


Channel 2452MHz

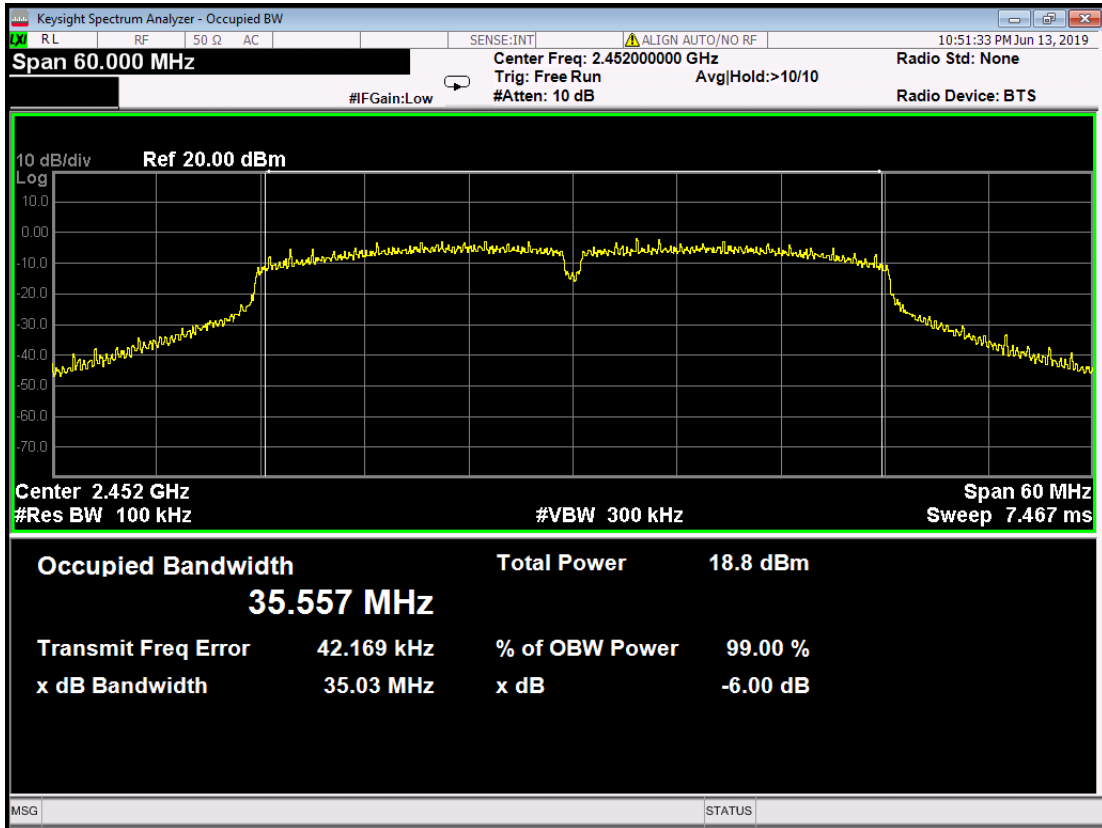


802.11n HT40 mode (antenna 1):


Channel 2422MHz

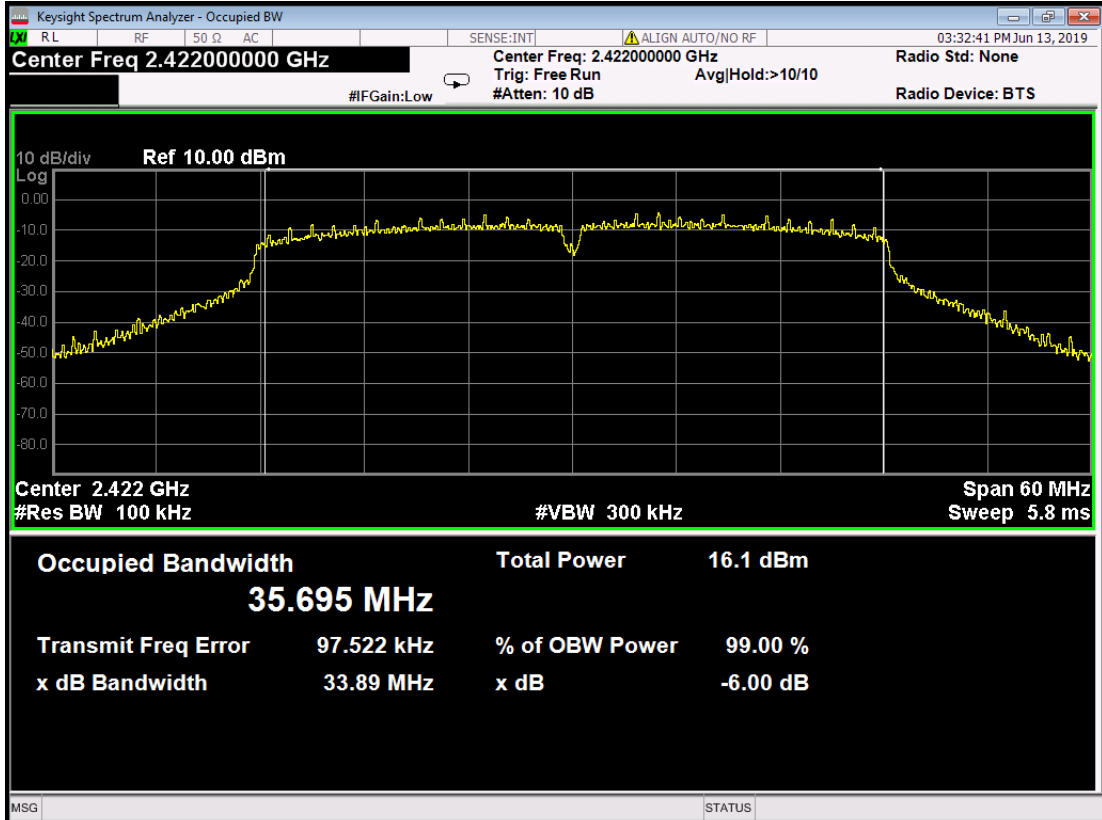

Channel 2437MHz

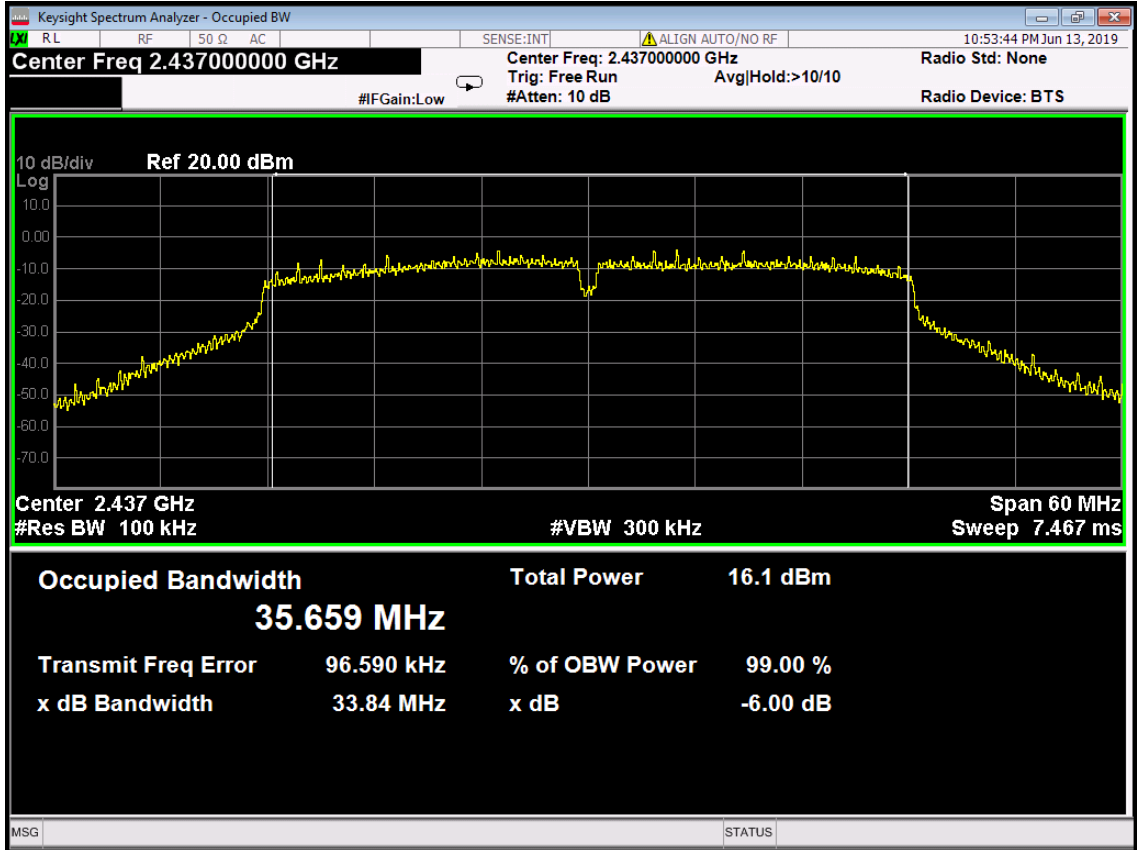

Channel 2452MHz

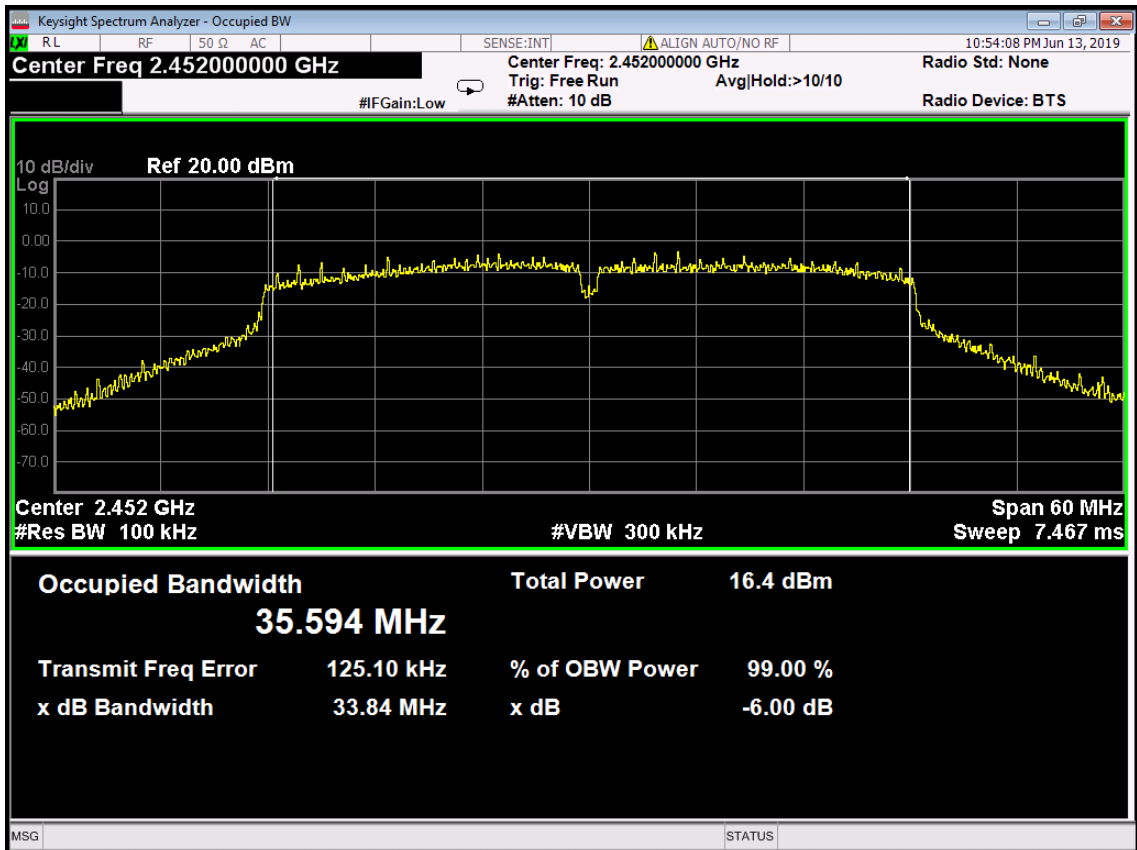



## 9. MAXIMUM PEAK OUTPUT POWER


### 9.1. LIMITS

The maximum Peak output power measurement is 1W

### 9.2. TEST PROCEDURES

- 1) Place the EUT on a bench and set it in transmitting mode.
- 2) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
- 3) The spectrum analyzer resolution bandwidth that is  $\leq$ EBW. So we test the Maximum Conducted Output Power —Integrated band power method.
- 4) Set the analyzer span  $\geq$  1.5 x DTS bandwidth. Set the RBW = 1 MHz. Set the VBW  $\geq$  3 MHz. Sweep time = auto couple. Detector = peak. Allow trace to fully stabilize.

### 9.3. TEST SETUP



## 9.4. TEST RESULTS

### 802.11b Mode (antenna 0):

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Peak / AVG	Limit	Result
1	2412	14.53	Peak	1W (30dBm)	Pass
6	2437	13.67			Pass
11	2462	13.03			Pass
1	2412	11.04	AVG	1W (30dBm)	Pass
6	2437	10.79			Pass
11	2462	10.08			Pass

### 802.11b Mode (antenna 1):

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Peak / AVG	Limit	Result
1	2412	10.63	Peak	1W (30dBm)	Pass
6	2437	11.65			Pass
11	2462	12.72			Pass
1	2412	7.71	AVG	1W (30dBm)	Pass
6	2437	8.73			Pass
11	2462	9.82			Pass

### 802.11g Mode (antenna 0):

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Peak / AVG	Limit	Result
1	2412	26.14	Peak	1W (30dBm)	Pass
6	2437	25.26			Pass
11	2462	24.07			Pass
1	2412	17.84	AVG	1W (30dBm)	Pass
6	2437	17.04			Pass
11	2462	16.26			Pass

### 802.11g Mode (antenna 1):

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Peak / AVG	Limit	Result
1	2412	24.46	Peak	1W (30dBm)	Pass
6	2437	25.37			Pass
11	2462	24.81			Pass
1	2412	15.98	AVG	1W (30dBm)	Pass
6	2437	16.97			Pass
11	2462	16.35			Pass

**802.11n HT20 Mode (combine with antenna 0 and antenna 1):**

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)			Peak/AVG	Limit	Result
		antenna 0	antenna 1	total			
1	2412	23.95	20.59	25.60	Peak	1W (30dBm)	Pass
6	2437	23.68	22.10	25.97			Pass
11	2462	22.88	22.60	25.75			Pass
1	2412	15.59	11.99	17.16	AVG	1W (30dBm)	Pass
6	2437	15.07	13.38	17.32			Pass
11	2462	14.39	14.34	17.38			Pass

**802.11n HT40 Mode (combine with antenna 0 and antenna 1):**

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)			Peak/AVG	Limit	Result
		antenna 0	antenna 1	total			
3	2422	21.45	18.40	23.20	Peak	1W (30dBm)	Pass
6	2437	21.28	18.92	23.27			Pass
9	2452	21.20	19.61	23.49			Pass
3	2422	12.65	9.50	14.36	AVG	1W (30dBm)	Pass
6	2437	12.53	10.11	14.50			Pass
9	2452	12.27	10.67	14.55			Pass

## 10. POWER SPECTRAL DENSITY


### 10.1. LIMITS

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 10.2. TEST PROCEDURES

- 1) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
- 2) Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3) Set the analyzer span to 1.5 times the DTS bandwidth. Set the RBW = 3 kHz. Set the VBW  $\geq 3$  RBW. Detector = peak. Ensure that the number of measurement points in the sweep  $\geq 2 \times$  span/RBW (use of a greater number of measurement points than this minimum requirement is recommended).
- 4) Repeat above procedures until all frequencies measured were complete.

### 10.3. TEST SETUP



## 10.4. TEST RESULTS

### 802.11b Mode:

Channel No.	Frequency (MHz)	PPSD (dBm)		Limit (dBm)	Result
		antenna 0	antenna 1		
1	2412	-11.663	-15.614	5.35	Pass
6	2437	-11.917	-14.878		Pass
11	2462	-12.736	-13.678		Pass

### 802.11g Mode:

Channel No.	Frequency (MHz)	PPSD (dBm)		Limit (dBm)	Result
		antenna 0	antenna 1		
1	2412	-6.060	-8.867	5.35	Pass
6	2437	-6.567	-7.445		Pass
11	2462	-7.567	-6.282		Pass

### 802.11n HT20 Mode:

Channel No.	Frequency (MHz)	PPSD (dBm)			Limit (dBm)	Result
		antenna 0	antenna 1	total		
1	2412	-7.662	-11.512	-6.163	8	Pass
6	2437	-8.403	-9.886	-6.071		Pass
11	2462	-9.085	-8.492	-5.768		Pass

### 802.11n HT40 Mode:

Channel No.	Frequency (MHz)	PPSD (dBm)			Limit (dBm)	Result
		antenna 0	antenna 1	total		
3	2422	-13.404	-16.830	-11.777	8	Pass
6	2437	-13.159	-16.308	-11.444		Pass
9	2452	-13.296	-16.344	-11.548		Pass

Remark:


Directional Gain =  $10 \log \left[ \left( 10^{\frac{G_1}{20}} + 10^{\frac{G_2}{20}} + \dots + 10^{\frac{G_n}{20}} \right)^2 / N_{\text{ant}} \right]$  dBi

Limits = limits - (Directional Gain - 6)


$N_{\text{ant}}$ : Number of Transmit Antennas

$G_1, G_2, \dots, G_n$ : Gain of Individual Antennas (Difference for Each Antenna)


802.11b mode (antenna 0):  
Channel 2412MHz

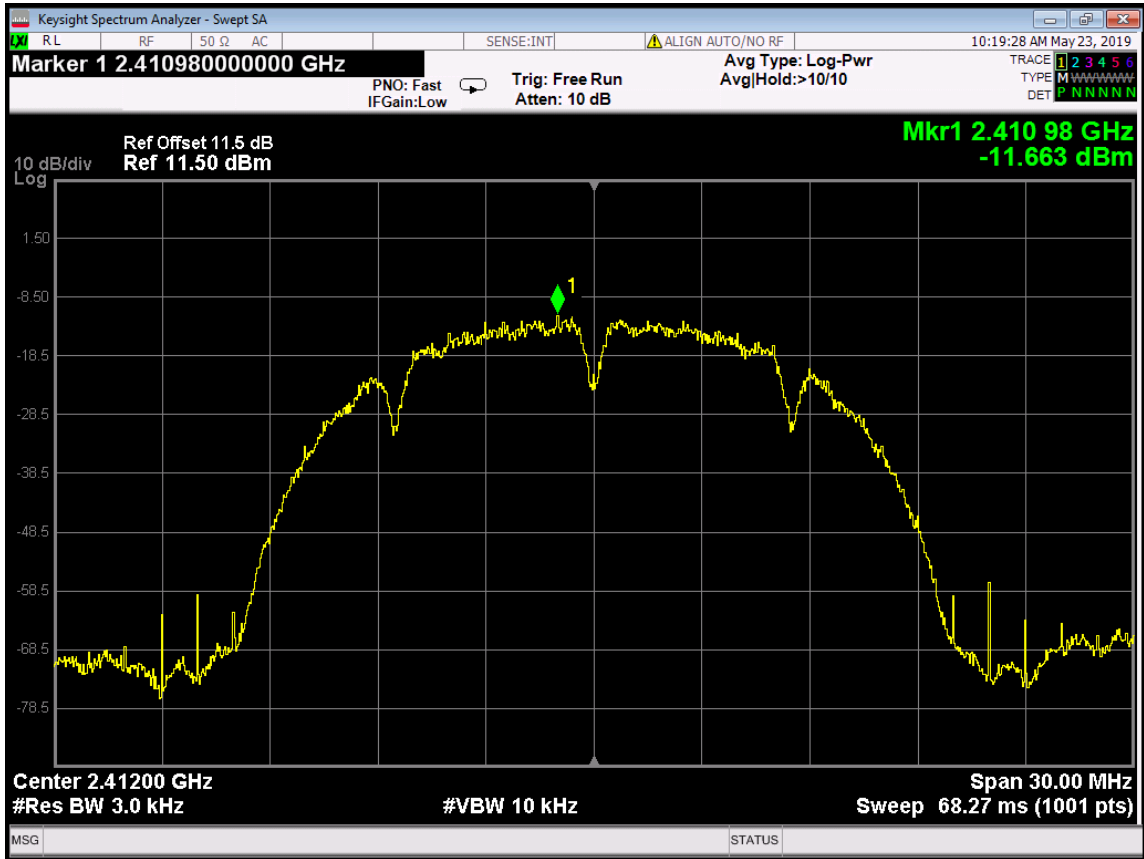


Channel 2437MHz

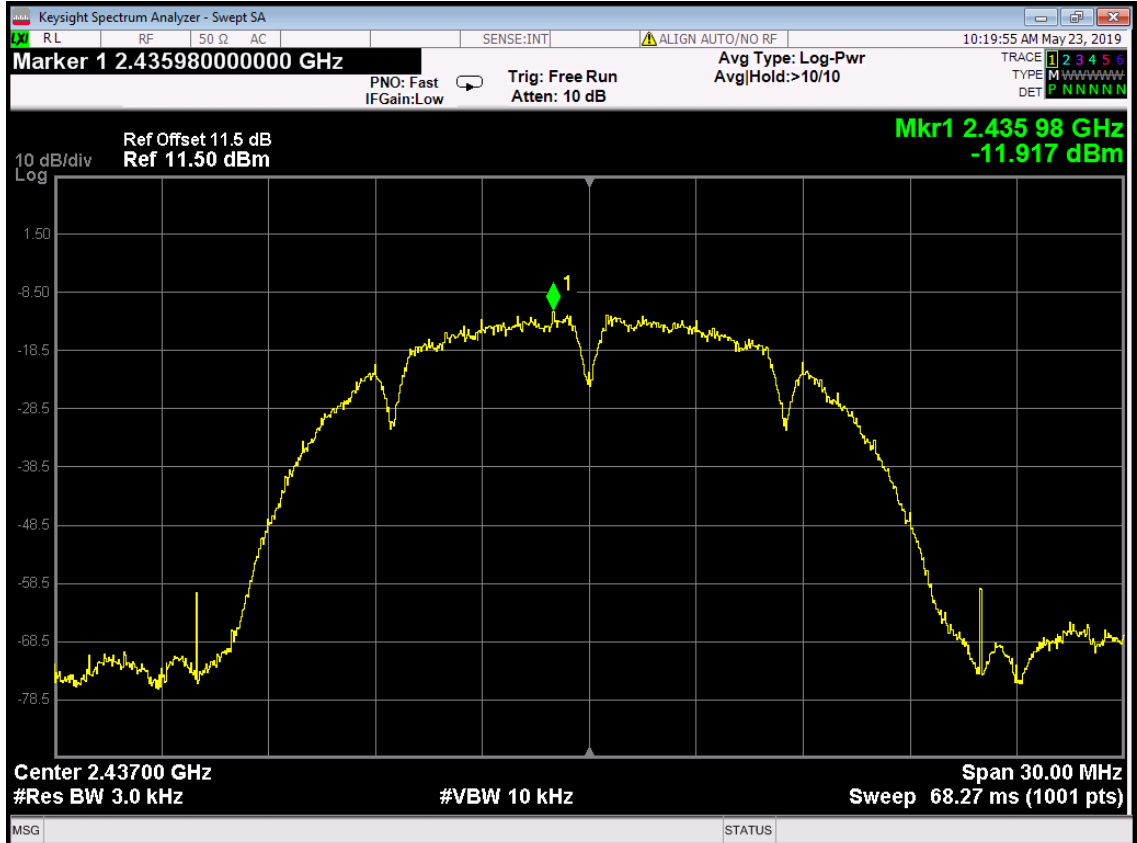


Channel 2462MHz

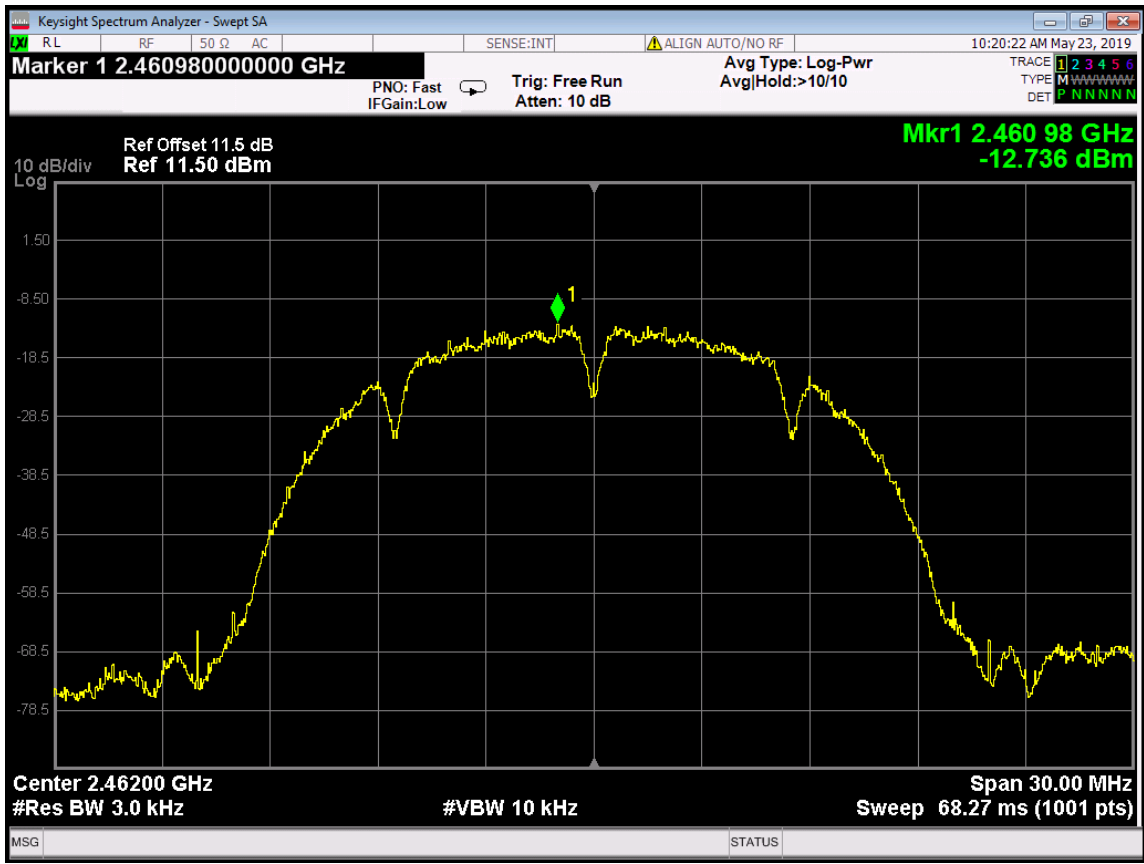


802.11b mode (antenna 1):  
Channel 2412MHz

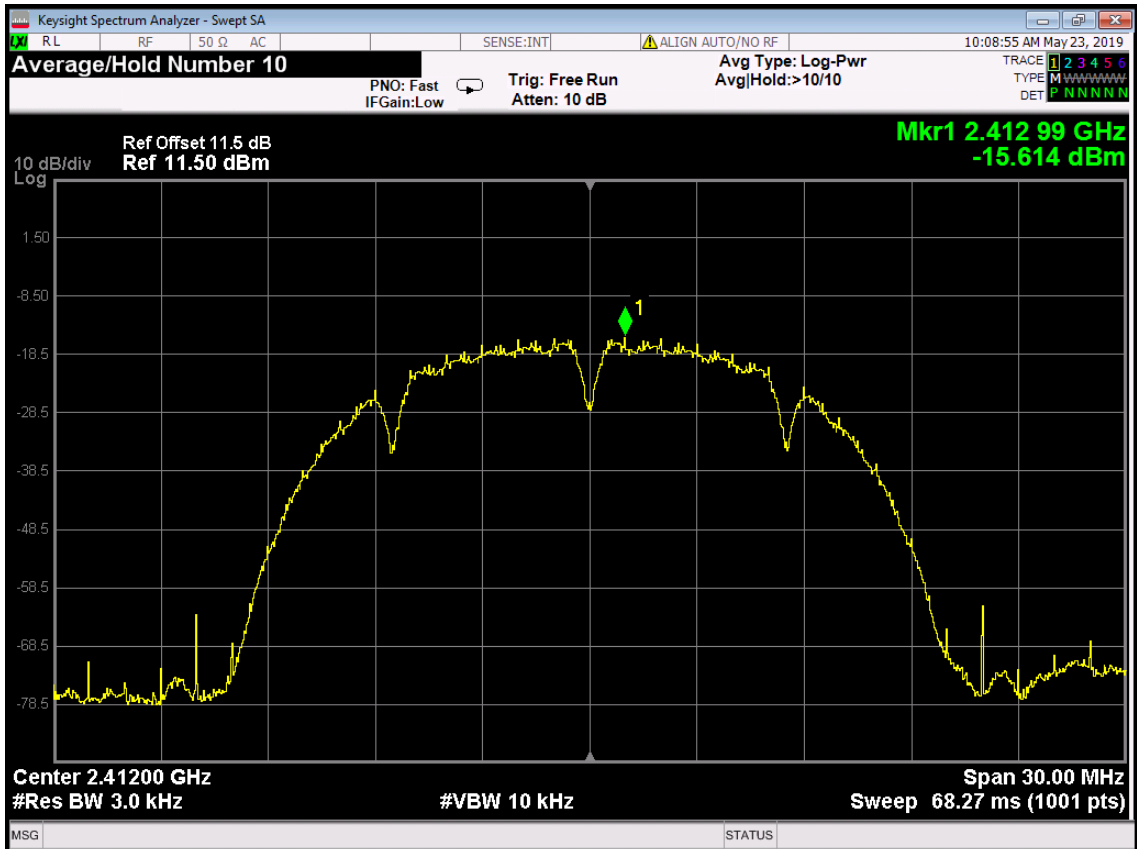

Channel 2437MHz

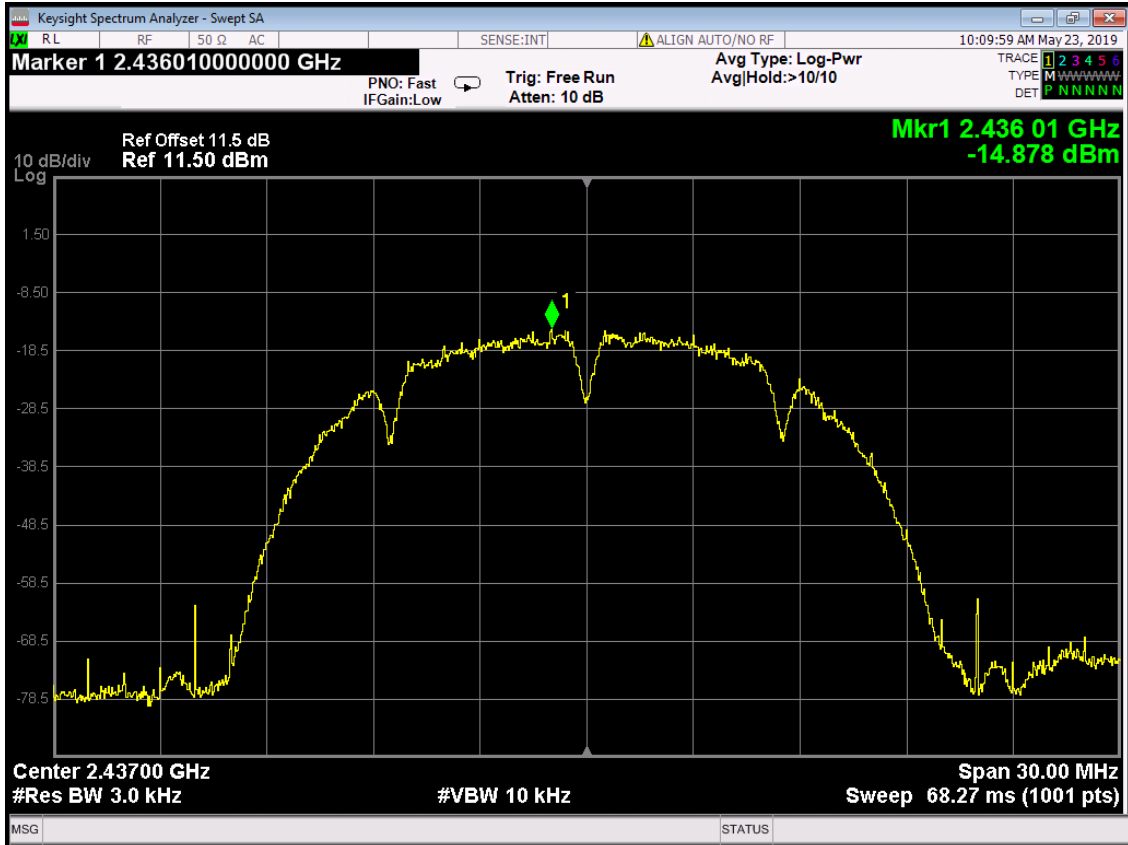


Channel 2462MHz

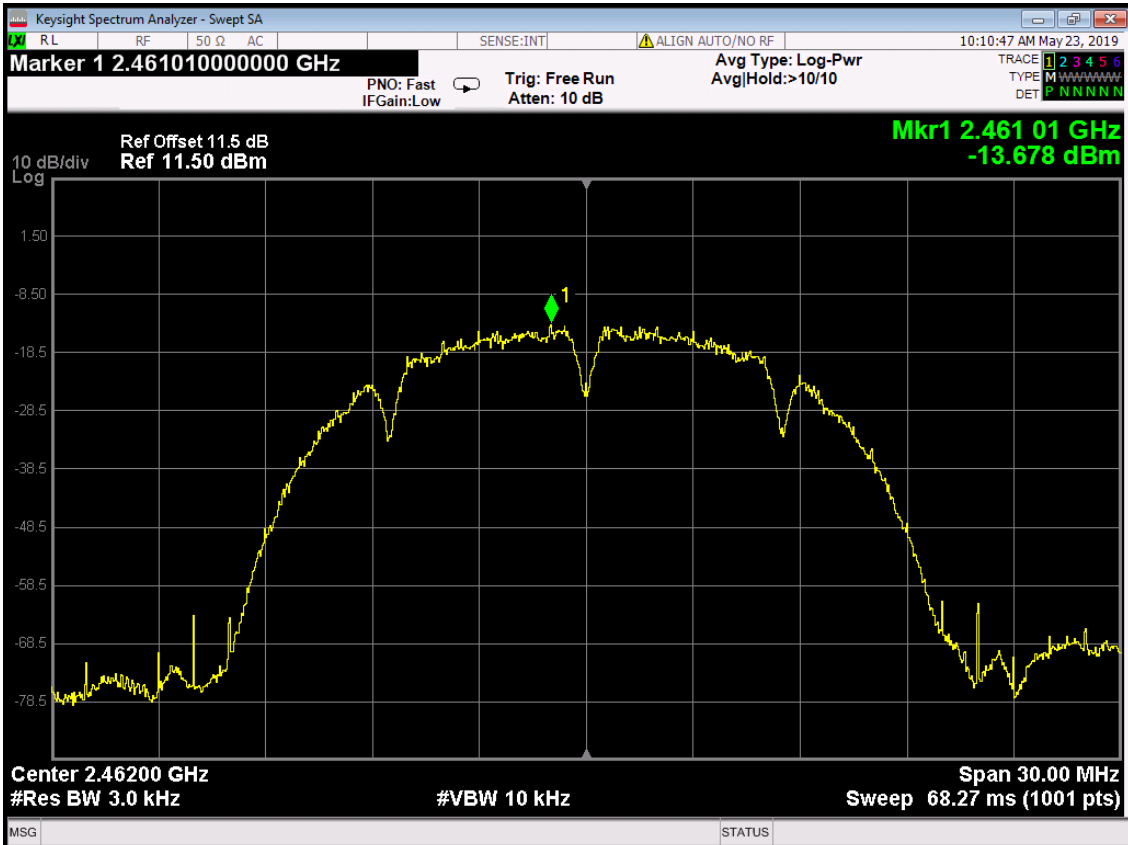





802.11g mode (antenna 0):  
Channel 2412MHz

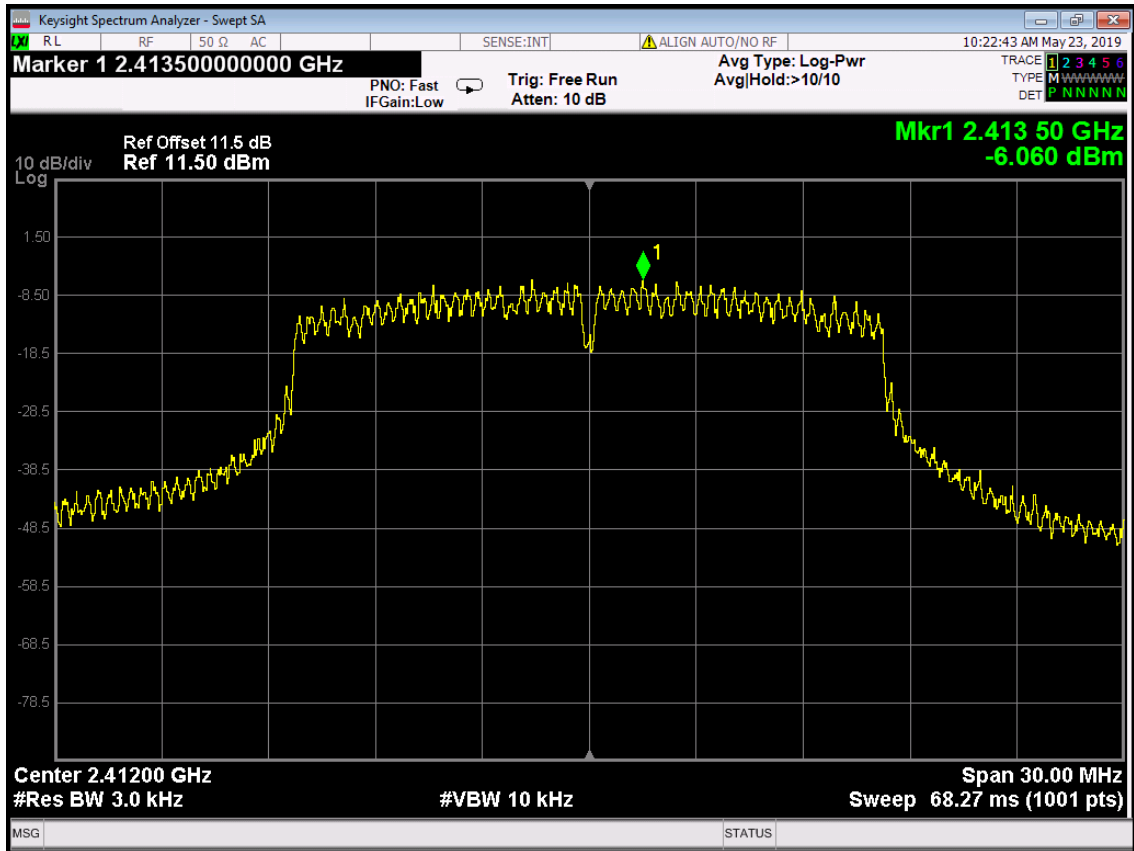


Channel 2437MHz

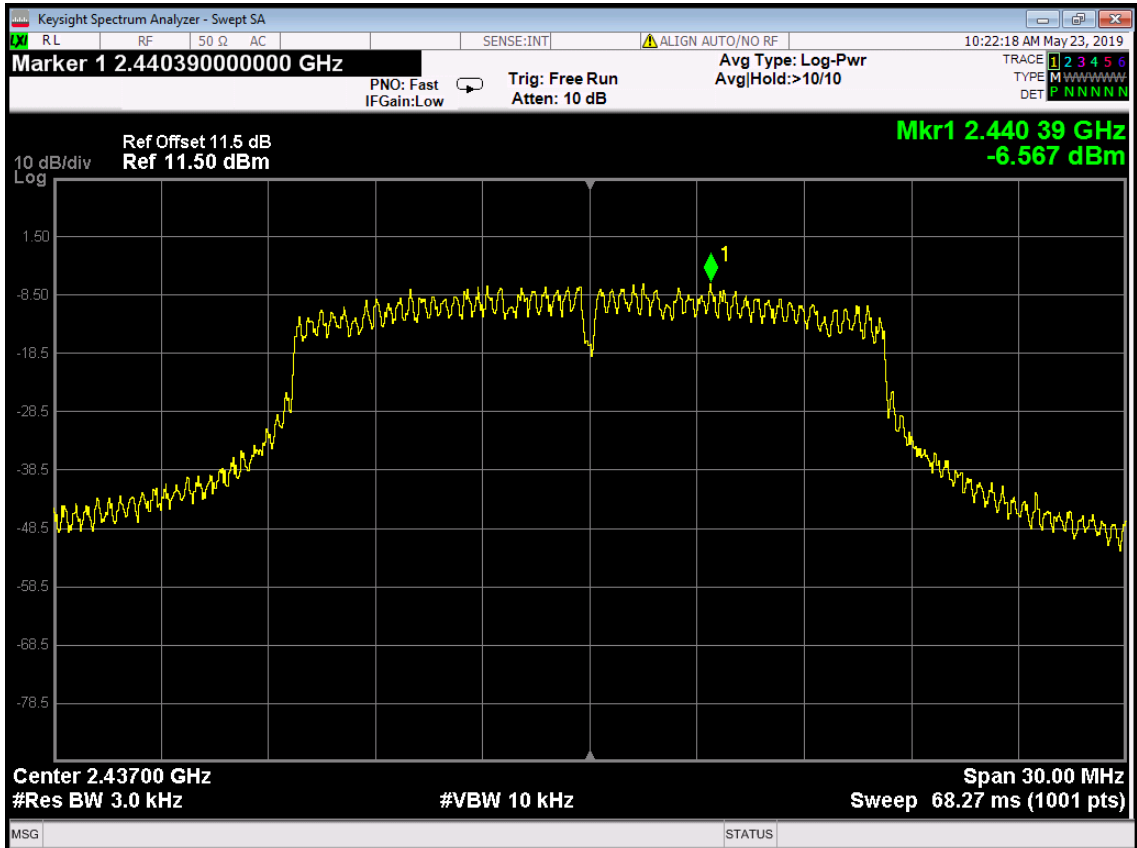


Channel 2462MHz

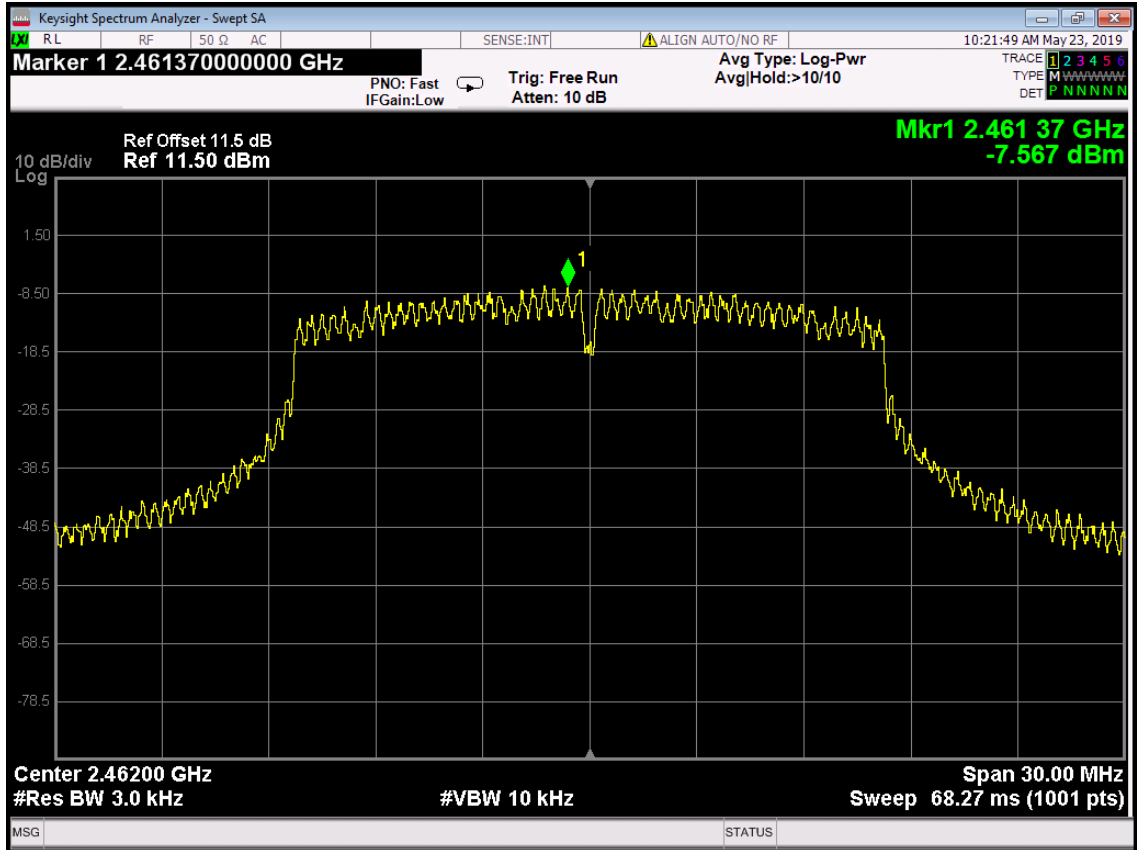


802.11g mode (antenna 1):  
Channel 2412MHz

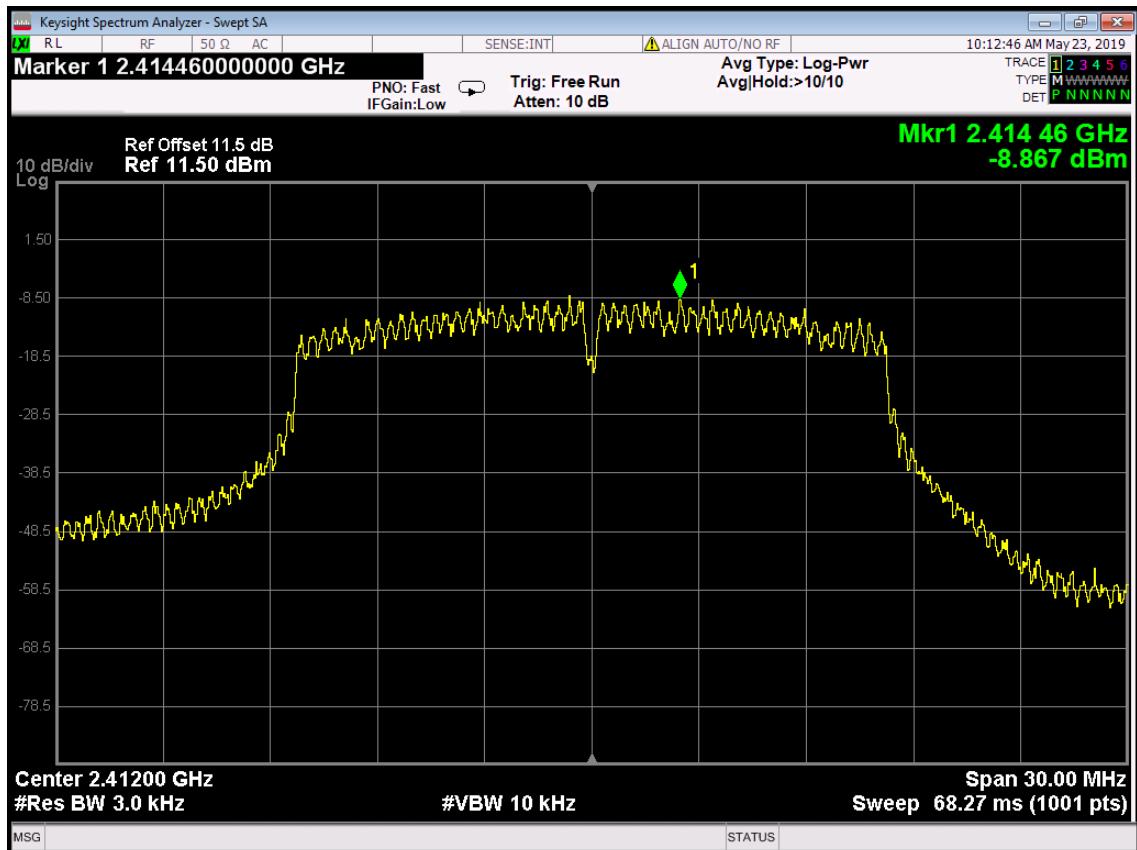


Channel 2437MHz

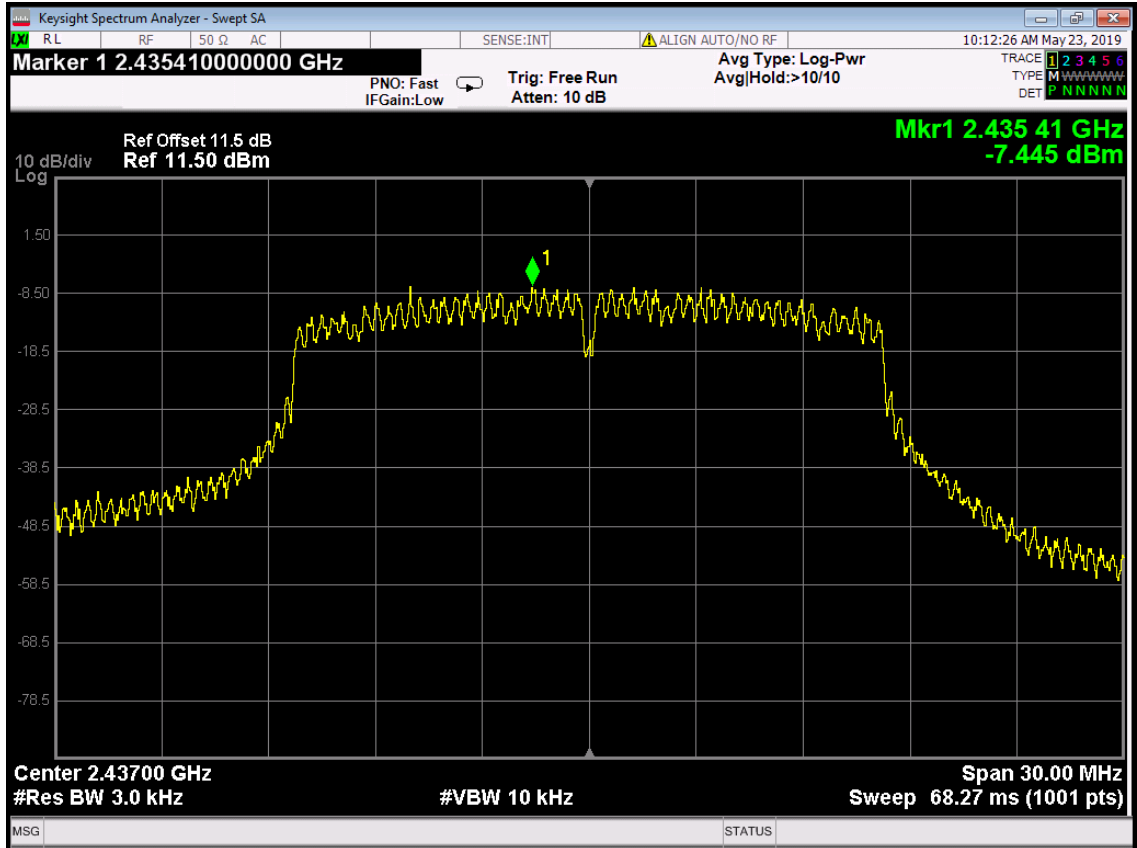


Channel 2462MHz

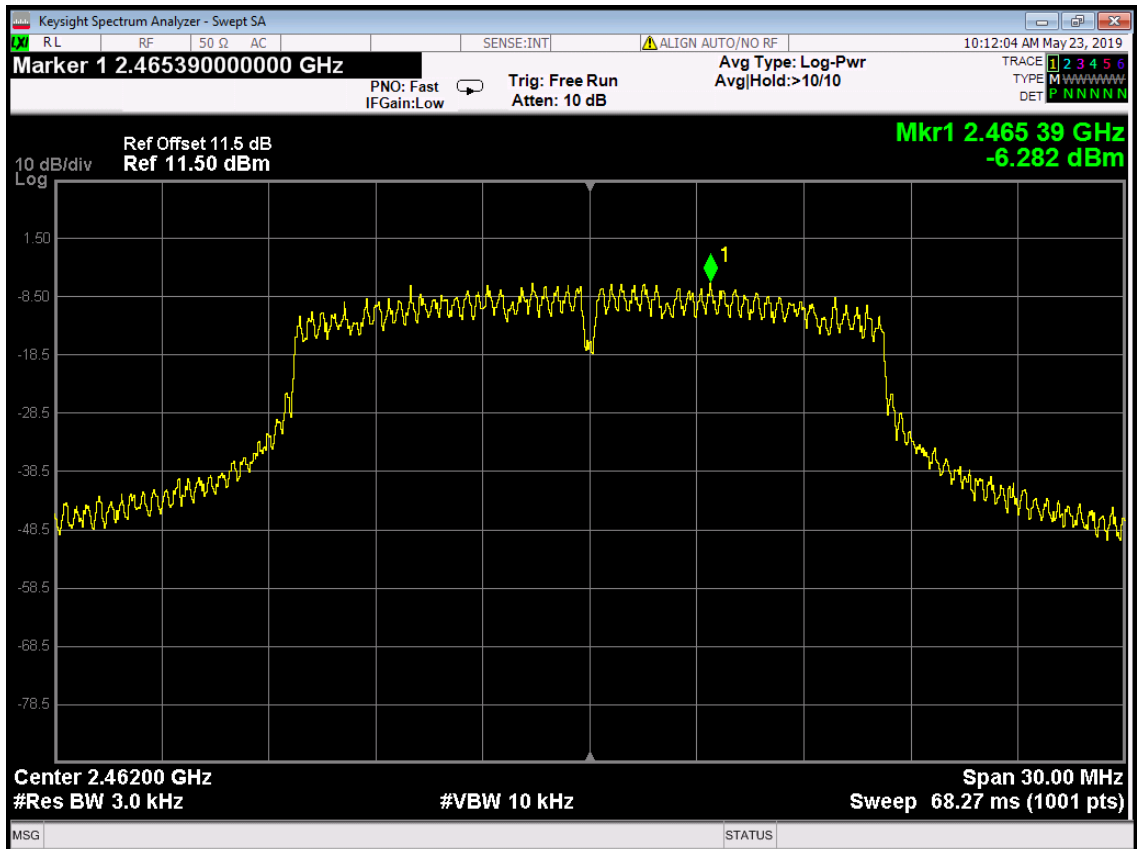


802.11n HT20 mode (antenna 0):  
Channel 2412MHz

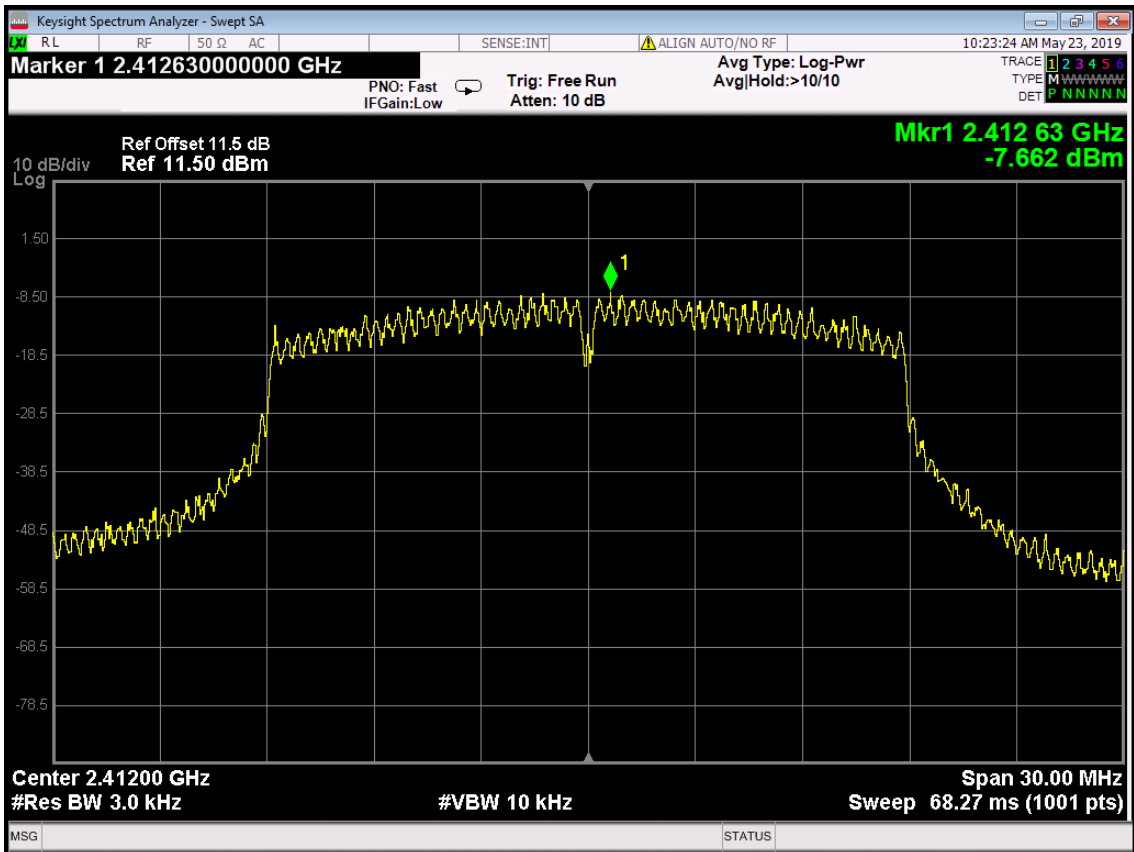

Channel 2437MHz

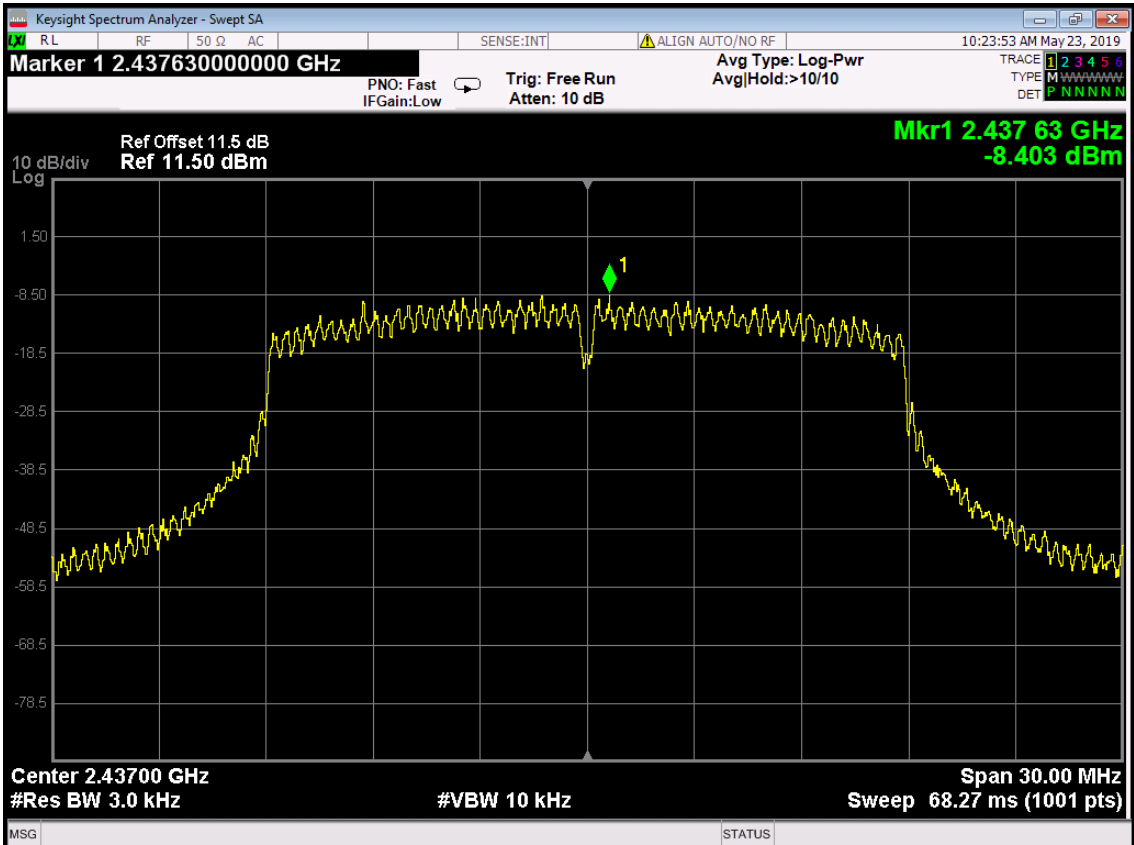


Channel 2462MHz

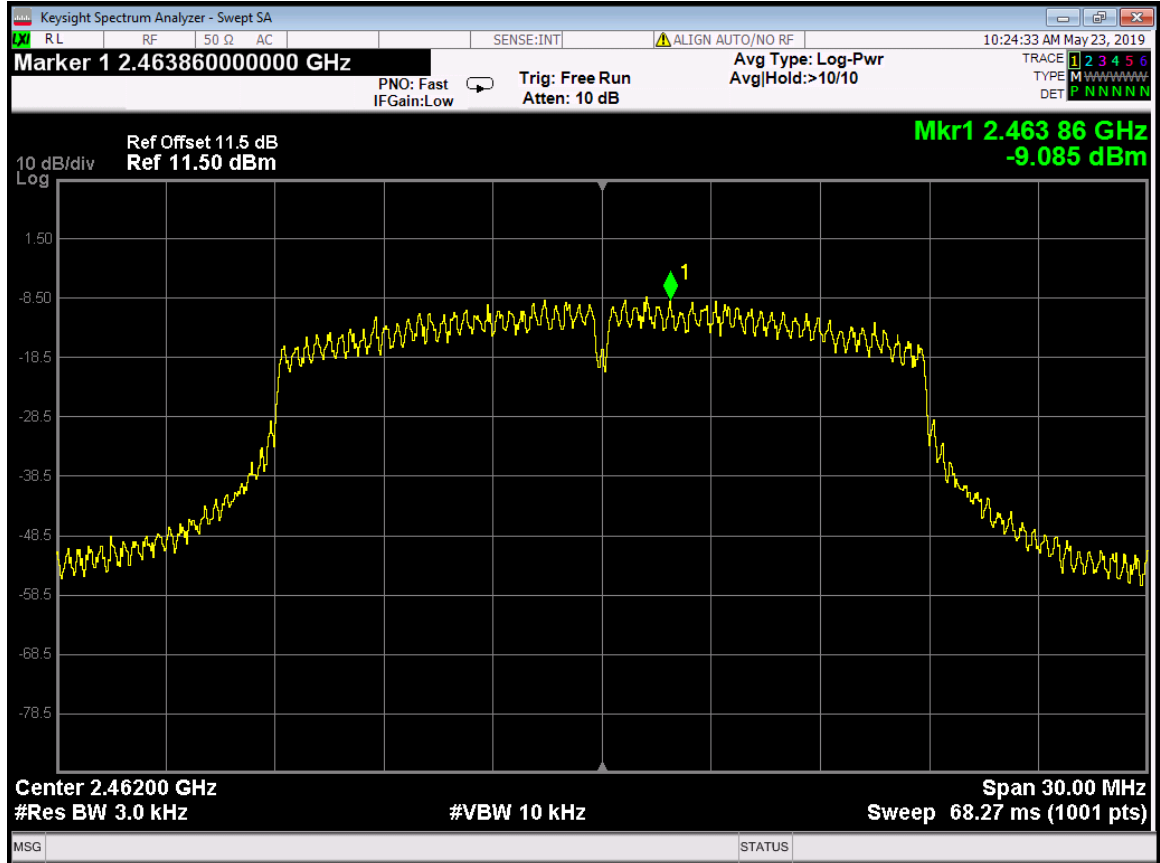


802.11n HT20 mode (antenna 1):


Channel 2412MHz

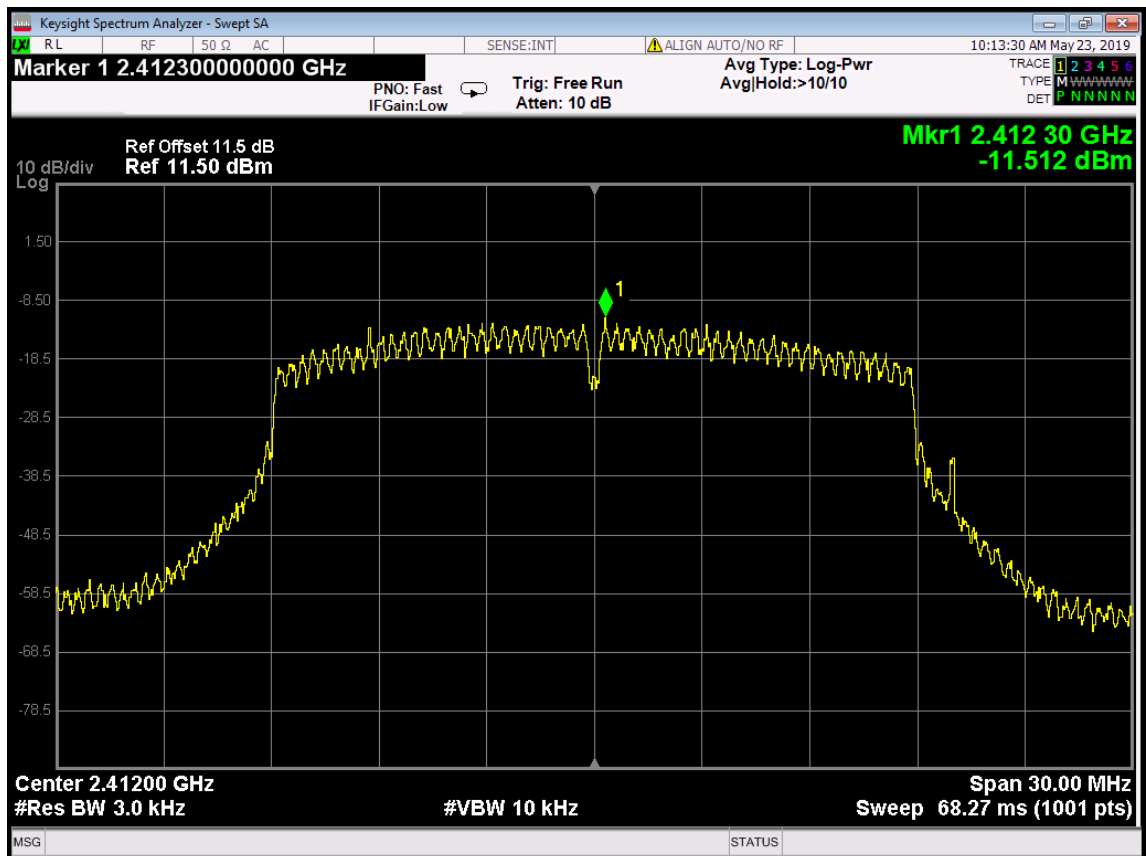


Channel 2437MHz

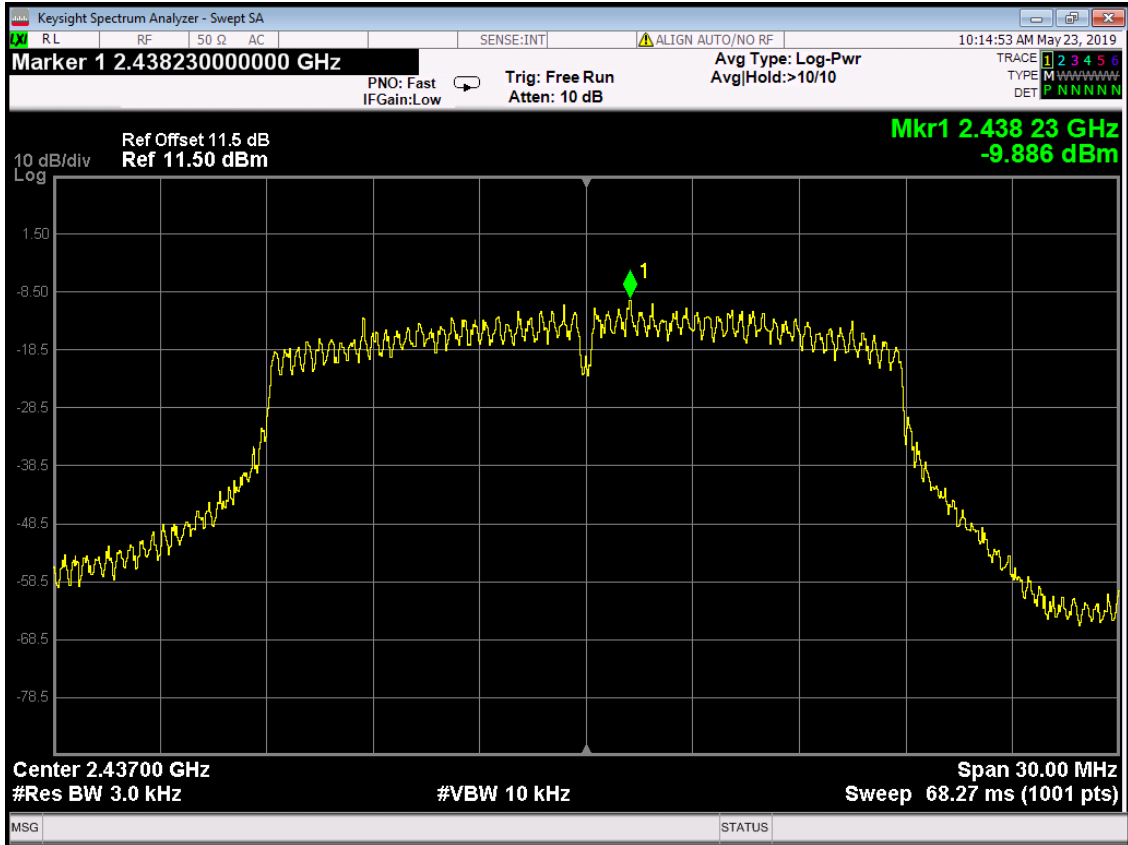


Channel 2462MHz

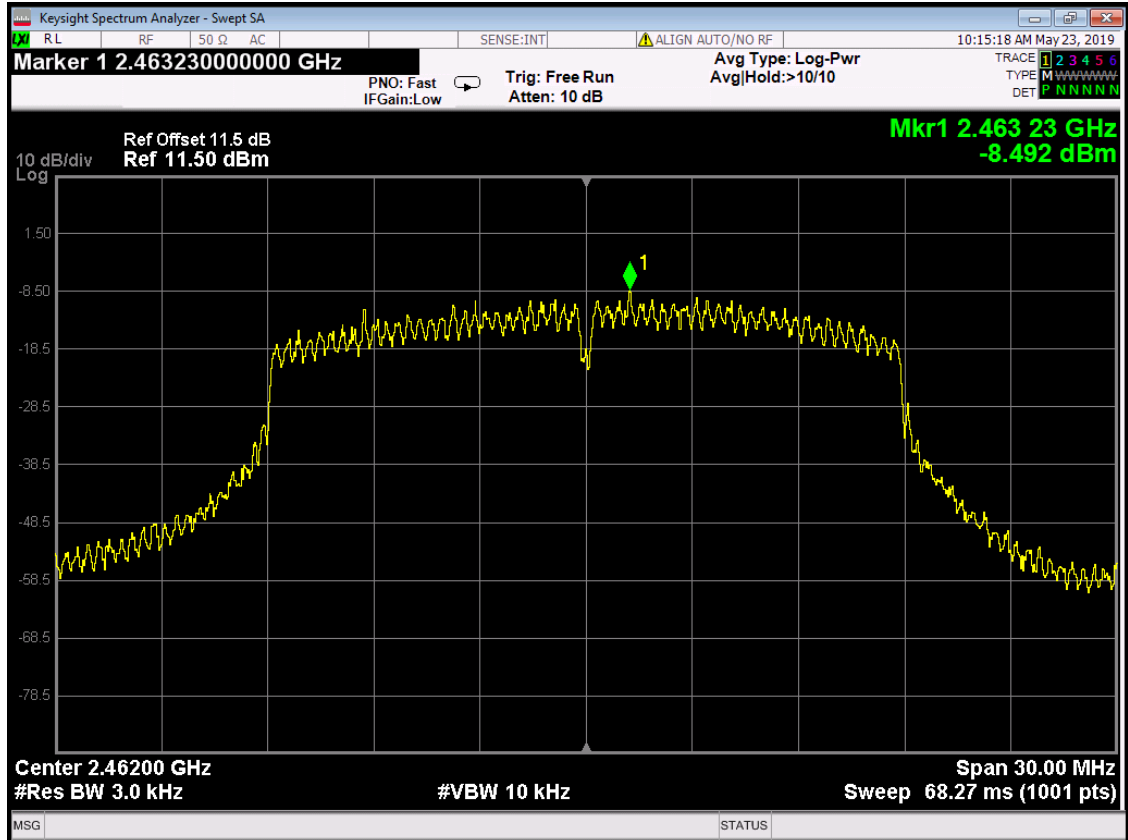


802.11n HT40 mode (antenna 0):  
Channel 2422MHz

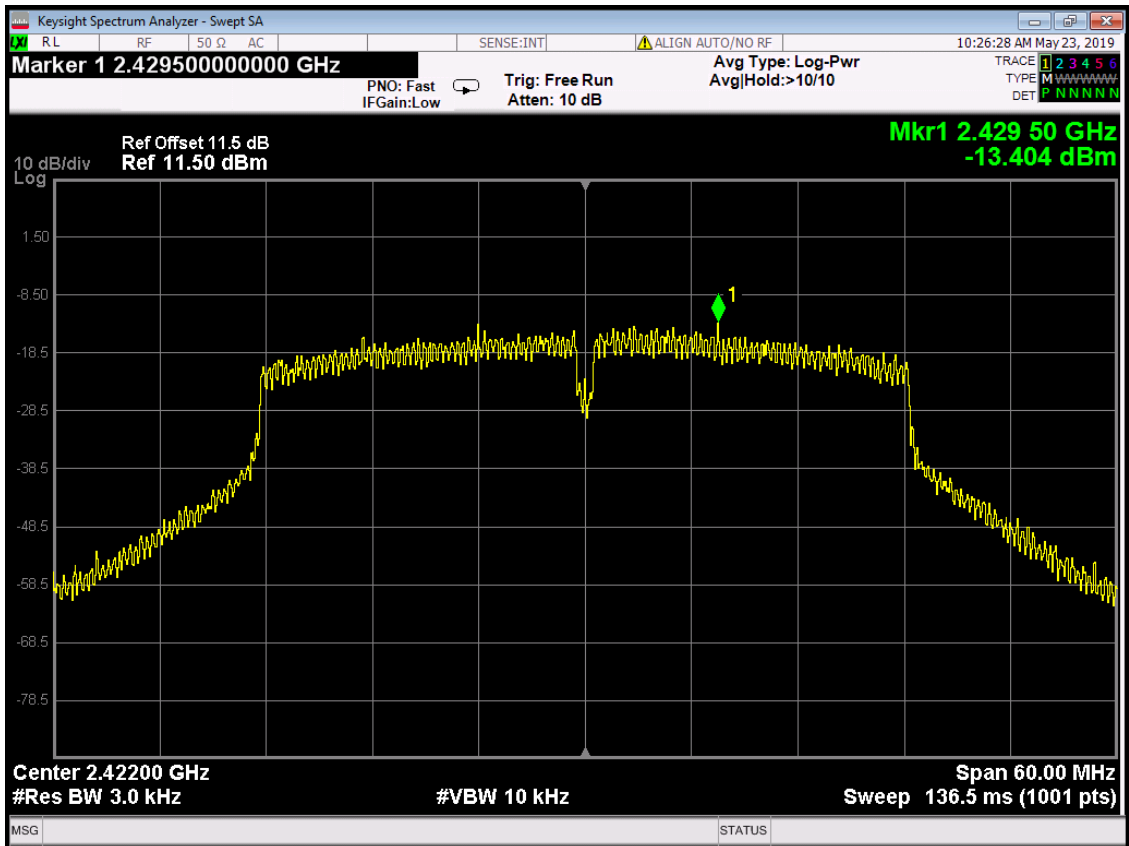

Channel 2437MHz

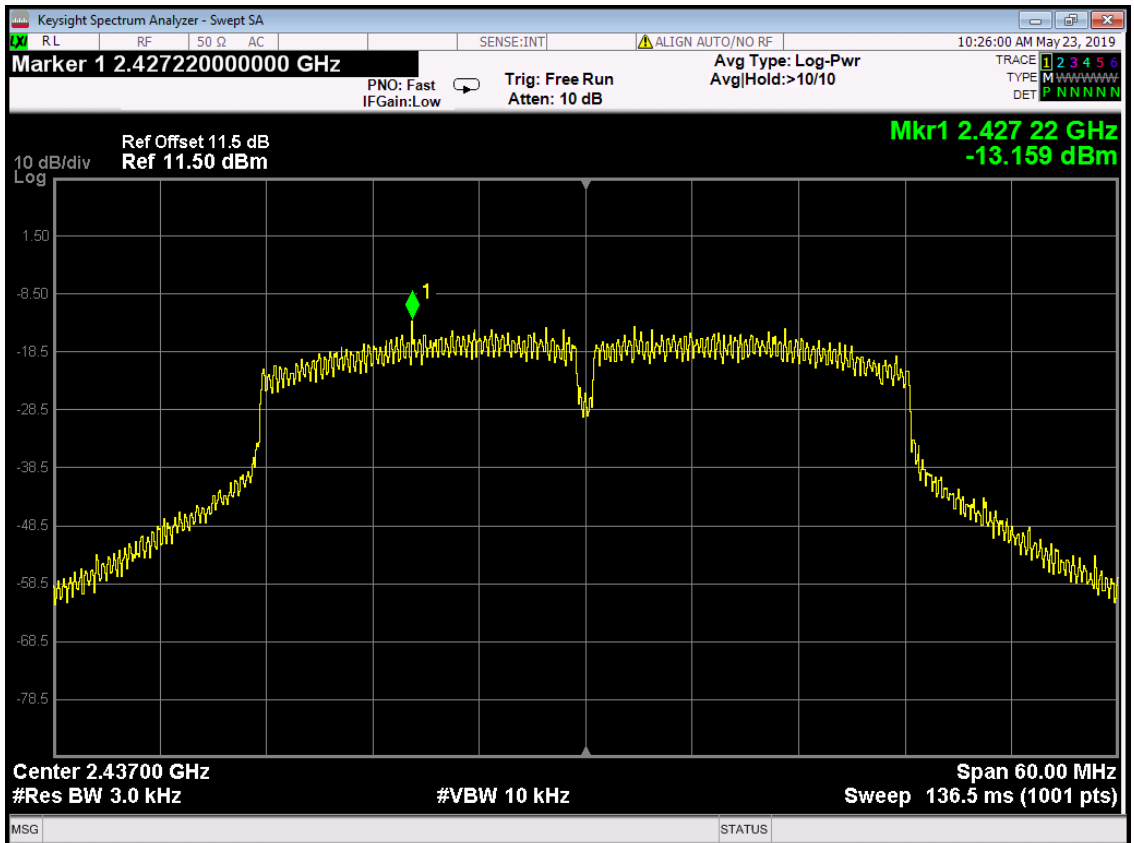


Channel 2452MHz

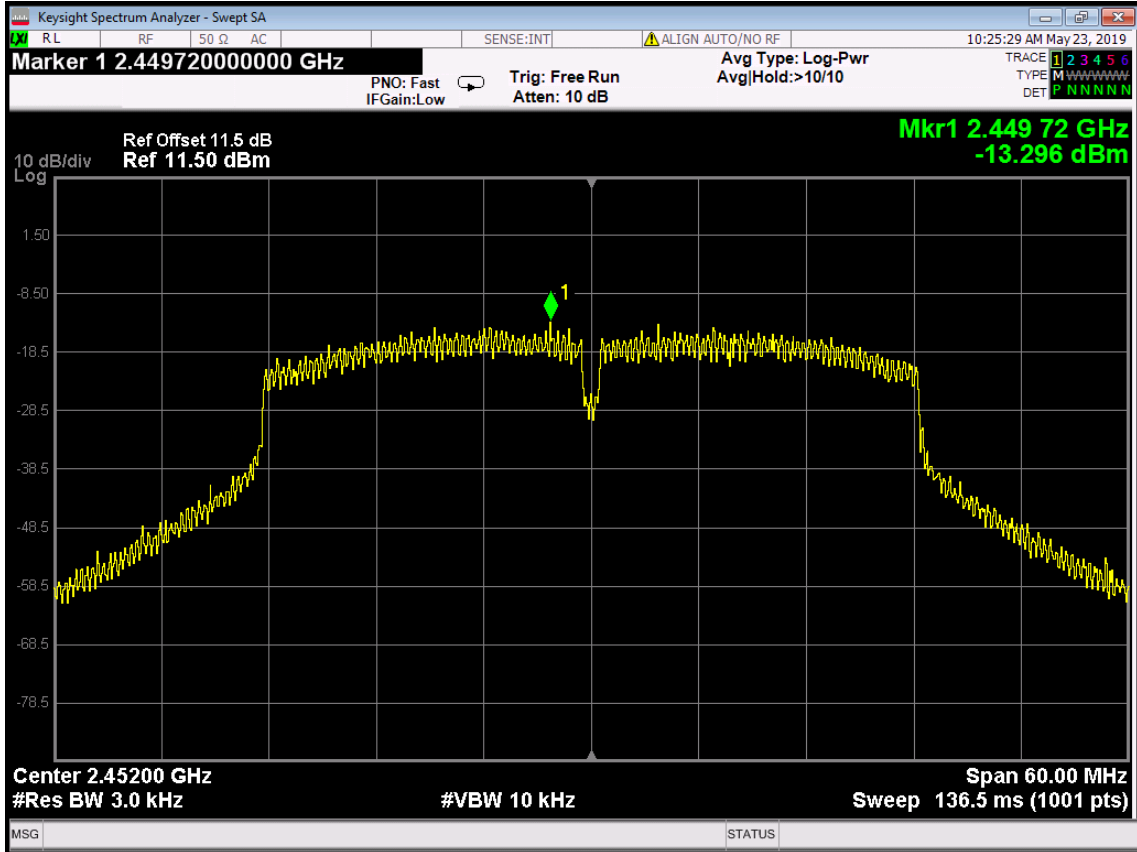


802.11n HT40 mode (antenna 1):

Channel 2422MHz

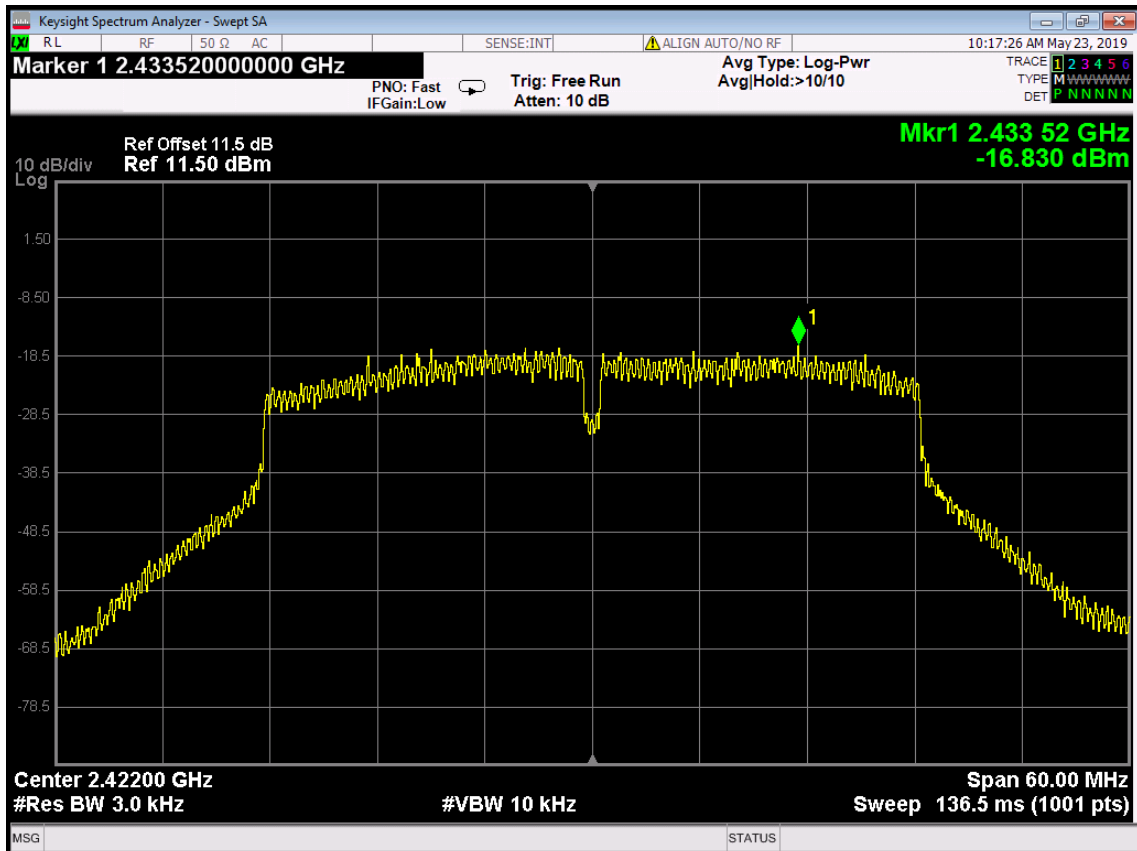




Channel 2437MHz

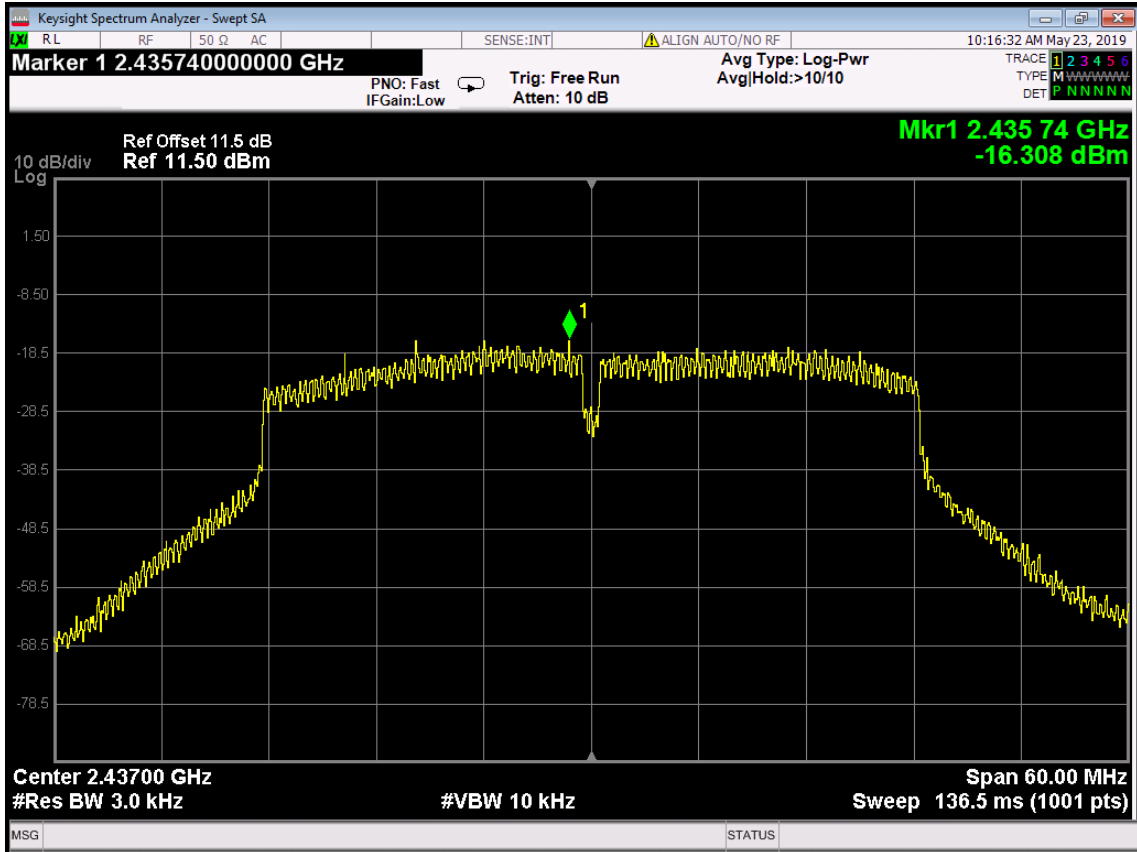

Channel 2452MHz

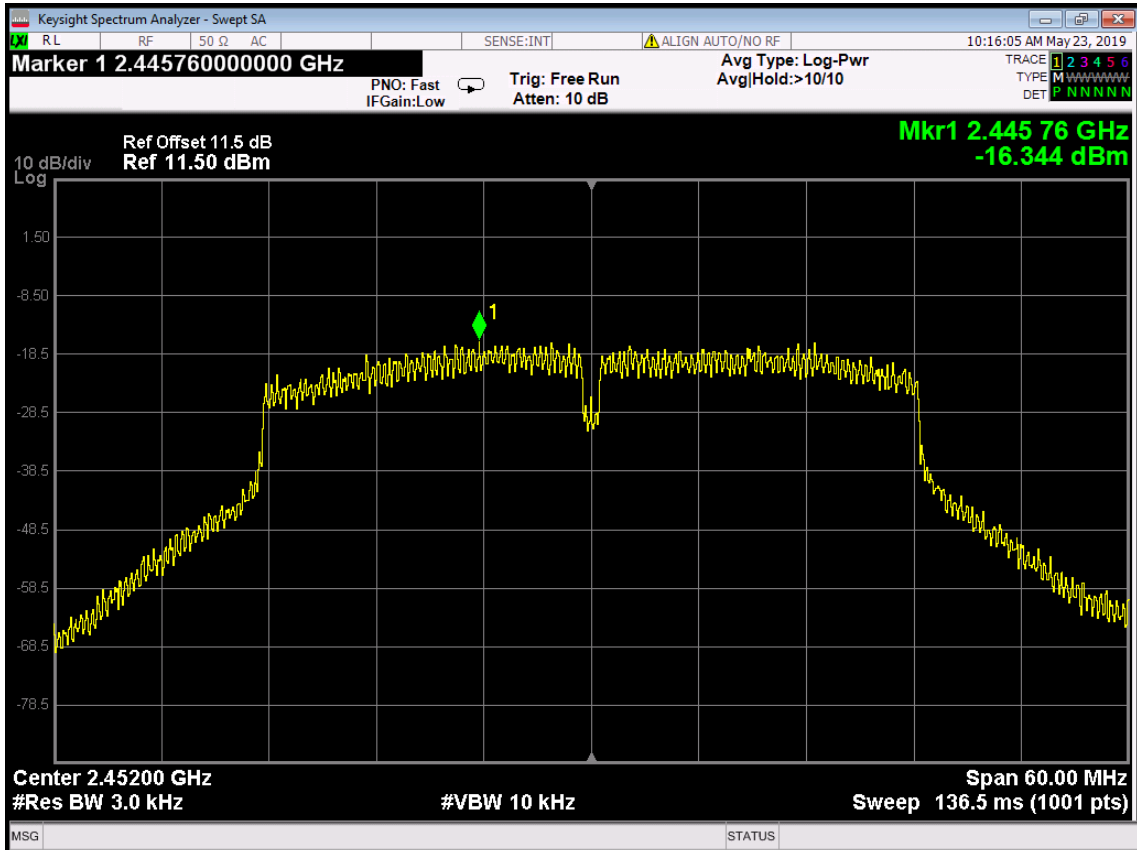

## 11. CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS

### 11.1. LIMITS

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


### 11.2. TEST PROCEDURES

Test procedures follow KDB 558074 D01 DTS Measurement Guidance v03r01.

Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.


- 1) Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.
- 2) Set the spectrum analyzer: RBW =100KHz; VBW =300KHz, Span = 10MHz to 26GHz; Sweep = auto; Detector Function = Peak. Trace = Max, hold.
- 3) Measure and record the results in the test report.
- 4) The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 11.3. TEST SETUP




### 11.4.TEST RESULTS



802.11b mode (antenna 0):  
 Channel 2412MHz  
 0.01GHz-26.5GHz

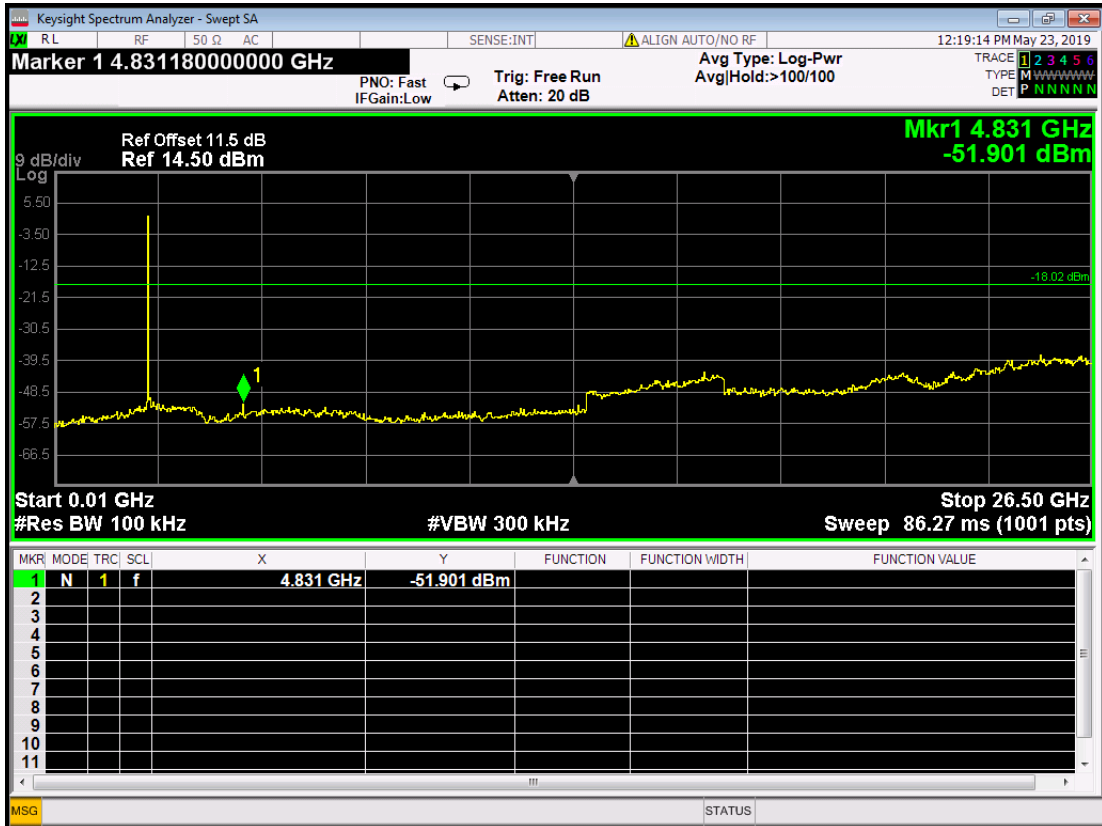


2.31GHz-2.43GHz

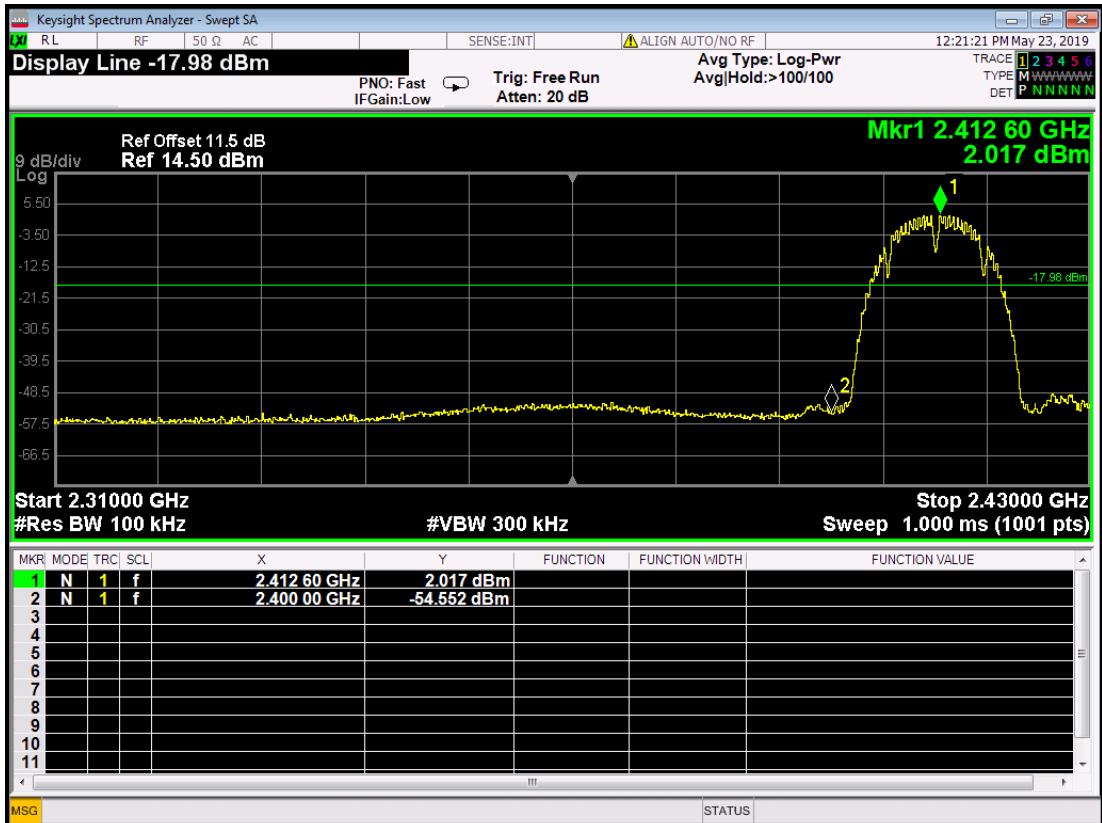


802.11b mode (antenna 0):  
Channel 2437MHz  
0.01GHz-26.5GHz

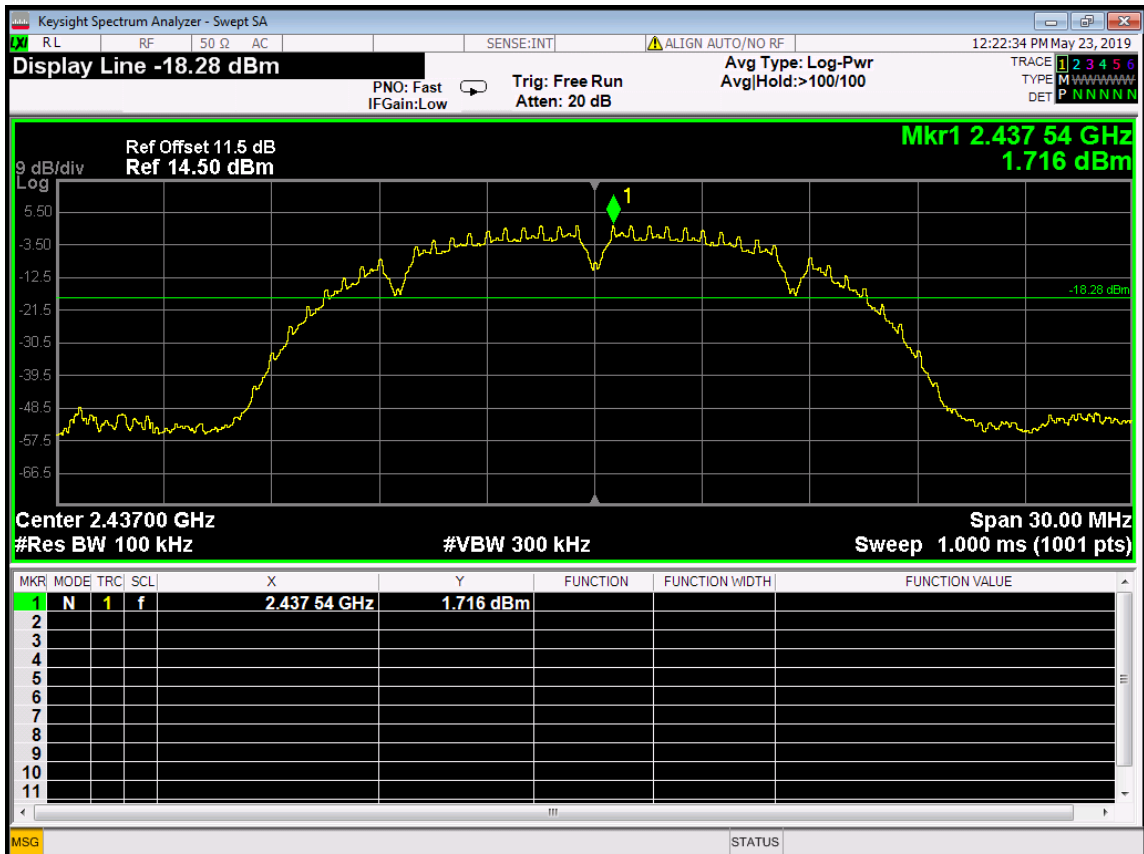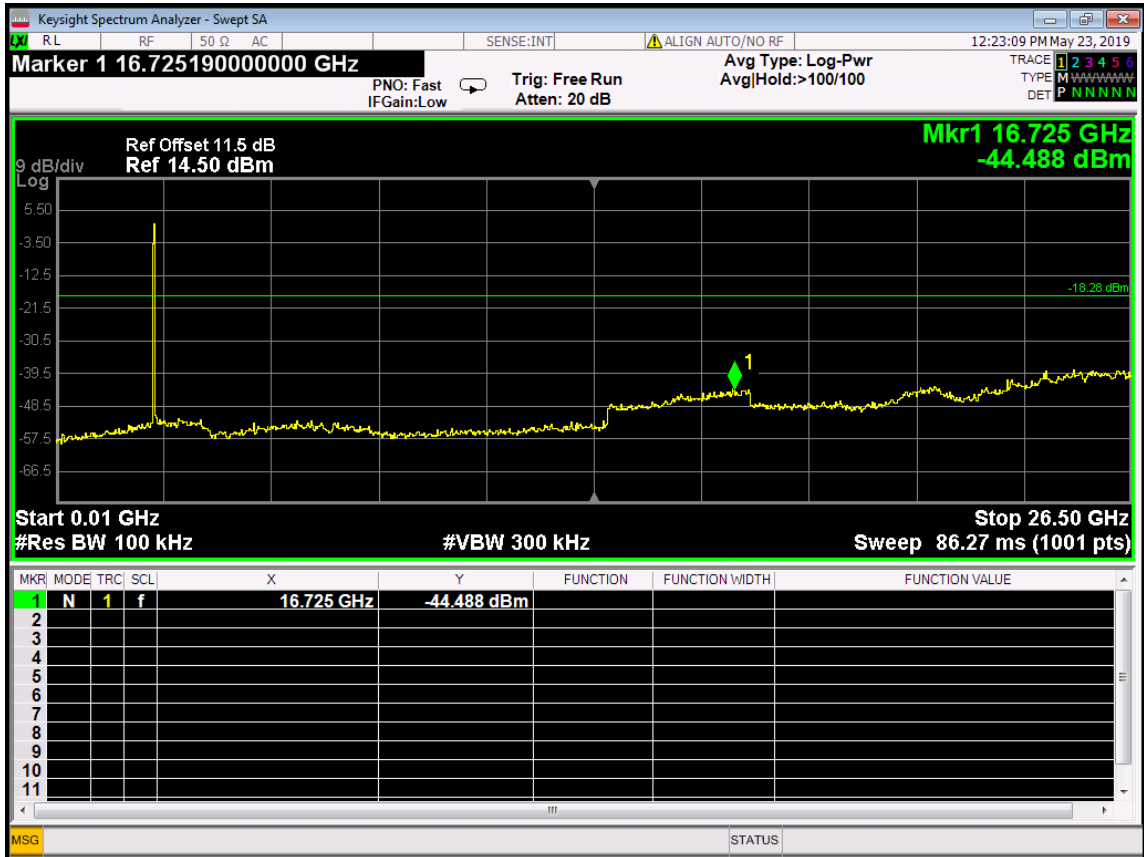


802.11b mode (antenna 0):  
 Channel 2462MHz  
 0.01GHz-26.5GHz

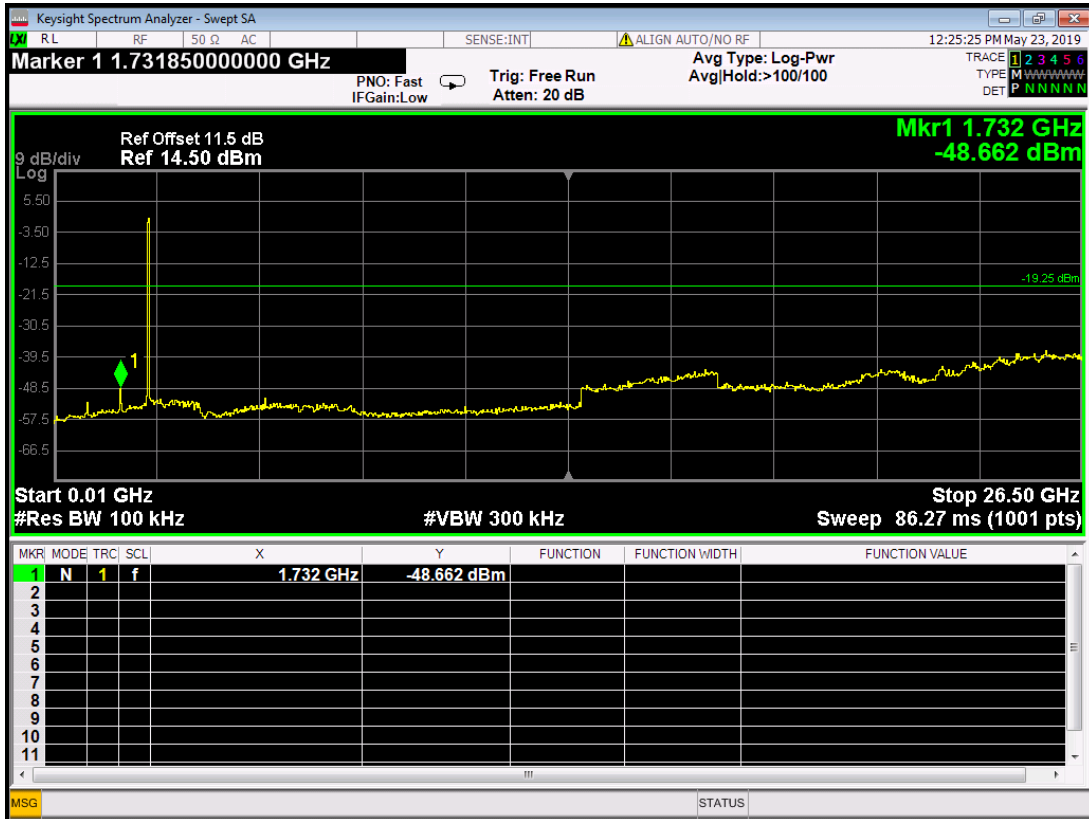


2.45GHz-2.5GHz

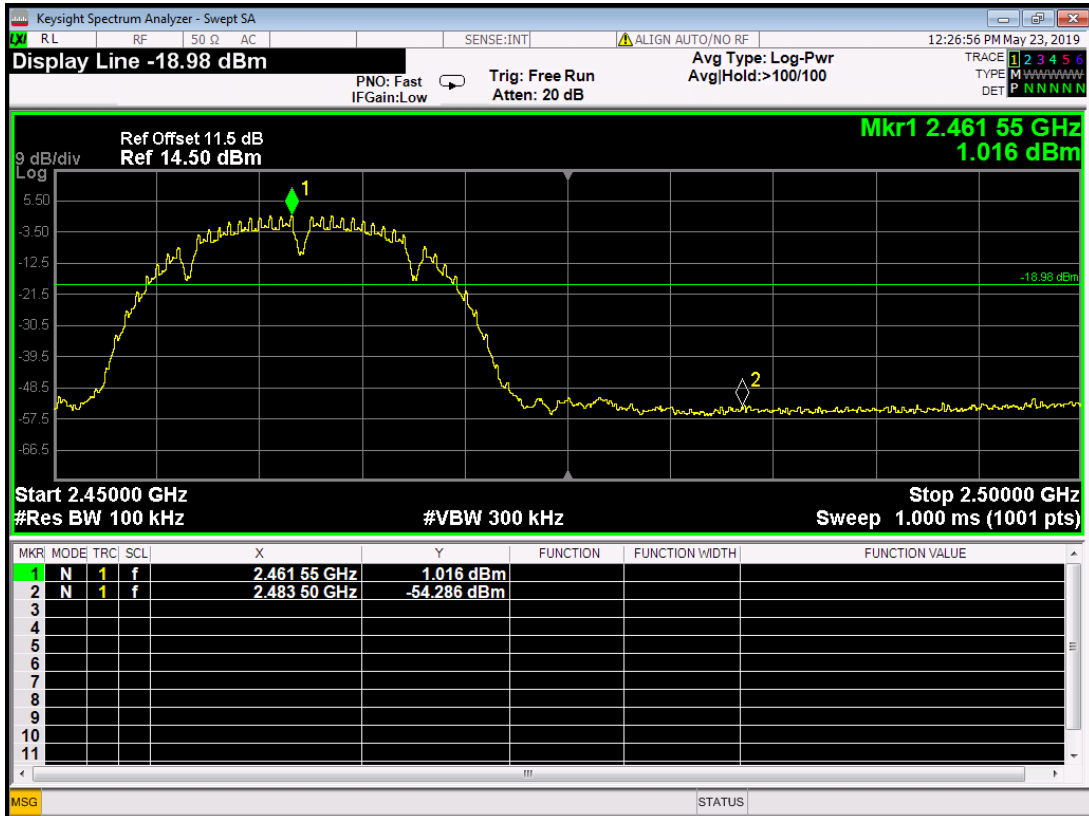



802.11b mode (antenna 1):  
 Channel 2412MHz  
 0.01GHz-26.5GHz

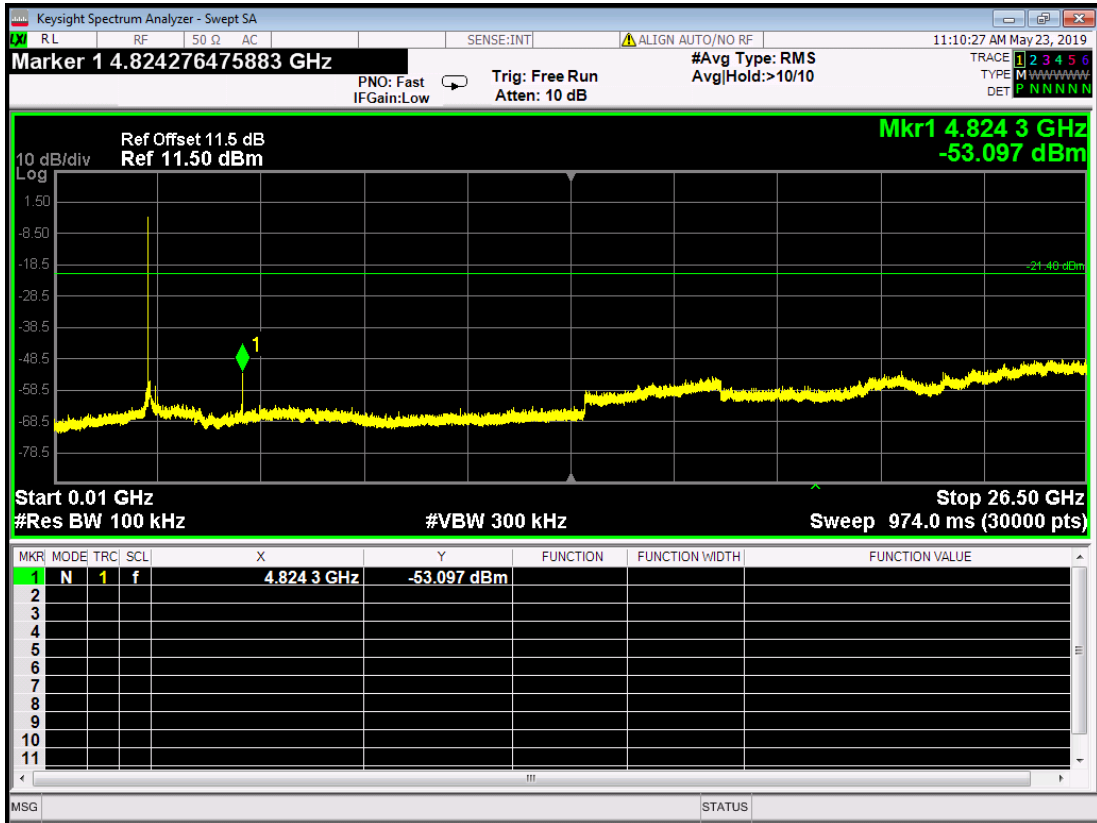


2.31GHz-2.43GHz

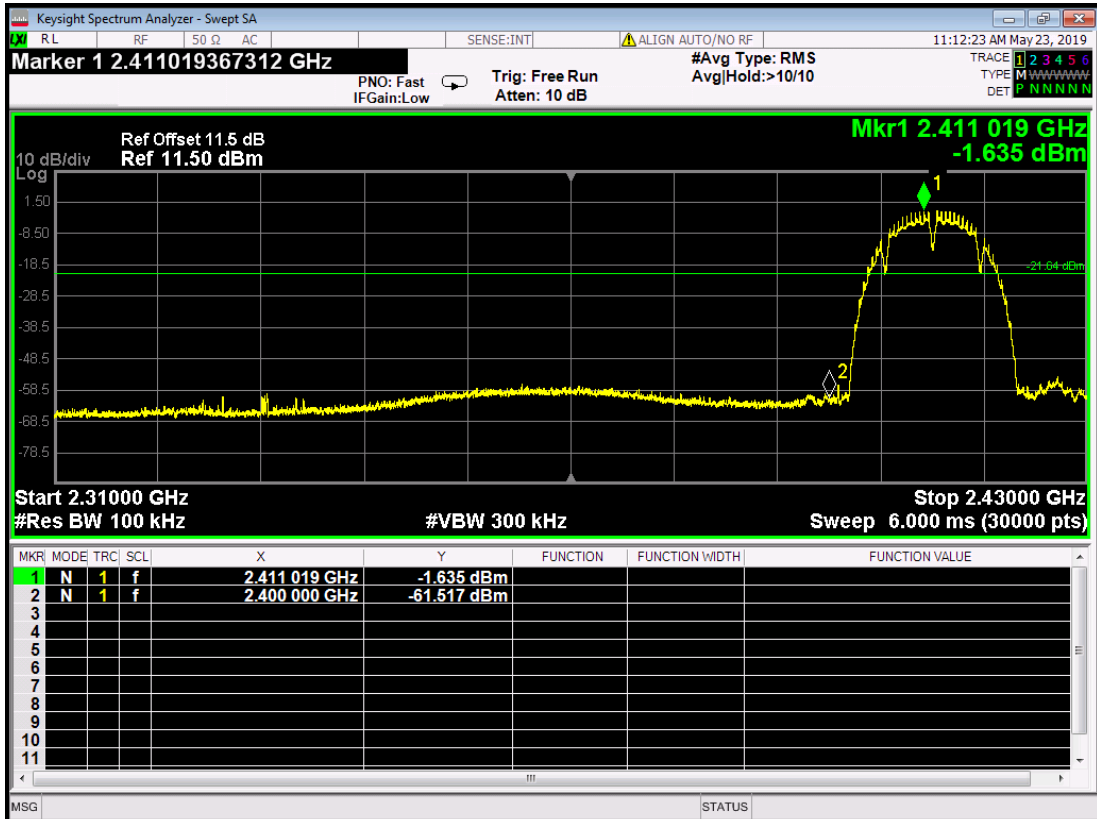


802.11b mode (antenna 1):  
 Channel 2437MHz  
 0.01GHz-26.5GHz

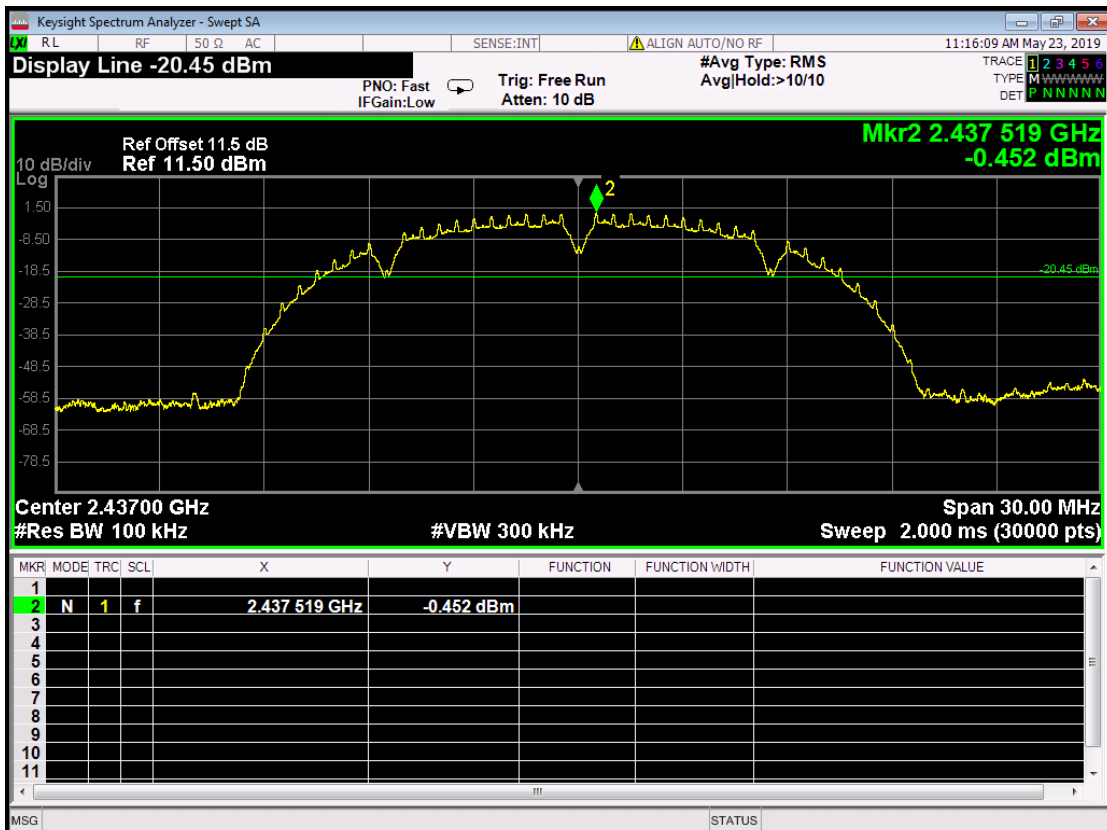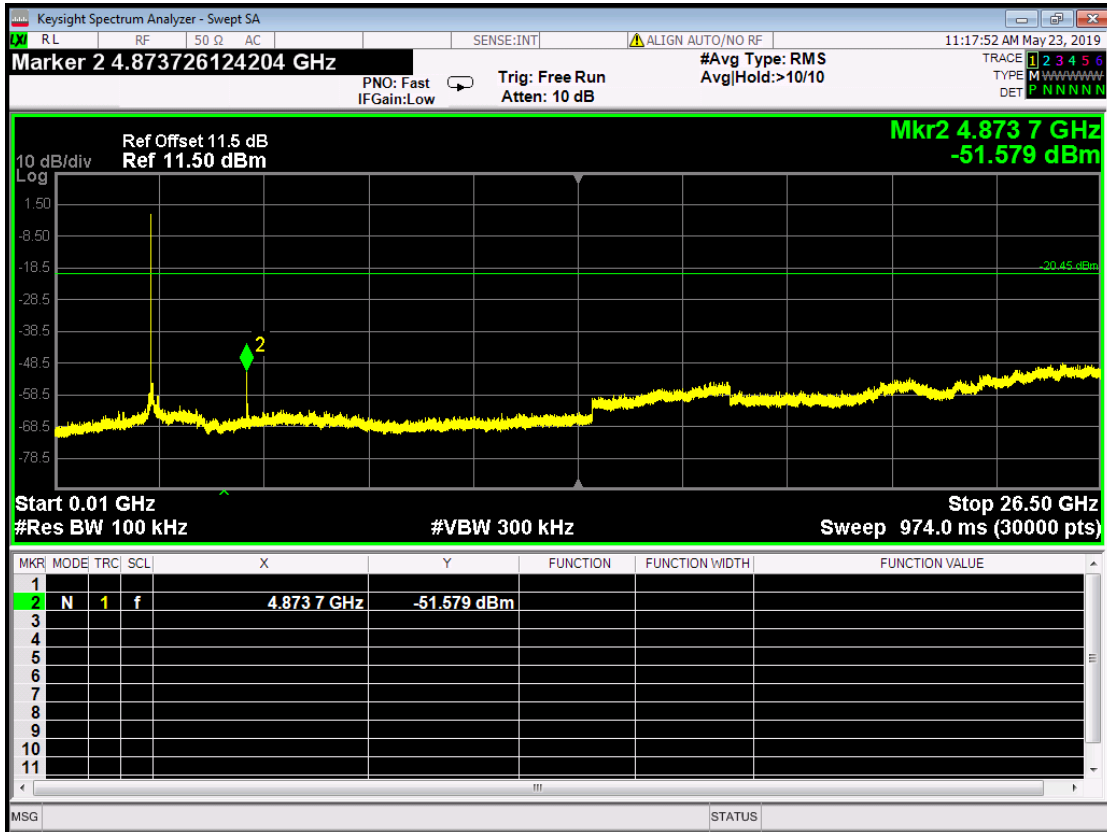

802.11b mode (antenna 1):  
Channel 2462MHz  
0.01GHz-26.5GHz

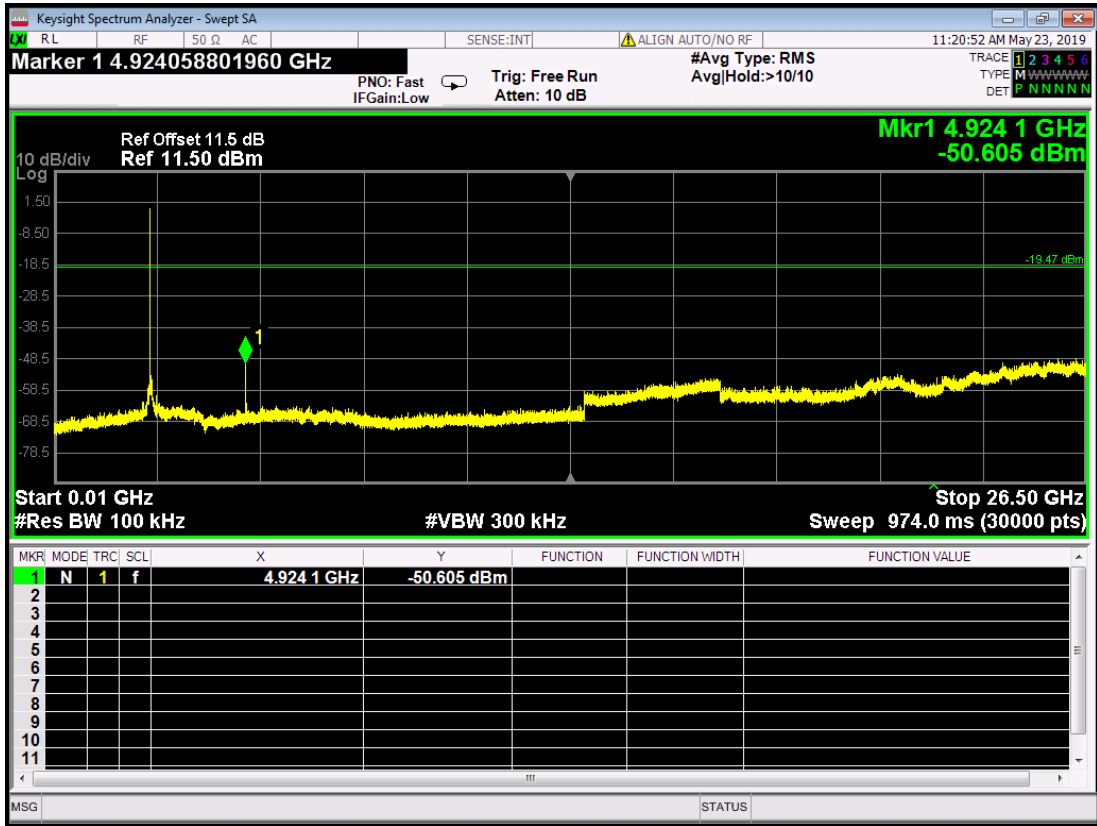


2.45GHz-2.5GHz

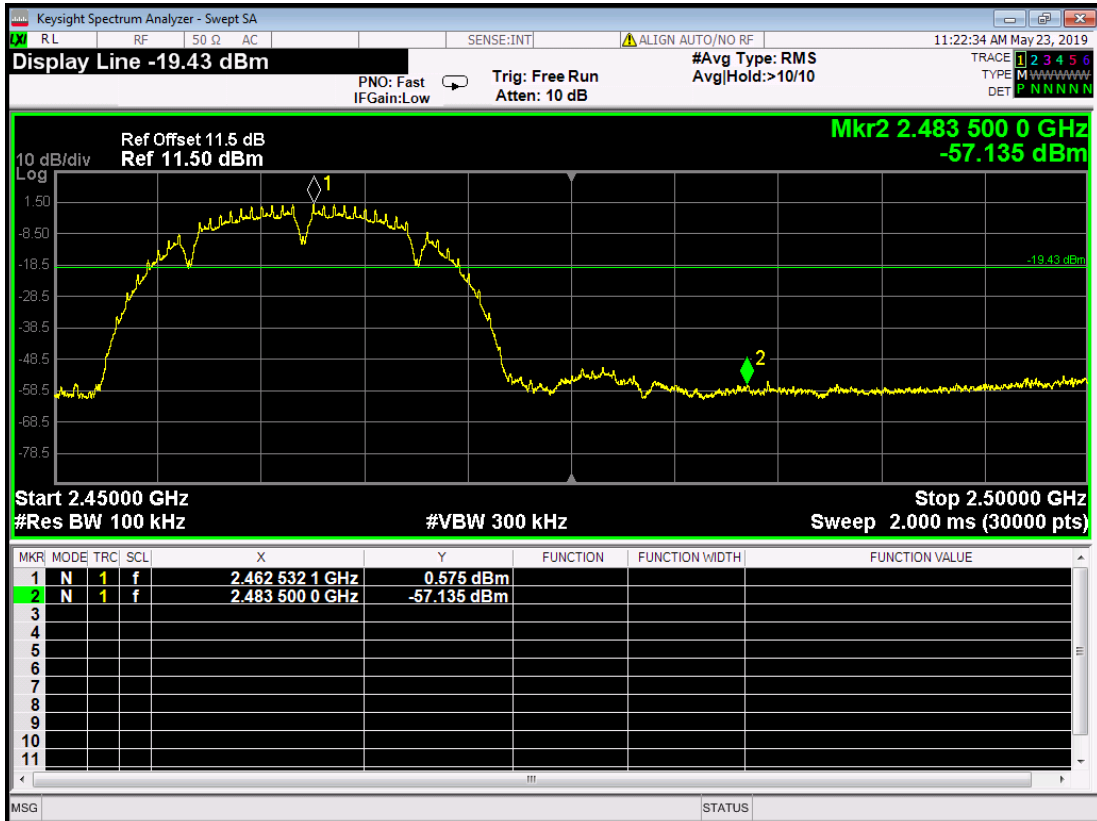






802.11g mode (antenna 0):  
 Channel 2412MHz  
 0.01GHz-26.5GHz

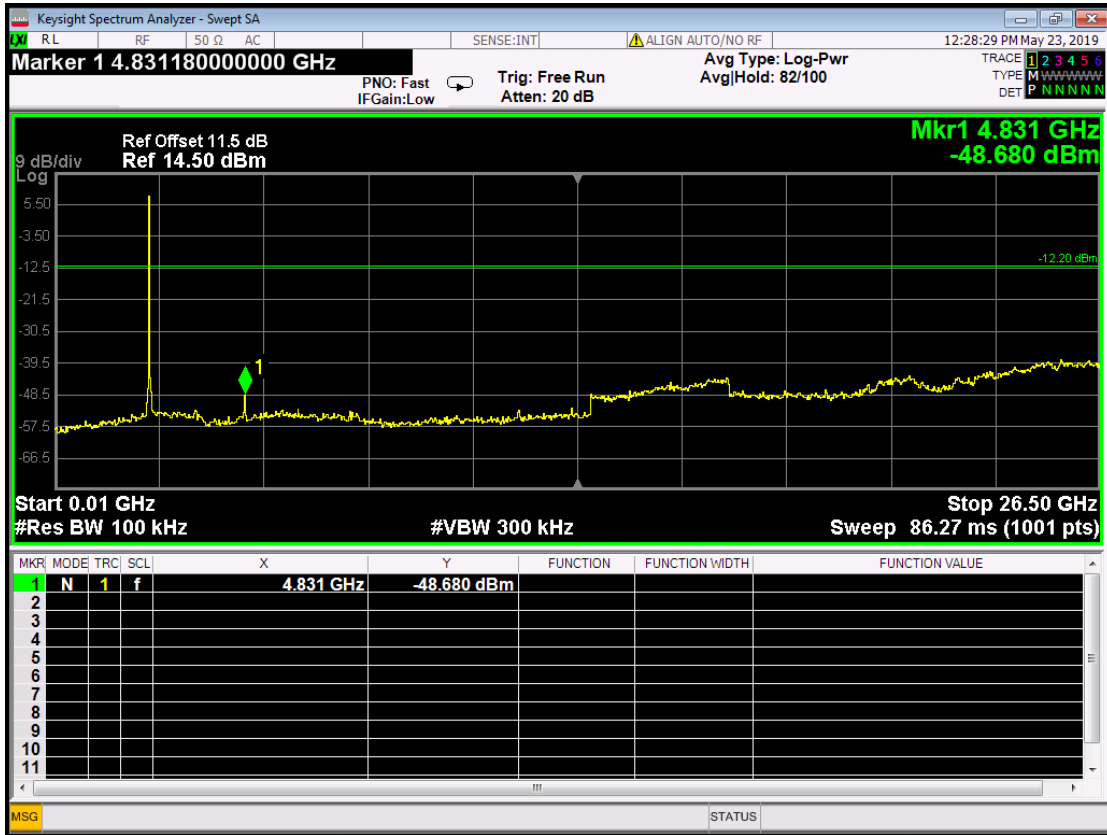


2.31GHz-2.43GHz

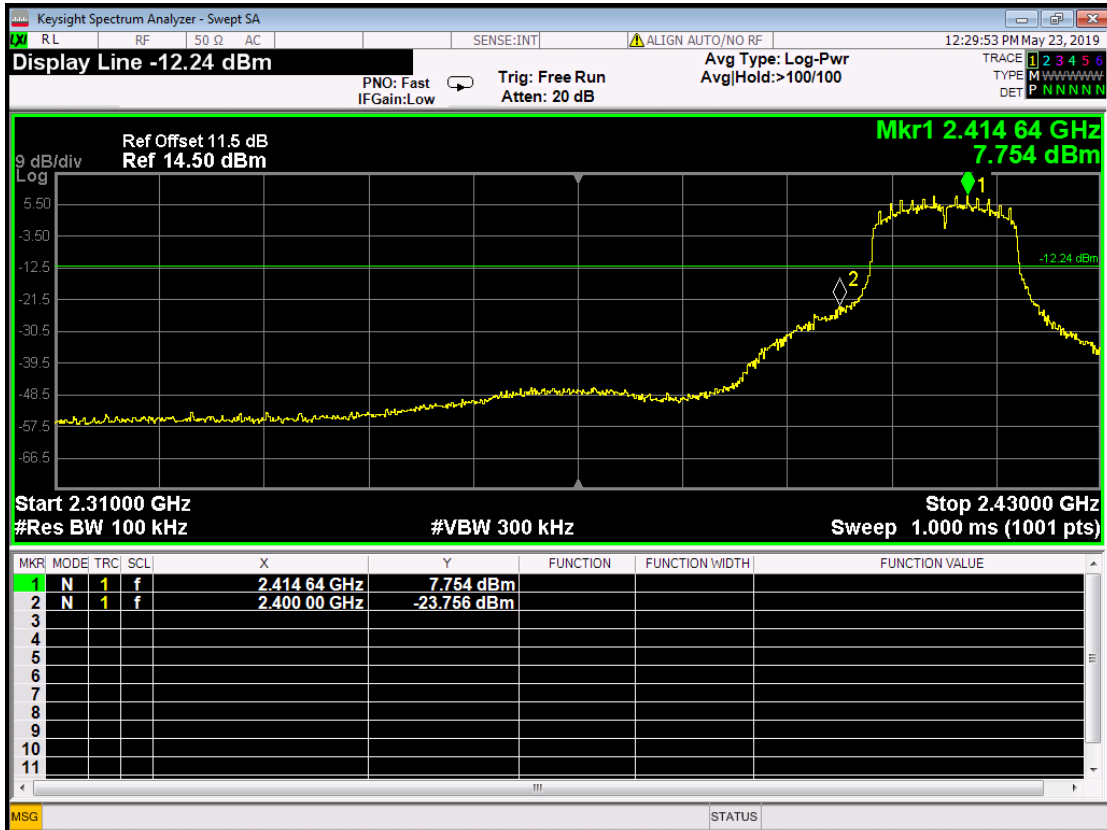


802.11g mode (antenna 0):  
Channel 2437MHz  
0.01GHz-26.5GHz

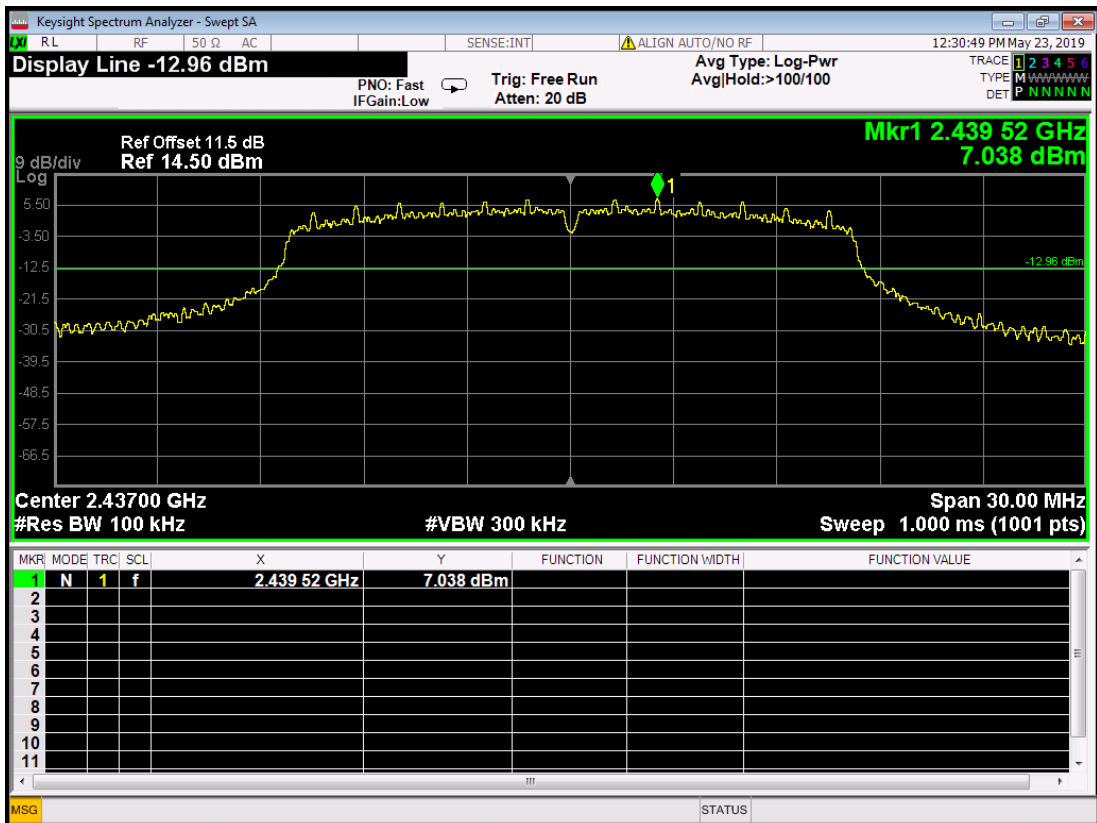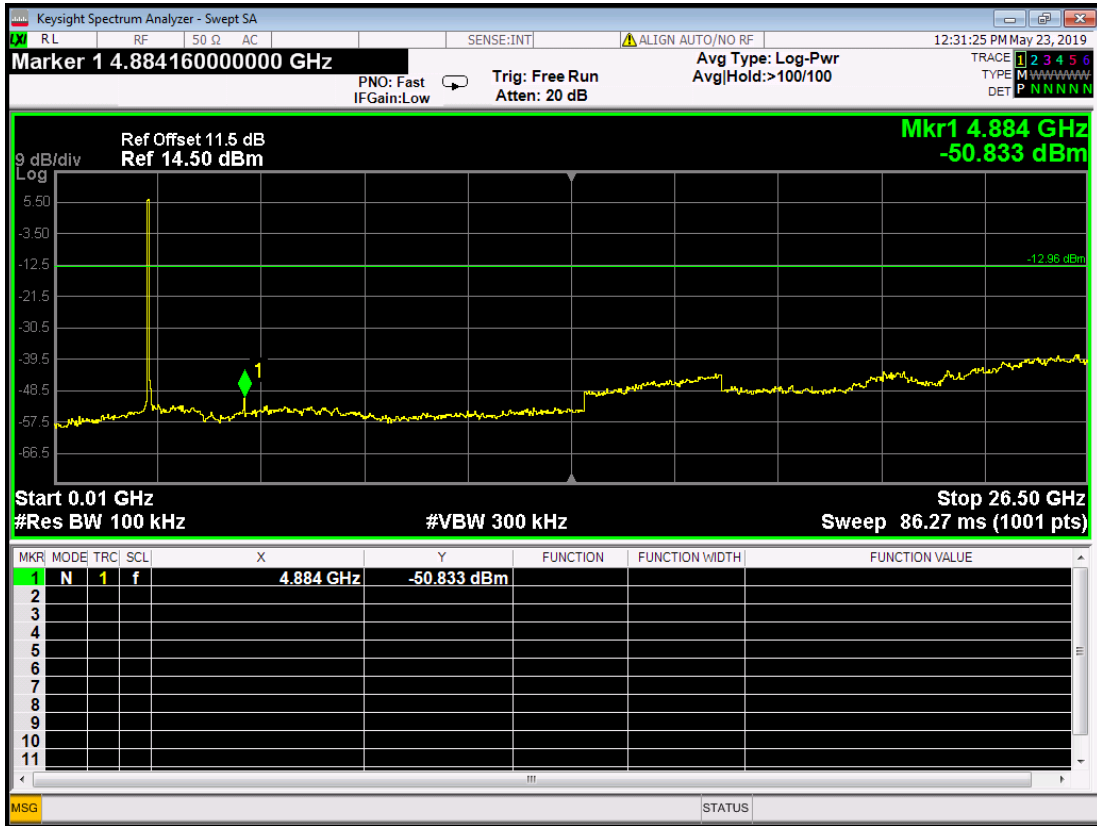


802.11g mode (antenna 0):  
 Channel 2462MHz  
 0.01GHz-26.5GHz

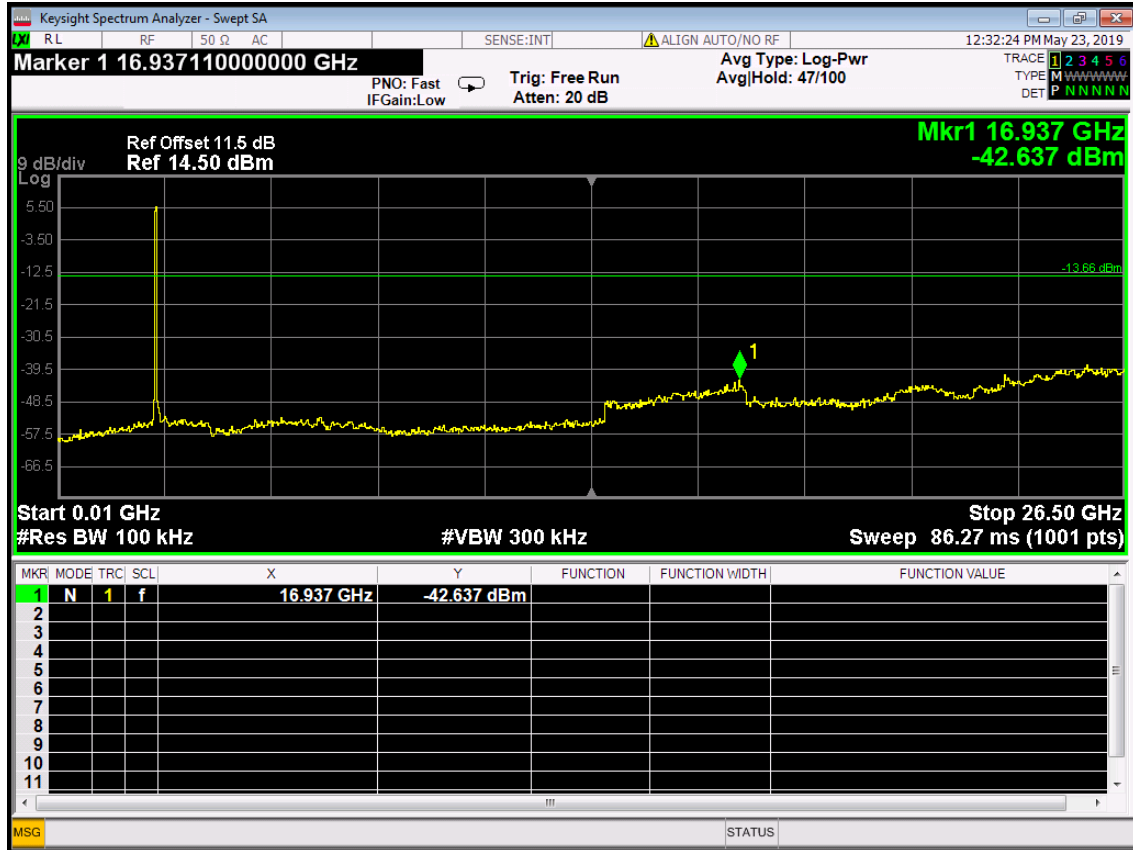


2.45GHz-2.5GHz

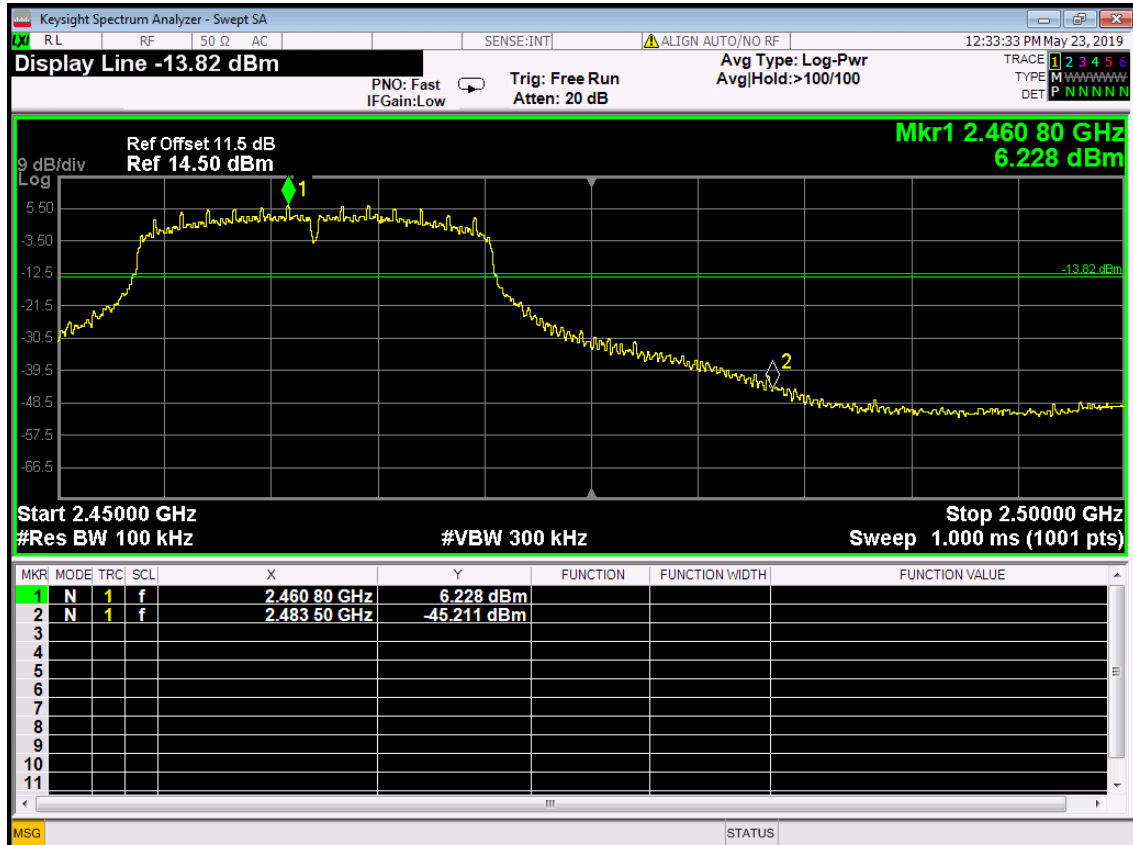



802.11g mode (antenna 1):  
Channel 2412MHz  
0.01GHz-26.5GHz

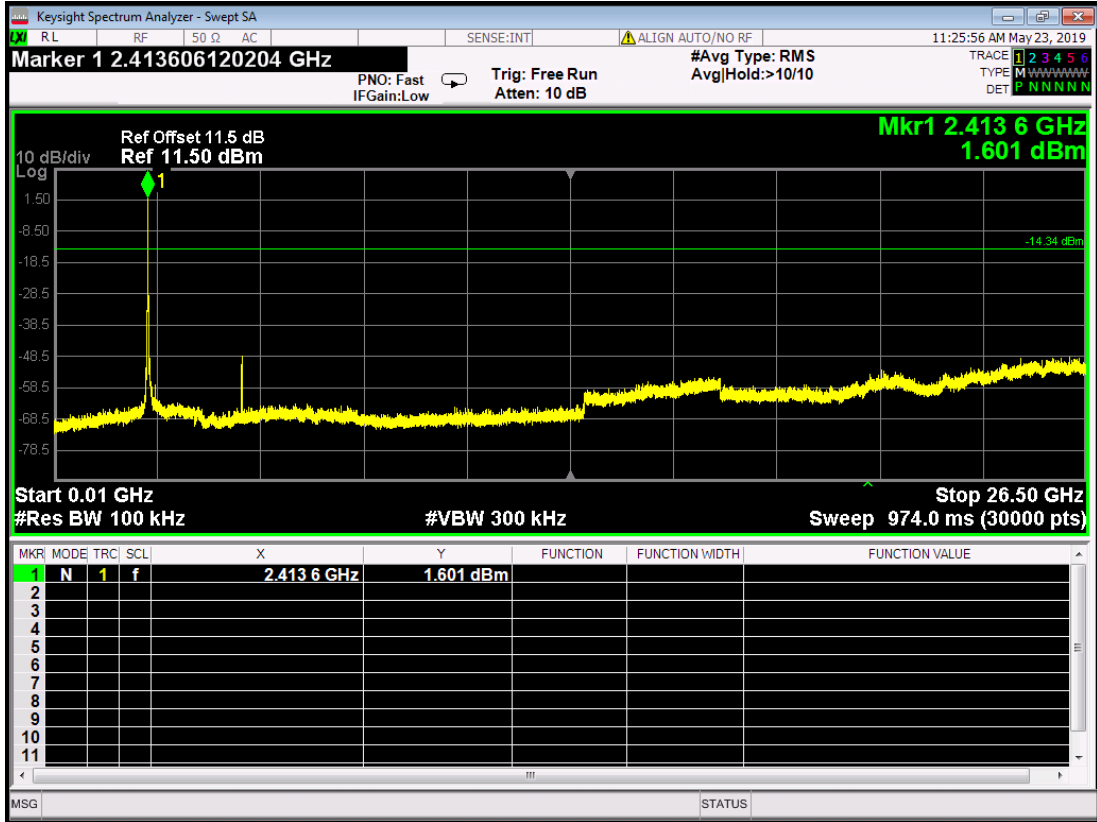


2.31GHz-2.43GHz

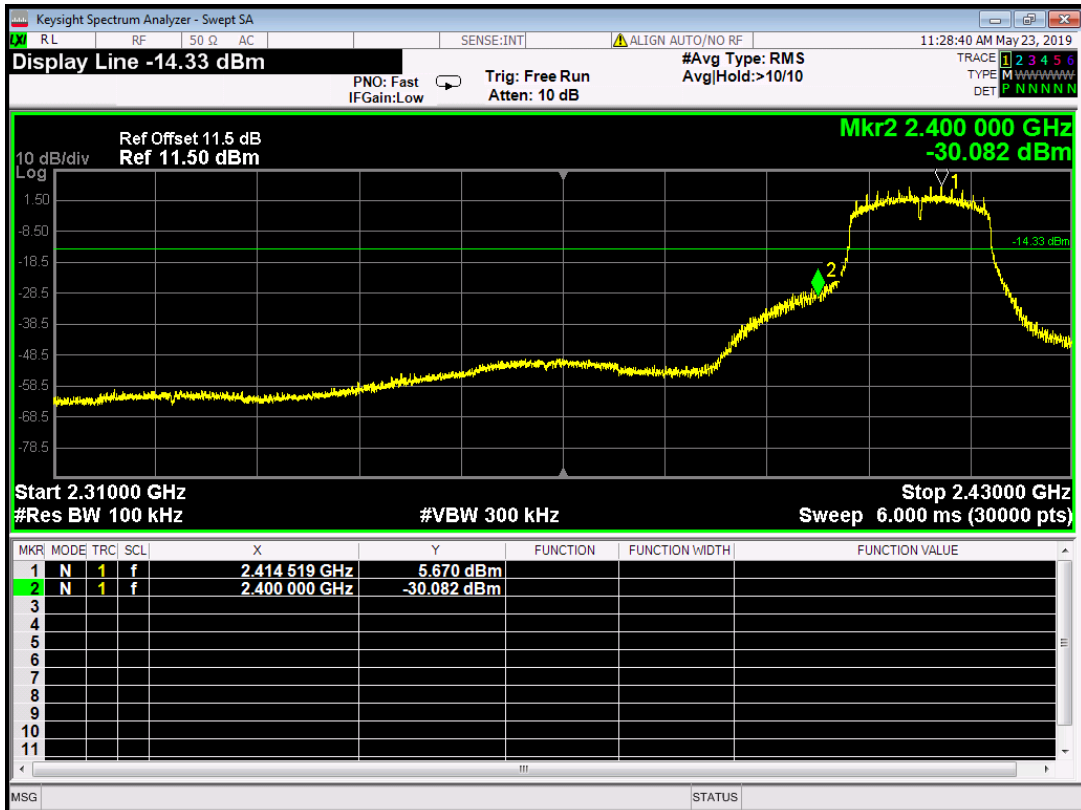


802.11g mode (antenna 1):  
 Channel 2437MHz  
 0.01GHz-26.5GHz

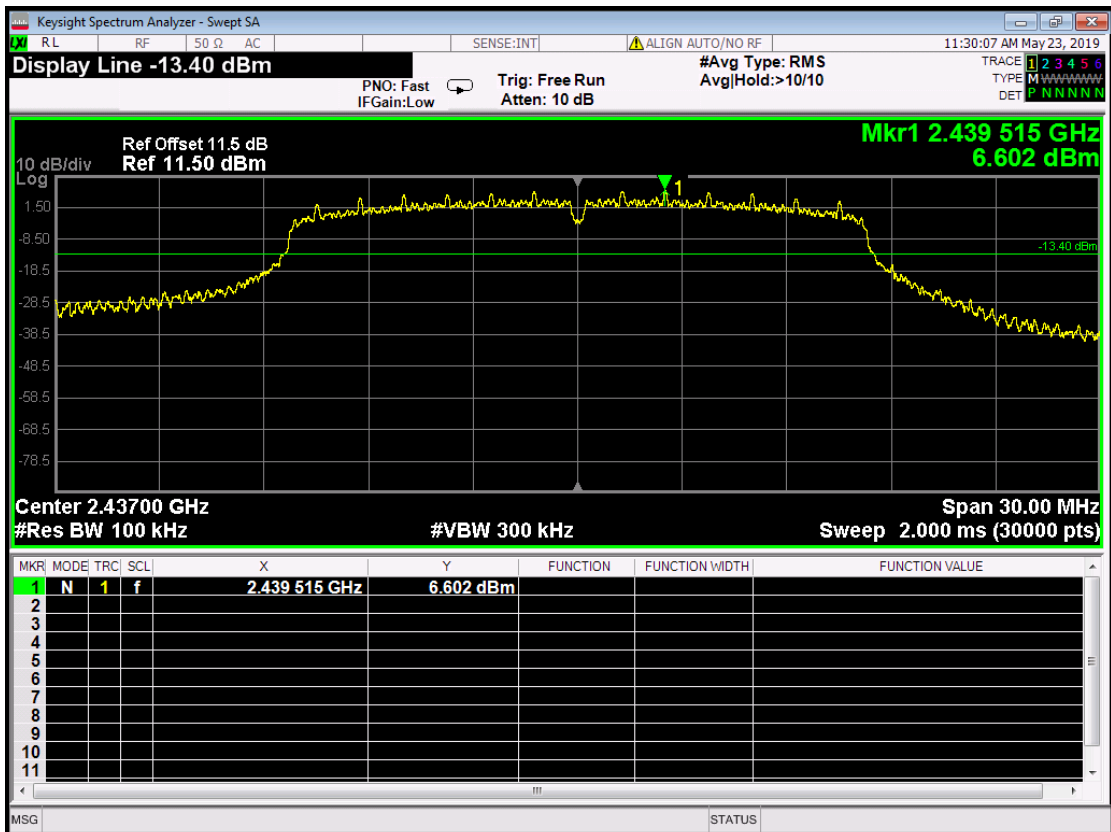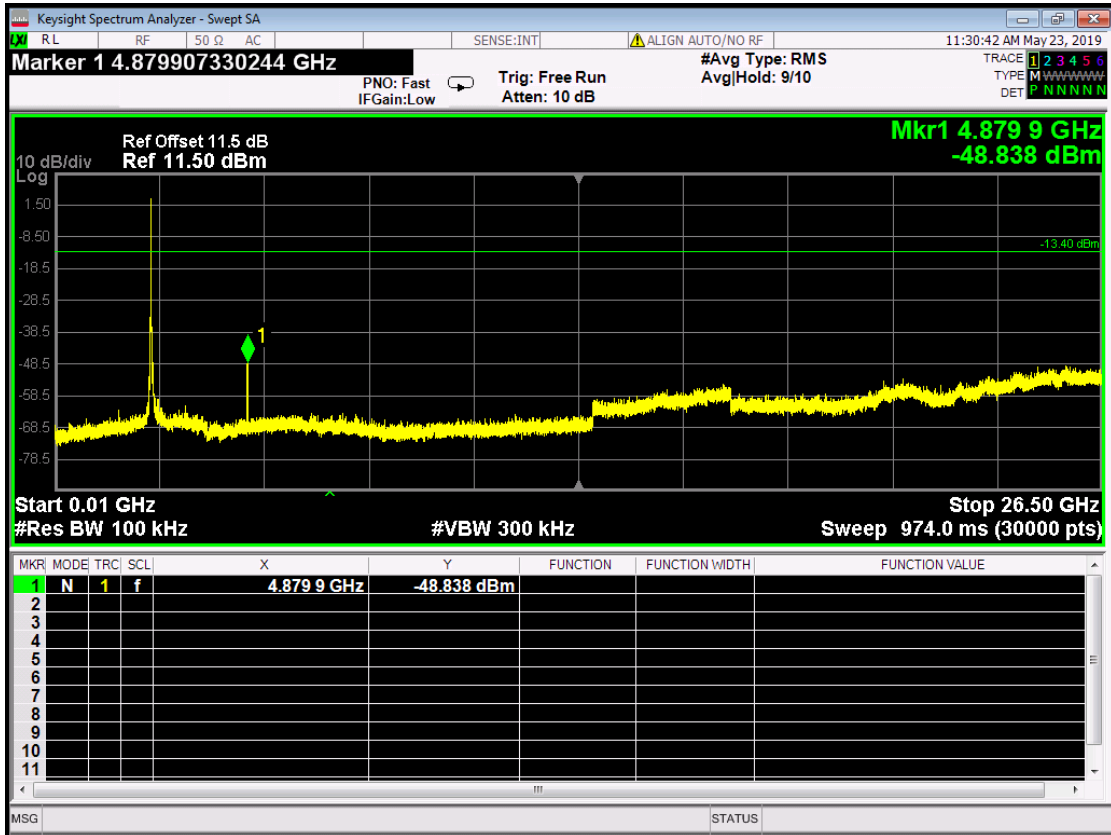


802.11g mode (antenna 1):  
Channel 2462MHz  
0.01GHz-26.5GHz

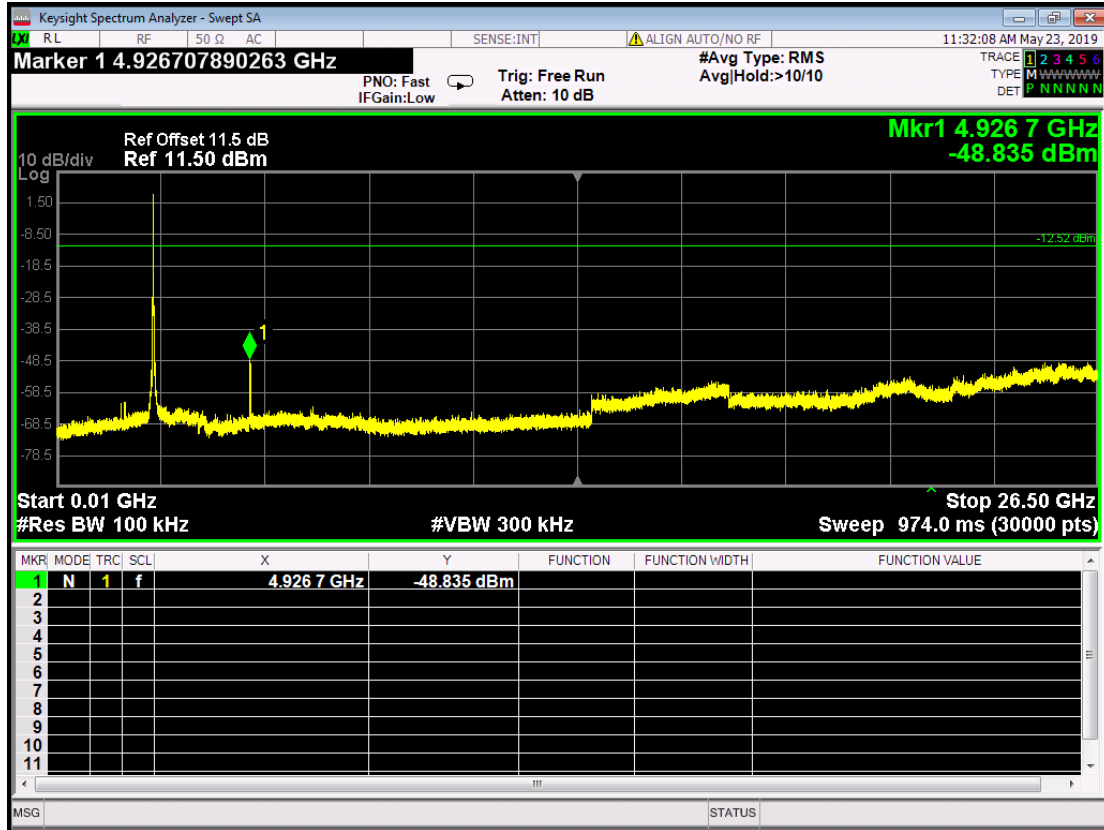


2.45GHz-2.5GHz

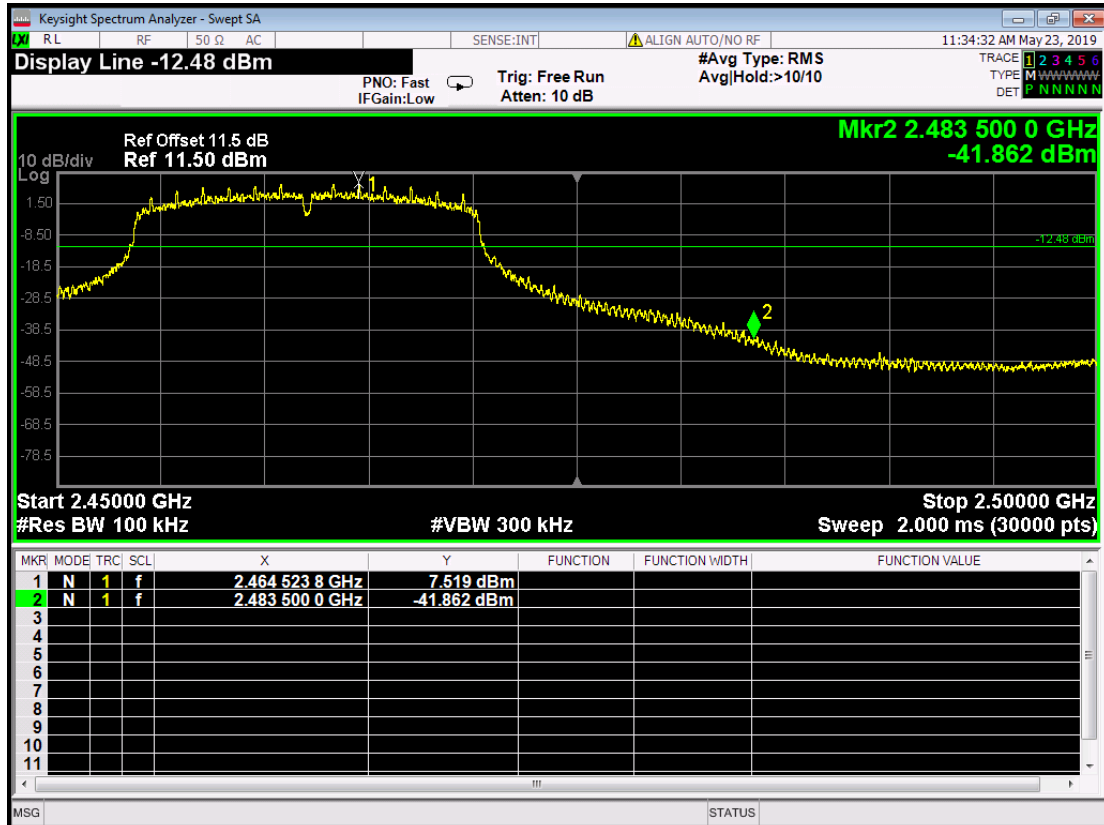



802.11n HT20 mode (antenna 0):  
Channel 2412MHz  
0.01GHz-26.5GHz

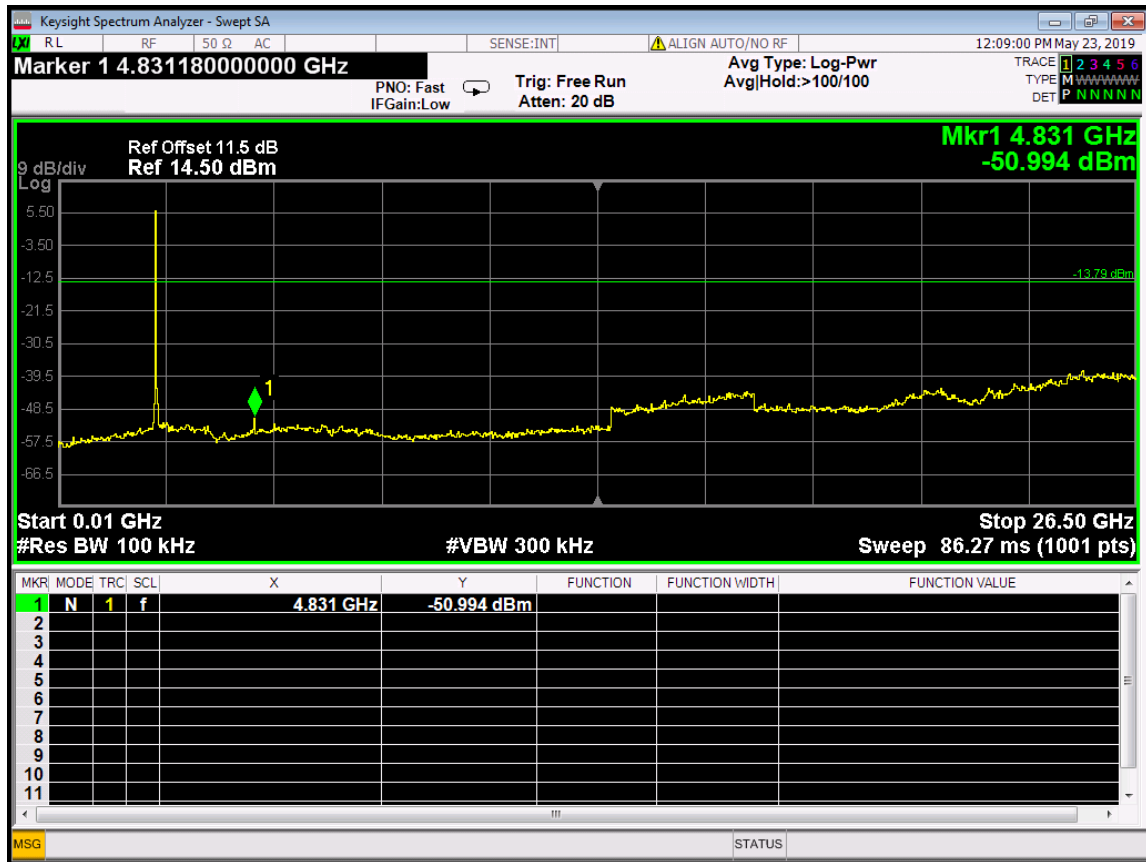

2.31GHz-2.43GHz

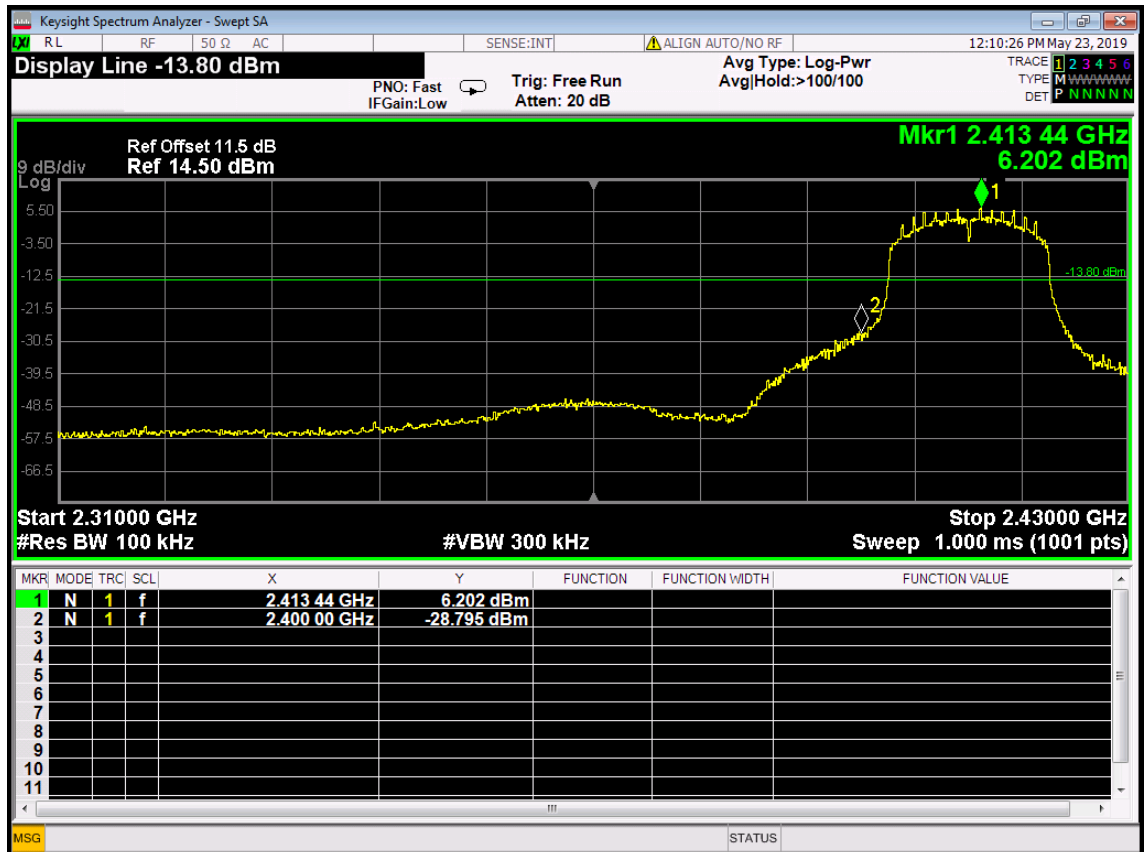


802.11n HT20 mode (antenna 0):  
Channel 2437MHz  
0.01GHz-26.5GHz

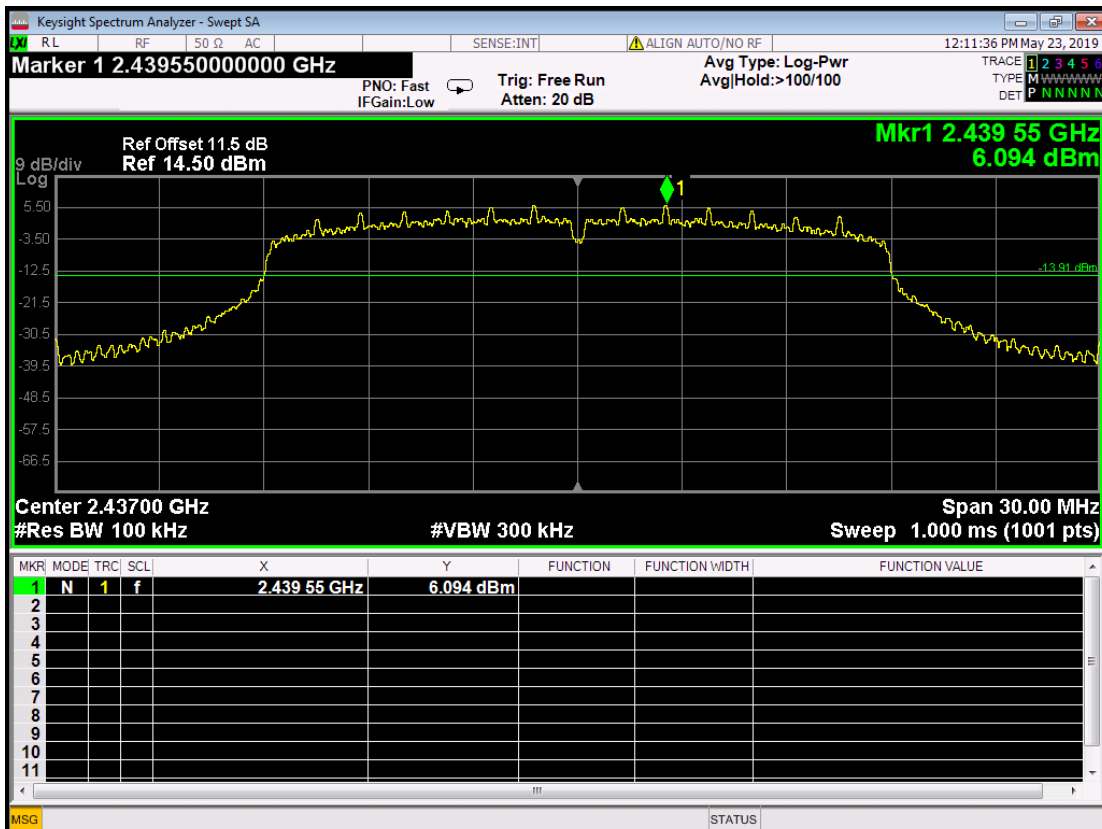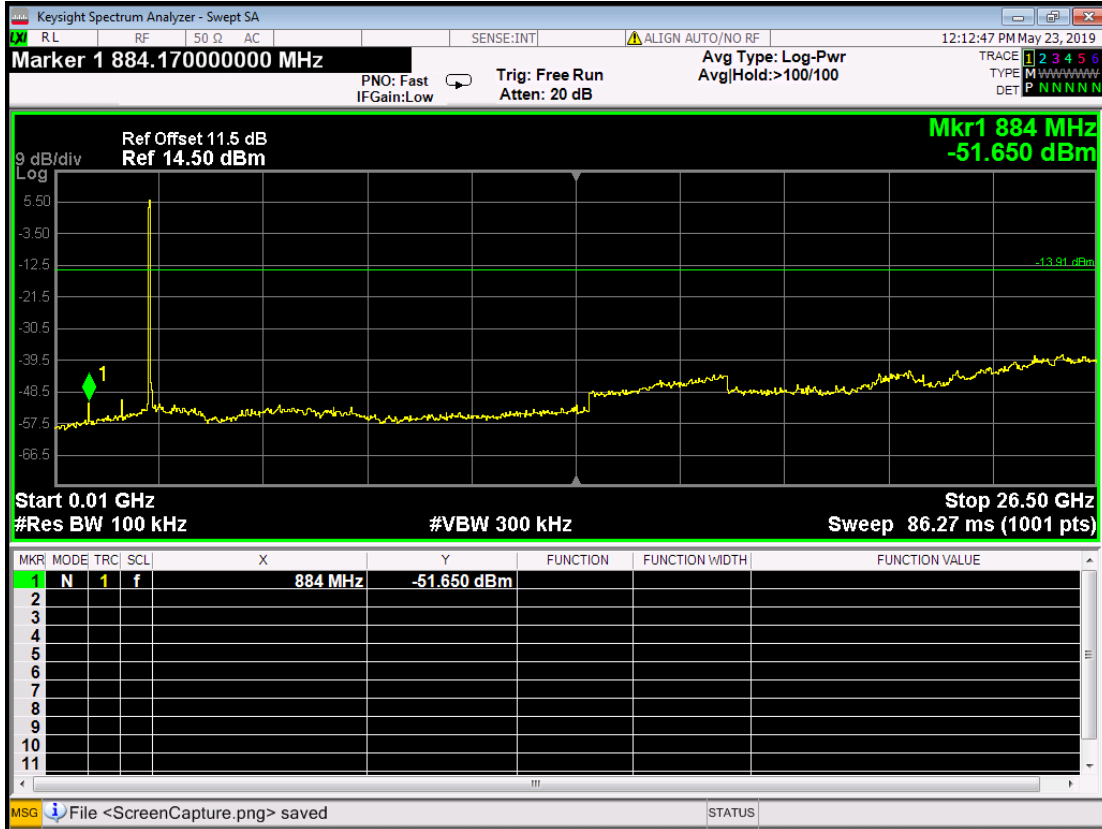




802.11n HT20 mode (antenna 0):  
 Channel 2462MHz  
 0.01GHz-26.5GHz

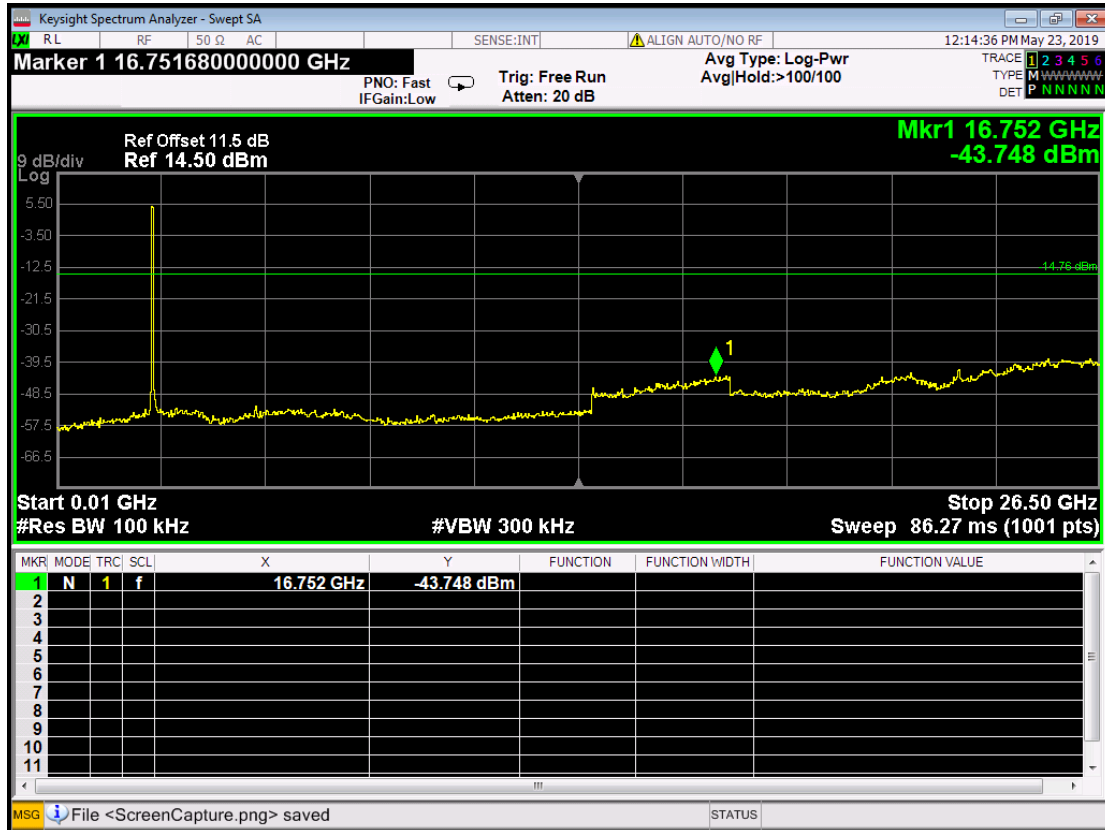


2.45GHz-2.5GHz





802.11n HT20 mode (antenna 1):  
 Channel 2412MHz  
 0.01GHz-26.5GHz

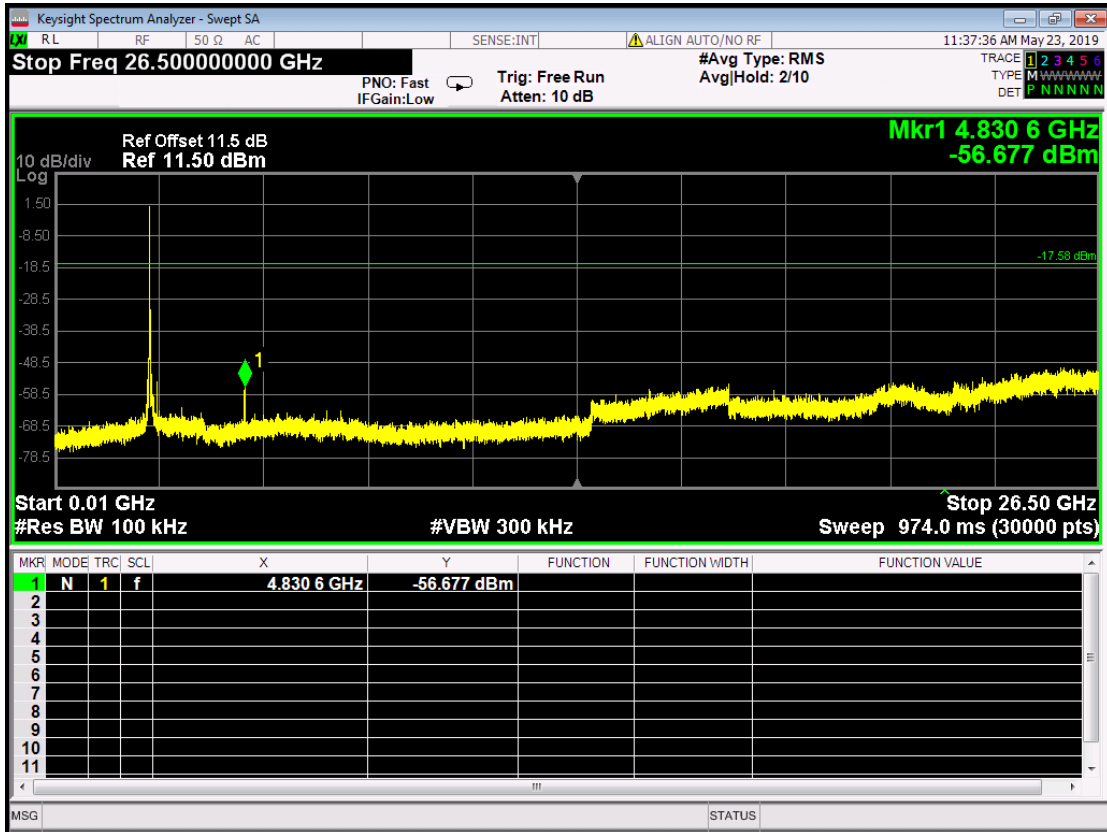


2.31GHz-2.43GHz

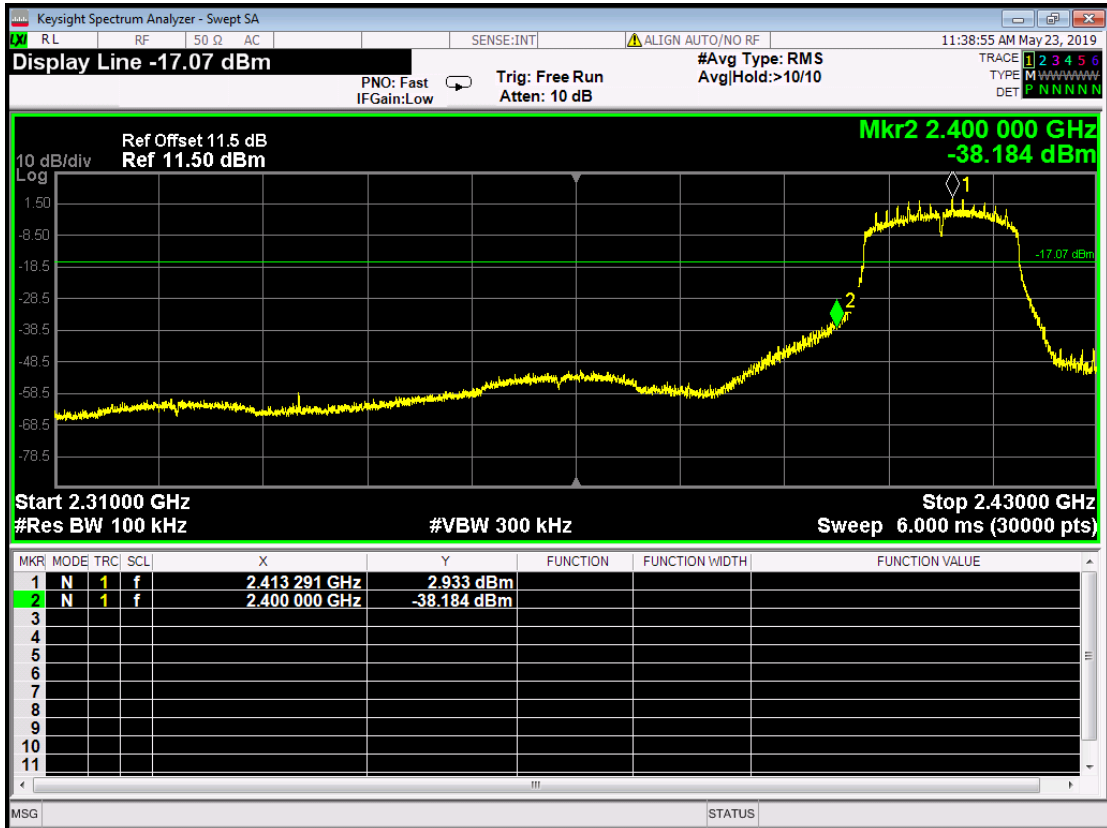


802.11n HT20 mode (antenna 1):  
 Channel 2437MHz  
 0.01GHz-26.5GHz

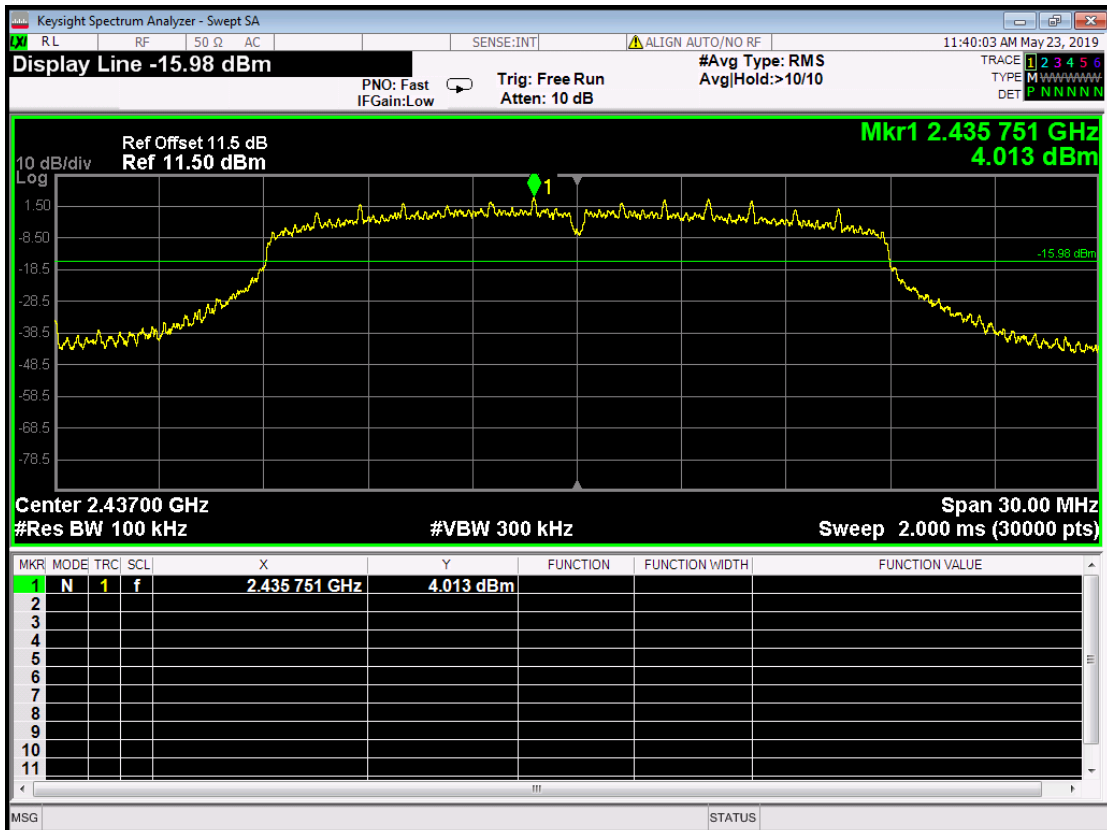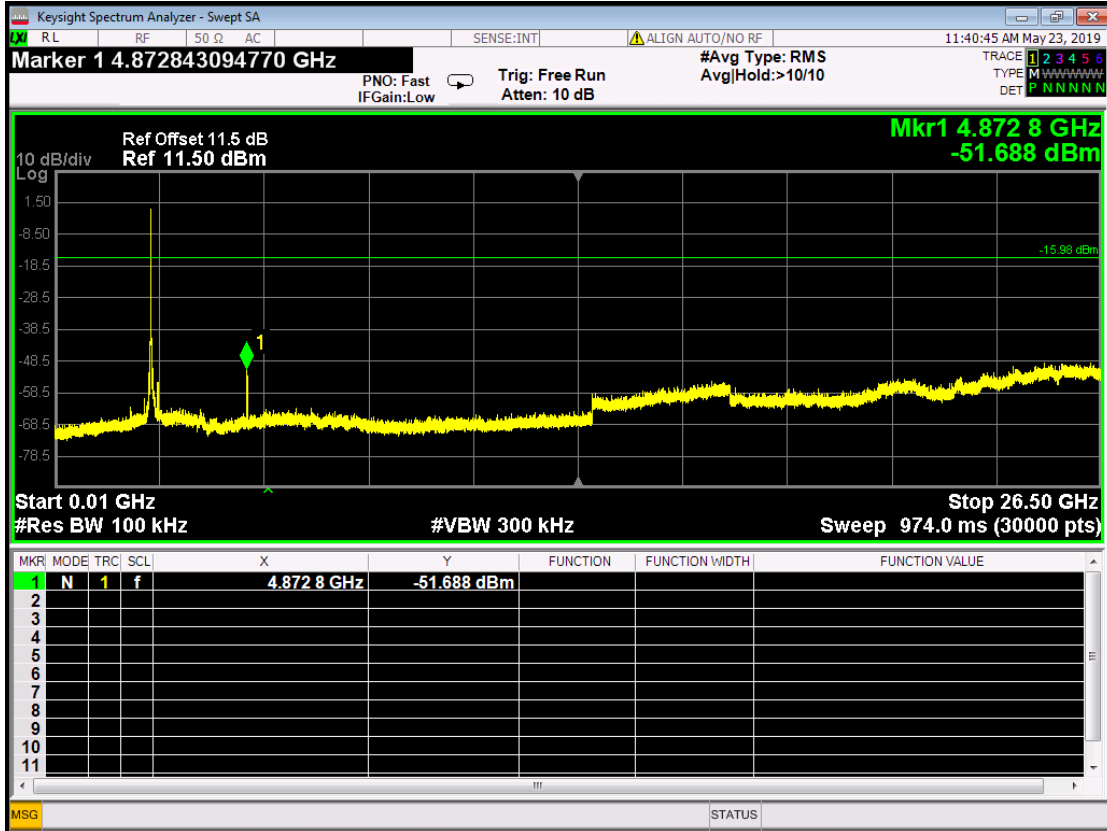


802.11n HT20 mode (antenna 1):  
Channel 2462MHz  
0.01GHz-26.5GHz

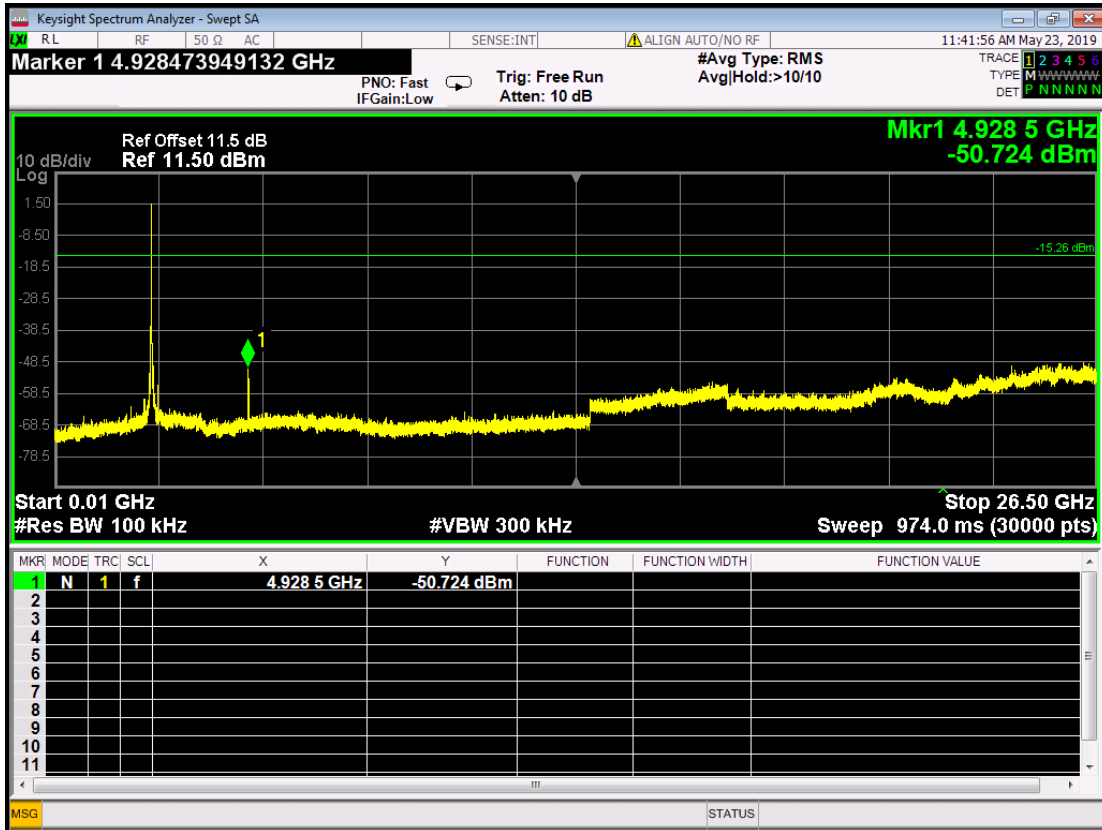


2.45GHz-2.5GHz

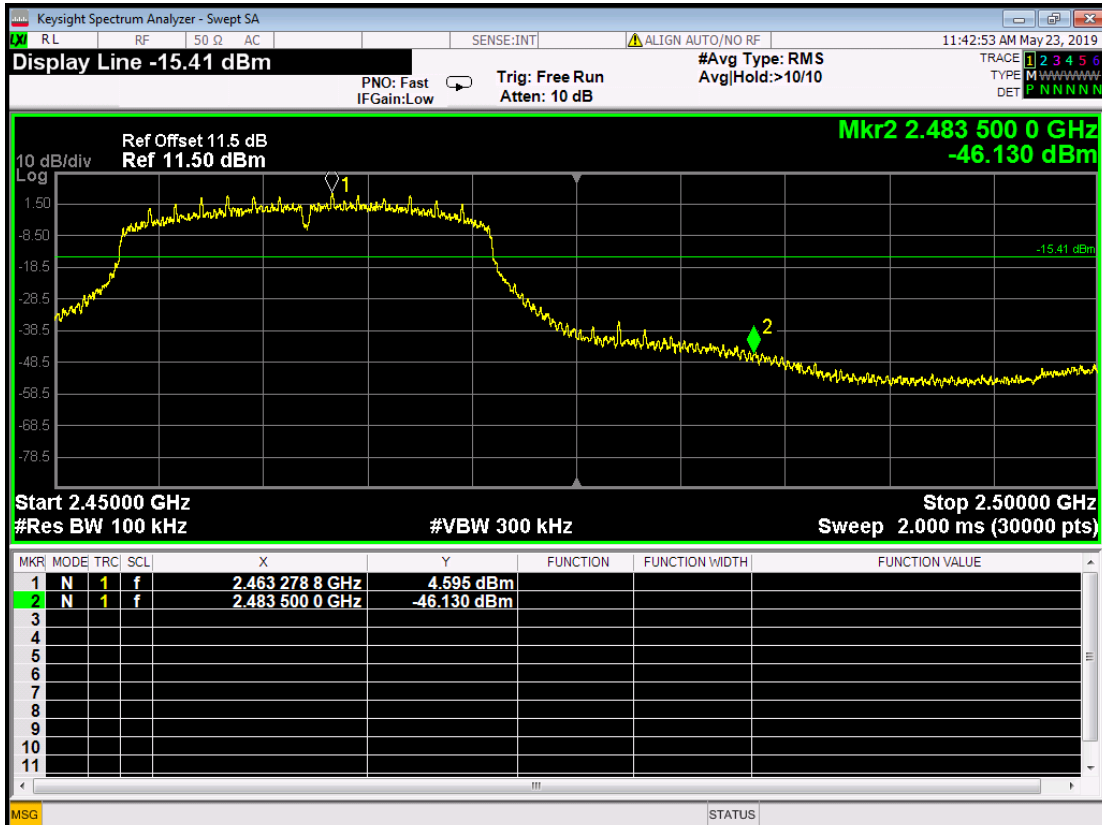



802.11n HT40 mode (antenna 0):  
Channel 2422MHz  
0.01GHz-26.5GHz

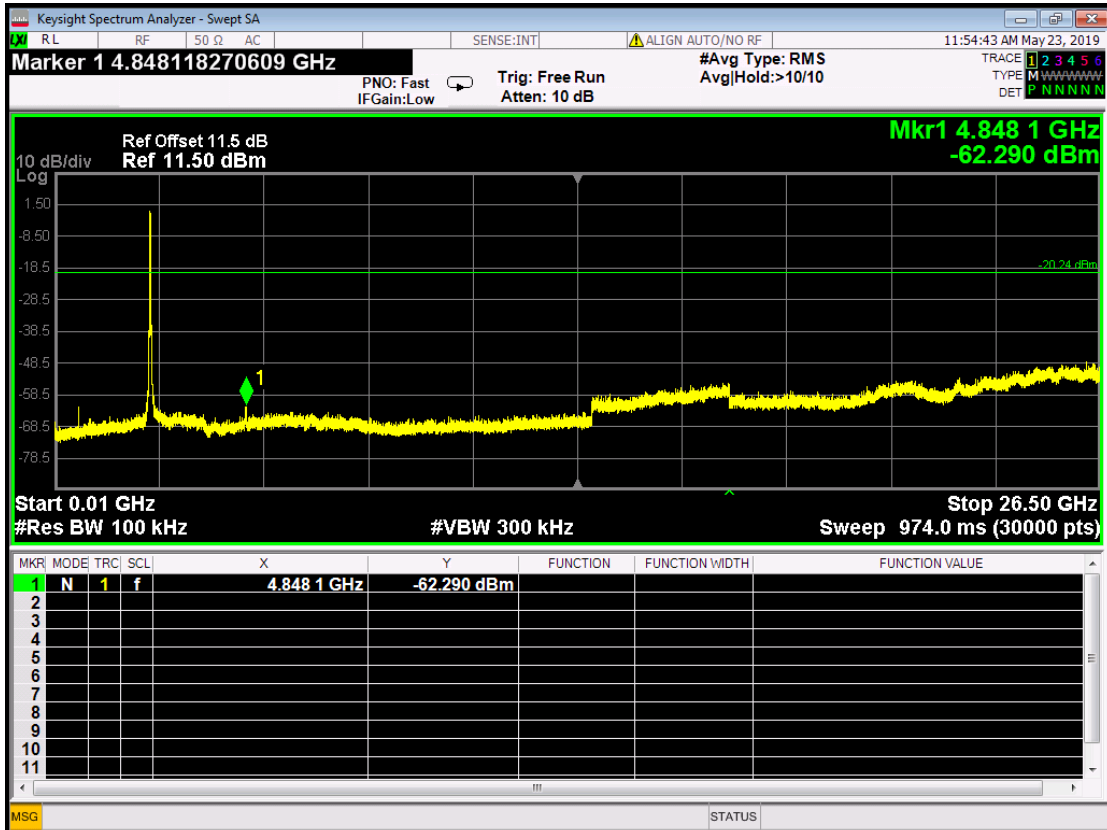


2.31GHz-2.45GHz

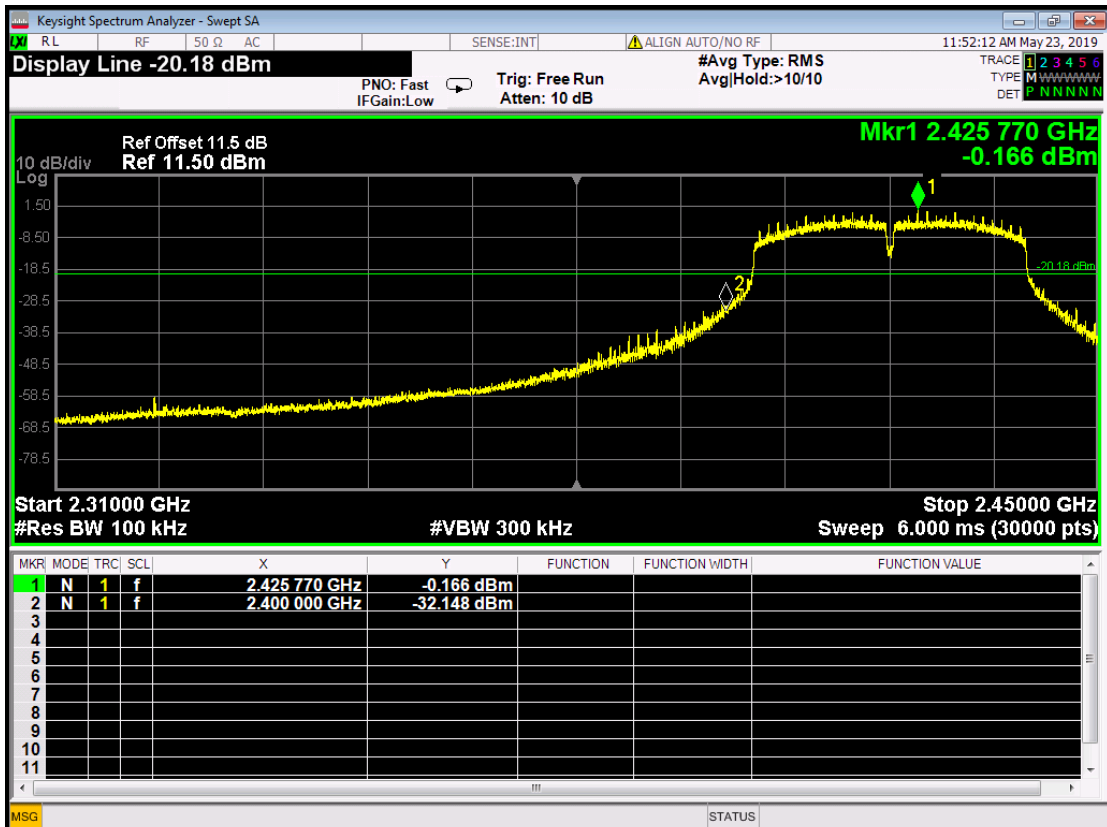

802.11n HT40 mode (antenna 0):  
 Channel 2437MHz  
 0.01GHz-26.5GHz

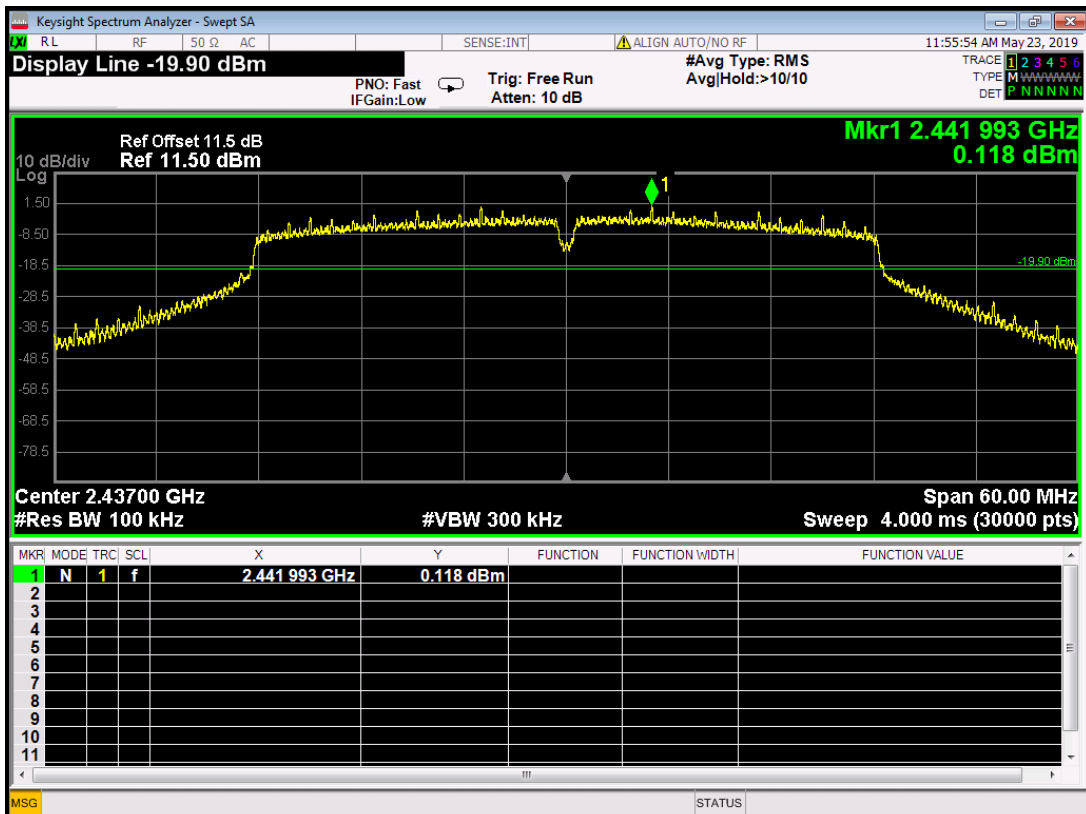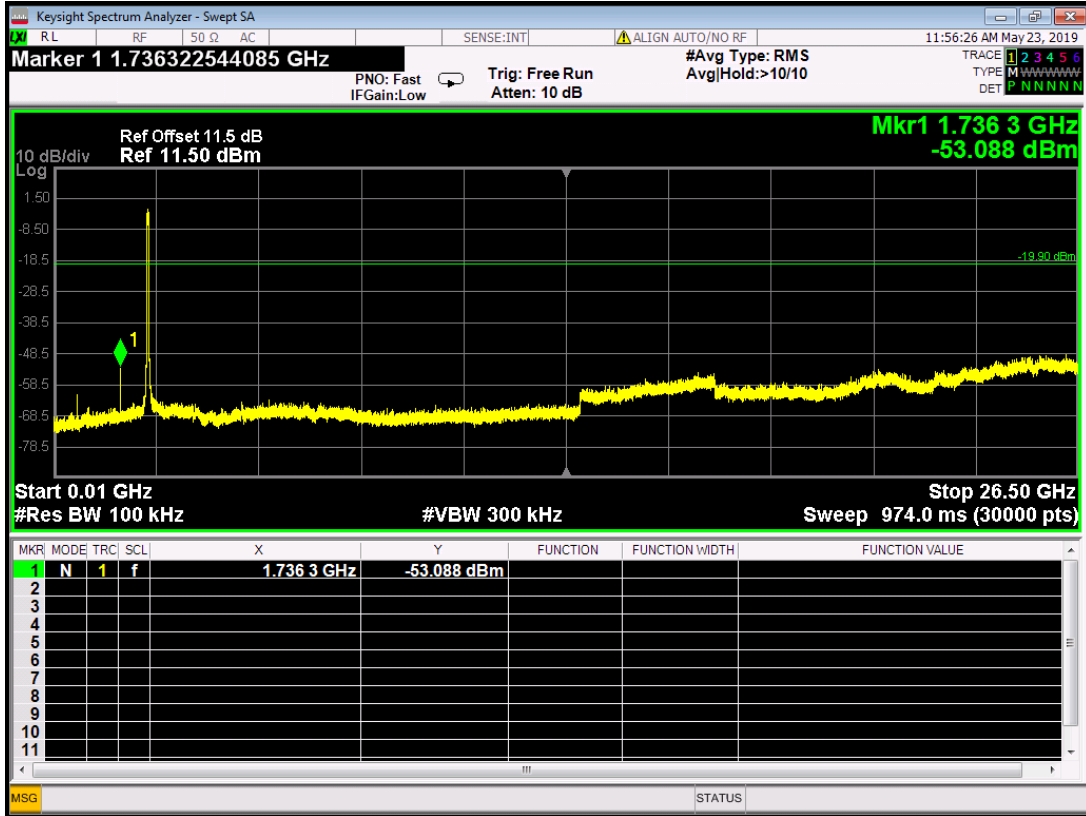


802.11n HT40 mode (antenna 0):  
 Channel 2452MHz  
 0.01GHz-26.5GHz

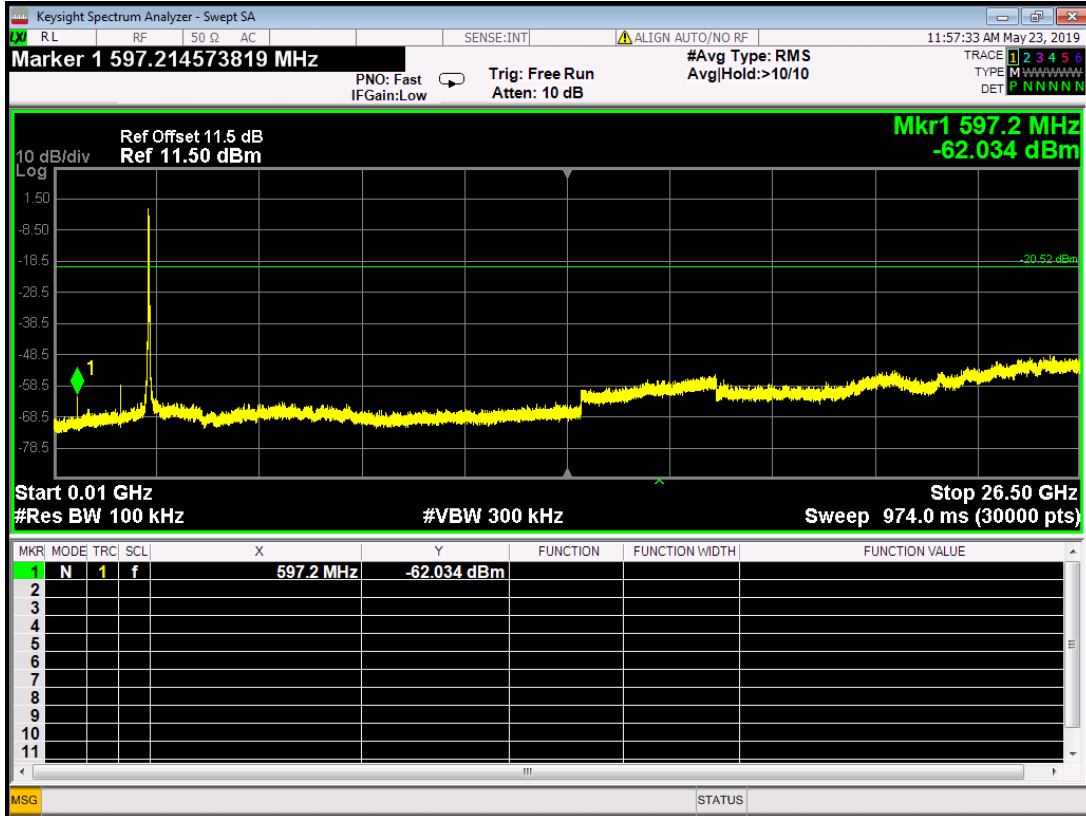


2.43GHz-2.5GHz



802.11n HT40 mode (antenna 1):  
 Channel 2422MHz  
 0.01GHz-26.5GHz


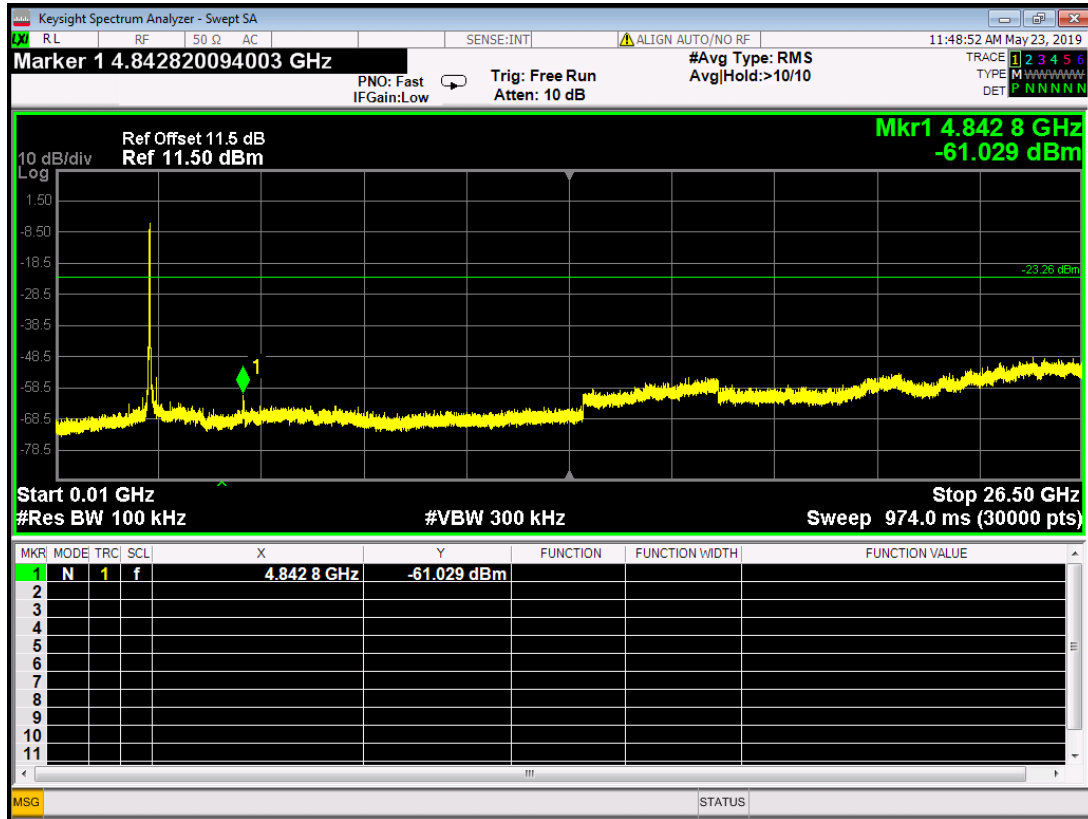


2.31GHz-2.45GHz

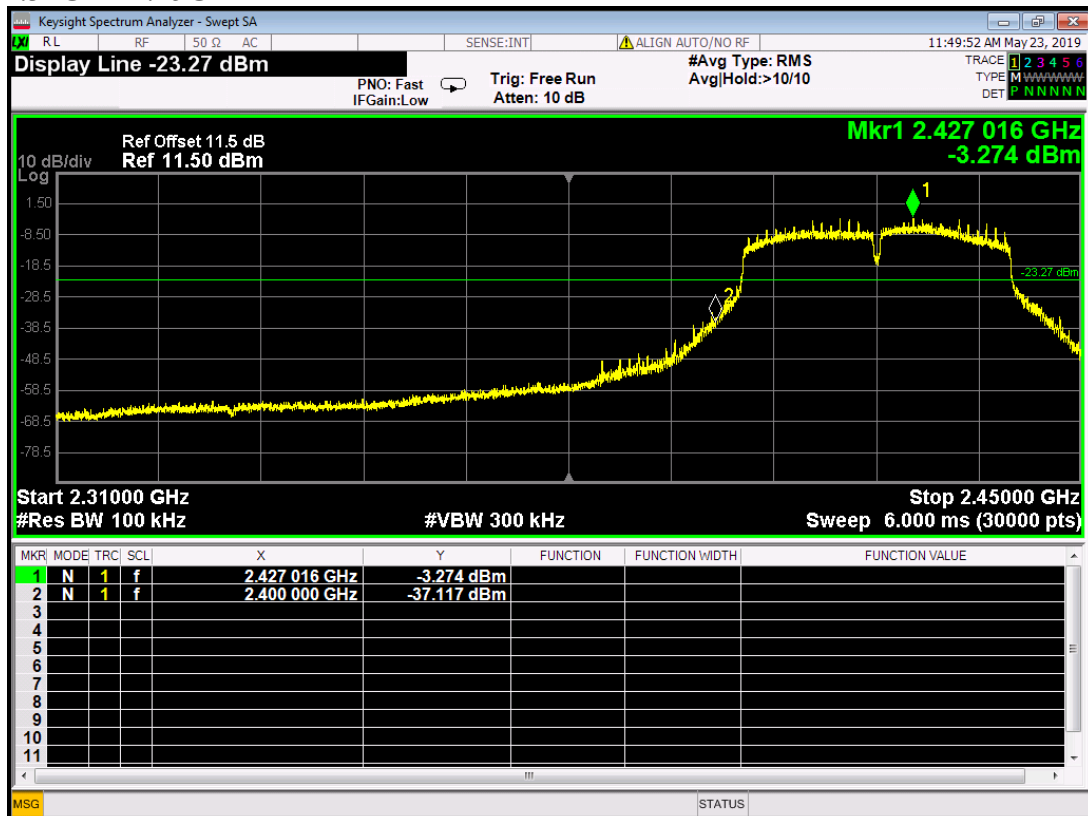




802.11n HT40 mode (antenna 1):  
 Channel 2437MHz  
 0.01GHz-26.5GHz

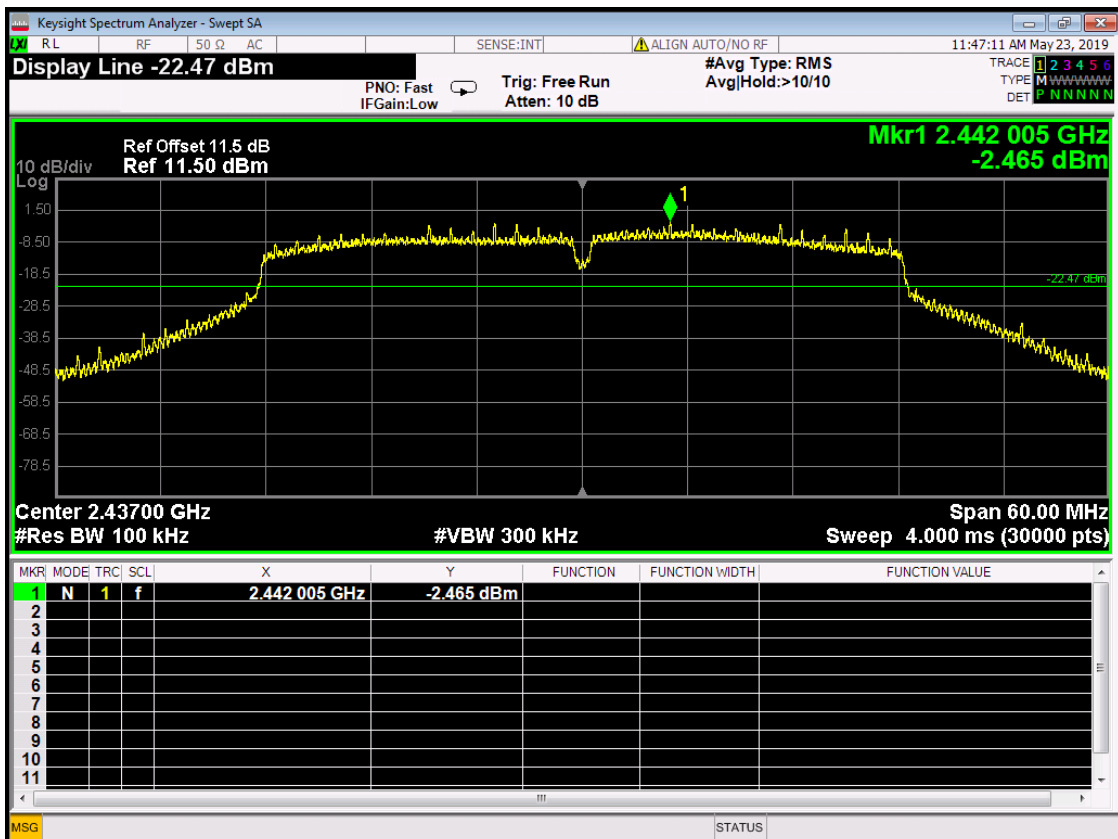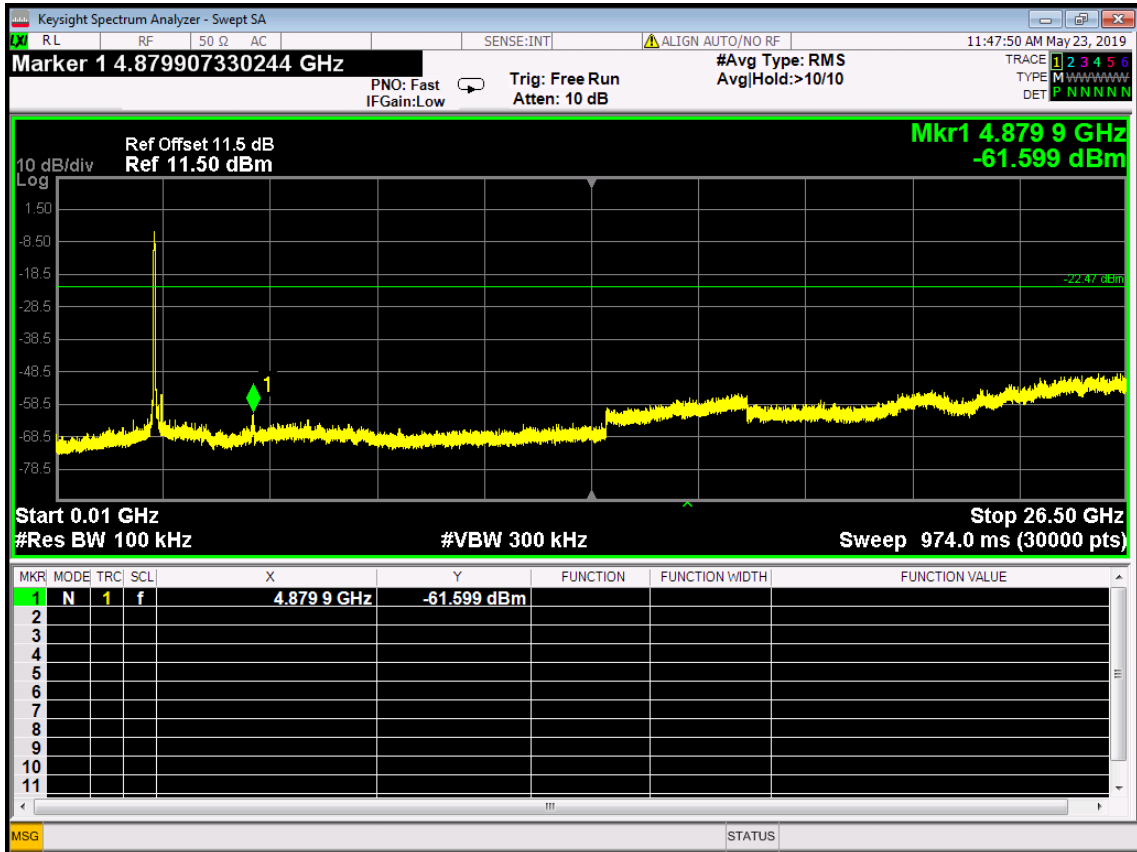

802.11n HT40 mode (antenna 1):  
Channel 2452MHz  
0.01GHz-26.5GHz

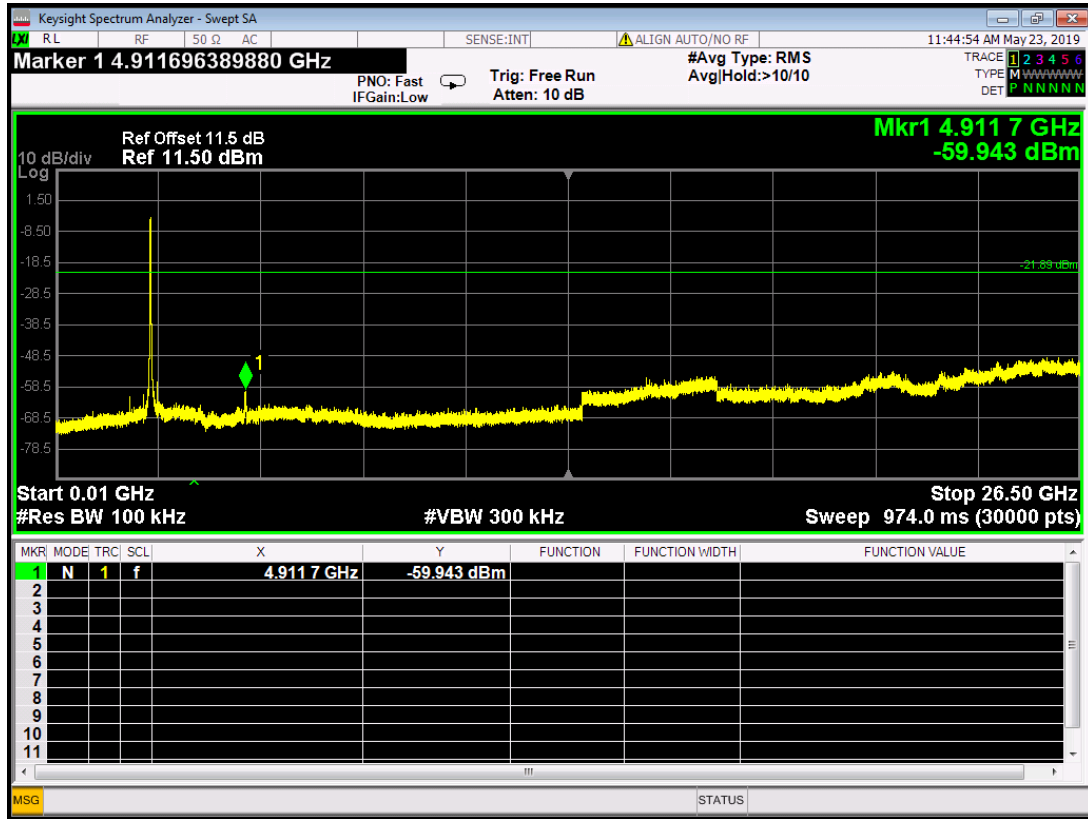

2.43GHz-2.5GHz



## 12. RESTRICTED BANDS OF OPERATION

### 12.1.LIMITS

Section 15.247(d) In addition, Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 -	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.69525	960 - 1240	7.25 - 7.75
4.125 - 4.128	16.80425 -	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	16.80475	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	25.5 - 25.67	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	37.5 - 38.25	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	73 - 74.6	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	74.8 - 75.2	2200 - 2300	14.47 - 14.5
8.291 - 8.294	108 - 121.94	2310 - 2390	15.35 - 16.2
8.362 - 8.366	123 - 138	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	149.9 - 150.05	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.52475 -	3260 - 3267	23.6 - 24.0
12.29 - 12.293	156.52525	3332 - 3339	31.2 - 31.8
12.51975 -	156.7 - 156.9	3345.8 - 3358	36.43 - 36.5
12.52025	162.0125 - 167.17	3600 - 4400	
12.57675 -	167.72 - 173.2		
12.57725	240 - 285		
13.36 - 13.41	322 - 335.4		

### 12.2.TEST PROCEDURES

Test procedures follow KDB 558074 D01 DTS Meas Guidance v03r01.

- 1) The EUT is placed on a turntable, which is 1.5m above the ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4) Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - a) PEAK: RBW=1MHz / VBW=1MHz / Sweep=AUTO
  - b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO
- 5) Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### 12.3.TEST SETUP

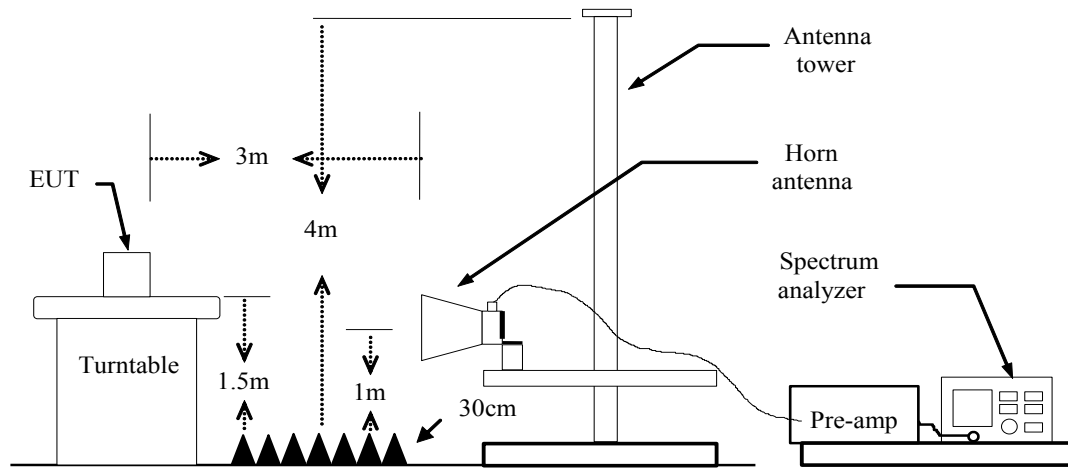


### 12.4.TEST RESULTS

#### 802.11b mode (antenna 0)

##### Lowest Channel


Detector mode: Peak

Polarity: Vertical

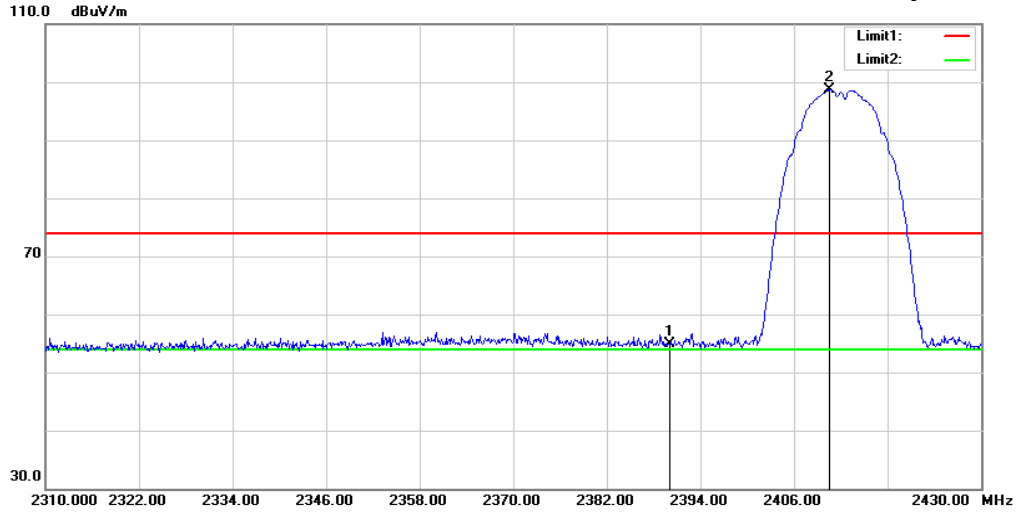

Detector mode: Average

Polarity: Vertical

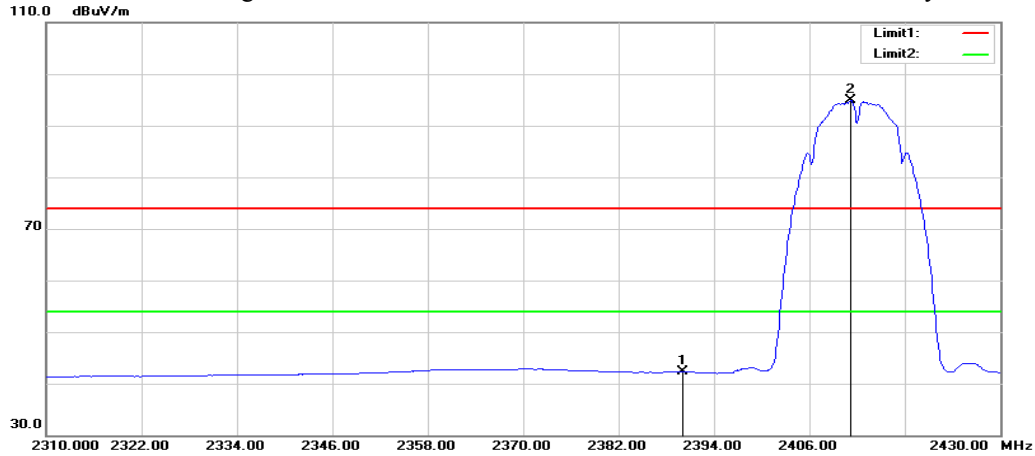


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	56.39	-1.48	54.91	74.00	-19.09	Peak	Vertical
2	2411.160	100.08	-1.43	---	74.00	---	Peak	Vertical
1	2390.000	43.73	-1.48	42.25	54.00	-11.75	Average	Vertical
2	2411.160	96.29	-1.43	---	54.00	---	Average	Vertical

**802.11b mode (antenna 0)**

**Lowest Channel**


Detector mode: Peak

Polarity: Horizontal

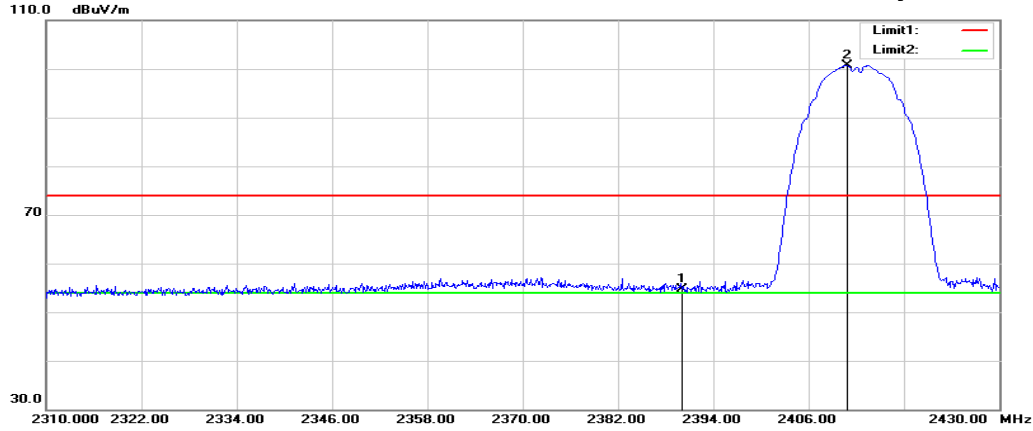

Detector mode: Average

Polarity: Horizontal

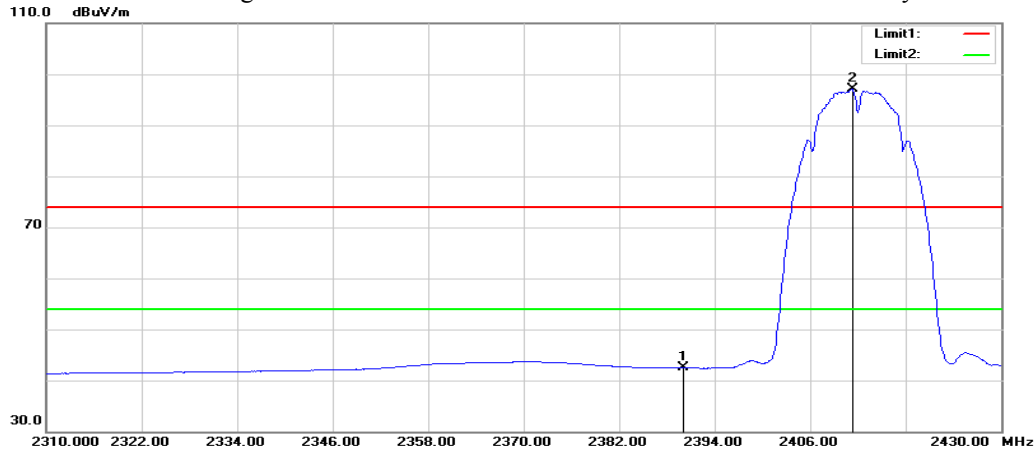


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	56.26	-1.48	54.78	74.00	-19.22	Peak	Horizontal
2	2410.800	102.12	-1.43	---	74.00	---	Peak	Horizontal
1	2390.000	44.02	-1.48	42.54	54.00	-11.46	Average	Horizontal
2	2411.280	98.44	-1.43	---	54.00	---	Average	Horizontal

**802.11b mode (antenna 0)**

**Highest Channel**


Detector mode: Peak

Polarity: Vertical

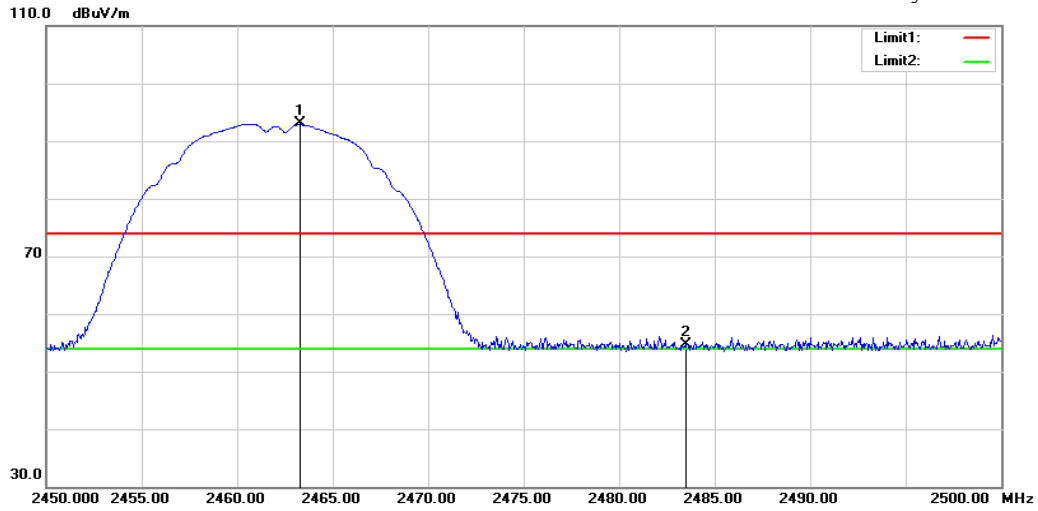

Detector mode: Average

Polarity: Vertical

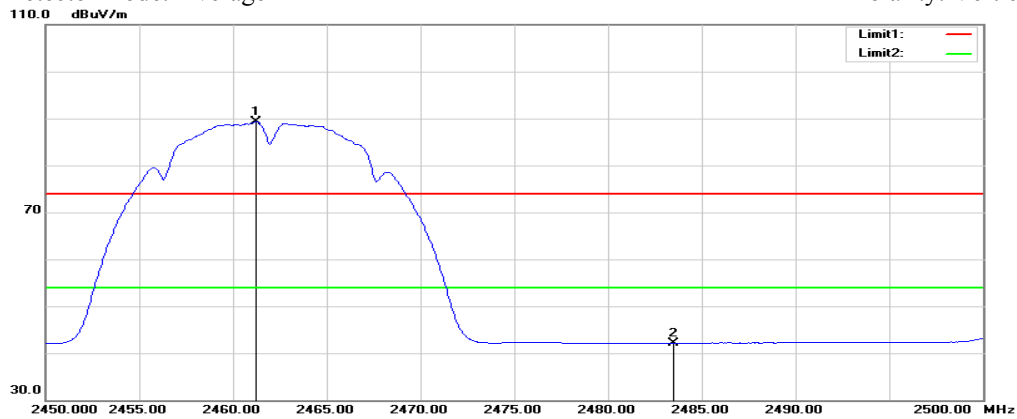


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2463.300	94.44	-1.32	---	74.00	---	Peak	Vertical
2	2483.500	55.97	-1.27	54.70	74.00	-19.30	Peak	Vertical
1	2461.200	90.58	-1.32	---	54.00	---	Average	Vertical
2	2483.500	43.45	-1.27	42.18	54.00	-11.82	Average	Vertical

**802.11b mode (antenna 0)**

**Highest Channel**


Detector mode: Peak

Polarity: Horizontal

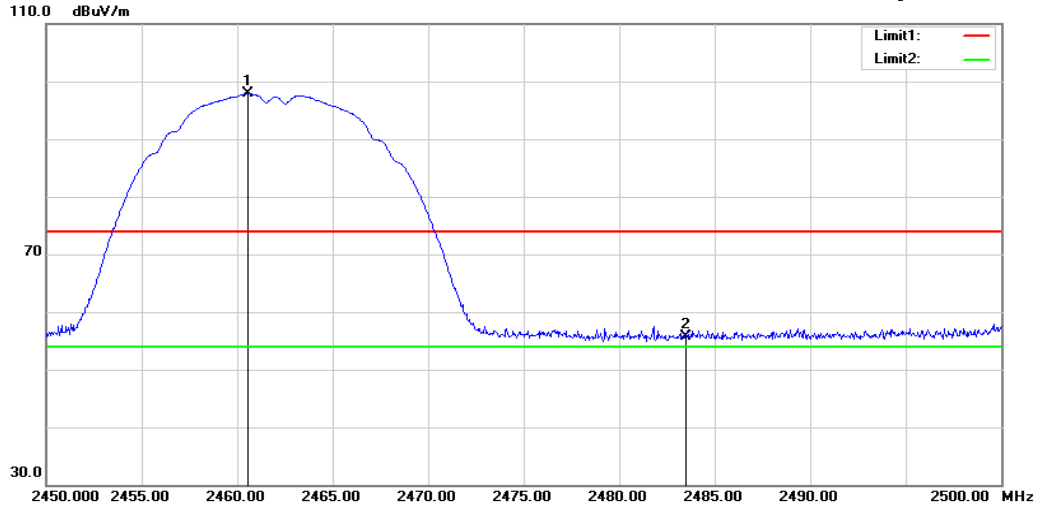

Detector mode: Average

Polarity: Horizontal

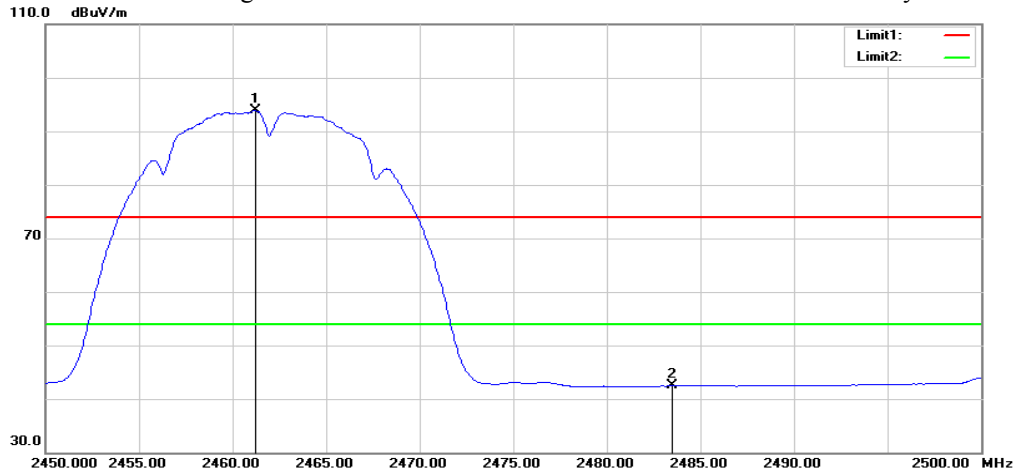

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2460.550	99.16	-1.32	---	74.00	---	Peak	Horizontal
2	2483.500	57.03	-1.27	55.76	74.00	-18.24	Peak	Horizontal
1	2461.250	95.19	-1.32	---	54.00	---	Average	Horizontal
2	2483.500	43.69	-1.27	42.42	54.00	-11.58	Average	Horizontal




**802.11b mode (antenna 1)**

**Lowest Channel**


Detector mode: Peak

Polarity: Vertical

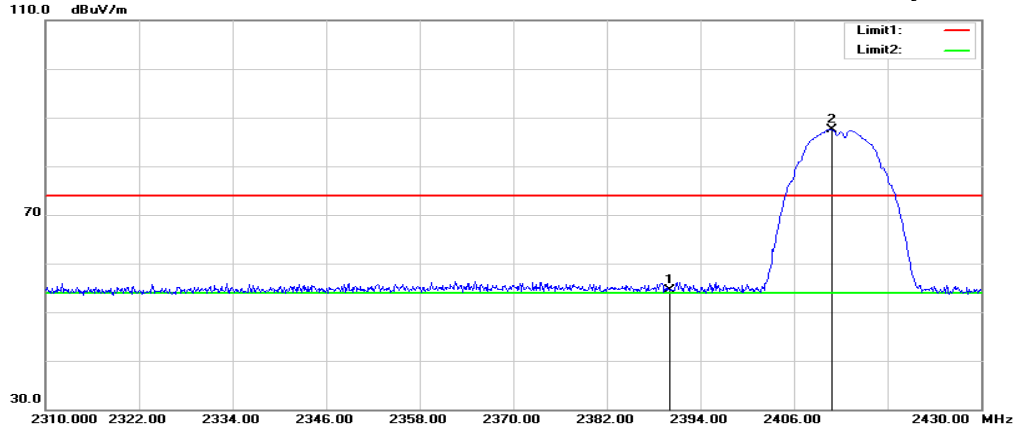

Detector mode: Average

Polarity: Vertical

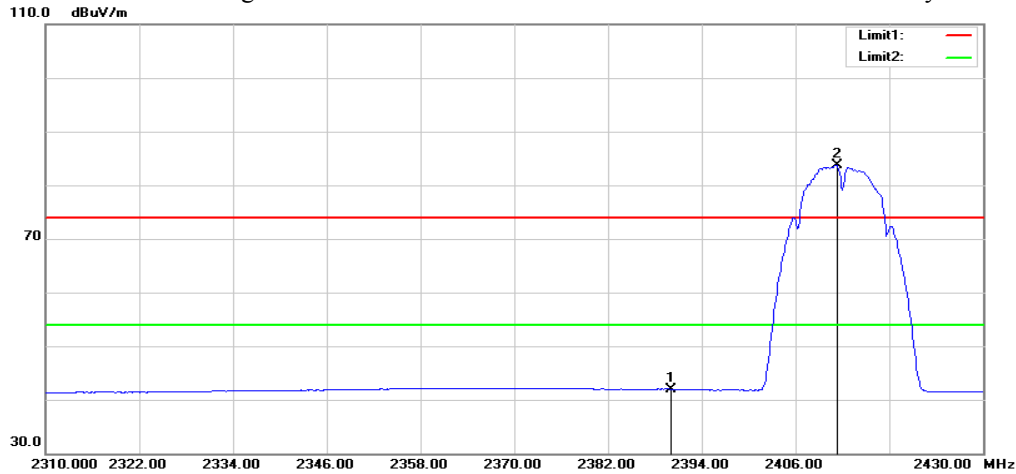


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	56.05	-1.48	54.57	74.00	-19.43	Peak	Vertical
2	2410.800	89.01	-1.43	---	74.00	---	Peak	Vertical
1	2390.000	43.45	-1.48	41.97	54.00	-12.03	Average	Vertical
2	2411.280	85.14	-1.43	---	54.00	---	Average	Vertical

**802.11b mode (antenna 1)**

**Lowest Channel**


Detector mode: Peak

Polarity: Horizontal

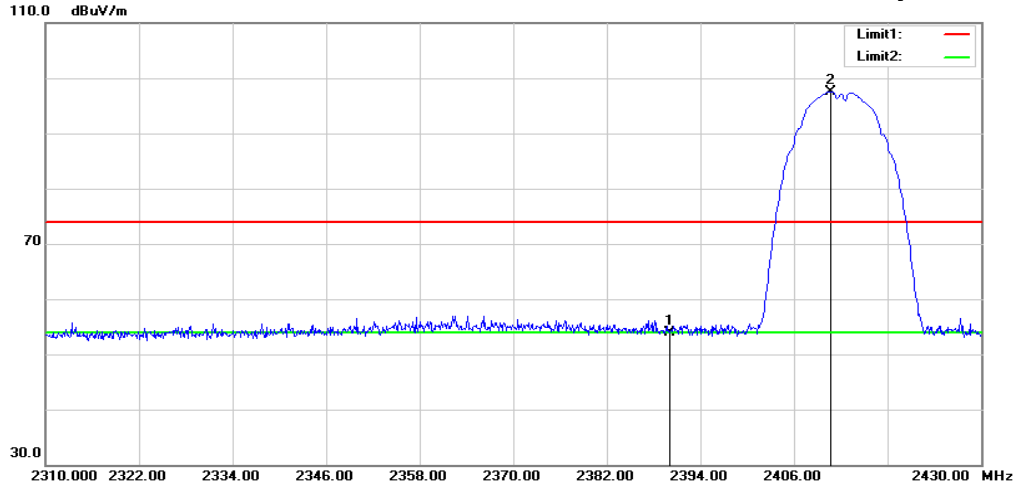

Detector mode: Average

Polarity: Horizontal

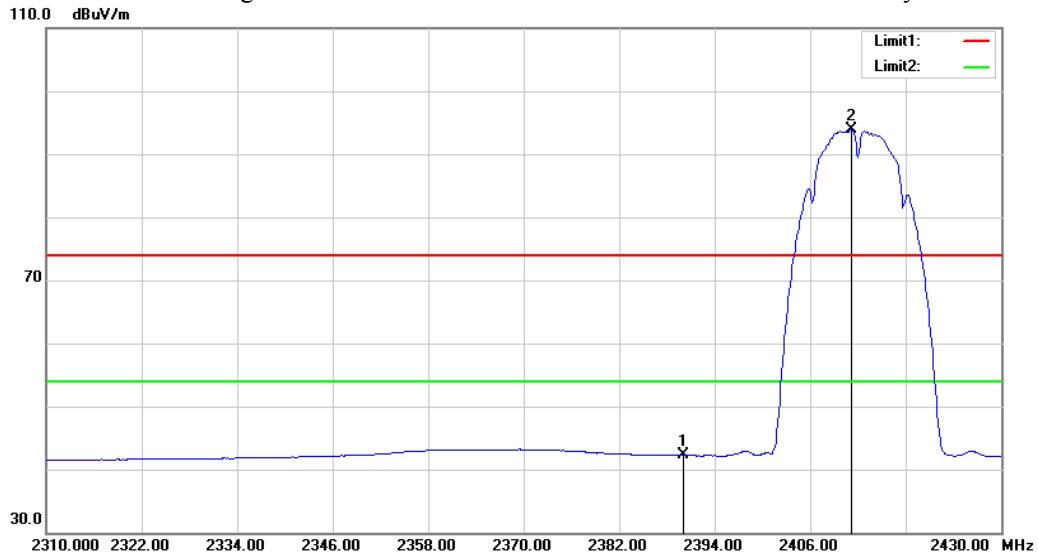


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2390.000	55.46	-1.48	53.98	74.00	-20.02	Peak	Horizontal
2	2410.680	98.99	-1.43	---	74.00	---	Peak	Horizontal
1	2390.000	43.79	-1.48	42.31	54.00	-11.69	Average	Horizontal
2	2411.160	95.42	-1.43	---	54.00	---	Average	Horizontal

**802.11b mode (antenna 1)**

**Highest Channel**


Detector mode: Peak

Polarity: Vertical

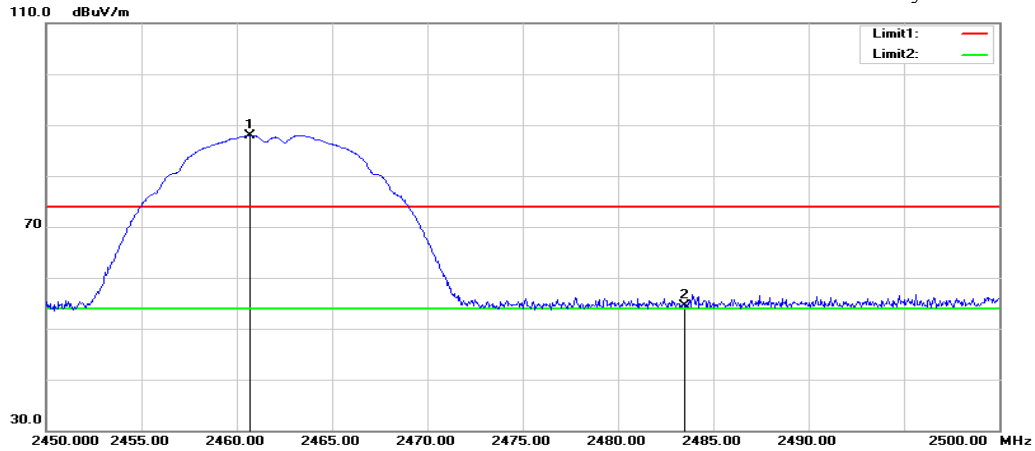

Detector mode: Average

Polarity: Vertical

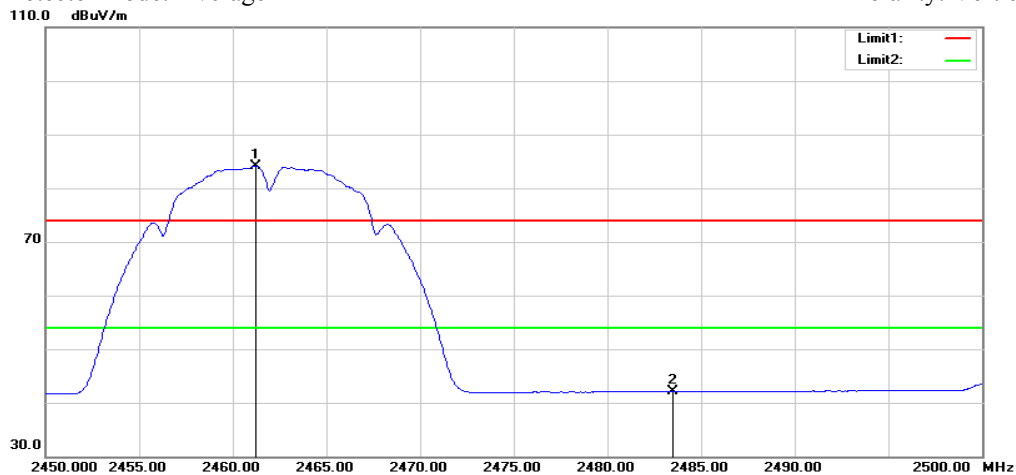


No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2460.700	89.27	-1.32	---	74.00	---	Peak	Vertical
2	2483.500	55.78	-1.27	54.51	74.00	-19.49	Peak	Vertical
1	2461.200	85.51	-1.32	---	54.00	---	Average	Vertical
2	2483.500	43.33	-1.27	42.06	54.00	-11.94	Average	Vertical

**802.11b mode (antenna 1)**

**Highest Channel**


Detector mode: Peak

Polarity: Horizontal

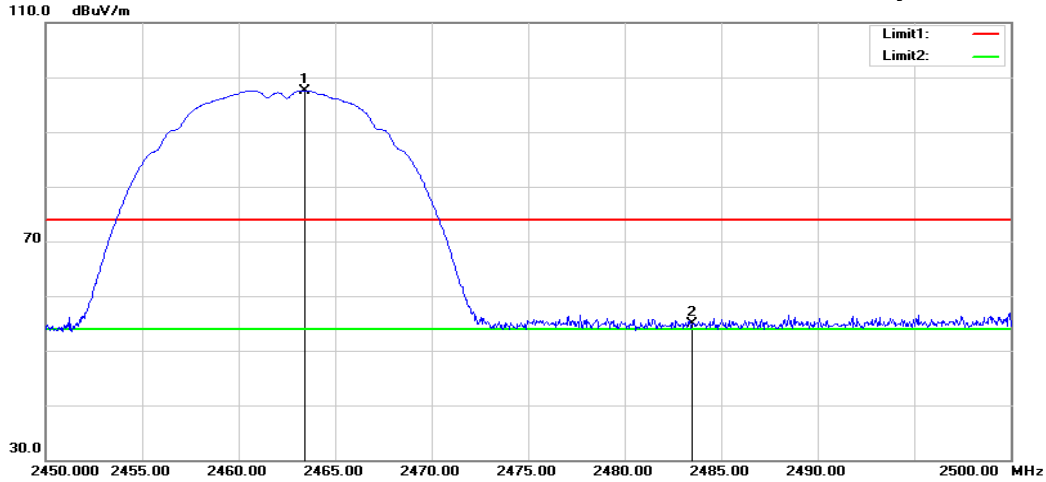

Detector mode: Average

Polarity: Horizontal

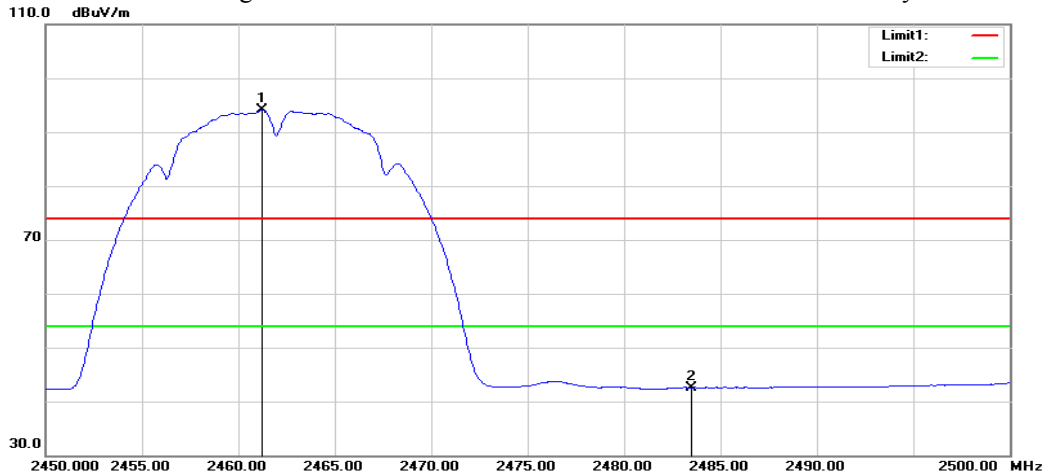

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Pole
1	2463.400	98.90	-1.32	---	74.00	---	Peak	Horizontal
2	2483.500	56.08	-1.27	54.81	74.00	-19.19	Peak	Horizontal
1	2461.250	95.37	-1.32	---	54.00	---	Average	Horizontal
2	2483.500	43.84	-1.27	42.57	54.00	-11.43	Average	Horizontal