

SAR TEST REPORT
For
GL Technologies (Hong Kong) Limited
4G LTE Wireless Router
Test Model: GL-XE300C6
Additional Model No. : /

Prepared for : GL Technologies (Hong Kong) Limited
Address : FLAT/RM 203 2/F BUILDING 19W 19 SCIENCE PARK WEST
AVENUE SHATIN NT, Hong Kong

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel : (86)755-82591330
Fax : (86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : November 13, 2020
Number of tested samples : 2
Samples Number : 200924013A-1, 200924013A-2
Serial number : Prototype
Date of Test : November 13, 2020 ~ November 24, 2020
Date of Report : March 11, 2021

SAR TEST REPORT**Report Reference No.** : **LCS200924067AEB**

Date Of Issue : March 11, 2021

Testing Laboratory Name..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei,
Shajing Street, Baoan District, Shenzhen, 518000, ChinaTesting Location/ Procedure : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method **Applicant's Name** : **GL Technologies (Hong Kong) Limited**Address : FLAT/RM 203 2/F BUILDING 19W 19 SCIENCE PARK WEST
AVENUE SHATIN NT, Hong Kong**Test Specification:**

Standard..... : IEEE Std C95.1-2019& IEEE Std 1528™-2013 & FCC Part 2.1093

Test Report Form No. : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : **4G LTE Wireless Router**

Trade Mark : GL.iNET

Model/Type Reference..... : GL-XE300C6

Operation Frequency : WCDMA II,IV,V;LTE2,4,5,7,12,13,25,26,30;WLAN2.4G

Modulation Type..... : /

Ratings : DC 3.7V by Rechargeable Li-ion Battery (5000mAh)

For Adapter 1 Input: 100-240V~, 50/60Hz, 0.6A Max

Adapter 1 Output:5.0V—3.0A, 15.0W

For Adapter 2 Input: 100-240V~, 50/60Hz, 0.3A Max

Adapter 2 Output:5.0V—2.0A, 10.0W

Result : **Positive****Compiled by:**

Ping Li

Ping Li/ File administrators

Supervised by:

Jin Wang

Jin Wang/ Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager

SAR -- TEST REPORT

| | | |
|--------------------------|------------------------|--|
| Test Report No. : | LCS200924067AEB | <u>March 11, 2021</u> Date of issue |
|--------------------------|------------------------|--|

| | |
|--------------------------|--|
| Type / Model..... | : GL-XE300C6 |
| EUT..... | : 4G LTE Wireless Router |
| Applicant..... | : GL Technologies (Hong Kong) Limited |
| Address..... | : FLAT/RM 203 2/F BUILDING 19W 19 SCIENCE PARK WEST AVENUE SHATIN NT, Hong Kong |
| Telephone..... | : / |
| Fax..... | : / |
| Manufacturer..... | : Shenzhen Guanglianzhitong Tech Co.,Ltd |
| Address..... | : Room 305-306, Skyworth Digital Building, Shiyuan Street, Bao'an District, Shenzhen, China |
| Telephone..... | : / |
| Fax..... | : / |
| Factory..... | : / |
| Address..... | : / |
| Telephone..... | : / |
| Fax..... | : / |

| | |
|--------------------|-----------------|
| Test Result | Positive |
|--------------------|-----------------|

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

| Revision | Issue Date | Revisions | Revised By |
|----------|----------------|---------------|-------------|
| 000 | March 11, 2021 | Initial Issue | Gavin Liang |
| | | | |
| | | | |

TABLE OF CONTENTS

| | |
|--|------------|
| 1. TEST STANDARDS AND TEST DESCRIPTION..... | 6 |
| 1.1. TEST STANDARDS | 6 |
| 1.2. TEST DESCRIPTION..... | 6 |
| 1.3. GENERAL REMARKS | 6 |
| 1.4. PRODUCT DESCRIPTION | 6 |
| 1.5. STATEMENT OF COMPLIANCE | 8 |
| 2. TEST ENVIRONMENT | 9 |
| 2.1. TEST FACILITY..... | 9 |
| 2.2. ENVIRONMENTAL CONDITIONS | 9 |
| 2.3. SAR LIMITS | 9 |
| 2.4. EQUIPMENTS USED DURING THE TEST | 10 |
| 3. SAR MEASUREMENTS SYSTEM CONFIGURATION | 11 |
| 3.1. SARMEASUREMENT SET-UP..... | 11 |
| 3.2. OPENSAR E-FIELD PROBE SYSTEM..... | 12 |
| 3.3. PHANTOMS..... | 13 |
| 3.4. DEVICE HOLDER | 13 |
| 3.5. SCANNING PROCEDURE | 14 |
| 3.6. DATA STORAGE AND EVALUATION..... | 15 |
| 3.7. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS | 17 |
| 3.8. TISSUE EQUIVALENT LIQUID PROPERTIES | 17 |
| 3.9. SYSTEM CHECK | 18 |
| 3.10. SAR MEASUREMENT PROCEDURE | 21 |
| 3.11. CONFIGURATION AND PERIPHERALS | 23 |
| 3.12. POWER REDUCTION | 24 |
| 3.13. POWER DRIFT | 24 |
| 4. TEST CONDITIONS AND RESULTS..... | 25 |
| 4.1. CONDUCTED POWER RESULTS | 25 |
| 4.2. TRANSMIT ANTENNAS AND SAR MEASUREMENT POSITION..... | 43 |
| 4.3. SAR MEASUREMENT RESULTS | 44 |
| 4.4. SIMULTANEOUS TX SAR CONSIDERATIONS..... | 48 |
| 4.5. SAR MEASUREMENT VARIABILITY | 49 |
| 4.6. GENERAL DESCRIPTION OF TEST PROCEDURES | 50 |
| 4.7. MEASUREMENT UNCERTAINTY (450MHZ-6GHZ)..... | 50 |
| 4.8. SYSTEM CHECK RESULTS | 51 |
| 4.9. SAR TEST GRAPH RESULTS..... | 57 |
| 5. CALIBRATION CERTIFICATES | 71 |
| 5.1 PROBE-EPGO324 CALIBRATION CERTIFICATE..... | 71 |
| 5.2 SID750DIPOLE CALIBRATION CERITICATE..... | 81 |
| 5.3 SID835DIPOLE CALIBRATION CERITICATE..... | 92 |
| 5.4 SID1800 DIPOLE CALIBRATION CERTIFICATE | 103 |
| 5.5 SID1900 DIPOLE CALIBRATION CERTIFICATE | 114 |
| 5.6 SID2450 DIPOLE CALIBRATION CERITICATE..... | 125 |
| 5.7 SID2600 DIPOLE CALIBRATION CERITICATE..... | 136 |
| 6. PHOTOGRAPHS OF THE LIQUID | 147 |
| 7. PHOTOGRAPHS OF THE TEST | 150 |
| 8. EUT PHOTOGRAPHS | 151 |

1. TEST STANDARDS AND TEST DESCRIPTION

1.1. Test Standards

[IEEE Std C95.1-2019](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

[FCC Part 2.1093 Radiofrequency Radiation Exposure Evaluation](#): Portable Devices

[KDB447498 D01 General RF Exposure Guidance v06](#) : Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[KDB447498 D02 SAR Procedures for Dongle Xmtr v02r01](#): SAR Measurement Procedures For USB Dongle Transmitters.

[KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#) : SAR Measurement Requirements for 100 MHz to 6 GHz

[KDB865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[KDB 248227 D01 802.11 Wi-Fi SAR v02r02](#): SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

[KDB941225 D01 3G SAR Procedures](#): 3G SAR MEAUREMENT PROCEDURES

[KDB 941225 D05 SAR for LTE Devices](#): SAR Evaluation Considerations For LTE Devices

[KDB 941225 D06 Hotspot Mode](#): SAR Evaluation Procedures For Portable Devices With Wireless Router Capabilities

1.2. Test Description

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power . And Test device is identical prototype.

1.3. General Remarks

| | | |
|--------------------------------|---|-------------------|
| Date of receipt of test sample | : | November 13, 2020 |
| Testing commenced on | : | November 13, 2020 |
| Testing concluded on | : | November 24, 2020 |

1.4. Product Description

The GL Technologies (Hong Kong) Limited's Model: GL-XE300C6 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

| General Description | |
|-----------------------|--|
| EUT : | 4G LTE Wireless Router |
| Model/Type reference: | GL-XE300C6 |
| Additional Model No. | / |
| Hardware Version | V1.0 |
| Firmware Version: | 3.200 |
| Power supply: | DC 3.7V by Rechargeable Li-ion Battery (5000mAh) For Adapter 1 Input: 100-240V~, 50/60Hz, 0.6A Max Adapter 1 Output:5.0V—3.0A, 15.0W For Adapter 2 Input: 100-240V~, 50/60Hz, 0.3A Max Adapter 2 Output:5.0V—2.0A, 10.0W |
| Hotspot: | Supported |
| Exposure category | General population/uncontrolled environment |

| | |
|--|-----------------|
| EUT Type | Production Unit |
| Device Type | Portable Device |
| <p>The EUT is 4G LTE Wireless Router. the 4G LTE Wireless Router is intended for WLAN transmission. It is equipped with WiFi2.4G WCDMA Band II,Band V, Band IV; LTE 2,4,5,7,12,13,25,26,30. For more information see the following datasheet</p> | |

| Technical Characteristics | |
|---------------------------|--|
| LTE | |
| Operation Band: | LTE FDD band 2, 4, 5, 7, 12, 13, 25, 26,30 |
| Modulation Type: | 64QAM for LTE |
| Release Version: | R8 |
| Power Class: | Class 3 |
| Antenna Description: | Internal Antenna; 2dBi (max.) For E-UTRA Band 2; 2dBi (max.) For E-UTRA Band 4; 3dBi (max.) For E-UTRA Band 5; 2dBi (max.) For E-UTRA Band 7; 3dBi (max.) For E-UTRA Band 12; 3dBi (max.) For E-UTRA Band 13; 2dBi (max.) For E-UTRA Band 25; 3dBi (max.) For E-UTRA Band 26; 0dBi (max.) For E-UTRA Band 30; |
| WIFI 2.4G | |
| Supported Standards: | IEEE 802.11b/802.11g/802.11n(HT20 and HT40) |
| Frequency Range: | 2412MHz-2462MHz |
| Operation frequency: | 2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40) |
| Type of Modulation: | IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK); IEEE 802.11g/n: OFDM(64QAM, 16QAM, QPSK, BPSK) |
| Channel number: | 11 channels for 20MHz bandwidth (2412~2462MHz) 7 channels for 40MHz bandwidth (2422~2452MHz) |
| Channel separation: | 5MHz |
| Antenna Description: | ANT0: Internal Antenna; 2.6dBi (max.) ANT1: Internal Antenna; 2.6dBi (max.) |

| UMTS | |
|---------------------------|---|
| Operation Band: | UMTS FDD Band II/IV/V |
| FrequencyRange: | WCDMA Band II: 1852.4~1907.6MHz WCDMA Band IV: 1710.0~1755.0MHz WCDMA Band V: 826.4~846.6MHz |
| Modulation Type: | QPSK for WCDMA/HSUPA/HSDPA |
| WCDMA Release Version: | R8 |
| DC-HSUPA Release Version: | Not Supported |
| Antenna Description: | Internal Antenna; 2dBi (max.) For WCDMA Band II 2dBi (max.) For WCDMA Band V 3dBi (max.) For WCDMA Band IV |

1.5. Statement of Compliance

The maximum of results of SAR found during testing for GL-XE300C6 are follows:

<Highest Reported standalone SAR Summary>

| Classment Class | Frequency Band | Hotspot (Report SAR _{1-g} (W/kg)) | Body-worn (Report SAR _{1-g} (W/kg)) |
|-----------------|----------------|---|---|
| | | (Separation Distance 10mm) | |
| PCE | WCDMA Band V | 0.587 | 0.587 |
| | WCDMA Band IV | 0.880 | 0.880 |
| | WCDMA Band II | 0.895 | 0.895 |
| | LTE band 2 | 0.933 | 0.933 |
| | LTE band 4 | 0.755 | 0.755 |
| | LTE band 5 | 0.173 | 0.173 |
| | LTE band 7 | 0.254 | 0.254 |
| | LTE band 12 | 0.249 | 0.249 |
| | LTE band 13 | 0.343 | 0.343 |
| | LTE band 25 | 0.694 | 0.694 |
| | LTE band 26 | 0.622 | 0.622 |
| DTS | LTE band 30 | 0.512 | 0.512 |
| | WIFI2.4G ANT0 | 0.270 | 0.270 |
| | WIFI2.4G ANT1 | 0.246 | 0.246 |

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

<Highest Reported simultaneous SAR Summary>

| Exposure Position | Classment Class | Highest Reported Simultaneous Transmission SAR _{1-g} (W/kg) |
|-----------------------------|-----------------|--|
| Body-worn (hotspot open) | PCE | 1.449 |
| | DTS | |

2. TEST ENVIRONMENT

2.1. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Site Description

EMC Lab.

: NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

2.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|-----------------------|--------------|
| Temperature: | 18-25 ° C |
| Humidity: | 40-65 % |
| Atmospheric pressure: | 950-1050mbar |

2.3. SAR Limits

FCC Limit (1g Tissue)

| EXPOSURE LIMITS | SAR (W/kg) | |
|--|--|--|
| | (General Population / Uncontrolled Exposure Environment) | (Occupational / Controlled Exposure Environment) |
| Spatial Average(averaged over the whole body) | 0.08 | 0.4 |
| Spatial Peak(averaged over any 1 g of tissue) | 1.6 | 8.0 |
| Spatial Peak(hands/wrists/ feet/anklesaveraged over 10 g) | 4.0 | 20.0 |

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

2.4. Equipments Used during the Test

| Item | Equipment | Manufacturer | Model No. | Serial No. | Cal Date | Due Date |
|------|--|--------------|--------------------|---------------------------|------------|------------|
| 1 | PC | Lenovo | G5005 | MY42081102 | N/A | N/A |
| 2 | SAR Measurement system | SATIMO | 4014_01 | SAR_4014_01 | N/A | N/A |
| 3 | Signal Generator | Agilent | E4438C | MY49072627 | 2020-06-11 | 2021-06-10 |
| 4 | Multimeter | Keithley | Multimeter 2000 | 4059164 | 2020-11-15 | 2021-11-14 |
| 5 | S-parameter Network Analyzer | Agilent | 8753ES | US38432944 | 2020-11-15 | 2021-11-14 |
| 6 | Wideband Radio Communication Tester | R&S | CMW500 | 103818-1 | 2020-11-22 | 2021-11-21 |
| 7 | E-Field PROBE | MVG | SSE2 | SN 31/17 EPGO324 | 2020-10-07 | 2021-10-06 |
| 8 | DIPOLE 750 | SATIMO | SID 750 | SN 07/14 DIP 0G750-302 | 2018-10-01 | 2021-09-30 |
| 9 | DIPOLE 835 | SATIMO | SID 835 | SN 07/14 DIP 0G835-303 | 2018-10-01 | 2021-09-30 |
| 10 | DIPOLE 1800 | SATIMO | SID 1800 | SN 07/14 DIP 1G800-301 | 2018-10-01 | 2021-09-30 |
| 11 | DIPOLE 1900 | SATIMO | SID 1900 | SN 38/18 DIP 1G900-466 | 2018-09-01 | 2021-08-31 |
| 12 | DIPOLE 2450 | SATIMO | SID 2450 | SN 07/14 DIP 2G450-306 | 2018-10-01 | 2021-09-30 |
| 13 | DIPOLE 2600 | SATIMO | SID 2600 | SN 38/18 DIP 2G600-468 | 2018-09-24 | 2021-09-23 |
| 14 | COMOSAR OPENCoaxial Probe | SATIMO | OCPG 68 | SN 40/14 OCPG68 | 2020-11-15 | 2021-11-14 |
| 15 | SAR Locator | SATIMO | VPS51 | SN 40/14 VPS51 | 2020-11-15 | 2021-11-14 |
| 16 | Communication Antenna | SATIMO | ANTA57 | SN 39/14 ANTA57 | 2020-11-15 | 2021-11-14 |
| 17 | FEATURE PHONEPOSITIONING DEVICE | SATIMO | MSH98 | SN 40/14 MSH98 | N/A | N/A |
| 18 | DUMMY PROBE | SATIMO | DP60 | SN 03/14 DP60 | N/A | N/A |
| 19 | SAM PHANTOM | SATIMO | SAM117 | SN 40/14 SAM117 | N/A | N/A |
| 20 | Liquid measurement Kit | HP | 85033D | 3423A03482 | 2020-11-15 | 2021-11-14 |
| 21 | Power meter | Agilent | E4419B | MY45104493 | 2020-06-11 | 2021-06-10 |
| 22 | Power meter | Agilent | E4419B | MY45100308 | 2020-11-22 | 2021-11-21 |
| 23 | Power sensor | Agilent | E9301H | MY41495616 | 2020-11-22 | 2021-11-21 |
| 24 | Power sensor | Agilent | E9301H | MY41495234 | 2020-06-11 | 2021-06-10 |
| 25 | Directional Coupler | MCLI/USA | 4426-20 | 03746 | 2020-06-11 | 2021-06-10 |

Note:

- 1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three year extended calibration interval. Each measured dipole is expected to evaluate with following criteria at least on annual interval.
 - a) There is no physical damage on the dipole;
 - b) System check with specific dipole is within 10% of calibrated values;
 - c) The most recent return-loss results, measured at least annually, deviates by no more than 20% from the previous measurement;
 - d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.
- 2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

3. SAR MEASUREMENTS SYSTEM CONFIGURATION

3.1. SAR Measurement Set-up

The OPENSAR system for performing compliance tests consist of the following items:

A standard high precision 6-axis robot (KUKA) with controller and software.

KUKA Control Panel (KCP)

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with a Video Positioning System(VPS).

The stress sensor is composed with mechanical and electronic when the electronic part detects a change on the electro-mechanical switch,It sends an "Emergency signal" to the robot controller that to stop robot's moves

A computer operating Windows XP.

OPENSAR software


Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.

The SAM phantom enabling testing left-hand right-hand and body usage.

The Position device for handheld EUT

Tissue simulating liquid mixed according to the given recipes .

System validation dipoles to validate the proper functioning of the system.

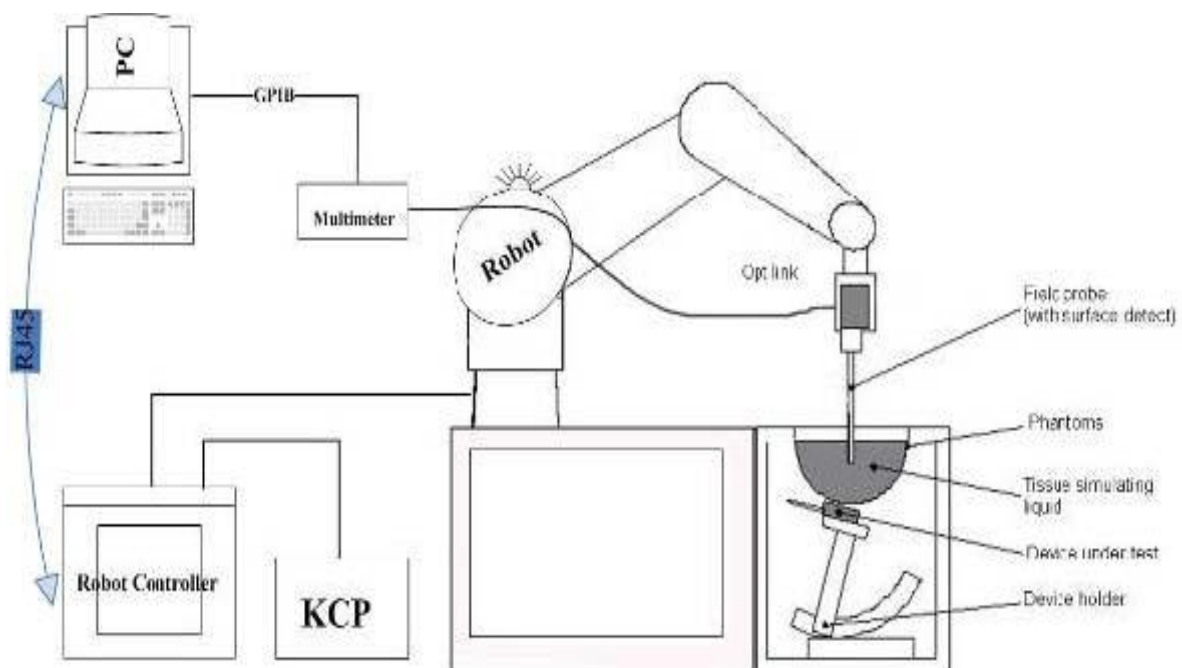

3.2. OPENSAR E-field Probe System

The SAR measurements were conducted with the dosimetric probe EPG0324 (manufactured by MVG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

Probe Specification

Construction Symmetrical design with triangular core
 Interleaved sensors
 Built-in shielding against static charges
 PEEK enclosure material (resistant to organic solvents, e.g., DGBE)


Calibration ISO/IEC 17025 calibration service available.

| | |
|---------------|---|
| Frequency | 450 MHz to 6 GHz; Linearity: 0.25 dB (450 MHz to 6 GHz) |
| Directivity | 0.25 dB in HSL (rotation around probe axis) 0.5 dB in tissue material (rotation normal to probe axis) |
| Dynamic Range | 0.01 W/kg to > 100 W/kg; Linearity: 0.25 dB |
| Dimensions | Overall length: 330 mm (Tip: 16 mm) Tip diameter: 5 mm (Body: 8 mm) Distance from probe tip to sensor centers: 2.5 mm |
| Application | General dosimetry up to 6 GHz Dosimetry in strong gradient fields Compliance tests of Mobile Phones |

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.


The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

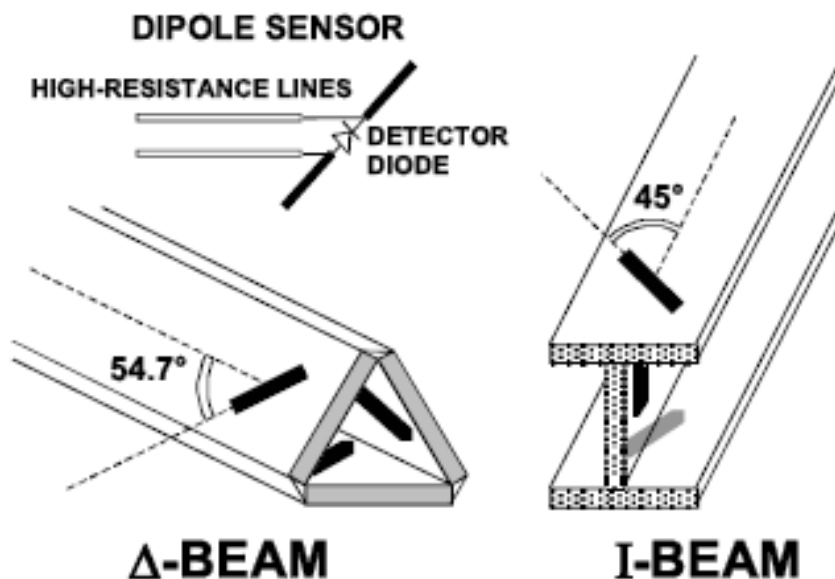

3.3. Phantoms

The SAM Phantom SAM117 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is in compliance with the specification set in IEEE 1528 and EN62209-1, EN62209-2. The phantom enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

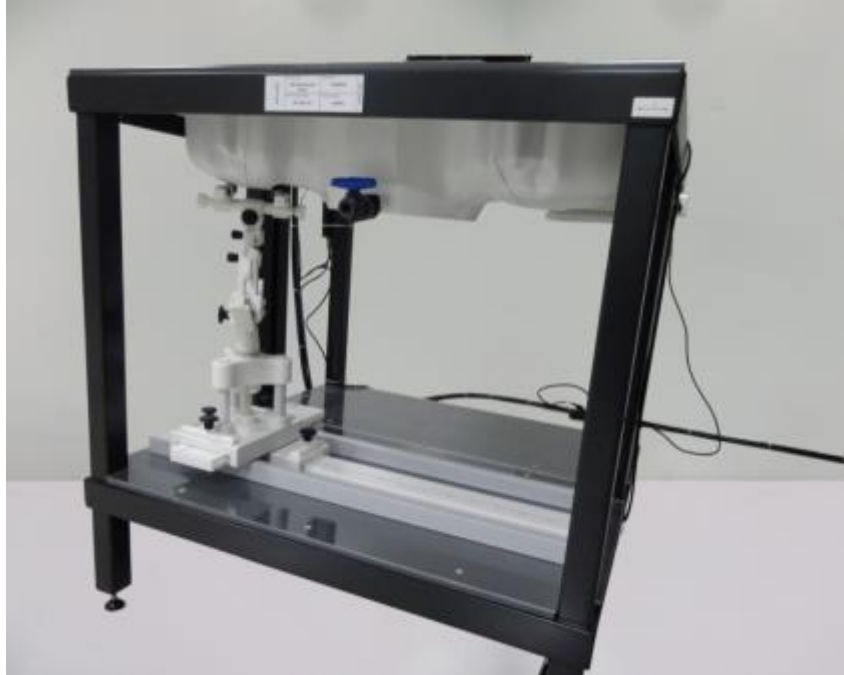

SAM Twin Phantom

3.4. Device Holder

In combination with the Generic Twin Phantom SAM117, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Device holder supplied by SATIMO

3.5. Scanning Procedure

The procedure for assessing the peak spatial-average SAR value consists of the following steps

Power Reference Measurement

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

| | ≤ 3 GHz | > 3 GHz |
|--|---|---|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 mm ± 1 mm | $\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | 30° ± 1° | 20° ± 1° |
| Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area} | ≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm | 3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm |
| | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. | |

Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

| Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom} | | ≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm* | 3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm* | |
|---|------------------------------------|--|--|---|
| Maximum zoom scan spatial resolution, normal to phantom surface | uniform grid: $\Delta z_{Zoom}(n)$ | ≤ 5 mm | 3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm | |
| | graded grid | $\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface | ≤ 4 mm | 3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm |
| | | $\Delta z_{Zoom}(n>1)$: between subsequent points | ≤ 1.5 · $\Delta z_{Zoom}(n-1)$ mm | |
| Minimum zoom scan volume | x, y, z | ≥ 30 mm | 3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm | |
| Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. | | | | |
| * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. | | | | |

Power Drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have OPENSAR software stop the measurements if this limit is exceeded.

3.6. Data Storage and Evaluation

Data Storage

The OPENSAR software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The OPENSAR software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

| | | |
|--------------------|---------------------------|----------------------|
| Probe parameters: | - Sensitivity | Normi, ai0, ai1, ai2 |
| | - Conversion factor | ConvFi |
| | - Diode compression point | Dcpi |
| Device parameters: | - Frequency | f |
| | - Crest factor | cf |
| Media parameters: | - Conductivity | σ |
| | - Density | ρ |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the OPENSAR components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

With V_i = compensated signal of channel i ($i = x, y, z$)
 U_i = input signal of channel i ($i = x, y, z$)
 cf = crest factor of exciting field
 dcp_i = diode compression point

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E - fieldprobes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H - fieldprobes : } H_i = \sqrt{V_i \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

With V_i = compensated signal of channel i (i = x, y, z)
 Norm_i = sensor sensitivity of channel i (i = x, y, z)
 [mV/(V/m)²] for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

3.7. Tissue Dielectric Parameters for Head and Body Phantoms

The liquid is consisted of water,salt,Glycol,Sugar,Preventol and Cellulose.The liquid has previously been proven to be suited for worst-case.It's satisfying the latest tissue dielectric parameters requirements proposed by the KDB865664.

The composition of the tissue simulating liquid

| Frequency (MHz) | Bactericide | DGBE | HEC | NaCl | Sucrose | 1,2-Propanediol | X100 | Water | Conductivity | Permittivity |
|-----------------|-------------|-------|-----|------|---------|-----------------|-------|-------|--------------|--------------|
| | % | % | % | % | % | % | % | % | σ | ϵ_r |
| 750 | / | / | / | 0.79 | / | 64.81 | / | 34.40 | 0.97 | 41.8 |
| 835 | / | / | / | 0.79 | / | 64.81 | / | 34.40 | 0.97 | 41.8 |
| 900 | / | / | / | 0.79 | / | 64.81 | / | 34.40 | 0.97 | 41.8 |
| 1800 | / | 13.84 | / | 0.35 | / | / | 30.45 | 55.36 | 1.38 | 41.0 |
| 1900 | / | 13.84 | / | 0.35 | / | / | 30.45 | 55.36 | 1.38 | 41.0 |
| 2000 | / | 7.99 | / | 0.16 | / | / | 19.97 | 71.88 | 1.55 | 41.1 |
| 2450 | / | 7.99 | / | 0.16 | / | / | 19.97 | 71.88 | 1.88 | 40.3 |
| 2600 | / | 7.99 | / | 0.16 | / | / | 19.97 | 71.88 | 1.88 | 40.3 |

| Target Frequency (MHz) | Head | | Body | |
|------------------------|--------------|----------------|--------------|----------------|
| | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) |
| 150 | 52.3 | 0.76 | 61.9 | 0.80 |
| 300 | 45.3 | 0.87 | 58.2 | 0.92 |
| 450 | 43.5 | 0.87 | 56.7 | 0.94 |
| 835 | 41.5 | 0.90 | 55.2 | 0.97 |
| 900 | 41.5 | 0.97 | 55.0 | 1.05 |
| 915 | 41.5 | 0.98 | 55.0 | 1.06 |
| 1450 | 40.5 | 1.20 | 54.0 | 1.30 |
| 1610 | 40.3 | 1.29 | 53.8 | 1.40 |
| 1800-2000 | 40.0 | 1.40 | 53.3 | 1.52 |
| 2450 | 39.2 | 1.80 | 52.7 | 1.95 |
| 2600 | 39.0 | 1.96 | 52.5 | 2.16 |
| 3000 | 38.5 | 2.40 | 52.0 | 2.73 |
| 5800 | 35.3 | 5.27 | 48.2 | 6.00 |

3.8. Tissue equivalent liquid properties


Dielectric Performance of Head and Body Tissue Simulating Liquid

| Test Engineer: Jenny Wu | | | | | | | | | |
|-------------------------|--------------------------|---------------|--------------|-----------------|--------|--------------|--------|--------------|------------|
| Tissue Type | Measured Frequency (MHz) | Target Tissue | | Measured Tissue | | | | Liquid Temp. | Test Data |
| | | σ | ϵ_r | σ | Dev. | ϵ_r | Dev. | | |
| 750H | 750 | 0.89 | 41.90 | 0.88 | -1.12% | 41.58 | -0.76% | 21.4 | 11/13/2020 |
| 835H | 835 | 0.90 | 41.50 | 0.86 | -4.44% | 40.14 | -3.28% | 20.4 | 11/20/2020 |
| 1800H | 1800 | 1.40 | 40.00 | 1.42 | 1.43% | 41.59 | 3.98% | 22.6 | 11/27/2020 |
| 1900H | 1900 | 1.40 | 40.00 | 1.37 | -2.14% | 39.23 | -1.93% | 21.5 | 12/17/2020 |
| 2450H | 2450 | 1.80 | 39.20 | 1.76 | -2.22% | 40.12 | 2.35% | 22.5 | 12/24/2020 |
| 2600H | 2600 | 1.96 | 39.0 | 1.89 | -3.57% | 38.81 | -0.49% | 22.1 | 12/30/2020 |

3.9. System Check

The purpose of the system check is to verify that the system operates within its specifications at the device test frequency. The system check is simple check of repeatability to make sure that the system works correctly at the time of the compliance test;

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

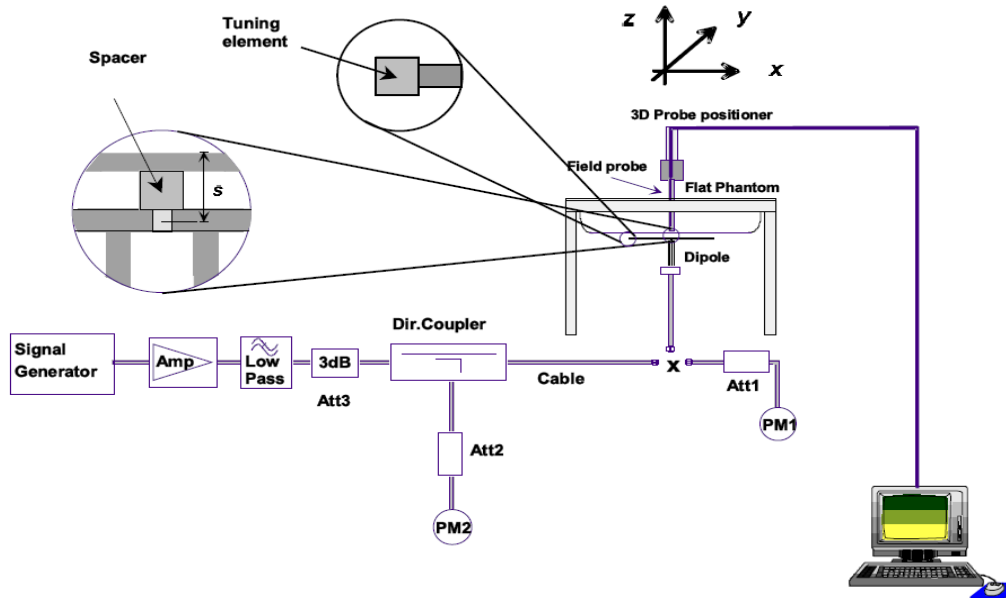

The output power on dipole port must be calibrated to 20 dBm (100mW) before dipole is connected.



Photo of Dipole Setup

Justification for Extended SAR Dipole Calibrations

Referring to KDB 865664D01V01r04, if dipoles are verified in return loss (<-20dB, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended. While calibration intervals not exceed 3 years.

SID750 SN 07/14 DIP 0G750-302 Extend Dipole Calibrations

| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
|---------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| 2018-10-01 | -34.80 | | 50.7 | | 1.6 | |
| 2019-10-01 | -34.35 | -1.29 | 51.2 | 0.5 | 1.5 | -0.1 |
| 2020-10-01 | -34.30 | -1.44 | 51.0 | 0.3 | 1.5 | -0.1 |

SID835 SN 07/14 DIP 0G835-303 Extend Dipole Calibrations

| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
|---------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| 2018-10-01 | -24.49 | | 54.9 | | 2.8 | |
| 2019-10-01 | -24.17 | -1.31 | 54.5 | -0.4 | 2.6 | -0.2 |
| 2020-10-01 | -24.20 | -1.18 | 54.3 | -0.6 | 2.5 | -0.3 |

SID1800 SN 30/14 DIP 1G800-301 Extend Dipole Calibrations

| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
|---------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| 2018-10-01 | -20.26 | | 43.1 | | 6.9 | |
| 2019-10-01 | -20.13 | -0.64 | 42.9 | -0.2 | 6.7 | -0.2 |
| 2020-10-01 | -20.15 | -0.54 | 42.8 | -0.3 | 6.5 | -0.4 |

SID1900 SN 38/18 DIP 1G900-466 Extend Dipole Calibrations

| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
|---------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| 2018-09-01 | -26.43 | | 50.5 | | 4.7 | |
| 2019-09-01 | -26.33 | -0.38 | 50.2 | -0.3 | 4.5 | -0.2 |
| 2020-10-01 | -26.30 | -0.49 | 50.1 | -0.4 | 4.2 | -0.5 |

SID2450 SN 07/14 DIP 2G450-306 Extend Dipole Calibrations

| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
|---------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| 2018-10-01 | -25.59 | | 44.7 | | -1.1 | |
| 2019-10-01 | -25.68 | 0.35 | 44.8 | 0.1 | -1.0 | 0.1 |
| 2020-10-01 | -25.75 | 0.63 | 44.5 | -0.2 | -1.2 | -0.1 |

SID2600 SN 38/18 DIP 2G600-468 Extend Dipole Calibrations

| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
|---------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| 2018-09-24 | -29.14 | | 49.2 | | 3.4 | |
| 2019-09-24 | -29.12 | -0.07 | 49.1 | -0.1 | 3.2 | -0.2 |
| 2020-09-24 | -29.10 | -0.07 | 49.2 | 0.0 | 3.3 | -0.1 |

| Mixture Type | Frequency (MHz) | Power | SAR _{1g} (W/Kg) | SAR _{10g} (W/Kg) | Drift (%) | 1W Target | | Difference percentage | | Liquid Temp | Date |
|--------------|-----------------|---------------------|--------------------------|---------------------------|-----------|--------------------------|---------------------------|-----------------------|--------|-------------|------------|
| | | | | | | SAR _{1g} (W/Kg) | SAR _{10g} (W/Kg) | 1g | 10g | | |
| Head | 750 | 100 mW | 0.824 | 0.562 | 1.42 | 8.38 | 5.53 | -1.67% | 1.63% | 21.4 | 11/13/2020 |
| | | Normalize to 1 Watt | 8.24 | 5.62 | | | | | | | |
| Head | 835 | 100 mW | 0.975 | 0.632 | -0.21 | 9.60 | 6.20 | 1.56% | 1.94% | 20.4 | 11/20/2020 |
| | | Normalize to 1 Watt | 9.75 | 6.32 | | | | | | | |
| Head | 1800 | 100 mW | 3.819 | 20.13 | 3.56 | 38.13 | 20.20 | 0.16% | -0.35% | 22.6 | 11/27/2020 |
| | | Normalize to 1 Watt | 38.19 | 20.13 | | | | | | | |
| Head | 1900 | 100 mW | 3.921 | 2.068 | -1.17 | 40.03 | 20.55 | -2.05% | 0.63% | 21.5 | 12/17/2020 |
| | | Normalize to 1 Watt | 39.21 | 20.68 | | | | | | | |
| Head | 2450 | 100 mW | 5.224 | 2.343 | 0.24 | 53.89 | 24.15 | -3.06% | -2.98% | 22.5 | 12/24/2020 |
| | | Normalize to 1 Watt | 52.24 | 23.43 | | | | | | | |
| Head | 2600 | 100 mW | 5.511 | 2.458 | 3.25 | 54.14 | 24.13 | 1.79% | 1.86% | 22.1 | 12/30/2020 |
| | | Normalize to 1 Watt | 55.11 | 24.58 | | | | | | | |

3.10. SAR measurement procedure

The measurement procedures are as follows:

3.10.1 Conducted power measurement

- a. For WWAN power measurement, use base station simulator connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- b. Read the WWAN RF power level from the base station simulator.
- c. For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously Transmission, at maximum RF power in each supported wireless interface and frequency band.
- d. Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

3.10.2 WIFI Test Configuration

The SAR measurement and test reduction procedures are structured according to either the DSSS or OFDM transmission mode configurations used in each standalone frequency band and aggregated band. For devices that operate in exposure configurations that require multiple test positions, additional SAR test reduction may be applied. The maximum output power specified for production units, including tune-up tolerance, are used to determine initial SAR test requirements for the 802.11 transmission modes in a frequency band. SAR is measured using the highest measured maximum output power channel for the initial test configuration. SAR measurement and test reduction for the remaining 802.11 modes and test channels are determined according to measured or specified maximum output power and reported SAR of the initial measurements. The general test reduction and SAR measurement approaches are summarized in the following:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.
2. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, an "initial test configuration" is first determined for each standalone and aggregated frequency band according to the maximum output power and tune-up tolerance specified for production units.
 - a. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
 - b. SAR is measured for OFDM configurations using the initial test configuration procedures. Additional frequency band specific SAR test reduction may be considered for individual frequency bands
 - c. Depending on the reported SAR of the highest maximum output power channel tested in the initial test configuration, SAR test reduction may apply to subsequent highest output channels in the initial test configuration to reduce the number of SAR measurements.
3. The Initial test configuration does not apply to DSSS. The 2.4 GHz band SAR test requirements and 802.11b DSSS procedures are used to establish the transmission configurations required for SAR measurement.
4. An "initial test position" is applied to further reduce the number of SAR tests for devices operating in next to the ear, UMPC mini-tablet or hotspot mode exposure configurations that require multiple test positions .
 - a. SAR is measured for 802.11b according to the 2.4 GHz DSSS procedure using the exposure condition established by the initial test position.
 - b. SAR is measured for 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration. 802.11b/g/n operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g/n modes are tested on the maximum average output channel.
5. The Initial test position does not apply to devices that require a fixed exposure test position. SAR is measured in a fixed exposure test position for these devices in 802.11b according to the 2.4 GHz DSSS procedure or in 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration procedures .
6. The "subsequent test configuration" procedures are applied to determine if additional SAR measurements are required for the remaining OFDM transmission modes that have not been tested in the initial test configuration. SAR test exclusion is determined according to reported SAR in the initial test configuration and maximum output power specified or measured for these other OFDM configurations.

2.4 GHz and 5GHz SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test

configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in section 5.2.2.

1. 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- a. When the reported SAR of the highest measured maximum output power channel (section 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- b. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

1. 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3). SAR is not required for the following 2.4 GHz OFDM conditions.

- a. When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration
- b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

2. SAR Test Requirements for OFDM Configurations

When SAR measurement is required for 802.11 a/g/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements.²⁰ In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

3. OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures (section 4). When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- a. The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- b. If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- c. If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- d. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.

- a. Channels with measured maximum output power within $\frac{1}{4}$ dB of each other are considered to have the same maximum output.
- b. When there are multiple test channels with the same measured maximum output power, the channel closest to mid-band frequency is selected for SAR measurement.
- c. When there are multiple test channels with the same measured maximum output power and equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2). SAR test reduction of subsequent highest output test channels is based on the reported SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode.²³ For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

4. Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, the procedures in section 5.3.2 are applied to determine the test configuration. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.


- a. When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- b. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- c. The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - 1). SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - 2). SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested.
 - a) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- d. SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - 1) replace "subsequent test configuration" with "next subsequent test configuration" (i.e., subsequent next highest specified maximum output power configuration)
 - 2) replace "initial test configuration" with "all tested higher output power configurations."

3.11. Configuration and Peripherals

The EUT was tested in the following configuration(s) unless otherwise stated:

- Powered via a USB port.

• Test all USB orientations [see figure below: (A) Horizontal-Up, (B) Horizontal-Down, (C) Vertical-Front, and (D) Vertical-Back] with a device-to-phantom separation distance of 5 mm or less, according to KDB Publication 447498 D01 requirements.

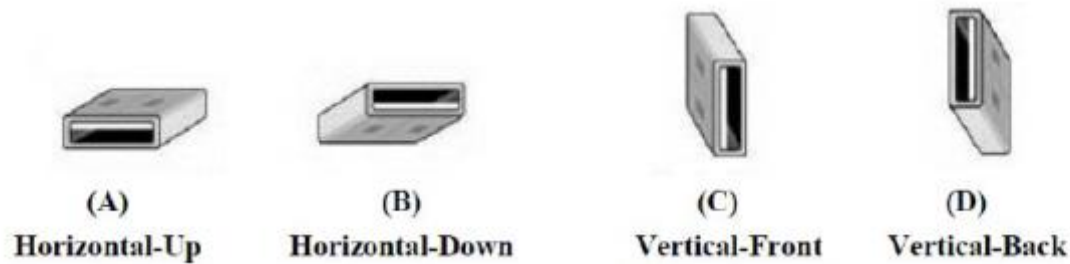

These test orientations are intended for the exposure conditions found in typical laptop/notebook/netbook or tablet computers with either horizontal or vertical USB connector configurations at various locations in the keyboard section of the computer. Current generation portable host computers should be used to establish the required SAR measurement separation distance. The same test separation distance must be used to test all frequency bands and modes in each USB orientation. The typical Horizontal-Up USB connection (A), found in the majority of host computers, must be tested using an appropriate host computer. A host computer with either Vertical-Front (C) or Vertical-Back (D) USB connection should be used to test one of the vertical USB orientations. If a suitable host computer is not available for testing the Horizontal-Down (B) or the remaining Vertical USB orientation, a high quality USB cable, 12 inches or less, may be used for testing these other orientations. It must be documented that the USB cable does not influence the radiating characteristics and output power of the transmitter

3.12. Power Reduction

The product without any power reduction.

3.13. Power Drift

To control the output power stability during the SAR test, SAR system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. This ensures that the power drift during one measurement is within 5%.

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Power Results

According KDB 447498D01 General RF Exposure Guidance v06 Section 4.1 2) states that “Unless it is specified differently in the published RF exposure KDB procedures, these requirements also apply to test reduction and test exclusion considerations. Time-averaged maximum conducted output power applies to SAR and, as required by § 2.1091(c), time-averaged ERP applies to MPE. When an antenna port is not available on the device to support conducted power measurement, such as FRS and certain Part 15 transmitters with built-in integral antennas, the maximum output power allowed for production units should be used to determine RF exposure test exclusion and compliance.”

<UMTS Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

| Sub-test | β_c | β_d | β_d (SF) | β_c/β_d | β_{HS} (Note 1, Note 2) | CM (dB) (Note 3) | MPR (dB) (Note 3) |
|----------|-------------------|-------------------|-------------------|-------------------|-------------------------------------|---------------------|----------------------|
| 1 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 0.0 | 0.0 |
| 2 | 12/15 (Note 4) | 15/15 (Note 4) | 64 | 12/15 (Note 4) | 24/15 | 1.0 | 0.0 |
| 3 | 15/15 | 8/15 | 64 | 15/8 | 30/15 | 1.5 | 0.5 |
| 4 | 15/15 | 4/15 | 64 | 15/4 | 30/15 | 1.5 | 0.5 |

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station R&S CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK

- ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

| Sub-test | β_c | β_d | β_d (SF) | β_c/β_d | β_{HS} (Note 1) | β_{ec} | β_{ed} (Note 5) (Note 6) | β_{ed} (SF) | β_{ed} (Codes) | CM (dB) (Note 2) | MPR (dB) (Note 2) | AG Index (Note 6) | E-TFCI |
|----------|----------------|----------------|----------------|-------------------|-----------------------|--------------|--|-------------------|----------------------|------------------|-------------------|-------------------|--------|
| 1 | 11/15 (Note 3) | 15/15 (Note 3) | 64 | 11/15 (Note 3) | 22/15 | 209/25 | 1309/225 | 4 | 1 | 1.0 | 0.0 | 20 | 75 |
| 2 | 6/15 | 15/15 | 64 | 6/15 | 12/15 | 12/15 | 94/75 | 4 | 1 | 3.0 | 2.0 | 12 | 67 |
| 3 | 15/15 | 9/15 | 64 | 15/9 | 30/15 | 30/15 | β_{ed1} : 47/15 β_{ed2} : 47/15 | 4 4 | 2 | 2.0 | 1.0 | 15 | 92 |
| 4 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 2/15 | 56/75 | 4 | 1 | 3.0 | 2.0 | 17 | 71 |
| 5 | 15/15 (Note 4) | 15/15 (Note 4) | 64 | 15/15 (Note 4) | 30/15 | 24/15 | 134/15 | 4 | 1 | 1.0 | 0.0 | 21 | 81 |

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

General Note

1. Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
2. By design, AMR and HSDPA/HSUPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.
3. It is expected by the manufacturer that MPR for some HSDPA/HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.

Conducted Power Measurement Results(WCDMA Band II/V/IV)

| Item | Band | FDD Band V result (dBm) | | | FDD Band IV result (dBm) | | | FDD Band II result (dBm) | | |
|-------|-----------|-------------------------|----------------|----------------|--------------------------|-----------------|-----------------|--------------------------|---------------|-----------------|
| | | Test Channel | | | Test Channel | | | Test Channel | | |
| | | 4132/ 826.4 | 4183/ 836.6 | 4233/ 846.6 | 1312/ 1712.4 | 1413/ 1732.6 | 1513/ 1752.6 | 9262/ 1852.4 | 9400/ 1880 | 9538/ 1907.6 |
| RMC | 12.2kbps | 23.32 | 23.45 | 23.39 | 23.89 | 23.95 | 23.88 | 23.46 | 23.50 | 23.44 |
| HSDPA | Subtest 1 | 22.44 | 22.37 | 22.40 | 22.84 | 22.82 | 22.85 | 22.94 | 22.97 | 22.85 |
| | Subtest 2 | 22.14 | 22.21 | 22.20 | 22.59 | 22.67 | 22.50 | 22.75 | 22.69 | 22.73 |
| | Subtest 3 | 21.81 | 22.11 | 21.86 | 22.52 | 22.52 | 22.14 | 22.60 | 22.67 | 22.51 |
| | Subtest 4 | 21.78 | 21.80 | 21.70 | 22.12 | 22.39 | 21.84 | 22.21 | 22.28 | 22.43 |
| HSUPA | Subtest 1 | 22.47 | 22.39 | 22.41 | 22.80 | 22.74 | 22.88 | 22.84 | 22.80 | 22.70 |
| | Subtest 2 | 22.18 | 22.24 | 22.16 | 22.63 | 22.81 | 22.58 | 22.90 | 22.81 | 22.46 |
| | Subtest 3 | 22.03 | 21.99 | 22.01 | 22.48 | 22.52 | 22.47 | 22.89 | 22.57 | 22.17 |
| | Subtest 4 | 21.90 | 21.87 | 21.83 | 22.19 | 22.22 | 22.57 | 22.75 | 22.65 | 22.21 |
| | Subtest 5 | 21.61 | 21.66 | 21.75 | 22.21 | 22.17 | 22.44 | 22.68 | 22.37 | 22.12 |

Note:1. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/2$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary

mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

LTE Band2

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | | |
|----------|-----------------|------------------|--------|---------------------|-------|-------|
| | | Size | Offset | QPSK | 16QAM | |
| 1.4 | 1850.7 | 1 | 0 | 22.06 | 21.29 | |
| | | 1 | 3 | 22.16 | 21.53 | |
| | | 1 | 5 | 22.11 | 21.42 | |
| | | 3 | 0 | 22.09 | 21.28 | |
| | | 3 | 2 | 22.13 | 21.14 | |
| | | 3 | 3 | 22.10 | 21.13 | |
| | | 6 | 0 | 21.12 | 20.09 | |
| | 1880.0 | 1 | 0 | 22.12 | 21.11 | |
| | | 1 | 3 | 22.30 | 21.18 | |
| | | 1 | 5 | 22.18 | 21.01 | |
| | | 3 | 0 | 22.28 | 21.16 | |
| | | 3 | 2 | 22.39 | 21.03 | |
| | | 3 | 3 | 22.33 | 20.52 | |
| | | 6 | 0 | 21.24 | 20.39 | |
| | 1909.3 | 1 | 0 | 22.42 | 21.72 | |
| | | 1 | 3 | 22.58 | 21.88 | |
| | | 1 | 5 | 22.49 | 21.68 | |
| | | 3 | 0 | 22.48 | 21.72 | |
| | | 3 | 2 | 22.61 | 21.71 | |
| | | 3 | 3 | 22.53 | 21.64 | |
| | | 6 | 0 | 21.52 | 20.58 | |
| | 3 | 1851.5 | 1 | 0 | 22.22 | 21.05 |
| | | | 1 | 7 | 22.12 | 21.32 |
| | | | 1 | 14 | 22.23 | 21.39 |
| 8 | | | 0 | 21.21 | 20.00 | |
| 8 | | | 4 | 21.39 | 20.21 | |
| 8 | | | 7 | 21.15 | 20.15 | |
| 15 | | | 0 | 21.35 | 20.36 | |
| 1880.0 | | 1 | 0 | 22.40 | 21.85 | |
| | | 1 | 7 | 22.48 | 22.01 | |
| | | 1 | 14 | 22.31 | 21.88 | |
| | | 8 | 0 | 21.39 | 20.69 | |
| | | 8 | 4 | 21.48 | 20.60 | |
| | | 8 | 7 | 21.51 | 20.64 | |
| | | 15 | 0 | 21.52 | 20.49 | |
| 1908.5 | | 1 | 0 | 22.43 | 21.23 | |
| | | 1 | 7 | 22.71 | 21.59 | |
| | | 1 | 14 | 22.62 | 21.75 | |
| | | 8 | 0 | 21.50 | 20.47 | |
| | | 8 | 4 | 21.49 | 20.48 | |
| | | 8 | 7 | 21.43 | 20.41 | |
| | | 15 | 0 | 21.62 | 20.64 | |
| 5 | | 1852.5 | 1 | 0 | 22.11 | 20.83 |
| | | | 1 | 12 | 22.65 | 21.21 |
| | | | 1 | 24 | 22.47 | 21.02 |
| | 12 | | 0 | 21.28 | 20.26 | |
| | 12 | | 6 | 21.33 | 20.43 | |
| | 12 | | 13 | 21.33 | 20.50 | |
| | 25 | | 0 | 21.37 | 20.61 | |
| | 1880.0 | 1 | 0 | 22.66 | 21.45 | |
| | | 1 | 12 | 22.77 | 21.51 | |
| | | 1 | 24 | 22.57 | 21.37 | |
| | | 12 | 0 | 21.50 | 20.73 | |
| | | 12 | 6 | 21.44 | 20.42 | |
| | | 12 | 13 | 21.53 | 20.58 | |

| | | | | | | |
|--------|--------|--------|----|-------|-------|-------|
| | 1907.5 | 25 | 0 | 21.48 | 20.72 | |
| | | 1 | 0 | 22.47 | 21.15 | |
| | | 1 | 12 | 22.61 | 20.98 | |
| | | 1 | 24 | 22.54 | 21.28 | |
| | | 12 | 0 | 21.53 | 20.43 | |
| | | 12 | 6 | 21.60 | 20.31 | |
| | | 12 | 13 | 21.63 | 20.40 | |
| | | 25 | 0 | 21.58 | 20.64 | |
| 10 | 1855.0 | 1 | 0 | 22.67 | 22.16 | |
| | | 1 | 24 | 22.32 | 22.15 | |
| | | 1 | 49 | 22.57 | 22.11 | |
| | | 25 | 0 | 21.45 | 20.57 | |
| | | 25 | 12 | 21.43 | 20.43 | |
| | | 25 | 25 | 21.57 | 20.59 | |
| | | 50 | 0 | 21.43 | 20.57 | |
| | 1880.0 | 1 | 0 | 22.38 | 22.07 | |
| | | 1 | 24 | 22.37 | 22.11 | |
| | | 1 | 49 | 22.22 | 21.90 | |
| | | 25 | 0 | 21.56 | 20.62 | |
| | | 25 | 12 | 21.51 | 20.49 | |
| | | 25 | 25 | 21.57 | 20.58 | |
| | 1905.0 | 50 | 0 | 21.59 | 20.66 | |
| | | 1 | 0 | 22.31 | 21.35 | |
| | | 1 | 24 | 22.52 | 21.40 | |
| | | 1 | 49 | 22.56 | 21.53 | |
| | | 25 | 0 | 21.54 | 20.74 | |
| | | 25 | 12 | 21.63 | 20.55 | |
| | | 25 | 25 | 21.69 | 20.85 | |
| | 15 | 1857.5 | 50 | 0 | 21.65 | 20.71 |
| | | | 1 | 0 | 22.13 | 21.54 |
| | | | 1 | 37 | 22.56 | 22.36 |
| | | | 1 | 74 | 22.84 | 22.26 |
| 37 | | | 0 | 21.52 | 20.56 | |
| 37 | | | 18 | 21.58 | 20.54 | |
| 37 | | | 38 | 21.74 | 20.76 | |
| 1880.0 | | 75 | 0 | 21.58 | 20.62 | |
| | | 1 | 0 | 22.72 | 22.31 | |
| | | 1 | 37 | 22.68 | 22.11 | |
| | | 1 | 74 | 22.57 | 22.24 | |
| | | 37 | 0 | 21.69 | 20.80 | |
| | | 37 | 18 | 21.55 | 20.62 | |
| | | 37 | 38 | 21.51 | 20.59 | |
| 1902.5 | | 75 | 0 | 21.59 | 20.73 | |
| | | 1 | 0 | 22.45 | 21.14 | |
| | | 1 | 37 | 22.72 | 21.67 | |
| | | 1 | 74 | 22.79 | 21.73 | |
| | | 37 | 0 | 21.35 | 20.33 | |
| | | 37 | 18 | 21.45 | 20.39 | |
| | | 37 | 38 | 21.62 | 20.68 | |
| 20 | | 1860.0 | 75 | 0 | 21.60 | 20.38 |
| | | | 1 | 0 | 23.17 | 20.99 |
| | | | 1 | 49 | 22.58 | 21.13 |
| | 1 | | 99 | 22.62 | 20.66 | |
| | 50 | | 0 | 21.56 | 20.55 | |
| | 50 | | 25 | 21.71 | 20.58 | |
| | 50 | | 50 | 21.64 | 20.53 | |
| | 1880.0 | 100 | 0 | 21.58 | 20.59 | |
| | | 1 | 0 | 23.16 | 21.53 | |
| | | 1 | 49 | 22.58 | 21.60 | |
| | | 1 | 99 | 22.56 | 20.94 | |
| | | 50 | 0 | 21.95 | 20.78 | |

| | | | | | |
|--|--------|-----|----|-------|-------|
| | | 50 | 25 | 21.69 | 20.64 |
| | | 50 | 50 | 21.68 | 20.62 |
| | | 100 | 0 | 21.64 | 20.56 |
| | 1900.0 | 1 | 0 | 22.97 | 21.00 |
| | | 1 | 49 | 22.44 | 21.54 |
| | | 1 | 99 | 22.61 | 21.42 |
| | | 50 | 0 | 21.46 | 20.41 |
| | | 50 | 25 | 21.60 | 20.56 |
| | | 50 | 50 | 21.70 | 20.50 |
| | | 100 | 0 | 21.56 | 20.63 |

LTE Band4

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | |
|----------|-----------------|------------------|--------|---------------------|-------|
| | | Size | Offset | QPSK | 16QAM |
| 1.4 | 1710.7 | 1 | 0 | 22.11 | 21.20 |
| | | 1 | 3 | 22.35 | 21.42 |
| | | 1 | 5 | 22.63 | 21.25 |
| | | 3 | 0 | 22.51 | 21.39 |
| | | 3 | 2 | 22.26 | 21.15 |
| | | 3 | 3 | 22.16 | 21.10 |
| | | 6 | 0 | 21.23 | 20.10 |
| | 1732.5 | 1 | 0 | 23.07 | 22.52 |
| | | 1 | 3 | 22.99 | 22.56 |
| | | 1 | 5 | 22.85 | 22.29 |
| | | 3 | 0 | 23.19 | 22.33 |
| | | 3 | 2 | 23.15 | 22.32 |
| | | 3 | 3 | 23.07 | 22.26 |
| | | 6 | 0 | 22.11 | 20.79 |
| | 1754.3 | 1 | 0 | 23.67 | 22.47 |
| | | 1 | 3 | 23.83 | 22.94 |
| | | 1 | 5 | 23.92 | 22.81 |
| | | 3 | 0 | 23.69 | 22.66 |
| | | 3 | 2 | 23.87 | 22.97 |
| | | 3 | 3 | 23.96 | 22.80 |
| | | 6 | 0 | 22.81 | 22.19 |
| 3 | 1711.5 | 1 | 0 | 22.46 | 21.49 |
| | | 1 | 7 | 22.37 | 21.66 |
| | | 1 | 14 | 22.64 | 22.20 |
| | | 8 | 0 | 21.22 | 20.35 |
| | | 8 | 4 | 21.29 | 20.40 |
| | | 8 | 7 | 21.30 | 20.48 |
| | | 15 | 0 | 21.30 | 20.27 |
| | 1732.5 | 1 | 0 | 23.30 | 22.59 |
| | | 1 | 7 | 23.10 | 22.15 |
| | | 1 | 14 | 23.19 | 22.11 |
| | | 8 | 0 | 22.20 | 21.29 |
| | | 8 | 4 | 22.02 | 21.16 |
| | | 8 | 7 | 21.88 | 20.97 |
| | | 15 | 0 | 21.96 | 20.95 |
| | 1753.5 | 1 | 0 | 23.11 | 21.94 |
| | | 1 | 7 | 23.66 | 22.67 |
| | | 1 | 14 | 23.81 | 22.83 |
| | | 8 | 0 | 22.41 | 21.29 |
| | | 8 | 4 | 22.54 | 21.64 |
| | | 8 | 7 | 22.66 | 21.75 |
| | | 15 | 0 | 22.49 | 21.52 |
| 5 | 1712.0 | 1 | 0 | 22.28 | 21.09 |
| | | 1 | 12 | 22.58 | 21.20 |
| | | 1 | 24 | 22.52 | 21.35 |
| | | 12 | 0 | 21.41 | 20.46 |
| | | 12 | 6 | 21.31 | 20.28 |

| | | | | | | |
|--------|--------|--------|-------|-------|-------|-------|
| | | 12 | 13 | 21.38 | 20.43 | |
| | | 25 | 0 | 21.18 | 20.54 | |
| | 1732.5 | 1 | 0 | 23.53 | 22.36 | |
| | | 1 | 12 | 23.21 | 21.90 | |
| | | 1 | 24 | 22.72 | 21.38 | |
| | | 12 | 0 | 22.30 | 21.07 | |
| | | 12 | 6 | 22.01 | 21.05 | |
| | | 12 | 13 | 21.81 | 20.78 | |
| | | 25 | 0 | 21.90 | 20.87 | |
| | | 1752.5 | 1 | 0 | 22.66 | 21.47 |
| | 1 | | 12 | 23.51 | 21.70 | |
| | 1 | | 24 | 23.94 | 22.76 | |
| | 12 | | 0 | 21.97 | 20.75 | |
| | 12 | | 6 | 22.33 | 21.33 | |
| | 12 | | 13 | 22.95 | 21.58 | |
| | 25 | | 0 | 22.59 | 21.24 | |
| 10 | 1715.0 | 1 | 0 | 22.39 | 21.64 | |
| | | 1 | 24 | 22.51 | 21.93 | |
| | | 1 | 49 | 23.10 | 23.00 | |
| | | 25 | 0 | 21.56 | 20.56 | |
| | | 25 | 12 | 21.50 | 20.50 | |
| | | 25 | 25 | 21.72 | 20.75 | |
| | | 50 | 0 | 21.60 | 20.72 | |
| | 1732.5 | 1 | 0 | 23.50 | 22.93 | |
| | | 1 | 24 | 22.80 | 22.47 | |
| | | 1 | 49 | 21.99 | 22.30 | |
| | | 25 | 0 | 22.41 | 21.48 | |
| | | 25 | 12 | 22.03 | 21.03 | |
| | | 25 | 25 | 21.63 | 20.66 | |
| | | 50 | 0 | 22.05 | 20.91 | |
| | 1750.0 | 1 | 0 | 22.13 | 20.90 | |
| | | 1 | 24 | 22.69 | 21.76 | |
| | | 1 | 49 | 24.00 | 23.00 | |
| | | 25 | 0 | 21.39 | 20.39 | |
| | | 25 | 12 | 21.85 | 20.87 | |
| | | 25 | 25 | 22.49 | 21.56 | |
| | | 50 | 0 | 21.90 | 20.93 | |
| | 15 | 1717.5 | 1 | 0 | 22.52 | 22.58 |
| | | | 1 | 37 | 22.90 | 22.31 |
| | | | 1 | 74 | 23.54 | 22.82 |
| 37 | | | 0 | 21.57 | 20.58 | |
| 37 | | | 18 | 21.79 | 20.82 | |
| 37 | | | 38 | 22.20 | 21.25 | |
| 75 | | | 0 | 21.85 | 20.97 | |
| 1732.5 | | 1 | 0 | 23.65 | 22.88 | |
| | | 1 | 37 | 23.12 | 22.44 | |
| | | 1 | 74 | 21.51 | 21.67 | |
| | | 37 | 0 | 22.55 | 21.47 | |
| | | 37 | 18 | 22.09 | 20.90 | |
| | | 37 | 38 | 21.45 | 20.42 | |
| | | 75 | 0 | 21.97 | 20.91 | |
| 1747.5 | | 1 | 0 | 21.93 | 20.25 | |
| | | 1 | 37 | 23.25 | 21.30 | |
| | 1 | 74 | 24.00 | 22.93 | | |
| | 37 | 0 | 20.91 | 19.89 | | |
| | 37 | 18 | 21.44 | 20.20 | | |
| | 37 | 38 | 22.07 | 20.98 | | |
| | 75 | 0 | 21.60 | 20.63 | | |
| 20 | 1720.0 | 1 | 0 | 22.07 | 20.90 | |
| | | 1 | 49 | 23.12 | 21.90 | |
| | | 1 | 99 | 23.68 | 21.88 | |

| | | | | | |
|--|--------|-----|----|-------|-------|
| | | 50 | 0 | 21.79 | 20.78 |
| | | 50 | 25 | 22.27 | 21.22 |
| | | 50 | 50 | 22.81 | 21.74 |
| | | 100 | 0 | 22.33 | 20.88 |
| | 1732.5 | 1 | 0 | 23.52 | 22.72 |
| | | 1 | 49 | 22.97 | 21.87 |
| | | 1 | 99 | 22.19 | 20.92 |
| | | 50 | 0 | 22.59 | 21.54 |
| | | 50 | 25 | 22.09 | 21.03 |
| | | 50 | 50 | 21.44 | 20.14 |
| | 1745.0 | 100 | 0 | 21.97 | 20.86 |
| | | 1 | 0 | 22.50 | 20.97 |
| | | 1 | 49 | 22.45 | 21.04 |
| | | 1 | 99 | 23.75 | 22.64 |
| | | 50 | 0 | 21.18 | 19.78 |
| | | 50 | 25 | 21.09 | 20.11 |
| | | 50 | 50 | 22.36 | 20.94 |
| | | 100 | 0 | 21.33 | 20.36 |

LTE Band5

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | | |
|-------------|--------------------|------------------|--------|---------------------|-------|-------|
| | | Size | Offset | QPSK | 16QAM | |
| 1.4 | 824.7 | 1 | 0 | 22.26 | 21.40 | |
| | | 1 | 3 | 22.15 | 21.57 | |
| | | 1 | 5 | 21.99 | 21.43 | |
| | | 3 | 0 | 22.07 | 21.06 | |
| | | 3 | 2 | 22.15 | 21.19 | |
| | | 3 | 3 | 22.14 | 21.19 | |
| | | 6 | 0 | 21.12 | 19.81 | |
| | 836.5 | 1 | 0 | 23.02 | 22.49 | |
| | | 1 | 3 | 23.16 | 22.58 | |
| | | 1 | 5 | 23.12 | 22.40 | |
| | | 3 | 0 | 23.14 | 22.32 | |
| | | 3 | 2 | 23.31 | 22.43 | |
| | | 3 | 3 | 23.12 | 22.38 | |
| | | 6 | 0 | 22.08 | 21.21 | |
| | 848.3 | 1 | 0 | 22.51 | 21.55 | |
| | | 1 | 3 | 22.62 | 21.42 | |
| | | 1 | 5 | 22.57 | 21.49 | |
| | | 3 | 0 | 22.46 | 21.68 | |
| | | 3 | 2 | 22.31 | 21.50 | |
| | | 3 | 3 | 22.22 | 21.50 | |
| | | 6 | 0 | 21.33 | 20.44 | |
| | 3 | 825.5 | 1 | 0 | 21.81 | 21.07 |
| | | | 1 | 7 | 21.84 | 21.57 |
| | | | 1 | 14 | 22.26 | 21.77 |
| 8 | | | 0 | 21.05 | 20.10 | |
| 8 | | | 4 | 20.98 | 19.83 | |
| 8 | | | 7 | 21.19 | 19.79 | |
| 15 | | | 0 | 21.14 | 20.29 | |
| 836.5 | | 1 | 0 | 22.85 | 22.14 | |
| | | 1 | 7 | 23.15 | 22.60 | |
| | | 1 | 14 | 23.21 | 22.62 | |
| | | 8 | 0 | 22.01 | 20.61 | |
| | | 8 | 4 | 22.10 | 20.73 | |
| | | 8 | 7 | 22.09 | 21.20 | |
| | | 15 | 0 | 22.00 | 21.10 | |
| 847.5 | | 1 | 0 | 22.53 | 22.36 | |
| | | 1 | 7 | 22.29 | 21.83 | |
| | | 1 | 14 | 22.17 | 21.47 | |
| | 8 | 0 | 21.55 | 20.88 | | |

| | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|
| 5 | 826.5 | 8 | 4 | 21.40 | 20.76 | |
| | | 8 | 7 | 21.26 | 20.34 | |
| | | 15 | 0 | 21.48 | 20.53 | |
| | | 1 | 0 | 21.75 | 20.22 | |
| | | 1 | 12 | 22.37 | 20.30 | |
| | | 1 | 24 | 22.23 | 21.05 | |
| | | 12 | 0 | 20.98 | 19.73 | |
| | | 12 | 6 | 21.02 | 19.97 | |
| | | 12 | 13 | 21.31 | 20.15 | |
| | 25 | 0 | 21.07 | 20.23 | | |
| | 836.5 | 1 | 0 | 22.87 | 21.88 | |
| | | 1 | 12 | 23.28 | 21.75 | |
| | | 1 | 24 | 23.32 | 22.03 | |
| | | 12 | 0 | 21.87 | 20.79 | |
| | | 12 | 6 | 22.05 | 21.21 | |
| | | 12 | 13 | 22.06 | 20.98 | |
| | | 25 | 0 | 21.89 | 21.05 | |
| | | 846.5 | 1 | 0 | 22.78 | 21.20 |
| | | | 1 | 12 | 22.75 | 20.97 |
| | 1 | | 24 | 22.02 | 20.85 | |
| | 12 | | 0 | 21.73 | 20.83 | |
| | 12 | | 6 | 21.57 | 20.51 | |
| | 12 | | 13 | 21.62 | 20.67 | |
| | 25 | | 0 | 21.70 | 20.77 | |
| | 10 | 829.0 | 1 | 0 | 23.57 | 21.10 |
| | | | 1 | 24 | 22.67 | 22.10 |
| | | | 1 | 49 | 22.66 | 22.07 |
| 25 | | | 0 | 23.16 | 20.23 | |
| 25 | | | 12 | 21.37 | 20.31 | |
| 25 | | | 25 | 21.76 | 20.56 | |
| 50 | | | 0 | 21.37 | 20.37 | |
| 836.5 | | | 1 | 0 | 22.70 | 22.07 |
| | | | 1 | 24 | 23.57 | 22.60 |
| | | 1 | 49 | 22.98 | 22.84 | |
| | | 25 | 0 | 21.90 | 20.91 | |
| | | 25 | 12 | 22.00 | 21.07 | |
| | | 25 | 25 | 22.24 | 21.36 | |
| | | 50 | 0 | 22.20 | 20.80 | |
| | | 844.0 | 1 | 0 | 23.09 | 21.99 |
| | | | 1 | 24 | 23.57 | 21.68 |
| 1 | | | 49 | 22.12 | 20.74 | |
| 25 | | | 0 | 22.36 | 21.34 | |
| 25 | | | 12 | 22.02 | 21.07 | |
| 25 | | | 25 | 21.77 | 20.90 | |
| 50 | | | 0 | 21.90 | 21.00 | |

LTE Band 7

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | |
|----------|-----------------|------------------|--------|---------------------|-------|
| | | Size | Offset | QPSK | 16QAM |
| 5 | 2502.5 | 1 | 0 | 21.49 | 21.04 |
| | | 1 | 12 | 21.32 | 20.83 |
| | | 1 | 24 | 21.33 | 20.88 |
| | | 12 | 0 | 20.55 | 19.83 |
| | | 12 | 6 | 20.51 | 19.82 |
| | | 12 | 13 | 20.39 | 19.72 |
| | | 25 | 0 | 20.66 | 19.92 |
| | 2535.0 | 1 | 0 | 22.86 | 21.43 |
| | | 1 | 12 | 22.88 | 21.43 |
| | | 1 | 24 | 22.75 | 21.44 |
| | | 12 | 0 | 21.84 | 20.80 |
| | | 12 | 6 | 21.70 | 20.79 |

| | | | | | | |
|--------|--------|--------|----|-------|-------|-------|
| | | 12 | 13 | 21.67 | 20.68 | |
| | | 25 | 0 | 21.72 | 21.03 | |
| | 2567.5 | 1 | 0 | 22.46 | 21.25 | |
| | | 1 | 12 | 22.52 | 21.43 | |
| | | 1 | 24 | 22.65 | 21.45 | |
| | | 12 | 0 | 21.47 | 20.56 | |
| | | 12 | 6 | 21.57 | 20.50 | |
| | | 12 | 13 | 21.61 | 20.56 | |
| | | 25 | 0 | 21.57 | 20.76 | |
| 10 | 2505.0 | 1 | 0 | 21.63 | 21.70 | |
| | | 1 | 24 | 21.51 | 21.55 | |
| | | 1 | 49 | 21.62 | 21.78 | |
| | | 25 | 0 | 20.73 | 19.63 | |
| | | 25 | 12 | 20.83 | 19.82 | |
| | | 25 | 25 | 20.83 | 19.79 | |
| | | 50 | 0 | 20.70 | 19.91 | |
| | 2535.0 | 1 | 0 | 22.92 | 23.15 | |
| | | 1 | 24 | 22.89 | 23.06 | |
| | | 1 | 49 | 22.69 | 22.91 | |
| | | 25 | 0 | 21.92 | 21.15 | |
| | | 25 | 12 | 21.79 | 21.04 | |
| | | 25 | 25 | 21.75 | 20.95 | |
| | | 50 | 0 | 21.76 | 20.98 | |
| | 2565.0 | 1 | 0 | 22.31 | 21.63 | |
| | | 1 | 24 | 22.41 | 21.70 | |
| | | 1 | 49 | 22.53 | 21.80 | |
| | | 25 | 0 | 21.46 | 20.57 | |
| | | 25 | 12 | 21.39 | 20.64 | |
| | | 25 | 25 | 21.47 | 20.57 | |
| | | 50 | 0 | 21.48 | 20.60 | |
| | 15 | 2507.5 | 1 | 0 | 23.50 | 22.61 |
| | | | 1 | 37 | 22.27 | 21.25 |
| | | | 1 | 74 | 21.02 | 20.10 |
| 37 | | | 0 | 21.92 | 20.87 | |
| 37 | | | 18 | 21.33 | 20.25 | |
| 37 | | | 38 | 20.64 | 19.53 | |
| 75 | | | 0 | 21.31 | 20.23 | |
| 2535.0 | | 1 | 0 | 23.53 | 22.72 | |
| | | 1 | 37 | 22.75 | 22.72 | |
| | | 1 | 74 | 22.60 | 20.94 | |
| | | 37 | 0 | 23.04 | 21.93 | |
| | | 37 | 18 | 22.66 | 21.58 | |
| | | 37 | 38 | 21.89 | 20.87 | |
| | | 75 | 0 | 22.43 | 21.37 | |
| 2562.5 | | 1 | 0 | 21.02 | 20.11 | |
| | | 1 | 37 | 21.76 | 21.67 | |
| | | 1 | 74 | 22.03 | 21.30 | |
| | | 37 | 0 | 21.10 | 19.97 | |
| | | 37 | 18 | 21.66 | 20.53 | |
| | | 37 | 38 | 21.90 | 20.68 | |
| | | 75 | 0 | 21.51 | 20.36 | |
| 20 | 2510.0 | 1 | 0 | 21.75 | 20.57 | |
| | | 1 | 49 | 21.97 | 20.78 | |
| | | 1 | 99 | 22.69 | 21.42 | |
| | | 50 | 0 | 20.74 | 19.96 | |
| | | 50 | 25 | 21.08 | 20.17 | |
| | | 50 | 50 | 21.31 | 20.44 | |
| | | 100 | 0 | 21.17 | 20.20 | |
| | 2535.0 | 1 | 0 | 23.01 | 22.02 | |
| | | 1 | 49 | 23.08 | 21.91 | |
| | | 1 | 99 | 22.77 | 21.67 | |

| | | | | | |
|--|------|-----|----|-------|-------|
| | | 50 | 0 | 21.90 | 21.05 |
| | | 50 | 25 | 21.79 | 20.98 |
| | | 50 | 50 | 21.72 | 20.73 |
| | | 100 | 0 | 21.73 | 20.89 |
| | 2560 | 1 | 0 | 22.31 | 21.89 |
| | | 1 | 49 | 22.25 | 21.82 |
| | | 1 | 99 | 22.43 | 22.00 |
| | | 50 | 0 | 21.41 | 20.63 |
| | | 50 | 25 | 21.45 | 20.49 |
| | | 50 | 50 | 21.42 | 20.63 |
| | | 100 | 0 | 21.40 | 20.45 |

LTE Band 12

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | | |
|----------|-----------------|------------------|--------|---------------------|-------|-------|
| | | Size | Offset | QPSK | 16QAM | |
| 1.4 | 699.7 | 1 | 0 | 22.94 | 22.50 | |
| | | 1 | 3 | 23.07 | 22.66 | |
| | | 1 | 5 | 23.14 | 22.70 | |
| | | 3 | 0 | 23.20 | 22.14 | |
| | | 3 | 2 | 23.23 | 22.22 | |
| | | 3 | 3 | 23.30 | 22.30 | |
| | | 6 | 0 | 22.32 | 21.21 | |
| | 707.5 | 1 | 0 | 24.54 | 23.38 | |
| | | 1 | 3 | 24.55 | 23.35 | |
| | | 1 | 5 | 24.41 | 23.30 | |
| | | 3 | 0 | 24.57 | 23.59 | |
| | | 3 | 2 | 24.67 | 23.61 | |
| | | 3 | 3 | 24.55 | 23.45 | |
| | | 6 | 0 | 23.71 | 23.03 | |
| | 715.3 | 1 | 0 | 24.05 | 23.14 | |
| | | 1 | 3 | 24.19 | 23.28 | |
| | | 1 | 5 | 24.10 | 22.82 | |
| | | 3 | 0 | 23.89 | 23.15 | |
| | | 3 | 2 | 23.95 | 23.17 | |
| | | 3 | 3 | 23.88 | 23.11 | |
| | | 6 | 0 | 22.92 | 22.03 | |
| | 3 | 700.5 | 1 | 0 | 23.18 | 22.63 |
| | | | 1 | 7 | 23.82 | 23.26 |
| | | | 1 | 14 | 23.63 | 23.50 |
| 8 | | | 0 | 22.49 | 21.44 | |
| 8 | | | 4 | 22.69 | 21.47 | |
| 8 | | | 7 | 22.65 | 21.46 | |
| 15 | | | 0 | 22.58 | 21.50 | |
| 707.5 | | 1 | 0 | 24.39 | 24.00 | |
| | | 1 | 7 | 24.70 | 24.00 | |
| | | 1 | 14 | 24.64 | 24.00 | |
| | | 8 | 0 | 23.79 | 22.95 | |
| | | 8 | 4 | 23.82 | 23.03 | |
| | | 8 | 7 | 23.71 | 22.95 | |
| | | 15 | 0 | 23.81 | 22.79 | |
| 714.3 | | 1 | 0 | 24.12 | 23.24 | |
| | | 1 | 7 | 24.24 | 23.48 | |
| | | 1 | 14 | 24.04 | 22.83 | |
| | | 8 | 0 | 23.31 | 22.25 | |
| | | 8 | 4 | 23.22 | 22.21 | |
| | | 8 | 7 | 23.11 | 21.98 | |
| | | 15 | 0 | 23.17 | 22.18 | |
| 5 | 701.5 | 1 | 0 | 23.16 | 22.11 | |
| | | 1 | 12 | 24.18 | 23.20 | |
| | | 1 | 24 | 24.44 | 23.08 | |
| | | 12 | 0 | 22.45 | 21.45 | |

| | | | | | |
|-------|-------|-----|-------|-------|-------|
| | | 12 | 6 | 22.87 | 21.81 |
| | | 12 | 13 | 23.11 | 22.23 |
| | | 25 | 0 | 22.89 | 21.99 |
| | 707.5 | 1 | 0 | 24.54 | 23.51 |
| | | 1 | 12 | 24.96 | 23.69 |
| | | 1 | 24 | 24.45 | 23.42 |
| | | 12 | 0 | 23.66 | 22.70 |
| | | 12 | 6 | 23.82 | 22.79 |
| | | 12 | 13 | 23.68 | 22.85 |
| | | 25 | 0 | 23.66 | 22.72 |
| | 713.5 | 1 | 0 | 24.33 | 23.04 |
| | | 1 | 12 | 24.58 | 23.42 |
| | | 1 | 24 | 23.94 | 22.68 |
| | | 12 | 0 | 23.49 | 22.23 |
| | | 12 | 6 | 23.36 | 22.20 |
| | | 12 | 13 | 23.16 | 22.01 |
| | | 25 | 0 | 23.21 | 22.34 |
| | 10 | 704 | 1 | 0 | 25.13 |
| 1 | | | 24 | 24.53 | 24.00 |
| 1 | | | 49 | 24.64 | 23.90 |
| 25 | | | 0 | 24.26 | 21.84 |
| 25 | | | 12 | 23.50 | 22.54 |
| 25 | | | 25 | 23.70 | 22.76 |
| 50 | | | 0 | 23.37 | 22.37 |
| 707.5 | | 1 | 0 | 24.28 | 23.58 |
| | | 1 | 24 | 24.83 | 24.48 |
| | | 1 | 49 | 24.25 | 23.84 |
| | | 25 | 0 | 23.65 | 22.63 |
| | | 25 | 12 | 23.76 | 22.69 |
| | | 25 | 25 | 23.67 | 22.52 |
| | | 50 | 0 | 23.62 | 22.73 |
| 711 | | 1 | 0 | 24.55 | 23.62 |
| | | 1 | 24 | 24.70 | 23.51 |
| | | 1 | 49 | 23.94 | 22.82 |
| | | 25 | 0 | 23.85 | 22.93 |
| | 25 | 12 | 23.65 | 22.58 | |
| | 25 | 25 | 23.33 | 22.33 | |
| | 50 | 0 | 23.55 | 22.58 | |

LTE Band13

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | |
|----------|-----------------|------------------|--------|---------------------|-------|
| | | Size | Offset | QPSK | 16QAM |
| 5 | 779.5 | 1 | 0 | 22.95 | 21.79 |
| | | 1 | 12 | 23.49 | 21.82 |
| | | 1 | 24 | 23.38 | 21.97 |
| | | 12 | 0 | 22.18 | 20.83 |
| | | 12 | 6 | 22.11 | 21.16 |
| | | 12 | 13 | 22.34 | 21.20 |
| | | 25 | 0 | 22.06 | 21.40 |
| | 782 | 1 | 0 | 23.40 | 22.40 |
| | | 1 | 12 | 23.54 | 21.74 |
| | | 1 | 24 | 23.06 | 21.99 |
| | | 12 | 0 | 22.18 | 21.22 |
| | | 12 | 6 | 22.27 | 21.14 |
| | | 12 | 13 | 21.98 | 21.15 |
| | | 25 | 0 | 22.11 | 21.16 |
| | 784.5 | 1 | 0 | 22.81 | 21.26 |
| | | 1 | 12 | 22.41 | 21.45 |
| | | 1 | 24 | 22.28 | 20.53 |
| | | 12 | 0 | 22.03 | 20.61 |
| 12 | | 6 | 21.64 | 20.37 | |

| | | | | | | |
|----|-----|----|----|-------|-------|-------|
| 10 | 782 | 12 | 13 | 21.53 | 20.39 | |
| | | 25 | 0 | 21.76 | 20.74 | |
| | | 1 | 0 | 24.07 | 22.49 | |
| | | 1 | 24 | 23.33 | 22.97 | |
| | | 1 | 49 | 22.76 | 22.44 | |
| | | 25 | 0 | 22.37 | 21.28 | |
| | | 25 | 12 | 22.28 | 21.23 | |
| | | 25 | 25 | 22.23 | 21.29 | |
| | 782 | 50 | 0 | 22.19 | 21.24 | |
| | 782 | 1 | 0 | 23.35 | 22.67 | |
| | | 1 | 24 | 22.94 | 22.73 | |
| | | 1 | 49 | 22.37 | 21.93 | |
| | | 25 | 0 | 23.16 | 21.35 | |
| | | 25 | 12 | 22.17 | 21.17 | |
| | | 25 | 25 | 22.08 | 21.22 | |
| | 782 | 50 | 0 | 22.18 | 21.17 | |
| | | 1 | 0 | 23.41 | 21.94 | |
| | | 1 | 24 | 23.19 | 21.58 | |
| | | 1 | 49 | 22.32 | 21.03 | |
| | | 25 | 0 | 22.35 | 21.40 | |
| | | 25 | 12 | 22.11 | 21.08 | |
| | | | 25 | 25 | 21.92 | 20.98 |
| | | | 50 | 0 | 22.04 | 21.10 |

LTE Band25

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | | |
|----------|-----------------|------------------|--------|---------------------|-------|-------|
| | | Size | Offset | QPSK | 16QAM | |
| 1.4 | 1850.7 | 1 | 0 | 23.69 | 22.88 | |
| | | 1 | 3 | 23.14 | 22.75 | |
| | | 1 | 5 | 23.95 | 22.87 | |
| | | 3 | 0 | 23.06 | 22.85 | |
| | | 3 | 2 | 23.75 | 22.52 | |
| | | 3 | 3 | 23.10 | 22.77 | |
| | 1882.5 | 6 | 0 | 23.91 | 22.07 | |
| | | 1 | 0 | 23.01 | 22.33 | |
| | | 1 | 3 | 23.57 | 22.72 | |
| | | 1 | 5 | 23.66 | 22.70 | |
| | | 3 | 0 | 23.44 | 22.38 | |
| | | 3 | 2 | 23.66 | 23.00 | |
| | 1914.3 | 3 | 3 | 23.85 | 22.78 | |
| | | 6 | 0 | 23.87 | 22.29 | |
| | | 1 | 0 | 23.74 | 22.21 | |
| | | 1 | 3 | 23.43 | 22.47 | |
| | | 1 | 5 | 23.01 | 22.25 | |
| | | 3 | 0 | 23.89 | 22.76 | |
| | 3 | 1851.5 | 3 | 2 | 23.90 | 22.89 |
| | | | 3 | 3 | 23.44 | 22.63 |
| | | | 6 | 0 | 23.43 | 22.65 |
| | | | 1 | 0 | 23.77 | 22.18 |
| | | | 1 | 7 | 23.06 | 22.24 |
| | | | 1 | 14 | 23.52 | 22.06 |
| 1882.5 | | 8 | 0 | 23.31 | 22.30 | |
| | | 8 | 4 | 23.46 | 22.77 | |
| | | 8 | 7 | 23.81 | 22.50 | |
| | | 15 | 0 | 23.30 | 22.79 | |
| | | 1 | 0 | 23.23 | 22.81 | |
| | | 1 | 7 | 23.08 | 22.06 | |
| | | 1 | 14 | 23.96 | 22.65 | |
| | | 8 | 0 | 23.63 | 22.26 | |
| | | 8 | 4 | 23.79 | 22.96 | |
| | | 8 | 7 | 23.53 | 22.75 | |

| | | | | | | |
|--------|--------|--------|----|-------|-------|-------|
| | 1913.5 | 15 | 0 | 23.56 | 22.71 | |
| | | 1 | 0 | 23.83 | 22.66 | |
| | | 1 | 7 | 23.30 | 22.49 | |
| | | 1 | 14 | 23.09 | 22.38 | |
| | | 8 | 0 | 23.32 | 22.37 | |
| | | 8 | 4 | 23.08 | 22.11 | |
| | | 8 | 7 | 23.29 | 22.02 | |
| | | 15 | 0 | 23.53 | 22.97 | |
| 5 | 1852.5 | 1 | 0 | 23.31 | 22.02 | |
| | | 1 | 12 | 23.28 | 22.82 | |
| | | 1 | 24 | 23.96 | 22.24 | |
| | | 12 | 0 | 23.84 | 22.47 | |
| | | 12 | 6 | 23.41 | 22.25 | |
| | | 12 | 13 | 23.97 | 22.13 | |
| | | 25 | 0 | 23.68 | 22.93 | |
| | 1882.5 | 1 | 0 | 23.84 | 22.14 | |
| | | 1 | 12 | 23.93 | 22.05 | |
| | | 1 | 24 | 23.80 | 22.53 | |
| | | 12 | 0 | 23.54 | 22.97 | |
| | | 12 | 6 | 23.22 | 22.85 | |
| | | 12 | 13 | 23.66 | 22.71 | |
| | | 25 | 0 | 23.58 | 22.67 | |
| | 1912.5 | 1 | 0 | 23.10 | 22.04 | |
| | | 1 | 12 | 23.48 | 22.30 | |
| | | 1 | 24 | 23.37 | 22.13 | |
| | | 12 | 0 | 23.74 | 22.57 | |
| | | 12 | 6 | 23.94 | 22.78 | |
| | | 12 | 13 | 23.08 | 22.72 | |
| | | 25 | 0 | 23.65 | 22.75 | |
| | 10 | 1855.0 | 1 | 0 | 23.17 | 22.59 |
| | | | 1 | 24 | 23.39 | 22.96 |
| | | | 1 | 49 | 23.66 | 22.19 |
| 25 | | | 0 | 23.63 | 22.14 | |
| 25 | | | 12 | 23.25 | 22.62 | |
| 25 | | | 25 | 23.89 | 22.92 | |
| 50 | | | 0 | 23.98 | 22.33 | |
| 1882.5 | | 1 | 0 | 23.01 | 22.22 | |
| | | 1 | 24 | 23.46 | 22.87 | |
| | | 1 | 49 | 23.97 | 22.03 | |
| | | 25 | 0 | 23.30 | 22.21 | |
| | | 25 | 12 | 23.10 | 22.89 | |
| | | 25 | 25 | 23.81 | 22.18 | |
| | | 50 | 0 | 23.47 | 22.05 | |
| 1910.0 | | 1 | 0 | 23.14 | 22.60 | |
| | | 1 | 24 | 23.23 | 22.09 | |
| | | 1 | 49 | 23.11 | 22.66 | |
| | | 25 | 0 | 23.19 | 22.36 | |
| | | 25 | 12 | 23.47 | 22.73 | |
| | | 25 | 25 | 23.73 | 22.23 | |
| | | 50 | 0 | 23.34 | 22.89 | |
| 15 | 1857.5 | 1 | 0 | 23.23 | 22.33 | |
| | | 1 | 37 | 23.97 | 22.36 | |
| | | 1 | 74 | 23.58 | 22.24 | |
| | | 37 | 0 | 23.81 | 22.38 | |
| | | 37 | 18 | 23.59 | 22.47 | |
| | | 37 | 38 | 23.47 | 22.10 | |
| | | 75 | 0 | 23.51 | 22.64 | |
| | 1882.5 | 1 | 0 | 23.23 | 22.24 | |
| | | 1 | 37 | 23.43 | 22.23 | |
| | | 1 | 74 | 23.47 | 22.10 | |
| | | 37 | 0 | 23.47 | 22.52 | |

| | | | | | |
|-----|--------|-----|-------|-------|-------|
| | | 37 | 18 | 23.33 | 22.87 |
| | | 37 | 38 | 23.24 | 22.93 |
| | | 75 | 0 | 23.91 | 22.15 |
| | 1907.5 | 1 | 0 | 23.66 | 22.65 |
| | | 1 | 37 | 23.68 | 22.03 |
| | | 1 | 74 | 23.15 | 22.25 |
| | | 37 | 0 | 23.63 | 22.21 |
| | | 37 | 18 | 23.14 | 22.05 |
| | | 37 | 38 | 23.61 | 22.68 |
| | | 75 | 0 | 23.15 | 22.96 |
| 20 | 1860.0 | 1 | 0 | 23.53 | 22.38 |
| | | 1 | 49 | 23.29 | 22.35 |
| | | 1 | 99 | 24.07 | 22.08 |
| | | 50 | 0 | 23.70 | 22.86 |
| | | 50 | 25 | 23.97 | 22.61 |
| | | 50 | 50 | 23.47 | 22.51 |
| | | 100 | 0 | 23.99 | 22.70 |
| | 1882.5 | 1 | 0 | 23.08 | 22.23 |
| | | 1 | 49 | 23.35 | 22.97 |
| | | 1 | 99 | 23.49 | 22.92 |
| | | 50 | 0 | 23.46 | 22.43 |
| | | 50 | 25 | 23.43 | 22.46 |
| | | 50 | 50 | 24.16 | 22.13 |
| | | 100 | 0 | 23.93 | 22.66 |
| | 1905.0 | 1 | 0 | 23.76 | 22.75 |
| | | 1 | 49 | 23.41 | 22.03 |
| | | 1 | 99 | 23.04 | 22.76 |
| | | 50 | 0 | 23.44 | 22.14 |
| | | 50 | 25 | 23.27 | 22.05 |
| | | 50 | 50 | 23.50 | 22.12 |
| 100 | | 0 | 23.89 | 22.53 | |

LTE Band26

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | | |
|----------|-----------------|------------------|--------|---------------------|-------|-------|
| | | Size | Offset | QPSK | 16QAM | |
| 1.4 | 814.7 | 1 | 0 | 23.19 | 22.18 | |
| | | 1 | 3 | 23.01 | 22.39 | |
| | | 1 | 5 | 23.50 | 22.83 | |
| | | 3 | 0 | 23.05 | 22.54 | |
| | | 3 | 2 | 23.04 | 22.51 | |
| | | 3 | 3 | 23.05 | 22.02 | |
| | | 6 | 0 | 23.88 | 22.27 | |
| | 831.5 | 1 | 0 | 23.43 | 22.18 | |
| | | 1 | 3 | 23.42 | 22.13 | |
| | | 1 | 5 | 23.21 | 22.86 | |
| | | 3 | 0 | 23.58 | 22.85 | |
| | | 3 | 2 | 23.95 | 22.31 | |
| | | 3 | 3 | 23.59 | 22.20 | |
| | | 6 | 0 | 23.66 | 22.13 | |
| | 848.3 | 1 | 0 | 23.65 | 22.56 | |
| | | 1 | 3 | 23.21 | 22.21 | |
| | | 1 | 5 | 23.11 | 22.11 | |
| | | 3 | 0 | 23.91 | 22.92 | |
| | | 3 | 2 | 23.91 | 22.01 | |
| | | 3 | 3 | 23.22 | 22.91 | |
| | | 6 | 0 | 23.65 | 22.11 | |
| | 3 | 815.5 | 1 | 0 | 23.99 | 22.51 |
| | | | 1 | 7 | 23.26 | 22.57 |
| | | | 1 | 14 | 23.54 | 22.61 |
| 8 | | | 0 | 23.48 | 22.06 | |
| 8 | | | 4 | 23.16 | 22.01 | |

| | | | | | |
|-------|-------|-------|-------|-------|-------|
| | | 8 | 7 | 23.32 | 22.74 |
| | | 15 | 0 | 23.53 | 22.90 |
| | 831.5 | 1 | 0 | 23.99 | 22.22 |
| | | 1 | 7 | 23.63 | 22.41 |
| | | 1 | 14 | 23.12 | 22.97 |
| | | 8 | 0 | 23.38 | 22.06 |
| | | 8 | 4 | 23.95 | 22.08 |
| | | 8 | 7 | 23.16 | 22.05 |
| | | 15 | 0 | 23.35 | 22.65 |
| | | 1 | 0 | 23.68 | 22.90 |
| | 847.5 | 1 | 7 | 23.74 | 22.22 |
| | | 1 | 14 | 23.75 | 22.39 |
| | | 8 | 0 | 23.57 | 22.75 |
| | | 8 | 4 | 23.24 | 22.79 |
| | | 8 | 7 | 23.34 | 22.19 |
| | | 15 | 0 | 23.38 | 22.38 |
| 5 | 816.5 | 1 | 0 | 23.20 | 22.36 |
| | | 1 | 12 | 23.89 | 22.56 |
| | | 1 | 24 | 23.09 | 22.68 |
| | | 12 | 0 | 23.57 | 22.79 |
| | | 12 | 6 | 23.16 | 22.77 |
| | | 12 | 13 | 23.50 | 22.71 |
| | | 25 | 0 | 23.69 | 22.28 |
| | | 1 | 0 | 23.64 | 22.65 |
| | 831.5 | 1 | 12 | 23.42 | 22.89 |
| | | 1 | 24 | 23.05 | 22.88 |
| | | 12 | 0 | 23.92 | 22.40 |
| | | 12 | 6 | 23.86 | 22.30 |
| | | 12 | 13 | 23.97 | 22.74 |
| | | 25 | 0 | 23.73 | 22.94 |
| | | 1 | 0 | 23.10 | 22.98 |
| | | 1 | 12 | 23.32 | 22.36 |
| | 846.5 | 1 | 24 | 23.48 | 22.02 |
| | | 12 | 0 | 23.12 | 22.34 |
| | | 12 | 6 | 23.69 | 22.90 |
| | | 12 | 13 | 23.97 | 22.82 |
| | | 25 | 0 | 23.74 | 22.62 |
| | | 1 | 0 | 23.80 | 22.45 |
| | | 1 | 24 | 23.22 | 22.50 |
| | | 1 | 49 | 23.43 | 22.97 |
| 10 | 819.0 | 25 | 0 | 23.55 | 22.25 |
| | | 25 | 12 | 23.65 | 22.73 |
| | | 25 | 25 | 23.16 | 22.20 |
| | | 50 | 0 | 23.50 | 22.56 |
| | | 1 | 0 | 23.85 | 22.14 |
| | | 1 | 24 | 23.38 | 22.92 |
| | | 1 | 49 | 23.20 | 22.44 |
| | | 25 | 0 | 23.82 | 22.25 |
| | 831.5 | 25 | 12 | 23.86 | 22.48 |
| | | 25 | 25 | 23.25 | 22.29 |
| | | 50 | 0 | 23.48 | 22.30 |
| | | 1 | 0 | 23.38 | 22.64 |
| | | 1 | 24 | 23.30 | 22.47 |
| | | 1 | 49 | 23.92 | 22.30 |
| | | 25 | 0 | 23.95 | 22.90 |
| | | 25 | 12 | 23.91 | 22.72 |
| 844.0 | 25 | 25 | 23.07 | 22.25 | |
| | 50 | 0 | 23.33 | 22.98 | |
| | 1 | 0 | 24.53 | 22.83 | |
| | 1 | 37 | 23.08 | 22.51 | |
| | 1 | 74 | 23.50 | 22.34 | |
| | 15 | 821.5 | | | |

| | | | | | | |
|--|-------|----|----|-------|-------|-------|
| | | 37 | 0 | 23.88 | 22.85 | |
| | | 37 | 18 | 23.40 | 22.81 | |
| | | 37 | 38 | 24.53 | 22.74 | |
| | | 75 | 0 | 23.26 | 22.34 | |
| | 831.5 | 1 | 0 | 23.34 | 22.70 | |
| | | 1 | 37 | 24.00 | 22.53 | |
| | | 1 | 74 | 23.61 | 22.98 | |
| | | 37 | 0 | 23.96 | 22.23 | |
| | | 37 | 18 | 23.24 | 22.94 | |
| | | 37 | 38 | 23.76 | 22.94 | |
| | 841.5 | 75 | 0 | 23.75 | 22.96 | |
| | | 1 | 0 | 23.71 | 22.21 | |
| | | 1 | 37 | 23.23 | 22.65 | |
| | | 1 | 74 | 23.94 | 22.80 | |
| | | 37 | 0 | 23.52 | 22.26 | |
| | | 37 | 18 | 23.40 | 22.66 | |
| | | | 37 | 38 | 23.91 | 22.05 |
| | | | 75 | 0 | 23.40 | 22.26 |

LTE Band30

| BW (MHz) | Frequency (MHz) | RB Configuration | | Average Power [dBm] | |
|----------|-----------------|------------------|--------|---------------------|-------|
| | | Size | Offset | QPSK | 16QAM |
| 5 | 2307.5 | 1 | 0 | 20.43 | 19.66 |
| | | 1 | 12 | 20.25 | 18.72 |
| | | 1 | 24 | 20.46 | 18.68 |
| | | 12 | 0 | 19.58 | 18.59 |
| | | 12 | 6 | 19.61 | 18.58 |
| | | 12 | 13 | 19.73 | 18.45 |
| | 2310.0 | 25 | 0 | 19.25 | 18.56 |
| | | 1 | 0 | 20.33 | 19.46 |
| | | 1 | 12 | 20.21 | 19.15 |
| | | 1 | 24 | 20.58 | 19.74 |
| | | 12 | 0 | 19.11 | 18.25 |
| | | 12 | 6 | 19.85 | 18.95 |
| | 2312.5 | 12 | 13 | 19.32 | 18.69 |
| | | 25 | 0 | 19.77 | 18.92 |
| | | 1 | 0 | 20.58 | 19.55 |
| | | 1 | 12 | 20.82 | 19.23 |
| | | 1 | 24 | 20.76 | 19.25 |
| | | 12 | 0 | 19.55 | 18.64 |
| 10 | 2307.5 | 12 | 6 | 19.72 | 18.70 |
| | | 12 | 13 | 19.83 | 18.86 |
| | | 25 | 0 | 19.65 | 18.79 |
| | | 1 | 0 | 20.38 | 19.59 |
| | | 1 | 24 | 20.62 | 19.82 |
| | | 1 | 49 | 20.57 | 19.56 |
| | 2310.0 | 25 | 0 | 19.59 | 18.62 |
| | | 25 | 12 | 19.78 | 18.43 |
| | | 25 | 25 | 19.62 | 18.29 |
| | | 50 | 0 | 19.69 | 18.52 |
| | | 1 | 0 | 20.44 | 19.58 |
| | | 1 | 24 | 20.12 | 19.58 |
| | 2312.5 | 1 | 49 | 20.45 | 19.47 |
| | | 25 | 0 | 19.46 | 18.24 |
| | | 25 | 12 | 19.35 | 18.11 |
| | | 25 | 25 | 19.72 | 18.75 |
| | | 50 | 0 | 19.22 | 18.01 |
| | | 1 | 0 | 20.31 | 19.68 |
| | 2312.5 | 1 | 24 | 20.66 | 19.77 |
| | | 1 | 49 | 20.58 | 19.86 |
| | | 25 | 0 | 19.14 | 18.72 |

| | | | | | |
|--|--|----|----|-------|-------|
| | | 25 | 12 | 19.85 | 18.62 |
| | | 25 | 25 | 19.78 | 18.84 |
| | | 50 | 0 | 19.58 | 18.78 |


<WLAN 2.4GHz Conducted Power>

| Mode | Channel | Frequency (MHz) | Data rate (Mbps) | Average Output Power (dBm)(ANT0) | Average Output Power (dBm)(ANT1) |
|-------------------|---------|-----------------|------------------|----------------------------------|----------------------------------|
| IEEE 802.11b | 1 | 2412 | 1 | 17.73 | 17.95 |
| | | | 2 | 15.24 | 15.04 |
| | | | 5.5 | 15.16 | 16.96 |
| | | | 11 | 15.07 | 11.87 |
| | 6 | 2437 | 1 | 21.28 | 21.08 |
| | | | 2 | 20.21 | 20.01 |
| | | | 5.5 | 20.48 | 20.28 |
| | | | 11 | 20.52 | 20.32 |
| | 11 | 2462 | 1 | 17.03 | 17.52 |
| | | | 2 | 15.25 | 15.05 |
| | | | 5.5 | 15.09 | 14.89 |
| | | | 11 | 15.11 | 14.91 |
| IEEE 802.11g | 1 | 2412 | 6 | 17.84 | 16.91 |
| | | | 9 | 16.49 | 16.29 |
| | | | 12 | 16.29 | 16.09 |
| | | | 18 | 16.26 | 16.06 |
| | | | 24 | 16.11 | 15.91 |
| | | | 36 | 16.07 | 15.87 |
| | | | 48 | 16.01 | 15.81 |
| | | | 54 | 16.12 | 15.92 |
| | 6 | 2437 | 6 | 21.83 | 21.81 |
| | | | 9 | 21.16 | 21.76 |
| | | | 12 | 21.15 | 21.75 |
| | | | 18 | 21.14 | 21.64 |
| | | | 24 | 21.12 | 21.72 |
| | | | 36 | 21.19 | 21.79 |
| | | | 48 | 21.25 | 21.05 |
| | | | 54 | 21.14 | 21.84 |
| | 11 | 2462 | 6 | 17.63 | 16.75 |
| | | | 9 | 15.23 | 15.03 |
| | | | 12 | 15.01 | 14.81 |
| | | | 18 | 15.14 | 14.94 |
| | | | 24 | 15.25 | 15.05 |
| | | | 36 | 15.32 | 15.12 |
| | | | 48 | 15.21 | 15.01 |
| | | | 54 | 15.37 | 15.17 |
| IEEE 802.11n HT20 | 1 | 2412 | MCS0 | 17.89 | 17.36 |
| | | | MCS1 | 16.26 | 16.06 |
| | | | MCS2 | 16.54 | 16.34 |
| | | | MCS3 | 16.39 | 16.19 |
| | | | MCS4 | 16.46 | 16.26 |
| | | | MCS5 | 16.78 | 16.41 |
| | | | MCS6 | 16.32 | 16.12 |
| | | | MCS7 | 16.17 | 15.97 |
| | 6 | 2437 | MCS0 | 20.87 | 21.16 |
| | | | MCS1 | 20.14 | 19.94 |
| | | | MCS2 | 20.05 | 19.85 |
| | | | MCS3 | 20.02 | 19.82 |
| | | | MCS4 | 20.10 | 19.90 |
| | | | MCS5 | 20.69 | 20.49 |
| | | | MCS6 | 20.85 | 20.65 |
| | | | MCS7 | 20.77 | 20.57 |
| 11 | 2462 | MCS0 | 17.61 | 16.77 | |
| | | MCS1 | 15.25 | 15.05 | |

| | | | | | |
|-------------------------|---|------|------|-------|-------|
| | | | MCS2 | 15.13 | 14.93 |
| | | | MCS3 | 15.09 | 14.89 |
| | | | MCS4 | 15.08 | 14.88 |
| | | | MCS5 | 15.00 | 14.80 |
| | | | MCS6 | 15.24 | 15.04 |
| | | | MCS7 | 15.19 | 14.99 |
| IEEE 802.11n HT40 | 3 | 2422 | MCS0 | 18.76 | 17.72 |
| | | | MCS1 | 16.25 | 14.05 |
| | | | MCS2 | 16.36 | 14.16 |
| | | | MCS3 | 16.01 | 13.81 |
| | | | MCS4 | 16.24 | 14.04 |
| | | | MCS5 | 16.02 | 13.82 |
| | | | MCS6 | 16.27 | 14.07 |
| | 6 | 2437 | MCS7 | 16.30 | 14.10 |
| | | | MCS0 | 21.05 | 21.17 |
| | | | MCS1 | 20.25 | 20.05 |
| | | | MCS2 | 20.36 | 20.16 |
| | | | MCS3 | 20.41 | 20.21 |
| | | | MCS4 | 20.20 | 20.00 |
| | | | MCS5 | 20.47 | 20.27 |
| | 9 | 2452 | MCS6 | 20.36 | 20.16 |
| | | | MCS7 | 20.19 | 19.99 |
| | | | MCS0 | 17.16 | 17.63 |
| | | | MCS1 | 15.42 | 15.22 |
| | | | MCS2 | 15.23 | 15.03 |
| | | | MCS3 | 15.08 | 14.88 |
| | | | MCS4 | 15.47 | 15.27 |
| | | | MCS5 | 15.36 | 15.16 |
| | | | MCS6 | 15.24 | 15.04 |
| | | | MCS7 | 15.47 | 15.27 |

Note:SAR is not required for the following 2.4 GHz OFDM conditions as the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

4.2. Transmit Antennas and SAR Measurement Position

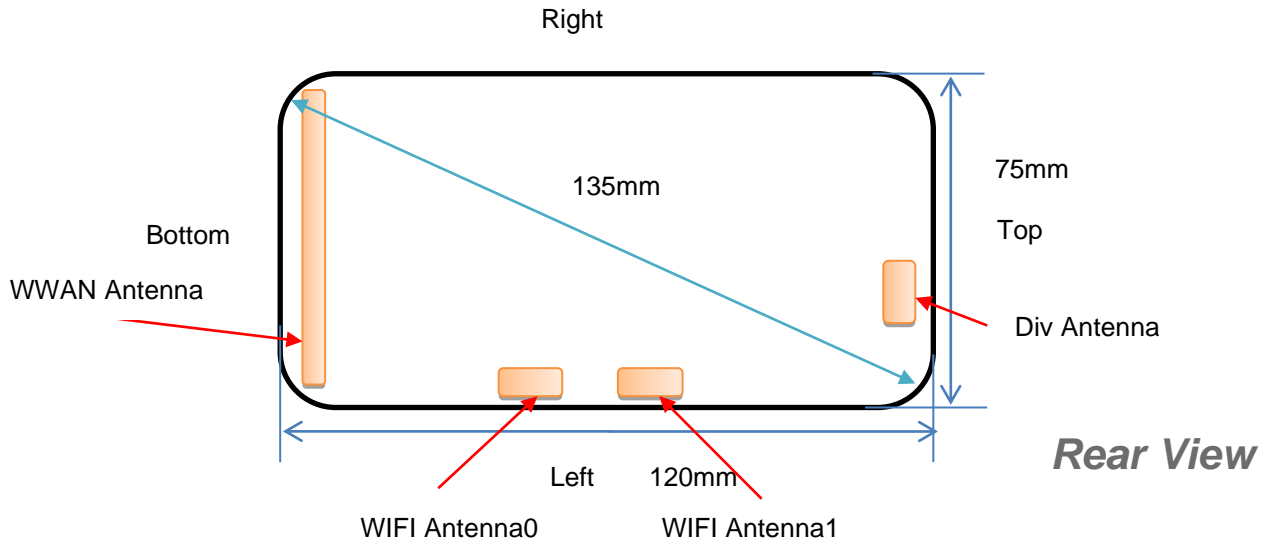

| Distance of The Antenna to the EUT surface and edge (mm) | | | | | | |
|--|-------|------|----------|-------------|-----------|------------|
| Antennas | Front | Back | Top Side | Bottom Side | Left Side | Right Side |
| WWAN | <5 | <5 | 110 | <5 | <5 | <5 |
| WLAN | <5 | <5 | 75 | 35 | <5 | 65 |

| Positions for SAR tests; Hotspot mode | | | | | | |
|---------------------------------------|-------|------|----------|-------------|-----------|------------|
| Antennas | Front | Back | Top Side | Bottom Side | Left Side | Right Side |
| WWAN | Yes | Yes | No | Yes | Yes | Yes |
| WLAN | Yes | Yes | No | No | Yes | No |

1. SAR is required only for both back and edge with the most conservation exposure condition
2. For Body mode,SAR is not required when the main antenna to edge is >2.5cm (refer to EUT photographs)

4.3. SAR Measurement Results

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} * 10^{(P_{\text{target}} - P_{\text{measured}})/10}$$

$$\text{Scaling factor} = 10^{(P_{\text{target}} - P_{\text{measured}})/10}$$

$$\text{Reported SAR} = \text{Measured SAR} * \text{Scaling factor}$$

Where

P_{target} is the power of manufacturing upper limit;

P_{measured} is the measured power;

Measured SAR is measured SAR at measured power which including power drift)

Reported SAR which including Power Drift and Scaling factor

Duty Cycle

| Test Mode | Duty Cycle |
|-----------|------------|
| UMTS | 1:1 |
| LTE | 1:1 |
| WLAN2450 | 1:1 |

4.3.1 SAR Results

SAR Values [WCDMA Band V]

| Ch. | Freq. (MHz) | Channel Type | Test Position | Conducted Power (dBm) | Maximum Allowed Power (dBm) | Power Drift (%) | Scaling Factor | SAR _{1-g} results(W/kg) | | Graph Results |
|--|-------------|--------------|---------------|-----------------------|-----------------------------|-----------------|----------------|----------------------------------|--------------|---------------|
| | | | | | | | | Measured | Reported | |
| measured / reported SAR numbers - Body (hotspot open, distance 10mm) | | | | | | | | | | |
| 4183 | 836.6 | RMC* | Front | 23.45 | 23.50 | 1.26 | 1.012 | 0.580 | 0.587 | Plot 1 |
| 4183 | 836.6 | RMC* | Back | 23.45 | 23.50 | 3.54 | 1.012 | 0.232 | 0.235 | |
| 4183 | 836.6 | RMC* | Left | 23.45 | 23.50 | 0.25 | 1.012 | 0.128 | 0.129 | |
| 4183 | 836.6 | RMC* | Right | 23.45 | 23.50 | 1.07 | 1.012 | 0.305 | 0.309 | |
| 4183 | 836.6 | RMC* | Bottom | 23.45 | 23.50 | 3.25 | 1.012 | 0.243 | 0.246 | |

Remark:

1. The value with block color is the maximum SAR Value of each test band.

2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is optional for such test configuration(s).

3. RMC* - RMC 12.2kbps mode;

SAR Values [WCDMA Band IV]

| Ch. | Freq. (MHz) | Channel Type | Test Position | Conducted Power (dBm) | Maximum Allowed Power (dBm) | Power Drift (%) | Scaling Factor | SAR _{1-g} results(W/kg) | | Graph Results |
|--|-------------|--------------|---------------|-----------------------|-----------------------------|-----------------|----------------|----------------------------------|--------------|---------------|
| | | | | | | | | Measured | Reported | |
| measured / reported SAR numbers - Body (hotspot open, distance 10mm) | | | | | | | | | | |
| 1413 | 1732.6 | RMC | Front | 23.95 | 24.00 | -1.23 | 1.012 | 0.870 | 0.880 | Plot 2 |
| 1312 | 1712.4 | RMC | Front | 23.89 | 24.00 | 0.49 | 1.026 | 0.613 | 0.629 | |
| 1513 | 1752.6 | RMC | Front | 23.88 | 24.00 | 2.56 | 1.028 | 0.702 | 0.722 | |
| 1413 | 1732.6 | RMC | Back | 23.95 | 24.00 | -0.41 | 1.012 | 0.578 | 0.585 | |
| 1413 | 1732.6 | RMC | Left | 23.95 | 24.00 | 3.64 | 1.012 | 0.412 | 0.417 | |
| 1413 | 1732.6 | RMC | Right | 23.95 | 24.00 | 2.18 | 1.012 | 0.365 | 0.369 | |
| 1413 | 1732.6 | RMC | Bottom | 23.95 | 24.00 | 0.18 | 1.012 | 0.208 | 0.210 | |

Remark:

1. The value with block color is the maximum SAR Value of each test band.

2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is optional for such test configuration(s).

3. RMC* - RMC 12.2kbps mode;

SAR Values [WCDMA Band II]

| Ch. | Freq. (MHz) | Channel Type | Test Position | Conducted Power | Maximum Allowed Power | Power Drift (%) | Scaling Factor | SAR _{1-g} results(W/kg) | | Graph Results |
|-----|-------------|--------------|---------------|-----------------|-----------------------|-----------------|----------------|----------------------------------|----------|---------------|
| | | | | | | | | Measured | Reported | |

| | | | | (dBm) | (dBm) | | | | | |
|--|--------|-----|--------|-------|-------|-------|-------|--------------|--------------|---------------|
| measured / reported SAR numbers - Body (hotspot open, distance 10mm) | | | | | | | | | | |
| 9400 | 1880.0 | RMC | Front | 23.50 | 23.50 | 1.38 | 1.000 | 0.895 | 0.895 | Plot 3 |
| 9262 | 1852.4 | RMC | Front | 23.46 | 23.50 | 0.34 | 1.009 | 0.814 | 0.822 | |
| 9538 | 1907.6 | RMC | Front | 23.44 | 23.50 | -1.25 | 1.014 | 0.773 | 0.784 | |
| 9400 | 1880.0 | RMC | Back | 23.50 | 23.50 | 0.62 | 1.000 | 0.410 | 0.410 | |
| 9400 | 1880.0 | RMC | Left | 23.50 | 23.50 | 0.14 | 1.000 | 0.285 | 0.285 | |
| 9400 | 1880.0 | RMC | Right | 23.50 | 23.50 | 0.58 | 1.000 | 0.198 | 0.198 | |
| 9400 | 1880.0 | RMC | Bottom | 23.50 | 23.50 | 3.17 | 1.000 | 0.304 | 0.304 | |

Remark:

1. The value with block color is the maximum SAR Value of each test band.
2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is optional for such test configuration(s).
3. RMC* - RMC 12.2kbps mode;

SAR Values [LTE Band 2]

| Ch. | Freq. (MHz) | Channel Type (20M) | Test Position | Conducted Power (dBm) | Maximum Allowed Power (dBm) | Power Drift (%) | Scaling Factor | SAR _{1-g} results(W/kg) | | Graph Results |
|--|-------------|--------------------|---------------|-----------------------|-----------------------------|-----------------|----------------|----------------------------------|--------------|---------------|
| | | | | | | | | Measured | Reported | |
| measured / reported SAR numbers - Body (hotspot open, distance 10mm) | | | | | | | | | | |
| 18700 | 1860.0 | 1RB | Front | 23.17 | 24.00 | 0.96 | 1.211 | 0.310 | 0.375 | |
| 18700 | 1860.0 | 1RB | Back | 23.17 | 24.00 | -2.07 | 1.211 | 0.771 | 0.933 | Plot 4 |
| 18900 | 1880.0 | 1RB | Back | 23.16 | 24.00 | 1.48 | 1.213 | 0.701 | 0.851 | |
| 19100 | 1900.0 | 1RB | Back | 22.97 | 23.00 | -2.18 | 1.007 | 0.654 | 0.659 | |
| 18700 | 1860.0 | 1RB | Left | 23.17 | 24.00 | 0.09 | 1.211 | 0.501 | 0.607 | |
| 18700 | 1860.0 | 1RB | Right | 23.17 | 24.00 | 0.31 | 1.211 | 0.225 | 0.272 | |
| 18700 | 1860.0 | 1RB | Bottom | 23.17 | 24.00 | 2.37 | 1.211 | 0.271 | 0.328 | |
| 18900 | 1880.0 | 50%RB | Front | 21.95 | 22.00 | 2.04 | 1.012 | 0.265 | 0.268 | |
| 18900 | 1880.0 | 50%RB | Back | 21.95 | 22.00 | 4.36 | 1.012 | 0.414 | 0.419 | |
| 18900 | 1880.0 | 50%RB | Left | 21.95 | 22.00 | -0.29 | 1.012 | 0.333 | 0.337 | |
| 18900 | 1880.0 | 50%RB | Right | 21.95 | 22.00 | 1.58 | 1.012 | 0.200 | 0.202 | |
| 18900 | 1880.0 | 50%RB | Bottom | 21.95 | 22.00 | 0.35 | 1.012 | 0.226 | 0.229 | |

SAR Values [LTE Band 4]

| Ch. | Freq. (MHz) | Channel Type (20M) | Test Position | Conducted Power (dBm) | Maximum Allowed Power (dBm) | Power Drift (%) | Scaling Factor | SAR _{1-g} results(W/kg) | | Graph Results |
|--|-------------|--------------------|---------------|-----------------------|-----------------------------|-----------------|----------------|----------------------------------|--------------|---------------|
| | | | | | | | | Measured | Reported | |
| measured / reported SAR numbers - Body (hotspot open, distance 10mm) | | | | | | | | | | |
| 20175 | 1720.0 | 1RB | Front | 23.68 | 24.00 | 3.58 | 1.076 | 0.511 | 0.550 | |
| 20175 | 1720.0 | 1RB | Back | 23.68 | 24.00 | -0.43 | 1.076 | 0.701 | 0.755 | Plot 5 |
| 20175 | 1720.0 | 1RB | Left | 23.68 | 24.00 | -0.15 | 1.076 | 0.320 | 0.344 | |
| 20175 | 1720.0 | 1RB | Right | 23.68 | 24.00 | 2.47 | 1.076 | 0.214 | 0.230 | |
| 20175 | 1720.0 | 1RB | Bottom | 23.68 | 24.00 | 2.14 | 1.076 | 0.288 | 0.310 | |
| 20300 | 1745.0 | 50%RB | Front | 22.36 | 23.00 | 0.58 | 1.159 | 0.492 | 0.570 | |
| 20300 | 1745.0 | 50%RB | Back | 22.36 | 23.00 | -1.15 | 1.159 | 0.301 | 0.349 | |
| 20300 | 1745.0 | 50%RB | Left | 22.36 | 23.00 | -4.78 | 1.159 | 0.163 | 0.189 | |
| 20300 | 1745.0 | 50%RB | Right | 22.36 | 23.00 | 0.70 | 1.159 | 0.185 | 0.214 | |
| 20300 | 1745.0 | 50%RB | Bottom | 22.36 | 23.00 | 2.56 | 1.159 | 0.251 | 0.291 | |

SAR Values [LTE Band 5]

| Ch. | Freq. (MHz) | Channel Type (20M) | Test Position | Conducted Power (dBm) | Maximum Allowed Power (dBm) | Power Drift (%) | Scaling Factor | SAR _{1-g} results(W/kg) | | Graph Results |
|--|-------------|--------------------|---------------|-----------------------|-----------------------------|-----------------|----------------|----------------------------------|--------------|---------------|
| | | | | | | | | Measured | Reported | |
| measured / reported SAR numbers - Body (hotspot open, distance 10mm) | | | | | | | | | | |
| 20450 | 829.0 | 1RB | Front | 23.57 | 24.00 | 3.60 | 1.104 | 0.105 | 0.116 | |
| 20450 | 829.0 | 1RB | Back | 23.57 | 24.00 | -1.53 | 1.104 | 0.157 | 0.173 | Plot 6 |
| 20450 | 829.0 | 1RB | Left | 23.57 | 24.00 | 3.83 | 1.104 | 0.136 | 0.150 | |
| 20450 | 829.0 | 1RB | Right | 23.57 | 24.00 | 2.47 | 1.104 | 0.085 | 0.094 | |
| 20450 | 829.0 | 1RB | Bottom | 23.57 | 24.00 | 0.25 | 1.104 | 0.072 | 0.079 | |

| | | | | | | | | | | |
|-------|-------|-------|--------|-------|-------|------|-------|-------|-------|--|
| 20450 | 829.0 | 50%RB | Front | 23.16 | 23.50 | 2.35 | 1.104 | 0.088 | 0.095 | |
| 20450 | 829.0 | 50%RB | Back | 23.16 | 23.50 | 4.37 | 1.104 | 0.112 | 0.121 | |
| 20450 | 829.0 | 50%RB | Left | 23.16 | 23.50 | 2.08 | 1.104 | 0.102 | 0.110 | |
| 20450 | 829.0 | 50%RB | Right | 23.16 | 23.50 | 3.29 | 1.104 | 0.076 | 0.082 | |
| 20450 | 829.0 | 50%RB | Bottom | 23.16 | 23.50 | 2.58 | 1.104 | 0.052 | 0.056 | |

SAR Values [LTE Band 7]

| Ch. | Freq. (MHz) | Channel Type (10M) | Test Position | Conducted Power (dBm) | Maximum Allowed Power (dBm) | Power Drift (%) | Scaling Factor | SAR1-g results(W/kg) | | Graph Results |
|---|-------------|--------------------|---------------|-----------------------|-----------------------------|-----------------|----------------|----------------------|--------------|---------------|
| | | | | | | | | Measured | Reported | |
| measured / reported SAR numbers - Body (hotspot open, distance 0mm) | | | | | | | | | | |
| 21100 | 2535.0 | 1RB | Front | 23.08 | 23.50 | 0.40 | 1.102 | 0.130 | 0.143 | |
| 21100 | 2535.0 | 1RB | Rear | 23.08 | 23.50 | 1.91 | 1.102 | 0.231 | 0.254 | Plot 7 |
| 21100 | 2535.0 | 1RB | Left | 23.08 | 23.50 | 0.58 | 1.102 | 0.105 | 0.116 | |
| 21100 | 2535.0 | 1RB | Right | 23.08 | 23.50 | 2.54 | 1.102 | 0.150 | 0.165 | |
| 21100 | 2535.0 | 1RB | Bottom | 23.08 | 23.50 | 1.16 | 1.102 | 0.086 | 0.095 | |
| 21100 | 2535.0 | 50%RB | Front | 21.90 | 22.00 | 2.01 | 1.023 | 0.091 | 0.093 | |
| 21100 | 2535.0 | 50%RB | Rear | 21.90 | 22.00 | 0.59 | 1.023 | 0.184 | 0.188 | |
| 21100 | 2535.0 | 50%RB | Left | 21.90 | 22.00 | 0.35 | 1.023 | 0.073 | 0.075 | |
| 21100 | 2535.0 | 50%RB | Right | 21.90 | 22.00 | 1.20 | 1.023 | 0.081 | 0.083 | |
| 21100 | 2535.0 | 50%RB | Bottom | 21.90 | 22.00 | 3.18 | 1.023 | 0.064 | 0.065 | |

SAR Values [LTE Band 12]

| Ch. | Freq. (MHz) | Channel Type (10M) | Test Position | Conducted Power (dBm) | Maximum Allowed Power (dBm) | Power Drift (%) | Scaling Factor | SAR1-g results(W/kg) | | Graph Results |
|--|-------------|--------------------|---------------|-----------------------|-----------------------------|-----------------|----------------|----------------------|--------------|---------------|
| | | | | | | | | Measured | Reported | |
| measured / reported SAR numbers - Body (hotspot open, distance 10mm) | | | | | | | | | | |
| 23060 | 704.0 | 1RB | Front | 25.13 | 26.00 | 3.56 | 1.222 | 0.170 | 0.208 | |
| 23060 | 704.0 | 1RB | Back | 25.13 | 26.00 | 0.71 | 1.222 | 0.204 | 0.249 | Plot 8 |
| 23060 | 704.0 | 1RB | Left | 25.13 | 26.00 | 3.43 | 1.222 | 0.153 | 0.187 | |
| 23060 | 704.0 | 1RB | Right | 25.13 | 26.00 | 0.17 | 1.222 | 0.132 | 0.161 | |
| 23060 | 704.0 | 1RB | Bottom | 25.13 | 26.00 | 1.46 | 1.222 | 0.116 | 0.142 | |
| 23060 | 704.0 | 50%RB | Front | 24.26 | 25.00 | 0.58 | 1.186 | 0.148 | 0.175 | |
| 23060 | 704.0 | 50%RB | Back | 24.26 | 25.00 | -0.86 | 1.186 | 0.123 | 0.146 | |
| 23060 | 704.0 | 50%RB | Left | 24.26 | 25.00 | 2.27 | 1.186 | 0.129 | 0.153 | |
| 23060 | 704.0 | 50%RB | Right | 24.26 | 25.00 | 3.62 | 1.186 | 0.108 | 0.128 | |
| 23060 | 704.0 | 50%RB | Bottom | 24.26 | 25.00 | 0.09 | 1.186 | 0.090 | 0.107 | |

SAR Values [LTE Band 13]

| Ch. | Freq. (MHz) | Channel Type (20M) | Test Position | Conducted Power (dBm) | Maximum Allowed Power (dBm) | Power Drift (%) | Scaling Factor | SAR1-g results(W/kg) | | Graph Results |
|--|-------------|--------------------|---------------|-----------------------|-----------------------------|-----------------|----------------|----------------------|--------------|---------------|
| | | | | | | | | Measured | Reported | |
| measured / reported SAR numbers - Body (hotspot open, distance 10mm) | | | | | | | | | | |
| 23230 | 782.0 | 1RB | Front | 24.07 | 25.00 | 2.15 | 1.239 | 0.188 | 0.233 | |
| 23230 | 782.0 | 1RB | Back | 24.07 | 25.00 | 0.11 | 1.239 | 0.277 | 0.343 | Plot 9 |
| 23230 | 782.0 | 1RB | Left | 24.07 | 25.00 | -1.27 | 1.239 | 0.232 | 0.287 | |
| 23230 | 782.0 | 1RB | Right | 24.07 | 25.00 | 0.32 | 1.239 | 0.165 | 0.204 | |
| 23230 | 782.0 | 1RB | Bottom | 24.07 | 25.00 | 2.14 | 1.239 | 0.110 | 0.136 | |
| 23230 | 782.0 | 50%RB | Front | 23.16 | 24.00 | 1.01 | 1.213 | 0.156 | 0.189 | |
| 23230 | 782.0 | 50%RB | Back | 23.16 | 24.00 | 3.61 | 1.213 | 0.165 | 0.200 | |
| 23230 | 782.0 | 50%RB | Left | 23.16 | 24.00 | -4.18 | 1.213 | 0.101 | 0.123 | |
| 23230 | 782.0 | 50%RB | Right | 23.16 | 24.00 | -0.02 | 1.213 | 0.078 | 0.095 | |
| 23230 | 782.0 | 50%RB | Bottom | 23.16 | 24.00 | 2.32 | 1.213 | 0.090 | 0.109 | |

SAR Values [LTE Band 25]

| Ch. | Freq. (MHz) | Channel Type (20M) | Test Position | Conducted Power (dBm) | Maximum Allowed Power (dBm) | Power Drift (%) | Scaling Factor | SAR1-g results(W/kg) | | Graph Results |
|--|-------------|--------------------|---------------|-----------------------|-----------------------------|-----------------|----------------|----------------------|----------|---------------|
| | | | | | | | | Measured | Reported | |
| measured / reported SAR numbers - Body (hotspot open, distance 10mm) | | | | | | | | | | |

| | | | | | | | | | | |
|-------|--------|-------|--------|-------|-------|-------|-------|--------------|--------------|----------------|
| 26047 | 1850.7 | 1RB | Front | 24.07 | 25.00 | -1.24 | 1.239 | 0.202 | 0.250 | |
| 26047 | 1850.7 | 1RB | Rear | 24.07 | 25.00 | -1.01 | 1.239 | 0.560 | 0.694 | Plot 10 |
| 26047 | 1850.7 | 1RB | Left | 24.07 | 25.00 | -1.27 | 1.239 | 0.292 | 0.362 | |
| 26047 | 1850.7 | 1RB | Right | 24.07 | 25.00 | 0.59 | 1.239 | 0.102 | 0.126 | |
| 26047 | 1850.7 | 1RB | Bottom | 24.07 | 25.00 | 0.10 | 1.239 | 0.209 | 0.259 | |
| 26365 | 1882.5 | 50%RB | Front | 23.16 | 25.00 | 3.61 | 1.213 | 0.153 | 0.234 | |
| 26365 | 1882.5 | 50%RB | Rear | 23.16 | 24.00 | 3.61 | 1.213 | 0.143 | 0.174 | |
| 26365 | 1882.5 | 50%RB | Left | 23.16 | 24.00 | -4.48 | 1.213 | 0.062 | 0.075 | |
| 26365 | 1882.5 | 50%RB | Right | 23.16 | 25.00 | 0.20 | 1.213 | 0.078 | 0.119 | |
| 26365 | 1882.5 | 50%RB | Bottom | 23.16 | 24.00 | 1.19 | 1.213 | 0.020 | 0.024 | |

SAR Values [LTE Band 26]

| Ch. | Freq. (MHz) | Channel Type (20M) | Test Position | Conducted Power (dBm) | Maximum Allowed Power (dBm) | Power Drift (%) | Scaling Factor | SAR1-g results(W/kg) | | Graph Results |
|--|-------------|--------------------|---------------|-----------------------|-----------------------------|-----------------|----------------|----------------------|--------------|----------------|
| | | | | | | | | Measured | Reported | |
| measured / reported SAR numbers - Body (hotspot open, distance 10mm) | | | | | | | | | | |
| 26765 | 821.5 | 1RB | Front | 24.53 | 25.00 | 3.57 | 1.114 | 0.225 | 0.251 | |
| 26765 | 821.5 | 1RB | Rear | 24.53 | 25.00 | -0.94 | 1.114 | 0.558 | 0.622 | Plot 11 |
| 26765 | 821.5 | 1RB | Left | 24.53 | 25.00 | -1.27 | 1.114 | 0.289 | 0.322 | |
| 26765 | 821.5 | 1RB | Right | 24.53 | 25.00 | 0.20 | 1.114 | 0.134 | 0.149 | |
| 26765 | 821.5 | 1RB | Bottom | 24.53 | 25.00 | 0.10 | 1.114 | 0.192 | 0.214 | |
| 26765 | 821.5 | 50%RB | Front | 24.53 | 25.00 | 3.32 | 1.114 | 0.110 | 0.123 | |
| 26765 | 821.5 | 50%RB | Rear | 24.53 | 25.00 | 3.61 | 1.114 | 0.331 | 0.369 | |
| 26765 | 821.5 | 50%RB | Left | 24.53 | 25.00 | -4.48 | 1.114 | 0.145 | 0.162 | |
| 26765 | 821.5 | 50%RB | Right | 24.53 | 25.00 | 3.57 | 1.114 | 0.094 | 0.105 | |
| 26765 | 821.5 | 50%RB | Bottom | 24.53 | 25.00 | 1.19 | 1.114 | 0.105 | 0.117 | |

SAR Values [LTE Band 30]

| Ch. | Freq. (MHz) | Channel Type (20M) | Test Position | Conducted Power (dBm) | Maximum Allowed Power (dBm) | Power Drift (%) | Scaling Factor | SAR1-g results(W/kg) | | Graph Results |
|--|-------------|--------------------|---------------|-----------------------|-----------------------------|-----------------|----------------|----------------------|--------------|----------------|
| | | | | | | | | Measured | Reported | |
| measured / reported SAR numbers - Body (hotspot open, distance 10mm) | | | | | | | | | | |
| 27710 | 2310.0 | 1RB | Front | 20.66 | 21.00 | -0.49 | 1.081 | 0.473 | 0.512 | Plot 12 |
| 27710 | 2310.0 | 1RB | Rear | 20.66 | 21.00 | 0.15 | 1.081 | 0.346 | 0.374 | |
| 27710 | 2310.0 | 1RB | Left | 20.66 | 21.00 | 3.20 | 1.081 | 0.241 | 0.261 | |
| 27710 | 2310.0 | 1RB | Right | 20.66 | 21.00 | 3.69 | 1.081 | 0.125 | 0.135 | |
| 27710 | 2310.0 | 1RB | Bottom | 20.66 | 21.00 | 4.74 | 1.081 | 0.076 | 0.082 | |
| 27710 | 2310.0 | 50%RB | Front | 19.85 | 20.00 | -3.35 | 1.035 | 0.257 | 0.266 | |
| 27710 | 2310.0 | 50%RB | Rear | 19.85 | 20.00 | -0.01 | 1.035 | 0.139 | 0.144 | |
| 27710 | 2310.0 | 50%RB | Left | 19.85 | 20.00 | 1.05 | 1.035 | 0.210 | 0.217 | |
| 27710 | 2310.0 | 50%RB | Right | 19.85 | 20.00 | 0.28 | 1.035 | 0.074 | 0.077 | |
| 27710 | 2310.0 | 50%RB | Bottom | 19.85 | 20.00 | 1.45 | 1.035 | 0.039 | 0.040 | |

SAR Values [WIFI2.4G](ANT0)

| Ch. | Freq. (MHz) | Service | Test Position | Conducted Power (dBm) | Maximum Allowed Power (dBm) | Power Drift (%) | Scaling Factor | SAR1-g results(W/kg) | | Graph Results |
|--|-------------|---------|---------------|-----------------------|-----------------------------|-----------------|----------------|----------------------|--------------|----------------|
| | | | | | | | | Measured | Reported | |
| measured / reported SAR numbers - Body (hotspot open, distance 10mm) | | | | | | | | | | |
| 6 | 2437 | 802.11b | Front | 21.28 | 22.00 | 0.13 | 1.180 | 0.034 | 0.040 | |
| 6 | 2437 | 802.11b | Back | 21.28 | 22.00 | -0.76 | 1.180 | 0.229 | 0.270 | Plot 13 |
| 6 | 2437 | 802.11b | Left | 21.28 | 22.00 | -2.26 | 1.180 | 0.074 | 0.087 | |
| 6 | 2437 | 802.11g | Front | 21.83 | 22.00 | 0.13 | 1.040 | 0.019 | 0.020 | |
| 6 | 2437 | 802.11g | Back | 21.83 | 22.00 | -0.76 | 1.040 | 0.204 | 0.212 | |
| 6 | 2437 | 802.11g | Left | 21.83 | 22.00 | -2.26 | 1.040 | 0.053 | 0.055 | |

SAR Values [WIFI2.4G](ANT1)

| Ch. | Freq. (MHz) | Service | Test Position | Conducted Power (dBm) | Maximum Allowed Power (dBm) | Power Drift (%) | Scaling Factor | SAR1-g results(W/kg) | | Graph Results |
|-----|-------------|---------|---------------|-----------------------|-----------------------------|-----------------|----------------|----------------------|----------|---------------|
| | | | | | | | | Measured | Reported | |

measured / reported SAR numbers - Body (hotspot open, distance 10mm)

| | | | | | | | | | | |
|---|------|---------|-------|-------|-------|-------|-------|--------------|--------------|----------------|
| 6 | 2437 | 802.11b | Front | 21.08 | 21.50 | 1.21 | 1.102 | 0.028 | 0.031 | |
| 6 | 2437 | 802.11b | Back | 21.08 | 21.50 | 0.17 | 1.102 | 0.223 | 0.246 | Plot 14 |
| 6 | 2437 | 802.11b | Left | 21.08 | 21.50 | -2.24 | 1.102 | 0.069 | 0.076 | |
| 6 | 2437 | 802.11g | Front | 21.81 | 22.00 | 1.21 | 1.045 | 0.018 | 0.019 | |
| 6 | 2437 | 802.11g | Back | 21.81 | 22.00 | 0.17 | 1.045 | 0.206 | 0.215 | |
| 6 | 2437 | 802.11g | Left | 21.81 | 22.00 | -2.24 | 1.045 | 0.052 | 0.054 | |

Remark:

1. The value with blue color is the maximum SAR Value of each test band.
2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is optional for such test configuration(s).
3. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. 19 If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
4. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

4.4. Simultaneous TX SAR Considerations

4.4.1 Introduction

4.4.1 Introduction

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. The device has 4 antennas, WWAN main antenna and WWAN diversity antenna(RX only), WiFi Ant0 And WiFi Ant1. The 3 TX antennas can always transmit simultaneously. The work mode combination is showed as below table.

Application Simultaneous Transmission information:

| Combination No. | Mode |
|-----------------|------------------------------------|
| 1 | WWAN+WIFI 2.4G Ant0+WIFI 2.4G Ant1 |

4.4.2 Evaluation of Simultaneous SAR

Body Hotspot Exposure Conditions

Simultaneous transmission SAR for WiFi and UMTS

| Test Position | UMTS Band V Reported SAR1-g (W/kg) | UMTS Band IV Reported SAR1-g (W/kg) | UMTS Band II Reported SAR1-g (W/kg) | WiFi2.4G Reported SAR1-g (W/kg)Ant0 | WiFi2.4G Reported SAR1-g (W/kg) Ant1 | MAX. Σ SAR1-g (W/kg) | SAR1-g Limit (W/kg) | Peak location separation ratio | Simut Meas. Required |
|---------------|------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|--------------------------------------|-----------------------------|---------------------|--------------------------------|----------------------|
| Front | 0.587 | 0.88 | 0.895 | 0.04 | 0.031 | 0.966 | 1.6 | no | no |
| Rear | 0.235 | 0.585 | 0.41 | 0.27 | 0.246 | 1.101 | 1.6 | no | no |
| Left | 0.129 | 0.417 | 0.285 | 0.087 | 0.076 | 0.58 | 1.6 | no | no |
| Right | 0.309 | 0.369 | 0.198 | / | / | 0.369 | 1.6 | no | no |
| Bottom | 0.246 | 0.21 | 0.304 | / | / | 0.304 | 1.6 | no | no |
| Top | / | / | / | / | / | / | 1.6 | no | no |

Simultaneous transmission SAR for WiFi and LTE

| Reported SAR1-g(W/kg) | Test Position | | | | | |
|--------------------------------|---------------|-------|-------|-------|--------|-----|
| | Front | Rear | Left | Right | Bottom | Top |
| LTE Band2 | 0.375 | 0.933 | 0.607 | 0.272 | 0.328 | / |
| LTE Band4 | 0.55 | 0.755 | 0.344 | 0.23 | 0.31 | / |
| LTE Band5 | 0.116 | 0.173 | 0.15 | 0.094 | 0.079 | / |
| LTE Band7 | 0.143 | 0.254 | 0.116 | 0.165 | 0.095 | / |
| LTE Band12 | 0.208 | 0.249 | 0.187 | 0.161 | 0.142 | / |
| LTE Band13 | 0.233 | 0.343 | 0.287 | 0.204 | 0.136 | / |
| LTE Band25 | 0.25 | 0.694 | 0.362 | 0.126 | 0.259 | / |
| LTE Band26 | 0.251 | 0.622 | 0.322 | 0.149 | 0.214 | / |
| LTE Band30 | 0.512 | 0.374 | 0.261 | 0.135 | 0.082 | / |
| WiFi2.4G Ant0 | 0.04 | 0.27 | 0.087 | / | / | / |
| WiFi2.4G Ant1 | 0.031 | 0.246 | 0.076 | / | / | / |
| MAX. Σ SAR1-g (W/kg) | 0.621 | 1.449 | 0.77 | 0.272 | 0.328 | / |
| SAR1-g Limit (W/kg) | 1.6 | 1.6 | 1.6 | 1.6 | 1.6 | 1.6 |
| Peak location separation ratio | no | no | no | no | no | no |
| Simut Meas. Required | no | no | no | no | no | no |

Note:

1. The value with **block** color is the maximum values of standalone
2. The value with blue color is the maximum values of Σ SAR_{1-g}.

4.5. SAR Measurement Variability

According to KDB865664, Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR value of the initial repeated measurement is < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. A second repeated measurement is required only if the measured result for the initial repeated measurement is within 10% of the SAR limit and vary by more than 20%, which are often related to device and measurement setup difficulties. The following procedures are applied to determine if repeated measurements are required. The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.¹⁹ The repeated measurement results must be clearly identified in the SAR report. All measured SAR, including the repeated results, must be considered to determine compliance and for reporting according to KDB 690783. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 3) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20

| Frequency Band (MHz) | Air Interface | RF Exposure Configuration | Test Position | Repeated SAR (yes/no) | Highest Measured SAR _{1-g} (W/Kg) | First Repeated | |
|----------------------|---------------|---------------------------|---------------|-----------------------|--|------------------------------------|-------------------------------|
| | | | | | | Measured SAR _{1-g} (W/Kg) | Largest to Smallest SAR Ratio |
| 750 | LTE Band 12 | Standalone | Body-Rear | no | 0.204 | n/a | n/a |
| | LTE Band 13 | Standalone | Body-Rear | no | 0.277 | n/a | n/a |
| 850 | WCDMA Band V | Standalone | Body-Front | no | 0.580 | n/a | n/a |
| | LTE Band 5 | Standalone | Body-Rear | no | 0.157 | n/a | n/a |
| | LTE Band 26 | Standalone | Body-Rear | no | 0.558 | n/a | n/a |
| 1800 | WCDMA Band IV | Standalone | Body-Front | no | 0.870 | 0.866 | 0.46 |
| | LTE Band 4 | Standalone | Body-Rear | no | 0.701 | n/a | n/a |
| 1900 | WCDMA Band II | Standalone | Body-Front | no | 0.895 | 0.881 | 1.56 |
| | LTE Band 2 | Standalone | Body-Rear | no | 0.771 | n/a | n/a |
| | LTE Band 25 | Standalone | Body-Rear | no | 0.560 | n/a | n/a |

| | | | | | | | |
|------|-------------|------------|------------|----|-------|-----|-----|
| 2450 | 2.4GWLAN | Standalone | Body-Rear | no | 0.206 | n/a | n/a |
| | LTE Band 30 | Standalone | Body-Front | no | 0.473 | n/a | n/a |
| 2600 | LTE Band 7 | Standalone | Body-Rear | no | 0.231 | n/a | n/a |

Remark:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 or 3 (1-g or 10-g respectively)

4.6. General description of test procedures

1. Test positions as described in the tables above are in accordance with the specified test standard.
2. Tests in body position were performed in that configuration, which generates the highest time based averaged output power (see conducted power results).
3. According to IEEE 1528 the SAR test shall be performed at middle channel. Testing of top and bottom channel is optional.
4. According to KDB 447498 D01 testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
5. IEEE 1528-2003 require the middle channel to be tested first. This generally applies to wireless devices that are designed to operate in technologies with tight tolerances for maximum output power variations across channels in the band. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
6. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements.19 If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
7. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

4.7. Measurement Uncertainty (450MHz-6GHz)

Not required as SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is ≥ 1.5 W/kg for 1-g SAR according to KDB865664D01.




4.8. System Check Results

Test mode:750MHz(Head)
 Product Description:Validation
 Model:Dipole SID750
 E-Field Probe: SSE2(SN 31/17 EPGO324)
 Test Date: November 13, 2020

| | |
|-----------------------------------|----------|
| Medium(liquid type) | HSL_750 |
| Frequency (MHz) | 750.0000 |
| Relative permittivity (real part) | 41.58 |
| Conductivity (S/m) | 0.88 |
| Input power | 100mW |
| Crest Factor | 1.0 |
| Conversion Factor | 1.45 |
| Variation (%) | 1.420000 |
| SAR 10g (W/Kg) | 0.562452 |
| SAR 1g (W/Kg) | 0.824413 |

SURFACE SAR

VOLUME SAR

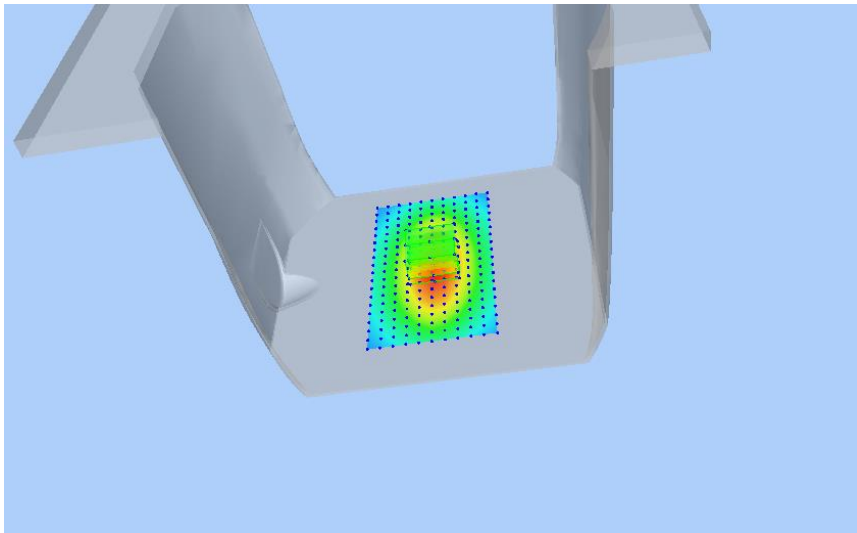
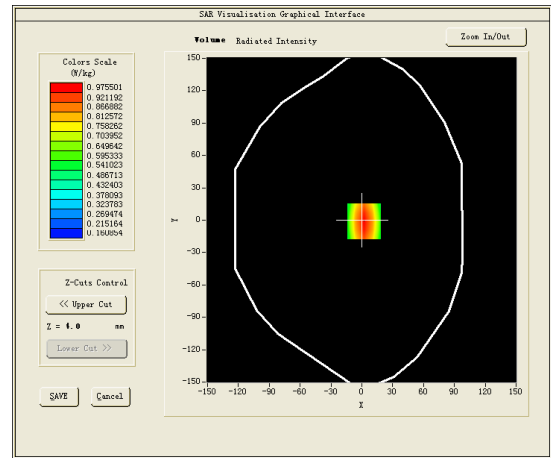
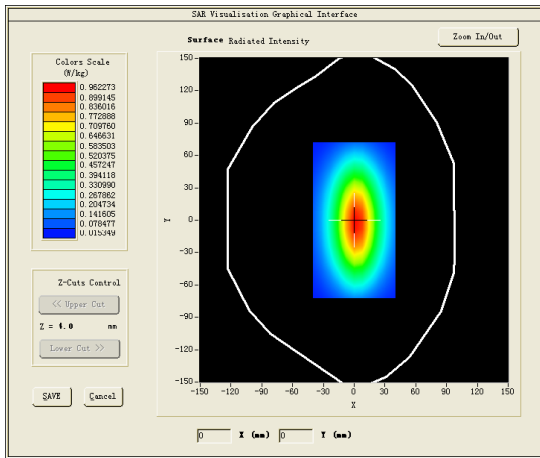


Test mode:835MHz(Head)
 Product Description:Validation
 Model:Dipole SID835
 E-Field Probe:SSE2(SN 31/17 EPGO324)
 Test Date:November 20, 2020

| | |
|-----------------------------------|-----------|
| Medium(liquid type) | HSL_850 |
| Frequency (MHz) | 835.0000 |
| Relative permittivity (real part) | 40.14 |
| Conductivity (S/m) | 0.86 |
| Input power | 100mW |
| Crest Factor | 1.0 |
| Conversion Factor | 1.55 |
| Variation (%) | -0.210000 |
| SAR 10g (W/Kg) | 0.632132 |
| SAR 1g (W/Kg) | 0.975488 |

SURFACE SAR

VOLUME SAR

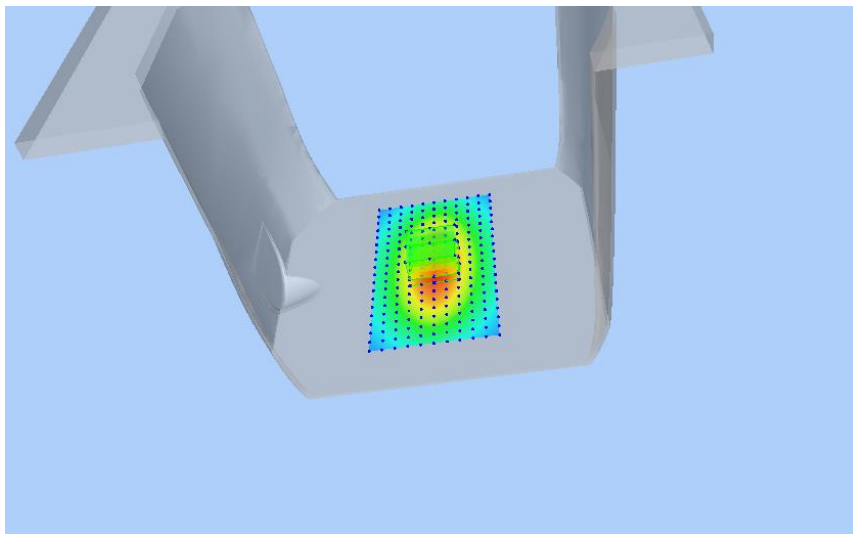
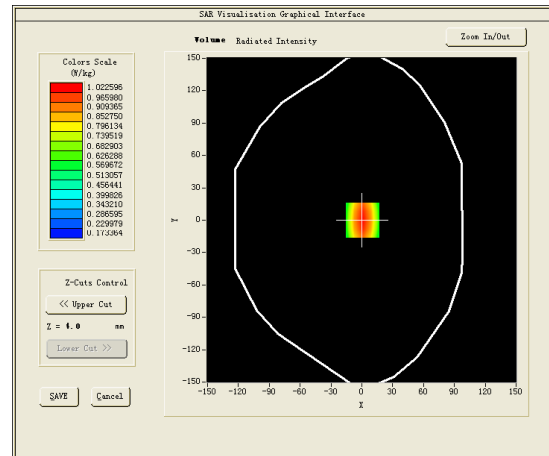
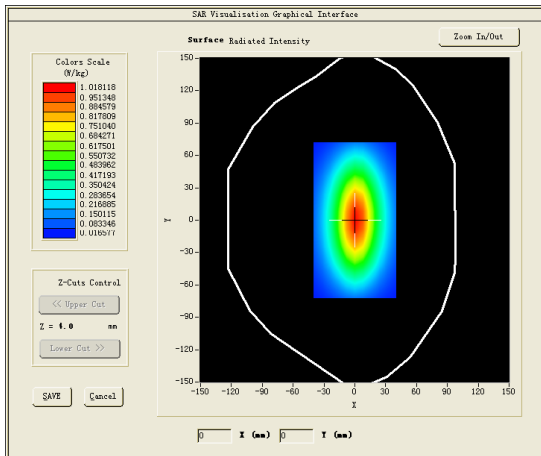


Test mode:1800MHz(Head)
 Product Description:Validation
 Model :Dipole SID1800
 E-Field Probe:SSE2(SN 31/17 EPGO324)
 Test Date: November 27, 2020

| | |
|-----------------------------------|-----------|
| Medium(liquid type) | HSL_1800 |
| Frequency (MHz) | 1800.0000 |
| Relative permittivity (real part) | 41.59 |
| Conductivity (S/m) | 1.42 |
| Input power | 100mW |
| Crest Factor | 1.0 |
| Conversion Factor | 1.65 |
| Variation (%) | 3.560000 |
| SAR 10g (W/Kg) | 2.013283 |
| SAR 1g (W/Kg) | 3.819085 |

SURFACE SAR

VOLUME SAR

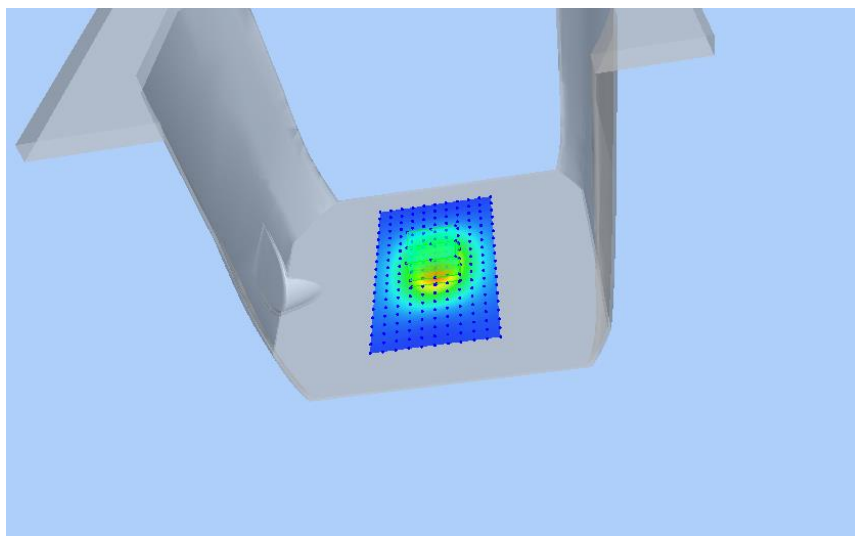
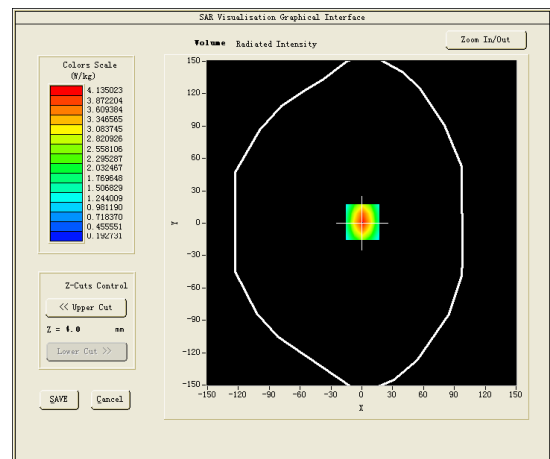
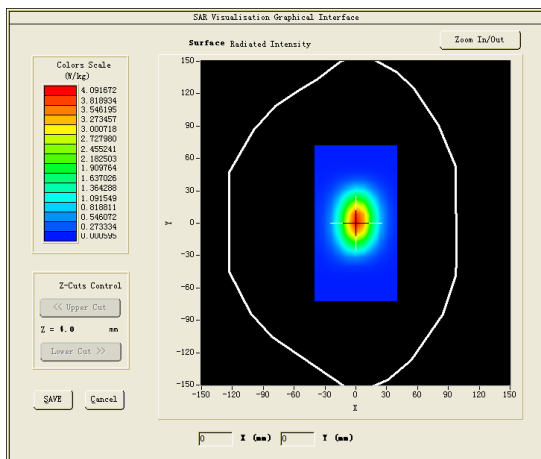


Test mode:1900MHz(Head)
 Product Description:Validation
 Model :Dipole SID1900
 E-Field Probe:SSE2(SN 31/17 EPGO324)
 Test Date: December 17, 2020

| | |
|-----------------------------------|-----------|
| Medium(liquid type) | HSL_1900 |
| Frequency (MHz) | 1900.0000 |
| Relative permittivity (real part) | 39.23 |
| Conductivity (S/m) | 1.37 |
| Input power | 100mW |
| Crest Factor | 1.0 |
| Conversion Factor | 1.86 |
| Variation (%) | -1.170000 |
| SAR 10g (W/Kg) | 2.068260 |
| SAR 1g (W/Kg) | 3.921162 |

SURFACE SAR

VOLUME SAR

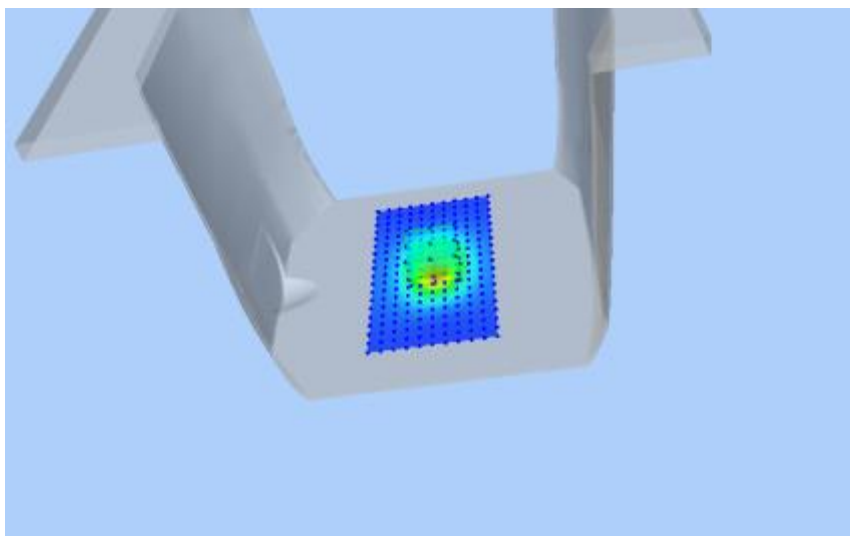
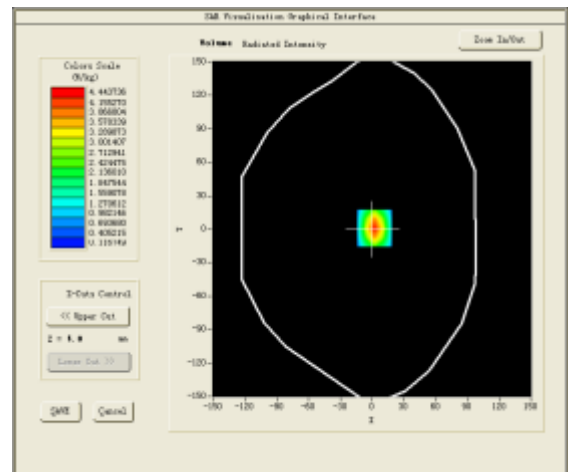
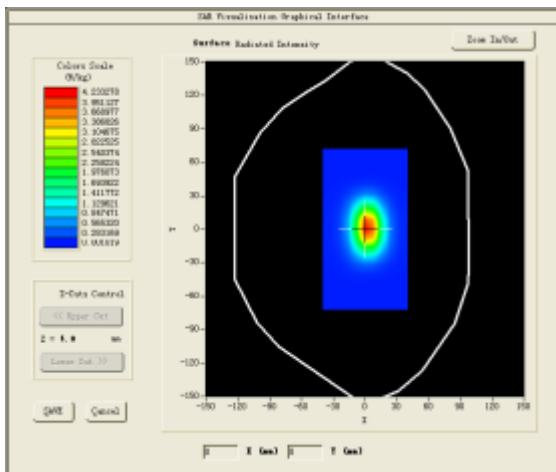


Test mode:2450MHz(Head)
 Product Description:Validation
 Model:Dipole SID2450
 E-Field Probe:SSE2(SN 31/17 EPGO324)
 Test Date: December 24, 2020

| | |
|-----------------------------------|-----------|
| Medium(liquid type) | HSL_2450 |
| Frequency (MHz) | 2450.0000 |
| Relative permittivity (real part) | 40.12 |
| Conductivity (S/m) | 1.76 |
| Input power | 100mW |
| Crest Factor | 1.0 |
| Conversion Factor | 1.91 |
| Variation (%) | 0.240000 |
| SAR 10g (W/Kg) | 2.343463 |
| SAR 1g (W/Kg) | 5.224016 |

SURFACE SAR

VOLUME SAR

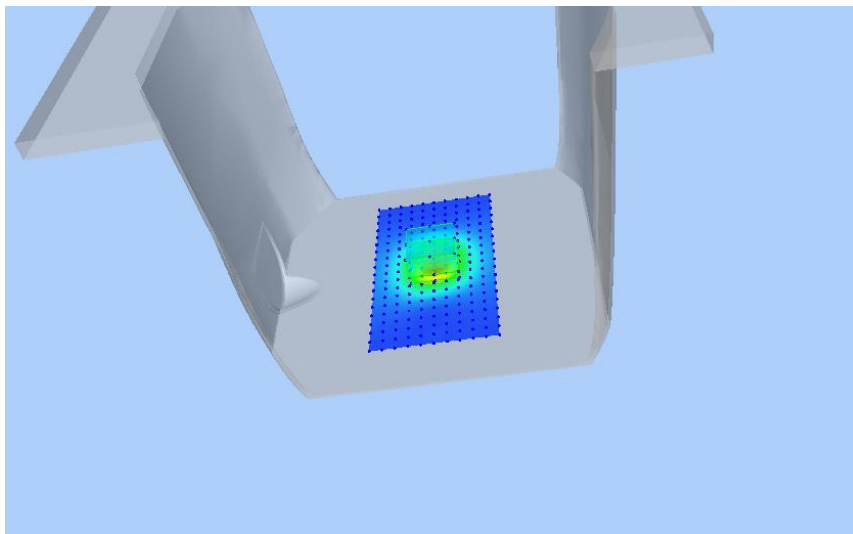
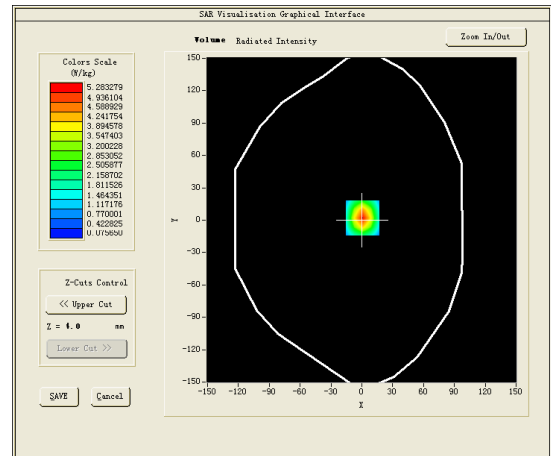
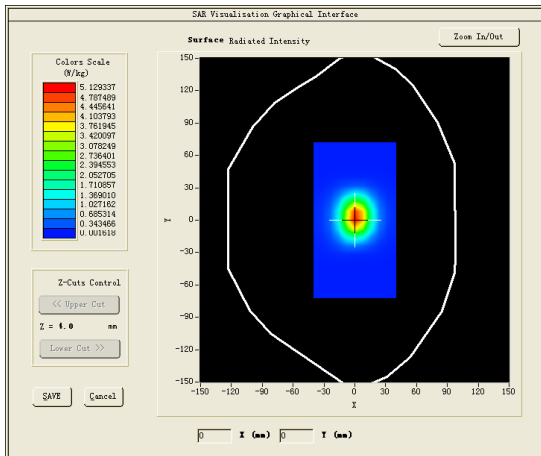


Test mode:2600MHz
 Product Description:Validation
 Model:Dipole SID2600
 E-Field Probe: SSE2(SN 31/17 EPGO324)
 Test Date: December 30, 2020

| | |
|-----------------------------------|-----------|
| Medium(liquid type) | HSL_2600 |
| Frequency (MHz) | 2600.0000 |
| Relative permittivity (real part) | 38.81 |
| Conductivity (S/m) | 1.89 |
| Input power | 100mW |
| Crest Factor | 1.0 |
| Conversion Factor | 1.89 |
| Variation (%) | -1.200000 |
| SAR 10g (W/Kg) | 2.453607 |
| SAR 1g (W/Kg) | 5.600611 |

SURFACE SAR

VOLUME SAR

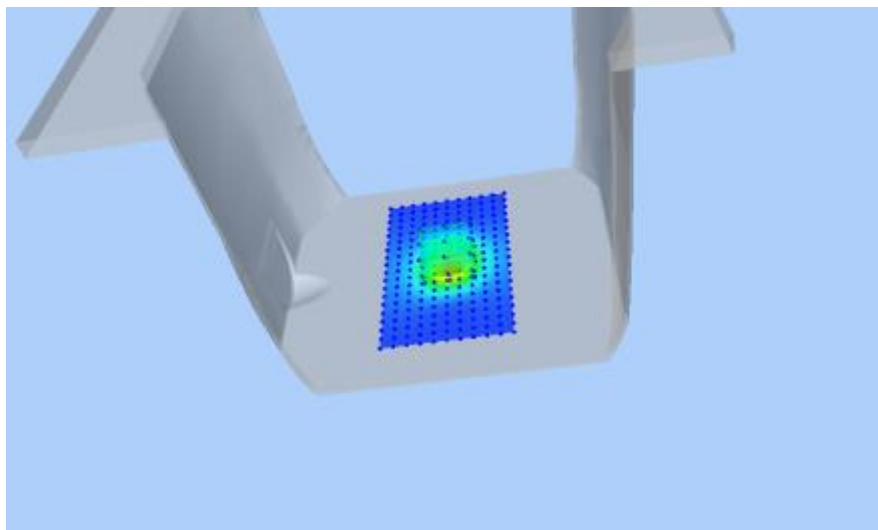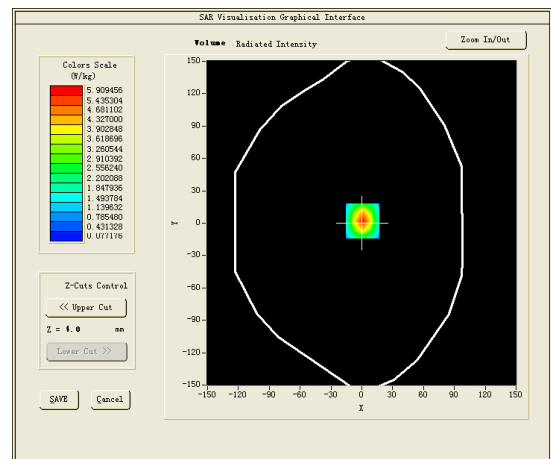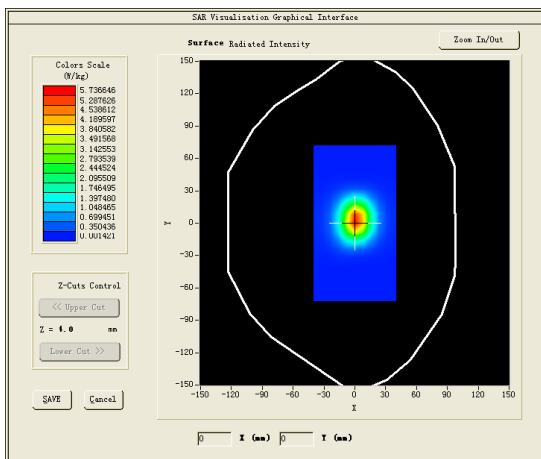

4.9. SAR Test Graph Results

SAR plots for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination

#1





Test Mode: Hotspot WCDMA Band V, Middle channel(Body Front Side)

Product Description:4G LTE Wireless Router

Model:GL-XE300C6

Test Date: November 20, 2020

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_850 |
| Frequency (MHz) | 846.6000 |
| Relative permittivity (real part) | 40.23 |
| Conductivity (S/m) | 0.89 |
| E-Field Probe | SN 31/17 EPGO324 |
| Crest Factor | 1.0 |
| Conversion Factor | 1.55 |
| Sensor | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | 1.260000 |
| SAR 10g (W/Kg) | 0.356010 |
| SAR 1g (W/Kg) | 0.580124 |
| SURFACE SAR | VOLUME SAR |

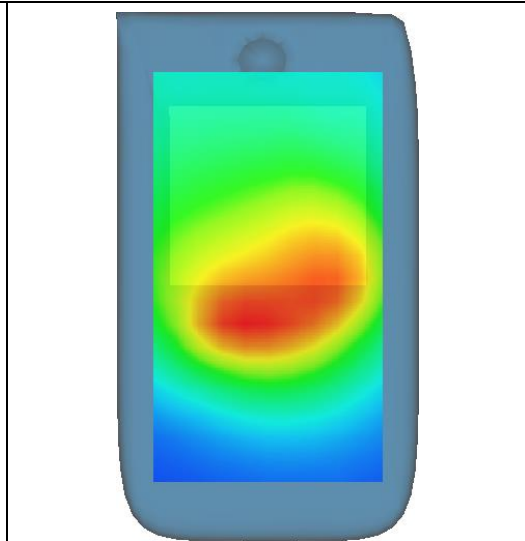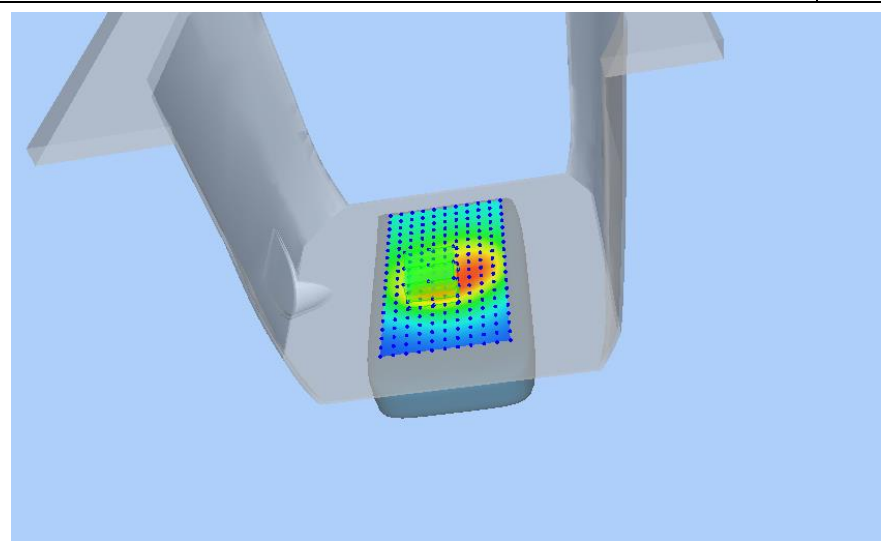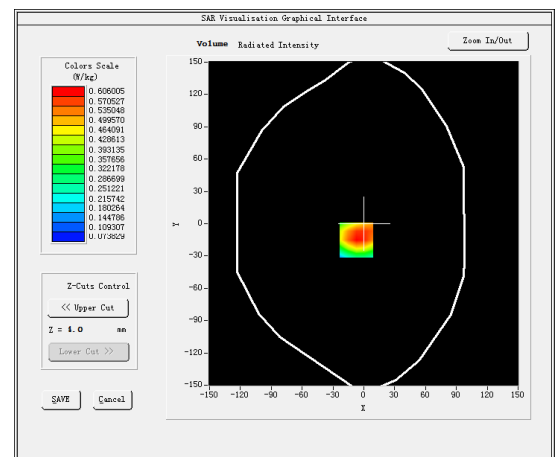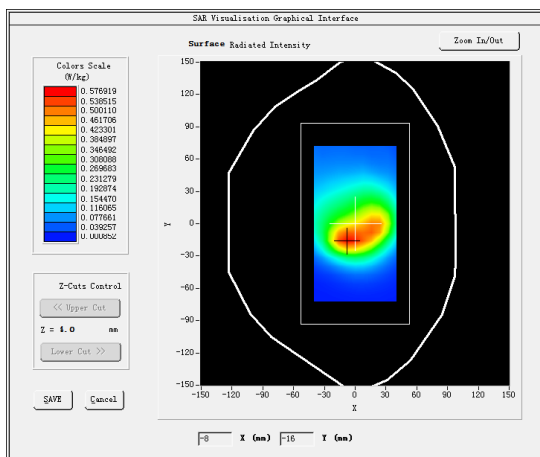

#2





Test Mode: Hotspot WCDMA Band IV, Middle channel(Body Front Side)

Product Description:4G LTE Wireless Router

Model:GL-XE300C6

Test Date: November 27, 2020

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_1800 |
| Frequency (MHz) | 1712.4000 |
| Relative permittivity (real part) | 41.48 |
| Conductivity (S/m) | 1.41 |
| E-Field Probe | SN 31/17 EPGO324 |
| Crest Factor | 1.0 |
| Conversion Factor | 1.65 |
| Sensor | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | -1.230000 |
| SAR 10g (W/Kg) | 0.481053 |
| SAR 1g (W/Kg) | 0.870245 |
| SURFACE SAR | VOLUME SAR |

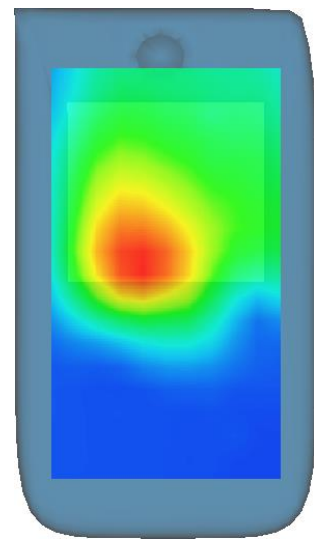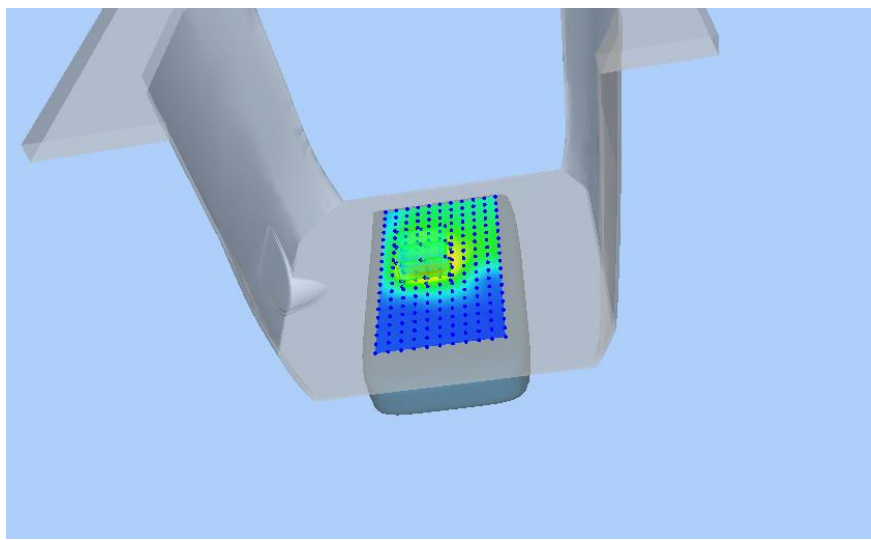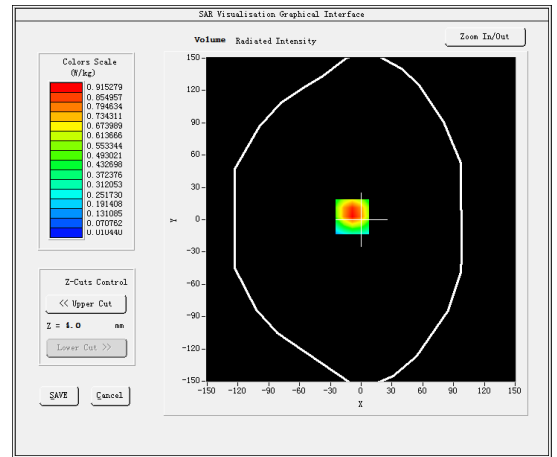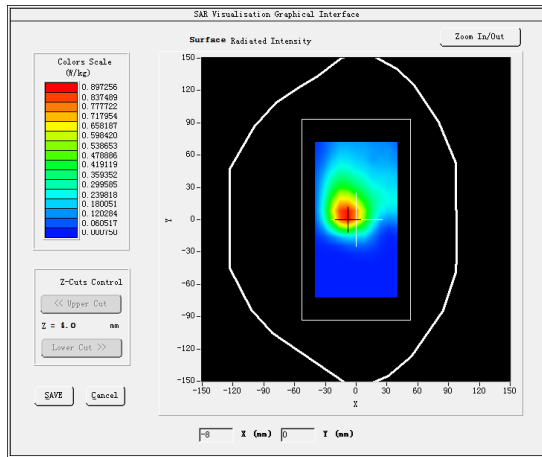

#3

Test Mode: Hotspot WCDMA Band II,Middle channel(Body Front Side)

Product Description:4G LTE Wireless Router





Model:GL-XE300C6

Test Date: December 17, 2020

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_1900 |
| Frequency (MHz) | 1880.0000 |
| Relative permittivity (real part) | 39.25 |
| Conductivity (S/m) | 1.43 |
| E-Field Probe | SN 31/17 EPGO324 |
| Crest Factor | 1.0 |
| Conversion Factor | 1.86 |
| Sensor | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | 1.380000 |
| SAR 10g (W/Kg) | 0.560521 |
| SAR 1g (W/Kg) | 0.895258 |

SURFACE SAR

VOLUME SAR

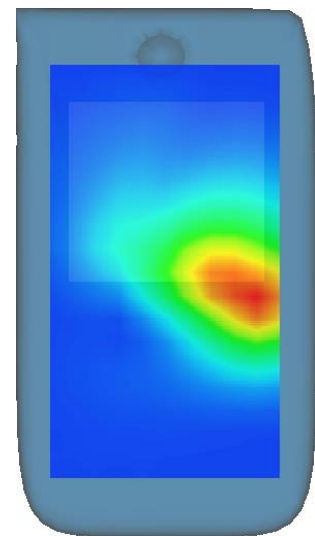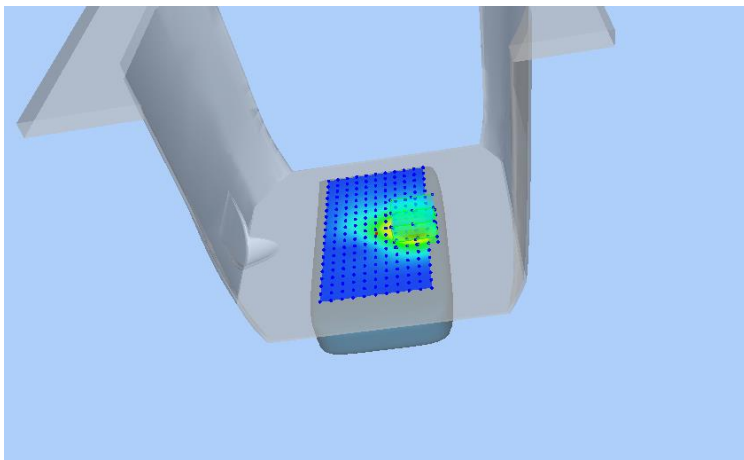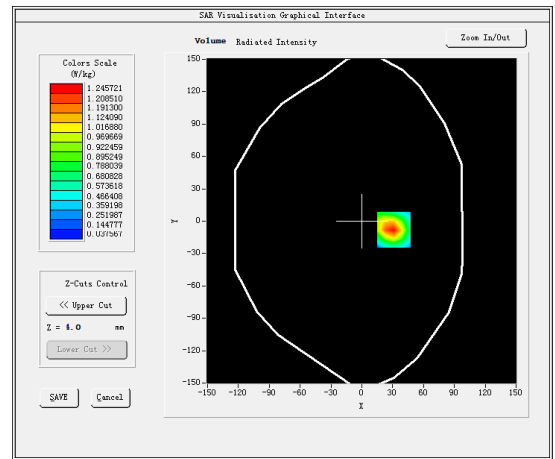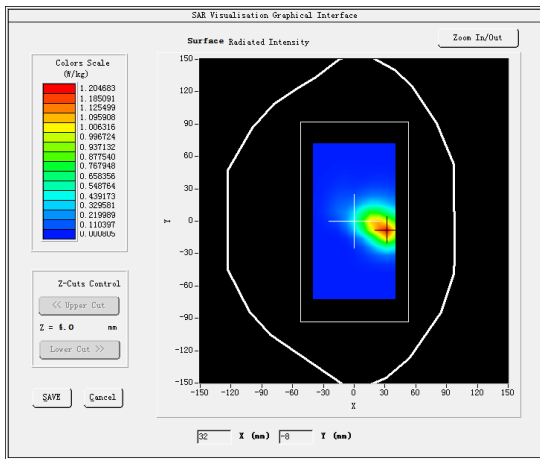





#4

Test Mode: Hotspot LTE Band 2, 1RB,Low channel(Body Rear Side)
 Product Description:4G LTE Wireless Router
 Model:GL-XE300C6
 Test Date: December 17, 2020

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_1900 |
| Frequency (MHz) | 1860.0000 |
| Relative permittivity (real part) | 40.22 |
| Conductivity (S/m) | 1.38 |
| E-Field Probe | SN 31/17 EPGO324 |
| Crest Factor | 1.0 |
| Conversion Factor | 1.86 |
| Sensor | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | -2.070000 |
| SAR 10g (W/Kg) | 0.465302 |
| SAR 1g (W/Kg) | 0.771202 |

SURFACE SAR

VOLUME SAR

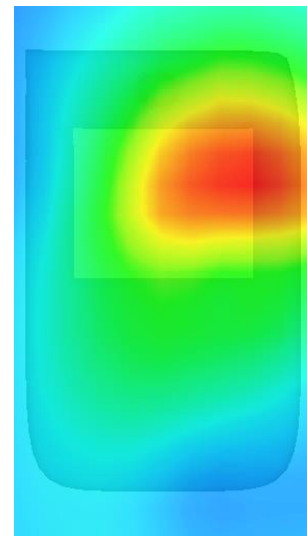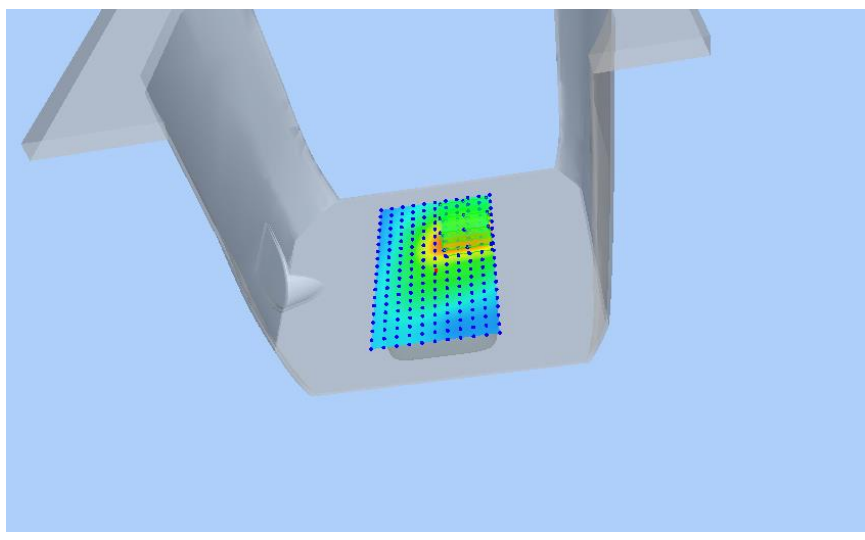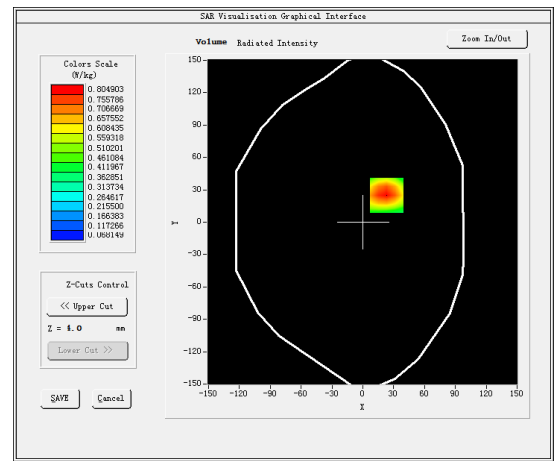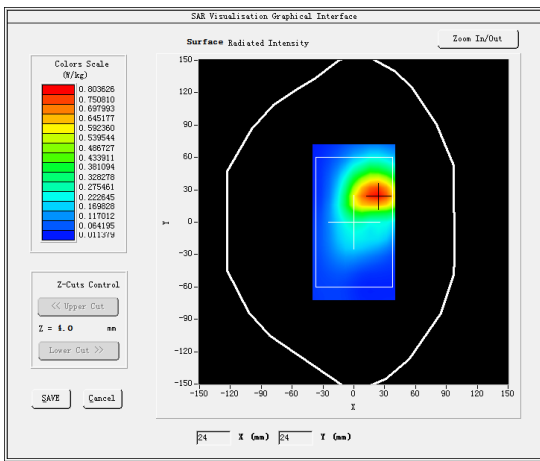

#5

Test Mode: LTE Band 4, 1RB,Low channel(Body Rear Side)

Product Description:4G LTE Wireless Router





Model:GL-XE300C6

Test Date: November 27, 2020

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_1800 |
| Frequency (MHz) | 1720.0000 |
| Relative permittivity (real part) | 41.74 |
| Conductivity (S/m) | 1.38 |
| E-Field Probe | SN 31/17 EPGO324 |
| Crest Factor | 1.0 |
| Conversion Factor | 1.65 |
| Sensor | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | -0.430000 |
| SAR 10g (W/Kg) | 0.640152 |
| SAR 1g (W/Kg) | 0.701412 |

SURFACE SAR

VOLUME SAR

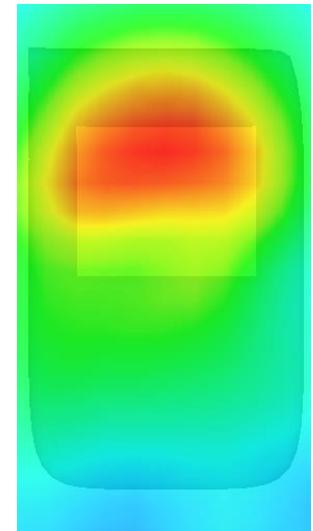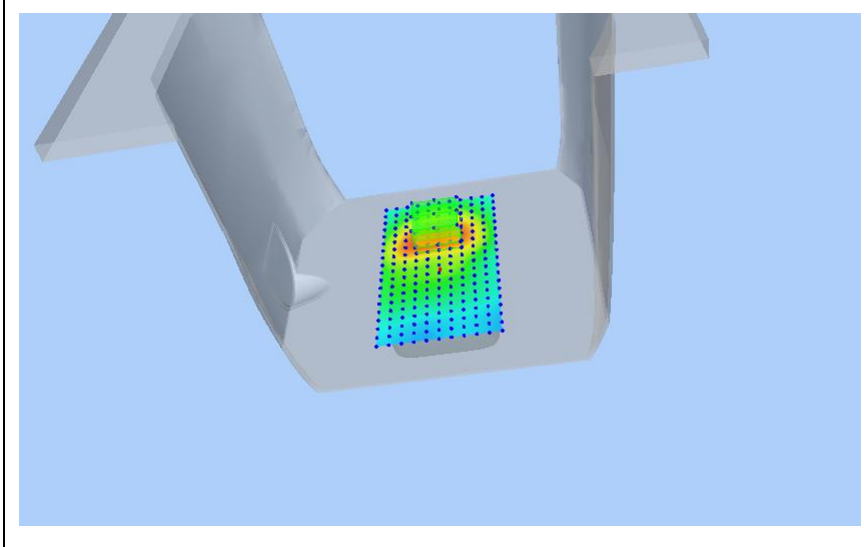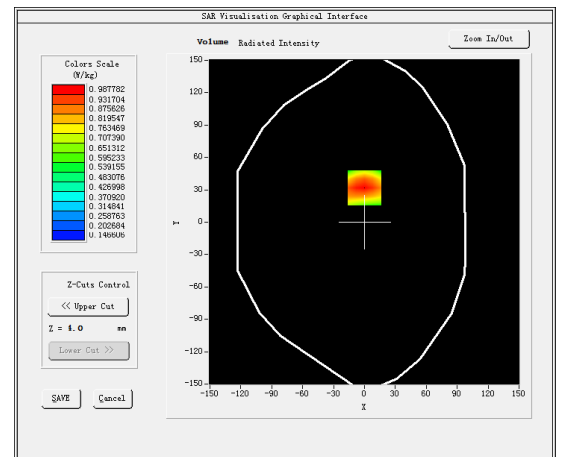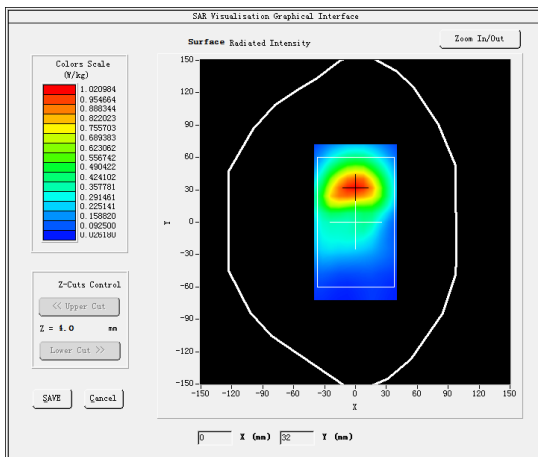

#6





Test Mode: LTE Band 5, 1RB,Low channel(Body Rear Side)

Product Description:4G LTE Wireless Router

Model:GL-XE300C6

Test Date: November 20, 2020

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_835 |
| Frequency (MHz) | 829.0000 |
| Relative permittivity (real part) | 40.68 |
| Conductivity (S/m) | 0.90 |
| E-Field Probe | SN 31/17 EPGO324 |
| Crest Factor | 1.0 |
| Conversion Factor | 1.55 |
| Sensor | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | -1.530000 |
| SAR 10g (W/Kg) | 0.120254 |
| SAR 1g (W/Kg) | 0.157012 |
| SURFACE SAR | VOLUME SAR |

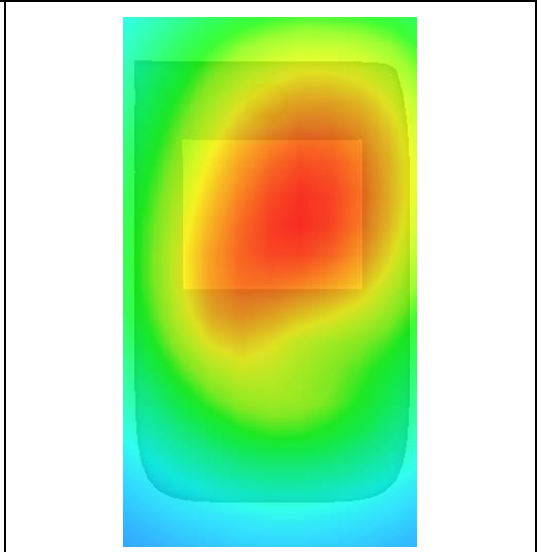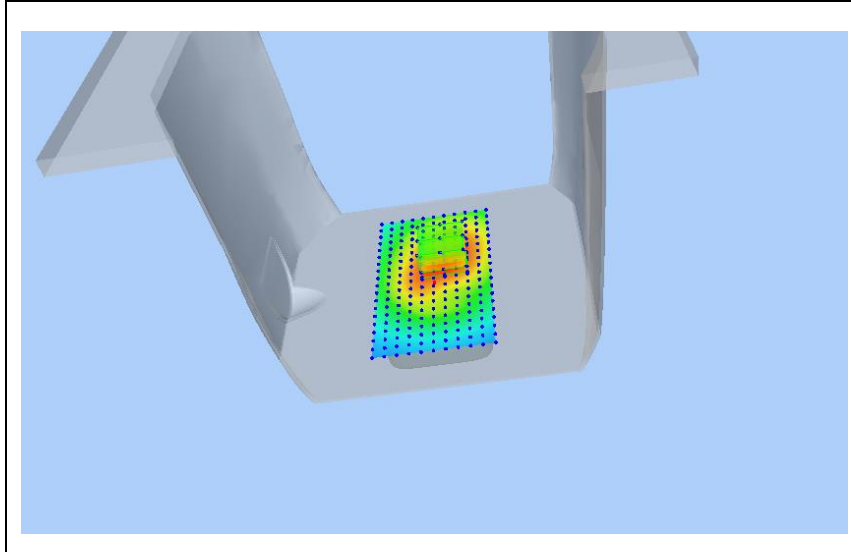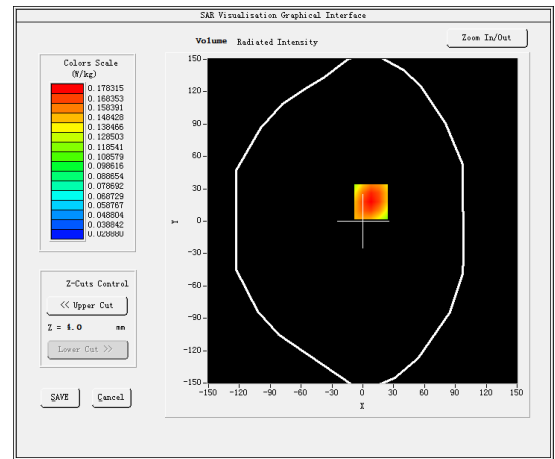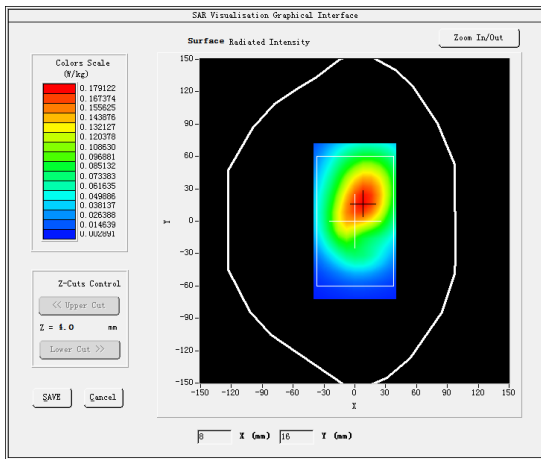

#7





Test Mode: LTE Band 7, 1RB,Low channel(Body Rear Side)

Product Description:4G LTE Wireless Router

Model:GL-XE300C6

Test Date: December 30, 2020

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_2600 |
| Frequency (MHz) | 2535.0000 |
| Relative permittivity (real part) | 39.36 |
| Conductivity (S/m) | 1.92 |
| E-Field Probe | SN 31/17 EPGO324 |
| Crest Factor | 1.0 |
| Conversion Factor | 1.89 |
| Sensor | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | 1.910000 |
| SAR 10g (W/Kg) | 0.108712 |
| SAR 1g (W/Kg) | 0.231204 |
| SURFACE SAR | VOLUME SAR |

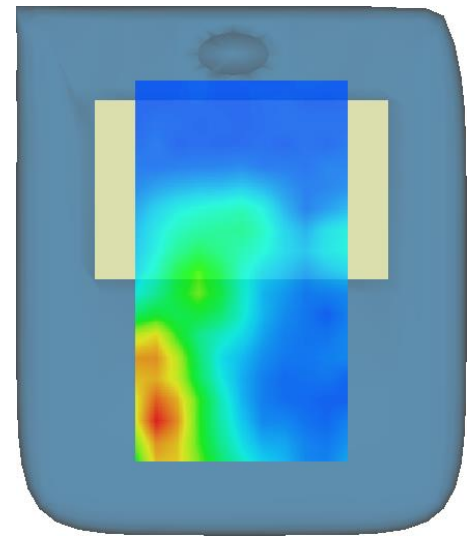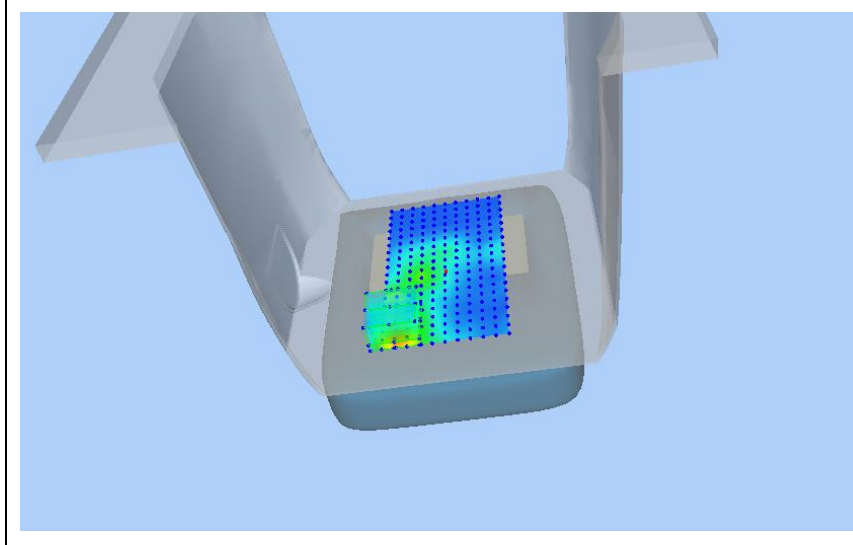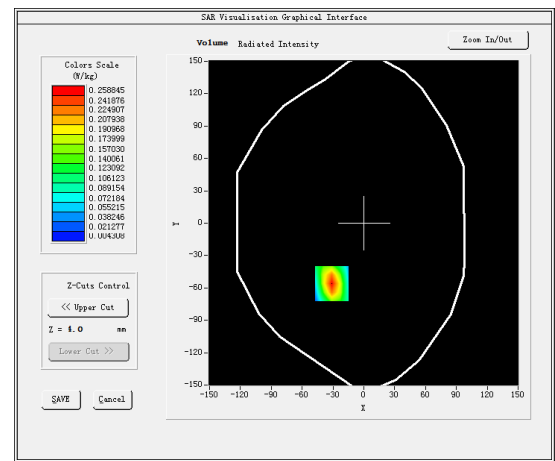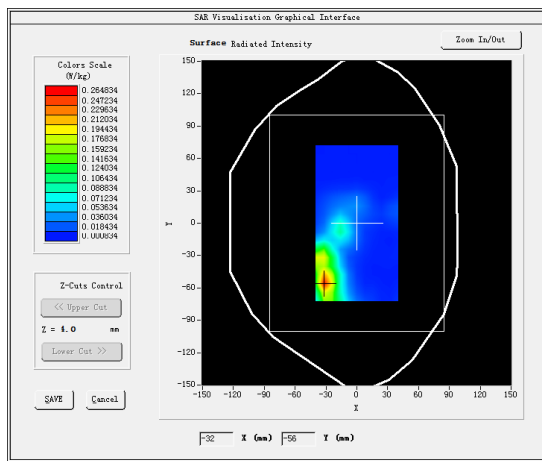

#8





Test Mode: Hotspot LTE Band 12, 1RB,Low channel (Body Rear Side)

Product Description:4G LTE Wireless Router

Model:GL-XE300C6

Test Date: November 13, 2020





| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_750 |
| Frequency (MHz) | 704.0000 |
| Relative permittivity (real part) | 41.17 |
| Conductivity (S/m) | 0.88 |
| E-Field Probe | SN 31/17 EPGO324 |
| Crest Factor | 1.0 |
| Conversion Factor | 1.45 |
| Sensor | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | 0.710000 |
| SAR 10g (W/Kg) | 0.165021 |
| SAR 1g (W/Kg) | 0.204231 |
| SURFACE SAR | VOLUME SAR |

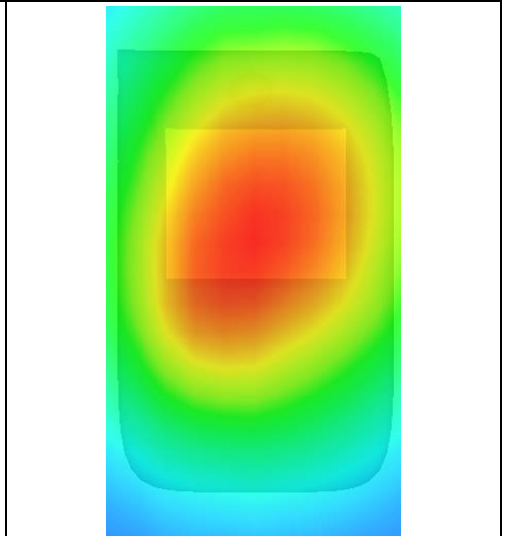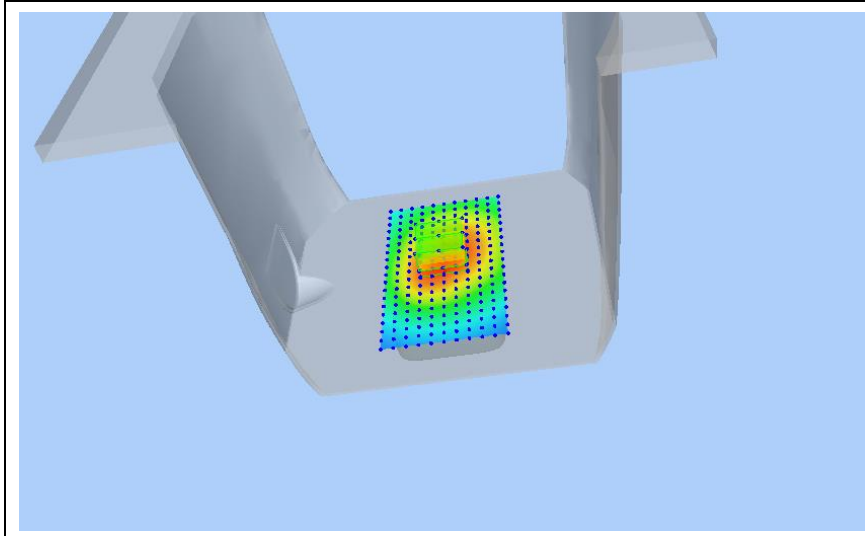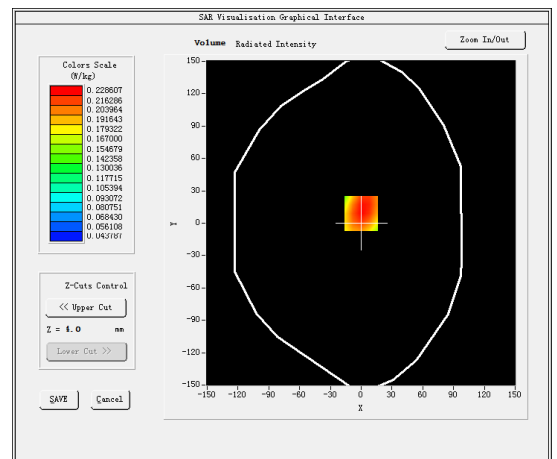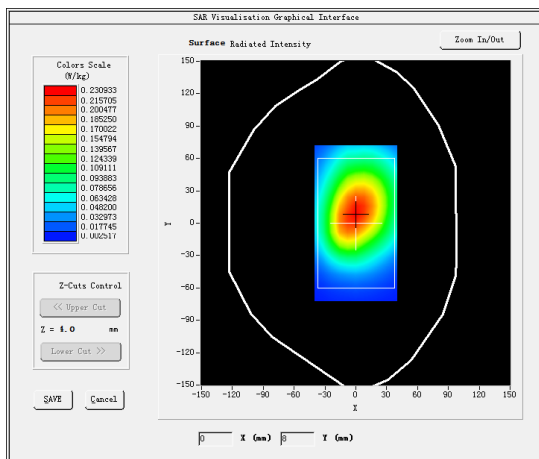

#9

Test Mode: Hotspot LTE Band 13, 1RB,Low channel (Body Rear Side)
 Product Description:4G LTE Wireless Router
 Model:GL-XE300C6
 Test Date: November 13, 2020

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_750 |
| Frequency (MHz) | 782.0000 |
| Relative permittivity (real part) | 41.74 |
| Conductivity (S/m) | 0.91 |
| E-Field Probe | SN 31/17 EPGO324 |
| Crest Factor | 1.0 |
| Conversion Factor | 1.45 |
| Sensor | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | 0.110000 |
| SAR 10g (W/Kg) | 0.210702 |
| SAR 1g (W/Kg) | 0.277125 |
| SURFACE SAR | VOLUME SAR |

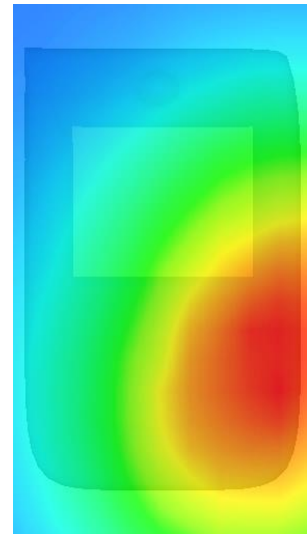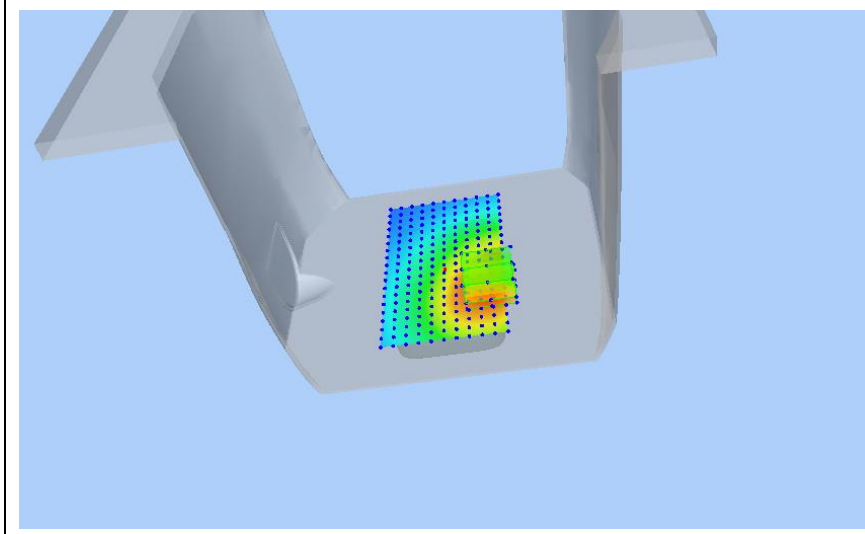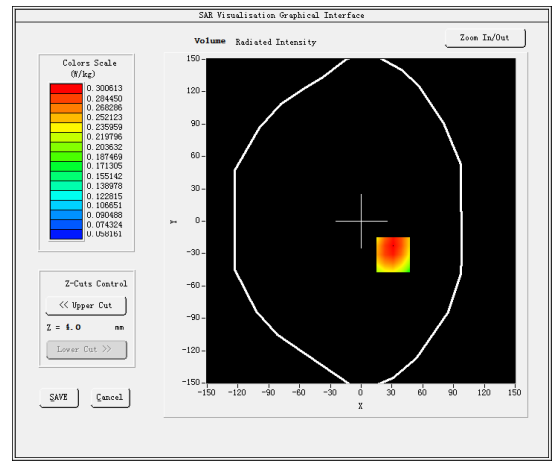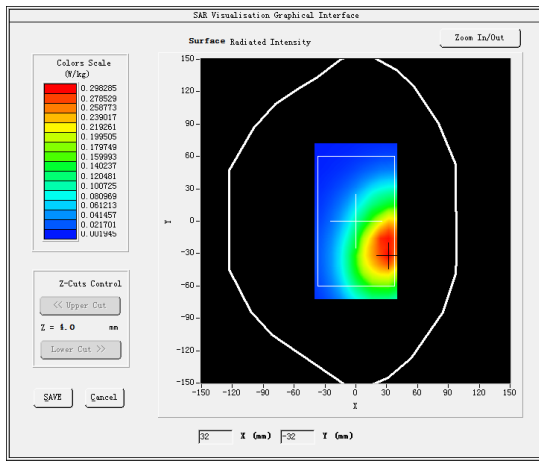

#10





Test Mode: Hotspot LTE Band 25, 1RB,Low channel (Body Rear Side)

Product Description: MOBILE PHONE

Model: GL-XE300C6

Test Date: November 27, 2020

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_1900 |
| Frequency (MHz) | 1850.7000 |
| Relative permittivity (real part) | 41.62 |
| Conductivity (S/m) | 1.41 |
| E-Field Probe | SN 31/17 EPGO324 |
| Crest Factor | 1.0 |
| Conversion Factor | 1.86 |
| Sensor | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | -1.010000 |
| SAR 10g (W/Kg) | 0.361025 |
| SAR 1g (W/Kg) | 0.560274 |
| SURFACE SAR | VOLUME SAR |

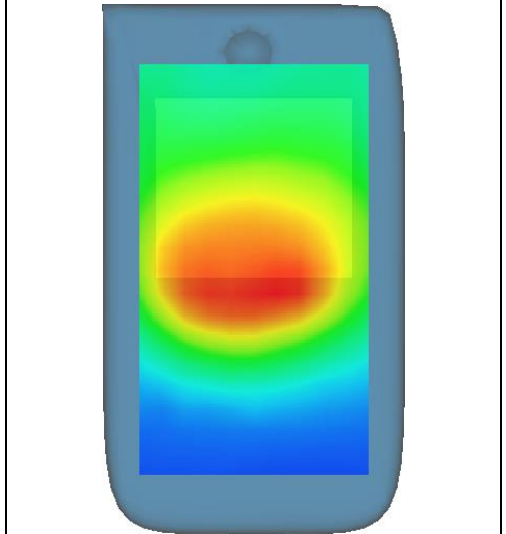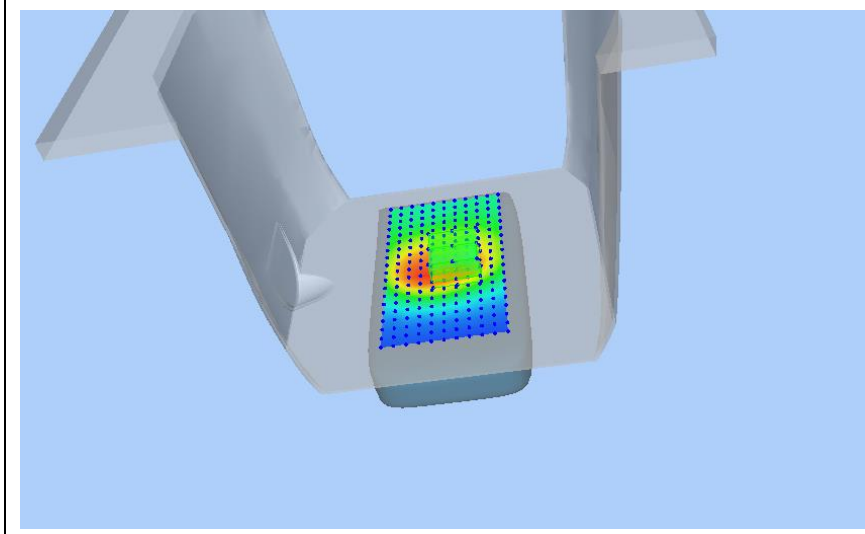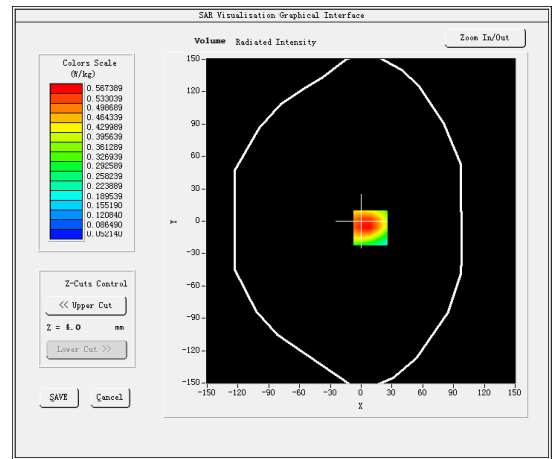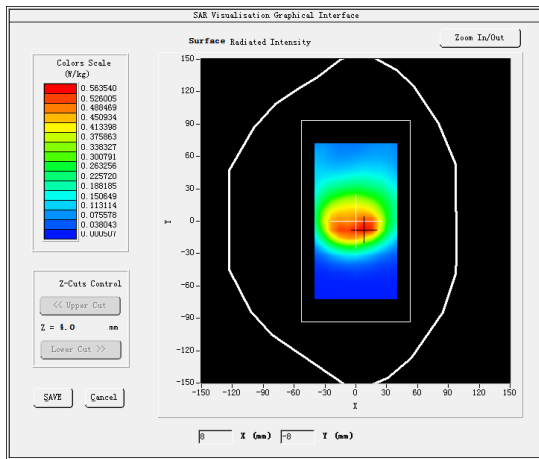

#11





Test Mode: Hotspot LTE Band 26, 1RB,Low channel (Body Rear Side)

Product Description: MOBILE PHONE

Model: GL-XE300C6

Test Date: November 20, 2020

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_835 |
| Frequency (MHz) | 821.5000 |
| Relative permittivity (real part) | 40.68 |
| Conductivity (S/m) | 0.89 |
| E-Field Probe | SN 31/17 EPGO324 |
| Crest Factor | 1.0 |
| Conversion Factor | 1.55 |
| Sensor | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | -0.940000 |
| SAR 10g (W/Kg) | 0.364027 |
| SAR 1g (W/Kg) | 0.558204 |
| SURFACE SAR | VOLUME SAR |

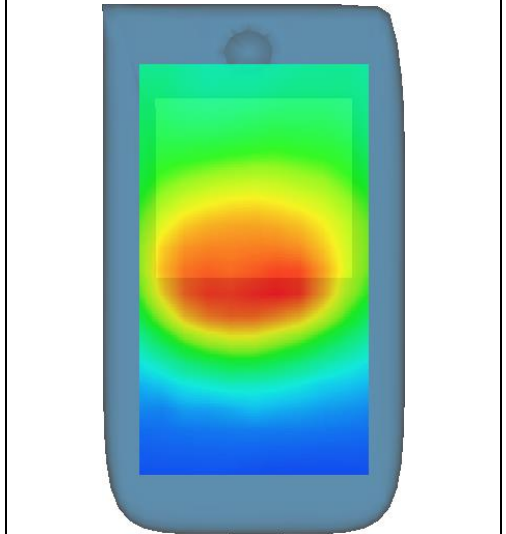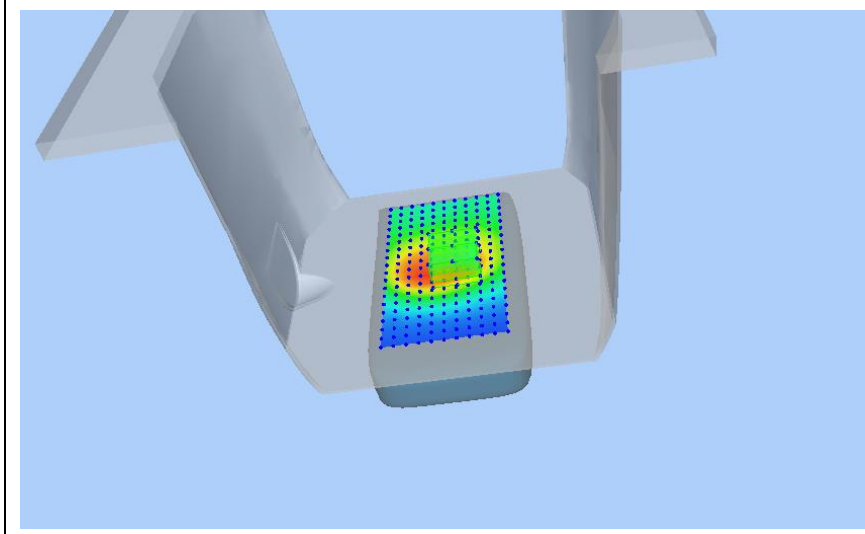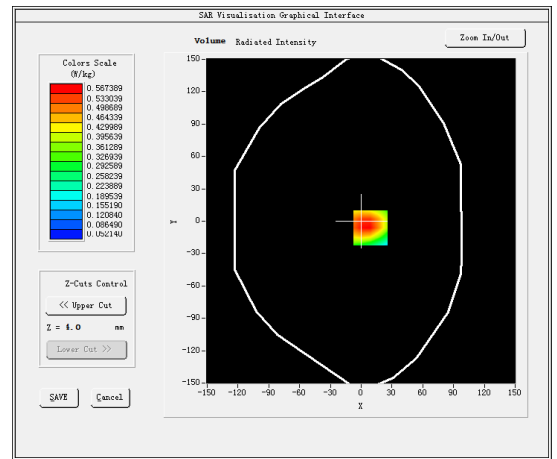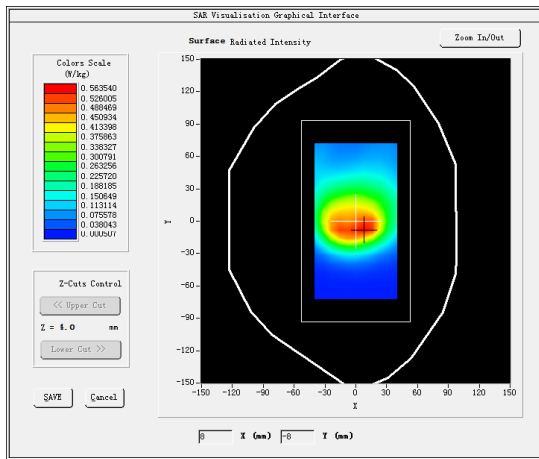

#12





Test Mode: Hotspot LTE Band 30, 1RB,High channel (Body Front Side)

Product Description:4G LTE Wireless Router

Model:GL-XE300C6

Test Date: December 24, 2020

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_2450 |
| Frequency (MHz) | 2312.50000 |
| Relative permittivity (real part) | 40.13 |
| Conductivity (S/m) | 1.76 |
| E-Field Probe | SN 31/17 EPGO324 |
| Crest Factor | 1.0 |
| Conversion Factor | 1.91 |
| Sensor | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | -0.490000 |
| SAR 10g (W/Kg) | 0.341698 |
| SAR 1g (W/Kg) | 0.473550 |
| SURFACE SAR | VOLUME SAR |

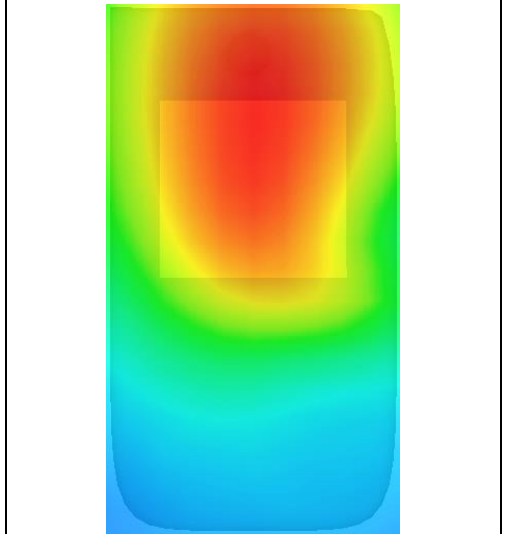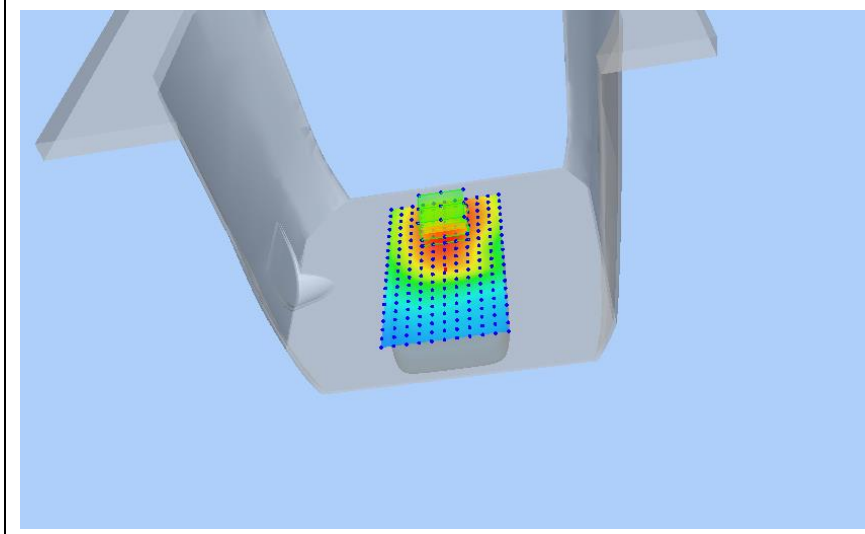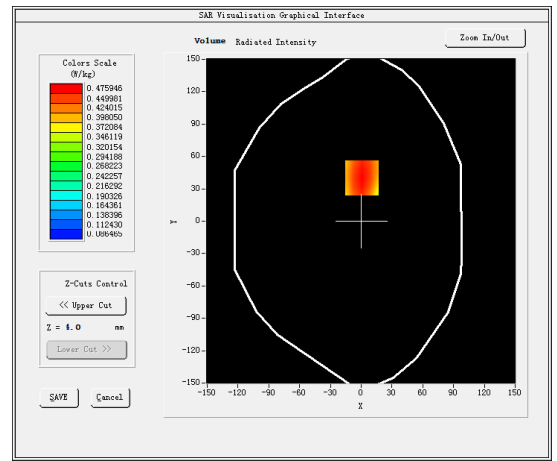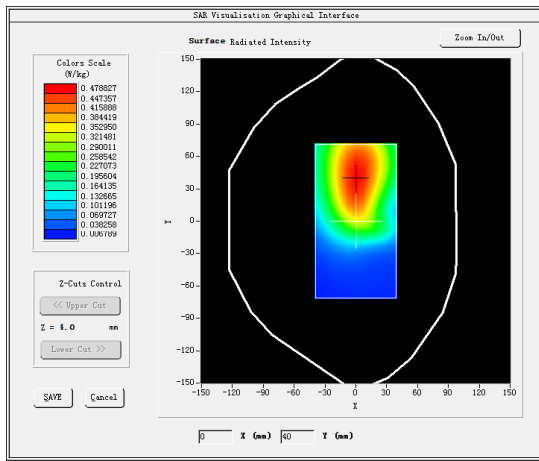

#13





Test Mode: Hotspot 802.11g(WiFi2.4G),High channel(Body Rear Side)(ANT0)

Product Description:4G LTE Wireless Router

Model:GL-XE300C6

Test Date: December 24, 2020

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_2450 |
| Frequency (MHz) | 2452.0000 |
| Relative permittivity (real part) | 40.03 |
| Conductivity (S/m) | 1.79 |
| E-Field Probe | SN 31/17 EPGO324 |
| Crest Factor | 1.0 |
| Conversion Factor | 1.91 |
| Sensor | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | -0.760000 |
| SAR 10g (W/Kg) | 0.150205 |
| SAR 1g (W/Kg) | 0.229278 |
| SURFACE SAR | VOLUME SAR |

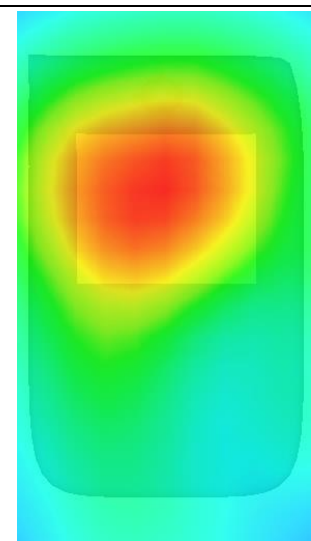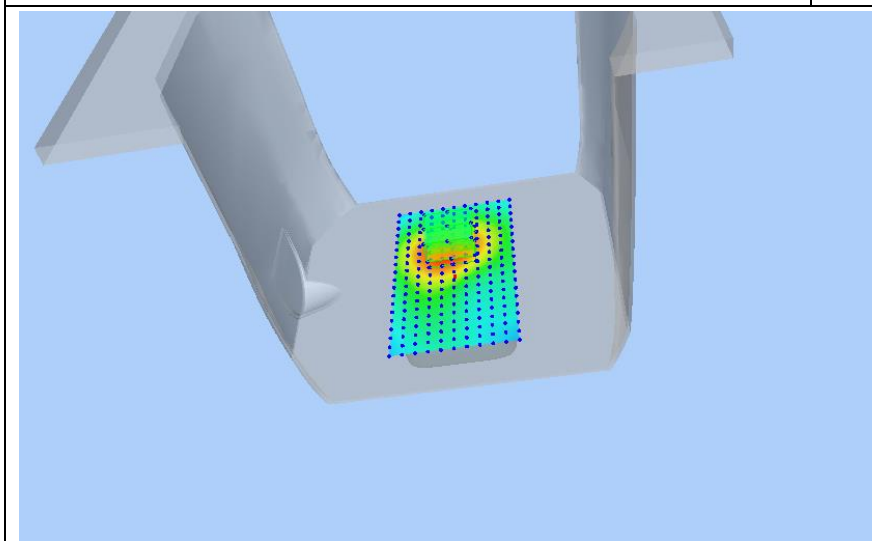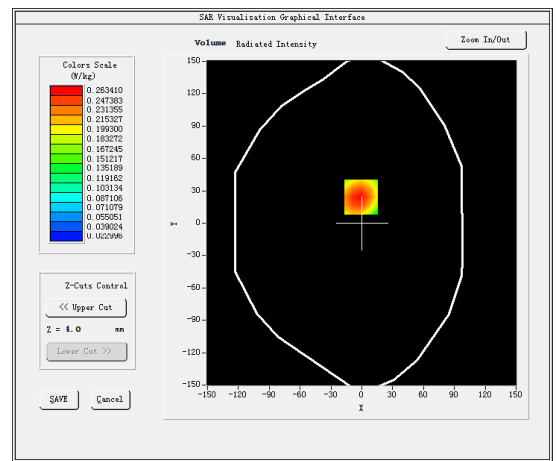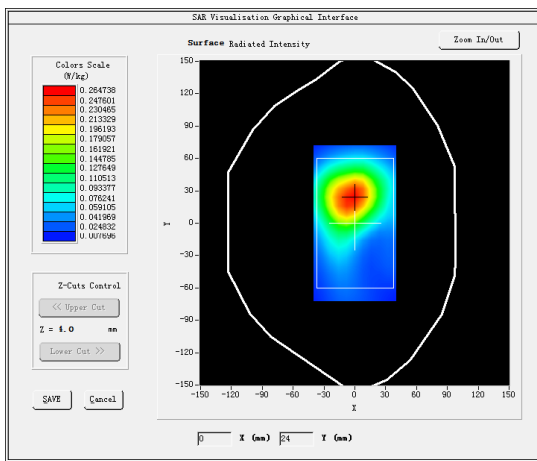

#14





Test Mode: Hotspot 802.11g(WiFi2.4G),High channel(Body Rear Side) (ANT1)

Product Description:4G LTE Wireless Router

Model:GL-XE300C6

Test Date: December 24, 2020

| | |
|-----------------------------------|----------------------------|
| Medium(liquid type) | HSL_2450 |
| Frequency (MHz) | 2452.0000 |
| Relative permittivity (real part) | 40.03 |
| Conductivity (S/m) | 1.79 |
| E-Field Probe | SN 31/17 EPGO324 |
| Crest Factor | 1.0 |
| Conversion Factor | 1.91 |
| Sensor | 4mm |
| Area Scan | dx=8mm dy=8mm |
| Zoom Scan | 5x5x7,dx=8mm dy=8mm dz=5mm |
| Variation (%) | 0.170000 |
| SAR 10g (W/Kg) | 0.151002 |
| SAR 1g (W/Kg) | 0.223487 |
| SURFACE SAR | VOLUME SAR |

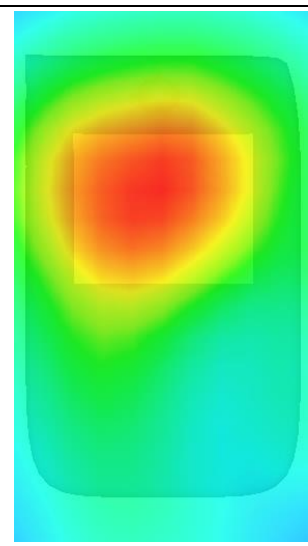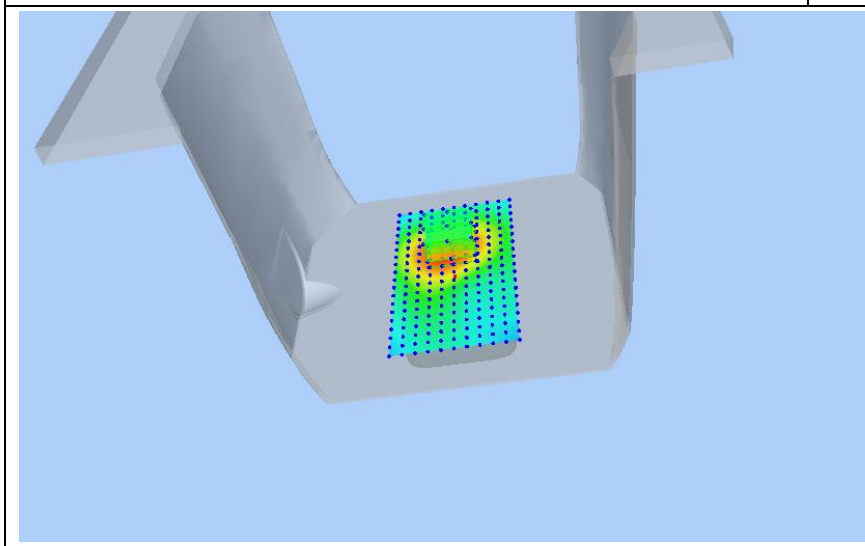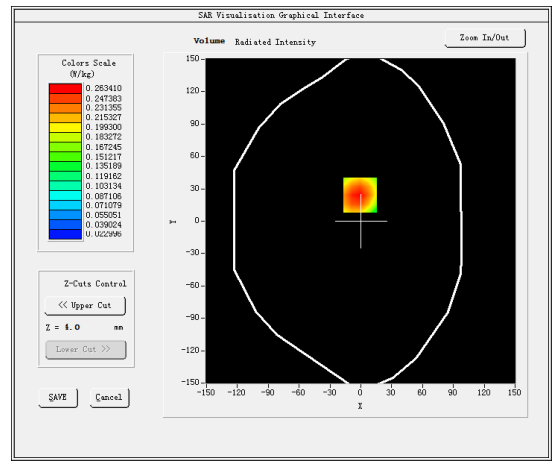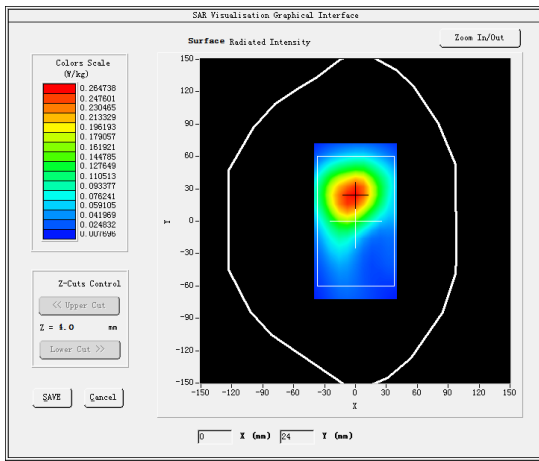

5. CALIBRATION CERTIFICATES

5.1 Probe-EPGO324 Calibration Certificate



COMOSAR E-Field Probe Calibration Report

Ref : ACR.281.2.18.SATU.A

**SHENZHEN LCS COMPLIANCE TESTING
LABORATORY LTD.**
1F., XINGYUAN INDUSTRIAL PARK, TONGDA ROAD,
BAO'AN BLVD
BAO'AN DISTRICT, SHENZHEN, GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: SN 31/17 EPGO324

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 10/07/2020

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in MVG USA using the CALISAR / CALIBAIR test bench, for use with a COMOSAR system only. All calibration results are traceable to national metrology institutions.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.281.2.18.SATU.A

| | <i>Name</i> | <i>Function</i> | <i>Date</i> | <i>Signature</i> |
|----------------------|---------------|-----------------|-------------|----------------------|
| <i>Prepared by :</i> | Jérôme LUC | Product Manager | 10/7/2020 | <i>JL</i> |
| <i>Checked by :</i> | Jérôme LUC | Product Manager | 10/7/2020 | <i>JL</i> |
| <i>Approved by :</i> | Kim RUTKOWSKI | Quality Manager | 10/7/2020 | <i>Kim Rutkowski</i> |

| | <i>Customer Name</i> |
|-----------------------|---|
| <i>Distribution :</i> | Shenzhen LCS Compliance Testing Laboratory Ltd. |

| <i>Issue</i> | <i>Date</i> | <i>Modifications</i> |
|--------------|-------------|----------------------|
| A | 10/7/2020 | Initial release |
| | | |
| | | |
| | | |

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.281.2.18.SATU.A

TABLE OF CONTENTS

1 Device Under Test 4

2 Product Description 4

 2.1 General Information 4

3 Measurement Method 4

 3.1 Linearity 4

 3.2 Sensitivity 5

 3.3 Lower Detection Limit 5

 3.4 Isotropy 5

 3.5 Boundary Effect 5

4 Measurement Uncertainty 5

5 Calibration Measurement Results 6

 5.1 Sensitivity in air 6

 5.2 Linearity 7

 5.3 Sensitivity in liquid 7

 5.4 Isotropy 8

6 List of Equipment 10

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.281.2.18.SATU.A

1 DEVICE UNDER TEST

| Device Under Test | |
|--|---|
| Device Type | COMOSAR DOSIMETRIC E FIELD PROBE |
| Manufacturer | MVG |
| Model | SSE2 |
| Serial Number | SN 31/17 EPGO324 |
| Product Condition (new / used) | New |
| Frequency Range of Probe | 0.15 GHz-6GHz |
| Resistance of Three Dipoles at Connector | Dipole 1: R1=0.189 MΩ Dipole 2: R2=0.203 MΩ Dipole 3: R3=0.218 MΩ |

A yearly calibration interval is recommended.

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

| | |
|--|--------|
| Probe Length | 330 mm |
| Length of Individual Dipoles | 2 mm |
| Maximum external diameter | 8 mm |
| Probe Tip External Diameter | 2.5 mm |
| Distance between dipoles / probe extremity | 1 mm |

3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

Page: 4/10

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.281.2.18.SATU.A

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

| Uncertainty analysis of the probe calibration in waveguide | | | | | |
|--|-----------------------|--------------------------|------------|----|--------------------------|
| ERROR SOURCES | Uncertainty value (%) | Probability Distribution | Divisor | ci | Standard Uncertainty (%) |
| Incident or forward power | 3.00% | Rectangular | $\sqrt{3}$ | 1 | 1.732% |
| Reflected power | 3.00% | Rectangular | $\sqrt{3}$ | 1 | 1.732% |
| Liquid conductivity | 5.00% | Rectangular | $\sqrt{3}$ | 1 | 2.887% |
| Liquid permittivity | 4.00% | Rectangular | $\sqrt{3}$ | 1 | 2.309% |
| Field homogeneity | 3.00% | Rectangular | $\sqrt{3}$ | 1 | 1.732% |
| Field probe positioning | 5.00% | Rectangular | $\sqrt{3}$ | 1 | 2.887% |

Page: 5/10

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.281.2.18.SATU.A

| | | | | | |
|--|-------|-------------|------------|---|--------|
| Field probe linearity | 3.00% | Rectangular | $\sqrt{3}$ | 1 | 1.732% |
| Combined standard uncertainty | | | | | 5.831% |
| Expanded uncertainty 95 % confidence level k = 2 | | | | | 12.0% |

5 CALIBRATION MEASUREMENT RESULTS

| Calibration Parameters | |
|------------------------|-------|
| Liquid Temperature | 21 °C |
| Lab Temperature | 21 °C |
| Lab Humidity | 45 % |


5.1 SENSITIVITY IN AIR

| Normx dipole 1 ($\mu\text{V}/(\text{V}/\text{m})^2$) | Normy dipole 2 ($\mu\text{V}/(\text{V}/\text{m})^2$) | Normz dipole 3 ($\mu\text{V}/(\text{V}/\text{m})^2$) |
|---|---|---|
| 0.80 | 0.83 | 0.68 |

| DCP dipole 1 (mV) | DCP dipole 2 (mV) | DCP dipole 3 (mV) |
|----------------------|----------------------|----------------------|
| 95 | 90 | 93 |

Calibration curves $e_i=f(V)$ ($i=1,2,3$) allow to obtain H-field value using the formula:

$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$

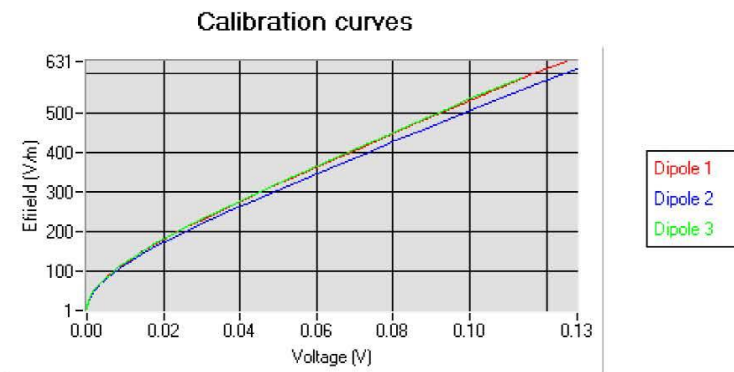


This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.281.2.18.SATU.A

5.2 LINEARITY

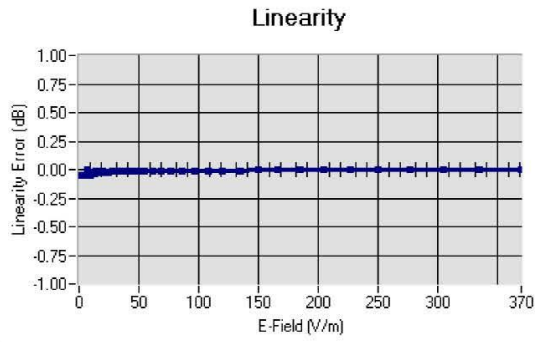

Linearity: $\pm 1.13\%$ ($\pm 0.05\text{dB}$)

5.3 SENSITIVITY IN LIQUID

| Liquid | Frequency (MHz +/- 100MHz) | Permittivity | Epsilon (S/m) | ConvF |
|--------|----------------------------|--------------|---------------|-------|
| HL450 | 450 | 42.17 | 0.86 | 1.56 |
| BL450 | 450 | 57.65 | 0.95 | 1.60 |
| HL750 | 750 | 40.03 | 0.93 | 1.45 |
| BL750 | 750 | 56.83 | 1.00 | 1.50 |
| HL850 | 835 | 42.19 | 0.90 | 1.55 |
| BL850 | 835 | 54.67 | 1.01 | 1.59 |
| HL900 | 900 | 42.08 | 1.01 | 1.54 |
| BL900 | 900 | 55.25 | 1.08 | 1.60 |
| HL1800 | 1800 | 41.68 | 1.46 | 1.65 |
| BL1800 | 1800 | 53.86 | 1.46 | 1.68 |
| HL1900 | 1900 | 38.45 | 1.45 | 1.86 |
| BL1900 | 1900 | 53.32 | 1.56 | 1.93 |
| HL2000 | 2000 | 38.26 | 1.38 | 1.83 |
| BL2000 | 2000 | 52.70 | 1.51 | 1.89 |
| HL2300 | 2300 | 39.44 | 1.62 | 1.95 |
| BL2300 | 2300 | 54.52 | 1.77 | 2.01 |
| HL2450 | 2450 | 37.50 | 1.80 | 1.91 |
| BL2450 | 2450 | 53.22 | 1.89 | 1.95 |
| HL2600 | 2600 | 39.80 | 1.99 | 1.89 |
| BL2600 | 2600 | 52.52 | 2.23 | 1.94 |
| HL5200 | 5200 | 35.64 | 4.67 | 1.50 |
| BL5200 | 5200 | 48.64 | 5.51 | 1.56 |
| HL5400 | 5400 | 36.44 | 4.87 | 1.44 |
| BL5400 | 5400 | 46.52 | 5.77 | 1.47 |
| HL5600 | 5600 | 36.66 | 5.17 | 1.48 |
| BL5600 | 5600 | 46.79 | 5.77 | 1.53 |
| HL5800 | 5800 | 35.31 | 5.31 | 1.50 |
| BL5800 | 5800 | 47.04 | 6.10 | 1.55 |

LOWER DETECTION LIMIT: 9mW/kg

Page: 7/10

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.




COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.281.2.18.SATU.A

5.4 ISOTROPY


HL900 MHz

- Axial isotropy: 0.05 dB
- Hemispherical isotropy: 0.07 dB

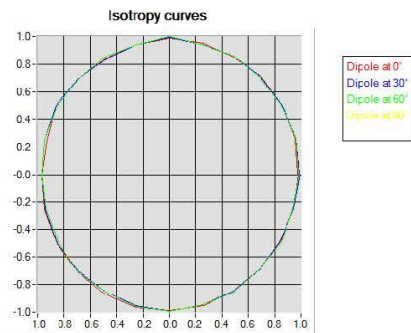

HL1800 MHz

- Axial isotropy: 0.06 dB
- Hemispherical isotropy: 0.07 dB

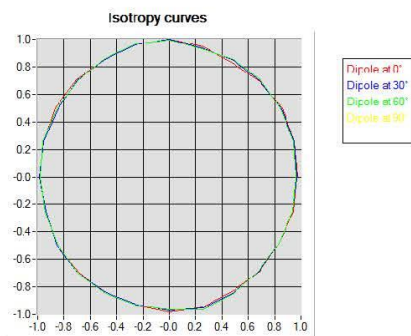

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.




COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.281.2.18.SATU.A

HL5600 MHz

- Axial isotropy: 0.06 dB
- Hemispherical isotropy: 0.10 dB

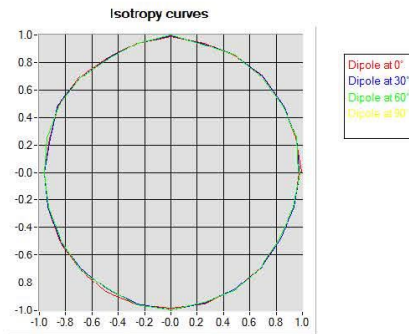

Page: 9/10

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.281.2.18.SATU.A

6 LIST OF EQUIPMENT

| Equipment Summary Sheet | | | | |
|-------------------------------|----------------------|--------------------|---|---|
| Equipment Description | Manufacturer / Model | Identification No. | Current Calibration Date | Next Calibration Date |
| Flat Phantom | MVG | SN-20/09-SAM71 | Validated. No cal required. | Validated. No cal required. |
| COMOSAR Test Bench | Version 3 | NA | Validated. No cal required. | Validated. No cal required. |
| Network Analyzer | Rhode & Schwarz ZVA | SN100132 | 02/2019 | 02/2022 |
| Reference Probe | MVG | EP 94 SN 37/08 | 10/2019 | 10/2021 |
| Multimeter | Keithley 2000 | 1188656 | 01/2020 | 01/2023 |
| Signal Generator | Agilent E4438C | MY49070581 | 01/2020 | 01/2023 |
| Amplifier | Aethercomm | SN 046 | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Power Meter | HP E4418A | US38261498 | 01/2020 | 01/2023 |
| Power Sensor | HP ECP-E26A | US37181460 | 01/2020 | 01/2023 |
| Directional Coupler | Narda 4216-20 | 01386 | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Waveguide | Mega Industries | 069Y7-158-13-712 | Validated. No cal required. | Validated. No cal required. |
| Waveguide Transition | Mega Industries | 069Y7-158-13-701 | Validated. No cal required. | Validated. No cal required. |
| Waveguide Termination | Mega Industries | 069Y7-158-13-701 | Validated. No cal required. | Validated. No cal required. |
| Temperature / Humidity Sensor | Control Company | 150798832 | 11/2020 | 11/2023 |

Page: 10/10

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*

5.2 SID750 Dipole Calibration Certificate



SAR Reference Dipole Calibration Report

Ref : ACR.287.3.14.SATU.A

**SHENZHEN LCS COMPLIANCE TESTING
LABORATORY LTD.**

**1F., XINGYUAN INDUSTRIAL PARK, TONGDA ROAD,
BAO'AN BLVD**

BAO'AN DISTRICT, SHENZHEN, GUANGDONG, CHINA

SATIMO COMOSAR REFERENCE DIPOLE

FREQUENCY: 750 MHZ

SERIAL NO.: SN 07/14 DIP 0G750-302

Calibrated at SATIMO US

2105 Barrett Park Dr. - Kennesaw, GA 30144



10/01/2018

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in SATIMO USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.287.3.14.SATU.A

| | <i>Name</i> | <i>Function</i> | <i>Date</i> | <i>Signature</i> |
|----------------------|---------------|-----------------|-------------|----------------------|
| <i>Prepared by :</i> | Jérôme LUC | Product Manager | 10/14/2018 | <i>JS</i> |
| <i>Checked by :</i> | Jérôme LUC | Product Manager | 10/14/2018 | <i>JS</i> |
| <i>Approved by :</i> | Kim RUTKOWSKI | Quality Manager | 10/14/2018 | <i>Kim Rutkowski</i> |

| | <i>Customer Name</i> |
|-----------------------|---|
| <i>Distribution :</i> | Shenzhen LCS Compliance Testing Laboratory Ltd. |

| <i>Issue</i> | <i>Date</i> | <i>Modifications</i> |
|--------------|-------------|----------------------|
| A | 10/14/2018 | Initial release |
| | | |
| | | |
| | | |

Page: 2/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.
The information contained herein is to be used only for the purpose for which it is submitted and is not to
be released in whole or part without written approval of SATIMO.*