




**MPE TEST REPORT**

Report No: STS1704193F02

Issued for

Spigen Korea Co., Ltd.

NO. 1709 STX-V Tower, 371-37, Gasan-Dong,  
GeumCheon-Gu, Seoul, South Korea

<b>Product Name:</b>	Fast Wireless Charger
<b>Brand Name:</b>	
<b>Model Name:</b>	F303W
<b>Series Model:</b>	N/A
<b>FCC ID:</b>	2AFKNF303W
<b>Test Standard:</b>	FCC CFR 47 part 1, 1.1310

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.



**TEST RESULT CERTIFICATION**

**Applicant's name :** Spigen Korea Co., Ltd.


**Address :** NO. 1709 STX-V Tower, 371-37, Gasan-Dong, GeumCheon-Gu, Seoul, South Korea

**Manufacture's Name :** Shenzhen Fang Xin Technology Co.,Ltd.

**Address :** 27F-JK, ShangbuBuilding, 68, NanYuan, RD, FuTian, SHenZhen,GuangDong, China

**Product description**

**Product name :** Fast Wireless Charger

**Brand name :** 

**Model and/or type reference :** F303W

**Standards :** FCC CFR 47 part 1, 1.1310

**Test Procedure :** KDB 680106 D01 RF Exposure Wireless Charging Apps v02

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

**Date of performance of tests:** 09 Sep. 2016 ~28 Sep. 2016

**Date of Issue :** 15 May. 2017

**Test Result :** **Pass**

Testing Engineer :



(Leo li)

Technical Manager :



(Tony liu)

Authorized Signatory :



(Vita Li)





Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
1.3 GENERAL DESCRIPTION OF EUT	6
1.4 EQUIPMENTS LIST FOR ALL TEST ITEMS	7
<b>2. MAXIMUM PERMISSIBLE EXPOSURE</b>	<b>8</b>
2.1 MAXIMUM PERMISSIBLE EXPOSURE	8
2.2 TEST PROCEDURE	9
2.3 TEST SETUP	9
2.4 RESULT OF MAXIMUM PERMISSIBLE EXPOSURE	10





**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	15 May, 2017	STS1704193F02	ALL	Initial Issue



### 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:  
 FCC KDB 680106 D01 RF Exposure Wireless Charging Apps v02

FCC CFR 47			
Standard Section	Test Item	Judgment	Remark
FCC CFR 47 part1, 1.1310 KDB680106 D01v02 (3)(3)	Electric Field Strength (E) (V/m)	PASS	
	Magnetic Field Strength (H) (A/m)	PASS	

#### 1.1 TEST FACTORY


BZT Testing Technology Co., Ltd.  
 Add. : Buliding 17, Xinghua Road Xingwei industrial Park Fuyong,  
 Baoan District, Shenzhen, Guangdong, China  
 FCC Registration No.: 701733

#### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$  · where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2** · providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	All emissions,radiated(<30M)(9KHz-30MHz)	±2.45dB
2	Temperature	±0.5°C
3	Humidity	±2%

1.3 GENERAL DESCRIPTION OF EUT

Equipment	Fast Wireless Charger
Trade Name	
Model Name	F303W
Series Model	N/A
Model Difference	N/A
Equipemnt Category	Non-ISM frequency
Operating frequency	111-205KHz
Modulation Type	GFSK
Power Adapter	Input: AC 5V, 2A
Hardware version number	V1.0.1
Software version number	V1.1.2


Note:

1. For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual.

2.

Channel List					
Channel	Frequency (KHz)	Channel	Frequency (KHz)	Channel	Frequency (KHz)
01	111	48	158	95	205

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	NOTE
1		F303W	Coil	NA	

The EUT antenna is Coil Antenna. No antenna other than that furnished by the responsible party shall be used with the device.



## 1.4 EQUIPMENTS LIST FOR ALL TEST ITEMS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
E-Field Probe	CHROMA	MFM 2000	CR25G41Y	2016.10.23	2017.10.22
H-Field Probe	CHROMA	MFM 2000	CR25G41Y	2016.10.23	2017.10.22



## 2. MAXIMUM PERMISSIBLE EXPOSURE

### 2.1 MAXIMUM PERMISSIBLE EXPOSURE

Limit of Maximum Permissible Exposure

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

Note 1: f = frequency in MHz ; \*Plane-wave equivalent power density

Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v02


Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.



## 2.2 TEST PROCEDURE

- a. For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 10 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device.

## 2.3 TEST SETUP

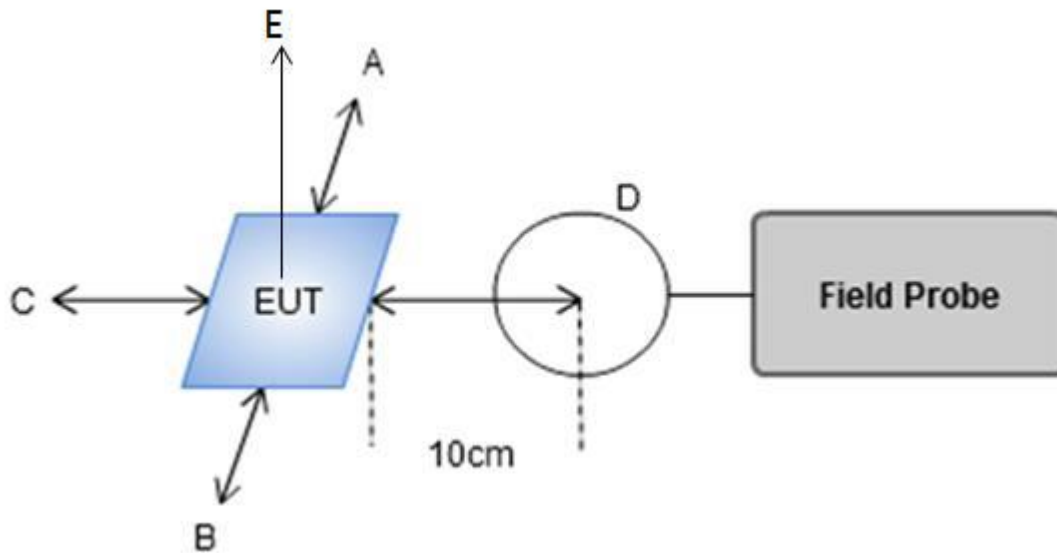



## 2.4 RESULT OF MAXIMUM PERMISSIBLE EXPOSURE

Maximum Permissible Exposure				
Charging	Separation	Probe from EUT Side	E-field (V/m)	H-field (A/m)
Full load	10cm	A	1.72	0.367
Full load	10cm	B	1.69	0.375
Full load	10cm	C	1.96	0.351
Full load	10cm	D	1.64	0.362
Full load	10cm	E	5.88	0.342
Limit			614	1.63
Margin Limit (%)			0.96%	23.01%

Maximum Permissible Exposure				
Charging	Separation	Probe from EUT Side	E-field (V/m)	H-field (A/m)
no load	10cm	A	1.12	0.320
no load	10cm	B	1.24	0.330
no load	10cm	C	1.32	0.318
no load	10cm	D	1.24	0.323
no load	10cm	E	4.98	0.317
Limit			614	1.63
Margin Limit (%)			0.81%	20.25%

### MPE SETUP PHOTO



※※※※※END OF THE REPORT※※※※※