

SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 1 of 22

RF EXPOSURE EVALUATION REPORT

Application No.: FYCR2210000409AT **Applicant:** Spigen Korea Co., Ltd.

Address of Applicant: 446, Bongeunsa-ro, Gangnam-gu, Seoul, 06153, Rep. of KOREA

Manufacturer: Shenzhen Wireless Technology Co., Ltd.

Floor 2,3,4 building A4, Fangxing Science and Technology park, NO.13 Baonan Road, Longgang street, Longgang Distric Address of Manufacturer:

Factory: Shenzhen Wireless Technology Co., Ltd.

Floor 2,3,4 building A4, Fangxing Science and Technology park, NO.13 Baonan Road, Longgang street, Longgang Distric Address of Factory:

Equipment Under Test (EUT):

EUT Name: * ITS12W Spigen OneTap Pro Wireless Car Charger

*ITS35W Spigen OneTap Pro Wireless Car Charger

*S310W Spigen OneTap Pro Wireless Magnetic Charging Stand

*ITS68W

Spigen OneTap Pro Wireless Car Charger for iPhone MagSafe Cup Holder

Mount *ITT90W

Spigen OneTap Pro Wireless Car Charger for Tesla (Screen Mount)

*ITS35W-3

Spigen OneTap Pro 3 Wireless Car Charger Dashboard ITS12W/ITS35W/S310W/ITS68W/ITT90W/ITS35W-3

Model No.:

Please refer to section 2 of this report which indicates which model was

actually tested and which were electrically identical.

Trade Mark: Spigen

FCC ID: 2AFKNITS12W

Standards: 47 CFR PART 1, Subpart I, Section 1.1310

47 CFR PART 2, Subpart J, Section 2.1093

Date of Receipt: 2022-10-20 2023-02-09 Date of Evaluation: 2023-02-09 Date of Issue:

Pass* **Evaluation Result:**



WinkeyWarg



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Con

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistrict, Bad'an, Shenzhen, China 518103 t (86–755) 88663988 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳·宝安区福永街道风塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com

^{*} In the configuration evaluated, the EUT complied with the standards specified above.



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 2 of 22

	Revision Record							
Version	Version Chapter Date Modifier Remark							
01		2023-02-09		Original				

Authorized for issue by:		
	Tree Zhan	
	Tree Zhan/Project Engineer	
	WinkeyWarg	
	Winkey Wang/Reviewer	_





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 3 of 22

2 Evaluation Summary

Radio Spectrum Matter Part								
Item	Standard	Method	Requirement	Result				
RF Exposure	47 CFR PART 1, Subpart I, Section 1.1310	KDB 680106 D01 TCB Workshop Presentation November 2019 RF Exposure	CFR 47 Part 1.1310	Pass				

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

Declaration of EUT Family Grouping:

Model No.: ITS12W/ITS35W/S310W/ITS68W/ITT90W/ITS35W-3

Only the model ITS35W/S310W was tested, since according to the declaration from the applicant, the electrical circuit design, PCB layout, components used and internal wiring and functions were identical for the above models, with only difference on back shell and accessories.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Reductions. Subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Co



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 4 of 22

3 Contents

		Г	age
1	Cov	er Page	1
2	Eval	luation Summary	3
3	Con	tents	4
4	Gen	eral Information	5
	4.1 4.2 4.3 4.4 Me	Details of E.U.T Description of Support Units Test modes description:	5 6
5	Equ	ipments Used during Test	6
	5.1 5.2 5.3 5.4 5.5	Evaluating Location Facility Deviation from Standards Abnormalities from Standard Conditions Test Block Diagram	7 8 8
6	Test	Results	9
	6.1 6.1.1 6.1.2	RF Exposure test	10
7	Pho	tographs- RF exposure Setup photos	22



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits to Client's instructions, if any. The Company's sole responsibility is to its Client and this cocument does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, Please Contact us at telephone: (86-755) 8307 1443, **Certificate, Please Contact us at telephone: (86-755) 8307 1443, **Certificate, Please Contact us at telephone: (86-755) 8307 1443, **Certificate, Please Contact us at telephone: (86-755) 8307 1443, **Certificate, Please Contact us at telephone: (86-755) 8307 1443, **Certificate, Please Contact us at telephone: (86-755) 8307 1443, **Certificate, Please Contact us at telephone: (86-755)

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdishict, Bao'an, Shenzhen, China 518103 t (86-755) 88663988 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 5 of 22

4 General Information

4.1 Details of E.U.T.

Power supply:	Input: DC5.0V/2A, DC9.0V/1.67V
	Output: WPC: 5W/7.5W
Cable(s):	Type-C cable: 113cm unshielded
Operation frequency:	110.1kHz to 150.16kHz
Modulation type:	Load modulation
Antenna type:	Loop Antenna

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Adapter	Huawei	HW-05920CHQ	K68247GBP14582
Mobile Phone	Nexus	MRA58K	REF. No.SEA16P00
iPhone 12	Apple	MGGU3CH/A	REF. No.SEA16J00
E-loading	SGS	N/A	REF. No.SEA42A00





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 6 of 22

4.3 Test modes description:

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	Charge mode_Keep the EUT charging(5W)
Final test	01	Charge mode_Keep the EUT charging(7.5W)

4.4 Measurement Uncertainty

Test Item	Measurement Uncertainty	
RF Exposure Evaluation	MF: 0.13dB, EF: 0.4dB	

5 Equipments Used during Test

RF Exposure					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi- Anechoic Chamber	CRT	N/A	SEM001-13	2021/7/13	2024/7/12
Electric and Magnetic Field Probe - Analyzer(3kHz-30MHz)	Narda	EHP-200AC	SEM022-20	2022/4/2	2023/4/1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 7 of 22

5.1 Evaluating Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc. Shenzhen branch.

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China Tel: +86 755 8866 3988 Fax: +86 755 2671 0594

No tests were sub-contracted.

5.2 Facility

The test facility is recognized, certified, or accredited by the following organizations:

A2LA (Certificate No. 6606.01)

Compliance Certification Services (Kunshan) Inc. Shenzhen branch is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6606.01.

• FCC -Designation Number: CN1322

Compliance Certification Services (Kunshan) Inc. Shenzhen branch has been recognized as an accredited testing laboratory.

Designation Number: CN1322. Test Firm Registration Number: 718073

Innovation, Science and Economic Development Canada

Compliance Certification Services (Kunshan) Inc. Shenzhen branch has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0129.

IC#: 28189.





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 8 of 22


5.3 Deviation from Standards

None

5.4 Abnormalities from Standard Conditions

None

5.5 Test Block Diagram

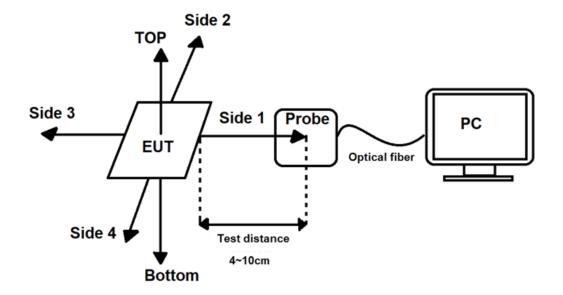



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Reductions. Subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Co



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 9 of 22

6 Test Results

6.1 RF Exposure test

Test Requirement: 47 CFR PART 1, Subpart I, Section 1.1310

Measurement Distance: 0/2/4/6/8/10/12/14/16/18/20cm

Limit:

According to FCC Part1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in Part1.1307(b)

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm²)	Averaging time (minutes)						
	(A) Limits for Occupational/Controlled Exposures									
0.3-3.0	614	1.63	*(100)	6						
3.0-30	1842/f	4.89/f	*(900/f²)	6						
30-300	61.4	0.163	1.0	6						
300-1500	1	/	f/300	6						
1500-100,000	/	/	5	6						
	(B) Limits for Genera	l Population/Uncontrolle	ed Exposure							
0.3-1.34	614	1.63	*(100)	30						
1.34-30	824/f	2.19/f	*(180/f²)	30						
30-300	27.5	0.073	0.2	30						
300-1500	/	/	f/1500	30						
1500-100,000	/	/	1.0	30						

F=frequency in MHz

RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

According to IEEE C95.3:2002 section 5.5.1.1, The power density S at a point on the axis at a distance d from a transmitting antenna is given by the Friis free-space transmission formula

 $S = power density (mW/cm^2)$

 $S = \frac{PG}{4\pi d^2}$ P = the net power delivered to the antenna (mW) G = gain of the antenna in linear scale

d = distance between observation point and center of the radiator (cm)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Reductions. Subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Co

Fuyong lab. Xinlong TechnoPark, Fenglang Road, Fuyong Subdistrict, Badran, Shenzhen, China 518103 t (86-755) 88663988 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com

^{*=}Plane-wave equivalent power density



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 10 of 22

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C Humidity: 51.4% RH Atmospheric Pressure: 1010 mbar

EUT Operation:

This device has been tested the worst status of full load and the device has been tested with load at zero charge, intermediate charge, and full charge.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Reductions. Subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Co



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 11 of 22

6.1.2 Measurement Data

Mode 01:

The max output power =7.5W

Magnetic Field Emissions

Operation frequency	Test Distance (cm)	Test Position	Prob	e Measure Res (A/m)	50 % Limit (A/m)	10 % Limit (A/m)	
			unload	Half load	full load		
131.4 kHz which is		Side 1	0.206	0.229	0.275		
the worst		Side 2	0.169	0.186	0.226		
case	0	Side 3	0.175	0.195	0.234	0.815	0.163
within the operation		Side 4	0.132	0.151	0.179		
frequency range		Тор	0.071	0.079	0.095		

Magnetic Field Emissions

Onovotion	Test Distance	T	Probe Measure Result(A/m)			50 % Limit	10 % Limit
Operation frequency	(cm)	Test Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)
127.6 kHz which is		Side 1	0.283	0.238	0.197		
the worst		Side 2	0.226	0.190	0.157		
case within the	0	Side 3	0.240	0.202	0.167	0.815	0.163
operation		Side 4	0.179	0.150	0.124		
frequency range		Тор	0.096	0.081	0.067		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 12 of 22

Operation frequency	Test Distance (cm)	Test Position	Prob	e Measure Res (A/m)	ult	50 % Limit (A/m)	10 % Limit (A/m)
			unload	Half load	full load		
131.4 kHz		Side 1	0.166	0.183	0.226		
which is the worst		Side 2	0.135	0.152	0.185		
case	2	Side 3	0.143	0.159	0.194	0.815	0.163
within the	۷	Side 4	0.104	0.116	0.143	0.615	0.163
operation frequency range		Тор	0.063	0.072	0.090		

Magnetic Field Emissions

Operation frequency (cm)		Test	Probe N	leasure Result(50 % Limit	10 % Limit	
	Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)	
127.6 kHz		Side 1	0.236	0.200	0.158		0.400
which is the worst		Side 2	0.194	0.164	0.129	0.045	
case	2	Side 3	0.206	0.175	0.138		
within the	2	Side 4	0.149	0.126	0.100	0.815	0.163
operation frequency range		Тор	0.087	0.073	0.058		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 13 of 22

Operation frequency	Test Distance (cm)	Test Position	Prob	e Measure Res (A/m)	50 % Limit (A/m)	10 % Limit (A/m)	
			unload	Half load	full load		
131.4 kHz		Side 1	0.136	0.153	0.184		
which is the worst		Side 2	0.113	0.125	0.154		
case	4	Side 3	0.120	0.134	0.164	0.815	0.163
within the	4	Side 4	0.085	0.098	0.114	0.615	0.163
operation frequency range		Тор	0.057	0.065	0.078		

Magnetic Field Emissions

	Test Distance	Test	Probe N	leasure Result((A /m)	50 % Limit	10 % Limit
Operation frequency	(cm)	Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)
127.6 kHz		Side 1	0.187	0.157	0.127		0.400
which is the worst		Side 2	0.153	0.128	0.104	0.045	
case	4	Side 3	0.169	0.142	0.115		
within the	4	Side 4	0.119	0.100	0.081	0.815	0.163
operation frequency range		Тор	0.075	0.063	0.051		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 14 of 22

Operation frequency	Test Distance (cm)	Test Position	Prob	e Measure Res (A/m)	50 % Limit (A/m)	10 % Limit (A/m)	
			unload	Half load	full load		
131.4 kHz		Side 1	0.117	0.132	0.159		
which is the worst		Side 2	0.098	0.113	0.130		
case	6	Side 3	0.105	0.118	0.143	0.815	0.163
within the	0	Side 4	0.076	0.086	0.103	0.615	0.163
operation frequency range		Тор	0.049	0.056	0.072		

Magnetic Field Emissions

Operation frequency (cm)		Test	Probe M	leasure Result(50 % Limit	10 % Limit	
	Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)	
127.6 kHz		Side 1	0.165	0.137	0.111		0.400
which is the worst		Side 2	0.134	0.111	0.091	0.045	
case	c	Side 3	0.150	0.125	0.101		
within the	6	Side 4	0.107	0.089	0.072	0.815	0.163
operation frequency range		Тор	0.066	0.055	0.044		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 15 of 22

Operation frequency	Test Distance (cm)	Test Position					10 % Limit (A/m)
			unload	Half load	full load		
131.4 kHz		Side 1	0.108	0.122	0.147		
which is the worst		Side 2	0.085	0.101	0.117		
case	8	Side 3	0.093	0.107	0.125	0.815	0.163
within the	0	Side 4	0.067	0.075	0.092	0.615	0.163
operation frequency range		Тор	0.048	0.060	0.068		

Magnetic Field Emissions

Operation frequency (cm)		Test	Probe M	leasure Result(50 % Limit	10 % Limit	
	Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)	
127.6 kHz		Side 1	0.140	0.117	0.097		0.400
which is the worst		Side 2	0.111	0.093	0.078		
case	8	Side 3	0.124	0.104	0.086	0.815	
within the	0	Side 4	0.091	0.076	0.063	0.615	0.163
operation frequency range		Тор	0.057	0.048	0.040		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 16 of 22

Operation frequency	Test Distance (cm)	Test Position	Prob	e Measure Res (A/m)	50 % Limit (A/m)	10 % Limit (A/m)	
			unload	Half load	full load		
131.4 kHz		Side 1	0.088	0.102	0.122		
which is the worst		Side 2	0.070	0.084	0.096		
case	10	Side 3	0.074	0.084	0.100	0.015	0.400
within the	10	Side 4	0.059	0.070	0.081	0.815	0.163
operation frequency range		Тор	0.038	0.045	0.058		

Magnetic Field Emissions

magnetic i	icia Elliissi	J113					
Dis	Test Distance	Test	Probe N	leasure Result(50 % Limit	10 % Limit	
Operation frequency	(cm)	Position	zero charge	intermediate charge	full charge	(A /m)	(A/m)
127.6 kHz		Side 1	0.117	0.099	0.079		
which is the worst		Side 2	0.094	0.079	0.064		
case	40	Side 3	0.100	0.084	0.068	0.045	0.400
within the	10	Side 4	0.078	0.065	0.053	0.815	0.163
operation frequency range		Тор	0.047	0.040	0.032		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 17 of 22

Operation frequency	Test Distance (cm)	Test Position					10 % Limit (A/m)
			unload	Half load	full load		
131.4 kHz		Side 1	0.054	0.066	0.073		
which is the worst		Side 2	0.045	0.054	0.061		
case	12	Side 3	0.044	0.056	0.064	0.815	0.163
within the	12	Side 4	0.032	0.039	0.049	0.613	0.163
operation frequency range		Тор	0.022	0.027	0.032		

Magnetic Field Emissions

Operation	Test Distance	Test	Probe M	leasure Result((A /m)	50 % Limit	10 % Limit
Operation frequency	(cm)	Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)
127.6 kHz		Side 1	0.071	0.060	0.047		0.400
which is the worst		Side 2	0.057	0.048	0.038		
case	10	Side 3	0.059	0.049	0.039	0.815	
within the	12	Side 4	0.044	0.037	0.030	0.615	0.163
operation frequency range		Тор	0.029	0.024	0.019		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 18 of 22

Operation frequency	Test Distance (cm)	Test Position	Pro	be Measure Re	50 % Limit (A/m)	10 % Limit (A/m)	
			unload	Half load	full load		
131.4 kHz		Side 1	0.038	0.043	0.056	0.815	0.163
which is the worst		Side 2	0.030	0.034	0.042		
case	1.4	Side 3	0.030	0.037	0.045		
within the operation frequency range	14	Side 4	0.029	0.036	0.042		
		Тор	0.023	0.026	0.032		

Magnetic Field Emissions

Magnetic Field Emissions									
Operation frequency (cm)		Toot	Probe	Measure Resul	50 % Limit	10 % Limit			
	Test Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)			
127.6 kHz		Side 1	0.046	0.039	0.031		0.163		
which is the worst		Side 2	0.041	0.034	0.027				
case	14	Side 3	0.038	0.032	0.026	0.815			
within the operation frequency range		Side 4	0.031	0.026	0.021				
		Тор	0.022	0.019	0.015				





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 19 of 22

Operation frequency	Test Distance (cm)	Test Position	Pro	be Measure Re	50 % Limit (A/m)	10 % Limit (A/m)	
			unload	Half load	full load		
131.4 kHz		Side 1	0.034	0.042	0.049		
which is the worst		Side 2	0.025	0.035	0.038		0.163
case	16	Side 3	0.026	0.035	0.036	0.815	
within the operation frequency range	16	Side 4	0.022	0.029	0.034		
		Тор	0.016	0.023	0.026		

Magnetic Field Emissions

Operation frequency (cm)	Test Distance	Test	Probe	Measure Resul	50 % Limit	10 % Limit	
	(cm)	Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)
127.6 kHz		Side 1	0.041	0.034	0.027		
which is the worst		Side 2	0.033	0.028	0.022		
case	16	Side 3	0.032	0.027	0.021	0.815	0.160
within the operation frequency range	16	Side 4	0.026	0.020	0.016	0.615	0.163
		Тор	0.021	0.016	0.013		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 20 of 22

Operation frequency	Test Distance (cm)	Test Position	Probe Measure Result (A/m)			50 % Limit (A/m)	10 % Limit (A/m)
			unload	Half load	full load		
131.4 kHz		Side 1	0.031	0.039	0.048	0.815	0.163
which is the worst		Side 2	0.025	0.032	0.036		
case	10	Side 3	0.030	0.038	0.042		
within the operation frequency range	18	Side 4	0.025	0.033	0.039		
		Тор	0.019	0.023	0.031		

Magnetic Field Emissions

wagnetic Field Emissions									
Operation frequency (cm)		Test	Probe	Measure Resul	50 % Limit	10 % Limit			
	Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)			
127.6 kHz		Side 1	0.036	0.030	0.024		0.163		
which is the worst		Side 2	0.033	0.027	0.022				
case	10	Side 3	0.032	0.027	0.021	0.815			
within the operation frequency range	18 -	Side 4	0.025	0.021	0.017	0.815			
		Тор	0.020	0.017	0.013				





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 21 of 22

Operation frequency	Test Distance (cm)	Test Position	Pro	be Measure Re	50 % Limit (A/m)	10 % Limit (A/m)	
			unload	Half load	full load		
125 kHz		Side 1	0.025	0.031	0.037		0.163
which is the worst		Side 2	0.018	0.026	0.027		
case within the operation frequency range	20	Side 3	0.021	0.030	0.034	0.815	
		Side 4	0.017	0.020	0.028		
		Тор	0.020	0.025	0.027		

Magnetic Field Emissions

Operation frequency (cm)		Test	Probe	Measure Resul	50 % Limit	10 % Limit	
	Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)	
125 kHz		Side 1	0.029	0.024	0.019		
which is the worst		Side 2	0.022	0.018	0.015		
case	20	Side 3	0.024	0.020	0.016	0.015	0.160
within the operation frequency range	20	Side 4	0.019	0.016	0.012	0.815	0.163
		Тор	0.017	0.014	0.011		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221000040902

Page: 22 of 22

7 Photographs- RF exposure Setup photos

Refer to Appendix - RF Exposure Setup Photo for FYCR2210000409AT

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Reductions. Subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Co