



TEST REPORT

FCC PART 15 SUBPART E 15.407

Report Reference No.: **CTL1908054071-WF04**

Compiled by: Happy Guo
(position+printed name+signature) (File administrators)

Happy Guo

Tested by: Nice Nong
(position+printed name+signature) (Test Engineer)

Nice Nong

Approved by: Ivan Xie
(position+printed name+signature) (Manager)

Ivan Xie

Product Name.....: MaaXBoard
Model/Type reference: EM-MC-SBC-IMX8M
List Model(s).....: N/A
Trade Mark: N/A
FCC ID: **2AFLY-MAAX**
IC.....: **20715-MAAX**

Applicant's name: **Embest Technology Co., Ltd**
TowerB 4/F, Shanshui Building, Nanshan Yungu Innovation
Address of applicant: Industry Park, Liuxian Ave.No.1183, Nanshan District, ShenZhen,
China.

Test Firm: **Shenzhen CTL Testing Technology Co., Ltd.**
Address of Test Firm: Floor 1-A, Baisha Technology Park, No.3011, ShaheXi Road,
Nanshan District, Shenzhen, China 518055

Test specification:
Standard.....: **47 CFR FCC Part 15 Subpart E 15.407&
RSS 247 Issue 2, February 2017**
TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.
Master TRF: Dated 2011-01

Date of receipt of test item: Aug. 15, 2019
Date of sampling: Aug. 15, 2019
Date of Test Date: Aug. 15, 2019–Sep. 08, 2019
Data of Issue: Sep. 10, 2019
Result: **Pass**

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL1908054071-WF04	Sep. 10, 2019 Date of issue
--------------------------	---------------------------	--------------------------------

Equipment under Test : MaaXBoard

Model /Type : EM-MC-SBC-IMX8M

Listed Models : N/A

Applicant : **Embest Technology Co., Ltd**

Address : TowerB 4/F, Shanshui Building, Nanshan Yungu
Innovation Industry Park, Liuxian Ave.No.1183,
Nanshan District, ShenZhen, China.

Manufacturer : **Embest Technology Co., Ltd**

Address : TowerB 4/F, Shanshui Building, Nanshan Yungu
Innovation Industry Park, Liuxian Ave.No.1183,
Nanshan District, ShenZhen, China.

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

Table of Contents

Page

- 1. SUMMARY..... 5**
 - 1.1. TEST STANDARDS.....5
 - 1.2. TEST DESCRIPTION.....5
 - 1.3. TEST FACILITY6
 - 1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY..... 6
- 2. GENERAL INFORMATION..... 8**
 - 2.1. ENVIRONMENTAL CONDITIONS8
 - 2.2. GENERAL DESCRIPTION OF EUT8
 - 2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY 9
 - 2.4. EQUIPMENTS USED DURING THE TEST 10
 - 2.5. SPECIAL ACCESSORIES11
 - 2.6. RELATED SUBMITTAL(s) / GRANT (s)..... 11
 - 2.7. MODIFICATIONS.....11
- 3. TEST CONDITIONS AND RESULTS 12**
 - 3.1. CONDUCTED EMISSIONS TEST12
 - 3.2. RADIATED EMISSIONS.....15
 - 3.3. MAXIMUM CONDUCTED AVERAGE OUTPUT POWER 22
 - 3.4. POWER SPECTRAL DENSITY24
 - 3.5. EMISSION BANDWIDTH (26dBm BANDWIDTH)..... 38
 - 3.6. MINIMUM EMISSION BANDWIDTH (6dBm BANDWIDTH)..... 51
 - 3.7. OCCUPIED BANDWIDTH55
 - 3.8. FREQUENCY STABILITY59
- 4. TEST SETUP PHOTOS OF THE EUT 62**
- 5. PHOTOS OF THE EUT 63**

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15 Subpart E](#)—Unlicensed National Information Infrastructure Devices

[ANSI C63.10:2013](#) : American National Standard for Testing Unlicensed Wireless Devices

[KDB789033 D02](#): General UNII Test Procedures New Rules v02r01

[RSS-247-Issue 2](#): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

[RSS-Gen Issue 4](#): General Requirements for Compliance of Radio Apparatus

1.2. Test Description

FCC Requirement		
FCC Part 15.207 RSS-Gen 8.8	AC Power Conducted Emission	PASS
FCC Part 15.407(a) RSS 247 5.2 (1) RSS GEN 6.6	Emission Bandwidth(26dBm Bandwidth)	PASS ^{Note1}
FCC Part 15.407(e) RSS 247 5.2 (1) RSS GEN 6.6	Minimum Emission Bandwidth(6dBm Bandwidth)	PASS ^{Note2}
FCC Part 15.407(a) RSS 247 5.4 (4)	Maximum Conducted Output Power	PASS
FCC Part 15.407(a) RSS 247 5.2 (2)	Peak Power Spectral Density	PASS
FCC Part 15.407(g)	Frequency Stability	PASS
FCC Part 15.407(b)	Undesirable emission	PASS
FCC Part 15.407(b)/15.205/15.209 RSS-Gen 8.9	Radiated Emissions	PASS
FCC Part 15.407(h)	Dynamic Frequency Selection	PASS ^{Note 3}
FCC Part 15.203/15.247(b)	Antenna Requirement	PASS

Note 1: Apply to U-NII 1, U-NII 2A, and U-NII 2C band.

Note 2: Apply to U-NII 3 band only.

Note 3: Test result see DFS report.

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9518B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9518B on Jan. 22, 2019.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)

Conducted Disturbance 0.15~30MHz	$\pm 3.20\text{dB}$	(1)
----------------------------------	---------------------	-----

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	MaaXBoard			
Model/Type reference:	EM-MC-SBC-IMX8M			
Power supply:	DC 5.0V			
WIFI				
	20MHz system	40MHz system	80MHz system	160MHz system
Supported type:	802.11a 802.11n 802.11ac	802.11n 802.11ac	802.11ac	N/A
Operation frequency:	5180-5240MHz 5260-5320MHz 5500-5700MHz 5745-5825MHz	5190-5230MHz 5270-5310MHz 5510-5670MHz 5755MHz,5795MHz	5210MHz; 5290MHz; 5530MHz; 5610MHz; 5775MHz	N/A
Modulation:	OFDM	OFDM	OFDM	N/A
Channel number:	24	11	5	N/A
Channel separation:	20MHz	40MHz	80MHz	N/A
Antenna type:	Ceramics Antenna			
Antenna gain:	1dBi			

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

All test performed at the low, middle and high of operational frequency range of each mode.

Operation Frequency List WIFI on 5G Band:

Operating band	20MHz		40MHz		80MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII 1 (5150MHz-5250MHz)	36	5180	38	5190	42	5210
	40	5200				
	44	5220				
	48	5240				
U-NII 2A (5120MHz-5350MHz)	52	5260	54	5270	58	5290
	56	5280				
	60	5300				
	64	5320				
U-NII 2C (5470MHz-5725MHz)	100	5500	102	5510	106	5530
	104	5520				
	108	5540				
	112	5560				
	116	5580	118	5590	122	5610
	120	5600				
	124	5620				
	128	5640				
	132	5660	134	5670	--	--
	136	5680			--	--
140	5700	--	--	--	--	
U-NII 3 (5725MHz-5850MHz)	149	5745	151	5755	155	5775
	153	5765				
	157	5785				
	161	5805	159	5795	--	--
	165	5825	--	--	--	--

Note:

1. "--"Means no channel(s) available any more.
2. The line display in grey is those Channels/Frequencies select to test in this report for each operation mode.

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Conducted Output Power Power Spectral Density Emission Bandwidth(26dBm Bandwidth) Minimum Emission Bandwidth(6dBm Bandwidth) Undesirable emission Frequency Stability	11a/OFDM	6 Mbps
	11n(20MHz),11ac(20MHz)/OFDM	7.2 Mbps
	11n(40MHz),11ac(40MHz)/OFDM	15.0Mbps
	11ac(80MHz)/OFDM	65.0Mbps

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.1 2	2019/05/20	2020/05/19
LISN	R&S	ESH2-Z5	860014/010	2019/05/20	2020/05/19
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2019/05/20	2020/05/19
EMI Test Receiver	R&S	ESCI	1166.5950.03	2019/05/20	2020/05/19
Power Sensor	Agilent	U2021XA	MY55130004	2019/05/20	2020/05/19
Power Meter	Agilent	U2021XA	MY55130006	2019/05/20	2020/05/19
Spectrum Analyzer	Agilent	E4407B	MY41440676	2019/05/20	2020/05/19
Spectrum Analyzer	Agilent	N9020	US46220290	2019/05/20	2020/05/19
Spectrum Analyzer	Keysight	N9020A	MY53420874	2019/05/20	2020/05/19
Controller	EM Electronics	EM 1000	060859	2019/05/20	2020/05/19
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2019/05/20	2020/05/19
Active Loop Antenna	Da Ze	ZN30900A	/	2019/05/20	2020/05/19
Amplifier	Agilent	8449B	3008A02306	2019/05/20	2020/05/19
Signal Generator	Agilent	N5182A	MY47420864	2019/05/20	2020/05/19
Signal Generator	Wiltron	68347B	657001	2019/05/20	2020/05/19
Programmable constant temperature and humidity test chamber	ESPEC	EL-10KA	A20120523	2019/05/20	2020/05/19
Amplifier	Agilent	8447D	2944A10176	2019/05/20	2020/05/19
Temperature/Humidity Meter	Gangxing	CTH-608	02	2019/05/20	2020/05/19
High-Pass Filter	micro-tranics	HPM50108	G174	2019/05/20	2020/05/19
High-Pass Filter	micro-tranics	HPM50111	G142	2019/05/20	2020/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2019/05/20	2020/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2019/05/20	2020/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2019/05/20	2020/05/19
RF Cable	Megalon	RF-A303	N/A	2019/05/20	2020/05/19

The calibration interval was one year

2.5. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
ASUS	Notebook PC	FL5900U	9014	FCC ID:PPD-QCNFA335
Delta	AC Adapter	ADP-65DW A	00A99	SDOC

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207, AC Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus as below:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

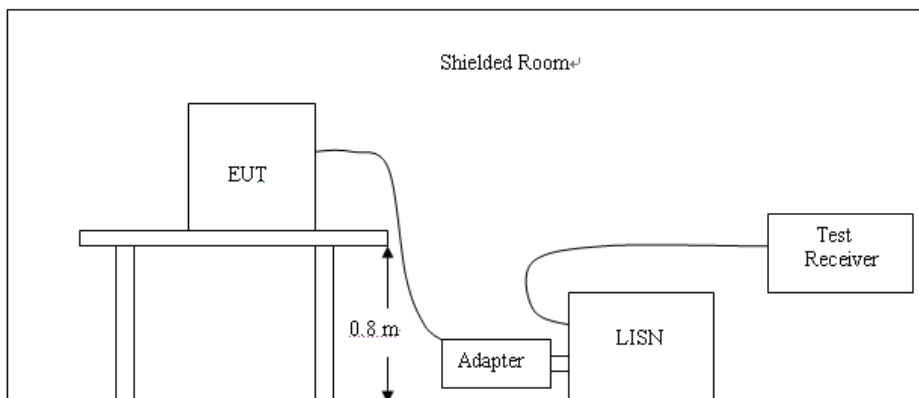


TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Remark:

1. All modes of 802.11a/ n/ac were tested at Low, Middle, and High channel; only the worst result of 802.11a CH36 was reported as below:
2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:
3. Pre-test AC conducted emission at power from AC mains mode and at charge from PC mode, recorded worst case.

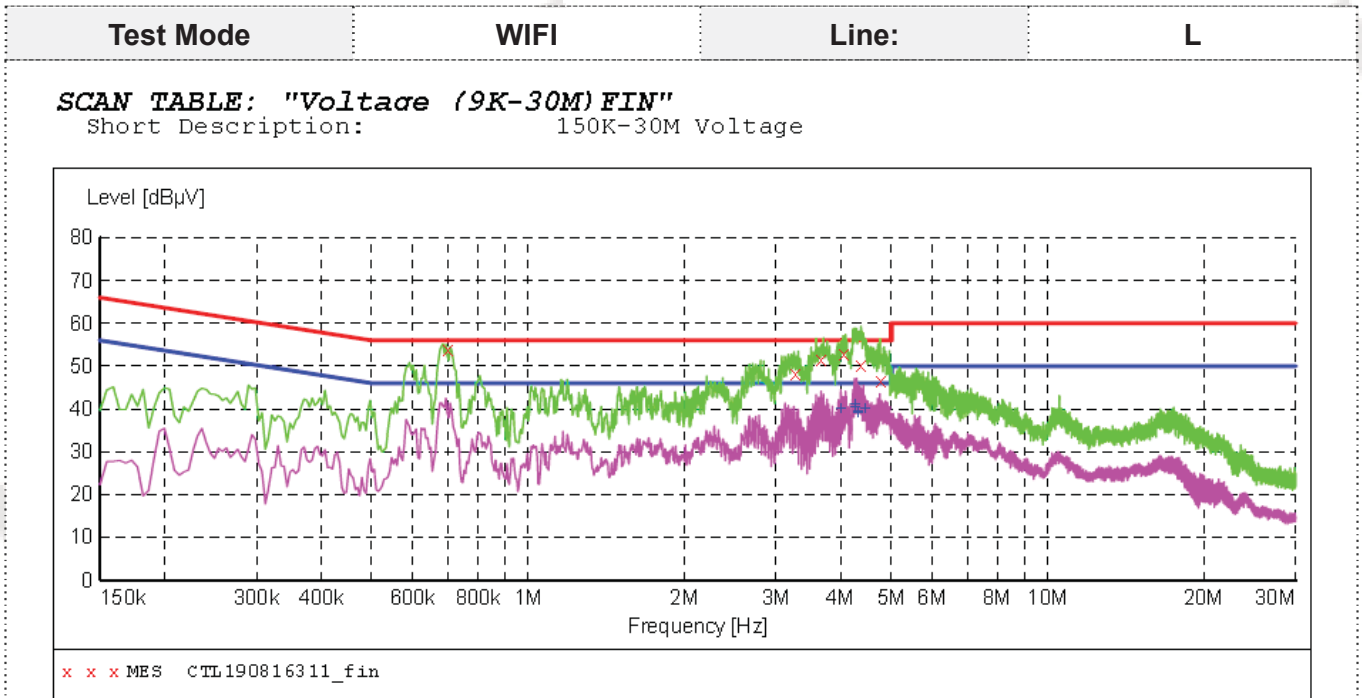

MEASUREMENT RESULT: "CTL190816311_fin"

2019-8-16 01:41??

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.699000	53.90	11.2	56	2.1	QP	L1	GND
3.273000	48.20	11.4	56	7.8	QP	L1	GND
3.660000	51.60	11.4	56	4.4	QP	L1	GND
4.051500	52.90	11.4	56	3.1	QP	L1	GND
4.380000	50.20	11.4	56	5.8	QP	L1	GND
4.771500	46.80	11.4	56	9.2	QP	L1	GND


MEASUREMENT RESULT: "CTL190816311_fin2"

2019-8-16 01:41??

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
4.002000	40.00	11.4	46	6.0	AV	L1	GND
4.245000	41.00	11.4	46	5.0	AV	L1	GND
4.263000	40.20	11.4	46	5.8	AV	L1	GND
4.312500	39.20	11.4	46	6.8	AV	L1	GND
4.317000	38.90	11.4	46	7.1	AV	L1	GND
4.438500	40.10	11.4	46	5.9	AV	L1	GND

Test Mode	WIFI	Line:	N
-----------	------	-------	---

SCAN TABLE: "Voltage (9K-30M)FIN"
 Short Description: 150K-30M Voltage

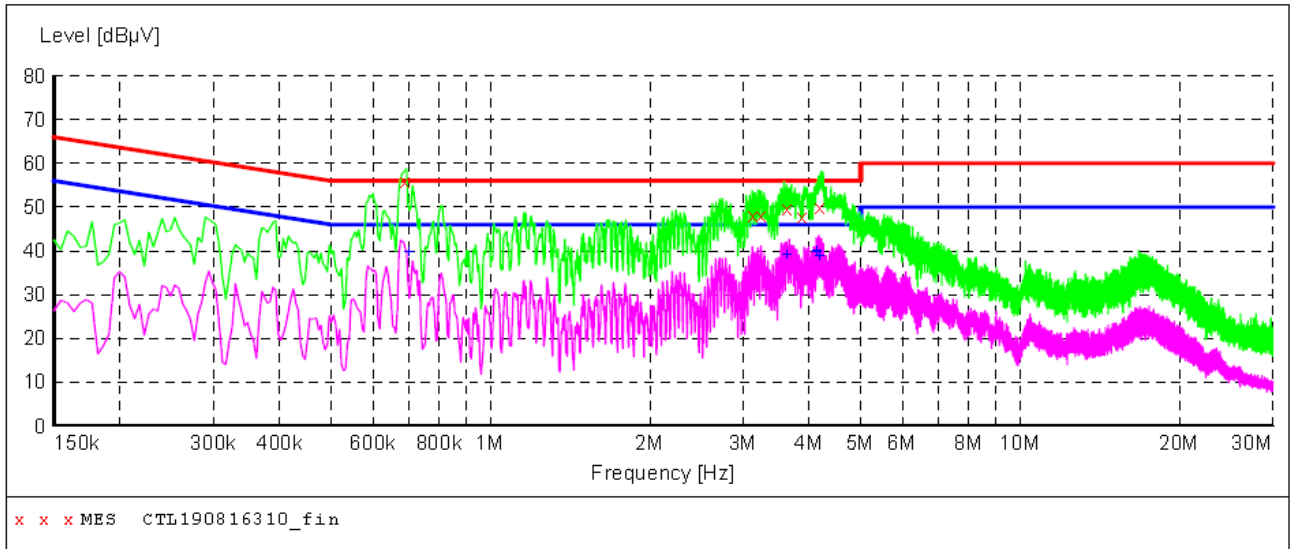

MEASUREMENT RESULT: "CTL190816310_fin"

2019-8-16 01:38??

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.690000	55.10	11.2	56	0.9	QP	N	GND
3.138000	48.20	11.4	56	7.8	QP	N	GND
3.246000	48.20	11.4	56	7.8	QP	N	GND
3.628500	49.80	11.4	56	6.2	QP	N	GND
3.885000	48.00	11.4	56	8.0	QP	N	GND
4.186500	50.00	11.4	56	6.0	QP	N	GND

MEASUREMENT RESULT: "CTL190816310_fin2"

2019-8-16 01:38??

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.703500	39.80	11.2	46	6.2	AV	N	GND
3.633000	39.00	11.4	46	7.0	AV	N	GND
3.637500	39.00	11.4	46	7.0	AV	N	GND
4.123500	40.00	11.4	46	6.0	AV	N	GND
4.128000	39.90	11.4	46	6.1	AV	N	GND
4.195500	38.80	11.4	46	7.2	AV	N	GND

3.2. Radiated Emissions

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Undesirable emission limits

Requirement	Limit(EIRP)	Limit (Field strength at 3m) ^{Note1}
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$


- (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209
- (6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

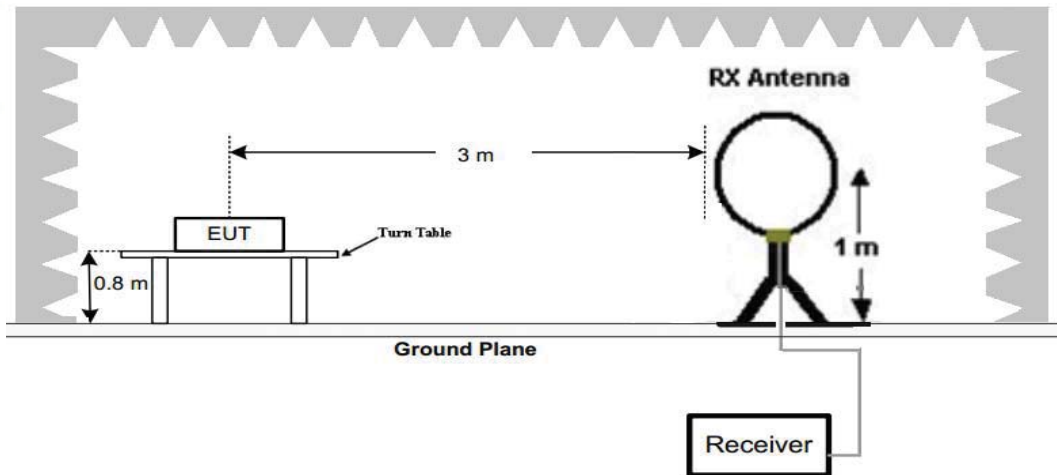

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

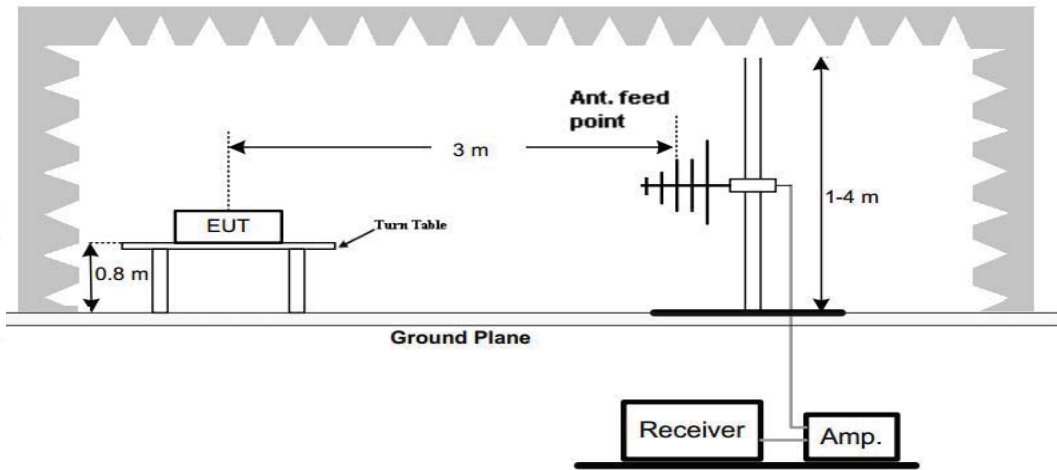

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

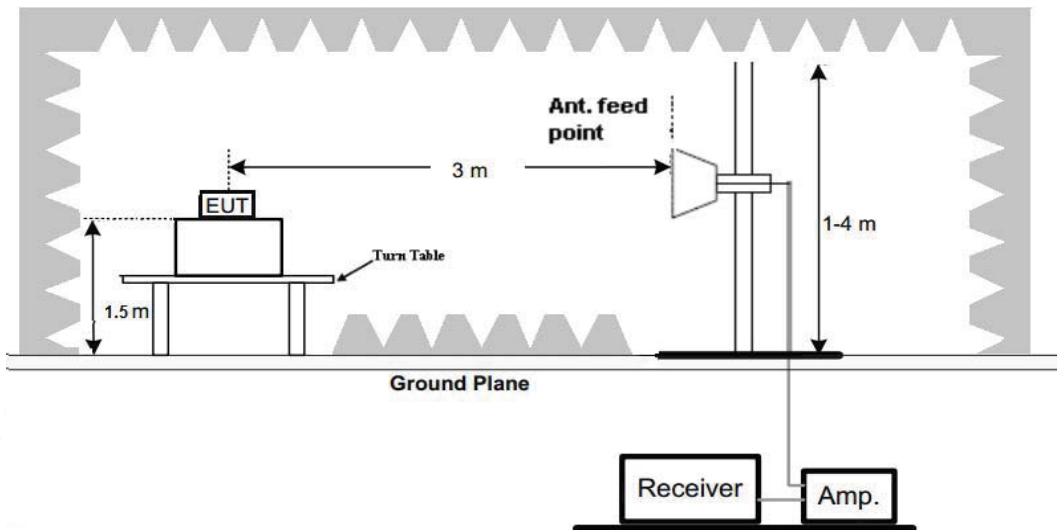

Test Procedure

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 40GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

TEST RESULTS

Remark:


- This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
- All 802.11a / 802.11n (HT20) / 802.11ac (HT20) / 802.11n (HT40) / 802.11ac (HT40) / 802.11ac (HT80) modes have been tested for below 1GHz test, only the worst case 802.11ac (HT20) low channel of U-NII 1 band was recorded.
- All 802.11a / 802.11n (HT20) / 802.11ac (HT20) / 802.11n (HT40) / 802.11ac (HT40) / 802.11ac (HT80) modes have been tested for above 1GHz test, only the worst case 802.11ac (HT20) was recorded.
- Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	VULB9168

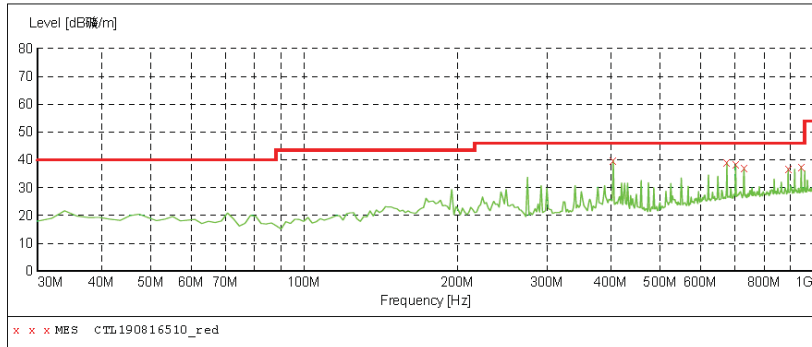

MEASUREMENT RESULT: "CTL190816510_red"


2019-8-16 9:34

Frequency MHz	Level dB/m	Transd dB	Limit dB/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
404.420000	39.90	16.3	46.0	6.1	---	0.0	0.00	HORIZONTAL
676.020000	39.00	21.3	46.0	7.0	---	0.0	0.00	HORIZONTAL
703.180000	38.50	21.6	46.0	7.5	---	0.0	0.00	HORIZONTAL
730.340000	37.10	21.9	46.0	8.9	---	0.0	0.00	HORIZONTAL
891.360000	36.90	23.6	46.0	9.1	---	0.0	0.00	HORIZONTAL
945.680000	37.60	24.2	46.0	8.4	---	0.0	0.00	HORIZONTAL

Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	VULB9168

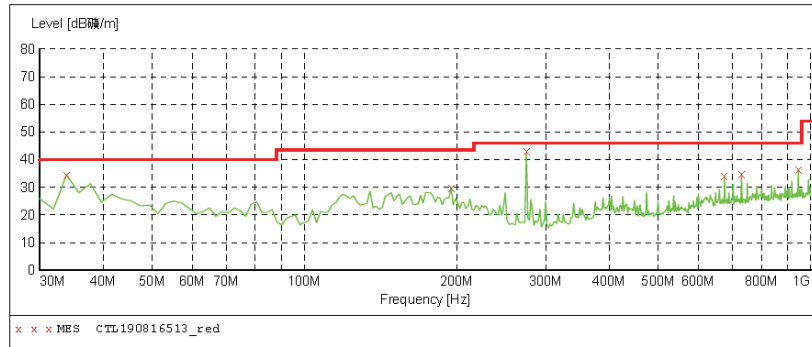

MEASUREMENT RESULT: "CTL190816513_red"

2019-8-16 9:37

Frequency MHz	Level dB/m	Transd dB	Limit dB/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
33.880000	34.50	14.0	40.0	5.5	---	0.0	0.00	VERTICAL
194.900000	30.00	11.3	43.5	13.5	---	0.0	0.00	VERTICAL
274.440000	43.00	13.5	46.0	3.0	---	0.0	0.00	VERTICAL
676.020000	34.20	21.3	46.0	11.8	---	0.0	0.00	VERTICAL
730.340000	34.90	21.9	46.0	11.1	---	0.0	0.00	VERTICAL
945.680000	36.50	24.2	46.0	9.5	---	0.0	0.00	VERTICAL

U-NII 3 & 802.11ac (HT20) Mode (above 1GHz)

Tested Channel	Frequency (MHz)	Emission Level (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre amplifier (dB)	Correction Factor (dB/m)
149 (5745MHz)	5720.00	50.21	PK	H	68.20	17.99	38.85	37.64	9.28	35.41	11.51
	11490.00	52.44	PK	H	68.20	15.76	34.19	39.69	12.90	34.33	18.26
	--	--	--	--	--	--	--	--	--	--	--
157 (5785MHz)	11570.00	51.87	PK	H	68.20	16.33	33.53	39.71	13.05	34.31	18.45
	--	--	--	--	--	--	--	--	--	--	--
165 (5825MHz)	5855.00	49.42	PK	H	68.20	18.78	38.00	37.64	9.28	35.38	11.54
	11650.00	52.15	PK	H	68.20	16.05	33.59	39.73	13.19	34.30	18.62
	--	--	--	--	--	--	--	--	--	--	--

Tested Channel	Frequency (MHz)	Emission Level (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre amplifier (dB)	Correction Factor (dB/m)
149 (5745MHz)	5720.00	49.15	PK	V	68.20	19.05	37.69	37.64	9.28	35.41	11.51
	11490.00	52.18	PK	V	68.20	16.02	33.96	39.69	12.90	34.33	18.26
	--	--	--	--	--	--	--	--	--	--	--
157 (5785MHz)	11570.00	51.74	PK	V	68.20	16.46	33.53	39.71	13.05	34.31	18.45
	--	--	--	--	--	--	--	--	--	--	--
165 (5825MHz)	5855.00	49.11	PK	V	68.20	19.09	37.67	37.64	9.28	35.38	11.54
	11650.00	52.08	PK	V	68.20	16.12	33.51	39.73	13.19	34.30	18.62
	--	--	--	--	--	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the other emission levels were very low against the limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20 ,IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;

3.3. Maximum Conducted Average Output Power

Limit

FCC requirement:

For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

U-NII 1

Type	Channel	Output power Average (dBm)	Limit (dBm)	Result
802.11a	36	4.56	23.98	Pass
	40	4.01		
	48	3.56		
802.11n(HT20)	36	4.34	23.98	Pass
	40	4.06		
	48	3.43		
802.11n(HT40)	38	4.72	23.98	Pass
	46	4.53		
802.11ac(HT20)	36	4.61	23.98	Pass
	40	4.24		
	48	3.97		
802.11ac(HT40)	38	4.61	23.98	Pass
	46	4.58		
802.11ac(HT80)	42	4.06	23.98	Pass

U-NII 2A

Type	Channel	Output power Average (dBm)	Limit (dBm)	Result
802.11a	52	3.71	23.98	Pass
	60	4.01		
	64	3.86		
802.11n(HT20)	52	3.68	23.98	Pass
	60	4.12		
	64	3.74		
802.11n(HT40)	54	3.89	23.98	Pass
	62	3.57		
802.11ac(HT20)	52	3.64	23.98	Pass
	60	3.51		
	64	3.12		
802.11ac(HT40)	54	3.67	23.98	Pass
	62	3.51		
802.11ac(HT80)	58	3.80	23.98	Pass

U-NII 2C

Type	Channel	Output power Average (dBm)	Limit (dBm)	Result
802.11a	100	4.45	23.98	Pass
	116	5.01		
	140	5.44		
802.11n(HT20)	100	4.31	23.98	Pass
	116	4.92		
	140	5.12		
802.11n(HT40)	102	4.31	23.98	Pass
	118	4.56		
	134	4.25		
802.11ac(HT20)	100	4.41	23.98	Pass
	116	4.35		
	140	4.21		
802.11ac(HT40)	102	5.12	23.98	Pass
	118	4.57		
	134	4.23		
802.11ac(HT80)	106	4.52	23.98	Pass
	122	4.64		

U-NII 3

Type	Channel	Output power Average (dBm)	Limit (dBm)	Result
802.11a	149	3.97	30.00	Pass
	157	2.63		
	165	2.11		
802.11n(HT20)	149	4.08	30.00	Pass
	157	3.35		
	165	3.48		
802.11n(HT40)	151	2.58	30.00	Pass
	159	2.64		
802.11ac(HT20)	149	3.86	30.00	Pass
	157	3.12		
	165	3.01		
802.11ac(HT40)	151	2.76	30.00	Pass
	159	2.61		
802.11ac(HT80)	155	3.69	30.00	Pass

Note:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20 ,IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;

3.4. Power Spectral Density

Limit

FCC requirement:

For the band 5.15-5.25 GHz.

- (i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}
- (ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}
- (iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
- (iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band.^{note1}

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

IC requirement:

For the band 5.15-5.25 GHz.

The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Frequency band 5250-5350 MHz

The power spectral density shall not exceed 11 dBm in any 1.0 MHz band

Frequency bands 5470-5600 MHz and 5650-5725 MHz

The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For the band 5.725 - 5.85 GHz


The maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.^{note1, note2}

Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 1MHz for U-NII 1, U-NII 2A, U-NII C band and 510KHz for U-NII 3 band.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to encompass the entire EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.

Test Configuration**Test Results****U-NII 1**

Type	Channel	P.S.D (dBm/MHz)	Limit (dBm/ MHz)	Result
802.11a	36	-3.642	11	Pass
	40	-2.416		
	48	-3.333		
802.11n(HT20)	36	-3.115		
	40	-2.703		
	48	-3.698		
802.11n(HT40)	38	-6.633		
	46	-6.609		
802.11ac(HT20)	36	-3.111		
	40	-3.115		
	48	-3.730		
802.11ac(HT40)	38	-5.649		
	46	-6.056		
802.11ac(HT80)	42	-9.926	Pass	

U-NII 2A

Type	Channel	P.S.D (dBm/MHz)	Limit (dBm/ MHz)	Result
802.11a	52	-3.772	11	Pass
	60	-3.225		
	64	-3.605		
802.11n(HT20)	52	-4.080		
	60	-3.491		
	64	-3.599		
802.11n(HT40)	54	-6.836		
	62	-6.587		
802.11ac(HT20)	52	-3.973		
	60	-3.634		
	64	-3.917		
802.11ac(HT40)	54	-7.108		
	62	-6.726		
802.11ac(HT80)	58	-9.915	Pass	

U-NII 2C

Type	Channel	P.S.D (dBm/MHz)	Limit (dBm/ MHz)	Result
802.11a	100	-2.837	11	Pass
	116	-2.330		
	140	-2.037		
802.11n(HT20)	100	-3.072		Pass
	116	-2.490		
	140	-2.009		
802.11n(HT40)	102	-6.463		Pass
	118	-5.903		
	134	-5.619		
802.11ac(HT20)	100	-3.304		Pass
	116	-2.331		
	140	-2.312		
802.11ac(HT40)	102	-6.520		Pass
	118	-5.415		
	134	-5.267		
802.11ac(HT80)	106	-9.265	Pass	
	122	-9.151		

U-NII 3


Type	Channel	Power Spectral Density (dBm/500KHz)	Limit (dBm/500KHz)	Result
802.11a	149	-6.622	30	Pass
	157	-8.247		
	165	-9.045		
802.11n(HT20)	149	-7.574		
	157	-8.337		
	165	-9.226		
802.11n(HT40)	151	-11.260		
	159	-11.484		
802.11ac(HT20)	149	-6.906		
	157	-8.237		
	165	-9.384		
802.11ac(HT40)	151	-10.821		
	159	-11.125		
802.11ac(HT80)	155	-14.166		

Note:


1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20 ,IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;
4. Please refer to following test plots;

802.11a

U-NII 1

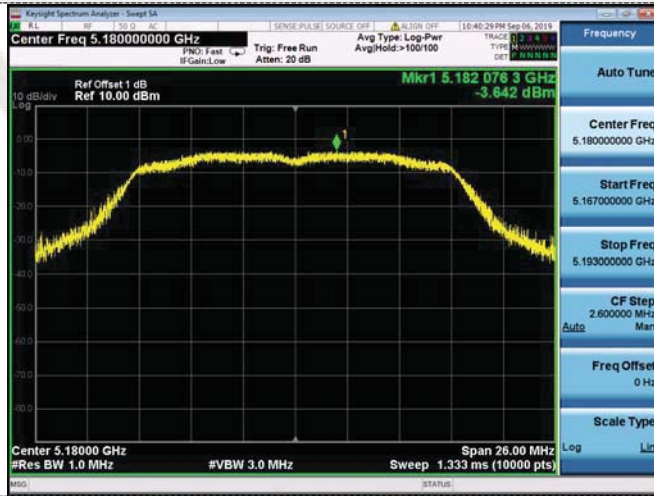

U-NII 2A

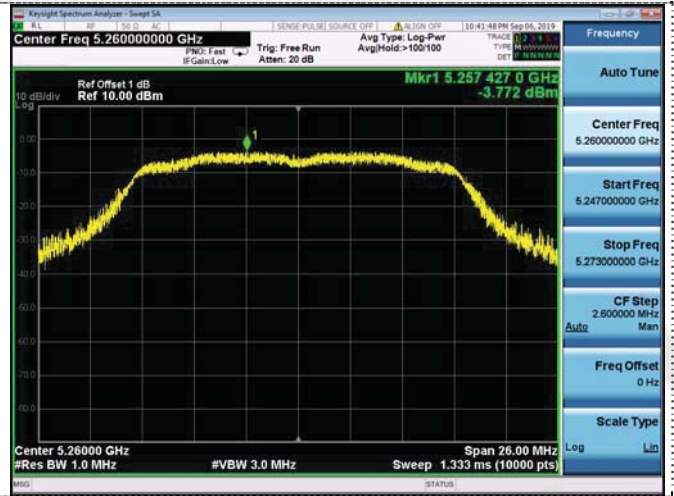

CH36




CH52



CH40



CH60

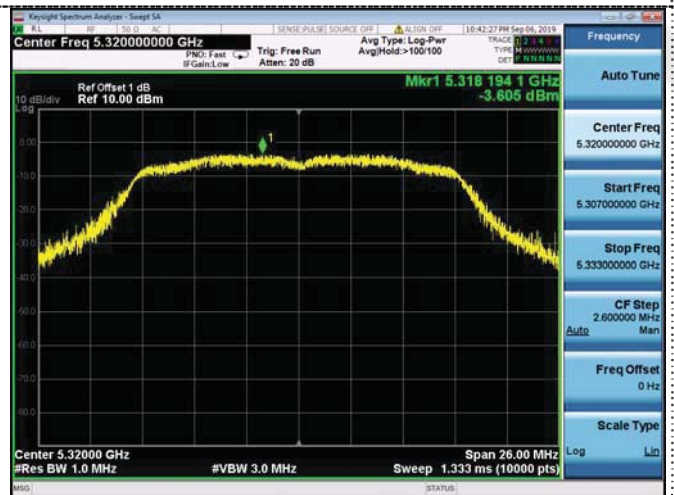


CH48

CH64

802.11a


U-NII 2C

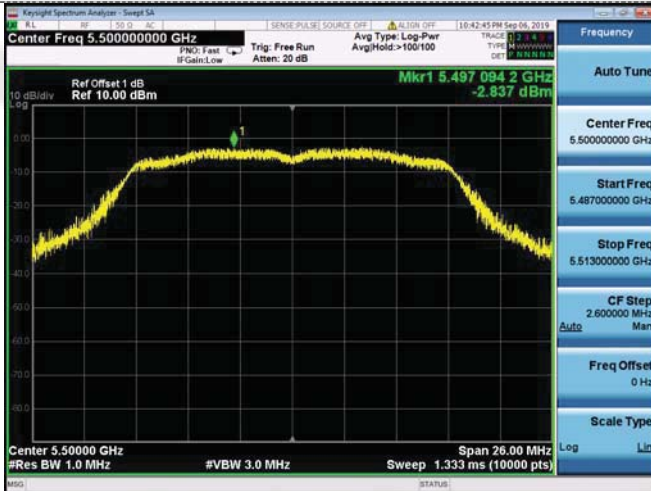

U-NII 3




CH100

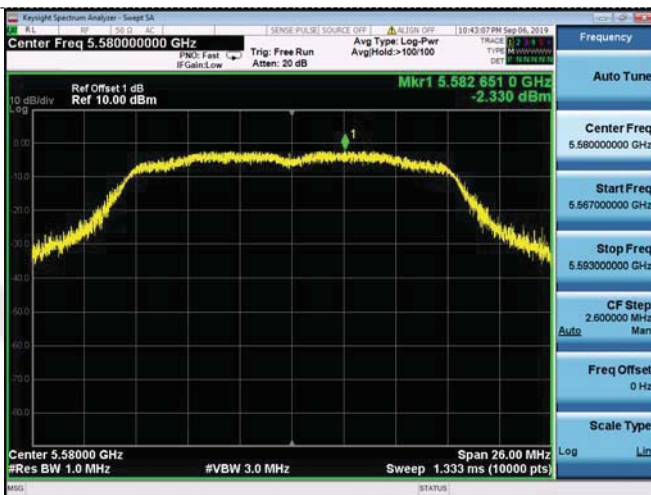


CH149




CH116

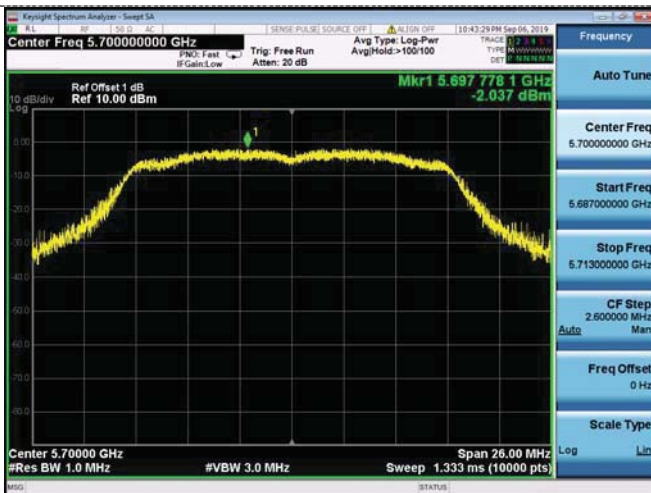

CH157

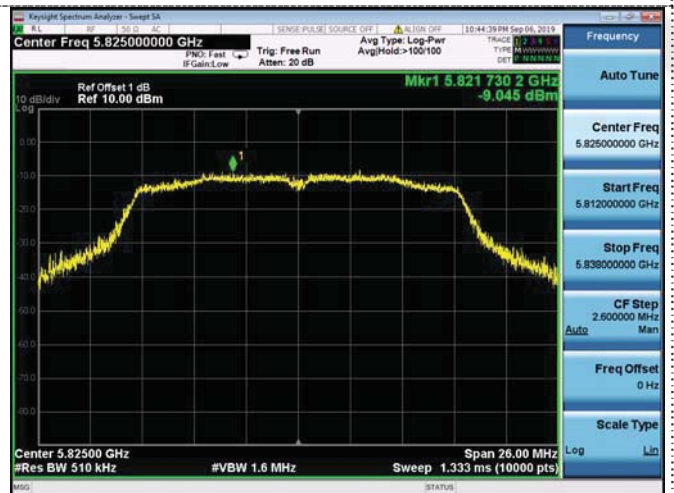

CH140




CH165

802.11n20

U-NII 1




U-NII 2A

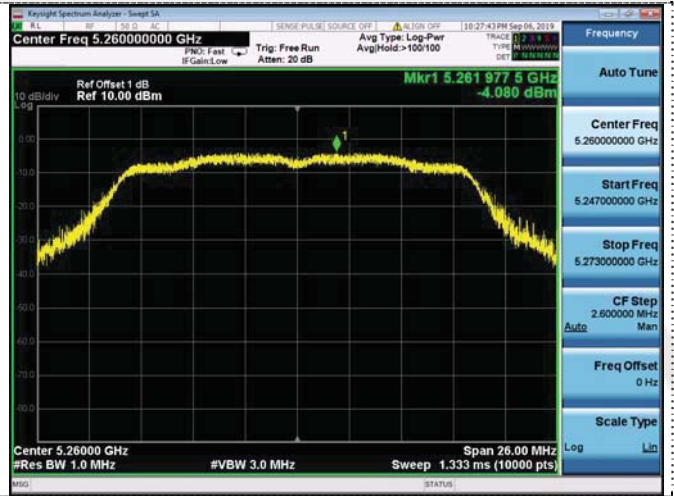

CH36



CH52

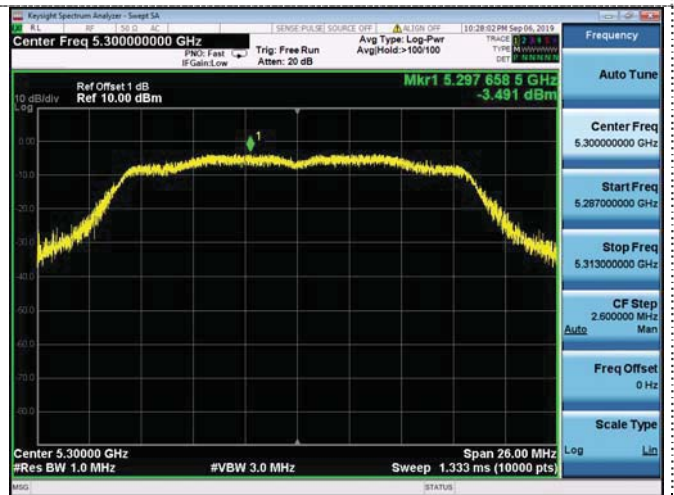

CH40




CH60



CH48




CH64



802.11n20


U-NII 2C

U-NII 3

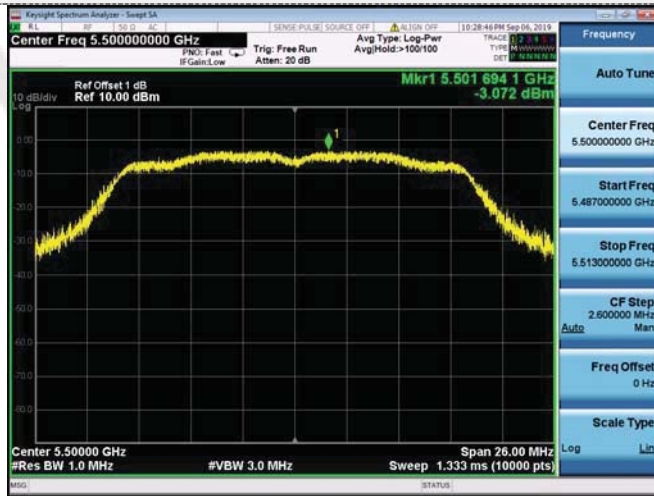

CH100

CH149

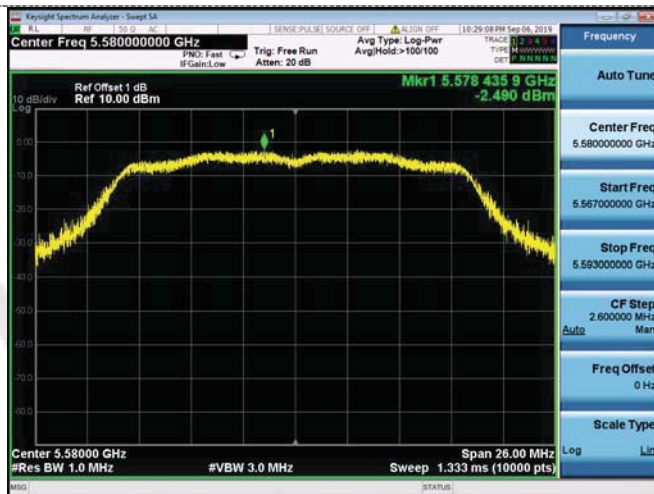

CH116

CH157



CH140

CH165

802.11n(HT40)

U-NII 1



U-NII 2A



CH38



CH54



CH46



CH62



802.11n(HT40)

U-NII 2C



U-NII 3



CH102



CH151



CH118



CH159

CH134




802.11ac(HT20)

U-NII 1




U-NII 2A

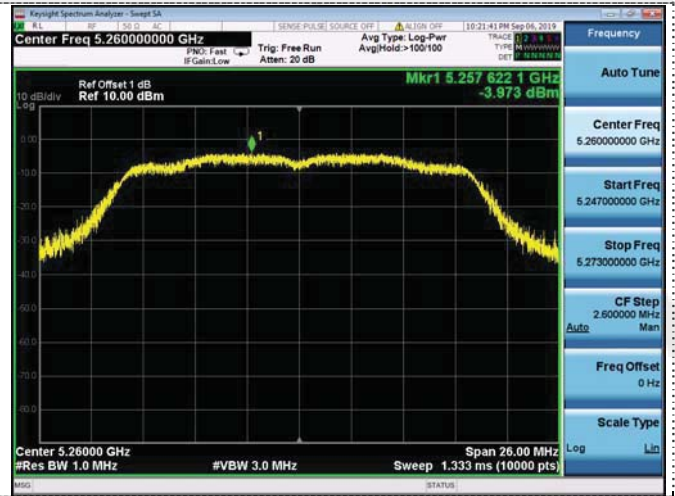

CH36



CH52

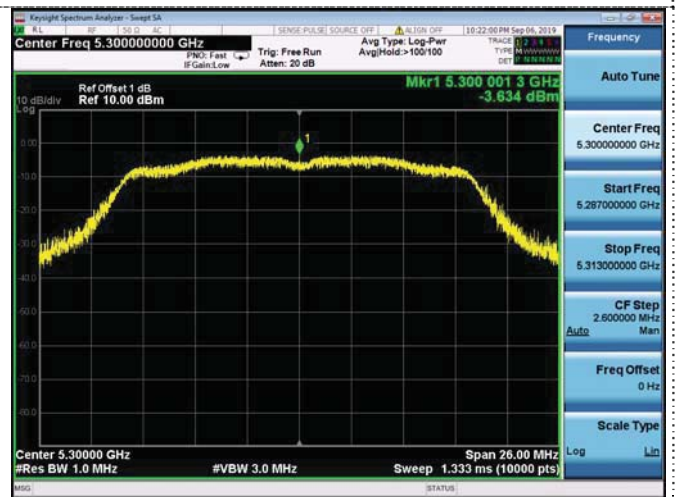

CH40



CH60



CH48

CH64

802.11ac(HT20)


U-NII 2C

U-NII 3



CH100

CH149

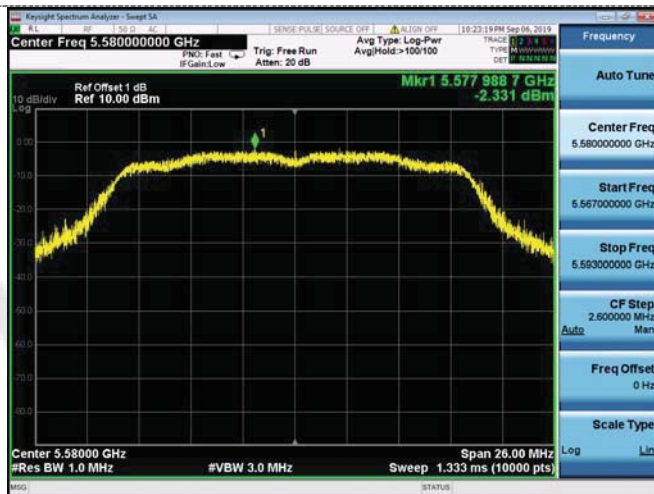

CH116

CH157



CH140

CH165

802.11ac(HT40)

U-NII 1



U-NII 2A



CH38



CH54



CH46



CH62



802.11ac(HT40)

U-NII 2C



U-NII 3



CH102



CH151



CH118



CH159

CH134



802.11ac(HT80)

U-NII 1



CH42


U-NII 2A



CH58

802.11ac(HT80)

U-NII 2C

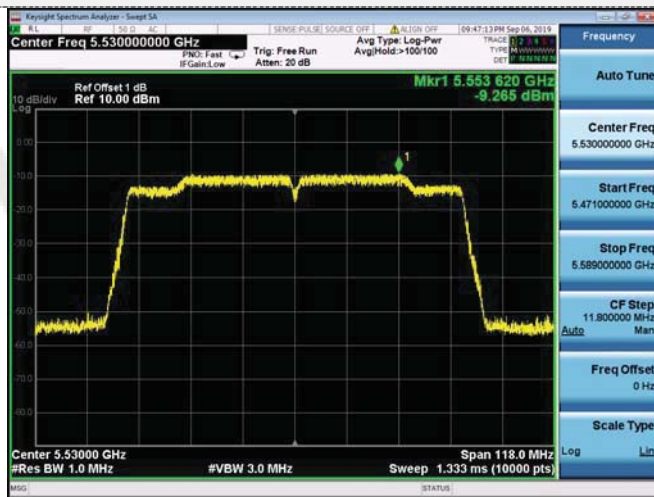

CH106

U-NII 3



CH155



CH122

3.5. Emission Bandwidth (26dBm Bandwidth)

Limit

N/A

Test Procedure

1. Set resolution bandwidth (RBW) = approximately 1 % of the EBW.
2. Set the video bandwidth (VBW) > RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW / EBW ratio is approximately 1 %.

Test Configuration



Test Results

Type	Bands	Channel	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Result
802.11a	U-NII 1	36	21.43	16.433	N/A	Pass
		40	22.06	16.430		
		48	21.54	16.436		
	U-NII 2A	52	21.56	16.462		
		60	21.36	16.403		
		64	21.53	16.431		
	U-NII 2C	100	21.56	16.430		
		116	20.83	16.420		
		140	22.39	16.459		
802.11n(HT20)	U-NII 1	36	22.81	17.609		
		40	21.87	17.626		
		48	22.53	17.624		
	U-NII 2A	52	22.62	17.630		
		60	21.69	17.646		
		64	22.59	17.644		
	U-NII 2C	100	22.38	17.634		
		116	21.88	17.631		
		140	22.43	17.611		
802.11n(HT40)	U-NII 1	38	42.15	36.098		
		46	41.01	36.000		
	U-NII 2A	54	42.71	36.051		
		62	42.19	36.067		
	U-NII 2C	102	42.75	36.099		
		118	42.08	36.024		
		134	41.60	36.044		

Type	Bands	Channel	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Result
802.11ac(HT20)	U-NII 1	36	22.73	17.673	N/A	Pass
		40	22.61	17.655		
		48	21.47	17.623		
	U-NII 2A	52	22.63	17.664		
		60	21.28	17.625		
		64	21.93	17.646		
	U-NII 2C	100	21.86	17.655		
		116	22.65	17.642		
		140	21.82	17.633		
802.11ac(HT40)	U-NII 1	38	41.93	36.000		
		46	41.30	36.018		
	U-NII 2A	54	41.66	36.032		
		62	41.68	35.999		
	U-NII 2C	102	42.76	36.061		
		118	41.73	36.006		
802.11ac(HT80)	U-NII 1	42	80.78	75.156		
		58	81.00	75.232		
	U-NII 2C	106	80.16	75.280		
		122	80.50	75.205		

Note:

1. Measured 26dB bandwidth at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20 ,IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;
4. Please refer to following test plots;

802.11a

U-NII 1



U-NII 2A



CH36



CH52



CH40




CH60



CH48



CH64



802.11a

U-NII 2C



CH100



CH116

CH140

802.11n(HT20)

U-NII 1



U-NII 2A



CH36



CH52



CH40



CH60



CH48

CH64