

Test report

299005-2TRFWL

Date of issue: April 11, 2016

Applicant:

GSI Electronics

Product:

RFID module

Model:

KP-8IN-1REL

FCC ID:

2AFLZEDGERFID

Variants:

TR-2IN-1REL

IC Registration number:

11880A-EDGERFID

Specifications:

FCC 47 CFR Part 15.225

Operation within the band 13.110–14.010 MHz

RSS-210 Issue 8, December 2010, Annex 2.6

Devices operating in 13.110–14.010 MHz frequency band for any application

Test location

Company name	Nemko Canada Inc.
Address	292 Labrosse Avenue
City	Pointe-Claire
Province	QC
Postal code	H9R 5L8
Country	Canada
Telephone	+1 514 694 2684
Facsimile	+1 514 694 3528
Toll free	+1 800 563 6336
Website	www.nemko.com
Site number	FCC: 722545; IC: 2040G-5 (3 m semi anechoic chamber)

Tested by	Yong Huang, EMC / Wireless Specialist
Reviewed by	Kevin Rose, Wireless/EMC Specialist
Date	April 11, 2016
Signature	

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. © Nemko Canada Inc.

Table of contents

Table of contents	3
Section 1. Report summary	4
1.1 Applicant and manufacturer	4
1.2 Test specifications	4
1.3 Statement of compliance	4
1.4 Exclusions	4
1.5 Test report revision history	4
Section 2. Summary of test results	5
2.1 FCC Part 15 Subpart C, general requirements test results	5
2.2 FCC Part 15 Subpart C, intentional radiators test results	5
2.3 IC RSS-GEN, Issue 4, test results	5
2.4 IC RSS-210, Issue 8, test results	5
Section 3. Equipment under test (EUT) details	6
3.1 Sample information	6
3.2 EUT information	6
3.3 Technical information	6
3.4 Product description and theory of operation	7
3.5 EUT exercise details	8
3.6 EUT setup diagram	9
3.7 EUT sub assemblies	10
Section 4. Engineering considerations	11
4.1 Modifications incorporated in the EUT	11
4.2 Technical judgment	11
4.3 Deviations from laboratory tests procedures	11
Section 5. Test conditions	12
5.1 Atmospheric conditions	12
5.2 Power supply range	12
Section 6. Measurement uncertainty	13
6.1 Uncertainty of measurement	13
Section 7. Test equipment	14
7.1 Test equipment list	14
Section 8. Testing data	15
8.1 FCC 15.207(a) and RSS-Gen 8.8 AC power line conducted emissions limits	15
8.2 FCC 15.215(c) and RSS-Gen 6.6 Occupied (Emission) bandwidth	21
8.3 FCC 15.225(a–c) and RSS-210 A2.6 (a–c) Field strength within the 13.110–14.010 MHz band	23
8.4 FCC 15.225(d) and RSS-210 A2.6(d) Field strength of emissions outside 13.110–14.010 MHz band	25
8.5 FCC 15.225(e) and RSS-210 A2.6 Frequency tolerance of the carrier signal	29
Section 9. Block diagrams of test set-ups	30
9.1 Radiated emissions set-up below 1 GHz	30
9.2 Conducted emissions set-up	30
Section 10. EUT photos	31
10.1 External photos	31

Section 1. Report summary

1.1 Applicant and manufacturer

Company name	GSI Electronics
Address	5200 Armand-Frappier
City	St-Hubert
Province/State	Quebec
Postal/Zip code	J3Z 1G5
Country	Canada

1.2 Test specifications

FCC 47 CFR Part 15, Subpart C, Clause 15.225	Operation in the 13.110–14.010 MHz
RSS-210 Issue 8, December 2010, Annex 2.6	Devices operating in 13.110–14.010 MHz frequency band for any application

1.3 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

1.4 Exclusions

None

1.5 Test report revision history

Revision #	Details of changes made to test report
TRF	Original report issued

Section 2. Summary of test results

2.1 FCC Part 15 Subpart C, general requirements test results

Part	Test description	Verdict
§15.207(a)	Conducted limits	Pass
§15.31(e)	Variation of power source	Pass ¹
§15.203	Antenna requirement	Pass ²
§15.215(c)	20 dB bandwidth	Pass

Notes: ¹ Measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, was performed with the supply voltage varied between 85 % and 115 % of the nominal rated supply voltage. No noticeable output power variation was observed

² The Antennas are located within the enclosure of EUT and not user accessible.

2.2 FCC Part 15 Subpart C, intentional radiators test results

Part	Test description	Verdict
§15.225(a)	Field strength within 13.553–13.567 MHz band	Pass
§15.225(b)	Field strength within 13.410–13.553 MHz and 13.567–13.710 MHz bands	Pass
§15.225(c)	Field strength within 13.110–13.410 MHz and 13.710–14.010 MHz bands	Pass
§15.225(d)	Field strength outside 13.110–14.010 MHz band	Pass
§15.225(e)	Frequency tolerance of carrier signal	Pass

Notes: None

2.3 IC RSS-GEN, Issue 4, test results

Part	Test description	Verdict
6.6	Occupied bandwidth	Pass
7.1.2	Receiver radiated emission limits	Not applicable
7.1.3	Receiver conducted emission limits	Not applicable
8.8	Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus	Pass

Notes: ¹ According to sections 5.2 and 5.3 of RSS-Gen, Issue 4 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

2.4 IC RSS-210, Issue 8, test results

Part	Test description	Verdict
A2.6 (a)	The field strength within the band 13.553–13.567 MHz	Pass
A2.6 (b)	The field strength within the bands 13.410–13.553 MHz and 13.567–13.710 MHz	Pass
A2.6 (c)	The field strength within the bands 13.110–13.410 MHz and 13.710–14.010 MHz	Pass
A2.6 (d)	The field strength outside the band 13.110–14.010 MHz	Pass
A2.6	Carrier frequency stability	Pass

Notes: None

Section 3. Equipment under test (EUT) details

3.1 Sample information

Receipt date	December 2, 2015 and December 11, 2015
Nemko sample ID number	133-002063, 133-002097

3.2 EUT information

Product name	RFID module
Model	KP-8IN-1REL
Model variant	TR-2IN-1REL
Serial number	0452816 and 0454438

3.3 Technical information

Operating band	13.553–13.567 MHz
Operating frequency	13.56 MHz
Modulation type	OOK, modulation depth : 100%
Occupied bandwidth (99 %)	1.17kHz
Power requirements	24 VDC via 120 VAC /230 VAC power supply from AA128 Touch or EDGE or PSU 24V 20W
Emission designator	K1D
Antenna information	The EUT uses non-detachable antenna to the intentional radiator.

3.4 Product description and theory of operation

KP-8IN-1REL, TR-2IN-1REL are supplied by the main system (EDGE, AA128 Touch or by an independent supply PSU 24V 20W) via the communication bus. The external modules use the RS-485 interface to communicate with the main system.

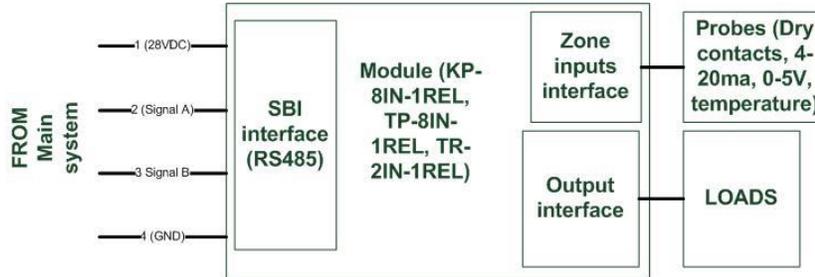


Figure 1 : Network definition between the main system and the external module

Each external module is defined below:

Item	Description
KP-8IN-1REL	Remote keypad displaying data from the main system that allows the addition of 8 sensors inputs and a programmable relay output
TR-2IN-1REL	Remote expansion module that allows the addition of 2 sensors inputs and a programmable relay output

Table 1 : List of external modules (product names)

The external modules (KP-8IN-1REL, TR-2IN-1REL) allow the possibility to extend the number of sensors inputs of the main system (EDGE, AA128 Touch) and to add an additional output of the main system.

The difference between external modules (KP-8IN-1REL, TR-2IN-1REL) is given below:

Product Name	Features					
	RS-485 port	Configurable input	Relay output with current reading (5A)	OLED display	RFID Reader	Keypad
KP-8IN-1REL	2	8	1	1	1	1
TR-2IN-1REL	2	2	1		1	

Table 2 : Hardware difference

3.5 EUT exercise details

The worst controller at the point view of EMC is the use of a KP-8IN-1REL. It has the maximum hardware and software features. The inputs were set in the temperature mode. A load of 470 Ohms were installed on the 24Vdc output. A load of 5 amps was installed at the relay output on the KP-8IN-1REL. A main controller (AA128 Touch) is connected with the KP-8IN-1REL on the RS-485 network. A specific config must be loaded to communicate with the specific KP-8IN-1REL. When the KP-8IN-1REL communicates with the main controller, the RFID module transmits every time. At the end, the setup transmits the temperature readings to the main system. The main system controls the relay output.

3.6 EUT setup diagram

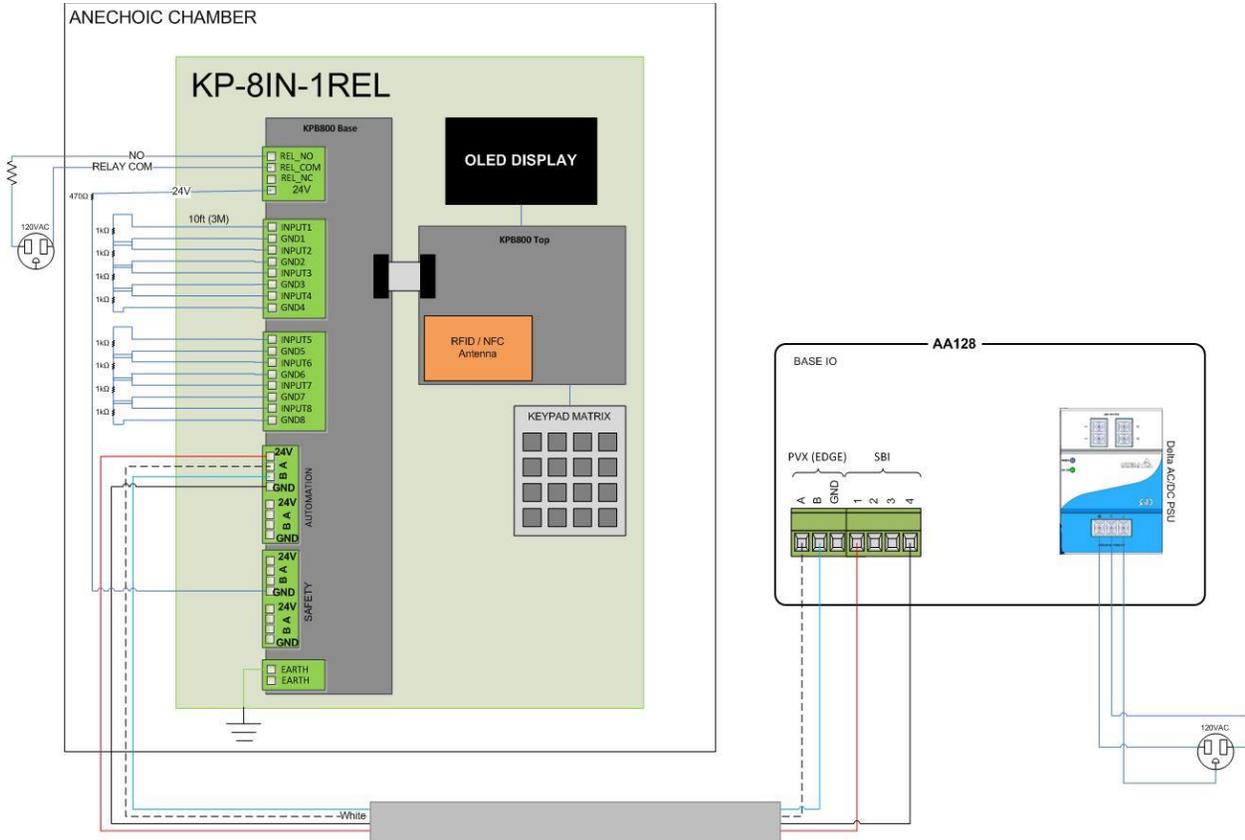


Figure 3.6-1: Setup diagram

3.7 EUT sub assemblies

Table 3.7-1: EUT sub assemblies

Description	Brand name	Model/Part number	Serial number	Rev.
External Module	Agri Alert or EDGE	KP-8IN-1REL	0452816	Base firmware: V1.2.0.992r UI firmware : V0.2.1.376r
The representative of the main system	Agri Alert	AA128	0448963	

Table 3.7-2: EUT interface ports

Description	Qty.
Sensors inputs	8
24V output	1
Relay output	1
Power (24V and GND) and communication port (RS-485 - A and RS-485 - B)	1

Table 3.7-3: Support equipment

Description	Brand name	Model/Part number	Serial number	Rev.
Representative of a main System	Agri Alert	AA128 TOUCH	0448963	
5 Amps Loads (lamps)				
Resistive loads for sensors inputs and 24V output				

Table 3.7-4: Inter-connection cables

Cable description	From	To	Length (m)
Power (24V and GND) and communication port (RS-485 - A and RS-485 - B)	AA128 Touch	KP-8IN-1REL	9.14
Supply cable	The main sector voltage (120Vac/230Vac)	AA128 Touch	9.14
Sensors Inputs	KP-8IN-1REL - Sensor Input	Resistor of 1K Ω	3
24V output	KP-8IN-1REL – 24V output	Resistor of 480 Ω	3
Relay output	L1 from the main sector voltage (120Vac/230Vac)	Relay - COM	3
Relay output	Relay - NO	5 Amps Loads (lamps)	3
Relay output	5 Amps Loads (lamps)	L2/N from the main sector voltage (120Vac/230Vac)	2

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

As per customer's instruction, the tested sample with model#: KP-8IN-1REL is the most representative of the whole lineup, since all other model variants are depopulated versions of the unit tested.

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

Temperature	15–30 °C
Relative humidity	20–75 %
Air pressure	860–1060 mbar

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6. Measurement uncertainty

6.1 Uncertainty of measurement

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of $K = 2$ with 95% certainty.

Test name	Measurement uncertainty, dB
All antenna port measurements	0.55
Conducted spurious emissions	1.13
Radiated spurious emissions	3.78
AC power line conducted emissions	3.55

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
Flush mount turntable	Sunol	FM2022	FA002550	—	NCR
Controller	Sunol	SC104V	FA002551	—	NCR
Antenna mast	Sunol	TLT2	FA002552	—	NCR
Power source	California Instruments	5001ix	FA002494	1 year	Jan. 22/16
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 40	FA002071	1 year	April 7/16
50 Ω coax cable	C.C.A.	None	FA002603	—	VOU
50 Ω coax cable	C.C.A.	None	FA002605	—	VOU
50 Ω coax cable	C.C.A.	None	FA002607	—	VOU
Bilog antenna (20–2000 MHz)	Sunol	JB1	FA002517	1 year	Sept. 29/16
Horn antenna (1–18 GHz)	EMCO	3115	FA001452	1 year	Sept. 29/16
Pre-amplifier (0.5–18 GHz)	COM-POWER	PAM-118A	FA002561	1 year	May 6/16
Active loop antenna (0.01–30 MHz)	Com-Power	AL-130	FA002674	1 year	Jan. 13/16
Temperature chamber	Thermotron	S-4	FA002534	1 year	NCR
Multimeter	Fluke	87III	FA001361	1 year	Aug. 25/16

Note: NCR - no calibration required, VOU - verify on use

Section 8. Testing data

8.1 FCC 15.207(a) and RSS-Gen 8.8 AC power line conducted emissions limits

8.1.1 Definitions and limits

FCC:
 Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

IC:
 A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in table below.

Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in table below. The more stringent limit applies at the frequency range boundaries.

Table 8.1-1: Conducted emissions limit

Frequency of emission, MHz	Conducted limit, dB μ V	
	Quasi-peak	Average**
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

Note: * - The level decreases linearly with the logarithm of the frequency.
 ** - A linear average detector is required.

8.1.2 Test summary

Test date	December 11, 2015	Temperature	24.7 °C
Test engineer	Yong Huang	Air pressure	1012.4 mbar
Verdict	Pass	Relative humidity	32.5 %

8.1.3 Observations, settings and special notes

The EUT was set up as tabletop configuration.

The spectral scan has been corrected with transducer factors (i.e. cable loss, LISN factors, and attenuators) for determination of compliance.


A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.

As per customer's instruction, tests were performed on the AC input of AA128 auxiliary equipment and the relay port. In addition to pre-scan of EUT with integral antenna, final measurement was made with a suitable dummy load installed in lieu of the antenna of EUT.

Test receiver settings:


Frequency span	150 kHz to 30 MHz
Detector mode	Peak and Average (preview mode); Quasi-Peak (final measurements)
Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Trace mode	Max Hold
Measurement time	1000 ms

8.1.4 Test data

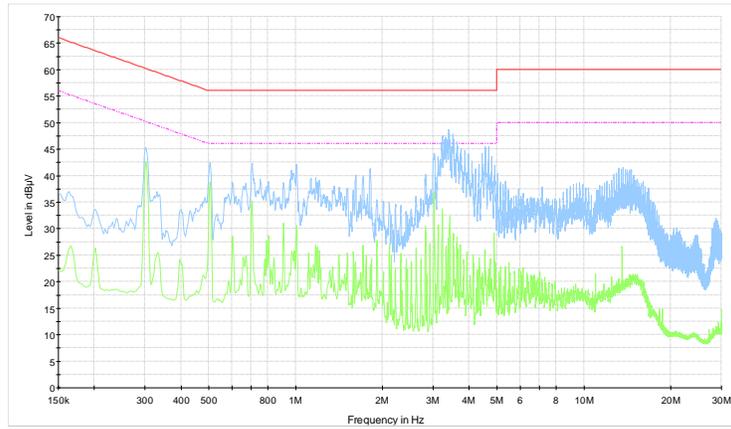

5W 299005 CE-120Vvac, input-port AA128-L1-tx-on-with dummy load
— CISPR 22 Mains OP Class B
- - - CISPR 22 Mains AV Class B
— Preview Result 1-PK+
— Preview Result 2-AVG


Plot 8.1-1: Conducted emissions on phase line – 120 V_{AC} power input of AA128

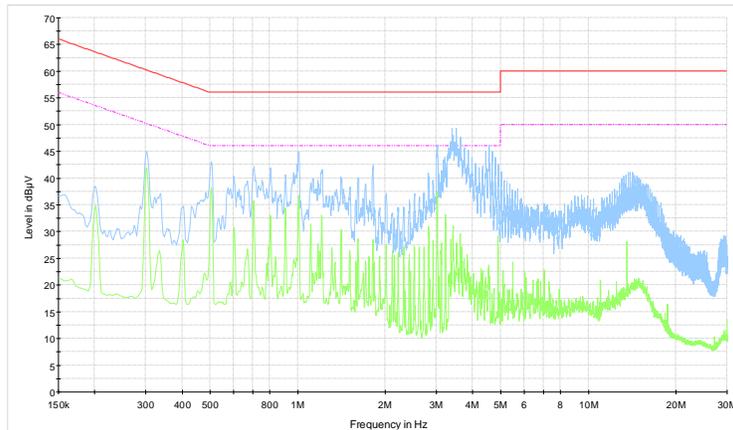

5W 299005 CE-120V-port AA128-N-tx-on-with dummy load
— CISPR 22 Mains OP Class B
- - - CISPR 22 Mains AV Class B
— Preview Result 1-PK+
— Preview Result 2-AVG


Plot 8.1-2: Conducted emissions on neutral line– 120 V_{AC} power input of AA128

8.1.4 Test data, continued

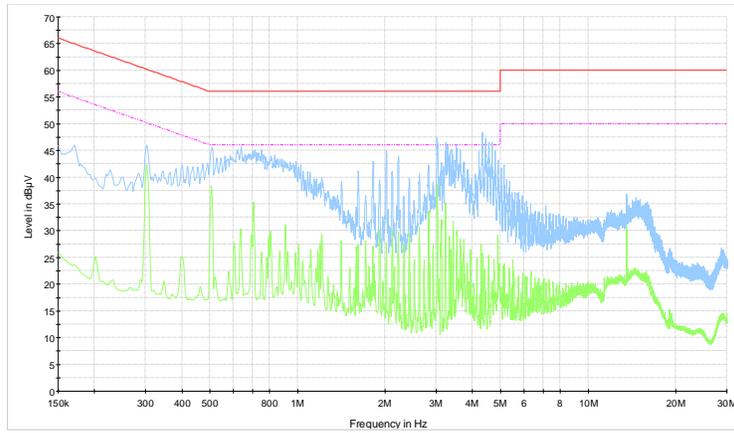

5W 299005.CE-240V-port AA128-L1-tx on with dummy load
 CISPR 22 Mains QP Class B
 CISPR 22 Mains AV Class B
 Preview Result 1-PK+
 Preview Result 2-AVG


Plot 8.1-3: Conducted emissions on phase line– 240 V_{AC} power input of AA128

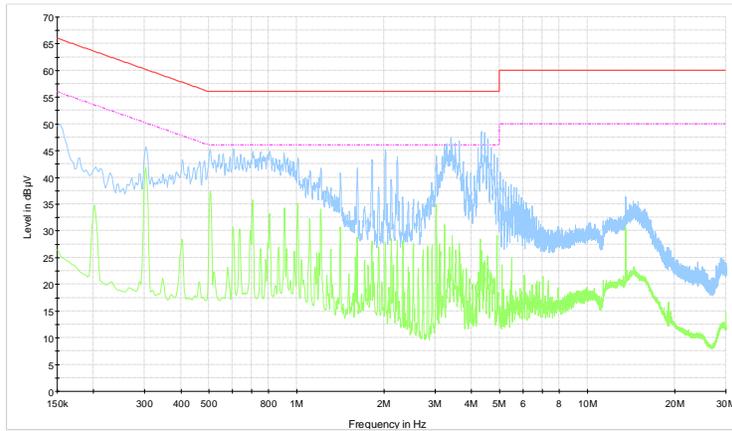

5W 299005.CE-240V-port AA128-N-tx on with dummy load
 CISPR 22 Mains QP Class B
 CISPR 22 Mains AV Class B
 Preview Result 1-PK+
 Preview Result 2-AVG


Plot 8.1-4: Conducted emissions on neutral line– 240 V_{AC} power input of AA128

8.1.4 Test data, continued

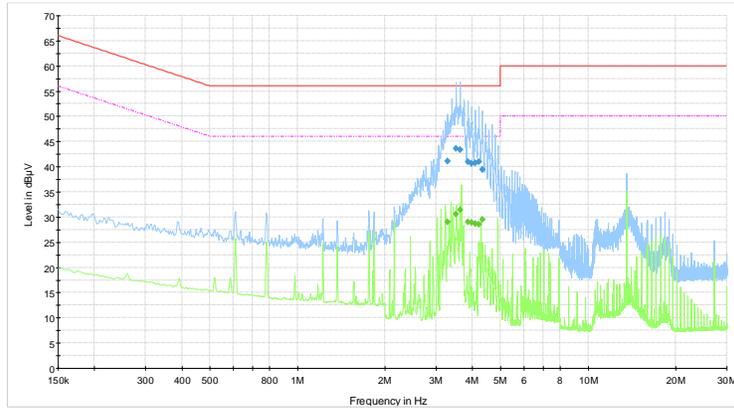

SR299005.CE-120V-portrelay-L1-tx on with dummy load
 — CISPR 22 Mains QP Class B
 - - - CISPR 22 Mains AV Class B
 Preview Result 1-PK+
 Preview Result 2-AVG
 Final Result 1-QPK
 Final Result 2-AVG


Plot 8.1-5: Conducted emissions on phase line— 120 V_{AC} power input of Relay port

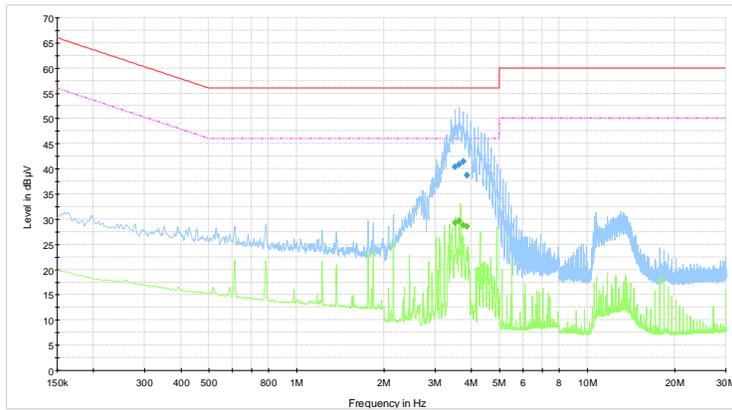

SW 299005.CE-120V-portrelay-N1-tx on with dummy load
 — CISPR 22 Mains QP Class B
 - - - CISPR 22 Mains AV Class B
 Preview Result 1-PK+
 Preview Result 2-AVG
 Final Result 1-QPK
 Final Result 2-AVG


Plot 8.1-6: Conducted emissions on neutral line— 120 V_{AC} power input of Relay port

8.1.4 Test data, continued

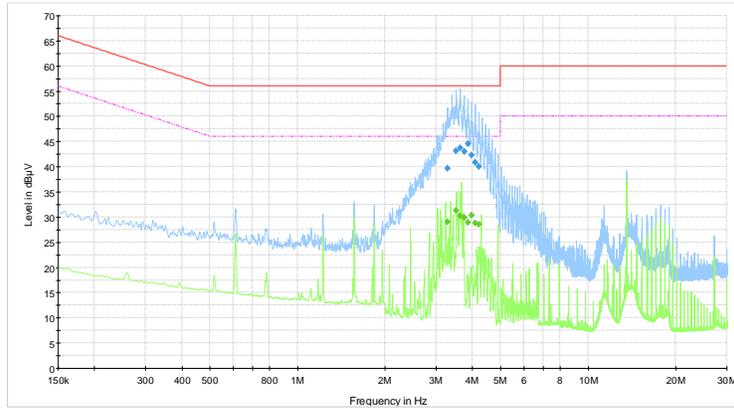

SR299005.CE-240V-port relay-L1-tx on with dummy load
 — CISPR 22 Mains QP Class B
 - - - CISPR 22 Mains AV Class B
 — Preview Result 1-PK+
 — Preview Result 2-AVG
 ◆ Final Result 1-QPK
 ◆ Final Result 2-AVG

Plot 8.1-7: Conducted emissions on phase line— 240 V_{AC} power input of Relay port

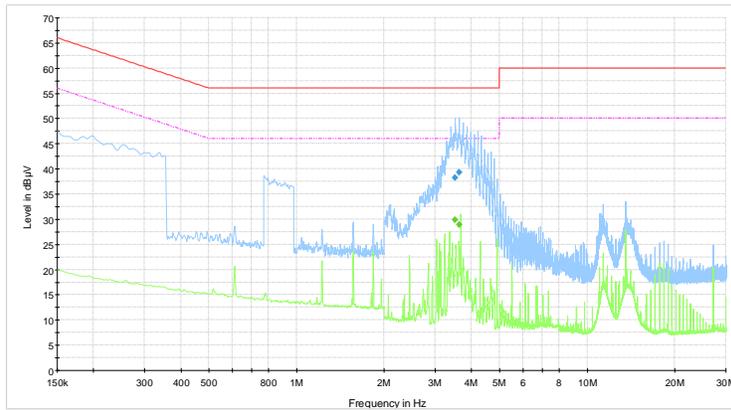

SR299005.CE-240V-port relay-N1-tx on with dummy load
 — CISPR 22 Mains QP Class B
 - - - CISPR 22 Mains AV Class B
 — Preview Result 1-PK+
 — Preview Result 2-AVG
 ◆ Final Result 1-QPK
 ◆ Final Result 2-AVG

Plot 8.1-8: Conducted emissions on neutral line— 240 V_{AC} power input of Relay port

8.2 FCC 15.215(c) and RSS-Gen 6.6 Occupied (Emission) bandwidth

8.2.1 Definitions and limits

FCC

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80 % of the permitted band in order to minimize the possibility of out-of-band operation.

IC

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

8.2.2 Test summary


Test date	December 21, 2015	Temperature	25 °C
Test engineer	Yong Huang	Air pressure	1007.5 mbar
Verdict	Pass	Relative humidity	32.0 %

8.2.3 Observations, settings and special notes

Spectrum analyzer settings:


Detector mode	Peak
Resolution bandwidth	≥1 % of span
Video bandwidth	RBW × 3
Trace mode	Max Hold

8.2.4 Test data

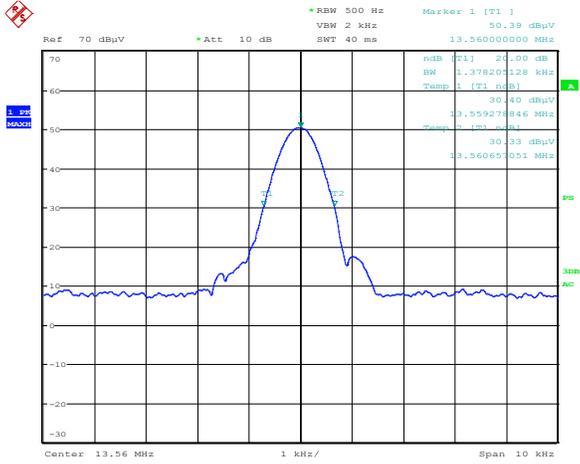

Date: 21.DEC.2015 16:00:05

Figure 8.2-1: 20 dB bandwidth

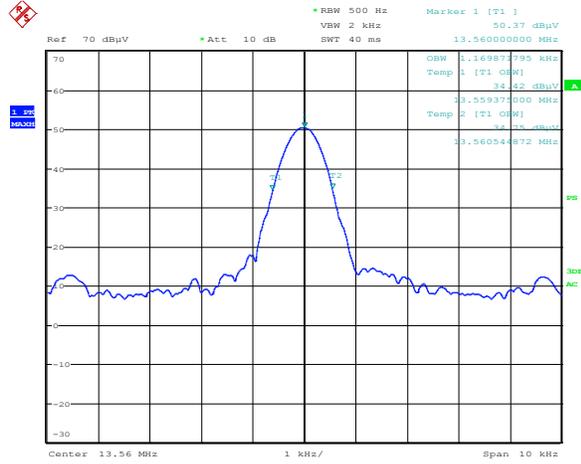

Date: 21.DEC.2015 16:00:33

Figure 8.2-2: 99% dB bandwidth

8.3 FCC 15.225(a-c) and RSS-210 A2.6 (a-c) Field strength within the 13.110–14.010 MHz band

8.3.1 Definitions and limits

- a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15848 $\mu\text{V/m}$ (84 dB $\mu\text{V/m}$) at 30 m.
- b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 $\mu\text{V/m}$ (50.5 dB $\mu\text{V/m}$) at 30 m.
- c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 $\mu\text{V/m}$ (40.5 dB $\mu\text{V/m}$) at 30 m.

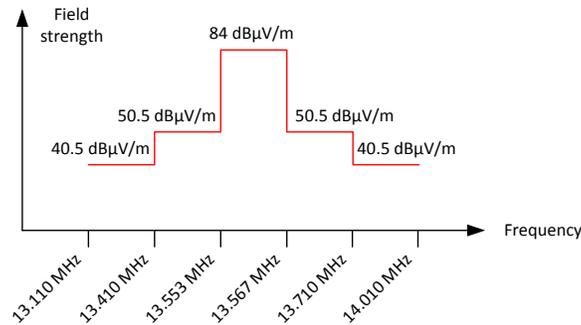


Figure 8.3-1: In-band spurious emissions limit

8.3.2 Test summary

Test date	December 9, 2015	Temperature	24.8 °C
Test engineer	Yong Huang	Air pressure	1005.0 mbar
Verdict	Pass	Relative humidity	32.0 %

8.3.3 Observations/special notes

The measurements were performed at the distance of 3 m. 40 dB distance correction factor* was applied to the measurement result in order to comply with 30 m limits.

* 30 m to 3 m distance correction factor calculation (for 13 MHz band):

$$40 \times \text{Log}_{10} (3 \text{ m}/30 \text{ m}) = 40 \times \text{Log}_{10} (0.1) = -40 \text{ dB}$$

Spectrum analyzer settings:

Detector mode	Peak
Resolution bandwidth	10 kHz
Video bandwidth	30 kHz
Trace mode	Max Hold

8.3.4 Test data

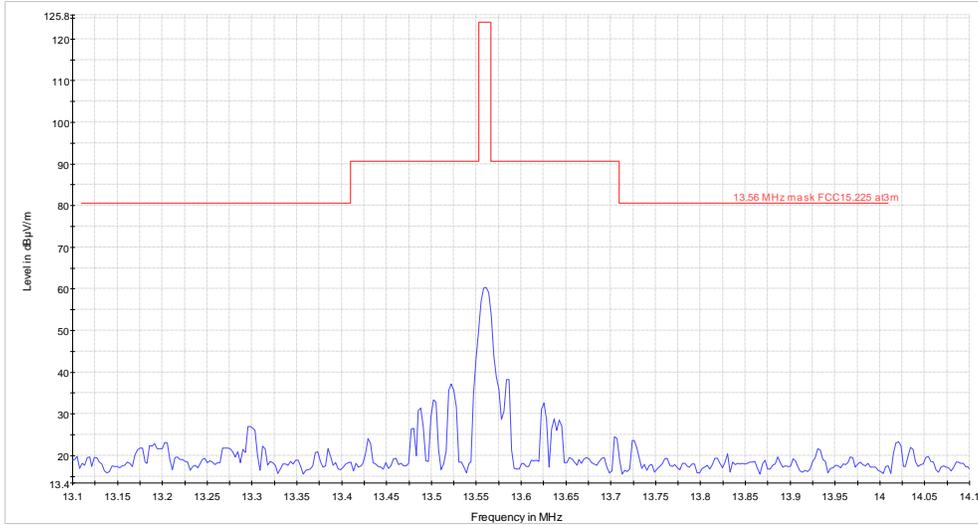


Figure 8.3-2: Field strength within 13.11–14.01 MHz band

Table 8.3-1: Field strength measurement results within 13.11–14.01 MHz band at 3 m distance

Frequency, MHz	Field strength, dBµV/m	Limit _{3 m} , dBµV/m	Margin, dB
13.56	60.4	124.0	63.6

8.4 FCC 15.225(d) and RSS-210 A2.6(d) Field strength of emissions outside 13.110–14.010 MHz band

8.4.1 Definitions and limits

FCC:

The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209. The field strength of emissions appearing within restricted bands (as specified in §15.205) shall not exceed the limits from §15.209.

IC:

The field strength of any emission outside the band 13.110–14.010 MHz shall not exceed the 30 µV/m (29.5 dBµV/m) at 30 m limit (69.5 dBµV/m at 3 m). In addition to RSS-210, the requirements in RSS-Gen, General Requirements and Information for the Certification of Radio Apparatus, must be met. Category I licence-exempt equipment is required to comply with the provisions in RSS-Gen with respect to emissions falling within restricted frequency bands. These restricted frequency bands are listed in RSS-Gen.

Table 8.4-1: FCC §15.209 and RSS-Gen – Radiated emission limits

Frequency, MHz	Field strength of emissions		Measurement distance, m
	µV/m	dBµV/m	
0.009–0.490	2400/F	$67.6 - 20 \times \log_{10}(F)$	300
0.490–1.705	24000/F	$87.6 - 20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges. For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

Table 8.4-2: IC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	12.51975–12.52025	399.9–410	5.35–5.46
2.1735–2.1905	12.57675–12.57725	608–614	7.25–7.75
3.020–3.026	13.36–13.41	960–1427	8.025–8.5
4.125–4.128	16.42–16.423	1435–1626.5	9.0–9.2
4.17725–4.17775	16.69475–16.69525	1645.5–1646.5	9.3–9.5
4.20725–4.20775	16.80425–16.80475	1660–1710	10.6–12.7
5.677–5.683	25.5–25.67	1718.8–1722.2	13.25–13.4
6.215–6.218	37.5–38.25	2200–2300	14.47–14.5
6.26775–6.26825	73–74.6	2310–2390	15.35–16.2
6.31175–6.31225	74.8–75.2	2655–2900	17.7–21.4
8.291–8.294	108–138	3260–3267	22.01–23.12
8.362–8.366	156.52475–156.52525	3332–3339	23.6–24.0
8.37625–8.38675	156.7–156.9	3345.8–3358	31.2–31.8
8.41425–8.41475	240–285	3500–4400	36.43–36.5
12.29–12.293	322–335.4	4500–5150	Above 38.6

Note: Certain frequency bands listed in table above and above 38.6 GHz are designated for low-power licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard

8.4.1 Definitions and limits, continued

Table 8.4-3: FCC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

8.4.2 Test summary

Test date	December 9, 2015	Temperature	24.8 °C
Test engineer	Yong Huang	Air pressure	1005.0 mbar
Verdict	Pass	Relative humidity	32.0 %

8.4.3 Observations, settings and special notes

The spectrum was searched from 9 kHz to 1 GHz.
 Radiated measurements were performed at a distance of 3 m.

Spectrum analyzer settings for frequencies below 30 MHz:

Detector mode	Quasi-Peak
Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Trace mode	Max Hold
Measurement time	100 ms

Spectrum analyzer settings for frequencies above 30 MHz:

Detector mode	Peak
Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Trace mode	Max Hold
Measurement time	100 ms

8.4.4 Test data


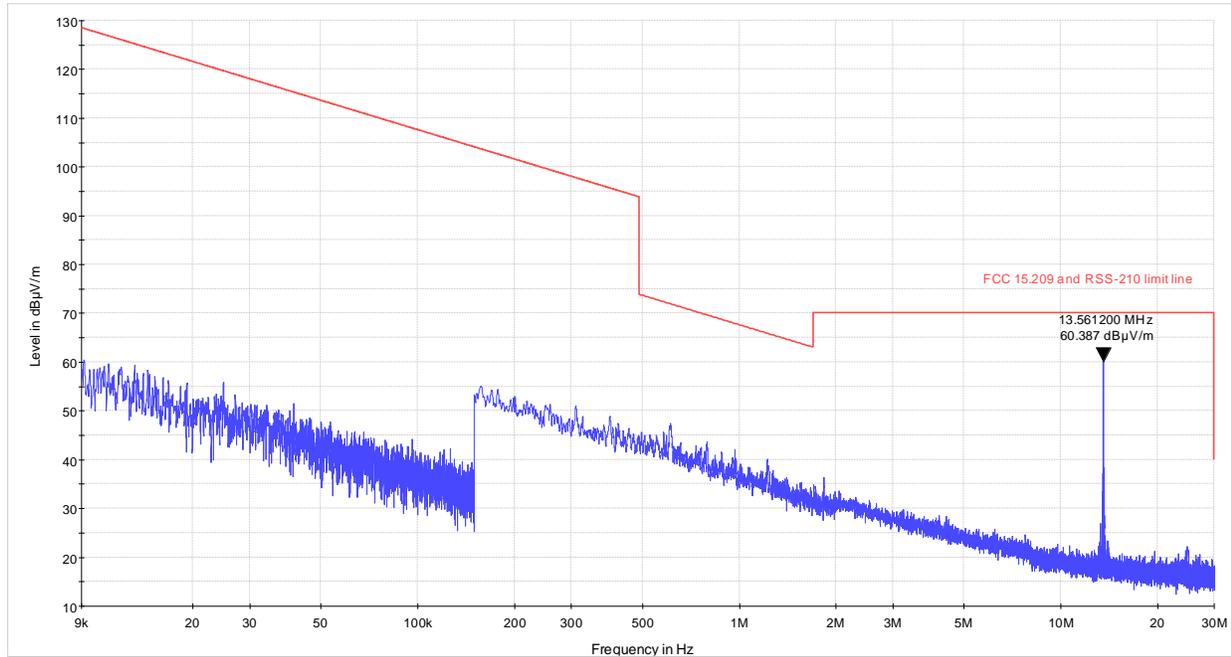


Figure 8.4-1: Field strength of spurious emissions below 30 MHz

8.4.4 Test data, continued

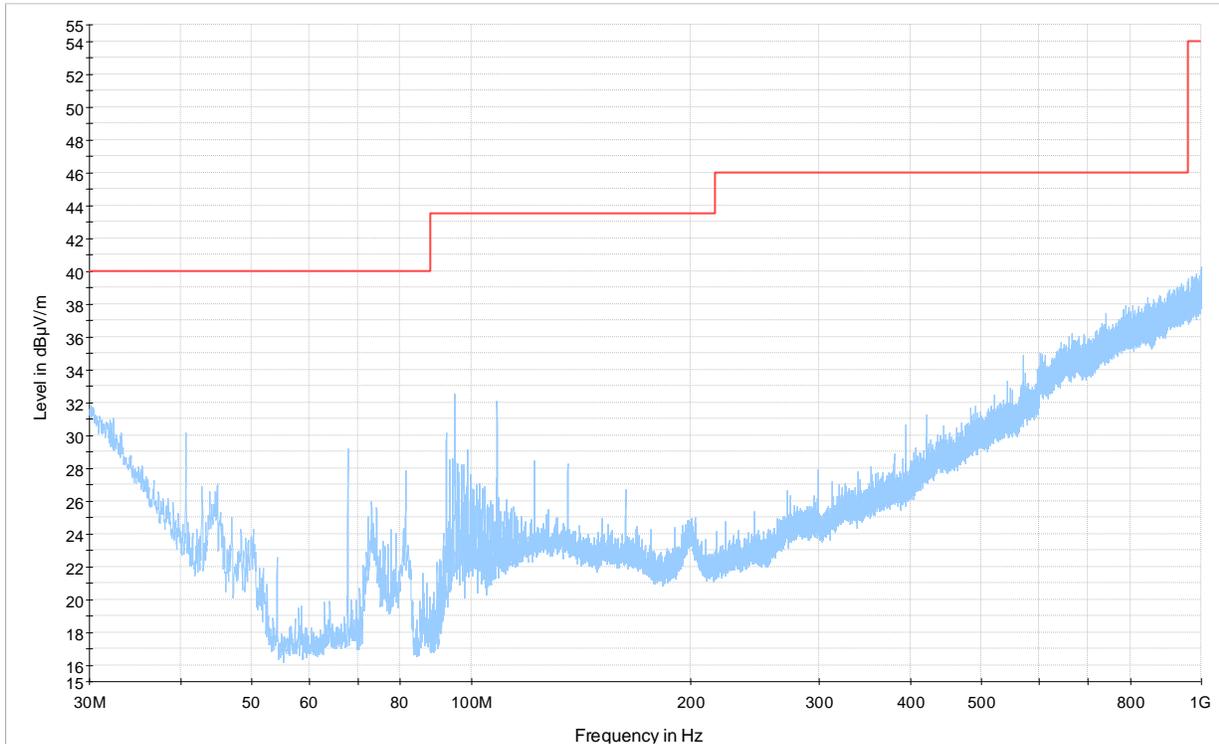

5W 299005, RE tx on
— FCC Part 15 - Class B 3m QP and Average
— Preview Result 1-PK+

Figure 8.4-2: Field strength of spurious emissions above 30 MHz

Note: all measurement results indicated in the plot were taken with a peak detector, which is more stringent measurement, and still comply with quasi-peak limit.

8.5 FCC 15.225(e) and RSS-210 A2.6 Frequency tolerance of the carrier signal

8.5.1 Definitions and limits

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ (± 100 ppm) of the operating frequency over a temperature variation of $-20\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$ at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of $20\text{ }^{\circ}\text{C}$. For battery operated equipment, the equipment tests shall be performed using a new battery.

8.5.2 Test summary

Test date	December 11, 2015	Temperature	24.8 $^{\circ}\text{C}$
Test engineer	Yong Huang	Air pressure	1005.0 mbar
Verdict	Pass	Relative humidity	32.0 %

8.5.3 Observations, settings and special notes

Spectrum analyzer settings:

Detector mode	Peak
Resolution bandwidth	$\geq 1\%$ of emission bandwidth
Video bandwidth	RBW $\times 3$
Trace mode	Max Hold

8.5.4 Test data

Table 8.5-1: Frequency drift measurements results


Test conditions	Frequency, MHz	Frequency drift, \pm ppm	Limit, \pm ppm	Margin, ppm
+50 $^{\circ}\text{C}$, Nominal	13.559916	-2.21	100	97.79
+20 $^{\circ}\text{C}$, +15 %	13.560006	4.42	100	95.58
+20 $^{\circ}\text{C}$, Nominal	13.559946	Reference	Reference	Reference
+20 $^{\circ}\text{C}$, -15 %	13.559956	0.73	100	99.27
-20 $^{\circ}\text{C}$, Nominal	13.560136	14.01	100	85.99

Note: frequency drift was calculated as follows:


$$\text{Frequency drift (ppm)} = ((F_{\text{measured}} - F_{\text{reference}}) \div F_{\text{reference}}) \times 1 \times 10^6$$

Section 9. Block diagrams of test set-ups

9.1 Radiated emissions set-up below 1 GHz

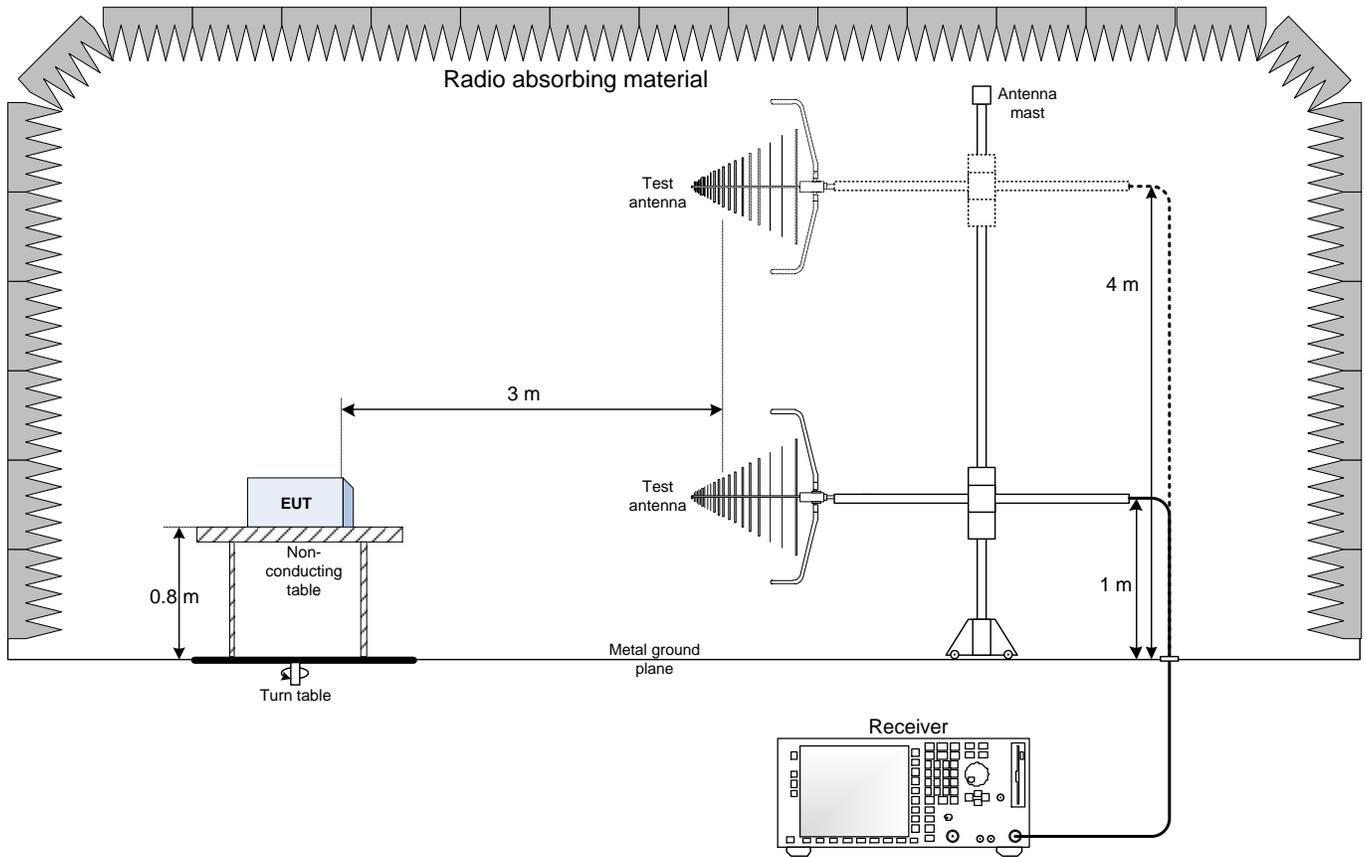

9.2 Conducted emissions set-up

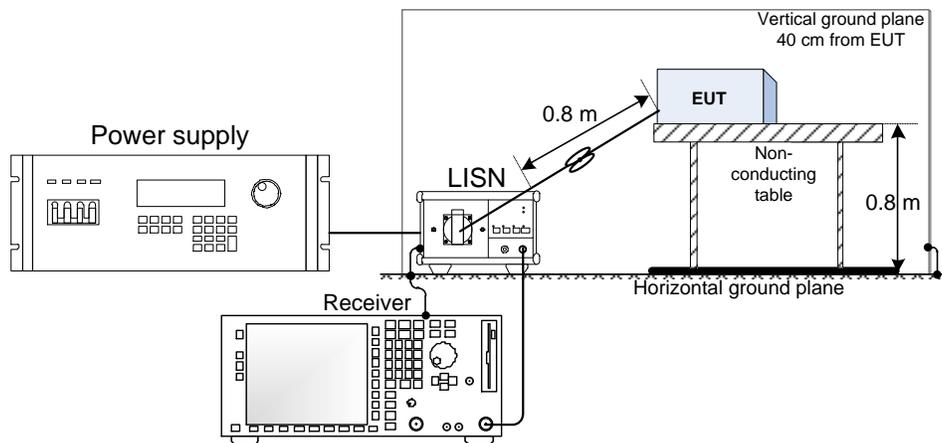

Section 10. EUT photos

10.1 External photos



Figure 10.1-1: Front view photo (KP-8IN-1REL)



Figure 10.1-2: Rear view photo (KP-8IN-1REL)



Figure 10.1-3: Side view photo (KP-8IN-1REL)

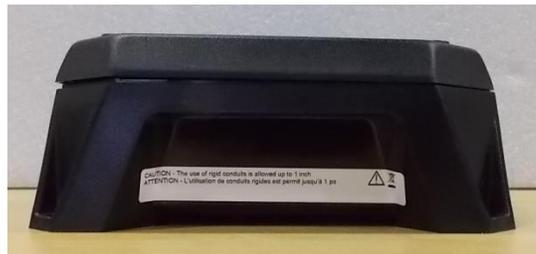


Figure 10.1-4: Side view photo (KP-8IN-1REL)



Figure 10.1-5: Front view photo (TR-2IN-1REL)



Figure 10.1-6: Rear view photo (TR-2IN-1REL)



Figure 10.1-7: Side view photo

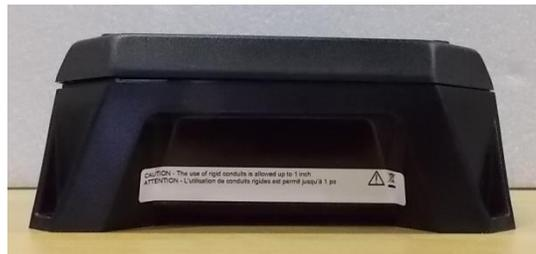


Figure 10.1-8: Side view photo