



**REPORT REVISE RECORD**

<b>Report Version</b>	<b>Revise Time</b>	<b>Issued Date</b>	<b>Valid Version</b>	<b>Notes</b>
V1.0	/	September 09, 2015	Valid	Original Report

Table of Contents	Page
<b>1. GENERAL INFORMATION</b>	<b>6</b>
<b>2. TEST DESCRIPTION</b>	<b>8</b>
2.1 MEASUREMENT UNCERTAINTY	8
2.2 DESCRIPTION OF TEST MODES	9
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	10
2.4 CONFIGURATION OF SYSTEM UNDER TEST	10
2.5 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	11
<b>3. SUMMARY OF TEST RESULTS</b>	<b>12</b>
<b>4. MEASUREMENT INSTRUMENTS</b>	<b>13</b>
<b>5. EMC EMISSION TEST</b>	<b>14</b>
5.1 CONDUCTED EMISSION MEASUREMENT	14
5.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
5.1.2 TEST PROCEDURE	15
5.1.3 DEVIATION FROM TEST STANDARD	15
5.1.4 TEST SETUP	15
5.1.5 EUT OPERATING CONDITIONS	15
5.1.6 TEST RESULTS	16
5.2 TRANSMITTER RADIATED EMISSION MEASUREMENT	18
5.2.1 RADIATED EMISSION LIMITS	18
5.2.2 TEST PROCEDURE	19
5.2.3 DEVIATION FROM TEST STANDARD	19
5.2.4 TEST SETUP	20
5.2.5 EUT OPERATING CONDITIONS	21
5.2.5.1 RESULTS (BELOW 30 MHZ)	22
5.2.5.2 TEST RESULTS (BETWEEN 30M – 1000 MHZ)	23
5.2.5.3 TEST RESULTS(1GHZ TO 25GHZ)	25
5.3 RECEIVER RADIATED EMISSION MEASUREMENT	33
5.3.1 RECEIVER RADIATED LIMITS	33
5.3.2 TEST PROCEDURE	34
5.2.3 DEVIATION FROM TEST STANDARD	34
5.3.4 TEST SETUP	35
5.3.5 EUT OPERATING CONDITIONS	35
5.3.5.1 TEST RESULTS (BETWEEN 30M – 1000 MHZ)	36
5.3.5.2 TEST RESULTS(1GHZ TO 25GHZ)	38
5.4 CONDUCTED SPURIOUS EMISSION MEASUREMENT	40
5.4.1 CONDUCTED SPURIOUS EMISSION LIMITS	40
5.4.2 TEST PROCEDURE	40

<b>Table of Contents</b>	<b>Page</b>
5.4.3 DEVIATION FROM STANDARD	40
5.4.4 TEST SETUP	40
5.3.5 EUT OPERATION CONDITIONS	40
5.4.6 TEST RESULTS	41
<b>6. NUMBER OF HOPPING CHANNEL</b>	
6.1 APPLIED PROCEDURES / LIMIT	49
6.2 TEST PROCEDURE	49
6.3 DEVIATION FROM STANDARD	49
6.4 TEST SETUP	49
6.5 EUT OPERATION CONDITIONS	49
6.6 TEST RESULTS	50
<b>7. AVERAGE TIME OF OCCUPANCY</b>	
7.1 APPLIED PROCEDURES / LIMIT	51
7.2 TEST PROCEDURE	51
7.3 DEVIATION FROM STANDARD	51
7.4 TEST SETUP	51
7.5 EUT OPERATION CONDITIONS	51
7.6 TEST RESULTS	52
<b>8. HOPPING CHANNEL SEPARATION MEASUREMENT</b>	
8.1 APPLIED PROCEDURES / LIMIT	54
8.2 TEST PROCEDURE	54
8.3 DEVIATION FROM STANDARD	54
8.4 TEST SETUP	54
8.5 EUT OPERATION CONDITIONS	54
8.6 TEST RESULTS	55
<b>9. BANDWIDTH TEST</b>	
9.1 APPLIED PROCEDURES / LIMIT	61
9.2 TEST PROCEDURE	61
9.3 DEVIATION FROM STANDARD	61
9.4 TEST SETUP	61
9.5 EUT OPERATION CONDITIONS	61
9.6 TEST RESULTS	62
<b>10. PEAK OUTPUT POWER TEST</b>	
10.1 APPLIED PROCEDURES / LIMIT	68
10.2 TEST PROCEDURE	68
10.3 DEVIATION FROM STANDARD	68
10.4 TEST SETUP	68
10.5 EUT OPERATION CONDITIONS	68

**Table of Contents****Page**

<b>10.6 TEST RESULTS</b>	<b>69</b>
<b>11. ANTENNA APPLICATION</b>	<b>69</b>
<b>12. EUT TEST PHOTO</b>	<b>70</b>
<b>13. PHOTOGRAPHS OF EUT</b>	<b>72</b>

## 1. GENERAL INFORMATION

### GENERAL DESCRIPTION OF EUT

Test Model	SML605BK
Derivative Model Name	SML605W,SML605XY (X instead of 0-9 or A-Z,Y instead of 0-9 or A-Z)
Model difference	All models are identical in circuitry and electrical, mechanical and physical construction, only different on model name, color and size. All tests are carried out on SML605BK.
Applicant	Shenzhen FDY Digital Electronics CO., Ltd.
Address	3 RD Floor, Building 1, Fuhong Industrial Zone, Tangwei Village, Fuyong Town, Baoan District, Shenzhen City, Guangdong Province, China
Manufacturer	Shenzhen FDY Digital Electronics CO., Ltd.
Address	3 RD Floor, Building 1, Fuhong Industrial Zone, Tangwei Village, Fuyong Town, Baoan District, Shenzhen City, Guangdong Province, China
Equipment Type	CD+G/MP3+G Karaoke Player With Bluetooth
Brand Name	Singing Machine
Hardware version:	SML605-MAIN-V04
Software version:	2015-09-V-1
Adapter Information:	Model: JDA1201500WUS Input:100V-240V~20/60Hz 0.8A Output: DC12V 1.5A
Operating Frequency	2402-2480MHz
Channels	79
Channel Spacing	1MHz
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Version	V2.1+EDR
Antenna Type:	Monopole Antenna
Antenna gain:	0dBi
Data of receipt	September 02, 2015
Date of test	September 02, 2015 to September 09, 2015
Deviation	None
Condition of Test Sample	Normal

**We hereby certify that:**

The above equipment was tested by Shenzhen WST Testing Technology Co., Ltd.

Registration Number: 939433

The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2014. The sample tested as described in this report is in compliance with the FCC Rules Part15 Subpart C.

The test results of this report relate only to the tested sample identified in this report.

## 2. TEST DESCRIPTION

### 2.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.7\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78
Mode 4	Normal Hopping

For Conducted Emission	
Final Test Mode	Description
Mode 4	Normal Hopping

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.**
- (2) The data rate was set in 1Mbps, 2 Mbps, 3 Mbps for radiated emission due to the highest RF output power.**
- (3) Record the worst case of each test item in this report.**

### 2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test software Version	N/A		
Test program	N/A		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	DEF	DEF	DEF
Parameters(2Mbps)	DEF	DEF	DEF
Parameters(3Mbps)	DEF	DEF	DEF

### 2.4 CONFIGURATION OF SYSTEM UNDER TEST



(EUT: CD+G/MP3+G Karaoke Player With Bluetooth)

I/O Port of EUT			
I/O Port Type	Q'TY	Cable	Tested with
Power port	1	1m cable, unshielded, fixed with adaptor	1
<b>Note: the AC Adaptor with a fixed cable that is marketed with the device and tested</b>			

**2.5 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	/	/	/	/	/

**Note:**

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.
- (4) The adapter supply by the applicant.

### 3. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Standard Section		Test Item	Judgment	Remark
§FCC 15.207	§RSS Gen sect.8.8	Conducted Emission	PASS	
§FCC 15.247(a)(1)	§RSS 247 sect.5.1(2)	Hopping Channel Separation	PASS	
§FCC 15.247(b)(1)	§RSS 247 sect.5.4(2)	Peak Output Power	PASS	
§FCC 15.247(c)	§RSS Gen sect.7.1, §RSS Gen sect.8.9	Radiated Spurious Emission	PASS	
§FCC 15.247(d)	§RSS 247 sect.5.5	Conducted Spurious Emission	PASS	
§FCC 15.247(a)(iii)	§RSS 247 sect.5.1(4)	Number of Hopping Frequency	PASS	
§FCC 15.247(a)(iii)	§RSS 247 sect.5.1(4)	Dwell Time	PASS	
§FCC 15.247(a)(1)	§RSS247 sect.5.1(3) §RSS Gen sect.6.6	Bandwidth	PASS	
§FCC 15.205	§RSS 247 sect.5.5	Band Edge Emission	PASS	
§FCC 15.203	§RSS Gen sect.8.3	Antenna Requirement	PASS	

**NOTE:**

(1) "N/A" denotes test is not applicable in this test report.

**4. MEASUREMENT INSTRUMENTS**

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibrated	Calibrated until
ESPI Test Receiver	R&S	ESPI	100379	08/19/2015	08/18/2016
EMI Test Receiver	R&S	ESCI	100005	08/19/2015	08/18/2016
LISN	AFJ	LS16	16010222119	08/19/2015	08/18/2016
LISN(EUT)	Mestec	AN3016	04/10040	08/19/2015	08/18/2016
Ultra Broadband ANT	R&S	HL562	100157	08/19/2015	08/18/2016
pre-amplifier	CDSI	PAP-1G18-38	--	08/19/2015	08/18/2016
System Controller	CT	SC100	-	08/19/2015	08/18/2016
Bi-log Antenna	Chase	CBL6111C	2576	08/19/2015	08/18/2016
Spectrum analyzer	R&S	FSU26	200409	08/19/2015	08/18/2016
Spectrum Analyzer	Agilent	E4440A	MY42510159	12/02/2014	12/01/2015-
Horn Antenna	SCHWARZBECK	9120D	1141	08/19/2015	08/18/2016
Bi-log Antenna	SCHWARZBECK	VULB9163	9163/340	08/19/2015	08/18/2016
Loop Antenna	EMCO	6502	00042960	08/22/2015	08/21/2016
Pre Amplifier	H.P.	HP8447E	2945A02715	10/13/2014	10/12/2015
9*6*6 Anechoic	--	--	--	08/21/2015	08/20/2016
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	09/13/2014	09/12/2015
Power meter	Anritsu	ML2487A	6K00003613	08/23/2015	08/22/2016
H & T Chamber	Guangzhou gongwen	GDJS-500-40	0329	08/19/2015	08/18/2016
EXA Signal Analyzer	Agilent	N9020A	--	08/19/2015	08/18/2016
Power sensor	Anritsu	MA2482D	--	08/19/2015	08/18/2016
RF cable	H+S	SUCOFLEX 102	--	08/19/2015	08/18/2016
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	08/19/2015	08/18/2016

## 5. EMC EMISSION TEST

### 5.1 CONDUCTED EMISSION MEASUREMENT

#### 5.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


### 5.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 5.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 5.1.4 TEST SETUP

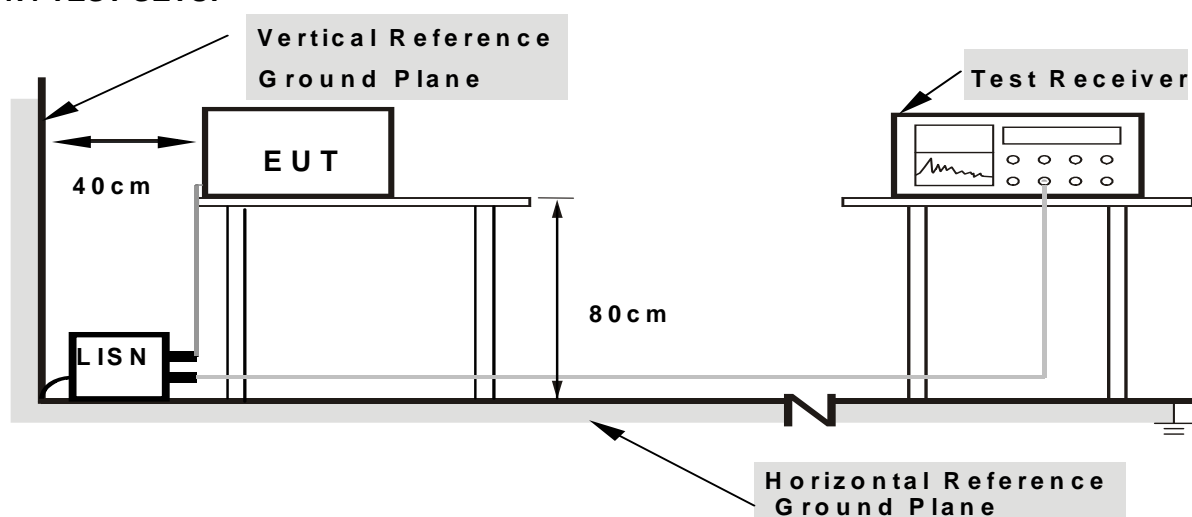


- Note:** 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 5.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 5.1.6 TEST RESULTS


EUT	Mobile Phone	Model Name	SML605BK
Temperature	26 °C	Relative Humidity	54%
Pressure	1010hPa	Phase	L
Test Date	September 03, 2015	Test Mode	Mode 4
Voltage	120V/60Hz		

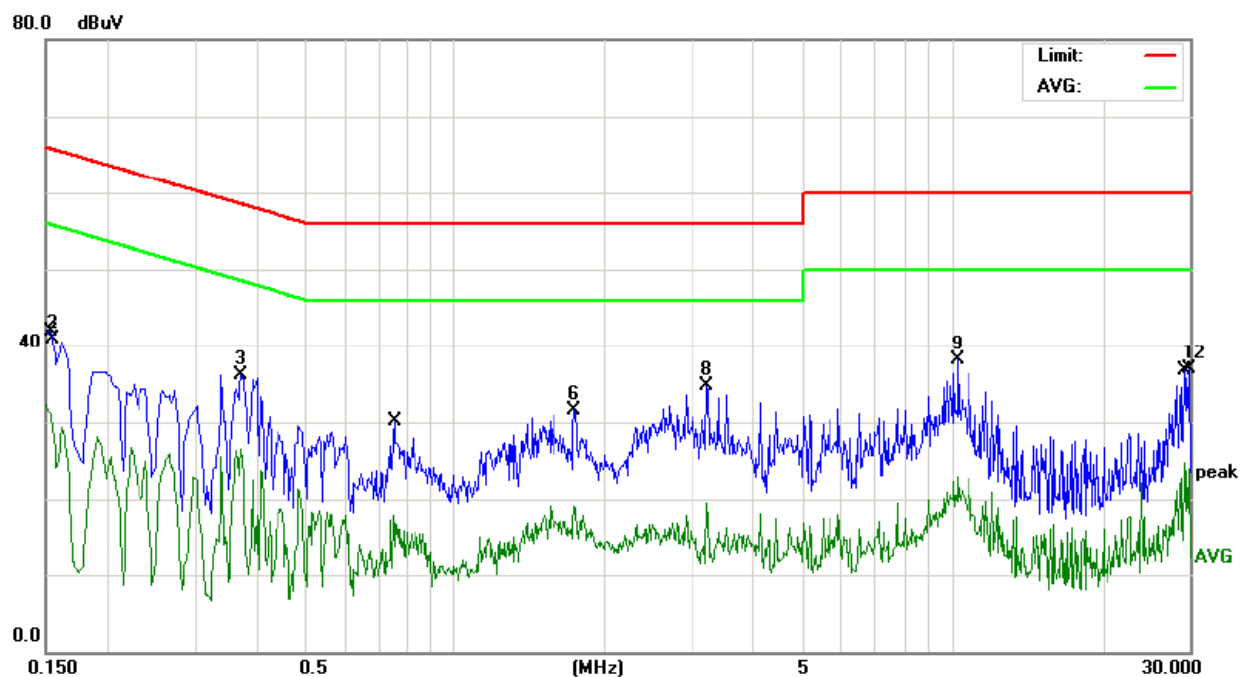

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1516	21.20	10.44	31.64	55.91	-24.27	AVG
2		0.1548	30.41	10.44	40.85	65.73	-24.88	peak
3		0.3700	25.59	10.54	36.13	58.50	-22.37	peak
4		0.3700	15.89	10.54	26.43	48.50	-22.07	AVG
5		0.7500	7.00	10.70	17.70	46.00	-28.30	AVG
6		1.7380	20.81	10.72	31.53	56.00	-24.47	peak
7		1.7380	8.35	10.72	19.07	46.00	-26.93	AVG
8	*	3.2220	24.06	10.67	34.73	56.00	-21.27	peak
9		10.2700	27.73	10.40	38.13	60.00	-21.87	peak
10		10.2700	12.58	10.40	22.98	50.00	-27.02	AVG
11		29.2860	14.20	10.59	24.79	50.00	-25.21	AVG
12		29.9100	26.35	10.60	36.95	60.00	-23.05	peak

Remark: All the modes have been investigated, and only worst mode is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	26 °C	Relative Humidity	54%
Pressure	1010hPa	Phase	N
Test Date	September 03, 2015	Test Mode	Mode 4
Voltage	120V/60Hz		

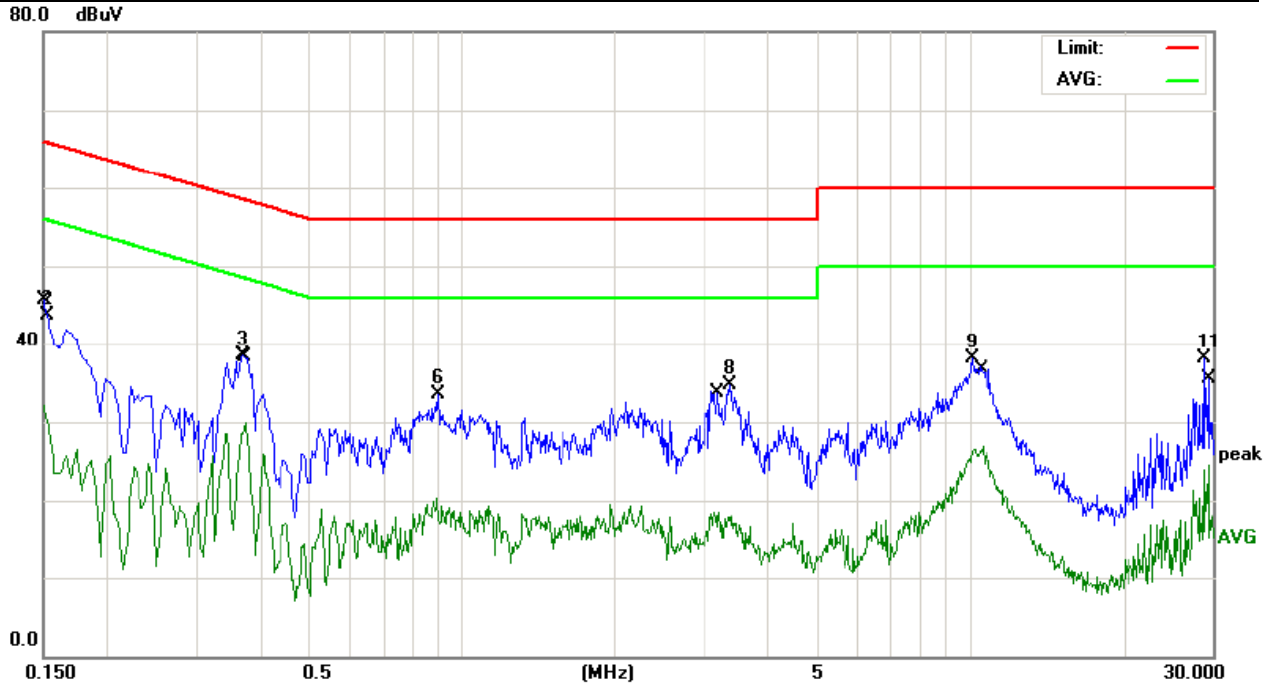

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	21.61	10.45	32.06	55.99	-23.93	AVG
2		0.1524	33.26	10.44	43.70	65.86	-22.16	peak
3		0.3700	28.02	10.54	38.56	58.50	-19.94	peak
4	*	0.3740	19.43	10.54	29.97	48.41	-18.44	AVG
5		0.8980	9.36	10.94	20.30	46.00	-25.70	AVG
6		0.9020	22.57	10.95	33.52	56.00	-22.48	peak
7		3.2180	7.90	10.67	18.57	46.00	-27.43	AVG
8		3.3660	24.04	10.66	34.70	56.00	-21.30	peak
9		10.0980	27.71	10.40	38.11	60.00	-21.89	peak
10		10.5780	16.47	10.41	26.88	50.00	-23.12	AVG
11		28.7780	27.56	10.59	38.15	60.00	-21.85	peak
12		29.4020	13.95	10.59	24.54	50.00	-25.46	AVG

Remark: All the modes have been investigated, and only worst mode is presented in this report.

## 5.2 TRANSMITTER RADIATED EMISSION MEASUREMENT

### 5.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**5.2.2 TEST PROCEDURE**

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**Note:**


*Both horizontal and vertical antenna polarities were tested and The worst case emissions were reported.*

**5.2.3 DEVIATION FROM TEST STANDARD**


No deviation


## 5.2.4 TEST SETUP

### (A) Radiated Emission Test-Up Frequency Below 30MHz

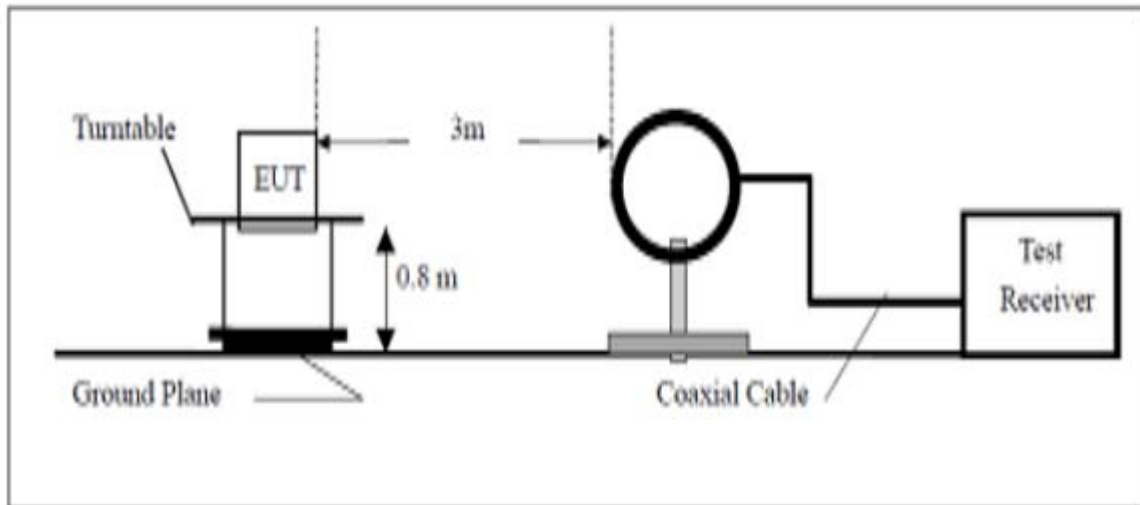

### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

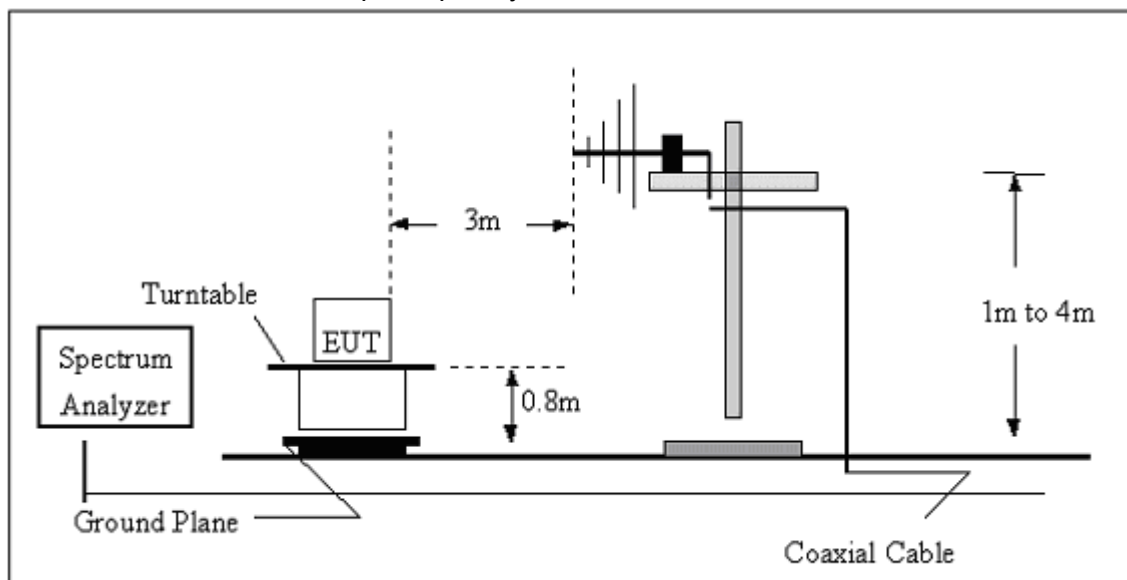

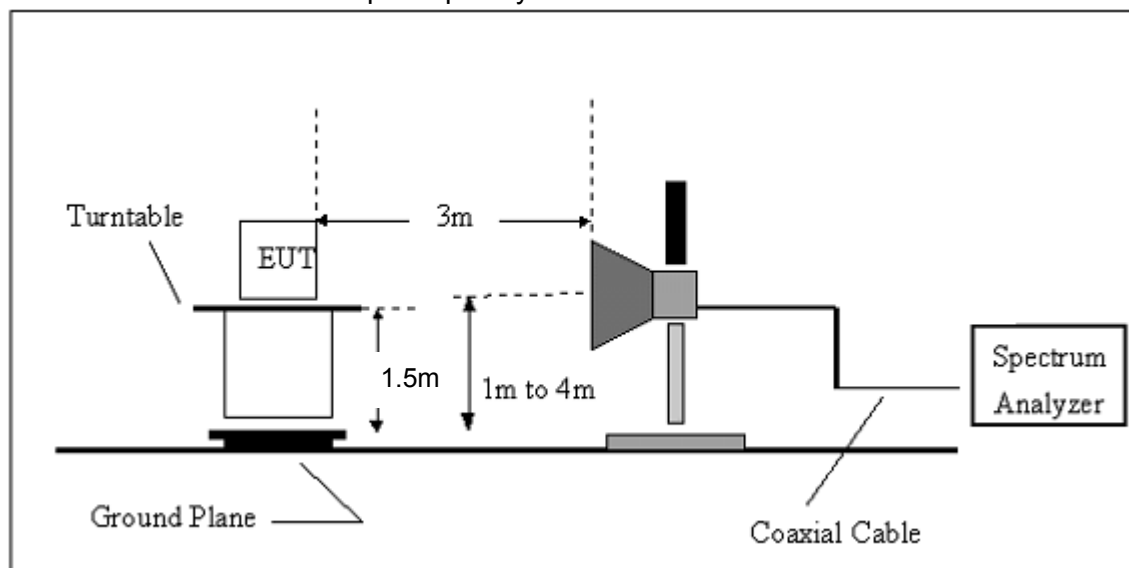**(C) Radiated Emission Test-Up Frequency Above 1GHz****5.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.2.5.1 RESULTS (BELOW 30 MHZ)**

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	---
Test Mode	Mode 1/ Mode 2/ Mode 3/Mode 4	Test Date	September 03, 2015

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

**NOTE:**


No result in this part for margin above 20dB.

Distance extrapolation factor =  $20 \log (\text{specific distance}/\text{test distance})(\text{dB})$ ;

Limit line = specific limits(dBuV) + distance extrapolation factor.

## 5.2.5.2 TEST RESULTS (30M – 1000 MHZ)


EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Horizontal
Test Mode	Mode 1 with 1Mbps(GFSK)	Test Date	September 03, 2015

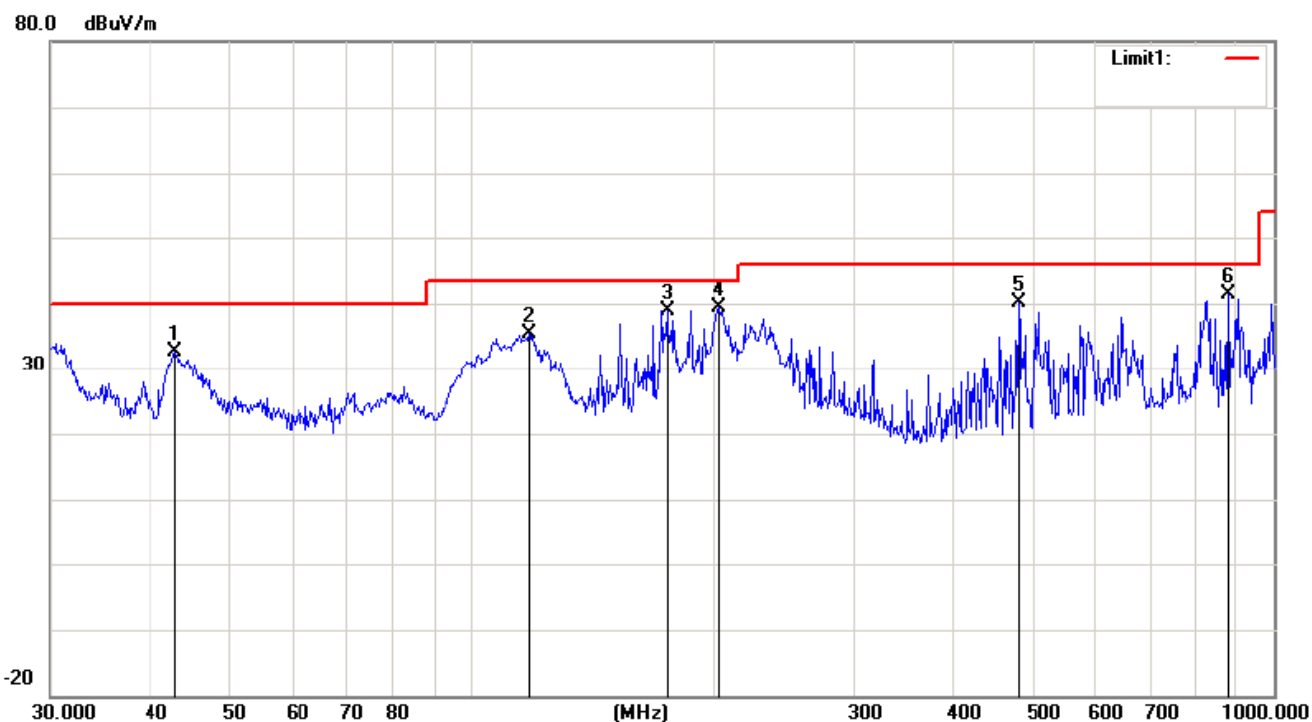

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		42.8997	38.10	-5.36	32.74	40.00	-7.26	peak
2		118.1860	37.80	-2.48	35.32	43.50	-8.18	peak
3		175.6516	43.93	-4.97	38.96	43.50	-4.54	peak
4	*	203.5226	44.25	-4.95	39.30	43.50	-4.20	peak
5		480.5276	41.12	-1.07	40.05	46.00	-5.95	peak
6		878.3214	36.27	5.01	41.28	46.00	-4.72	peak

Remark: All the modes have been investigated, and only worst mode is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Vertical
Test Mode	Mode 1 with 1Mbps(GFSK)	Test Date	September 03, 2015

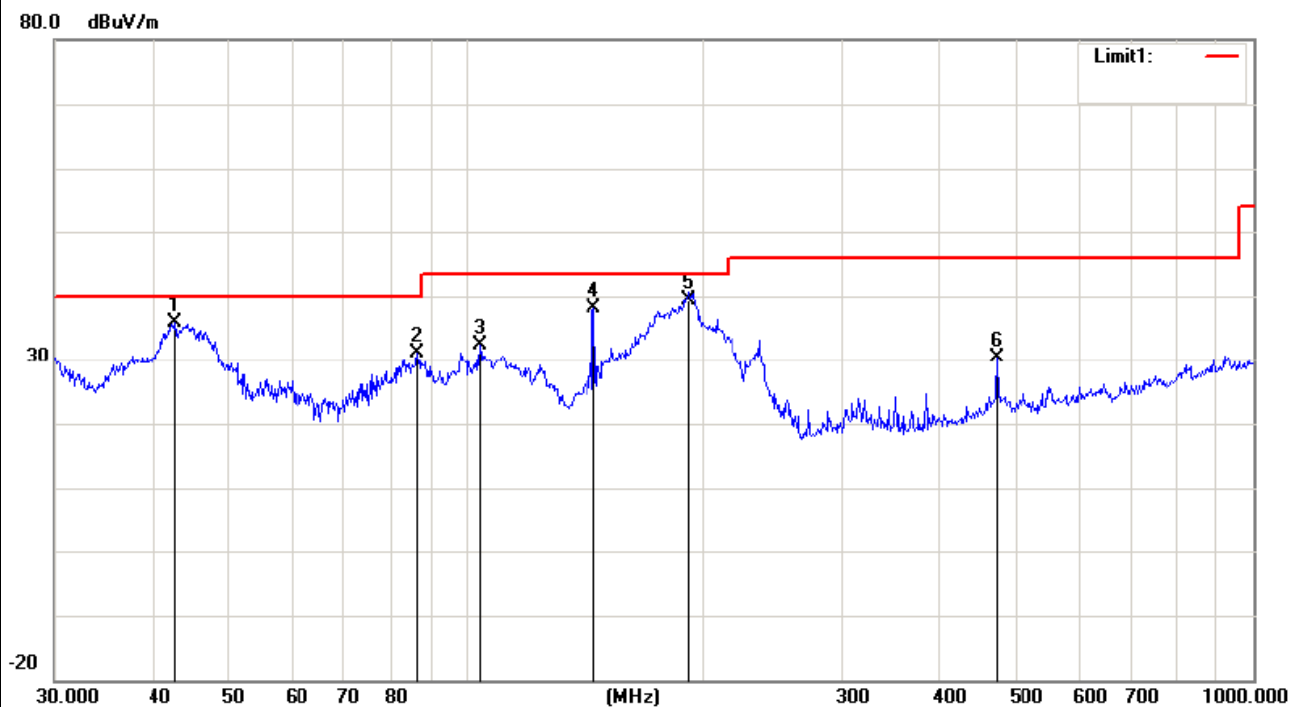

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree
1	*	42.7496	41.21	-5.27	35.94	40.00	-4.06	peak		
2		86.5027	39.06	-7.97	31.09	40.00	-8.91	peak		
3		104.1701	37.48	-5.18	32.30	43.50	-11.20	peak		
4		145.3505	41.50	-3.42	38.08	43.50	-5.42	peak		
5		191.7450	44.68	-5.29	39.39	43.50	-4.11	QP	100	25
6		472.1759	31.79	-1.31	30.48	46.00	-15.52	peak		

Remark: All the modes have been investigated, and only worst mode is presented in this report.

### 5.2.5.3 TEST RESULTS(1GHZ TO 25GHZ)

Note: *the worst case is 1Mbps(GFSK)mode as result in this part.*

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 1 TX(1Mbps)
Test Date	September 03, 2015		

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4804	V	59.93	39.02	74	54	-14.07	-14.98
7206	V	59.32	40.97	74	54	-14.68	-13.03
4804	H	60.00	40.57	74	54	-14.00	-13.43
7206	H	58.96	39.96	74	54	-15.04	-14.04

**Remark:**

All emissions not reported were more than 20dB below the specified limit or in the noise floor.  
Only worst case is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 2 TX(1Mbps)
Test Date	September 03, 2015		

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	58.64	41.35	74	54	-15.36	-12.65
7323	V	58.14	39.10	74	54	-15.86	-14.90
4882	H	58.36	40.73	74	54	-15.64	-13.27
7323	H	59.15	40.15	74	54	-14.85	-13.85

## Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.  
Only worst case is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 3 TX(1Mbps)
Test Date	September 03, 2015		

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	59.11	41.26	74	54	-14.89	-12.74
7440	V	58.80	40.34	74	54	-15.20	-13.66
4960	H	58.50	40.87	74	54	-15.50	-13.13
7440	H	58.15	39.15	74	54	-15.85	-14.85

## Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.  
Only worst case is presented in this report.

#### 5.2.5.4 TEST RESULTS (Restricted Bands Requirements)

##### Test result for 1Mbps Mode:

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	September 03, 2015
Test Mode	TX /2402MHz-1Mbps	Polarization	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2382	62.79	-8.76	54.03	74	19.97	peak
2382	55.61	-8.76	46.85	54	7.15	AVG
2390	63.11	-8.73	54.38	74	19.62	peak
2390	55.46	-8.73	46.73	54	7.27	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Only worst case is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	September 03, 2015
Test Mode	TX /2402MHz-1Mbps	Polarization	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2376	63.14	-8.78	54.36	74	19.64	peak
2376	55.35	-8.78	46.57	54	7.43	AVG
2390	60.43	-8.73	51.70	74	22.30	peak
2390	63.14	-8.78	54.36	74	19.64	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Only worst case is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	September 03, 2015
Test Mode	TX /2480MHz-1Mbps	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.5	61.98	-8.17	53.81	74	20.19	peak
2483.5	53.72	-8.17	45.55	54	8.45	AVG

Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
Only worst case is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	September 03, 2015
Test Mode	TX /2480MHz-1Mbps	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.5	60.18	-8.17	52.01	74	21.99	peak
2483.5	53.26	-8.17	45.09	54	8.91	AVG

Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
Only worst case is presented in this report.

**Test result for 3Mbps Mode:**

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	September 03, 2015
Test Mode	TX /2402MHz-3Mbps	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2387	63.75	-8.74	55.01	74	18.99	peak
2387	55.25	-8.74	46.51	54	7.49	AVG
2390	62.67	-8.73	53.94	74	20.06	peak
2390	55.27	-8.73	46.54	54	7.46	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Only worst case is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	September 03, 2015
Test Mode	TX /2402MHz-3Mbps	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2384	63.18	-8.75	54.43	74	19.57	peak
2384	56.71	-8.75	47.96	54	6.04	AVG
2390	62.68	-8.73	53.95	74	20.05	peak
2390	56.36	-8.73	47.63	54	6.37	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Only worst case is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	September 03, 2015
Test Mode	TX /2480MHz-3Mbps	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	64.81	-8.17	56.64	74	17.36	peak
2483.5	53.72	-8.17	45.55	54	8.45	AVG

Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
Only worst case is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	September 03, 2015
Test Mode	TX /2480MHz-3Mbps	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	62.77	-8.17	54.60	74	19.40	peak
2483.5	53.85	-8.17	45.68	54	8.32	AVG

Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
Only worst case is presented in this report.

**Test result for hopping mode:**

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	September 03, 2015
Test Mode	hopping mode -1Mbps	Polarization	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2381	62.27	-8.76	53.51	74	20.49	peak
2381	54.94	-8.76	46.18	54	7.82	AVG
2390	60.08	-8.73	51.35	74	22.65	peak
2390	55.73	-8.73	47.00	54	7.00	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Only worst case is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	September 03, 2015
Test Mode	Hopping mode -1Mbps	Polarization	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2378	63.30	-8.77	54.53	74	19.47	peak
2378	54.12	-8.77	45.35	54	8.65	AVG
2390	59.30	-8.73	50.57	74	23.43	peak
2390	54.99	-8.73	46.26	54	7.74	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Only worst case is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	September 03, 2015
Test Mode	hopping mode -1Mbps	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	64.79	-8.17	56.62	74	17.38	peak
2483.5	53.55	-8.17	45.38	54	8.62	AVG

Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
Only worst case is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	September 03, 2015
Test Mode	hopping mode -1Mbps	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	60.51	-8.17	52.34	74	21.66	peak
2483.5	53.74	-8.17	45.57	54	8.43	AVG

Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
Only worst case is presented in this report.

### 5.3 RECEIVER RADIATED EMISSION MEASUREMENT

#### 5.3.1 RECEIVER RADIATED LIMITS

According to § RSS 247 sect. 7.1.2, Radiated emission measurements shall be performed with the receiver antenna connected to the receiver antenna terminals. The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is higher, to at least 5x the highest tunable or local oscillator frequency, whichever is higher, without exceeding 40 GHz. Spurious emissions from receivers shall not exceed the radiated limits shown in Table 2 below:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ at 3 metres) <sup>†</sup>
30-88	100
88-216	150
216-960	200
Above 960	500

Notes:

(1) Emission level (dBuV/m)=20log Emission level ( $\mu\text{V/m}$ ).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 5.3.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**Note:**


*Both horizontal and vertical antenna polarities were tested and The worst case emissions were reported.*

### 5.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 5.3.4 TEST SETUP

#### (A) Radiated Emission Test-Up Frequency 30MHz~1GHz

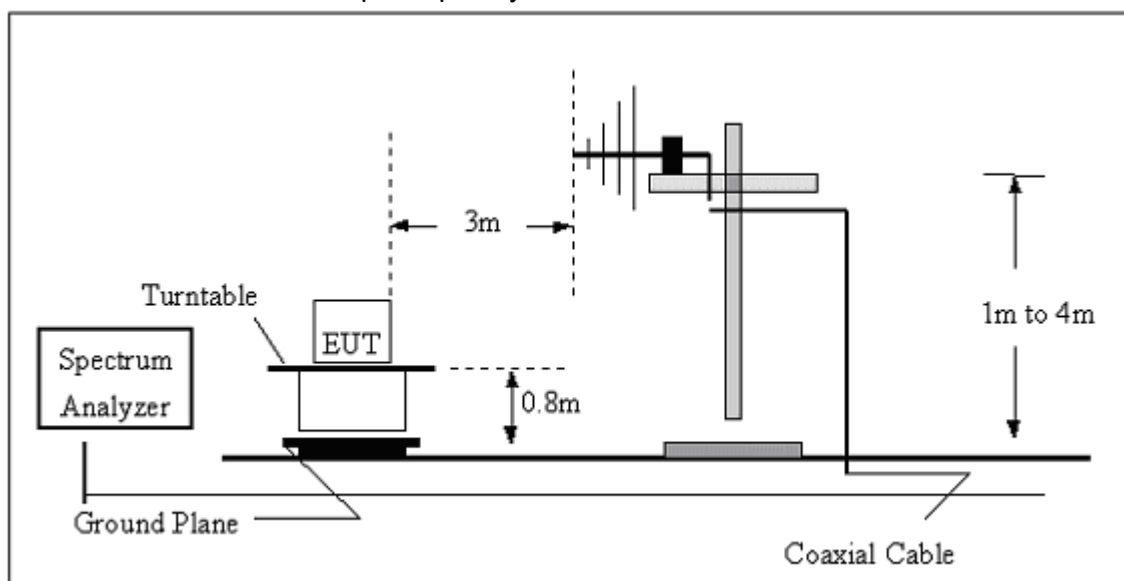

#### (B) Radiated Emission Test-Up Frequency Above 1GHz

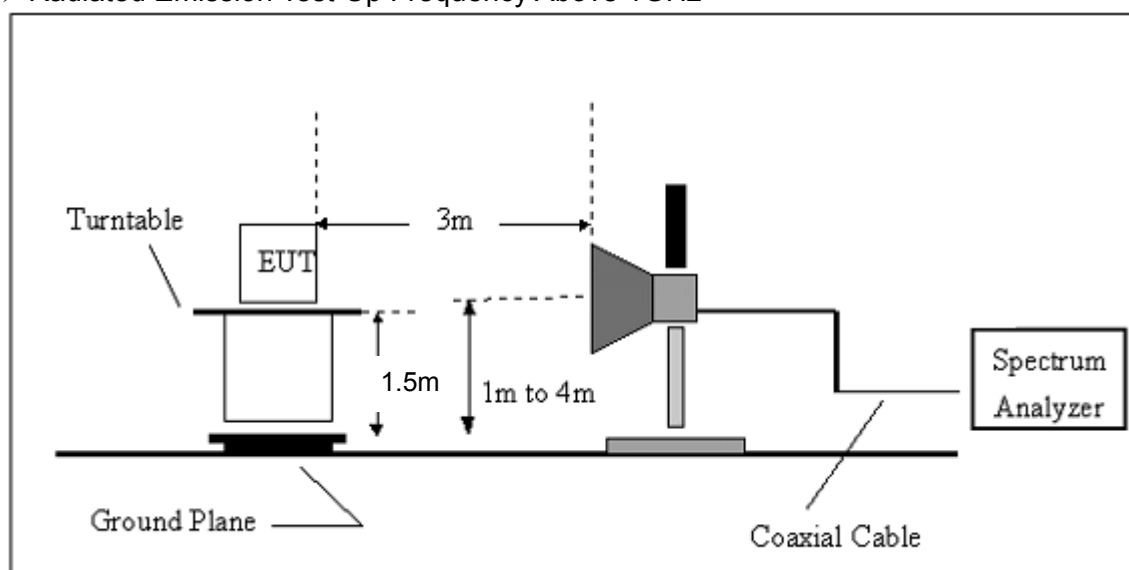


### 5.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 5.3.5.1 TEST RESULTS (30M – 1000 MHZ)


EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Horizontal
Test Mode	RX-1Mbps(GFSK)	Test Date	September 03, 2015

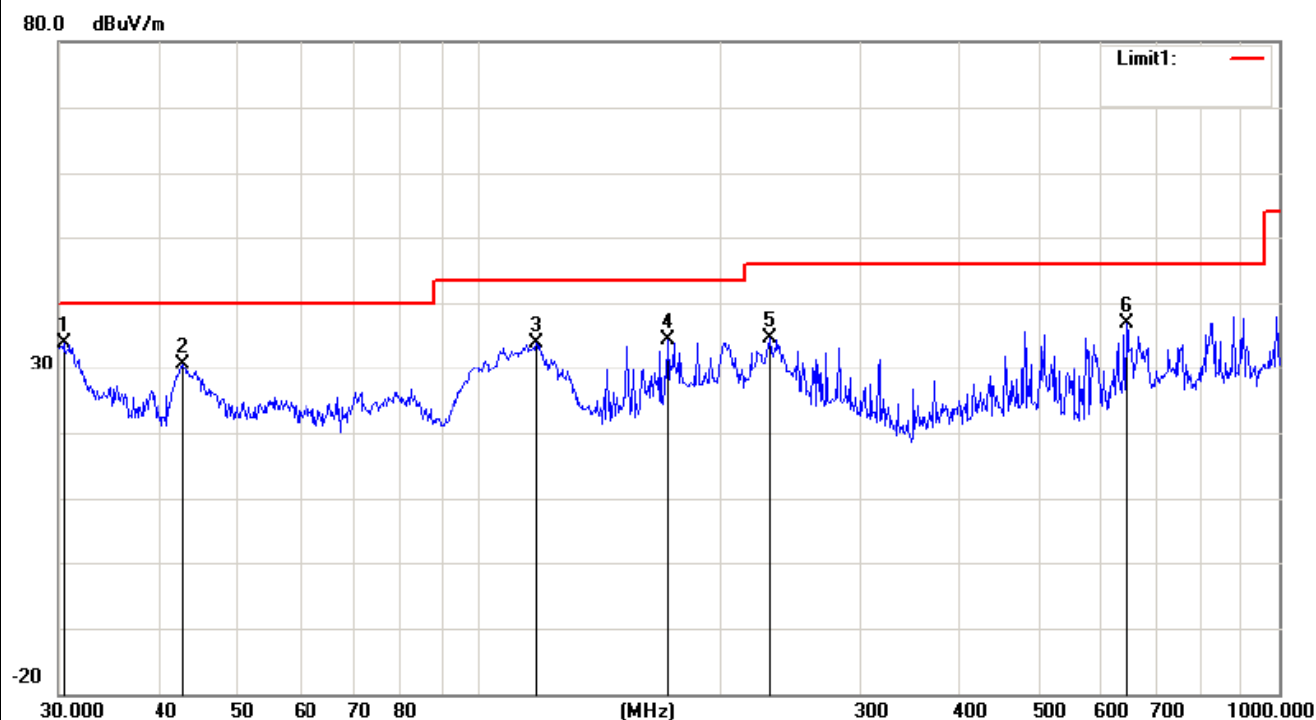

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	30.4237	30.67	3.20	33.87	40.00	-6.13	peak
2		42.8997	36.10	-5.36	30.74	40.00	-9.26	peak
3		118.1860	36.30	-2.48	33.82	43.50	-9.68	peak
4		172.5988	39.08	-4.81	34.27	43.50	-9.23	peak
5		231.7178	40.64	-5.95	34.69	46.00	-11.31	peak
6		645.1195	35.29	1.57	36.86	46.00	-9.14	peak

Remark: All the modes have been investigated, and only worst mode is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Vertical
Test Mode	RX-1Mbps(GFSK)	Test Date	September 03, 2015

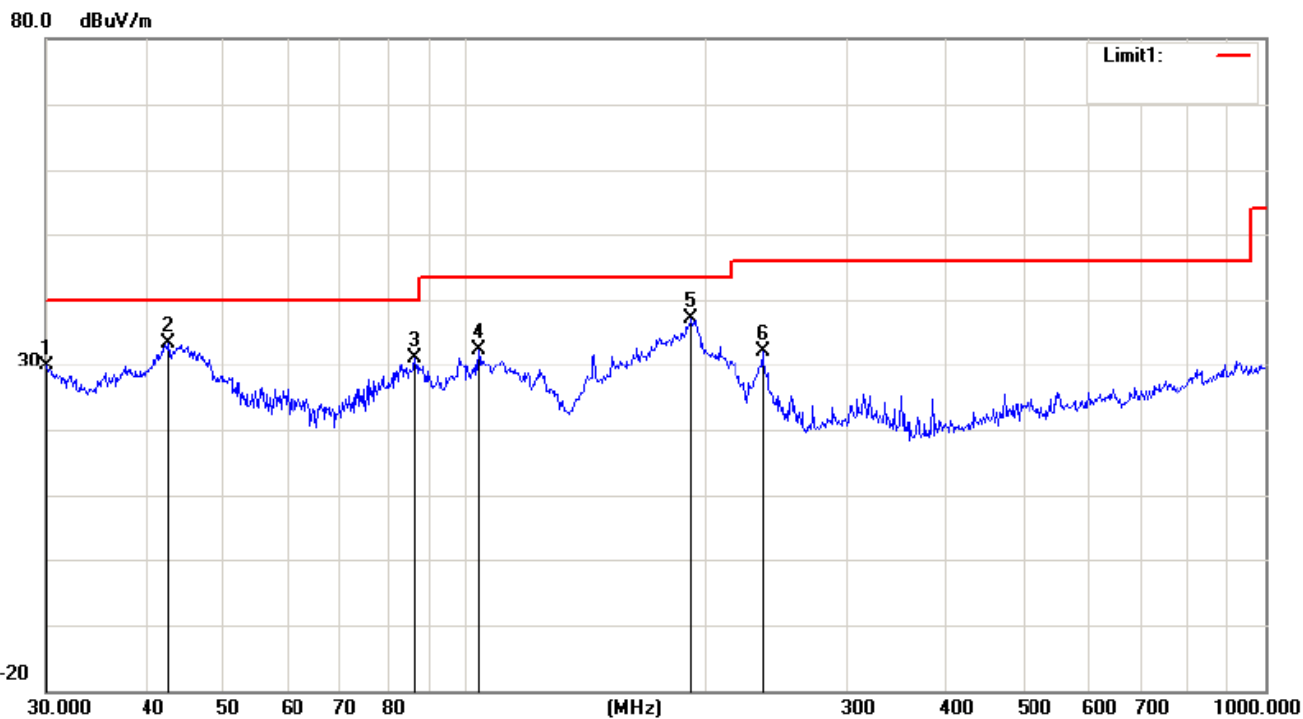

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		30.1051	26.45	3.42	29.87	40.00	-10.13	peak
2		42.7496	38.71	-5.27	33.44	40.00	-6.56	peak
3		86.5027	39.06	-7.97	31.09	40.00	-8.91	peak
4		104.1701	37.48	-5.18	32.30	43.50	-11.20	peak
5	*	191.7450	42.52	-5.29	37.23	43.50	-6.27	peak
6		235.8163	38.23	-6.10	32.13	46.00	-13.87	peak

Remark: All the modes have been investigated, and only worst mode is presented in this report.

### 5.3.5.2 TEST RESULTS(1GHZ TO 25GHZ)

Note: *the worst case is 1Mbps(GFSK)mode as result in this part.*

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 1 RX(1Mbps)
Test Date	September 03, 2015		

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4808.55	V	58.12	38.11	74	54	-15.88	-15.89
7207.57	V	56.31	37.26	74	54	-17.69	-16.74
4804.97	H	57.62	39.34	74	54	-16.38	-14.66
7204.62	H	56.12	39.65	74	54	-17.88	-14.35

**Remark:**

All emissions not reported were more than 20dB below the specified limit or in the noise floor.  
Only worst case is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 2 RX(1Mbps)
Test Date	September 03, 2015		

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4884.66	V	60.43	41.20	74	54	-13.57	-12.80
7329.42	V	59.02	40.37	74	54	-14.98	-13.63
4884.27	H	59.03	39.37	74	54	-14.97	-14.63
7323.09	H	58.62	39.62	74	54	-15.38	-14.38

## Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.  
Only worst case is presented in this report.

EUT	Mobile Phone	Model Name	SML605BK
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 3 RX(1Mbps)
Test Date	September 03, 2015		

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4961.32	V	59.07	41.85	74	54	-14.93	-12.15
7444.79	V	58.86	39.72	74	54	-15.14	-14.28
4964.71	H	58.05	39.60	74	54	-15.95	-14.40
7441.90	H	59.48	40.48	74	54	-14.52	-13.52

## Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.  
Only worst case is presented in this report.

## 5.4 CONDUCTED SPURIOUS EMISSION MEASUREMENT

### 5.4.1 CONDUCTED SPURIOUS EMISSION LIMITS

§ FCC 15.247 (d),

§ RSS 247 sect.5.5

Limit = -20 dBc

### 5.4.2 TEST PROCEDURE

According to the dictates of DA-000705

- a. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.
- b. The spectrum from 30 MHz to 25 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.
- c. The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

*Note: The correction factor has been added to the spectrum analyzer.*

### 5.4.3 DEVIATION FROM STANDARD

No deviation.

### 5.4.4 TEST SETUP





### 5.3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



### 5.4.6 TEST RESULTS

Operating Mode: GFSK (1 Mbps)



Low Channel

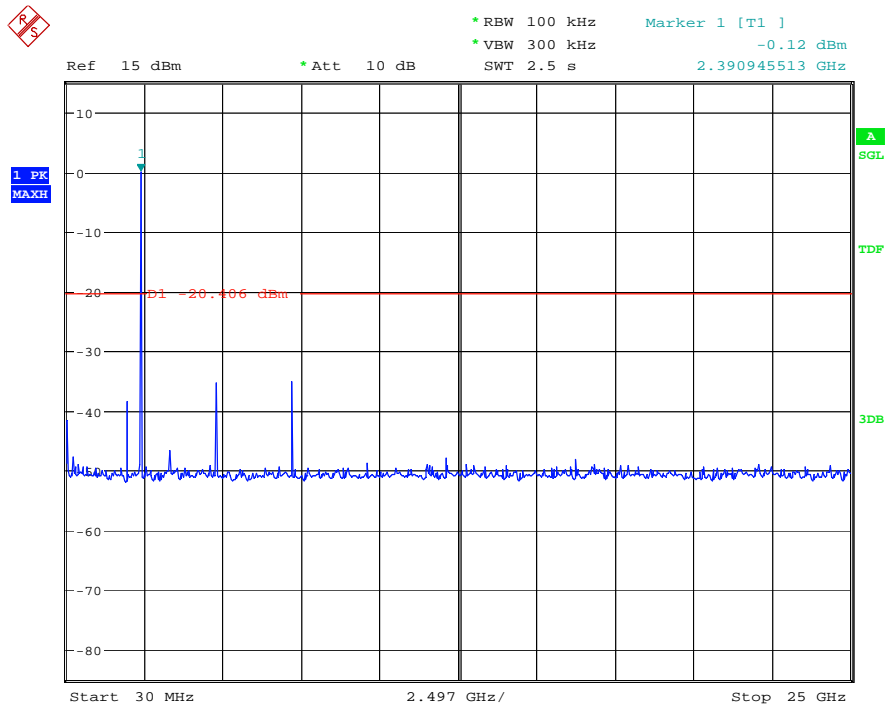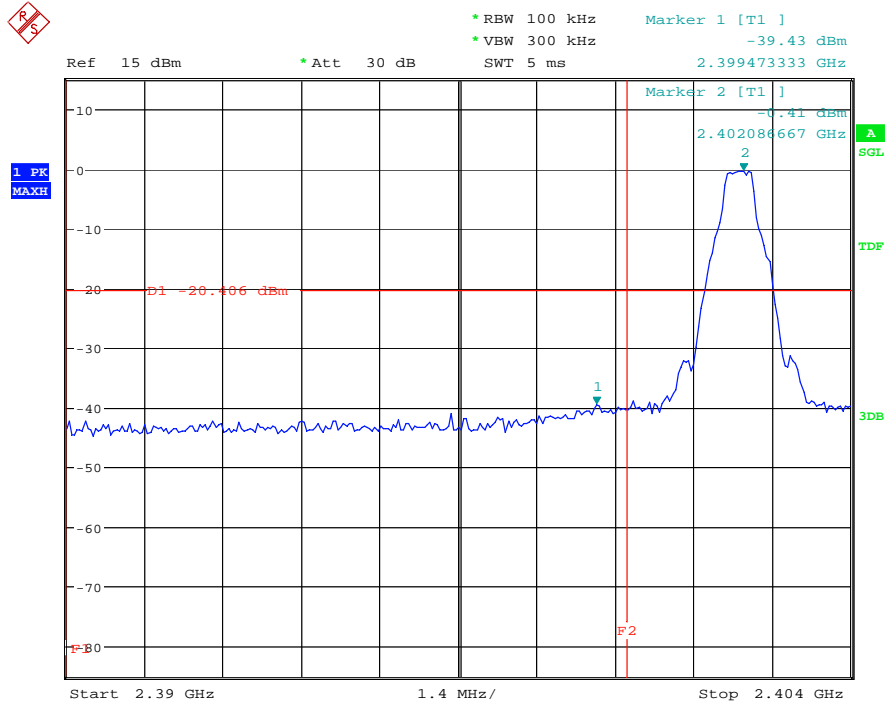



### Middle Channel

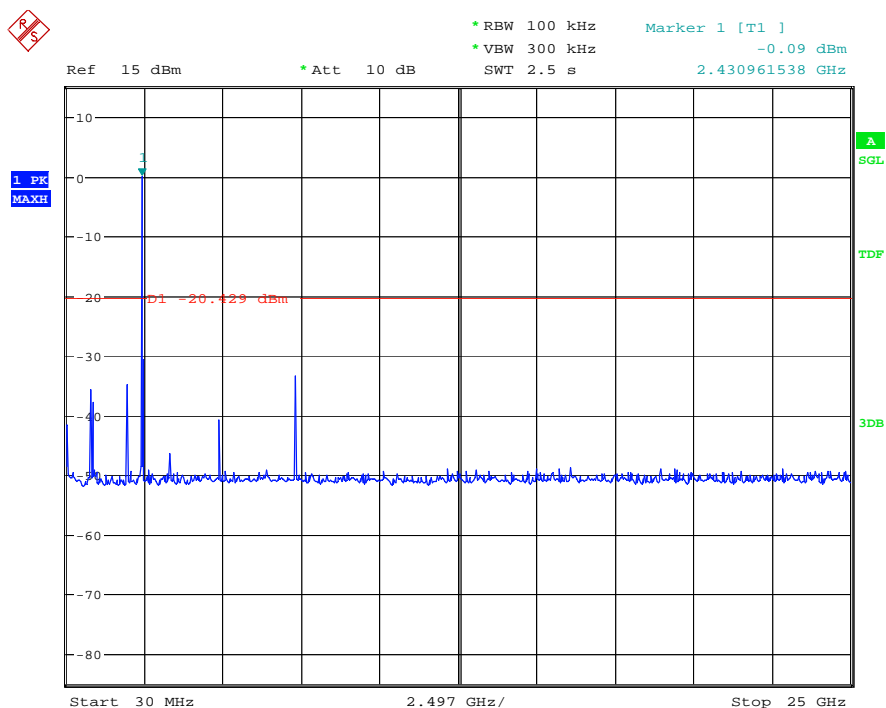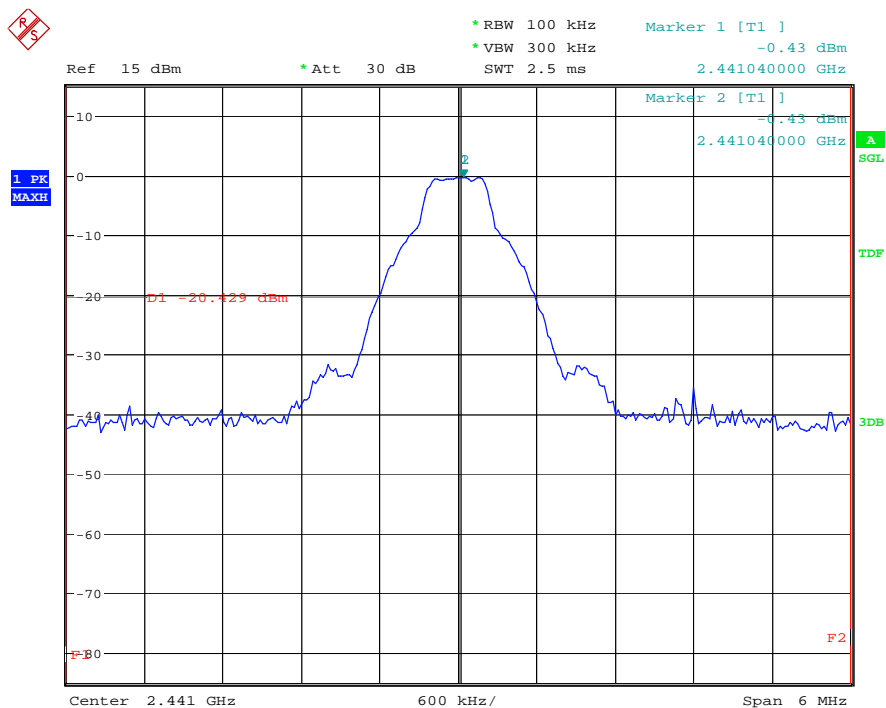

### High Channel

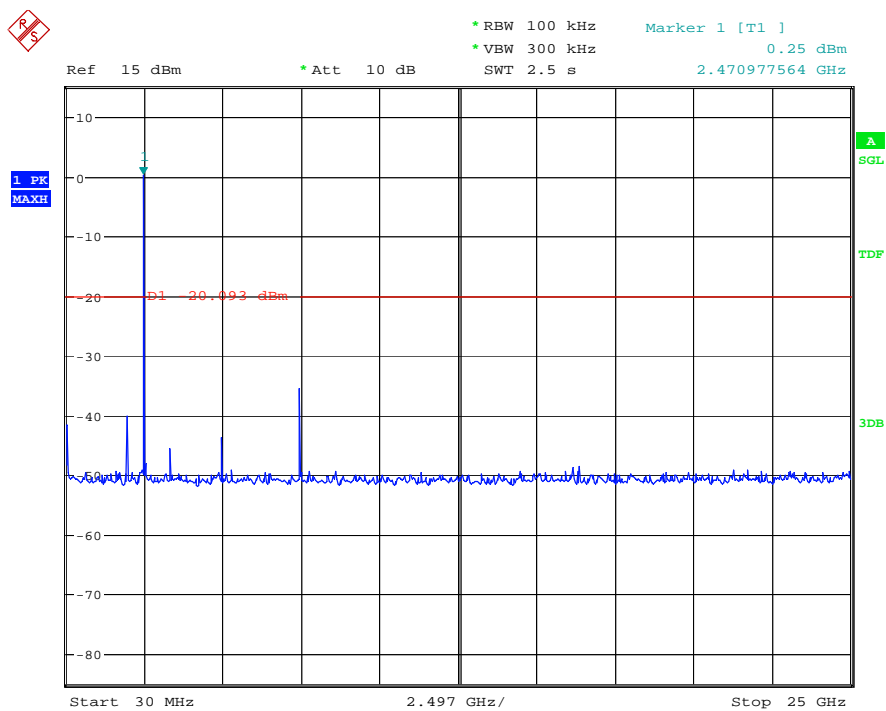
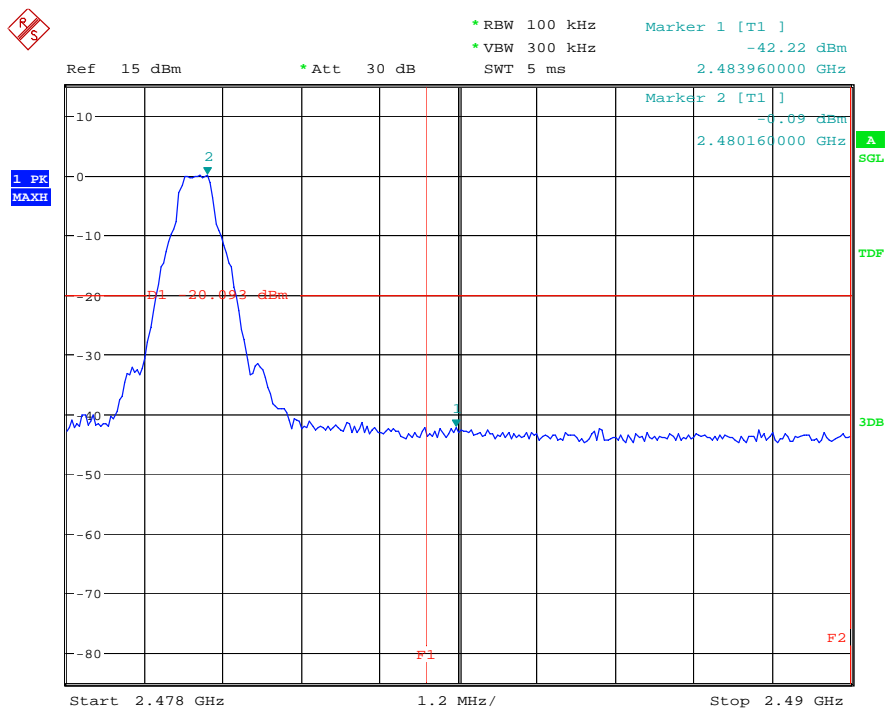


### Bandedge at Hopping

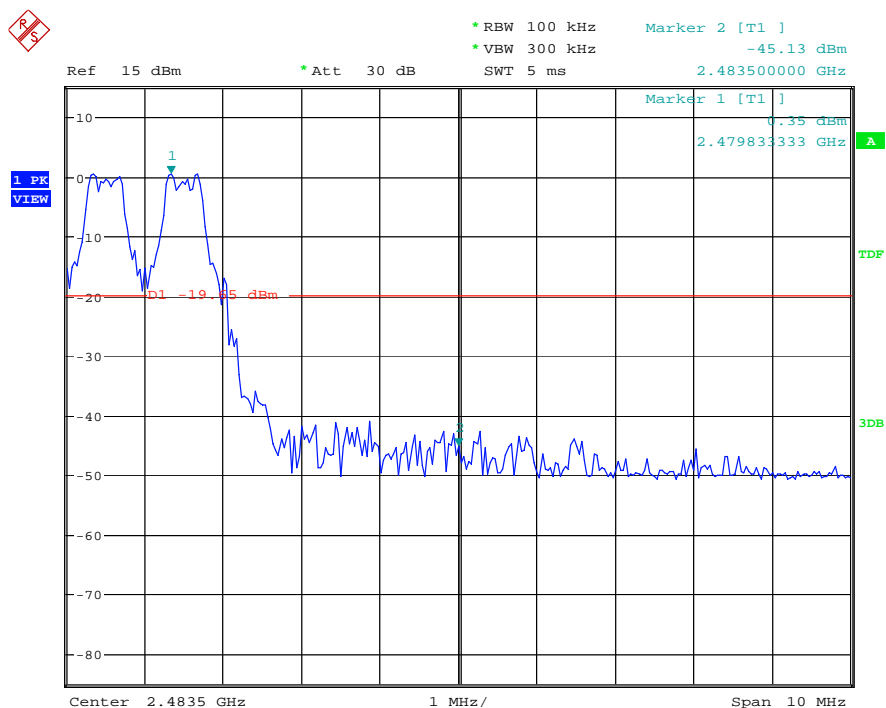
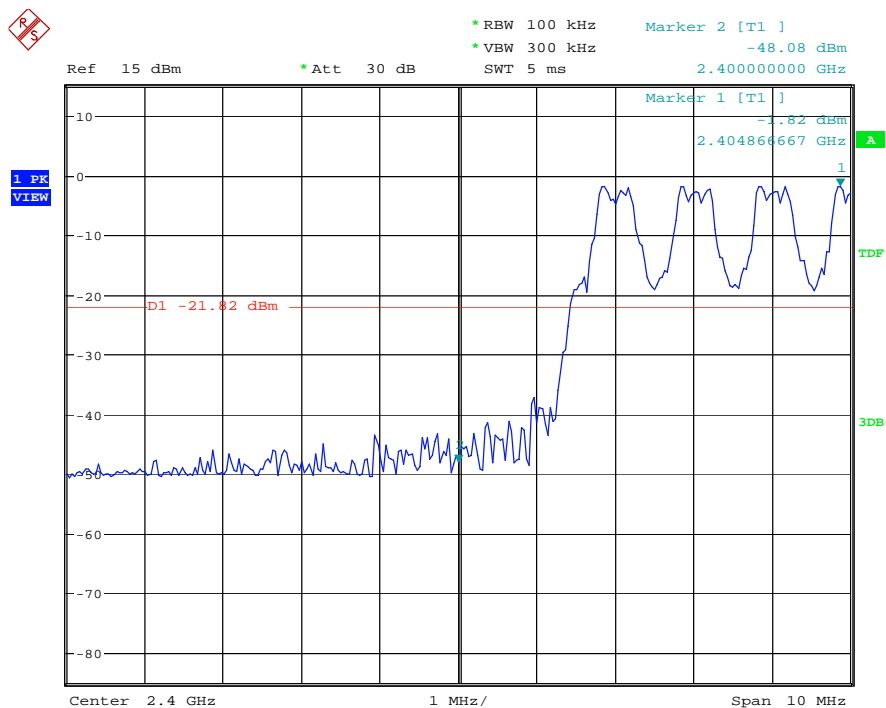


Operating Mode: 8DPSK(3 Mbps)



Low Channel

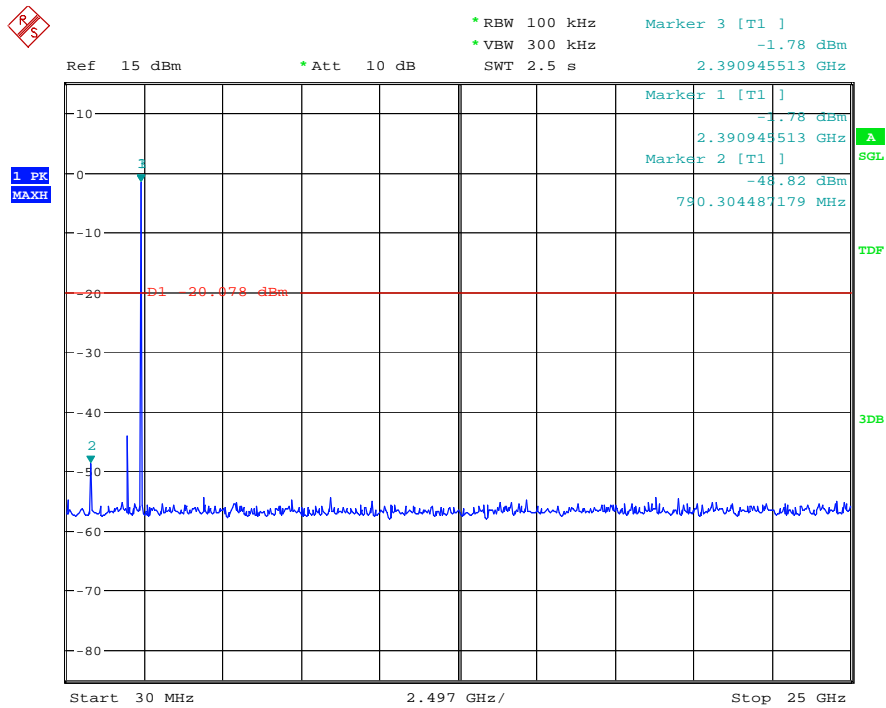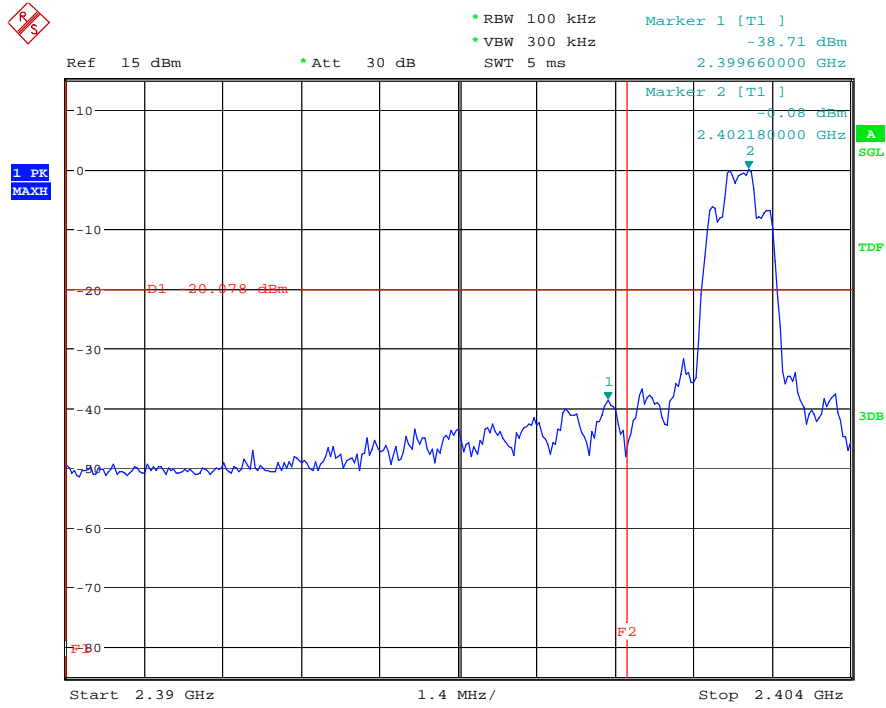



### Middle Channel

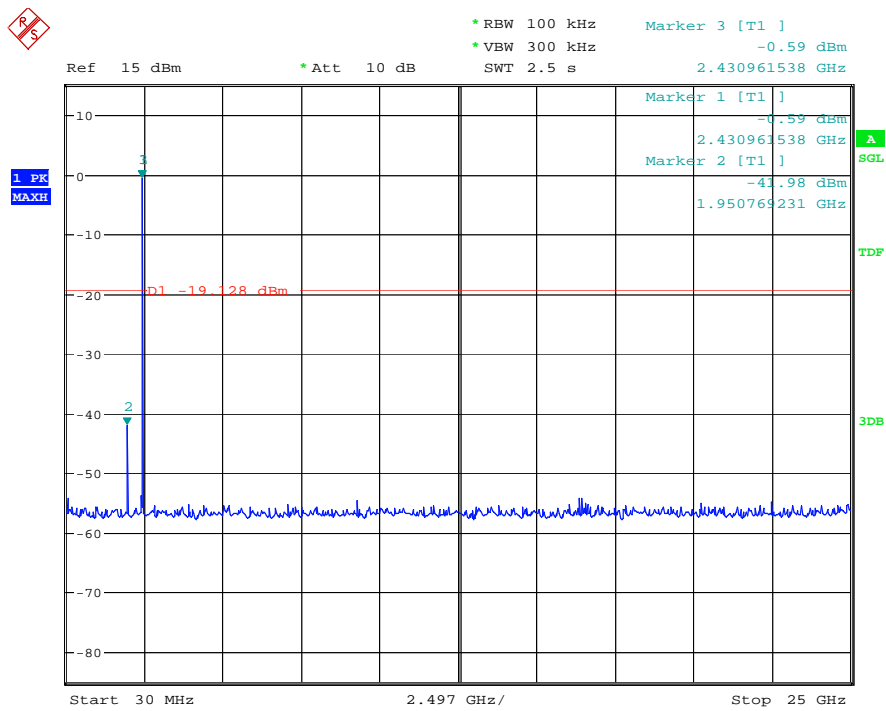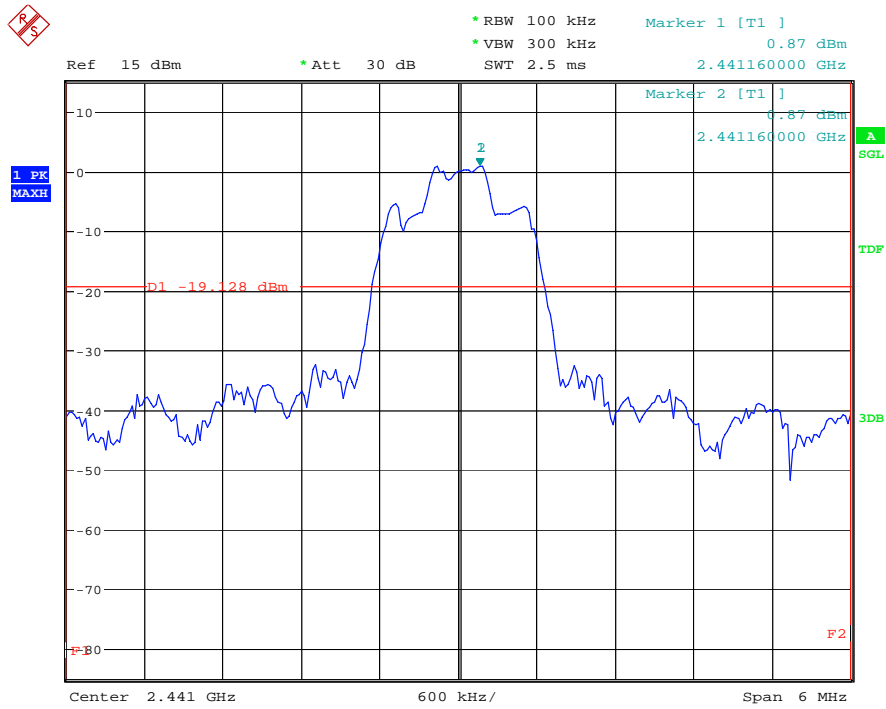

### High Channel

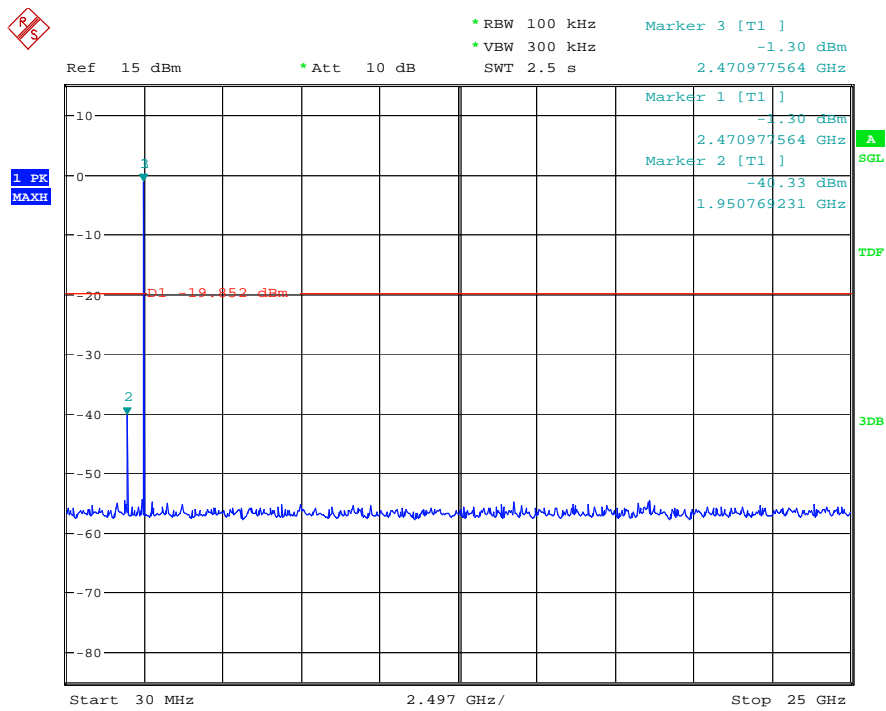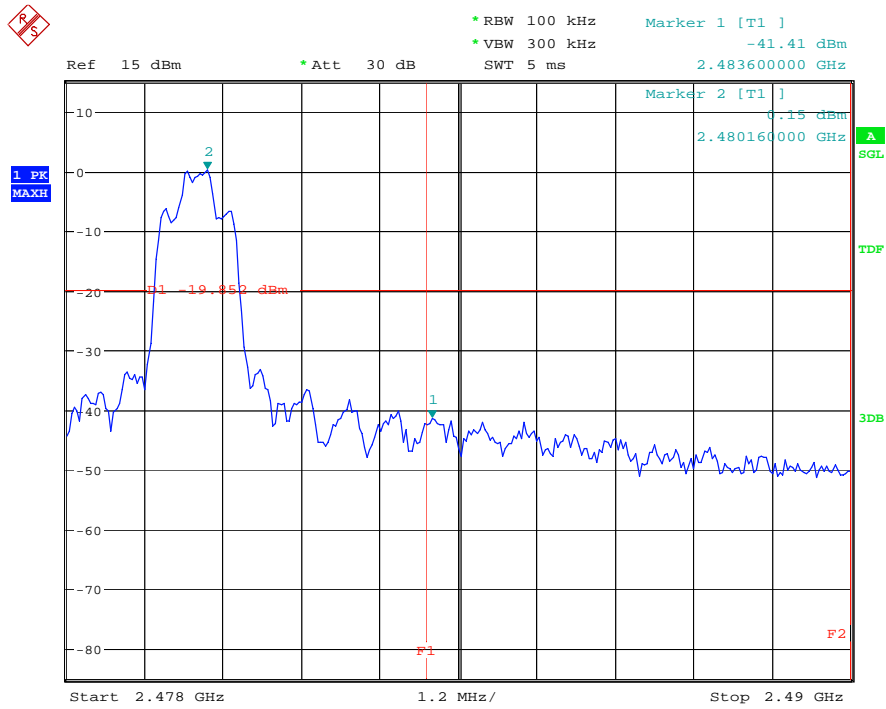

### Bandedge at Hopping

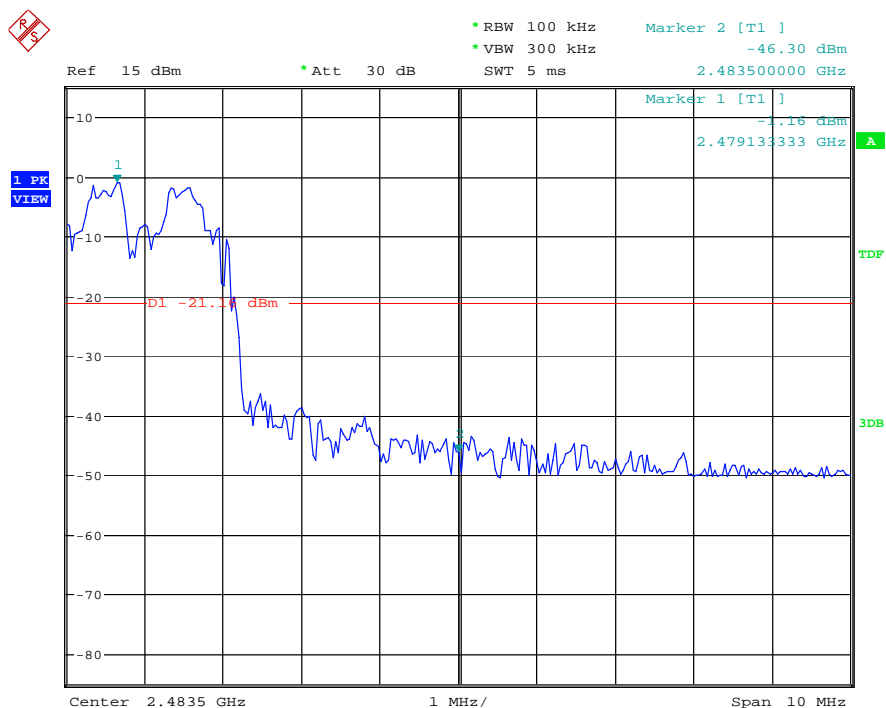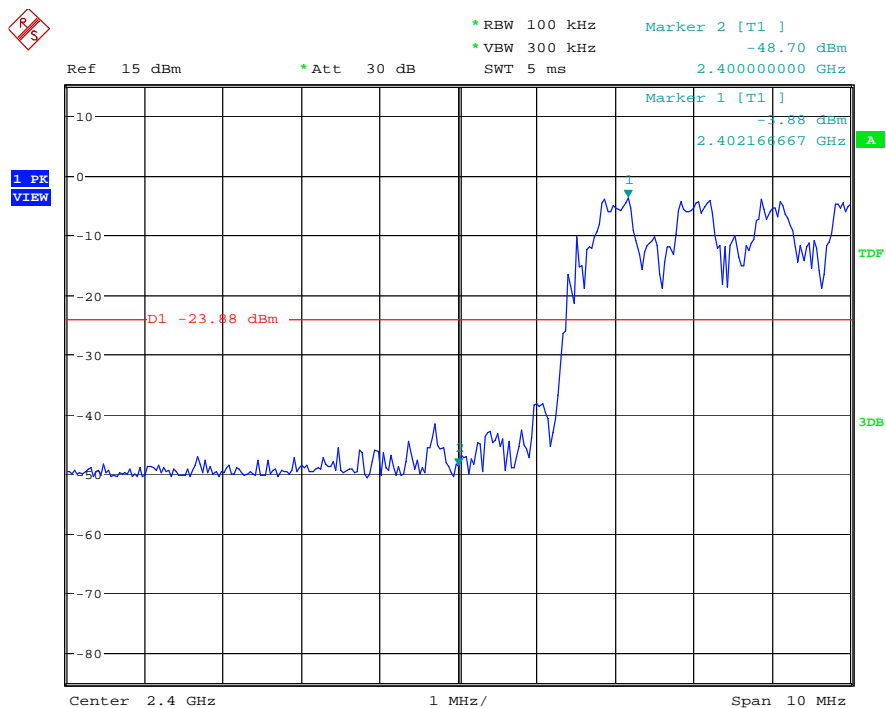

## 6. NUMBER OF HOPPING CHANNEL

### 6.1 APPLIED PROCEDURES / LIMIT

Standard Section		Test Item	Limit	Frequency Range (MHz)	Result
§FCC 15.247(a)(1)(iii)	§RSS 247 sect.5.1(4)	Number of Hopping Channel	≥15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 1MHz, VBW=3MHz, Sweep time = Auto.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP




### 6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 6.6 TEST RESULTS

EUT	Mobile Phone	Model Name	SML605BK
Temperature	25 °C	Relative Humidity	60%
Pressure	1015 hPa	Test Date	September 03, 2015
Test Mode	Hopping Mode	Number of Hopping Channel	79

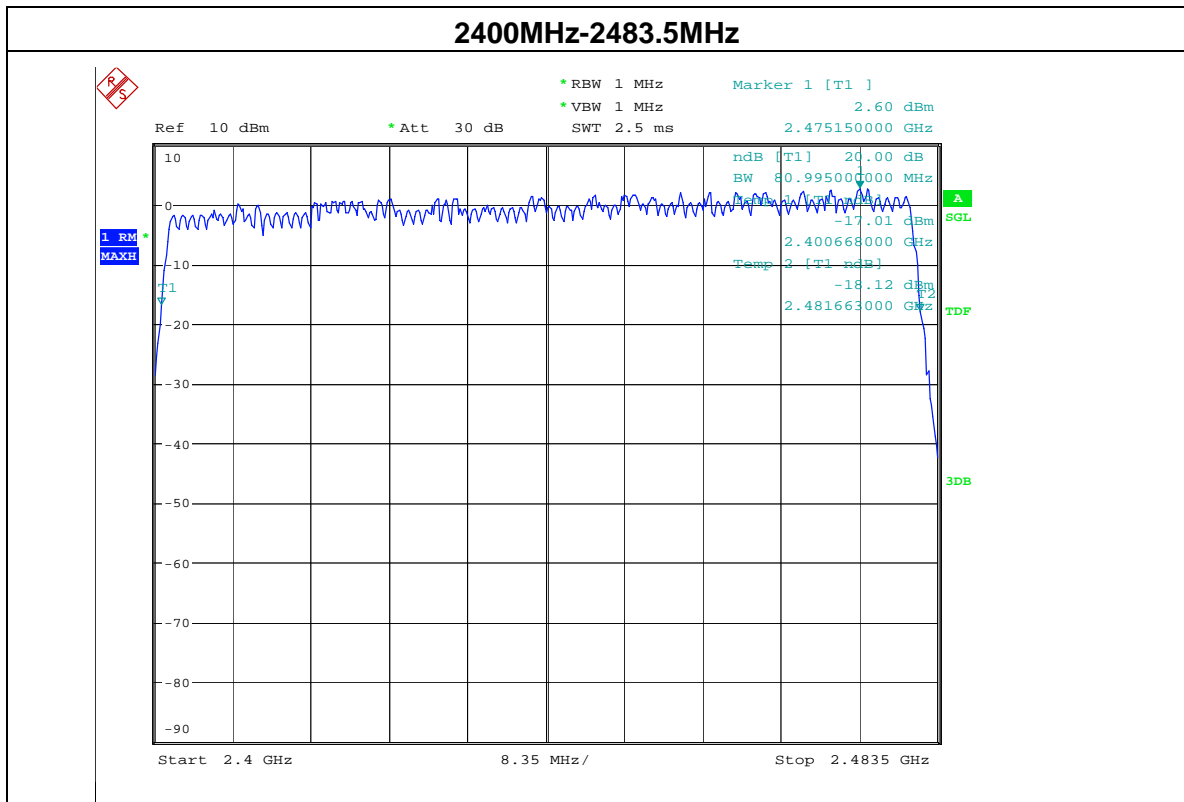

## 7. AVERAGE TIME OF OCCUPANCY

### 7.1 APPLIED PROCEDURES / LIMIT

Standard Section		Test Item	Limit	Frequency Range (MHz)	Result
§FCC 15.247 (a)(1)(iii)	§RSS 247 sect.5.1(4)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

### 7.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH1 Dwell time = Pulse time\*(1600/2/79)\*31.6S  
DH3 Dwell time = Pulse time\*(1600/4/79)\*31.6S  
DH5 Dwell time = Pulse time\*(1600/6/79)\*31.6S

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



### 7.6 TEST RESULTS

Note: *the worst case is DH5-3Mbps as result in this part.*

EUT	Mobile Phone	Model Name	SML605BK
Temperature	25 °C	Relative Humidity	60%
Pressure	1012 hPa	Test Date	September 03, 2015
Test Mode	DH5-3Mbps		

Data Packet	Frequency	Pulse time(ms)	Dwell Time(S)	Limits (S)
DH5	2402MHz	2.8846	0.308	0.4
DH5	2441MHz	2.8846	0.308	0.4
DH5	2480MHz	2.8846	0.308	0.4

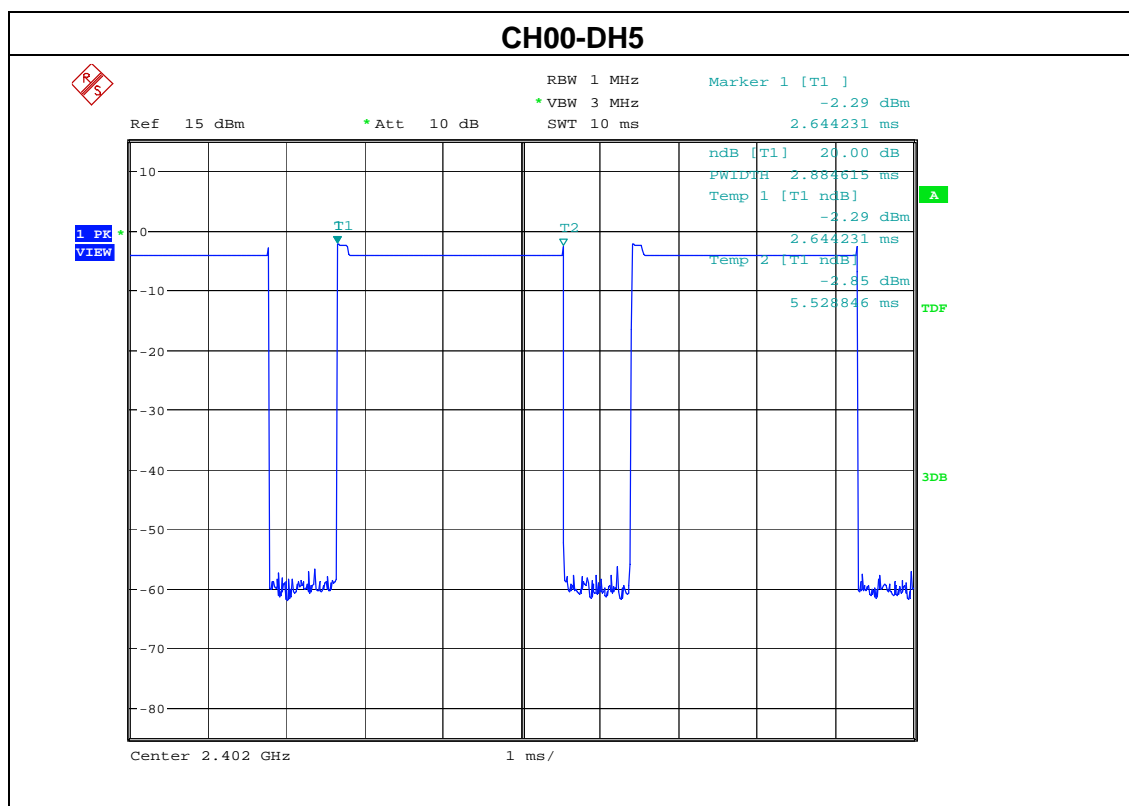

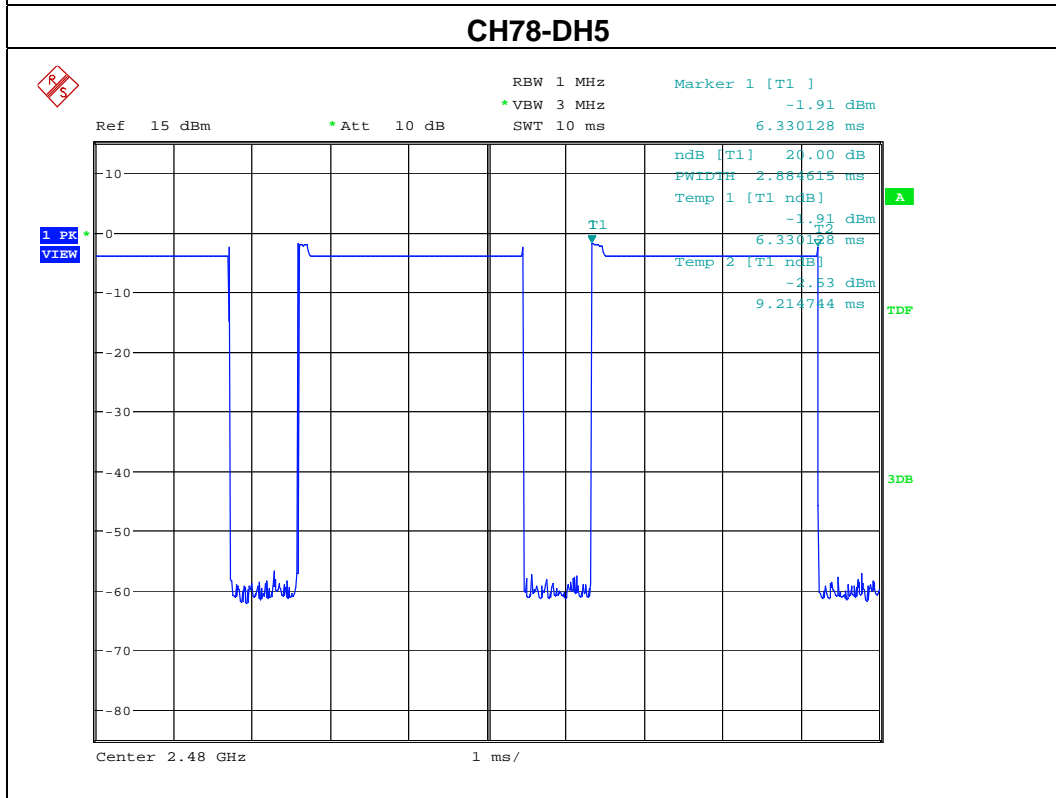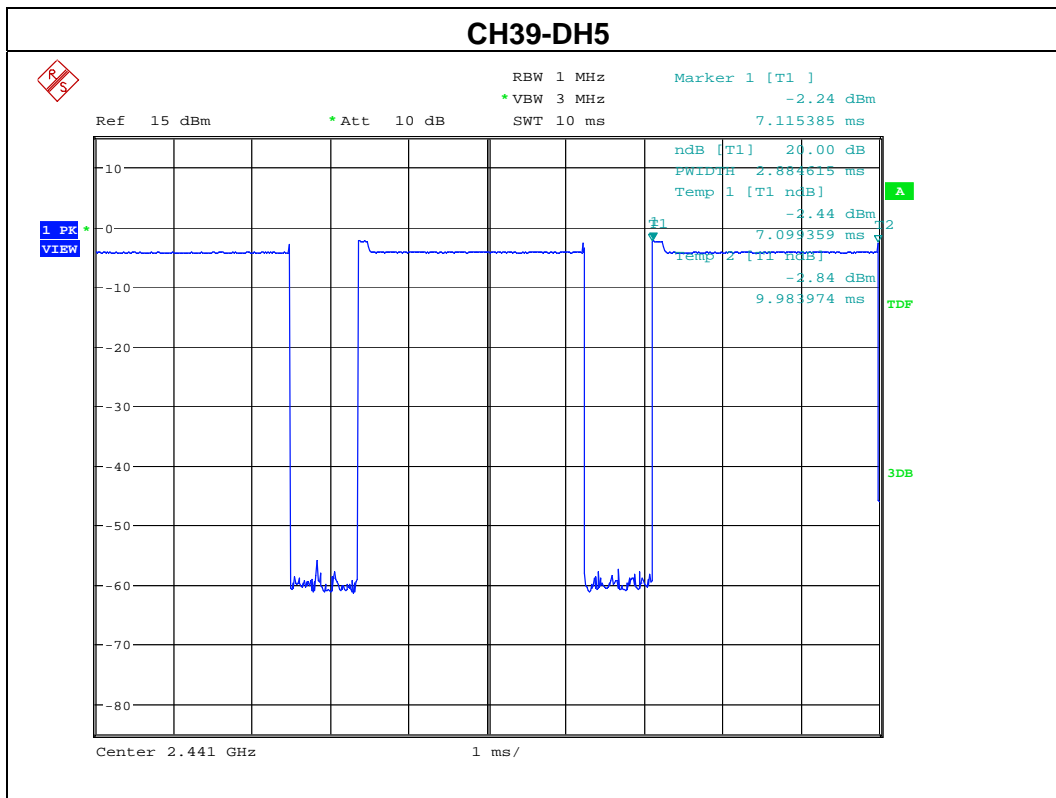

## 8. HOPPING CHANNEL SEPARATION MEASUREMENT

### 8.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span
VB	Video (or Average) Bandwidth (VBW) $\geq$ RBW
Detector	Peak
Trace	Max hold
Sweep Time	Auto


### 8.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span; Video (or Average) Bandwidth (VBW)  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold
3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
4. Repeat above procedures until all frequencies measured were complete.

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP

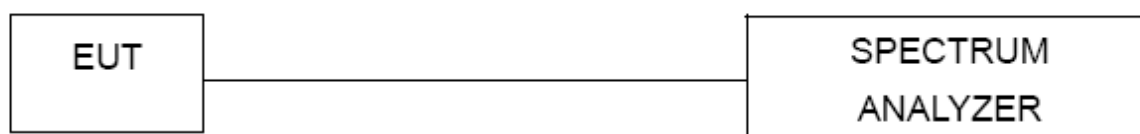

### 8.5 EUT OPERATION CONDITIONS


The EUT was programmed to be in continuously transmitting mode.



### 8.6 TEST RESULTS

EUT	Mobile Phone	Model Name	SML605BK
Temperature	25 °C	Relative Humidity	60%
Pressure	1012 hPa	Test Result	Pass
Test Mode	CH00 / CH39 /CH78 (1Mbps Mode)	Test Date	September 03, 2015

Channel number	Channel frequency (MHz)	Separation Read value (KHz)	Separation limit 2/3 20db down BW(KHz)
00	2402	1005	>740.40
39	2441	1005	>737.20
78	2480	990	>740.40

Note: 20db bandwidth refer to section 6.1.5

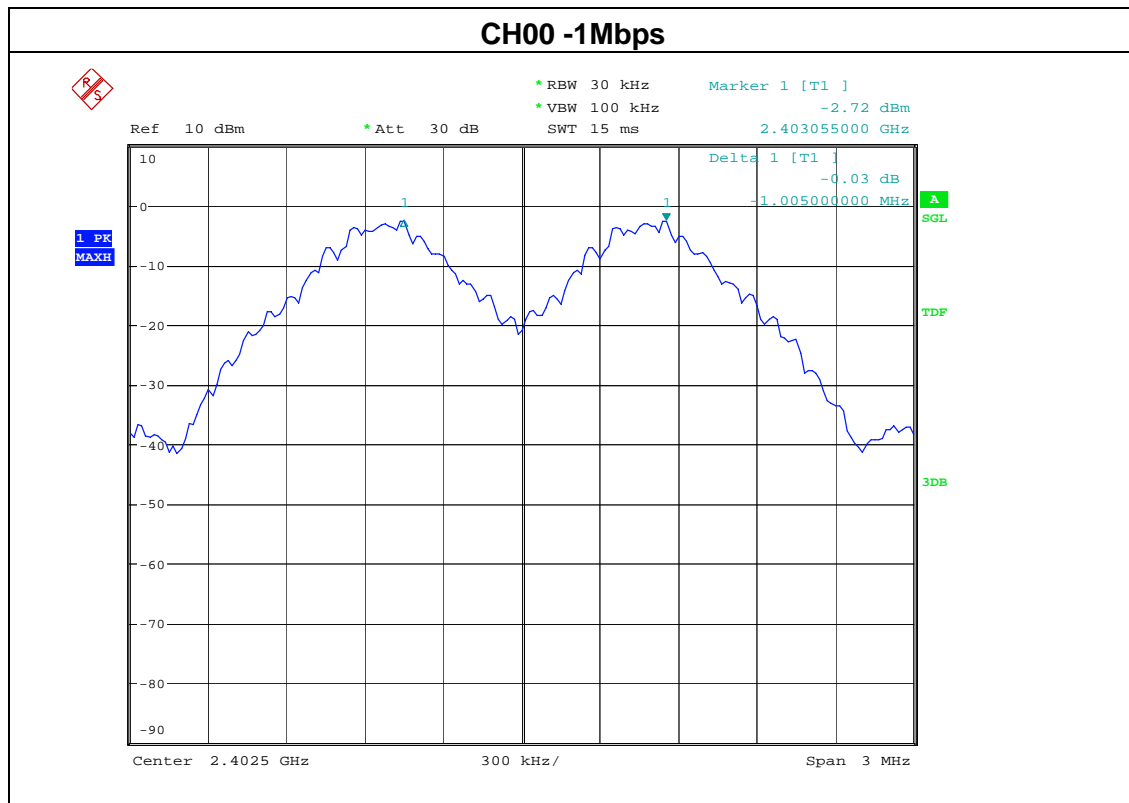


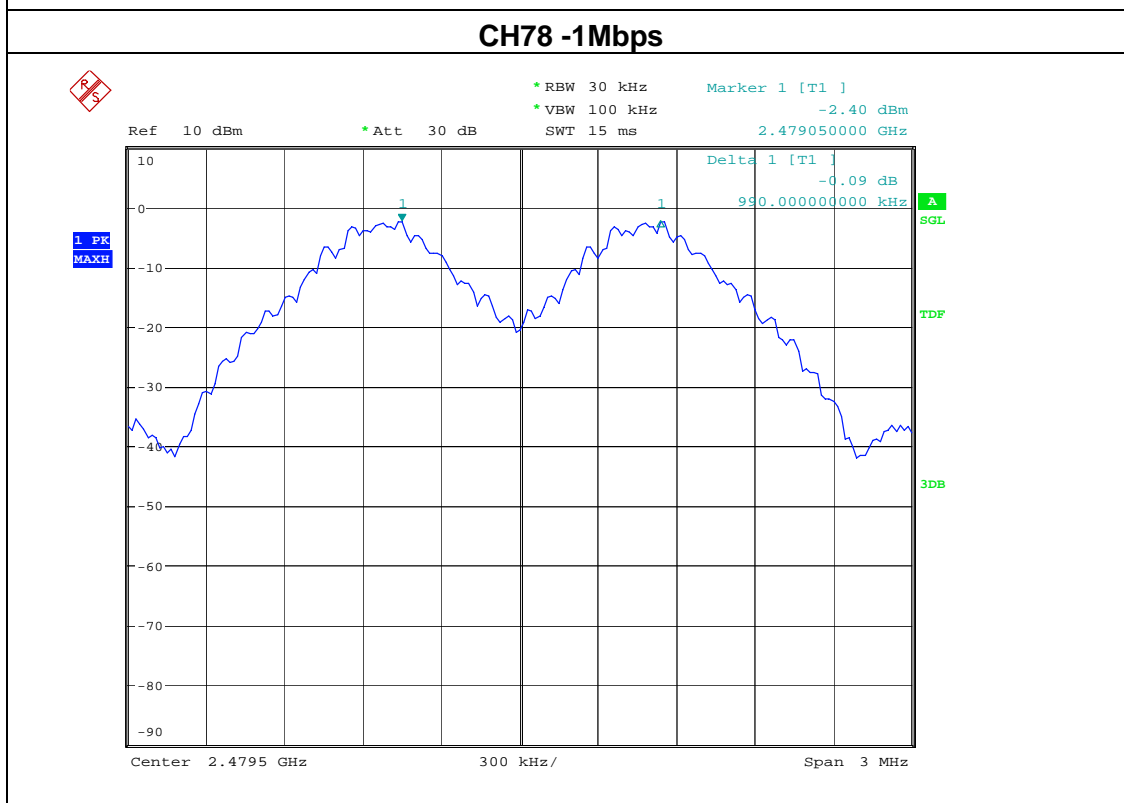
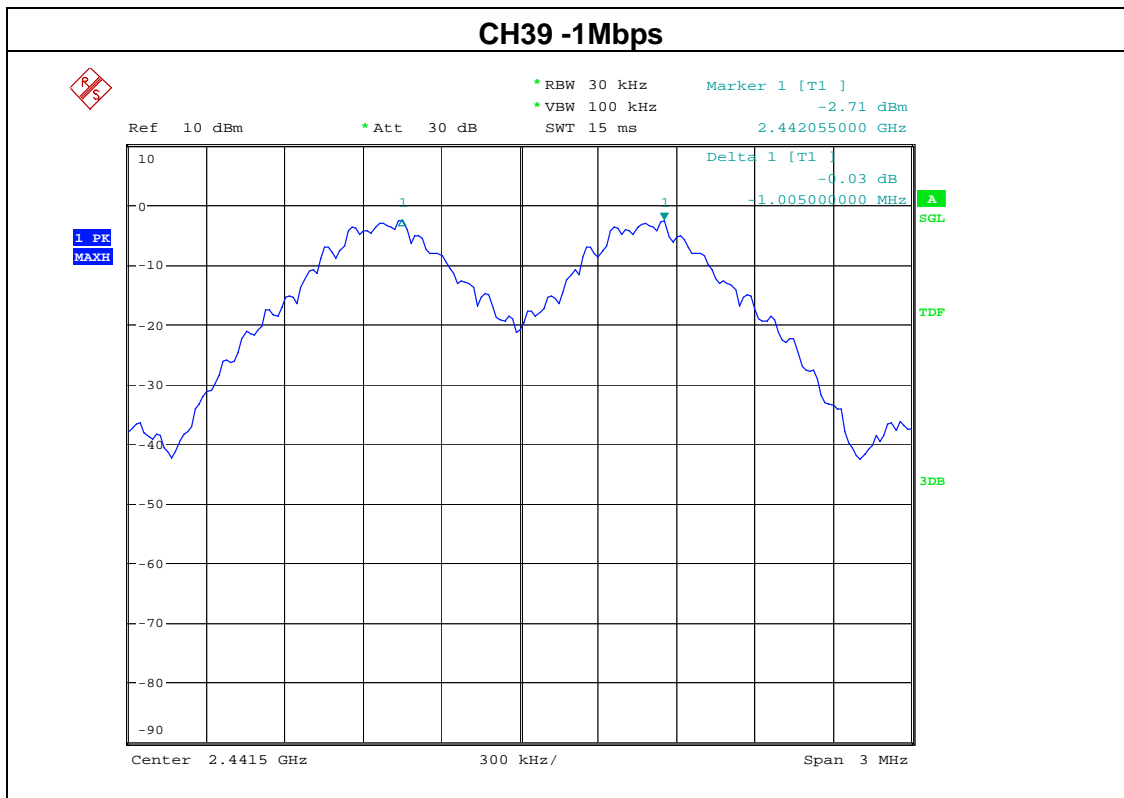


EUT	Mobile Phone	Model Name	SML605BK
Temperature	25 °C	Relative Humidity	60%
Pressure	1012 hPa	Test Result	Pass
Test Mode	CH00 / CH39 /CH78 (2Mbps Mode)	Test Date	September 03, 2015

Channel number	Channel frequency (MHz)	Separation Read value (KHz)	Separation limit 2/3 20db down BW(KHz)
00	2402	1005	>769.20
39	2441	1005	>762.80
78	2480	1005	>762.80

Note: 20db bandwidth refer to section 6.1.5

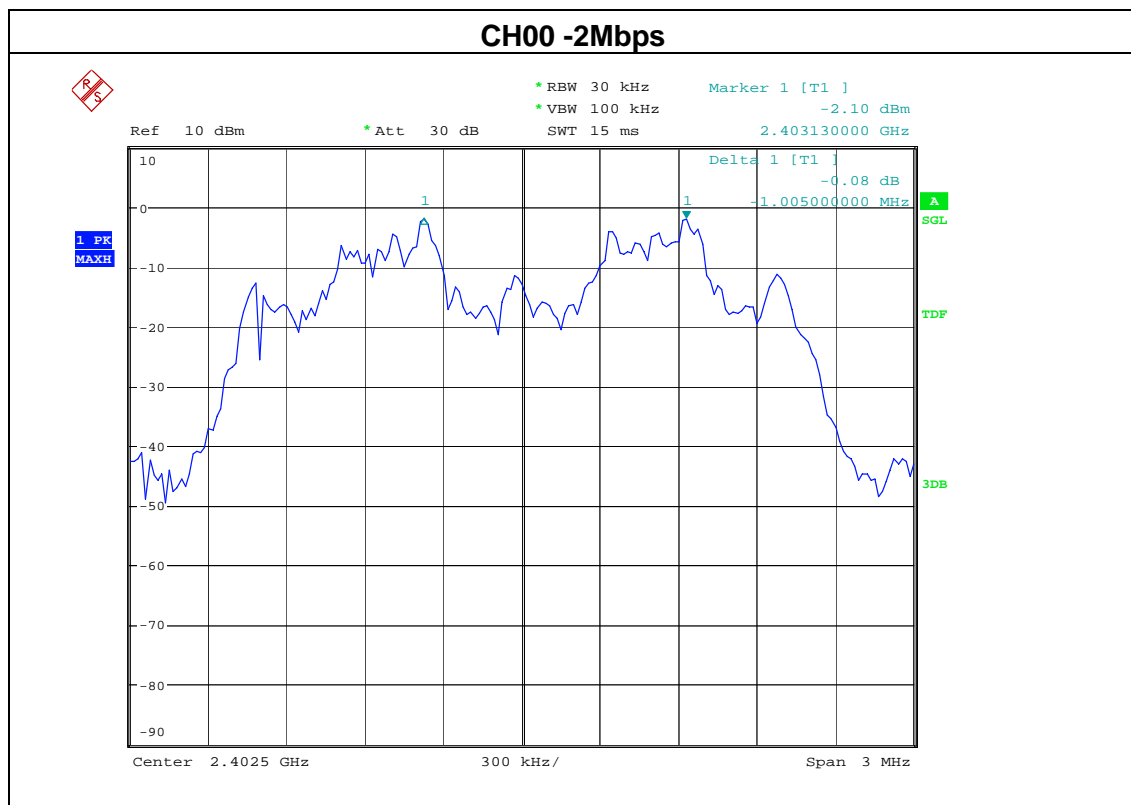


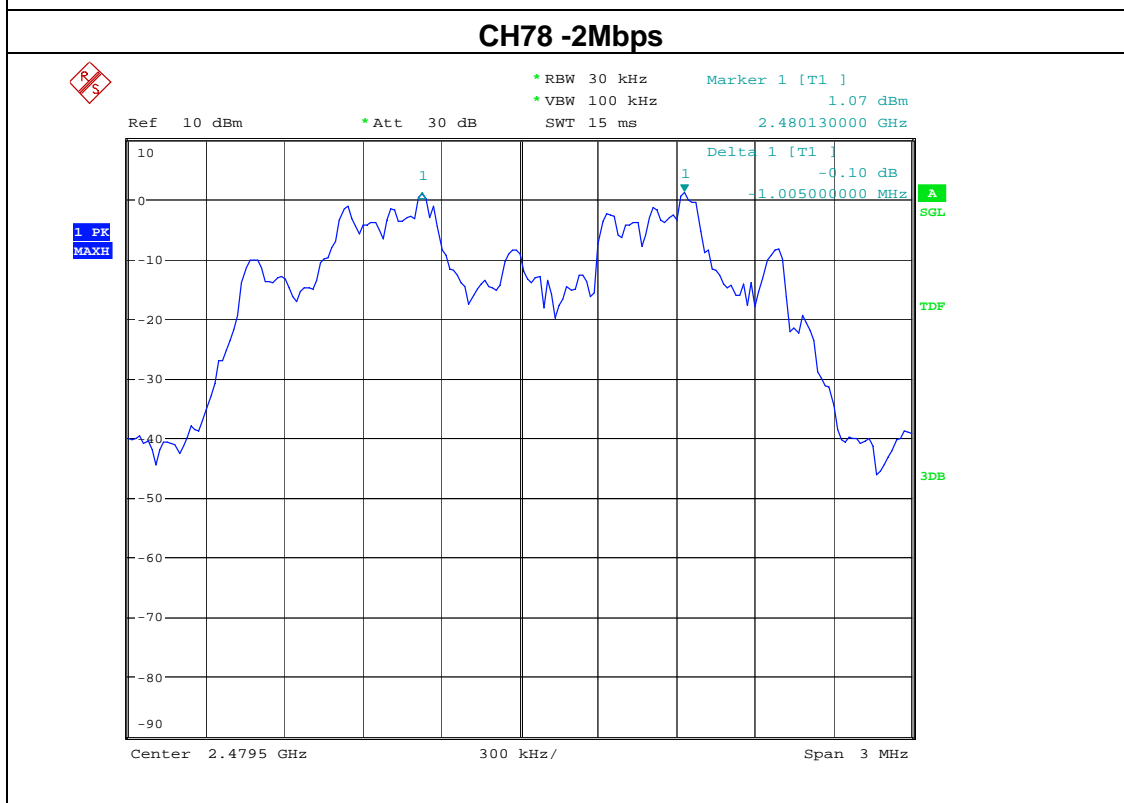
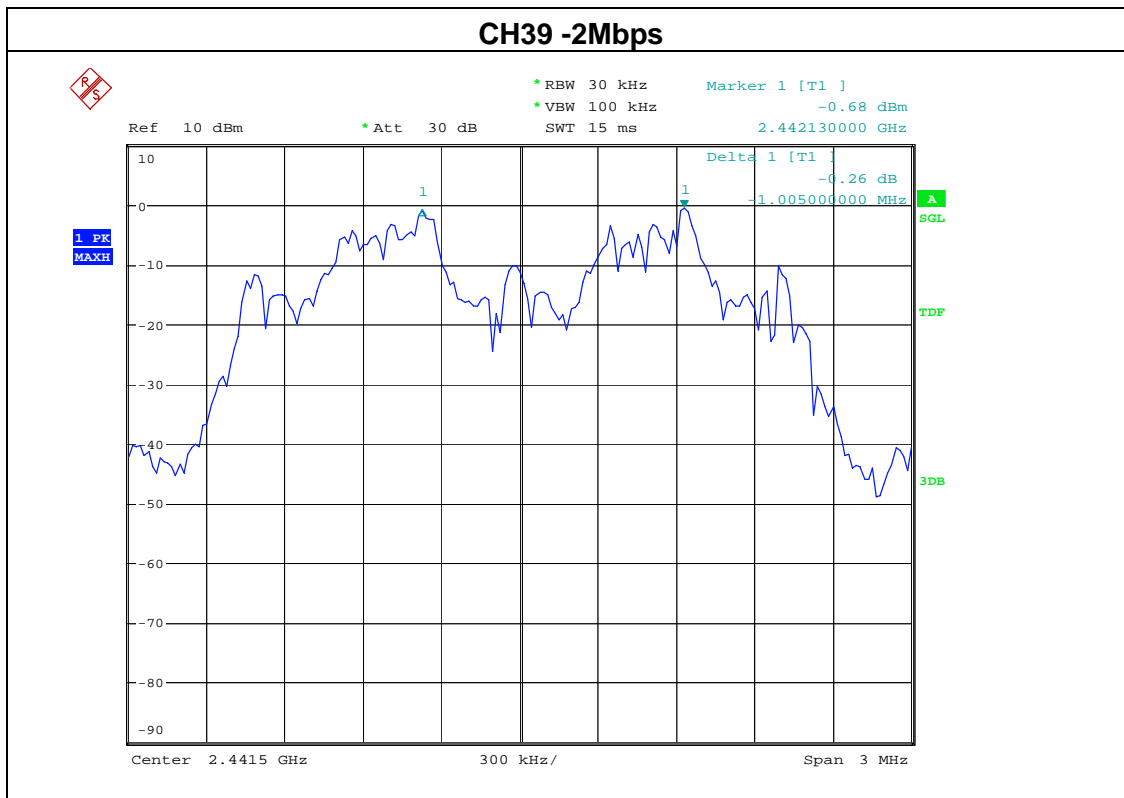


EUT	Mobile Phone	Model Name	SML605BK
Temperature	25 °C	Relative Humidity	60%
Pressure	1012 hPa	Test Result	Pass
Test Mode	CH00 / CH39 /CH78 (3Mbps Mode)	Test Date	September 03, 2015

Channel number	Channel frequency (MHz)	Separation Read value (KHz)	Separation limit 2/3 20db down BW(KHz)
00	2402	1005	>766.00
39	2441	1020	>769.20
78	2480	990	>772.47

Note: 20db bandwidth refer to section 6.1.5

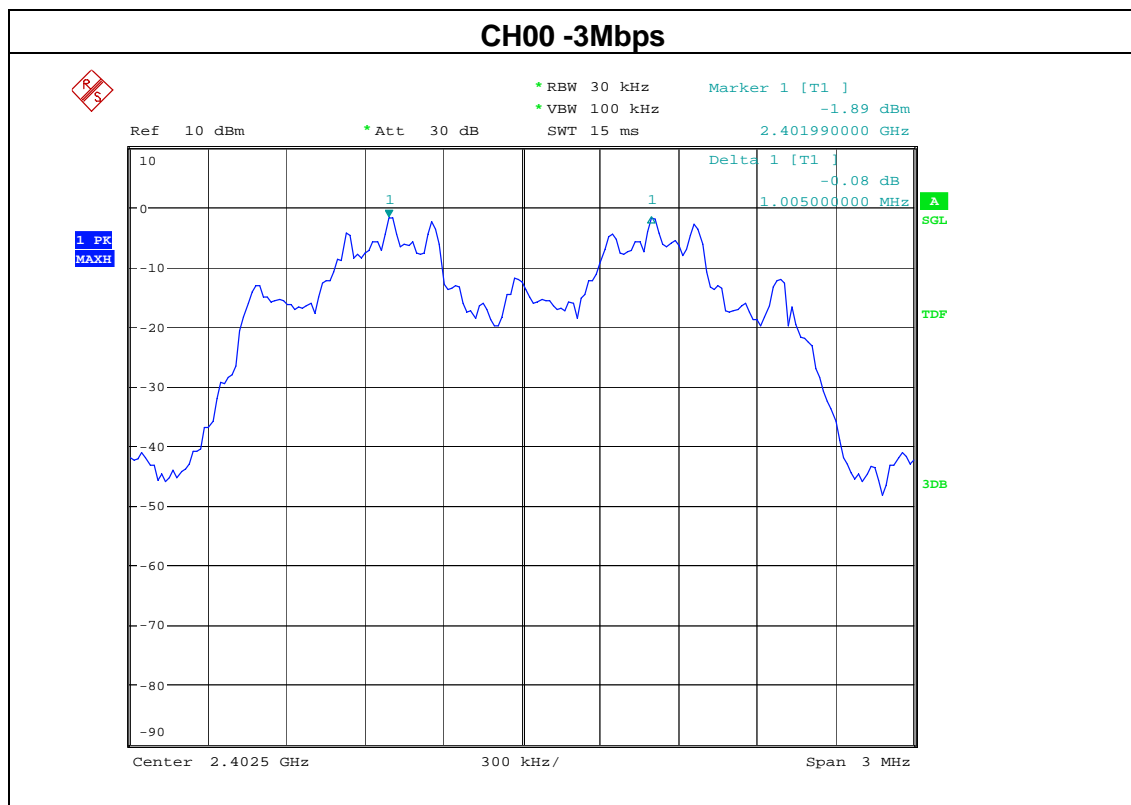

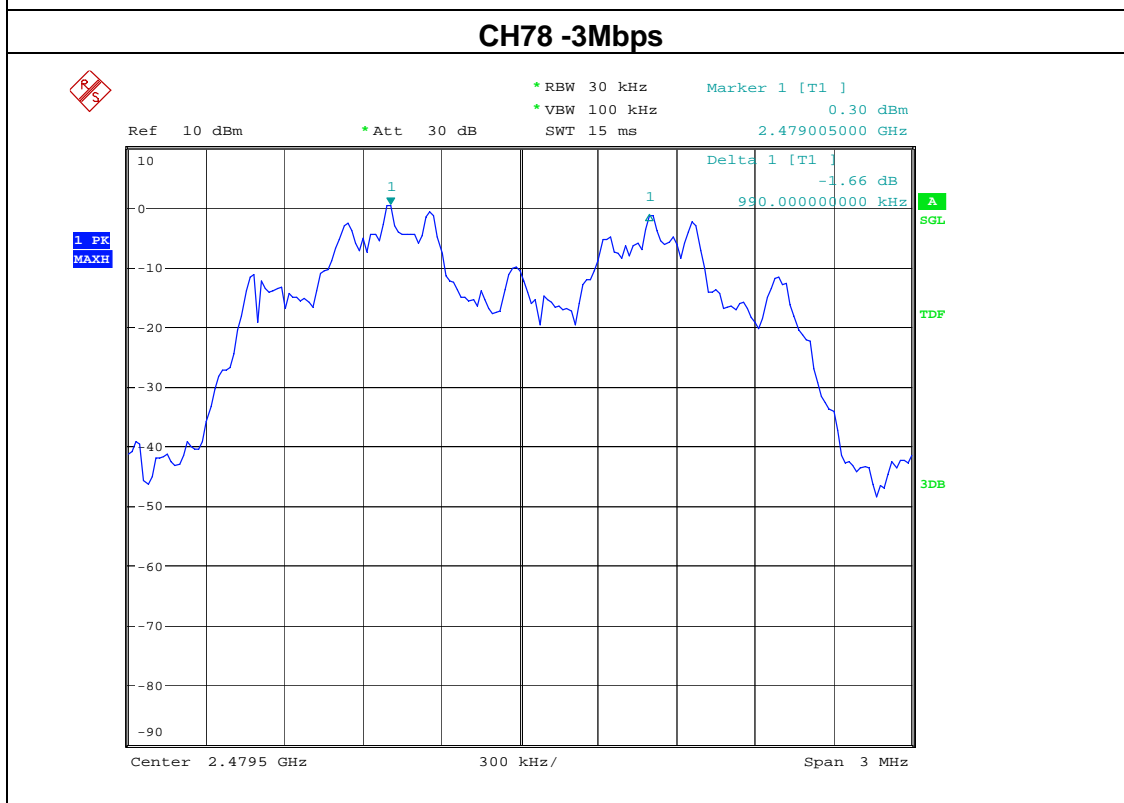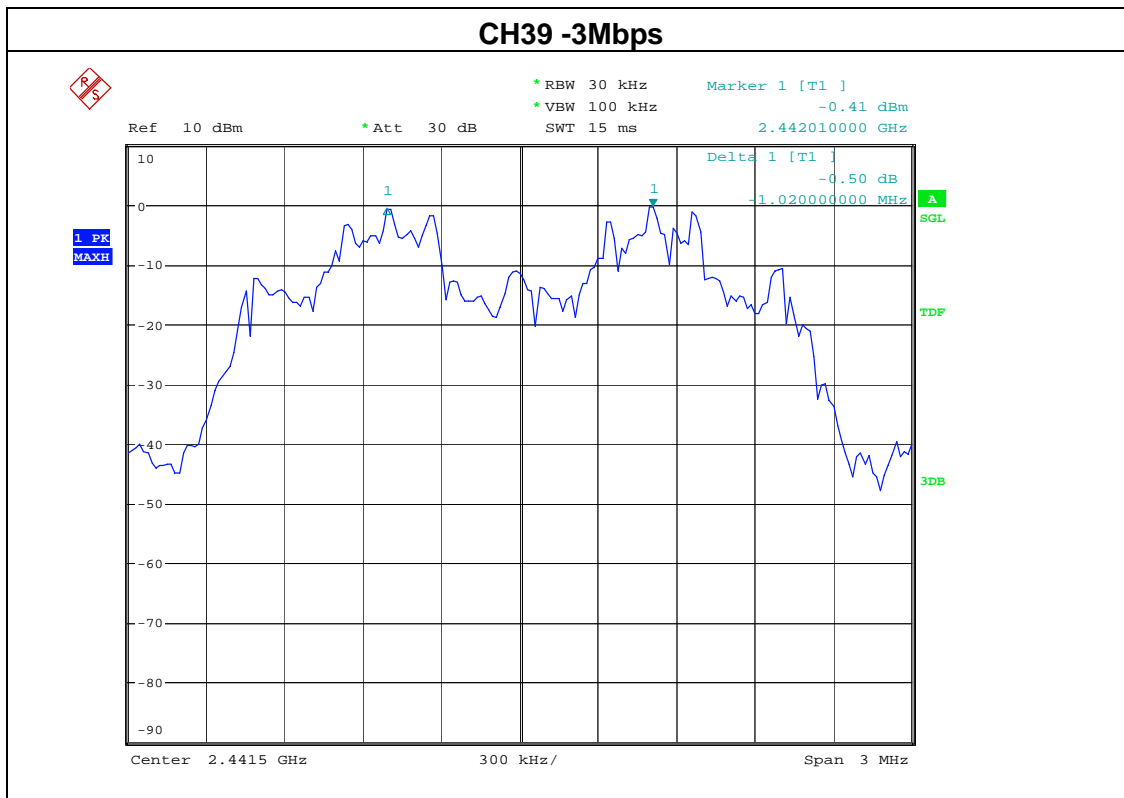

**9. BANDWIDTH TEST****9.1 APPLIED PROCEDURES / LIMIT**

Standard Section		Test Item	Limit	Frequency Range (MHz)	Result
§FCC 15.247 (a)(1)	§RSS247 sect.5.1(3) §RSS Gen sect.6.6	Bandwidth	—	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max hold
Sweep Time	Auto

**9.2 TEST PROCEDURE**

1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
2. Set the spectrum analyzer as follows: VBW =100kHz, RBW=300kHz, Sweep = auto  
Detector function = peak ,Trace = max hold
3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
4. Repeat above procedures until all frequencies measured were complete.

**9.3 DEVIATION FROM STANDARD**

No deviation.


**9.4 TEST SETUP****9.5 EUT OPERATION CONDITIONS**



The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 9.6 TEST RESULTS

EUT	Mobile Phone	Model Name	SML605BK
Temperature	25 °C	Relative Humidity	60%
Pressure	1012 hPa	Test Mode	CH00/CH39/C78(1Mbps)
Test Date	September 03, 2015		


Frequency	99% Bandwidth (kHz)	20dB Bandwidth (kHz)	Result
2402 MHz	976.0	1110.6	PASS
2441 MHz	976.0	1105.8	PASS
2480 MHz	976.0	111.06	PASS


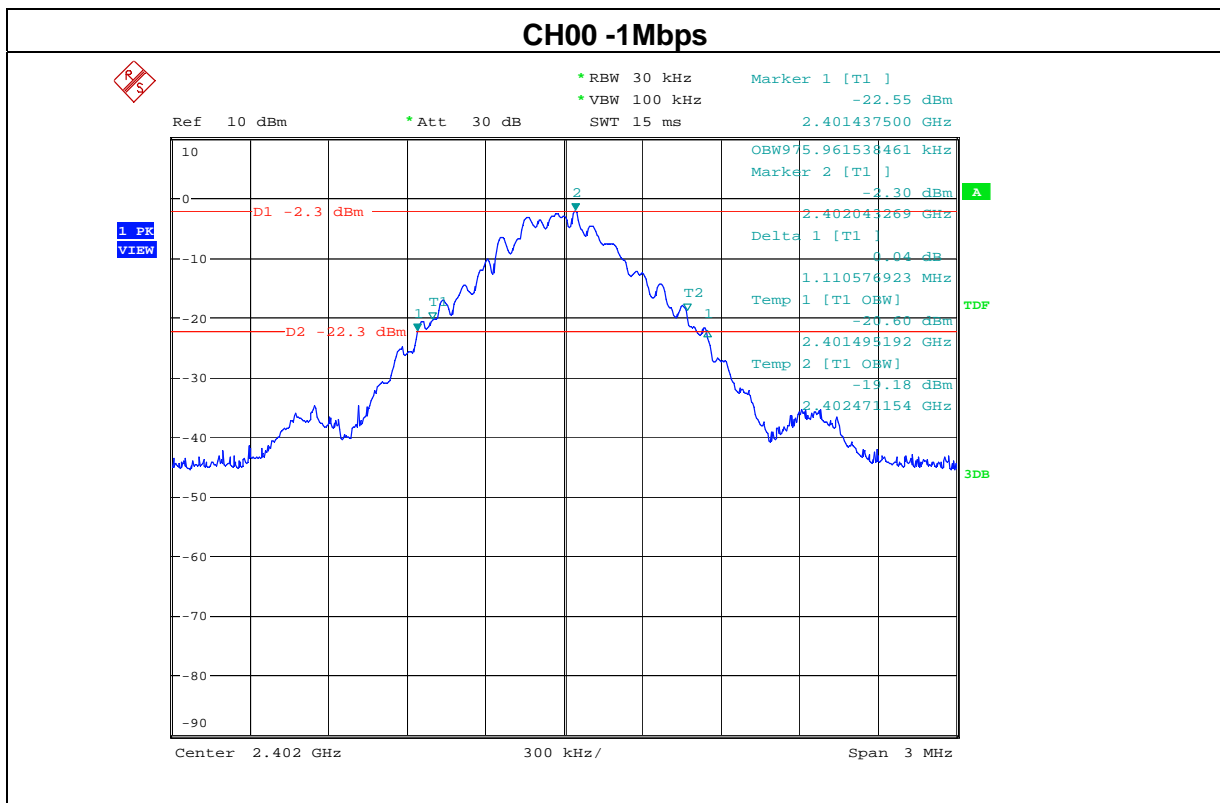


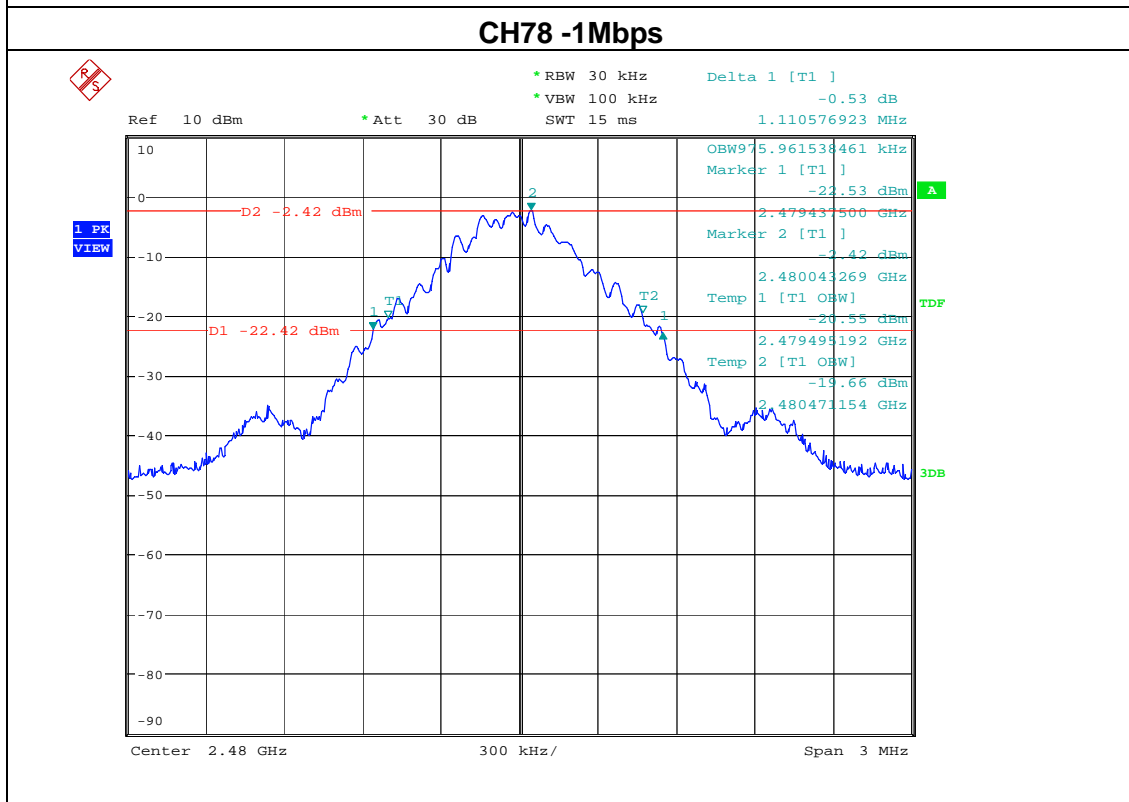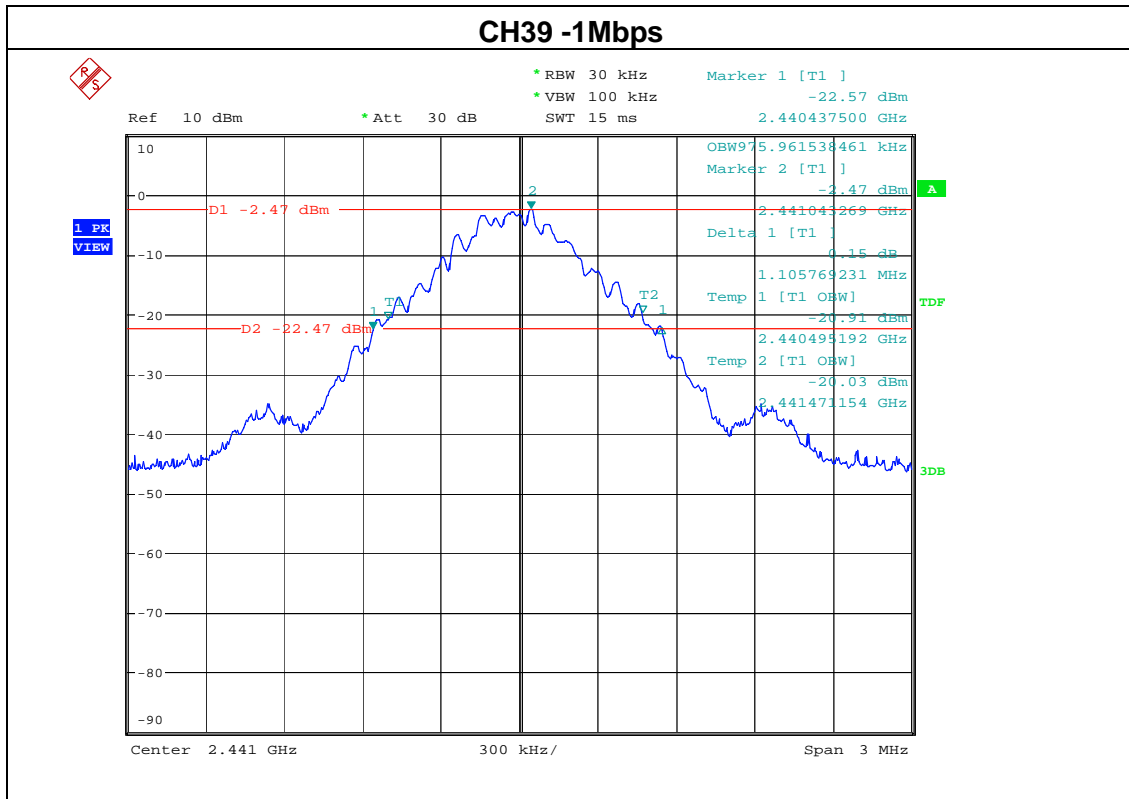

EUT	Mobile Phone	Model Name	SML605BK
Temperature	25 °C	Relative Humidity	60%
Pressure	1012 hPa	Test Mode	CH00/CH39/C78(2Mbps)
Test Date	September 03, 2015		


Frequency	99% Bandwidth (kHz)	20dB Bandwidth (kHz)	Result
2402 MHz	1086.5	1153.8	PASS
2441 MHz	1081.7	1144.2	PASS
2480 MHz	1081.7	1144.2	PASS


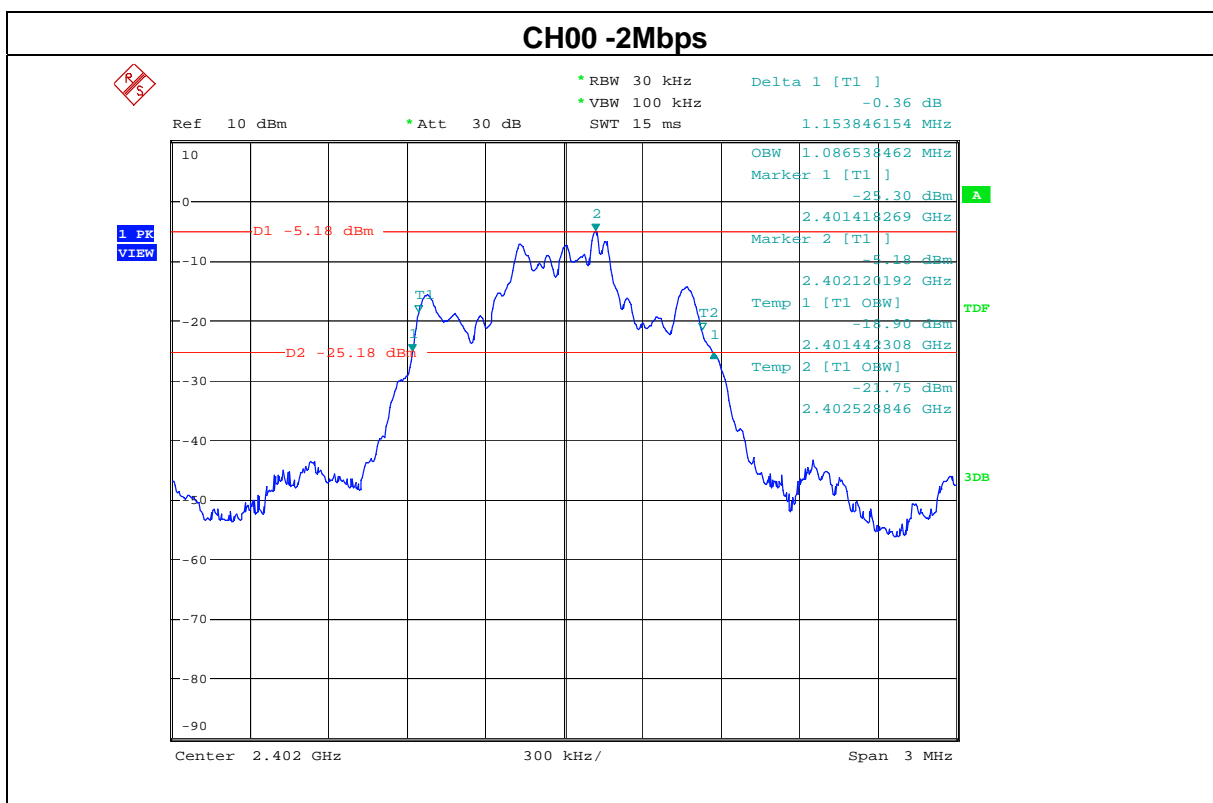


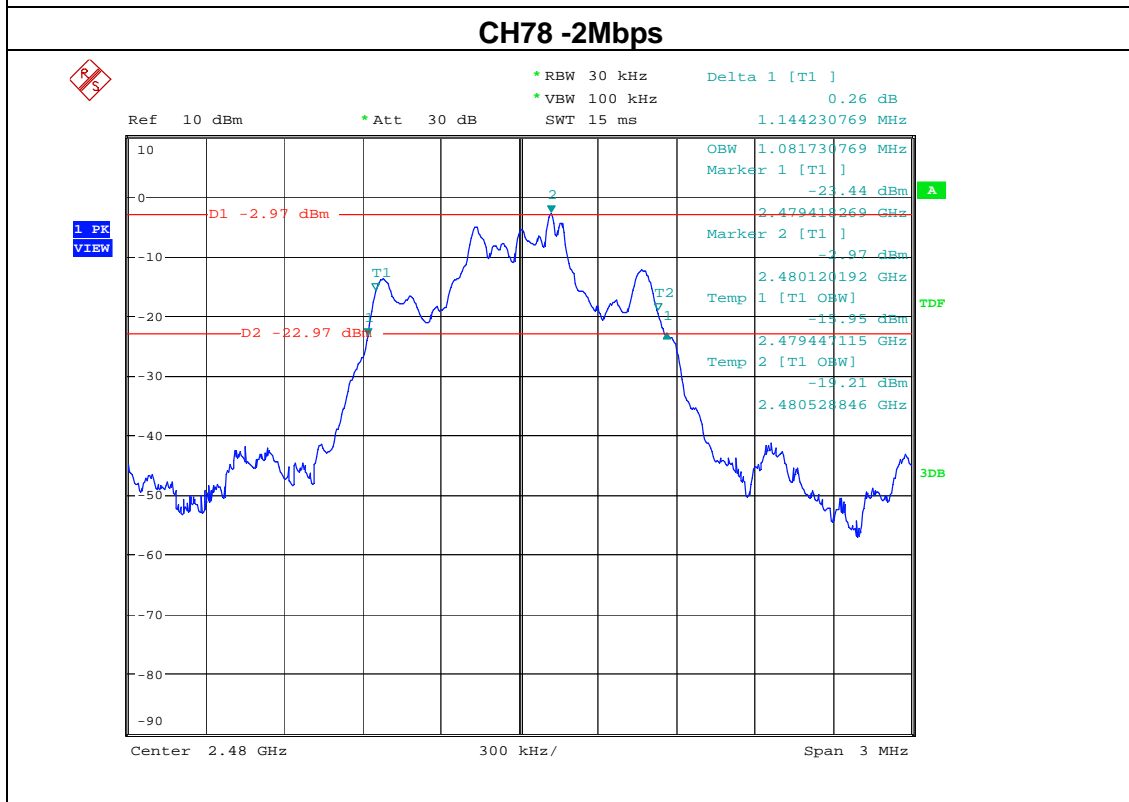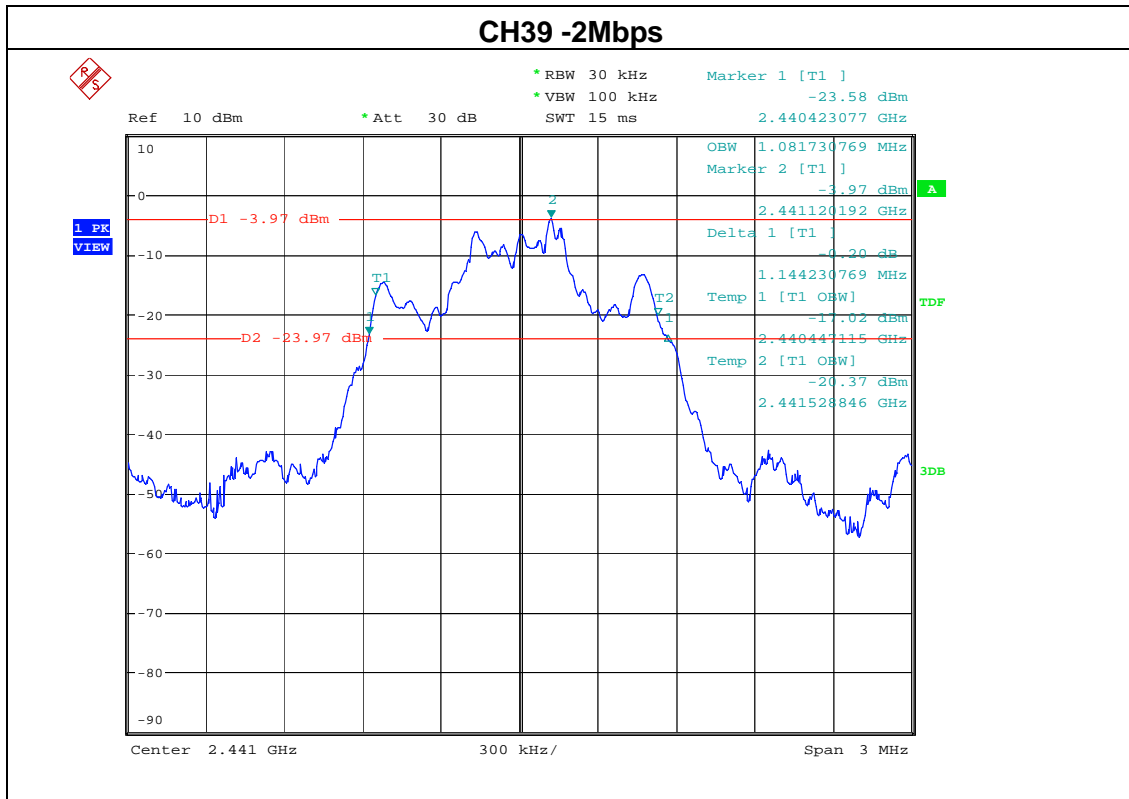

EUT	Mobile Phone	Model Name	SML605BK
Temperature	25 °C	Relative Humidity	60%
Pressure	1012 hPa	Test Mode	CH00/CH39/C78(3Mbps)
Test Date	September 03, 2015		

Frequency	99% Bandwidth (kHz)	20dB Bandwidth (kHz)	Result
2402 MHz	1076.9	1149.0	PASS
2441 MHz	1076.9	1153.8	PASS
2480 MHz	1081.7	1158.7	PASS

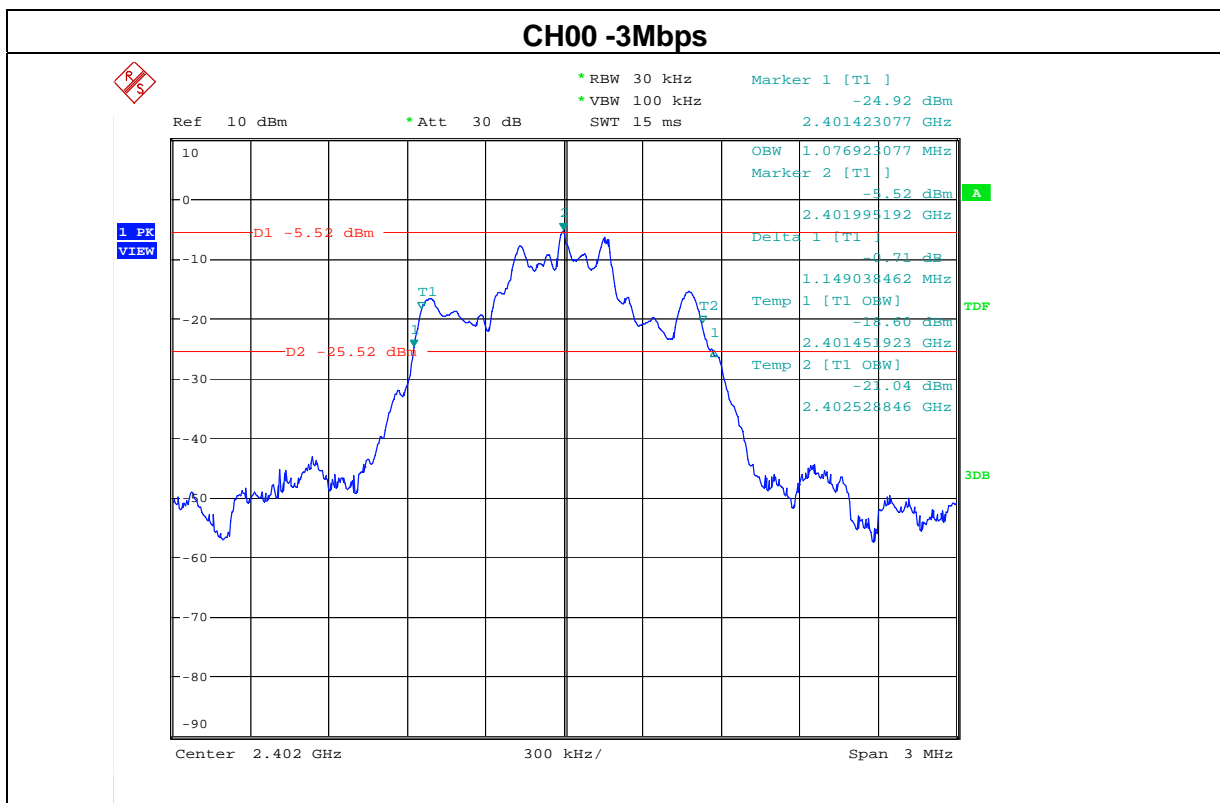

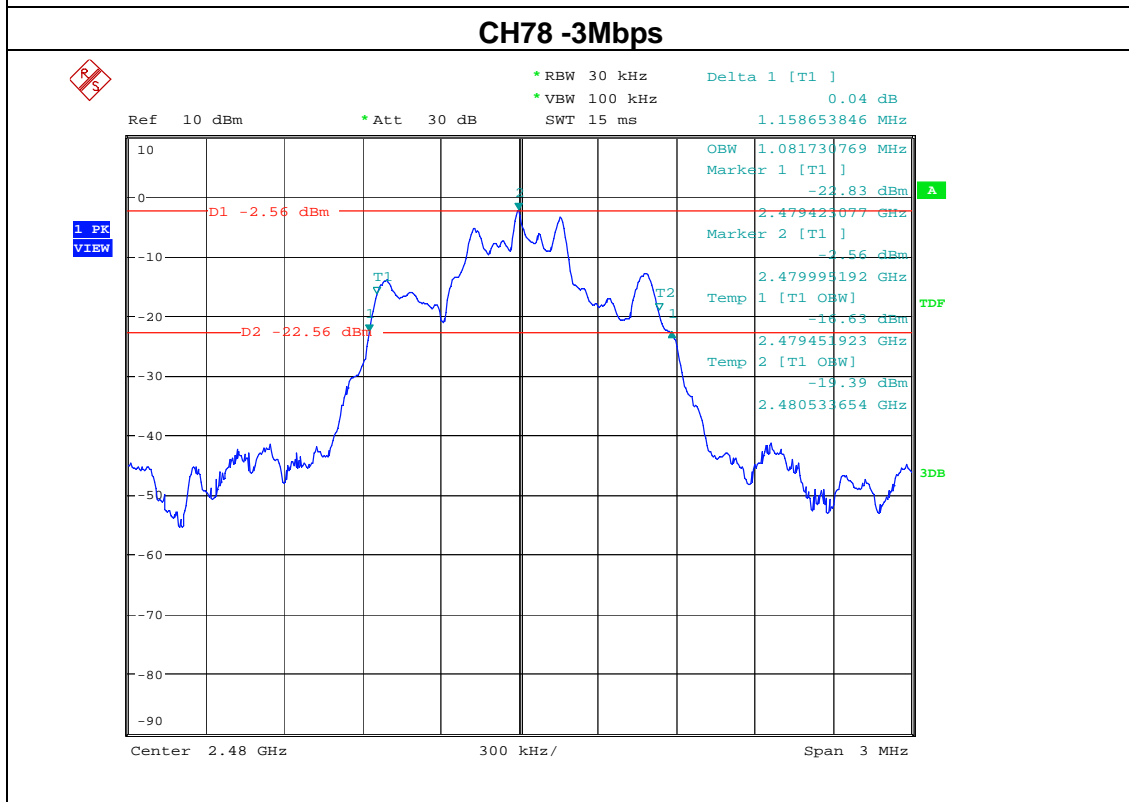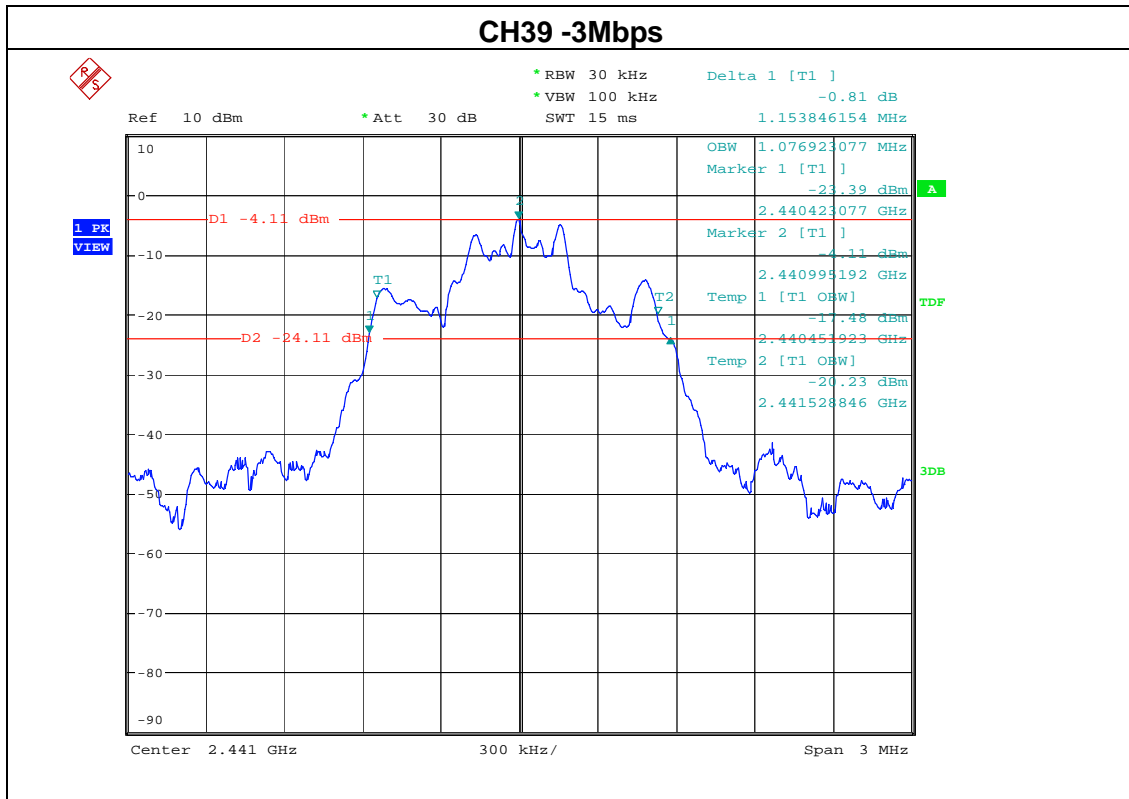

**10. PEAK OUTPUT POWER TEST****10.1 APPLIED PROCEDURES / LIMIT**


FCC Part15 (15.247) , Subpart C					
Standard Section		Test Item	Limit	Frequency Range (MHz)	Result
§FCC 15.247 (b)(i)	§RSS 247 sect.5.4(2)	Peak Output Power	0.125 w or 20.96dBm	2400-2483.5	PASS

**10.2 TEST PROCEDURE**

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. Setting : RBW  $\geq$  the 20 dB bandwidth of the emission being measured
  - Span  $\geq$  approximately 3 times the 20 dB bandwidth, centered on a hopping channel
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold

**10.3 DEVIATION FROM STANDARD**

No deviation.

**10.4 TEST SETUP****10.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**10.6 TEST RESULTS**

EUT :	Mobile Phone	Model Name :	SML605BK
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Mode :	CH00/ CH39 /CH78 (1M/2M/3Mbps Mode)
Test Date	September 03, 2015		

<b>1Mbps</b>				
Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT(dBm)	Result
CH00	2402	1.03	20.96	Pass
CH39	2441	1.05	20.96	Pass
CH78	2480	1.08	20.96	Pass
<b>2Mbps</b>				
CH00	2402	0.42	20.96	Pass
CH39	2441	0.43	20.96	Pass
CH78	2480	0.45	20.96	Pass
<b>3Mbps</b>				
CH00	2402	0.40	20.96	Pass
CH39	2441	0.42	20.96	Pass
CH78	2480	0.45	20.96	Pass

**11. ANTENNA APPLICATION****11.1 Antenna requirement**

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247 or §RSS Gen sect.8.8.

**11.2 Result**


The EUT's antenna integrated on PCB, The antenna's gain is 0dBi and meets the requirement.

## 12. EUT TEST PHOTO


CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

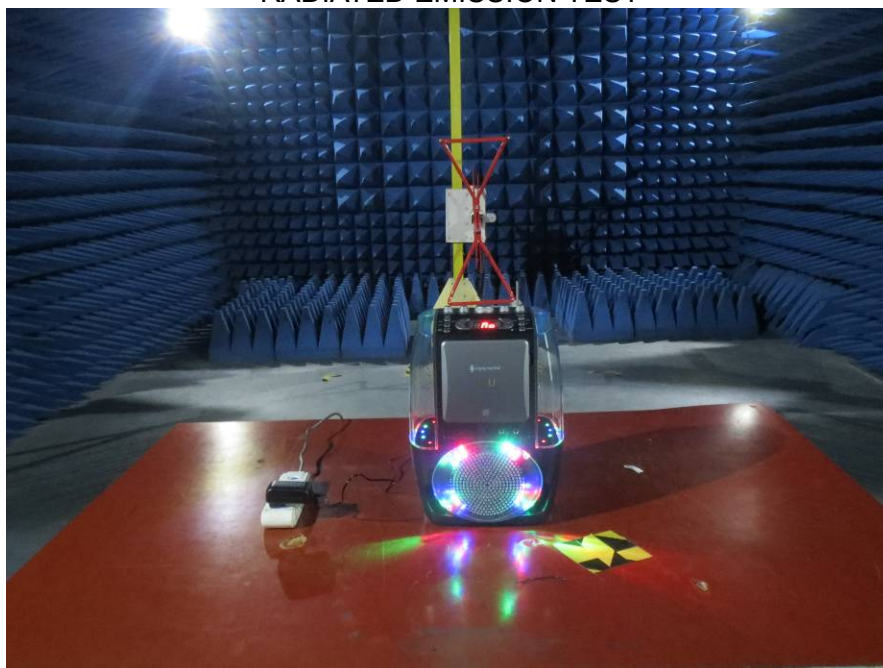

### RADIATED EMISSION TEST

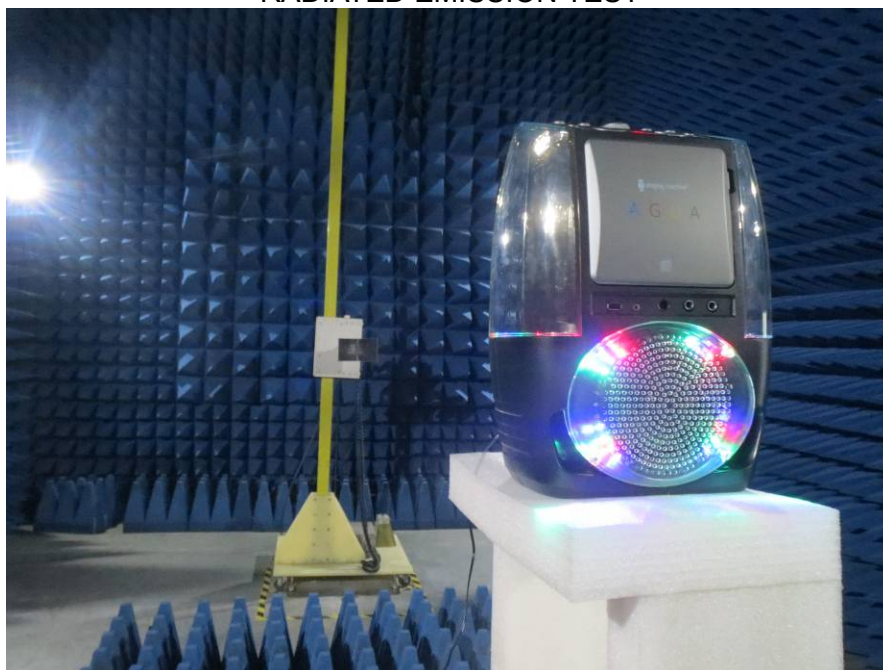

### RF TEST



### 13. PHOTOGRAPHS OF EUT

Appearance photograph of EUT



Appearance photograph of EUT



Appearance photograph of EUT



Appearance photograph of EUT



Appearance photograph of EUT




Appearance photograph of EUT




Appearance photograph of EUT




Internal photograph of EUT

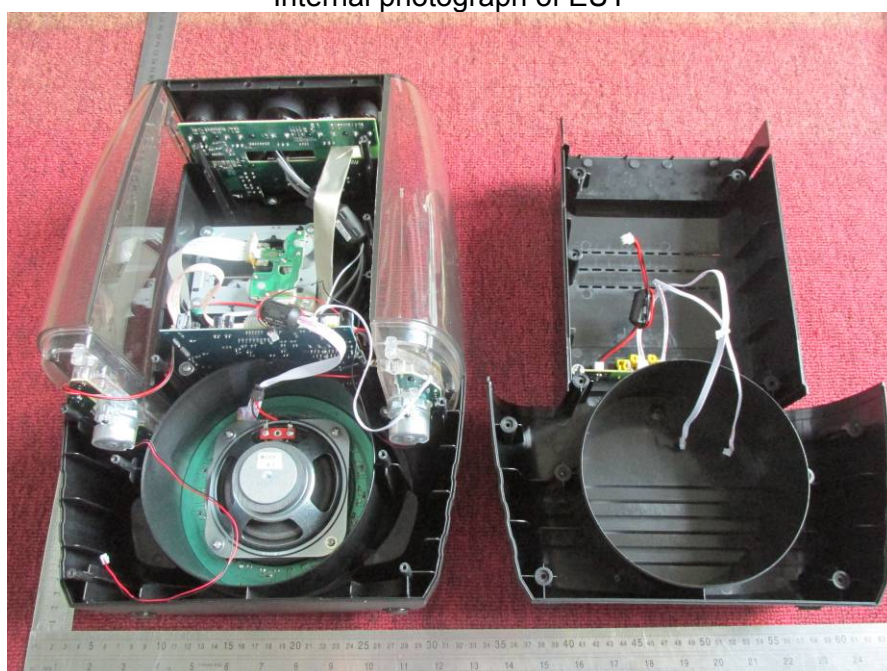


Internal photograph of EUT

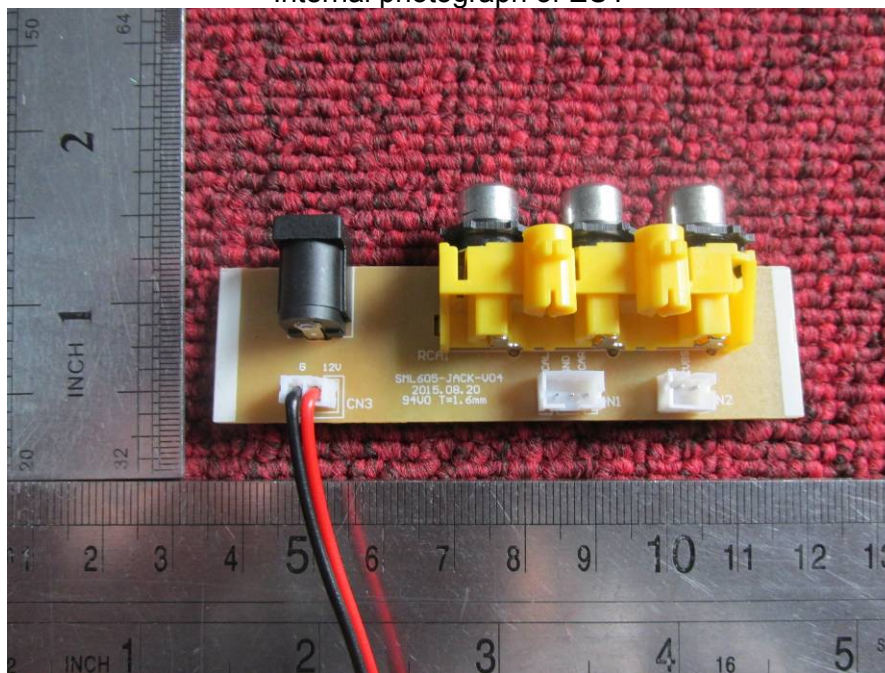


Internal photograph of EUT

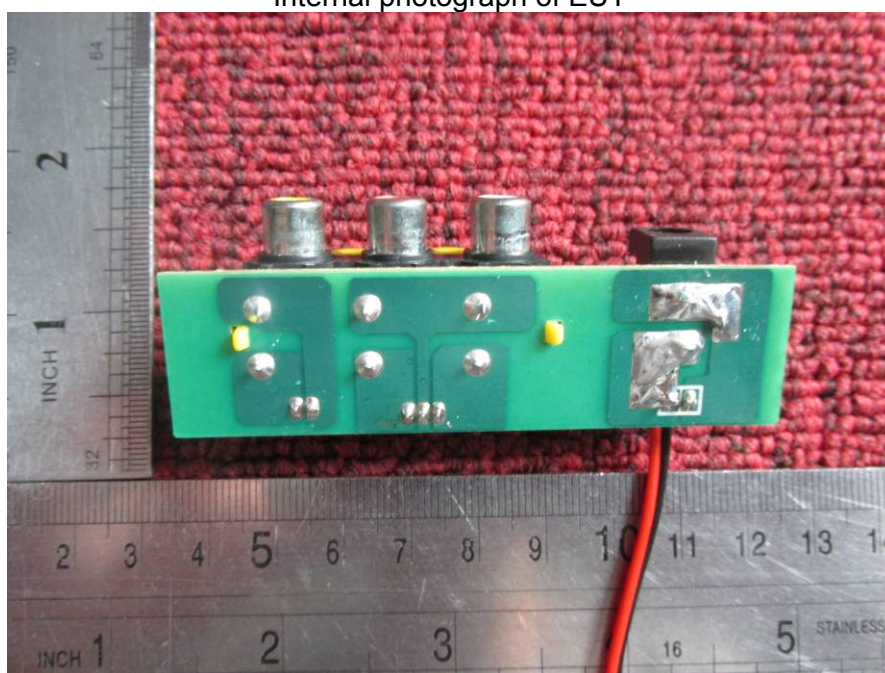


Internal photograph of EUT

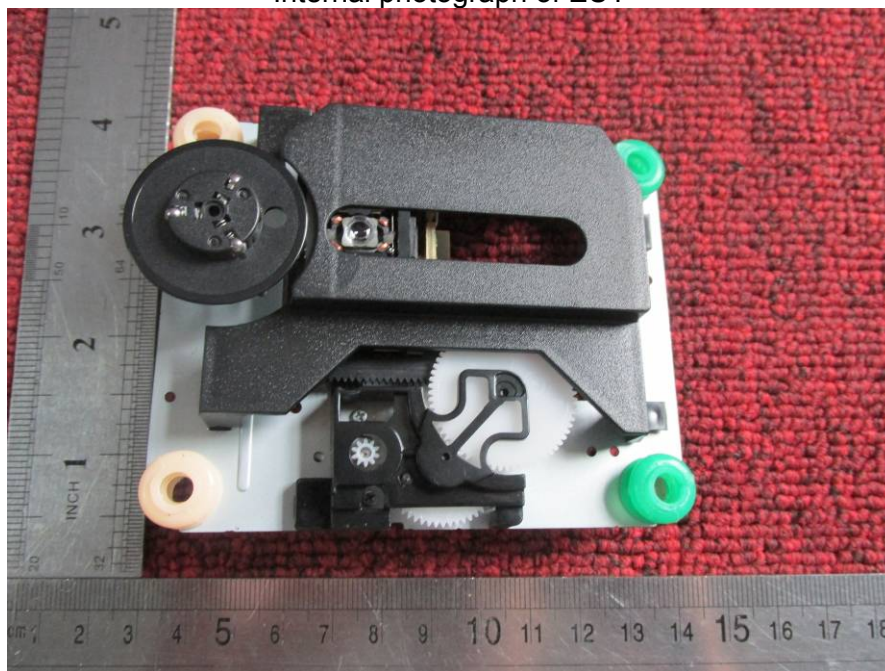


Internal photograph of EUT

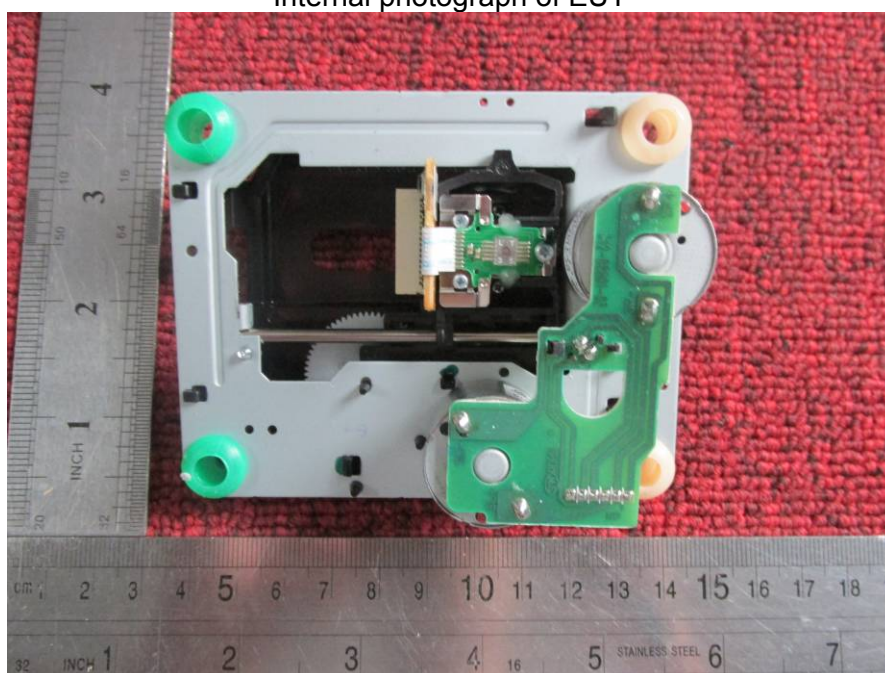


Internal photograph of EUT

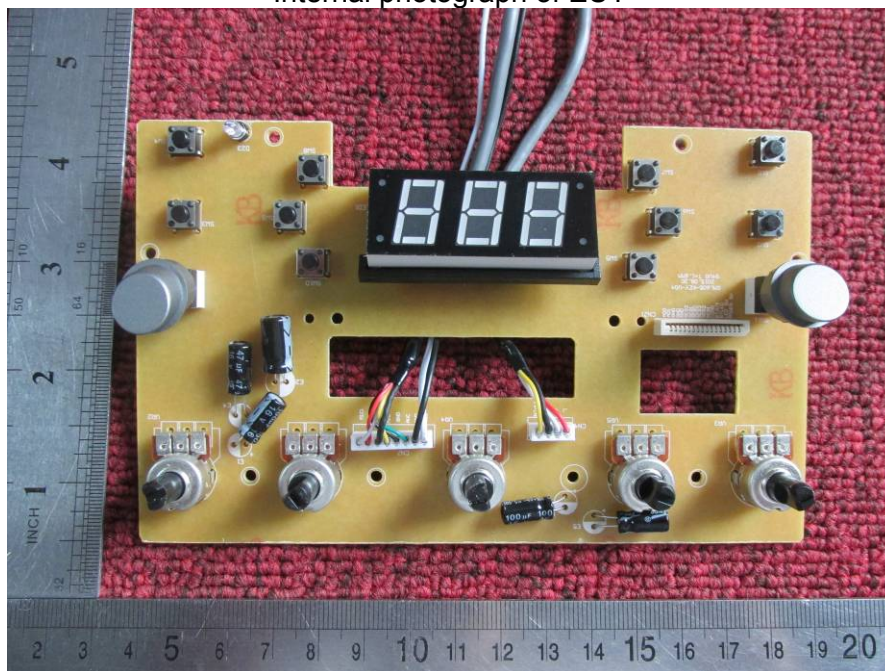


Internal photograph of EUT

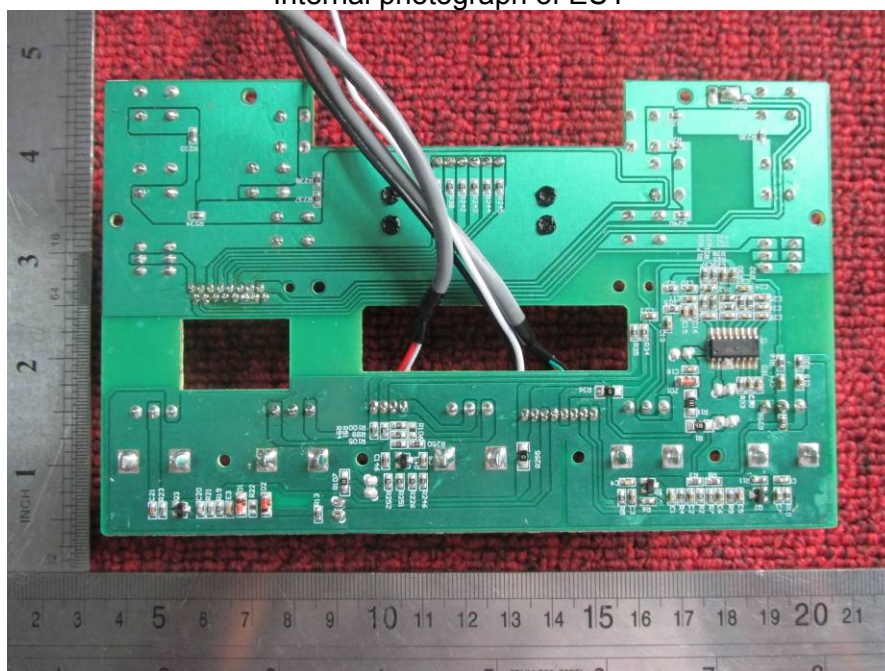


Internal photograph of EUT

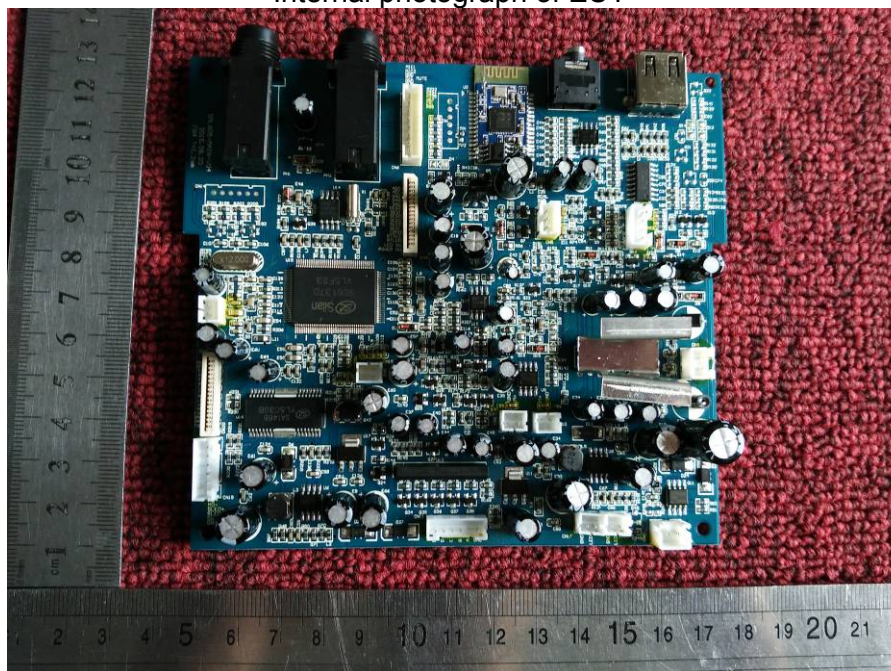

Internal photograph of EUT

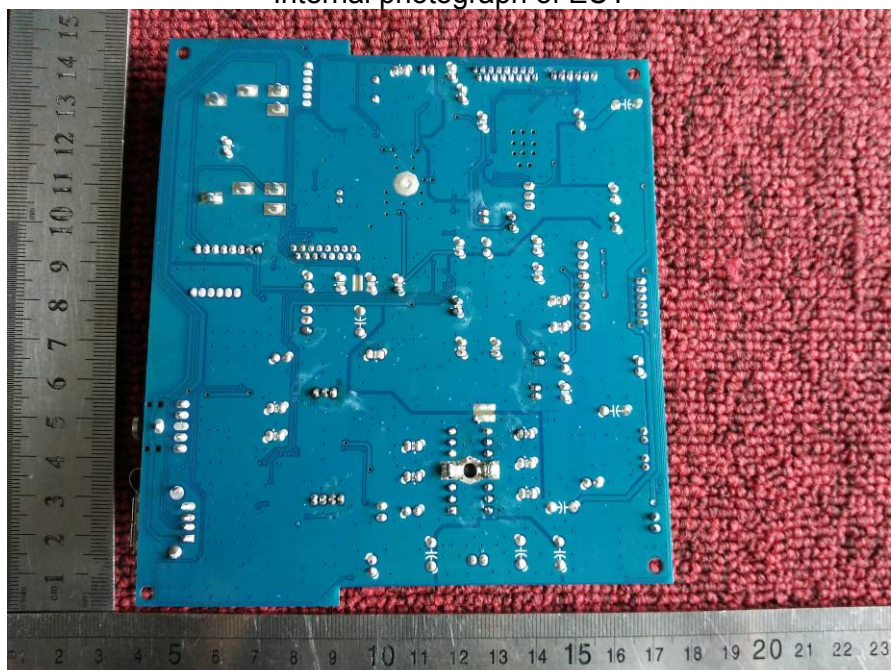

Internal photograph of EUT

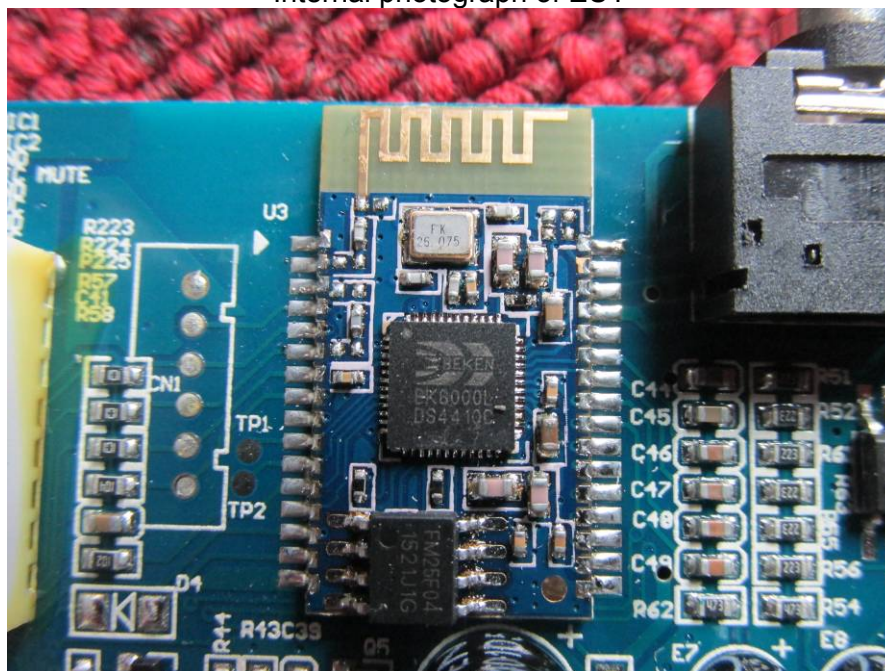

Appearance photograph of adapter



—END OF REPORT—