

# **FCC Test Report**

FCC ID : 2AFOA-VT36

Equipment : Tire-Pressure monitoring system (TPMS)

Model No. : VT36

Brand Name : ATEQ

Applicant : A.T.E.Q.(THAILAND) Co., Ltd.

Address : 903/47 Rama 3 Road, BangPongPang,

YanNaWa, BANGKOK, 10120 THAILAND

Standard : 47 CFR FCC Part 15.209

Received Date : Aug. 06, 2015

Tested Date : Apr. 12 ~ Apr. 15, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager

Iac-MRA



Page: 1 of 18

Report No.: FR580601



# **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	
1.2	Test Setup Chart	
1.3	The Equipment List	6
1.4	Test Standards	6
1.5	Measurement Uncertainty	6
2	TEST CONFIGURATION	7
2.1	Testing Condition	
2.2	The Worst Test Modes and Channel Details	
3	TRANSMITTER TEST RESULTS	
3.1	Conducted Emissions	8
3.2	Radiated Emissions	11
4	TEST LABORATORY INFORMATION	18



# **Release Record**

Report No.	Version	Description	Issued Date
FR580601	Rev. 01	Initial issue	May 11, 2016

Report No.: FR580601 Page: 3 of 18



# **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.207		[dBuV]: 0.471MHz 40.97 (Margin -5.52dB) - AV	Pass
15.209	Radiated Emissions	[dBuV/m at 3m]: 0.125MHz 105.37 (Margin -0.30dB) - AV	Pass

Report No.: FR580601 Page: 4 of 18



# 1 General Description

## 1.1 Information

## 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (kHz)	Modulation	Ch. Frequency (kHz)	Channel Number	Data Rate
123 ~ 127	CW	125	1	10 kbps

Note: The device uses wirebound antenna.


## 1.1.2 EUT Operational Condition

Supply Voltage	5Vdc from adapter
----------------	-------------------

#### 1.1.3 Accessories

	Accessories				
No.	Equipment	Description			
1	AC adapter	Brand Name: Zhongshan Shangpin Model Name: SP-UH04 I/P: 100-240Vac, 50-60Hz, 0.5A O/P: 5Vdc, 2A			
2	USB cable	0.5m shielded with one core (for charging use)			
Rechargeable Li-ion Battery  Brand Name: NEXcell Model Name: 4-NL035L Rating: 3.7V, 1150mAh, 4.25WH					

# 1.2 Test Setup Chart

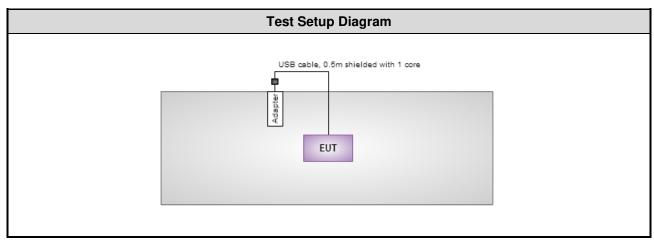

Report No.: FR580601 Page : 5 of 18



## 1.3 The Equipment List

Conducted Emission	Conducted Emission				
Conduction room 1 / (CO01-WS)					
Instrument Manufacturer Model No. Serial No. Calibration Date Calibration U				Calibration Until	
R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016	
SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2015	Nov. 12, 2016	
EMC	EMCCFD300-BM-BM-6000	50821	Dec. 21, 2015	Dec. 20, 2016	
AUDIX	e3	6.120210k	NA	NA	
	Conduction room 1 /  Manufacturer  R&S  SCHWARZBECK  EMC	ManufacturerModel No.R&SESCS 30SCHWARZBECKSchwarzbeck 8127EMCEMCCFD300-BM-BM-6000	Manufacturer         Model No.         Serial No.           R&S         ESCS 30         100169           SCHWARZBECK         Schwarzbeck 8127         8127-667           EMC         EMCCFD300-BM-BM-6000         50821	Manufacturer         Model No.         Serial No.         Calibration Date           R&S         ESCS 30         100169         Oct. 21, 2015           SCHWARZBECK         Schwarzbeck 8127         8127-667         Nov. 13, 2015           EMC         EMCCFD300-BM-BM-6000         50821         Dec. 21, 2015	

Test Item	Radiated Emission				
Test Site	966 chamber 2 / (03C	966 chamber 2 / (03CH02-WS)			
Instrument	Manufacturer Model No. Serial No. Calibration Date Calibration Until				
Receiver	R&S	ESR3	101657	Jan. 12, 2016	Jan. 11, 2017
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-523	Nov. 09, 2015	Nov. 08, 2016
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 10, 2015	Dec. 09, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 10, 2015	Dec. 09, 2016
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 10, 2015	Dec. 09, 2016
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

### 1.4 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.209

ANSI C63.10-2013

# 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty			
Parameters	Uncertainty		
AC conducted emission	±2.90 dB		
Radiated emission	±3.87 dB		

Report No.: FR580601 Page: 6 of 18



# 2 Test Configuration

# 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	21°C / 61%	Howard Huang
Radiated Emissions	03CH02-WS	25°C / 66%	Aska Huang

FCC site registration No.: 181692IC site registration No.: 10807A-2

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (kHz)
AC Conducted Emissions	CW	125
Radiated Emissions	CW	125

#### NOTE:

Report No.: FR580601 Page: 7 of 18

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Z-plane result was found as the worst case and was shown in this report.



## 3 Transmitter Test Results

#### 3.1 Conducted Emissions


#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit					
Frequency Emission (MHz) Quasi-Peak Average					
0.15-0.5	66 - 56 *	56 - 46 *			
0.5-5	56	46			
5-30	60	50			
Note 1: * Decreases with the logarithm of the frequency.					

#### 3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup

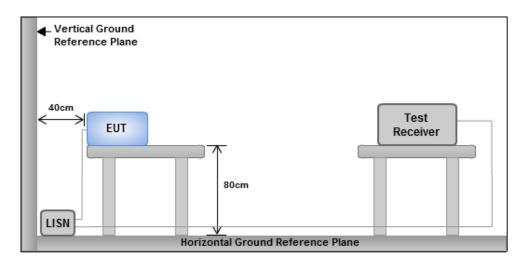


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR580601 Page: 8 of 18




#### 3.1.4 Test Result of Conducted Emissions

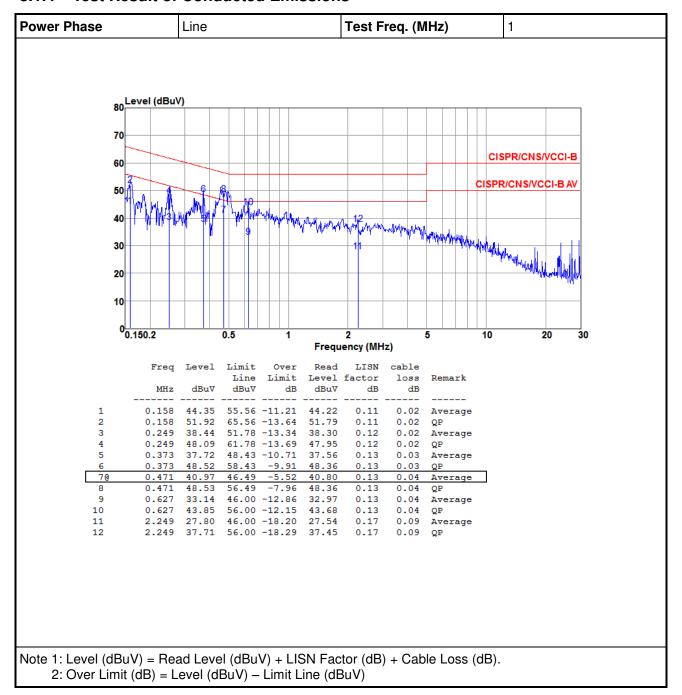

Report No.: FR580601 Page : 9 of 18



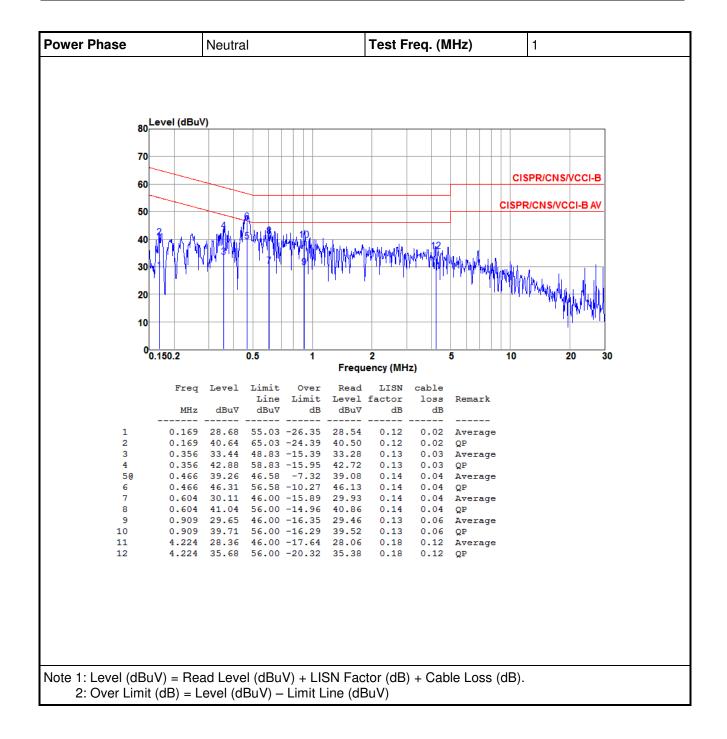

Report No.: FR580601 Page: 10 of 18



#### 3.2 Radiated Emissions

#### 3.2.1 Limit of Radiated Emissions

Restricted Band Emissions Limit							
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)				
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300				
0.490~1.705	24000/F(kHz)	33.8 - 23	30				
1.705~30.0	30	29.54	30				
30~88	100	40	3				
88~216	150	43.5	3				
216~960	200	46	3				
Above 960	500	54	3				

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.2.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


#### Note:

120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.

Report No.: FR580601 Page: 11 of 18



## 3.2.3 Test Setup

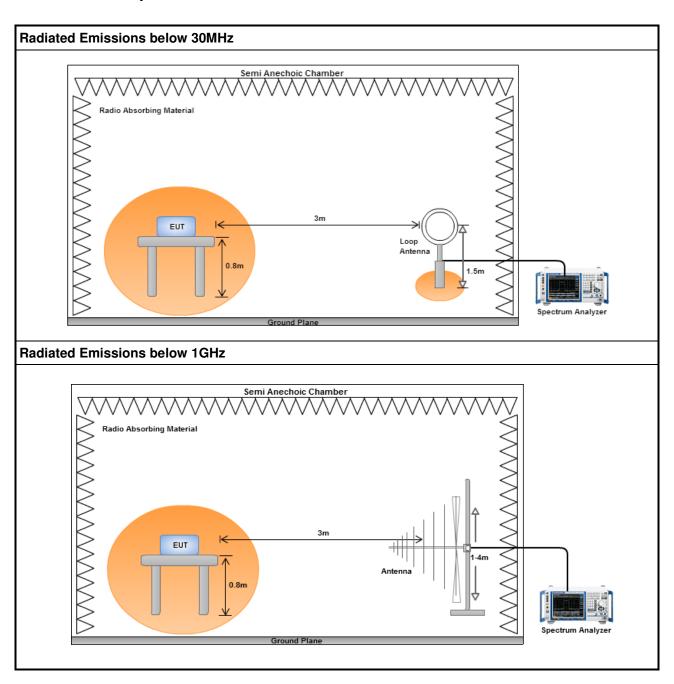

Report No.: FR580601 Page: 12 of 18



## 3.2.4 Transmitter Radiated Unwanted Emissions (9kHz ~ 1.705MHz)

Polaria	zation	Loop Open					
Frequency (MHz)		Emission Level dBuV/m	Limit (dBuV/m)	Margin (dB)	SA Reading (dBuV/m)	Factor	Remark
1	0.125	105.37	105.67	-0.30	85.81	19.56	Average
2	0.125	105.49	125.67	-20.18	85.93	19.56	Peak
3	0.375	56.35	96.12	-39.77	36.95	19.40	Average
4	0.375	56.50	116.12	-59.62	37.10	19.40	Peak
5	0.625	46.15	71.69	-25.54	26.69	19.46	QP

Polari	zation	Loop Close					
Frequ	uency (MHz)	Emission Level dBuV/m	Limit (dBuV/m)	Margin (dB)	SA Reading (dBuV/m)	Factor	Remark
1	0.125	100.06	105.67	-5.61	80.50	19.56	Average
2	0.125	100.18	125.67	-25.49	80.62	19.56	Peak
3	0.375	50.69	96.12	-45.43	31.29	19.40	Average
4	0.375	56.83	116.12	-59.29	37.43	19.40	Peak
5	0.625	41.10	71.69	-30.59	21.64	19.46	QP

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB).


\*Factor includes antenna factor and cable loss.

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR580601 Page: 13 of 18
Report Version: Rev. 01



## 3.2.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

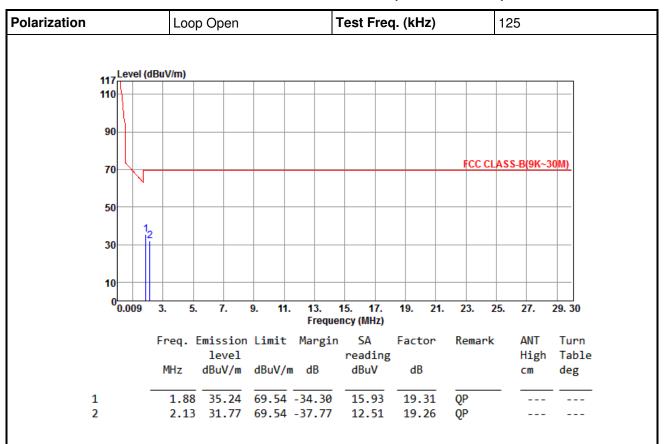


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor (dB)

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m)

Report No.: FR580601 Page: 14 of 18



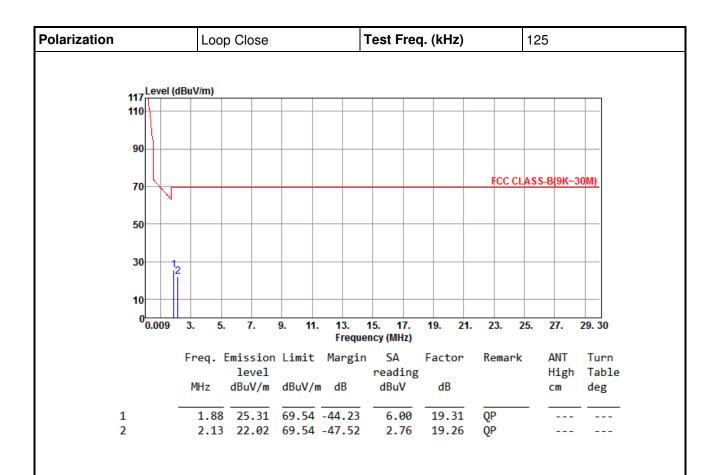


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor (dB)

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m)

Report No.: FR580601 Page: 15 of 18



### 3.2.6 Transmitter Radiated Unwanted Emissions (Above 30MHz)

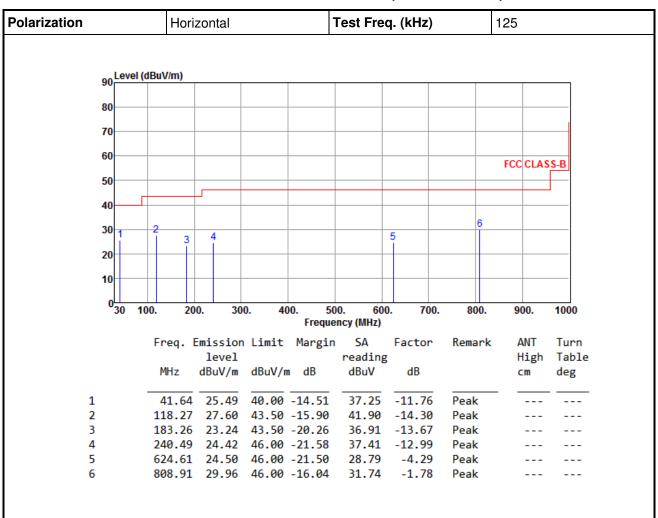


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m)

Report No.: FR580601 Page: 16 of 18



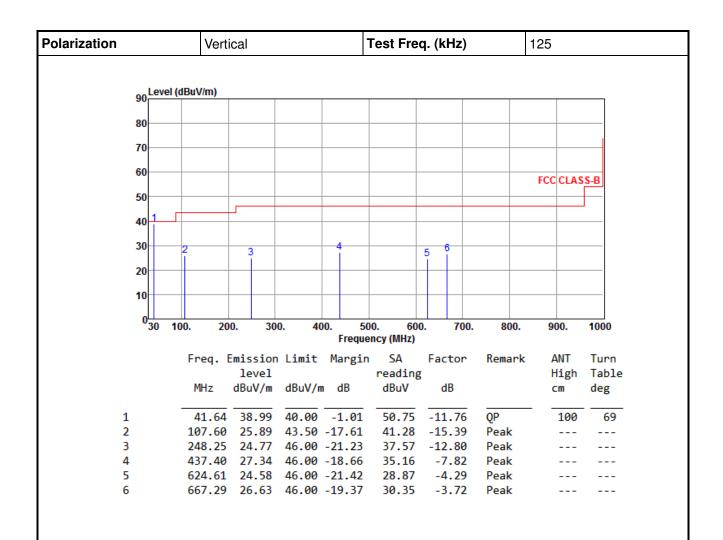

Note 1: Emission Level  $(dBuV/m) = SA Reading (dBuV/m) + Factor^* (dB)$ 

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m)

Report No.: FR580601 Page: 17 of 18



# 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan,

R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C. Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==

Report No.: FR580601 Page: 18 of 18