


Antenna Specification

Antenna manufacturer: WIRELESS-TAG TECHNOLOGY CO LIMITED


| ITEM | SPEC |
|----------------------|---|
| Antenna type | PCB Antenna(B) |
| Center Frequency | 2400Mhz -2.12dBi 2450Mhz -0.89dBi 2500Mhz 0.42dBi |
| MAX GAIN | 0.42dbi |
| Polarization | Horizontal |
| Azimuth Beam Pattern | Omni-directional |
| Impedance | 50ohm |
| Antenna Length | 36mm |

Antenna Photo & Length(mm)

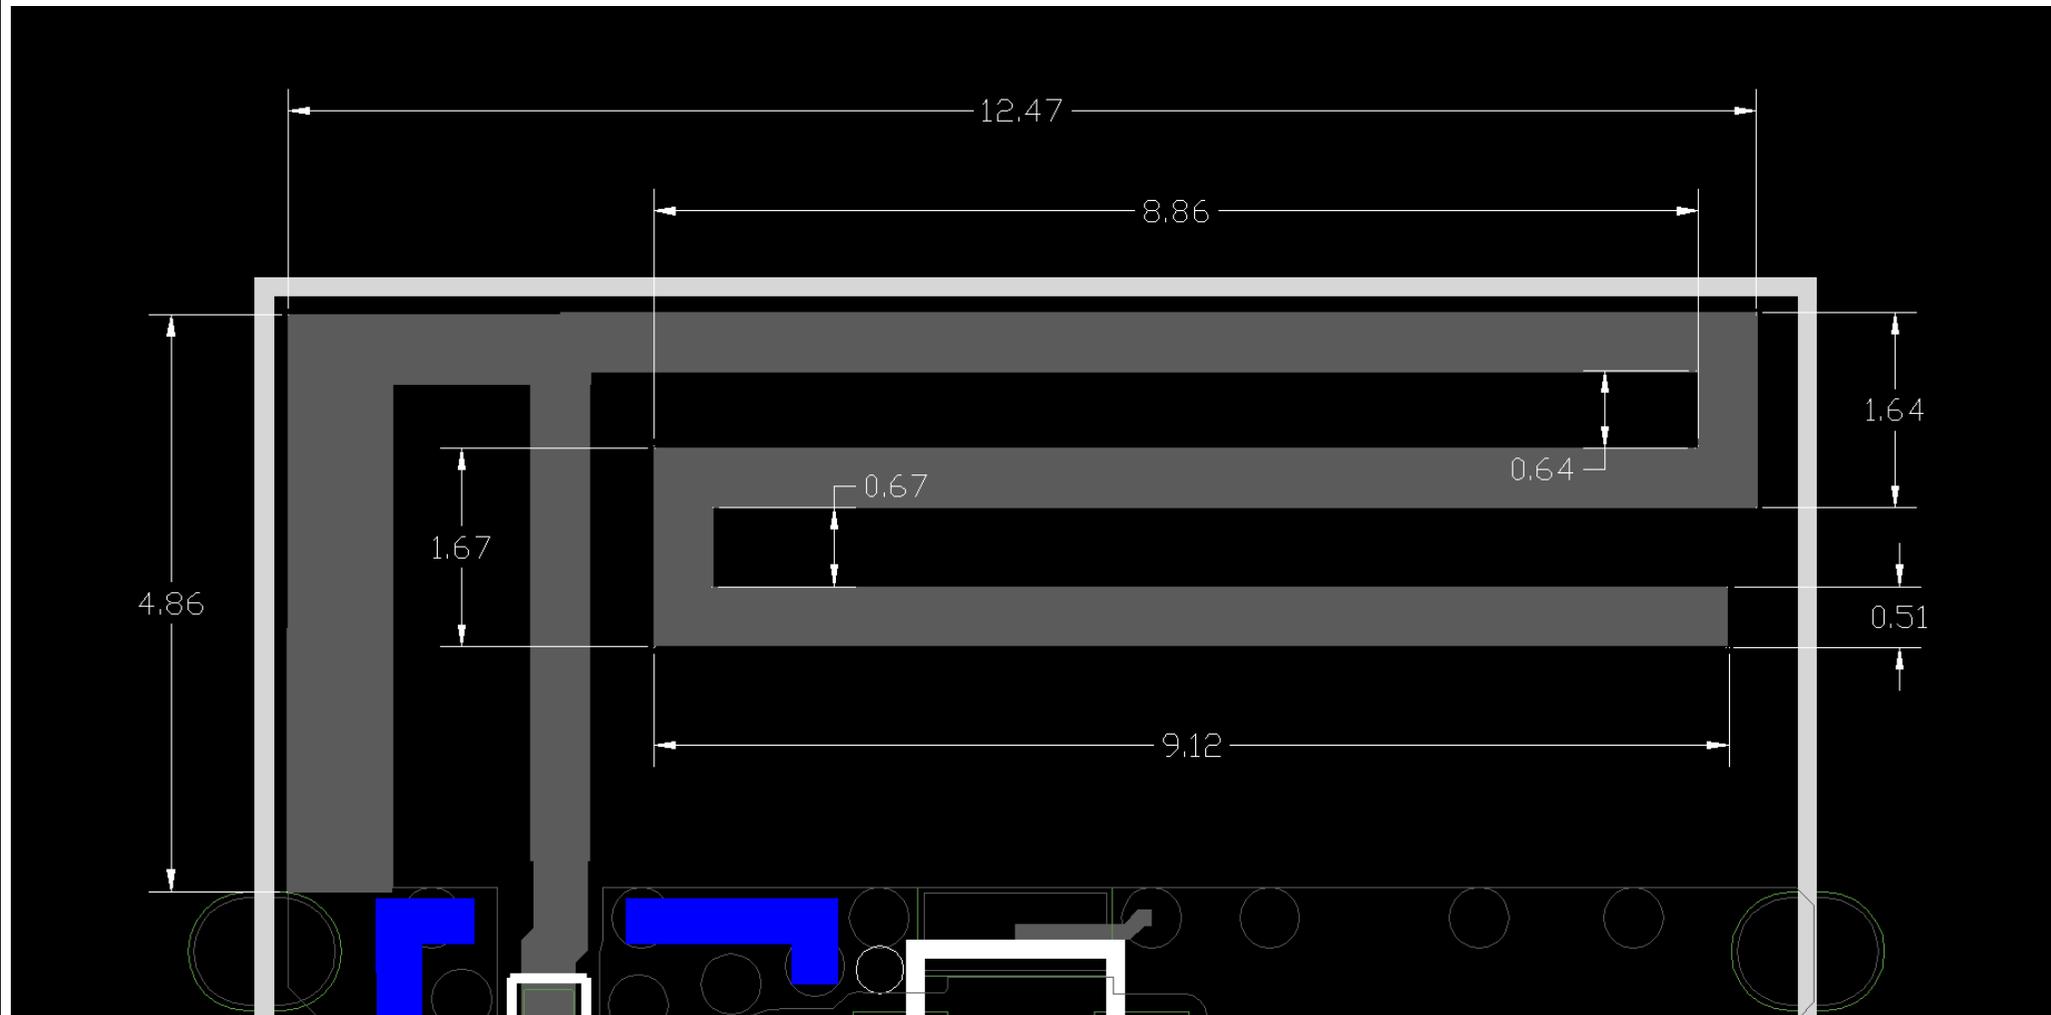


Coordinate System Reference:Antenna

Top view

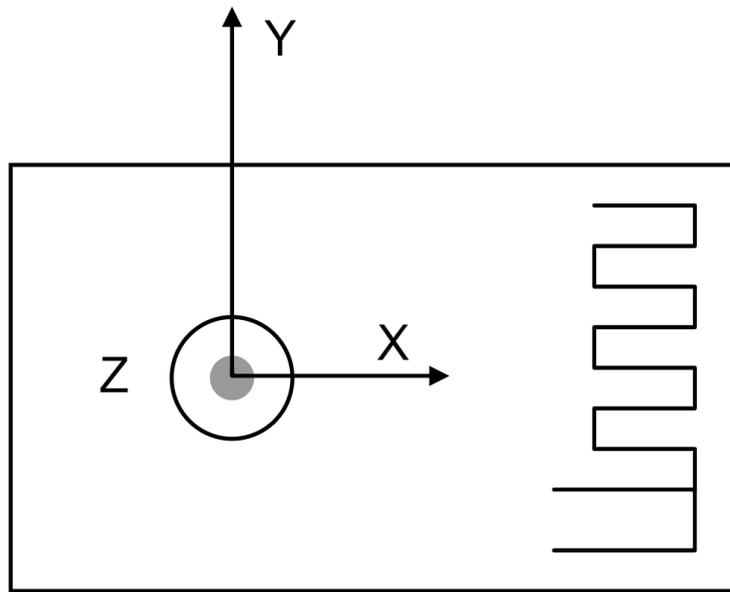


Side view

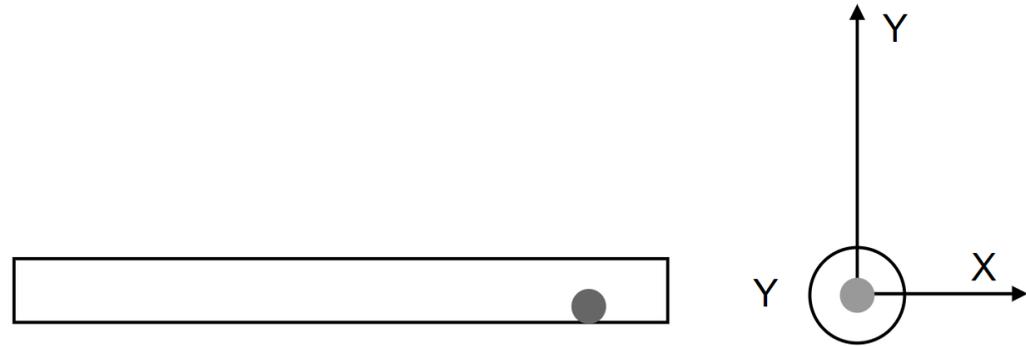

2D Radiation pattern $f = 2410\text{MHz}$


E1 Face

2410.000MHz

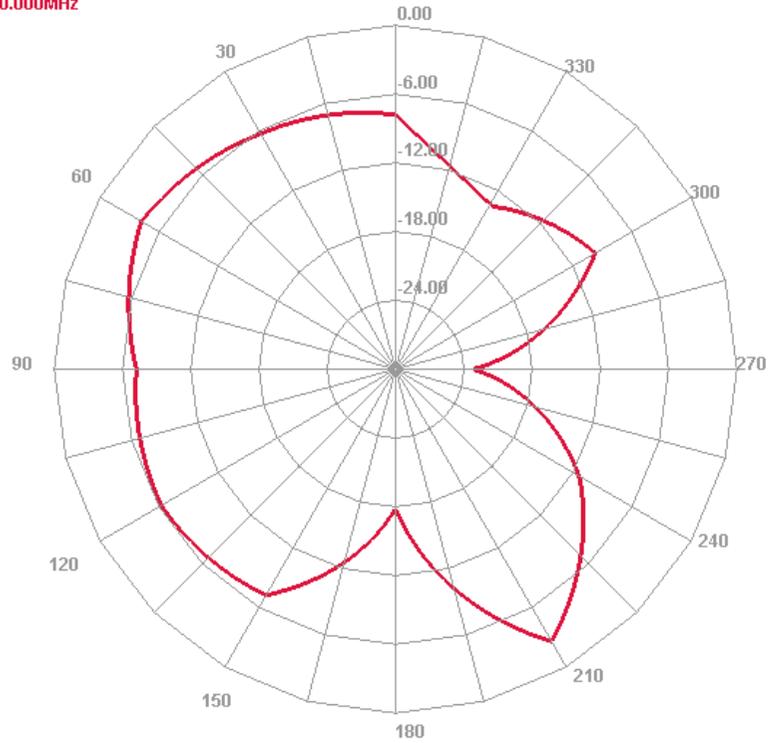

E2 Face


2410.000MHz

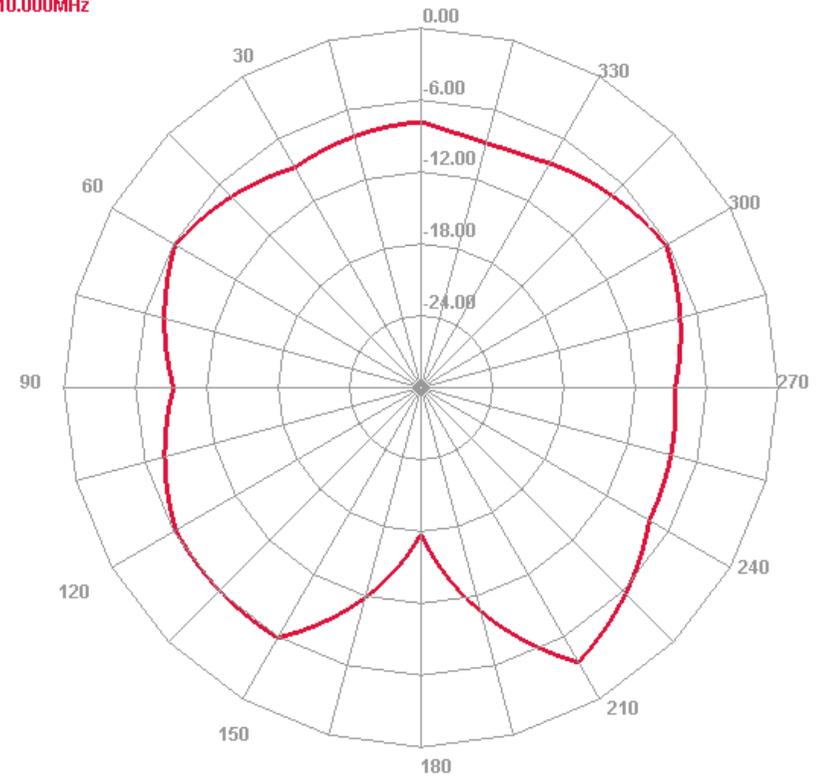

2D Radiation pattern $f = 2440\text{MHz}$


E1 Face

2440.000MHz

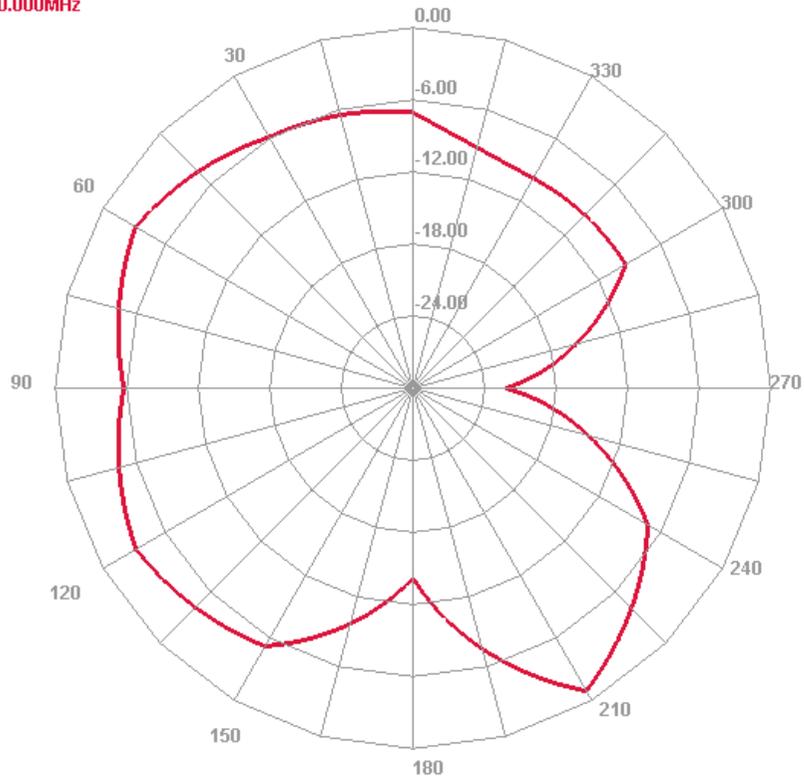

E2 Face


2440.000MHz

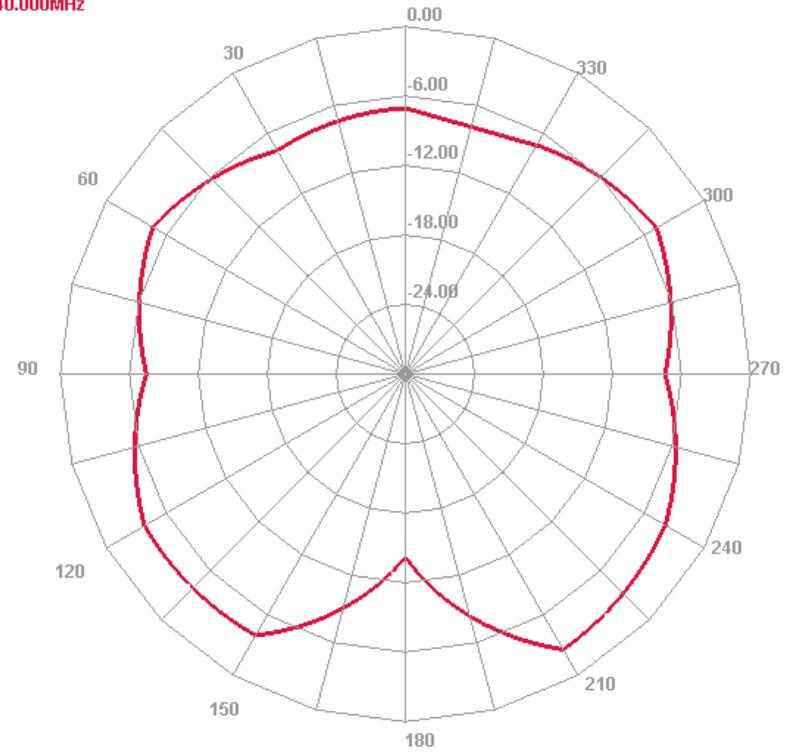

2D Radiation pattern $f = 2480\text{MHz}$


E1 Face

2480.000MHz

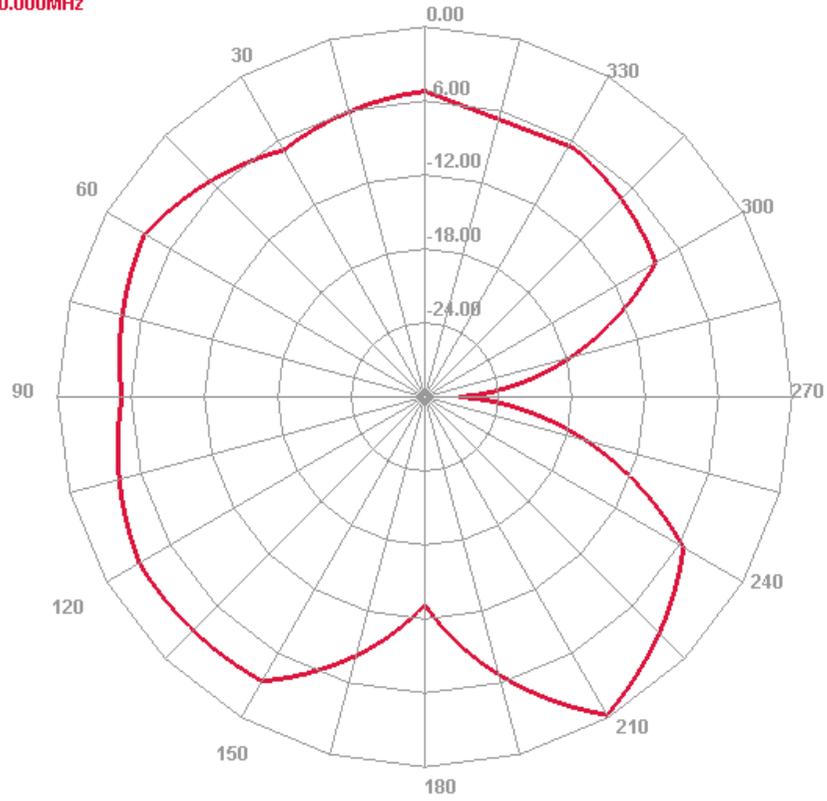


E2 Face

2480.000MHz

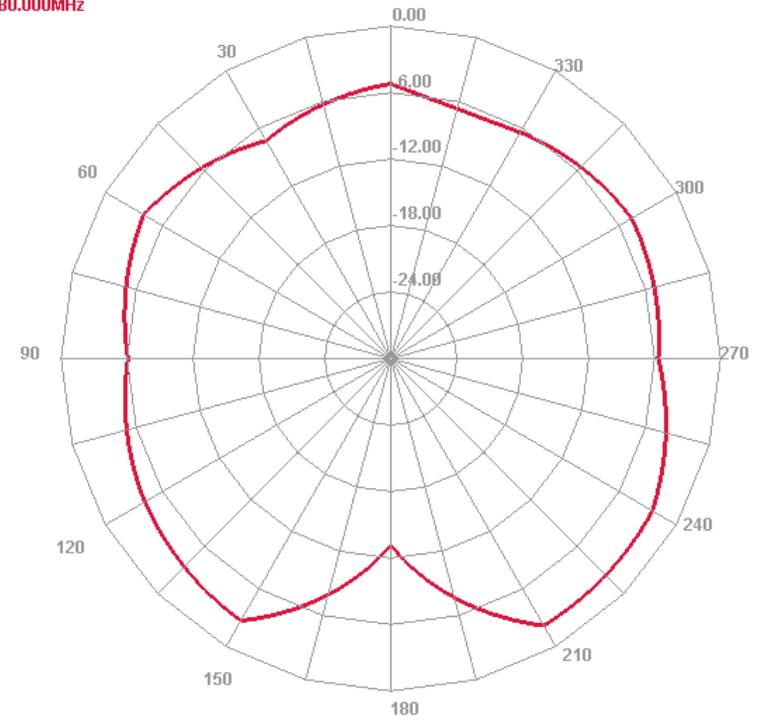


3D Radiation pattern f = 2410MHz

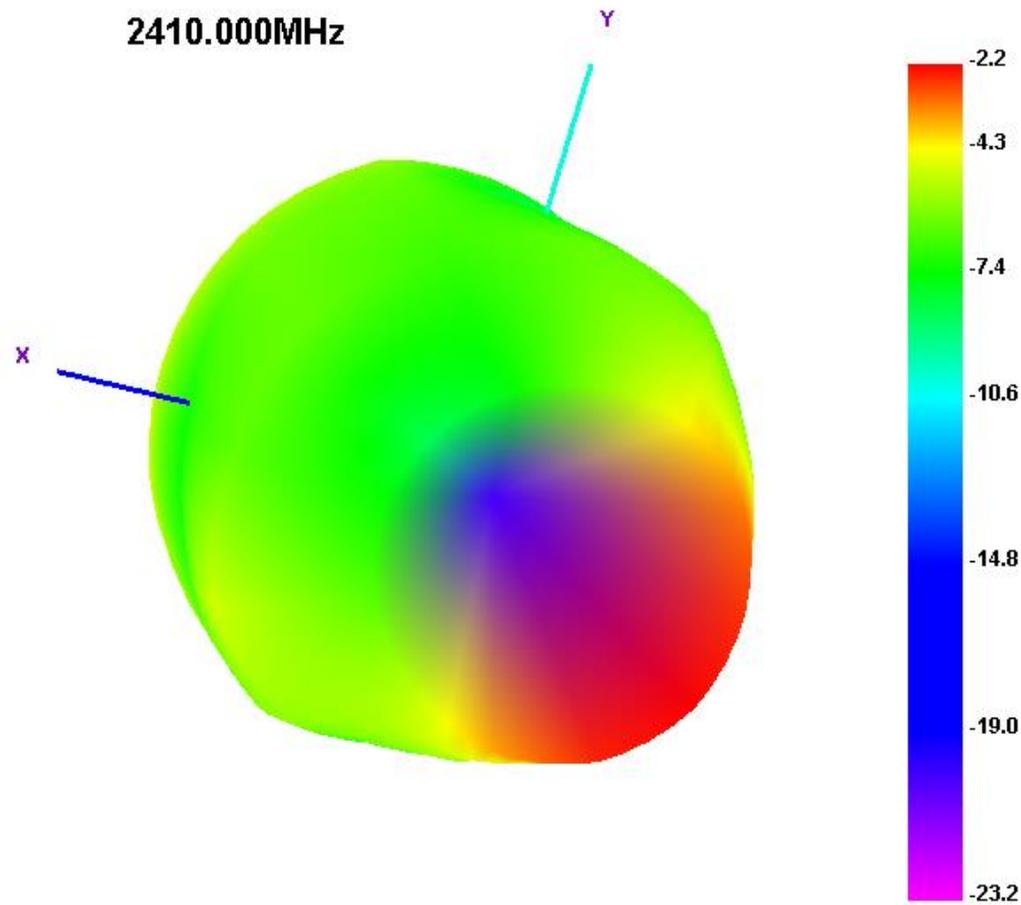


3D Radiation pattern $f = 2440\text{MHz}$

2440.000MHz

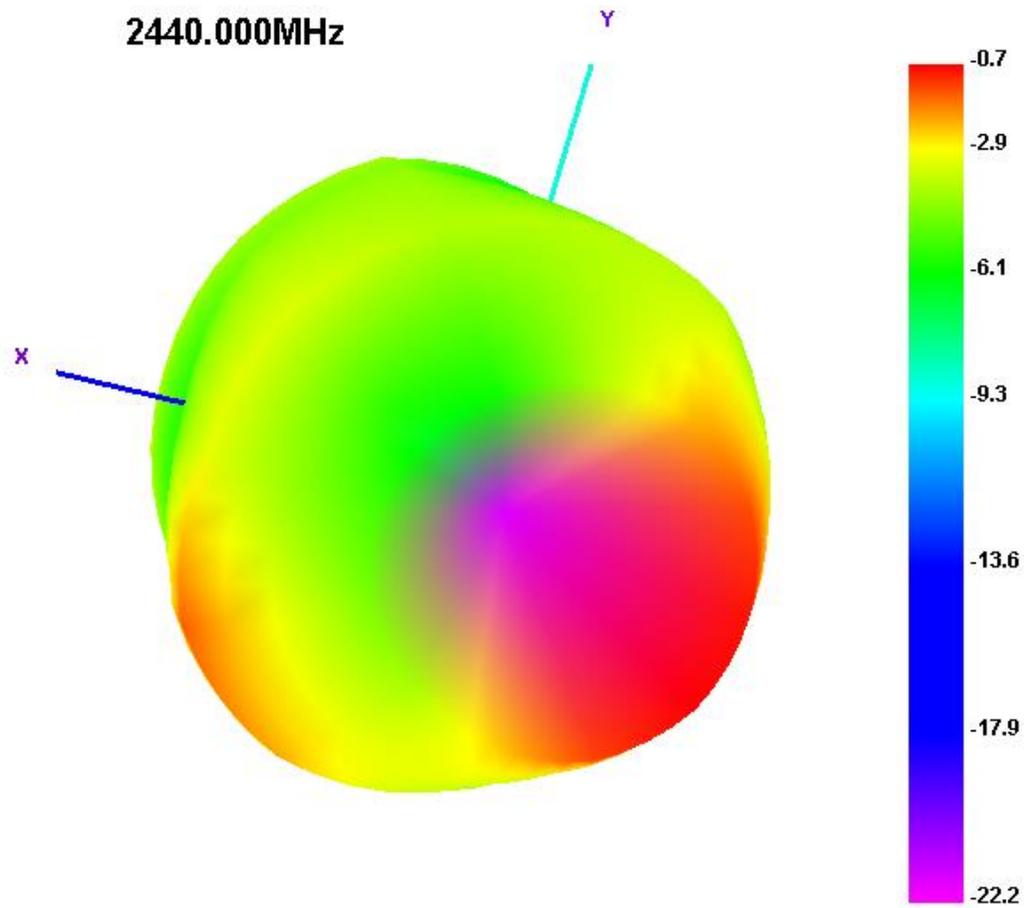

3D Radiation pattern $f = 2500\text{MHz}$

2500.000MHz

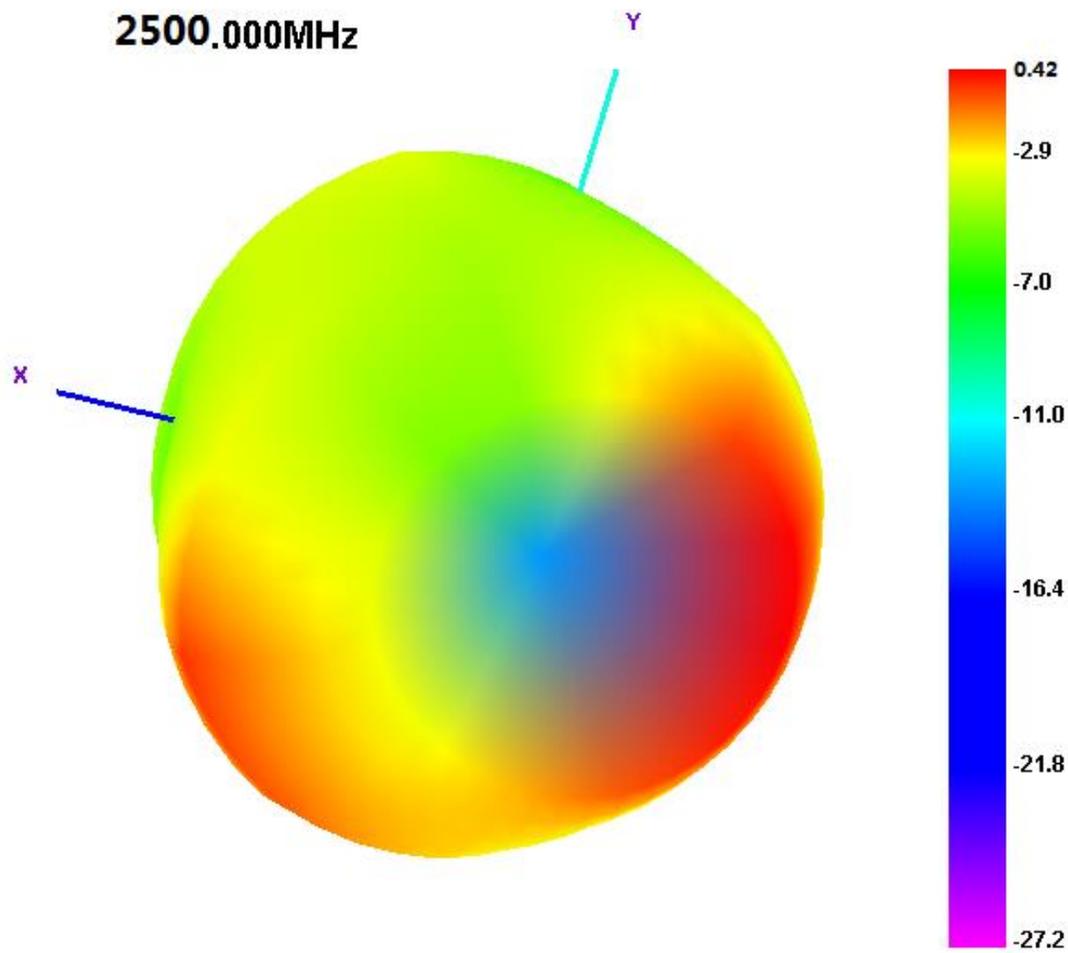

Measurements summary

| Frequency(GHz) | Gain(dBi) | CP Gain(dBi) | CO Gain(dBi) | Efficiency(dB) | Efficiency(%) |
|----------------|-----------|--------------|--------------|----------------|---------------|
| 2400 | -2.12 | -- | -- | -- | 20 |
| 2410 | -2.17 | -- | -- | -- | 19.91 |
| 2420 | -1.7 | -- | -- | -- | 23.15 |
| 2430 | -1.08 | -- | -- | -- | 27.4 |
| 2440 | -0.74 | -- | -- | -- | 30.24 |
| 2450 | -0.89 | -- | -- | -- | 29.98 |
| 2460 | -0.42 | -- | -- | -- | 33.77 |
| 2470 | -0.73 | -- | -- | -- | 31.49 |
| 2480 | -0.24 | -- | -- | -- | 34.69 |
| 2490 | 0.33 | -- | -- | -- | 38.5 |
| 2500 | 0.42 | -- | -- | -- | 40.13 |

Wireless-Tag Technology Co., Ltd

801, Block A, Building 6, Shenzhen International Innovation Valley, Dashi Road, Xili Community, Xili Street, Nanshan District, Shenzhen