



Microtest
微 测 检 测

Test Report

Report No.: MTi210922005-04E1

Date of issue: Dec. 07, 2021

Applicant: WIRELESS-TAG TECHNOLOGY CO., LIMITED.

Product name: WIFI Module

Model(s): WT32-S2-WROVER

FCC ID: 2AFOS-WT32S2WROVER

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>



Instructions

1. The report shall not be partially reproduced without the written consent of the laboratory;
2. The test results of this report are only responsible for the samples submitted ;
3. This report is invalid without the seal and signature of the laboratory;
4. This report is invalid if transferred, altered or tampered with in any form without authorization ;
5. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Table of Contents

S

1	GENERAL INFORMATION.....	6
1.1	DESCRIPTION OF EUT	6
1.2	OPERATION CHANNEL LIST	7
1.3	TEST CHANNEL LIST	7
1.4	ANCILLARY EQUIPMENT LIST	7
1.5	DESCRIPTION OF SUPPORT UNITS	8
2	SUMMARY OF TEST RESULTS	9
3	TEST FACILITIES AND ACCREDITATIONS	10
3.1	TEST LABORATORY	10
3.2	ENVIRONMENTAL CONDITIONS	10
3.3	MEASUREMENT UNCERTAINTY	10
3.4	TEST SOFTWARE	10
4	EQUIPMENT LIST	11
5	TEST RESULT	12
5.1	ANTENNA REQUIREMENT	12
5.1.1	<i>Standard requirement</i>	12
5.1.2	<i>EUT antenna</i>	12
5.2	PEAK OUTPUT POWER	13
5.2.1	<i>Limit</i>	13
5.2.2	<i>Test setup</i>	13
5.2.3	<i>Test procedure</i>	13
5.2.4	<i>Test results</i>	14
5.3	POWER SPECTRAL DENSITY	15
5.3.1	<i>Limit</i>	15
5.3.2	<i>Test setup</i>	15
5.3.3	<i>Test procedure</i>	15
5.3.4	<i>Test results</i>	16
5.4	CONDUCTED EMISSION	20
5.4.1	<i>Limits</i>	20
5.4.2	<i>Test setup</i>	20
5.4.3	<i>Test procedure</i>	21
5.4.4	<i>Test results</i>	21
5.5	RADIATED SPURIOUS	26
5.5.1	<i>Limits</i>	26
5.5.2	<i>Test setup</i>	27
5.5.3	<i>Test procedure</i>	28
5.5.4	<i>Test results</i>	29
5.5.4.1	<i>Radiation emission</i>	29
5.5.4.2	<i>Band edge - radiated</i>	34
5.5.5	<i>Spurious Emission in Restricted Band 3260MHz-18000MHz</i>	38
5.6	BAND EDGE - CONDUCTED	39
5.6.1	<i>Limits</i>	39
5.6.2	<i>Test setup</i>	39
5.6.3	<i>Test procedure</i>	39
5.6.4	<i>Test results</i>	40
5.7	6dB BANDWIDTH	44
5.7.1	<i>Limit</i>	44
5.7.2	<i>Test setup</i>	44
5.7.3	<i>Test procedure</i>	44
5.7.4	<i>Test results</i>	44
5.8	DUTY CYCLE	53



5.8.1	Limit	53
5.8.2	Measuring instruments	53
5.8.3	Test setup	53
5.8.4	Test procedure	53
5.8.5	Test Results.....	54
5.9	SPURIOUS RF CONDUCTED EMISSIONS	55
5.9.1	Limit	55
5.9.2	Measuring instruments	55
5.9.3	Test setup	55
5.9.4	Test procedure	55
5.9.5	Test results.....	55
PHOTOGRAPHS OF THE TEST SETUP		58
PHOTOGRAPHS OF THE EUT.....		60



TEST RESULT CERTIFICATION	
Applicant's name.....	WIRELESS-TAG TECHNOLOGY CO., LIMITED.
Address.....	801, Block A, Building 6, Shenzhen International Innovation Valley, Dashi Road, Xili Community, Xili Street, Nanshan District, Shenzhen
Manufacturer's Name	WIRELESS-TAG TECHNOLOGY CO., LIMITED.
Address.....	801, Block A, Building 6, Shenzhen International Innovation Valley, Dashi Road, Xili Community, Xili Street, Nanshan District, Shenzhen
Product description	
Product name	WIFI Module
Trademark	Wireless-tag
Model Name	WT32-S2-WROVER
Serial Model.....	N/A
Standards.....	FCC Part 15.247
Test procedure	ANSI C63.10-2013 KDB 558074 D01 D15.247 Meas Guidance v05r02
Date of Test	
Date (s) of performance of tests	Nov. 12, 2021 ~ Dec. 07, 2021
Test Result.....	Pass
This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.	

Testing Engineer

:

(Danny Xu)

Technical Manager

:

(Leon Chen)

Authorized Signatory

:

(Tom Xue)

1 General information

1.1 Description of EUT

Product name:	WIFI Module
Model name:	WT32-S2-WROVER
Serial model:	N/A
Model difference:	N/A
Operation frequency:	802.11b/g/n20:2412~2462 MHz 802.11n40:2422~2452 MHz
Modulation type:	IEEE 802.11b : DSSS (DBPSK, DQPSK, CCK) IEEE 802.11g/n (HT20/HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Bit Rate of transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz) use 800 ns GI: 65.0/58.5/52.0/39.0/26.0/19.5/13.0/6.5 Mbps (MCS0~MCS7) 802.11n(40MHz) use 800 ns GI: 13.5/27/40.5/54/81/108/121.5/135Mbps
Antenna type:	PCB Antenna
Antenna gain:	2dBi
Max. output power:	18.70dBm
Power supply:	DC 3.3V
Adapter information:	N/A
Hardware version:	v1.0
Software version:	v1.0
Serial number:	MTi210922005-04-S0001

1.2 Operation channel list

Channel List for 802.11b/g/n (20)

Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	\	\

Channel List for 802.11n (40)

Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	07	2442
04	2427	08	2447
05	2432	09	2452
06	2437	\	\

1.3 Test channel list

Channel List for 802.11b/g/n (20)

Channel	Channel	Frequency (MHz)
Low	01	2412
Middle	06	2437
High	11	2462

Channel List for 802.11n (40)

Channel	Channel	Frequency (MHz)
Low	03	2422
Middle	06	2437
High	09	2452

1.4 Ancillary equipment list

Equipment	Model	S/N	Manufacturer	Certificate type
Laptop	E485	/	Lenovo	/



1.5 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/
/	/	/	/	/	/

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2 Summary of Test Results

Test procedures according to the technical standards:

No.	Standard Section	Test Item	Result	Remark
1	15.203	Antenna Requirement	Pass	
2	15.247 (b)	Peak Output Power	Pass	
3	15.247 (e)	Power Spectral Density	Pass	
4	15.207	Conducted Emission	Pass	
5	15.247 (d) & 15.209	Radiated Spurious Emission	Pass	
6	15.205	Band Edge Emission	Pass	
7	15.247 (a)(2)	6dB Bandwidth	Pass	
8	558074 D01 15.247 Meas Guidance v05r02 Chapter 6	Duty Cycle	Pass	
9	15.247(d)	Spurious RF Conducted Emissions	Pass	

3 Test Facilities and Accreditations

3.1 Test laboratory

Test Laboratory	Shenzhen Microtest Co., Ltd
Location	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao' an District, Shenzhen, Guangdong, China.
FCC Registration No.:	448573

3.2 Environmental conditions

Temperature:	15°C~35°C
Humidity	20%~75%
Atmospheric pressure	98kPa~101kPa

3.3 Measurement uncertainty

The reported uncertainty of measurement $y \pm U$ where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ providing a level of confidence of approximately 95 %

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

3.4 Test software

Software Name	Manufacturer	Model	Version
Bluetooth and WiFi Test System	Shenzhen JS tonskend co., ltd	JS1120-3	2.5.77.0418

4 Equipment list

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E043	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2021/06/02	2022/06/01
MTI-E044	TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-1338	2021/05/30	2023/05/29
MTI-E047	Amplifier	Hewlett-Packard	8447F	3113A06150	2021/06/02	2022/06/01
MTI-E089	ESG Vector Signal Generator	Agilent	N5182A	MY49060455	2021/06/02	2022/06/01
MTI-E058	ESG Series Analog Signal Generator	Agilent	E4421B	GB40051240	2021/06/02	2022/06/01
MTI-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2021/06/02	2022/06/01
MTI-E066	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2021/06/02	2022/06/01
MTI-E078	Synthesized Sweeper	Agilent	83752A	3610A01957	2021/06/02	2022/06/01
MTI-E079	DC Power Supply	Agilent	E3632A	MY40027695	2021/06/02	2022/06/01
MTI-E045	Double Ridged Broadband Horn Antenna	schwarzbeck	BBHA 9120D	9120D-2278	2021/05/30	2023/05/29
MTI-E021	EMI Test Receiver	Rohde&schwarz	ESCS30	100210	2021/06/02	2022/06/01
MTI-E022	Pulse Limiter	Schwarzbeck	VSTD 9561-F	00679	2021/06/02	2022/06/01
MTI-E023	Artificial mains network	Schwarzbeck	NSLK 8127	NSLK 8127 #841	2021/06/02	2022/06/01
MTI-E046	Active Loop Antenna	Schwarzbeck	FMZB 1519B	00044	2021/05/30	2023/05/29
MTI-E048	Amplifier	Agilent	8449B	3008A02400	2021/06/02	2022/06/01
MTI-E072	Thermometer Clock Humidity Monitor	-	HTC-1	/	2021/06/02	2022/06/01
Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).						



5 Test Result

5.1 Antenna requirement

5.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 EUT antenna


The EUT antenna is PCB antenna (2dBi). It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.

5.2 Peak output power

5.2.1 Limit

Section	Test Item	Limit	Frequency Range (MHz)
15.247(b)(3)	Peak output power	1 watt or 30dBm	2400-2483.5

5.2.2 Test setup



5.2.3 Test procedure

The EUT was directly connected to the Power meter.

5.2.4 Test results

802.11b

Test Channel	Frequency (MHz)	Maximum Peak Conducted Output Power(dBm)	Limit (dBm)
CH01	2412	17.84	30
CH06	2437	16.87	30
CH11	2462	17.56	30

802.11g

Test Channel	Frequency (MHz)	Maximum Peak Conducted Output Power(dBm)	Limit (dBm)
CH01	2412	18.52	30
CH06	2437	17.65	30
CH11	2462	18.03	30

802.11n20

Test Channel	Frequency (MHz)	Maximum Peak Conducted Output Power(dBm)	Limit (dBm)
CH01	2412	18.42	30
CH06	2437	17.55	30
CH11	2462	18.09	30

802.11n40

Test Channel	Frequency (MHz)	Maximum Peak Conducted Output Power(dBm)	Limit (dBm)
CH03	2422	18.70	30
CH06	2437	17.85	30
CH09	2452	17.81	30



5.3 Power spectral density

5.3.1 Limit

Section	Test Item	Limit	Frequency Range (MHz)
15.247(e)	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5

5.3.2 Test setup




5.3.3 Test procedure

- The EUT tested system was configured as the statements of 2.1 unless otherwise a special operating condition is specified in the follows during the testing.
- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS channel bandwidth.
- Set the RBW ≥ 3 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


5.3.4 Test results

802.11b			
Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-6.105	8	Pass
2437 MHz	-7.147	8	Pass
2462 MHz	-5.704	8	Pass

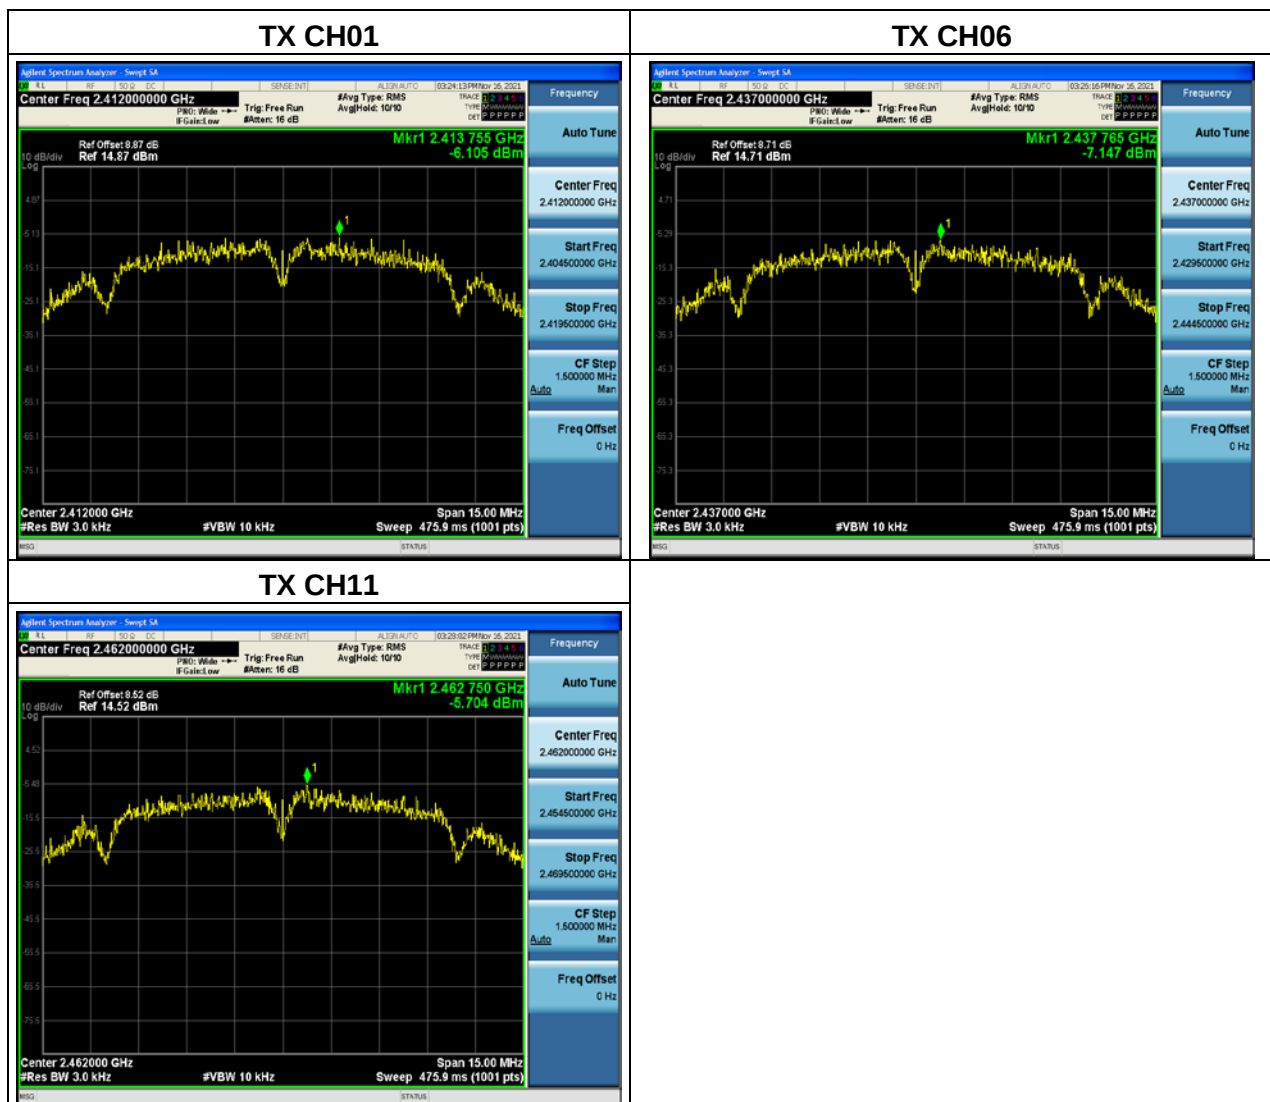




802.11g			
Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-7.753	8	Pass
2437 MHz	-8.797	8	Pass
2462 MHz	-8.655	8	Pass

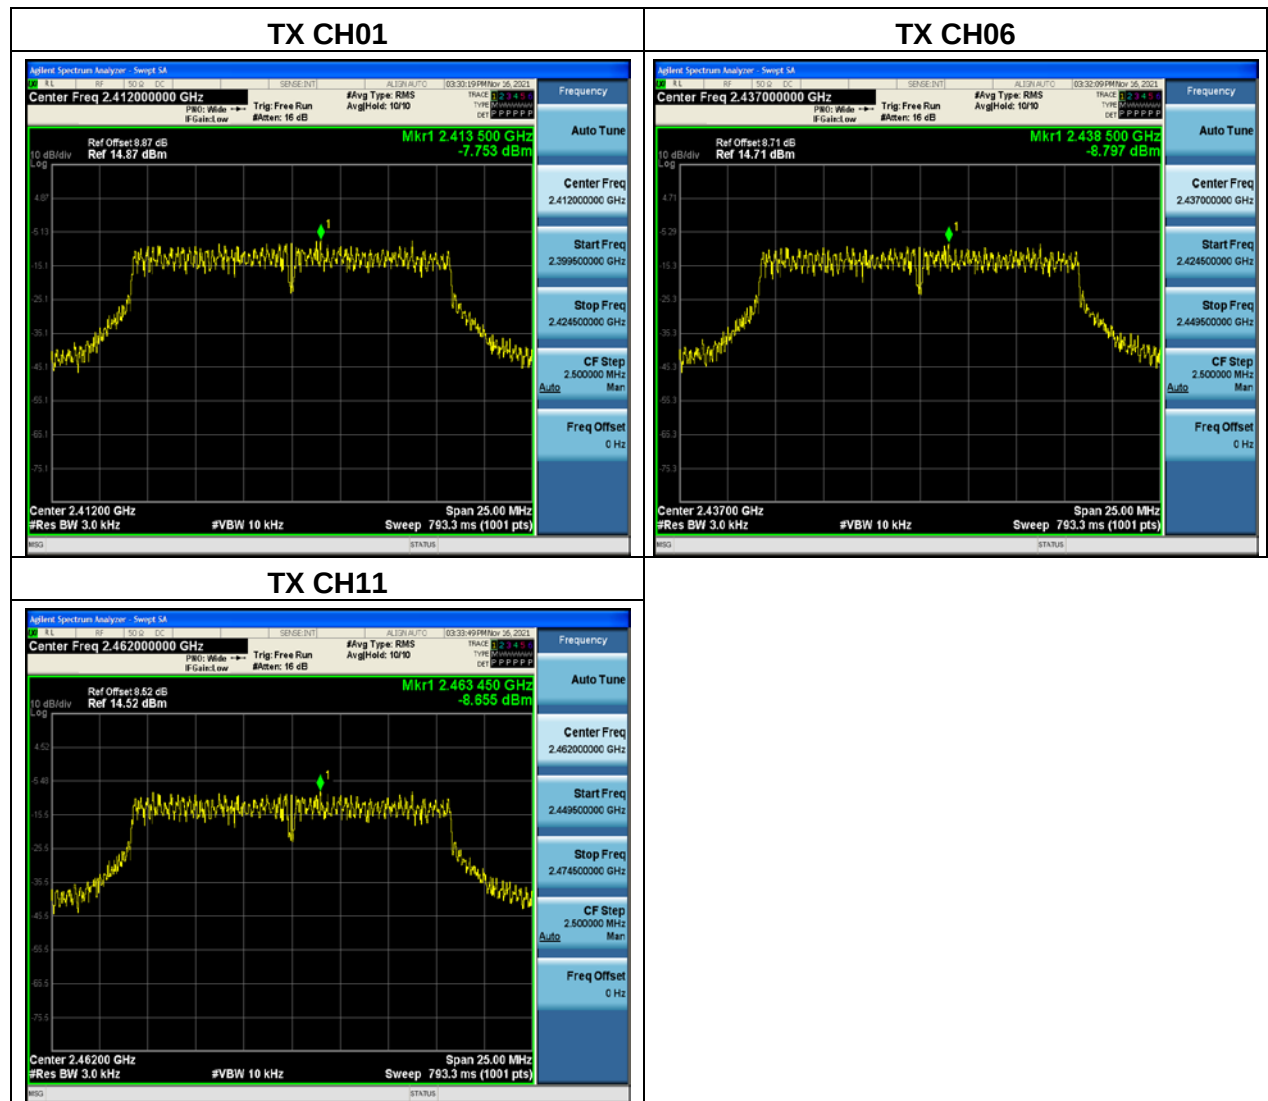




802.11n20			
Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-7.680	8	Pass
2437 MHz	-8.969	8	Pass
2462 MHz	-7.944	8	Pass

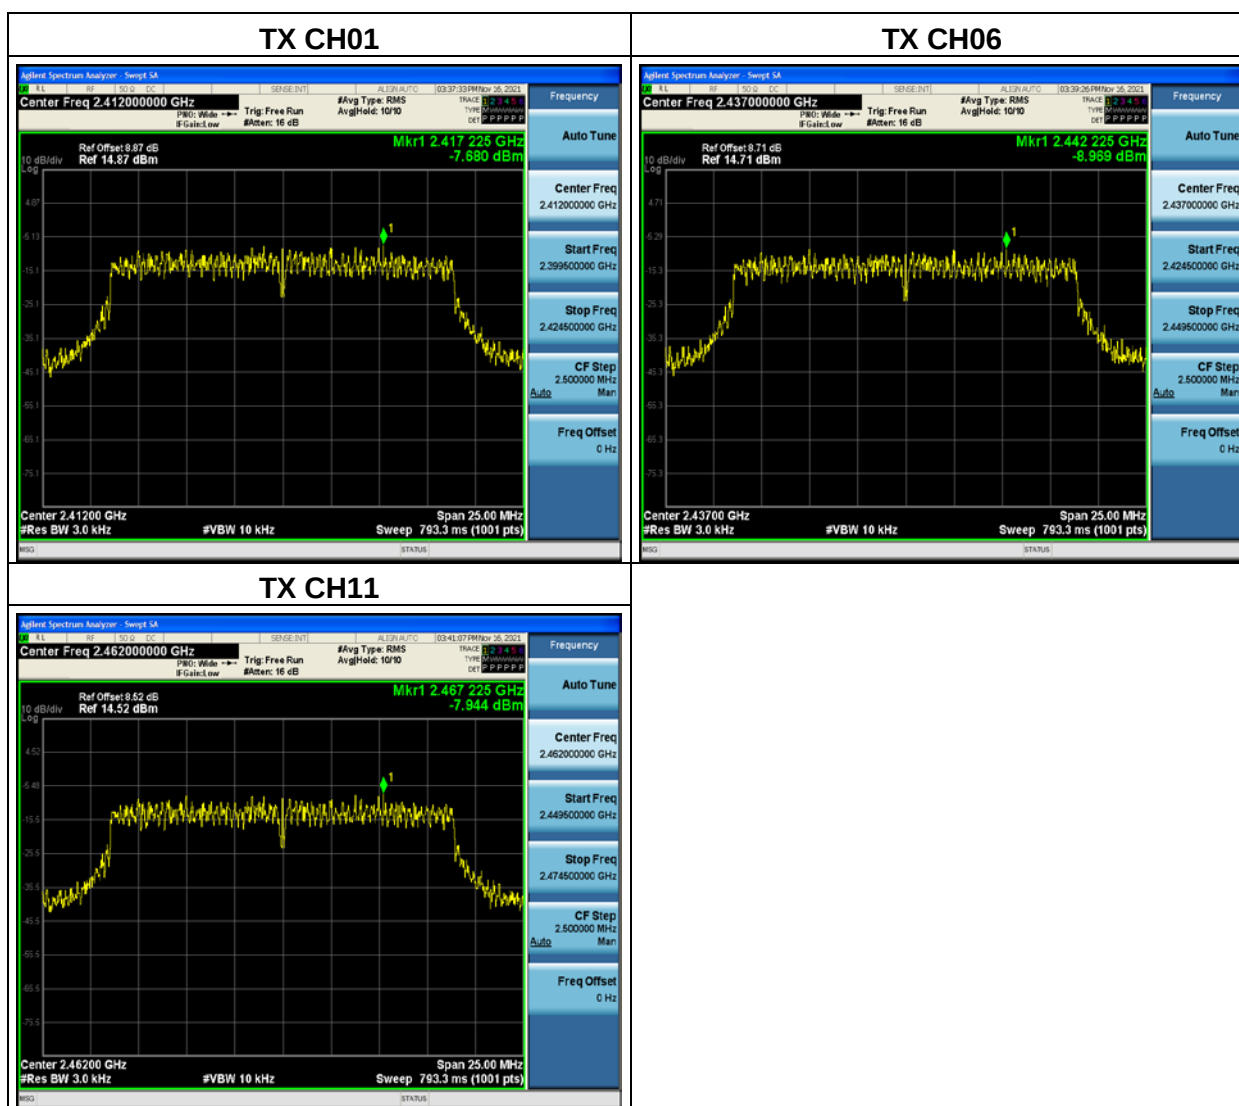



802.11n40			
Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2422 MHz	-8.458	8	Pass
2437 MHz	-8.977	8	Pass
2452 MHz	-9.234	8	Pass

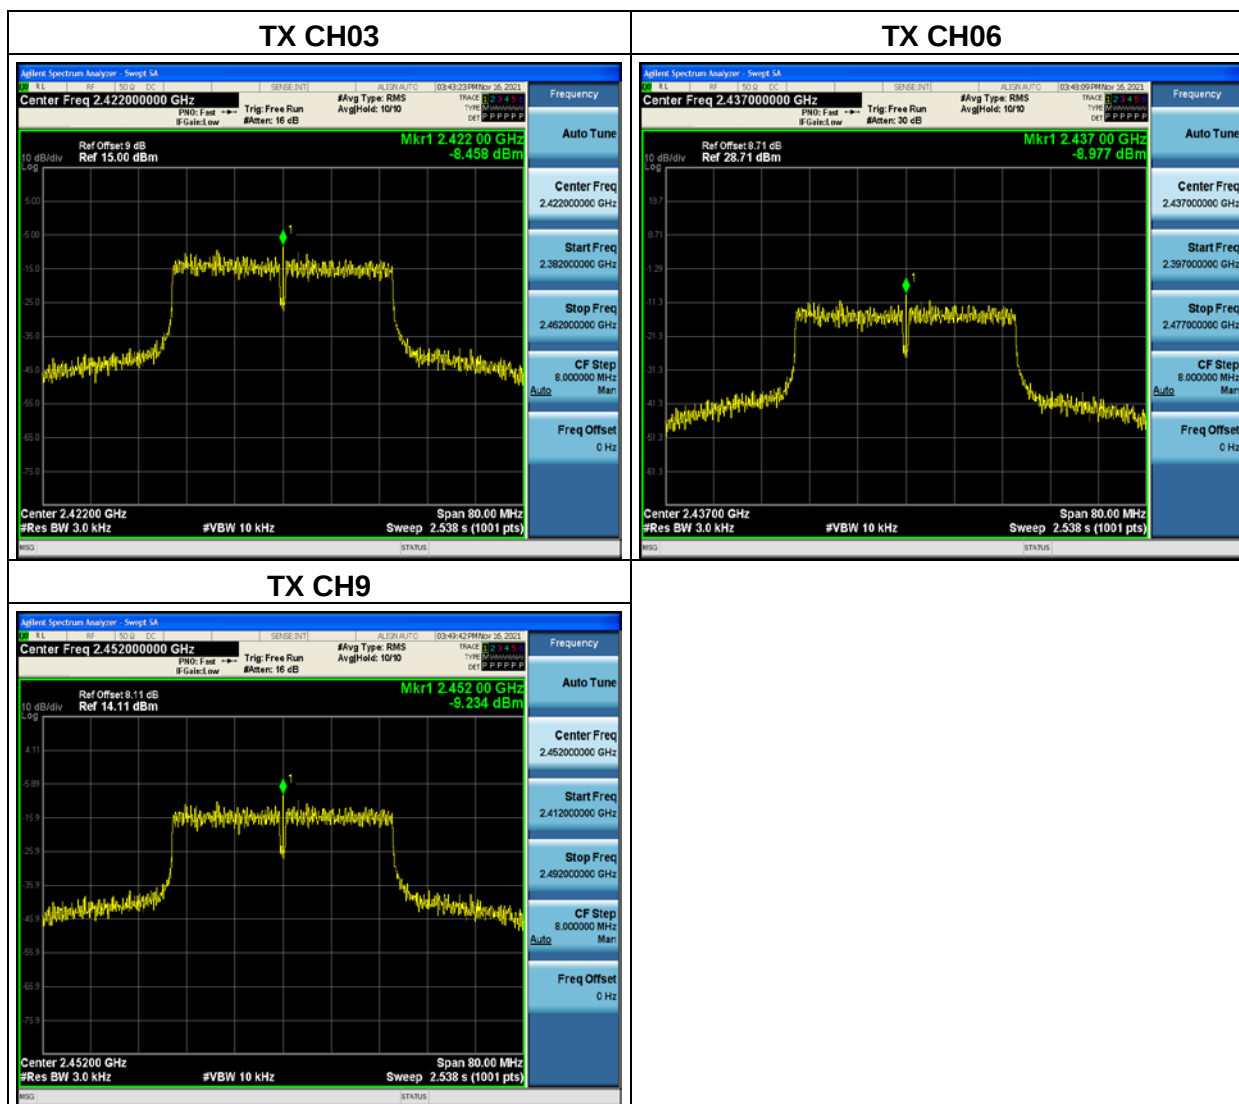



5.4 Conducted emission


5.4.1 Limits

According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01.

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note: *Decreases with the logarithm of the frequency..

5.4.2 Test setup

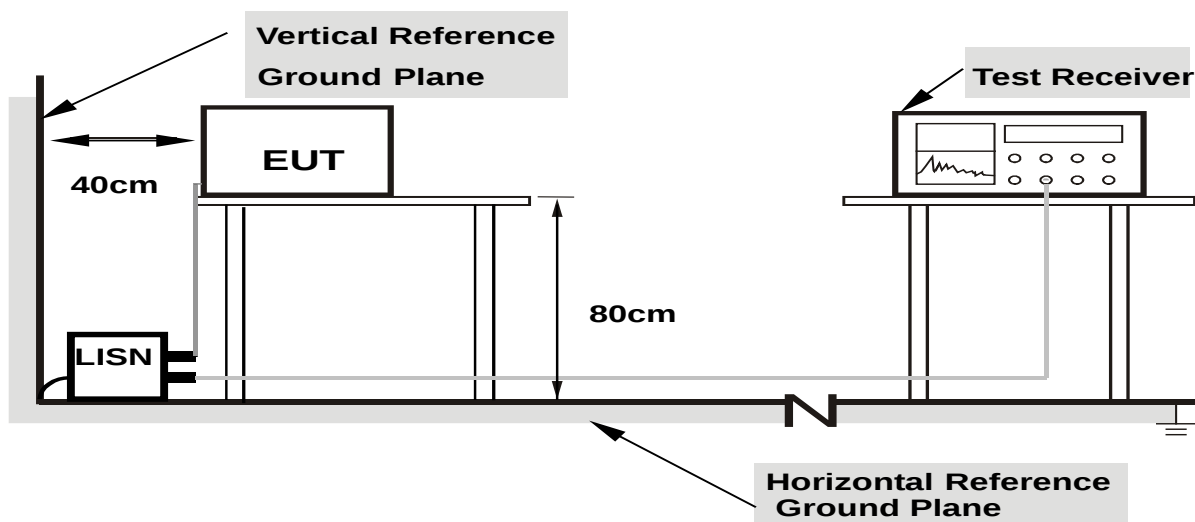

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

5.4.3 Test procedure

a. EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b. The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- c. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- d. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- e. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- f. LISN at least 80 cm from nearest part of EUT chassis.

For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.4.4 Test results


Note:

1. All the modulation modes have been tested, the report only shows the worst mode. The worst mode is 802.11n40 CH03.
2. Emission Level = Reading Level + Factor, Margin = Emission Level - Limit, Factor = LISN modulus + Cable Loss



Test data


EUT:	WIFI Module	Model Name:	WT32-S2-WROVER
Pressure:	1010hPa	Phase::	L
Test Voltage:	DC 3.3V	Test Mode:	Charging+TX

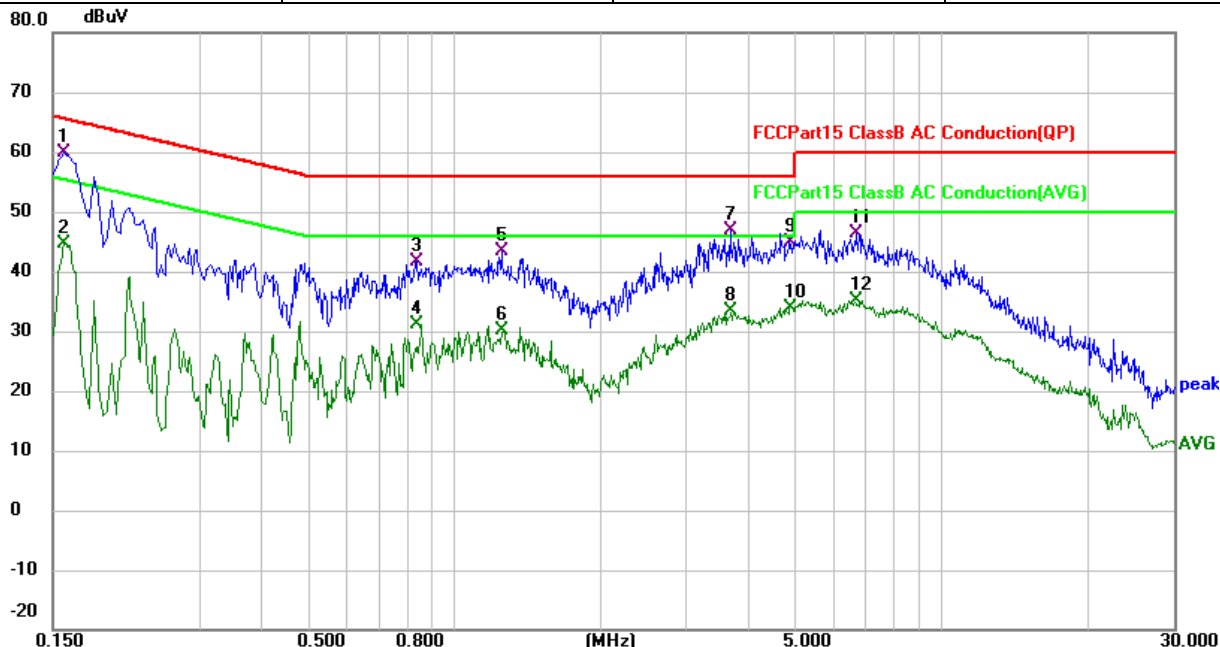

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1580	48.95	10.94	59.89	65.57	-5.68	QP
2		0.1580	33.69	10.94	44.63	55.57	-10.94	AVG
3		0.8340	30.54	11.13	41.67	56.00	-14.33	QP
4		0.8340	20.01	11.13	31.14	46.00	-14.86	AVG
5		1.2540	29.53	13.76	43.29	56.00	-12.71	QP
6		1.2540	16.31	13.76	30.07	46.00	-15.93	AVG
7		3.6900	35.51	11.39	46.90	56.00	-9.10	QP
8		3.6900	21.93	11.39	33.32	46.00	-12.68	AVG
9		4.8940	33.61	11.39	45.00	56.00	-11.00	QP
10		4.8940	22.39	11.39	33.78	46.00	-12.22	AVG
11		6.7300	35.00	11.42	46.42	60.00	-13.58	QP
12		6.7300	23.65	11.42	35.07	50.00	-14.93	AVG




EUT:	WIFI Module	Model Name:	WT32-S2-WROVER
Pressure:	1010hPa	Phase::	N
Test Voltage:	DC 3.3V	Test Mode:	Charging+TX

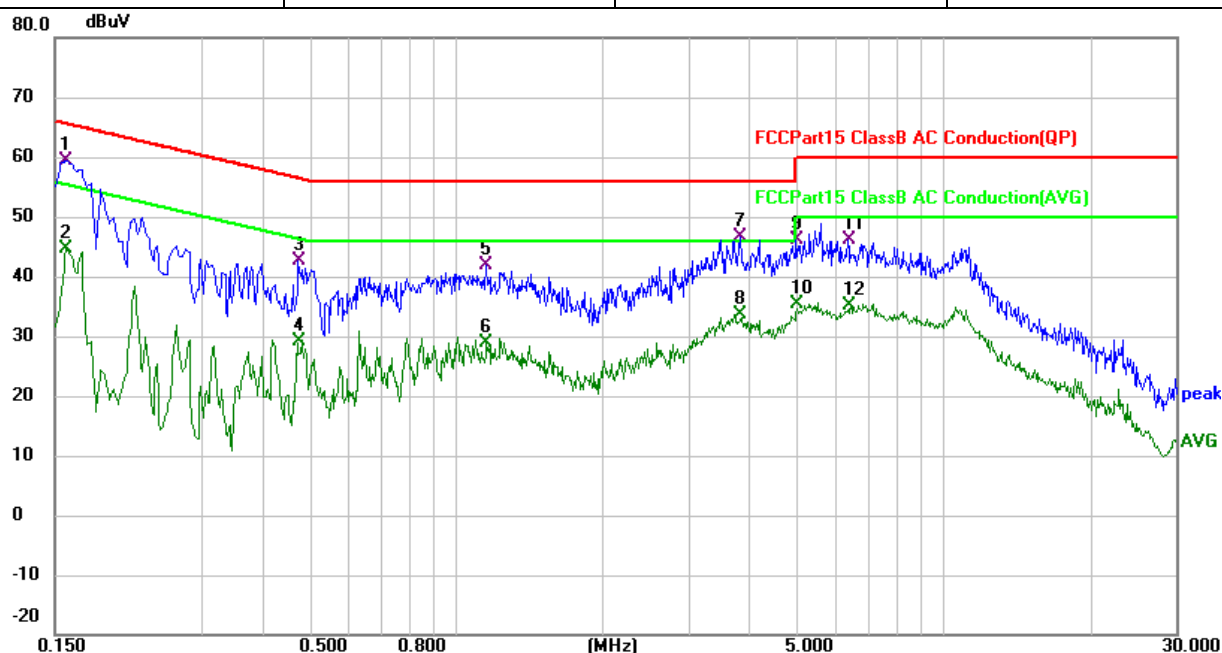

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1580	48.48	10.94	59.42	65.57	-6.15	QP
2		0.1580	33.78	10.94	44.72	55.57	-10.85	AVG
3		0.4740	31.67	10.90	42.57	56.44	-13.87	QP
4		0.4740	18.35	10.90	29.25	46.44	-17.19	AVG
5		1.1500	28.27	13.53	41.80	56.00	-14.20	QP
6		1.1500	15.31	13.53	28.84	46.00	-17.16	AVG
7		3.8380	35.34	11.38	46.72	56.00	-9.28	QP
8		3.8380	22.17	11.38	33.55	46.00	-12.45	AVG
9		4.9940	34.63	11.39	46.02	56.00	-9.98	QP
10		4.9940	23.92	11.39	35.31	46.00	-10.69	AVG
11		6.3820	34.81	11.40	46.21	60.00	-13.79	QP
12		6.3820	23.78	11.40	35.18	50.00	-14.82	AVG




EUT:	WIFI Module	Model Name:	WT32-S2-WROVER
Pressure:	1010hPa	Phase:	L
Test Voltage:	DC 3.3V	Test Mode:	Charging+TX

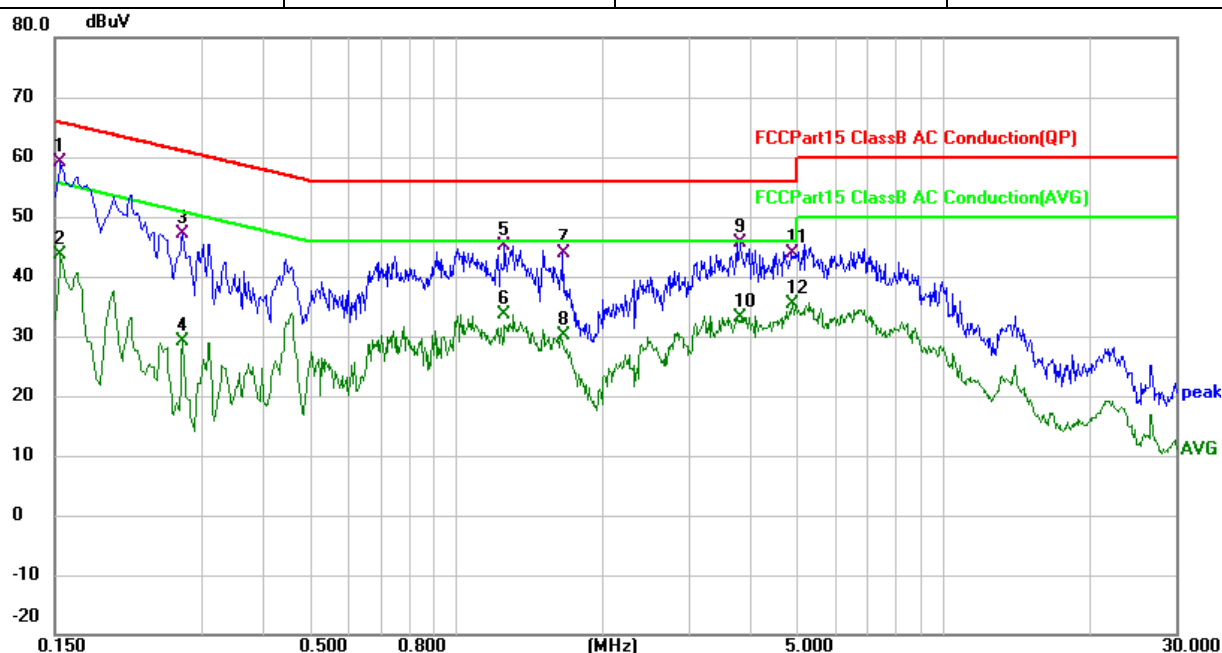

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1539	48.22	10.99	59.21	65.79	-6.58	QP
2		0.1539	32.69	10.99	43.68	55.79	-12.11	AVG
3		0.2740	36.15	11.00	47.15	61.00	-13.85	QP
4		0.2740	18.25	11.00	29.25	51.00	-21.75	AVG
5		1.2620	31.25	13.83	45.08	56.00	-10.92	QP
6		1.2620	19.69	13.83	33.52	46.00	-12.48	AVG
7		1.6540	29.10	14.66	43.76	56.00	-12.24	QP
8		1.6540	15.37	14.66	30.03	46.00	-15.97	AVG
9		3.8300	34.21	11.42	45.63	56.00	-10.37	QP
10		3.8300	21.80	11.42	33.22	46.00	-12.78	AVG
11		4.8940	32.35	11.47	43.82	56.00	-12.18	QP
12		4.8940	24.00	11.47	35.47	46.00	-10.53	AVG



EUT:	WIFI Module	Model Name:	WT32-S2-WROVER
Pressure:	1010hPa	Phase:	N
Test Voltage:	DC 3.3V	Test Mode:	Charging+TX

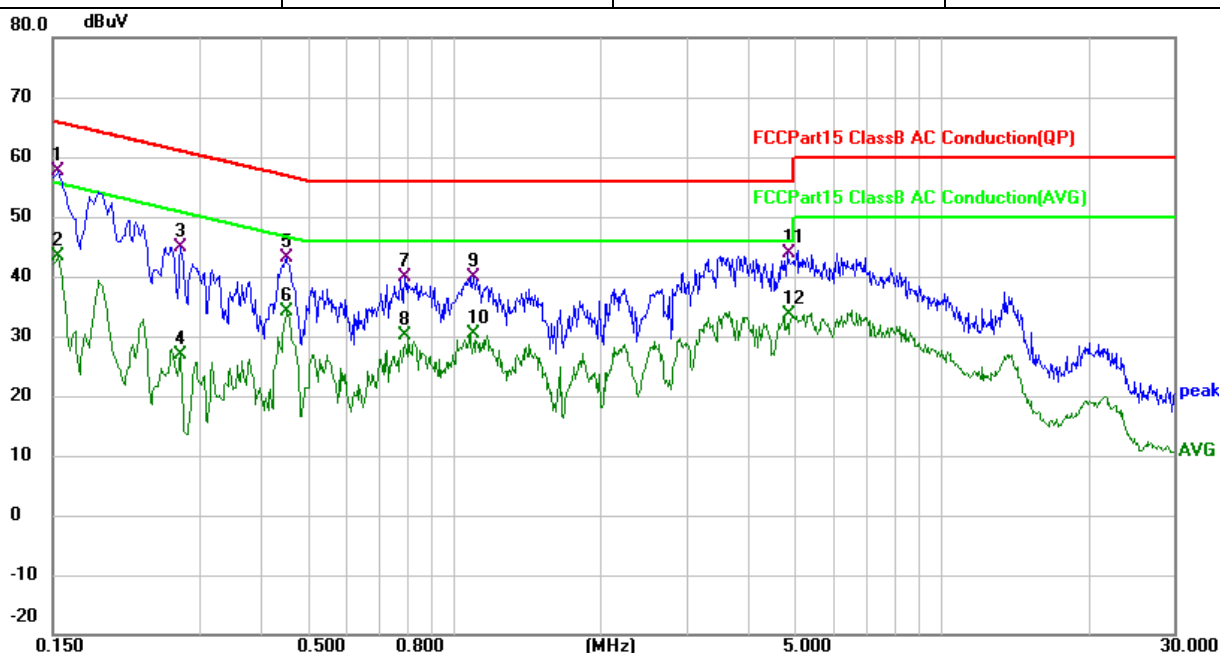

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1539	46.61	10.94	57.55	65.79	-8.24	QP
2		0.1539	32.51	10.94	43.45	55.79	-12.34	AVG
3		0.2740	33.99	10.93	44.92	61.00	-16.08	QP
4		0.2740	16.01	10.93	26.94	51.00	-24.06	AVG
5		0.4500	32.15	10.90	43.05	56.88	-13.83	QP
6		0.4500	23.20	10.90	34.10	46.88	-12.78	AVG
7		0.7940	28.78	11.12	39.90	56.00	-16.10	QP
8		0.7940	19.05	11.12	30.17	46.00	-15.83	AVG
9		1.0980	26.38	13.43	39.81	56.00	-16.19	QP
10		1.0980	16.83	13.43	30.26	46.00	-15.74	AVG
11		4.8260	32.37	11.40	43.77	56.00	-12.23	QP
12		4.8260	22.15	11.40	33.55	46.00	-12.45	AVG

5.5 Radiated spurious

5.5.1 Limits

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP




5.5.2 Test setup


Radiated emission test-up frequency below 30MHz

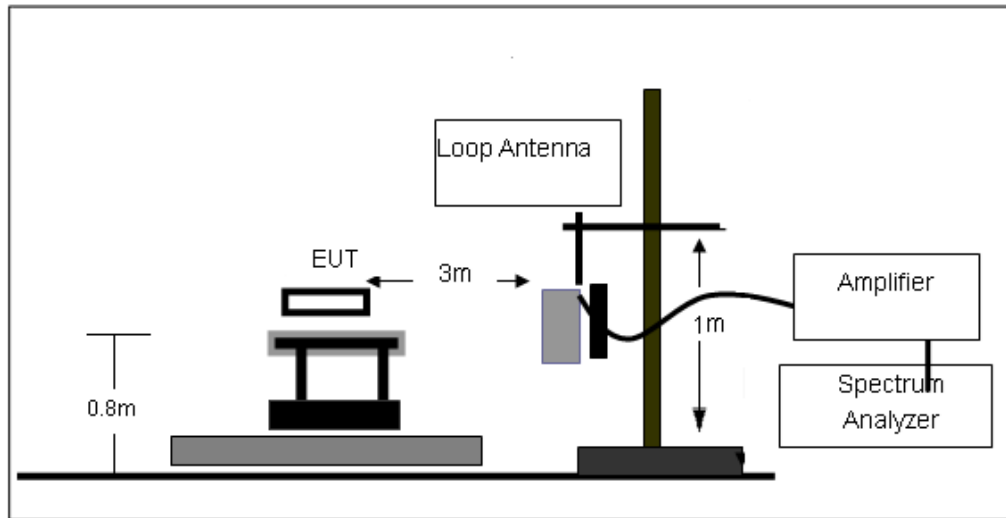

Radiated emission test-up frequency 30MHz~1GHz

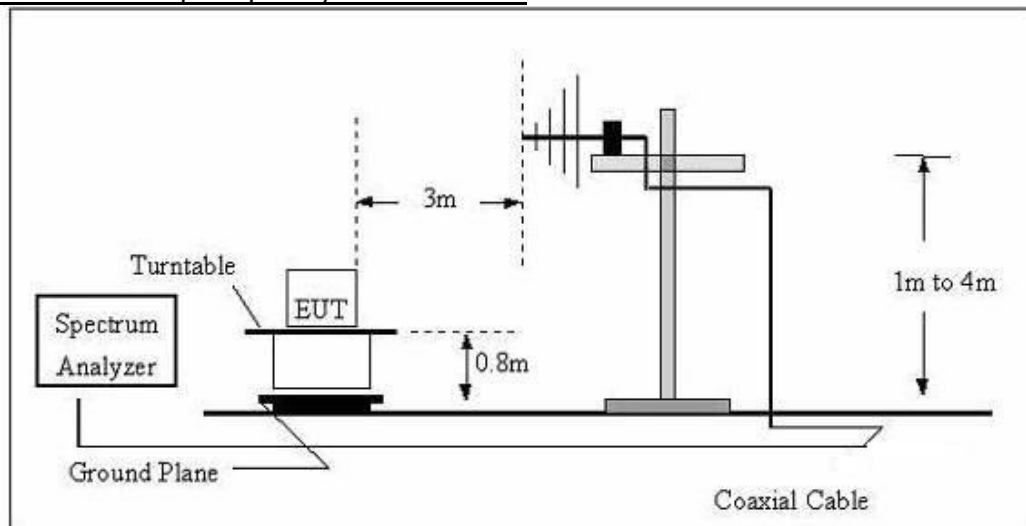

Radiated emission test-up frequency above 1GHz

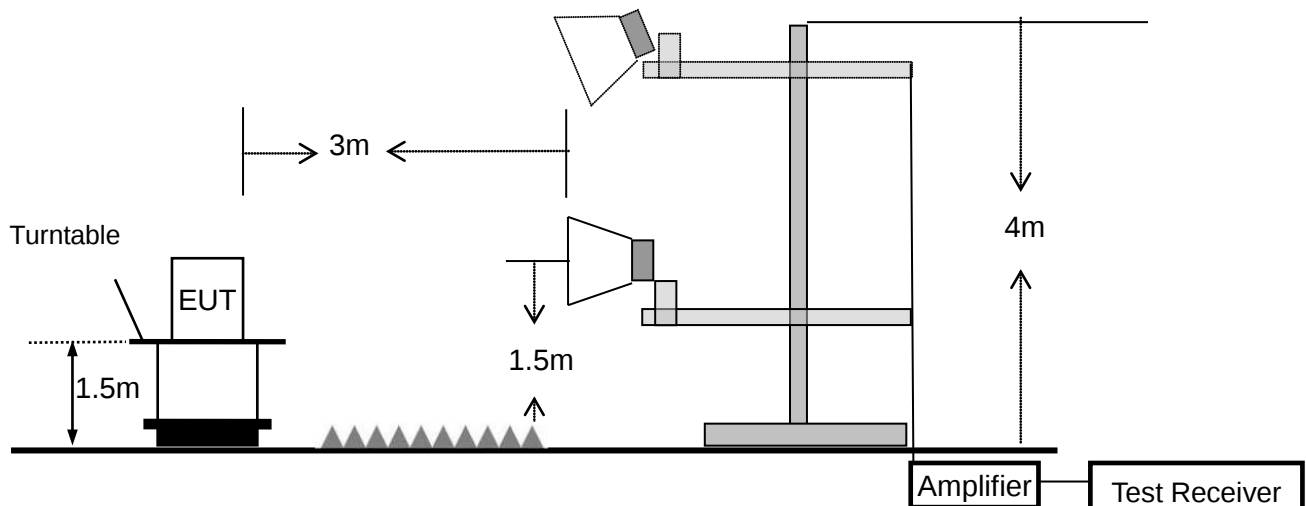

5.5.3 Test procedure

- a. EUT operating conditions. The EUT tested system was configured as the statements of 2.4 unless otherwise a special operating condition is specified in the follows during the testing.
- b. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- c. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For emission measurements above 1 GHz, the EUT shall be placed at a height of 1.5 m above the floor on a support that is RF transparent for the frequencies of interest. Final measurements for the EUT require a measurement antenna height scan of 1 m to 4 m.
- f. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- h. For the actual test configuration, please refer to the related Item –EUT Test photos.

Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.5.4 Test results

5.5.4.1 Radiation emission

Below 30MHz

EUT:	WIFI Module	Model Name:	WT32-S2-WROVER
Pressure:	1010 hPa	Phase:	H
Test Mode:	Charging+TX	Test Voltage:	DC 3.3V


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	Pass
--	--	--	--	Pass

Note:

1. For 9k-30MHz, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB).
3. Limit line = specific limits (dBuV) + distance extrapolation factor.


Between 30MHz – 1GHz

EUT:	WIFI Module	Model Name:	WT32-S2-WROVER
Pressure:	1010 hPa	Phase:	H
Test Mode:	Charging+TX	Test Voltage:	DC 3.3V

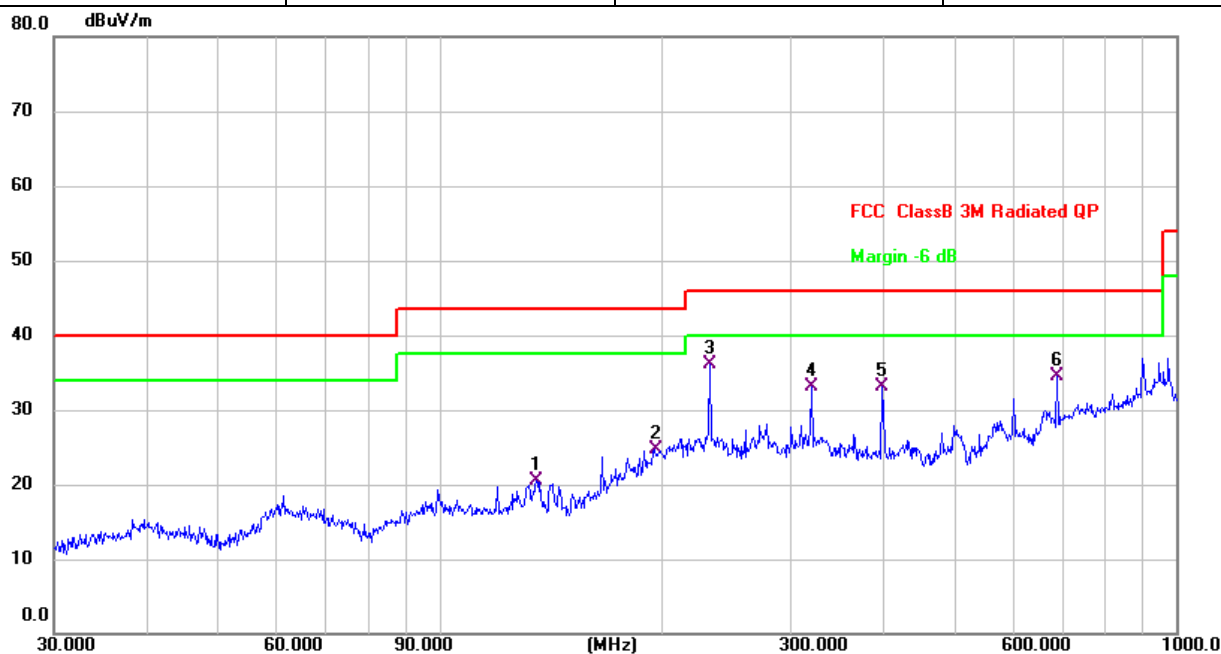

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	135.5061	35.73	-15.27	20.46	43.50	-23.04	QP
2	195.8217	38.02	-13.41	24.61	43.50	-18.89	QP
3 *	232.5318	48.68	-12.60	36.08	46.00	-9.92	QP
4	319.9368	43.00	-9.96	33.04	46.00	-12.96	QP
5	399.0300	40.32	-7.26	33.06	46.00	-12.94	QP
6	689.5643	38.10	-3.69	34.41	46.00	-11.59	QP

EUT:	WIFI Module	Model Name:	WT32-S2-WROVER
Pressure:	1010 hPa	Phase:	V
Test Mode:	Charging+TX	Test Voltage:	DC 3.3V

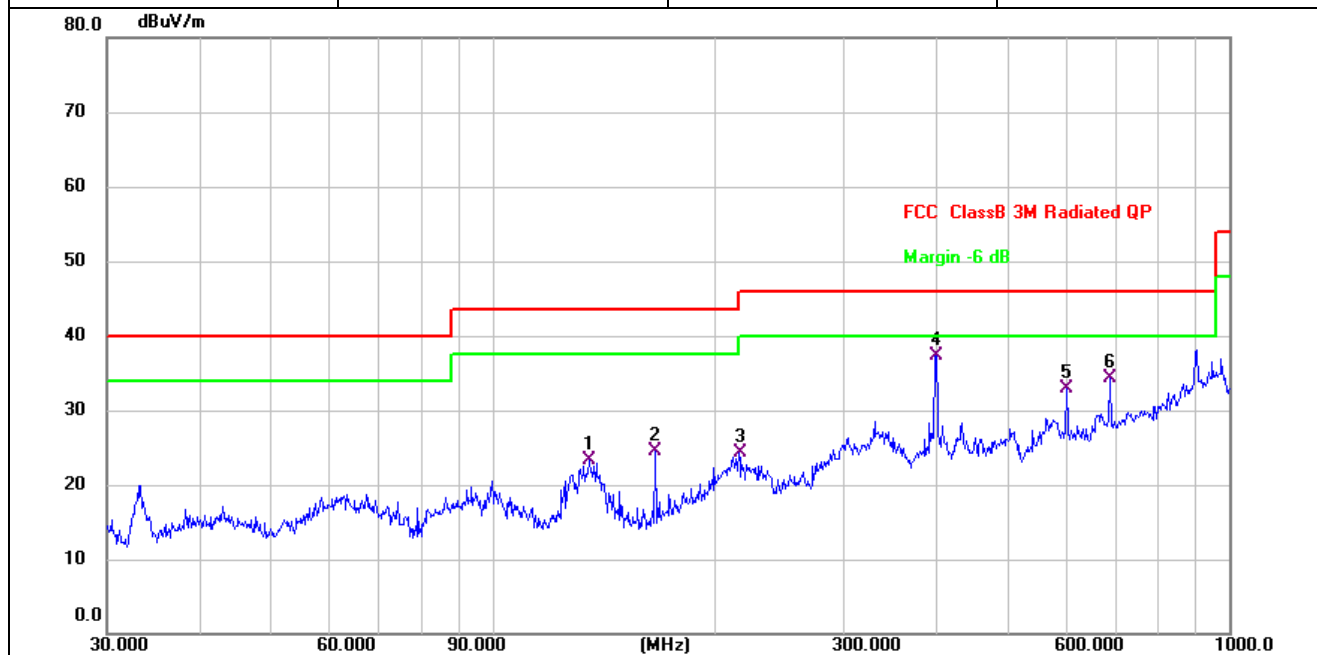

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	135.5061	40.55	-17.24	23.31	43.50	-20.19	QP
2	166.6511	41.11	-16.59	24.52	43.50	-18.98	QP
3	216.0236	37.79	-13.43	24.36	46.00	-21.64	QP
4 *	400.4318	46.23	-8.86	37.37	46.00	-8.63	QP
5	601.4265	33.22	-0.23	32.99	46.00	-13.01	QP
6	689.5643	37.20	-2.96	34.24	46.00	-11.76	QP

Note:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level- Limit, Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. The three modulated high, medium and low channels have been tested. The report only shows the worst mode. The worst mode is 802.11n40 CH03.

1GHz-25GHz

Frequency	Read Level	Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
Low Channel (2422 MHz)(802.11n40)--Above 1G							
4844.000	42.13	1.60	43.73	74.00	-30.27	Pk	Vertical
4844.000	33.50	1.60	35.10	54.00	-18.90	AV	Vertical
7266.000	42.59	5.46	48.05	74.00	-25.95	Pk	Vertical
7266.000	33.06	5.46	38.52	54.00	-15.48	AV	Vertical
9688.000	42.04	6.36	48.40	74.00	-25.60	Pk	Vertical
9688.000	32.61	6.36	38.97	54.00	-15.03	AV	Vertical
4844.000	42.45	1.60	44.05	74.00	-29.95	Pk	Horizontal
4844.000	31.13	1.60	32.73	54.00	-21.27	AV	Horizontal
7266.000	40.27	5.46	45.73	74.00	-28.27	Pk	Horizontal
7266.000	28.60	5.46	34.06	54.00	-19.94	AV	Horizontal
9688.000	42.35	6.36	48.71	74.00	-25.29	Pk	Horizontal
9688.000	30.75	6.36	37.11	54.00	-16.89	AV	Horizontal
Middle Channel (2437 MHz)(802.11n40)--Above 1G							
4874.000	41.90	1.67	43.57	74.00	-30.43	Pk	Vertical
4874.000	30.87	1.67	32.54	54.00	-21.46	AV	Vertical
7311.000	41.23	5.45	46.68	74.00	-27.32	Pk	Vertical
7311.000	29.66	5.45	35.11	54.00	-18.89	AV	Vertical
9748.000	42.01	6.37	48.38	74.00	-25.62	Pk	Vertical
9748.000	30.60	6.37	36.97	54.00	-17.03	AV	Vertical
4874.000	43.04	1.67	44.71	74.00	-29.29	Pk	Horizontal
4874.000	31.59	1.67	33.26	54.00	-20.74	AV	Horizontal
7311.000	41.35	5.45	46.80	74.00	-27.20	Pk	Horizontal
7311.000	30.03	5.45	35.48	54.00	-18.52	AV	Horizontal
9748.000	42.66	6.37	49.03	74.00	-24.97	Pk	Horizontal
9748.000	31.48	6.37	37.85	54.00	-16.15	AV	Horizontal
High Channel (2452 MHz)(802.11n40)--Above 1G							
4904.000	41.65	1.72	43.37	74.00	-30.63	Pk	Vertical
4904.000	29.80	1.72	31.52	54.00	-22.48	AV	Vertical
7356.000	41.31	5.45	46.76	74.00	-27.24	Pk	Vertical
7356.000	29.69	5.45	35.14	54.00	-18.86	AV	Vertical
9808.000	42.24	6.38	48.62	74.00	-25.38	Pk	Vertical
9808.000	29.89	6.38	36.27	54.00	-17.73	AV	Vertical
4904.000	42.37	1.72	44.09	74.00	-29.91	Pk	Horizontal



4904.000	31.46	1.72	33.18	54.00	-20.82	AV	Horizontal
7356.000	40.50	5.45	45.95	74.00	-28.05	Pk	Horizontal
7356.000	29.07	5.45	34.52	54.00	-19.48	AV	Horizontal
9808.000	42.47	6.38	48.85	74.00	-25.15	Pk	Horizontal
9808.000	30.39	6.38	36.77	54.00	-17.23	AV	Horizontal

Note:

1. Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
2. All other emissions more than 20dB below the limit.
3. The three modulated high, medium and low channels have been tested. The report only shows the worst mode. The worst mode is 802.11n40.

5.5.4.2 Band edge - radiated

Frequency	Read Level	Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		

802.11b							
2310.000	48.47	-6.60	41.87	74.00	-32.13	Pk	Horizontal
2310.000	38.94	-6.60	32.34	54.00	-21.66	AV	Horizontal
2310.000	48.43	-6.60	41.83	74.00	-32.17	Pk	Vertical
2310.000	38.49	-6.60	31.89	54.00	-22.11	AV	Vertical
2390.000	52.29	-6.23	46.06	74.00	-27.94	Pk	Vertical
2390.000	40.72	-6.23	34.49	54.00	-19.51	AV	Vertical
2390.000	56.83	-6.23	50.60	74.00	-23.40	Pk	Horizontal
2390.870	44.47	-6.22	38.25	54.00	-15.75	AV	Horizontal
2483.500	53.17	-5.79	47.38	74.00	-26.62	Pk	Vertical
2483.500	41.13	-5.79	35.34	54.00	-18.66	AV	Vertical
2500.000	49.67	-5.72	43.95	74.00	-30.05	Pk	Vertical
2500.000	40.22	-5.72	34.50	54.00	-19.50	AV	Vertical
2483.500	64.27	-5.79	58.48	74.00	-15.52	Pk	Horizontal
2483.500	48.66	-5.79	42.87	54.00	-11.13	AV	Horizontal
2500.000	54.65	-5.72	48.93	74.00	-25.07	Pk	Horizontal
2500.000	44.87	-5.72	39.15	54.00	-14.85	AV	Horizontal
802.11g							
2310.000	48.63	-6.60	42.03	74.00	-31.97	Pk	Horizontal
2310.000	38.94	-6.60	32.34	54.00	-21.66	AV	Horizontal
2310.000	48.08	-6.60	41.48	74.00	-32.52	Pk	Vertical
2310.000	38.57	-6.60	31.97	54.00	-22.03	AV	Vertical
2390.000	62.80	-6.23	56.57	74.00	-17.43	Pk	Vertical
2390.000	46.10	-6.23	39.87	54.00	-14.13	AV	Vertical
2390.000	67.40	-6.23	61.17	74.00	-12.83	Pk	Horizontal
2390.000	50.11	-6.23	43.88	54.00	-10.12	AV	Horizontal
2483.500	66.36	-5.79	60.57	74.00	-13.43	Pk	Vertical
2483.500	48.68	-5.79	42.89	54.00	-11.11	AV	Vertical
2500.000	51.71	-5.72	45.99	74.00	-28.01	Pk	Vertical
2500.000	41.06	-5.72	35.34	54.00	-18.66	AV	Vertical
2483.500	75.24	-5.79	69.45	74.00	-4.55	Pk	Horizontal
2483.500	57.76	-5.79	51.97	54.00	-2.03	AV	Horizontal



2500.000	56.96	-5.72	51.24	74.00	-22.76	Pk	Horizontal
2500.000	45.84	-5.72	40.12	54.00	-13.88	AV	Horizontal

802.11n20							
2310.000	47.98	-6.60	41.38	74.00	-32.62	Pk	Horizontal
2310.000	38.60	-6.60	32.00	54.00	-22.00	AV	Horizontal
2310.000	47.58	-6.60	40.98	74.00	-33.02	Pk	Vertical
2310.000	38.49	-6.60	31.89	54.00	-22.11	AV	Vertical
2390.000	53.20	-6.23	46.97	74.00	-27.03	Pk	Vertical
2390.000	40.82	-6.23	34.59	54.00	-19.41	AV	Vertical
2390.000	60.77	-6.23	54.54	74.00	-19.46	Pk	Horizontal
2390.000	45.75	-6.23	39.52	54.00	-14.48	AV	Horizontal
2483.500	59.71	-5.79	53.92	74.00	-20.08	Pk	Vertical
2483.500	45.65	-5.79	39.86	54.00	-14.14	AV	Vertical
2500.000	50.37	-5.72	44.65	74.00	-29.35	Pk	Vertical
2500.000	40.35	-5.72	34.63	54.00	-19.37	AV	Vertical
2483.500	68.46	-5.79	62.67	74.00	-11.33	Pk	Horizontal
2483.500	53.98	-5.79	48.19	54.00	-5.81	AV	Horizontal
2500.000	53.42	-5.72	47.70	74.00	-26.30	Pk	Horizontal
2500.000	43.19	-5.72	37.47	54.00	-16.53	AV	Horizontal
802.11n40							
2310.000	48.79	-6.60	42.19	74.00	-31.81	Pk	Horizontal
2310.000	38.69	-6.60	32.09	54.00	-21.91	AV	Horizontal
2310.000	48.06	-6.60	41.46	74.00	-32.54	Pk	Vertical
2310.000	38.47	-6.60	31.87	54.00	-22.13	AV	Vertical
2390.000	52.27	-6.23	46.04	74.00	-27.96	Pk	Vertical
2390.000	41.37	-6.23	35.14	54.00	-18.86	AV	Vertical
2390.000	58.48	-6.23	52.25	74.00	-21.75	Pk	Horizontal
2390.000	48.08	-6.23	41.85	54.00	-12.15	AV	Horizontal
2483.500	59.05	-5.79	53.26	74.00	-20.74	Pk	Vertical
2483.500	47.37	-5.79	41.58	54.00	-12.42	AV	Vertical
2500.000	52.30	-5.72	46.58	74.00	-27.42	Pk	Vertical
2500.000	41.84	-5.72	36.12	54.00	-17.88	AV	Vertical
2483.500	68.65	-5.79	62.86	74.00	-11.14	Pk	Horizontal
2483.500	55.98	-5.79	50.19	54.00	-3.81	AV	Horizontal
2500.000	57.98	-5.72	52.26	74.00	-21.74	Pk	Horizontal
2500.000	46.48	-5.72	40.76	54.00	-13.24	AV	Horizontal

Note:

1. All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
2. Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor.



3. All the modulation modes have been tested, and only the worst results are reflected in the report.

5.5.5 Spurious Emission in Restricted Band 3260MHz-18000MHz

All the modulation modes have been tested, and the worst result was report as below:

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
3260	59.91	-3.87	56.04	74	-17.96	Pk	Vertical
3260	41.73	-3.87	37.86	54	-16.14	AV	Vertical
3260	60.56	-3.87	56.69	74	-17.31	Pk	Horizontal
3260	39.30	-3.87	35.43	54	-18.57	AV	Horizontal
3332	60.48	-3.67	56.81	74	-17.19	Pk	Vertical
3332	41.43	-3.67	37.76	54	-16.24	AV	Vertical
3332	60.56	-3.67	56.89	74	-17.11	Pk	Horizontal
3332	41.81	-3.67	38.14	54	-15.86	AV	Horizontal
17797	49.52	15.42	64.94	74	-9.06	Pk	Vertical
17797	30.21	15.42	45.63	54	-8.37	AV	Vertical
17788	49.64	15.41	65.05	74	-8.95	Pk	Horizontal
17788	30.93	15.41	46.34	54	-7.66	AV	Horizontal



5.6 Band edge - Conducted

5.6.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.6.2 Test setup




5.6.3 Test procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- Repeat above procedures until all measured frequencies were complete.



5.6.4 Test results

Test plots:

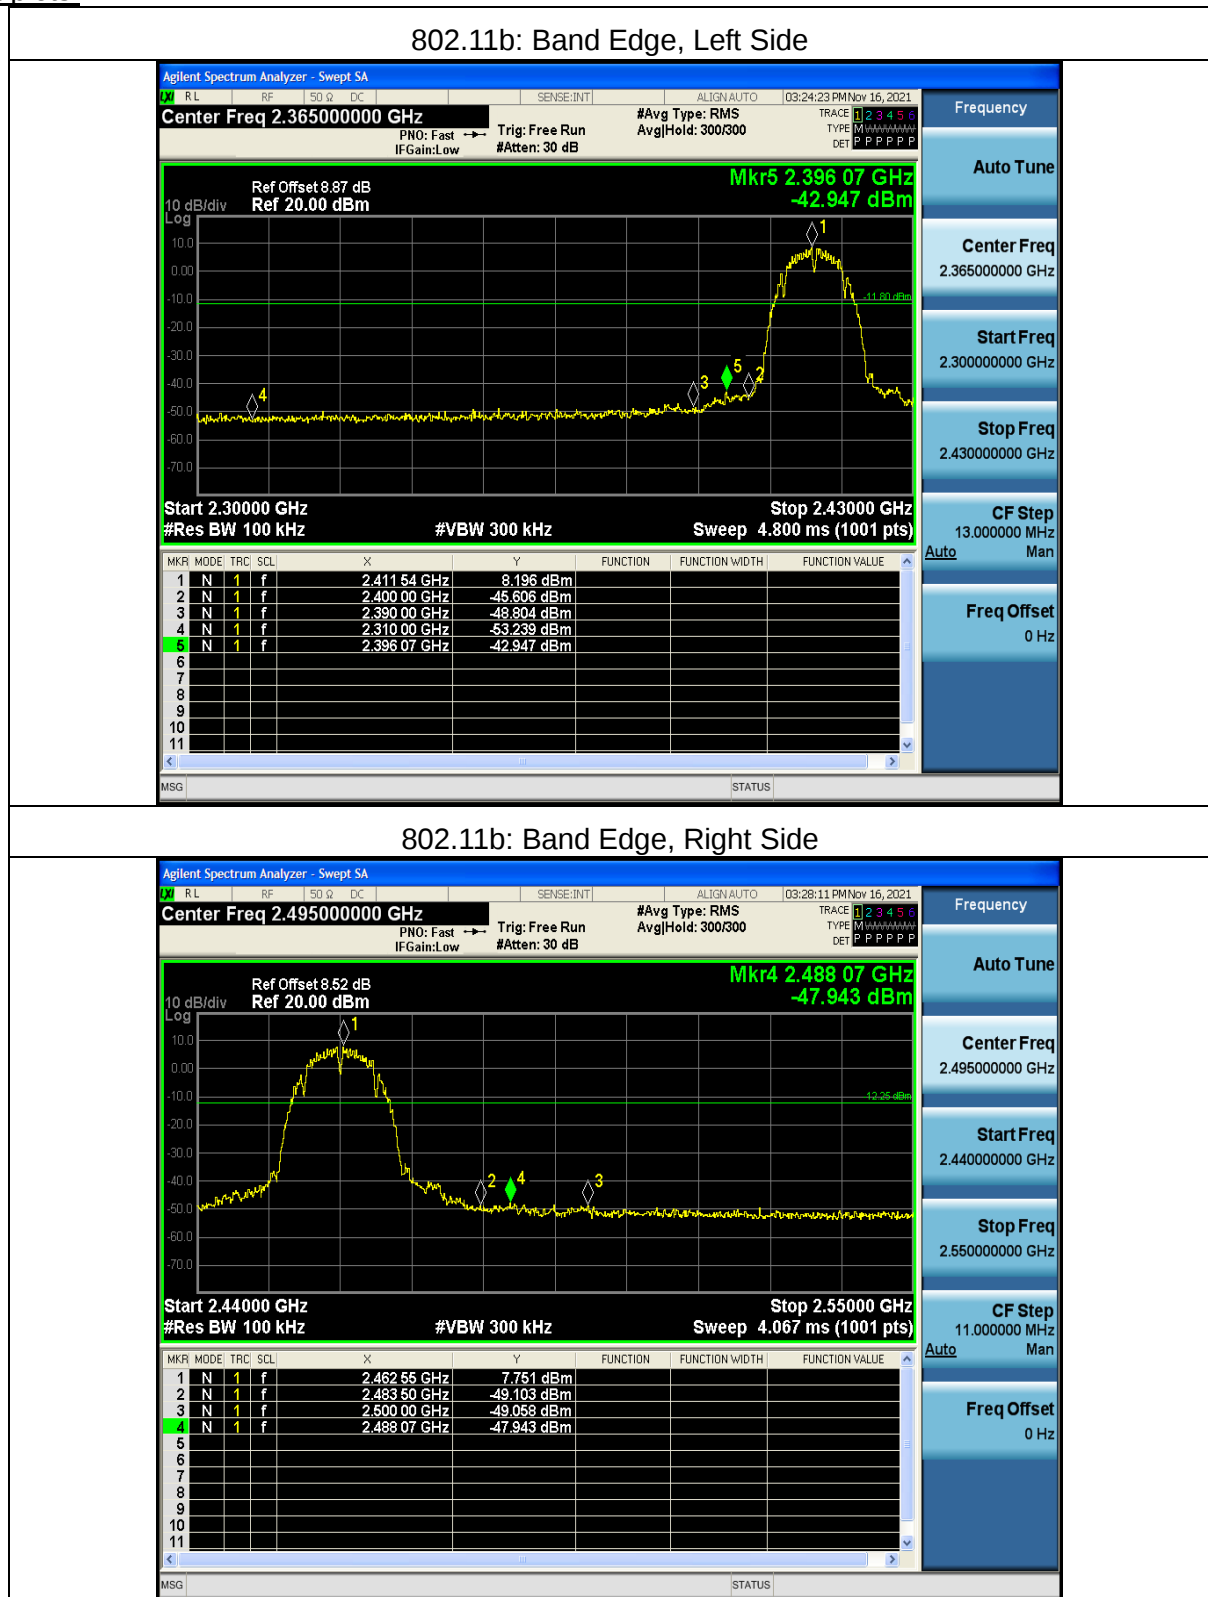



802.11g: Band Edge, Left Side



802.11g: Band Edge, Right Side






802.11n20: Band Edge, Left Side




802.11n20: Band Edge, Right Side

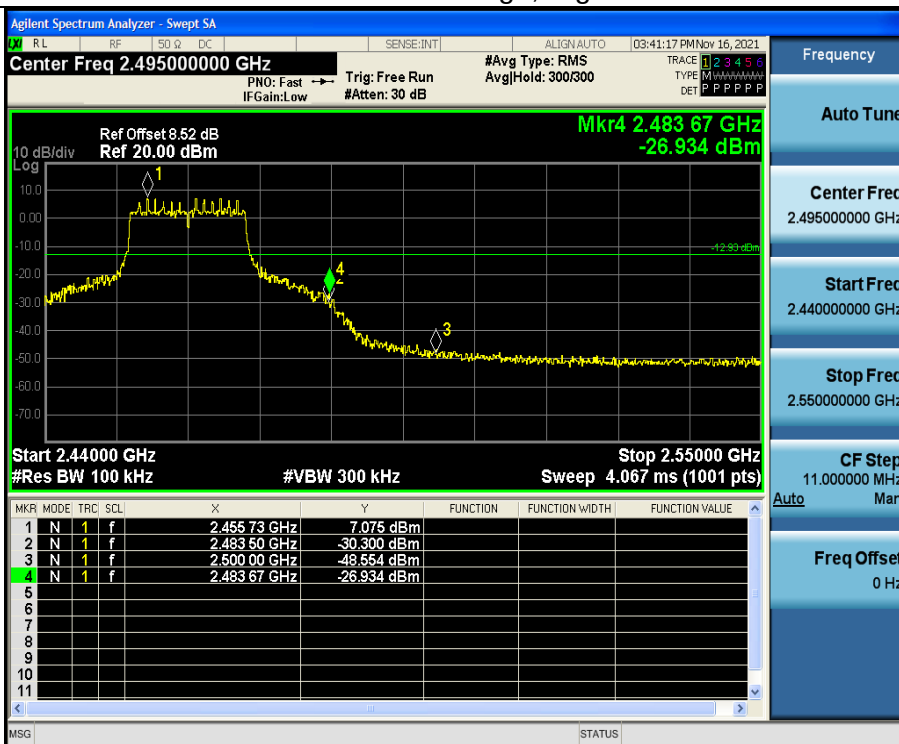



802.11n40: Band Edge, Left Side

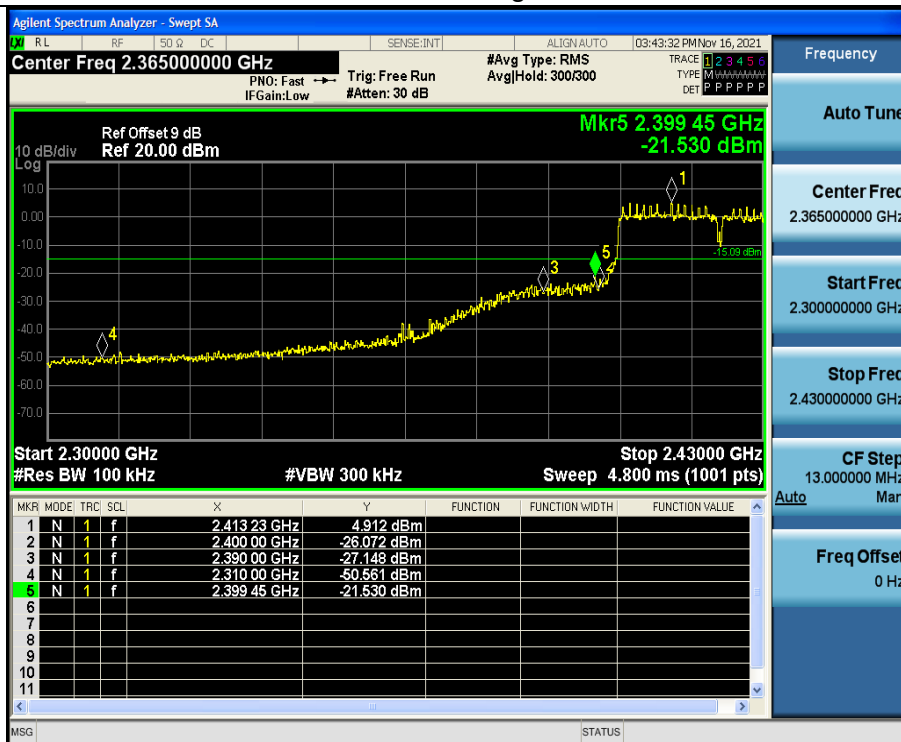

802.11n40: Band Edge, Right Side






5.7 6dB bandwidth

5.7.1 Limit

Section	Test Item	Limit	Frequency Range (MHz)
15.247(a)(2)	Bandwidth	$\geq 500\text{kHz}$ (6dB bandwidth)	2400-2483.5

5.7.2 Test setup

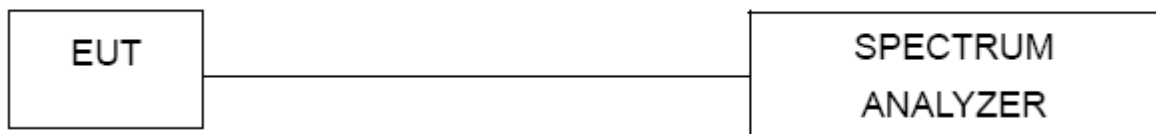


5.7.3 Test procedure

- Set RBW= 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.7.4 Test results


EUT:	WIFI Module	Model Name:	WT32-S2-WROVER
Pressure:	1012 hPa	Test Voltage:	DC 3.3V
Test Mode:	TX b Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	8.564	500	Pass
Middle	2437	9.118	500	Pass
High	2462	10.07	500	Pass

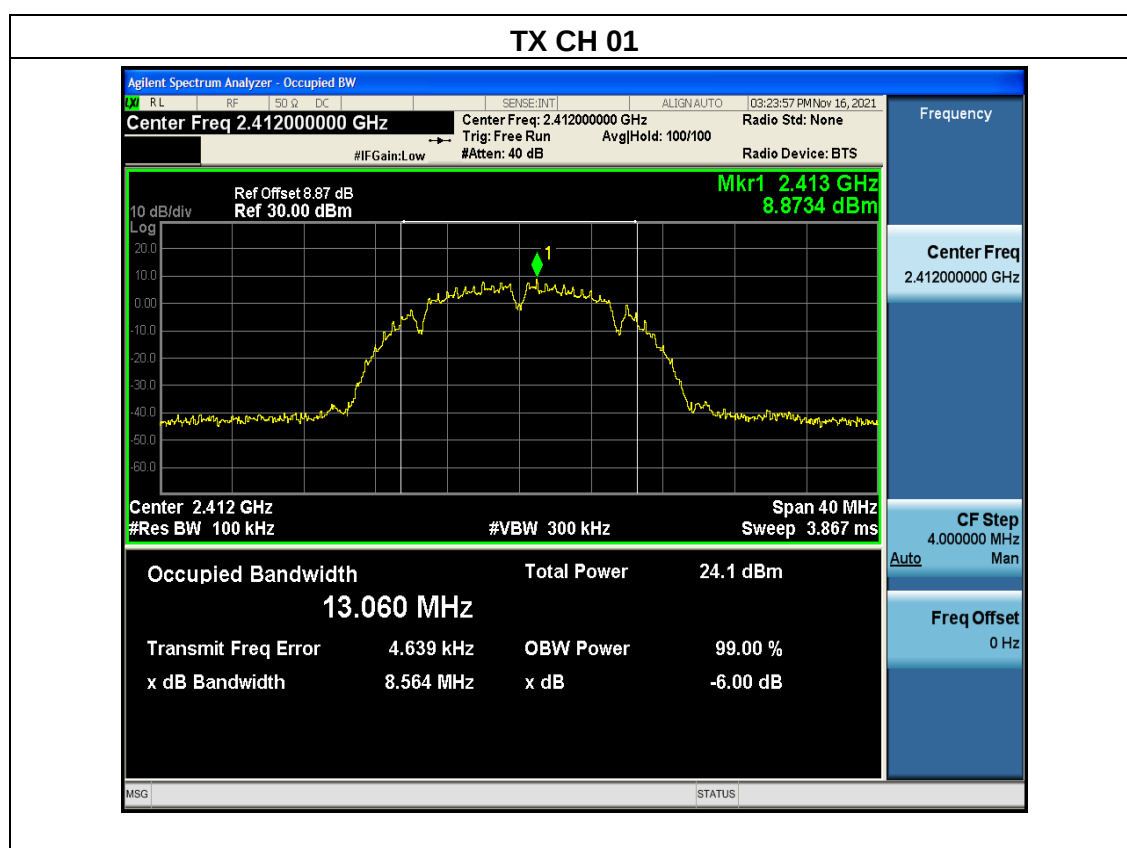




TX CH 06

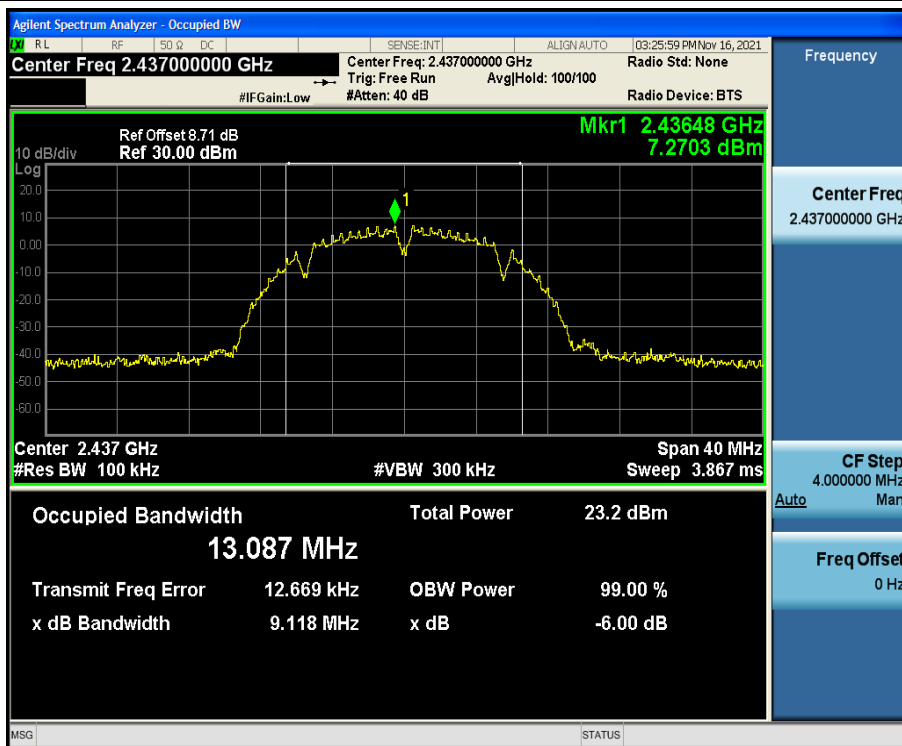



TX CH 11

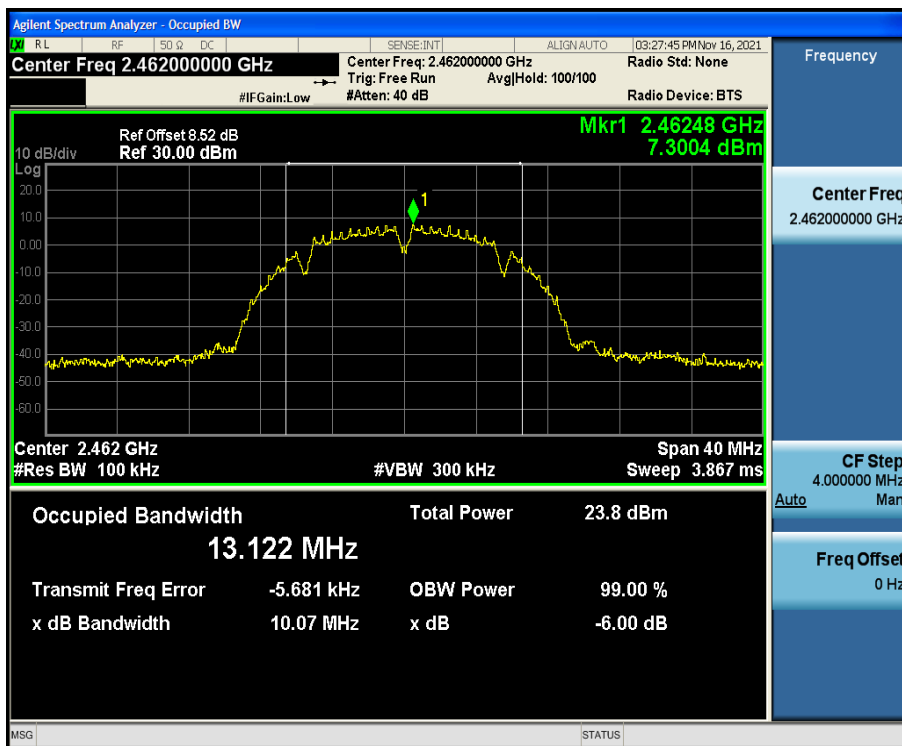

EUT:	WIFI Module	Model Name:	WT32-S2-WROVER
Pressure:	1012 hPa	Test Voltage:	DC 3.3V
Test Mode:	TX g Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.38	500	Pass
Middle	2437	16.39	500	Pass
High	2462	16.36	500	Pass

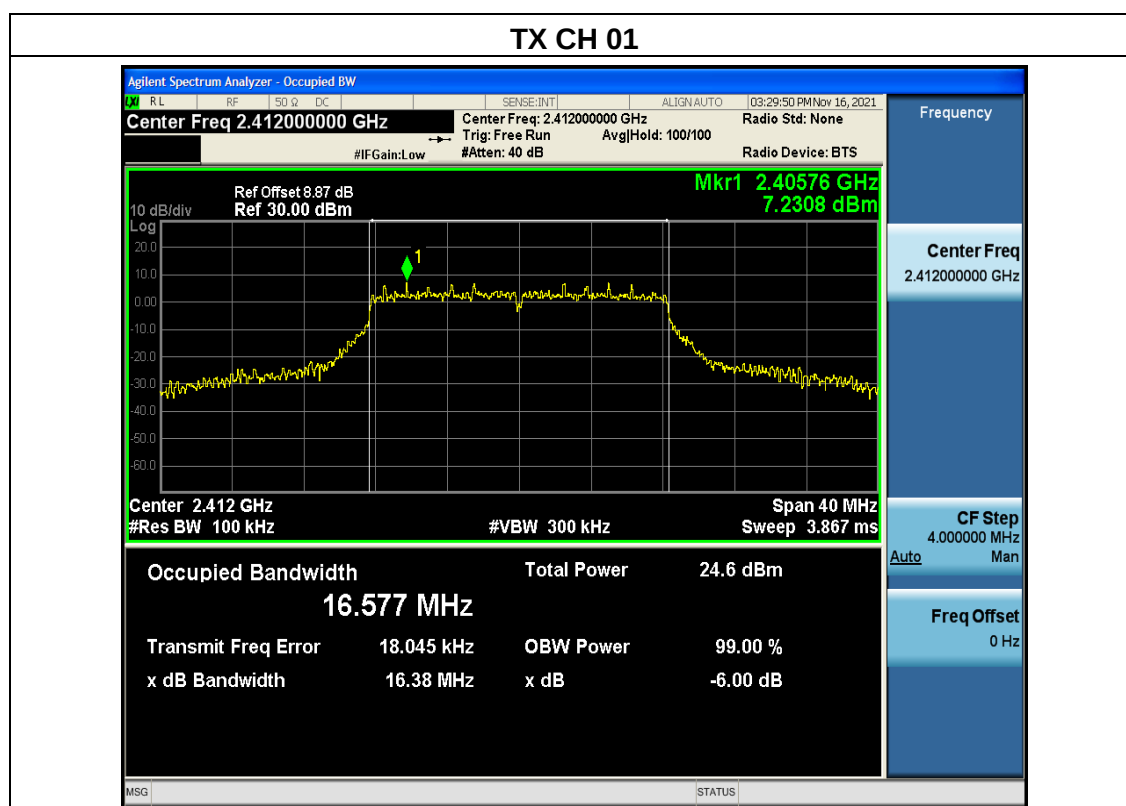


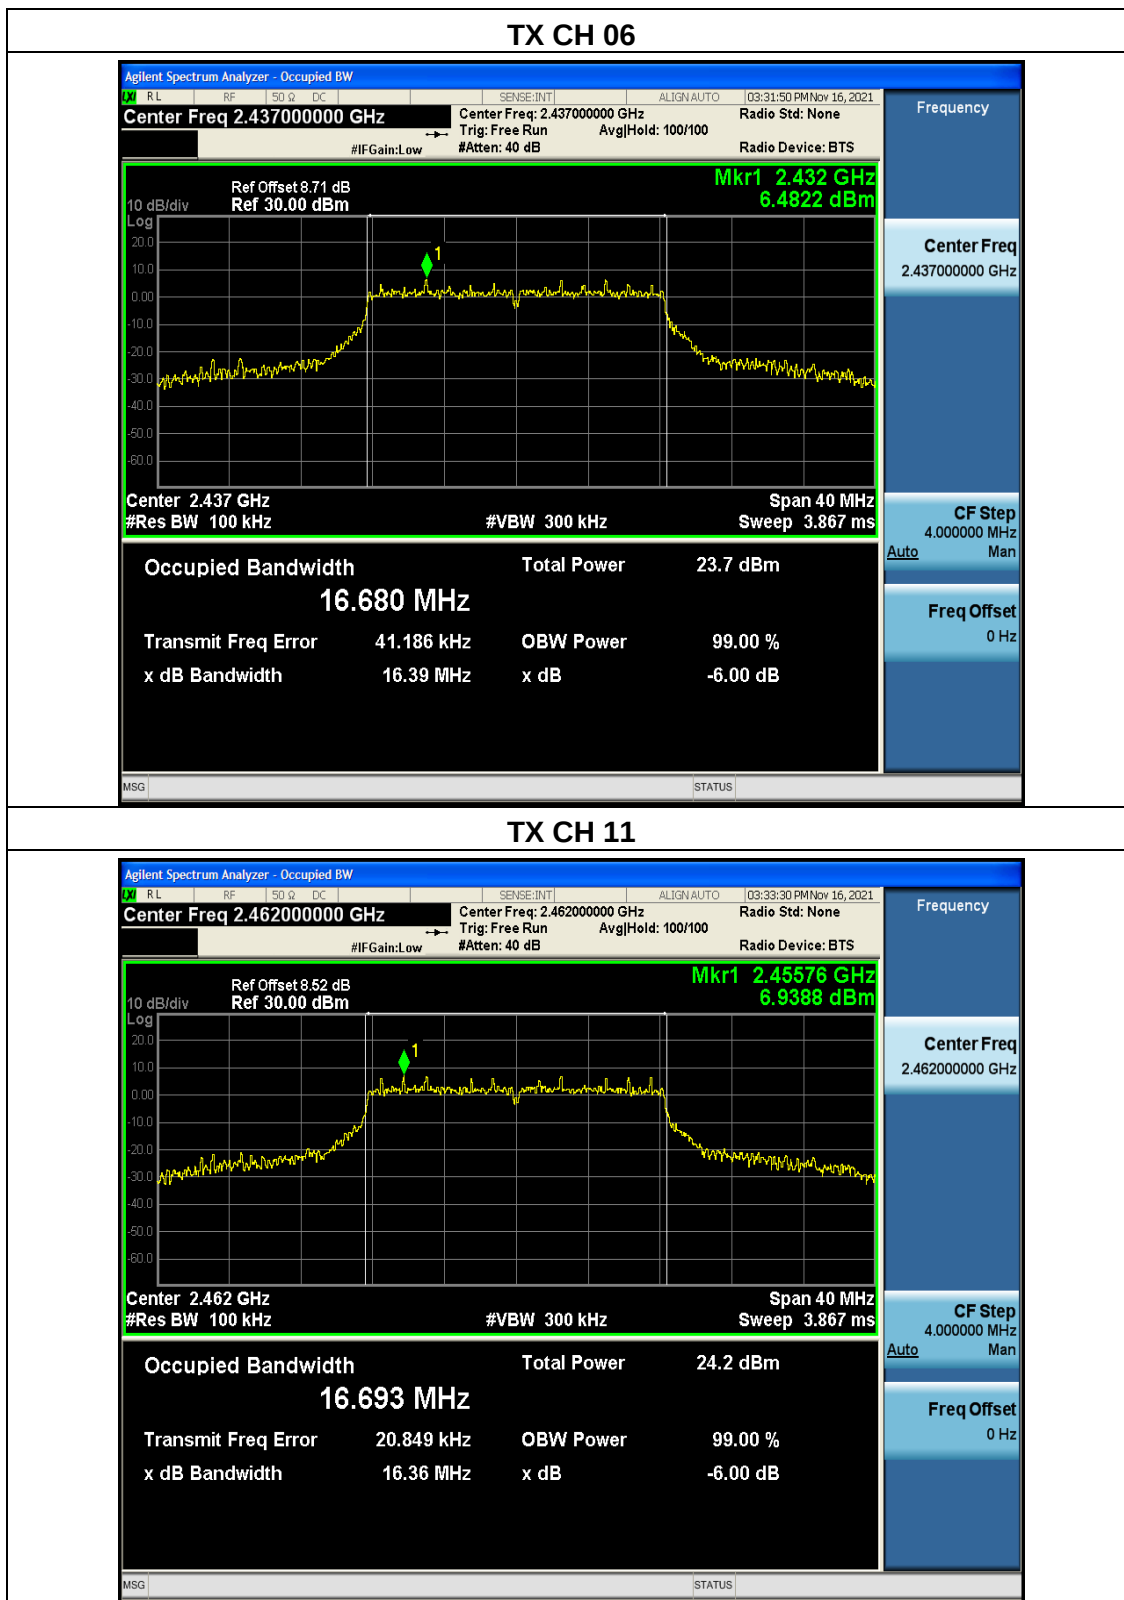

EUT:	WIFI Module	Model Name:	WT32-S2-WROVER
Pressure:	1012 hPa	Test Voltage:	DC 3.3V
Test Mode:	TX n20 Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.58	500	Pass
Middle	2437	17.60	500	Pass
High	2462	17.58	500	Pass

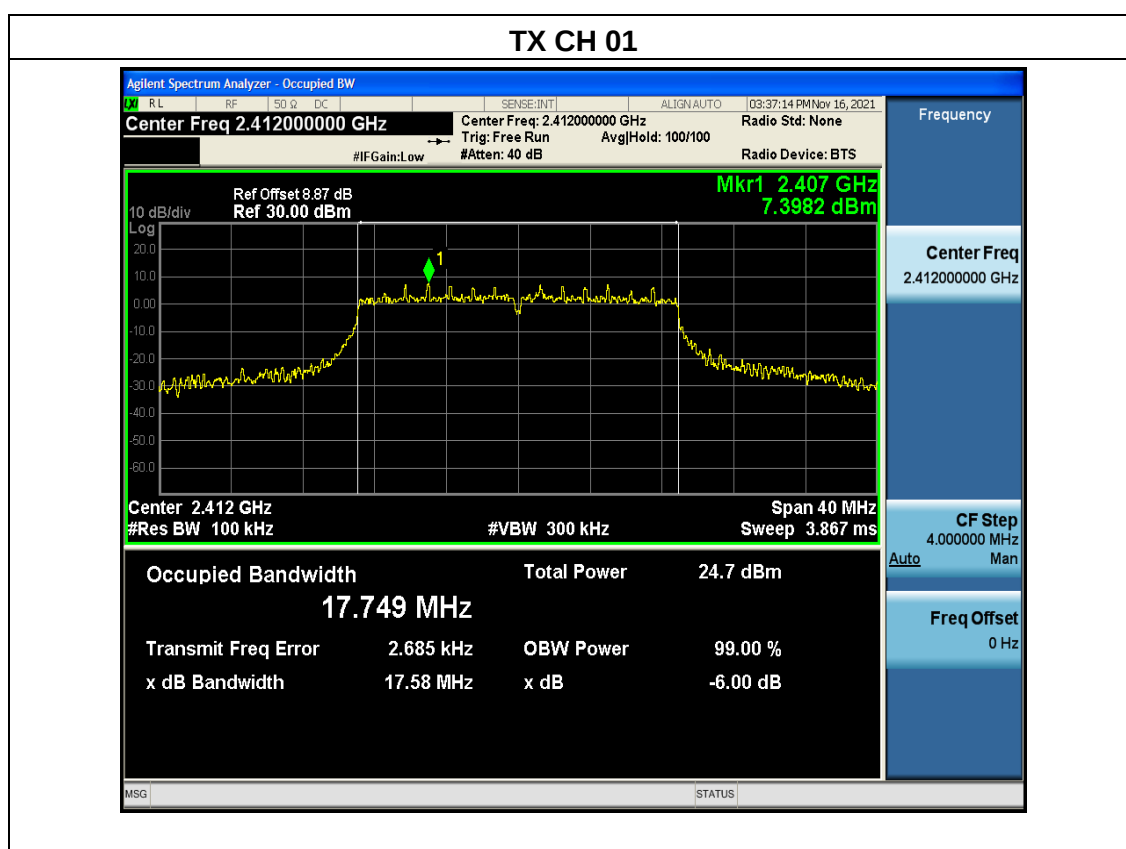


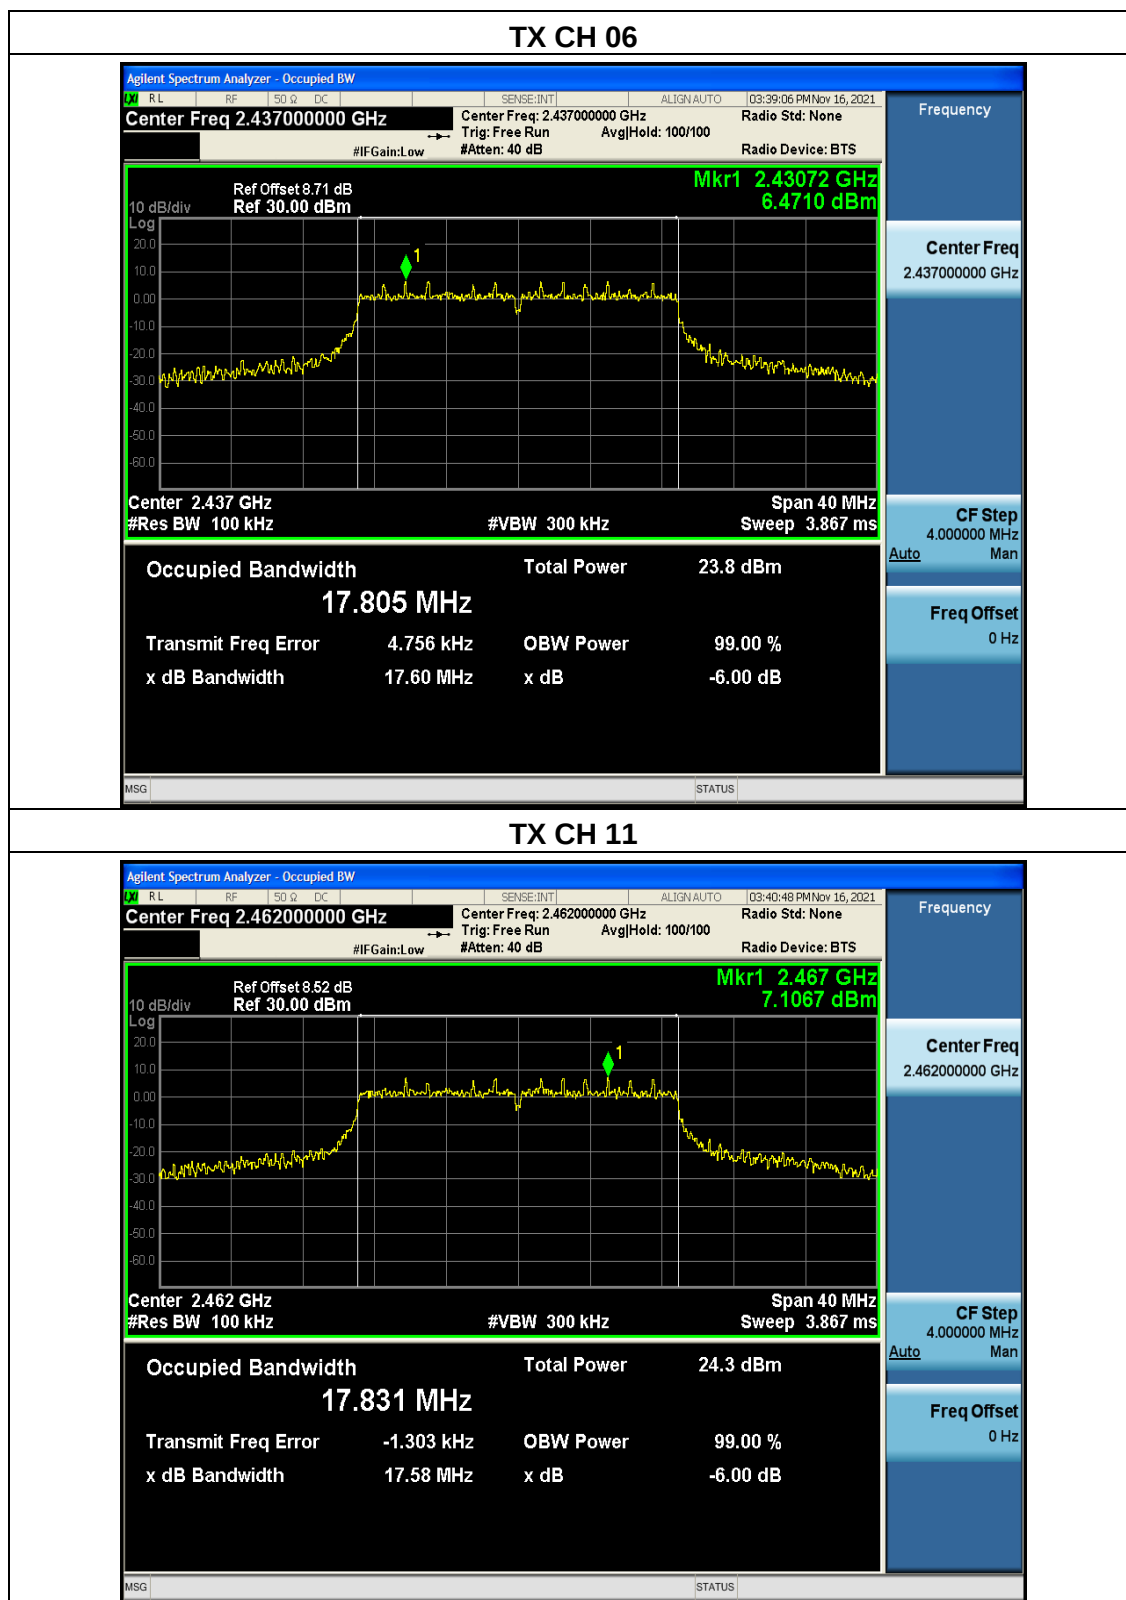




EUT:	WIFI Module	Model Name:	WT32-S2-WROVER
Pressure:	1012 hPa	Test Voltage:	DC 3.3V
Test Mode:	TX n40 Mode /CH03, CH06, CH09		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2422	35.98	500	Pass
Middle	2437	36.40	500	Pass
High	2452	36.03	500	Pass

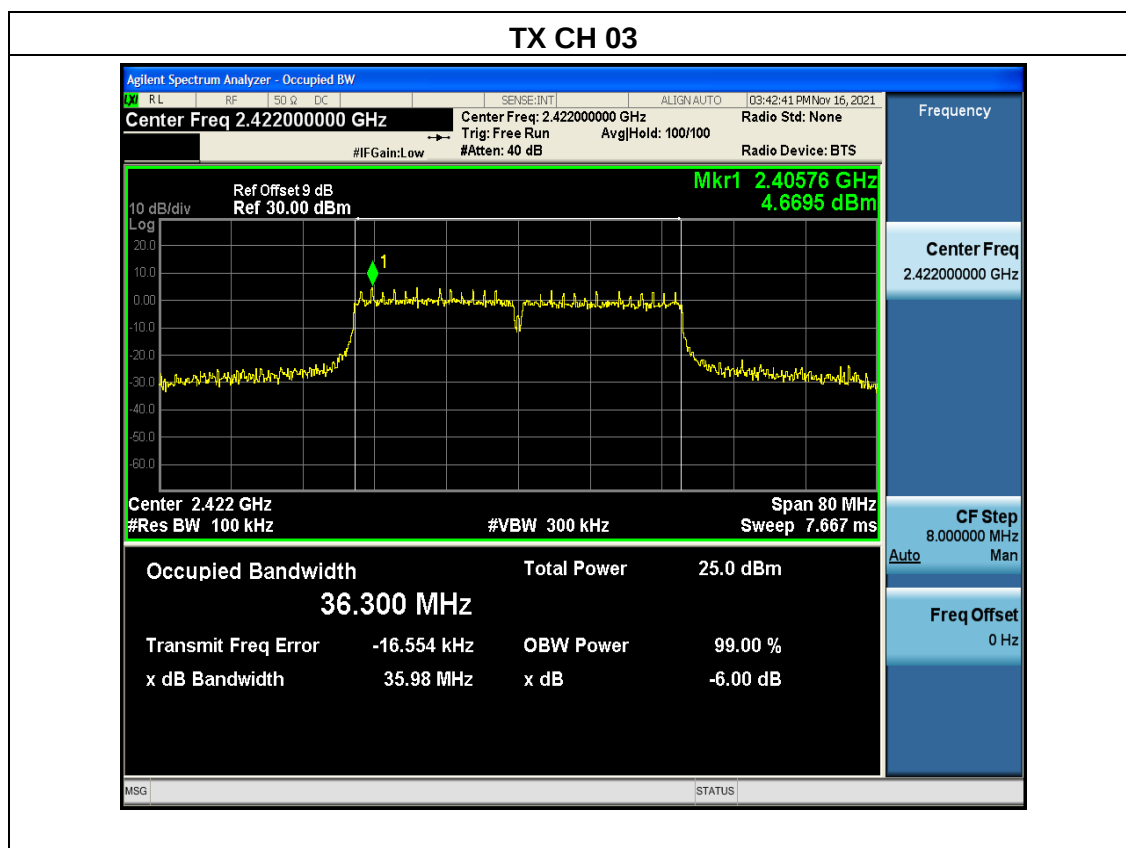

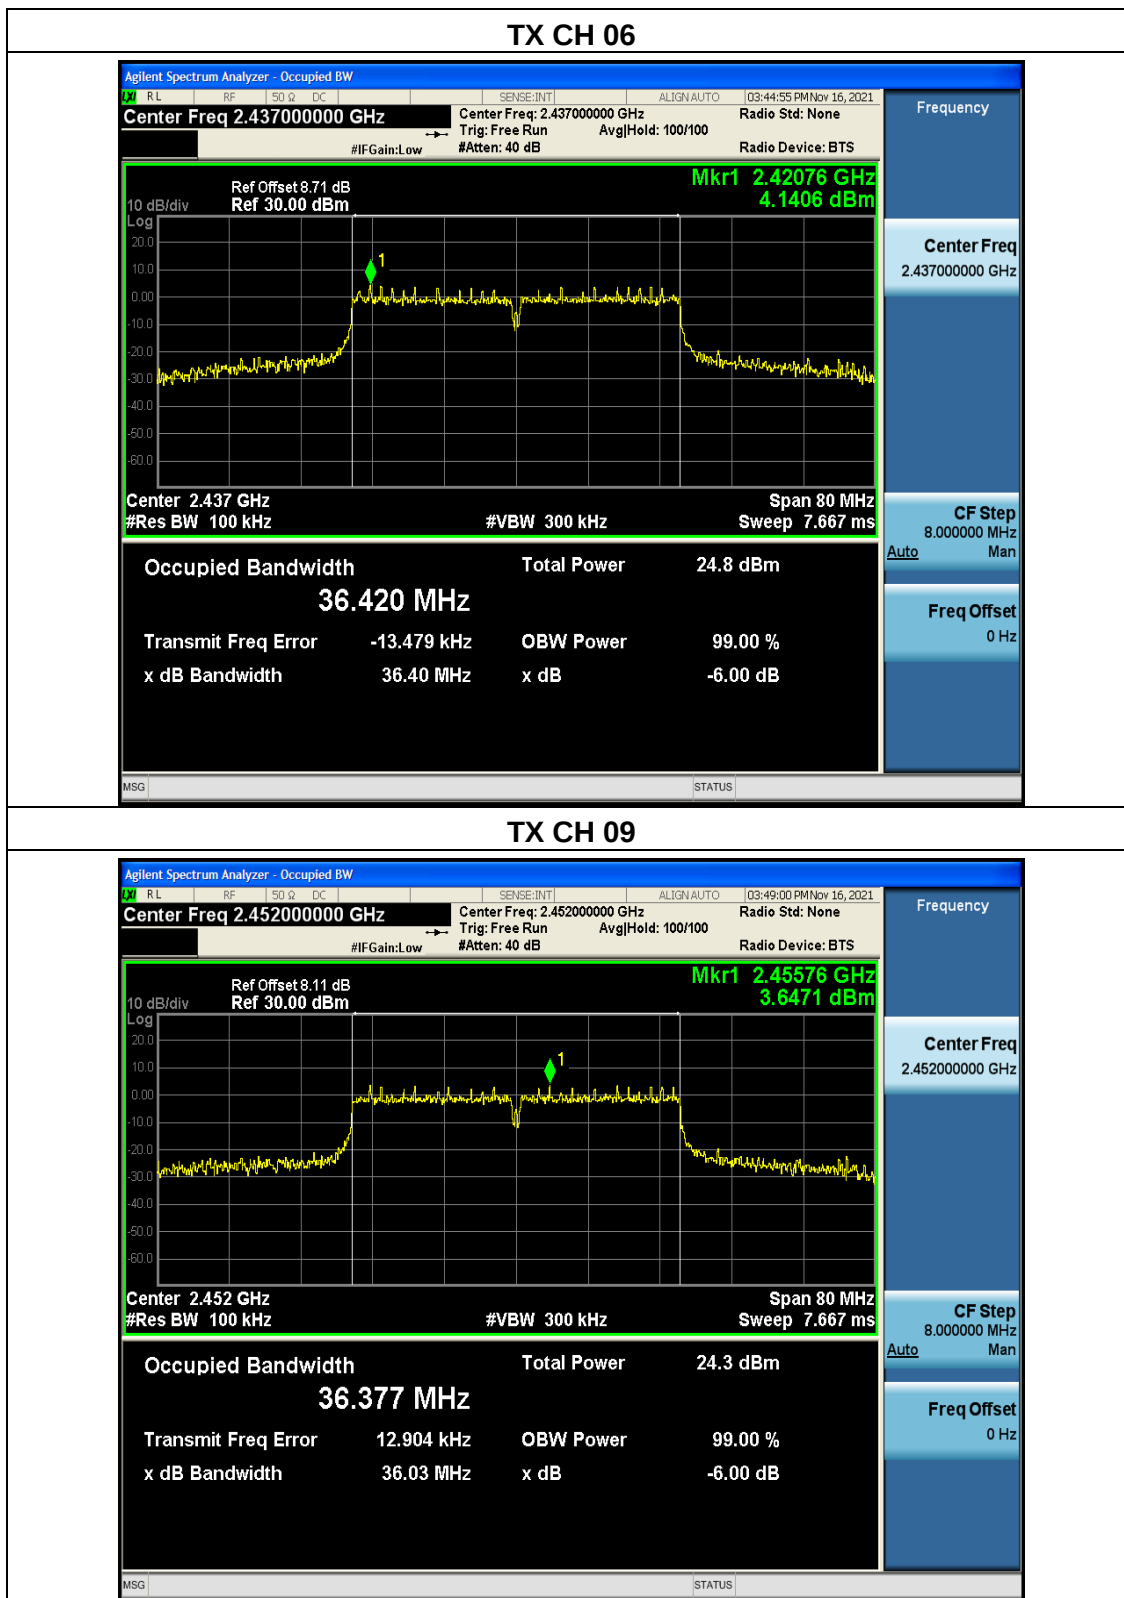

5.8 Duty Cycle

5.8.1 Limit

No limit requirement.

5.8.2 Measuring instruments

The Measuring equipment is listed in the section 4 of this test report.

5.8.3 Test setup



5.8.4 Test procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0(b) in KDB 558074

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

RBW = 8MHz (the largest available value)

VBW = 8MHz ($\geq$ RBW)

Number of points in Sweep > 100

Detector function = peak

Trace = Clear write

Measure T total and Ton

Calculate Duty Cycle = $Ton / T \text{ total}$

5.8.5 Test Results

EUT:	WIFI Module	Model Name:	WT32-S2-WROVER
Pressure:	1012 hPa	Test Voltage:	DC 3.3V
Test Mode:	TX b/g/n(20/40) Mode / CH06		

Mode	Data rate	Channel	T _{on}	T _{total}	Duty Cycle	Duty Cycle Factor (dB)	VBW Setting
802.11b	1Mbps	6	-	-	100%	0	10Hz
802.11g	6Mbps	6	-	-	100%	0	1kHz
802.11n HT20	MCS0	6	-	-	100%	0	1kHz
802.11n HT40	MCS0	6	-	-	100%	0	3kHz



5.9 Spurious RF Conducted Emissions

5.9.1 Limit

Below -20dB of the highest emission level in operating band.

5.9.2 Measuring instruments

The Measuring equipment is listed in the section 4 of this test report.

5.9.3 Test setup



5.9.4 Test procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300kHz to measure the peak field strength, and measure frequency range from 9kHz to 26.5GHz.

5.9.5 Test results

Note:


- 1: The measurement frequency range is from 9kHz to the 10th harmonic of the fundamental frequency; The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.
- 2: The three modulated high, medium and low channels have been tested. The report only shows the worst mode. The worst mode is 802.11n40 CH03/06/09.




802.11n40 on Channel 03




802.11n40 on Channel 03

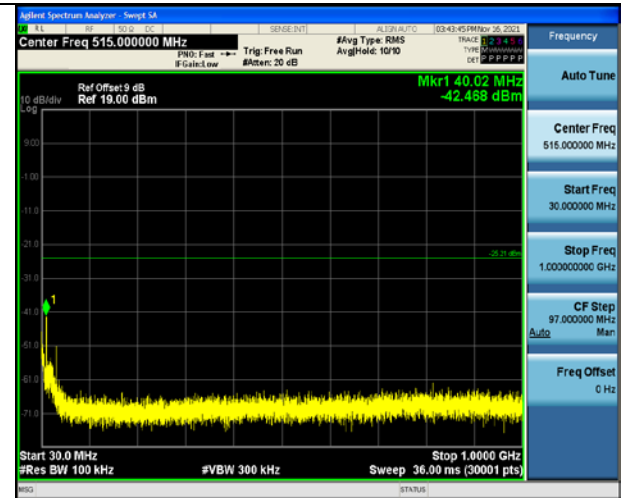

802.11n40 on Channel 03

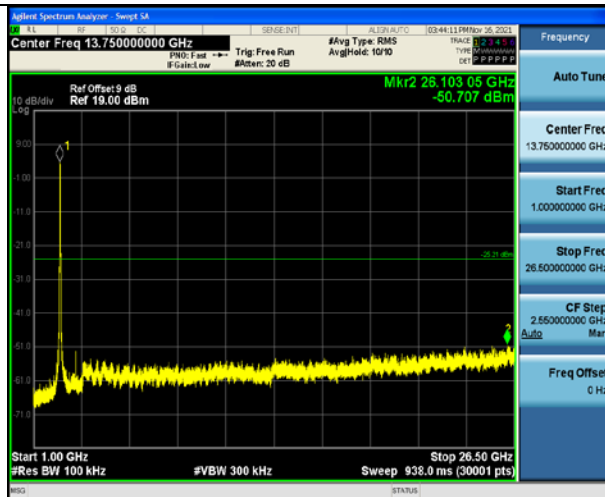


802.11n40 on Channel 06

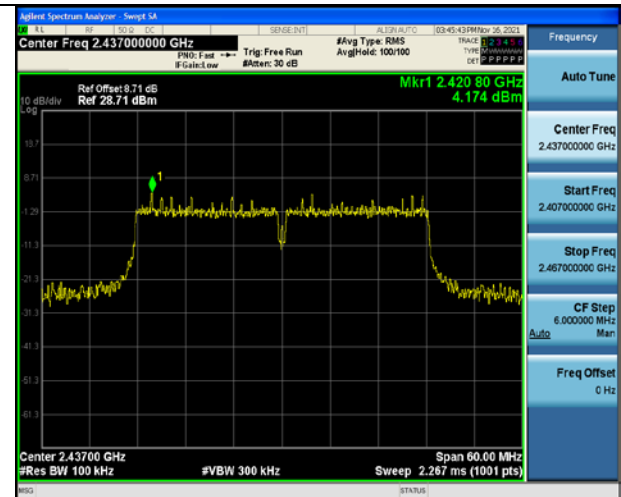





802.11n40 on Channel 06

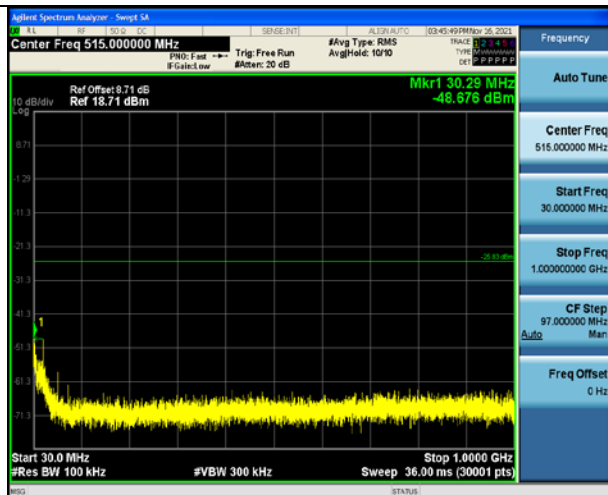


802.11n40 on Channel 06

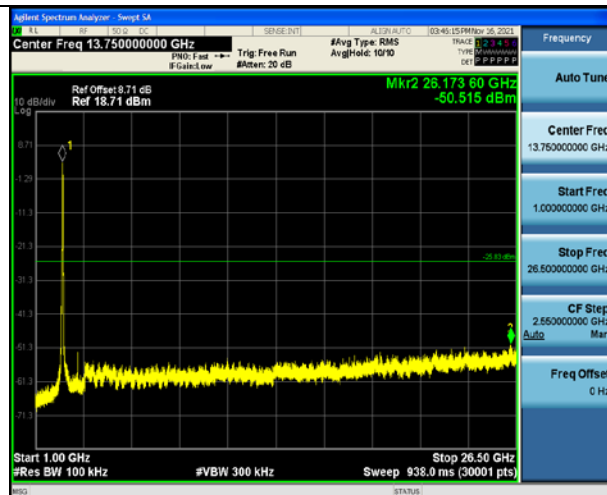


802.11n40 on Channel 09

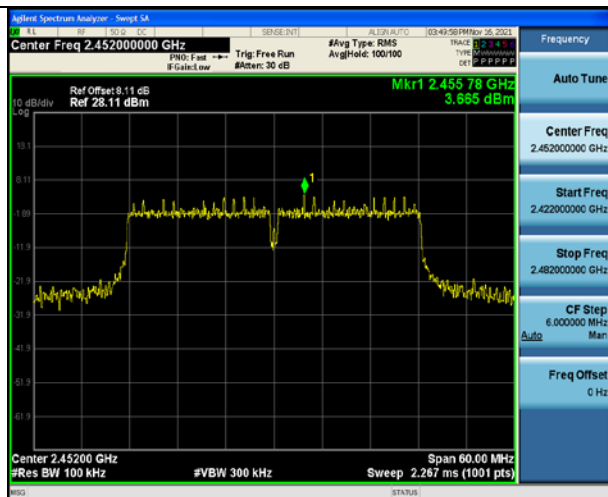

802.11n40 on Channel 09

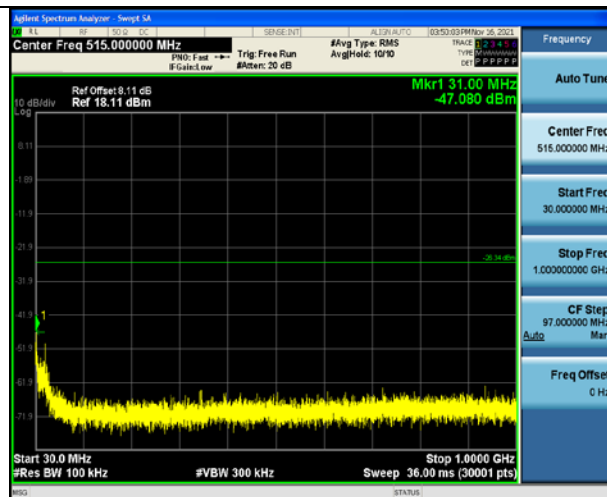

802.11n40 on Channel 09

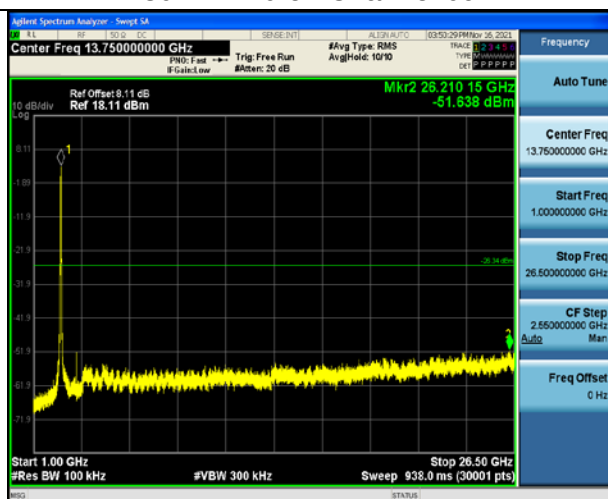



Photographs of the Test Setup

Radiated emission





Conducted emission





Photographs of the EUT

See the APPENDIX 1- EUT PHOTO.

----END OF REPORT----