

TEST REPORT

Reference No. : WTN16S0447850-1E
FCC ID..... : 2AFOYL434FCNN
Applicant..... : Le Shi Zhi Xin Electronic Technology (Tian jin) Limited
Address..... : 201-427 2F B1 District, Anime building, No.126 Anime Middle Road,
Eco-city Tianjin, China
Manufacturer : Goertek.Inc
Address..... : West of Weian Road, North of Yingqian Street, High-tech Industrial
Development Zone, Weifang, Shandong Province, China., ShenZhen,
China
Product Name..... : LED TV
Model No. : L434FCNN
Brand : LeEco
Standards..... : FCC CFR47 Part 15 C Section 15.247:2015
Date of Receipt sample..... : Apr. 15, 2016
Date of Test..... : Apr. 16 – May. 11, 2016
Date of Issue..... : Jun. 01, 2016
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207(a)	PASS
Radiated Emissions	15.247 15.205(a) 15.209(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	4
4.1 GENERAL DESCRIPTION OF E.U.T.	4
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	5
4.4 TEST MODE	5
4.5 TEST FACILITY	6
5 EQUIPMENT USED DURING TEST	7
5.1 EQUIPMENTS LIST	7
5.2 DESCRIPTION OF SUPPORT UNITS	8
5.3 MEASUREMENT UNCERTAINTY	8
5.4 TEST EQUIPMENT CALIBRATION	8
6 CONDUCTED EMISSION	9
6.1 E.U.T. OPERATION	9
6.2 EUT SETUP	9
6.3 MEASUREMENT DESCRIPTION	9
6.4 CONDUCTED EMISSION TEST RESULT	10
7 RADIATED EMISSIONS.....	12
7.1 EUT OPERATION.....	12
7.2 TEST SETUP	13
7.3 SPECTRUM ANALYZER SETUP	14
7.4 TEST PROCEDURE	15
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	15
7.6 SUMMARY OF TEST RESULTS	16
8 BAND EDGE MEASUREMENT	34
8.1 TEST PROCEDURE.....	34
8.2 TEST RESULT	35
9 6 DB BANDWIDTH MEASUREMENT	43
9.1 TEST PROCEDURE:	43
9.2 TEST RESULT:.....	43
10 MAXIMUM PEAK OUTPUT POWER.....	56
10.1 TEST PROCEDURE:.....	56
10.2 TEST RESULT:	56
11 POWER SPECTRAL DENSITY	69
11.1 TEST PROCEDURE:.....	69
11.2 TEST RESULT:	69
12 ANTENNA REQUIREMENT	82
13 RF EXPOSURE.....	83
13.1 REQUIREMENTS.....	83
13.2 THE PROCEDURES / LIMIT	83
13.3 MPE CALCULATION METHOD	84

4 General Information

4.1 General Description of E.U.T.

Product Name:	LED TV
Model No.:	L434FCNN
Model Description:	N/A
Operation Frequency:	IEEE 802.11b/g/n(HT20):2412MHz ~ 2462MHz IEEE 802.11n(HT40):2422MHz~2452MHz IEEE 802.11a/ n(HT20/40)/ac(HT20/40/80): 5150MHz to 5250MHz IEEE 802.11a/ n(HT20/40)/ac(HT20/40/80): 5725MHz to 5850MHz BT: 2402-2480MHz SRD: 2403-2480MHz
The Lowest Oscillator:	32.768KHz
Antenna Gain:	ANT 0 2.4GHz WIFI:3.2 dBi 5.2GHz WIFI:4.1 dBi 5.8GHz WIFI:4.0 dBi ANT 1 2.4GHz WIFI:3.2 dBi 5.2GHz WIFI:3.3 dBi 5.8GHz WIFI:3.4 dBi ANT 2 2.4GHz BT:3.2 dBi ANT 3 2.4GHz SRD:3.1 dBi
Type of modulation:	IEEE 802.11b DSSS(CCK/QPSK/BPSK) IEEE 802.11g OFDM(BPSK/QPSK/16QAM/64QAM) IEEE 802.11n OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11a: OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11n : OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11ac : OFDM (BPSK/QPSK/16QAM/64QAM/256QAM) BT: GFSK,PI/4-DQPSK,8DPSK SRD: GFSK
Number of transmitter chains:	WIFI:2*2 (MIMO) BT: 1 SRD: 1

The device supports MIMO 2*2, and the MIMO works with STBC(Space-Time Block Coding).The antenna is omnidirectional, does not support any directional gain in any modes.

TX power for MIMO rate, the wifi chip has a power/rate table that controls TX power from chipout, it's preset in nvram, FW don't need to calculate it again when MIMO rate is fixed. Of course the real radiation power is also related to antenna efficient.

Two transmitter signals are not correlated with each other.

4.2 Details of E.U.T.

Technical Data: AC 120V~60Hz, 73W

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

4.4 Test Mode

Test Mode Description:

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product. Transmitting duty cycle is no less 98%.

The software is installed in operation system, named "RFTestTool.apk", Version 1, date 20160518.

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Band Edge	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
	802.11n HT40	150 Mbps	3/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
6dB Bandwidth	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX

Table 2 Tests Carried Out Under FCC part 15.207 & FCC part 15.209

Test Item	Test Mode
Conduction Emission, 0.15MHz to 30MHz	Communication

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A-1, July 12, 2012.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.14,2015	Sep.13,2016
2.	LISN	R&S	ENV216	101215	Sep.14,2015	Sep.13,2016
3.	Cable	Top	TYPE16(3.5M)	-	Sep.14,2015	Sep.13,2016
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.14,2015	Sep.13,2016
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.14,2015	Sep.13,2016
3.	Limitter	York	MTS-IMP-136	261115-001-0024	Sep.14,2015	Sep.13,2016
4.	Cable	LARGE	RF300	-	Sep.14,2015	Sep.13,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.14,2015	Sep.13,2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Sep.14,2015	Sep.13,2016
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.14,2015	Sep.13,2016
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Sep.14,2015	Sep.13,2016
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Sep.14,2015	Sep.13,2016
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Sep.14,2015	Sep.13,2016
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Sep.14,2015	Sep.13,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Sep.14,2015	Sep.13,2016
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.14,2015	Sep.13,2016
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.14,2015	Sep.13,2016
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.14,2015	Sep.13,2016
RF Conducted Testing						

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.14,2015	Sep.13,2016
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.14,2015	Sep.13,2016

5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2009
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2009.

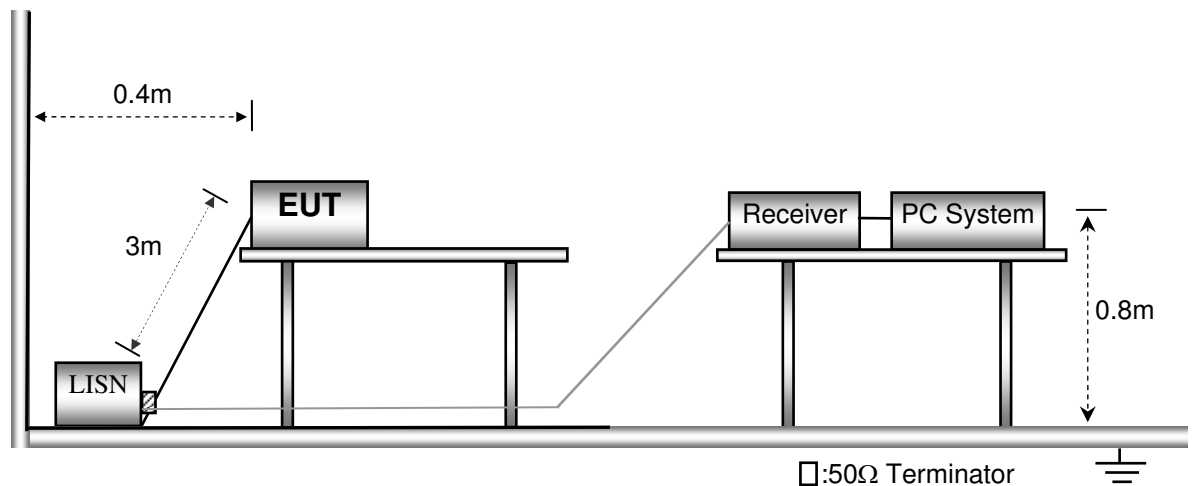


6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

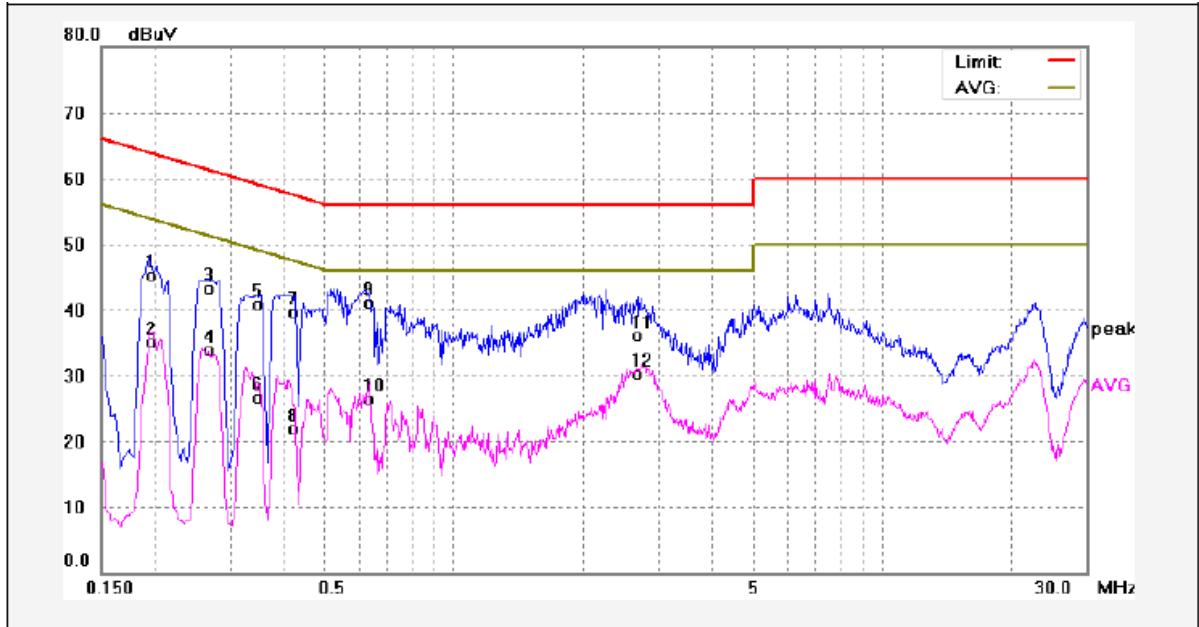

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1940	35.59	9.76	45.35	63.86	-18.51	QP	
2	0.1940	25.37	9.76	35.13	53.86	-18.73	AVG	
3	0.2660	33.61	9.74	43.35	61.24	-17.89	QP	
4	0.2660	24.09	9.74	33.83	51.24	-17.41	AVG	
5	0.3520	31.15	9.75	40.90	58.91	-18.01	QP	
6	0.3520	17.05	9.75	26.80	48.91	-22.11	AVG	
7	0.4260	30.04	9.75	39.79	57.33	-17.54	QP	
8	0.4260	12.15	9.75	21.90	47.33	-25.43	AVG	
9	0.6260	31.27	9.76	41.03	56.00	-14.97	QP	
10	0.6260	16.71	9.76	26.47	46.00	-19.53	AVG	
11	2.6860	26.18	9.91	36.09	56.00	-19.91	QP	
12	2.6860	20.42	9.91	30.33	46.00	-15.67	AVG	

Neutral line:

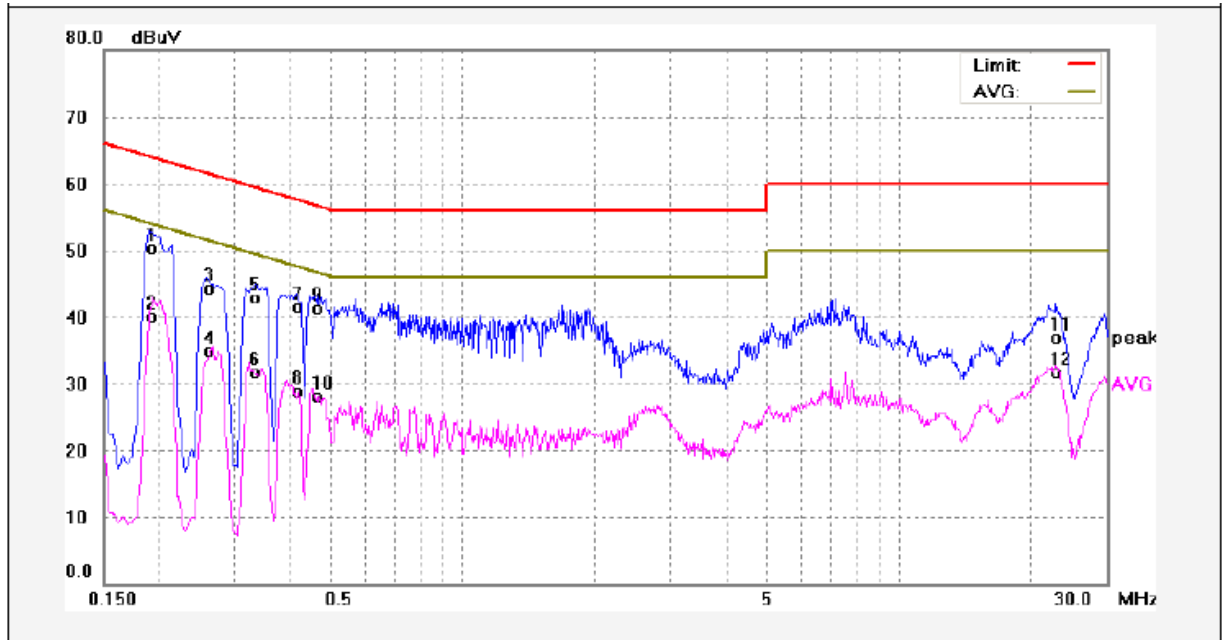

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1914	40.64	9.75	50.39	63.97	-13.58	QP	
2	0.1914	30.41	9.75	40.16	53.97	-13.81	AVG	
3	0.2589	34.56	9.74	44.30	61.46	-17.16	QP	
4	0.2589	25.25	9.74	34.99	51.46	-16.47	AVG	
5	0.3339	33.15	9.75	42.90	59.35	-16.45	QP	
6	0.3339	21.91	9.75	31.66	49.35	-17.69	AVG	
7	0.4140	31.85	9.75	41.60	57.57	-15.97	QP	
8	0.4140	19.19	9.75	28.94	47.57	-18.63	AVG	
9	0.4660	31.60	9.76	41.36	56.58	-15.22	QP	
10	0.4660	18.43	9.76	28.19	46.58	-18.39	AVG	
11	22.9700	26.02	10.91	36.93	60.00	-23.07	QP	
12	22.9700	20.83	10.91	31.74	50.00	-18.26	AVG	

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2009

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2009.


The test setup for emission measurement below 30MHz.

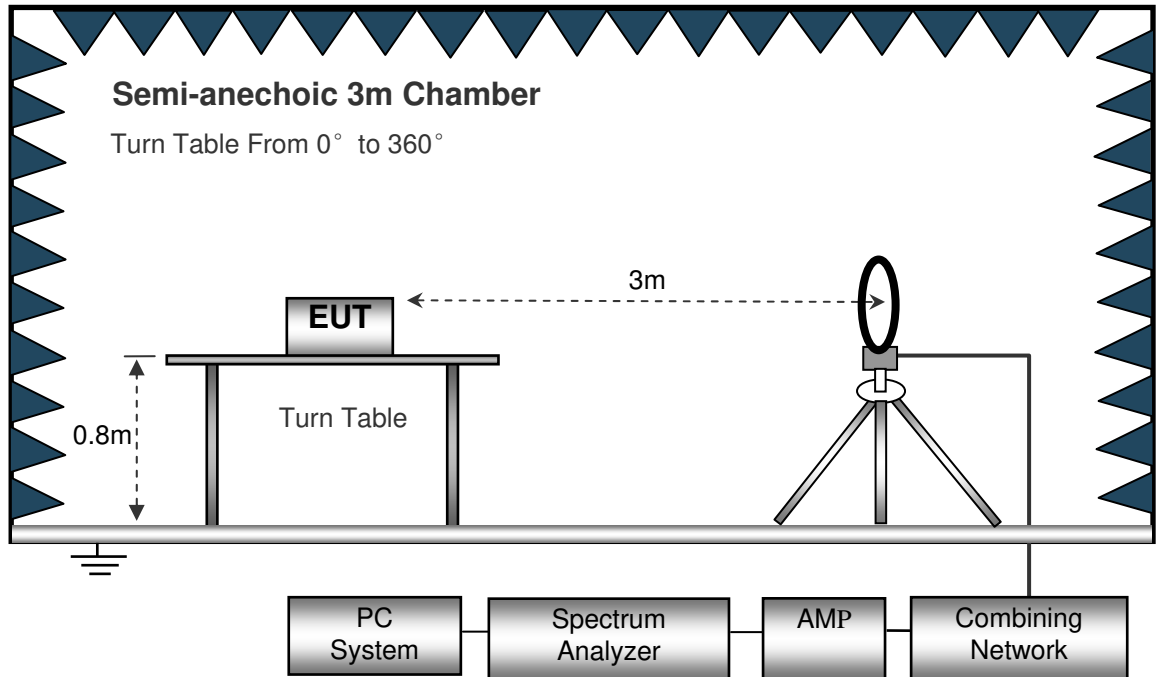

The test setup for emission measurement from 30 MHz to 1 GHz.

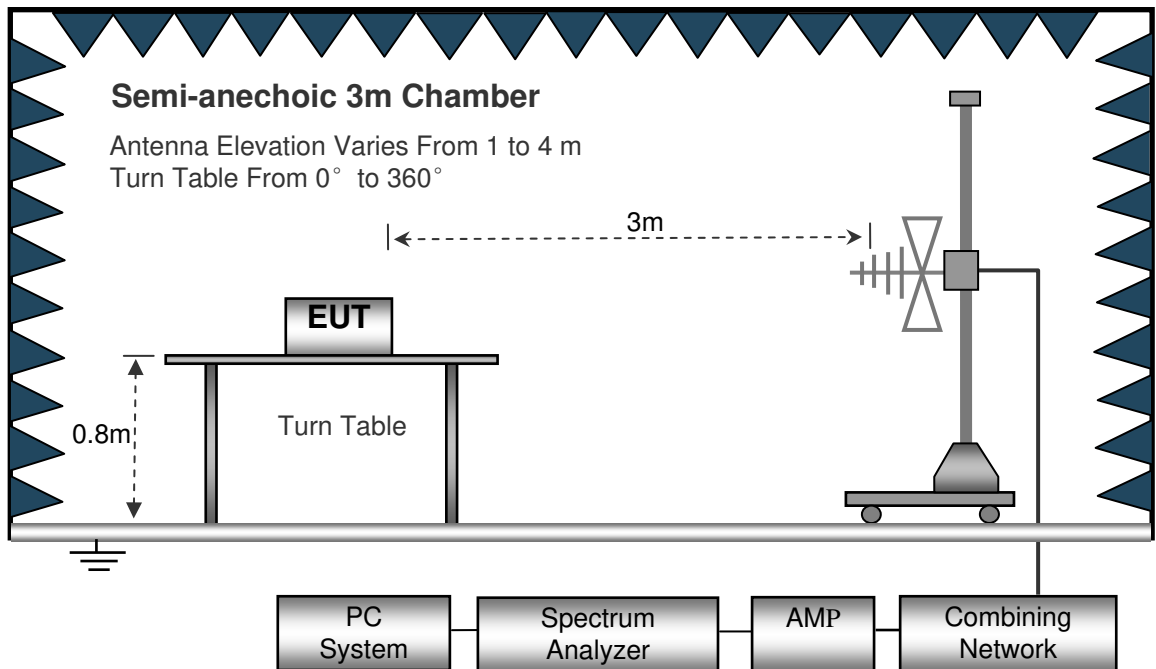

The test setup for emission measurement above 1 GHz.

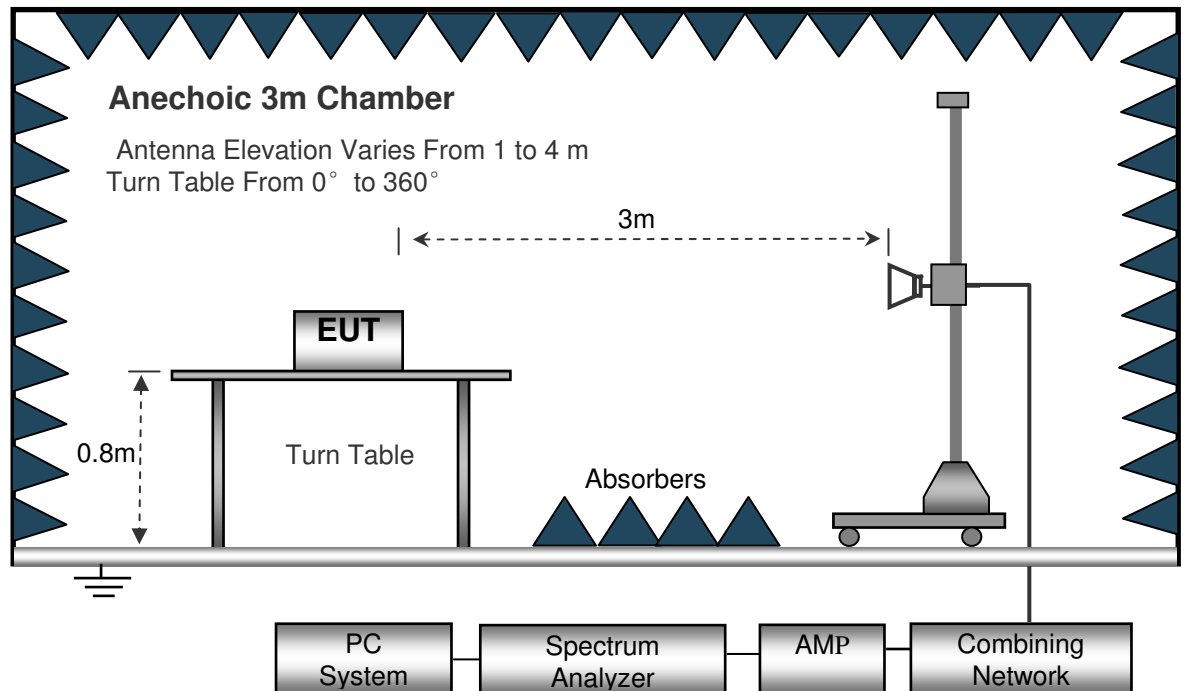

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth.....10kHz
 Video Bandwidth.....10kHz
 Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 DetectorPK
 Resolution Bandwidth.....100kHz
 Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
 DetectorPK
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....3MHz
 DetectorAve.
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used druing radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency: 32.768kHz~30MHz

Frequency (MHz)	Measurement results		Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
	dB μ V	@3m	PK/QP	dB/m	dB	dB μ V/m @30m	dB μ V/m @30m	dB
25.620	26.00		QP	19.90	40.00	5.90	29.54	-23.64

Test Frequency : 30MHz ~ 18GHz

Frequency (MHz)	Receiver Reading (dB μ V)	Detector (PK/QP/Ave)	Turn table Angle Degree	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247/209/205	
				Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
ANT0 11b: Low Channel 2412MHz									
223.45	41.05	QP	208	1.5	H	-11.62	29.43	46.00	-16.57
223.45	36.26	QP	127	1.4	V	-11.62	24.64	46.00	-21.36
4824.00	50.44	PK	212	1.9	V	-1.06	49.38	74.00	-24.62
4824.00	46.32	Ave	212	1.9	V	-1.06	45.26	54.00	-8.74
7236.00	41.08	PK	81	1.7	H	1.33	42.41	74.00	-31.59
7236.00	41.96	Ave	81	1.7	H	1.33	43.29	54.00	-10.71
2340.55	46.62	PK	213	1.4	V	-13.19	33.43	74.00	-40.57
2340.55	37.15	Ave	213	1.4	V	-13.19	23.96	54.00	-30.04
2385.51	44.27	PK	248	1.9	H	-13.14	31.13	74.00	-42.87
2385.51	36.32	Ave	248	1.9	H	-13.14	23.18	54.00	-30.82
2491.13	43.79	PK	120	2.0	V	-13.08	30.71	74.00	-43.29
2491.13	36.38	Ave	120	2.0	V	-13.08	23.30	54.00	-30.70

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT0 11b: Middle Channel 2437MHz									
223.45	39.63	QP	174	1.3	H	-11.62	28.01	46.00	-17.99
223.45	37.27	QP	113	1.5	V	-11.62	25.65	46.00	-20.35
4874.00	50.26	PK	44	1.7	V	-0.62	49.64	74.00	-24.36
4874.00	45.81	Ave	44	1.7	V	-0.62	45.19	54.00	-8.81
7311.00	42.52	PK	150	1.8	H	2.21	44.73	74.00	-29.27
7311.00	43.25	Ave	150	1.8	H	2.21	45.46	54.00	-8.54
2320.23	46.89	PK	271	1.7	V	-13.19	33.70	74.00	-40.30
2320.23	38.38	Ave	271	1.7	V	-13.19	25.19	54.00	-28.81
2362.63	43.93	PK	95	1.4	H	-13.14	30.79	74.00	-43.21
2362.63	38.10	Ave	95	1.4	H	-13.14	24.96	54.00	-29.04
2484.15	44.59	PK	202	1.8	V	-13.08	31.51	74.00	-42.49
2484.15	37.45	Ave	202	1.8	V	-13.08	24.37	54.00	-29.63

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT0 11b: High Channel 2462MHz									
223.45	40.83	QP	59	1.2	H	-11.62	29.21	46.00	-16.79
223.45	37.56	QP	276	1.1	V	-11.62	25.94	46.00	-20.06
4924.00	50.55	PK	267	1.8	V	-0.24	50.31	74.00	-23.69
4924.00	45.14	Ave	267	1.8	V	-0.24	44.90	54.00	-9.10
7386.00	42.96	PK	79	1.7	H	2.84	45.80	74.00	-28.20
7386.00	44.02	Ave	79	1.7	H	2.84	46.86	54.00	-7.14
2311.44	46.79	PK	220	1.0	V	-13.19	33.60	74.00	-40.40
2311.44	37.07	Ave	220	1.0	V	-13.19	23.88	54.00	-30.12
2365.16	44.16	PK	335	1.7	H	-13.14	31.02	74.00	-42.98
2365.16	37.83	Ave	335	1.7	H	-13.14	24.69	54.00	-29.31
2493.12	42.80	PK	172	1.5	V	-13.08	29.72	74.00	-44.28
2493.12	37.67	Ave	172	1.5	V	-13.08	24.59	54.00	-29.41

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT1 11b: Low Channel 2412MHz									
223.47	41.06	QP	86	2.0	H	-11.62	29.44	46.00	-16.56
223.47	36.28	QP	20	1.2	V	-11.62	24.66	46.00	-21.34
4824.00	50.43	PK	197	2.0	V	-1.06	49.37	74.00	-24.63
4824.00	46.35	Ave	197	2.0	V	-1.06	45.29	54.00	-8.71
7236.00	41.09	PK	127	1.8	H	1.33	42.42	74.00	-31.58
7236.00	41.95	Ave	127	1.8	H	1.33	43.28	54.00	-10.72
2333.95	46.04	PK	233	1.8	V	-13.19	32.85	74.00	-41.15
2333.95	39.34	Ave	233	1.8	V	-13.19	26.15	54.00	-27.85
2374.54	42.14	PK	52	1.9	H	-13.14	29.00	74.00	-45.00
2374.54	37.20	Ave	52	1.9	H	-13.14	24.06	54.00	-29.94
2497.56	44.49	PK	182	1.4	V	-13.08	31.41	74.00	-42.59
2497.56	37.91	Ave	182	1.4	V	-13.08	24.83	54.00	-29.17

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT1 11b: Middle Channel 2437MHz									
223.47	40.87	QP	213	1.3	H	-11.62	29.25	46.00	-16.75
223.47	35.87	QP	88	1.5	V	-11.62	24.25	46.00	-21.75
4874.00	50.38	PK	11	2.0	V	-0.62	49.76	74.00	-24.24
4874.00	46.50	Ave	11	2.0	V	-0.62	45.88	54.00	-8.12
7311.00	41.92	PK	280	1.5	H	2.21	44.13	74.00	-29.87
7311.00	43.26	Ave	280	1.5	H	2.21	45.47	54.00	-8.53
2329.86	45.37	PK	134	1.9	V	-13.19	32.18	74.00	-41.82
2329.86	37.23	Ave	134	1.9	V	-13.19	24.04	54.00	-29.96
2355.10	42.97	PK	226	1.4	H	-13.14	29.83	74.00	-44.17
2355.10	36.63	Ave	226	1.4	H	-13.14	23.49	54.00	-30.51
2499.63	43.73	PK	309	1.1	V	-13.08	30.65	74.00	-43.35
2499.63	37.62	Ave	309	1.1	V	-13.08	24.54	54.00	-29.46

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT1 11b: High Channel 2462MHz									
223.47	41.83	QP	329	1.0	H	-11.62	30.21	46.00	-15.79
223.47	35.23	QP	76	1.9	V	-11.62	23.61	46.00	-22.39
4924.00	49.48	PK	167	1.3	V	-0.24	49.24	74.00	-24.76
4924.00	46.00	Ave	167	1.3	V	-0.24	45.76	54.00	-8.24
7386.00	42.37	PK	12	1.1	H	2.84	45.21	74.00	-28.79
7386.00	41.82	Ave	12	1.1	H	2.84	44.66	54.00	-9.34
2315.88	46.19	PK	328	1.4	V	-13.19	33.00	74.00	-41.00
2315.88	37.05	Ave	328	1.4	V	-13.19	23.86	54.00	-30.14
2380.92	44.57	PK	36	1.5	H	-13.14	31.43	74.00	-42.57
2380.92	37.71	Ave	36	1.5	H	-13.14	24.57	54.00	-29.43
2493.54	42.17	PK	89	1.5	V	-13.08	29.09	74.00	-44.91
2493.54	36.22	Ave	89	1.5	V	-13.08	23.14	54.00	-30.86

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT0 11g: Low Channel 2412MHz									
223.45	41.34	QP	314	1.8	H	-11.62	29.72	46.00	-16.28
223.45	38.30	QP	218	1.6	V	-11.62	26.68	46.00	-19.32
4824.00	51.45	PK	140	1.3	V	-1.06	50.39	74.00	-23.61
4824.00	46.34	Ave	140	1.3	V	-1.06	45.28	54.00	-8.72
7236.00	41.98	PK	280	1.0	H	1.33	43.31	74.00	-30.69
7236.00	44.65	Ave	280	1.0	H	1.33	45.98	54.00	-8.02
2342.46	46.88	PK	184	1.0	V	-13.19	33.69	74.00	-40.31
2342.46	38.79	Ave	184	1.0	V	-13.19	25.60	54.00	-28.40
2382.90	44.63	PK	238	2.0	H	-13.14	31.49	74.00	-42.51
2382.90	36.33	Ave	238	2.0	H	-13.14	23.19	54.00	-30.81
2490.41	44.17	PK	199	1.6	V	-13.08	31.09	74.00	-42.91
2490.41	38.25	Ave	199	1.6	V	-13.08	25.17	54.00	-28.83

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT0 11g: Middle Channel 2437MHz									
223.45	40.86	QP	112	1.5	H	-11.62	29.24	46.00	-16.76
223.45	36.93	QP	329	1.1	V	-11.62	25.31	46.00	-20.69
4874.00	52.91	PK	236	1.2	V	-0.62	52.29	74.00	-21.71
4874.00	45.01	Ave	236	1.2	V	-0.62	44.39	54.00	-9.61
7311.00	43.30	PK	257	1.1	H	2.21	45.51	74.00	-28.49
7311.00	44.07	Ave	257	1.1	H	2.21	46.28	54.00	-7.72
2311.55	45.36	PK	357	1.8	V	-13.19	32.17	74.00	-41.83
2311.55	39.67	Ave	357	1.8	V	-13.19	26.48	54.00	-27.52
2363.86	44.83	PK	105	1.8	H	-13.14	31.69	74.00	-42.31
2363.86	38.64	Ave	105	1.8	H	-13.14	25.50	54.00	-28.50
2489.00	42.61	PK	26	1.4	V	-13.08	29.53	74.00	-44.47
2489.00	36.93	Ave	26	1.4	V	-13.08	23.85	54.00	-30.15

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT0 11g: High Channel 2462MHz									
223.45	40.13	QP	207	1.5	H	-11.62	28.51	46.00	-17.49
223.45	36.39	QP	152	1.7	V	-11.62	24.77	46.00	-21.23
4924.00	53.84	PK	45	1.1	V	-0.24	53.60	74.00	-20.40
4924.00	44.50	Ave	45	1.1	V	-0.24	44.26	54.00	-9.74
7386.00	42.22	PK	307	1.2	H	2.84	45.06	74.00	-28.94
7386.00	42.63	Ave	307	1.2	H	2.84	45.47	54.00	-8.53
2333.78	45.78	PK	92	1.5	V	-13.19	32.59	74.00	-41.41
2333.78	37.68	Ave	92	1.5	V	-13.19	24.49	54.00	-29.51
2352.00	43.99	PK	354	1.8	H	-13.14	30.85	74.00	-43.15
2352.00	36.67	Ave	354	1.8	H	-13.14	23.53	54.00	-30.47
2493.13	42.84	PK	125	1.2	V	-13.08	29.76	74.00	-44.24
2493.13	36.84	Ave	125	1.2	V	-13.08	23.76	54.00	-30.24

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT1 11g: Low Channel 2412MHz									
223.47	41.90	QP	107	1.7	H	-11.62	30.28	46.00	-15.72
223.47	35.26	QP	265	1.7	V	-11.62	23.64	46.00	-22.36
4824.00	48.92	PK	103	1.8	V	-1.06	47.86	74.00	-26.14
4824.00	45.21	Ave	103	1.8	V	-1.06	44.15	54.00	-9.85
7236.00	42.81	PK	103	1.9	H	1.33	44.14	74.00	-29.86
7236.00	40.49	Ave	103	1.9	H	1.33	41.82	54.00	-12.18
2344.38	46.37	PK	257	1.2	V	-13.19	33.18	74.00	-40.82
2344.38	39.64	Ave	257	1.2	V	-13.19	26.45	54.00	-27.55
2359.64	42.20	PK	13	1.8	H	-13.14	29.06	74.00	-44.94
2359.64	36.31	Ave	13	1.8	H	-13.14	23.17	54.00	-30.83
2490.59	44.59	PK	15	1.4	V	-13.08	31.51	74.00	-42.49
2490.59	38.35	Ave	15	1.4	V	-13.08	25.27	54.00	-28.73

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT1 11g: Middle Channel 2437MHz									
223.47	41.06	QP	252	1.9	H	-11.62	29.44	46.00	-16.56
223.47	36.65	QP	133	1.9	V	-11.62	25.03	46.00	-20.97
4874.00	49.94	PK	242	1.9	V	-0.62	49.32	74.00	-24.68
4874.00	44.41	Ave	242	1.9	V	-0.62	43.79	54.00	-10.21
7311.00	44.08	PK	157	1.5	H	2.21	46.29	74.00	-27.71
7311.00	41.17	Ave	157	1.5	H	2.21	43.38	54.00	-10.62
2346.23	45.32	PK	334	1.1	V	-13.19	32.13	74.00	-41.87
2346.23	39.83	Ave	334	1.1	V	-13.19	26.64	54.00	-27.36
2382.77	44.75	PK	313	1.3	H	-13.14	31.61	74.00	-42.39
2382.77	37.52	Ave	313	1.3	H	-13.14	24.38	54.00	-29.62
2484.77	42.60	PK	248	1.5	V	-13.08	29.52	74.00	-44.48
2484.77	38.88	Ave	248	1.5	V	-13.08	25.80	54.00	-28.20

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT1 11g: High Channel 2462MHz									
223.47	40.03	QP	71	1.5	H	-11.62	28.41	46.00	-17.59
223.47	36.85	QP	303	1.4	V	-11.62	25.23	46.00	-20.77
4924.00	49.71	PK	240	1.1	V	-0.24	49.47	74.00	-24.53
4924.00	45.23	Ave	240	1.1	V	-0.24	44.99	54.00	-9.01
7386.00	45.41	PK	232	1.1	H	2.84	48.25	74.00	-25.75
7386.00	40.48	Ave	232	1.1	H	2.84	43.32	54.00	-10.68
2314.41	46.28	PK	274	1.7	V	-13.19	33.09	74.00	-40.91
2314.41	37.39	Ave	274	1.7	V	-13.19	24.20	54.00	-29.80
2366.79	43.91	PK	183	2.0	H	-13.14	30.77	74.00	-43.23
2366.79	38.33	Ave	183	2.0	H	-13.14	25.19	54.00	-28.81
2487.74	42.69	PK	349	1.1	V	-13.08	29.61	74.00	-44.39
2487.74	38.85	Ave	349	1.1	V	-13.08	25.77	54.00	-28.23

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT0+ANT1 n20: Low Channel 2412MHz									
223.45	38.75	QP	16	1.2	H	-11.62	27.13	46.00	-18.87
223.45	36.91	QP	71	1.2	V	-11.62	25.29	46.00	-20.71
4824.00	53.33	PK	238	1.7	V	-1.06	52.27	74.00	-21.73
4824.00	43.86	Ave	238	1.7	V	-1.06	42.80	54.00	-11.20
7236.00	42.12	PK	251	1.4	H	1.33	43.45	74.00	-30.55
7236.00	44.09	Ave	251	1.4	H	1.33	45.42	54.00	-8.58
2331.28	45.32	PK	279	1.6	V	-13.19	32.13	74.00	-41.87
2331.28	39.64	Ave	279	1.6	V	-13.19	26.45	54.00	-27.55
2354.20	44.88	PK	254	2.0	H	-13.14	31.74	74.00	-42.26
2354.20	36.15	Ave	254	2.0	H	-13.14	23.01	54.00	-30.99
2492.45	44.73	PK	252	1.7	V	-13.08	31.65	74.00	-42.35
2492.45	37.22	Ave	252	1.7	V	-13.08	24.14	54.00	-29.86

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT0+ANT1 n20: Middle Channel 2437MHz									
223.51	46.00	QP	130	1.1	H	-11.62	34.38	46.00	-11.62
223.51	36.97	QP	101	1.7	V	-11.62	25.35	46.00	-20.65
4874.00	47.34	PK	77	1.3	V	-0.62	46.72	74.00	-27.28
4874.00	44.76	Ave	77	1.3	V	-0.62	44.14	54.00	-9.86
7311.00	40.14	PK	72	1.8	H	2.21	42.35	74.00	-31.65
7311.00	40.50	Ave	72	1.8	H	2.21	42.71	54.00	-11.29
2319.81	46.62	PK	218	1.6	V	-13.19	33.43	74.00	-40.57
2319.81	37.78	Ave	218	1.6	V	-13.19	24.59	54.00	-29.41
2384.84	44.69	PK	56	1.7	H	-13.14	31.55	74.00	-42.45
2384.84	37.74	Ave	56	1.7	H	-13.14	24.60	54.00	-29.40
2499.17	44.91	PK	97	1.3	V	-13.08	31.83	74.00	-42.17
2499.17	37.05	Ave	97	1.3	V	-13.08	23.97	54.00	-30.03

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
ANT0+ANT1 n20: High Channel 2462MHz									
223.51	45.84	QP	49	1.7	H	-11.62	34.22	46.00	-11.78
223.51	38.01	QP	338	1.9	V	-11.62	26.39	46.00	-19.61
4924.00	47.16	PK	77	1.8	V	-0.24	46.92	74.00	-27.08
4924.00	46.08	Ave	77	1.8	V	-0.24	45.84	54.00	-8.16
7386.00	39.62	PK	316	1.9	H	2.84	42.46	74.00	-31.54
7386.00	40.06	Ave	316	1.9	H	2.84	42.90	54.00	-11.10
2349.09	45.64	PK	249	1.0	V	-13.19	32.45	74.00	-41.55
2349.09	39.30	Ave	249	1.0	V	-13.19	26.11	54.00	-27.89
2369.76	42.29	PK	149	2.0	H	-13.14	29.15	74.00	-44.85
2369.76	37.60	Ave	149	2.0	H	-13.14	24.46	54.00	-29.54
2497.41	44.54	PK	195	1.8	V	-13.08	31.46	74.00	-42.54
2497.41	36.84	Ave	195	1.8	V	-13.08	23.76	54.00	-30.24

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT0+ANT1 n40: Low Channel 2422MHz									
223.51	44.77	QP	244	1.8	H	-11.62	33.15	46.00	-12.85
223.51	38.49	QP	69	1.4	V	-11.62	26.87	46.00	-19.13
4844.00	44.59	PK	92	1.5	V	-1.06	43.53	74.00	-30.47
4844.00	44.31	Ave	92	1.5	V	-1.06	43.25	54.00	-10.75
7266.00	38.54	PK	15	1.9	H	1.33	39.87	74.00	-34.13
7266.00	38.62	Ave	15	1.9	H	1.33	39.95	54.00	-14.05
2337.88	45.15	PK	183	1.1	V	-13.19	31.96	74.00	-42.04
2337.88	38.25	Ave	183	1.1	V	-13.19	25.06	54.00	-28.94
2382.04	42.53	PK	114	1.3	H	-13.14	29.39	74.00	-44.61
2382.04	36.61	Ave	114	1.3	H	-13.14	23.47	54.00	-30.53
2488.82	42.23	PK	132	1.7	V	-13.08	29.15	74.00	-44.85
2488.82	36.99	Ave	132	1.7	V	-13.08	23.91	54.00	-30.09

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT0+ANT1 n40: Middle Channel 2437MHz									
223.51	44.39	QP	327	1.1	H	-11.62	32.77	46.00	-13.23
223.51	38.84	QP	153	1.1	V	-11.62	27.22	46.00	-18.78
4874.00	44.43	PK	10	1.2	V	-0.62	43.81	74.00	-30.19
4874.00	44.48	Ave	10	1.2	V	-0.62	43.86	54.00	-10.14
7311.00	38.55	PK	338	1.6	H	2.21	40.76	74.00	-33.24
7311.00	38.90	Ave	338	1.6	H	2.21	41.11	54.00	-12.89
2343.12	45.46	PK	141	1.3	V	-13.19	32.27	74.00	-41.73
2343.12	38.98	Ave	141	1.3	V	-13.19	25.79	54.00	-28.21
2366.43	43.69	PK	21	2.0	H	-13.14	30.55	74.00	-43.45
2366.43	38.63	Ave	21	2.0	H	-13.14	25.49	54.00	-28.51
2495.18	42.96	PK	181	1.9	V	-13.08	29.88	74.00	-44.12
2495.18	38.30	Ave	181	1.9	V	-13.08	25.22	54.00	-28.78

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT0+ANT1 n40: High Channel 2452MHz									
223.51	45.37	QP	253	1.7	H	-11.62	33.75	46.00	-12.25
223.51	38.21	QP	95	1.2	V	-11.62	26.59	46.00	-19.41
4904.00	44.43	PK	338	1.4	V	-0.24	44.19	74.00	-29.81
4904.00	44.98	Ave	338	1.4	V	-0.24	44.74	54.00	-9.26
7356.00	38.21	PK	261	1.6	H	2.84	41.05	74.00	-32.95
7356.00	39.55	Ave	261	1.6	H	2.84	42.39	54.00	-11.61
2325.37	45.52	PK	335	1.4	V	-13.19	32.33	74.00	-41.67
2325.37	37.42	Ave	335	1.4	V	-13.19	24.23	54.00	-29.77
2374.24	43.61	PK	75	1.2	H	-13.14	30.47	74.00	-43.53
2374.24	38.01	Ave	75	1.2	H	-13.14	24.87	54.00	-29.13
2488.60	44.65	PK	316	1.6	V	-13.08	31.57	74.00	-42.43
2488.60	36.91	Ave	316	1.6	V	-13.08	23.83	54.00	-30.17

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

8 Band Edge Measurement

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB558074 D01 DTS Meas Guidance v03r05
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

8.1 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.2 Test Result

Test result plots shown as follows:

ANT0 TX 11b: Band edge-left side



ANT0 TX 11b: Band edge-right side



ANT0 TX 11g: Band edge-left side



ANT0 TX 11g: Band edge-right side




ANT0 TX 11n HT20: Band edge-left side




ANT0 TX 11n HT20: Band edge-right side



ANT0 TX 11n HT40: Band edge-left side

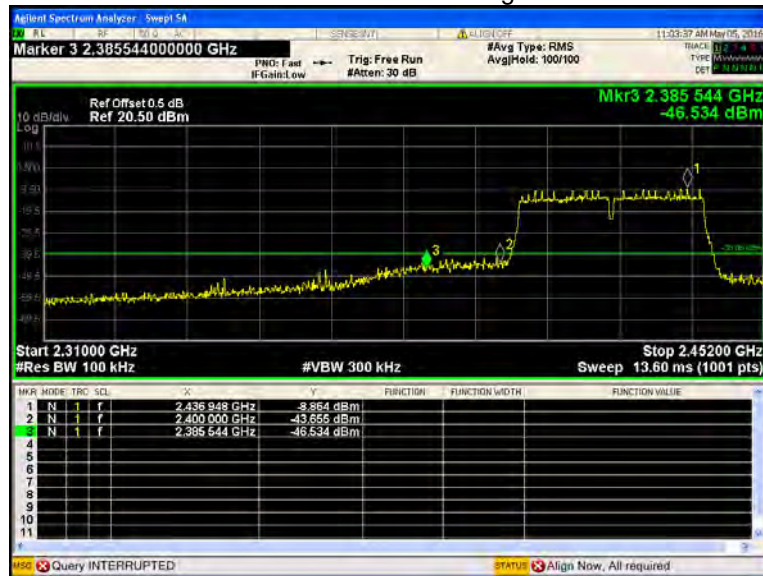

ANT0 TX 11n HT40: Band edge-right side

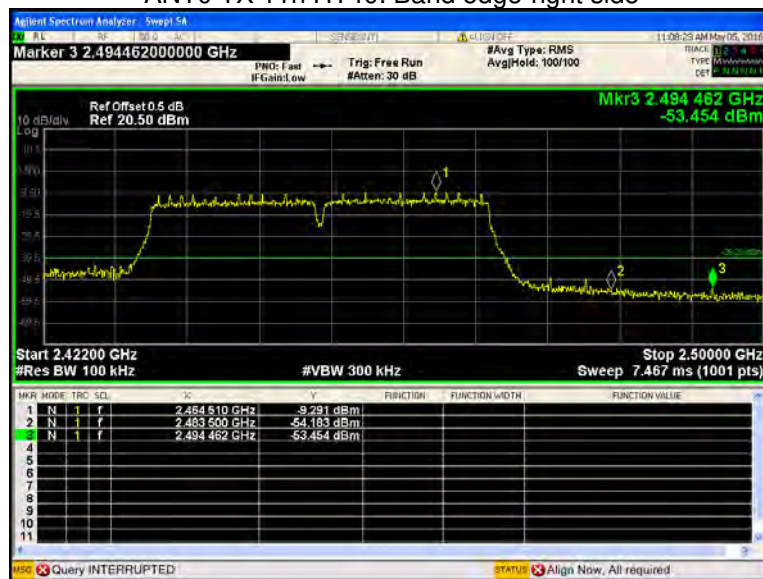

ANT1 TX 11b: Band edge-left side



ANT1 TX 11b: Band edge-right side



ANT1 TX 11g: Band edge-left side



ANT1 TX 11g: Band edge-right side



ANT1 TX 11n HT20: Band edge-left side



ANT1 TX 11n HT20: Band edge-right side



ANT1 TX 11n HT40: Band edge-left side



ANT1 TX 11n HT40: Band edge-right side



9 6 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB558074 D01 DTS Meas Guidance v03r05

9.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

9.2 Test Result:

ANT	Operation mode	Bandwidth (MHz)		
		Low	Middle	High
ANT0	11b	9.072	9.072	9.072
	11g	16.425	16.450	16.425
	11n HT20	17.685	17.685	17.658
	11n HT40	36.410	36.645	36.410
ANT1	11b	9.088	9.088	9.088
	11g	16.400	16.425	16.400
	11n HT20	17.652	17.658	17.658
	11n HT40	36.410	36.645	36.465

ANT0 TX 11b Low channel



ANT0 TX 11b Middle channel



ANT0 TX 11b High channel



ANT0 TX 11g Low channel




ANT0 TX 11g Middle channel



ANT0 TX 11g High channel



ANT0 TX 11n HT20 Low channel

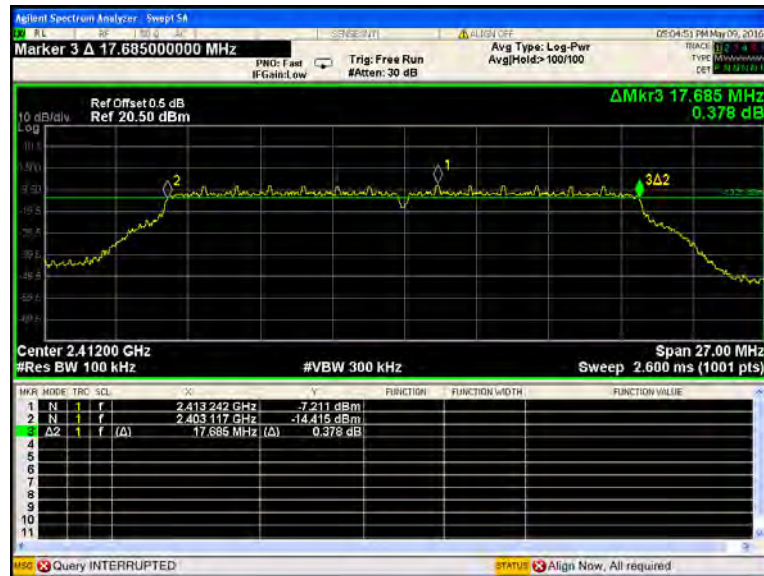

ANT0 TX 11n HT20 Middle channel




ANT0 TX 11n HT20 High channel




ANT0 TX 11n HT40 Low channel



ANT0 TX 11n HT40 Middle channel

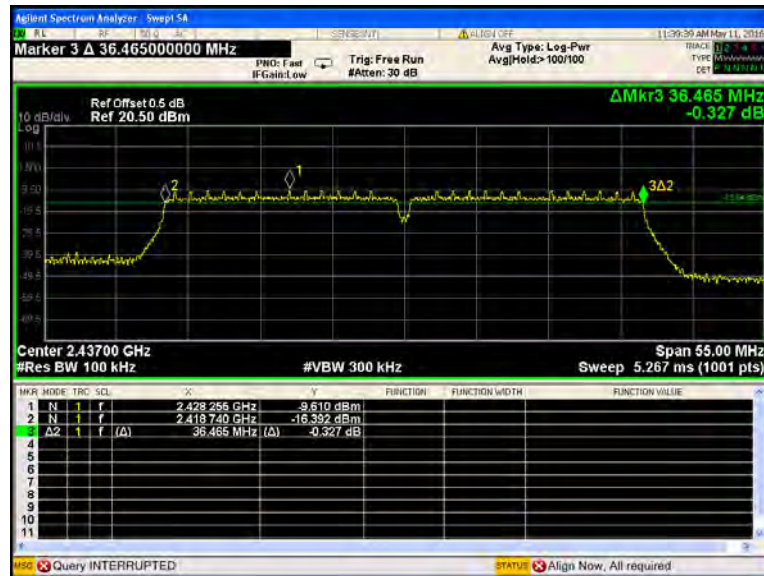

ANT0 TX 11n HT40 High channel

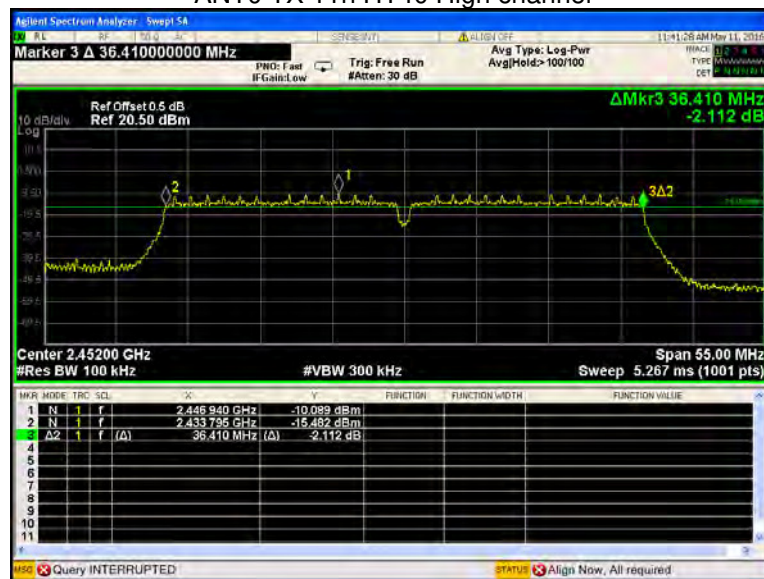

ANT1 TX 11b Low channel



ANT1 TX 11b Middle channel



ANT1 TX 11b High channel



ANT1 TX 11g Low channel




ANT1 TX 11g Middle channel



ANT1 TX 11g High channel



ANT1 TX 11n HT20 Low channel

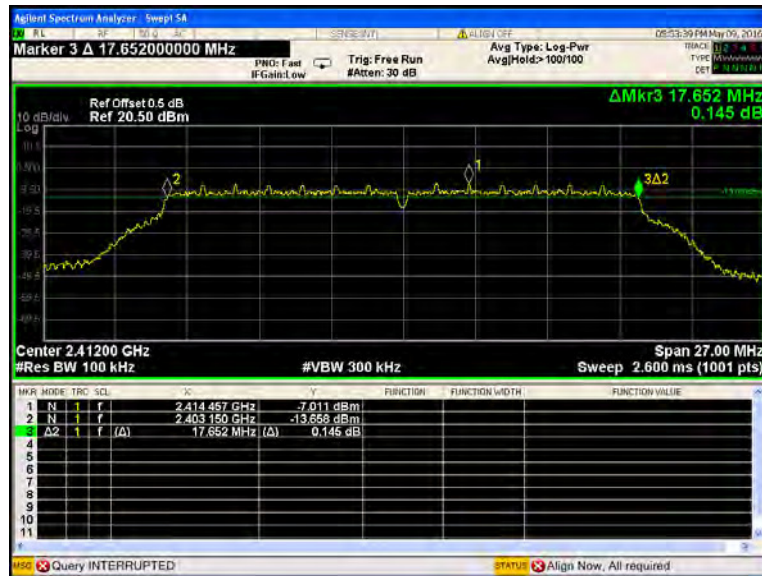

ANT1 TX 11n HT20 Middle channel



ANT1 TX 11n HT20 High channel



ANT1 TX 11n HT40 Low channel



ANT1 TX 11n HT40 Middle channel



ANT1 TX 11n HT40 High channel



10 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB558074 D01 DTS Meas Guidance v03r05

10.1 Test Procedure:


KDB558074 D01 DTS Meas Guidance v03r05 section 9.1.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


10.2 Test Result:

Operation mode	ANT	Maximum Peak Output Power (dBm)		
		Low	Middle	High
11b	ANT0	9.03	9.40	9.41
	ANT1	9.22	9.15	9.26
11g	ANT0	9.46	9.07	9.10
	ANT1	9.42	9.40	9.23
11n HT20	ANT0	9.33	9.09	9.15
	ANT1	9.37	9.35	9.26
	ANT0+ANT1	12.36	12.23	12.22
11n HT40	ANT0	9.19	9.26	9.17
	ANT1	9.31	9.45	9.33
	ANT0+ANT1	12.26	12.37	12.26
Limit				
1W/30dBm				


ANT0 TX 11b Low channel

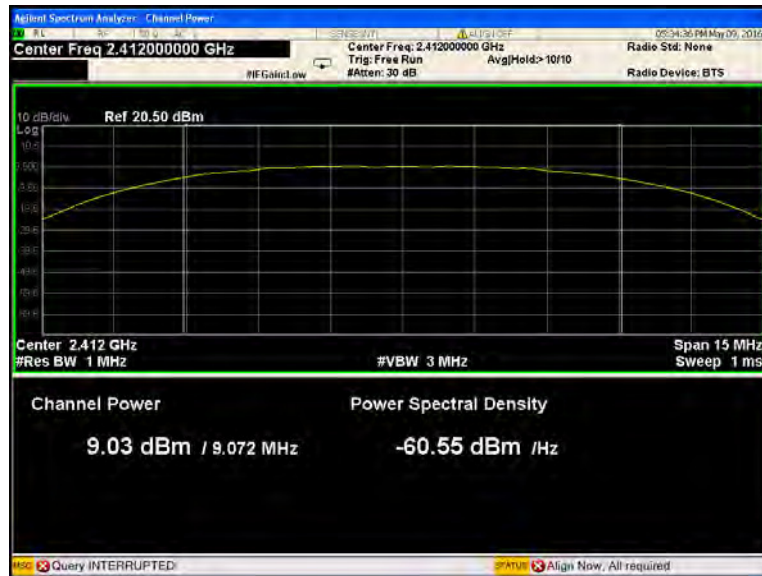


ANT0 TX 11b Middle channel

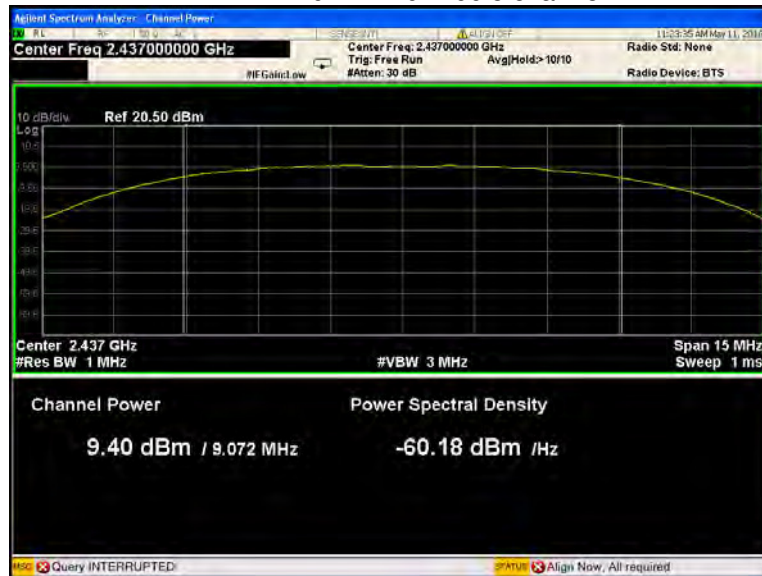


ANT0 TX 11b High channel

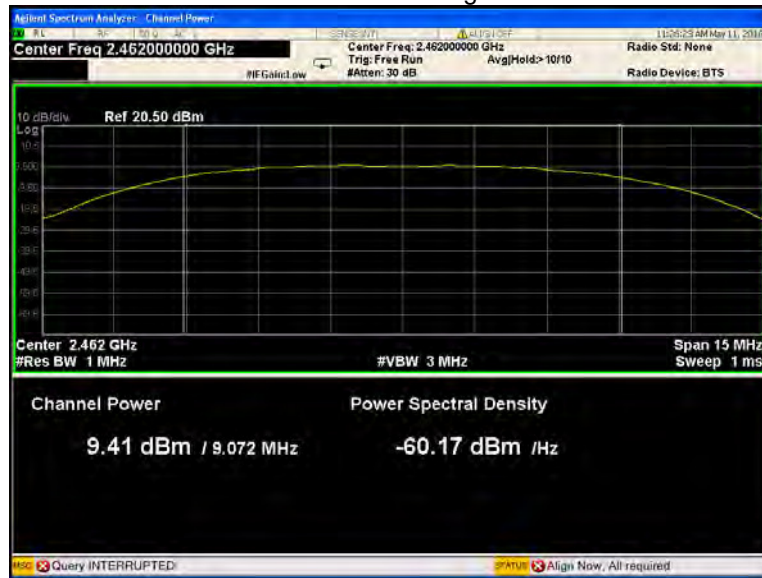


ANT0 TX 11g Low channel

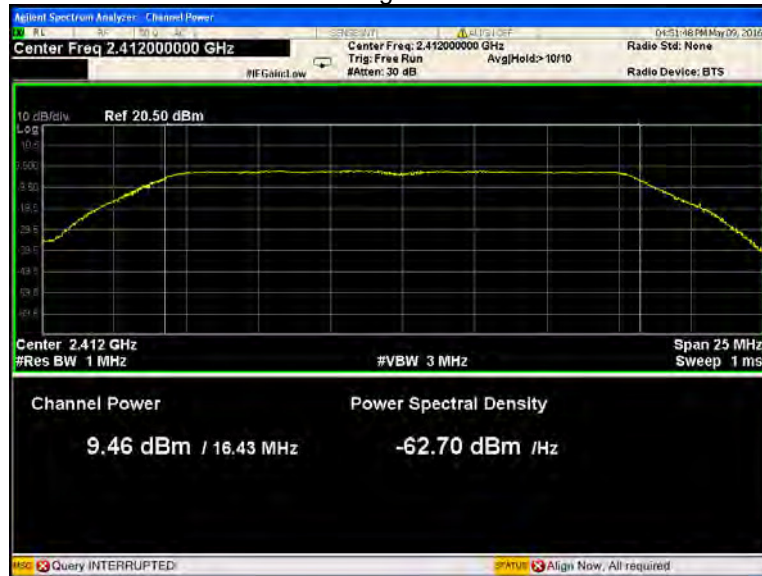


ANT0 TX 11g Middle channel

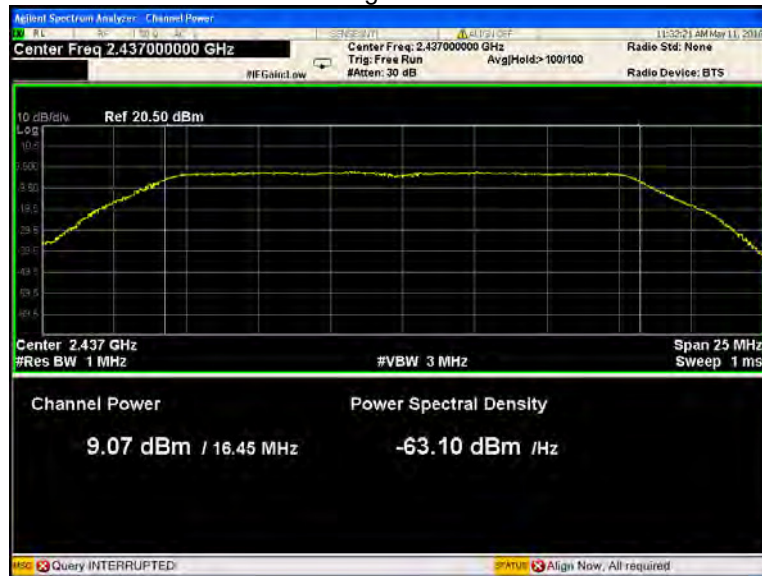


ANT0 TX 11g High channel

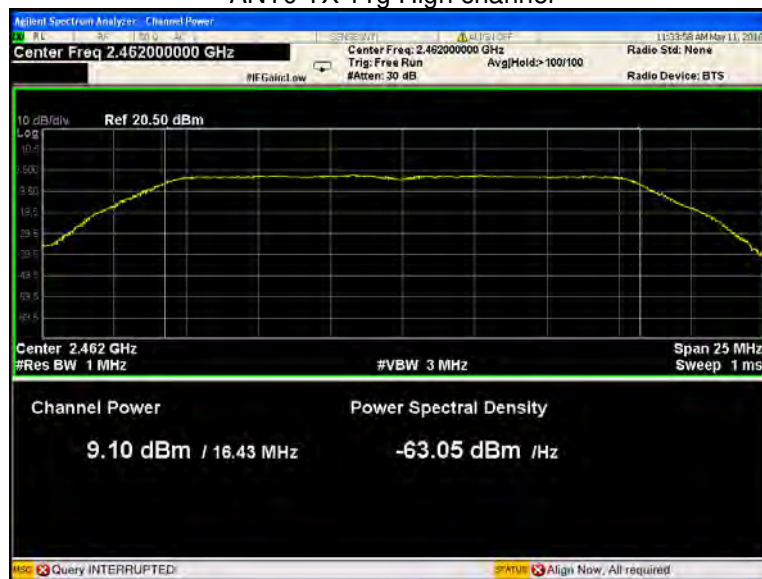


ANT0 TX 11n HT20 Low channel

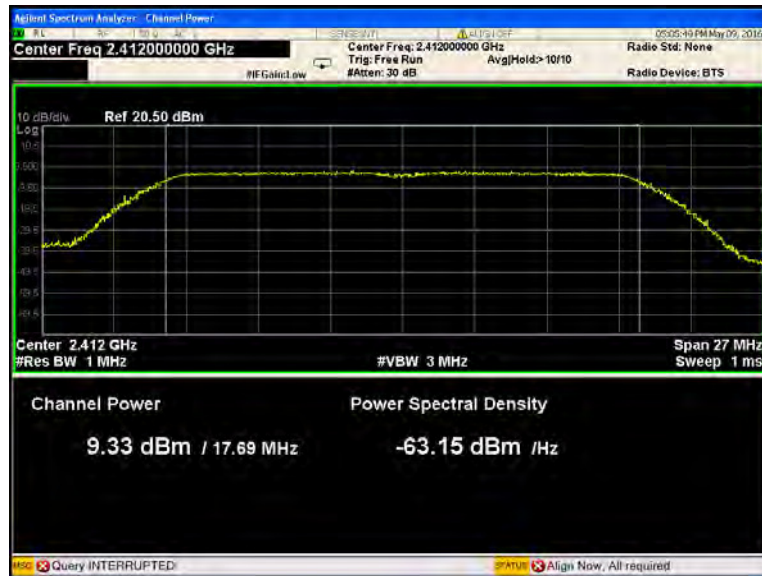


ANT0 TX 11n HT20 Middle channel

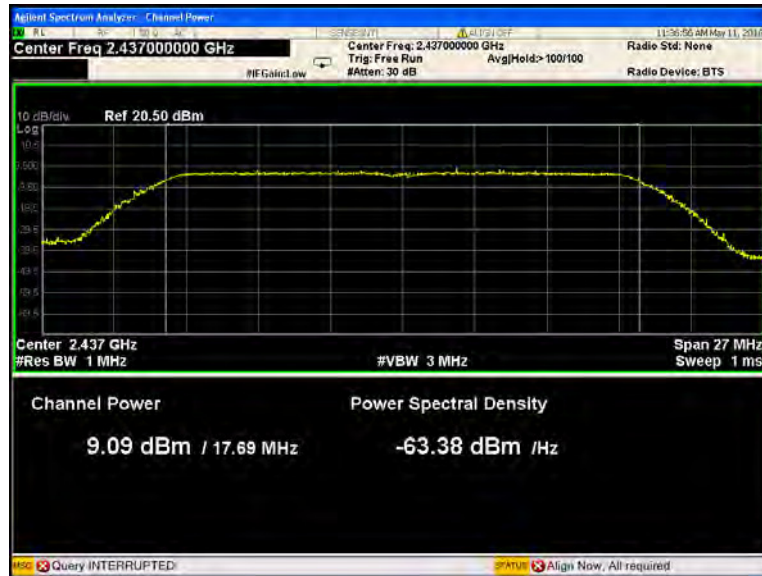


ANT0 TX 11n HT20 High channel

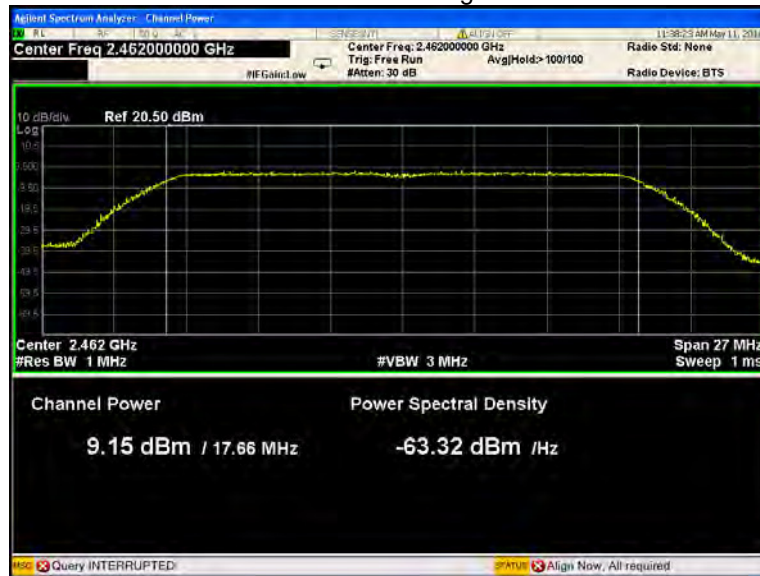


ANT0 TX 11n HT40 Low channel

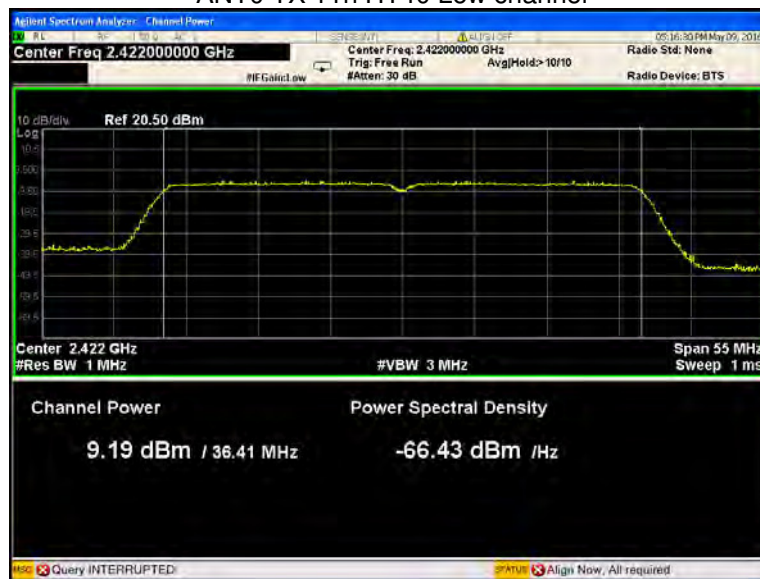


ANT0 TX 11n HT40 Middle channel

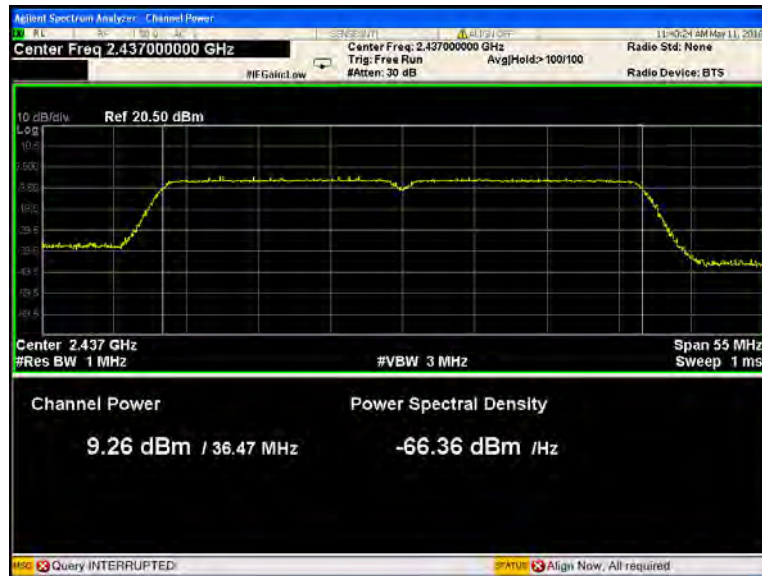


ANT0 TX 11n HT40 High channel

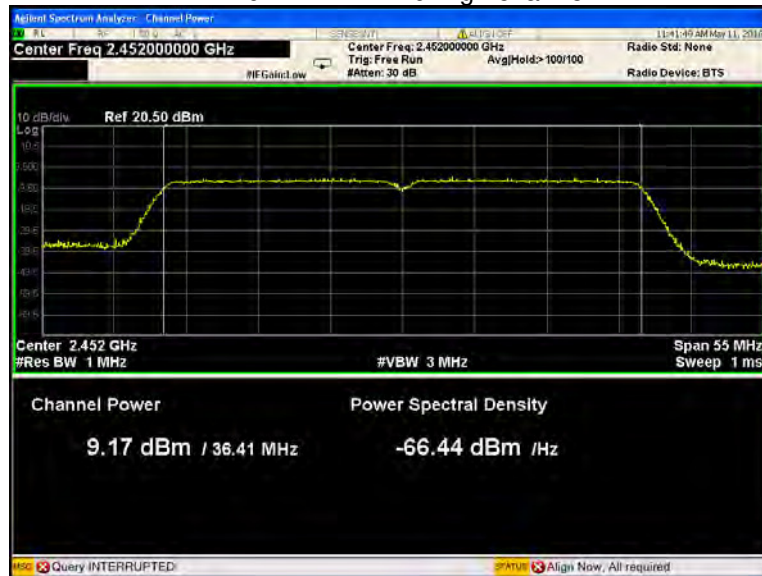


ANT1 TX 11b Low channel

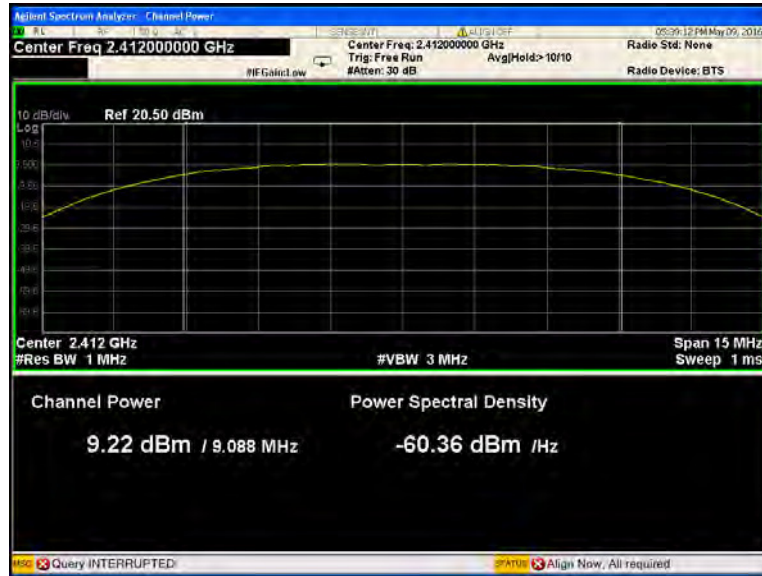


ANT1 TX 11b Middle channel

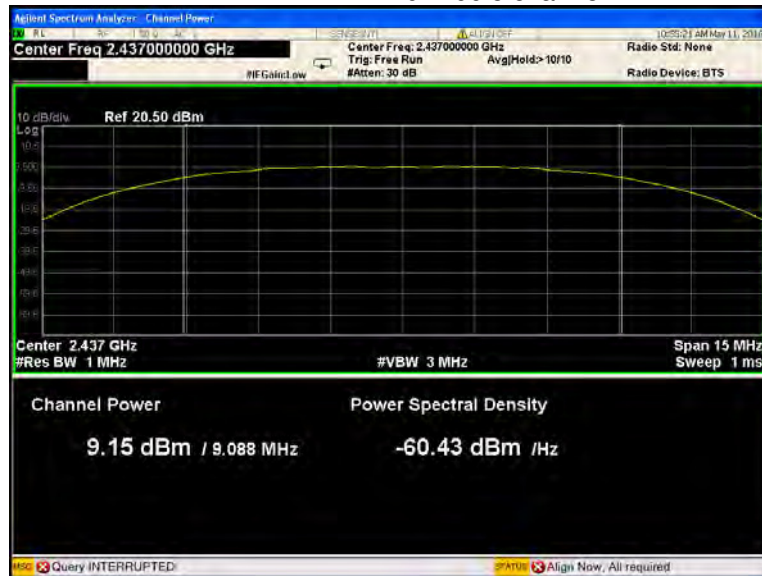


ANT1 TX 11b High channel

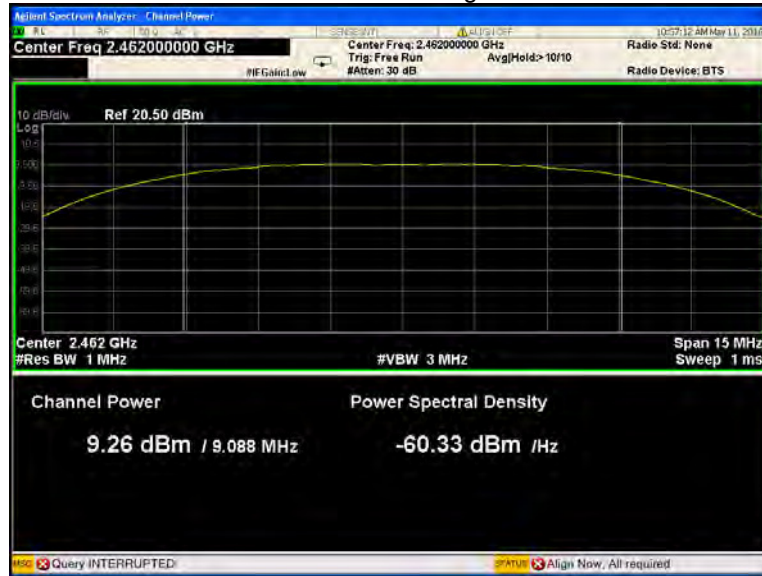


ANT1 TX 11g Low channel

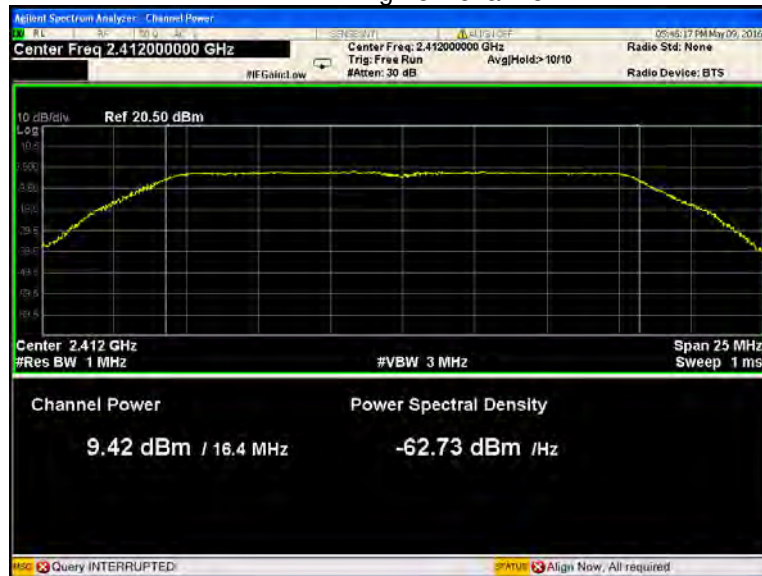


ANT1 TX 11g Middle channel

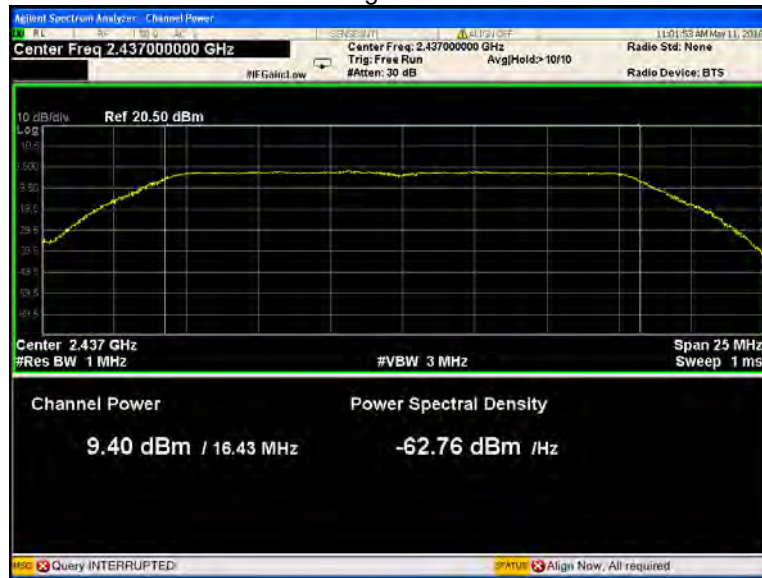


ANT1 TX 11g High channel

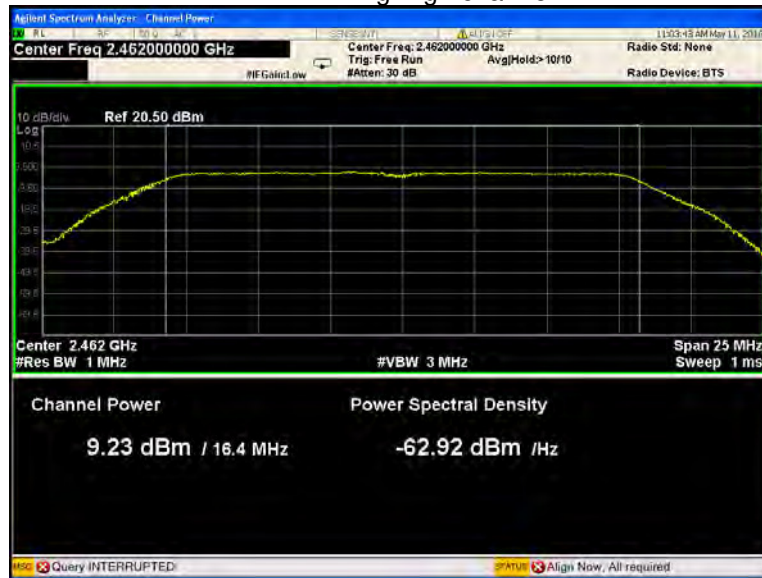


ANT1 TX 11n HT20 Low channel

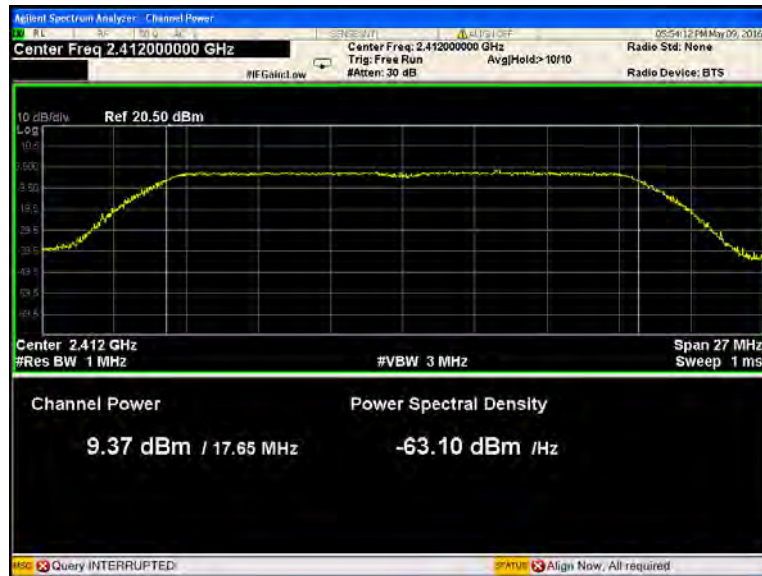


ANT1 TX 11n HT20 Middle channel

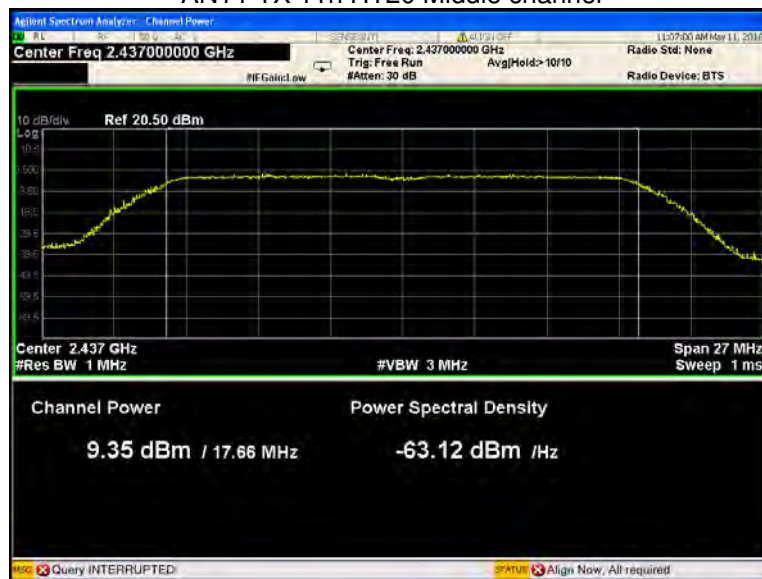


ANT1 TX 11n HT20 High channel

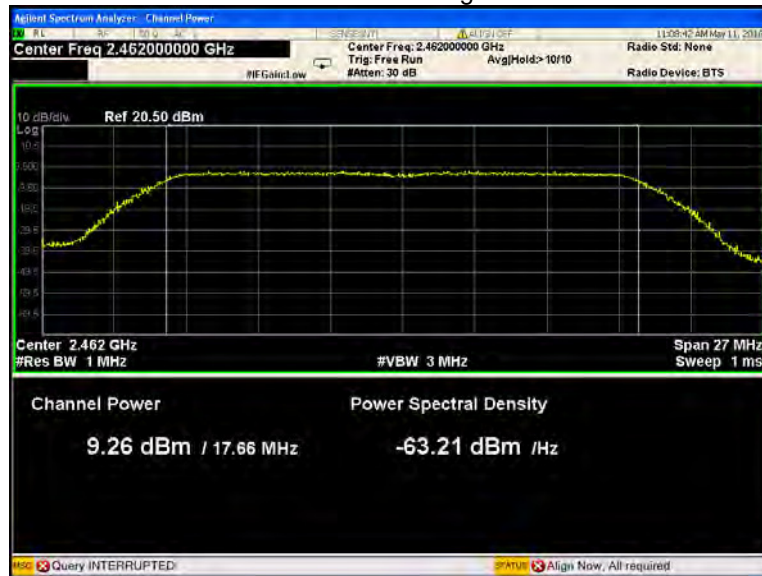


ANT1 TX 11n HT40 Low channel

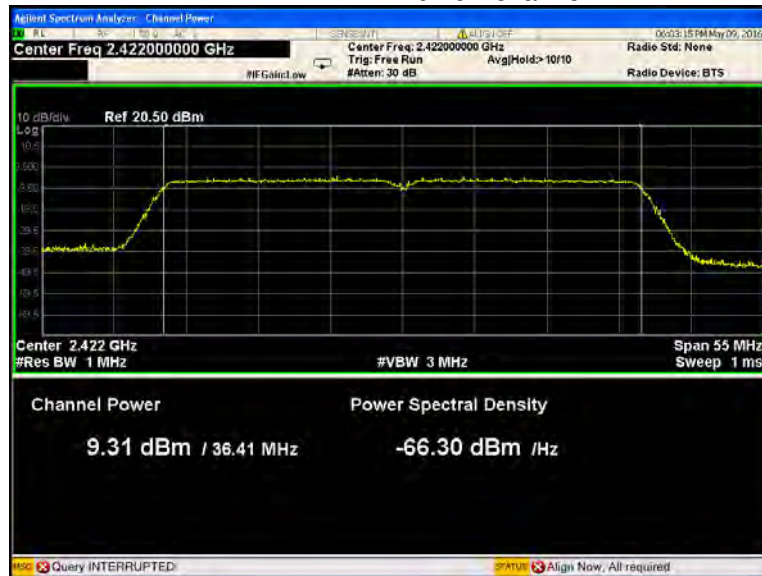

ANT1 TX 11n HT40 Middle channel

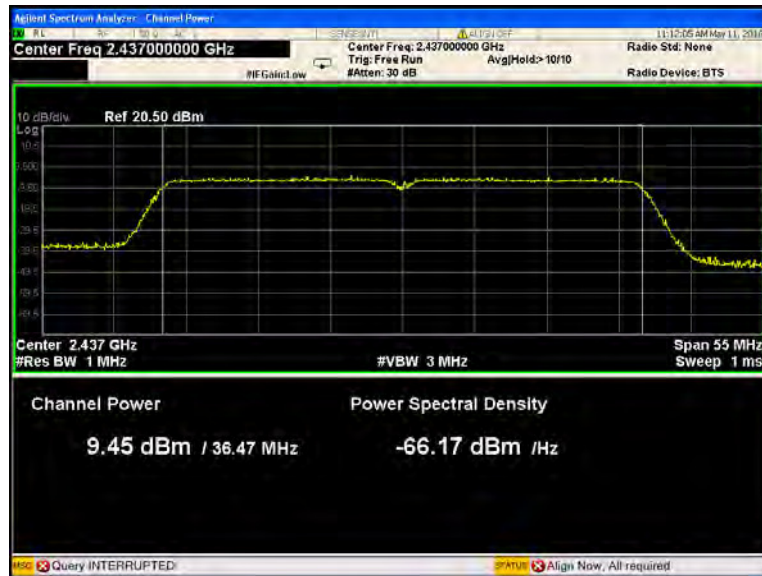

ANT1 TX 11n HT40 High channel

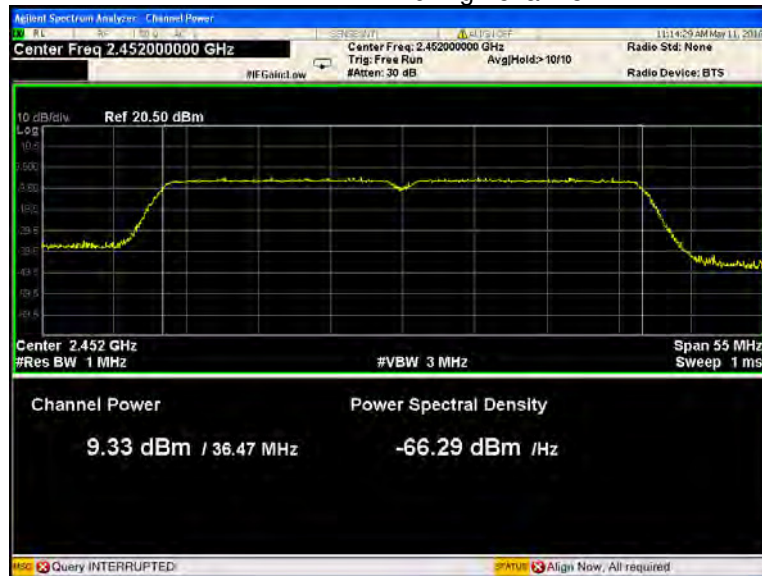

11 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB558074 D01 DTS Meas Guidance v03r05

11.1 Test Procedure:

KDB558074 D01 DTS Meas Guidance v03r05 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.

11.2 Test Result:

Operation mode	ANT	Maximum Peak Output Power (dBm per 3kHz)		
		Low	Middle	High
11b	ANT0	-17.129	-16.197	-16.943
	ANT1	-16.817	-16.701	-16.644
11g	ANT0	-18.666	-18.064	-18.558
	ANT1	-17.280	-18.537	-19.763
11n HT20	ANT0	-18.444	-18.662	-18.193
	ANT1	-19.108	-19.306	-19.022
	ANT0+ANT1	-15.750	-15.960	-15.580
11n HT40	ANT0	-22.346	-20.616	-21.311
	ANT1	-21.947	-22.698	-22.577
	ANT0+ANT1	-19.130	-18.520	-18.890
Limit				
(8 dBm per 3kHz)				

ANT0 TX 11b Low channel



ANT0 TX 11b Middle channel



ANT0 TX 11b High channel



ANT0 TX 11g Low channel



ANT0 TX 11g Middle channel



ANT0 TX 11g High channel



ANT0 TX 11n HT20 Low channel




ANT0 TX 11n HT20 Middle channel




ANT0 TX 11n HT20 High channel



ANT0 TX 11n HT40 Low channel

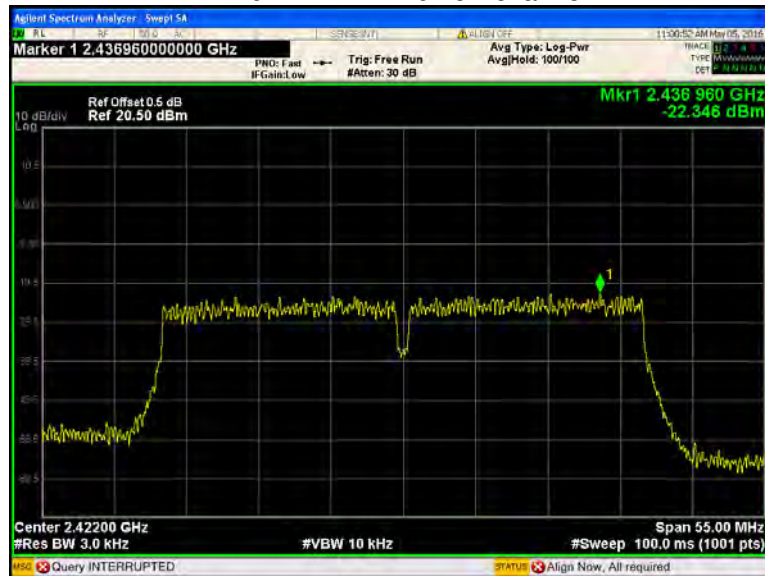

ANT0 TX 11n HT40 Middle channel

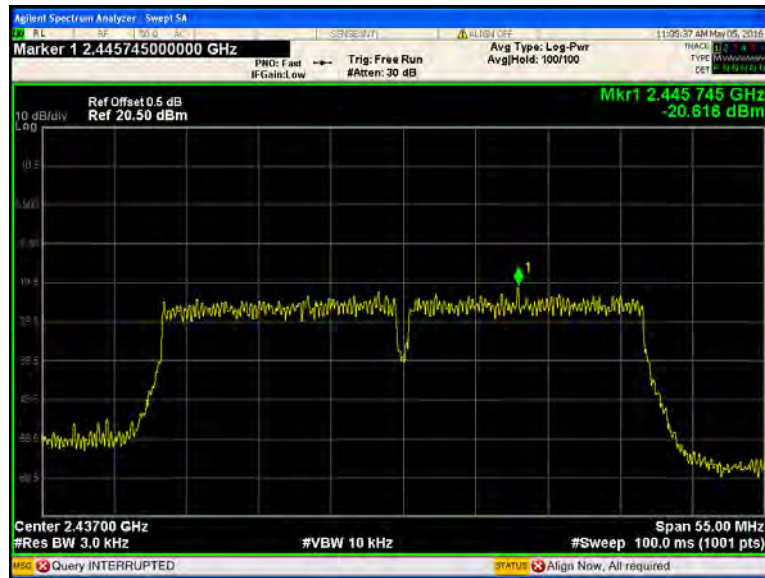

ANT0 TX 11n HT40 High channel



ANT1 TX 11b Low channel



ANT1 TX 11b Middle channel



ANT1 TX 11b High channel



ANT1 TX 11g Low channel



ANT1 TX 11g Middle channel



ANT1 TX 11g High channel



ANT1 TX 11n HT20 Low channel



ANT1 TX 11n HT20 Middle channel




ANT1 TX 11n HT20 High channel




ANT1 TX 11n HT40 Low channel



ANT1 TX 11n HT40 Middle channel

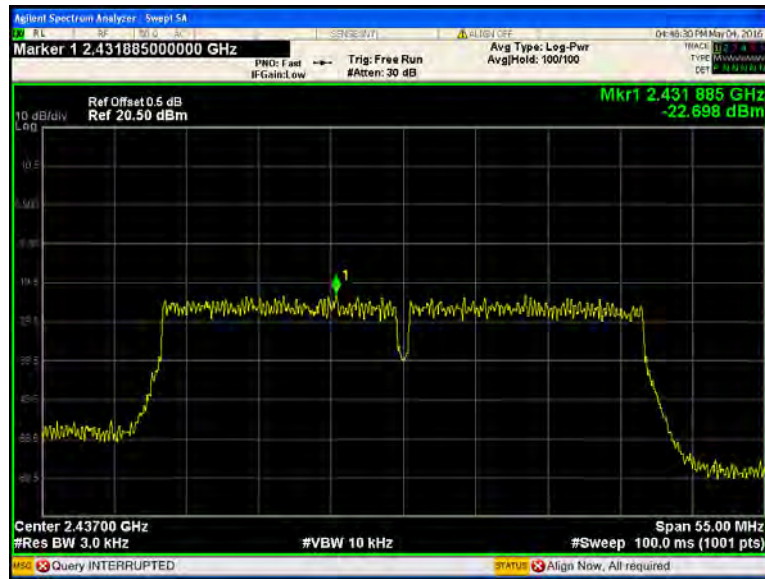

ANT1 TX 11n HT40 High channel

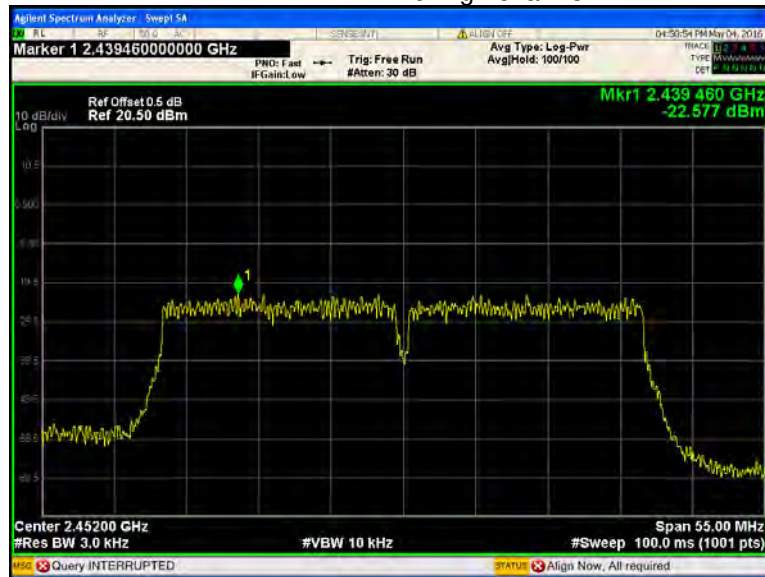

12 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

This device uses of two antennas that uses a specified coupling to the intentional radiator. Antenna connectors complied with the requirement.

13 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part 2.1091

13.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

13.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

13.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, $d=0.2\text{m}$, as well as the gain of the used antenna, the RF power density can be obtained

Directional Gain (dBi)	Directional Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
3.20	2.089	12.37	17.26	0.007173	1

* Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi =3.2 dBi

=====End of Report=====