

TEST REPORT

Reference No. : WTS15S0933801-2E
FCC ID..... : 2AFOYL653AN
Applicant..... : Le Shi Zhi Xin Electronic Technology (Tian jin) Limited
Address..... : 201-427 2F B1 District, Anime building, No.126 Anime Middle Road,
Eco-city Tianjin, China
Manufacturer : TPV Technology(Qingdao) Co.,Ltd
Address..... : NO.99 Huoju Road, High-tech Industrial Development Zone, Qingdao
City, Shandong Province, China(PRC)
Product Name : Letv Super TV
Model No. : L653AN, L65***(* can be A to Z(a-z), 0 to 9, "+", "-", "." or blank, series
model name is same to each other except for model designation for
market issue.)
Brand..... : Letv
Standards..... : FCC CFR47 Part 15 C Section 15.407:2014
Date of Receipt sample..... : Sep.14, 2015
Date of Test..... : Sep. 15, 2015 – Sep. 30, 2015
Date of Issue..... : Oct. 08, 2015
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China
Tel :+86-755-83551033
Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207(a)	PASS
Radiated Emissions	15.407(a) 15.205(a) 15.209(a)	PASS
Duty Cycle	KDB 789033	--
6dB Bandwidth	15.407(a)	PASS
26 dB Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	PASS
Maximum Conducted Output Power	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Restricted bands around fundamental frequency	15.407(a)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	6
4.3 CHANNEL LIST	6
4.4 TEST FACILITY	7
5 EQUIPMENT USED DURING TEST	8
5.1 EQUIPMENTS LIST	8
5.2 DESCRIPTION OF SUPPORT UNITS	9
5.3 MEASUREMENT UNCERTAINTY	9
5.4 TEST EQUIPMENT CALIBRATION	9
6 CONDUCTED EMISSION	10
6.1 E.U.T. OPERATION	10
6.2 EUT SETUP	10
6.3 MEASUREMENT DESCRIPTION	10
6.4 CONDUCTED EMISSION TEST RESULT	11
7 RADIATED EMISSIONS.....	13
7.1 EUT OPERATION.....	13
7.2 TEST SETUP	14
7.3 SPECTRUM ANALYZER SETUP	15
7.4 TEST PROCEDURE	16
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	16
7.6 SUMMARY OF TEST RESULTS	17
8 DUTY CYCLE.....	31
8.1 SUMMARY OF TEST RESULTS	31
9 BAND EDGE	44
9.1 TEST PRODUCE.....	44
9.2 TEST RESULT	45
10 6 DB BANDWIDTH.....	69
10.1 TEST PROCEDURE:.....	69
10.2 TEST RESULT:	69
11 26 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	84
11.1 TEST PROCEDURE:.....	84
11.2 TEST RESULT:	85
12 CONDUCTED OUTPUT POWER	114
12.1 TEST PROCEDURE:.....	114
12.2 TEST RESULT :	115
13 POWER SPECTRAL DENSITY	144
13.1 TEST PROCEDURE:.....	144
13.2 TEST RESULT:	145
14 ANTENNA REQUIREMENT	175
15 RF EXPOSURE.....	176
15.1 REQUIREMENTS.....	176

15.2	THE PROCEDURES / LIMIT	176
15.3	MPE CALCULATION METHOD	177

4 General Information

4.1 General Description of E.U.T.

Product Name:	Letv Super TV
Model No.:	L653AN, L65***(* can be A to Z(a-z), 0 to 9, "+", "-", "." or blank, series model name is same to each other except for model designation for market issue.)
Model Description:	Only the model names are different, The L653AN is tested model.
Operation Frequency:	IEEE 802.11b/g/n(HT20):2412MHz ~ 2462MHz IEEE 802.11n(HT40):2422MHz~2452MHz IEEE 802.11a/ n(HT20/40)/ac(HT20/40/80): 5150MHz to 5250MHz IEEE 802.11a/ n(HT20/40)/ac(HT20/40/80): 5725MHz to 5850MHz BT: 2402-2480MHz SRD: 2402-2480MHz
The Lowest Oscillator:	32.768KHz
Antenna Gain:	2.4GHz WIFI:3.2 dBi 5.2GHz WIFI:2.8 dBi 5.8GHz WIFI:4.5 dBi 2.4GHz BT:3.1 dBi 2.4GHz SRD:3.1 dBi
Type of modulation:	IEEE 802.11b DSSS(CCK/QPSK/BPSK) IEEE 802.11g OFDM(BPSK/QPSK/16QAM/64QAM) IEEE 802.11n OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11a: OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11n : OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11ac : OFDM (BPSK/QPSK/16QAM/64QAM/256QAM) BT: GFSK,PI/4-DQPSK,8DPSK SRD: GFSK
Number of transmitter chains	WIFI:2*2 (MIMO) BT: 1 SRD: 1

The device supports MIMO 2*2, and the MIMO works with STBC(Space-Time Block Coding).The antenna is omnidirectional, does not support any directional gain in any modes.

MIMO rate, antennas use two different streams, from this side, if RX side need to decode MIMO, data between the two stream should be correlated.

TX power for MIMO rate, the wifi chip has a power/rate table that controls TX power from chipout, it's preset in nvr, FW don't need to calculate it again when MIMO rate is fixed. Of course the real radiation power is also related to antenna efficient.

Two transmitter signals are not correlated with each other.

4.2 Details of E.U.T.

Technical Data: AC 120V~60Hz, 190W

4.3 Channel List

Band I (5.15-5.25GHz)		Band IV (5.725-5.85GHz)	
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	155	5775
44	5220	157	5785
46	5230	159	5795
48	5240	161	5805
		165	5825

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20)/ac(HT20):

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11 n(HT40)/ac(HT40):

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	151	5755
46	5230	159	5795

For 802.11 ac(HT80):

channel	Frequency(MHz)	channel	Frequency(MHz)
42	5210	155	5775

4.4 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A-1, July 12, 2012.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.14,2015	Sep.13,2016
2.	LISN	R&S	ENV216	101215	Sep.14,2015	Sep.13,2016
3.	Cable	Top	TYPE16(3.5M)	-	Sep.14,2015	Sep.13,2016
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.14,2015	Sep.13,2016
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.14,2015	Sep.13,2016
3.	Limitter	York	MTS-IMP-136	261115-001-0024	Sep.14,2015	Sep.13,2016
4.	Cable	LARGE	RF300	-	Sep.14,2015	Sep.13,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.14,2015	Sep.13,2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2015	Apr.18,2016
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.14,2015	Sep.13,2016
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2015	Apr.18,2016
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.19,2015	Apr.18,2016
7	Broadband Preampilifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2015	Mar.16,2016
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.10,2015	Apr.09,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Sep.14,2015	Sep.13,2016
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.14,2015	Sep.13,2016
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.14,2015	Sep.13,2016
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.14,2015	Sep.13,2016
RF Conducted Testing						

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.14,2015	Sep.13,2016
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.14,2015	Sep.13,2016

5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

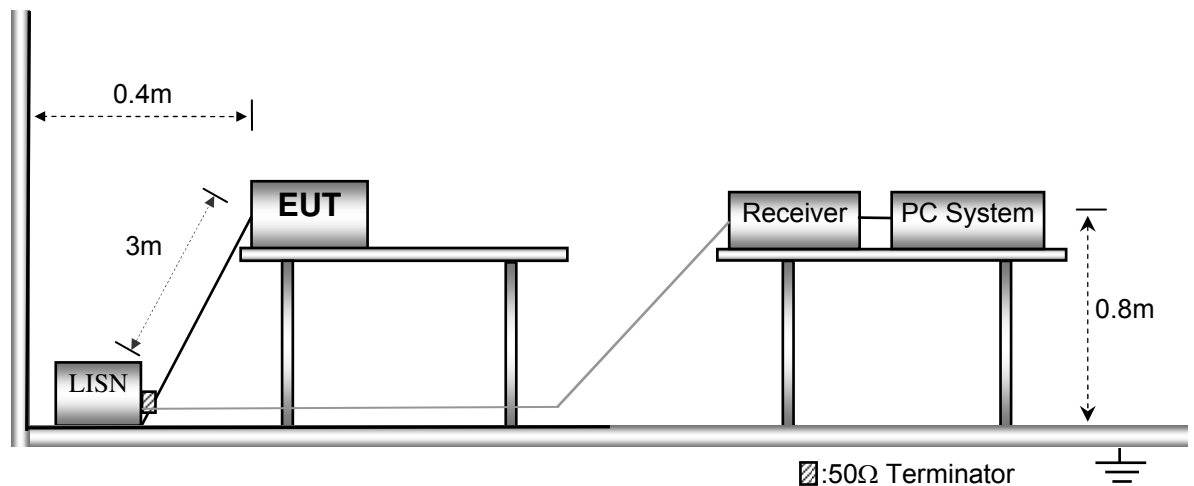


6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

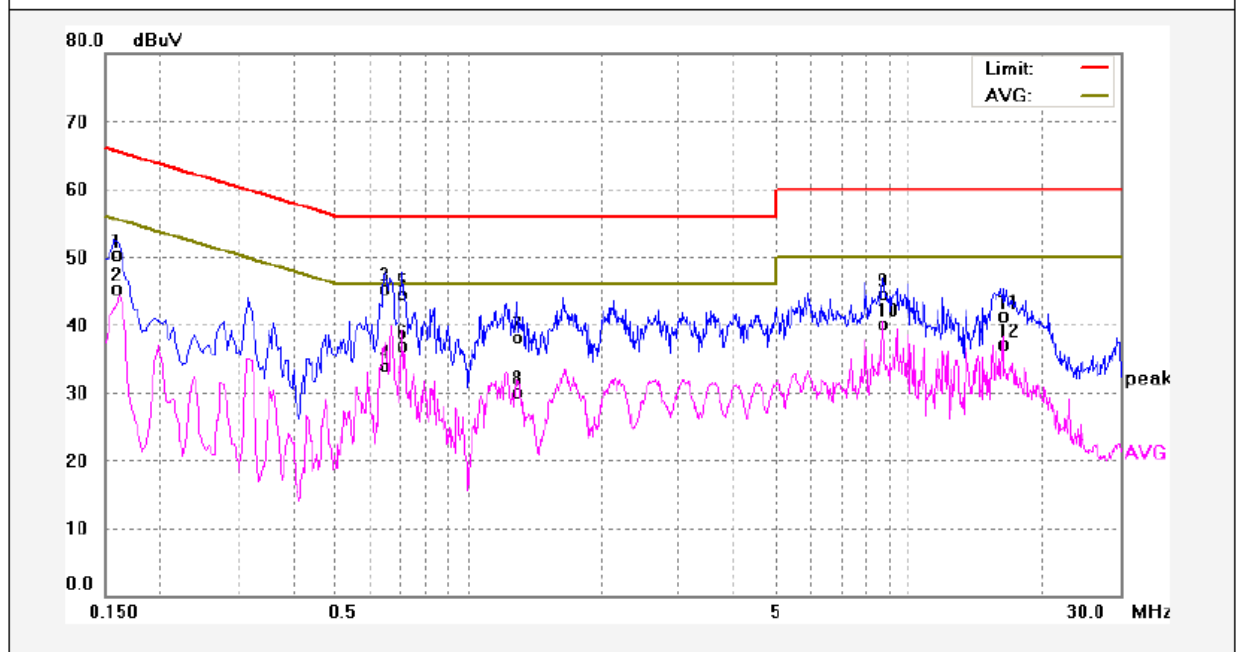

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	40.18	10.13	50.31	65.56	-15.25	QP	
2	0.1580	35.15	10.13	45.28	55.56	-10.28	AVG	
3	0.6460	35.03	10.20	45.23	56.00	-10.77	QP	
4	0.6460	23.72	10.20	33.92	46.00	-12.08	AVG	
5	0.7100	34.34	10.21	44.55	56.00	-11.45	QP	
6	0.7100	26.63	10.21	36.84	46.00	-9.16	AVG	
7	1.2900	27.90	10.23	38.13	56.00	-17.87	QP	
8	1.2900	19.90	10.23	30.13	46.00	-15.87	AVG	
9	8.7180	34.03	10.51	44.54	60.00	-15.46	QP	
10	8.7180	29.68	10.51	40.19	50.00	-9.81	AVG	
11	16.2300	30.58	10.70	41.28	60.00	-18.72	QP	
12	16.2300	26.49	10.70	37.19	50.00	-12.81	AVG	

Neutral line:

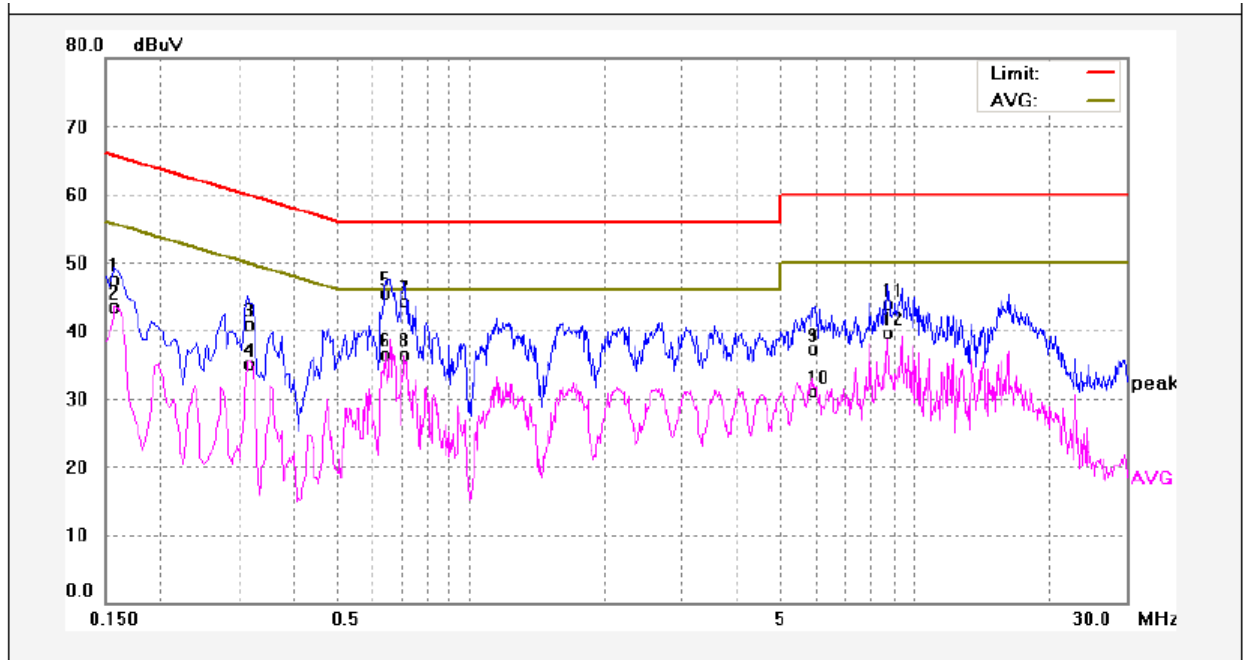

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	37.44	10.13	47.57	65.56	-17.99	QP	
2	0.1580	33.43	10.13	43.56	55.56	-12.00	AVG	
3	0.3140	30.73	10.17	40.90	59.86	-18.96	QP	
4	0.3140	24.86	10.17	35.03	49.86	-14.83	AVG	
5	0.6419	35.33	10.20	45.53	56.00	-10.47	QP	
6	0.6419	26.32	10.20	36.52	46.00	-9.48	AVG	
7	0.7100	34.05	10.21	44.26	56.00	-11.74	QP	
8	0.7100	26.39	10.21	36.60	46.00	-9.40	AVG	
9	5.9699	27.02	10.37	37.39	60.00	-22.61	QP	
10	5.9699	20.69	10.37	31.06	50.00	-18.94	AVG	
11	8.7180	33.41	10.51	43.92	60.00	-16.08	QP	
12	8.7180	29.15	10.51	39.66	50.00	-10.34	AVG	

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.407

Test Method: ANSI C63.4:2003

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

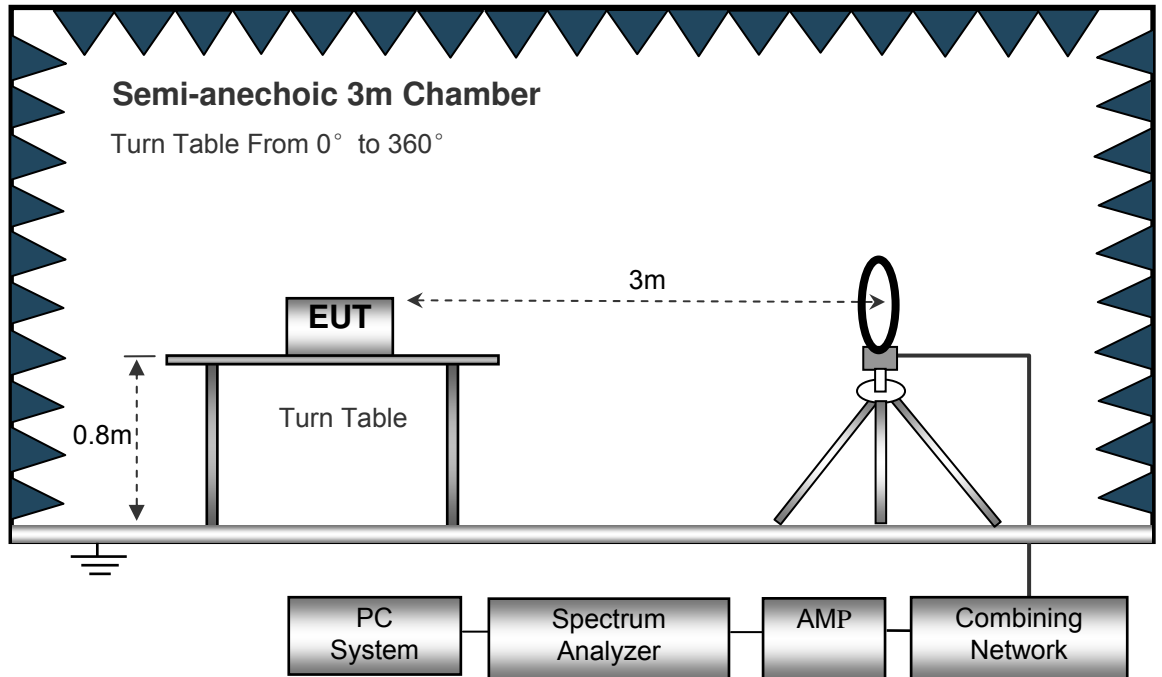

The test setup for emission measurement from 30 MHz to 1 GHz.

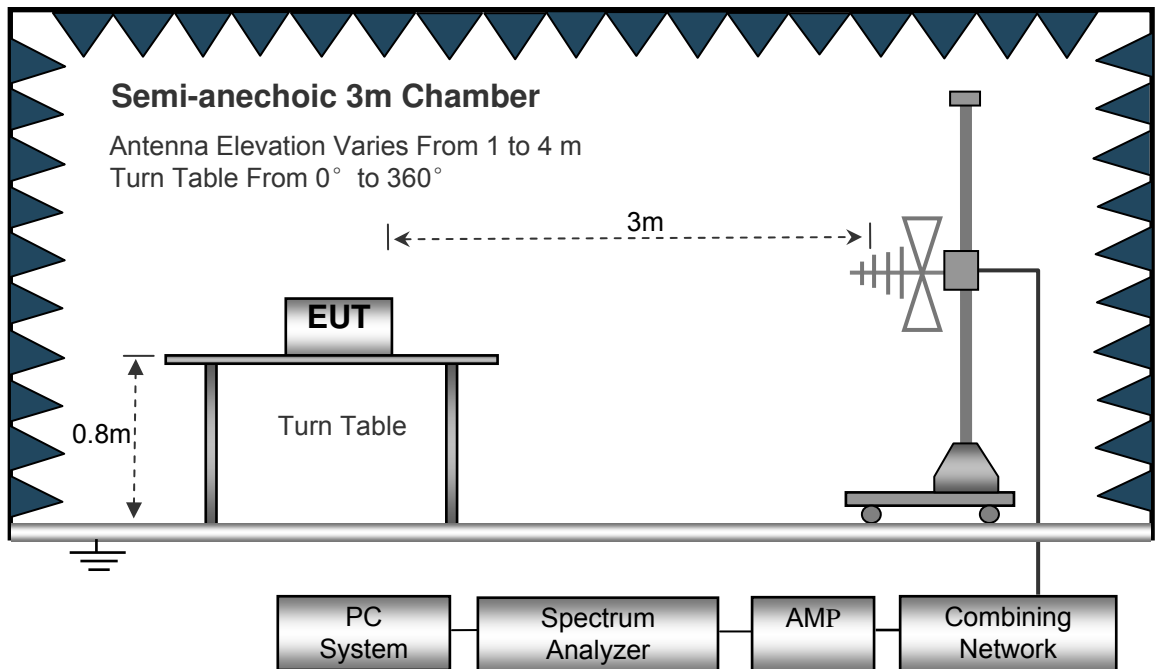

The test setup for emission measurement above 1 GHz.

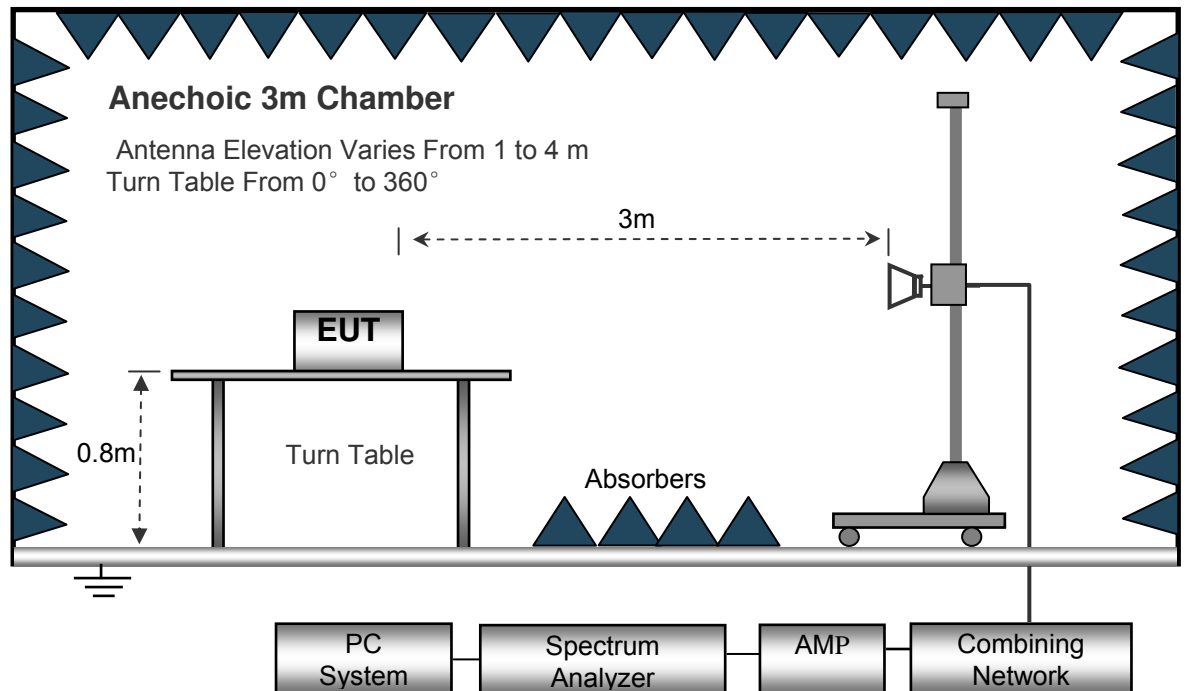

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used druing radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency: 32.768kHz~30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11a band I Low Channel 5180MHz									
223.49	41.06	QP	319	1.7	H	-11.62	29.44	46.00	-16.56
223.49	36.25	QP	230	2.0	V	-11.62	24.63	46.00	-21.37
4520.10	51.47	PK	88	1.8	H	-2.03	49.44	74.00	-24.56
4520.10	46.32	Ave	88	1.8	H	-2.03	44.29	54.00	-9.71
5114.24	52.53	PK	138	1.7	H	-1.02	51.51	74.00	-22.49
5114.24	48.18	Ave	138	1.7	H	-1.02	47.16	54.00	-6.84
10360.00	41.06	PK	256	1.4	H	5.33	46.39	74.00	-27.61
10360.00	36.85	Ave	256	1.4	H	5.33	42.18	54.00	-11.82
802.11a band I middle channel 5200MHz									
223.49	42.41	QP	76	1.2	H	-11.62	30.79	46.00	-15.21
223.49	36.00	QP	36	1.9	V	-11.62	24.38	46.00	-21.62
4519.51	51.52	PK	309	1.1	H	-1.94	49.58	74.00	-24.42
4519.51	47.28	Ave	309	1.1	H	-1.94	45.34	54.00	-8.66
5112.30	53.01	PK	102	1.9	H	-1.06	51.95	74.00	-22.05
5112.30	48.54	Ave	102	1.9	H	-1.06	47.48	54.00	-6.52
10400.00	40.56	PK	51	1.6	H	5.21	45.77	74.00	-28.23
10400.00	35.60	Ave	51	1.6	H	5.21	40.81	54.00	-13.19

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11a band I High channel 5240MHz									
223.49	41.67	QP	192	1.5	H	-11.62	30.05	46.00	-15.95
223.49	35.61	QP	329	1.8	V	-11.62	23.99	46.00	-22.01
4533.39	50.67	PK	315	1.3	H	-2.24	48.43	74.00	-25.57
4533.39	47.31	Ave	315	1.3	H	-2.24	45.07	54.00	-8.93
5141.34	53.20	PK	189	2.0	H	-1.09	52.11	74.00	-21.89
5141.34	49.90	Ave	189	2.0	H	-1.09	48.81	54.00	-5.19
10480.00	39.59	PK	245	1.9	H	5.14	44.73	74.00	-29.27
10480.00	37.48	Ave	245	1.9	H	5.14	42.62	54.00	-11.38
802.11a band IV low Channel 5745MHz									
223.49	41.89	QP	104	1.1	H	-11.62	30.27	46.00	-15.73
223.49	35.90	QP	194	1.5	V	-11.62	24.28	46.00	-21.72
4504.45	51.44	PK	248	1.4	H	-2.06	49.38	74.00	-24.62
4504.45	46.84	Ave	248	1.4	H	-2.06	44.78	54.00	-9.22
11490.00	39.81	PK	109	1.2	H	5.93	45.74	74.00	-28.26
11490.00	35.59	Ave	109	1.2	H	5.93	41.52	54.00	-12.48
5371.16	45.41	PK	109	1.2	H	-1.25	44.16	74.00	-29.84
5371.16	39.08	Ave	109	1.2	H	-1.25	37.83	54.00	-16.17

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a band IV middle channel 5785MHz									
223.49	42.65	QP	275	1.5	H	-11.62	31.03	46.00	-14.97
223.49	36.26	QP	285	1.4	V	-11.62	24.64	46.00	-21.36
4511.00	51.85	PK	102	1.8	H	-2.03	49.82	74.00	-24.18
4511.00	45.71	Ave	102	1.8	H	-2.03	43.68	54.00	-10.32
11570.00	39.66	PK	199	1.8	H	5.81	45.47	74.00	-28.53
11570.00	37.56	Ave	199	1.8	H	5.81	43.37	54.00	-10.63
5358.04	45.45	PK	43	1.7	H	-1.22	44.23	74.00	-29.77
5358.04	37.19	Ave	43	1.7	H	-1.22	35.97	54.00	-18.03
802.11a band IV High channel 5825MHz									
223.49	42.47	QP	332	1.4	H	-11.62	30.85	46.00	-15.15
223.49	36.42	QP	54	1.0	V	-11.62	24.80	46.00	-21.20
4520.42	52.57	PK	117	1.9	H	-1.84	50.73	74.00	-23.27
4520.42	46.71	Ave	117	1.9	H	-1.84	44.87	54.00	-9.13
11650.00	40.35	PK	244	1.9	H	5.84	46.19	74.00	-27.81
11650.00	35.65	Ave	244	1.9	H	5.84	41.49	54.00	-12.51
5373.15	46.48	PK	129	1.6	H	-1.30	45.18	74.00	-28.82
5373.15	38.69	Ave	129	1.6	H	-1.30	37.39	54.00	-16.61

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT20) band I low Channel 5180MHz									
223.49	42.86	QP	191	1.6	H	-11.62	31.24	46.00	-14.76
223.49	35.78	QP	338	1.6	V	-11.62	24.16	46.00	-21.84
4514.47	53.57	PK	353	1.2	H	-2.14	51.43	74.00	-22.57
4514.47	47.48	Ave	353	1.2	H	-2.14	45.34	54.00	-8.66
5142.23	47.53	PK	236	1.8	H	-1.06	46.47	74.00	-27.53
5142.23	38.81	Ave	236	1.8	H	-1.06	37.75	54.00	-16.25
10360.00	41.54	PK	78	1.8	H	5.33	46.87	74.00	-27.13
10360.00	35.76	Ave	78	1.8	H	5.33	41.09	54.00	-12.91
802.11n(HT20) band I middle channel 5200MHz									
223.49	43.62	QP	230	2.0	H	-11.62	32.00	46.00	-14.00
223.49	34.67	QP	199	1.5	V	-11.62	23.05	46.00	-22.95
4528.91	54.14	PK	255	1.1	H	-2.12	52.02	74.00	-21.98
4528.91	47.85	Ave	255	1.1	H	-2.12	45.73	54.00	-8.27
5122.77	47.63	PK	247	1.3	H	-1.06	46.57	74.00	-27.43
5122.77	40.69	Ave	247	1.3	H	-1.06	39.63	54.00	-14.37
10400.00	41.42	PK	166	1.8	H	5.21	46.63	74.00	-27.37
10400.00	37.87	Ave	166	1.8	H	5.21	43.08	54.00	-10.92

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT20) band I High channel 5240MHz									
223.49	44.41	QP	281	1.9	H	-11.62	32.79	46.00	-13.21
223.49	35.99	QP	266	1.4	V	-11.62	24.37	46.00	-21.63
4504.11	55.09	PK	233	1.1	H	-1.96	53.13	74.00	-20.87
4504.11	49.13	Ave	233	1.1	H	-1.96	47.17	54.00	-6.83
5124.39	47.70	PK	48	1.1	H	-1.06	46.64	74.00	-27.36
5124.39	40.13	Ave	48	1.1	H	-1.06	39.07	54.00	-14.93
10480.00	40.22	PK	44	1.1	H	5.14	45.36	74.00	-28.64
10480.00	35.39	Ave	44	1.1	H	5.14	40.53	54.00	-13.47
802.11n(HT20) band IV low Channel 5745MHz									
223.49	43.04	QP	149	1.1	H	-11.62	31.42	46.00	-14.58
223.49	37.21	QP	104	2.0	V	-11.62	25.59	46.00	-20.41
4539.19	52.81	PK	45	1.1	H	-1.85	50.96	74.00	-23.04
4539.19	47.05	Ave	45	1.1	H	-1.85	45.20	54.00	-8.80
11490.00	38.76	PK	359	1.3	H	5.93	44.69	74.00	-29.31
11490.00	34.63	Ave	359	1.3	H	5.93	40.56	54.00	-13.44
5354.28	46.89	PK	206	1.8	H	-1.01	45.88	74.00	-28.12
5354.28	39.22	Ave	206	1.8	H	-1.01	38.21	54.00	-15.79

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT20) band IV middle channel 5785MHz									
223.49	43.77	QP	311	1.2	H	-11.62	32.15	46.00	-13.85
223.49	36.50	QP	88	1.3	V	-11.62	24.88	46.00	-21.12
4522.78	52.82	PK	34	1.1	H	-1.89	50.93	74.00	-23.07
4522.78	47.89	Ave	34	1.1	H	-1.89	46.00	54.00	-8.00
11570.00	40.06	PK	162	1.6	H	5.81	45.87	74.00	-28.13
11570.00	37.36	Ave	162	1.6	H	5.81	43.17	54.00	-10.83
5351.98	45.33	PK	49	1.7	H	-1.04	44.29	74.00	-29.71
5351.98	37.18	Ave	49	1.7	H	-1.04	36.14	54.00	-17.86
802.11n(HT20) band IV High channel 5825MHz									
223.49	43.71	QP	71	1.1	H	-11.62	32.09	46.00	-13.91
223.49	37.34	QP	70	1.4	V	-11.62	25.72	46.00	-20.28
4513.06	52.06	PK	257	1.1	H	-1.97	50.09	74.00	-23.91
4513.06	48.23	Ave	257	1.1	H	-1.97	46.26	54.00	-7.74
11650.00	40.34	PK	55	1.3	H	5.84	46.18	74.00	-27.82
11650.00	37.52	Ave	55	1.3	H	5.84	43.36	54.00	-10.64
5385.71	45.83	PK	290	1.5	H	-1.12	44.71	74.00	-29.29
5385.71	38.24	Ave	290	1.5	H	-1.12	37.12	54.00	-16.88

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT20) band I low Channel 5180MHz									
223.49	43.61	QP	312	1.5	H	-11.62	31.99	46.00	-14.01
223.49	36.06	QP	14	1.6	V	-11.62	24.44	46.00	-21.56
4533.54	50.98	PK	313	1.3	H	-1.86	49.12	74.00	-24.88
4533.54	46.36	Ave	313	1.3	H	-1.86	44.50	54.00	-9.50
5111.70	47.52	PK	239	1.7	H	-1.06	46.46	74.00	-27.54
5111.70	39.06	Ave	239	1.7	H	-1.06	38.00	54.00	-16.00
10360.00	39.20	PK	29	1.3	H	5.33	44.53	74.00	-29.47
10360.00	35.42	Ave	29	1.3	H	5.33	40.75	54.00	-13.25
802.11ac(HT20) band I middle channel 5200MHz									
223.49	44.10	QP	95	1.6	H	-11.62	32.48	46.00	-13.52
223.49	36.51	QP	311	1.1	V	-11.62	24.89	46.00	-21.11
4506.03	50.26	PK	345	1.6	H	-1.82	48.44	74.00	-25.56
4506.03	45.79	Ave	345	1.6	H	-1.82	43.97	54.00	-10.03
5139.70	48.85	PK	240	1.9	H	-1.06	47.79	74.00	-26.21
5139.70	39.81	Ave	240	1.9	H	-1.06	38.75	54.00	-15.25
10400.00	41.73	PK	7	1.6	H	5.21	46.94	74.00	-27.06
10400.00	37.68	Ave	7	1.6	H	5.21	42.89	54.00	-11.11

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT20) band I High channel 5240MHz									
223.49	43.94	QP	279	1.8	H	-11.62	32.32	46.00	-13.68
223.49	36.69	QP	243	1.5	V	-11.62	25.07	46.00	-20.93
4502.52	49.63	PK	172	1.7	H	-1.81	47.82	74.00	-26.18
4502.52	45.01	Ave	172	1.7	H	-1.81	43.20	54.00	-10.80
5116.18	50.36	PK	358	1.8	H	-1.06	49.30	74.00	-24.70
5116.18	41.27	Ave	358	1.8	H	-1.06	40.21	54.00	-13.79
10480.00	40.87	PK	116	2.0	H	5.14	46.01	74.00	-27.99
10480.00	37.47	Ave	116	2.0	H	5.14	42.61	54.00	-11.39
802.11ac(HT20) band IV low Channel 5745MHz									
223.49	42.69	QP	329	1.5	H	-11.62	31.07	46.00	-14.93
223.49	36.91	QP	260	1.5	V	-11.62	25.29	46.00	-20.71
4505.77	48.42	PK	6	1.1	H	-1.92	46.50	74.00	-27.50
4505.77	43.61	Ave	6	1.1	H	-1.92	41.69	54.00	-12.31
11490.00	38.96	PK	80	1.0	H	5.93	44.89	74.00	-29.11
11490.00	35.62	Ave	80	1.0	H	5.93	41.55	54.00	-12.45
5382.79	46.16	PK	137	1.2	H	-1.03	45.13	74.00	-28.87
5382.79	39.44	Ave	137	1.2	H	-1.03	38.41	54.00	-15.59

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT20) band IV middle channel 5785MHz									
223.49	43.68	QP	117	1.1	H	-11.62	32.06	46.00	-13.94
223.49	37.25	QP	266	1.9	V	-11.62	25.63	46.00	-20.37
4523.68	47.92	PK	18	1.4	H	-1.97	45.95	74.00	-28.05
4523.68	44.55	Ave	18	1.4	H	-1.97	42.58	54.00	-11.42
11570.00	40.09	PK	142	1.6	H	5.81	45.90	74.00	-28.10
11570.00	36.68	Ave	142	1.6	H	5.81	42.49	54.00	-11.51
5373.15	46.86	PK	223	1.6	H	-1.05	45.81	74.00	-28.19
5373.15	39.97	Ave	223	1.6	H	-1.05	38.92	54.00	-15.08
802.11ac(HT20) band IV High channel 5825MHz									
223.49	43.52	QP	211	2.0	H	-11.62	31.90	46.00	-14.10
223.49	37.51	QP	16	1.4	V	-11.62	25.89	46.00	-20.11
4503.53	48.28	PK	286	1.3	H	-1.88	46.40	74.00	-27.60
4503.53	45.53	Ave	286	1.3	H	-1.88	43.65	54.00	-10.35
11650.00	41.26	PK	294	1.9	H	5.84	47.10	74.00	-26.90
11650.00	36.56	Ave	294	1.9	H	5.84	42.40	54.00	-11.60
5384.97	46.74	PK	223	1.7	H	-1.06	45.68	74.00	-28.32
5384.97	38.06	Ave	223	1.7	H	-1.06	37.00	54.00	-17.00

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT40) band I low Channel 5190MHz									
223.49	44.15	QP	275	2.0	H	-11.62	32.53	46.00	-13.47
223.49	36.40	QP	289	1.3	V	-11.62	24.78	46.00	-21.22
4534.56	46.79	PK	13	1.4	H	-1.89	44.90	74.00	-29.10
4534.56	43.77	Ave	13	1.4	H	-1.89	41.88	54.00	-12.12
5126.59	44.33	PK	98	1.8	H	-1.06	43.27	74.00	-30.73
5126.59	39.39	Ave	98	1.8	H	-1.06	38.33	54.00	-15.67
10380.00	38.54	PK	15	1.6	H	5.26	43.80	74.00	-30.20
10380.00	34.42	Ave	15	1.6	H	5.26	39.68	54.00	-14.32
802.11n(HT40) band I High channel 5230MHz									
223.49	43.87	QP	138	1.4	H	-11.62	32.25	46.00	-13.75
223.49	35.86	QP	178	1.9	V	-11.62	24.24	46.00	-21.76
4514.37	45.82	PK	166	1.8	H	-1.94	43.88	74.00	-30.12
4514.37	43.27	Ave	166	1.8	H	-1.94	41.33	54.00	-12.67
5132.11	45.65	PK	8	1.6	H	-1.06	44.59	74.00	-29.41
5132.11	40.33	Ave	8	1.6	H	-1.06	39.27	54.00	-14.73
10460.00	41.94	PK	310	1.9	H	5.28	47.22	74.00	-26.78
10480.00	36.62	Ave	310	1.9	H	5.28	41.90	54.00	-12.10

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT40) band IV low Channel 5755MHz									
223.49	43.67	QP	359	1.9	H	-11.62	32.05	74.00	-41.95
223.49	34.50	QP	50	1.0	V	-11.62	22.88	74.00	-51.12
4524.60	43.12	PK	296	1.5	H	-1.96	41.16	74.00	-32.84
4524.60	41.89	Ave	296	1.5	H	-1.96	39.93	54.00	-14.07
11510.00	39.91	PK	168	1.8	H	5.88	45.79	74.00	-28.21
11510.00	33.94	Ave	168	1.8	H	5.88	39.82	54.00	-14.18
5357.81	46.42	PK	243	1.3	H	-1.01	45.41	74.00	-28.59
5357.81	39.74	Ave	243	1.3	H	-1.01	38.73	54.00	-15.27
802.11n(HT40) band IV High channel 5795MHz									
223.49	44.38	QP	202	1.6	H	-11.62	32.76	74.00	-41.24
223.49	34.63	QP	211	1.3	V	-11.62	23.01	74.00	-50.99
4511.44	42.26	PK	224	1.9	H	-1.92	40.34	74.00	-33.66
4511.44	41.74	Ave	224	1.9	H	-1.92	39.82	54.00	-14.18
11590.00	42.02	PK	177	1.5	H	5.63	47.65	74.00	-26.35
11590.00	36.11	Ave	177	1.5	H	5.63	41.74	54.00	-12.26
5350.97	45.90	PK	72	1.9	H	-1.04	44.86	74.00	-29.14
5350.97	39.44	Ave	72	1.9	H	-1.04	38.40	54.00	-15.60

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT40) band I low Channel 5190MHz									
223.49	44.02	QP	73	1.2	H	-11.62	32.40	74.00	-41.60
223.49	33.35	QP	42	1.0	V	-11.62	21.73	74.00	-52.27
4518.89	39.86	PK	156	1.5	H	-1.91	37.95	74.00	-36.05
4518.89	39.40	Ave	156	1.5	H	-1.91	37.49	54.00	-16.51
5122.07	46.91	PK	229	1.6	H	-1.06	45.85	74.00	-28.15
5122.07	41.24	Ave	229	1.6	H	-1.06	40.18	54.00	-13.82
10380.00	39.16	PK	174	1.3	H	5.26	44.42	74.00	-29.58
10380.00	35.76	Ave	174	1.3	H	5.26	41.02	54.00	-12.98
802.11ac(HT40) band I High channel 5230MHz									
223.49	43.12	QP	270	1.5	H	-11.62	31.50	74.00	-42.50
223.49	33.08	QP	297	1.9	V	-11.62	21.46	74.00	-52.54
4527.89	39.08	PK	346	1.4	H	-1.93	37.15	74.00	-36.85
4527.89	38.69	Ave	346	1.4	H	-1.93	36.76	54.00	-17.24
5119.04	48.79	PK	339	1.0	H	-1.06	47.73	74.00	-26.27
5119.04	42.54	Ave	339	1.0	H	-1.06	41.48	54.00	-12.52
10460.00	40.83	PK	236	1.3	H	5.28	46.11	74.00	-27.89
10480.00	37.24	Ave	236	1.3	H	5.28	42.52	54.00	-11.48

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT40) band IV low Channel 5755MHz									
223.49	42.15	QP	132	1.5	H	-11.62	30.53	74.00	-43.47
223.49	32.75	QP	114	1.7	V	-11.62	21.13	74.00	-52.87
4500.76	37.08	PK	2	1.2	H	-1.92	35.16	74.00	-38.84
4500.76	36.63	Ave	2	1.2	H	-1.92	34.71	54.00	-19.29
11510.00	38.36	PK	246	1.1	H	5.88	44.24	74.00	-29.76
11510.00	34.33	Ave	246	1.1	H	5.88	40.21	54.00	-13.79
5372.74	45.28	PK	358	1.2	H	-1.07	44.21	74.00	-29.79
5372.74	37.38	Ave	358	1.2	H	-1.07	36.31	54.00	-17.69
802.11ac(HT40) band IV High channel 5795MHz									
223.49	41.38	QP	123	1.0	H	-11.62	29.76	74.00	-44.24
223.49	32.42	QP	189	1.5	V	-11.62	20.80	74.00	-53.20
4526.07	37.68	PK	245	1.6	H	-1.86	35.82	74.00	-38.18
4526.07	37.12	Ave	245	1.6	H	-1.86	35.26	54.00	-18.74
11590.00	40.58	PK	29	1.7	H	5.63	46.21	74.00	-27.79
11590.00	36.24	Ave	29	1.7	H	5.63	41.87	54.00	-12.13
5360.82	45.46	PK	94	1.5	H	-1.03	44.43	74.00	-29.57
5360.82	38.02	Ave	94	1.5	H	-1.03	36.99	54.00	-17.01

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT80) band I low Channel 5210MHz									
223.49	33.15	QP	40	1.5	H	-11.62	21.53	54.00	-32.47
4526.07	38.00	QP	279	1.6	V	-11.62	26.38	54.00	-27.62
4530.49	37.44	PK	45	1.3	H	-1.88	35.56	74.00	-38.44
4530.49	39.71	Ave	45	1.3	H	-1.88	37.83	54.00	-16.17
5121.94	35.78	PK	13	1.2	H	-1.06	34.72	74.00	-39.28
5121.94	46.37	Ave	13	1.2	H	-1.06	45.31	54.00	-8.69
10420.00	40.86	PK	257	1.8	H	4.65	45.51	74.00	-28.49
10420.00	36.24	Ave	257	1.8	H	4.65	40.89	54.00	-13.11
802.11ac(HT80) band IV low Channel 5775MHz									
4526.07	37.38	QP	109	1.5	H	-11.62	25.76	74.00	-48.24
4530.49	37.78	QP	86	1.6	V	-11.62	26.16	74.00	-47.84
4508.84	39.15	PK	335	1.4	H	-1.85	37.30	74.00	-36.70
4508.84	41.67	Ave	335	1.4	H	-1.85	39.82	54.00	-14.18
11550.00	41.82	PK	170	1.1	H	4.83	46.65	74.00	-27.35
11550.00	37.17	Ave	170	1.1	H	4.83	42.00	54.00	-12.00
5372.04	45.41	PK	106	1.5	H	-1.14	44.27	74.00	-29.73
5372.04	37.72	Ave	106	1.5	H	-1.14	36.58	54.00	-17.42

Test Frequency: 18GHz~40GHz

The measurements were more than 20 dB below the limit and not reported.

8 Duty cycle

Test Requirement:	47 CFR Part 15C 15.407 and 789033 D02 General UNII Test Procedures New Rules v01, Section (B)
Test Method:	ANSI C63.10: 2009
Test Limit:	N/A
Test Result:	PASS
Remark:	Through Pre-scan, and found 802.11a at lowest channel is the worst case. Only the worst case is recorded in the report.

8.1 Summary of Test Results

802.11a mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100
802.11ac(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11ac(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100
802.11ac(HT80) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
42	100	100	100
155	100	100	100


Test result plots shown as follows:

ANTO


802.11a band I Low channel




802.11n(HT20) band I Low channel

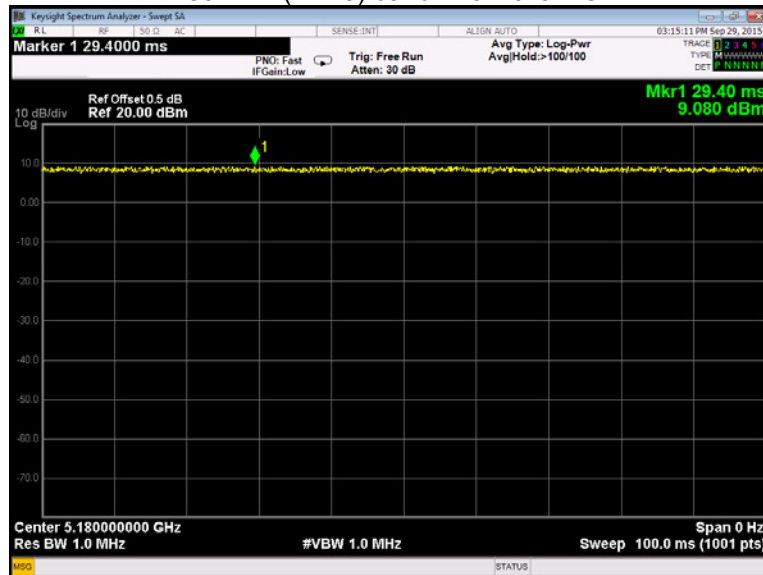


802.11n(HT40) band I Low channel

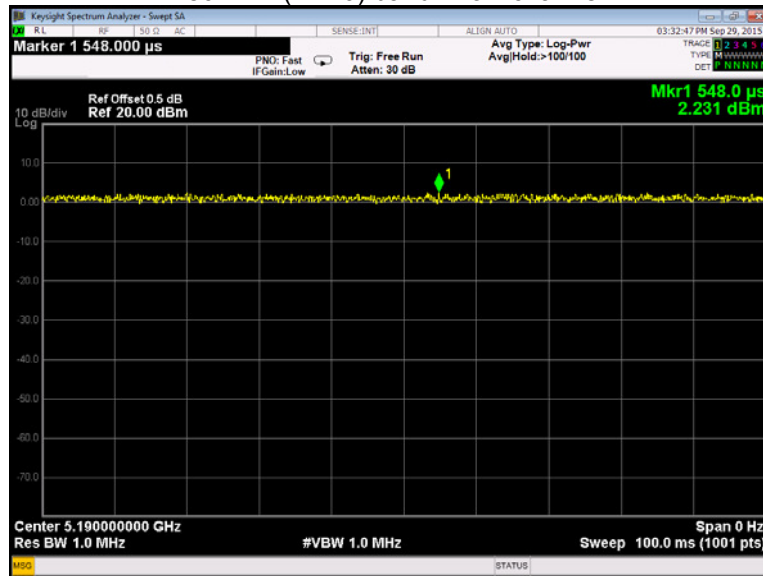


802.11ac(HT20) band I Low channel

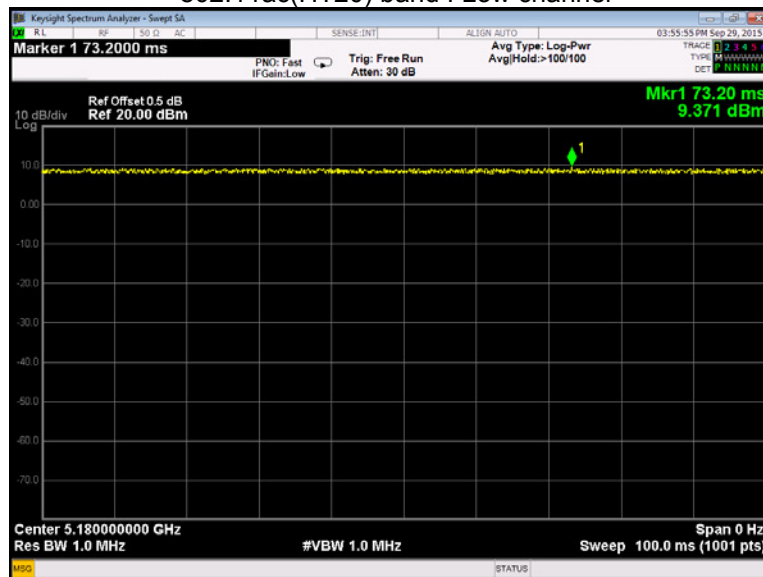


802.11ac(HT40) band I Low channel

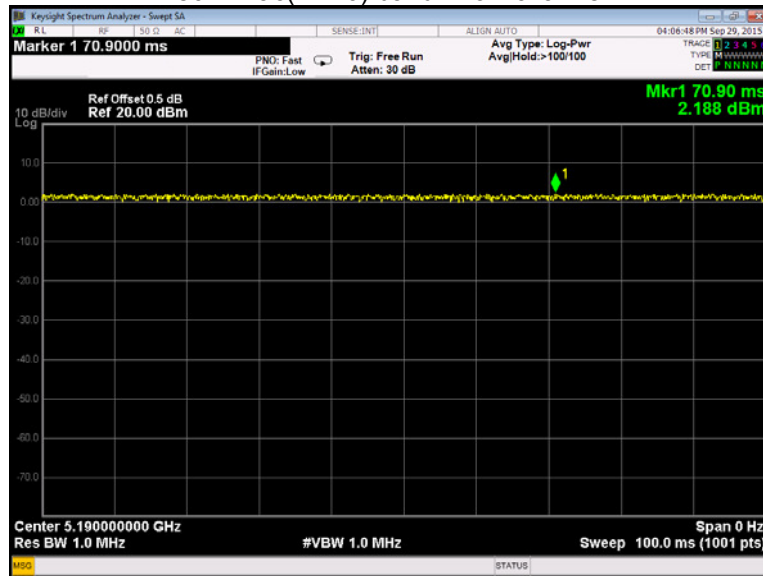


802.11ac(HT80) band I Low channel

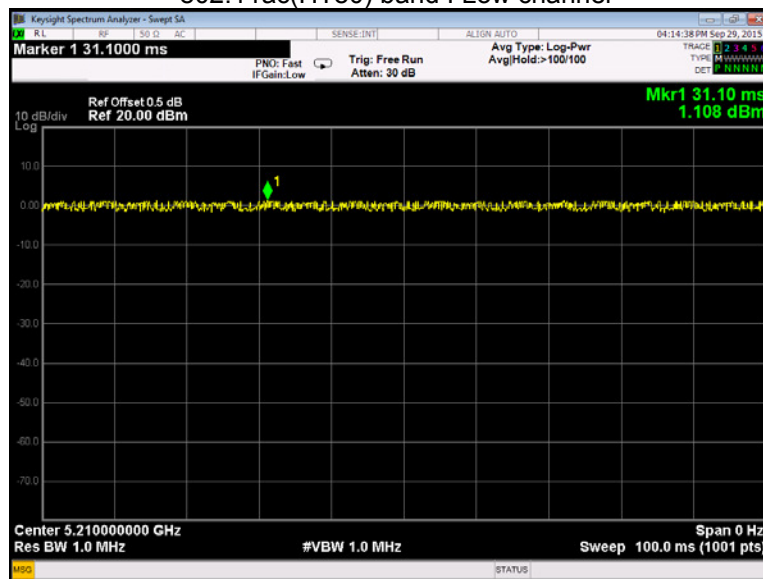


802.11a band IV Low channel

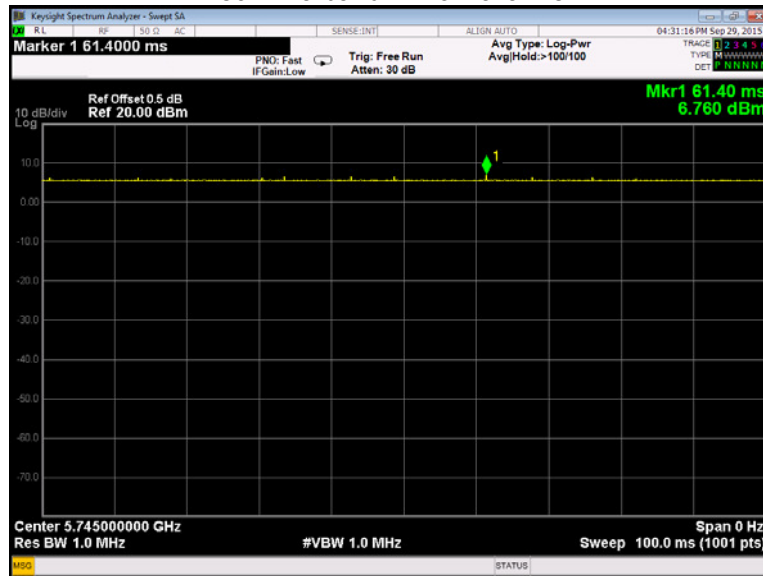


802.11n(HT20) band IV Low channel

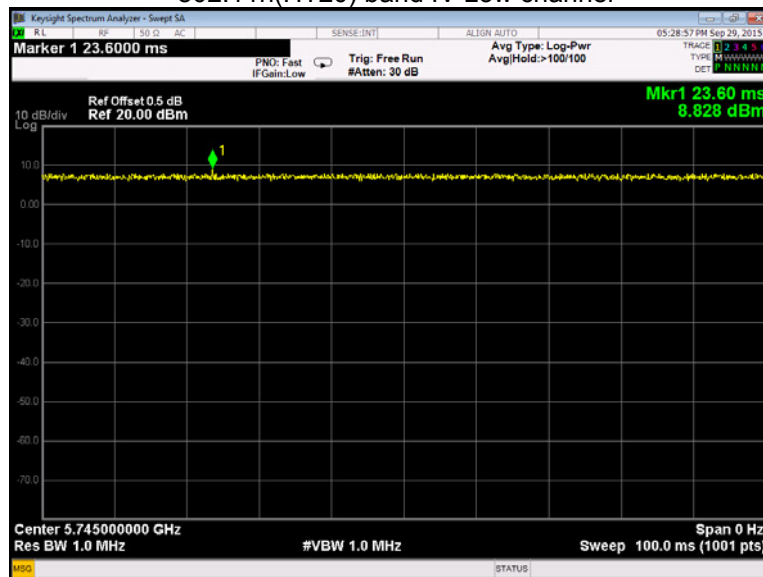


802.11n(HT40) band IV Low channel

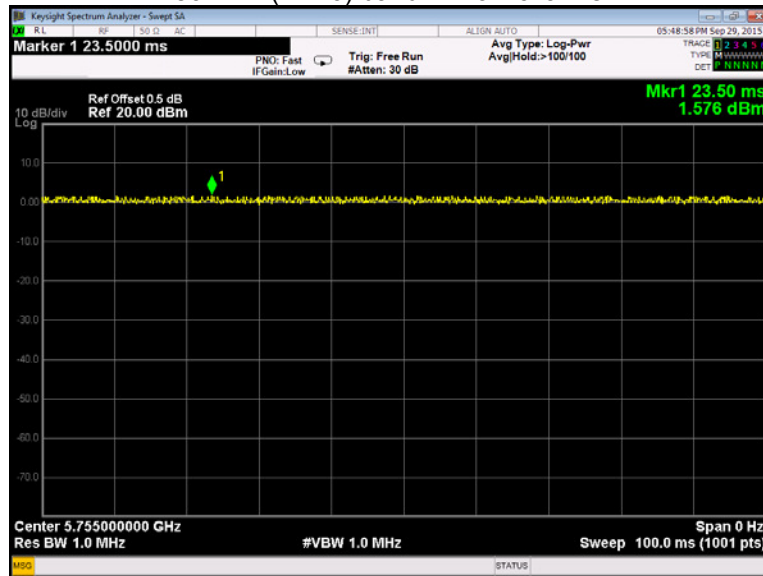


802.11ac(HT20) band IV Low channel

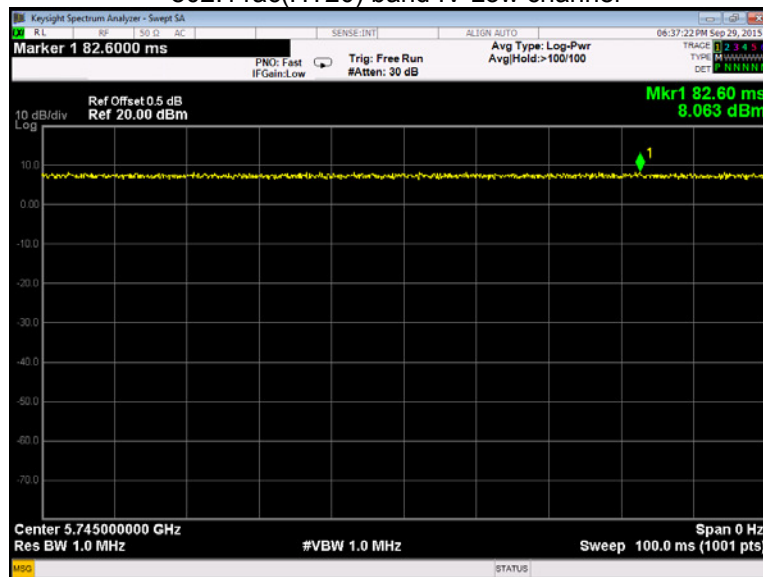

802.11ac(HT40) band IV Low channel

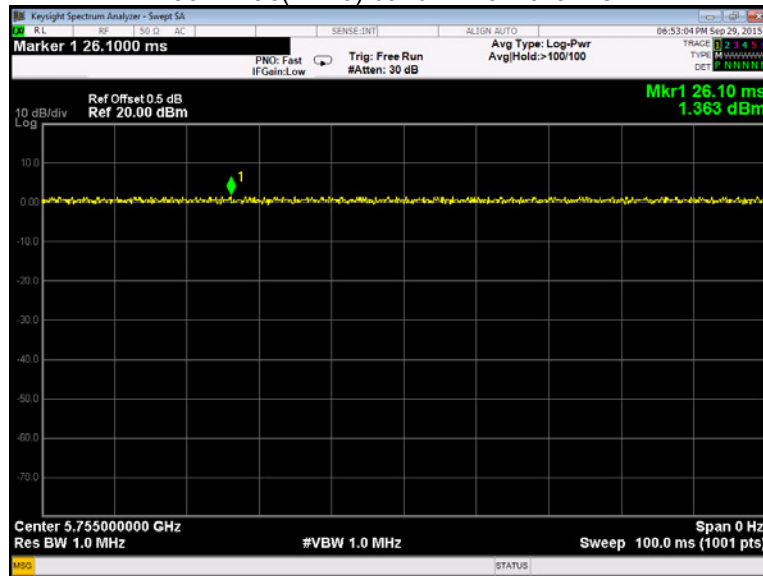


802.11ac(HT80) band IV Low channel

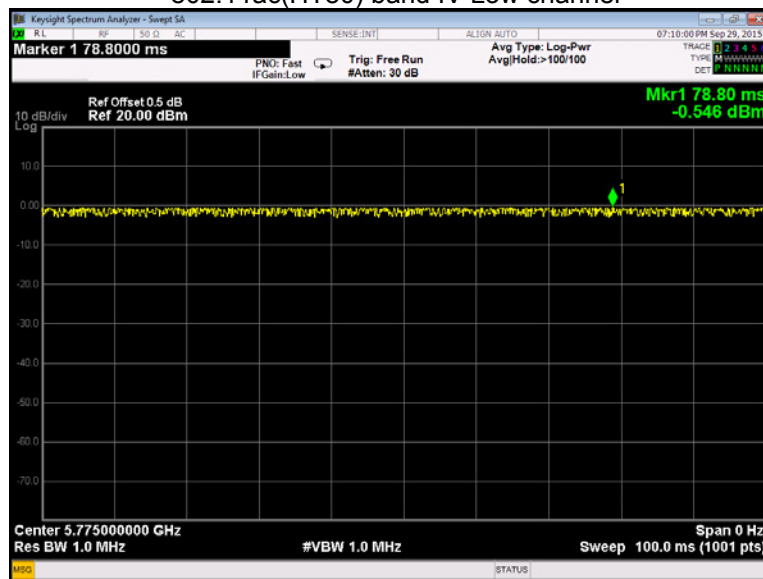


ANT1


802.11a band I Low channel

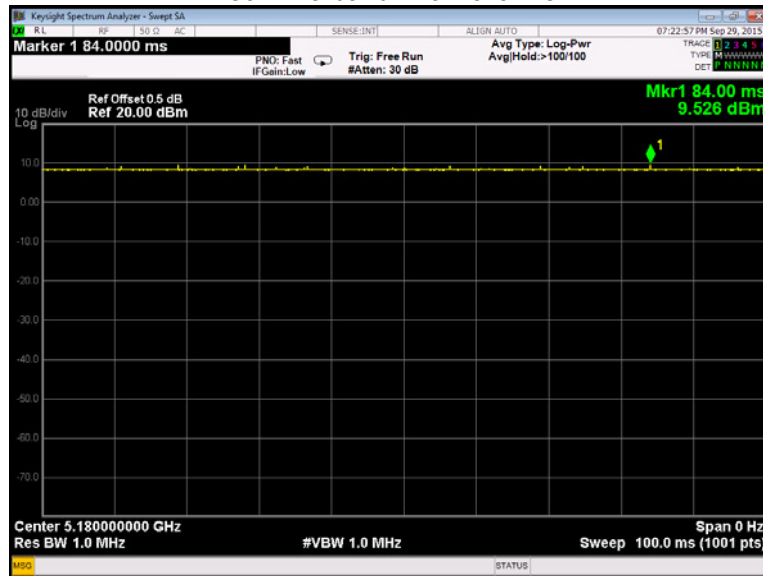


802.11n(HT20) band I Low channel

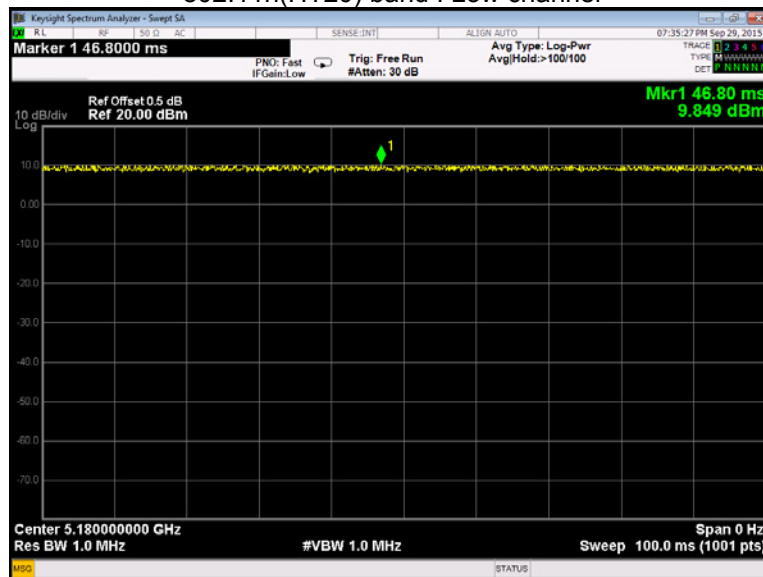


802.11n(HT40) band I Low channel

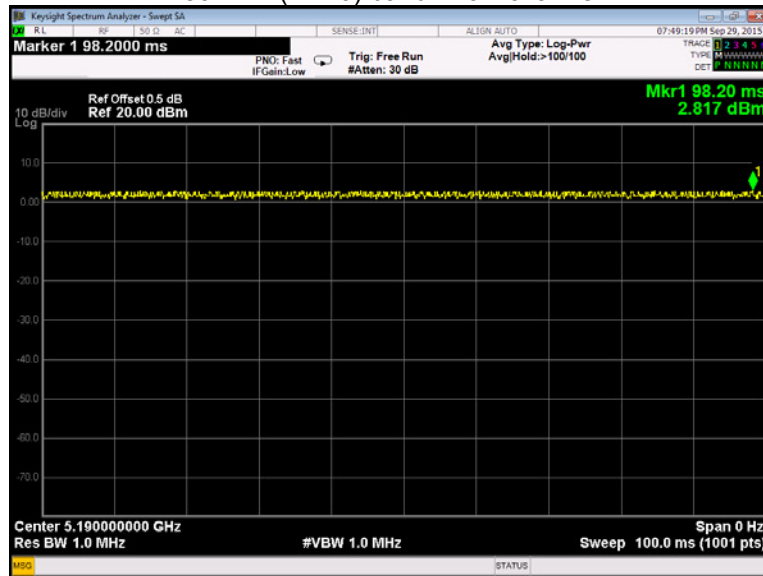


802.11ac(HT20) band I Low channel

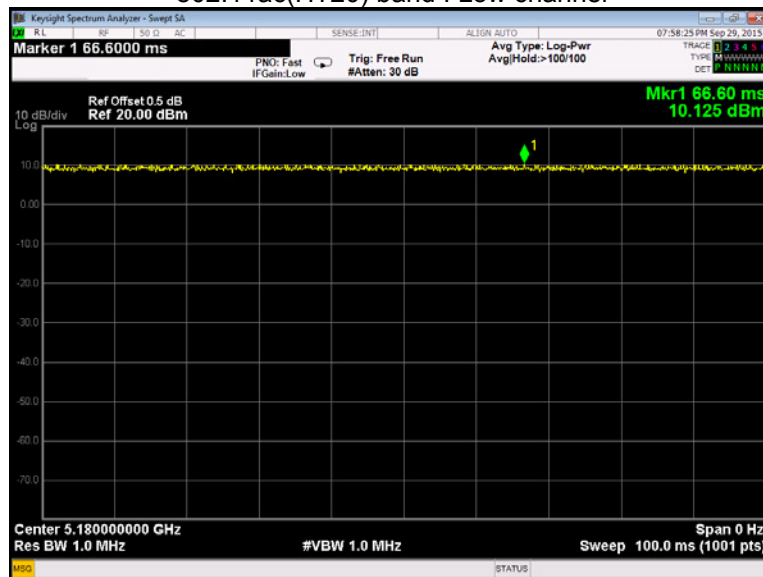


802.11ac(HT40) band I Low channel

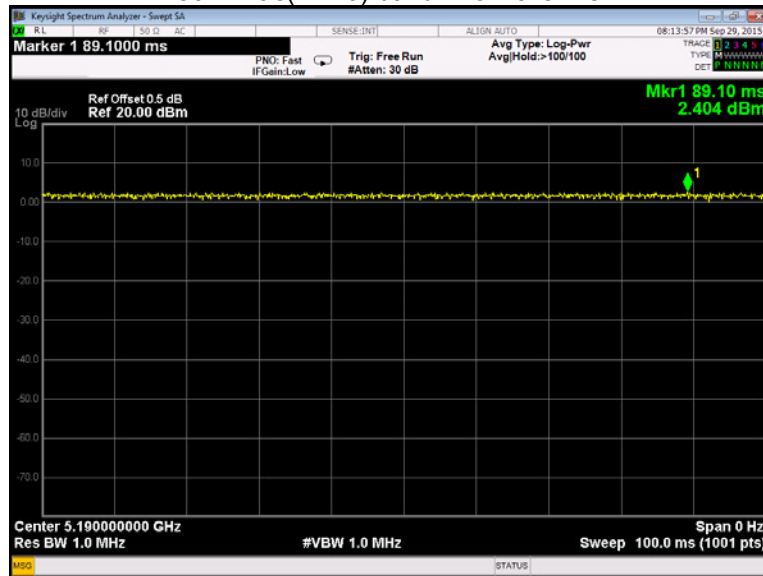


802.11ac(HT80) band I Low channel

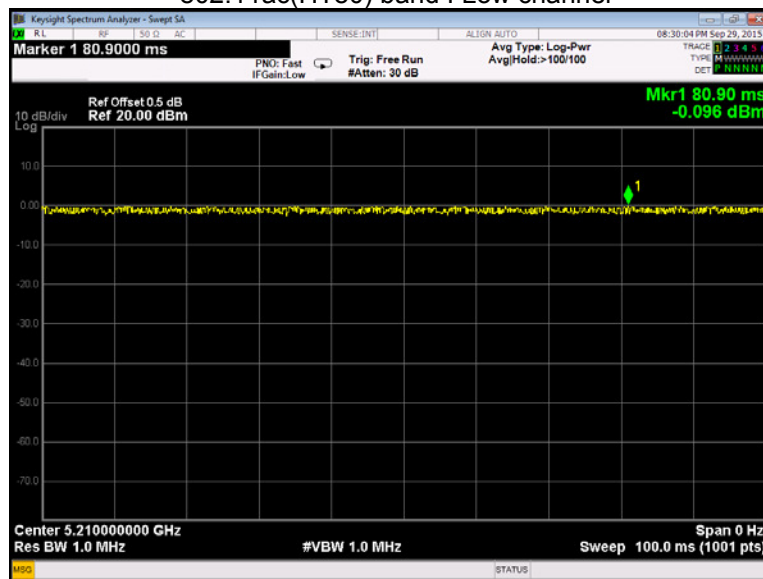


802.11a band IV Low channel

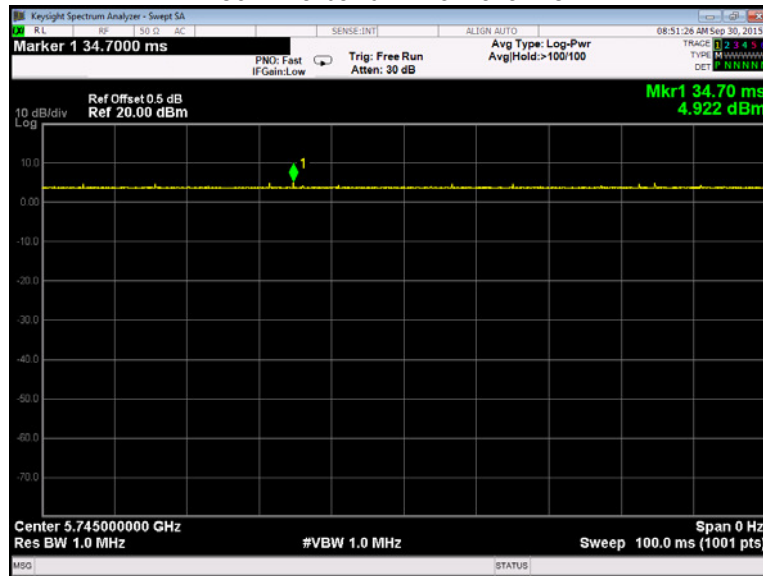


802.11n(HT20) band IV Low channel

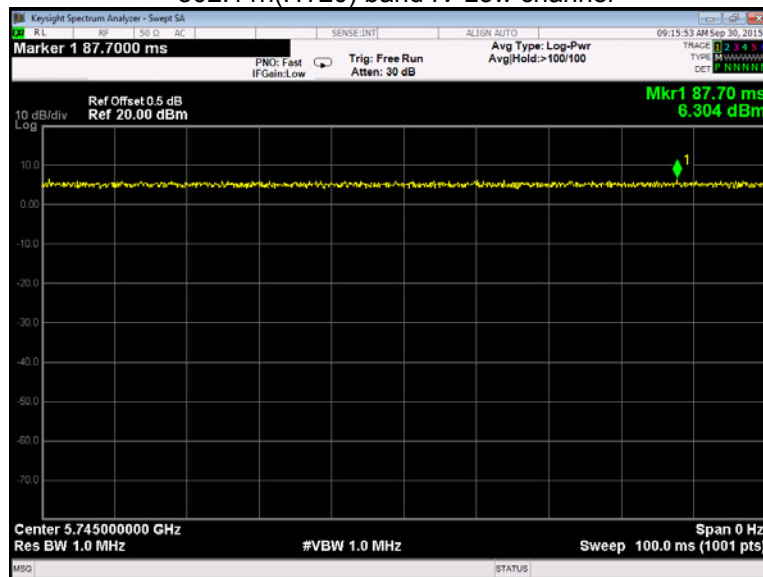


802.11n(HT40) band IV Low channel

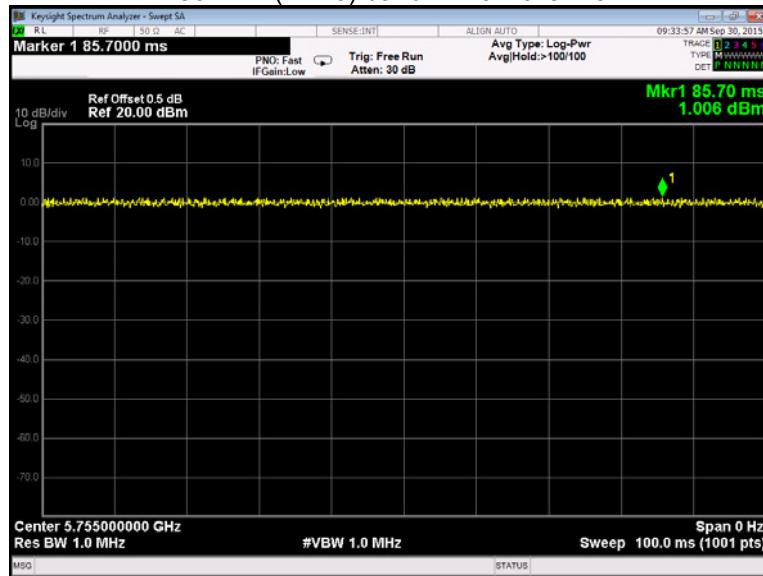


802.11ac(HT20) band IV Low channel

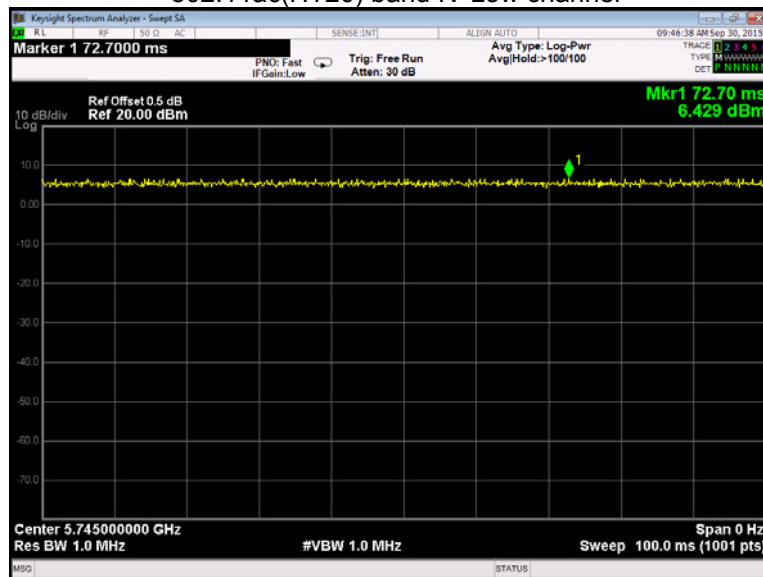

802.11ac(HT40) band IV Low channel

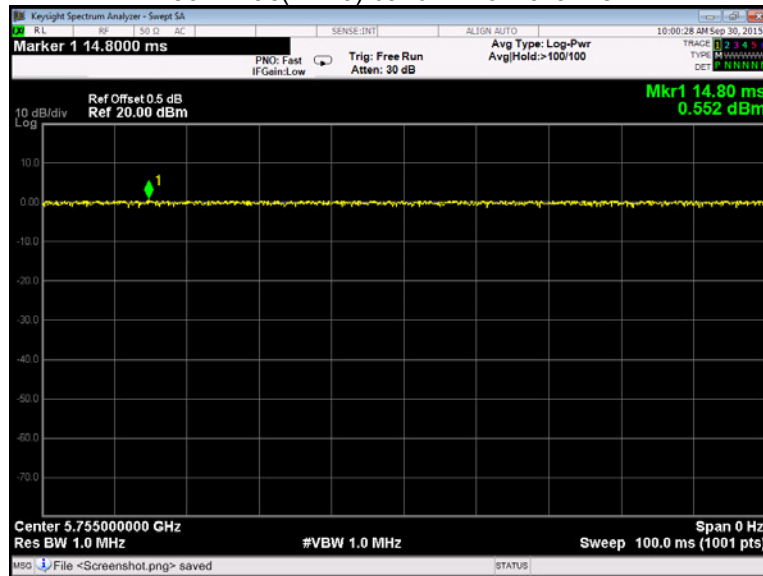

802.11ac(HT80) band IV Low channel

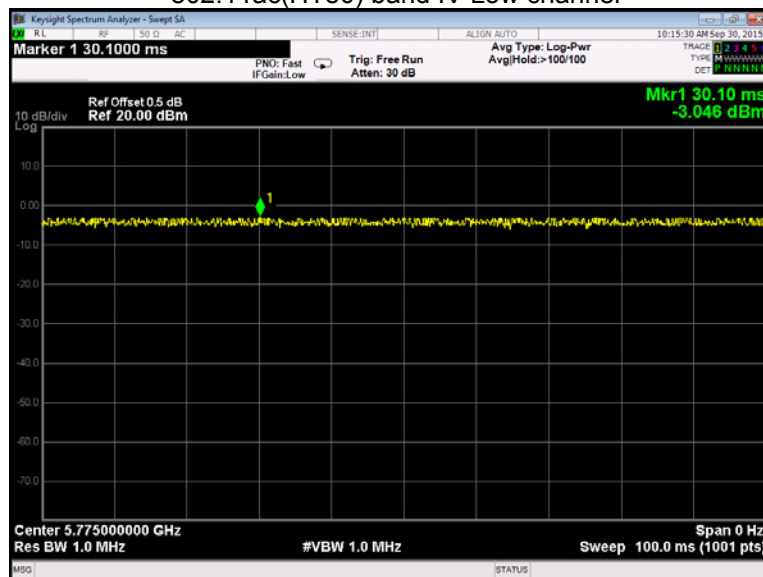

9 Band Edge

Test Requirement:	FCC CFR47 Part 15 Section 15.407
Test Method:	ANSI C63.10 2009
Test Limit:	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27dBm/MHz . (2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17dBm/MHz ; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27dBm/MHz .
Test Result:	PASS

9.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.2 Test Result


Test result plots shown as follows:

ANTO


802.11a band I Band edge-left side

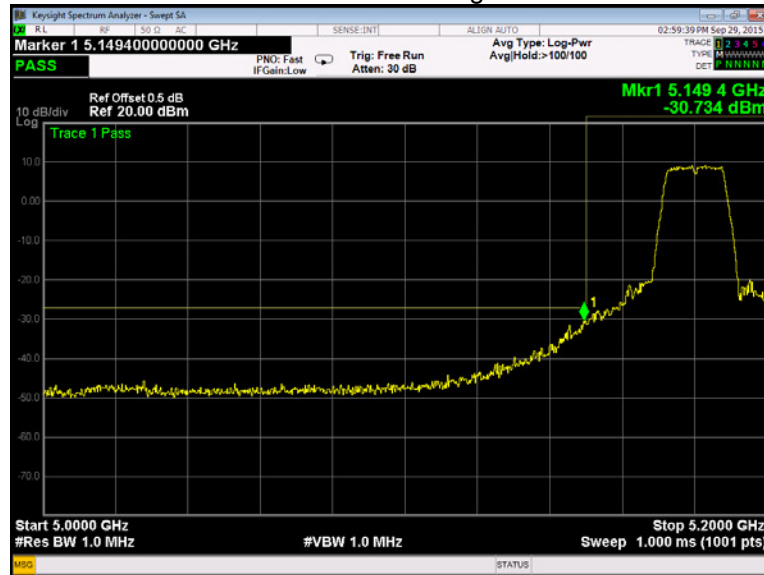


802.11a band I Band edge-right side

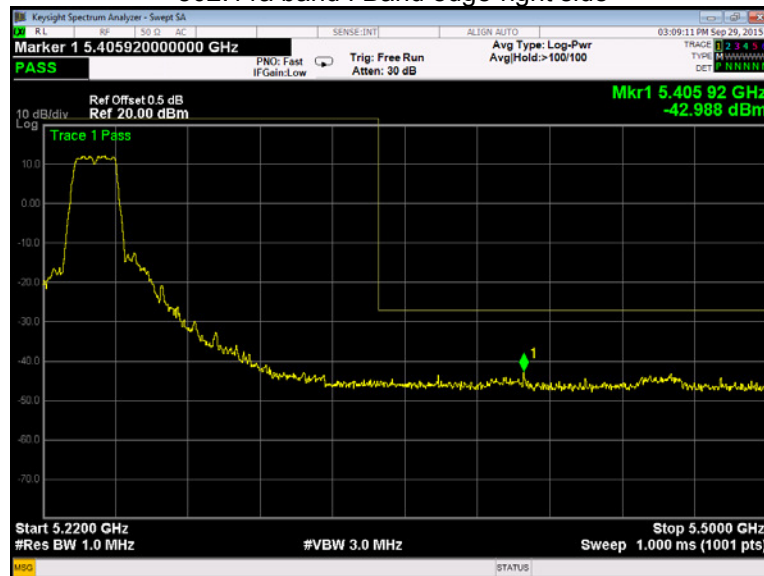


802.11a band IV Band edge-left side

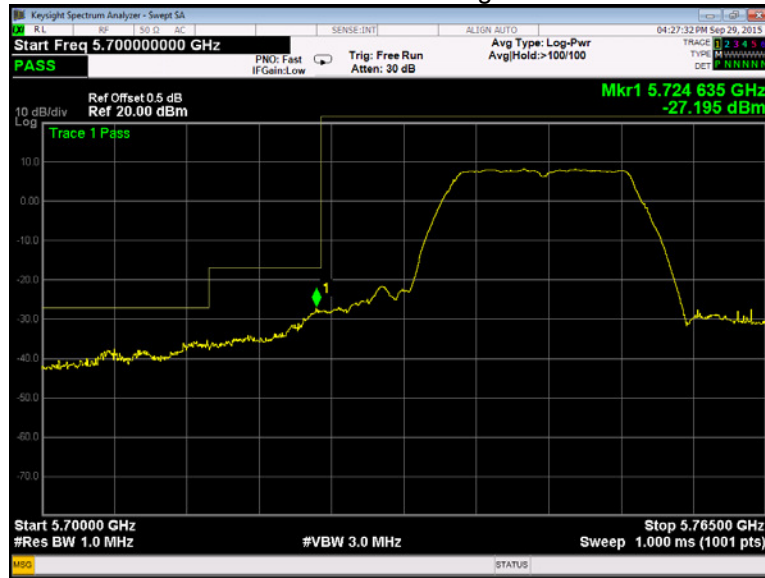

802.11a band IV Band edge-right side

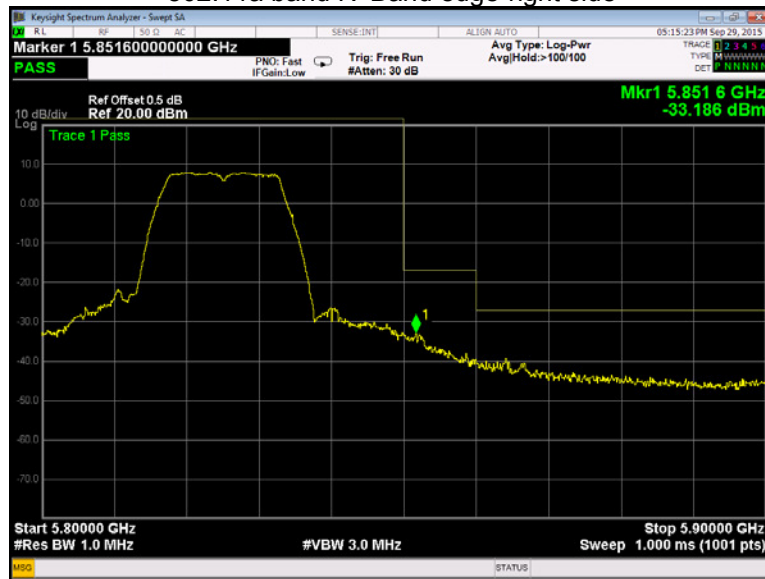


802.11n(HT20) band I Band edge-left side

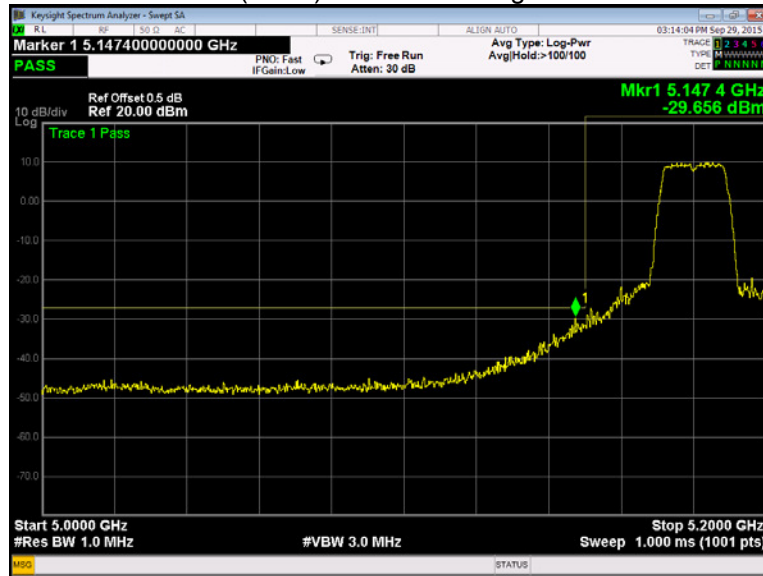


802.11n(HT20) band I Band edge-right side




802.11n(HT20) band IV Band edge-left side

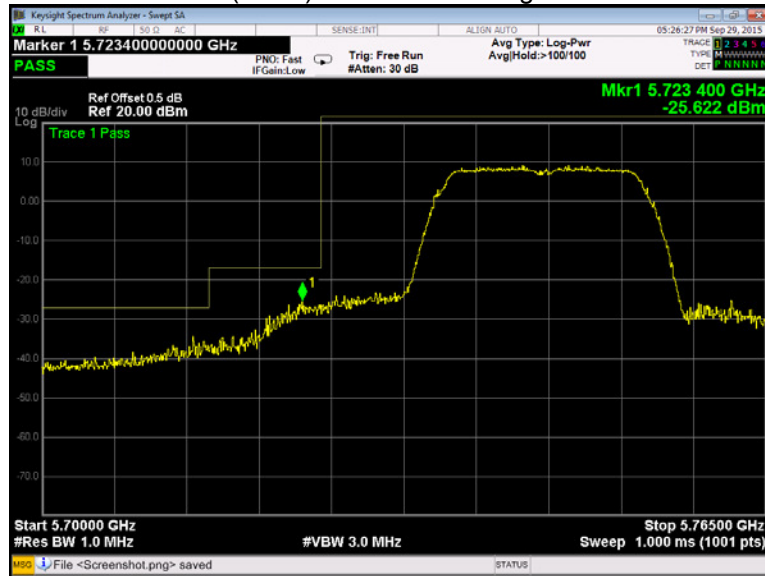

802.11n(HT20) band IV Band edge-right side

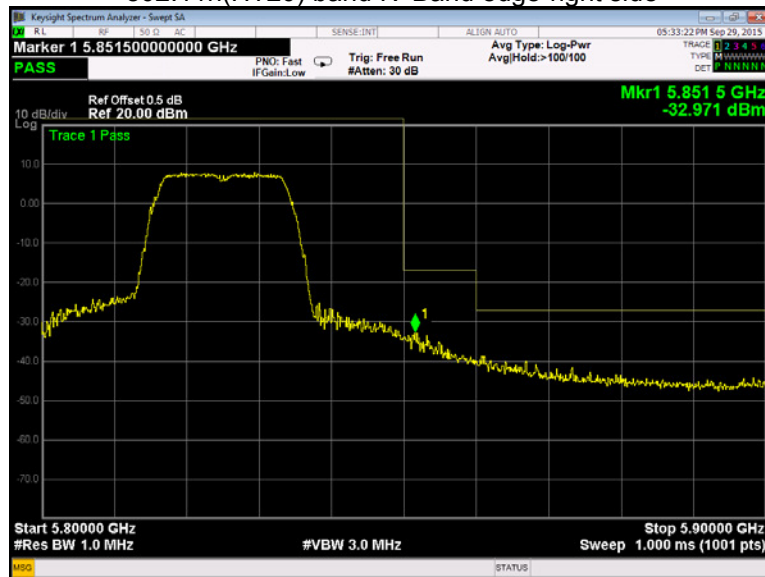


802.11n(HT40) band I Band edge-left side

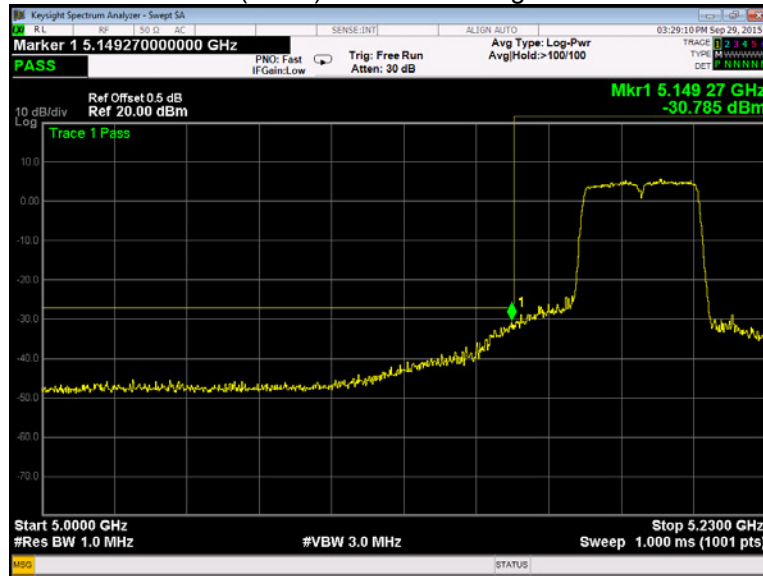


802.11n(HT40) band I Band edge-right side




802.11n(HT40) band IV Band edge-left side

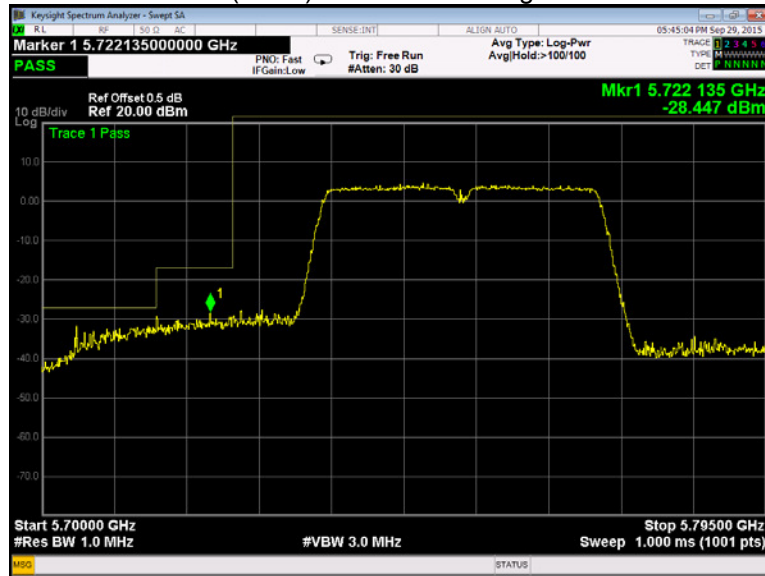


802.11n(HT40) band IV Band edge-right side

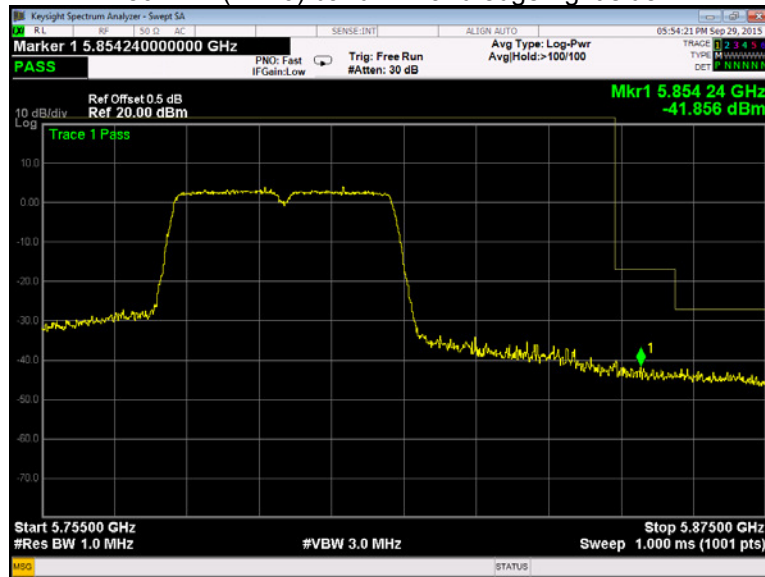


802.11ac(HT20) band I Band edge-left side

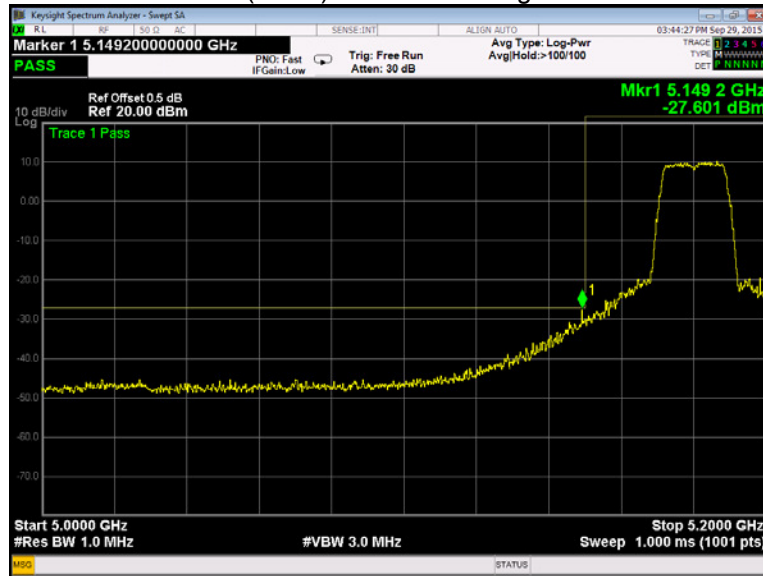


802.11ac(HT20) band I Band edge-right side

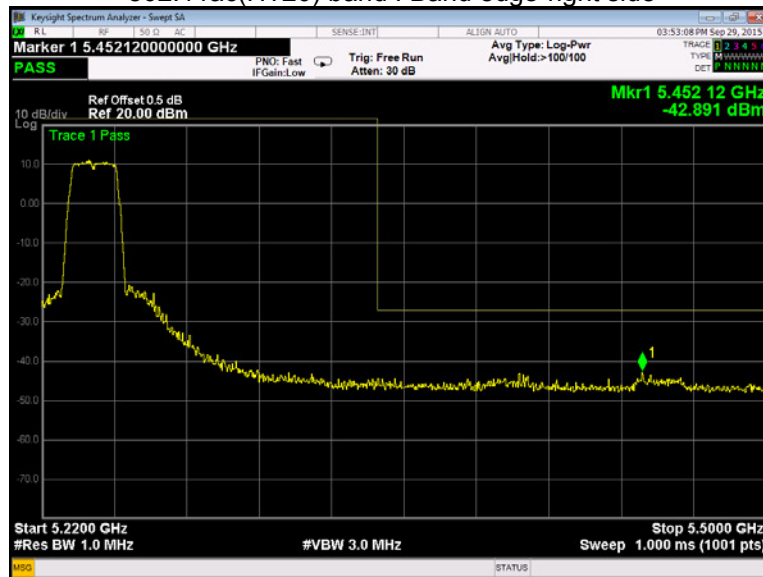


802.11ac(HT20) band IV Band edge-left side

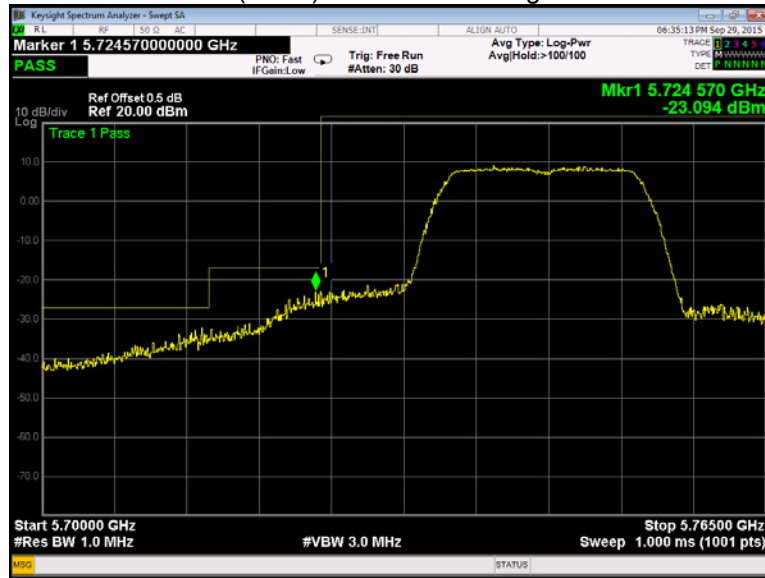


802.11ac(HT20) band IV Band edge-right side

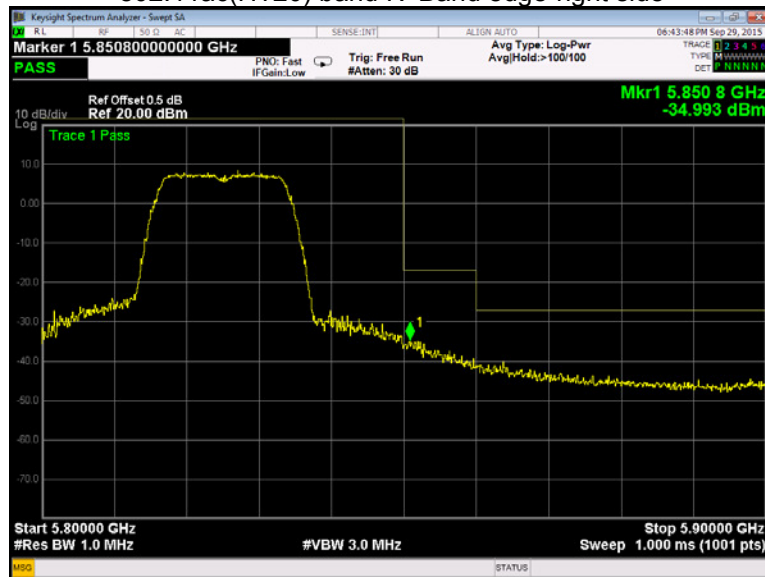


802.11ac(HT40) band I Band edge-left side

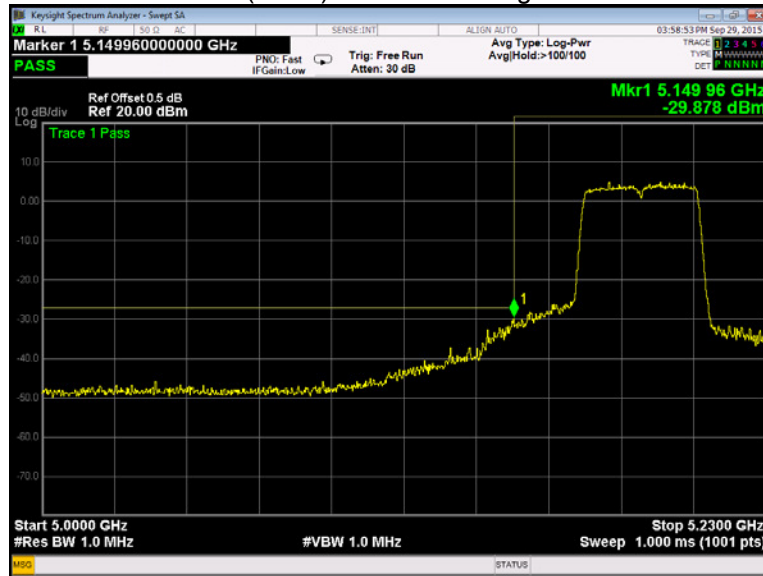

802.11ac(HT40) band I Band edge-right side

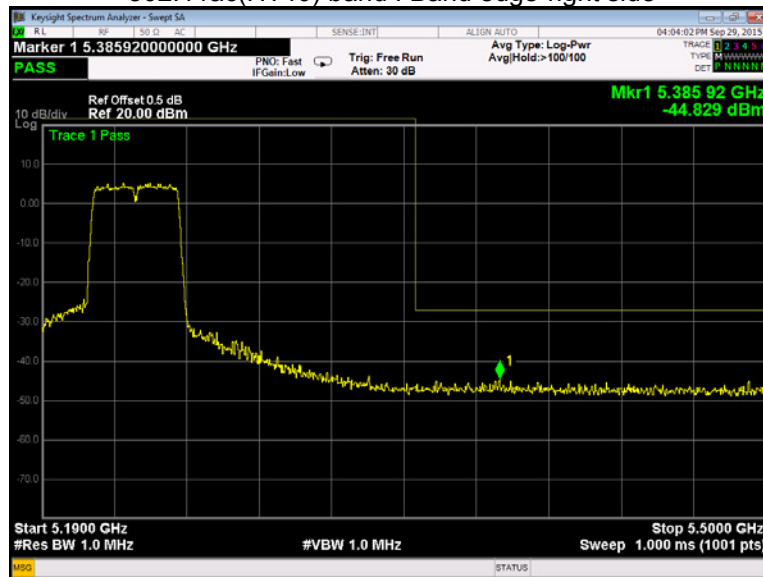


802.11ac(HT40) band IV Band edge-left side

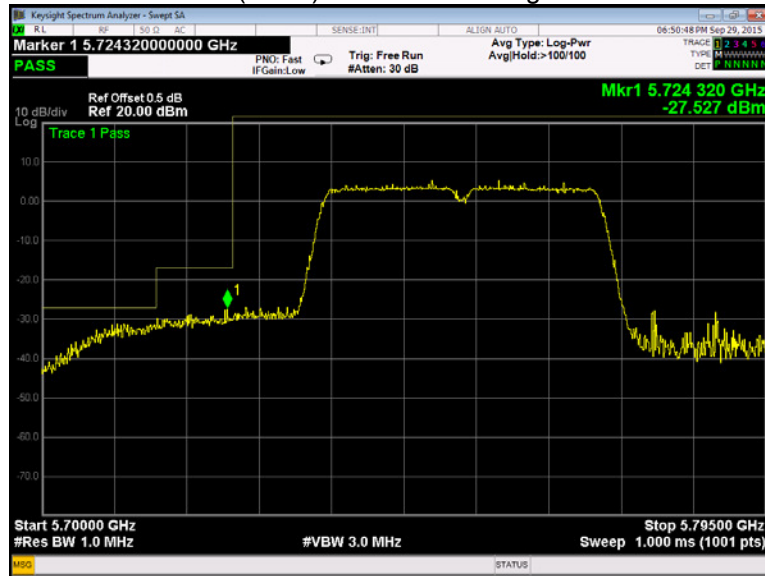


802.11ac(HT40) band IV Band edge-right side




802.11ac(HT80) band I Band edge-left side

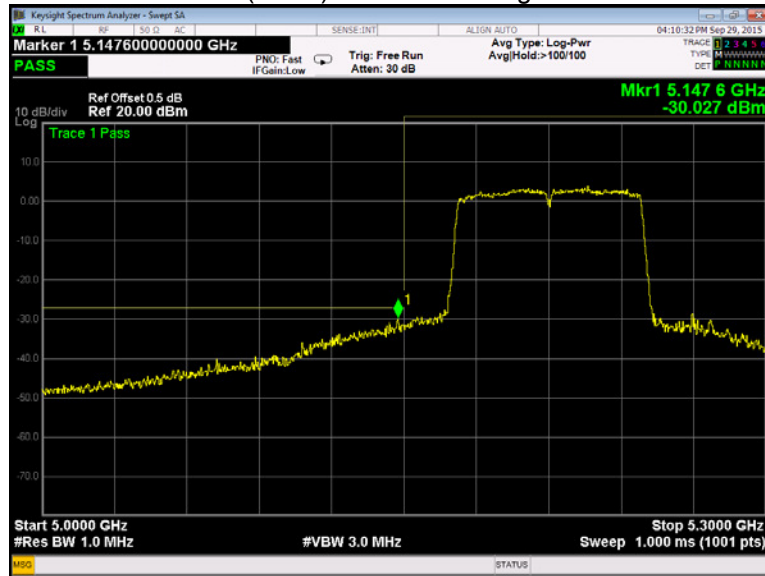

802.11ac(HT80) band I Band edge-right side

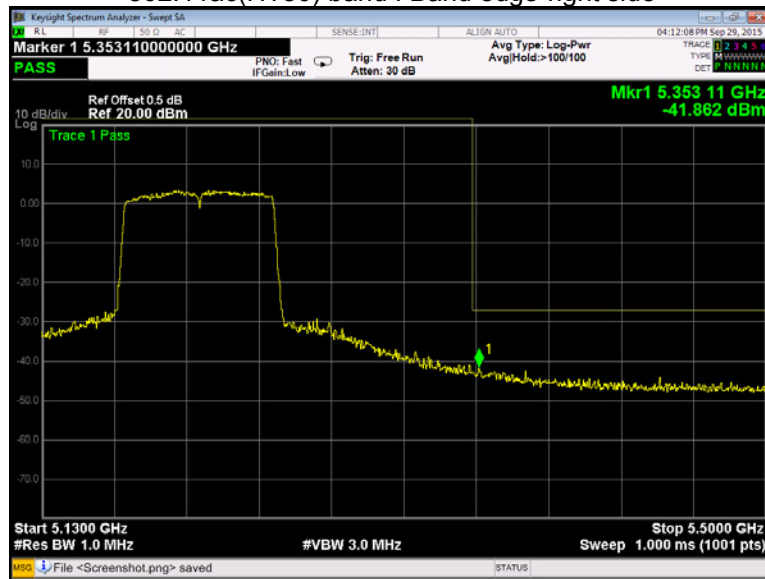

802.11ac(HT80) band IV Band edge-left side

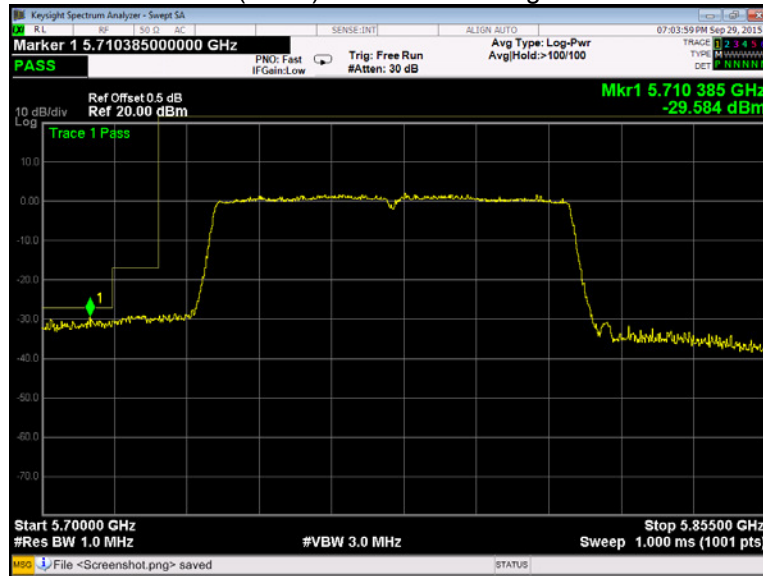


802.11ac(HT80) band IV Band edge-right side




ANT1


802.11a band I Band edge-left side

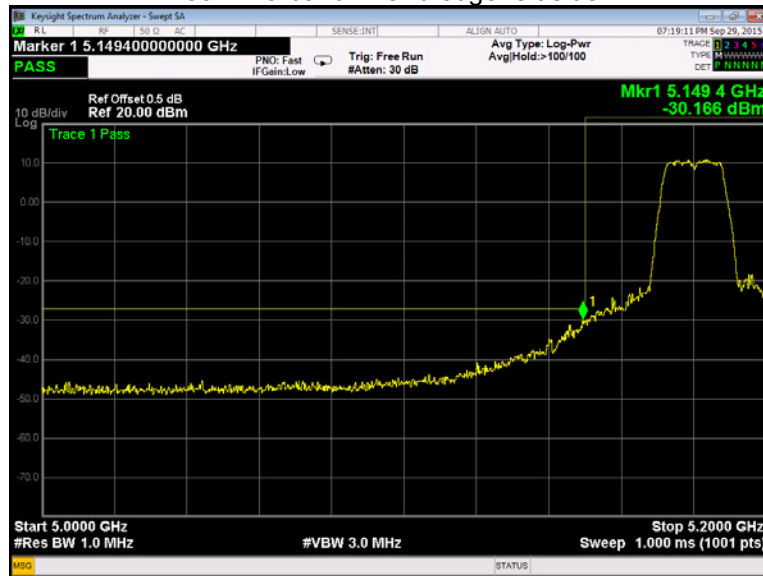


802.11a band I Band edge-right side

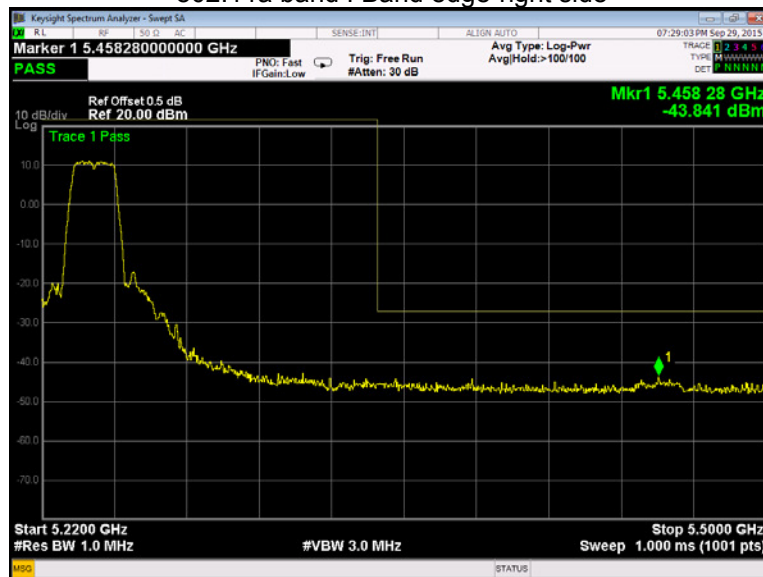


802.11a band IV Band edge-left side

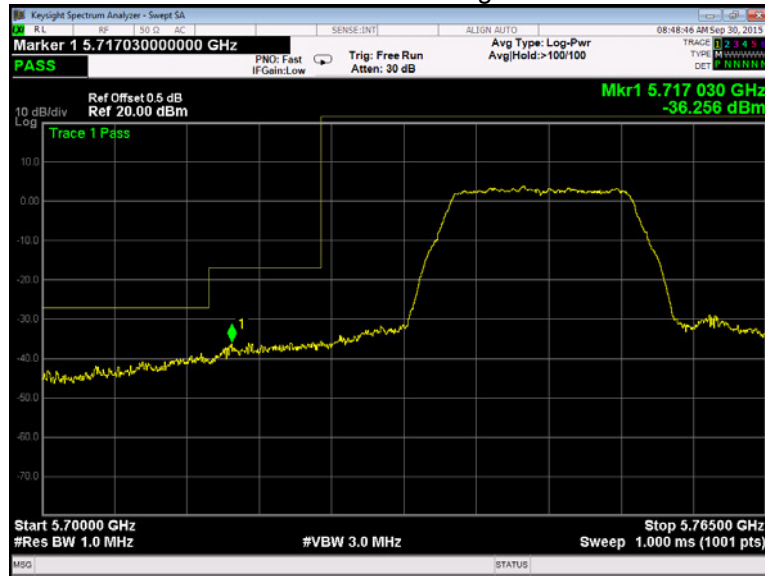

802.11a band IV Band edge-right side

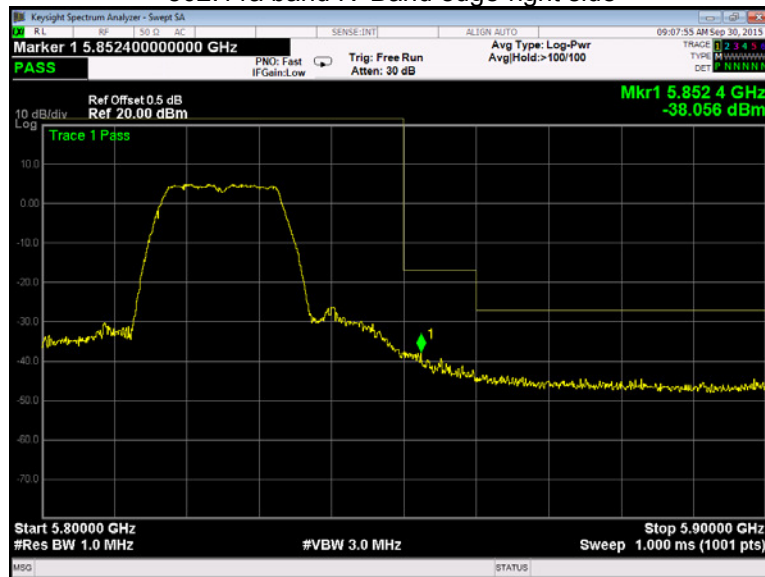


802.11n(HT20) band I Band edge-left side

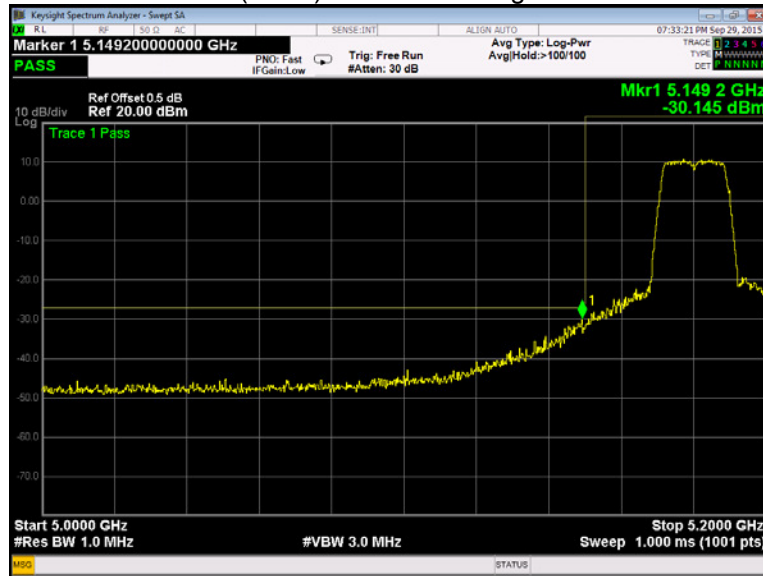


802.11n(HT20) band I Band edge-right side




802.11n(HT20) band IV Band edge-left side

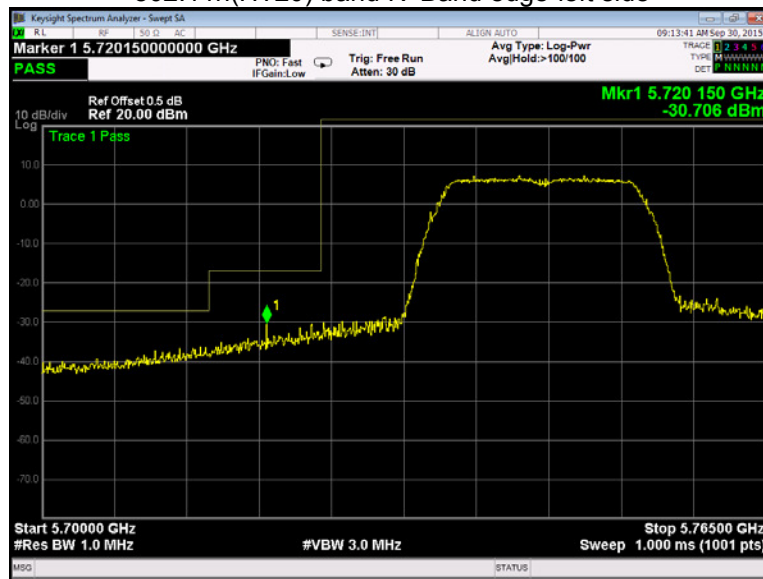


802.11n(HT20) band IV Band edge-right side

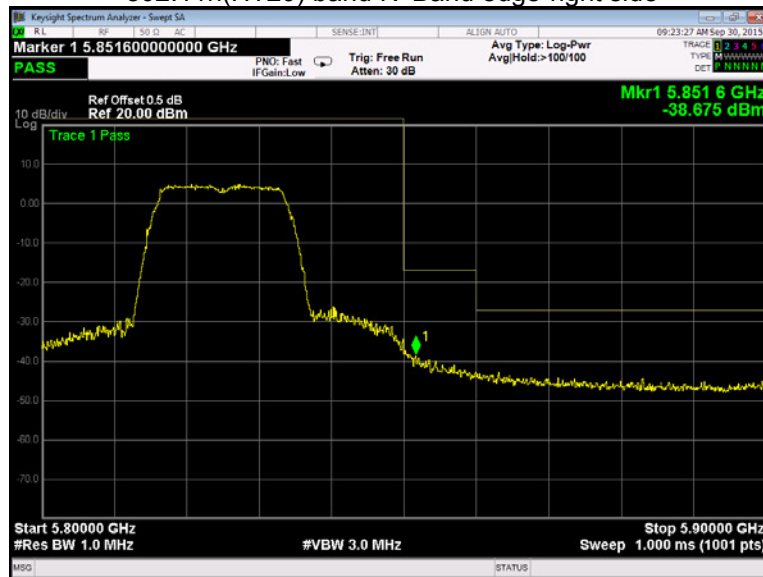


802.11n(HT40) band I Band edge-left side

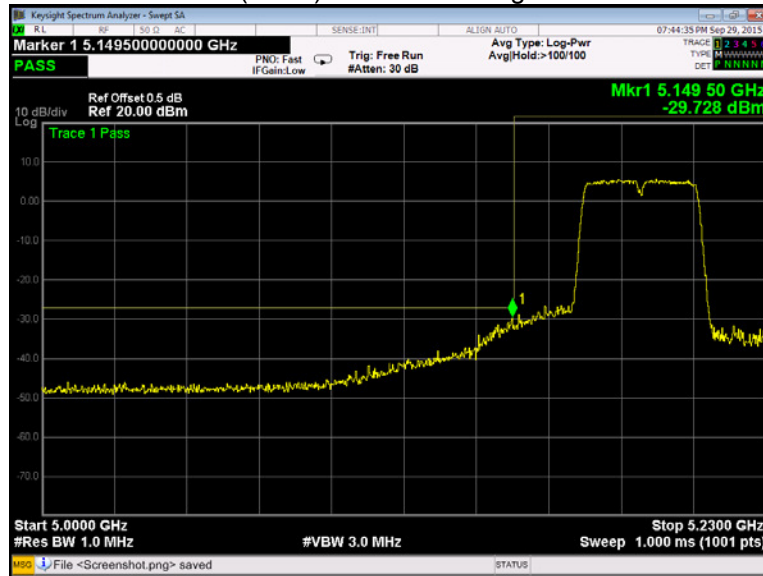

802.11n(HT40) band I Band edge-right side

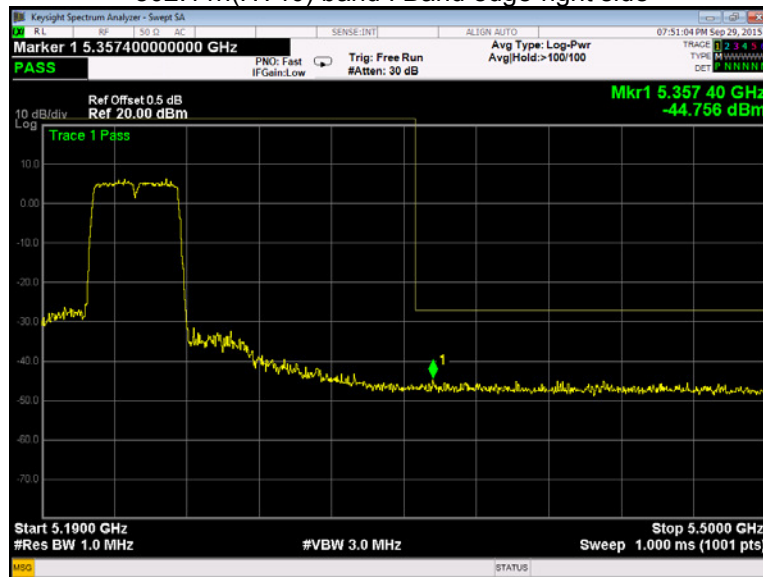


802.11n(HT40) band IV Band edge-left side

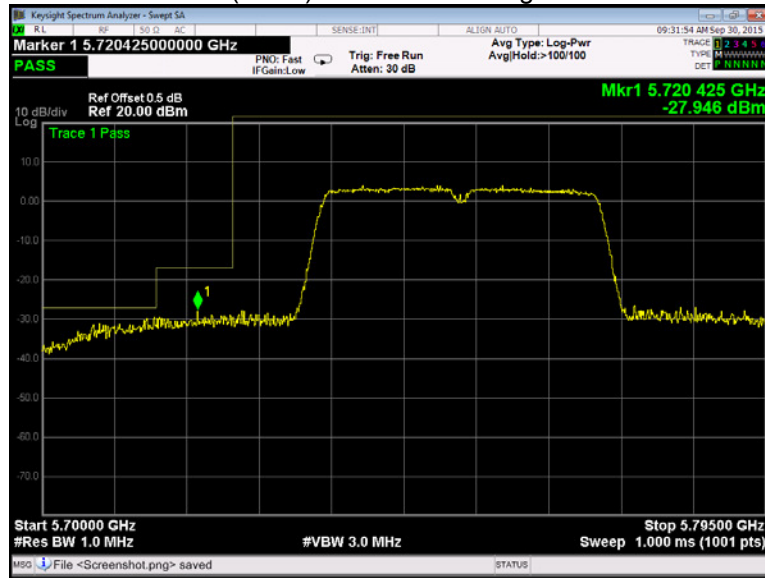


802.11n(HT40) band IV Band edge-right side




802.11ac(HT20) band I Band edge-left side

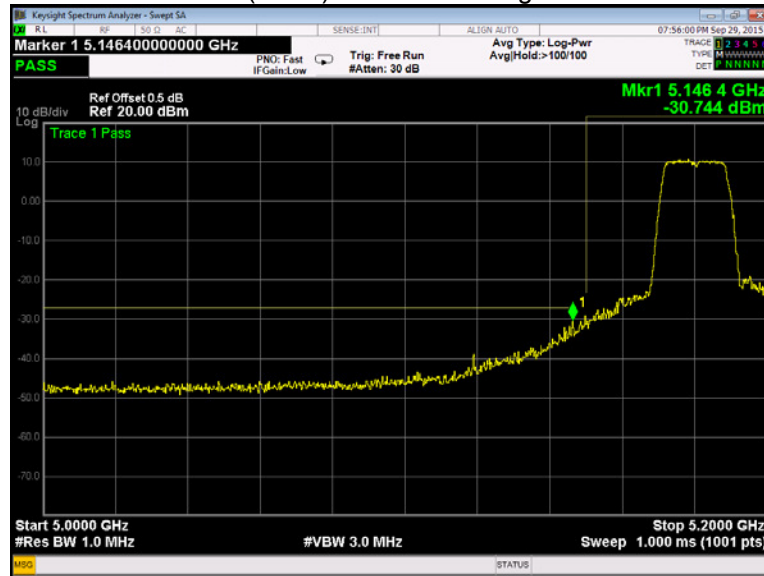


802.11ac(HT20) band I Band edge-right side

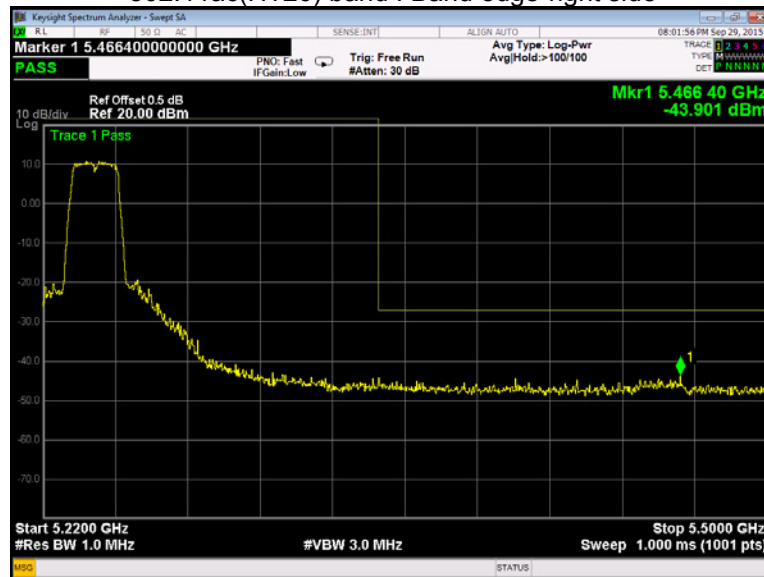


802.11ac(HT20) band IV Band edge-left side

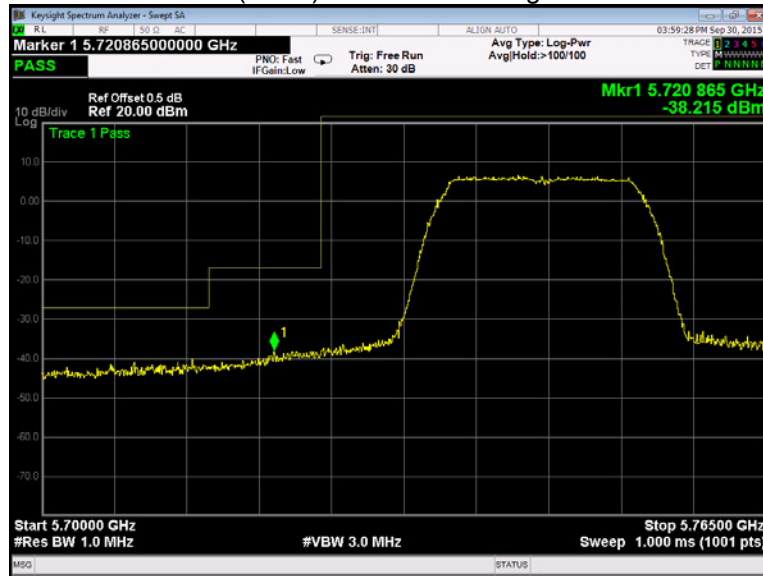


802.11ac(HT20) band IV Band edge-right side

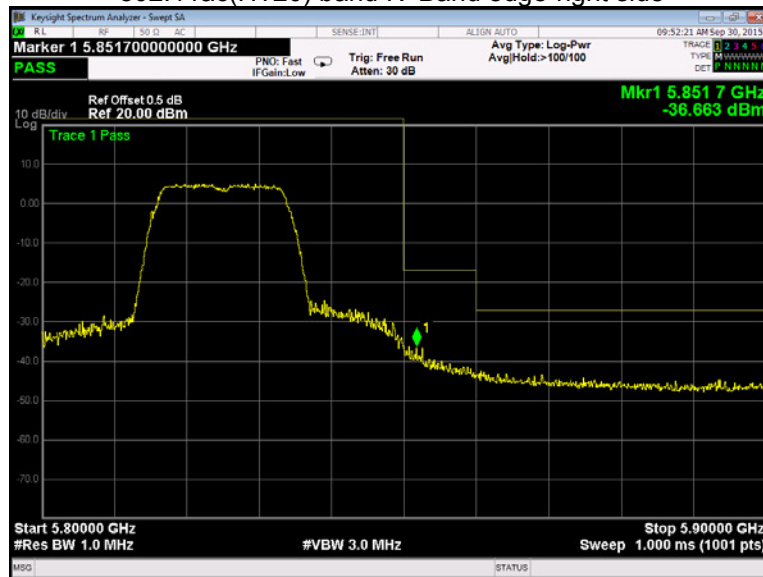


802.11ac(HT40) band I Band edge-left side

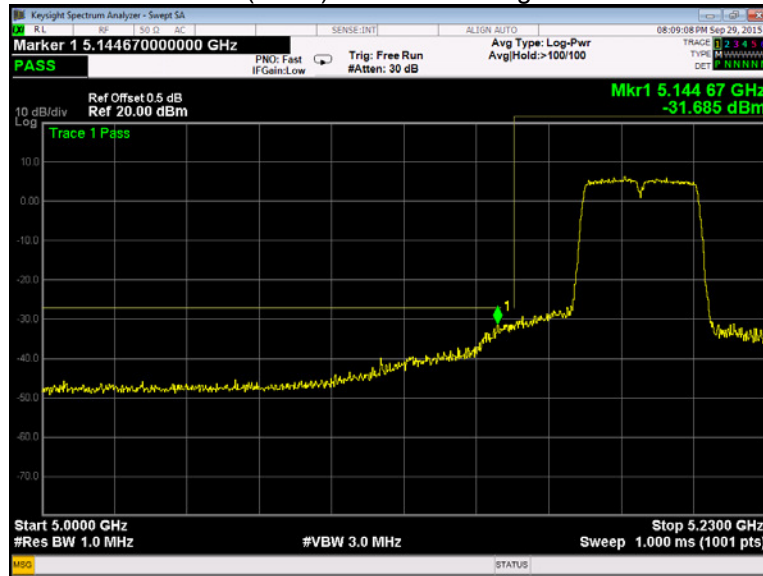

802.11ac(HT40) band I Band edge-right side

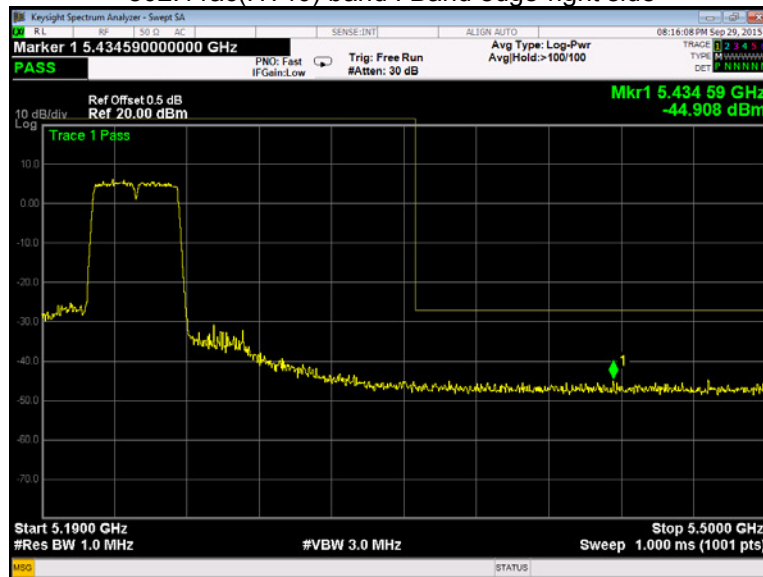


802.11ac(HT40) band IV Band edge-left side

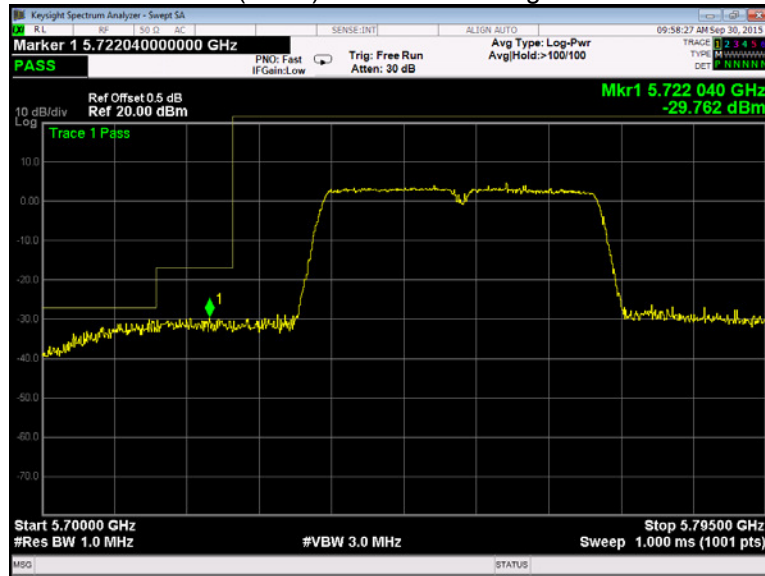


802.11ac(HT40) band IV Band edge-right side




802.11ac(HT80) band I Band edge-left side

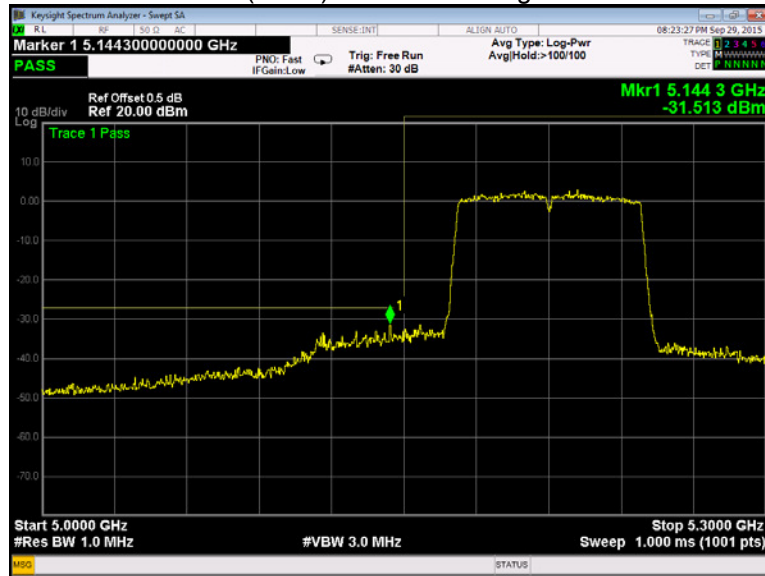

802.11ac(HT80) band I Band edge-right side

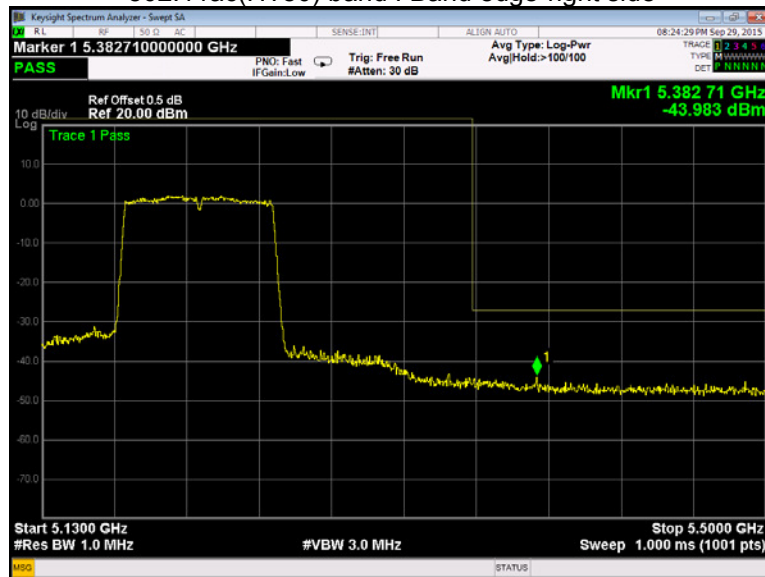

802.11ac(HT80) band IV Band edge-left side

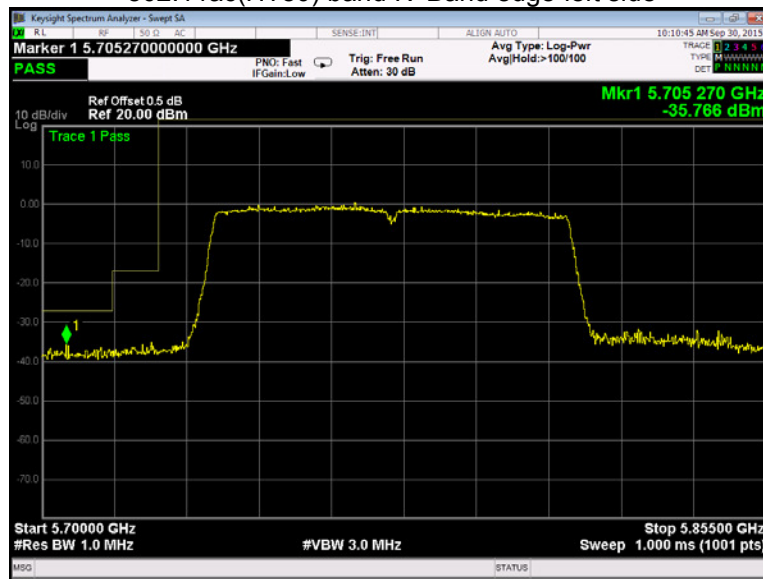

802.11ac(HT80) band IV Band edge-right side

