

TEST REPORT

Product : BOOM TOWER
Trade mark : SOUNDCANDY
Model/Type reference : SC3003
Serial Number : N/A
Report Number : EED32H000894-1
FCC ID : 2AFQL-SC3003
Date of Issue : July 23, 2015
Test Standards : 47 CFR Part 15 Subpart C (2014)
Test result : PASS

Prepared for:

DUST STUDIO LTD

**7/f, Flat B-03, Cheong Wah Factory Building,
Tokwawan, Kowloon, HK**

Prepared by:

**Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China**

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Tested by:

Ware Xin

Reviewed by:

Kevin Lam

Approved by:

Sheek Luo

Date:

July 23, 2015

Sheek Luo

Lab supervisor

Check No.: 1022581390



2 Version

Version No.	Date	Description
00	July 23, 2015	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.


4 Content

1 COVER PAGE.....	1
2 VERSION.....	2
3 TEST SUMMARY.....	3
4 CONTENT.....	4
5 TEST REQUIREMENT.....	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION.....	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	8
6.6 TEST FACILITY.....	8
6.7 DEVIATION FROM STANDARDS.....	9
6.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	10
7 EQUIPMENT LIST.....	11
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION.....	15
Appendix A) 20dB Occupied Bandwidth.....	16
Appendix B) Carrier Frequency Separation.....	20
Appendix C) Dwell Time.....	24
Appendix D) Hopping Channel Number.....	28
Appendix E) Conducted Peak Output Power.....	30
Appendix F) Band-edge for RF Conducted Emissions.....	34
Appendix G) RF Conducted Spurious Emissions.....	38
Appendix I) Antenna Requirement.....	46
Appendix J) AC Power Line Conducted Emission.....	47
Appendix K) Restricted bands around fundamental frequency (Radiated)/Radiated Spurious Emissions..	50
PHOTOGRAPHS OF TEST SETUP.....	55
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....	57

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

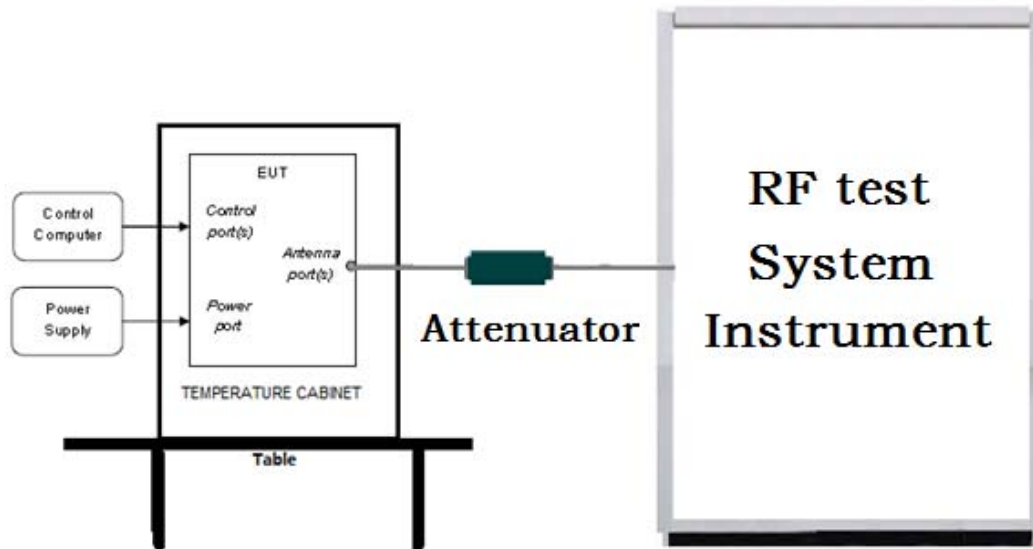

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

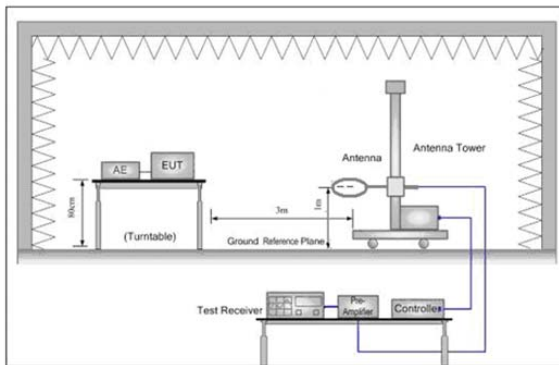


Figure 1. Below 30MHz

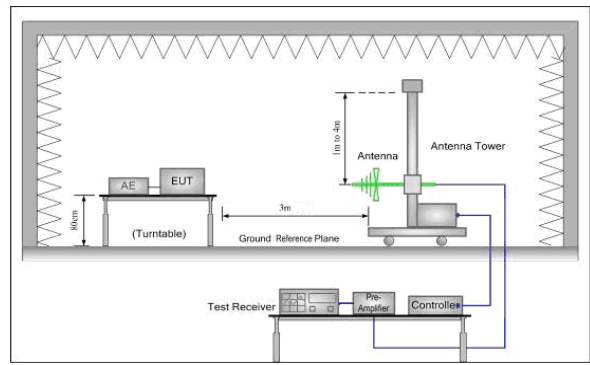


Figure 2. 30MHz to 1GHz


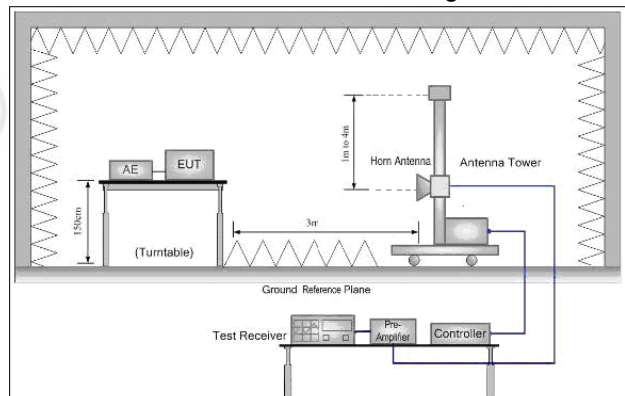


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

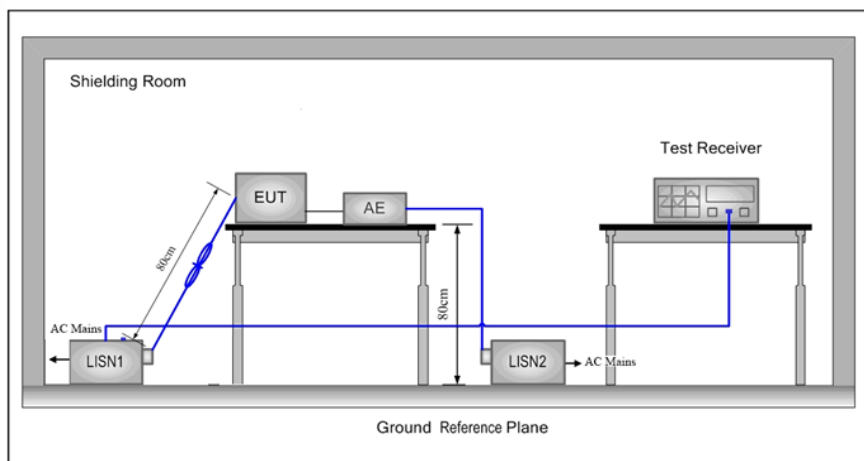

5.2 Test Environment

Operating Environment:	
Temperature:	24 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/π/4DQPSK/ 8DPSK(DH1,DH3,DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

6 General Information

6.1 Client Information

Applicant:	DUST STUDIO LTD
Address of Applicant:	7/f, Flat B-03, Cheong Wah Factory Building, Tokwawan, Kowloon, HK
Manufacturer:	DUST STUDIO LTD
Address of Manufacturer:	7/f, Flat B-03, Cheong Wah Factory Building, Tokwawan, Kowloon, HK
Factory:	SHENZHEN HUAZENG TECHNOLOGY CO LTD
Address of Factory:	Floor 2-3, Yinjin Building, District 71, BaoAn, Shenzhen, Guangdong, China

6.2 General Description of EUT

Product Name:	BOOM TOWER
Model No.(EUT):	SC3003
Trade mark:	SOUNDCANDY
EUT Supports Radios application:	Bluetooth V3.0+EDR
Power Supply:	DC 3.7V
Sample Received Date:	July 08, 2015
Sample tested Date:	July 08, 2015 to July 23, 2015

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	3.0+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Portable production
Antenna Type:	Integral
Antenna Gain:	0dBi
Test Voltage:	DC 3.7V

Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz

11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

The EUT has been tested with associated equipment below

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Notebook	HP	G3	FCC DOC	CTI
Mouse	L.Selectron	M004	FCC DOC	CTI

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China518101

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 565659

Centre Testing International Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 565659.

IC-Registration No.: 7408A

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A .

IC-Registration No.: 7408B

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B.

NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The Radiation 3 &10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of

Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

6.7 Deviation from Standards

None.

6.8 Abnormalities from Standard Conditions

None.

6.9 Other Information Requested by the Customer

None.

6.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	04-14-2015	04-13-2016
Communication test set test set	Agilent	N4010A	MY47230124	04-02-2015	04-01-2016
Spectrum Analyzer	Keysight	N9010A	MY54510339	04-01-2015	03-31-2016
Attenuator	HuaXiang	SHX370	15040701	04-01-2015	03-31-2016
Signal Generator	Keysight	N5182B	MY53051549	03-31-2015	03-30-2016
High-pass filter(3-18GHz)	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-13-2015	01-12-2016
High-pass filter(5-18GHz)	MICRO-TRONICS	SPA-F-63029-4	---	01-13-2015	01-12-2016
band rejection filter (GSM900)	Sinoscite	FL5CX01CA09C L12-0395-001	---	01-13-2015	01-12-2016
band rejection filter (GSM850)	Sinoscite	FL5CX01CA08C L12-0393-001	---	01-13-2015	01-12-2016
band rejection filter (GSM1800)	Sinoscite	FL5CX02CA04C L12-0396-002	---	01-13-2015	01-12-2016
band rejection filter (GSM1900)	Sinoscite	FL5CX02CA03C L12-0394-001	---	01-13-2015	01-12-2016
DC Power	Keysight	E3642A	MY54436035	03-31-2015	03-30-2016
PC-1	Lenovo	R4960d	---	04-01-2015	03-31-2016
BT&WI-FI Automatic control	R&S	OSPB157	101374	04-01-2015	03-31-2016
RF control unit	JS Tonscend	JS0806-2	2015860006	04-01-2015	03-31-2016
BT&WI-FI Automatic test software	JS Tonscend	JSTS1120-2	---	04-01-2015	03-31-2016

Conducted Spurious Emission					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	R&S	FSP40	100416	07-08-2014	07-07-2015
Spectrum Analyzer	R&S	FSP40	100416	07-08-2015	07-07-2016
Receiver	R&S	ESCI	100435	07-08-2014	07-07-2015
Receiver	R&S	ESCI	100435	07-08-2015	07-07-2016
Noise generator	Beijing damping jidian	DM1661	126001	04-01-2015	03-31-2016
Attenuator	HuaXiang	INMET64671	INMET64671	04-01-2015	03-31-2016
Signal Generator	Agilent	E4438C	MY45095744	04-19-2015	04-18-2016
Attenuator	HuaXiang	SHX370	15040701	04-01-2015	03-31-2016
Signal Generator	Keysight	E8257D	MY53401106	04-14-2015	04-13-2016
High-pass filter(3-18GHz)	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-13-2015	01-12-2016
High-pass filter(5-18GHz)	MICRO-TRONICS	SPA-F-63029-4	---	01-13-2015	01-12-2016
band rejection filter (GSM900)	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-13-2015	01-12-2016
band rejection filter (GSM850)	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-13-2015	01-12-2016
band rejection filter (GSM1800)	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-13-2015	01-12-2016

Radiated Spurious Emission & Radiated Emission(3M Semi-anechoic Chamber (2))					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-02-2013	06-01-2016
TRILOG Broadband Antenna	SCHWARZBEC K	VULB9163	9163-617	07-13-2014	07-12-2015
TRILOG Broadband Antenna	SCHWARZBEC K	VULB9163	9163-617	07-13-2015	07-12-2016
Microwave Preamplifier	Agilent	8449B	3008A024 25	02-05-2015	02-04-2016
Horn Antenna	ETS-LINDGREN	3117	00057410	07-07-2015	07-06-2016
Loop Antenna	ETS	6502	00071730	07-22-2014	07-21-2015
Loop Antenna	ETS	6502	00071730	07-22-2015	07-21-2016
Spectrum Analyzer	R&S	FSP40	100416	07-08-2014	07-07-2015
Spectrum Analyzer	R&S	FSP40	100416	07-08-2015	07-07-2016
Receiver	R&S	ESCI	100435	07-08-2014	07-07-2015
Receiver	R&S	ESCI	100435	07-08-2015	07-07-2016
Multi device Controller	maturo	NCD/070/10 711112	---	01-13-2015	01-12-2016
LISN	schwarzbeck	NNBM8125	81251547	07-08-2014	07-07-2015
LISN	schwarzbeck	NNBM8125	81251547	07-08-2015	07-07-2016
LISN	schwarzbeck	NNBM8125	81251546	07-08-2014	07-07-2015
LISN	schwarzbeck	NNBM8125	81251546	07-08-2015	07-07-2016
Signal Generator	Agilent	E4438C	MY45095 744	04-19-2015	04-18-2016
Signal Generator	Keysight	E8257D	MY53401 106	04-14-2015	04-13-2016
Temperature/ Humidity Indicator	TAYLOR	1451	5190	07-09-2014	07-06-2015
Temperature/ Humidity Indicator	TAYLOR	1451	5190	07-09-2015	07-06-2016
Communication test set	Agilent	E5515C	GB470505 33	01-13-2015	01-12-2016
Cable line	Fulai(7M)	SF106	5219/6A	01-13-2015	01-12-2016
Cable line	Fulai(6M)	SF106	5220/6A	01-13-2015	01-12-2016
Cable line	Fulai(3M)	SF106	5216/6A	01-13-2015	01-12-2016
Cable line	Fulai(3M)	SF106	5217/6A	01-13-2015	01-12-2016
Communication test set	R&S	CMW500	152394	04-19-2015	04-18-2016
High-pass filter(3-18GHz)	Sinoscite	FL3CX03WG 18NM12-0398-002	---	01-13-2015	01-12-2016
High-pass filter(5-18GHz)	MICRO-TRONICS	SPA-F-63029-4	---	01-13-2015	01-12-2016
band rejection	Sinoscite	FL5CX01CA	---	01-13-2015	01-12-2016

filter (GSM900)		09CL12- 0395-001			
band rejection filter (GSM850)	Sinoscite	FL5CX01CA 08CL12- 0393-001	---	01-13-2015	01-12-2016
band rejection filter (GSM1800)	Sinoscite	FL5CX02CA 04CL12- 0396-002	---	01-13-2015	01-12-2016
band rejection filter (GSM1900)	Sinoscite	FL5CX02CA 03CL12- 0394-001	---	01-13-2015	01-12-2016

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2014)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix K)

Appendix A) 20dB Occupied Bandwidth

Test Result




Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	1.027	0.89448	PASS
GFSK	MCH	1.031	0.89623	PASS
GFSK	HCH	1.027	0.89445	PASS
$\pi/4$ DQPSK	LCH	1.307	1.1967	PASS
$\pi/4$ DQPSK	MCH	1.315	1.1989	PASS
$\pi/4$ DQPSK	HCH	1.316	1.2000	PASS
8DPSK	LCH	1.314	1.1911	PASS
8DPSK	MCH	1.319	1.1902	PASS
8DPSK	HCH	1.318	1.1914	PASS


Remark: Peak detector is used


Test Graph

Graphs

GFSK/LCH	
GFSK/MCH	

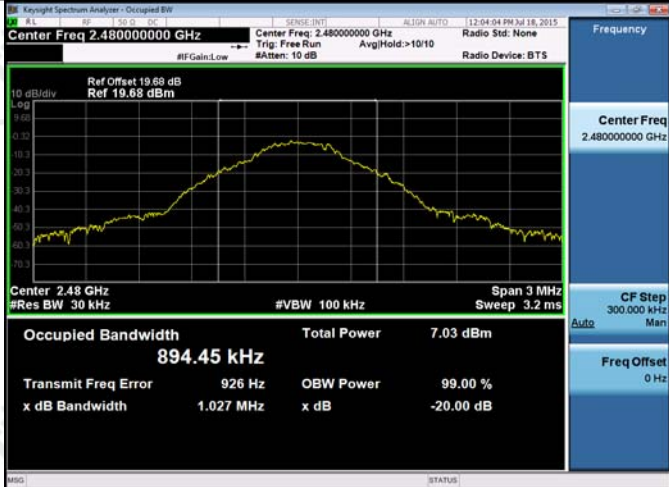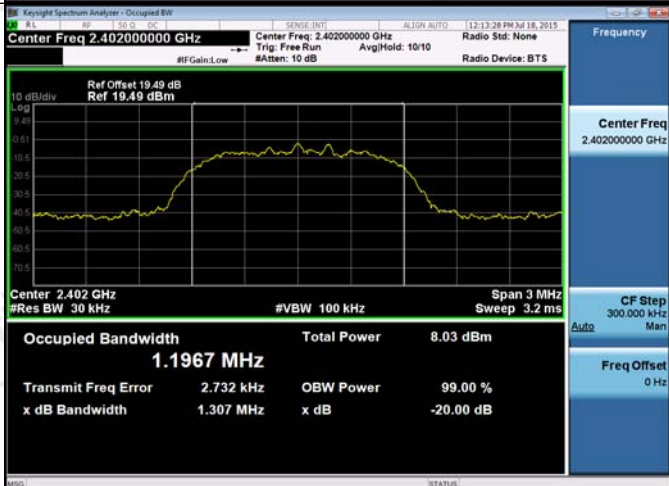GFSK/HCH	 <p>Key parameters for GFSK/HCH:</p> <ul style="list-style-type: none"> Center Freq: 2.480000000 GHz Occupied Bandwidth: 894.45 kHz Total Power: 7.03 dBm Transmit Freq Error: 926 Hz OBW Power: 99.00 %
$\pi/4$ DQPSK/LCH	 <p>Key parameters for $\pi/4$DQPSK/LCH:</p> <ul style="list-style-type: none"> Center Freq: 2.402000000 GHz Occupied Bandwidth: 1.1967 MHz Total Power: 8.03 dBm Transmit Freq Error: 2.732 kHz OBW Power: 99.00 %
$\pi/4$ DQPSK/MCH	 <p>Key parameters for $\pi/4$DQPSK/MCH:</p> <ul style="list-style-type: none"> Center Freq: 2.441000000 GHz Occupied Bandwidth: 1.1989 MHz Total Power: 7.85 dBm Transmit Freq Error: 1.879 kHz OBW Power: 99.00 %
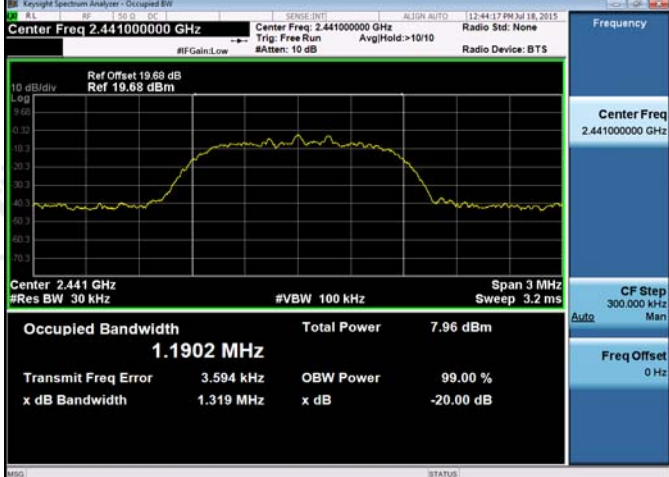
<p>$\pi/4$DQPSK/HCH</p>	
<p>8DPSK/LCH</p>	
<p>8DPSK/MCH</p>	

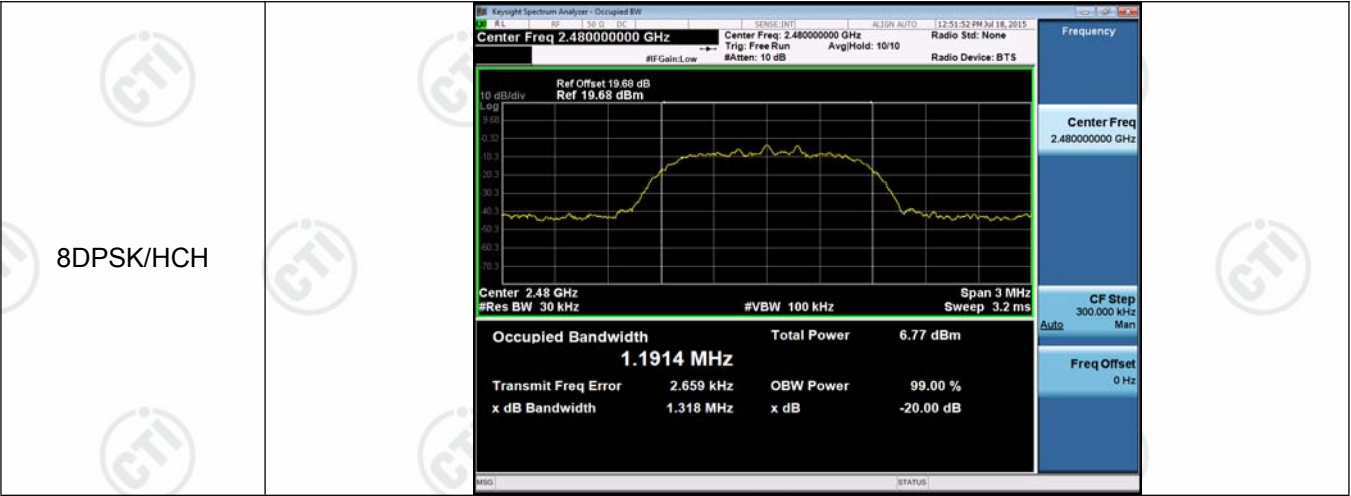



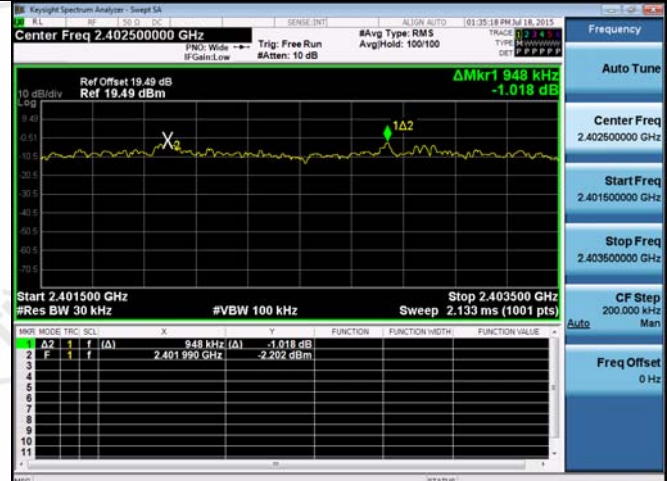
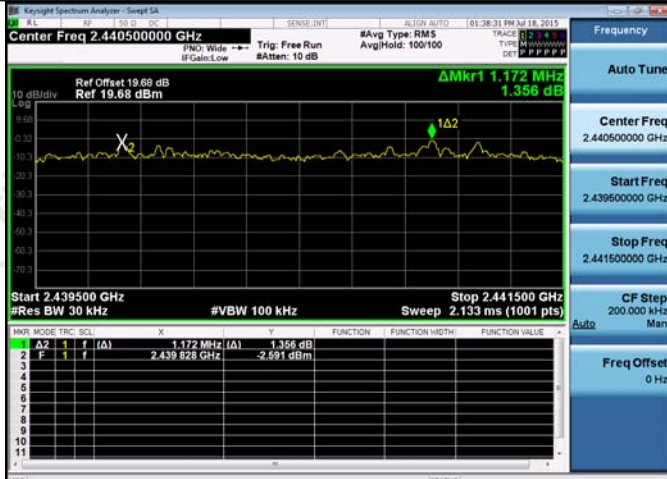
Appendix B) Carrier Frequency Separation




Result Table


Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.012	PASS
GFSK	MCH	0.946	PASS
GFSK	HCH	0.986	PASS
$\pi/4$ DQPSK	LCH	0.948	PASS
$\pi/4$ DQPSK	MCH	1.172	PASS
$\pi/4$ DQPSK	HCH	1.024	PASS
8DPSK	LCH	0.992	PASS
8DPSK	MCH	0.990	PASS
8DPSK	HCH	1.004	PASS

Test Graph

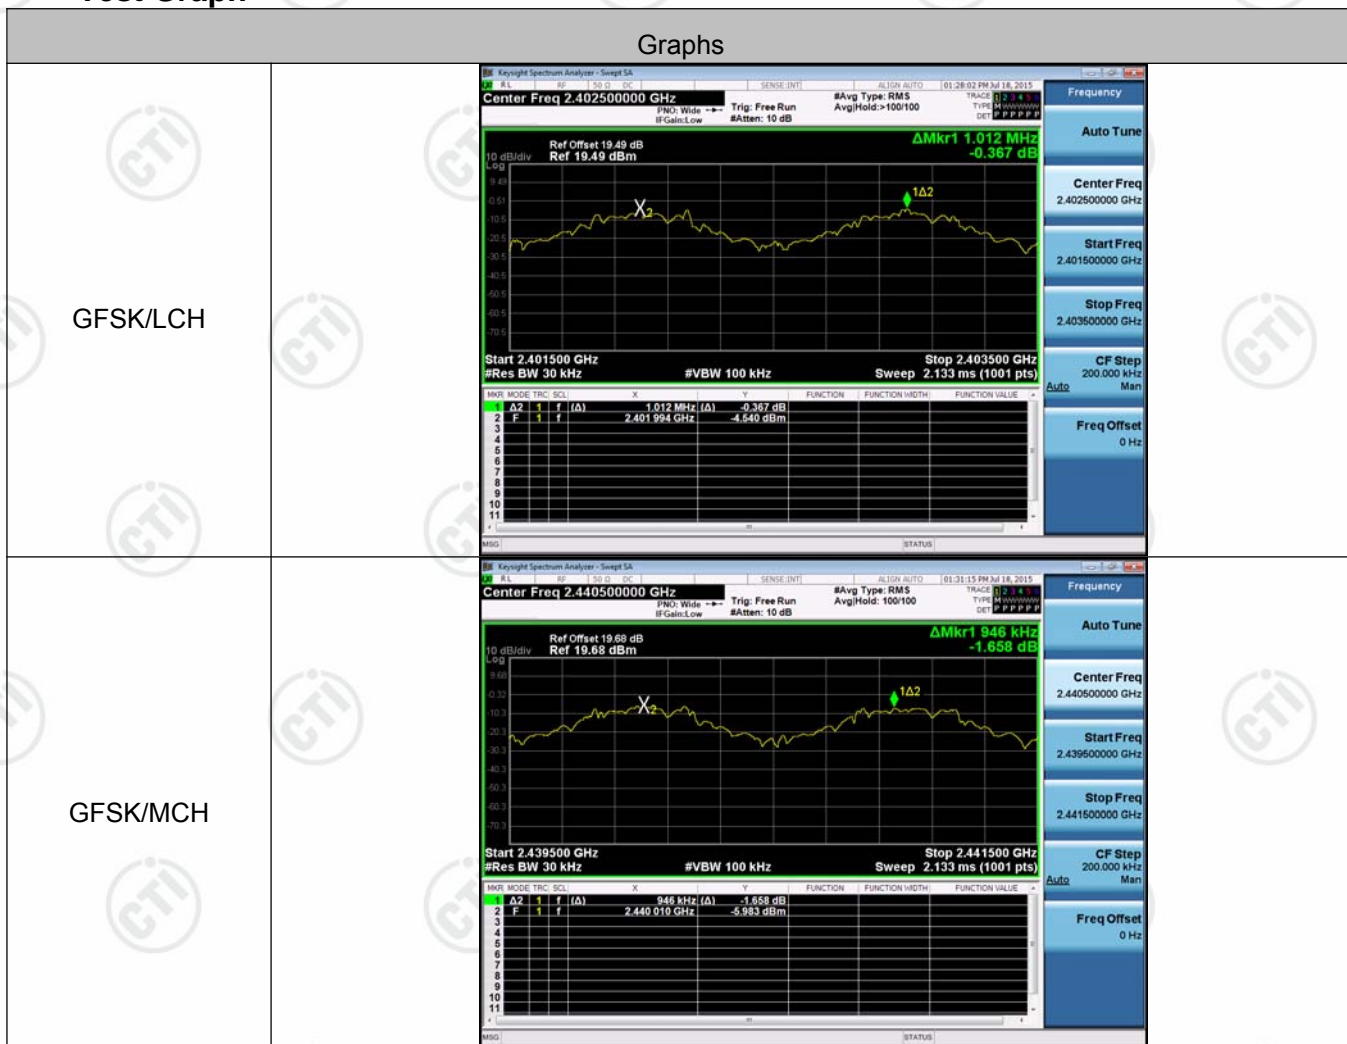

GFSK/HCH	 <table data-bbox="638 613 1201 770"><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(Δ)</td><td>986 kHz (Δ)</td><td>1.338 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.479 010 GHz</td><td>-6.828 dBm</td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	986 kHz (Δ)	1.338 dB			2	F	1	f		2.479 010 GHz	-6.828 dBm		
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(Δ)	986 kHz (Δ)	1.338 dB																						
2	F	1	f		2.479 010 GHz	-6.828 dBm																						
$\pi/4$ DQPSK/LCH	 <table data-bbox="638 1106 1201 1263"><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(Δ)</td><td>948 kHz (Δ)</td><td>-1.018 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.401 990 GHz</td><td>-2.202 dBm</td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	948 kHz (Δ)	-1.018 dB			2	F	1	f		2.401 990 GHz	-2.202 dBm		
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(Δ)	948 kHz (Δ)	-1.018 dB																						
2	F	1	f		2.401 990 GHz	-2.202 dBm																						
$\pi/4$ DQPSK/MCH	 <table data-bbox="638 1599 1201 1753"><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.172 MHz (Δ)</td><td>1.366 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.439 928 GHz</td><td>-2.991 dBm</td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	1.172 MHz (Δ)	1.366 dB			2	F	1	f		2.439 928 GHz	-2.991 dBm		
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(Δ)	1.172 MHz (Δ)	1.366 dB																						
2	F	1	f		2.439 928 GHz	-2.991 dBm																						
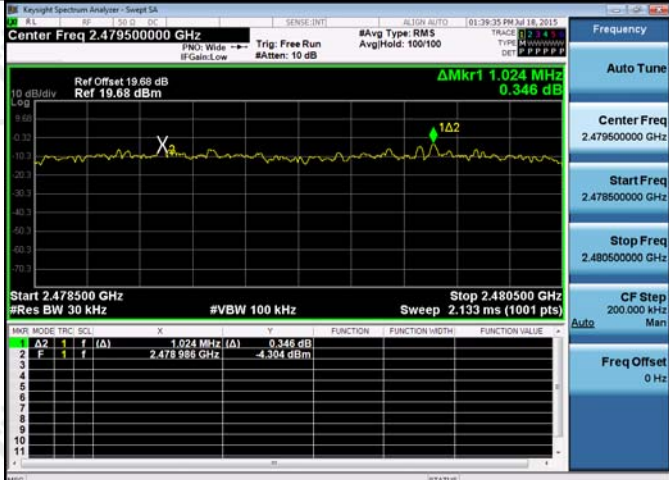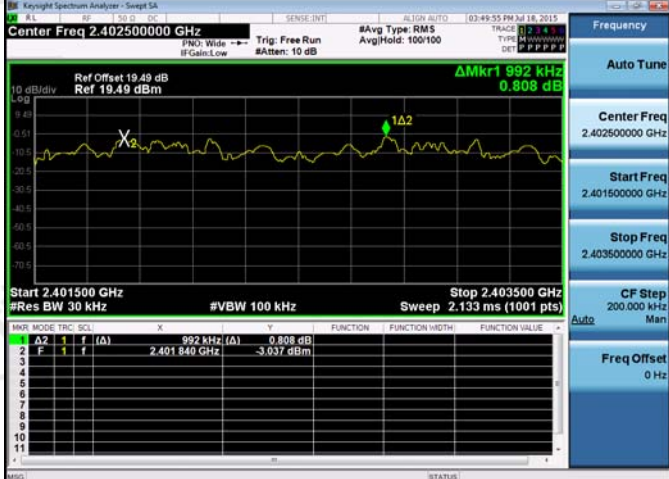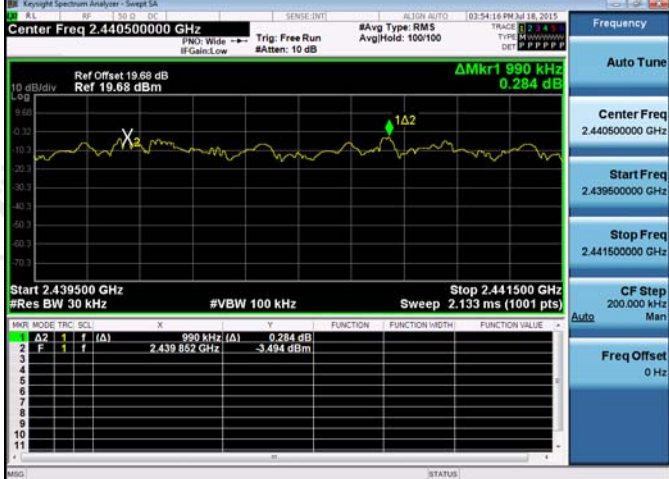
<p>$\pi/4$DQPSK/HCH</p>	
<p>8DPSK/LCH</p>	
<p>8DPSK/MCH</p>	

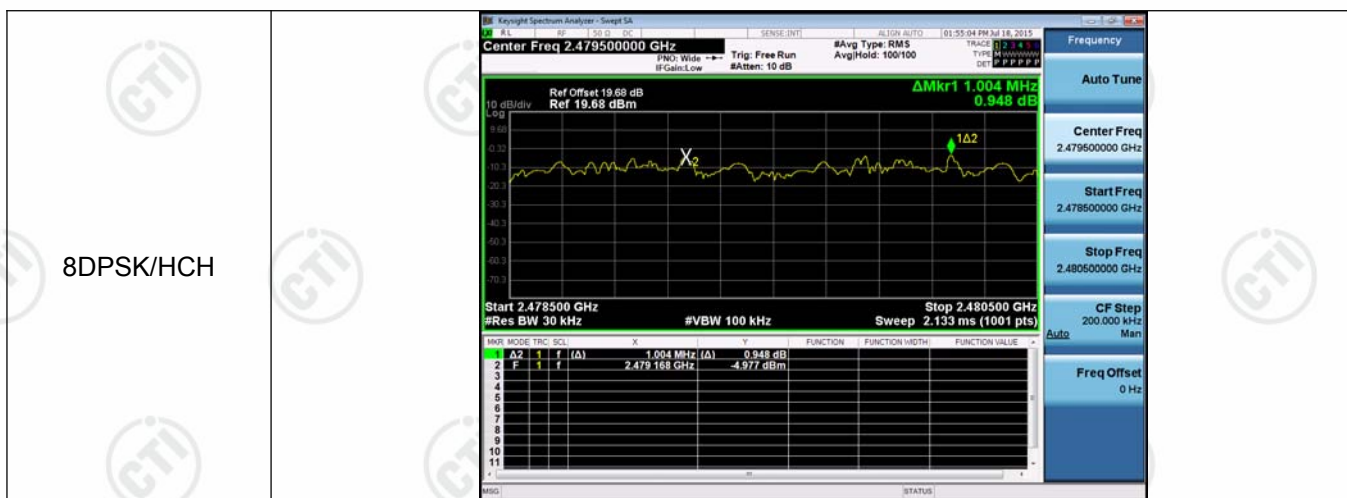


Appendix C) Dwell Time


Result Table


Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Verdict
GFSK	DH1	LCH	0.364	320	0.116	PASS
GFSK	DH1	MCH	0.364	320	0.116	PASS
GFSK	DH1	HCH	0.364	320	0.116	PASS
GFSK	DH3	LCH	1.619	160	0.259	PASS
GFSK	DH3	MCH	1.619	160	0.259	PASS
GFSK	DH3	HCH	1.619	160	0.259	PASS
GFSK	DH5	LCH	2.868	106.7	0.306	PASS
GFSK	DH5	MCH	2.868	106.7	0.306	PASS
GFSK	DH5	HCH	2.866	106.7	0.306	PASS


Remark : Only worse case GFSK is reported.

Test Graph

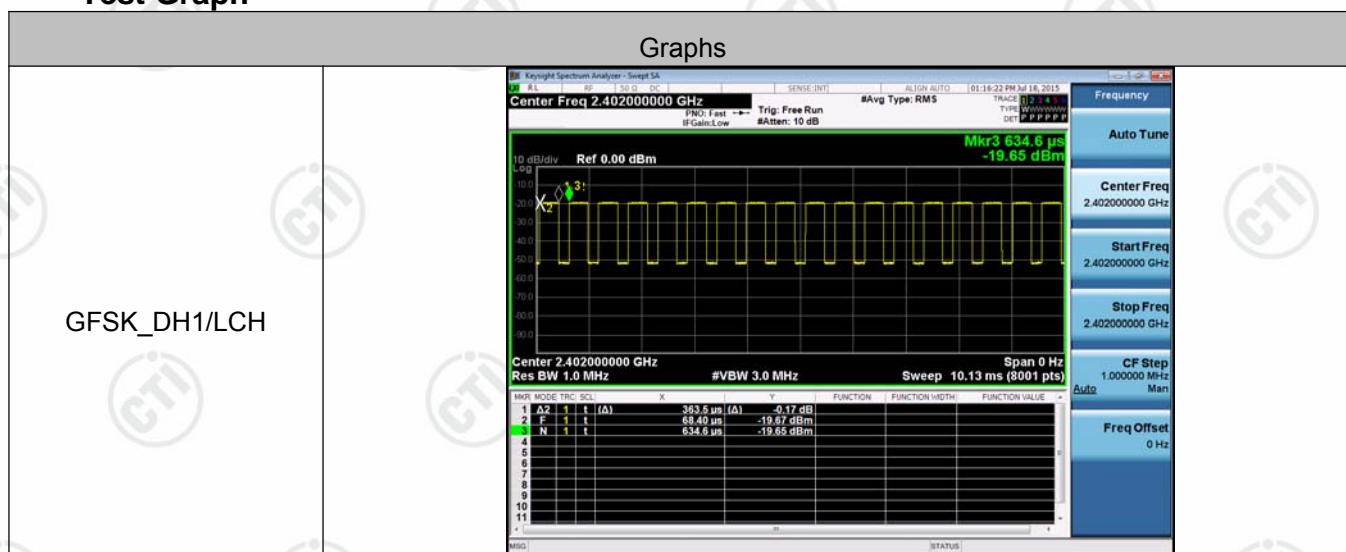

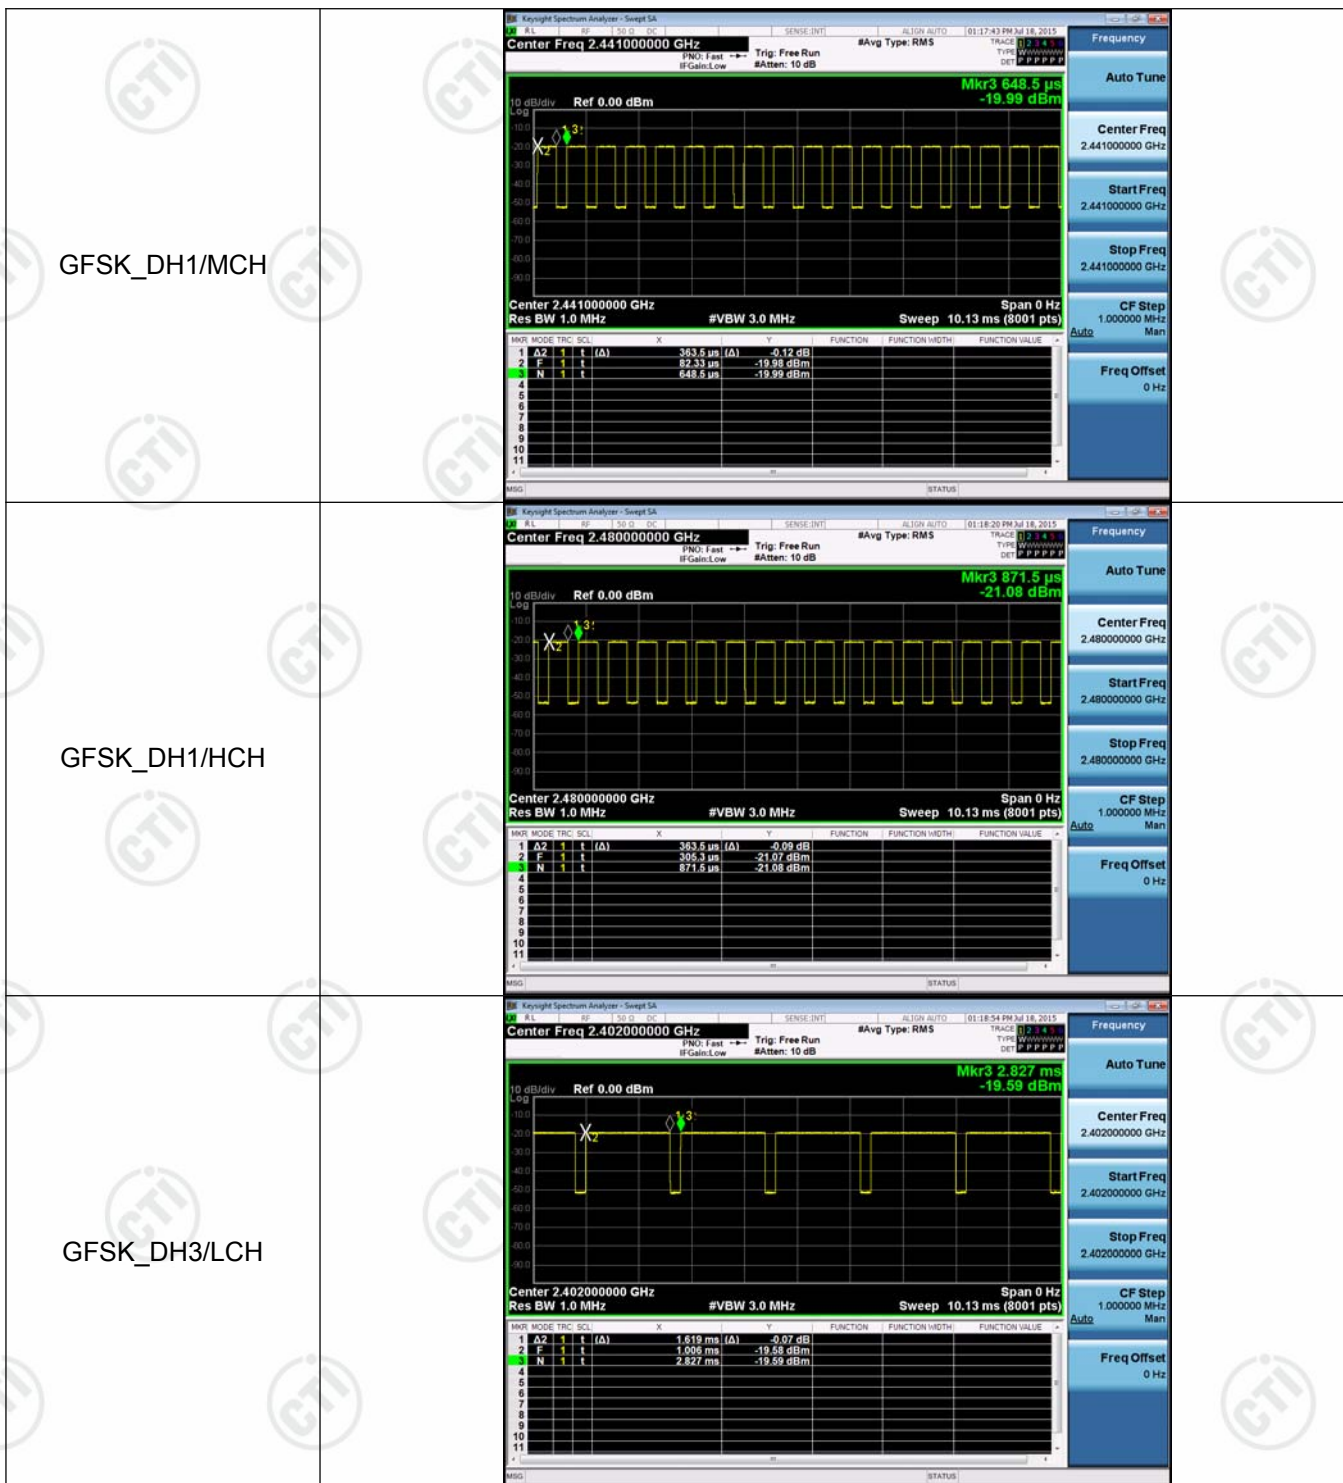

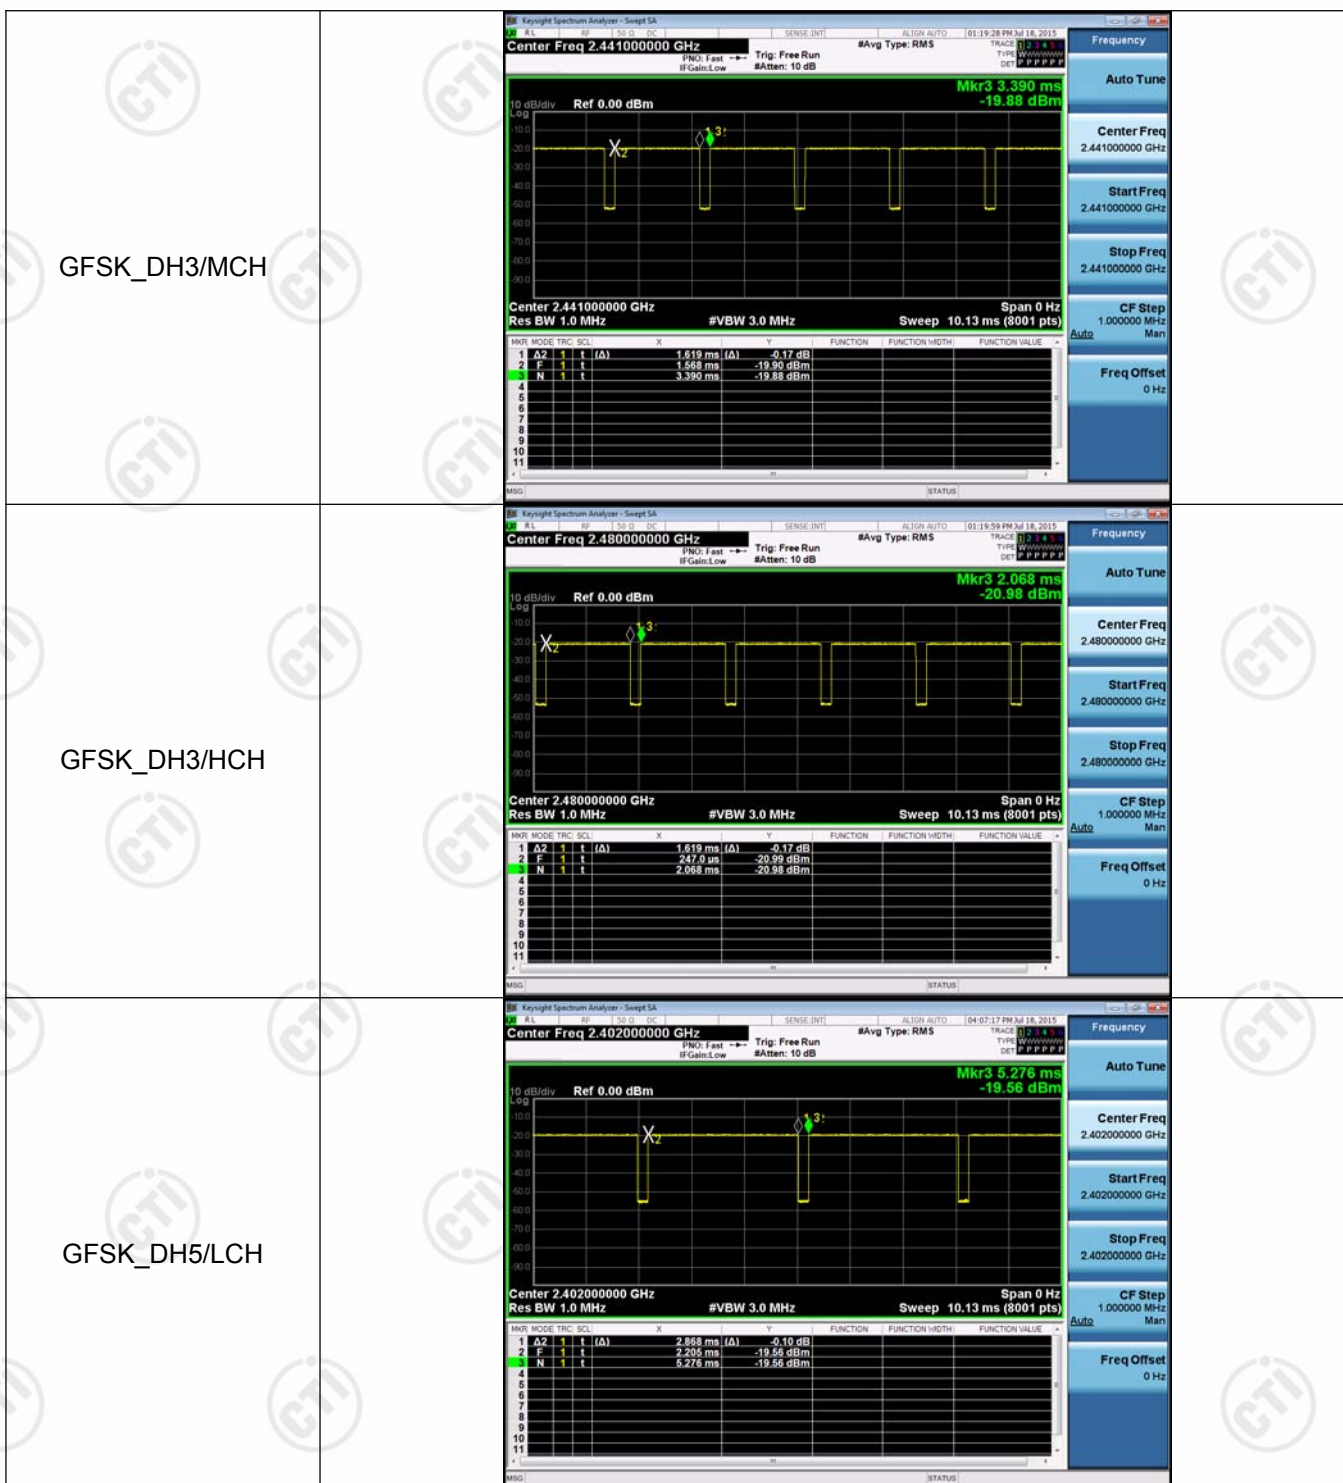

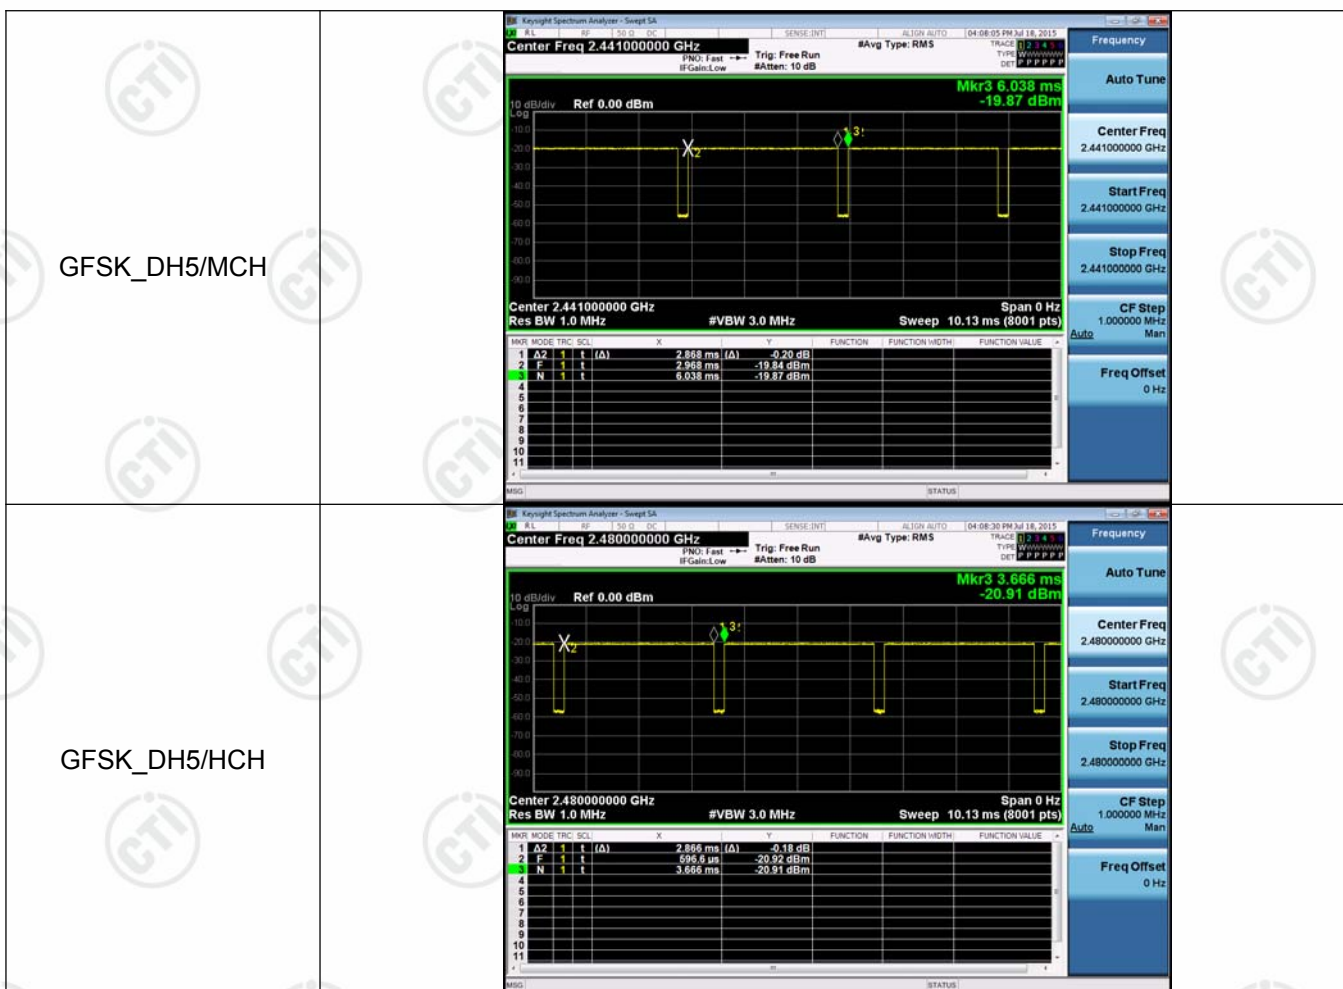



Appendix D) Hopping Channel Number

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

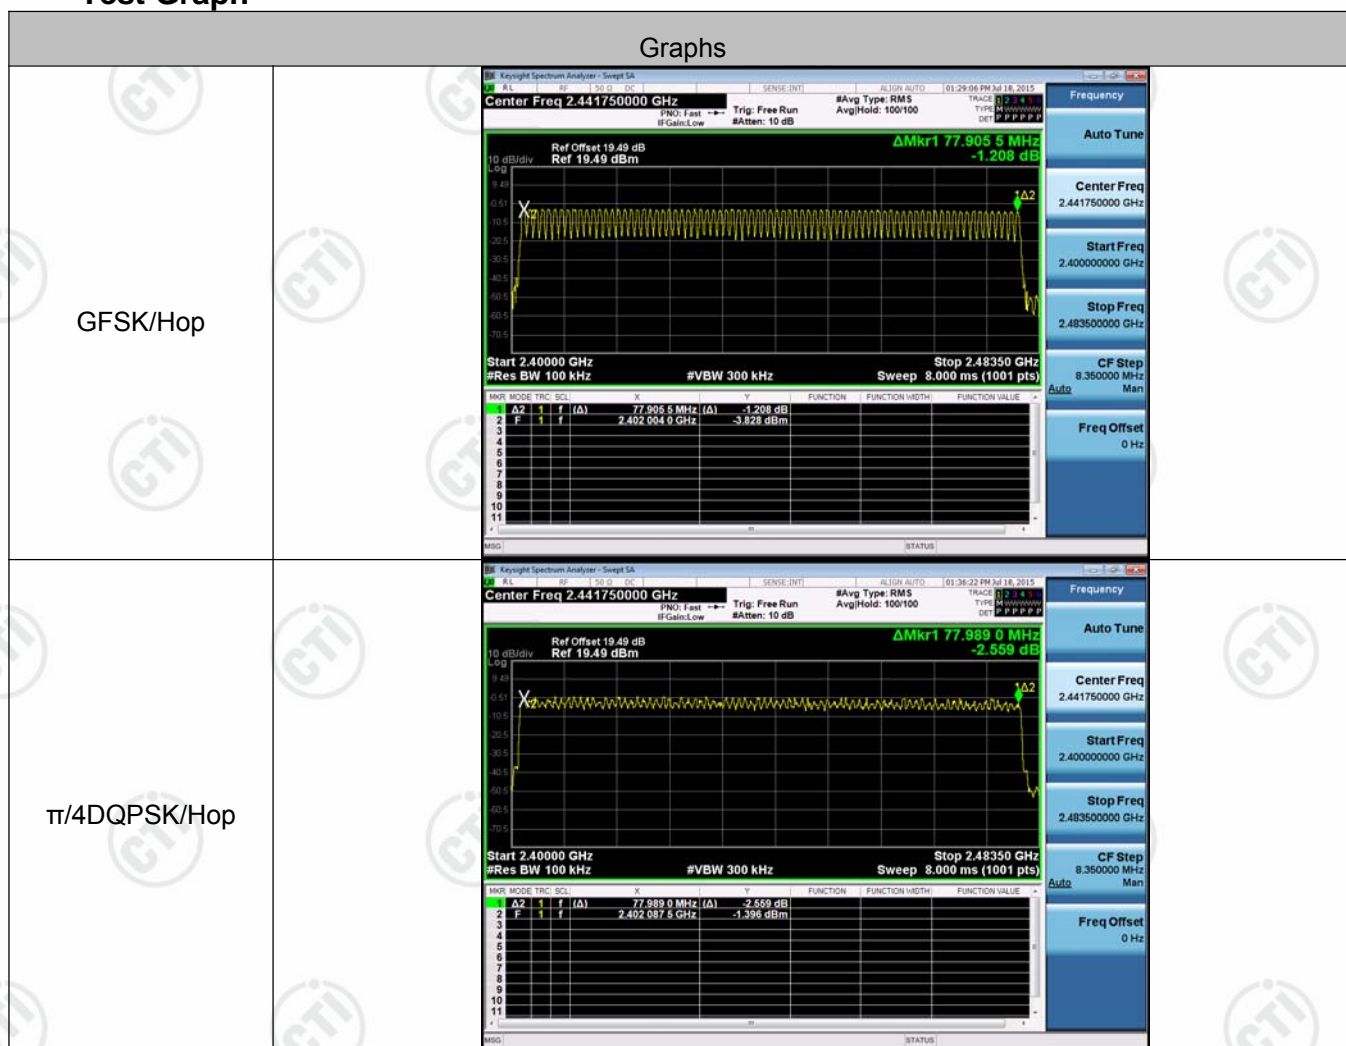

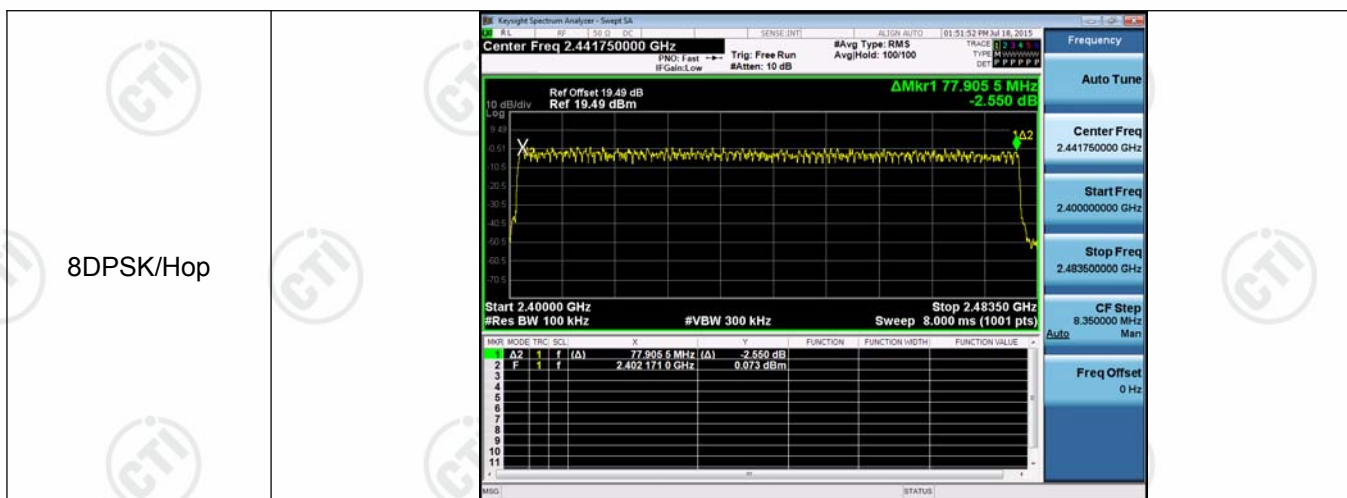





Appendix E) Conducted Peak Output Power




Result Table

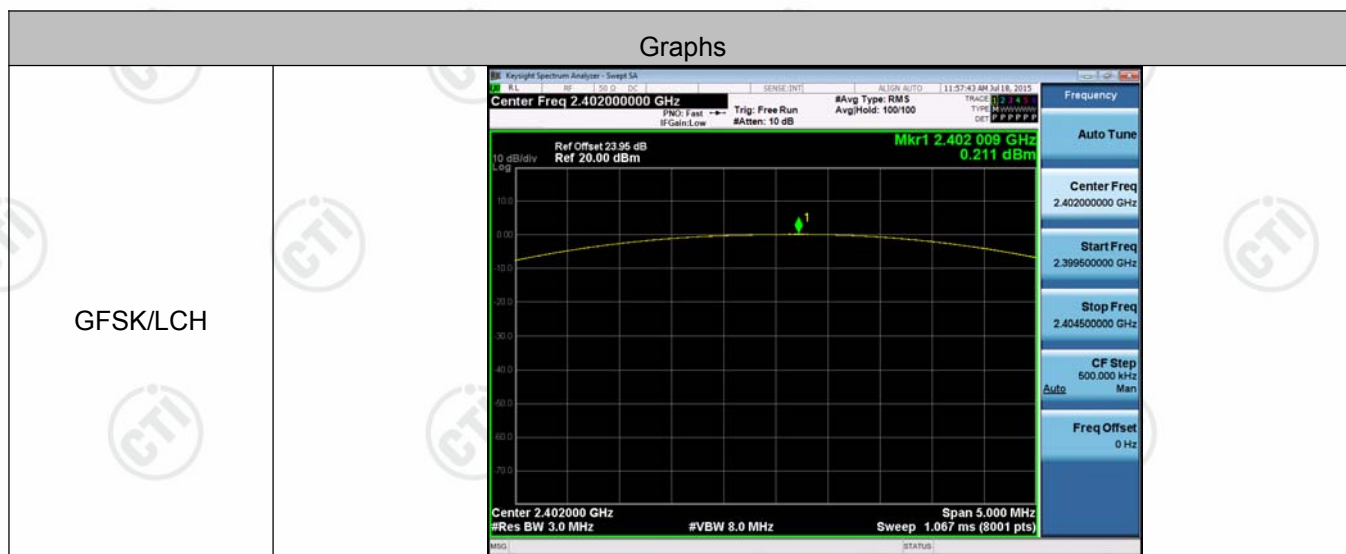
Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	0.211	PASS
GFSK	MCH	0.115	PASS
GFSK	HCH	-1.045	PASS
$\pi/4$ DQPSK	LCH	1.739	PASS
$\pi/4$ DQPSK	MCH	1.576	PASS
$\pi/4$ DQPSK	HCH	0.341	PASS
8DPSK	LCH	2.133	PASS
8DPSK	MCH	1.912	PASS
8DPSK	HCH	0.736	PASS

Test Graph




GFSK/MCH	
GFSK/HCH	
$\pi/4$ DQPSK/LCH	




<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	
<p>8DPSK/LCH</p>	



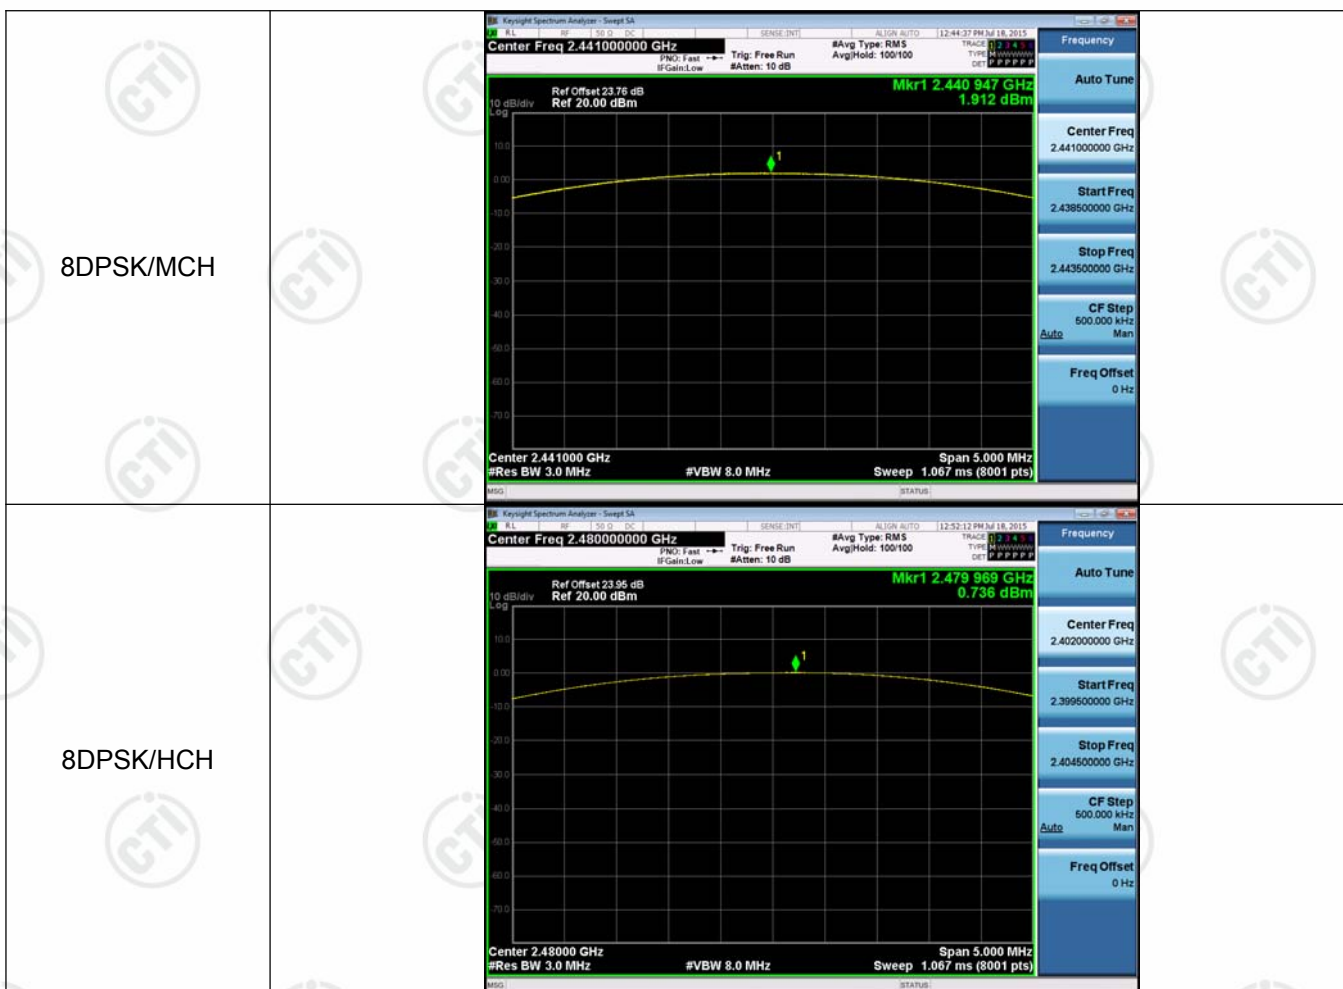





Appendix F) Band-edge for RF Conducted Emissions

Test Graph

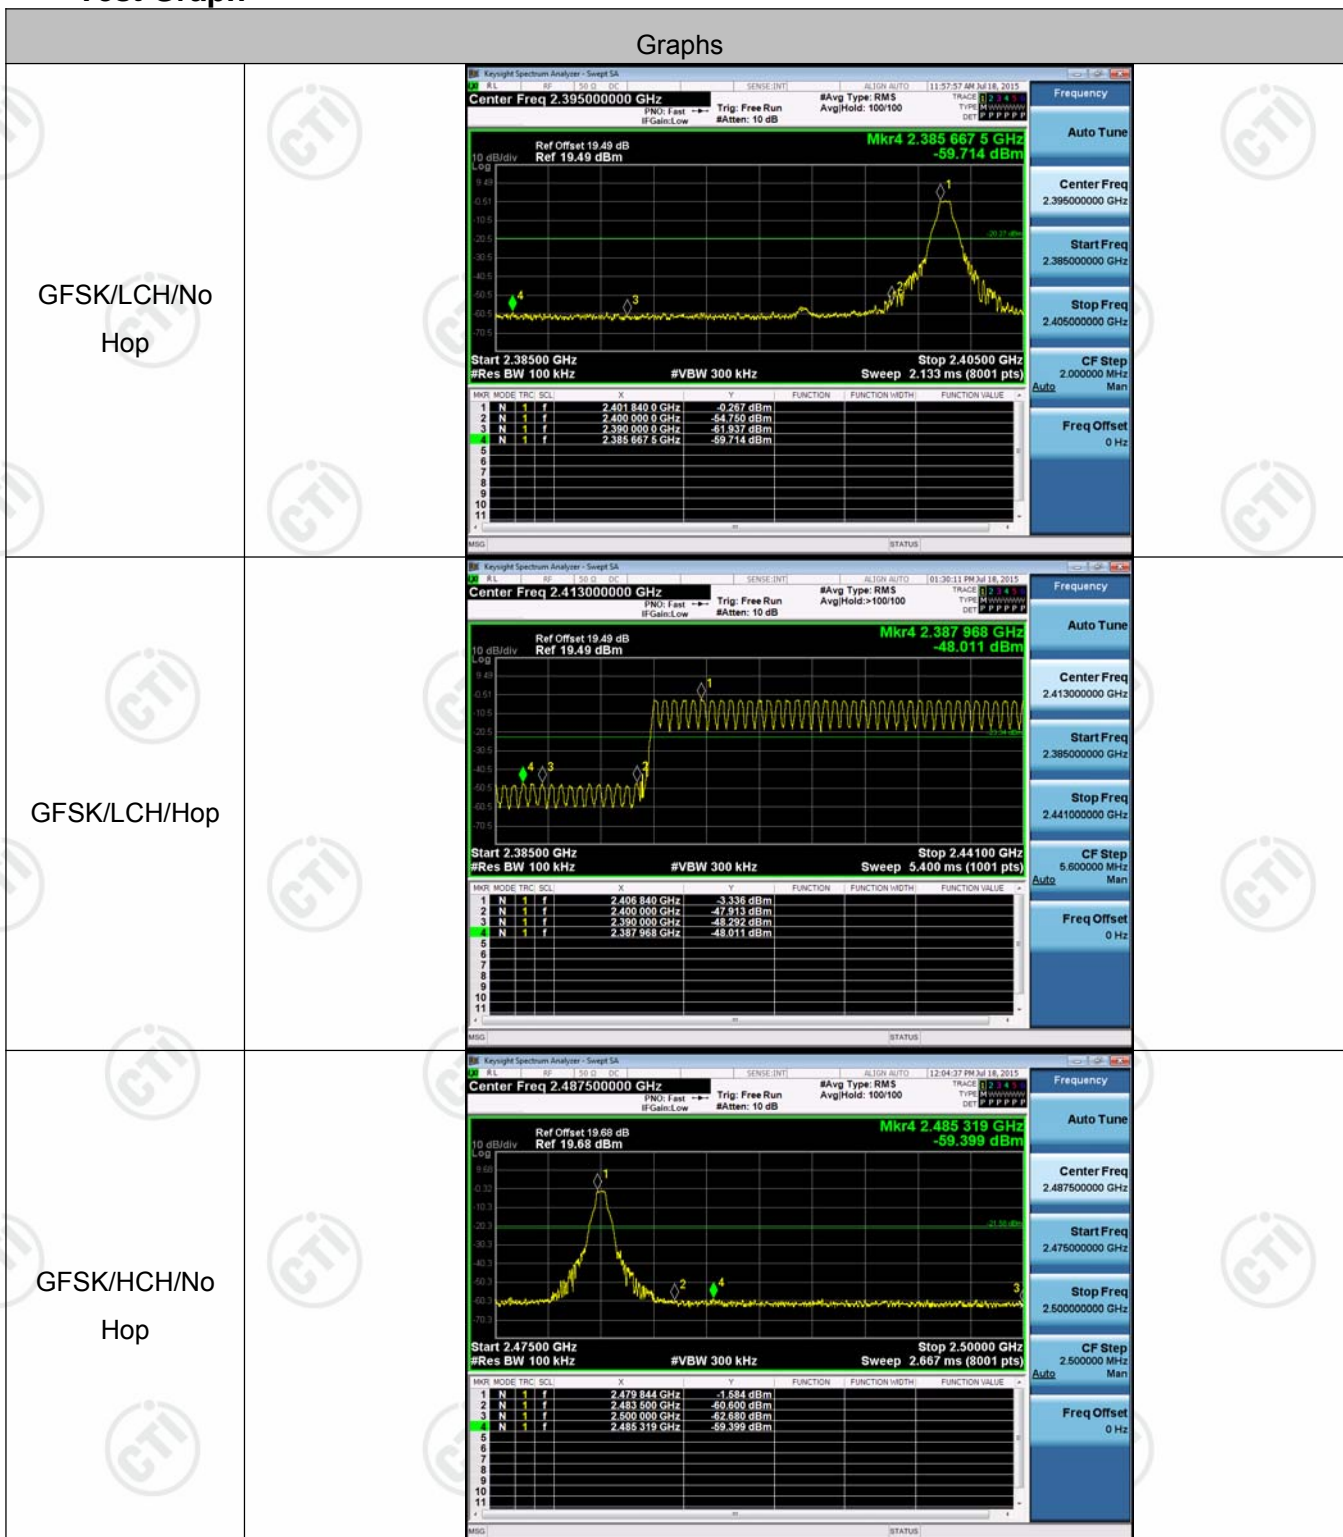


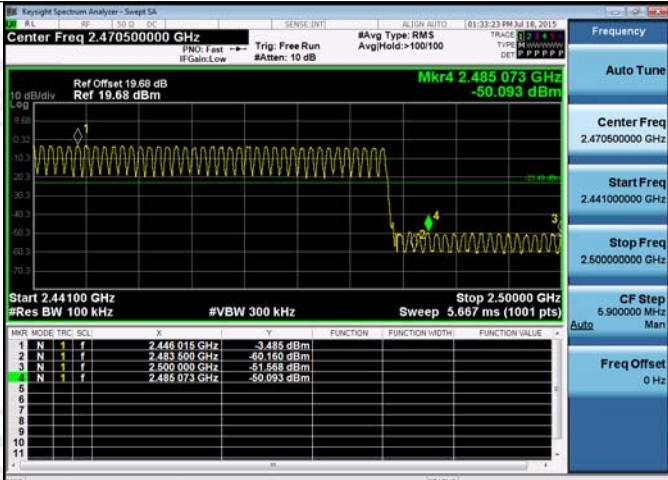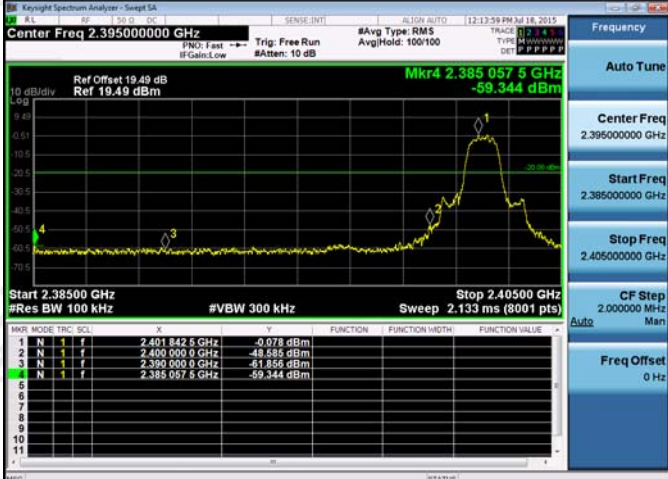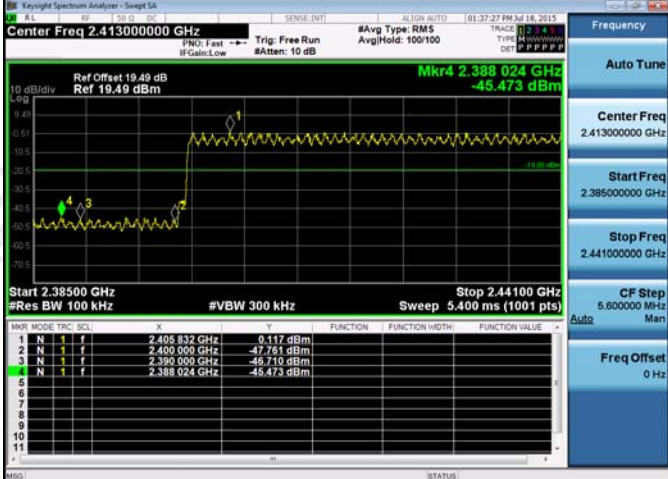
GFSK/HCH/Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.446 015 GHz</td><td>-3.485 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-60.160 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-51.568 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.485 073 GHz</td><td>-50.093 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.446 015 GHz	-3.485 dBm				2	N	1	f	2.483 500 GHz	-60.160 dBm				3	N	1	f	2.500 000 GHz	-51.568 dBm				4	N	1	f	2.485 073 GHz	-50.093 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.446 015 GHz	-3.485 dBm																																									
2	N	1	f	2.483 500 GHz	-60.160 dBm																																									
3	N	1	f	2.500 000 GHz	-51.568 dBm																																									
4	N	1	f	2.485 073 GHz	-50.093 dBm																																									
$\pi/4$ DQPSK/LCH/ No Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 842 5 GHz</td><td>-0.078 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 0 GHz</td><td>-49.585 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 0 GHz</td><td>-61.855 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.385 057 5 GHz</td><td>-59.344 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 842 5 GHz	-0.078 dBm				2	N	1	f	2.400 000 0 GHz	-49.585 dBm				3	N	1	f	2.390 000 0 GHz	-61.855 dBm				4	N	1	f	2.385 057 5 GHz	-59.344 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.401 842 5 GHz	-0.078 dBm																																									
2	N	1	f	2.400 000 0 GHz	-49.585 dBm																																									
3	N	1	f	2.390 000 0 GHz	-61.855 dBm																																									
4	N	1	f	2.385 057 5 GHz	-59.344 dBm																																									
$\pi/4$ DQPSK/LCH/ Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.405 832 GHz</td><td>-0.117 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-47.761 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-46.710 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.388 024 GHz</td><td>-45.473 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.405 832 GHz	-0.117 dBm				2	N	1	f	2.400 000 GHz	-47.761 dBm				3	N	1	f	2.390 000 GHz	-46.710 dBm				4	N	1	f	2.388 024 GHz	-45.473 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.405 832 GHz	-0.117 dBm																																									
2	N	1	f	2.400 000 GHz	-47.761 dBm																																									
3	N	1	f	2.390 000 GHz	-46.710 dBm																																									
4	N	1	f	2.388 024 GHz	-45.473 dBm																																									

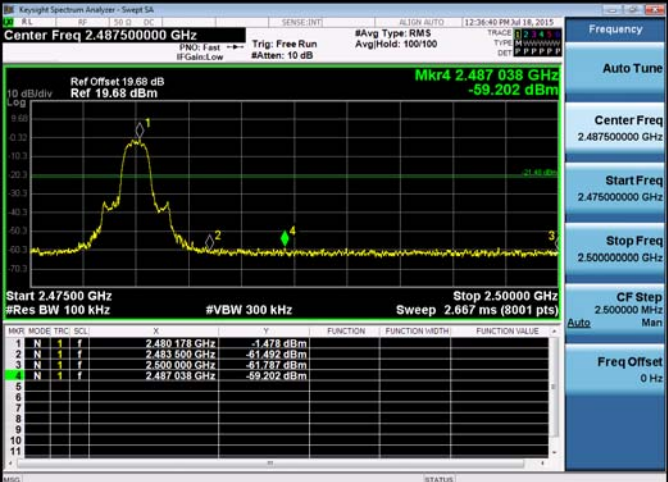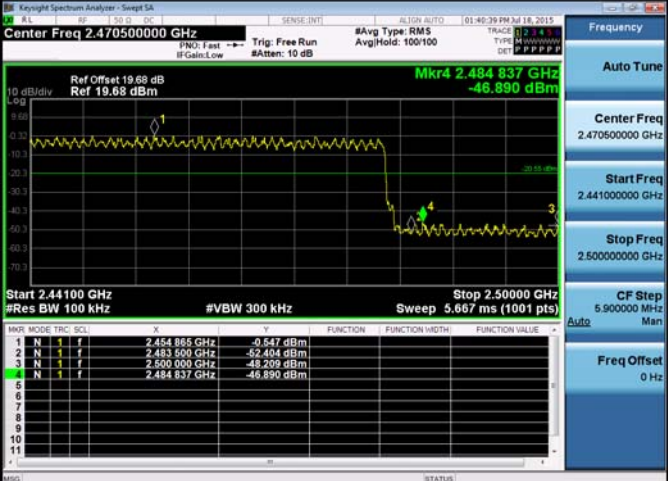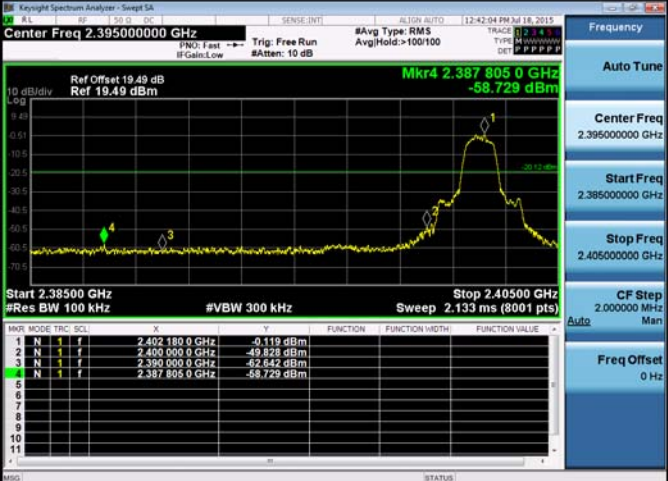
<p>$\pi/4$DQPSK/HCH/ No Hop</p>	
<p>$\pi/4$DQPSK/HCH/ Hop</p>	
<p>8DPSK/LCH/No Hop</p>	

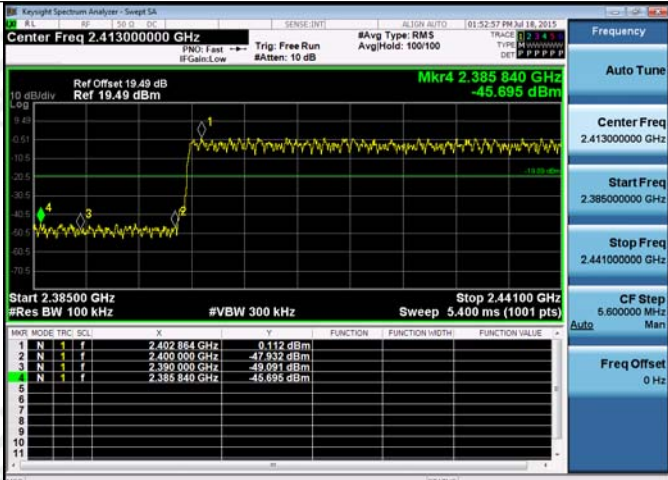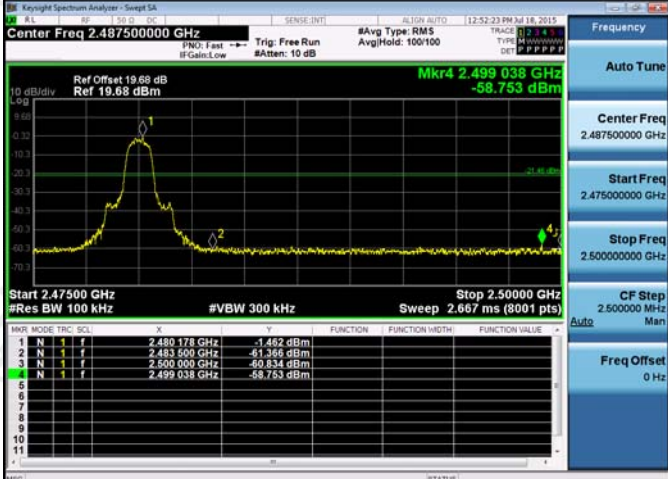
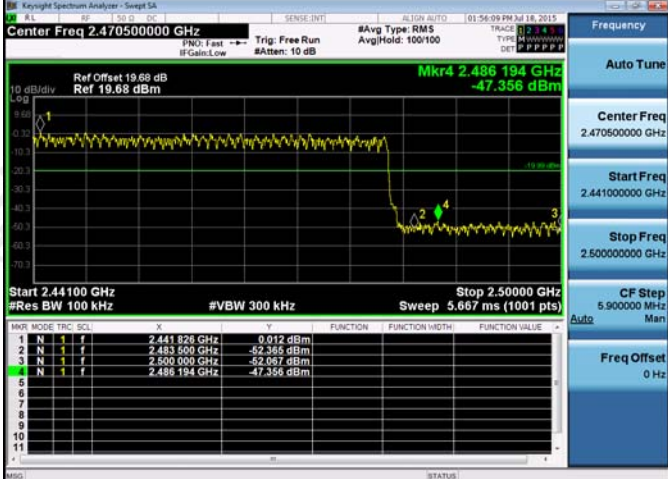
8DPSK/LCH/Hop	 <p>Center Freq 2.413000000 GHz</p> <p>Ref Offset 19.49 dB Ref 19.49 dBm</p> <p>Mkr4 2.385 840 GHz -45.695 dBm</p> <p>Start 2.385000 GHz #Res BW 100 kHz</p> <p>Stop 2.441000 GHz #VBW 300 kHz Sweep 5.400 ms (1001 pts)</p> <table><tr><th>MARK</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 884 GHz</td><td>0.112 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-47.932 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.398 000 GHz</td><td>-49.891 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.385 840 GHz</td><td>-45.695 dBm</td><td></td><td></td><td></td></tr></table>	MARK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 884 GHz	0.112 dBm				2	N	1	f	2.400 000 GHz	-47.932 dBm				3	N	1	f	2.398 000 GHz	-49.891 dBm				4	N	1	f	2.385 840 GHz	-45.695 dBm			
MARK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 884 GHz	0.112 dBm																																									
2	N	1	f	2.400 000 GHz	-47.932 dBm																																									
3	N	1	f	2.398 000 GHz	-49.891 dBm																																									
4	N	1	f	2.385 840 GHz	-45.695 dBm																																									
8DPSK/HCH/No Hop	 <p>Center Freq 2.487500000 GHz</p> <p>Ref Offset 19.68 dB Ref 19.68 dBm</p> <p>Mkr4 2.499 038 GHz -58.753 dBm</p> <p>Start 2.475000 GHz #Res BW 100 kHz</p> <p>Stop 2.500000 GHz #VBW 300 kHz Sweep 2.667 ms (8001 pts)</p> <table><tr><th>MARK</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 178 GHz</td><td>-1.462 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-51.366 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-60.834 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.499 038 GHz</td><td>-58.753 dBm</td><td></td><td></td><td></td></tr></table>	MARK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 178 GHz	-1.462 dBm				2	N	1	f	2.483 500 GHz	-51.366 dBm				3	N	1	f	2.500 000 GHz	-60.834 dBm				4	N	1	f	2.499 038 GHz	-58.753 dBm			
MARK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 178 GHz	-1.462 dBm																																									
2	N	1	f	2.483 500 GHz	-51.366 dBm																																									
3	N	1	f	2.500 000 GHz	-60.834 dBm																																									
4	N	1	f	2.499 038 GHz	-58.753 dBm																																									
8DPSK/HCH/Hop	 <p>Center Freq 2.470500000 GHz</p> <p>Ref Offset 19.68 dB Ref 19.68 dBm</p> <p>Mkr4 2.486 194 GHz -47.356 dBm</p> <p>Start 2.441000 GHz #Res BW 100 kHz</p> <p>Stop 2.500000 GHz #VBW 300 kHz Sweep 5.667 ms (1001 pts)</p> <table><tr><th>MARK</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.441 826 GHz</td><td>0.012 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-52.366 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-52.067 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.486 194 GHz</td><td>-47.356 dBm</td><td></td><td></td><td></td></tr></table>	MARK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 826 GHz	0.012 dBm				2	N	1	f	2.483 500 GHz	-52.366 dBm				3	N	1	f	2.500 000 GHz	-52.067 dBm				4	N	1	f	2.486 194 GHz	-47.356 dBm			
MARK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.441 826 GHz	0.012 dBm																																									
2	N	1	f	2.483 500 GHz	-52.366 dBm																																									
3	N	1	f	2.500 000 GHz	-52.067 dBm																																									
4	N	1	f	2.486 194 GHz	-47.356 dBm																																									



Appendix G) RF Conducted Spurious Emissions Test Graph


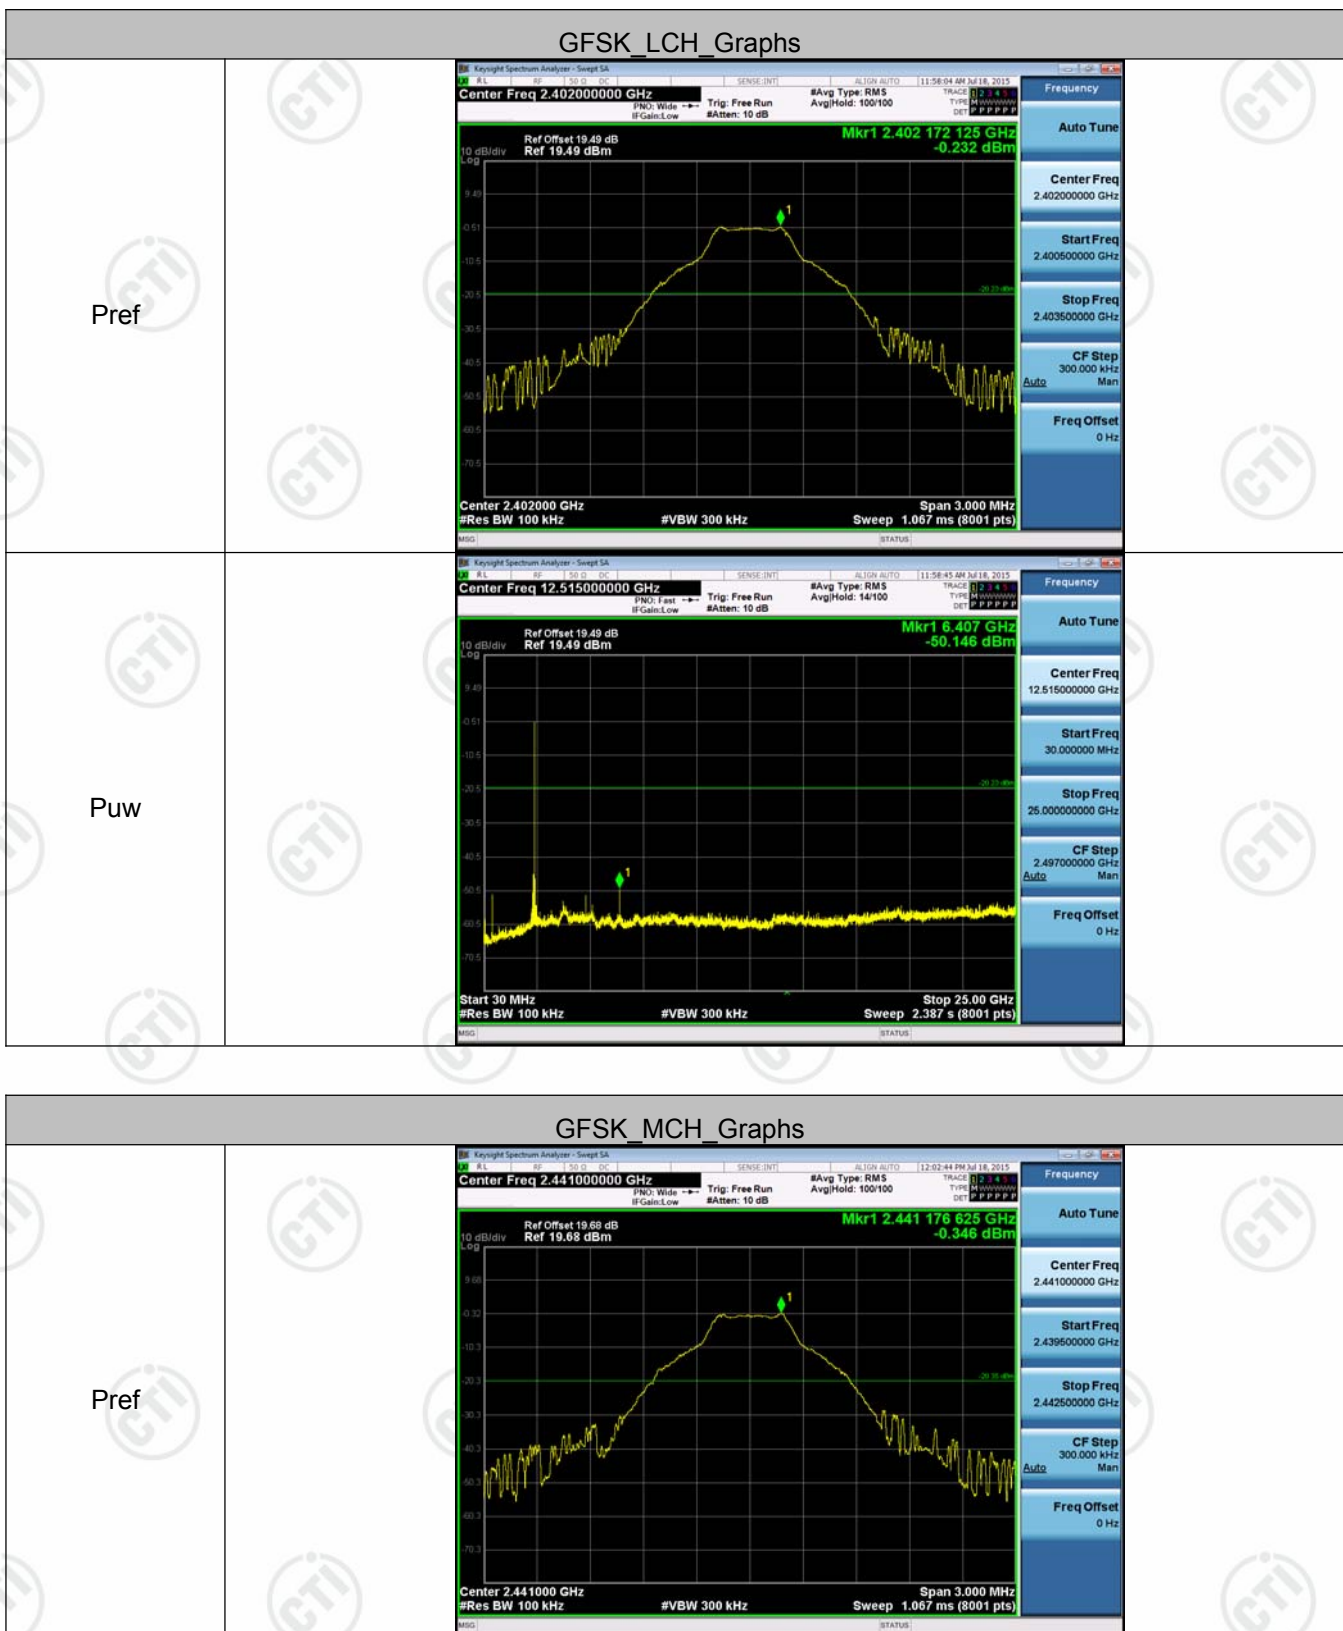


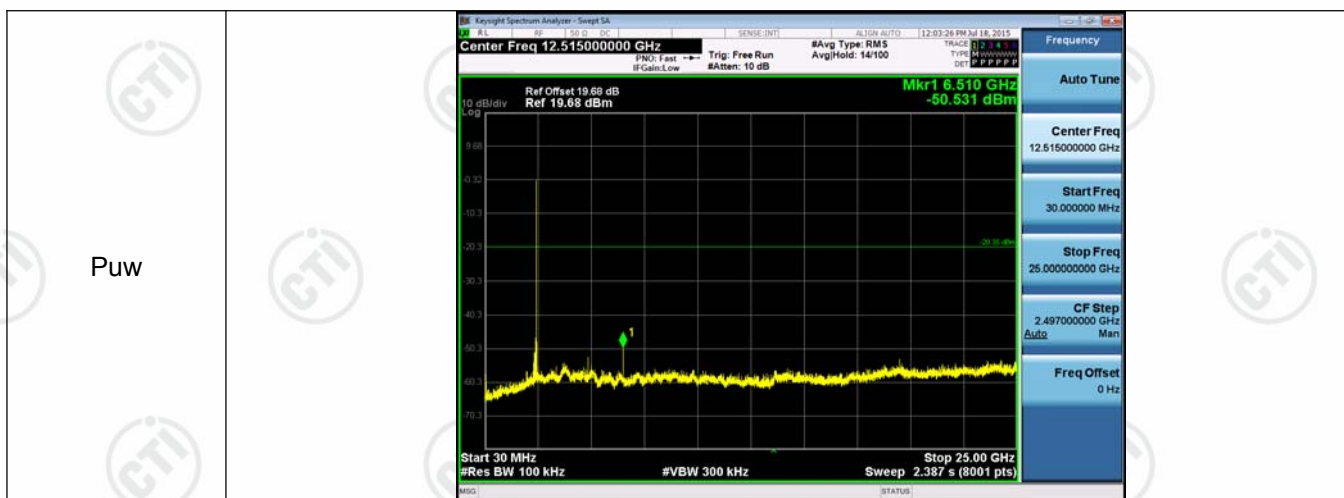


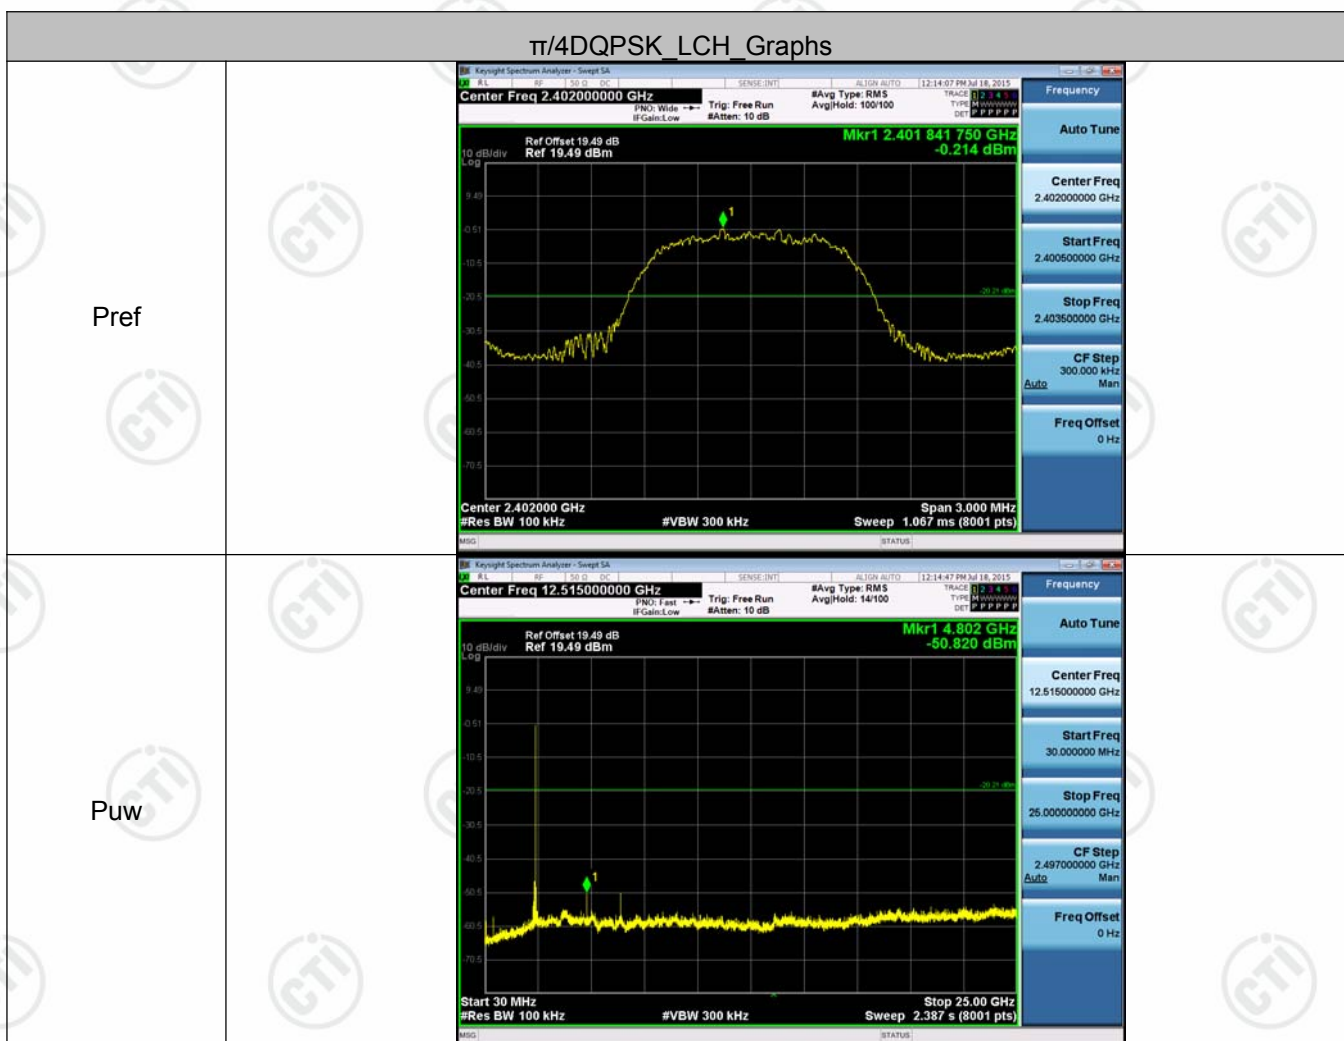

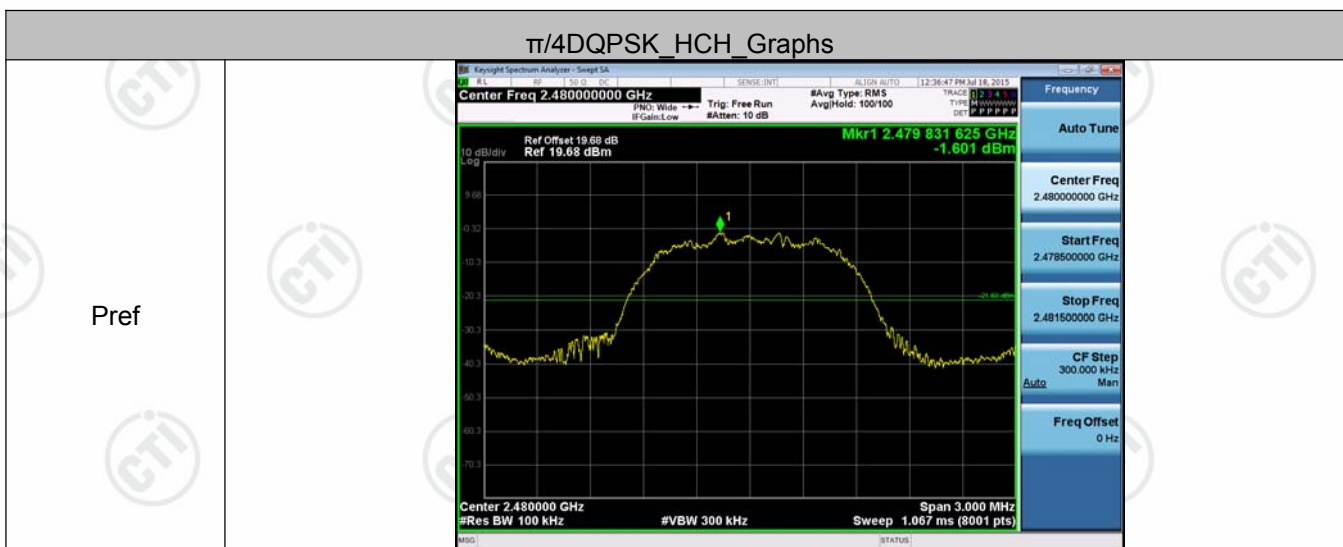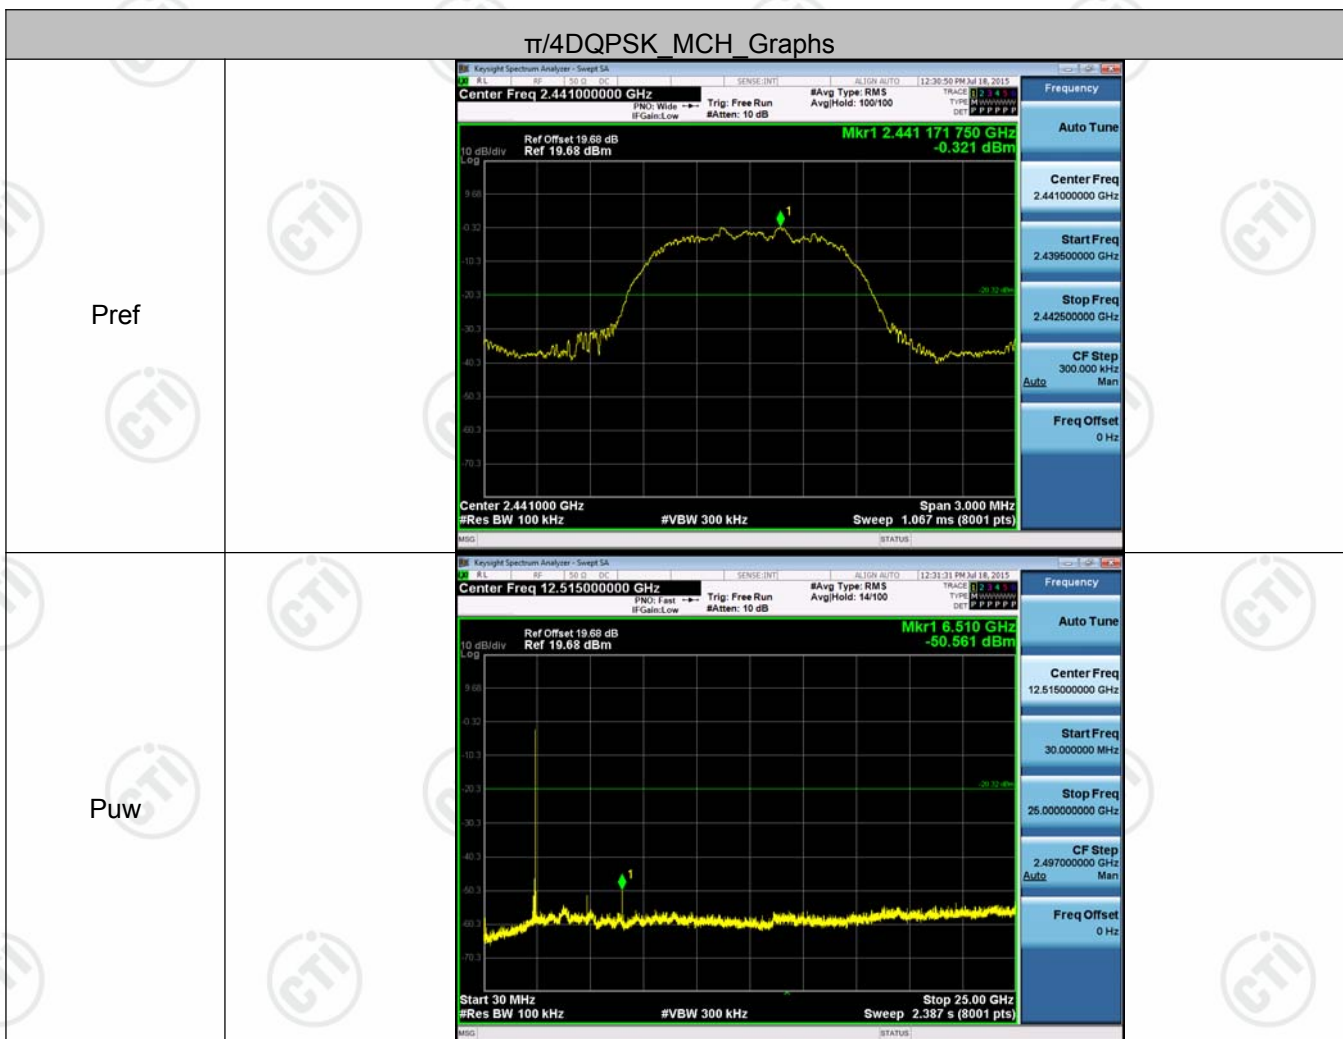

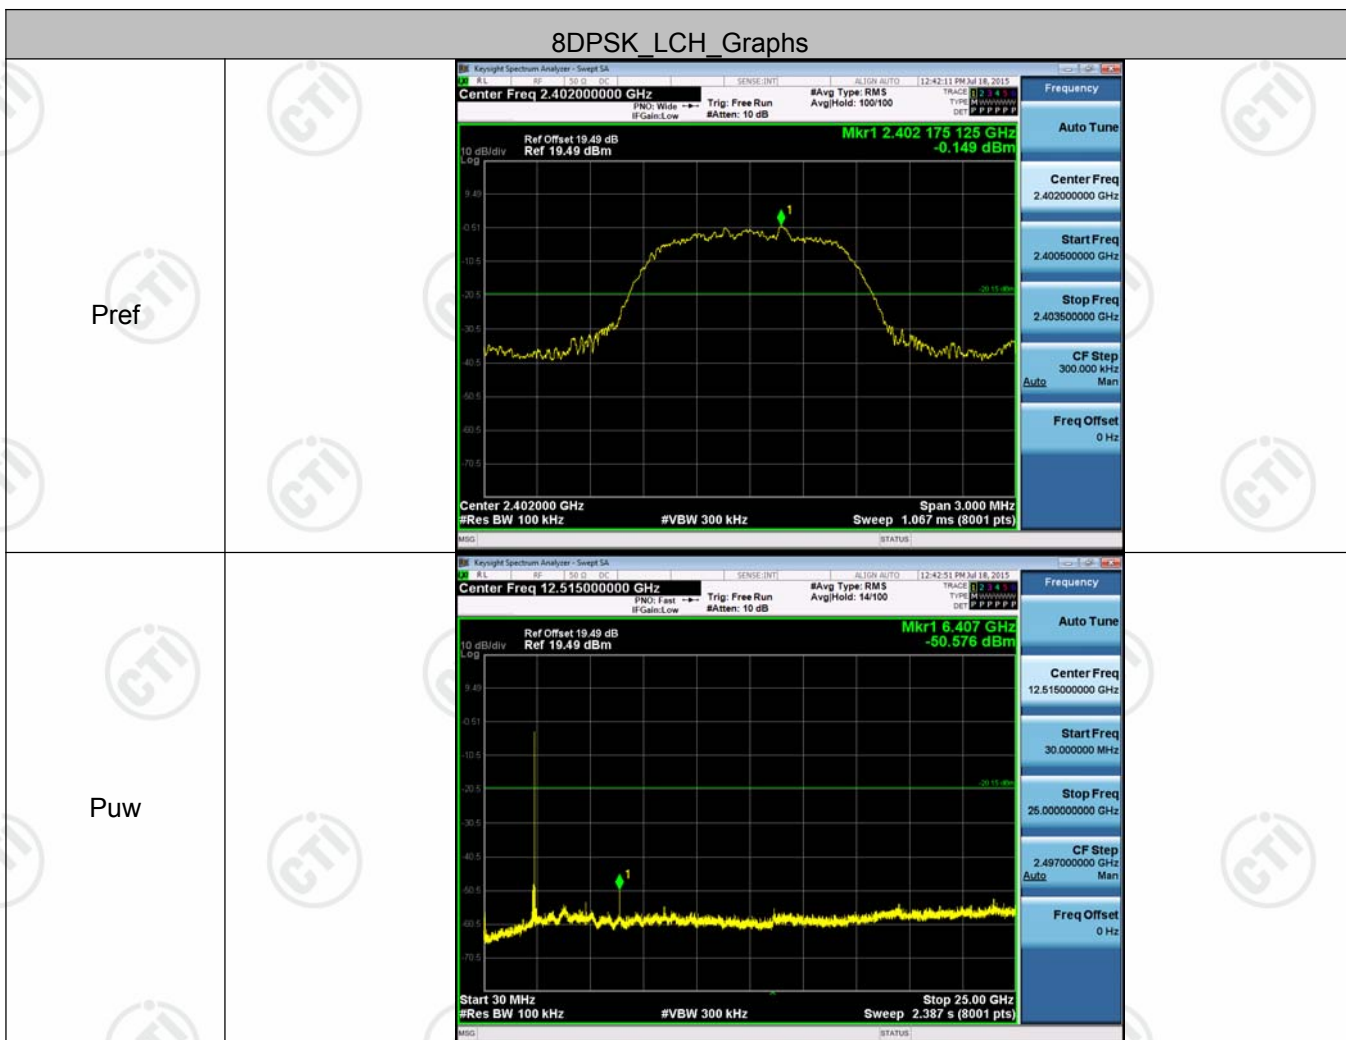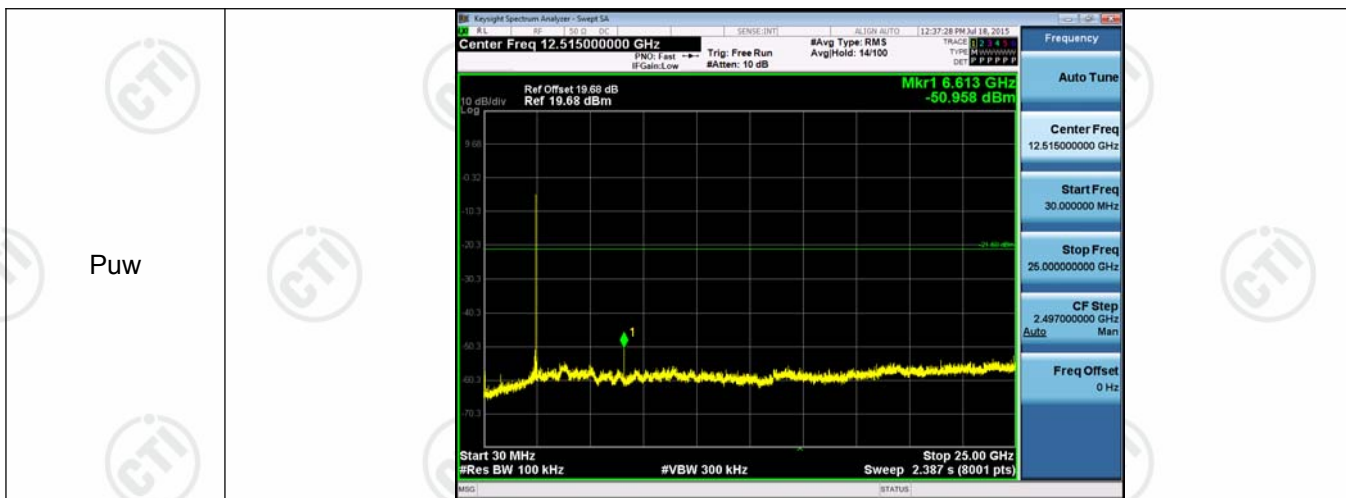

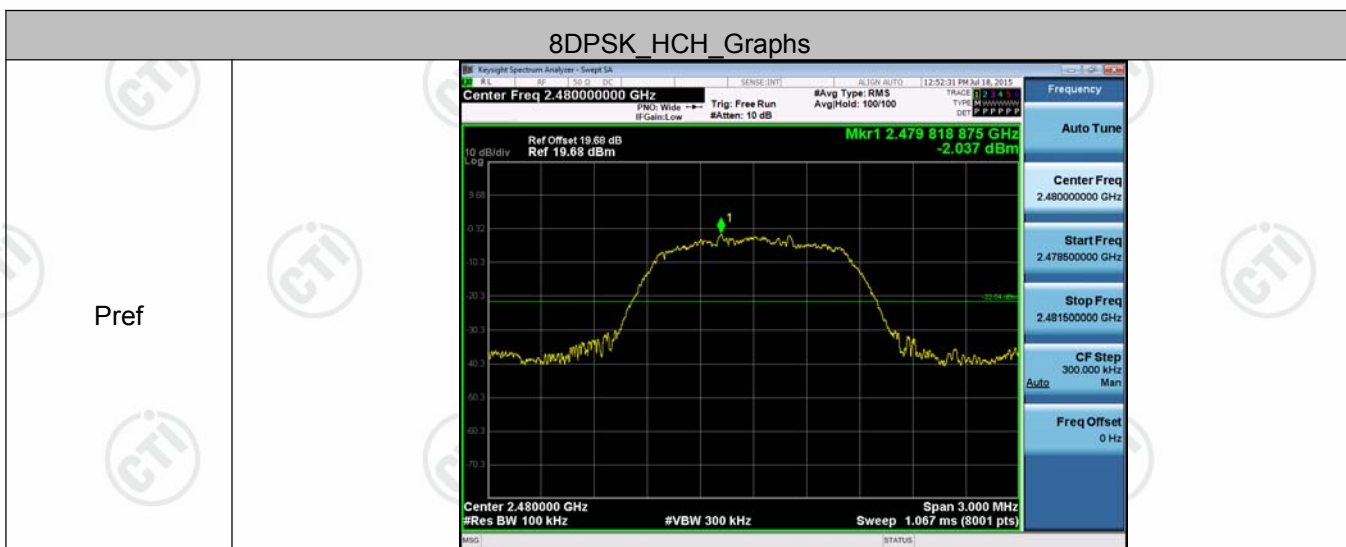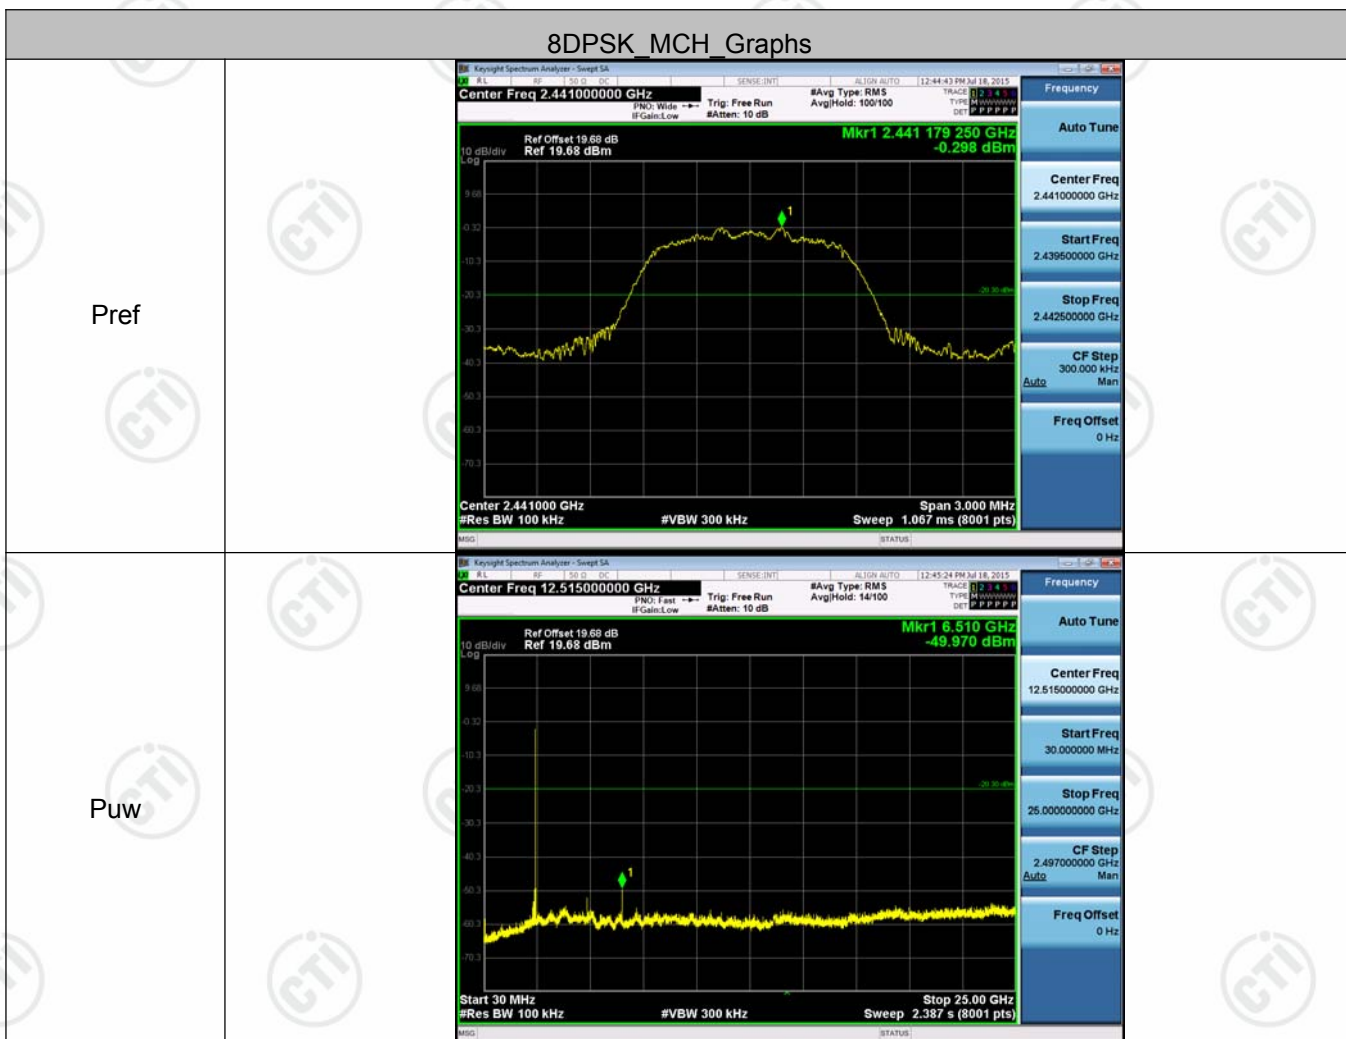

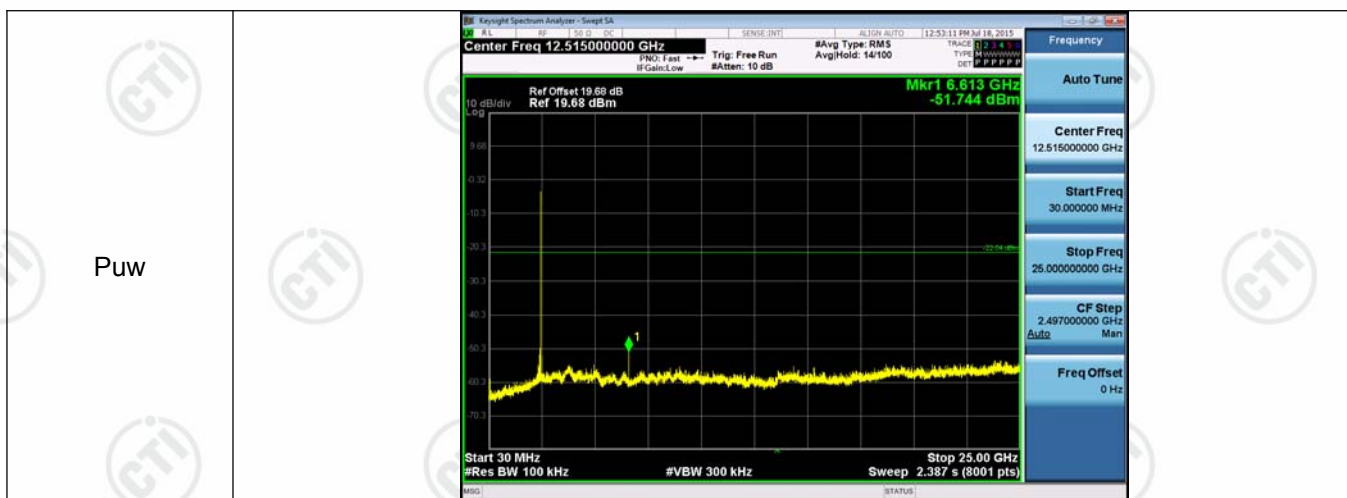

Appendix H) Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <div data-bbox="316 1001 1370 1151" data-label="Diagram"> </div> <p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="288 1249 1273 1393" data-label="Figure"> </div> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	
<p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

Appendix I) Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

Appendix J) AC Power Line Conducted Emission

Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p>														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Test data:

Product : BOOM TOWER

Model/Type reference : SC3003

Power : AC 120V/60Hz


Temperature : 24℃

Mode : Keeping TX and Charging

Humidity : 55%

Live line:


80.0 dBuV

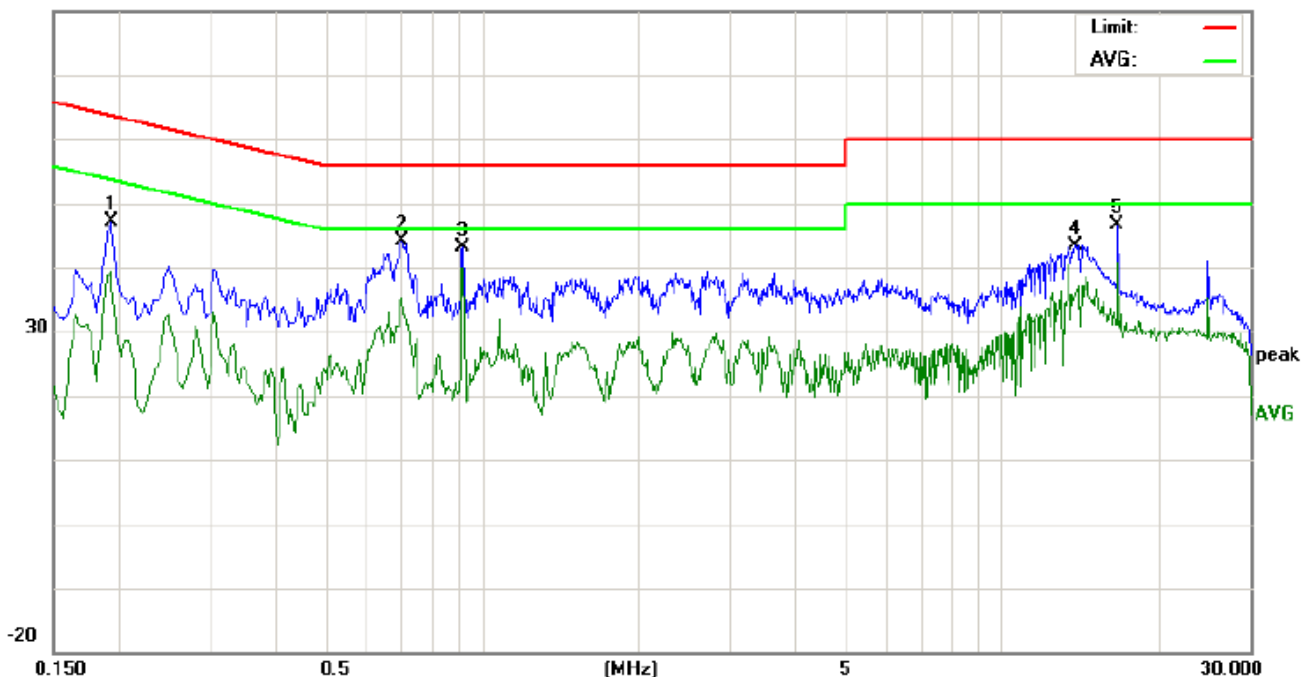

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1940	37.29		29.44	9.90	47.19		39.34	63.86	53.86	-16.67	-14.52	P	
2	0.7019	34.12		25.16	9.90	44.02		35.06	56.00	46.00	-11.98	-10.94	P	
3	0.9220	33.16		30.09	9.90	43.06		39.99	56.00	46.00	-12.94	-6.01	P	
4	13.8820	33.46		26.29	9.92	43.38		36.21	60.00	50.00	-16.62	-13.79	P	
5	16.6980	36.45		30.67	10.07	46.52		40.74	60.00	50.00	-13.48	-9.26	P	

Neutral line:

80.0 dBuV

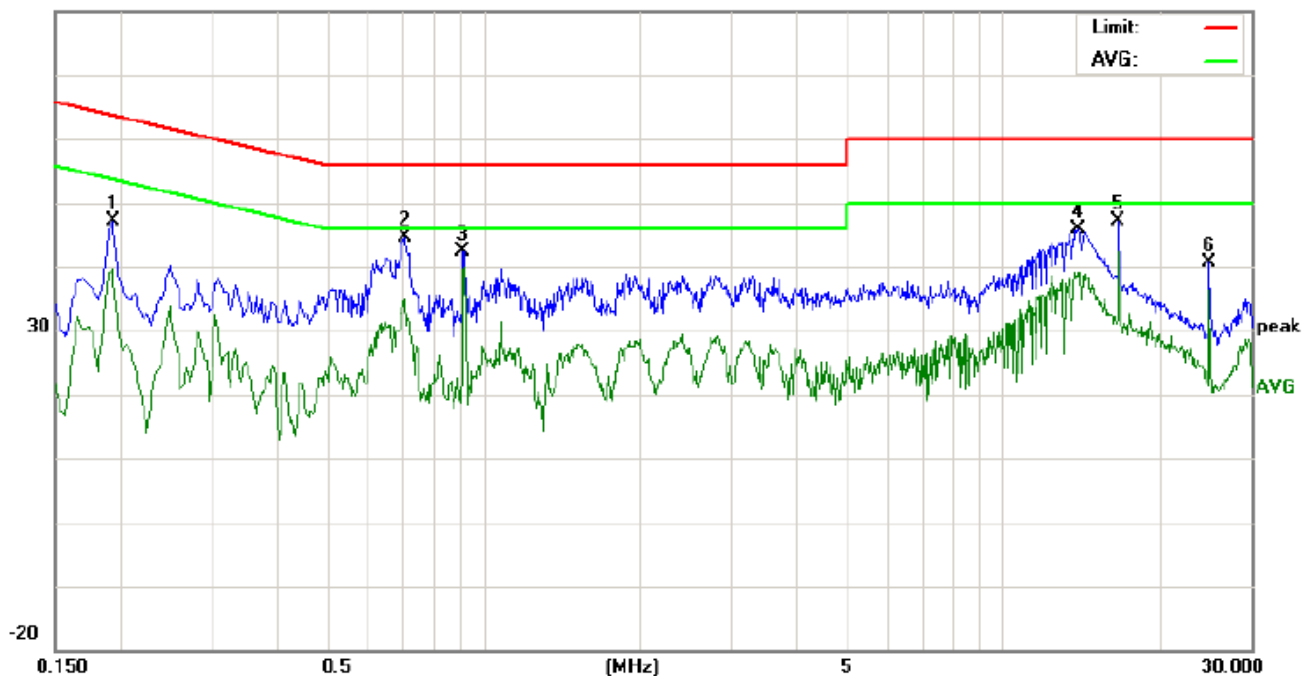

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1940	37.10		29.62	9.90	47.00		39.52	63.86	53.86	-16.86	-14.34	P	
2	0.7060	34.70		23.85	9.90	44.60		33.75	56.00	46.00	-11.40	-12.25	P	
3	0.9220	32.48		29.86	9.90	42.38		39.76	56.00	46.00	-13.62	-6.24	P	
4	13.9660	35.98		29.24	9.92	45.90		39.16	60.00	50.00	-14.10	-10.84	P	
5	16.6980	37.16		32.28	10.07	47.23		42.35	60.00	50.00	-12.77	-7.65	P	
6	25.0500	30.41		26.17	10.30	40.71		36.47	60.00	50.00	-19.29	-13.53	P	

Appendix K) Restricted bands around fundamental frequency (Radiated)/Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
<div>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</div> <div>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</div> <div>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</div> <div>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</div> <div>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</div> <div>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</div>					
Above 1GHz test procedure as below:					
<div>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).</div> <div>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</div> <div>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</div> <div>i. Repeat above procedures until all frequencies measured was complete.</div>					

Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Radiated Spurious Emissions test Data:


All the modes of operation (X, Y, Z) were investigated and the worst-case emissions are reported.

A. Below 30MHz:


No emissions were found higher than the background below 30MHz and background is lower than the limit, so it deems to compliance with the limit without recorded.

B. 30MHz ~ 1GHz:

The test data of low channel, middle channel and high channel are almost same in frequency bands 30MHz to 1GHz, and the data of middle channel (GFSK mode) are chosen as representative in below:

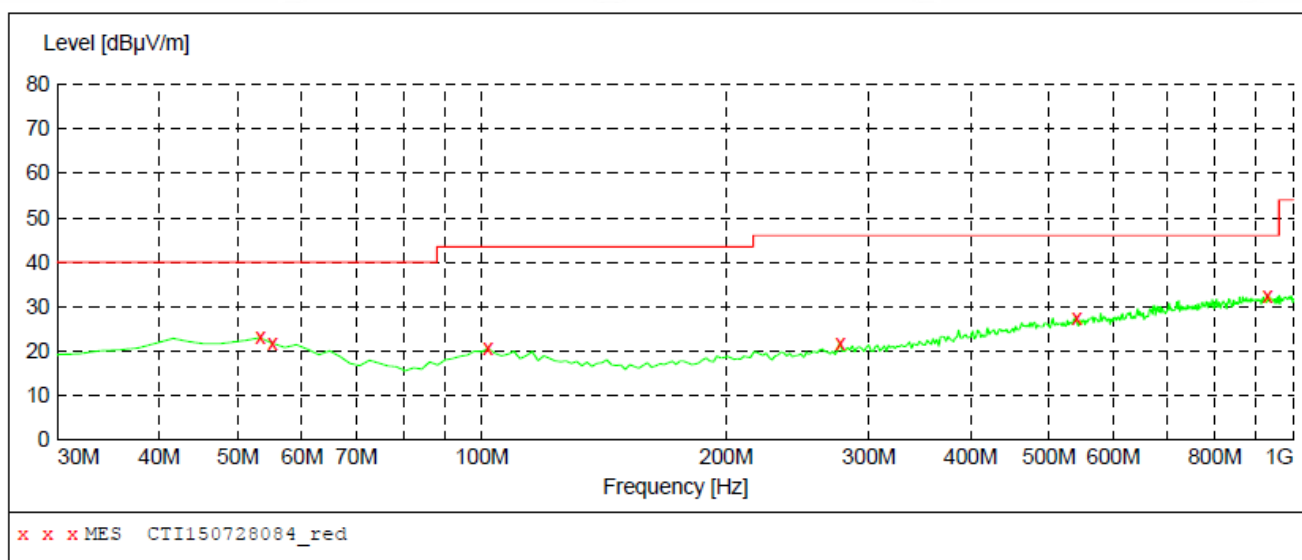

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	23.00	16.1	40.0	17.0	---	200.0	303.00	HORIZONTAL
55.220000	21.70	15.8	40.0	18.3	---	200.0	370.00	HORIZONTAL
101.780000	20.60	14.6	43.5	22.9	---	200.0	95.00	HORIZONTAL
276.380000	21.90	15.4	46.0	24.1	---	100.0	301.00	HORIZONTAL
540.220000	27.60	21.8	46.0	18.4	---	100.0	262.00	HORIZONTAL
928.220000	32.60	26.7	46.0	13.4	---	100.0	209.00	HORIZONTAL

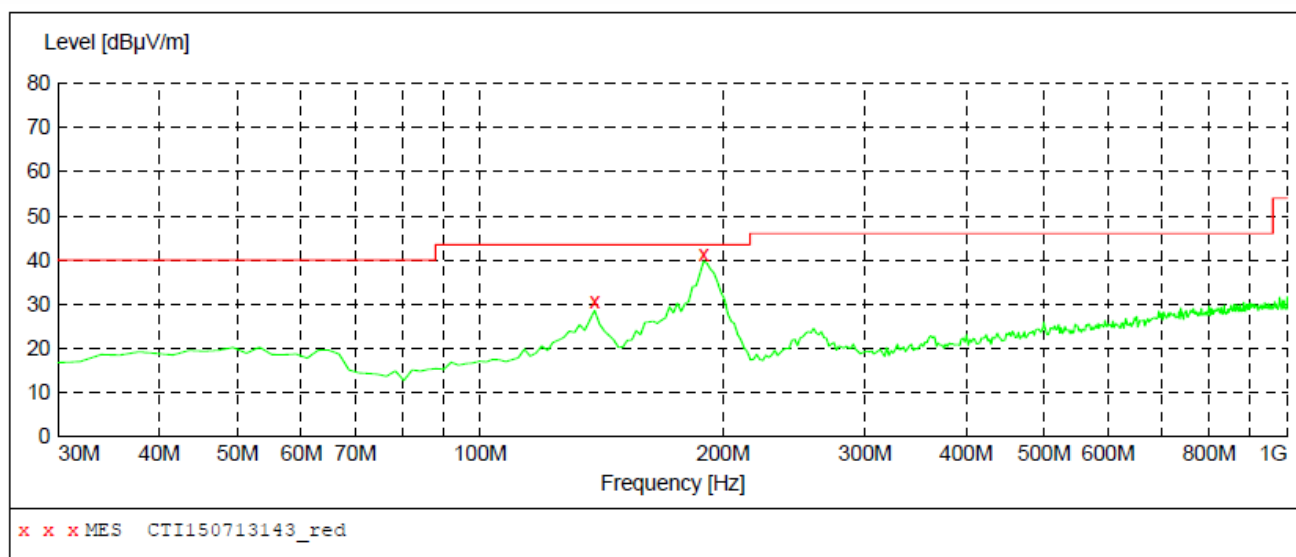

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
138.110000	28.90	12.0	43.5	14.6	---	100.0	61.00	VERTICAL
171.610000	30.10	12.5	43.5	13.4	---	100.0	167.00	VERTICAL

C. Above 1GHz:
Test Results-(Measurement Distance: 3m)_Channel low_2402MHz_GFSK mode:

Frequency (MHz)	Measurement (dBuV/m)	Limit (dBuV/m)	Detector Type	Antenna (H/V)	Result (P/F)
2390.0	37.52	74	PK	H	P
2400.0	45.32	74	PK	H	P
2402.0*	84.28	---	PK	H	P
4804.0	49.85	74	PK	H	P
2390.0	38.09	74	PK	V	P
2400.0	43.53	74	PK	V	P
2402.0*	85.82	---	PK	V	P
4804.0	48.24	74	PK	V	P

*: fundamental frequency

Test Results-(Measurement Distance: 3m)_Channel middle_2441MHz_GFSK mode:

Frequency (MHz)	Measurement (dBuV/m)	Limit (dBuV/m)	Detector Type	Antenna (H/V)	Result (P/F)
2441.0*	86.78	---	PK	H	P
4882.0	49.08	74	PK	H	P
2441.0*	87.52	---	PK	V	P
4882.0	48.54	74	PK	V	P

*: fundamental frequency

Test Results-(Measurement Distance: 3m)_Channel high_2480MHz_GFSK mode:

Frequency (MHz)	Measurement (dBuV/m)	Limit (dBuV/m)	Detector Type	Antenna (H/V)	Result (P/F)
2480.0*	86.08	---	PK	H	P
2483.5	42.52	74	PK	H	P
4960.0	49.09	74	PK	H	P
2480.0*	87.51	---	PK	V	P
2483.5	42.44	74	PK	V	P
4960.0	48.53	74	PK	V	P

*: fundamental frequency

Remark:

- The above tables show that the frequencies peak data are all below the average limit, so the average data of these frequencies are deemed to fulfill the average limits and not reported.
- All the modes of GFSK, $\pi/4$ -DQPSK and 8DPSK have been tested. The worst case is GFSK mode, and the worst data of GFSK mode are chosen as above.
- No emission found from 18GHz to 25GHz.
- All outside of operating frequency band and restricted band specified are below 15.209.

PHOTOGRAPHS OF TEST SETUP

Test mode No.: SC3003



Conducted Emission Test Setup



Radiated spurious emission Test Setup-1 (Below 1GHz)



Radiated spurious emission Test Setup-2(Above 1GHz)

PHOTOGRAPHS OF EUT Constructional Details



View of Product-1



View of Product-2




View of Product-3




View of Product-4




View of Product-5

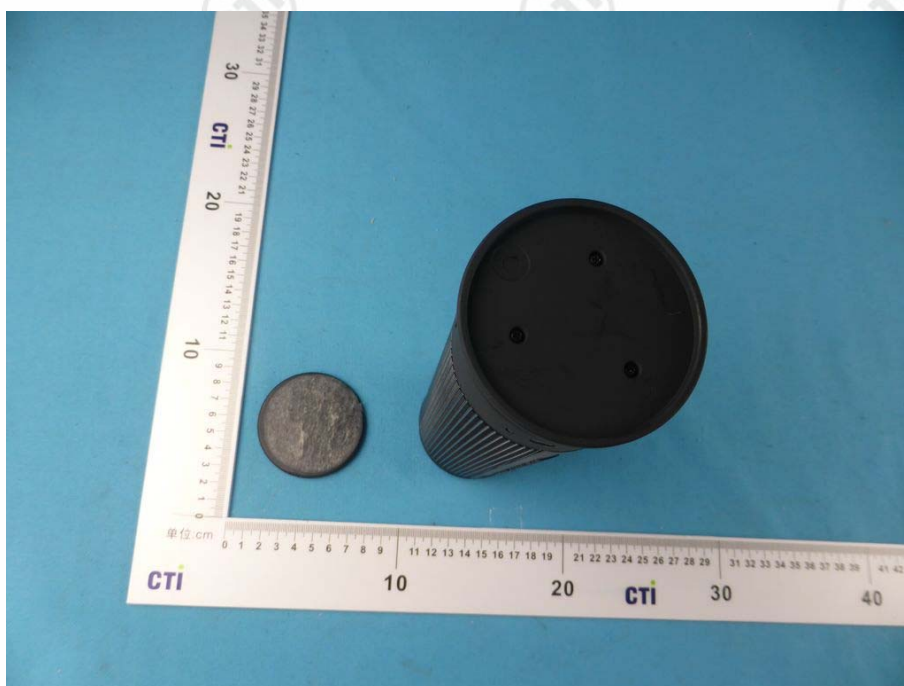

View of Product-6

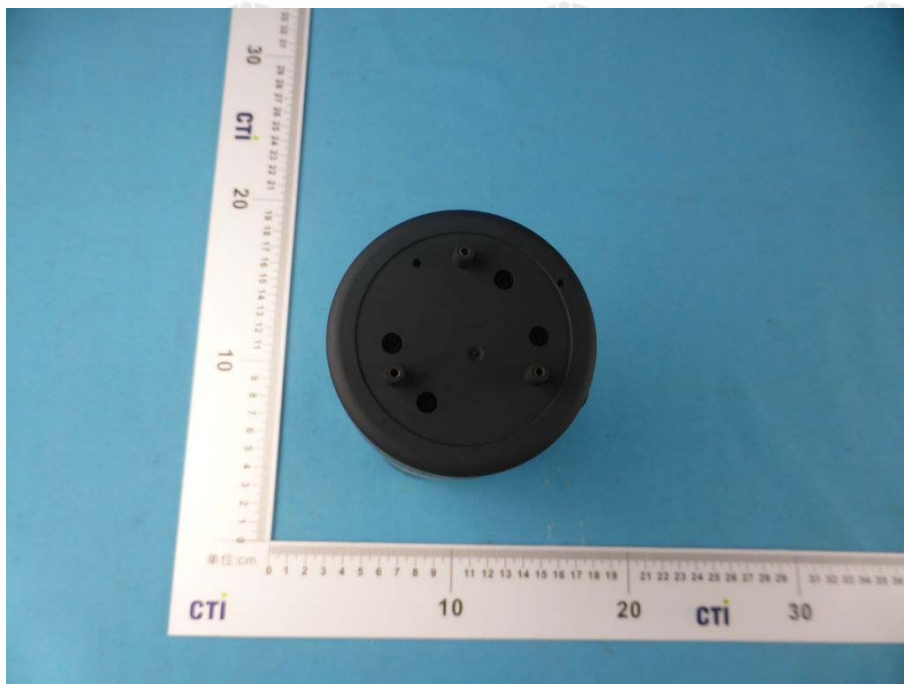


View of Product-7

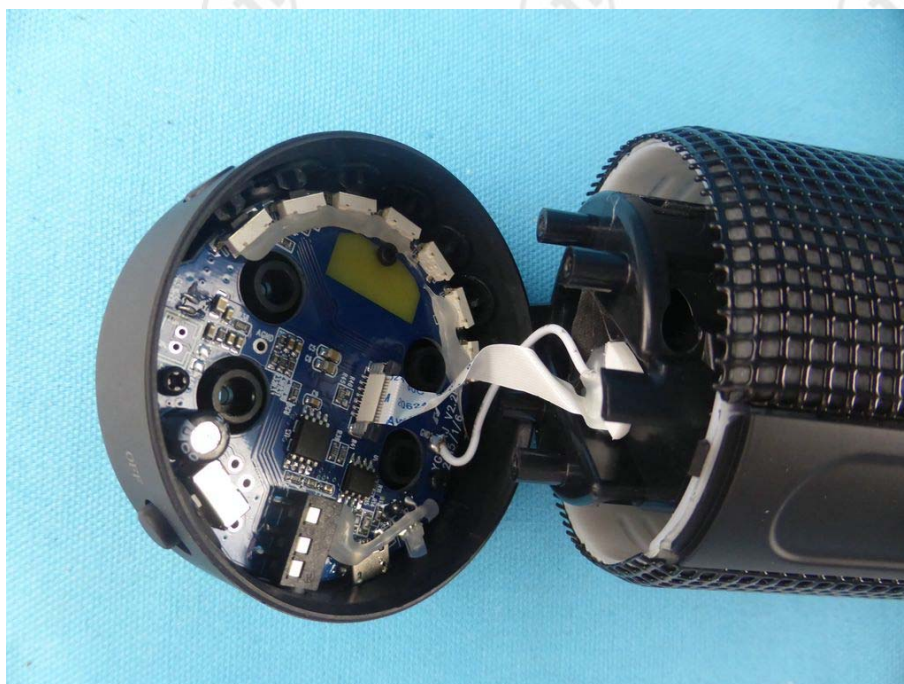

View of Product-8



View of Product-9

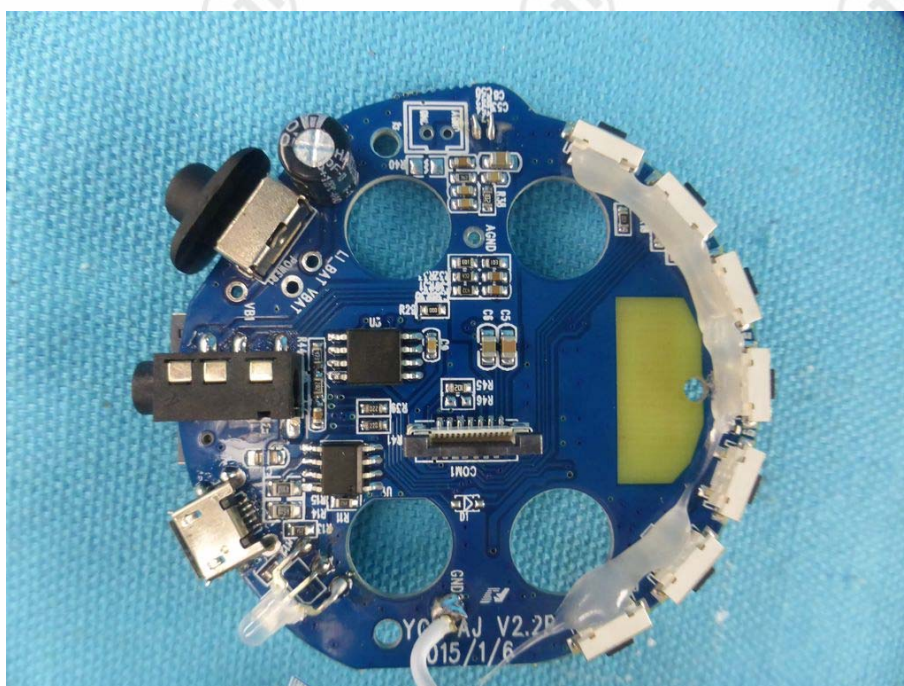


View of Product-10




View of Product-11




View of Product-12

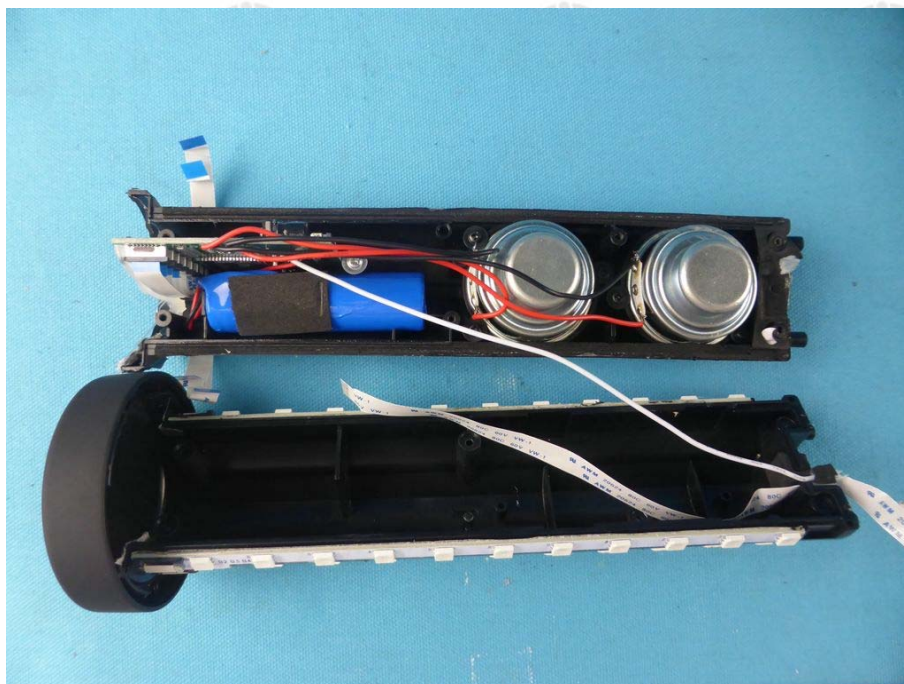

View of Product-13

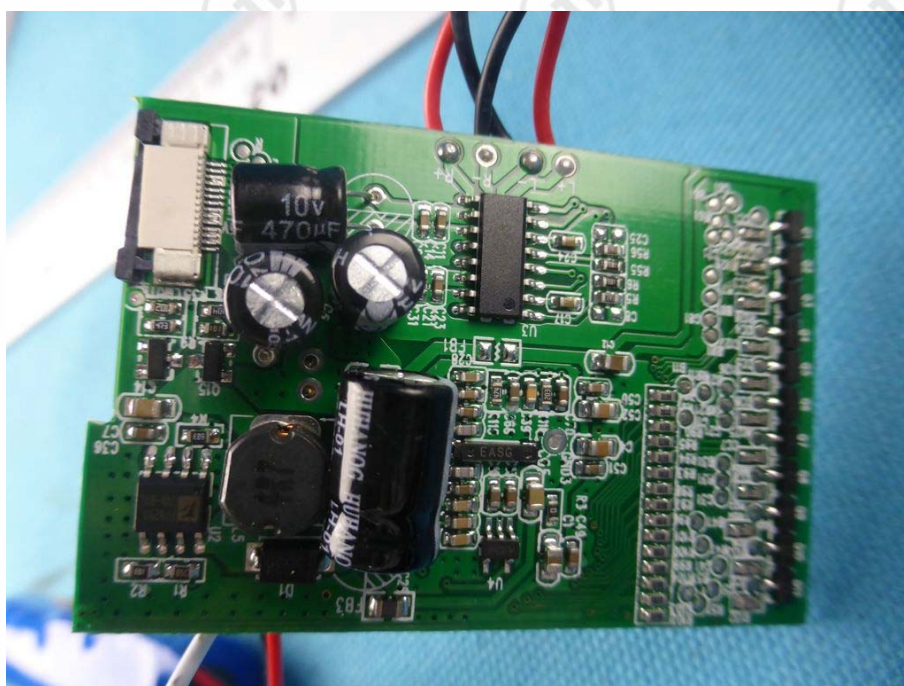

View of Product-14

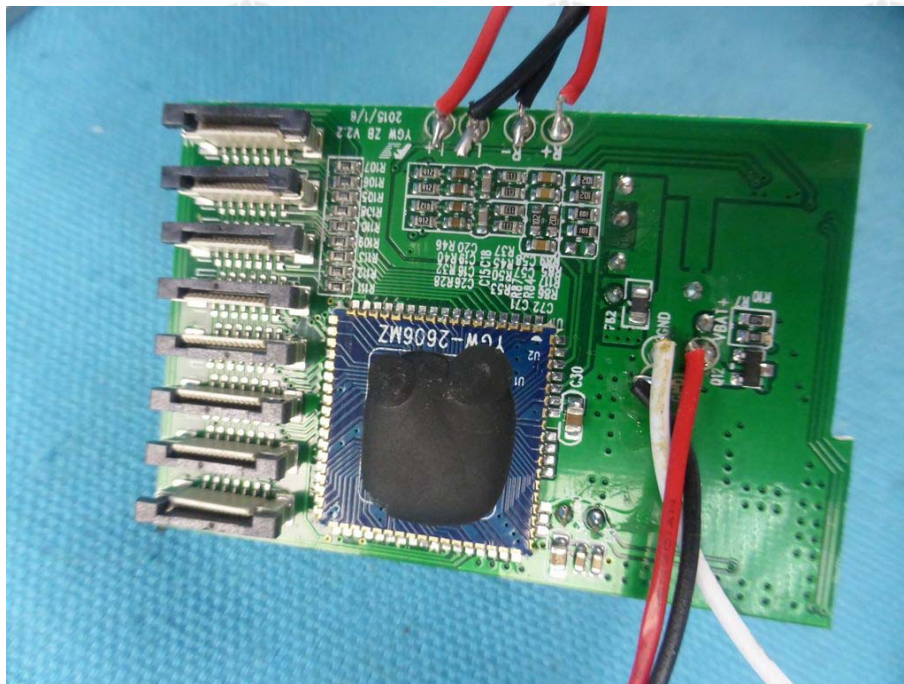

View of Product-15



View of Product-16

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.