

FCC Part 15C Measurement and Test Report

For

Shenzhen Arashi Vision Company Limited

Room B031 Logan Century Building, Hai Xiu Road, Bao An

District, Shenzhen, Guangdong.

FCC ID: 2AFSHINSTA4KB

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>360 video camera</u>
Tested Model:	<u>Insta360 4K beta</u>
Report No.:	<u>STR15118144I-1</u>
Tested Date:	<u>2015-11-21 to 2015-12-29</u>
Issued Date:	<u>2015-12-30</u>
Tested By:	<u>Rode Liu / Engineer</u> <i>Rode Liu</i>
Reviewed By:	<u>Silin Chen / EMC Manager</u> <i>Silin chen</i>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	5
1.6 TEST EQUIPMENT LIST AND DETAILS	5
2. SUMMARY OF TEST RESULTS	6
3. RF EXPOSURE	7
3.1 STANDARD APPLICABLE	7
3.2 TEST RESULT	7
4. ANTENNA REQUIREMENT	8
4.1 STANDARD APPLICABLE	8
4.2 EVALUATION INFORMATION	8
5. POWER SPECTRAL DENSITY	9
5.1 STANDARD APPLICABLE	9
5.2 TEST PROCEDURE	9
5.3 ENVIRONMENTAL CONDITIONS	9
5.4 SUMMARY OF TEST RESULTS/PLOTS	10
6. 6DB BANDWIDTH	23
6.1 STANDARD APPLICABLE	23
6.2 TEST PROCEDURE	23
6.3 ENVIRONMENTAL CONDITIONS	23
6.4 SUMMARY OF TEST RESULTS/PLOTS	23
7. RF OUTPUT POWER	37
7.1 STANDARD APPLICABLE	37
7.2 TEST PROCEDURE	37
7.3 ENVIRONMENTAL CONDITIONS	37
7.4 SUMMARY OF TEST RESULTS/PLOTS	38
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	51
8.1 MEASUREMENT UNCERTAINTY	51
8.2 STANDARD APPLICABLE	51
8.3 TEST PROCEDURE	51
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	53
8.5 ENVIRONMENTAL CONDITIONS	53
8.6 SUMMARY OF TEST RESULTS/PLOTS	53
9. OUT OF BAND EMISSIONS	82
9.1 STANDARD APPLICABLE	82
9.2 TEST PROCEDURE	82
9.3 ENVIRONMENTAL CONDITIONS	83
9.4 SUMMARY OF TEST RESULTS/PLOTS	83
10. CONDUCTED EMISSIONS	115
10.1 MEASUREMENT UNCERTAINTY	115
10.2 TEST PROCEDURE	115
10.3 BASIC TEST SETUP BLOCK DIAGRAM	115
10.4 ENVIRONMENTAL CONDITIONS	115
10.5 TEST RECEIVER SETUP	116
10.6 SUMMARY OF TEST RESULTS/PLOTS	116
10.7 CONDUCTED EMISSIONS TEST DATA	116

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Shenzhen Arashi Vision Company Limited
Address of applicant: Room B031 Logan Century Building, Hai Xiu Road,
Bao An District, Shenzhen, Guangdong.
Manufacturer: Shenzhen Arashi Vision Company Limited
Address of manufacturer: Room B031 Logan Century Building, Hai Xiu Road,
Bao An District, Shenzhen, Guangdong.

General Description of EUT	
Product Name:	360 video camera
Trade Name:	Insta360
Model No.:	Insta360 4K beta
Adding Model(s):	/
Rated Voltage:	Battery DC 3.7V/5000mAh
Power Adapter Model:	TEKA018-0503000BS I/P: AC100-240V/50Hz; O/P: DC 5V/3A
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	17.98 dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 300Mbps
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral
Antenna Gain:	4.0 dBi
Lowest Internal Frequency	12MHz

1.2 Test Standards

The following report is prepared on behalf of the Shenzhen Arashi Vision Company Limited in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 V03r03 for digital transmission systems shall be performed also.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz
TM4	802.11n-HT40	2422MHz, 2437MHz, 2452MHz

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2015-06-17	2016-06-16
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2015-06-17	2016-06-16
Amplifier	Agilent	8447F	3113A06717	2015-06-17	2016-06-16
Amplifier	C&D	PAP-1G18	2002	2015-06-17	2016-06-16
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2015-06-17	2016-06-16
Horn Antenna	ETS	3117	00086197	2015-06-17	2016-06-16
Horn Antenna	ETS	3116B	00088203	2015-06-17	2016-06-16
Loop Antenna	Schwarz beck	FMZB 1516	9773	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-06-17	2016-06-16
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-06-17	2016-06-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-06-17	2016-06-16

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1091, the mobile transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has two integral antennas, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure

According to the KDB 558074 D01 V03r03, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

5.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


5.4 Summary of Test Results/Plots

Test Mode	Test Channel MHz	Power Spectral Density dBm/100kHz			Limit dBm/3kHz
		Chain 1	Chain 2	Total	
802.11b	2412	5.898	3.304	7.80	8
	2437	5.481	3.472	7.60	8
	2462	5.056	3.05	7.18	8
802.11g	2412	-1.741	-3.216	0.61	8
	2437	-3.015	-3.107	-0.04	8
	2462	-3.503	-3.609	-0.51	8
802.11n HT20	2412	-1.178	-1.773	1.52	8
	2437	-2.344	-1.734	0.97	8
	2462	-3.112	-1.952	0.53	8
802.11n HT40	2422	-4.807	-4.839	-1.80	8
	2437	-4.246	-5.204	-1.67	8
	2452	-4.981	-5.01	-1.94	8


Please refer to the following test plots:

Antenna 1


802.11b-Low Channel

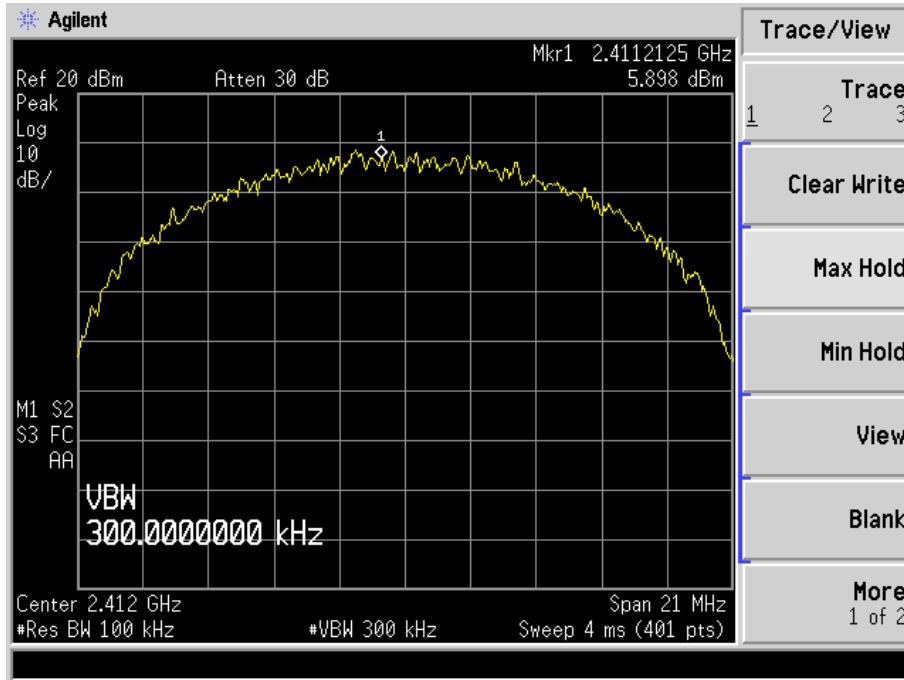


802.11b-Middle Channel

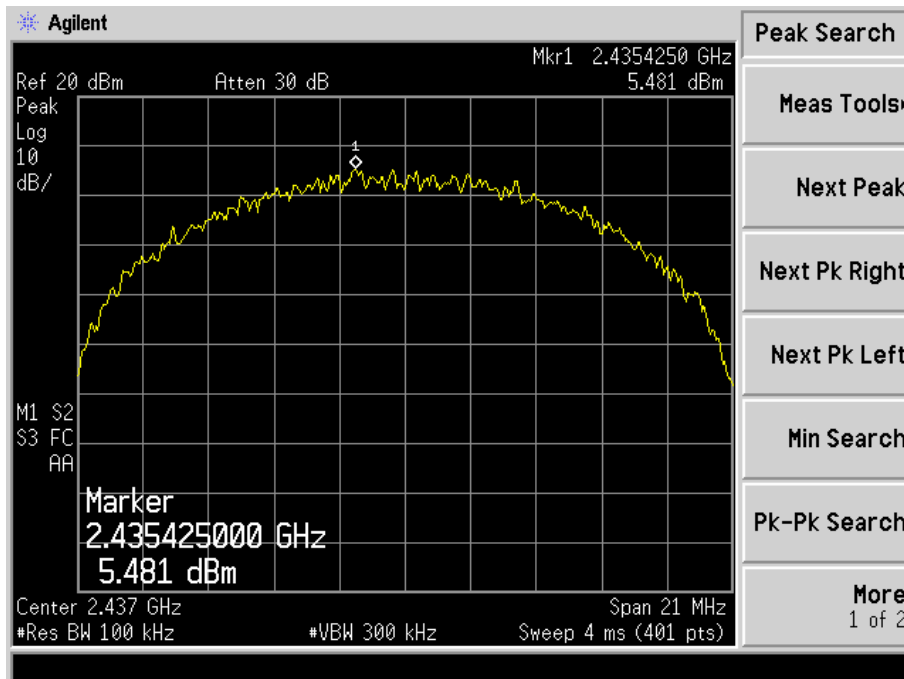


802.11b-High Channel

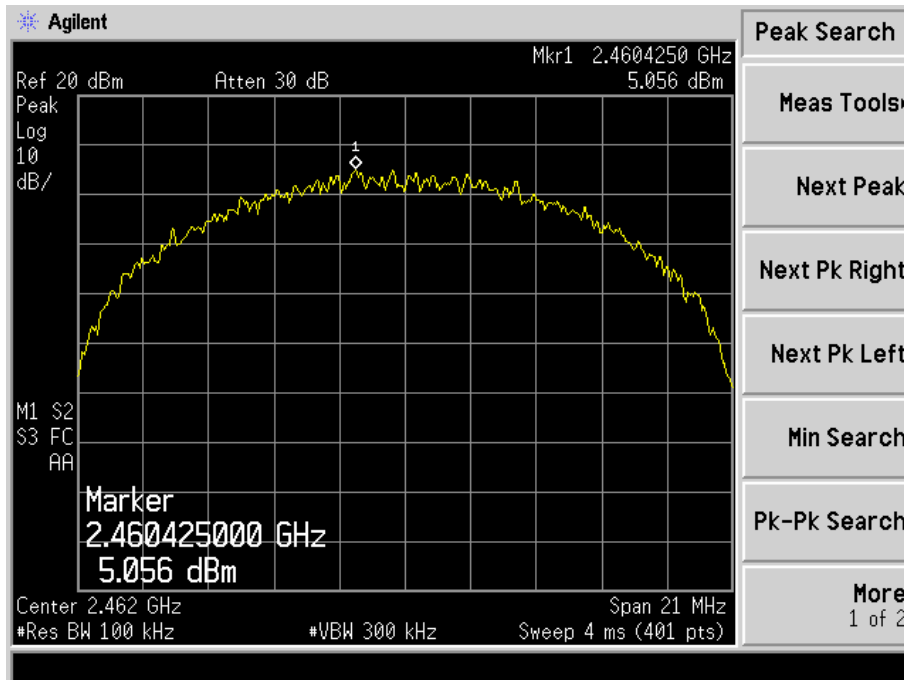


802.11g-Low Channel

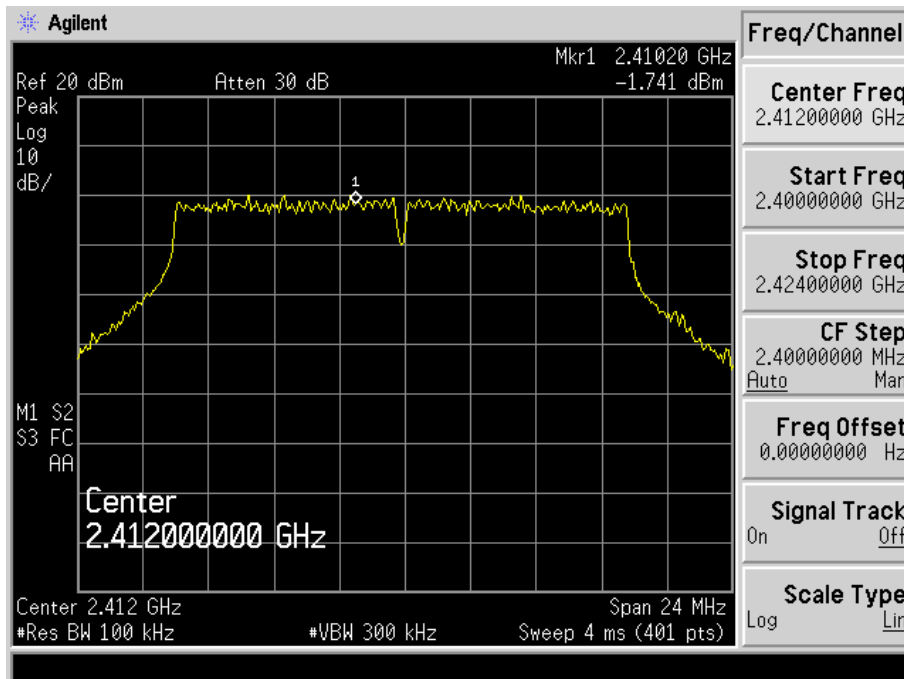


802.11g-Middle Channel

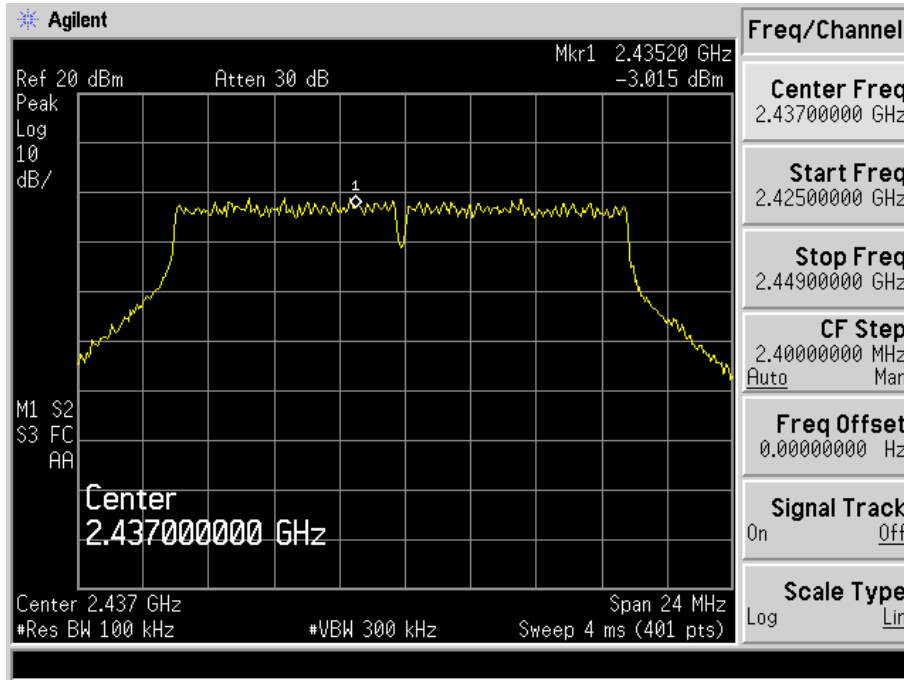


802.11g-High Channel

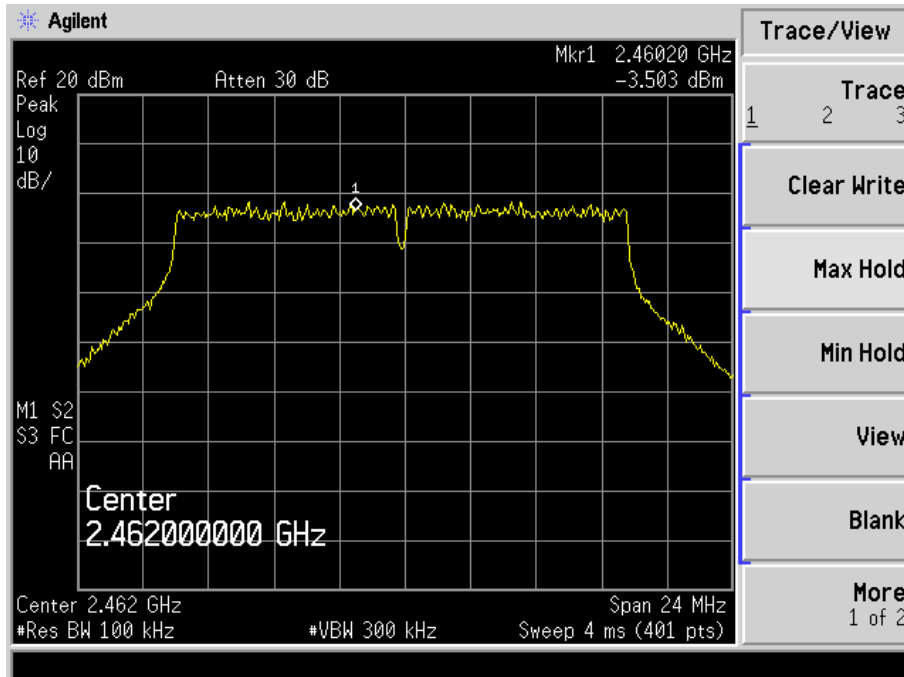


802.11n-HT20-Low Channel

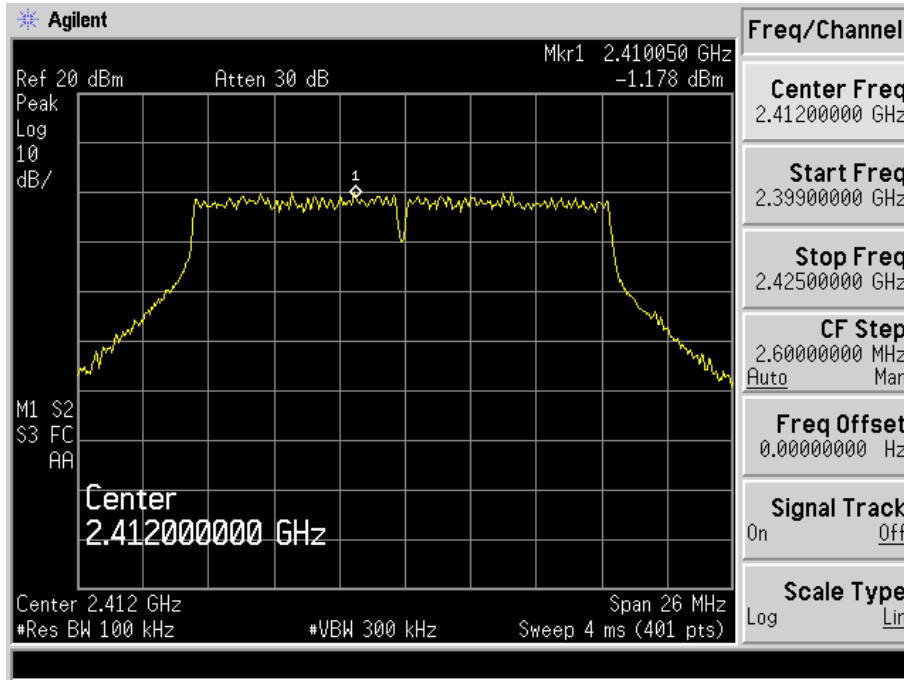


802.11n-HT20-Middle Channel

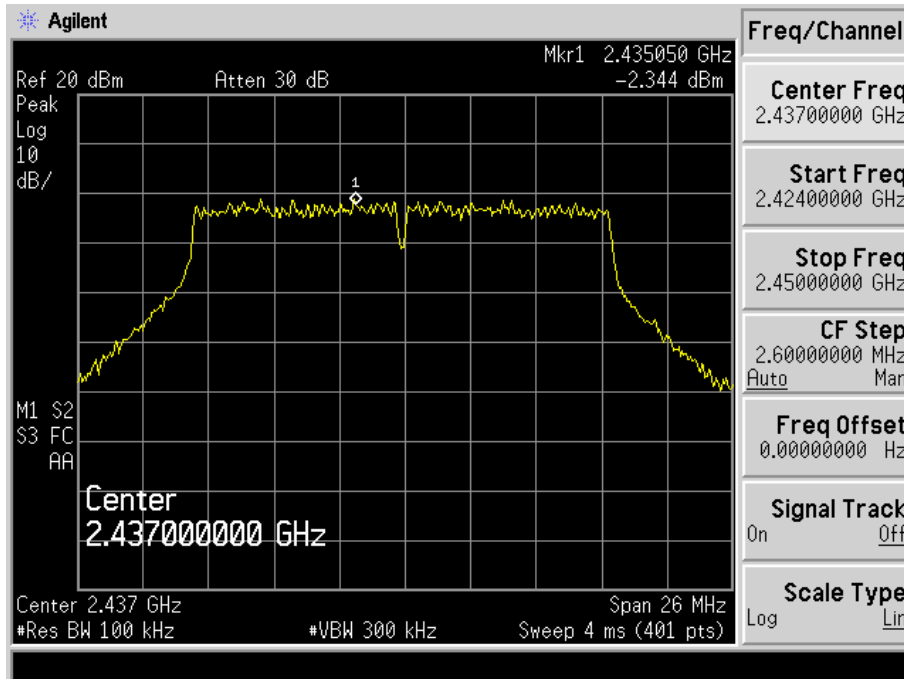


802.11n-HT20-High Channel

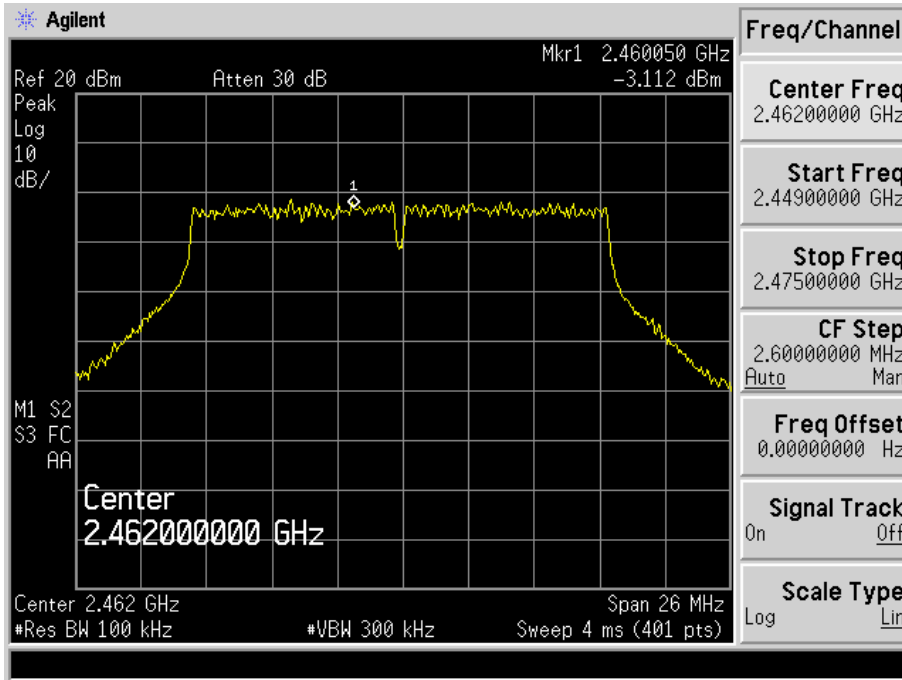


802.11n-HT40-Low Channel

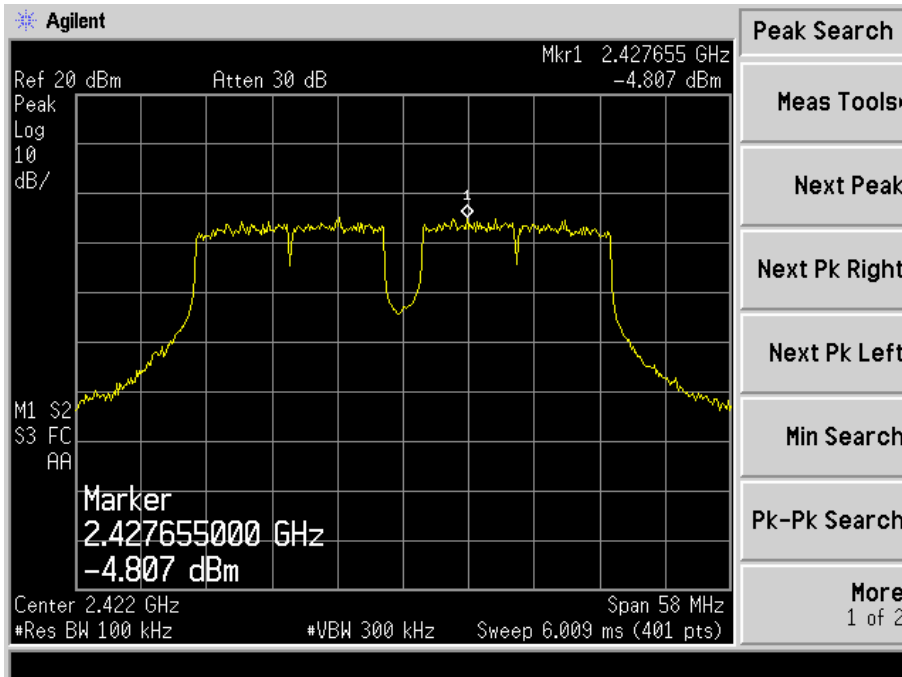

802.11n-HT40-Middle Channel

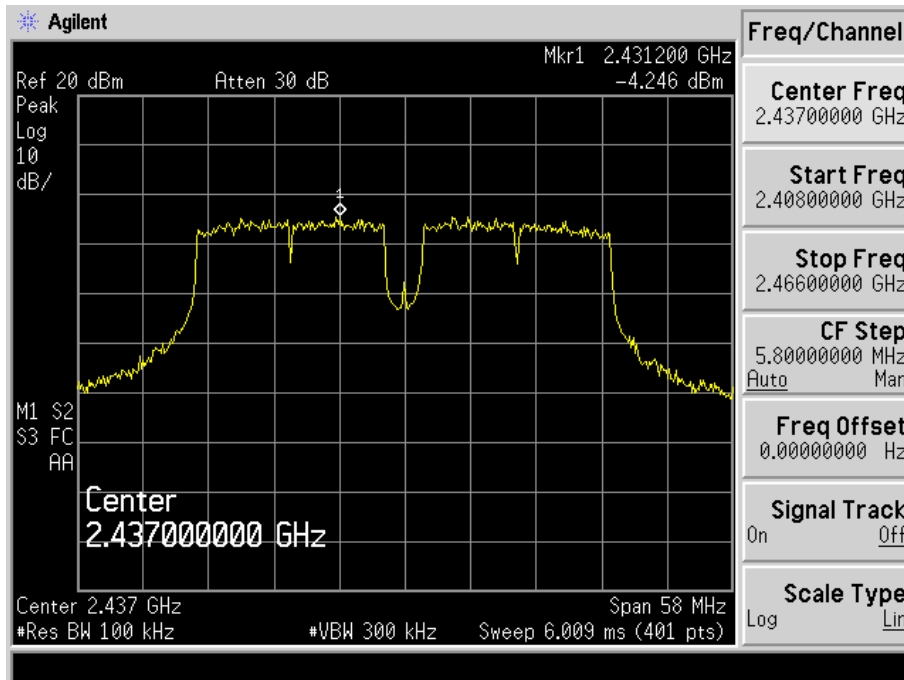


802.11n-HT40-High Channel

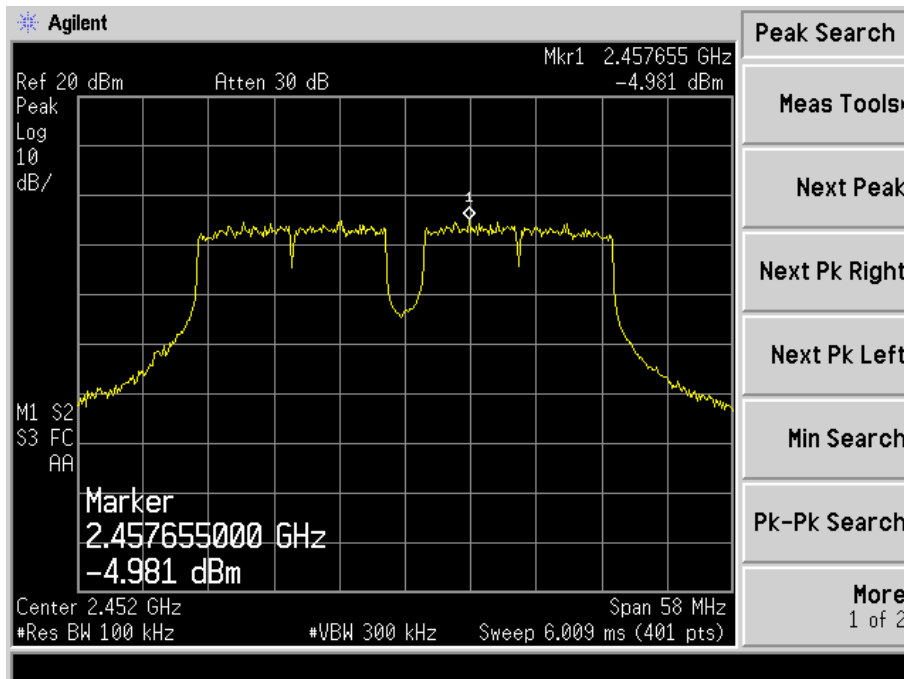


Antenna 2


802.11b-Low Channel

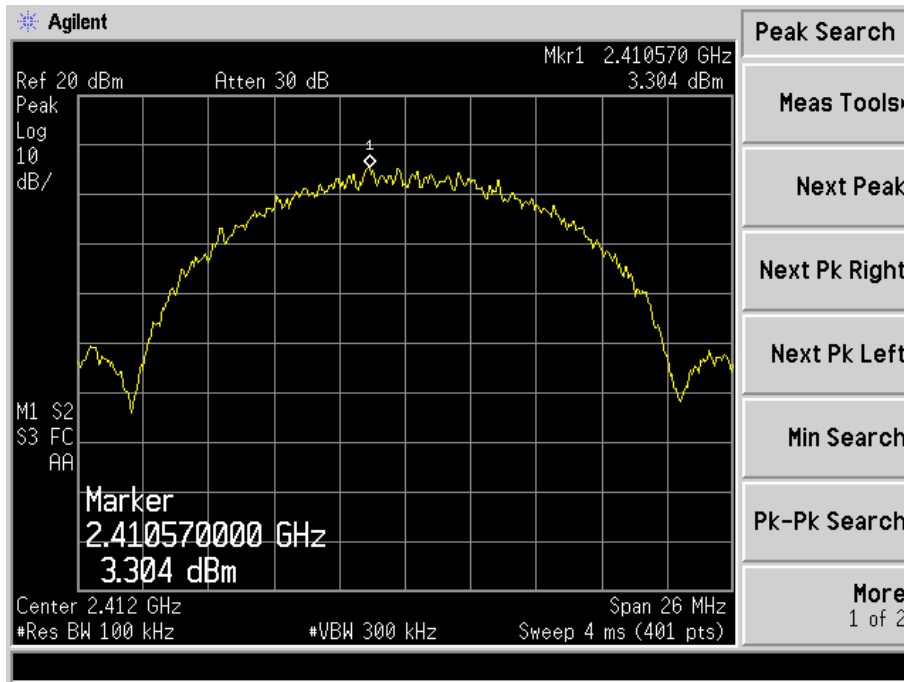


802.11b-Middle Channel

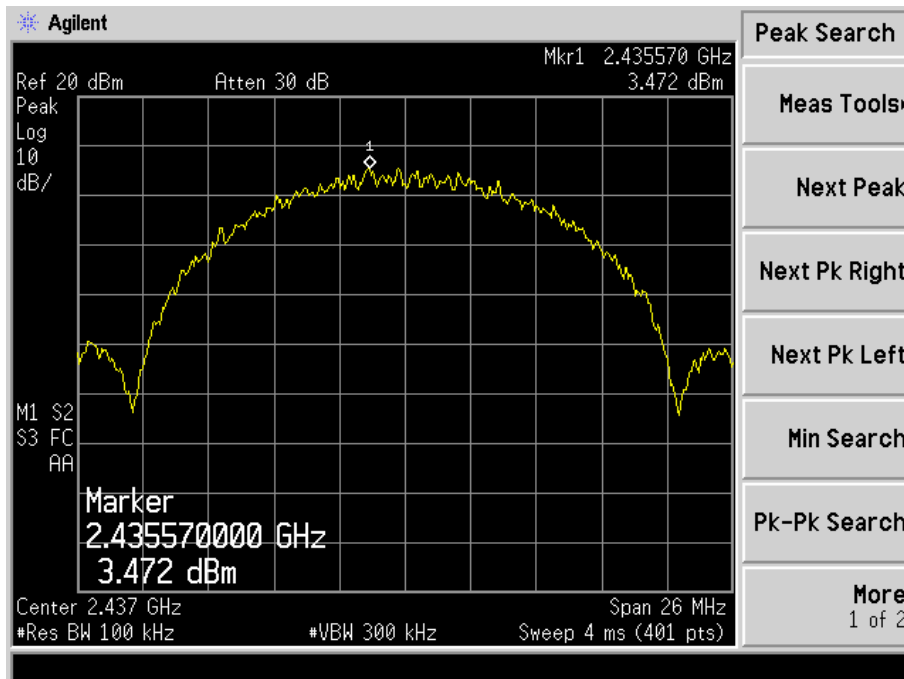


802.11b-High Channel

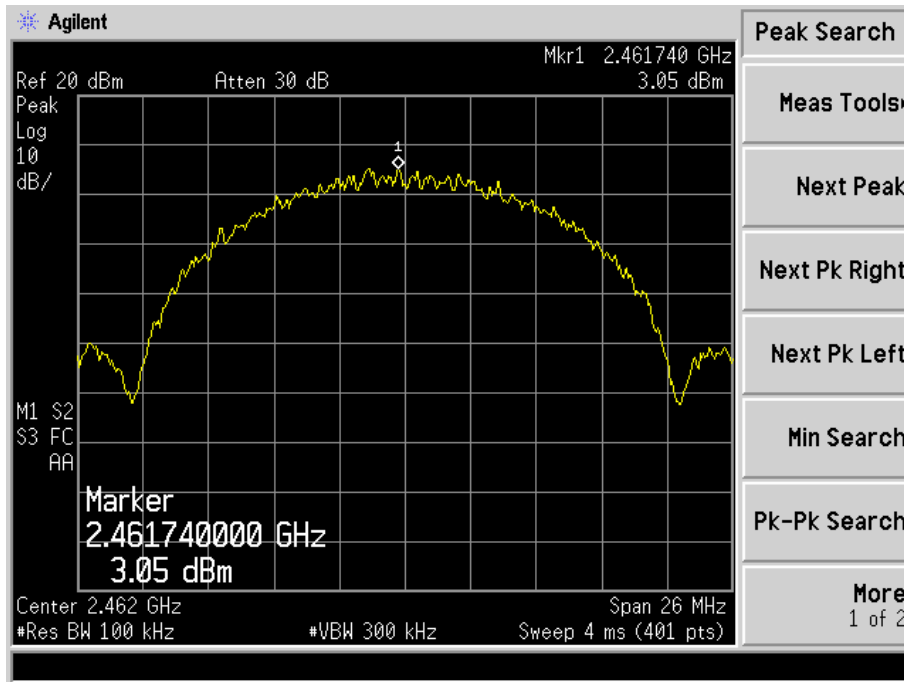


802.11g-Low Channel

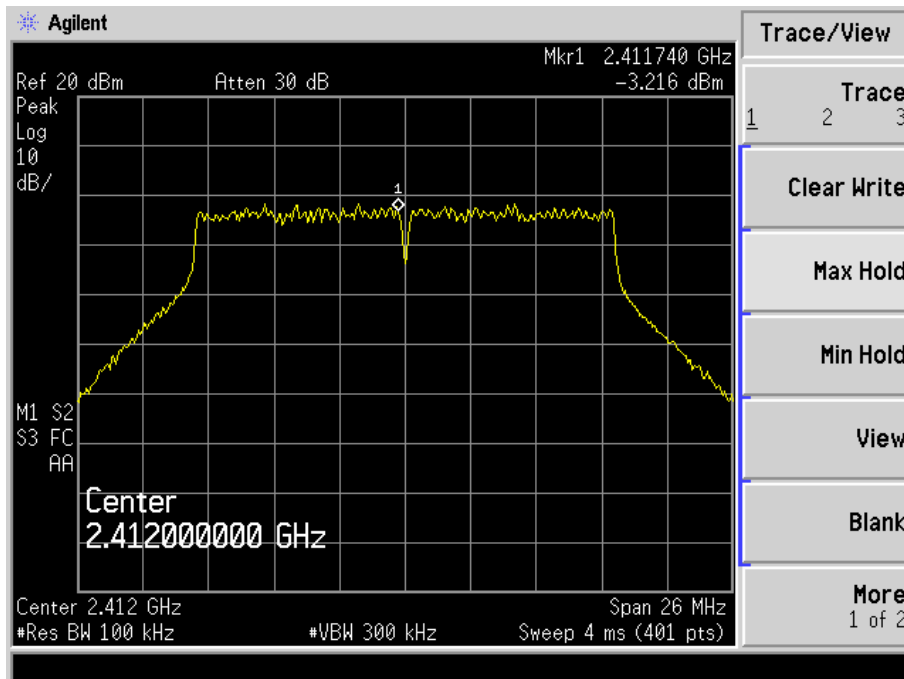


802.11g-Middle Channel

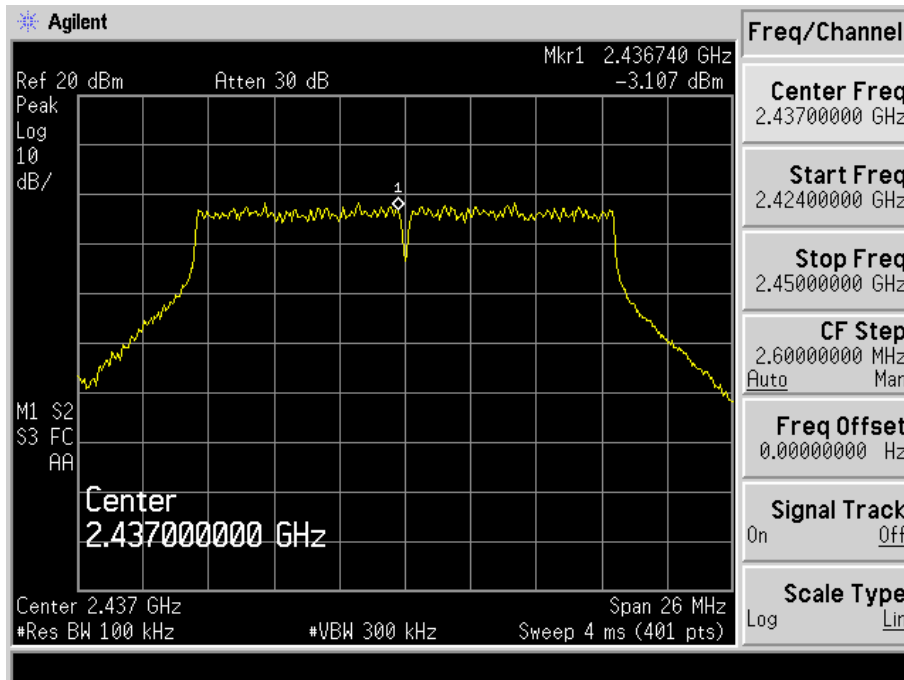


802.11g-High Channel

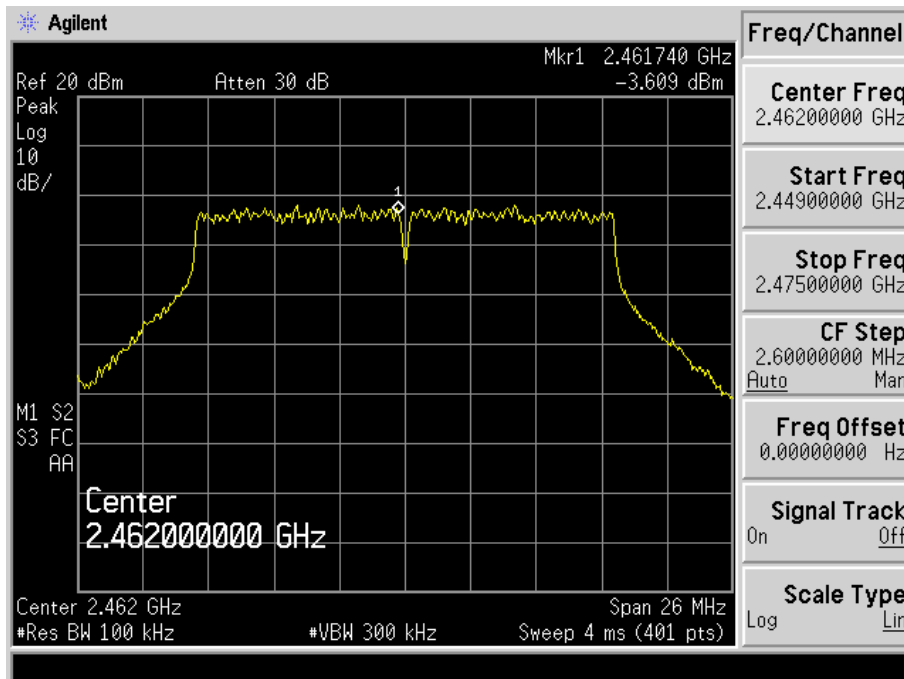


802.11n-HT20-Low Channel

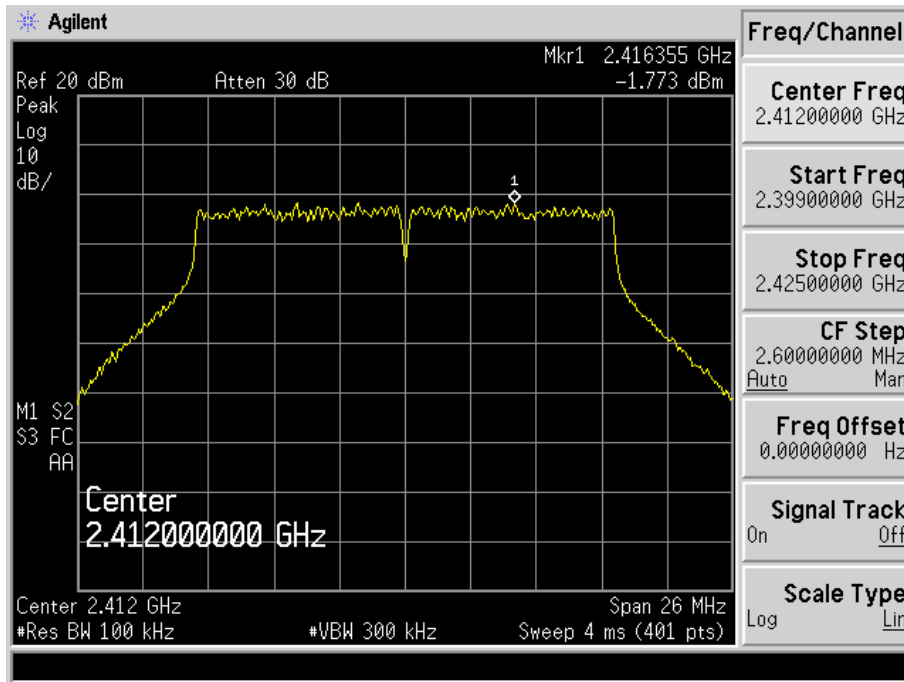


802.11n-HT20-Middle Channel

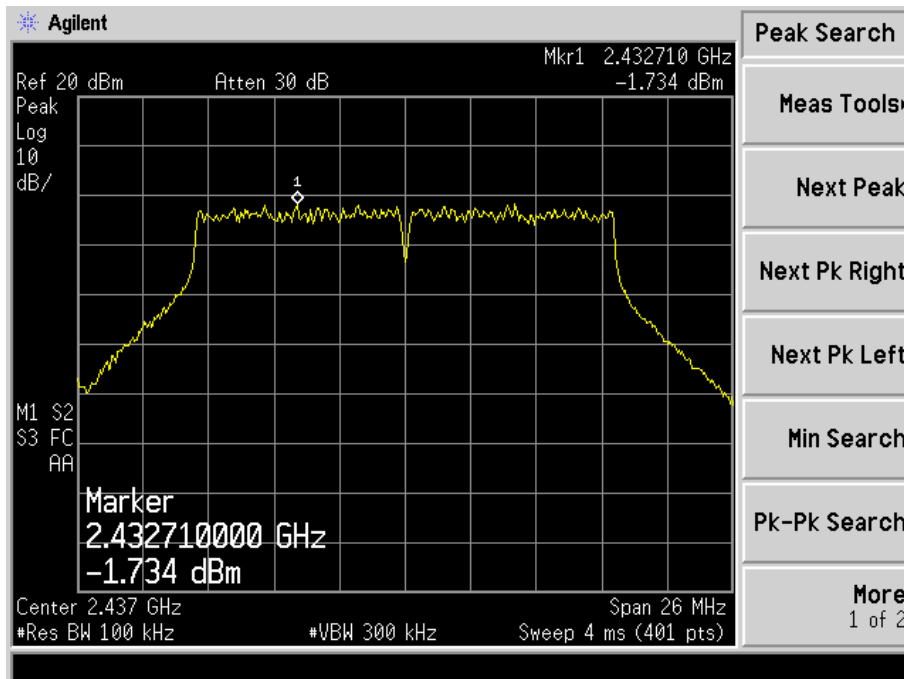


802.11n-HT20-High Channel

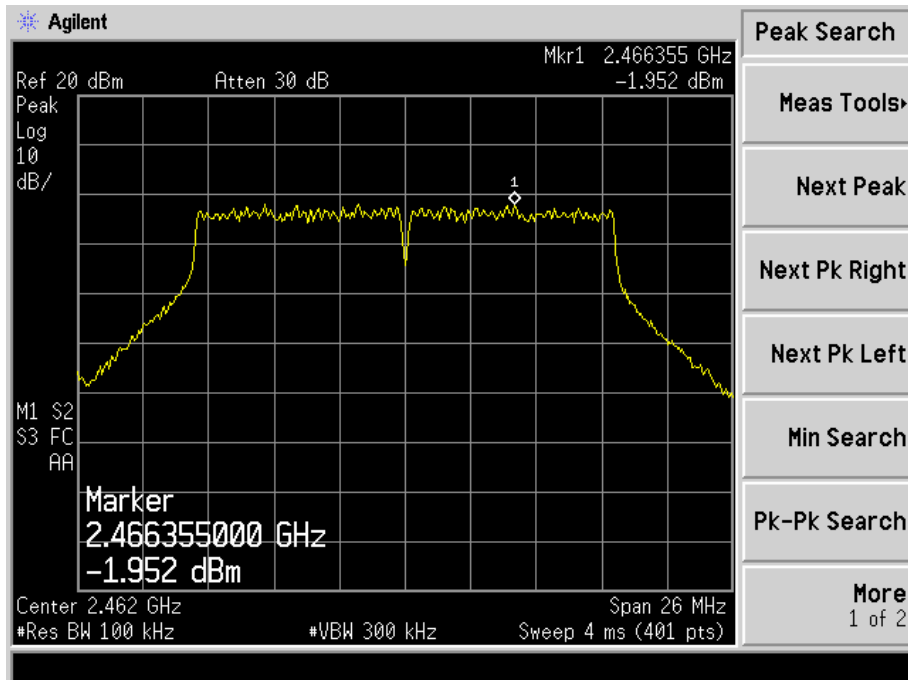


802.11n-HT40-Low Channel

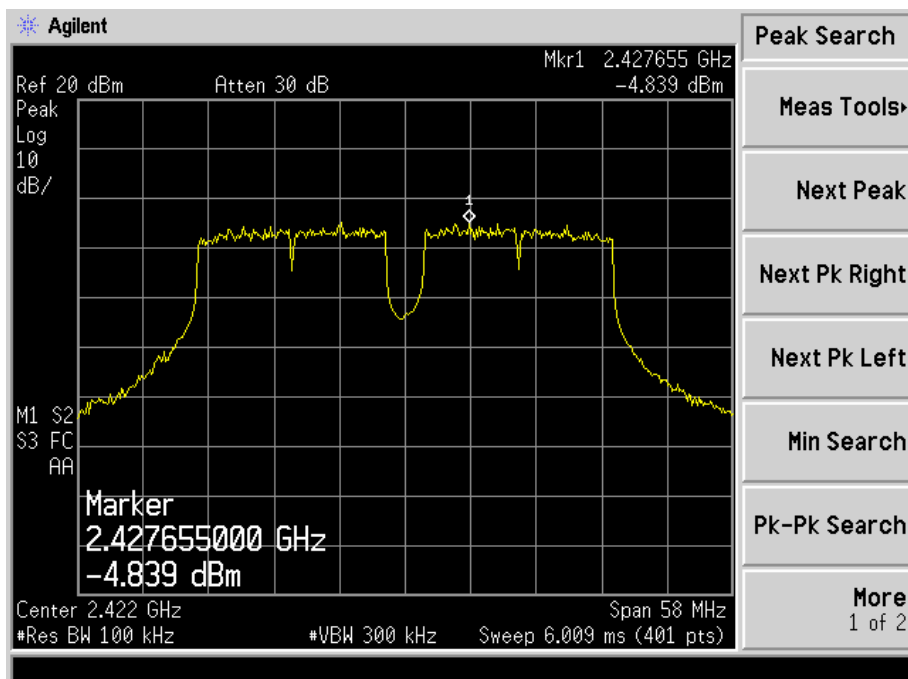

802.11n-HT40-Middle Channel

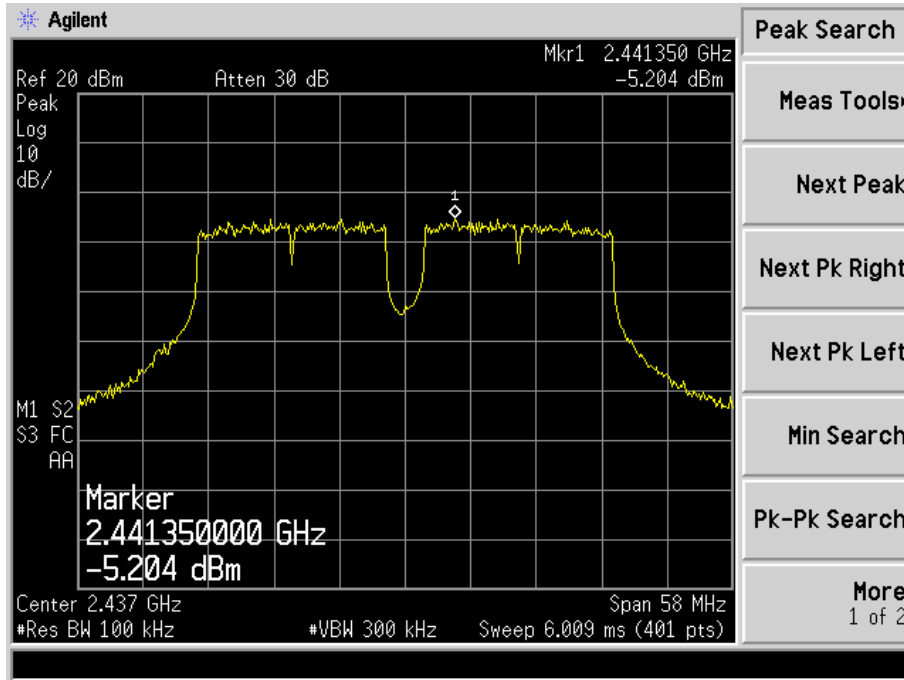

802.11n-HT40-High Channel

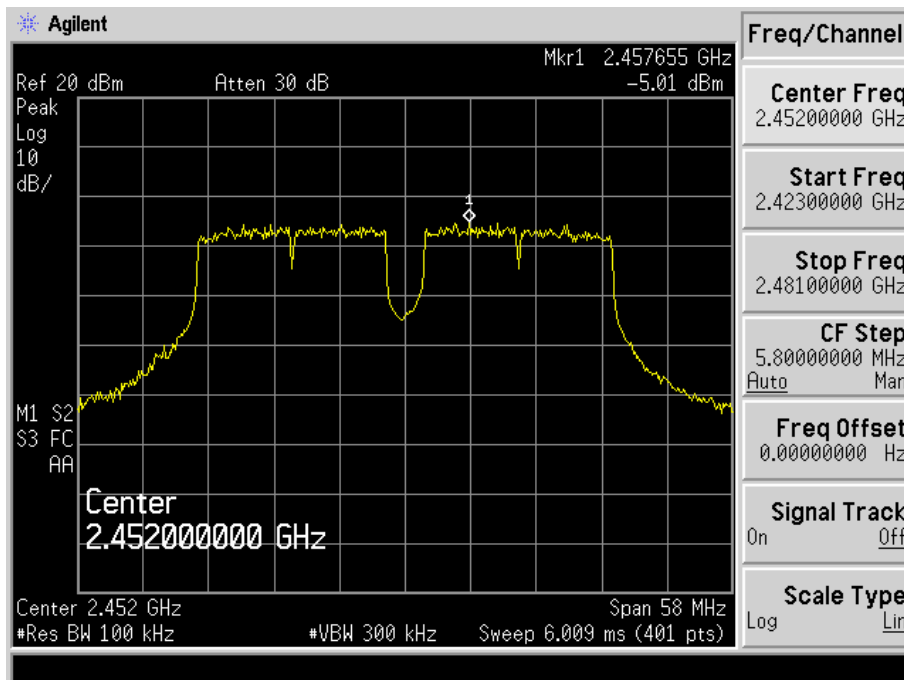

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Environmental Conditions

Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots

Antenna 1

Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
802.11b	2412	9.450	14.8534	≥500
	2437	9.476	14.8707	≥500
	2462	9.478	14.8925	≥500
802.11g	2412	16.522	16.4273	≥500
	2437	16.589	16.4669	≥500
	2462	16.569	16.4476	≥500
802.11n-HT20	2412	16.553	16.4449	≥500
	2437	16.523	16.4424	≥500
	2462	16.541	16.4277	≥500
802.11n-HT40	2422	36.488	36.1536	≥500
	2437	36.624	36.2255	≥500
	2452	36.614	36.2404	≥500


Antenna 2

Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
802.11b	2412	9.522	14.9399	≥500
	2437	9.551	14.9379	≥500
	2462	10.160	14.9642	≥500
802.11g	2412	16.510	16.4225	≥500
	2437	16.557	16.4476	≥500
	2462	16.541	16.4277	≥500
802.11n-HT20	2412	16.567	16.4428	≥500
	2437	16.571	16.4547	≥500
	2462	16.548	16.4358	≥500
802.11n-HT40	2422	36.541	36.1985	≥500
	2437	36.562	36.2092	≥500
	2452	36.630	36.2465	≥500


Please refer to the following test plots:

Antenna 1


802.11b-Low Channel

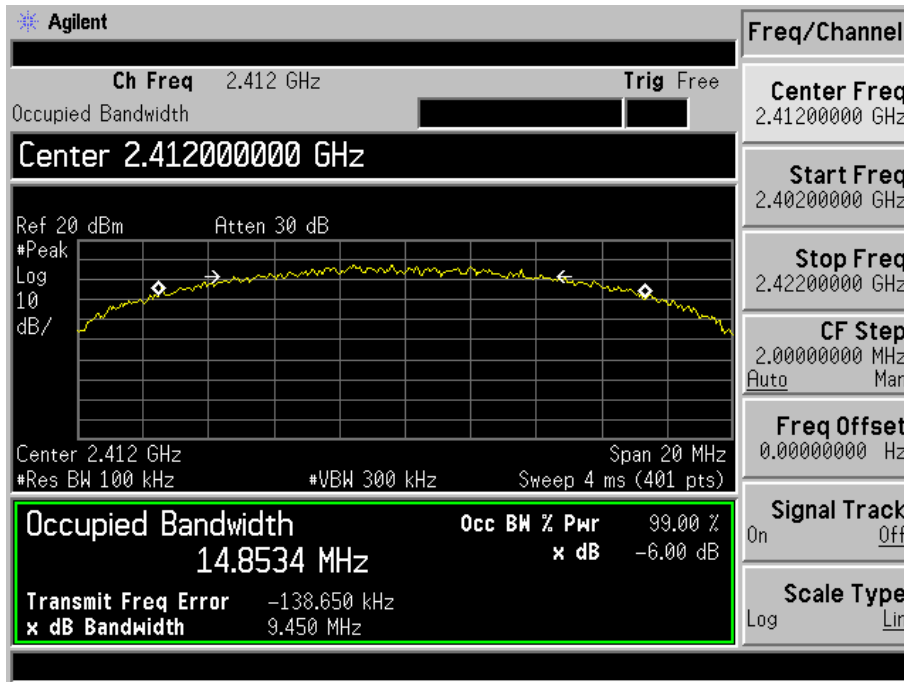


802.11b-Middle Channel

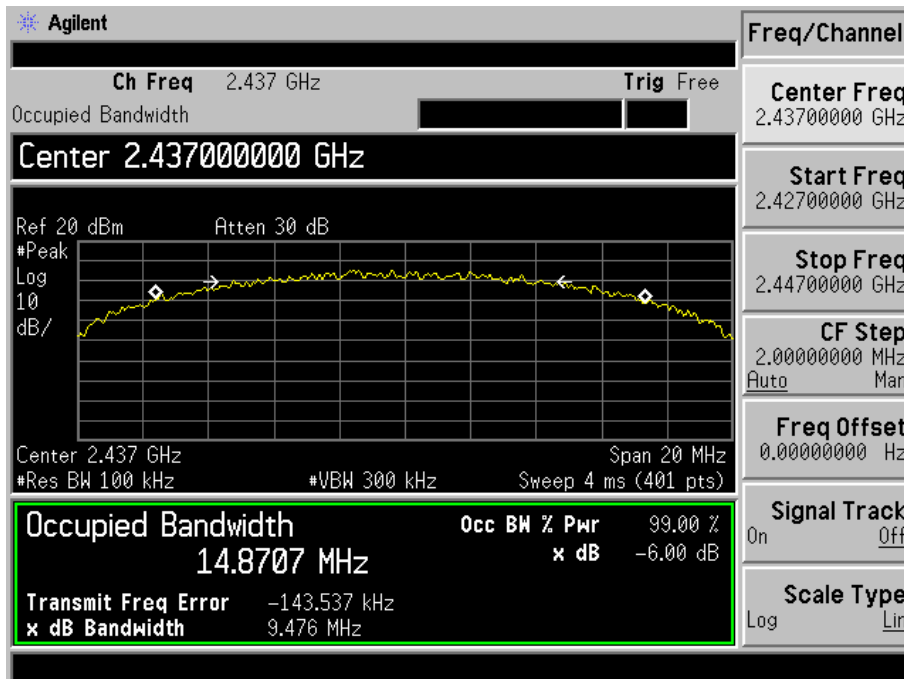


802.11b-High Channel

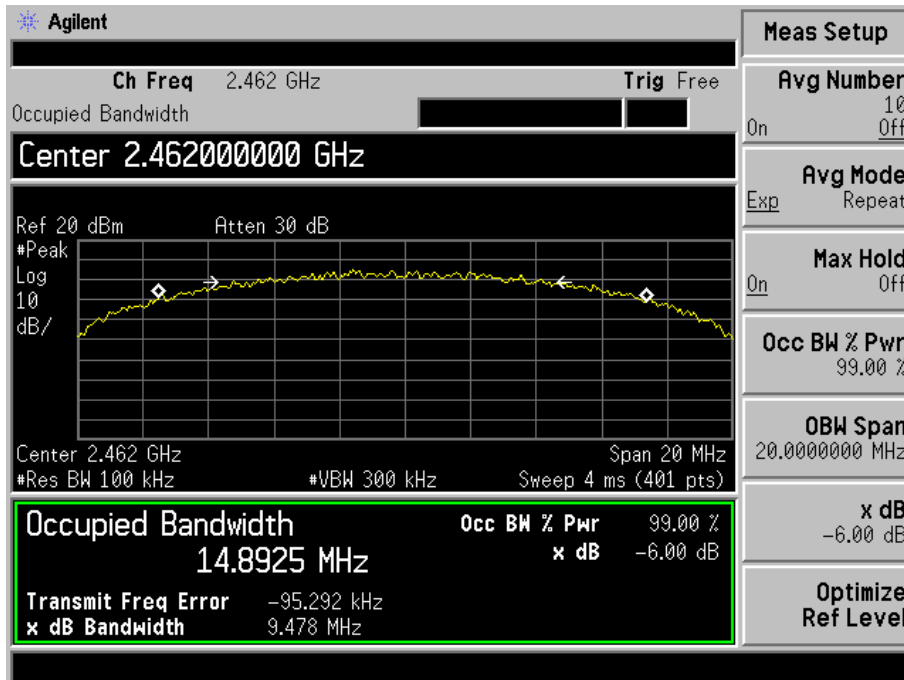


802.11g-Low Channel

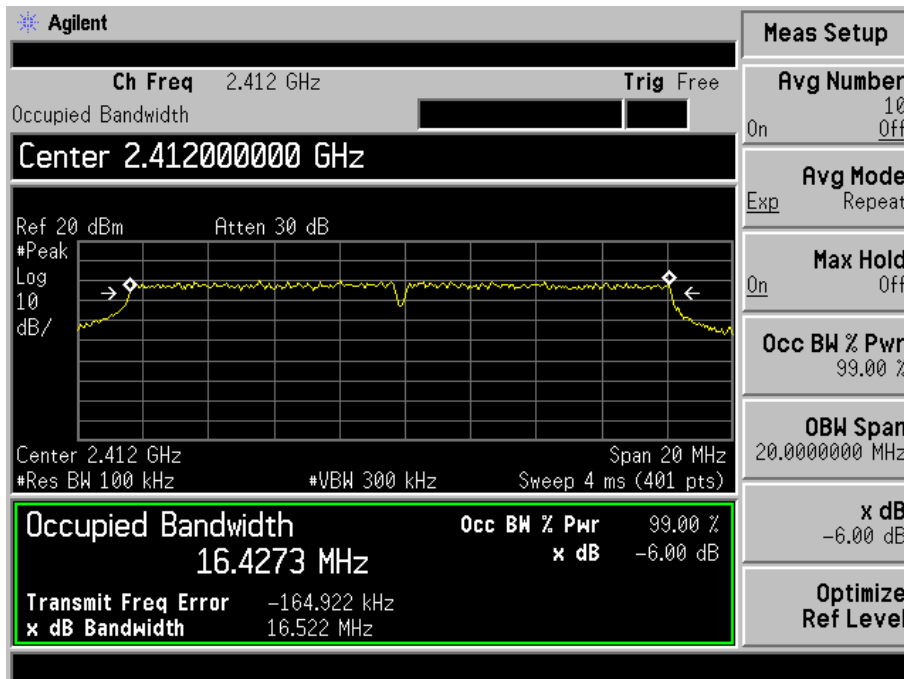


802.11g-Middle Channel

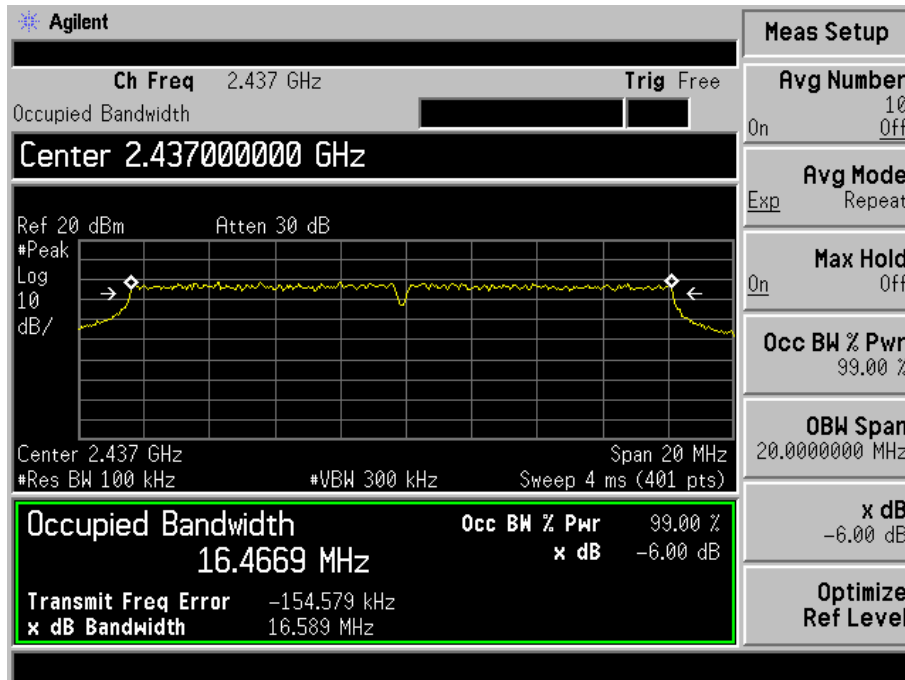


802.11g-High Channel

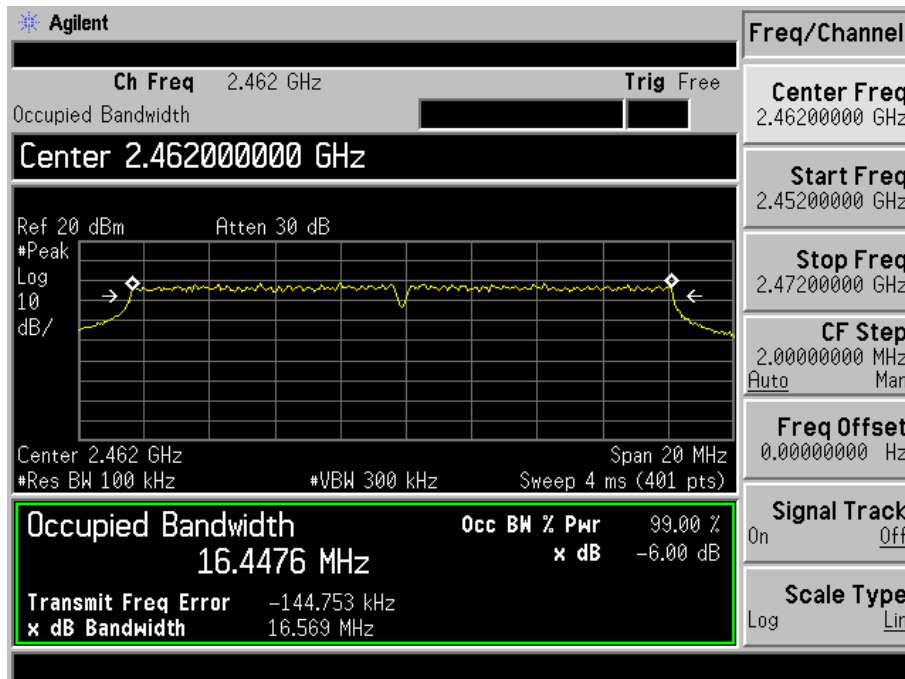


802.11n-HT20-Low Channel

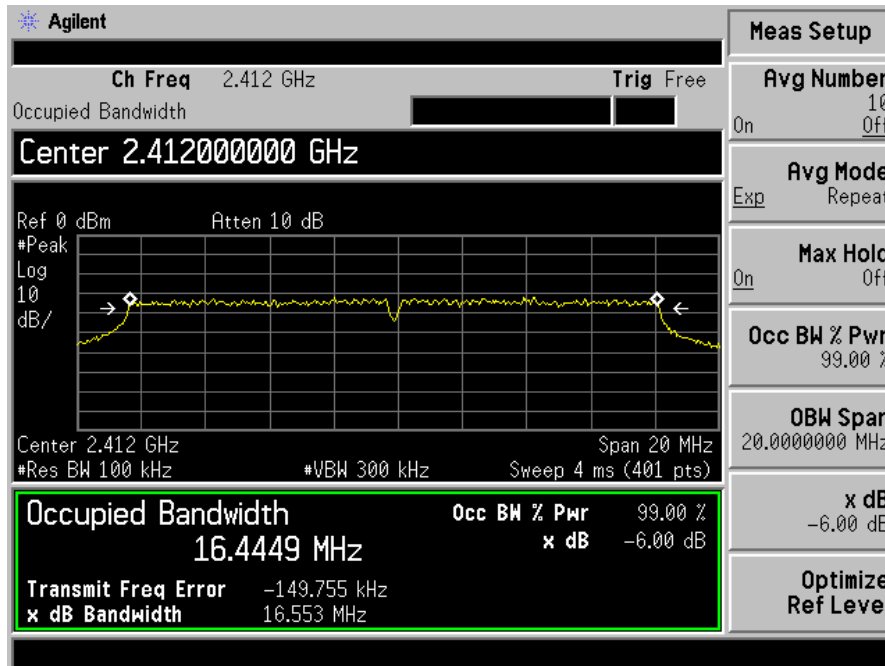


802.11n-HT20-Middle Channel

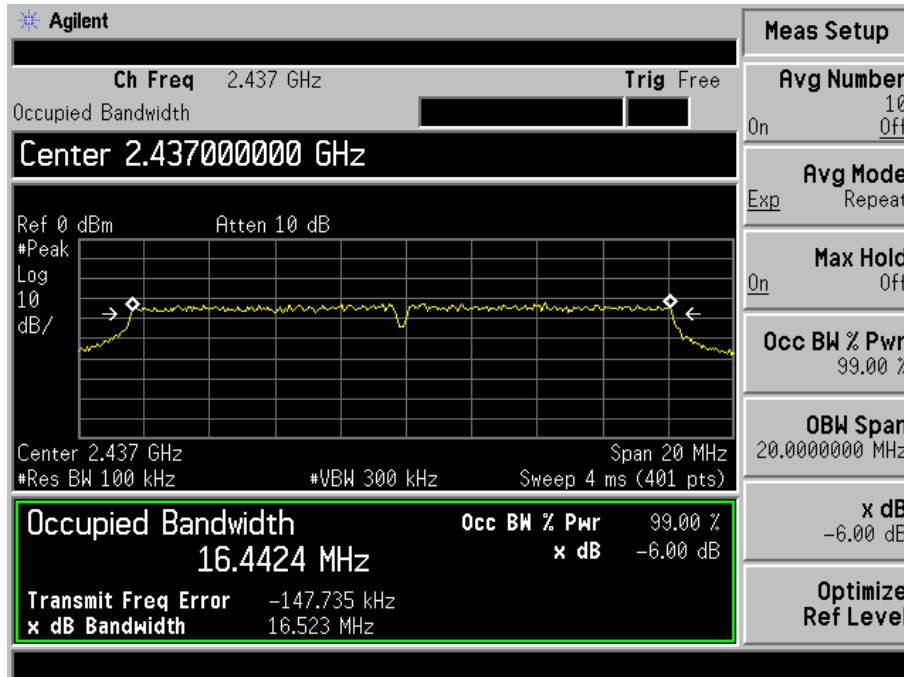


802.11n-HT20-High Channel

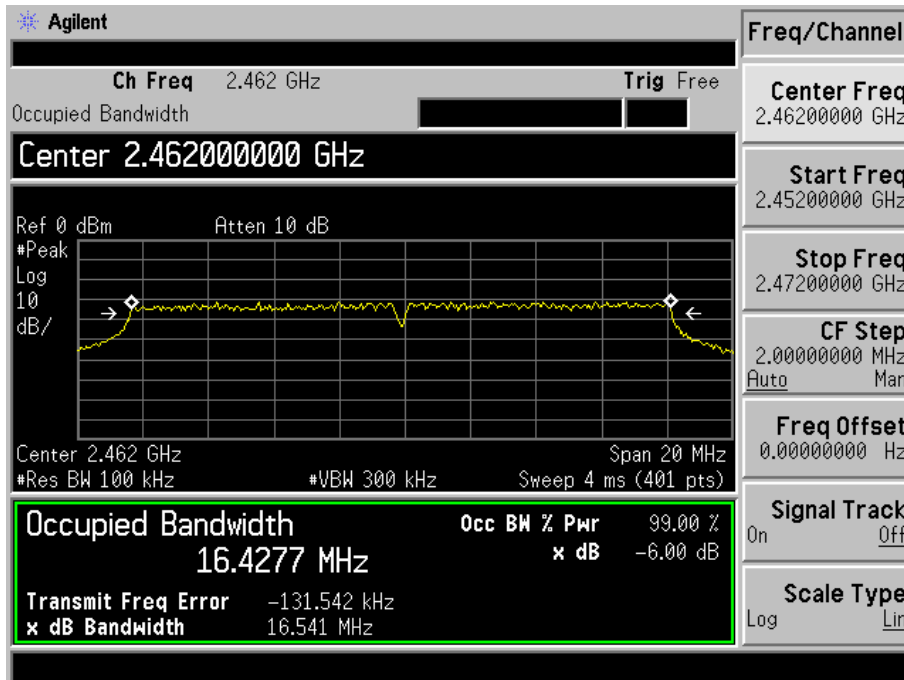


802.11n-HT40-Low Channel

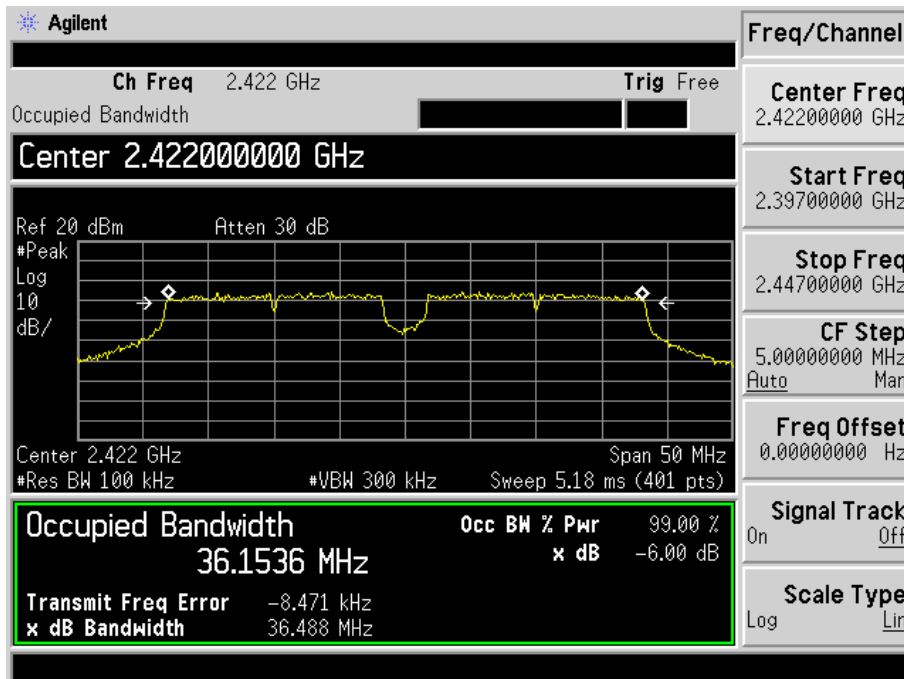

802.11n-HT40-Middle Channel

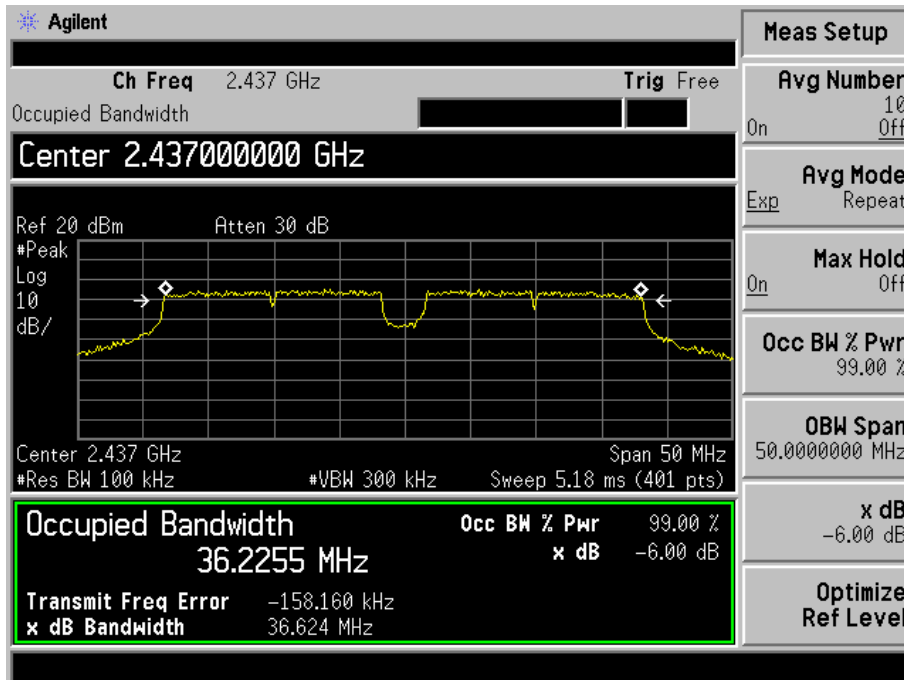


802.11n-HT40-High Channel

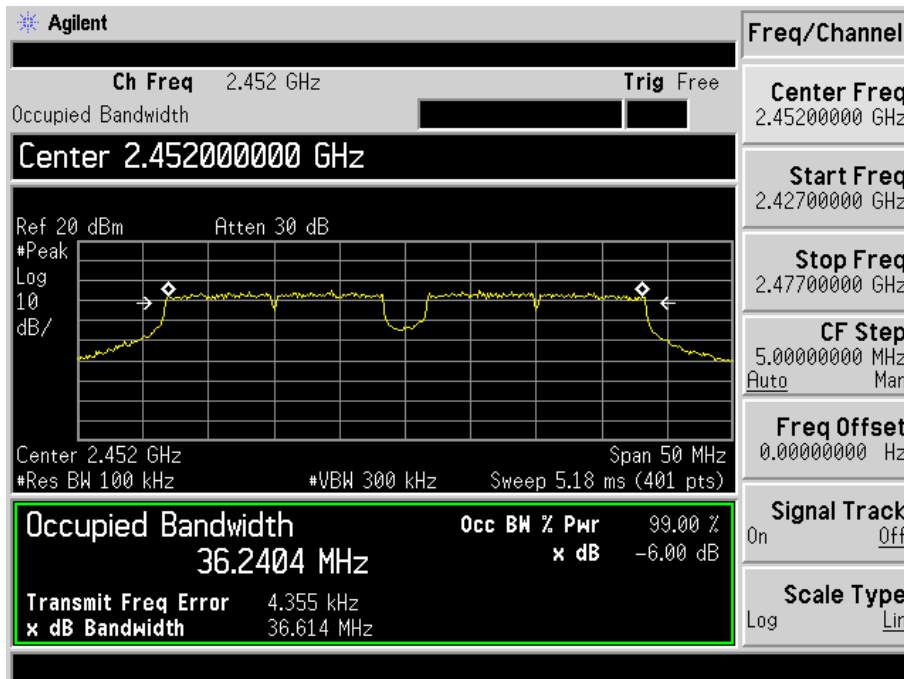


Antenna 2


802.11b-Low Channel

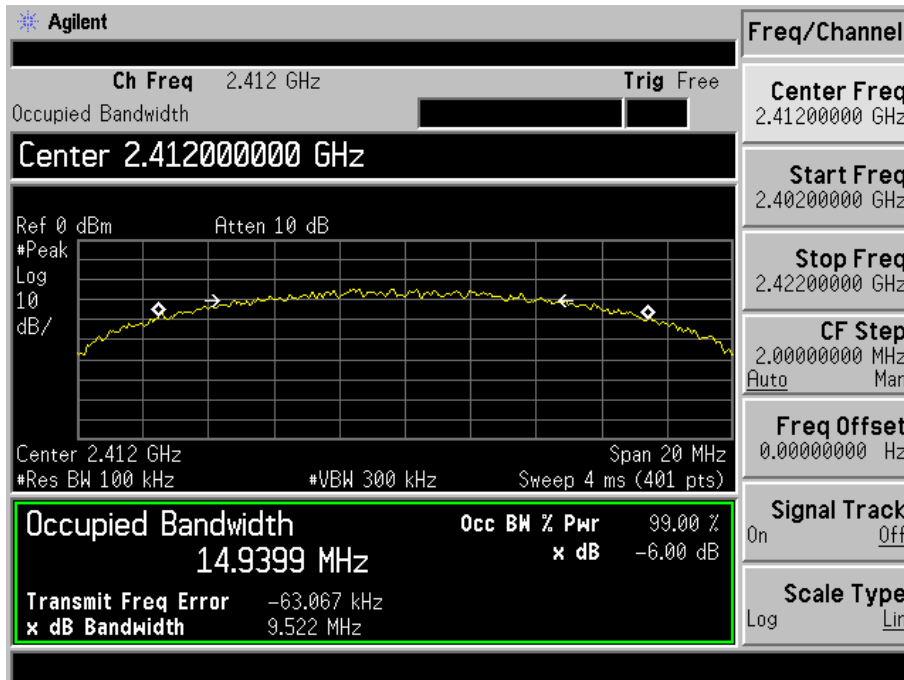


802.11b-Middle Channel

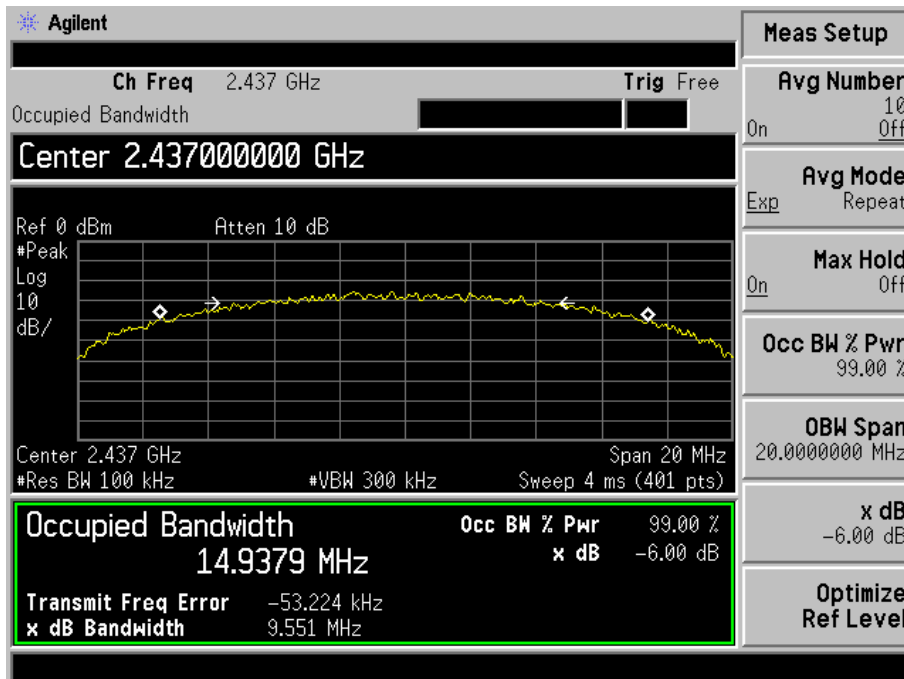


802.11b-High Channel

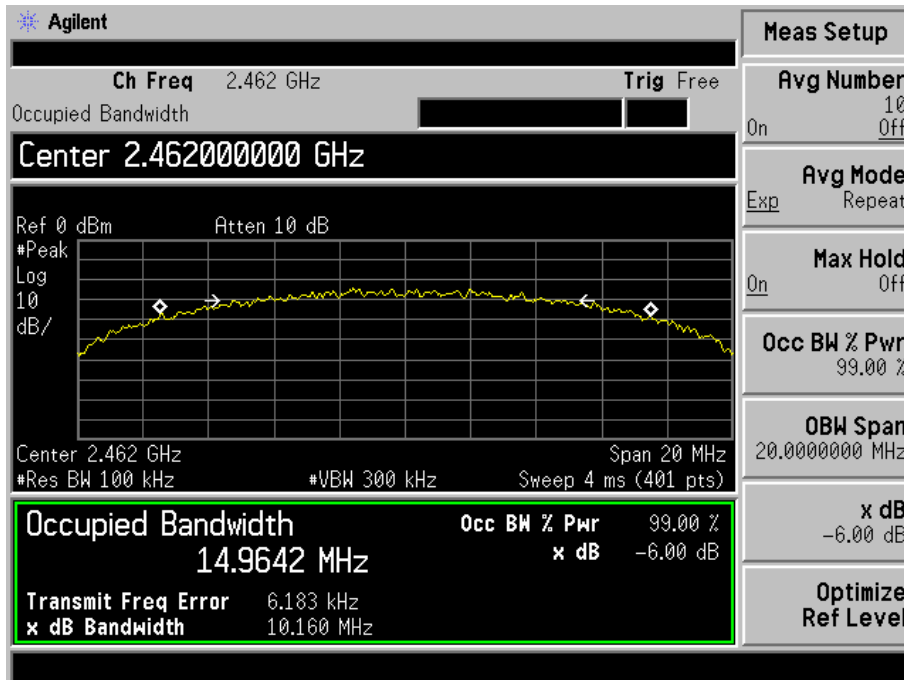


802.11g-Low Channel

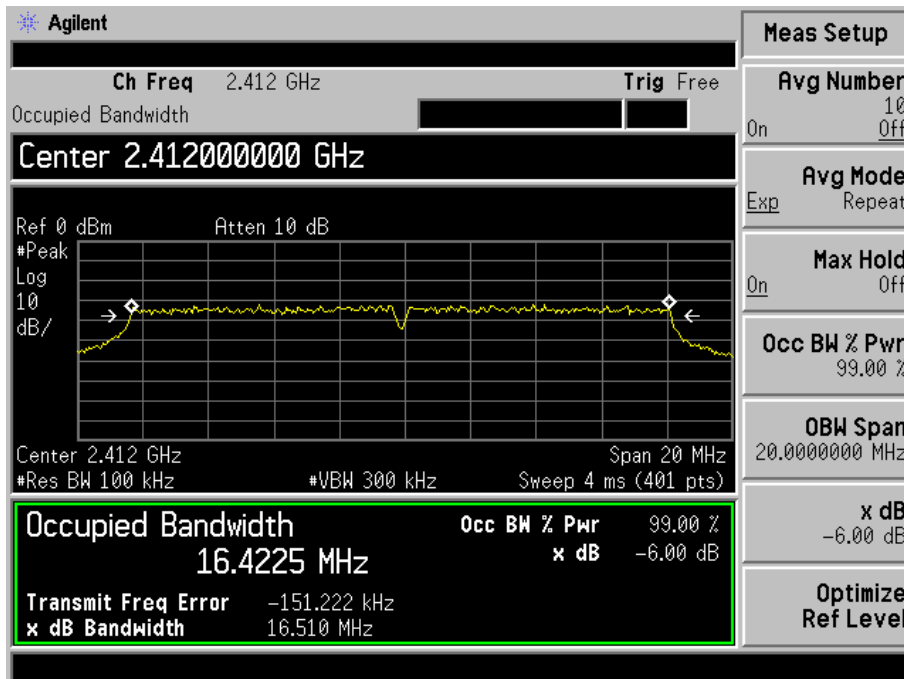


802.11g-Middle Channel

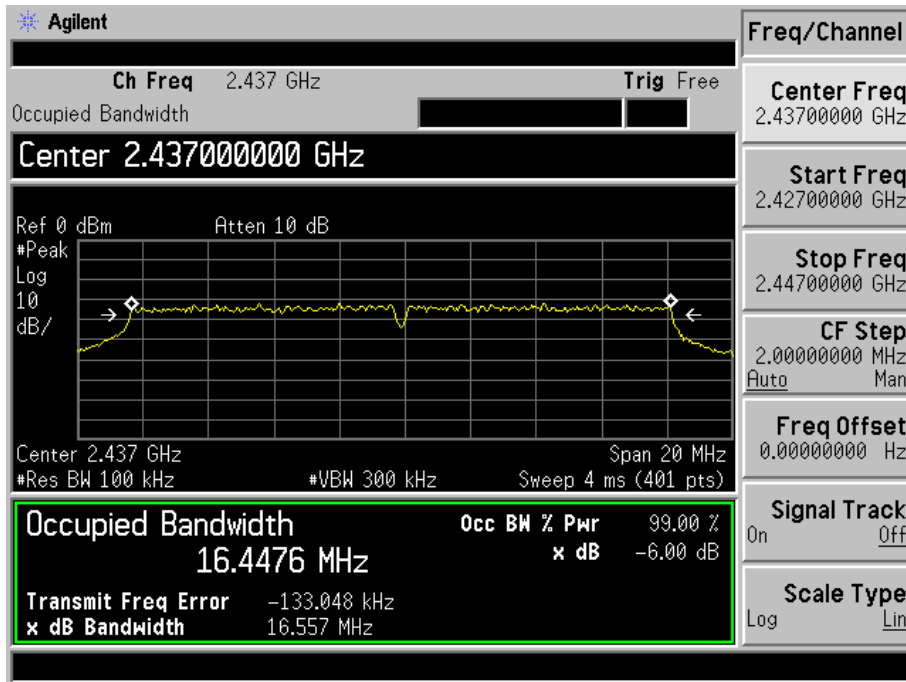


802.11g-High Channel

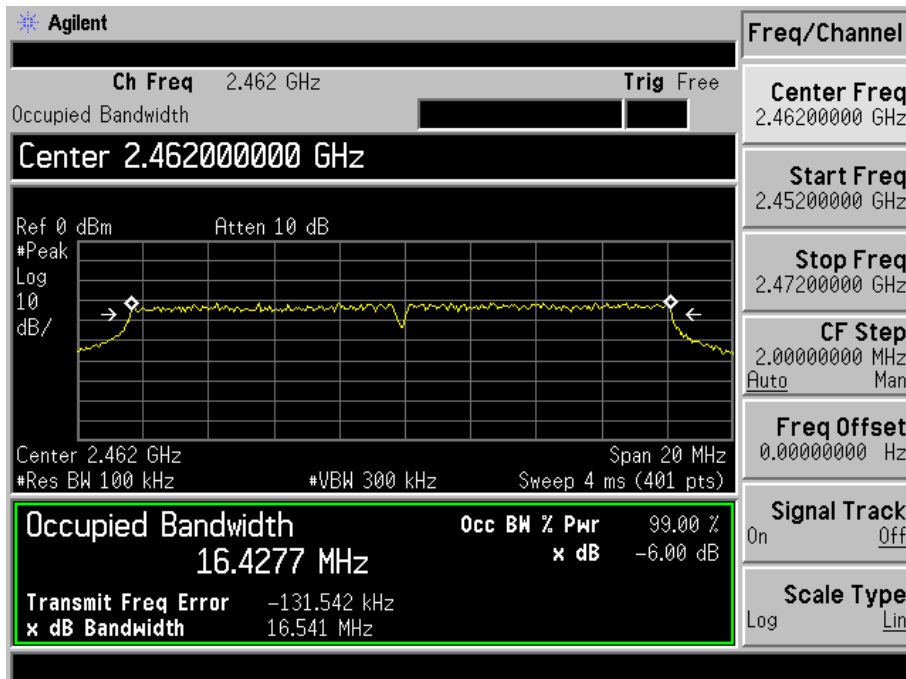


802.11n-HT20-Low Channel

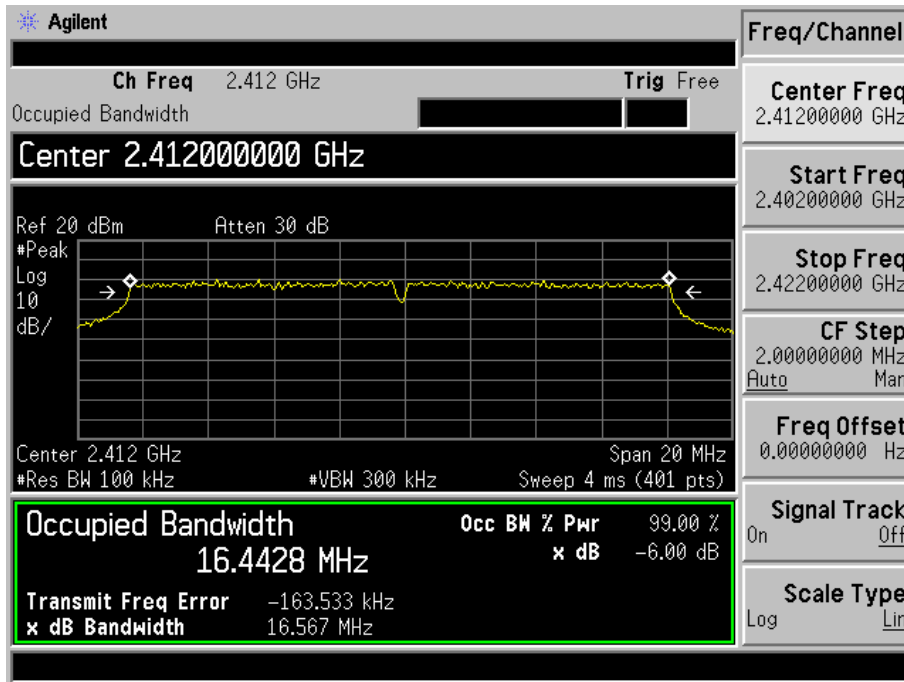


802.11n-HT20-Middle Channel

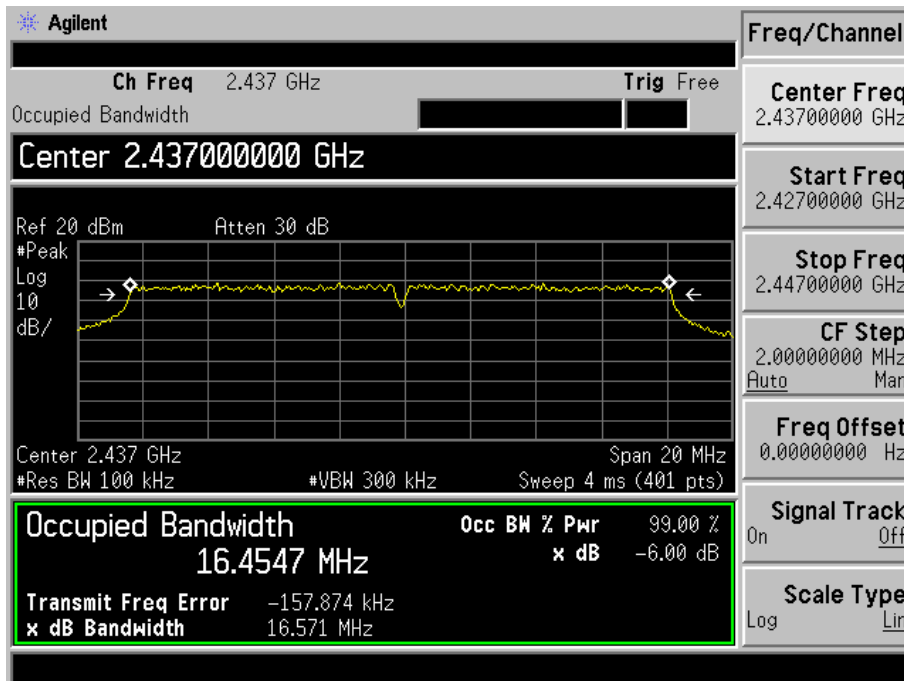


802.11n-HT20-High Channel

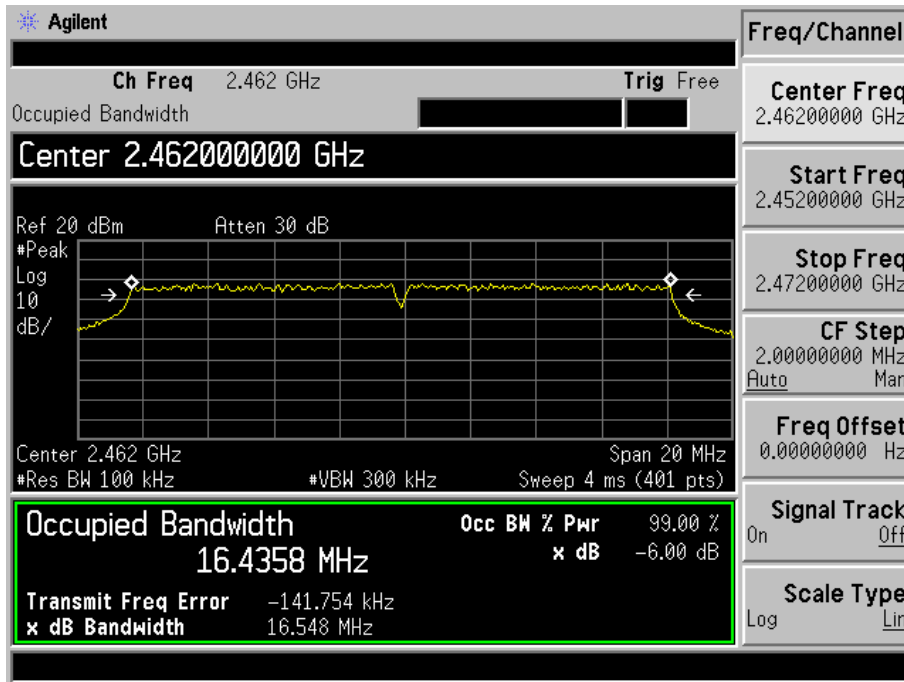


802.11n-HT40-Low Channel

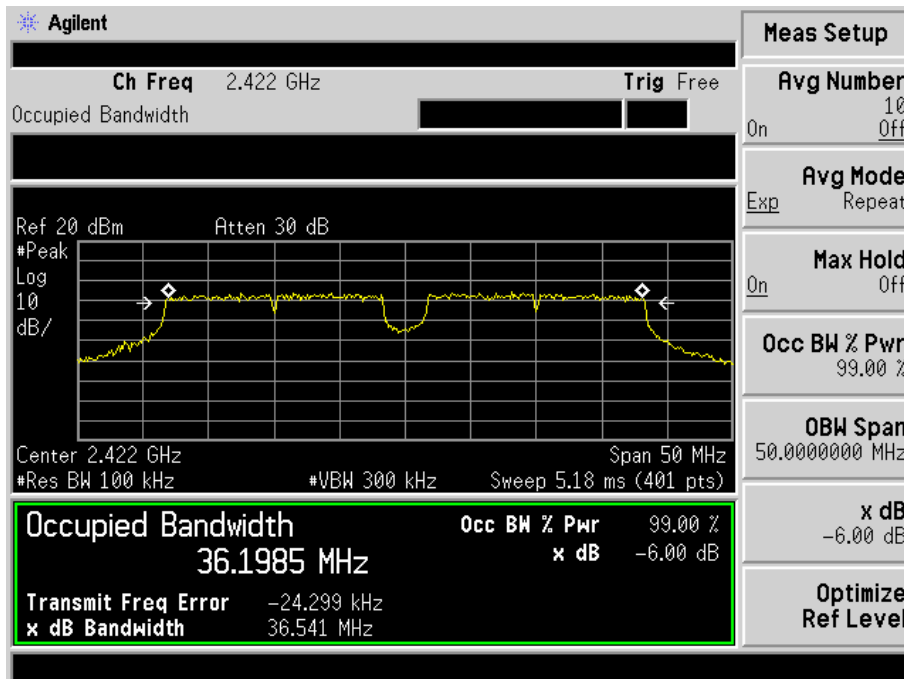

802.11n-HT40-Middle Channel

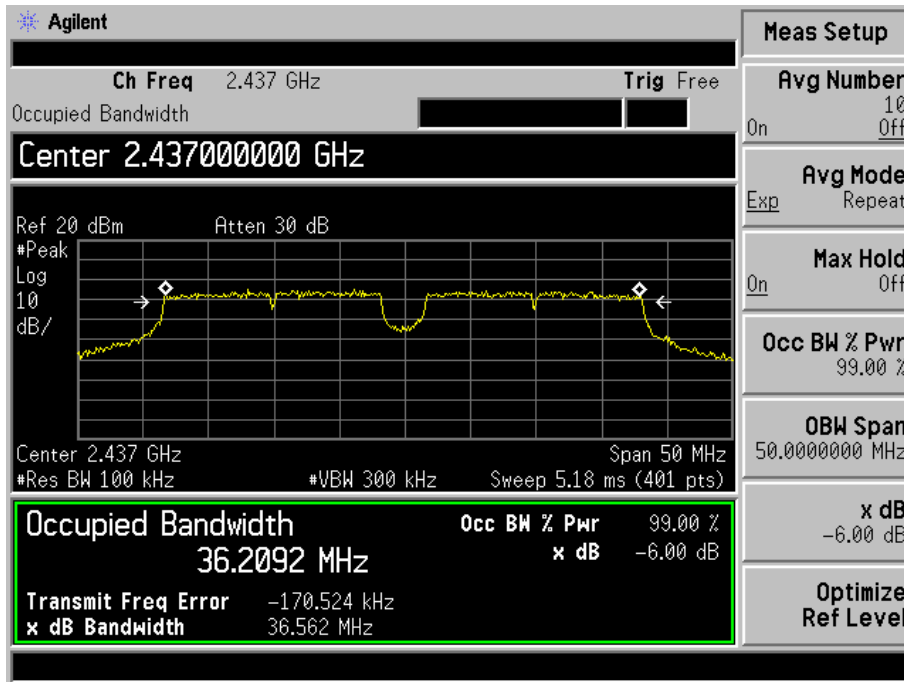

802.11n-HT40-High Channel

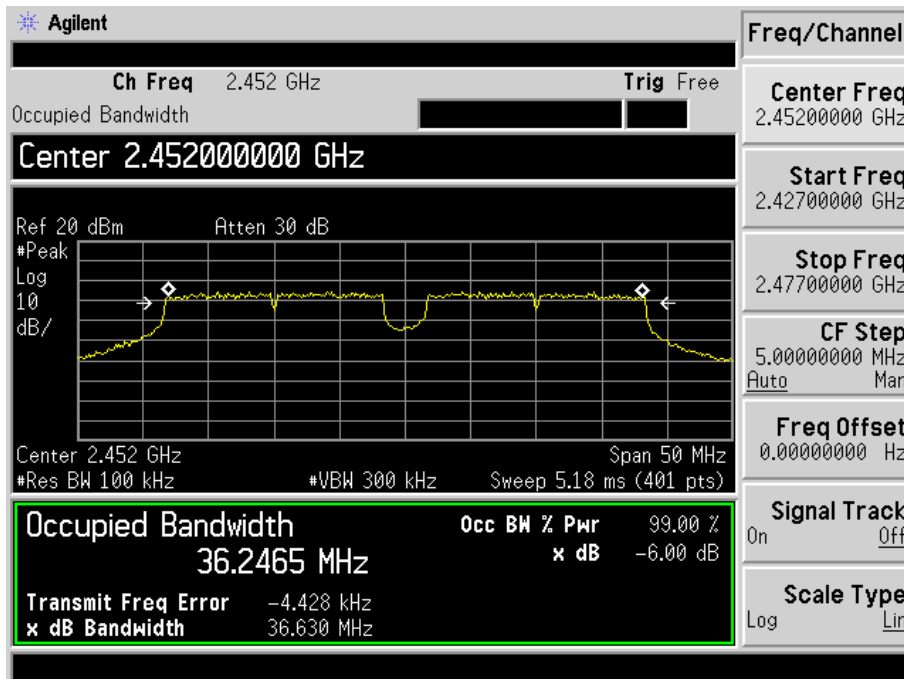

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure

According to section 15.247(b)-power output of the KDB-558074 D01 V03r03, 9.2.2.2 (channel integration method) When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

7.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar


7.4 Summary of Test Results/Plots

Test Mode	Frequency MHz	Power 1 dBm	Power 2 dBm	Total Power dBm	Output Power mW	Limit mW
802.11b_ 11Mbps	2412	16.00	13.62	17.98	62.82	1000
	2437	13.85	14.20	17.04	50.57	1000
	2462	13.31	13.81	16.58	45.47	1000
802.11g_54Mbps	2412	13.01	9.62	14.65	29.16	1000
	2437	10.53	9.77	13.18	20.78	1000
	2462	9.92	9.78	12.86	19.33	1000
802.11n HT20_MCS7	2412	11.33	9.86	13.48	22.26	1000
	2437	11.02	10.30	13.69	23.37	1000
	2462	10.61	9.50	13.10	20.42	1000
802.11n HT40_MCS7	2422	11.20	9.18	13.32	21.46	1000
	2437	9.26	8.73	12.01	15.89	1000
	2452	8.76	8.21	11.50	14.14	1000


Please refer to the following test plots:

Antenna 1


802.11b-11Mbps-Low Channel

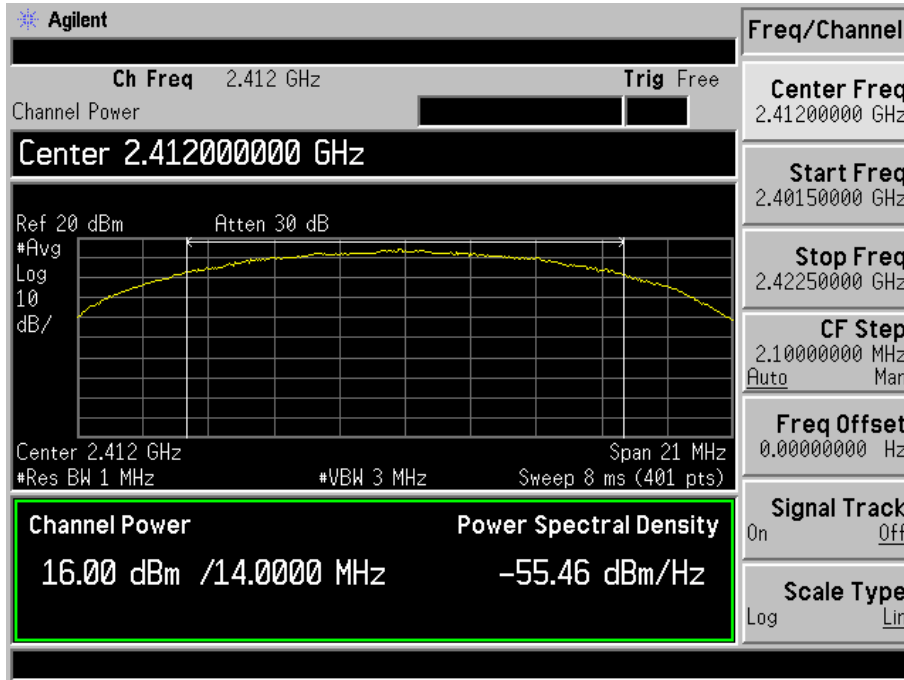


802.11b -11Mbps-Middle Channel

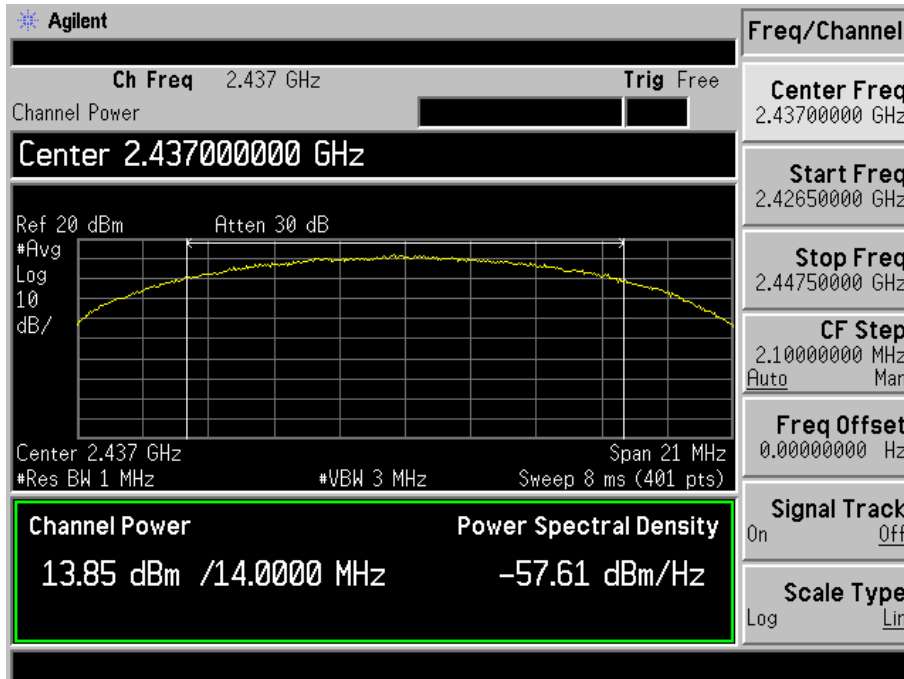


802.11b -11Mbps-High Channel

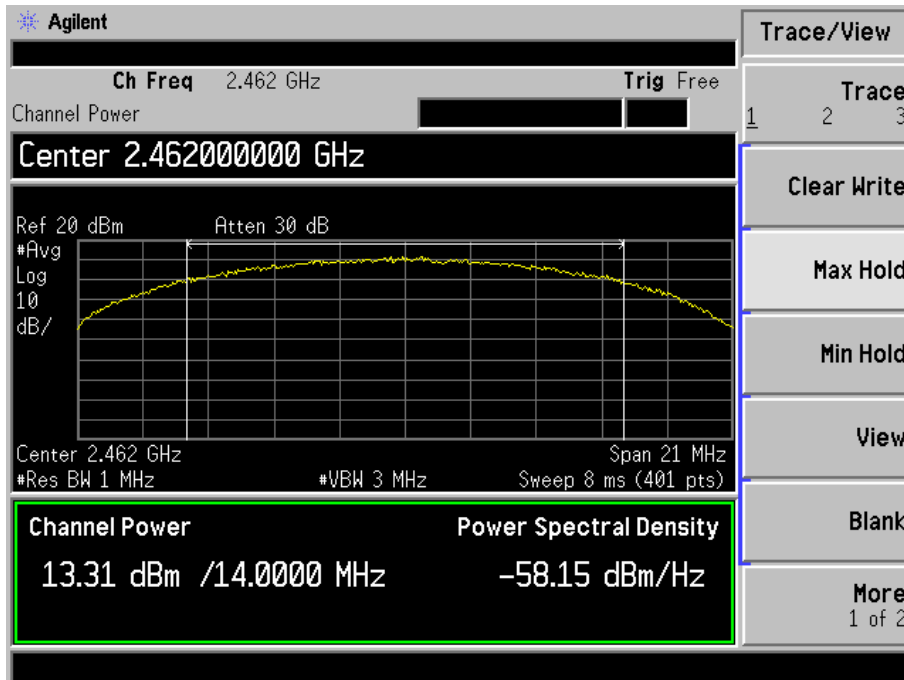


802.11g-54Mbps-Low Channel

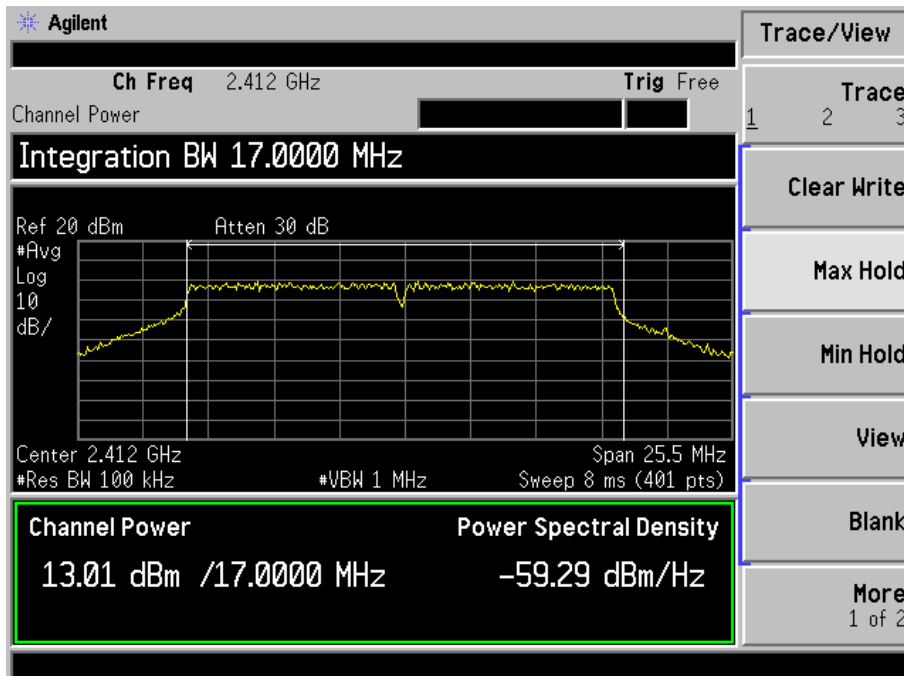


802.11g-54Mbps-Middle Channel

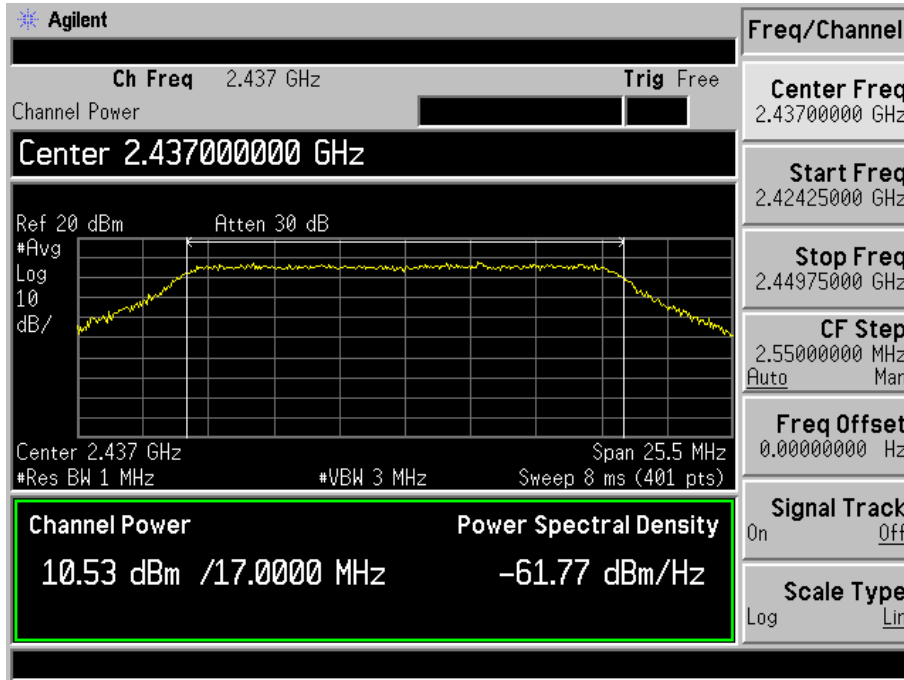


802.11g-54Mbps-High Channel

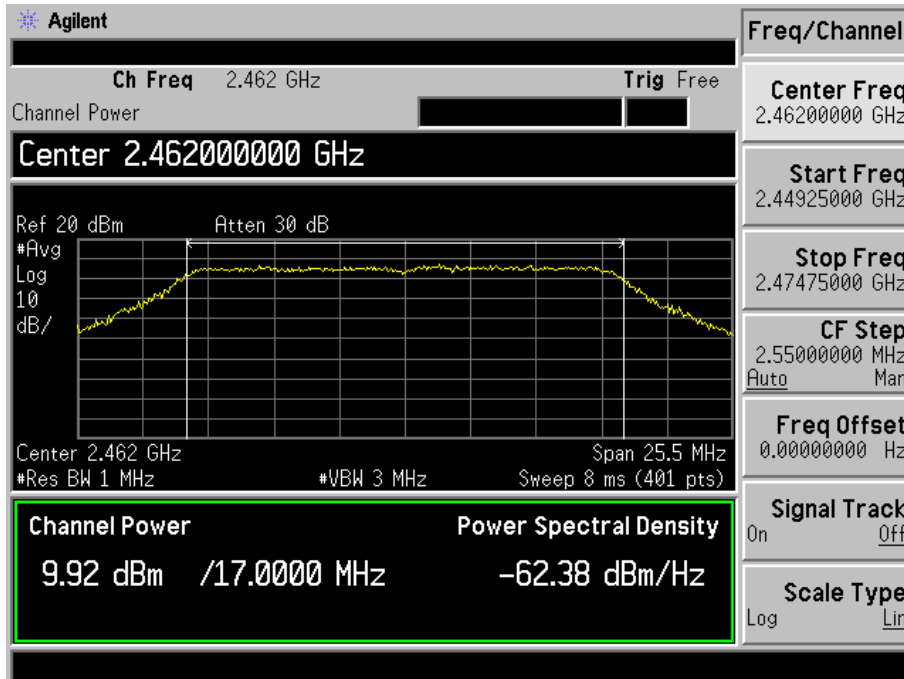


802.11n-HT20-MCS7-Low Channel

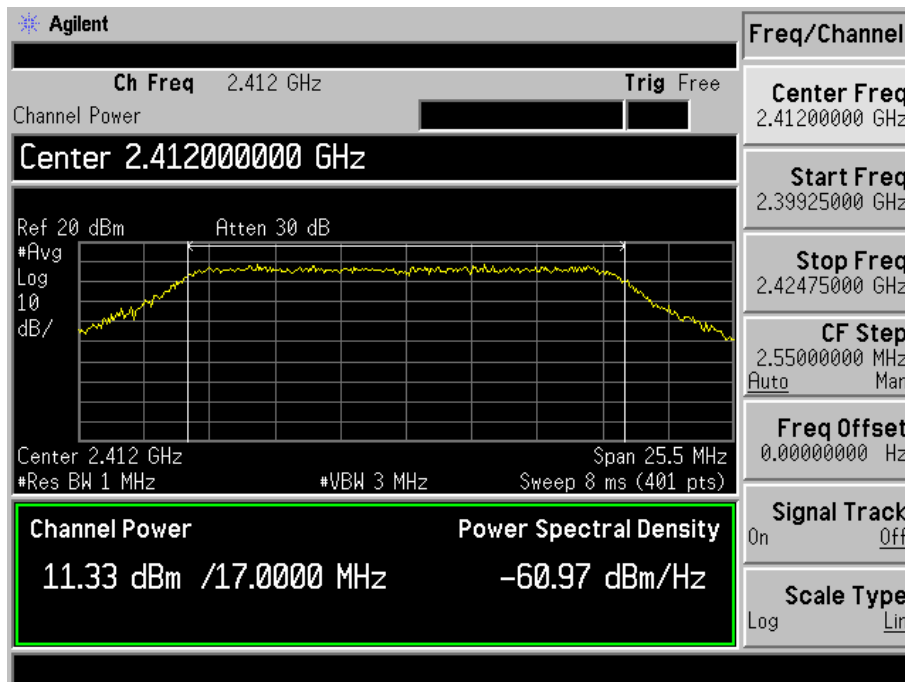


802.11n-HT20-MCS7-Middle Channel

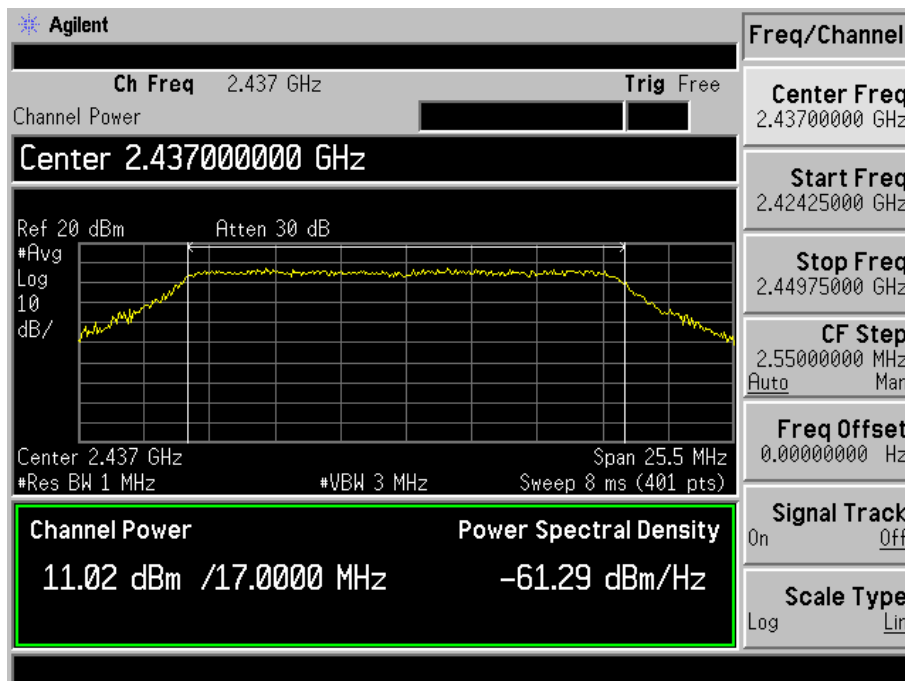


802.11n-HT20-MCS7-High Channel

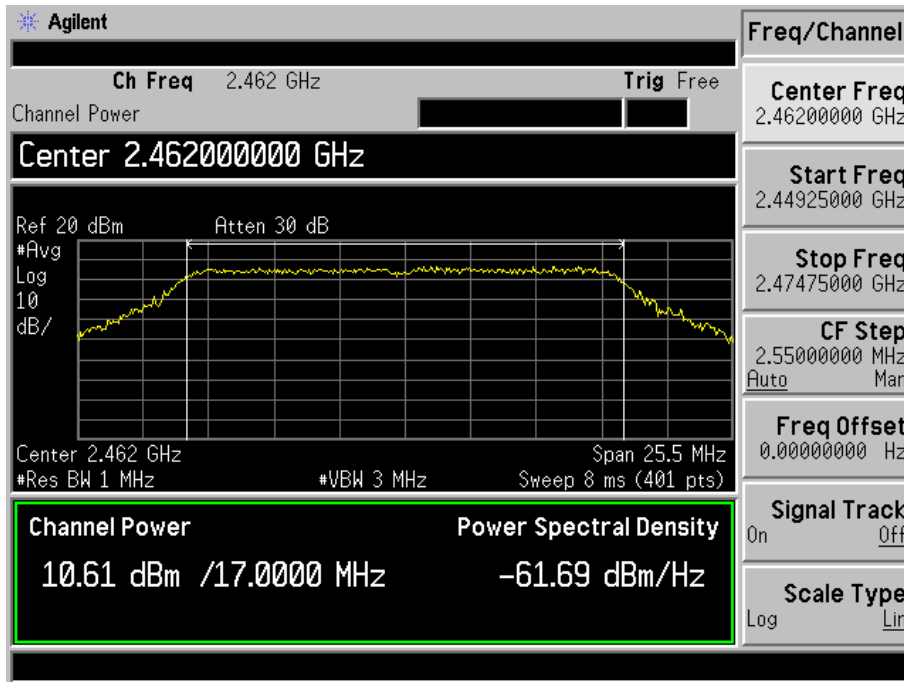


802.11n-HT40-MCS7-Low Channel

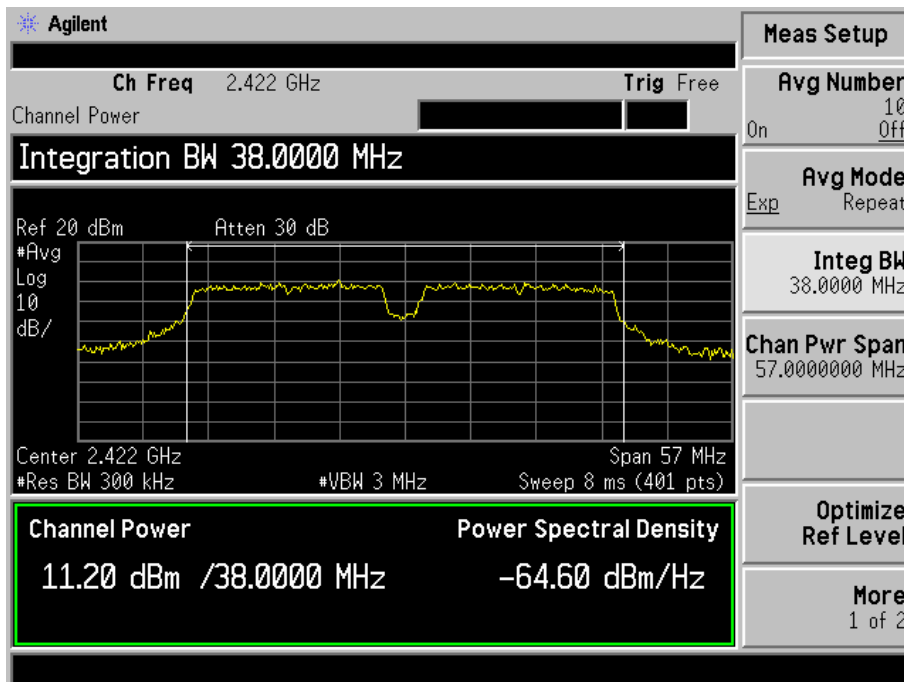

802.11n-HT40-MCS7-Middle Channel

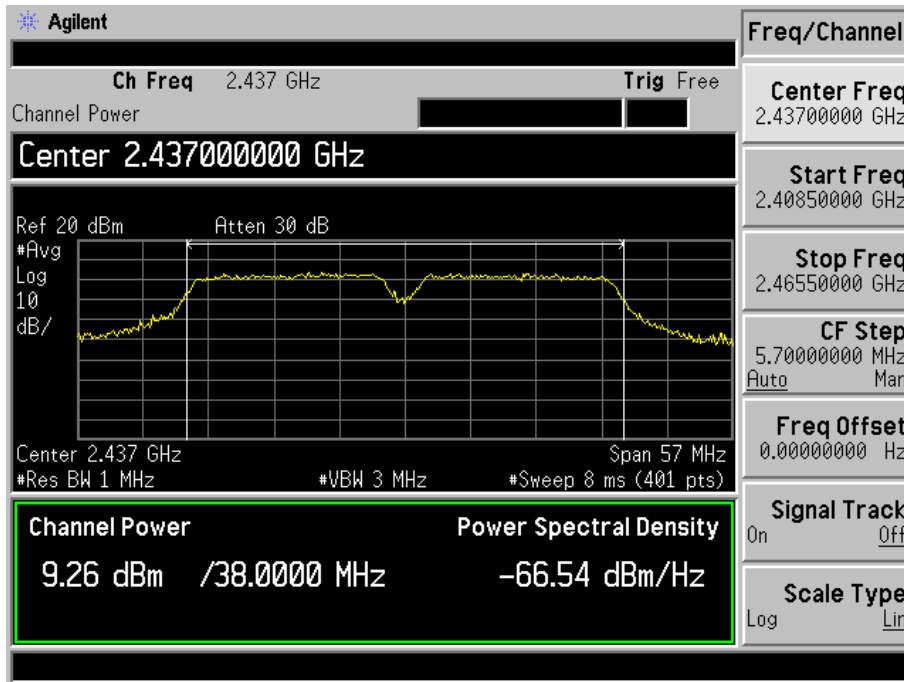


802.11n-HT40-MCS7-High Channel

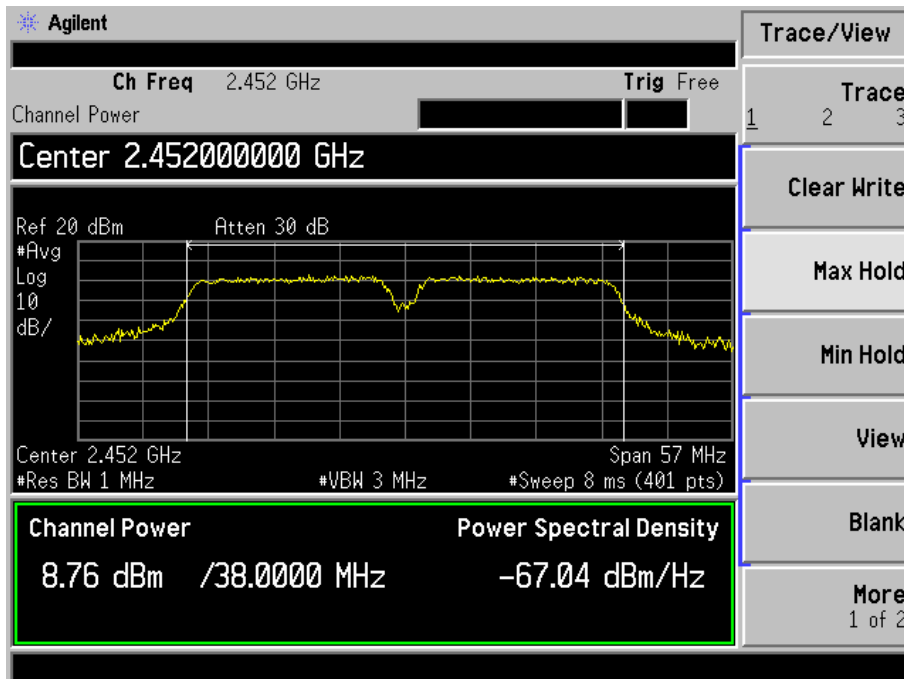


Antenna 2


802.11b-11Mbps-Low Channel

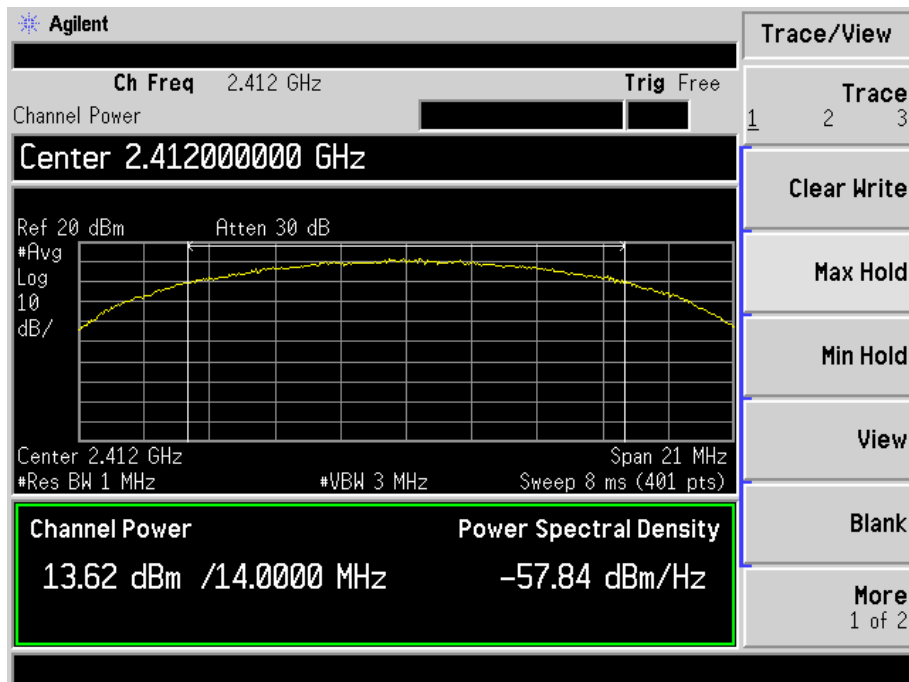


802.11b -11Mbps-Middle Channel

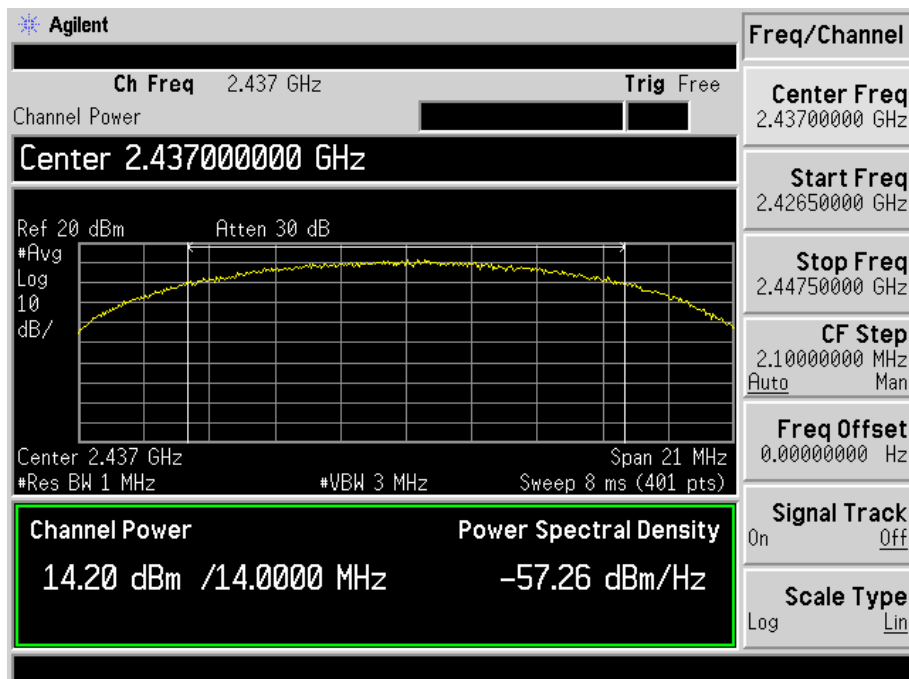


802.11b -11Mbps-High Channel

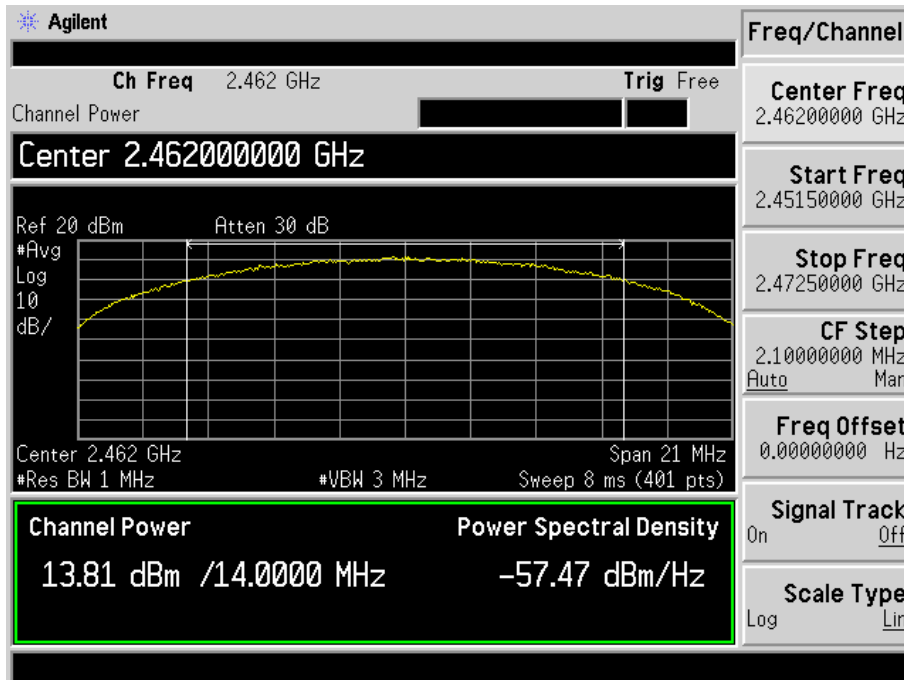


802.11g-54Mbps-Low Channel

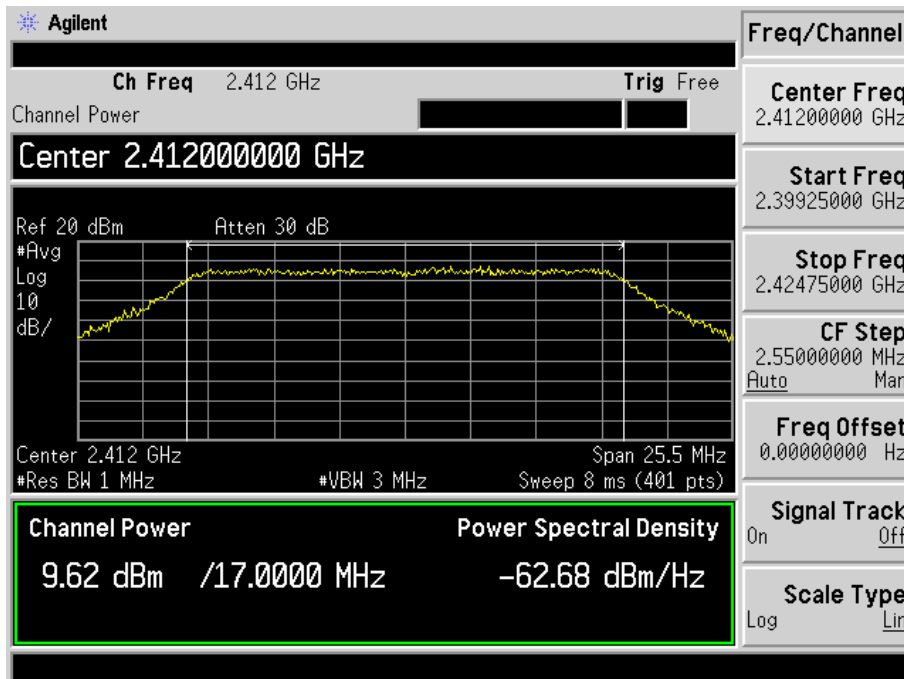


802.11g-54Mbps-Middle Channel

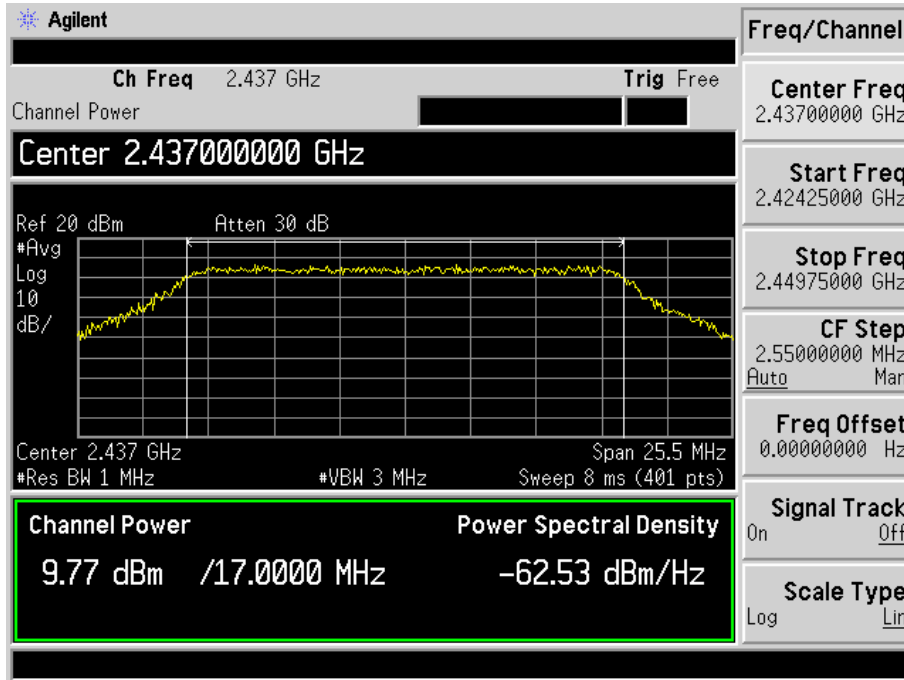


802.11g-54Mbps-High Channel

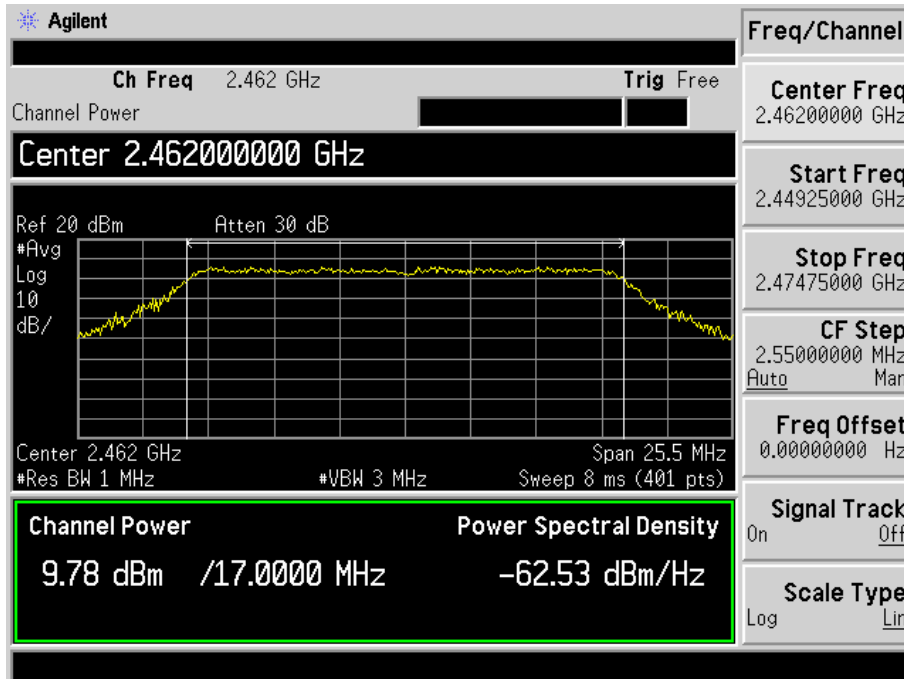


802.11n-HT20-MCS7-Low Channel

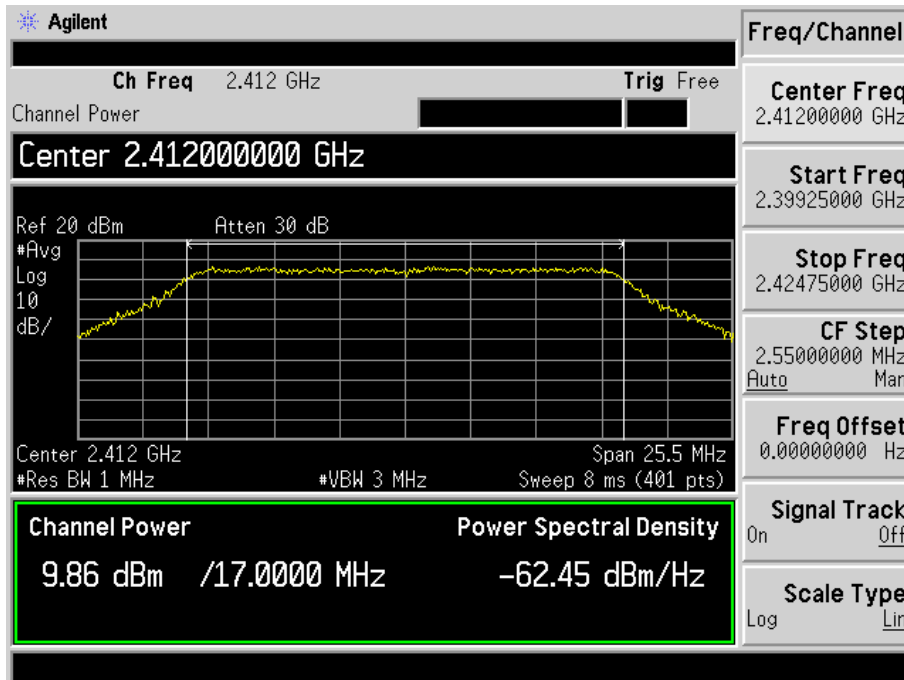


802.11n-HT20-MCS7-Middle Channel

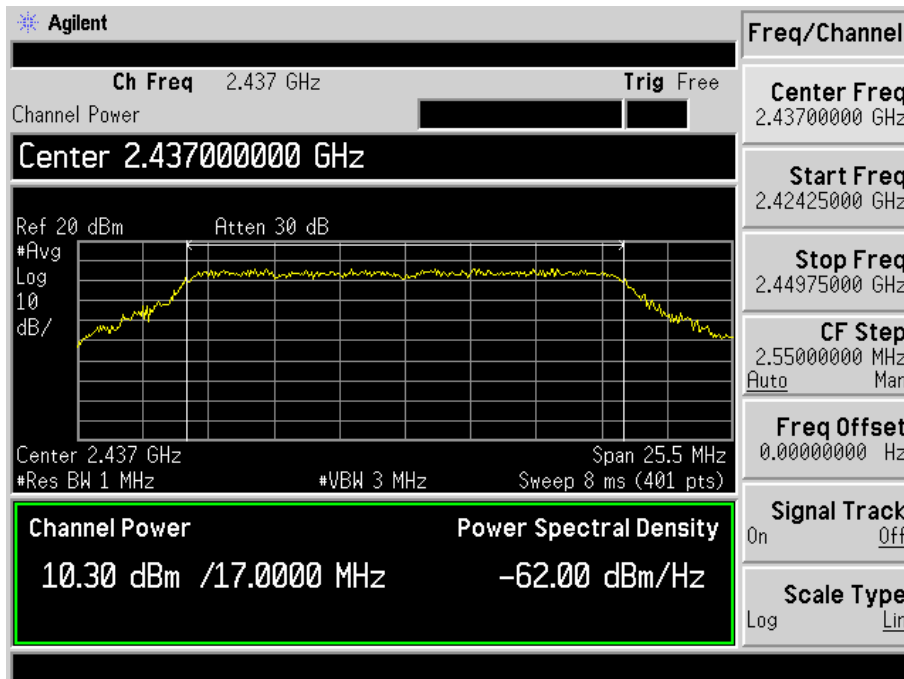


802.11n-HT20-MCS7-High Channel

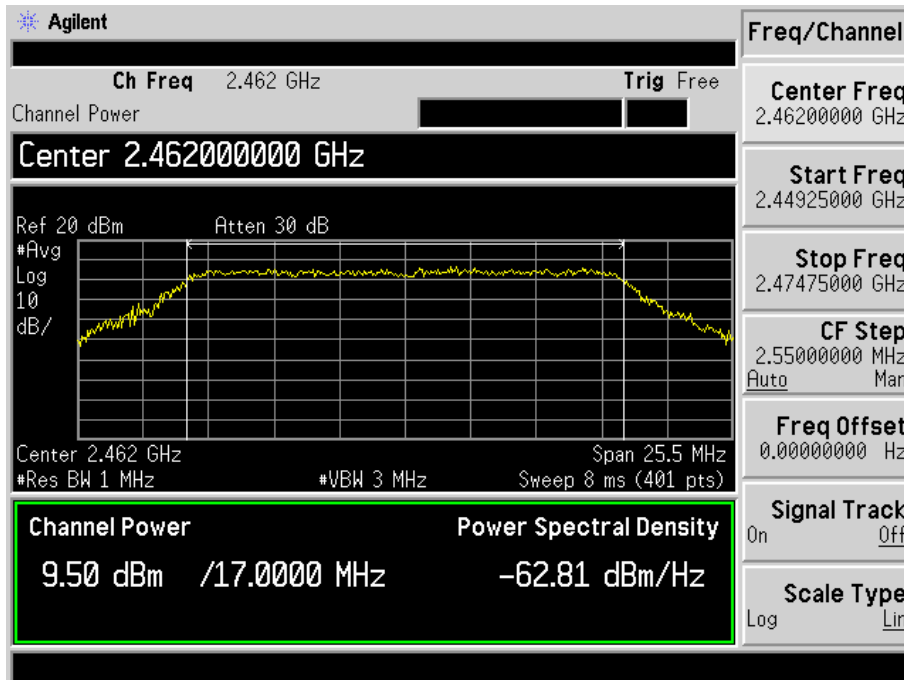


802.11n-HT40-MCS7-Low Channel

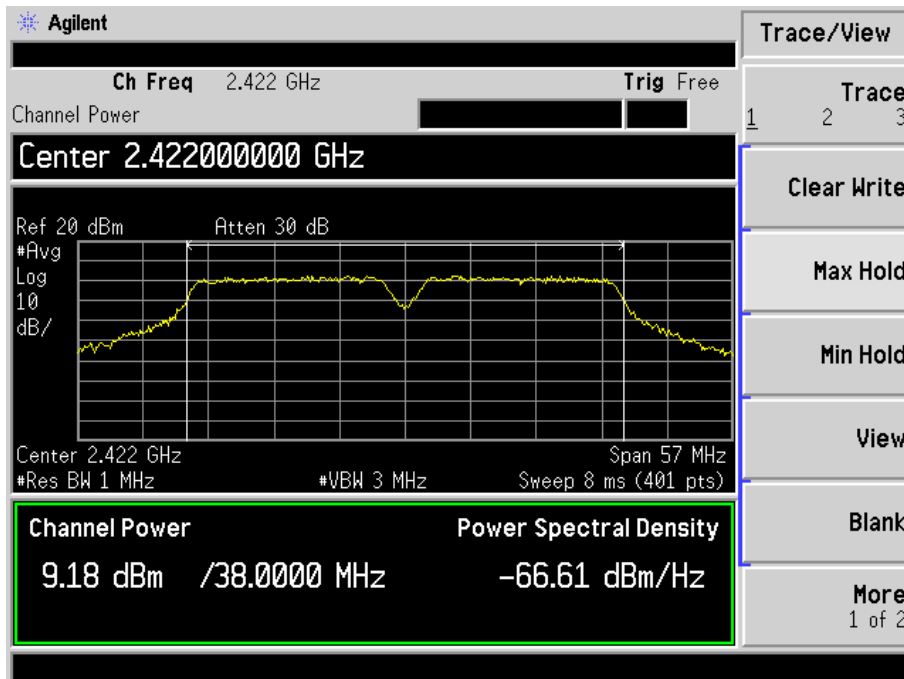

802.11n-HT40-MCS7-Middle Channel

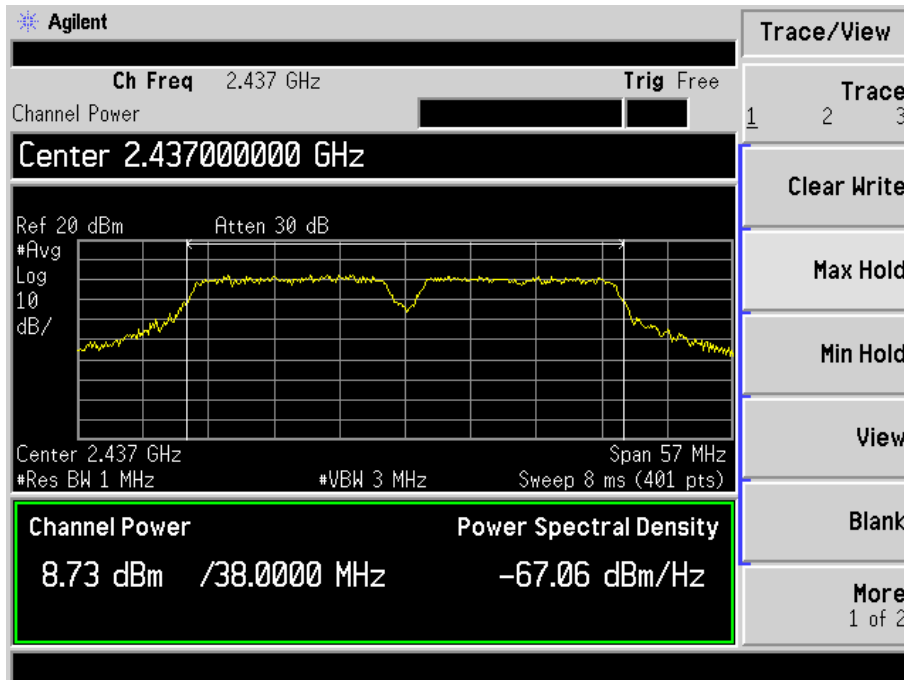

802.11n-HT40-MCS7-High Channel

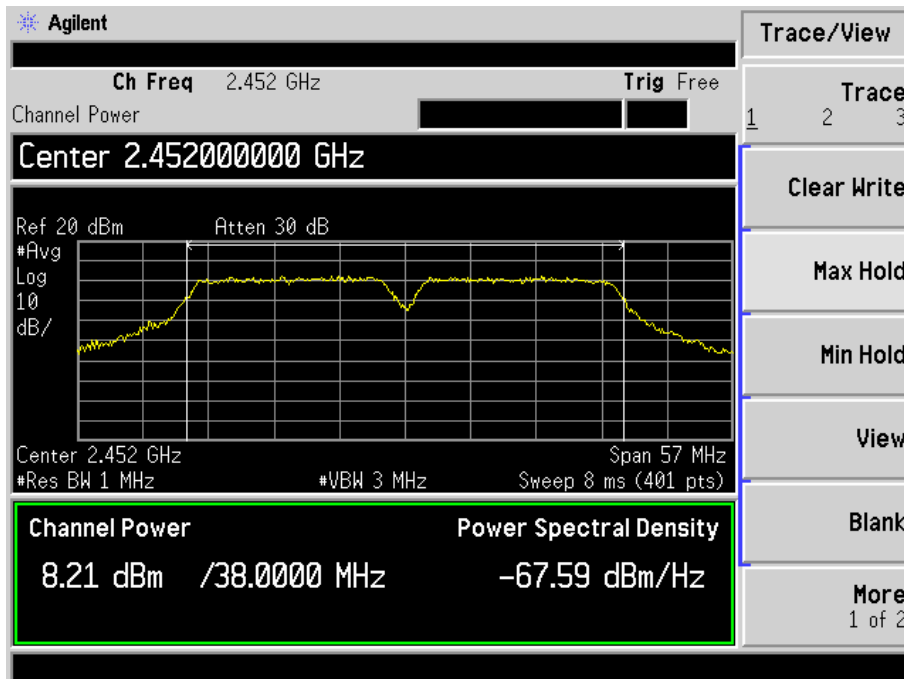

8. Field Strength of Spurious Emissions

8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

8.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

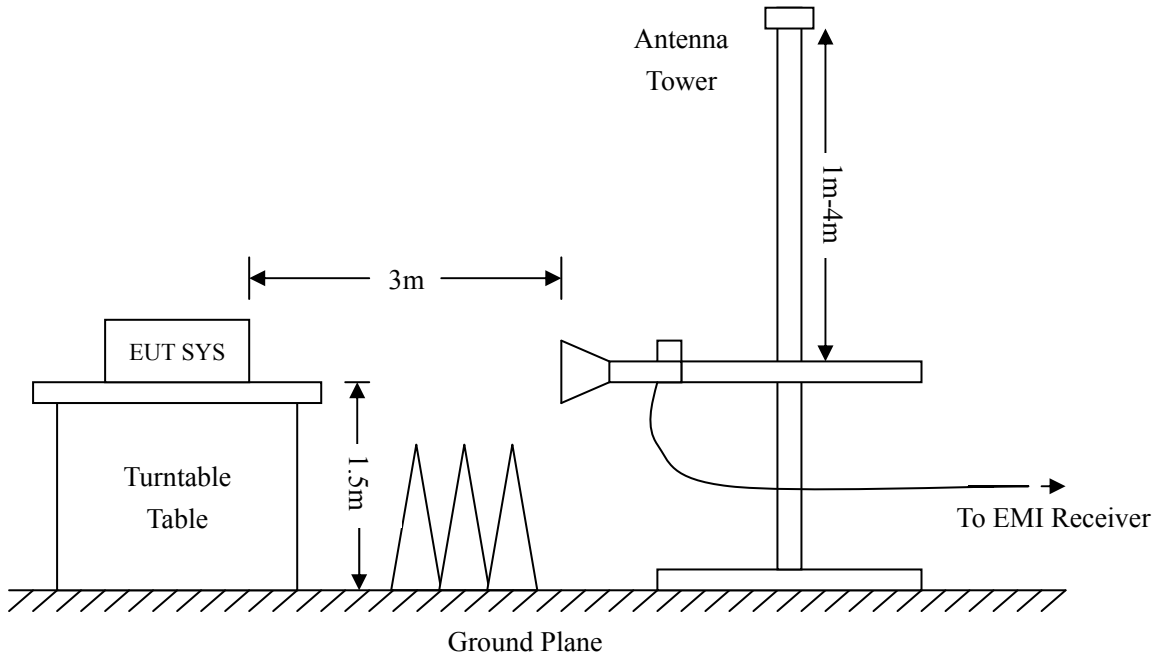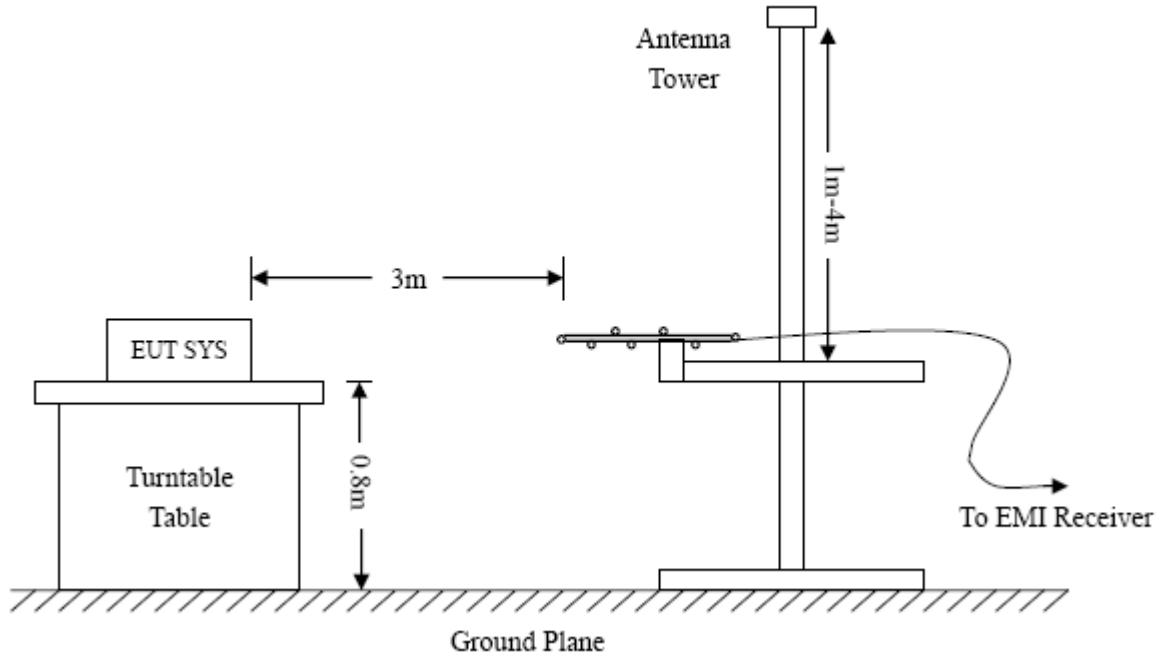

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar


8.6 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


Plot of Radiated Emissions Test Data (30MHz to 1GHz)

EUT: 360 video camera
 Tested Model: Insta360 4K beta
 Operating Condition: 802.11b Transmitting Low Channel-2412MHz
 Comment: 120V/60Hz; Adapter DC 5V/3A
 Test Specification: Horizontal

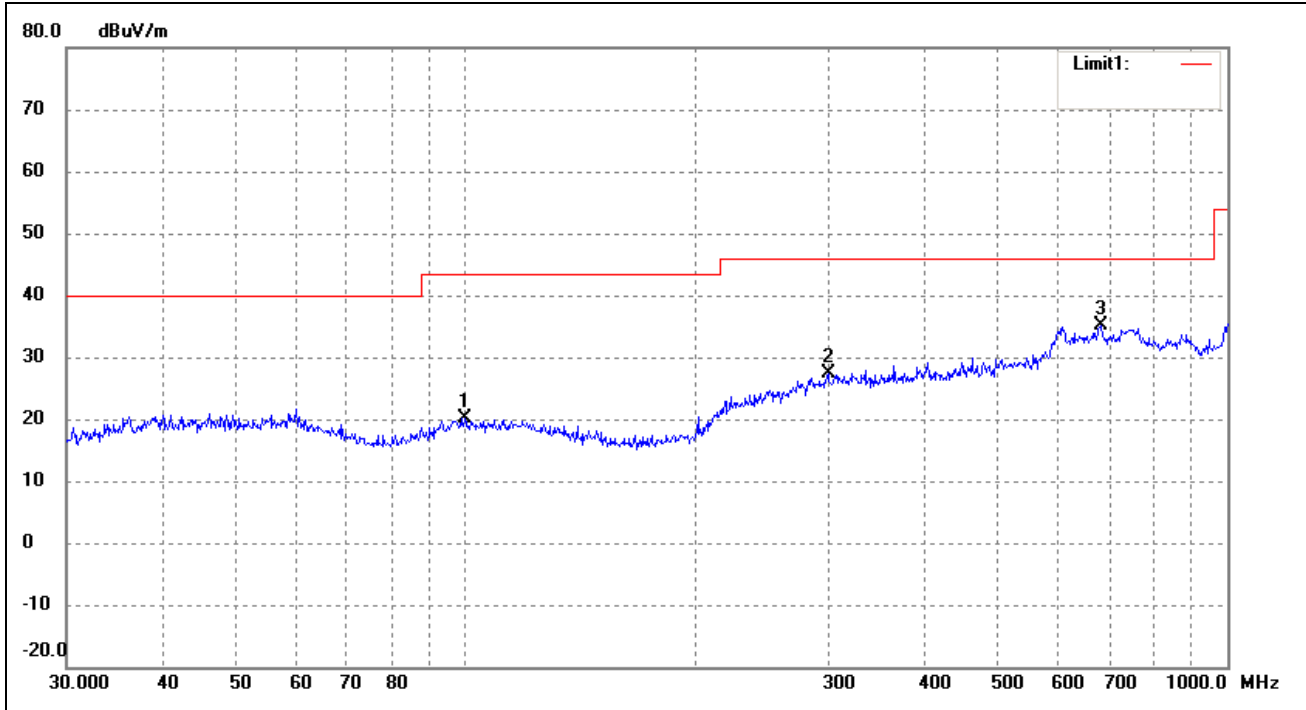

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	99.8777	15.14	5.11	20.25	43.50	-23.25	254	100	peak
2	299.3158	15.19	12.15	27.34	46.00	-18.66	100	100	peak
3	682.3485	15.96	19.08	35.04	46.00	-10.96	284	100	peak

Test Specification: Vertical

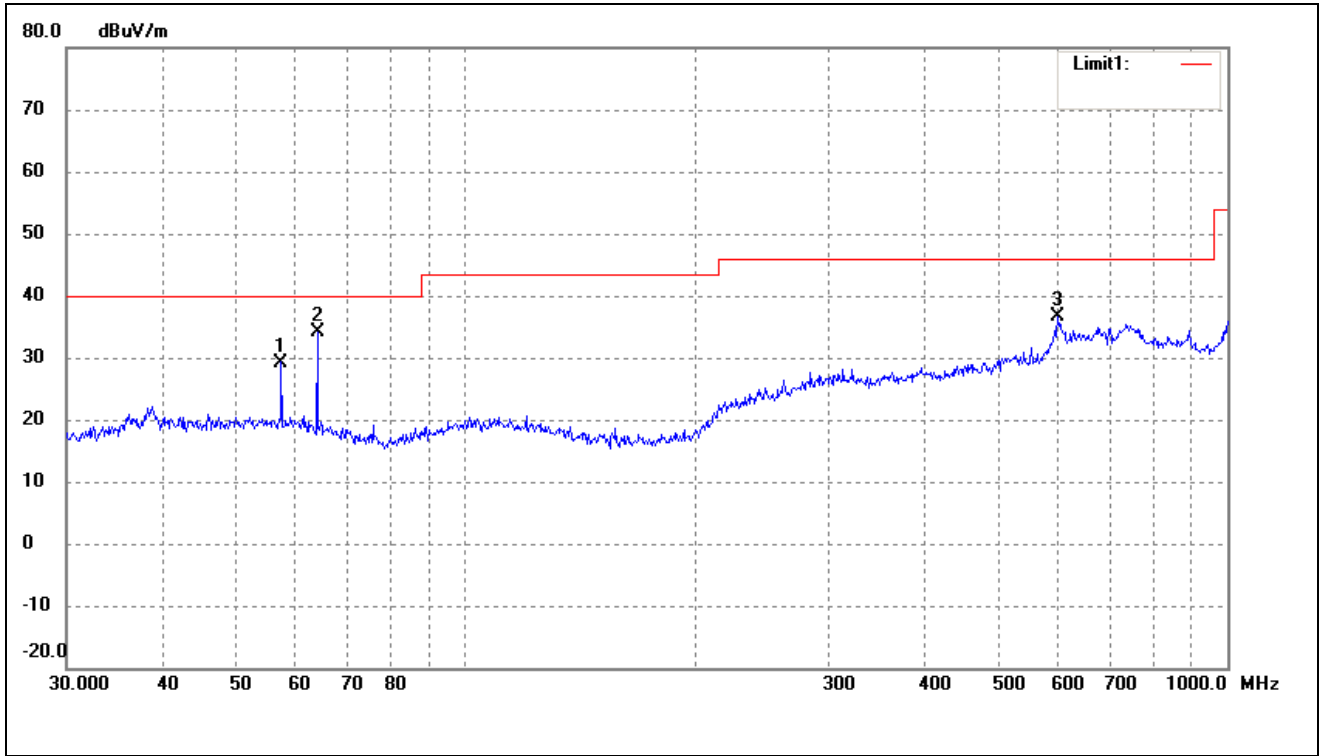


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	57.3923	23.91	5.34	29.25	40.00	-10.75	100	100	peak
2	63.9828	29.75	4.50	34.25	40.00	-5.75	100	100	peak
3	599.3213	17.38	19.19	36.57	46.00	-9.43	100	100	peak

Operating Condition: 802.11b Transmitting Middle Channel-2437MHz


Comment: 120V/60Hz; Adapter DC 5V/3A

Test Specification: Horizontal

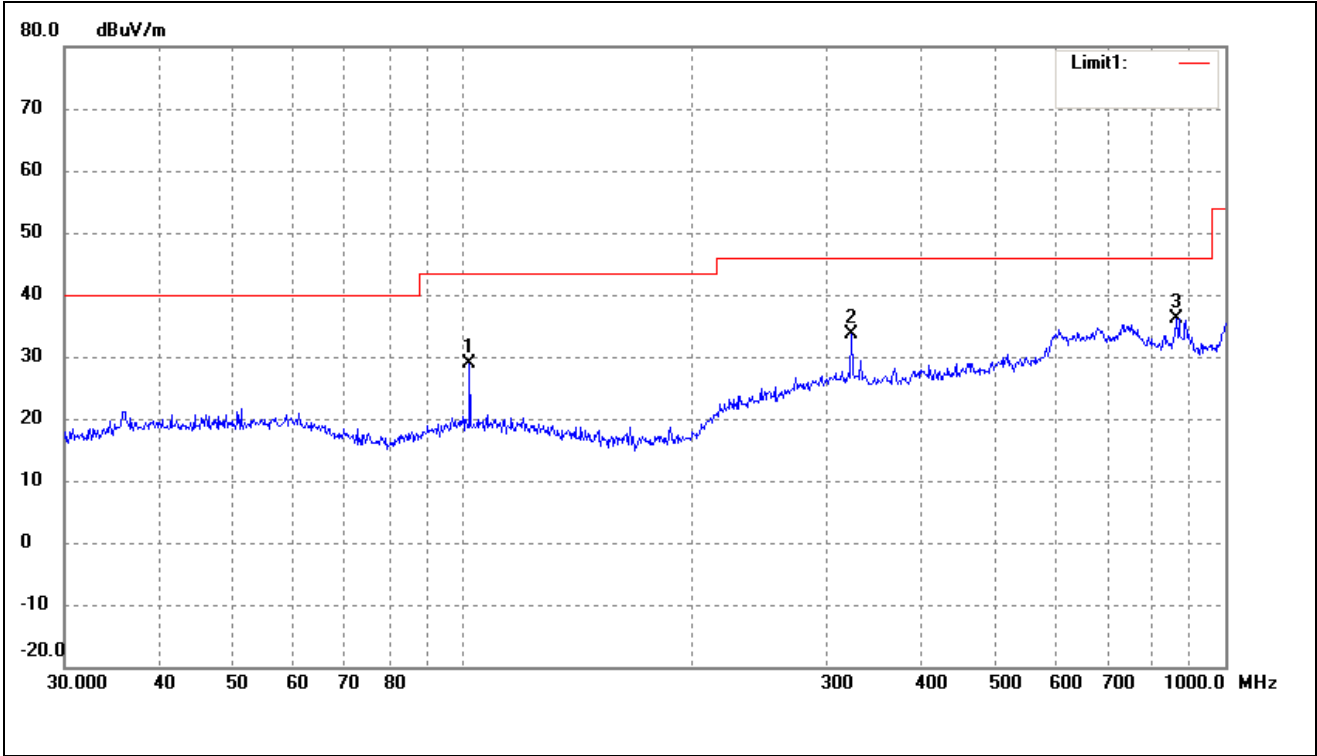

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	102.0014	23.77	5.11	28.88	43.50	-14.62	100	100	peak
2	323.3204	21.32	12.19	33.51	46.00	-12.49	100	100	peak
3	863.0562	18.82	17.38	36.20	46.00	-9.80	100	100	peak

Test Specification: Vertical

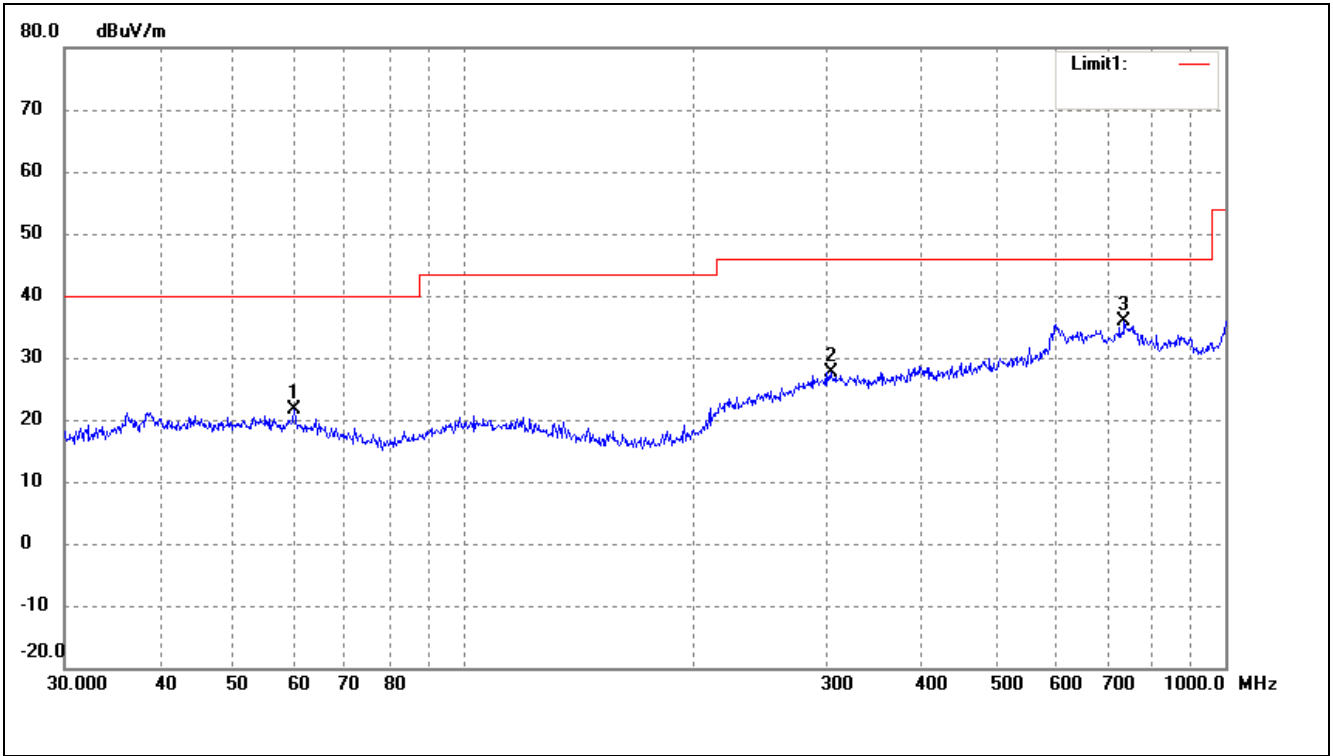


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	60.0691	16.32	5.36	21.68	40.00	-18.32	256	100	peak
2	303.5437	15.45	12.19	27.64	46.00	-18.36	360	100	peak
3	737.0714	16.47	19.37	35.84	46.00	-10.16	360	100	peak

Operating Condition: 802.11b Transmitting High Channel-2462MHz


Comment: 120V/60Hz; Adapter DC 5V/3A

Test Specification: Horizontal

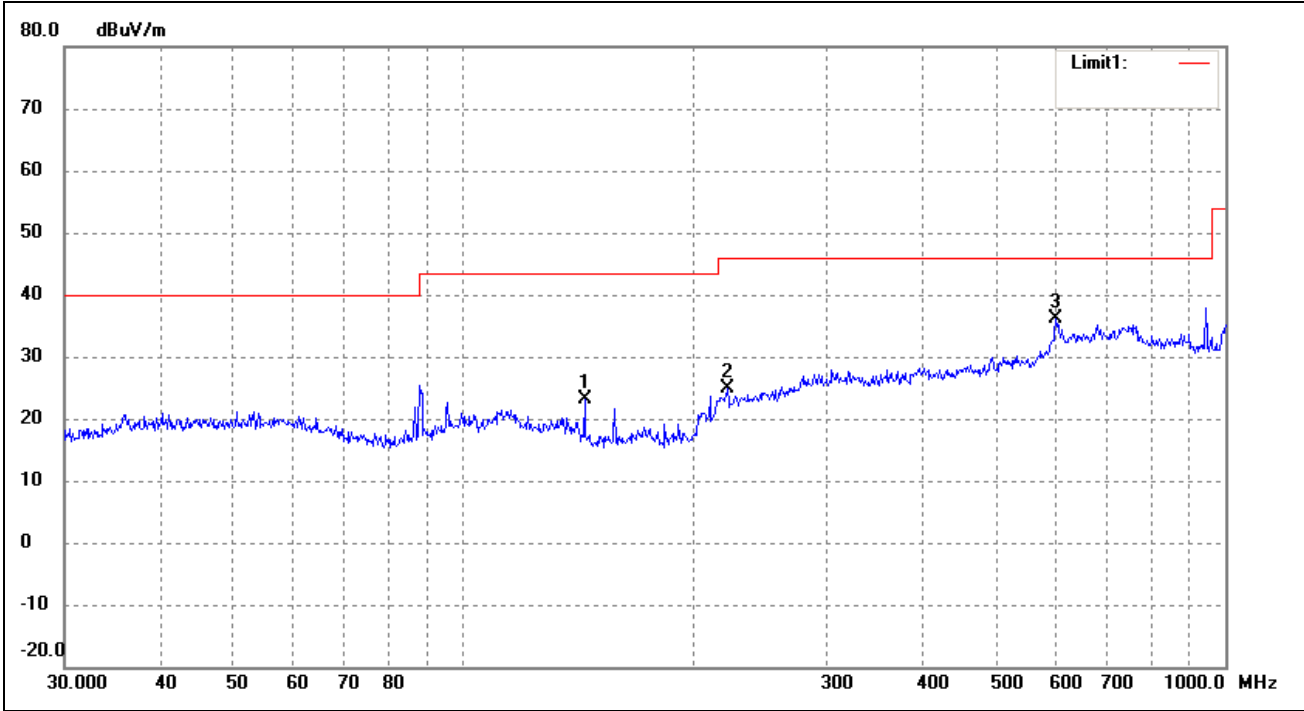

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	144.3348	19.88	3.23	23.11	43.50	-20.39	176	100	peak
2	222.1698	16.68	8.24	24.92	46.00	-21.08	255	100	peak
3	599.3213	16.89	19.19	36.08	46.00	-9.92	360	100	peak


Test Specification: Vertical

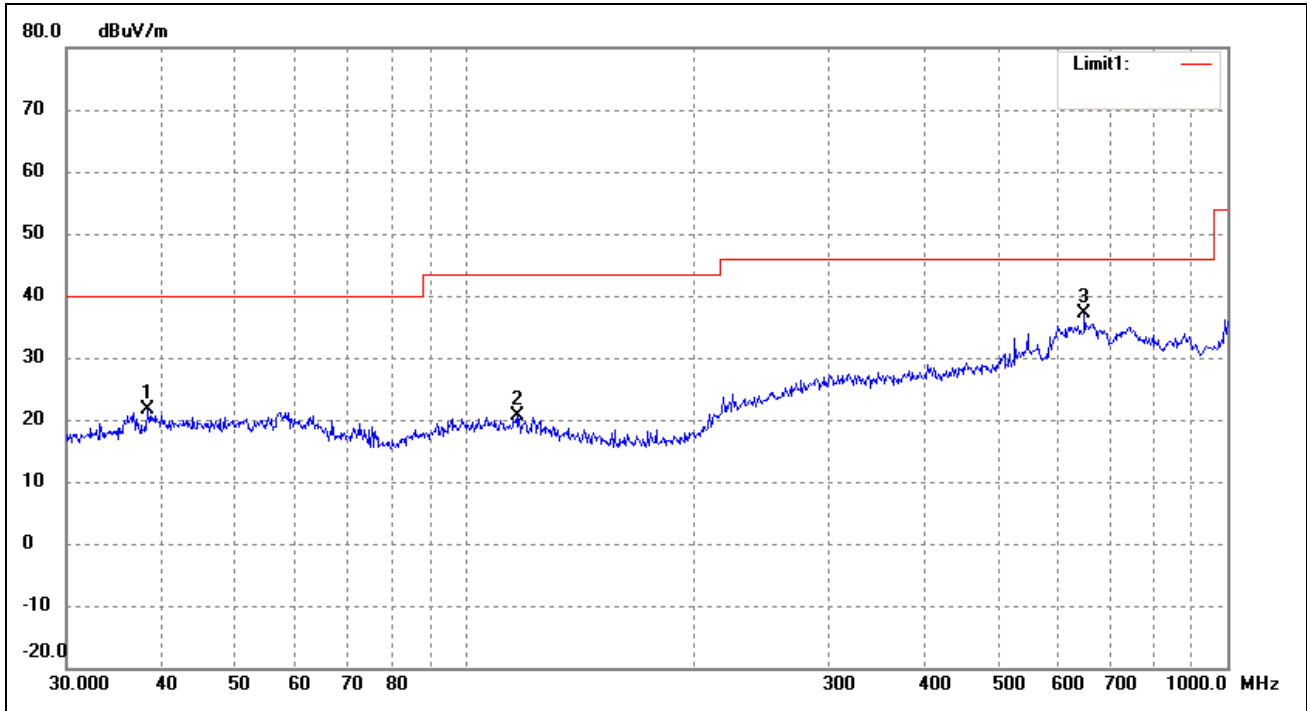

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	38.3462	16.66	4.97	21.63	40.00	-18.37	360	100	peak
2	116.9495	15.57	5.03	20.60	43.50	-22.90	225	100	peak
3	649.6597	18.64	18.39	37.03	46.00	-8.97	160	100	peak


Plot of Radiated Emissions Test Data (30MHz to 1GHz)

EUT: 360 video camera
 Tested Model: Insta360 4K beta
 Operating Condition: 802.11g Transmitting Low Channel-2412MHz
 Comment: 120V/60Hz; Adapter DC 5V/3A
 Test Specification: Horizontal

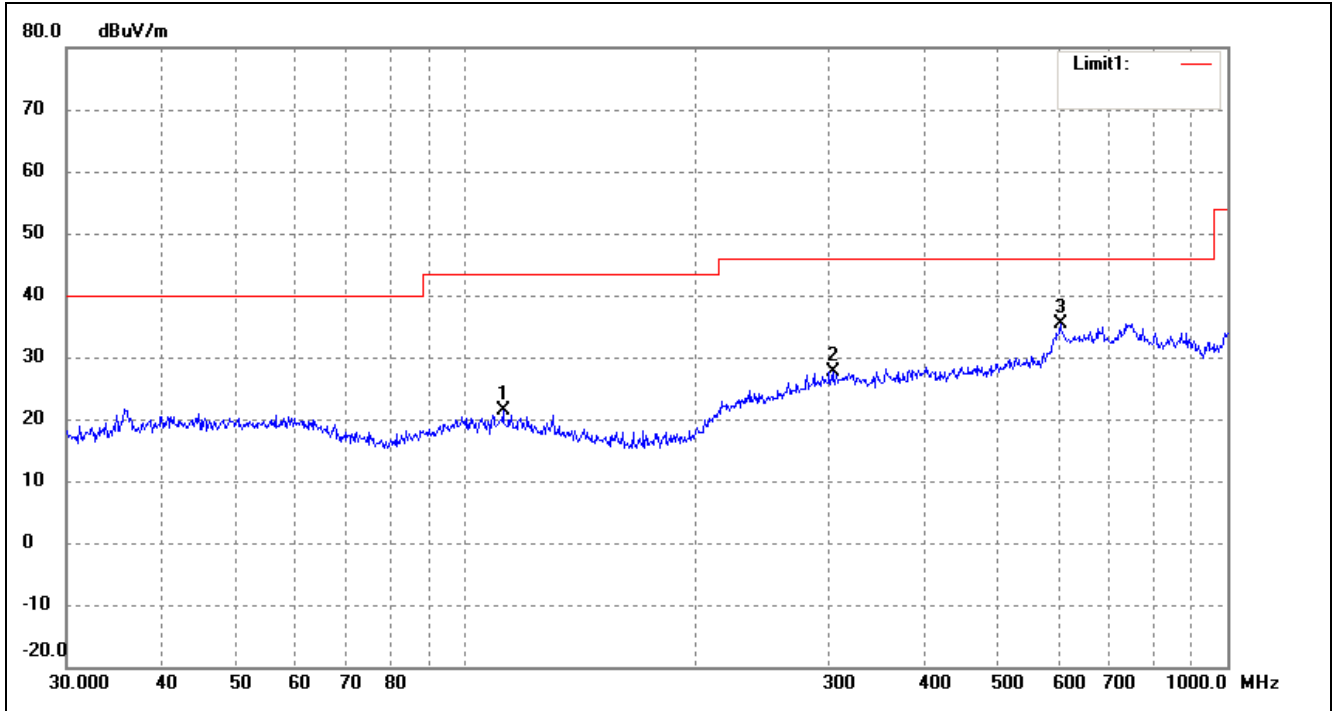

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	112.1305	16.23	5.06	21.29	43.50	-22.21	100	100	peak
2	303.5437	15.50	12.19	27.69	46.00	-18.31	160	100	peak
3	603.5392	16.42	19.06	35.48	46.00	-10.52	320	100	peak

Test Specification: Vertical

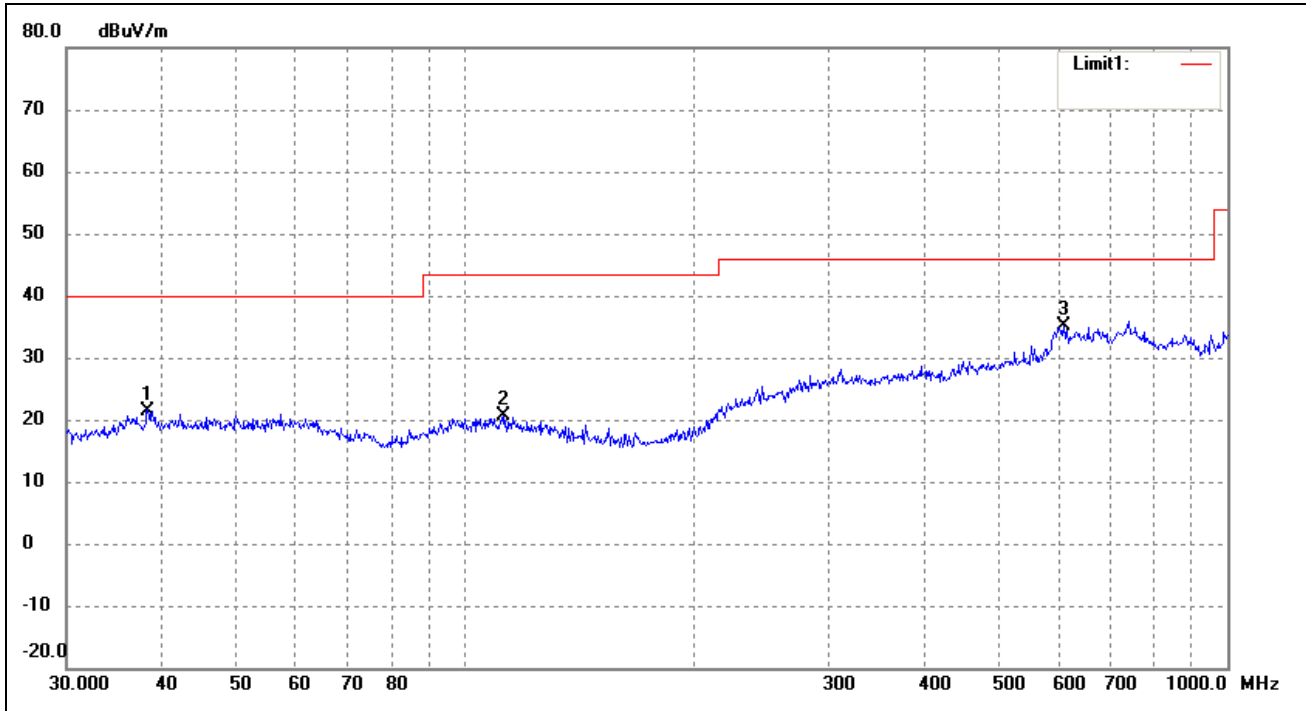


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	38.3462	16.53	4.97	21.50	40.00	-18.50	100	100	peak
2	112.5244	15.58	5.06	20.64	43.50	-22.86	100	100	peak
3	609.9217	16.56	18.63	35.19	46.00	-10.81	336	100	peak

Operating Condition: 802.11g Transmitting Middle Channel-2437MHz


Comment: 120V/60Hz; Adapter DC 5V/3A

Test Specification: Horizontal

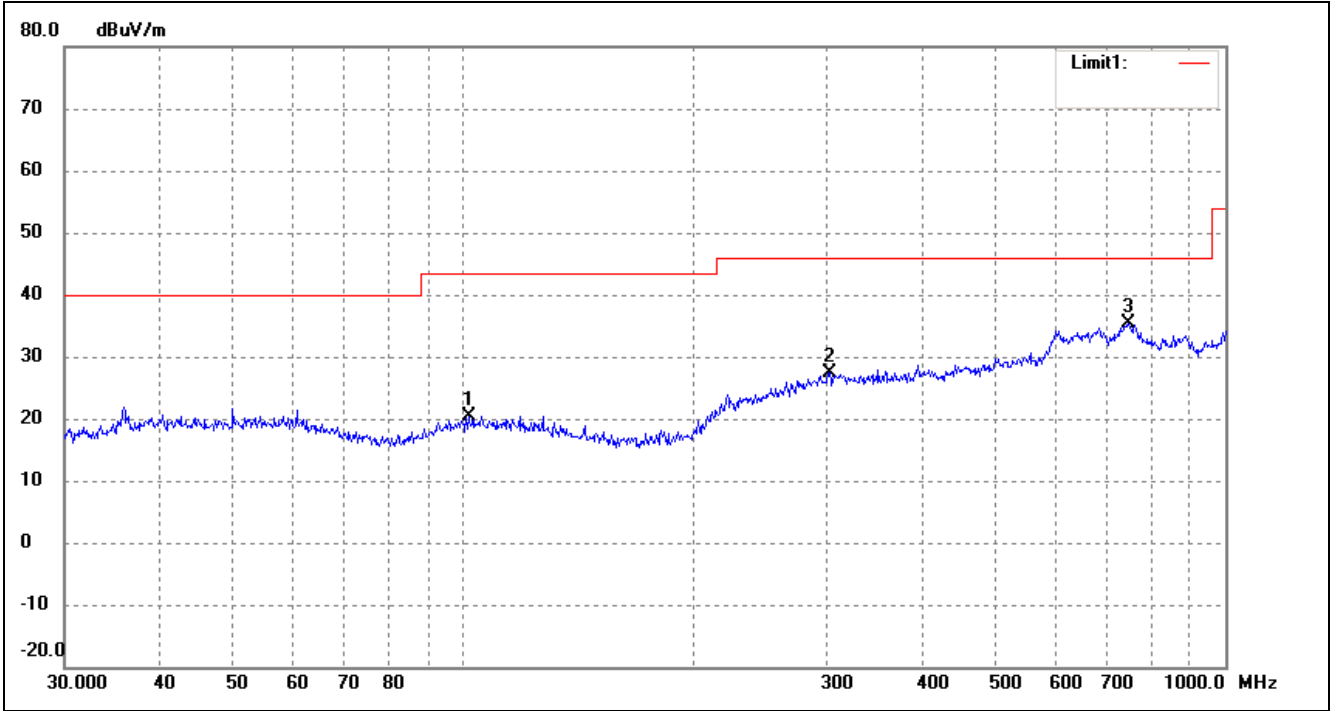

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	101.6443	15.22	5.11	20.33	43.50	-23.17	270	100	peak
2	302.4812	15.10	12.19	27.29	46.00	-18.71	100	100	peak
3	744.8661	16.08	19.33	35.41	46.00	-10.59	228	200	peak

Test Specification: Vertical

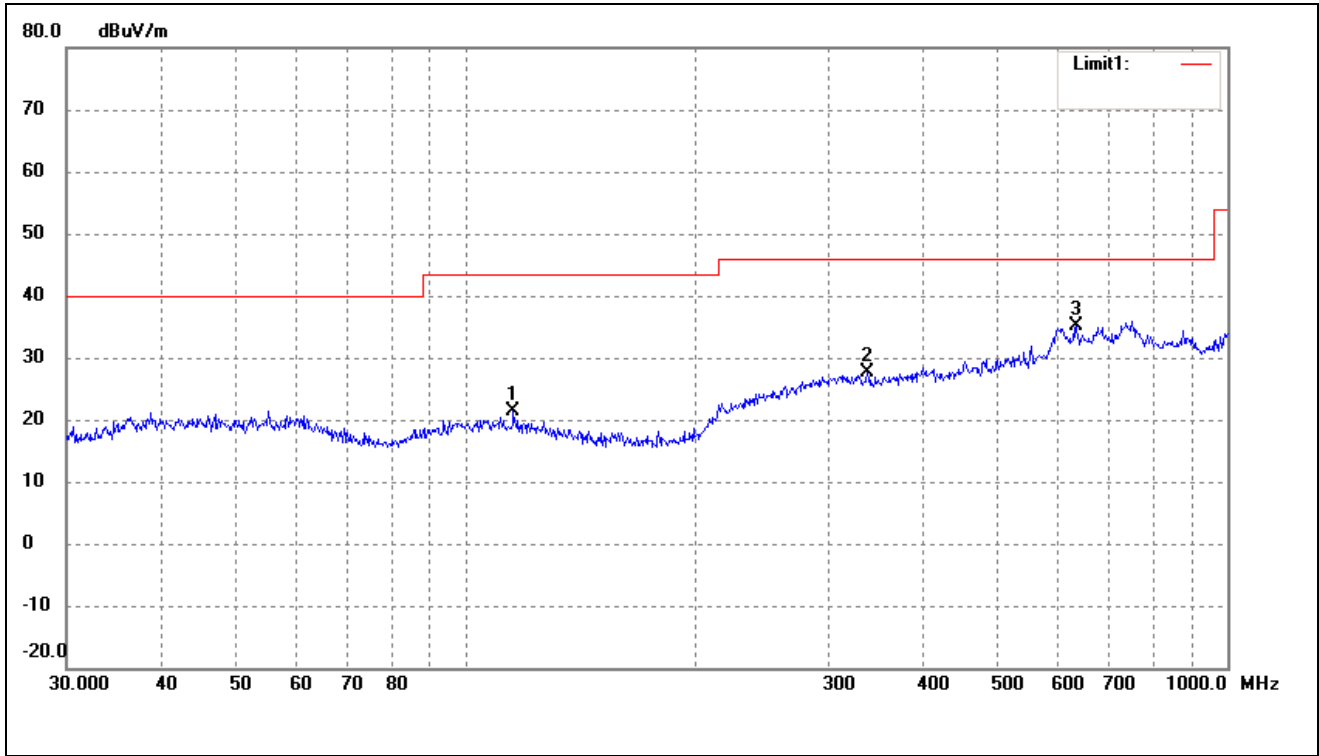


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	115.7256	16.43	5.04	21.47	43.50	-22.03	360	100	peak
2	337.2155	15.89	11.80	27.69	46.00	-18.31	100	100	peak
3	633.9073	16.60	18.41	35.01	46.00	-10.99	100	100	peak

Operating Condition: 802.11g Transmitting High Channel-2462MHz


Comment: 120V/60Hz; Adapter DC 5V/3A

Test Specification: Horizontal

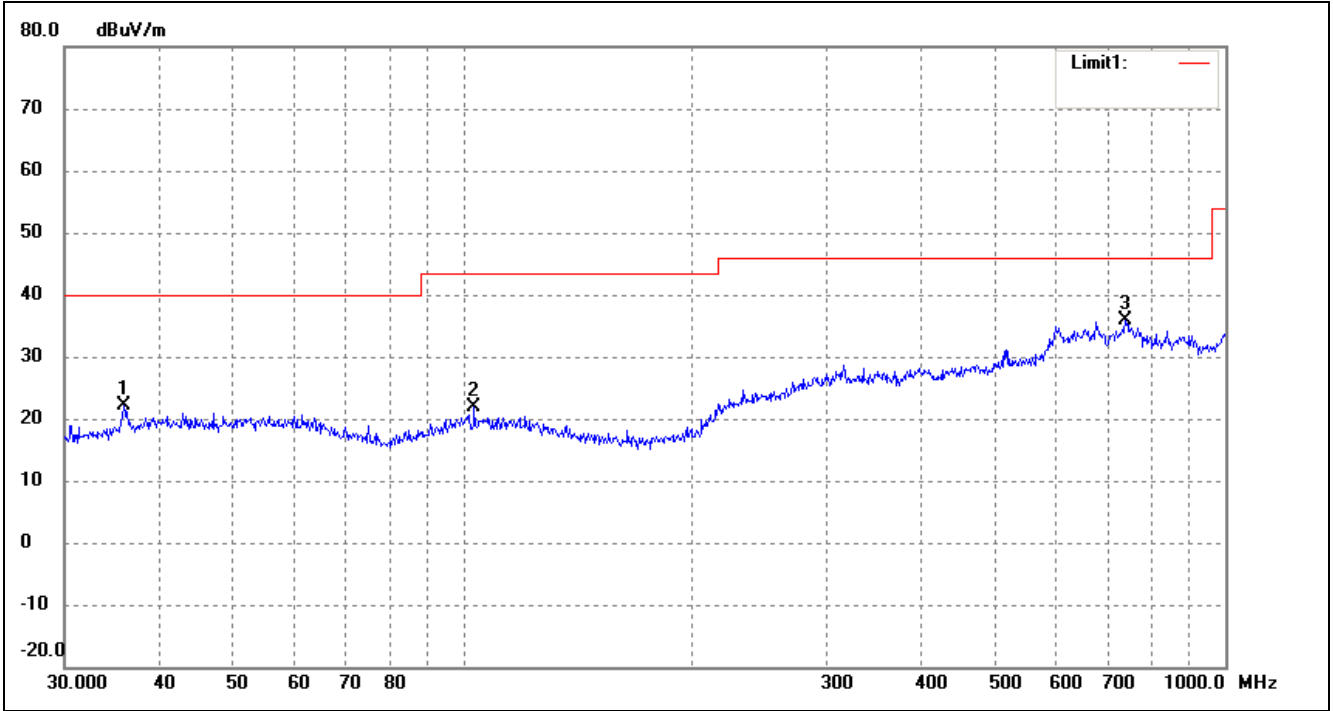

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	35.8747	17.61	4.54	22.15	40.00	-17.85	270	100	peak
2	103.4421	16.74	5.12	21.86	43.50	-21.64	100	200	peak
3	739.6605	16.37	19.53	35.90	46.00	-10.10	100	200	peak


Test Specification: Vertical

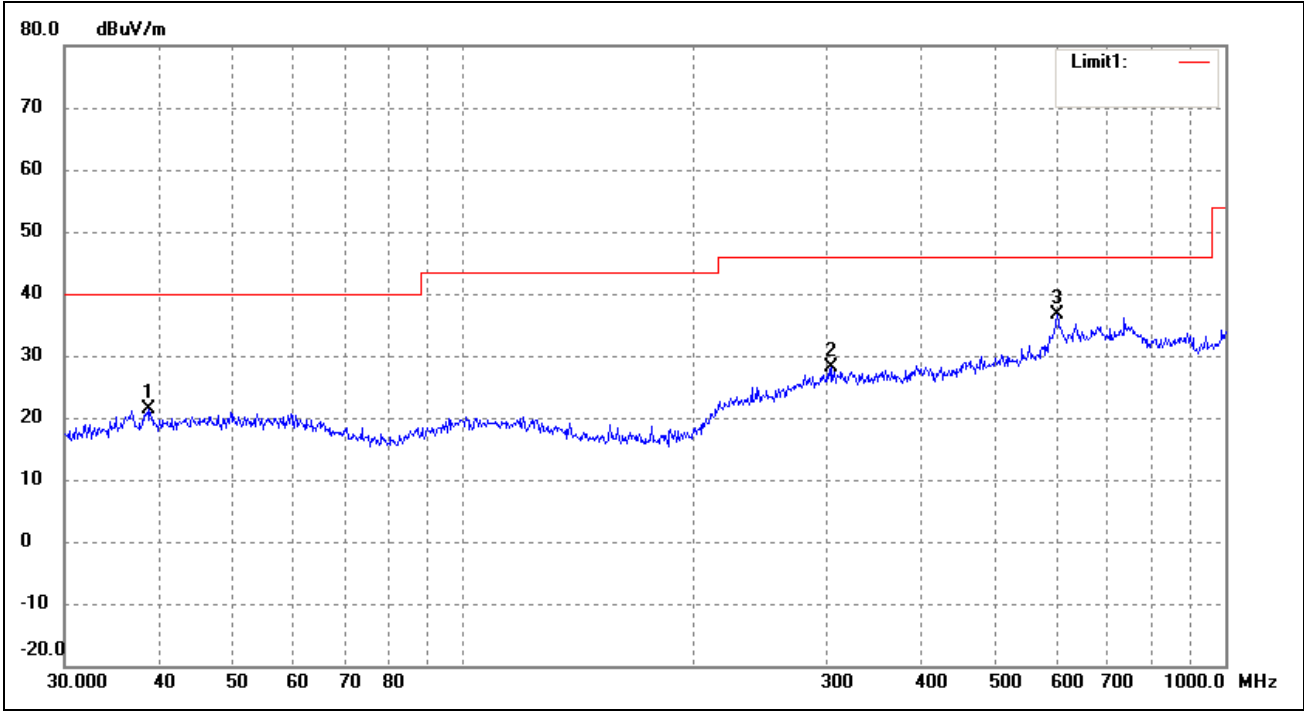

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	38.6161	16.37	5.01	21.38	40.00	-18.62	360	100	peak
2	304.6100	16.01	12.19	28.20	46.00	-17.80	100	100	peak
3	601.4265	17.40	19.22	36.62	46.00	-9.38	100	100	peak


Plot of Radiated Emissions Test Data (30MHz to 1GHz)

EUT: 360 video camera
 Tested Model: Insta360 4K beta
 Operating Condition: 802.11n-HT20 Transmitting Low Channel-2412MHz
 Comment: 120V/60Hz; Adapter DC 5V/3A
 Test Specification: Horizontal

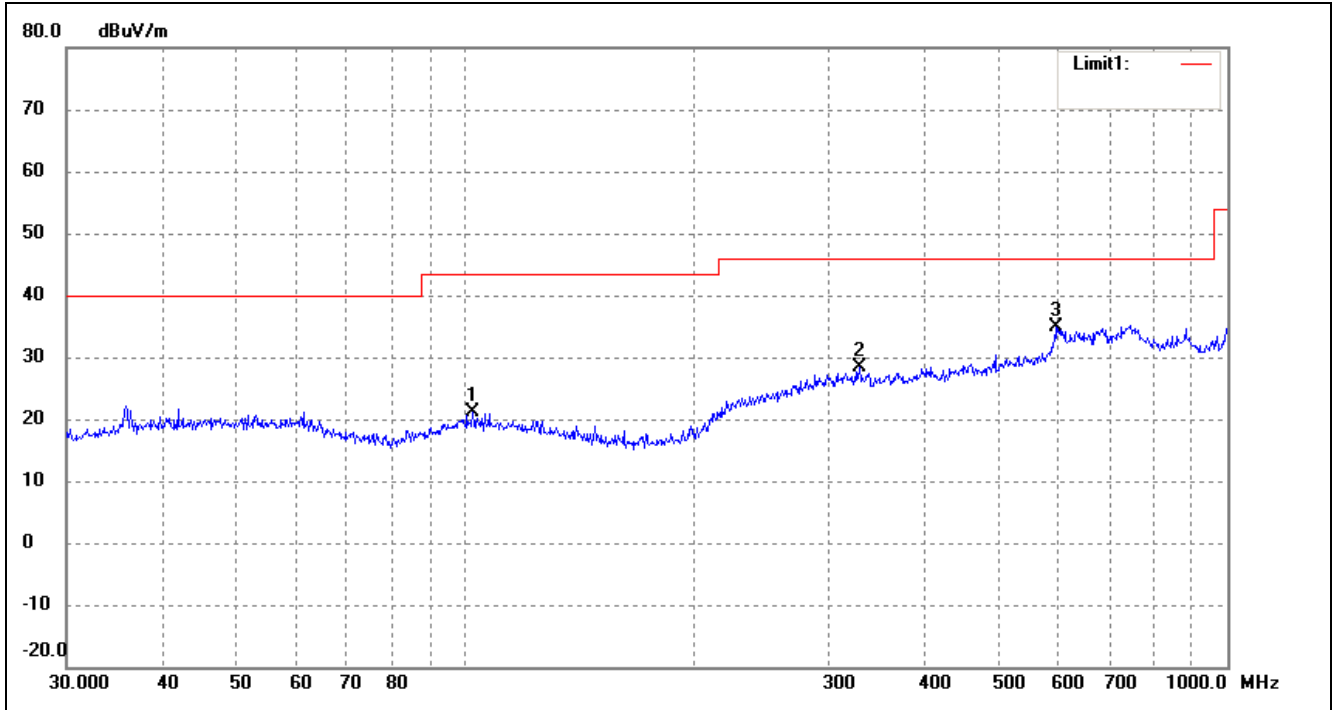

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	102.3597	16.02	5.12	21.14	43.50	-22.36	260	100	peak
2	329.0390	16.31	12.03	28.34	46.00	-17.66	100	200	peak
3	595.1329	16.37	18.41	34.78	46.00	-11.22	285	200	peak

Test Specification: Vertical

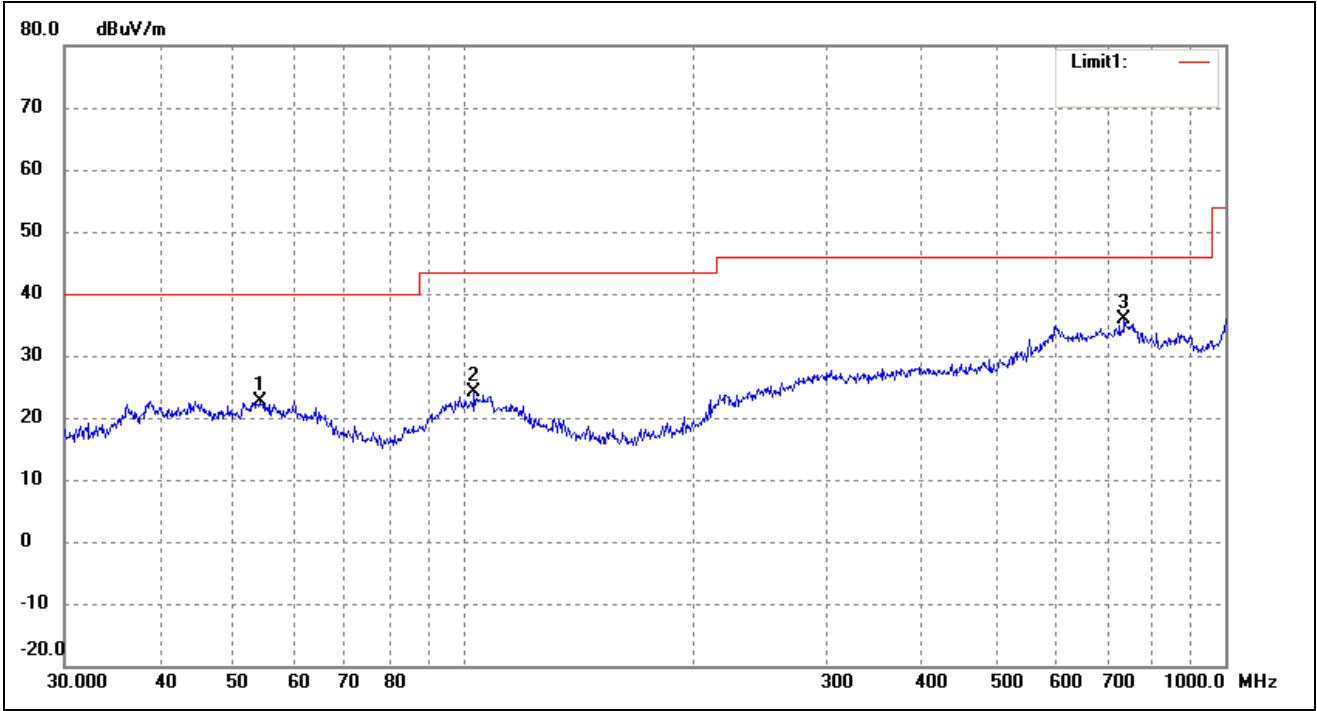


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	54.0711	17.33	5.31	22.64	40.00	-17.36	155	100	peak
2	103.4420	19.08	5.12	24.20	43.50	-19.30	100	100	peak
3	737.0714	16.47	19.37	35.84	46.00	-10.16	100	100	peak

Operating Condition: 802.11n-HT20 Transmitting Middle Channel-2437MHz


Comment: 120V/60Hz; Adapter DC 5V/3A

Test Specification: Horizontal

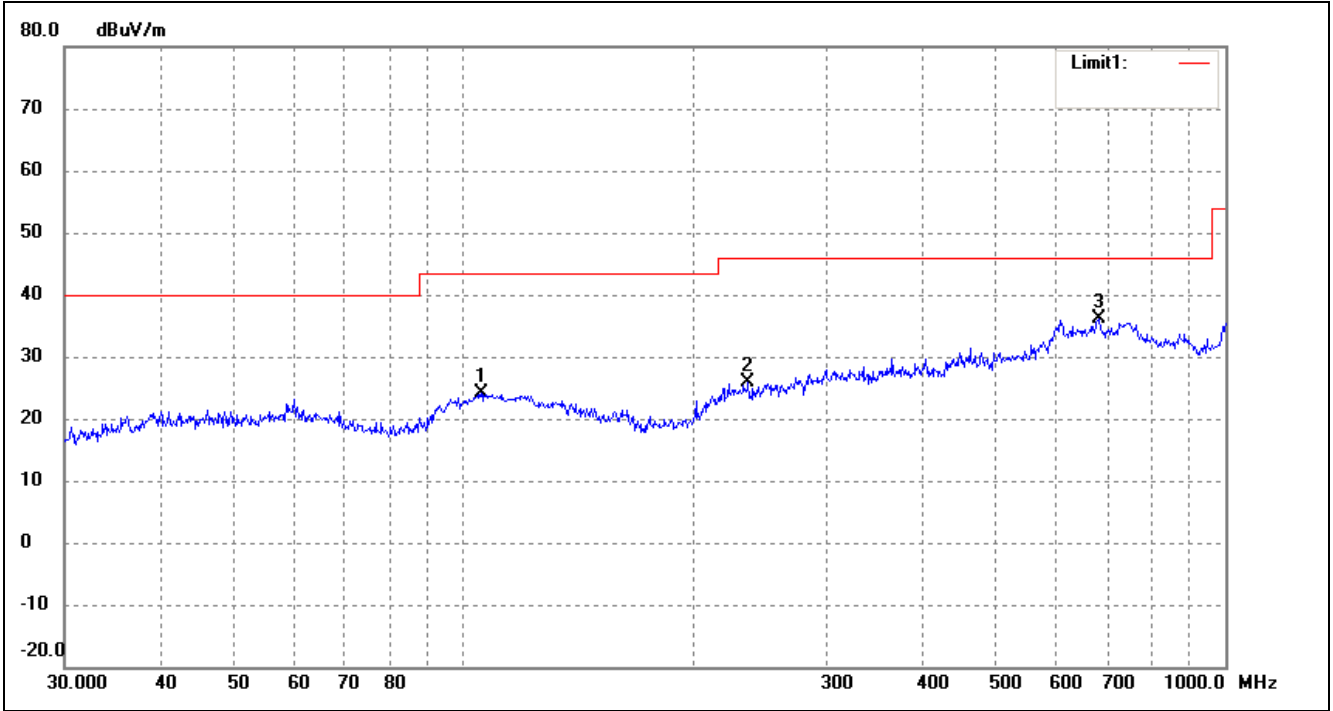

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	105.6414	18.94	5.09	24.03	43.50	-19.47	274	100	peak
2	236.6447	16.63	9.13	25.76	46.00	-20.24	116	100	peak
3	682.3484	16.96	19.08	36.04	46.00	-9.96	100	100	peak

Test Specification: Vertical

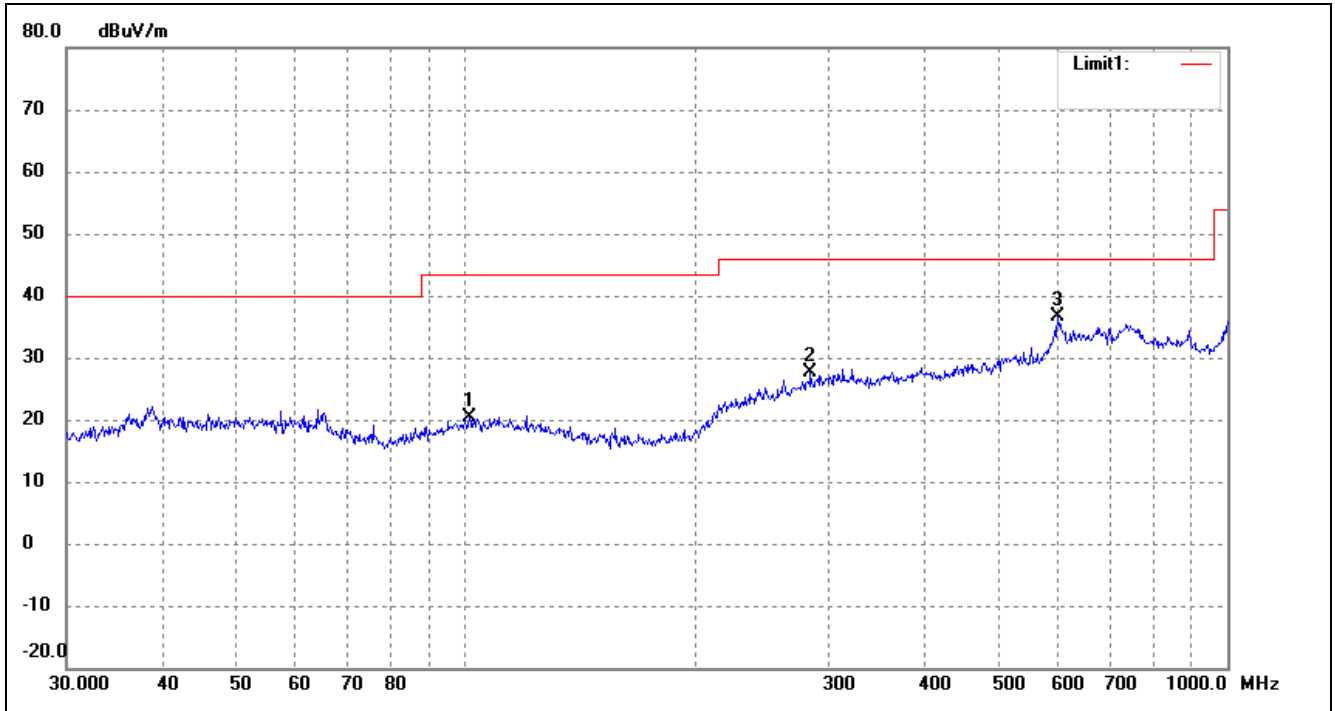


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	101.2884	15.31	5.12	20.43	43.50	-23.07	100	100	peak
2	283.9791	16.03	11.55	27.58	46.00	-18.42	100	100	peak
3	599.3212	17.38	19.19	36.57	46.00	-9.43	100	100	peak

Operating Condition: 802.11n-HT20 Transmitting High Channel-2462MHz


Comment: 120V/60Hz; Adapter DC 5V/3A

Test Specification: Horizontal

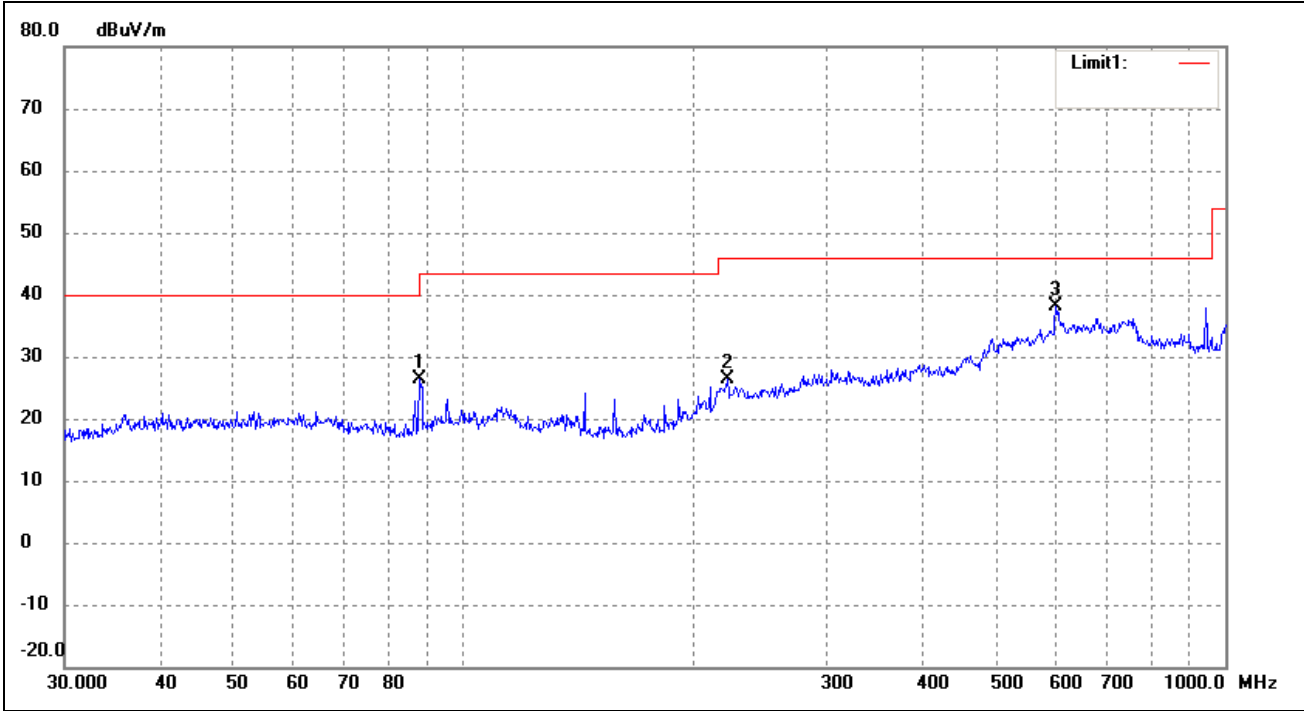

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	87.7248	23.17	3.25	26.42	40.00	-13.58	360	100	peak
2	222.1698	18.18	8.24	26.42	46.00	-19.58	100	100	peak
3	599.3212	18.89	19.19	38.08	46.00	-7.92	100	200	peak


Test Specification: Vertical

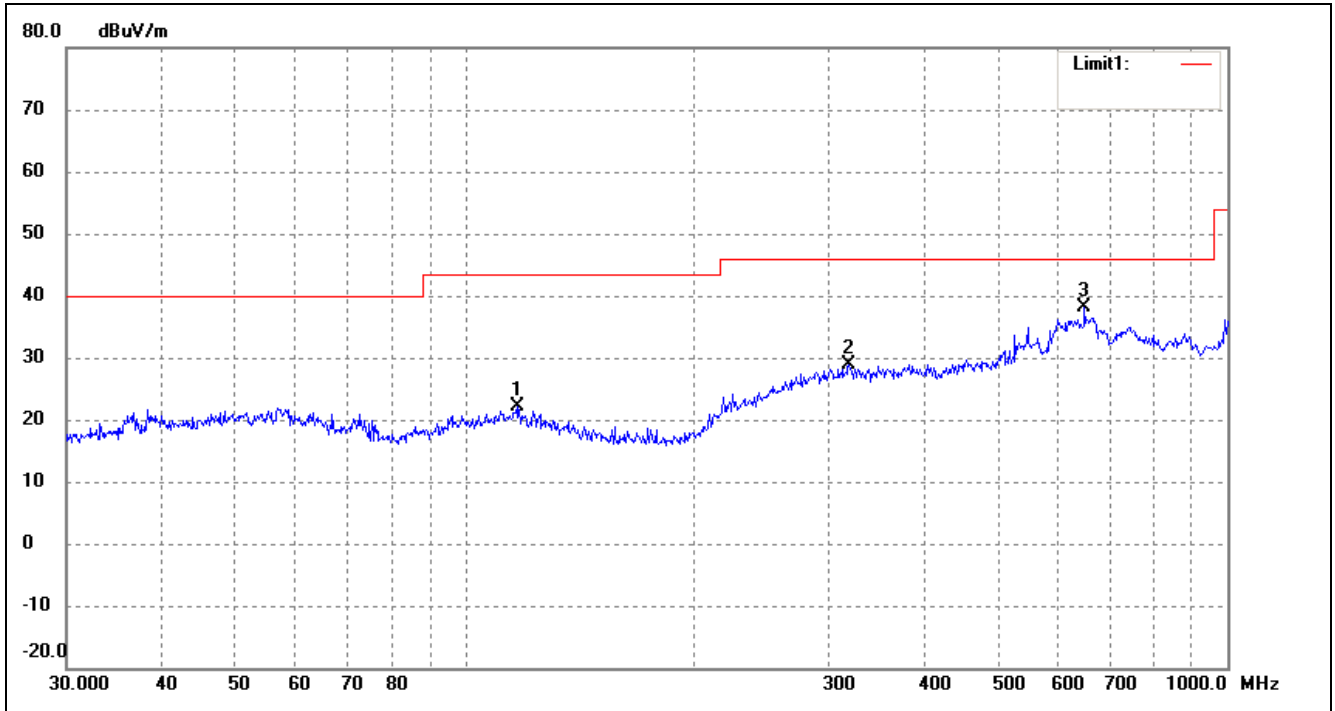

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	116.9495	17.07	5.03	22.10	43.50	-21.40	100	100	peak
2	318.8170	16.71	12.28	28.99	46.00	-17.01	100	100	peak
3	649.6597	19.64	18.39	38.03	46.00	-7.97	360	100	peak


EUT: 360 video camera
 Tested Model: Insta360 4K beta
 Operating Condition: 802.11n-HT40 Transmitting Low Channel-2422MHz
 Comment: 120V/60Hz; Adapter DC 5V/3A

Test Specification: Horizontal

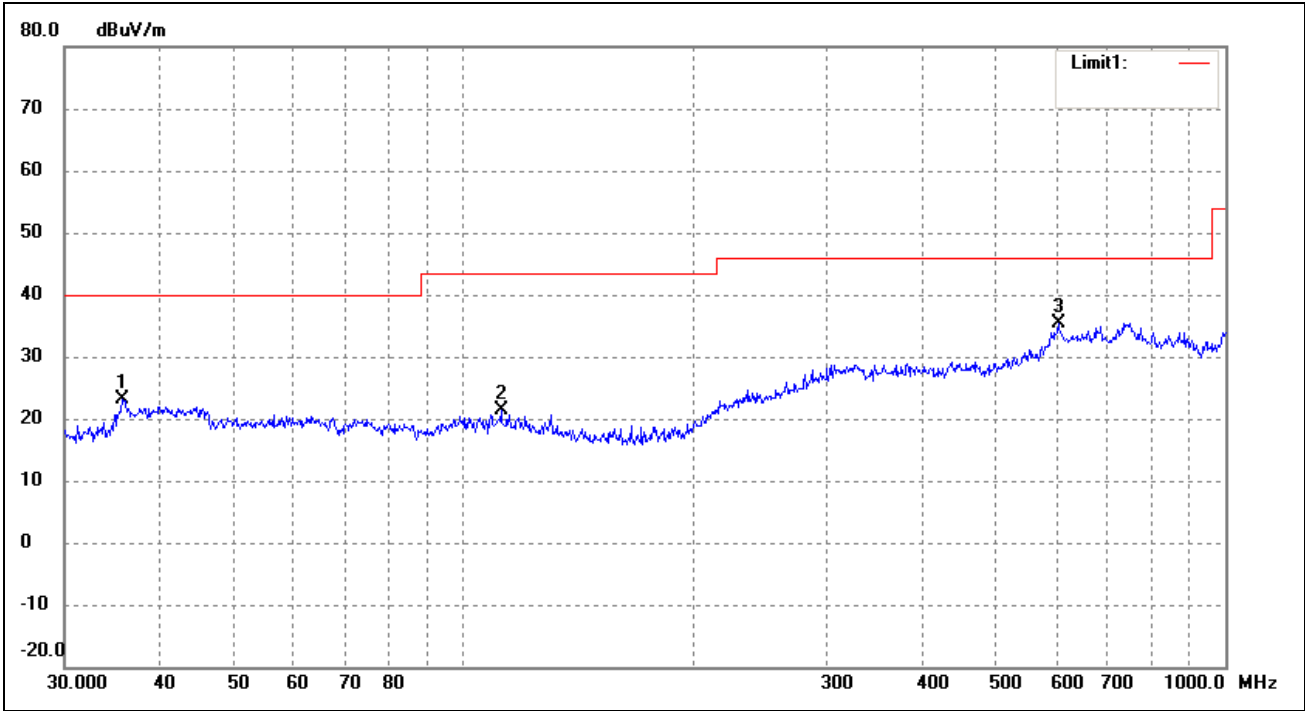

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	35.7490	18.51	4.51	23.02	40.00	-16.98	267	100	peak
2	112.1304	16.23	5.06	21.29	43.50	-22.21	100	200	peak
3	603.5392	16.42	19.06	35.48	46.00	-10.52	100	200	peak

Test Specification: Vertical

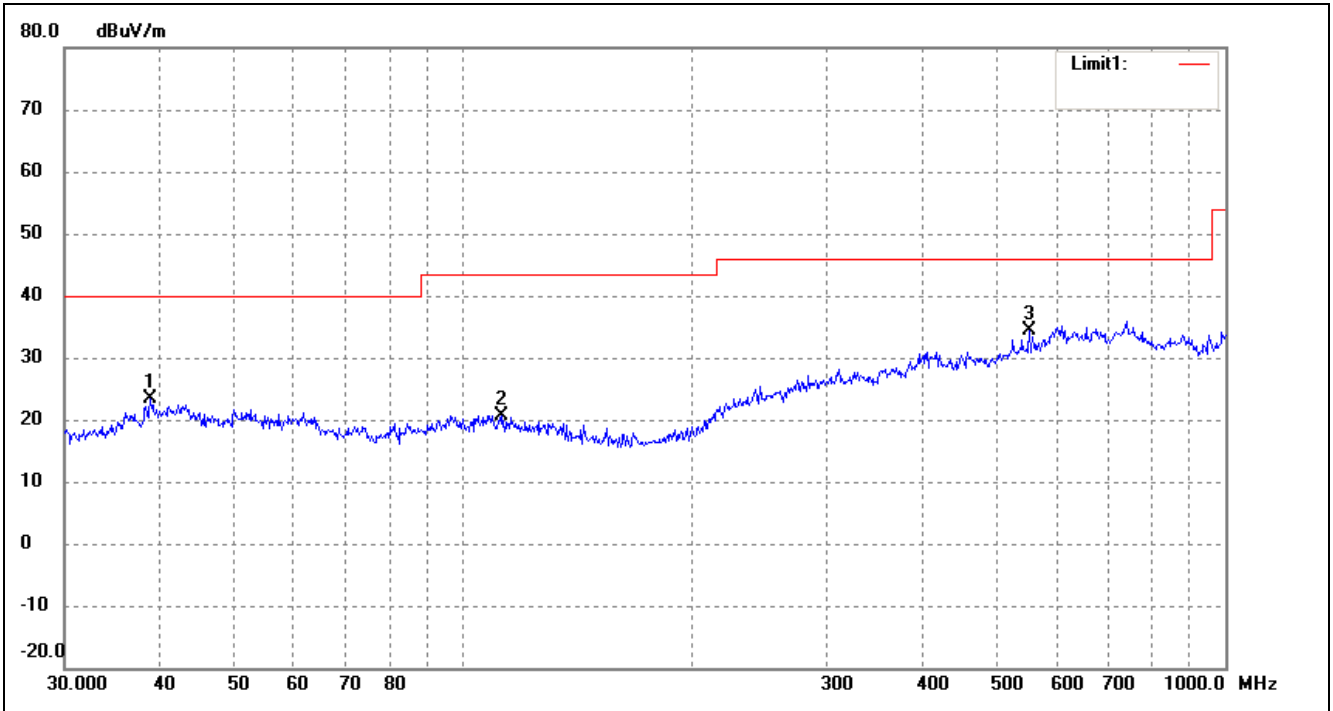


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	38.8879	18.22	5.06	23.28	40.00	-16.72	360	100	peak
2	112.5243	15.59	5.05	20.64	43.50	-22.86	258	100	peak
3	552.8832	19.81	14.45	34.26	46.00	-11.74	347	100	peak

Operating Condition: 802.11n-HT40 Transmitting Middle Channel-2437MHz


Comment: 120V/60Hz; Adapter DC 5V/3A

Test Specification: Horizontal

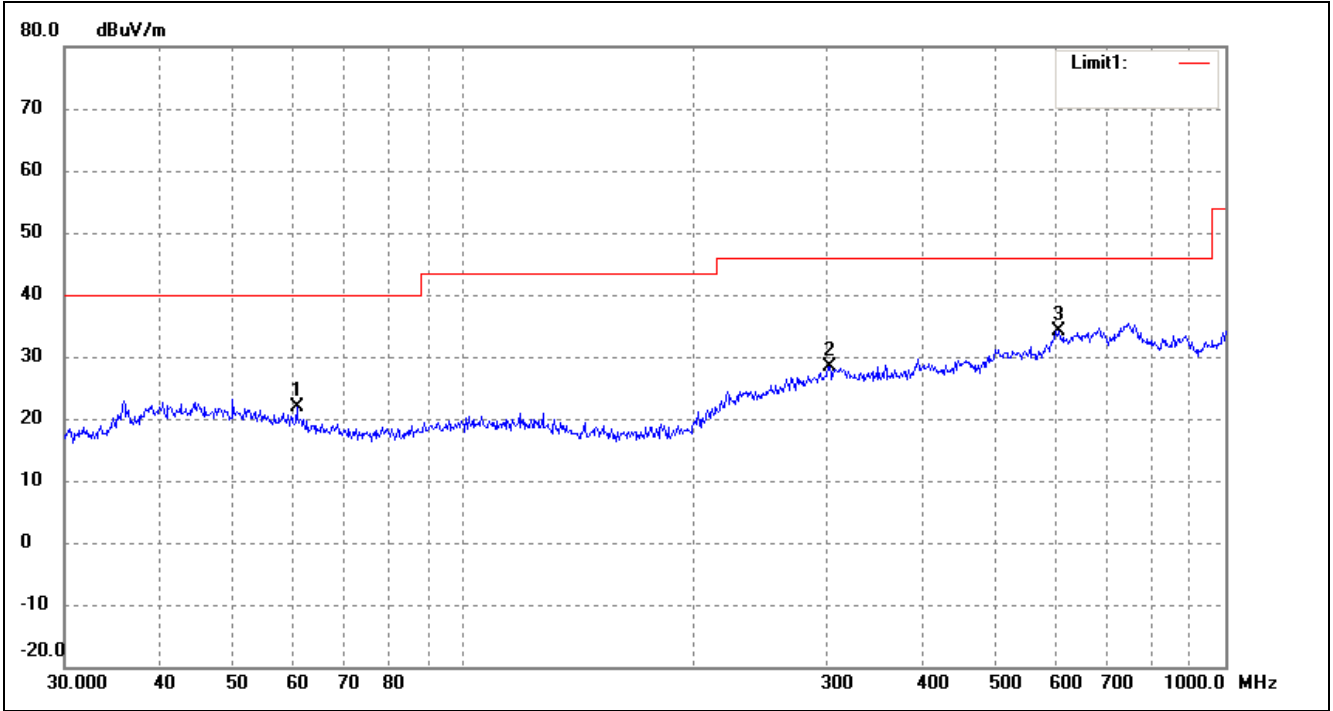

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	60.4919	16.53	5.27	21.80	40.00	-18.20	251	100	peak
2	302.4812	16.10	12.19	28.29	46.00	-17.71	100	100	peak
3	605.6592	15.17	18.92	34.09	46.00	-11.91	100	100	peak

Test Specification: Vertical

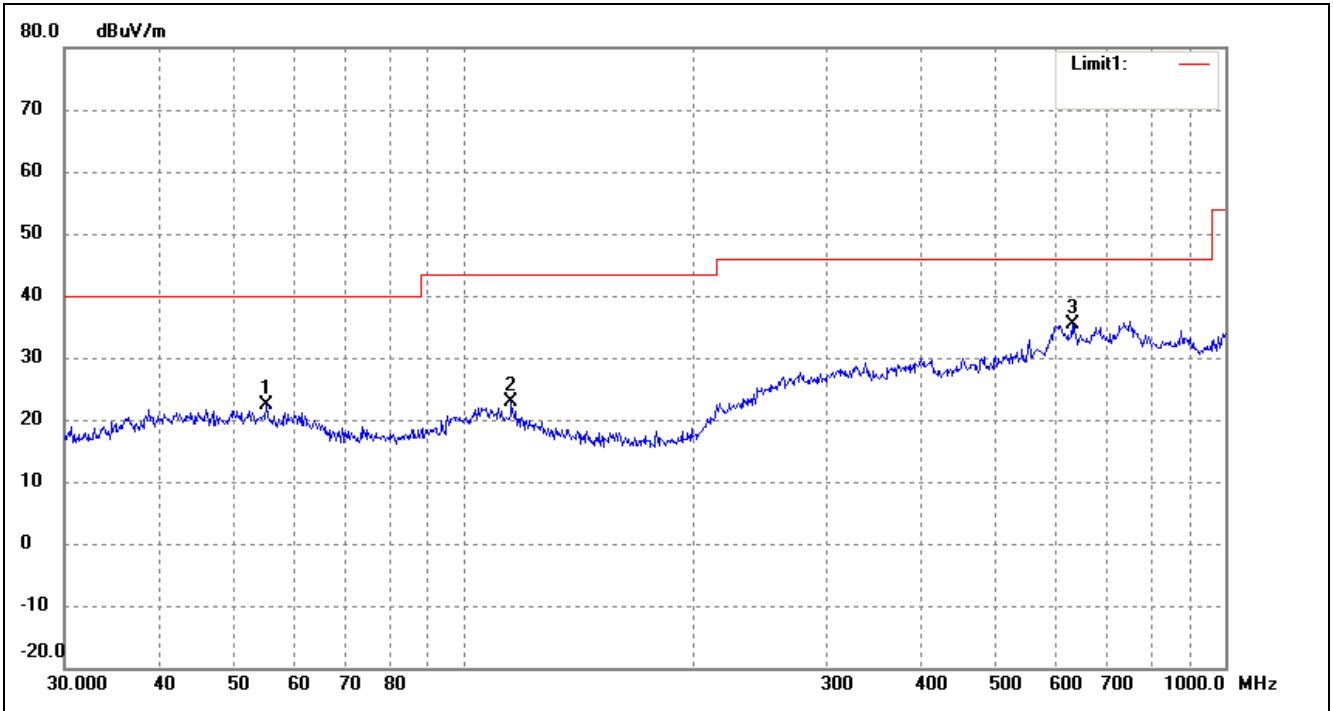


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	55.2207	17.14	5.32	22.46	40.00	-17.54	100	100	peak
2	115.7256	17.93	5.04	22.97	43.50	-20.53	100	100	peak
3	629.4772	17.05	18.25	35.30	46.00	-10.70	100	100	peak

Operating Condition: 802.11n-HT40 Transmitting High Channel-2452MHz


Comment: 120V/60Hz; Adapter DC 5V/3A

Test Specification: Horizontal

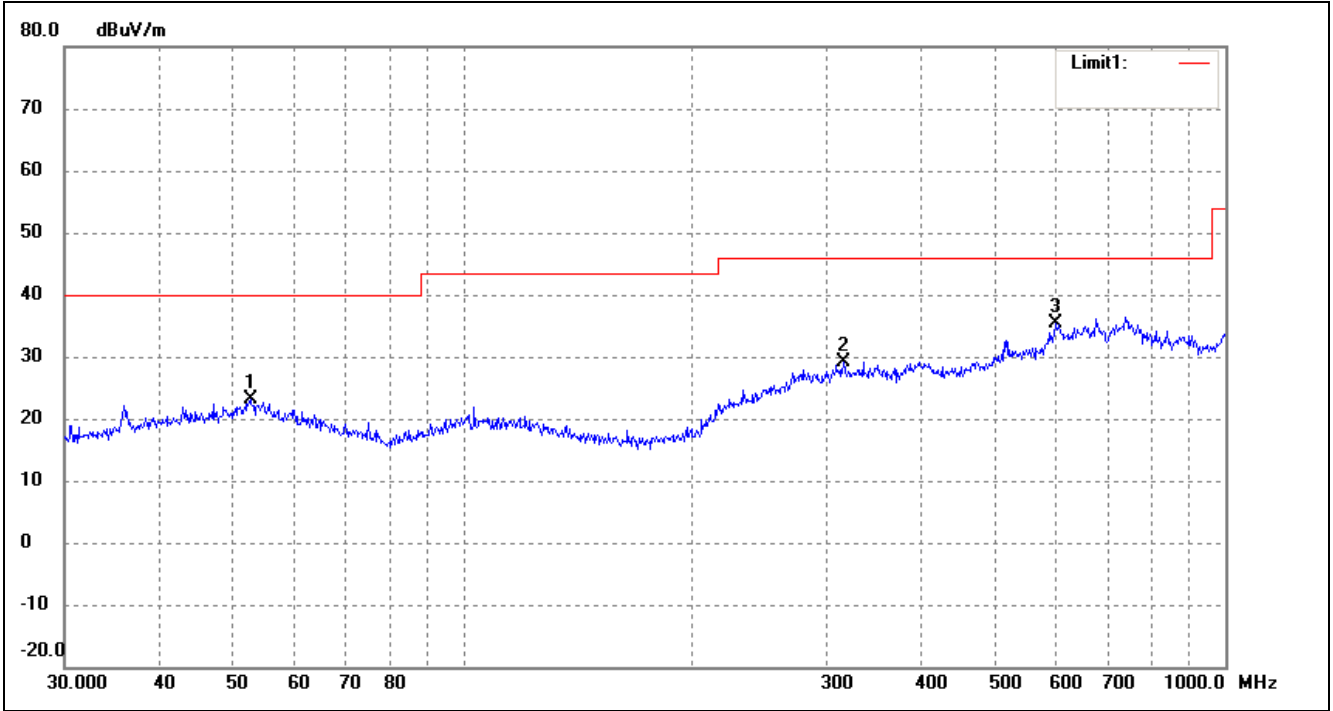

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	52.5752	17.88	5.30	23.18	40.00	-16.82	360	100	peak
2	315.4807	16.89	12.27	29.16	46.00	-16.84	287	100	peak
3	599.3212	16.07	19.19	35.26	46.00	-10.74	168	100	peak

Test Specification: Vertical

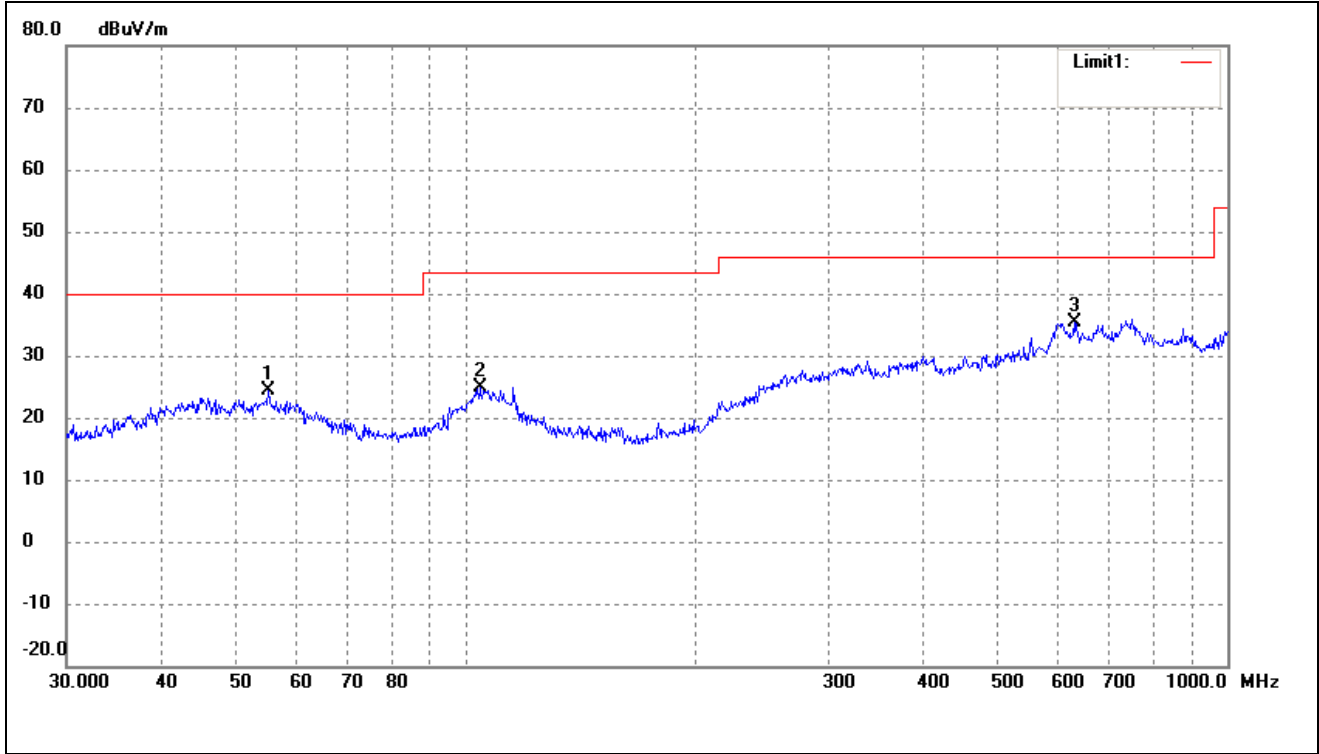

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	55.2207	19.14	5.32	24.46	40.00	-15.54	100	100	peak
2	104.5361	19.72	5.10	24.82	43.50	-18.68	136	100	peak
3	629.4772	17.05	18.25	35.30	46.00	-10.70	284	100	peak

Spurious Emissions Above 1GHz
Test Mode: 802.11b

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	54.09	-3.87	50.22	74.00	-23.78	H	PK
4824.000	38.84	-3.87	34.97	54.00	-19.03	H	AV
7236.000	46.30	1.14	47.44	74.00	-26.56	H	PK
7236.000	34.98	1.19	36.17	54.00	-17.83	H	AV
4824.000	57.31	-3.86	53.45	74.00	-20.55	V	PK
4824.000	40.50	-3.86	36.64	54.00	-17.36	V	AV
7236.000	49.11	1.10	50.21	74.00	-23.79	V	PK
7236.000	37.44	1.10	38.54	54.00	-15.46	V	AV
Middle Channel-2437MHz							
4874.000	54.74	-3.74	51.00	74.00	-23.00	H	PK
4874.000	39.99	-3.74	36.25	54.00	-17.75	H	AV
7311.000	47.77	1.47	49.24	74.00	-24.76	H	PK
7311.000	33.10	1.47	34.57	54.00	-19.43	H	AV
4874.000	53.97	-3.74	50.23	74.00	-23.77	V	PK
4874.000	40.89	-3.74	37.15	54.00	-16.85	V	AV
7311.000	47.98	1.47	49.45	74.00	-24.55	V	PK
7311.000	34.08	1.47	35.55	54.00	-18.45	V	AV
High Channel-2462MHz							
4924.000	55.82	-3.59	52.23	74.00	-21.77	H	PK
4924.000	41.76	-3.59	38.17	54.00	-15.83	H	AV
7386.000	46.38	1.79	48.17	74.00	-25.83	H	PK
7386.000	34.83	1.79	36.62	54.00	-17.38	H	AV
4924.000	54.94	-3.59	51.35	74.00	-22.65	V	PK
4924.000	42.04	-3.59	38.45	54.00	-15.55	V	AV
7386.000	47.99	1.79	49.78	74.00	-24.22	V	PK
7386.000	35.18	1.79	36.97	54.00	-17.03	V	AV

Test Mode: 802.11g

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	55.50	-3.86	51.64	74.00	-22.36	H	PK
4824.000	42.23	-3.86	38.37	54.00	-15.63	H	AV
7236.000	48.42	1.10	49.52	74.00	-24.48	H	PK
7236.000	34.40	1.10	35.50	54.00	-18.50	H	AV
4824.000	55.99	-3.86	52.13	74.00	-21.87	V	PK
4824.000	42.65	-3.86	38.79	54.00	-15.21	V	AV
7236.000	49.22	1.10	50.32	74.00	-23.68	V	PK
7236.000	35.54	1.10	36.64	54.00	-17.36	V	AV
Middle Channel-2437MHz							
4874.000	55.10	-3.74	51.36	74.00	-22.64	H	PK
4874.000	43.28	-3.74	39.54	54.00	-14.46	H	AV
7311.000	47.38	1.47	48.85	74.00	-25.15	H	PK
7311.000	35.27	1.47	36.74	54.00	-17.26	H	AV
4874.000	57.07	-3.74	53.33	74.00	-20.67	V	PK
4874.000	43.86	-3.74	40.12	54.00	-13.88	V	AV
7311.000	48.40	1.47	49.87	74.00	-24.13	V	PK
7311.000	35.33	1.47	36.80	54.00	-17.20	V	AV
High Channel-2462MHz							
4924.000	54.00	-3.59	50.41	74.00	-23.59	H	PK
4924.000	40.75	-3.59	37.16	54.00	-16.84	H	AV
7386.000	47.18	1.79	48.97	74.00	-25.03	H	PK
7386.000	34.73	1.79	36.52	54.00	-17.48	H	AV
4924.000	56.11	-3.59	52.52	74.00	-21.48	V	PK
4924.000	42.69	-3.59	39.10	54.00	-14.90	V	AV
7386.000	48.58	1.79	50.37	74.00	-23.63	V	PK
7386.000	35.95	1.79	37.74	54.00	-16.26	V	AV

Test Mode: 802.11n-HT20

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	55.60	-3.86	51.74	74.00	-22.26	H	PK
4824.000	40.54	-3.86	36.68	54.00	-17.32	H	AV
7236.000	47.26	1.10	48.36	74.00	-25.64	H	PK
7236.000	34.44	1.10	35.54	54.00	-18.46	H	AV
4824.000	56.71	-3.86	52.85	74.00	-21.15	V	PK
4824.000	43.18	-3.86	39.32	54.00	-14.68	V	AV
7236.000	49.21	1.10	50.31	74.00	-23.69	V	PK
7236.000	35.77	1.10	36.87	54.00	-17.13	V	AV
Middle Channel-2437MHz							
4874.000	54.16	-3.74	50.42	74.00	-23.58	H	PK
4874.000	42.48	-3.74	38.74	54.00	-15.26	H	AV
7311.000	48.74	1.47	50.21	74.00	-23.79	H	PK
7311.000	33.10	1.47	34.57	54.00	-19.43	H	AV
4874.000	54.92	-3.74	51.18	74.00	-22.82	V	PK
4874.000	42.62	-3.74	38.88	54.00	-15.12	V	AV
7311.000	48.49	1.47	49.96	74.00	-24.04	V	PK
7311.000	35.20	1.47	36.67	54.00	-17.33	V	AV
High Channel-2462MHz							
4924.000	53.90	-3.59	50.31	74.00	-23.69	H	PK
4924.000	43.23	-3.59	39.64	54.00	-14.36	H	AV
7386.000	48.31	1.79	50.10	74.00	-23.90	H	PK
7386.000	36.10	1.79	37.89	54.00	-16.11	H	AV
4924.000	55.70	-3.59	52.11	74.00	-21.89	V	PK
4924.000	41.48	-3.59	37.89	54.00	-16.11	V	AV
7386.000	48.55	1.79	50.34	74.00	-23.66	V	PK
7386.000	35.36	1.79	37.15	54.00	-16.85	V	AV

Test Mode: 802.11n-HT40

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2422MHz							
4844.000	53.25	-3.90	49.35	74.00	-24.65	H	PK
4824.000	38.25	-3.90	34.35	54.00	-19.65	H	AV
7266.000	46.48	1.06	47.54	74.00	-26.46	H	PK
7266.000	32.56	1.06	33.62	54.00	-20.38	H	AV
4844.000	54.22	-3.90	50.32	74.00	-23.68	V	PK
4824.000	39.42	-3.90	35.52	54.00	-18.48	V	AV
7266.000	48.81	1.06	49.87	74.00	-24.13	V	PK
7266.000	34.78	1.06	35.84	54.00	-18.16	V	AV
Middle Channel-2437MHz							
4874.000	52.53	-3.74	48.79	74.00	-25.21	H	PK
4874.000	37.88	-3.74	34.14	54.00	-19.86	H	AV
7311.000	44.88	1.47	46.35	74.00	-27.65	H	PK
7311.000	32.03	1.47	33.50	54.00	-20.50	H	AV
4874.000	53.74	-3.74	50.00	74.00	-24.00	V	PK
4874.000	39.95	-3.74	36.21	54.00	-17.79	V	AV
7311.000	45.78	1.47	47.25	74.00	-26.75	V	PK
7311.000	34.00	1.47	35.47	54.00	-18.53	V	AV
High Channel-2452MHz							
4904.000	52.65	-3.63	49.02	74.00	-24.98	H	PK
4904.000	39.37	-3.63	35.74	54.00	-18.26	H	AV
7356.000	45.63	1.62	47.25	74.00	-26.75	H	PK
7356.000	30.73	1.62	32.35	54.00	-21.65	H	AV
4904.000	54.84	-3.63	51.21	74.00	-22.79	V	PK
4904.000	40.83	-3.63	37.20	54.00	-16.80	V	AV
7356.000	48.18	1.62	49.80	74.00	-24.20	V	PK
7356.000	35.12	1.62	36.74	54.00	-17.26	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v03r03, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 V03r03, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Environmental Conditions


Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

9.4 Summary of Test Results/Plots

802.11b-Lowest Bandedge
Vertical (Worst case)

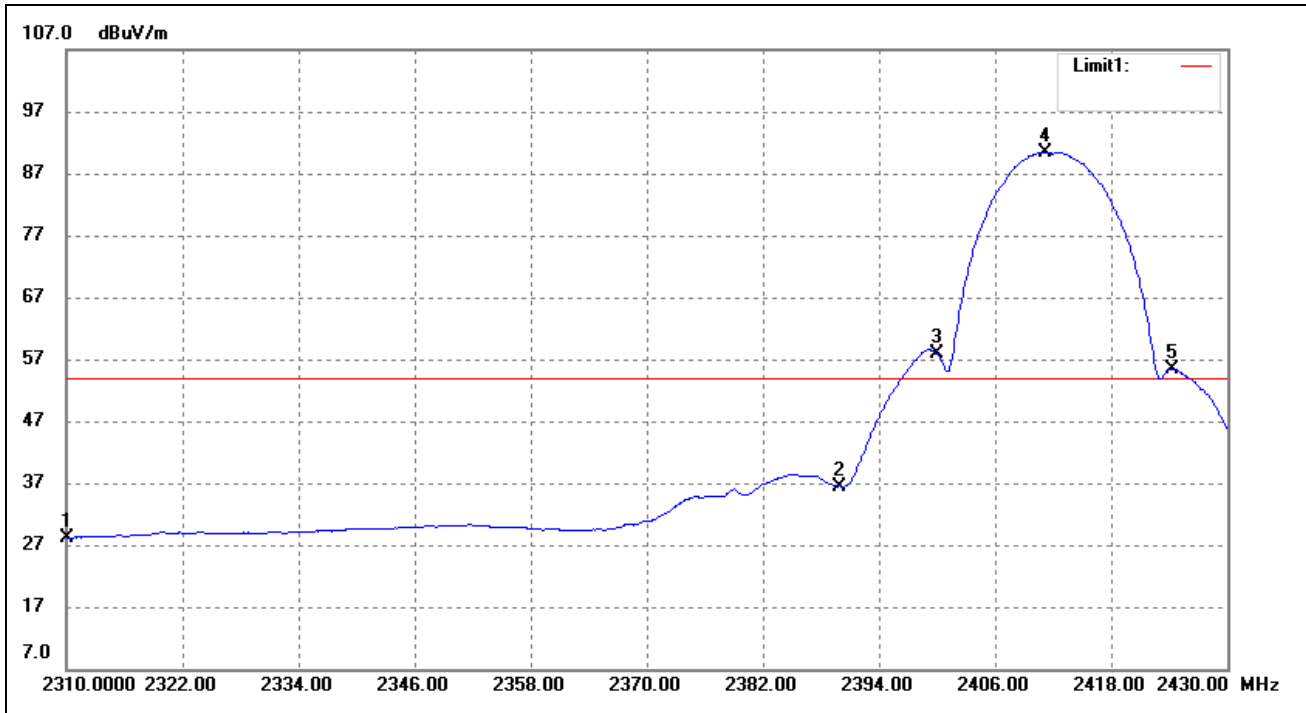


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	31.53	-3.35	28.18	54.00	-25.82	Average Detector
		45.17	-3.35	41.82	74.00	-32.18	Peak Detector
2	2390.000	40.78	-4.29	36.49	54.00	-17.51	Average Detector
		56.38	-4.29	52.09	74.00	-21.91	Peak Detector
3	2400.000	62.25	-4.40	57.85	Delta=32.59dBc		Average Detector
4	2411.160	94.88	-4.44	90.44			Average Detector

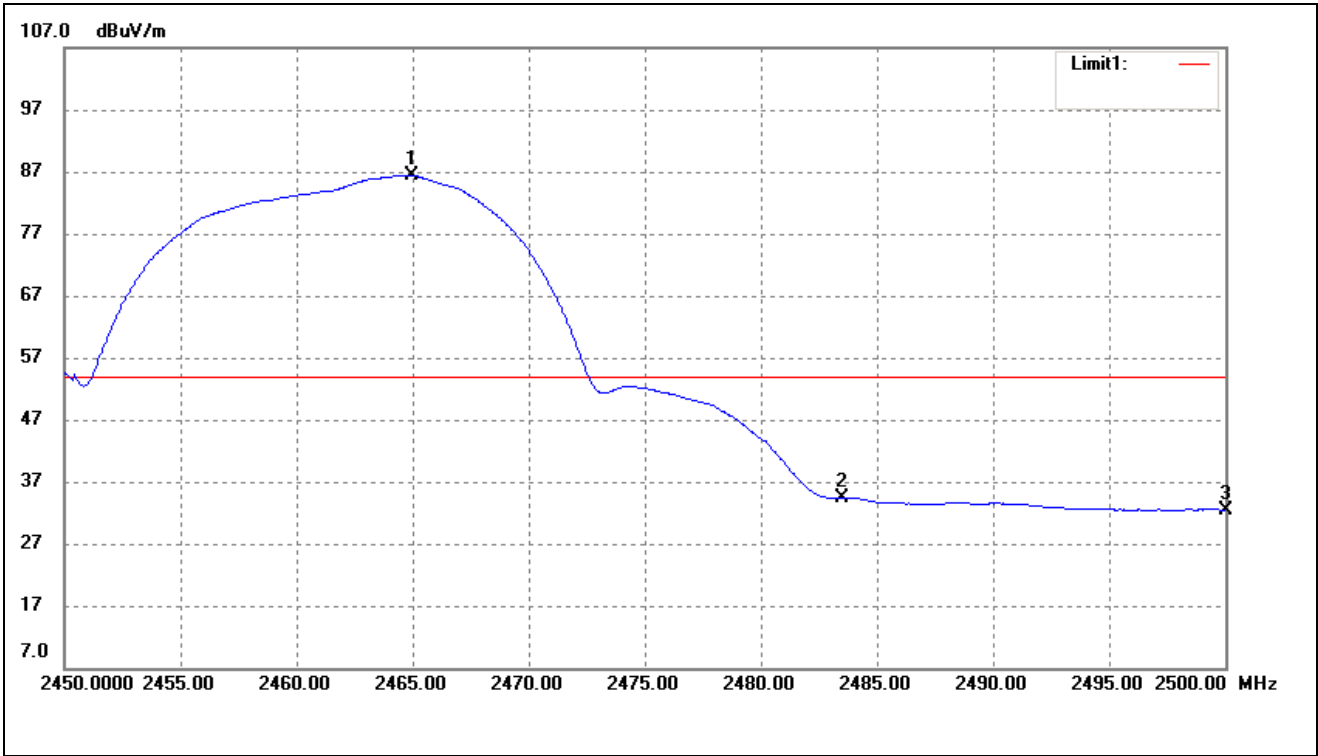802.11b-Highest Bandedge
 Vertical (Worst case)


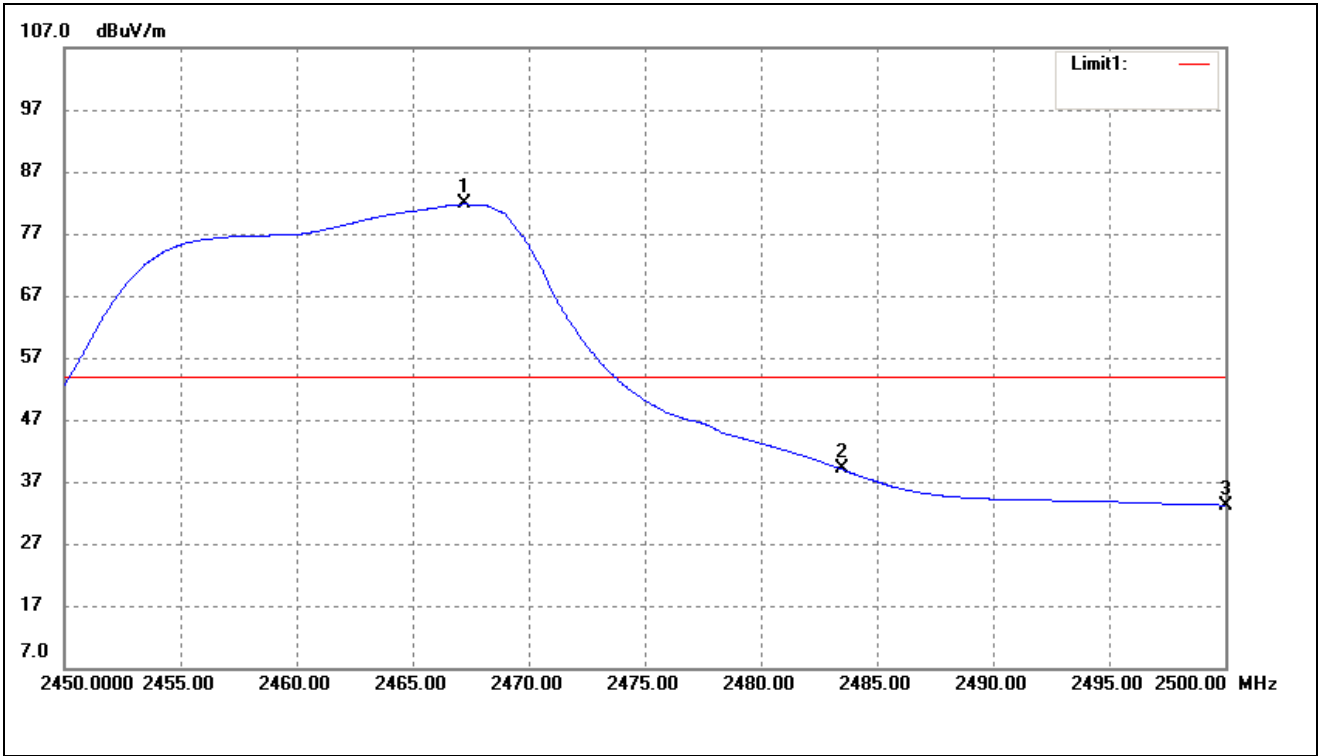
No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.950	89.68	-3.29	86.39	/	/	Average Detector
	2463.650	97.45	-3.29	94.16	/	/	Peak Detector
2	2483.500	Delta = 51.96dBc		34.43	54.00	-19.57	Average Detector
	2483.500			46.87	74.00	-27.13	Peak Detector
3	2500.000	35.64	-3.20	32.44	54.00	-21.56	Average Detector
	2500.000	47.53	-3.20	44.33	74.00	-29.67	Peak Detector

802.11g-Lowest Bandedge
Vertical (Worst case)

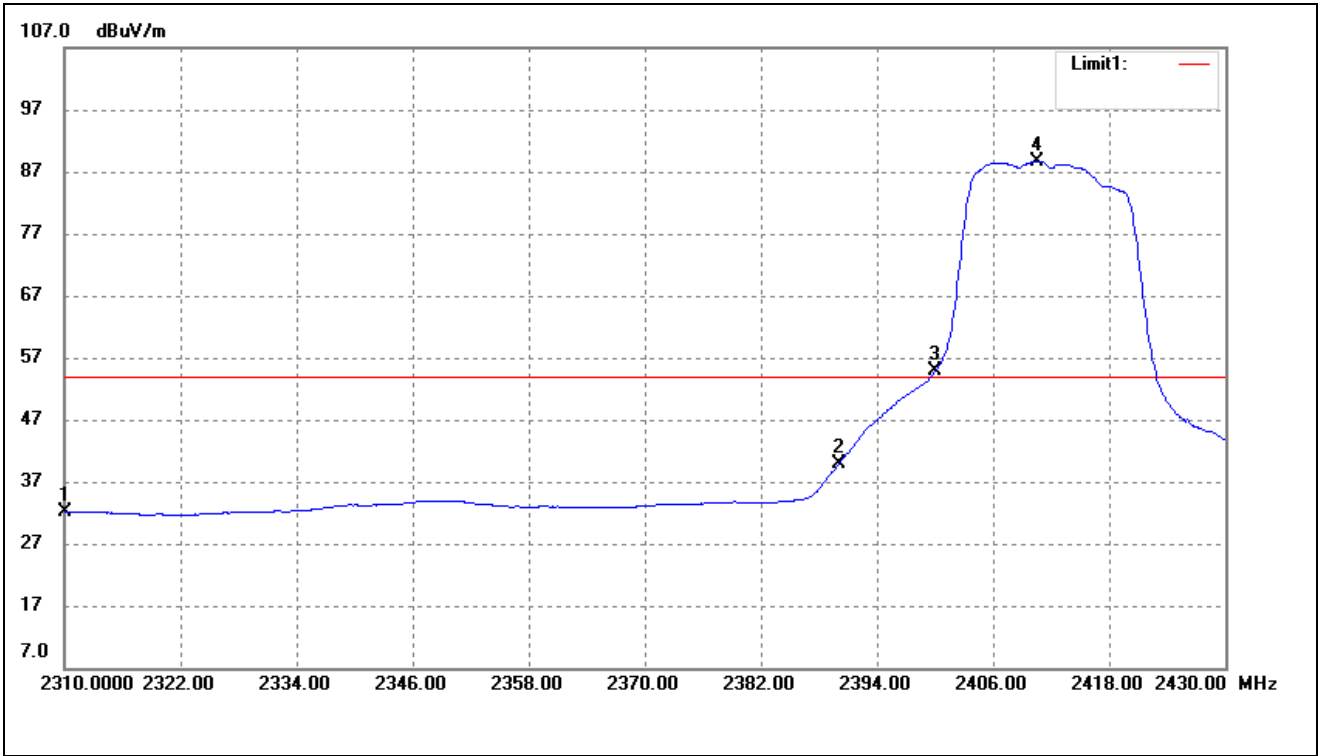


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	35.79	-3.69	32.10	54.00	-21.90	Average Detector
	2310.000	47.17	-3.69	43.48	74.00	-30.52	Peak Detector
2	2390.000	43.37	-3.49	39.88	54.00	-14.12	Average Detector
	2390.000	62.75	-3.49	59.26	74.00	-14.74	Peak Detector
3	2400.000	58.29	-3.46	54.83	Delta=33.78dBc		Average Detector
4	2410.560	92.04	-3.43	88.61		Average Detector	

802.11g-Highest Bandedge
Vertical (Worst case)




No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	2467.250	85.08	-3.28	81.80	/	/	Average Detector
	2469.100	97.30	-3.28	94.02	/	/	Peak Detector
1	2483.500	Delta = 42.77dBc		39.03	54.00	-14.97	Average Detector
	2483.500			53.65	74.00	-20.35	Peak Detector
3	2500.000	36.43	-3.20	33.23	54.00	-20.77	Average Detector
	2500.000	49.68	-3.20	46.48	74.00	-27.52	Peak Detector

802.11n-HT20-Lowest Bandedge
Vertical (Worst case)

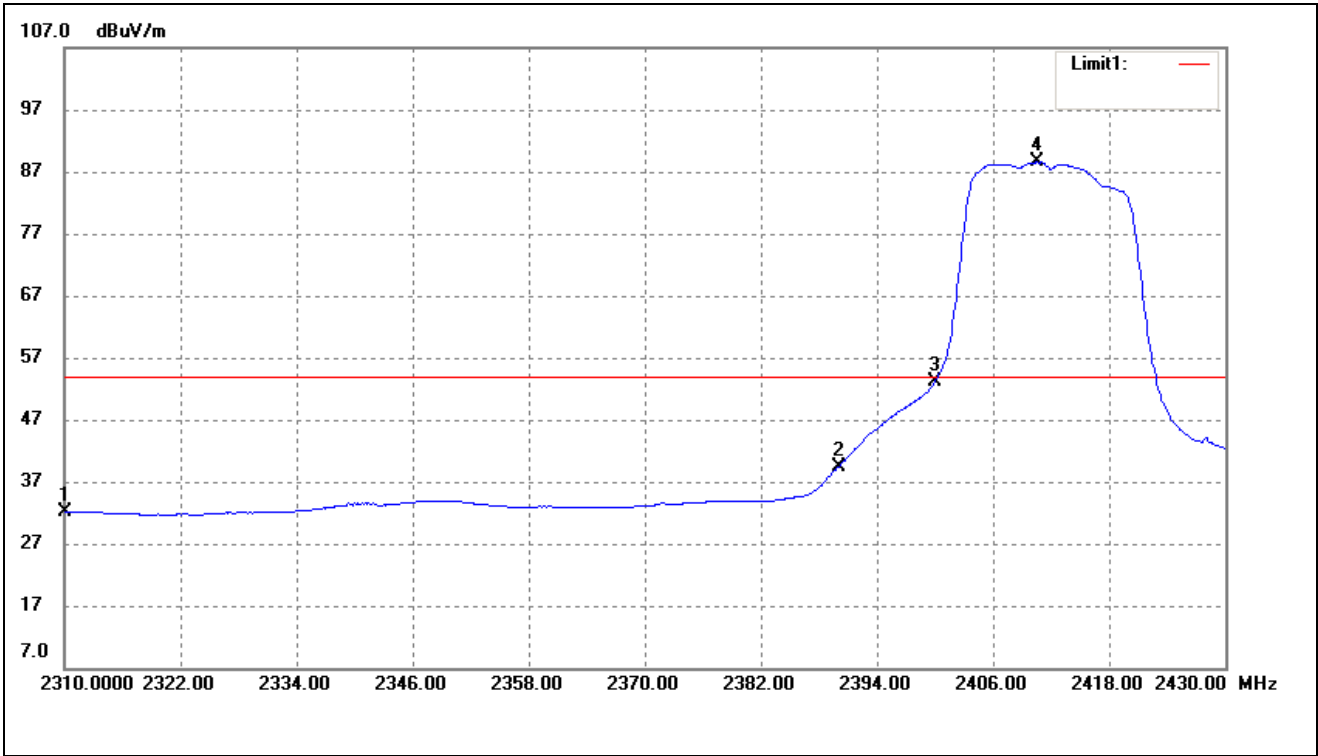


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	35.73	-3.69	32.04	54.00	-21.96	Average Detector
	2310.000	47.10	-3.69	43.41	74.00	-30.59	Peak Detector
2	2390.000	42.98	-3.49	39.49	54.00	-14.51	Average Detector
	2390.000	62.93	-3.49	59.44	74.00	-14.56	Peak Detector
3	2400.000	56.69	-3.46	53.23	Delta=35.28dBc		Average Detector
4	2410.560	91.94	-3.43	88.51		Average Detector	

802.11n-HT20-Highest Bandedge
Vertical (Worst case)

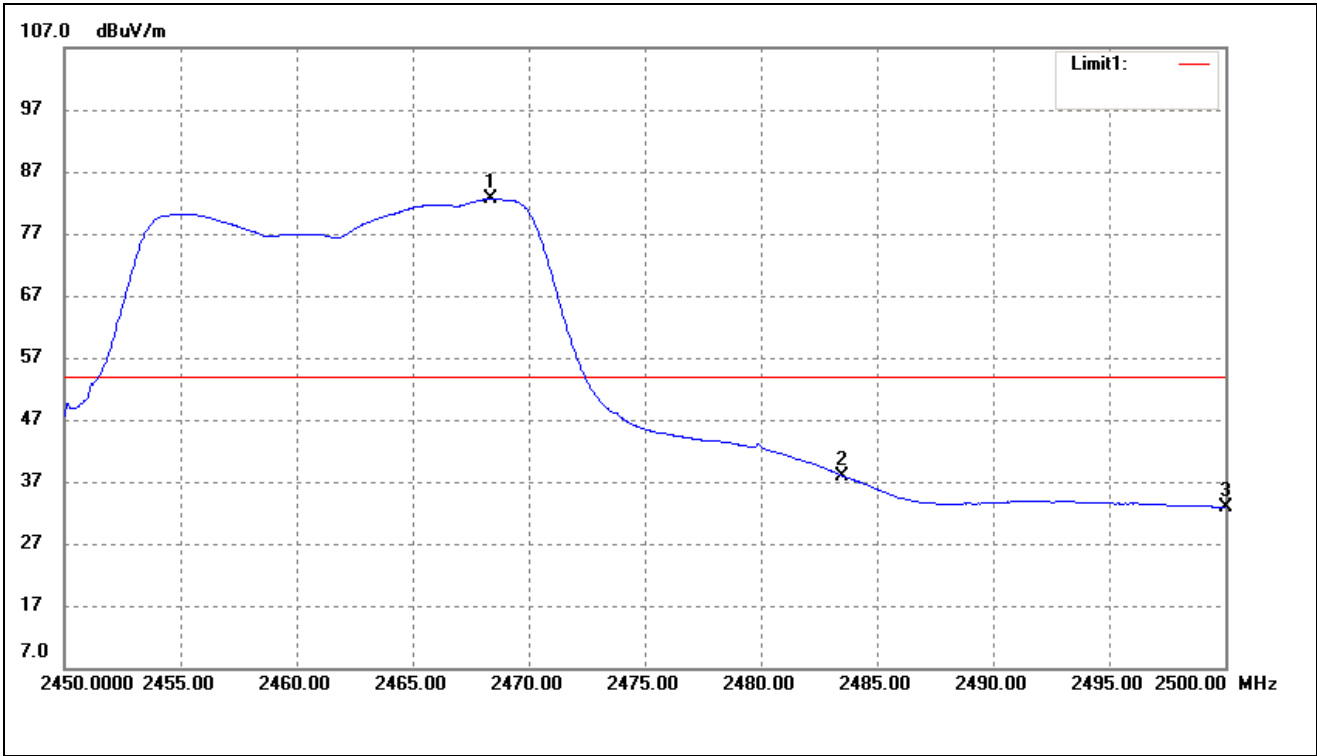


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2468.350	85.88	-3.28	82.60	/	/	Average Detector
	2469.150	97.31	-3.28	94.03	/	/	Peak Detector
2	2483.500	Delta = 39.78dBc		37.98	54.00	-16.02	Average Detector
	2483.500	Delta = 39.78dBc		54.25	74.00	-19.75	Peak Detector
3	2500.000	36.13	-3.20	32.93	54.00	-21.07	Average Detector
	2500.000	51.05	-3.20	47.85	74.00	-26.15	Peak Detector

802.11n-HT40-Lowest Bandedge
Vertical (Worst case)

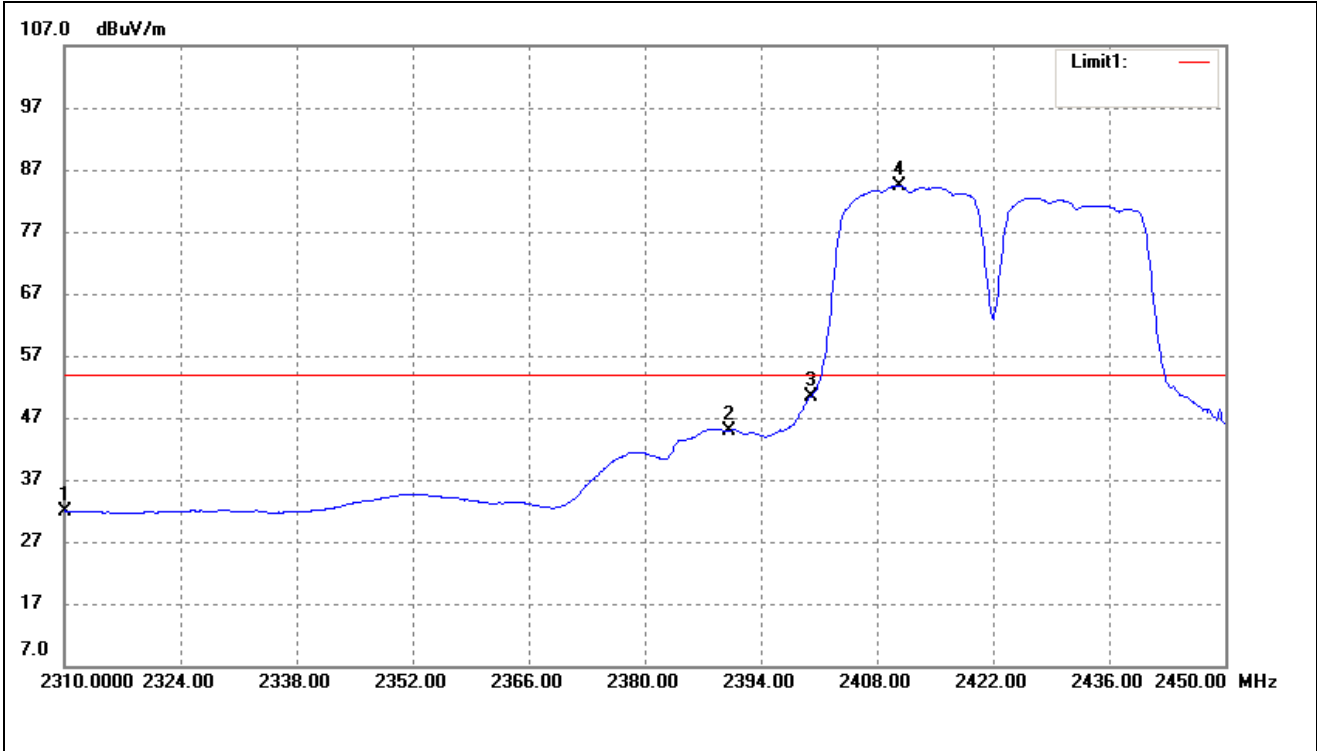



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	35.68	-3.69	31.99	54.00	-22.01	Average Detector
	2310.000	49.43	-3.69	45.74	74.00	-28.26	Peak Detector
2	2390.000	48.40	-3.49	44.91	54.00	-9.09	Average Detector
	2390.000	69.39	-3.49	65.90	74.00	-8.10	Peak Detector
3	2400.000	53.90	-3.46	50.44	Delta=33.94dBc		Average Detector
4	2410.660	87.81	-3.43	84.38			Average Detector

802.11n-HT40-Highest Bandedge
Vertical (Worst case)


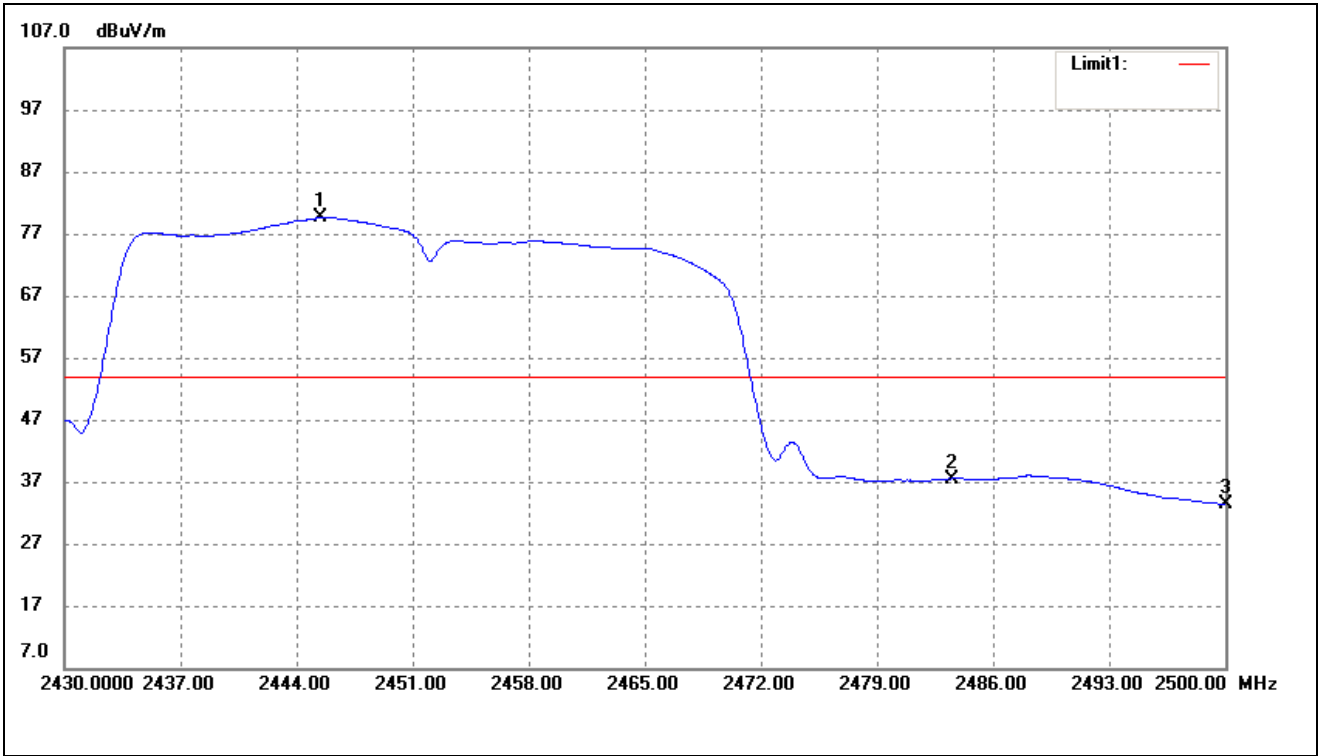


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2445.470	82.93	-3.35	79.58	/	/	Average Detector
	2444.560	94.22	-3.35	90.87	/	/	Peak Detector
2	2483.500	Delta = 42.08dBc		37.50	54.00	-16.50	Average Detector
	2483.500	Delta = 42.08dBc		53.03	74.00	-20.97	Peak Detector
3	2500.000	36.61	-3.20	33.41	54.00	-20.59	Average Detector
	2500.000	49.33	-3.20	46.13	74.00	-27.87	Peak Detector



Ant. 1
 Out-of-Band and Spurious Emission (Conducted)
 802.11b
 Low Channel

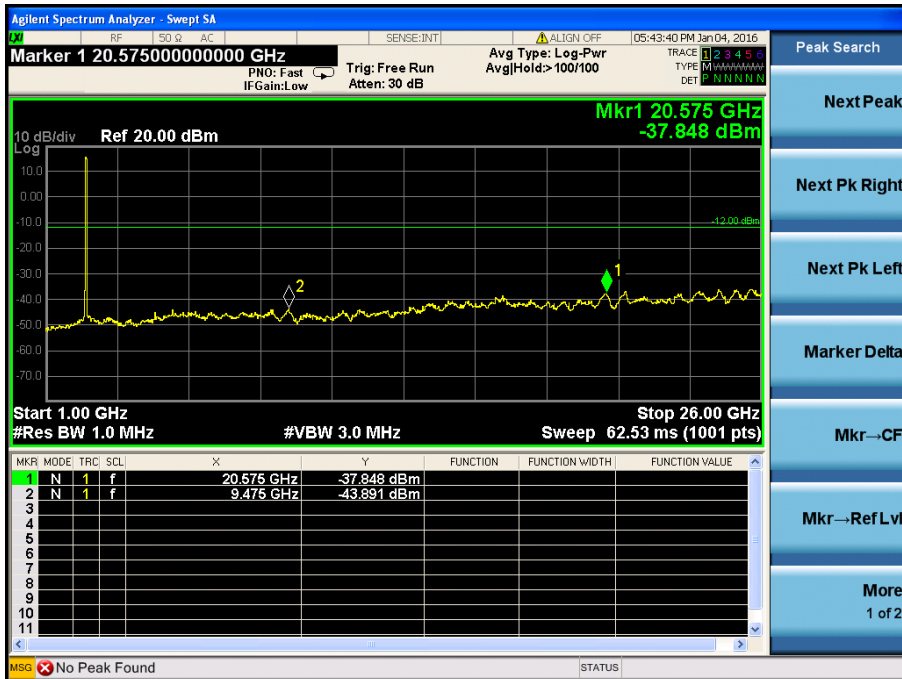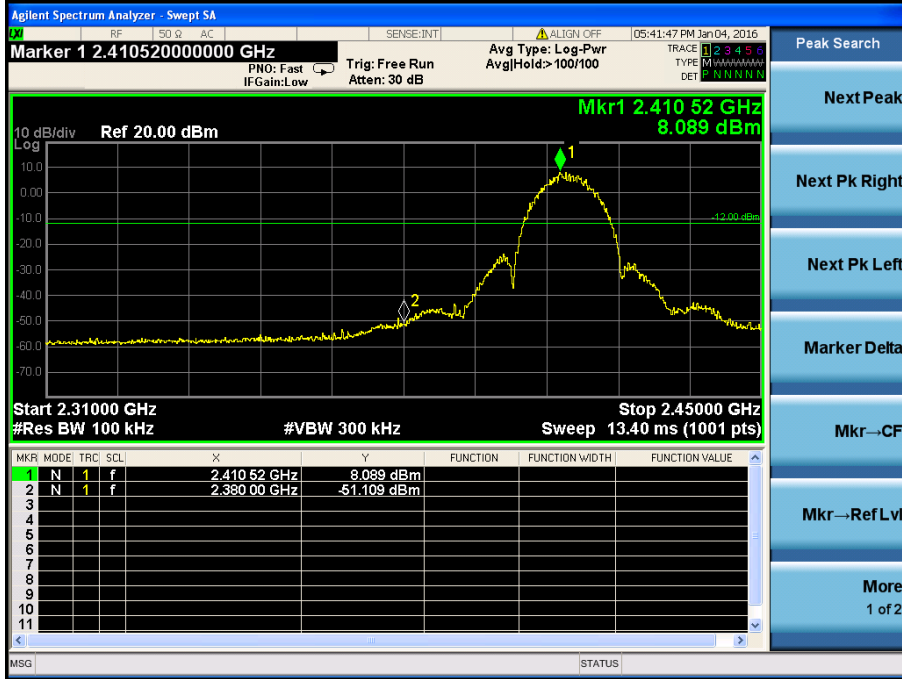



Middle Channel

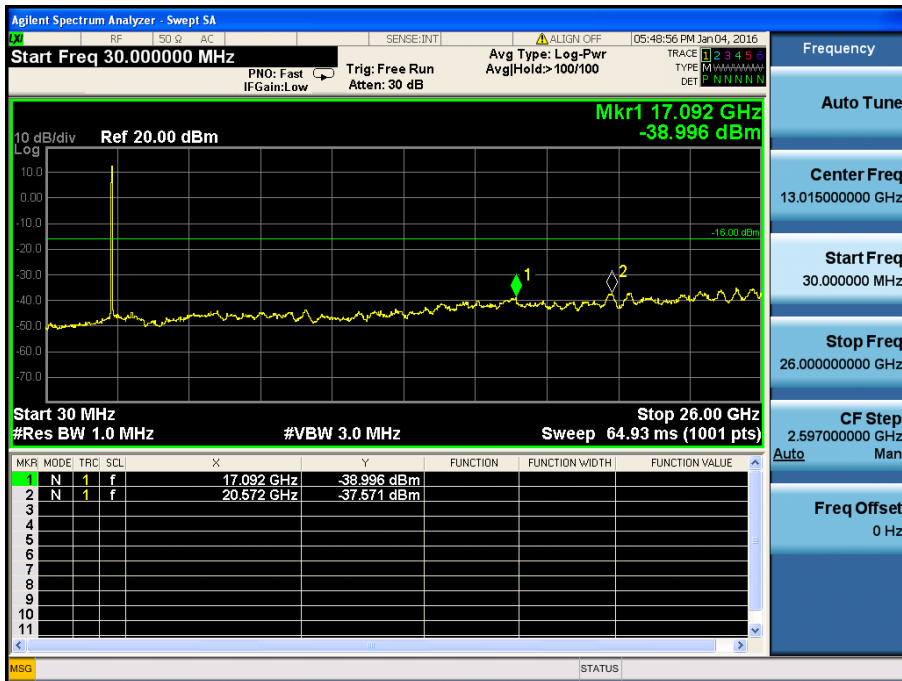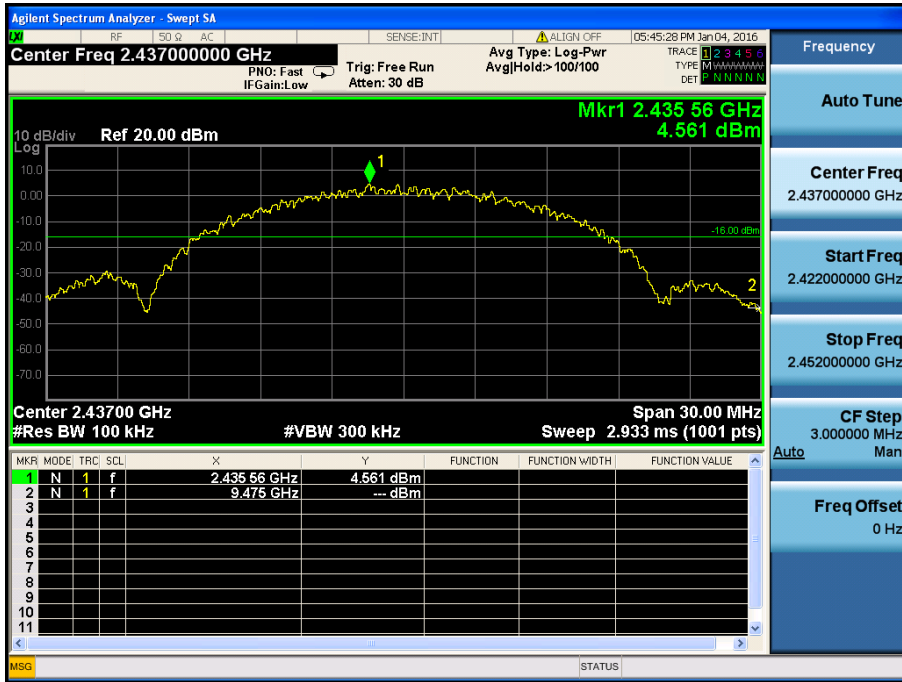



High Channel

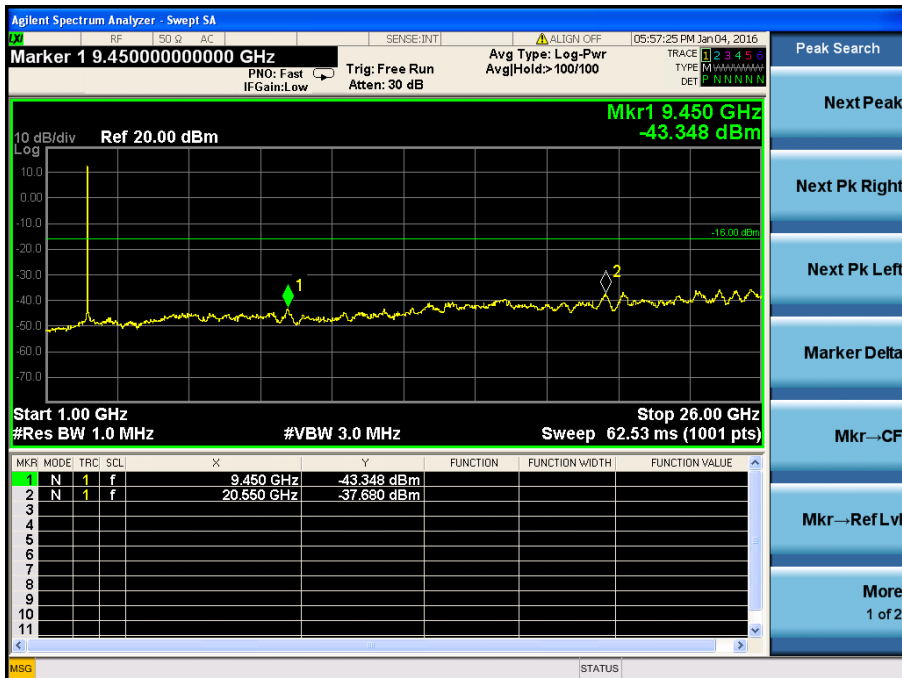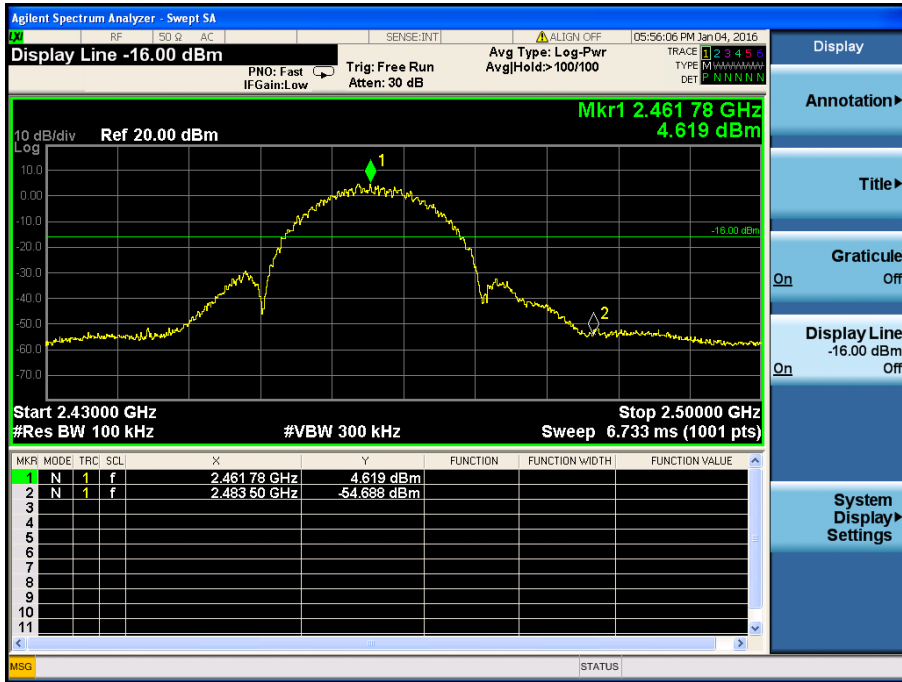



802.11g
Low Channel

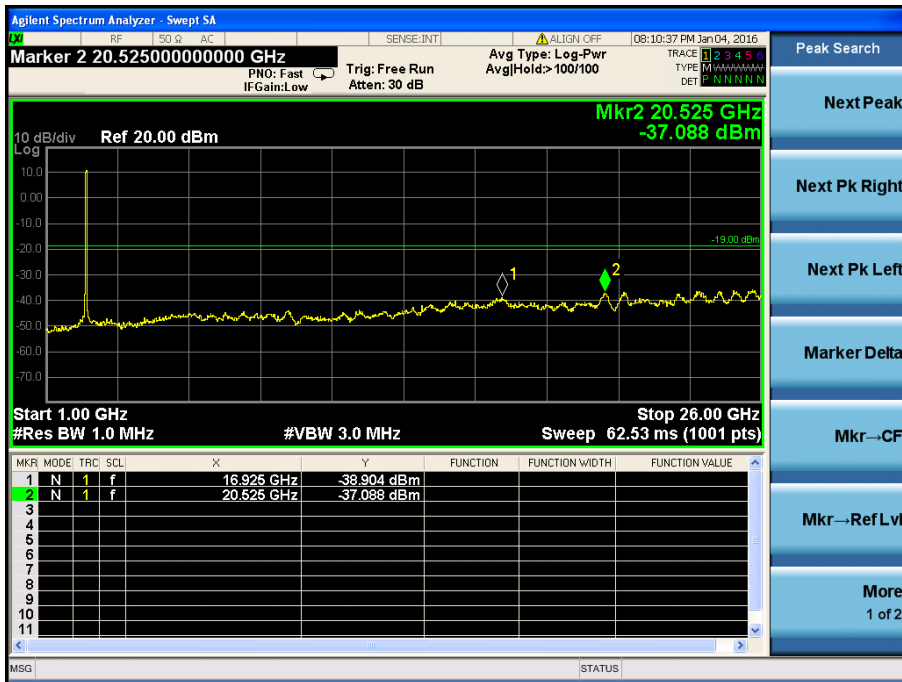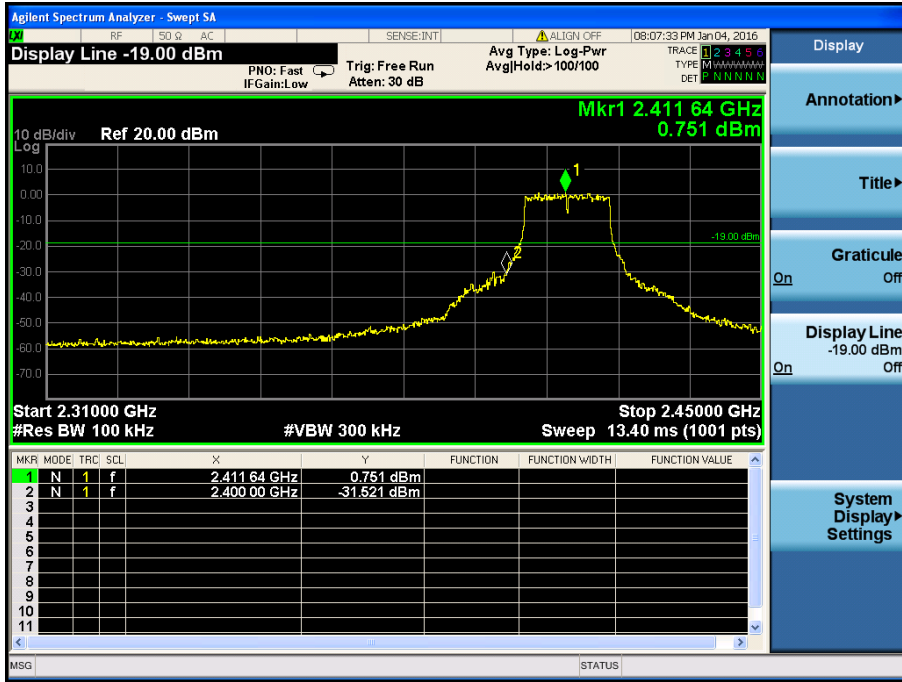



Middle Channel

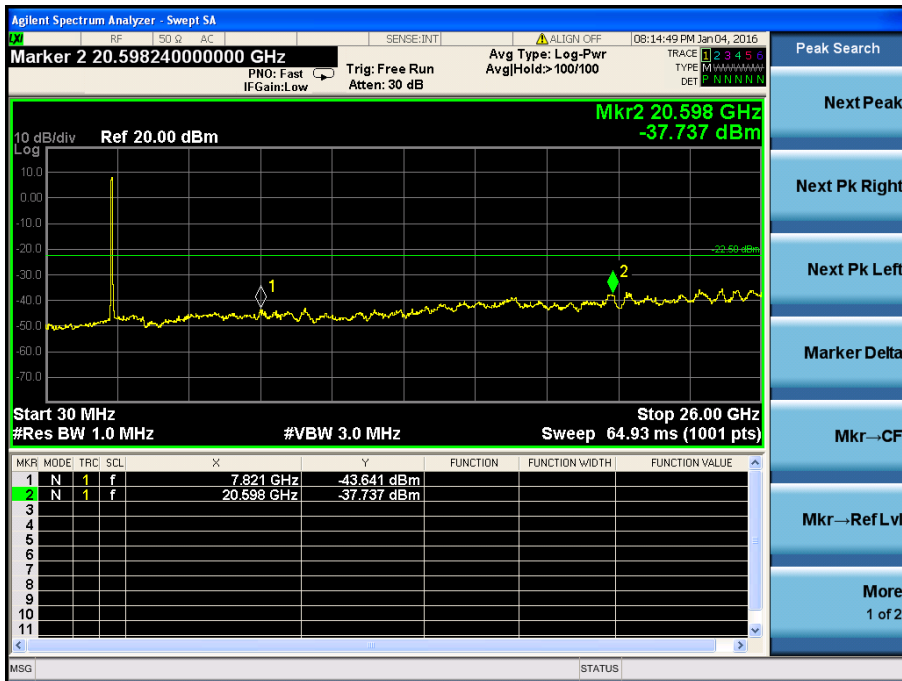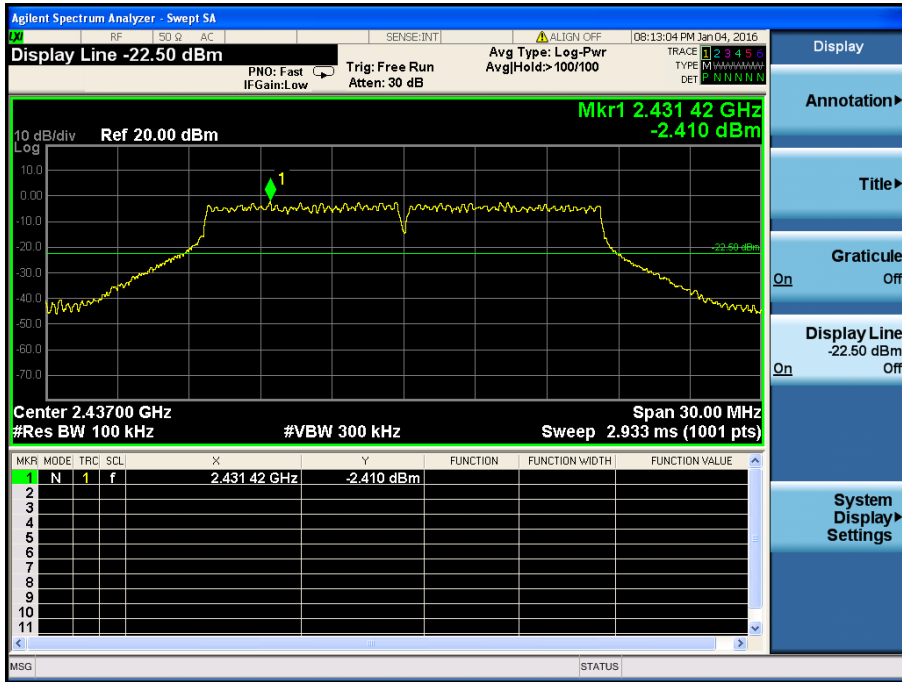



High Channel

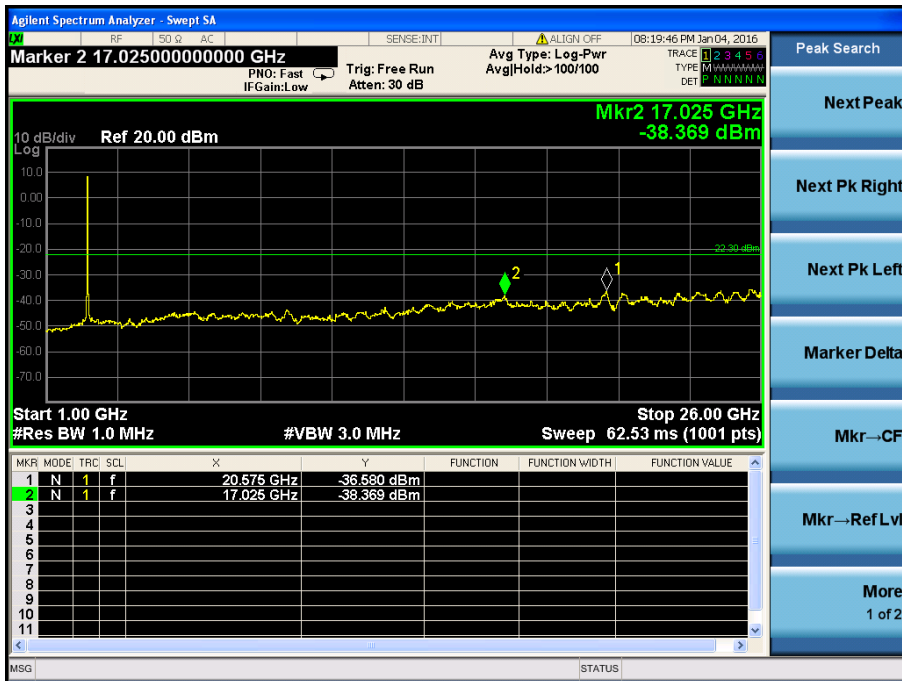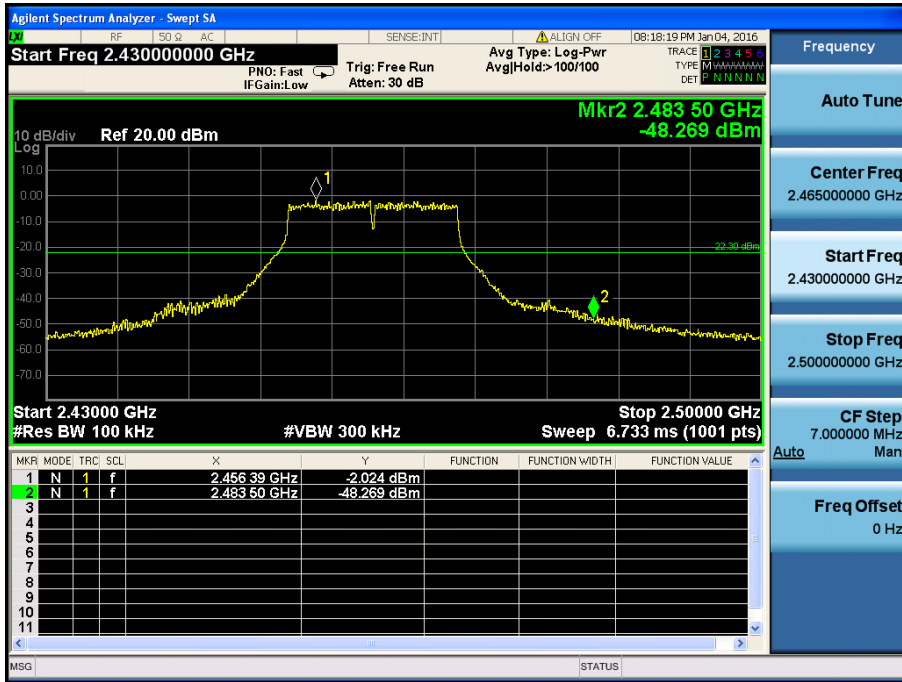



11n-HT20
Low Channel

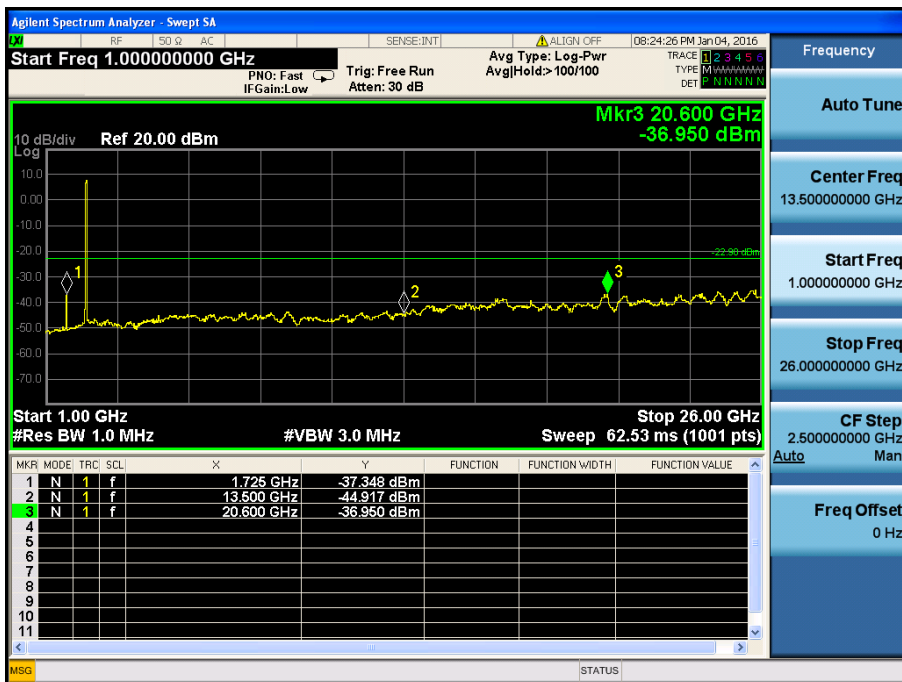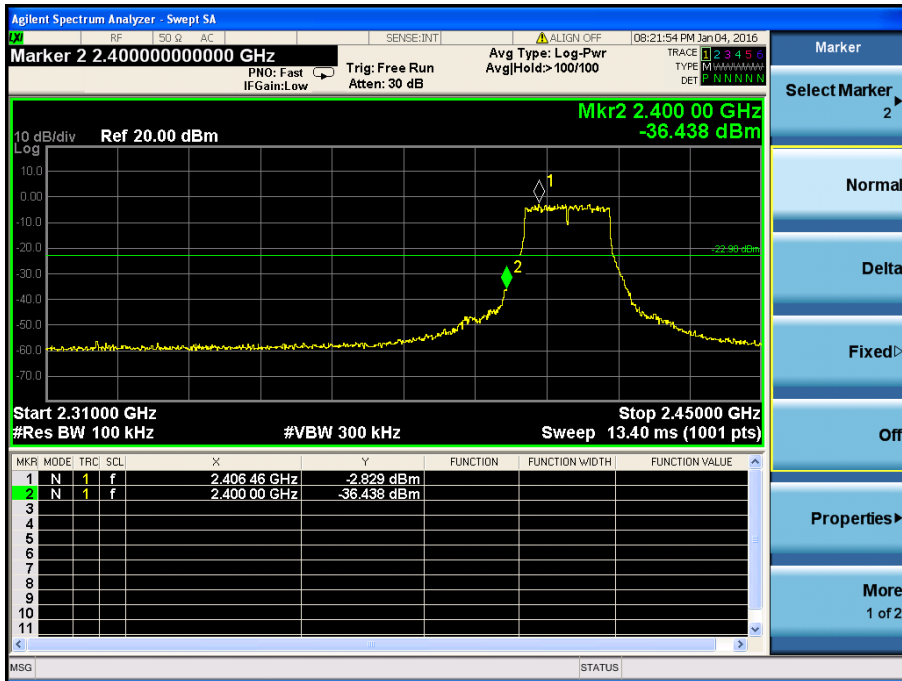



Middle Channel

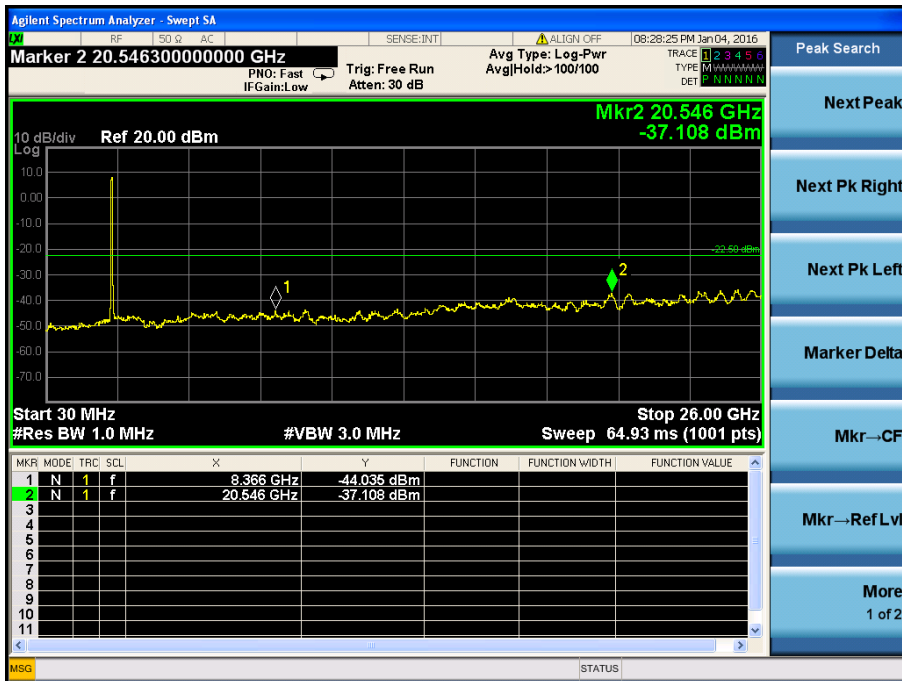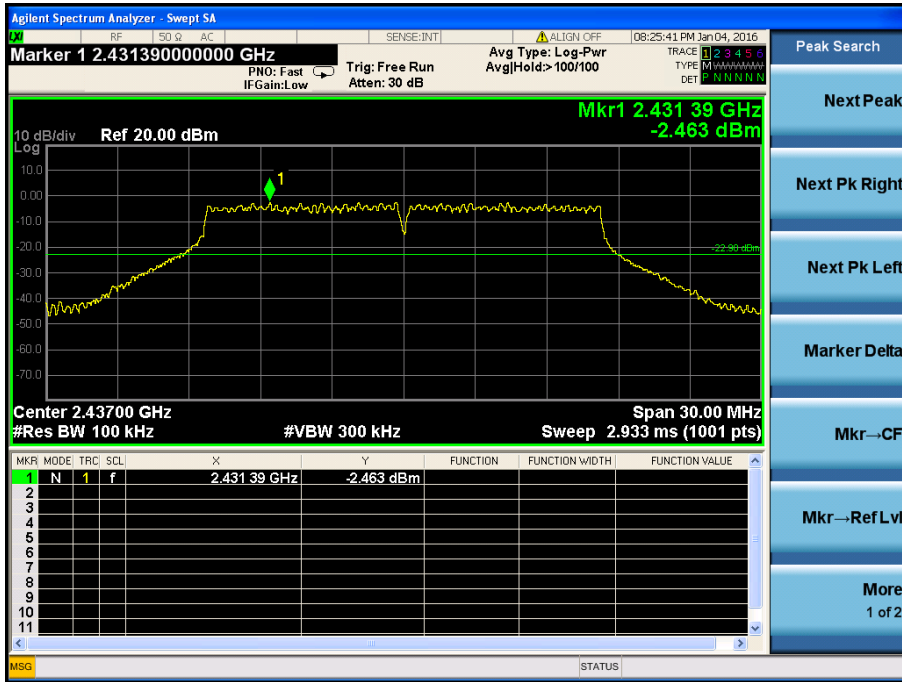



High Channel

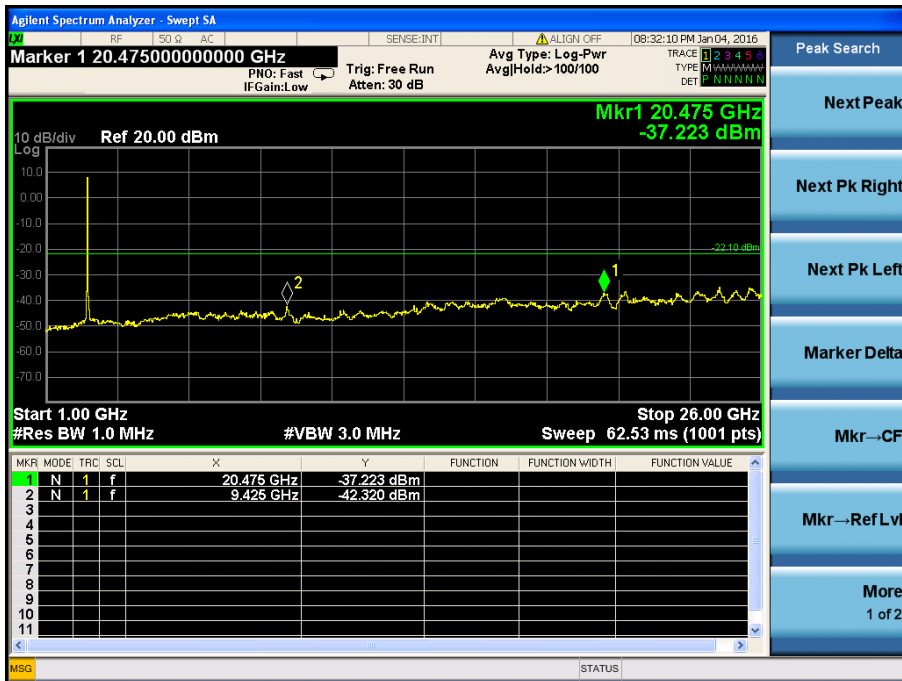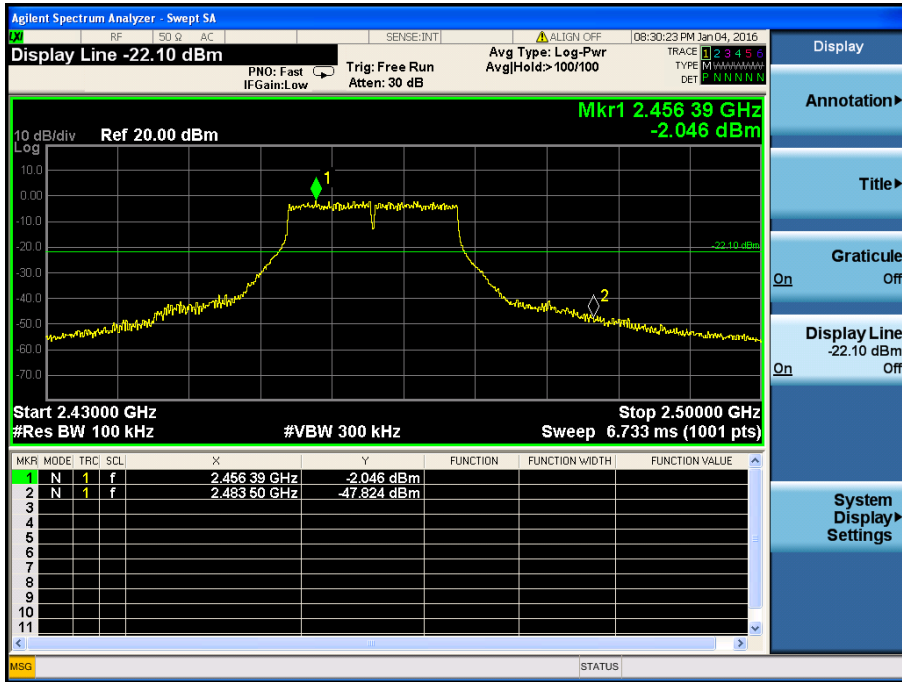



11n-HT40
Low Channel

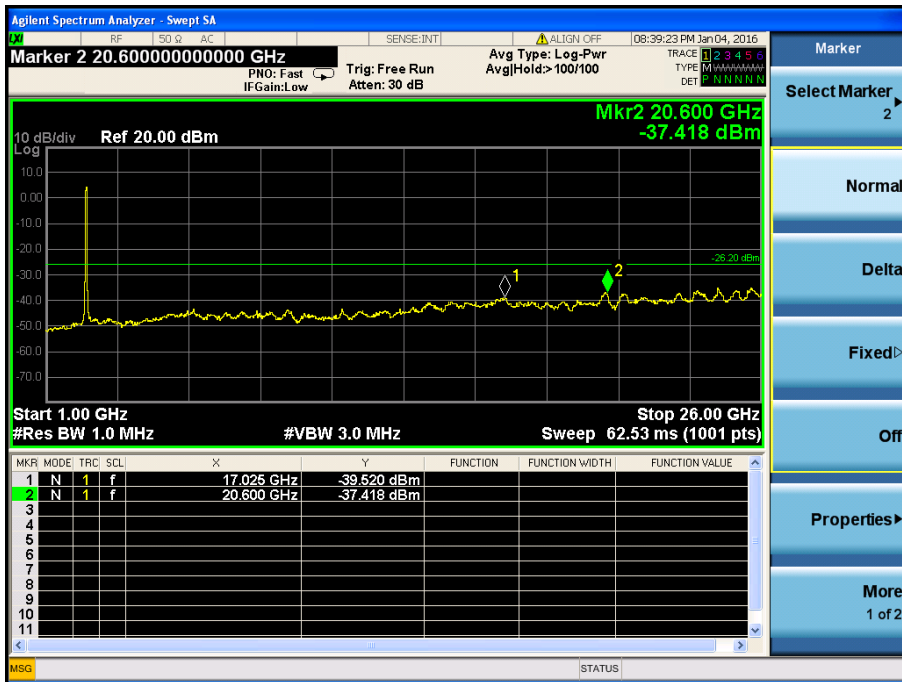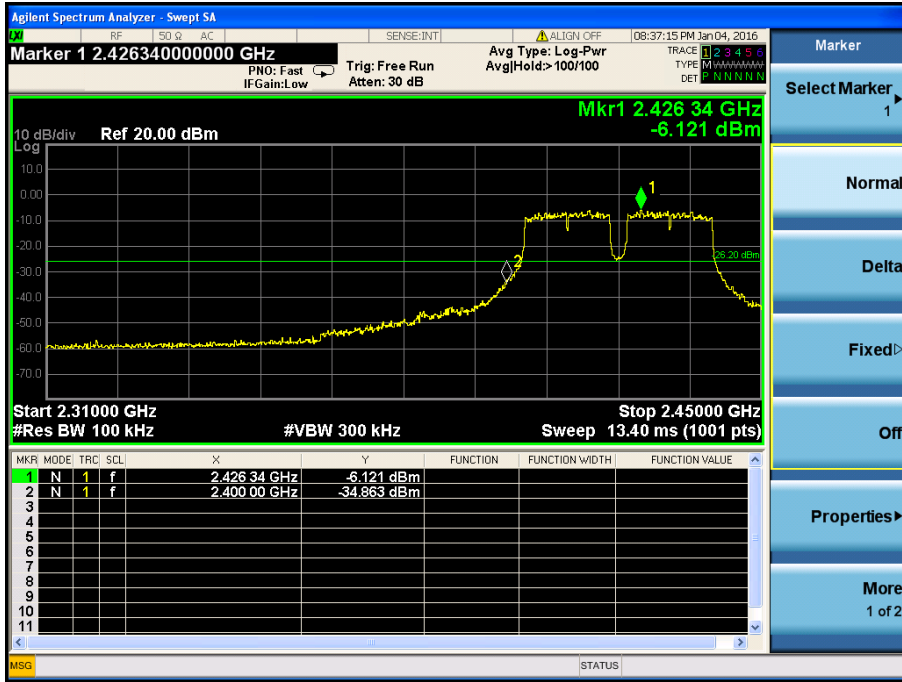



Middle Channel

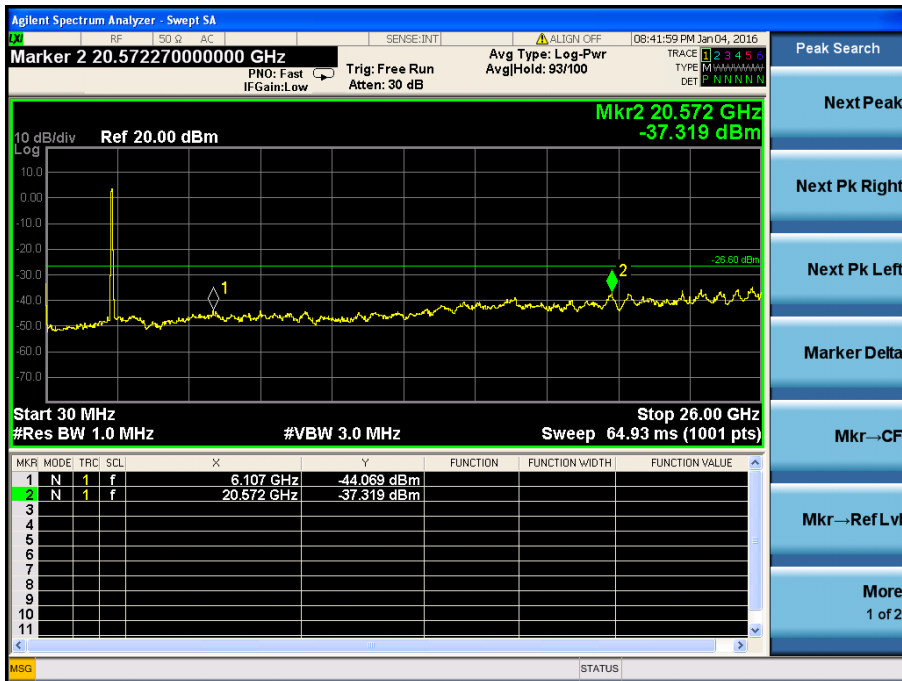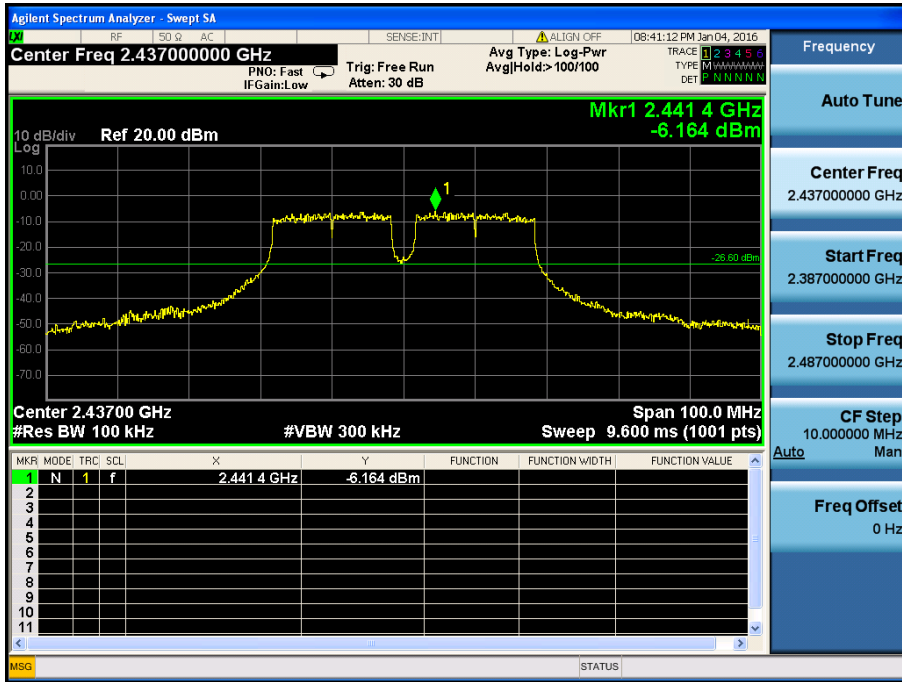



High Channel

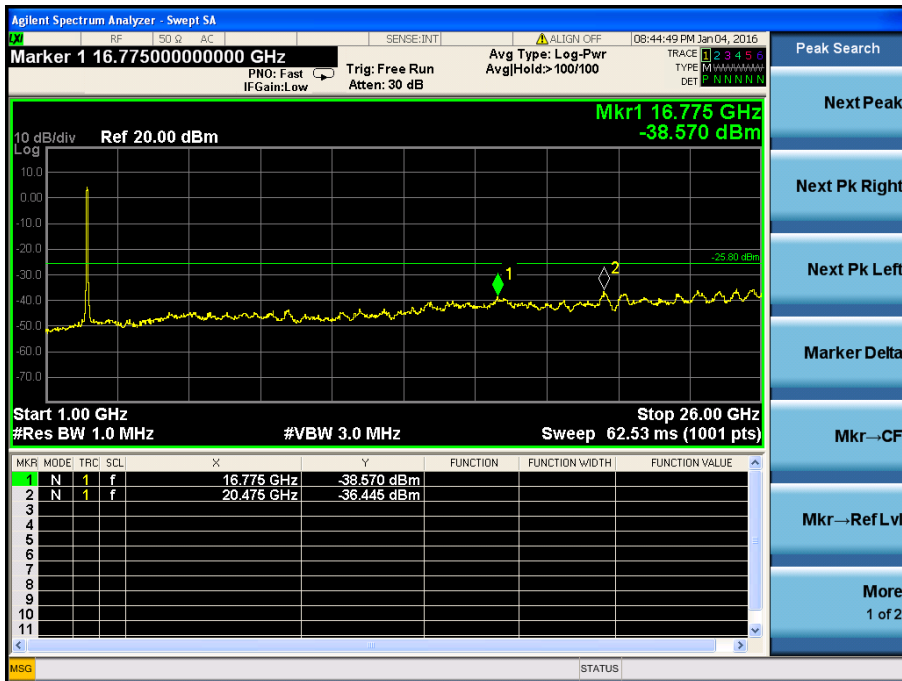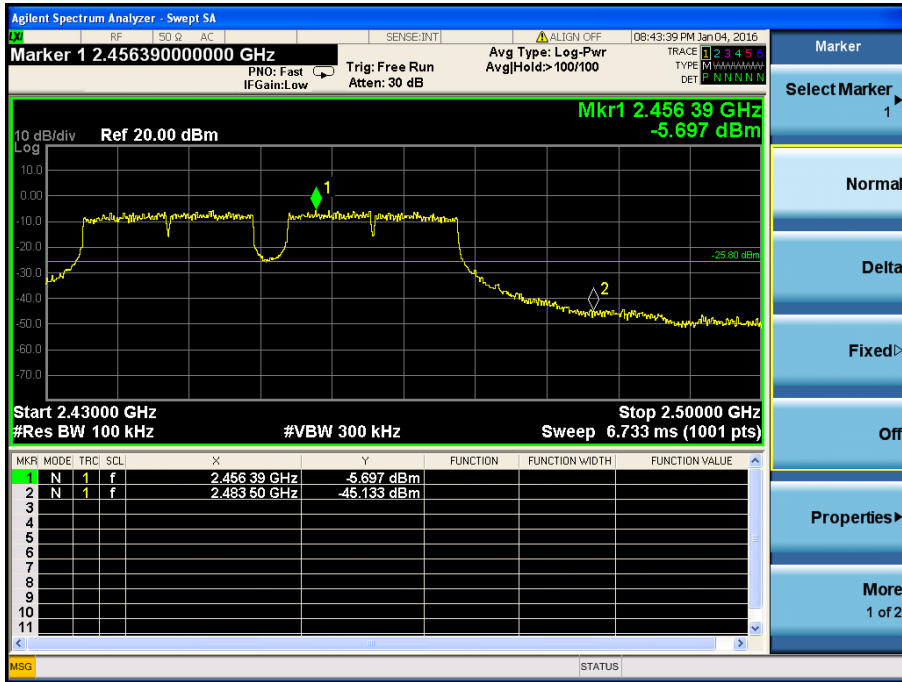



Ant. 2
802.11b
Low Channel

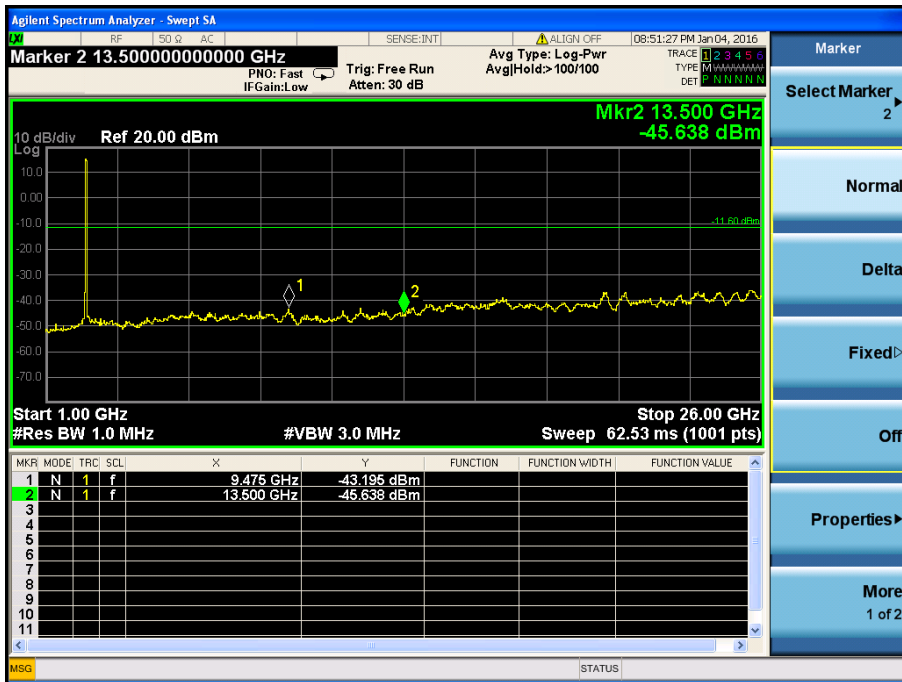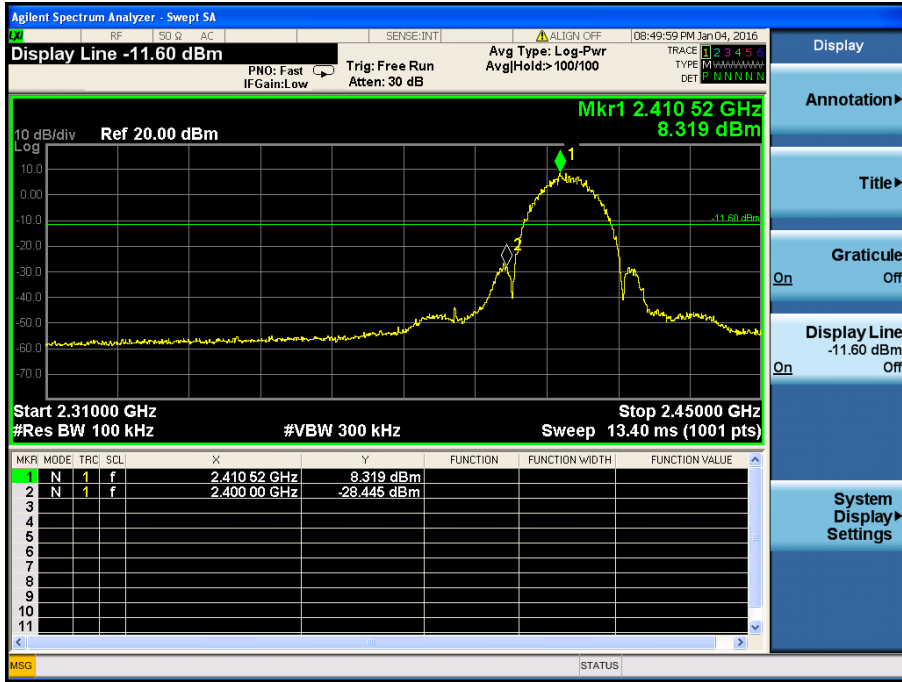



Middle Channel

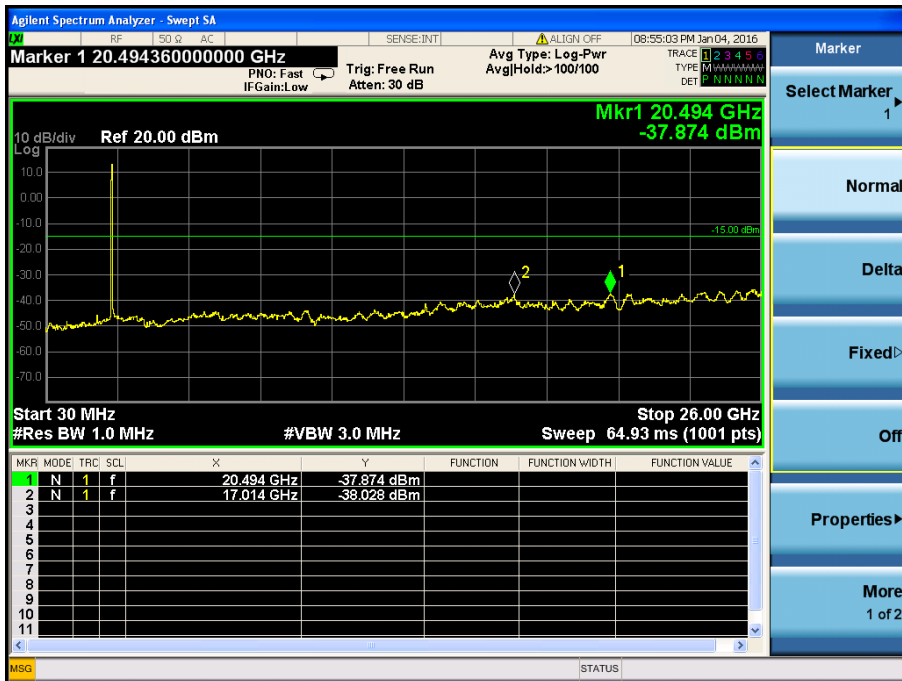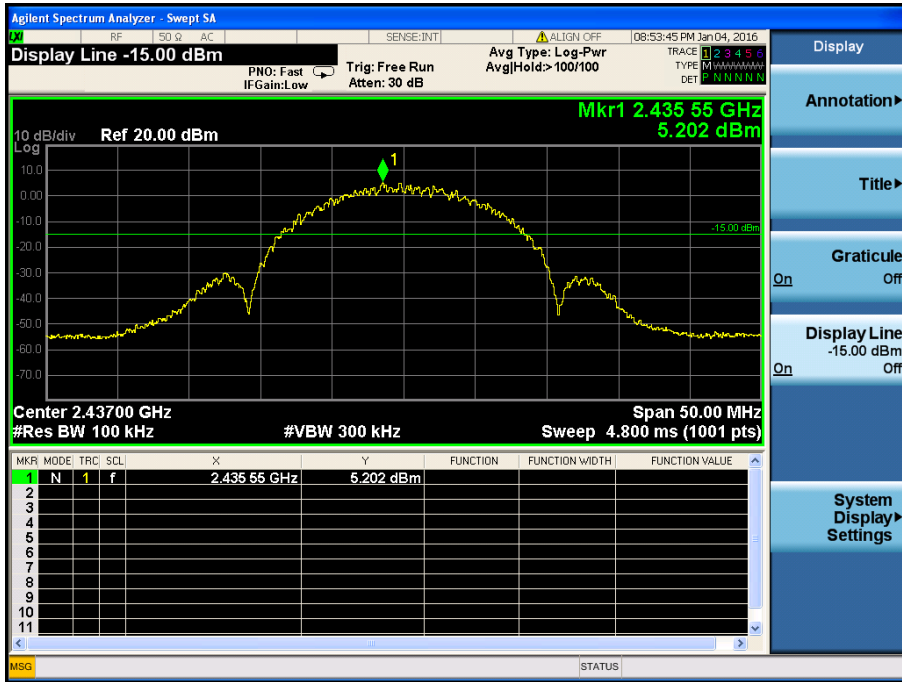



High Channel

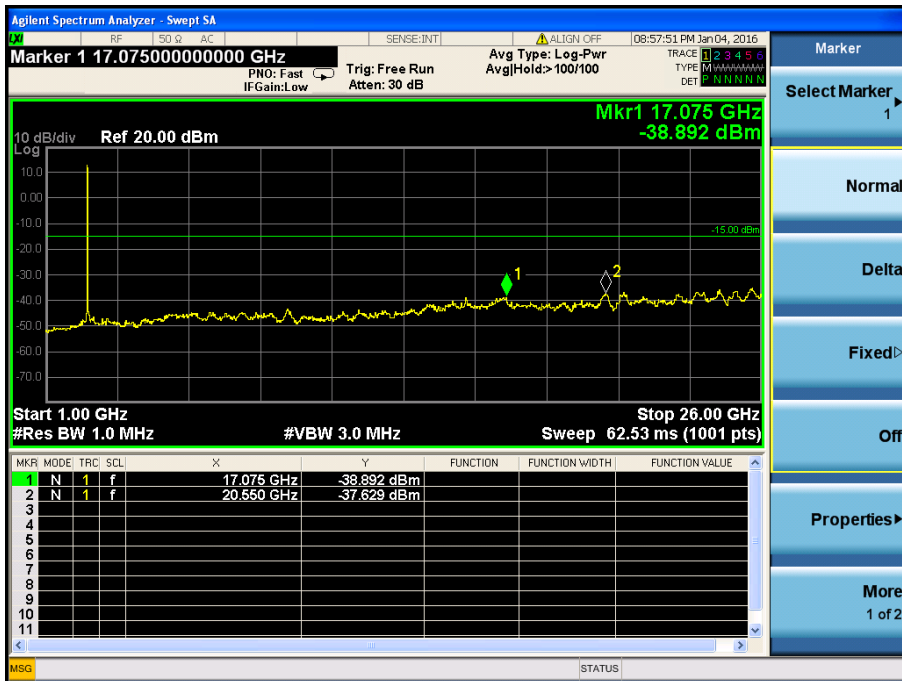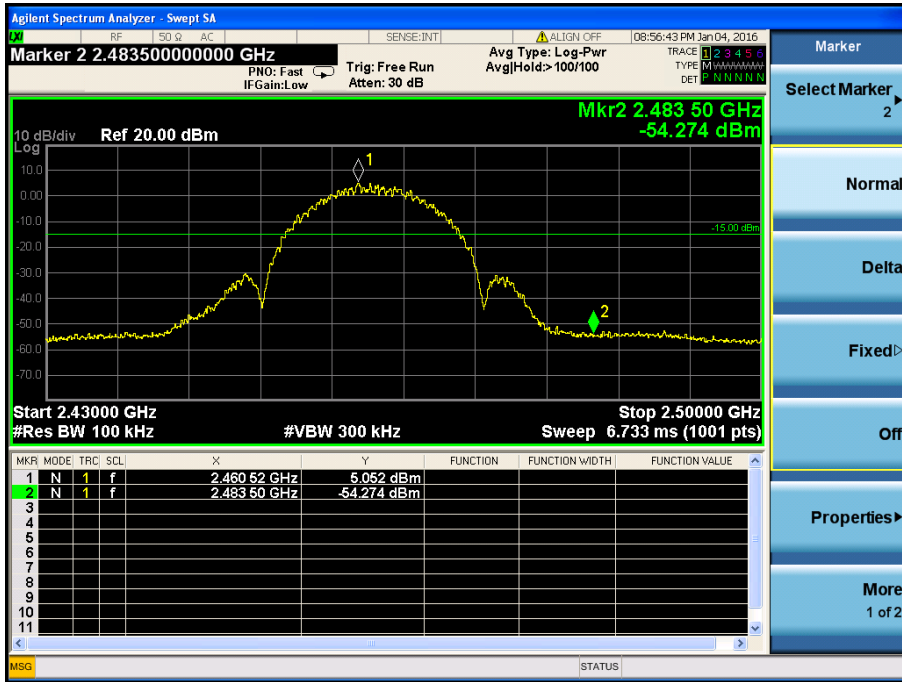



802.11g
Low Channel

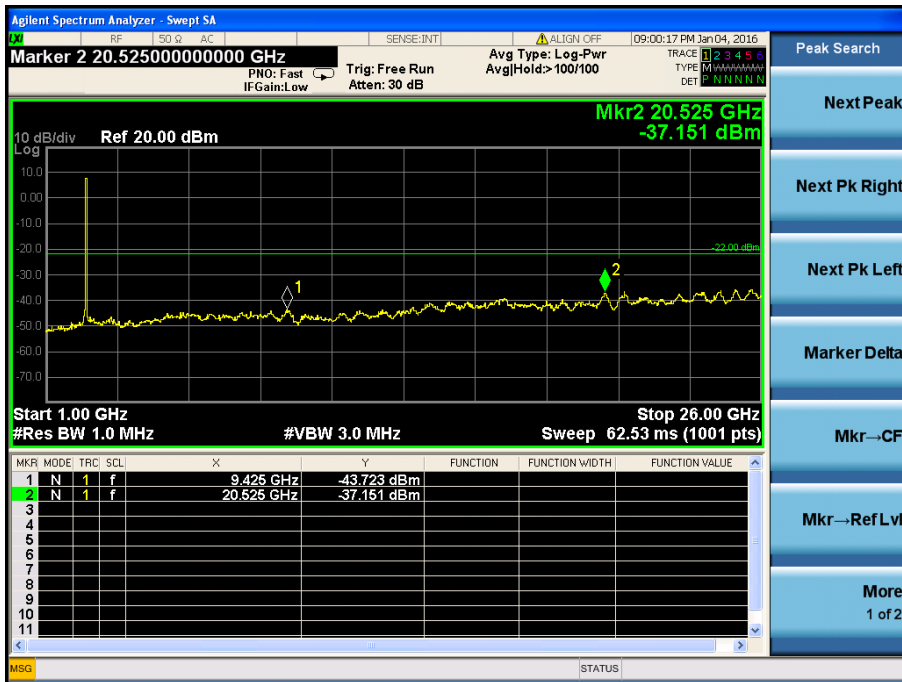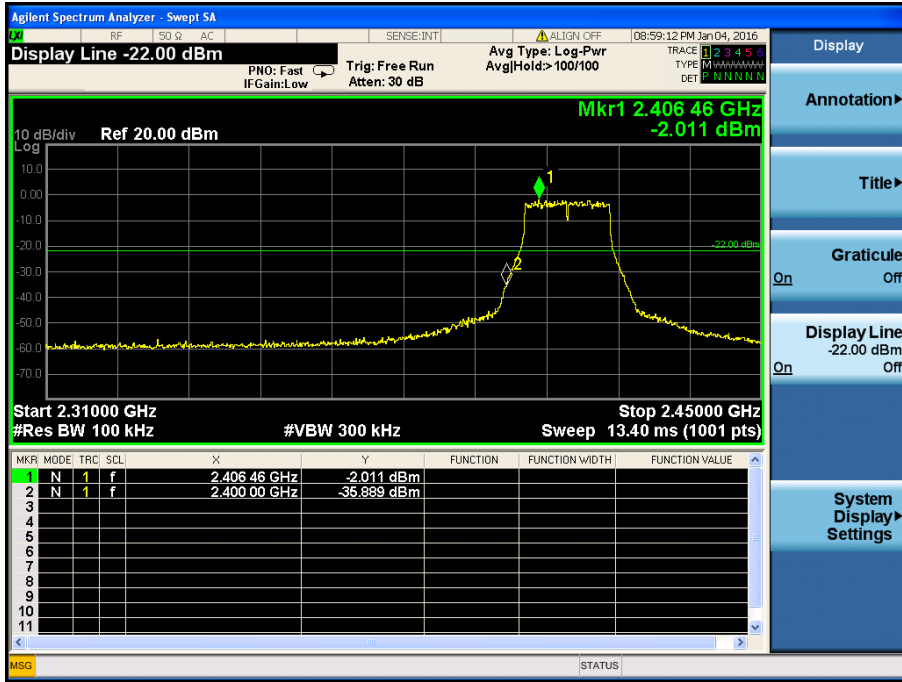



Middle Channel

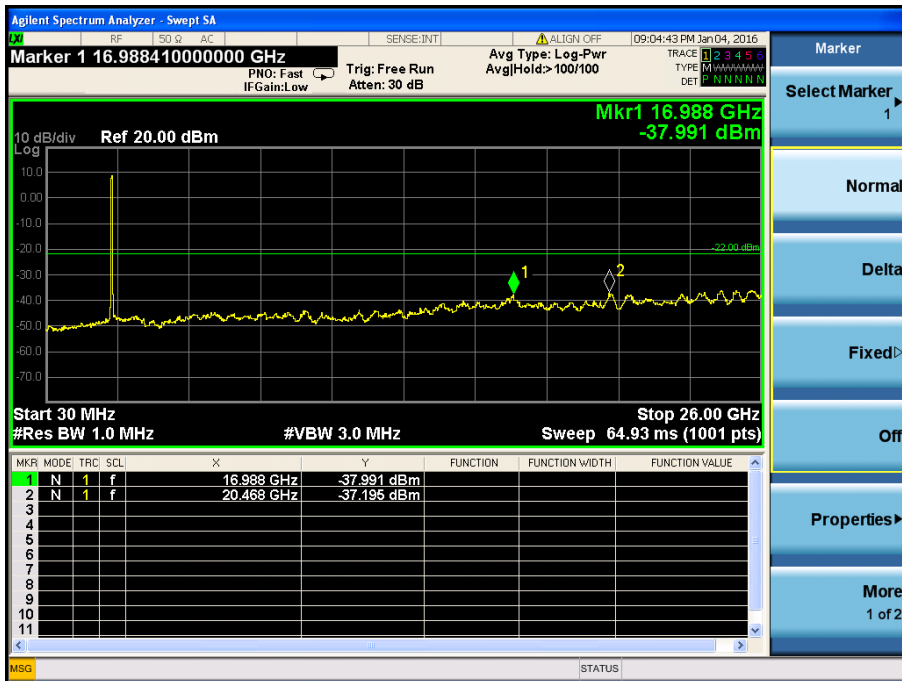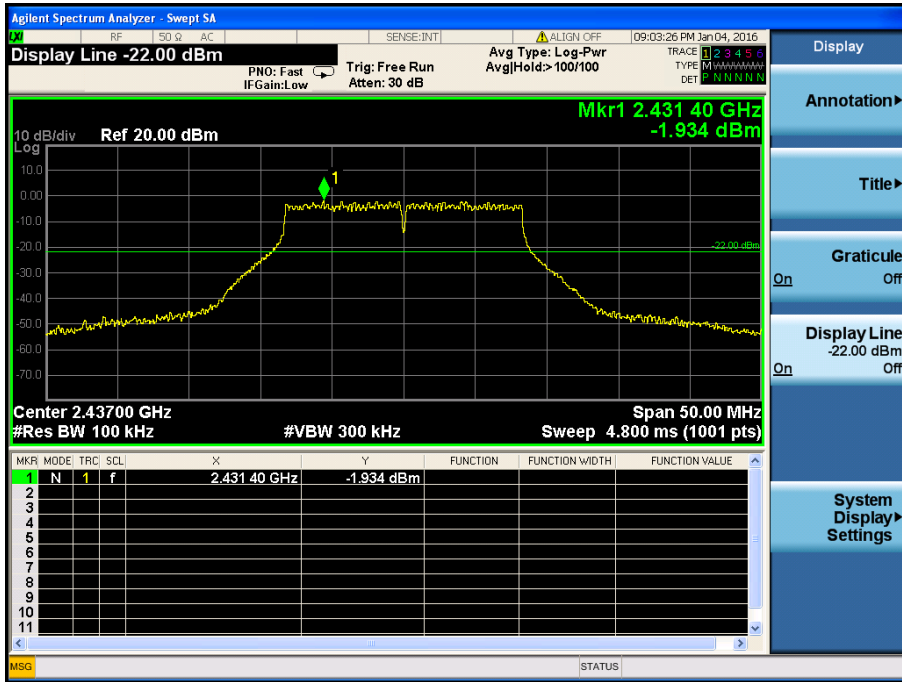



High Channel

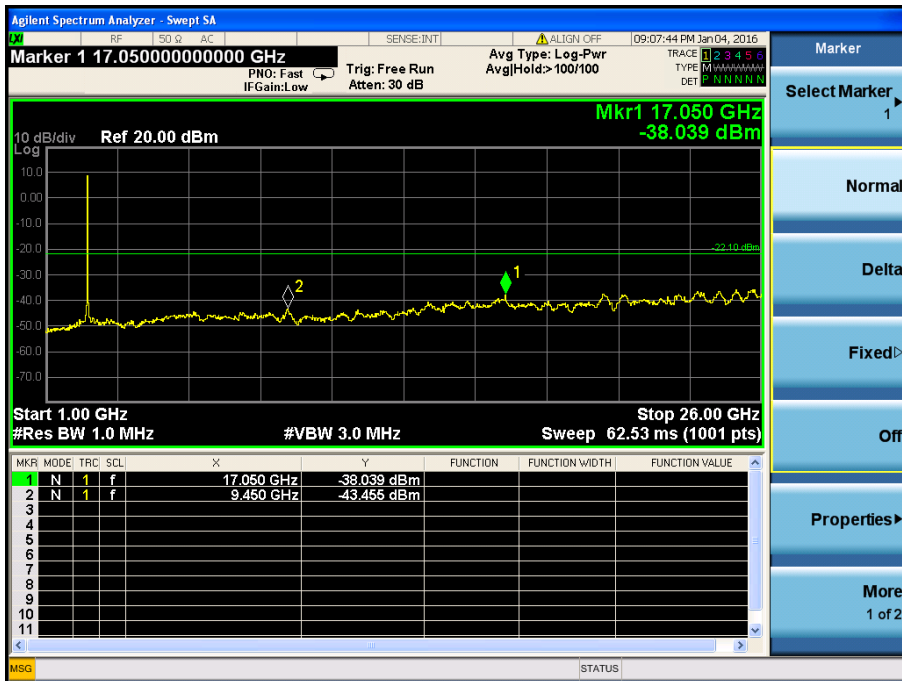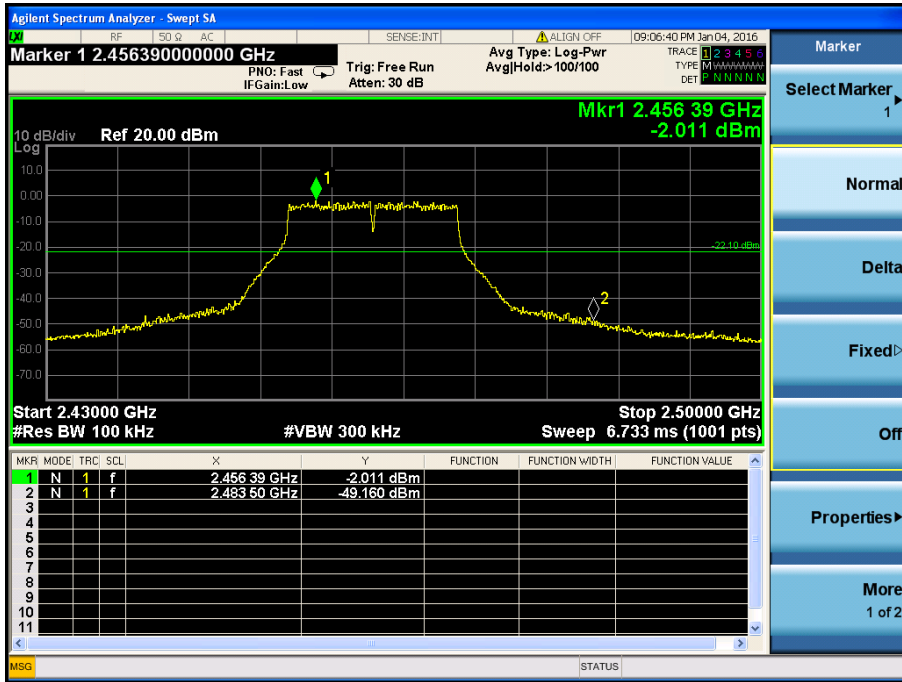



802.11n-HT20
Low Channel

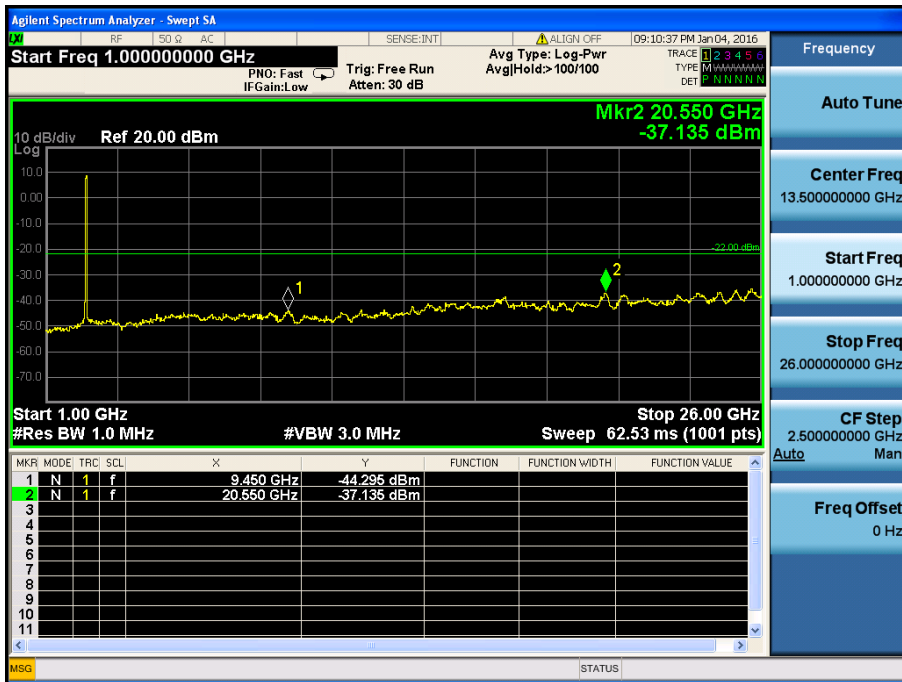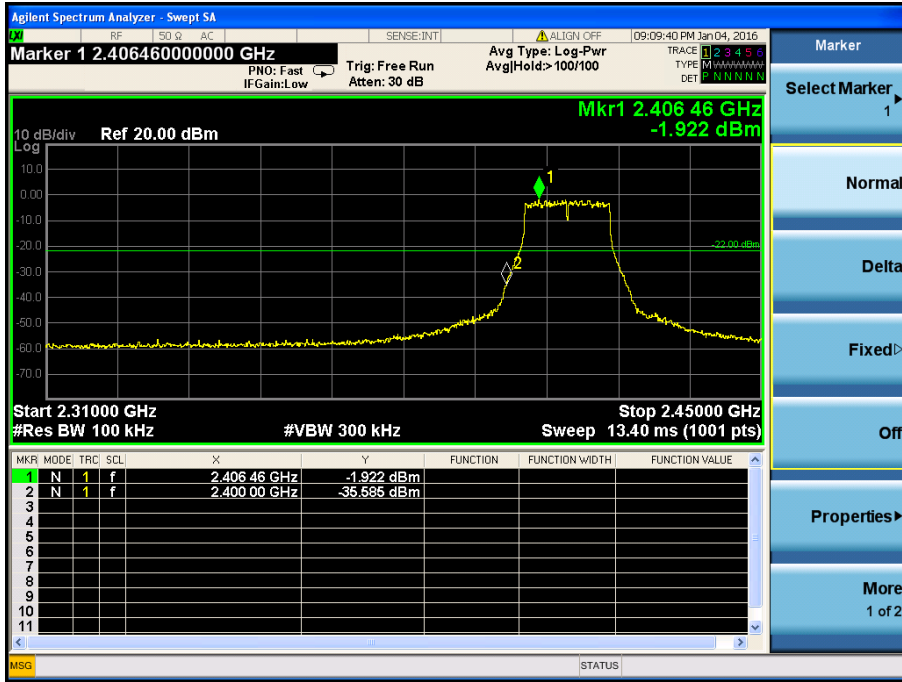



Middle Channel

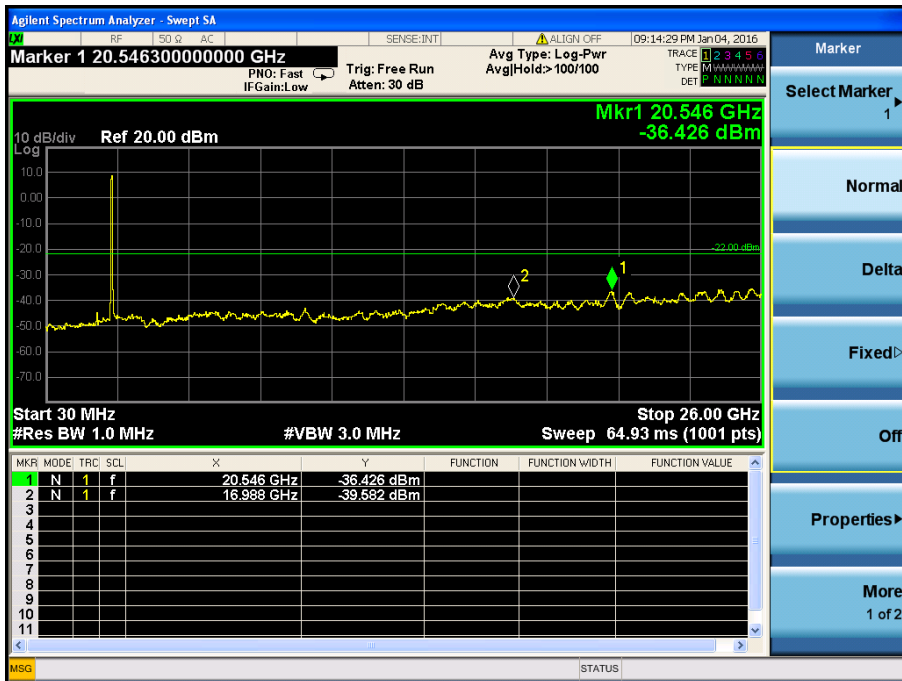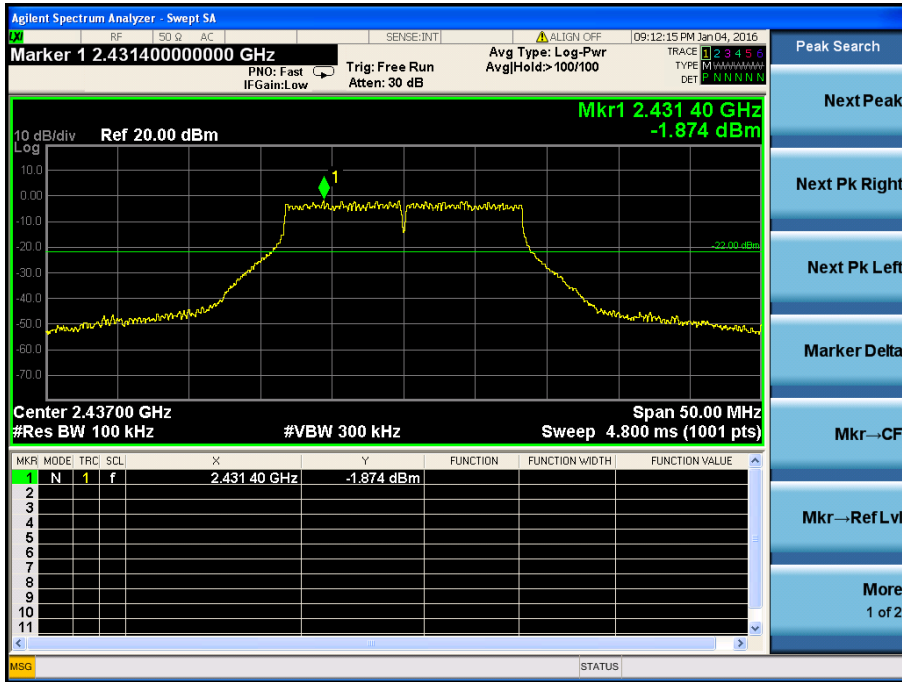



High Channel

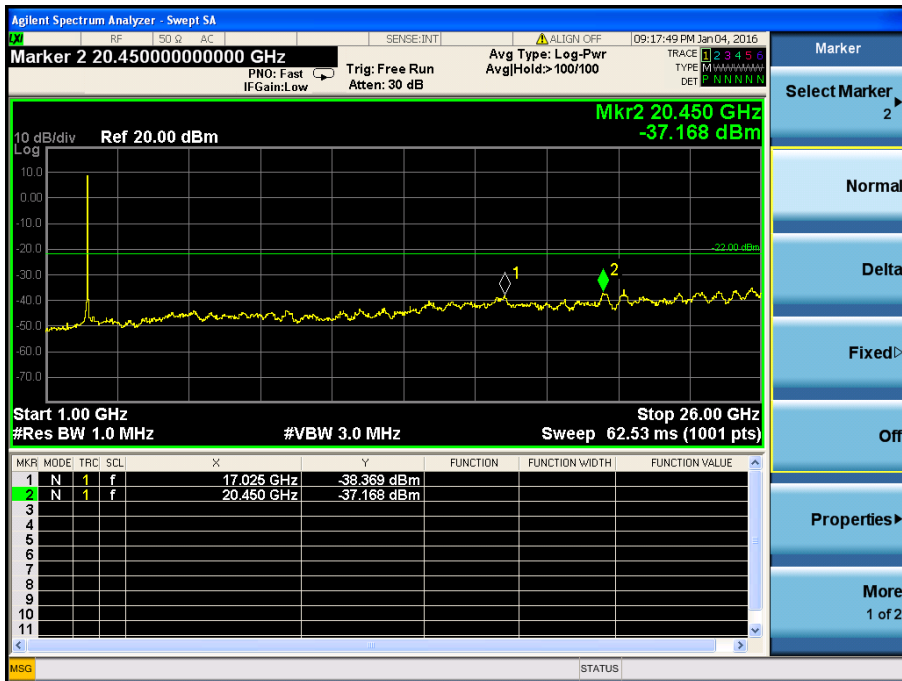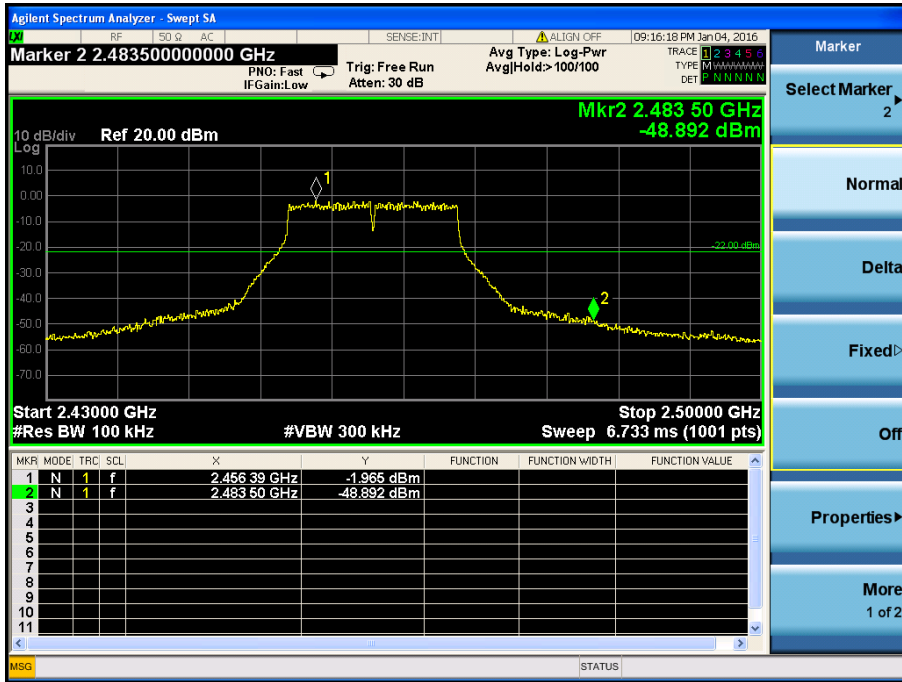



802.11n-HT40
Low Channel

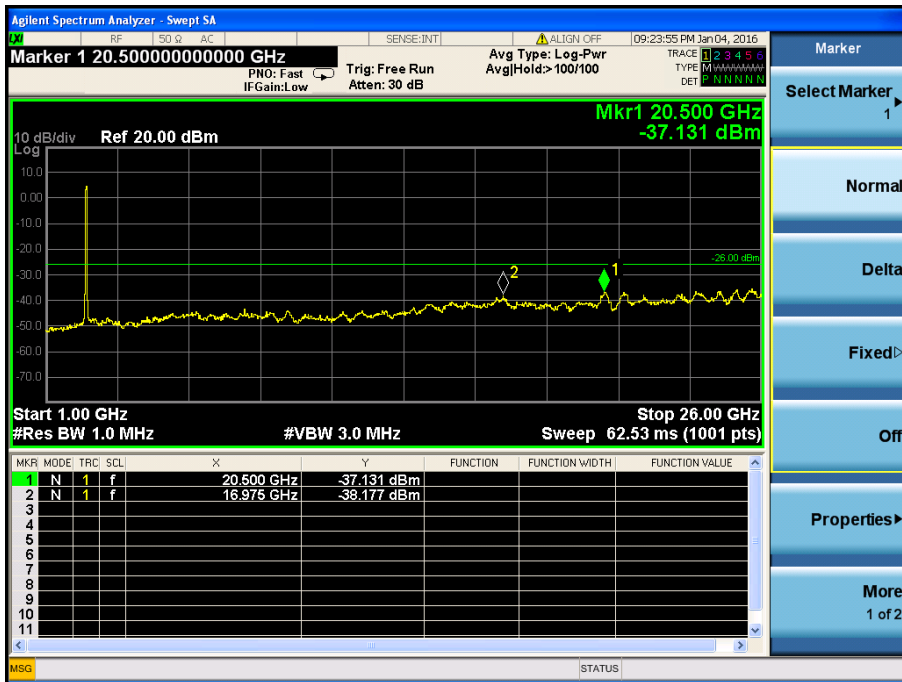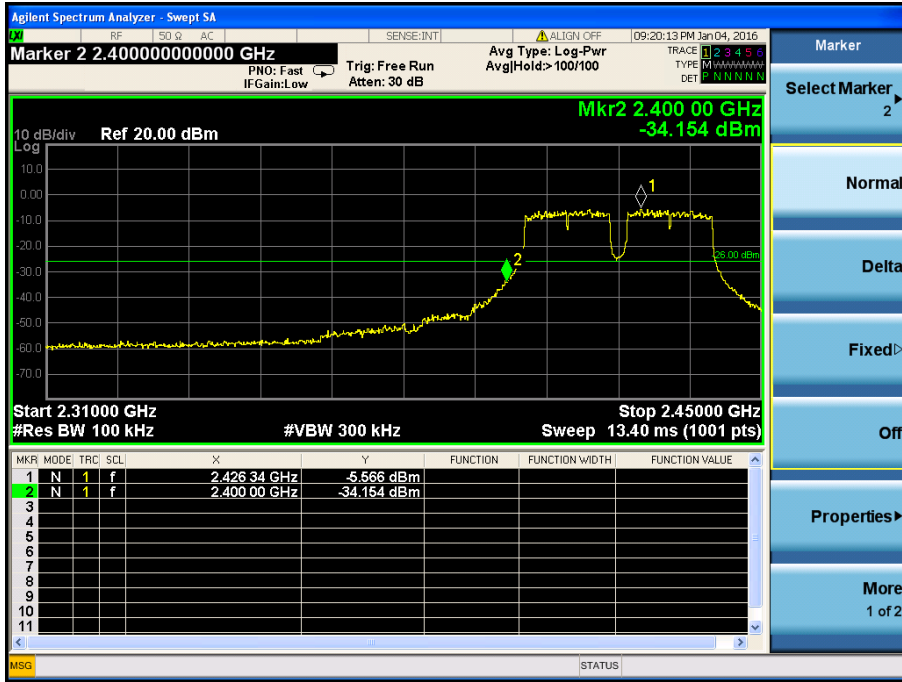

Middle Channel

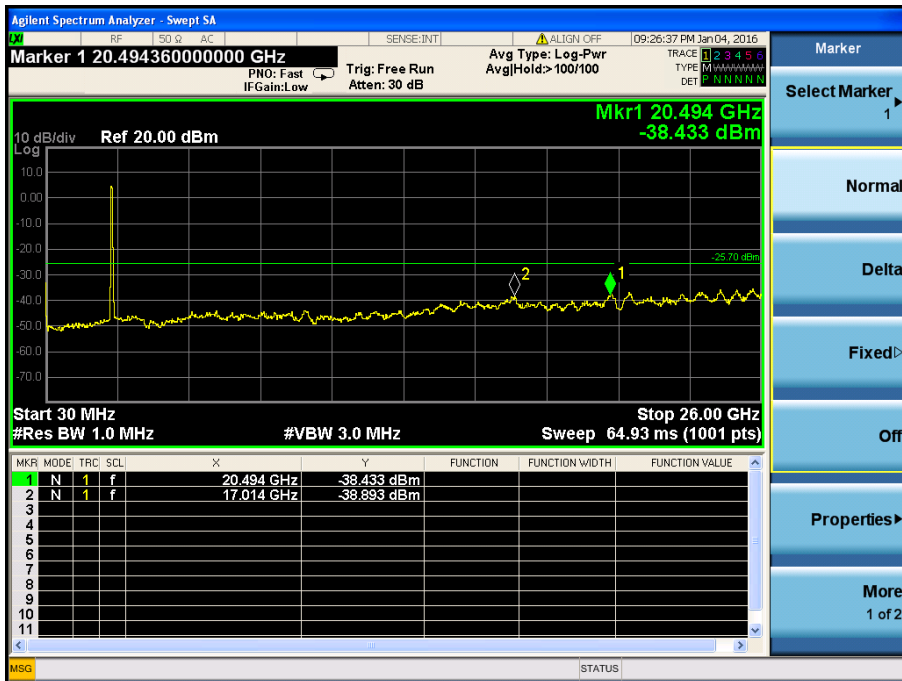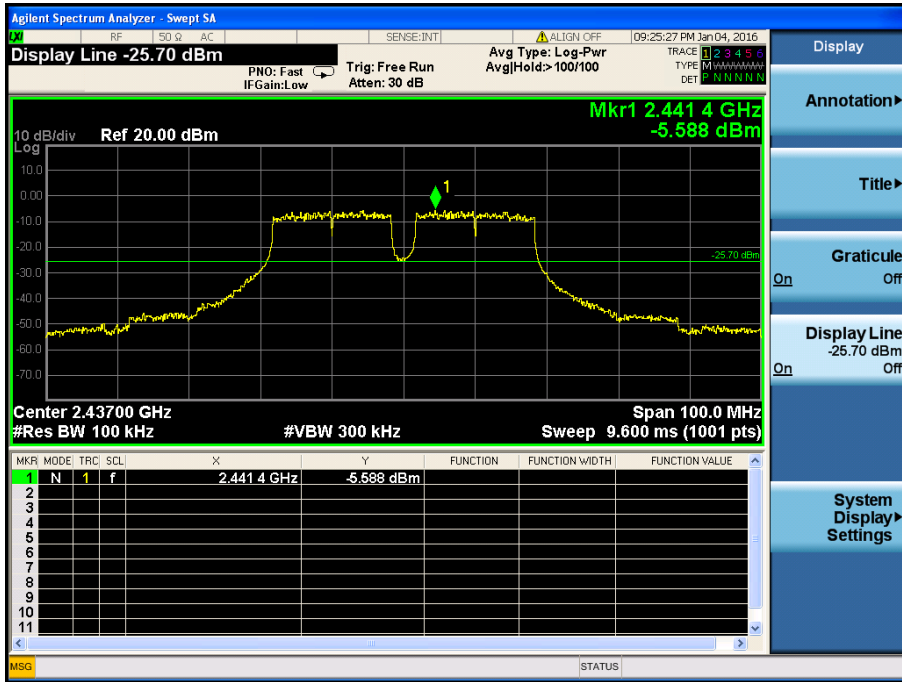

High Channel

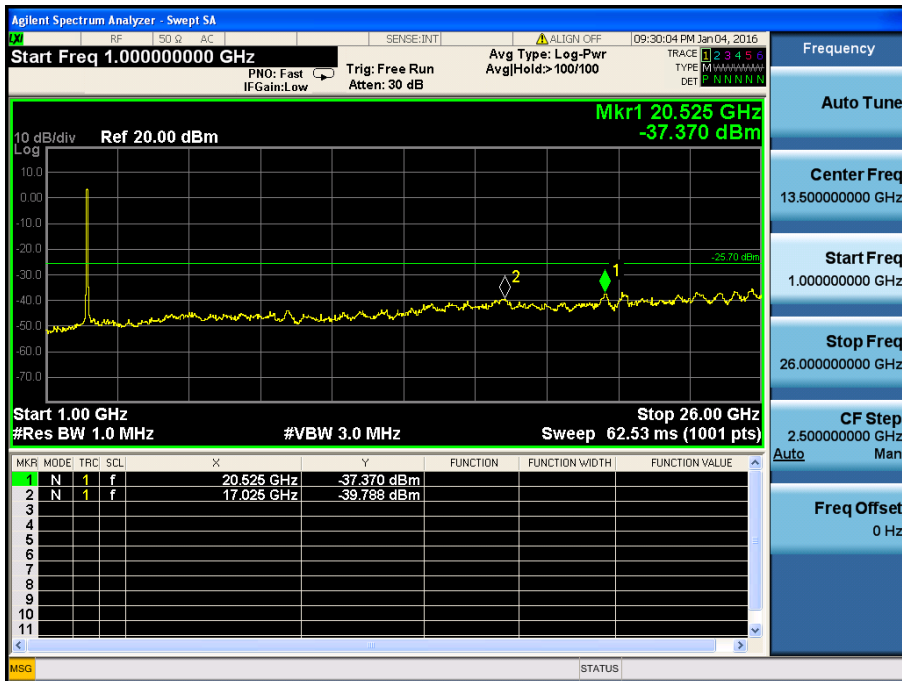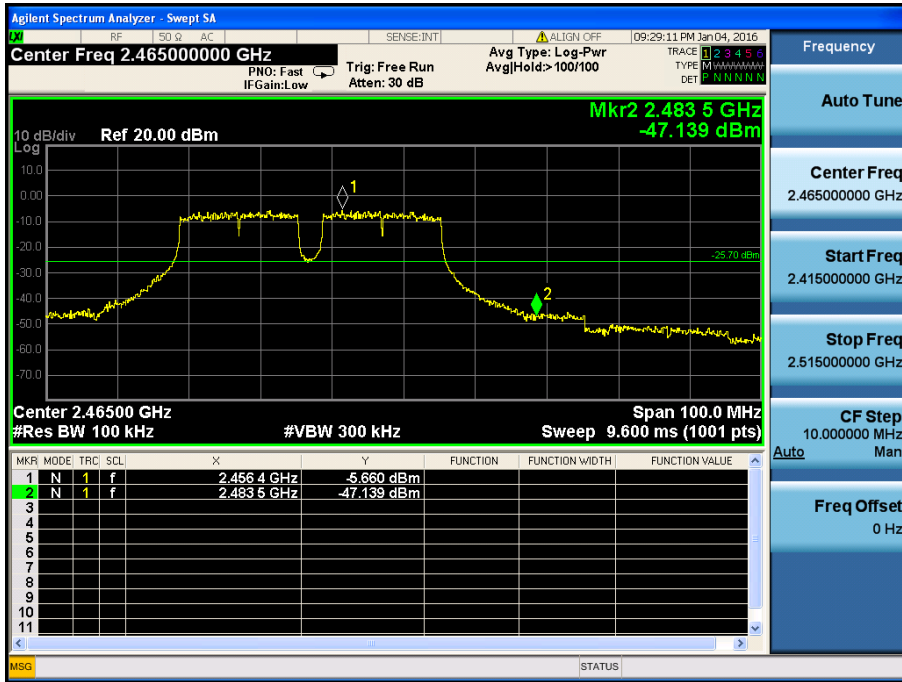

10. Conducted Emissions

10.1 Measurement Uncertainty


Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

10.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.3 Basic Test Setup Block Diagram

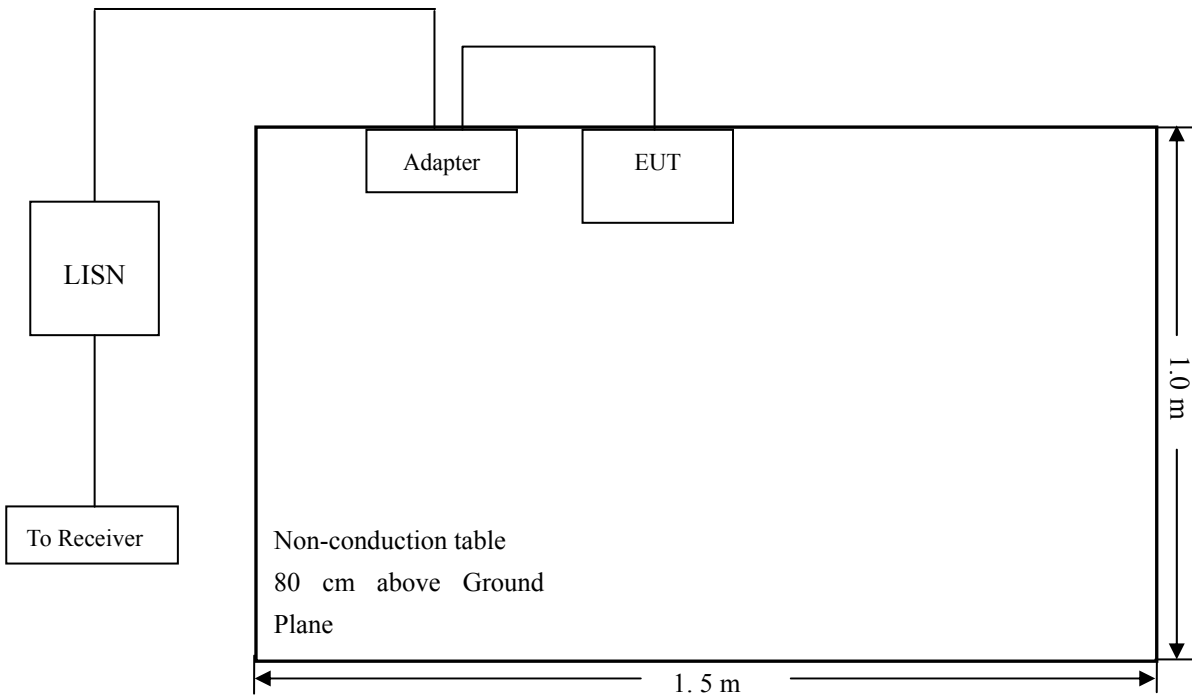

10.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

10.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

10.6 Summary of Test Results/Plots

According to the data in section 10.7, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:


-7.99 dB at 0.2020MHz in the **Neutral** mode, **Peak** detector, **0.15-30MHz**

10.7 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: 360 video camera
 Tested Model: Insta360 4K beta
 Operating Condition: Transmitting(Wi-Fi)
 Comment: AC 120V/60Hz; Adapter DC 5V/3A

Test Specification: Neutral

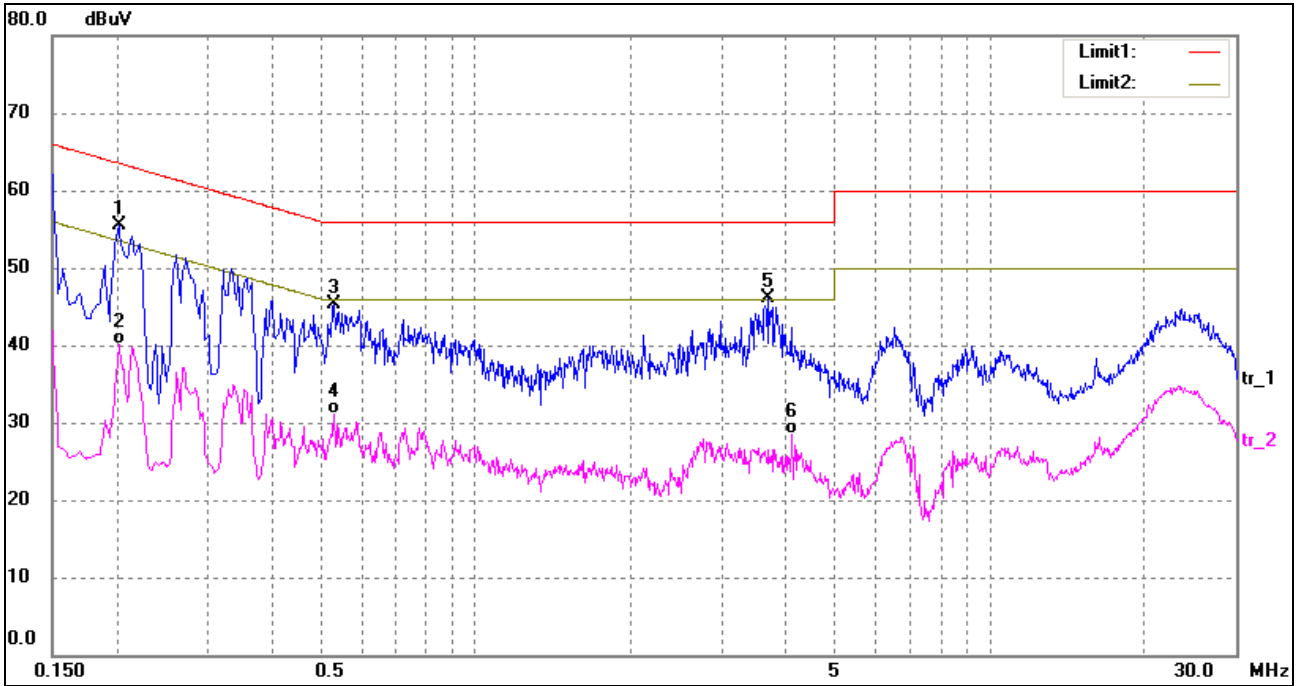

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.2020	43.03	12.50	55.53	63.52	-7.99	peak
2	0.2020	27.58	12.50	40.08	53.52	-13.44	AVG
3	0.5300	32.71	12.53	45.24	56.00	-10.76	peak
4	0.5300	18.63	12.53	31.16	46.00	-14.84	AVG
5	3.7060	33.10	13.00	46.10	56.00	-9.90	peak
6	4.1299	15.46	13.00	28.46	46.00	-17.54	AVG

Test Specification: Line

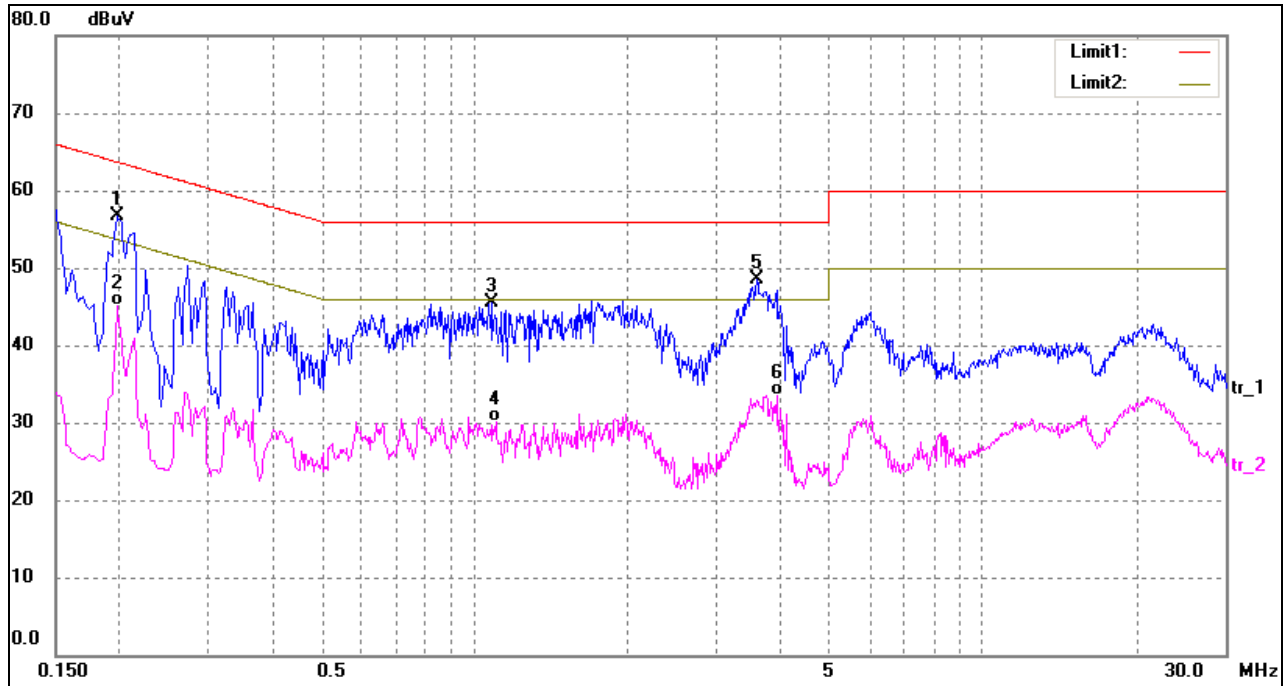

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.2020	39.09	12.50	51.59	63.53	-11.94	QP
2	0.2020	22.32	12.50	34.82	53.53	-18.71	AVG
3	1.9500	23.49	13.00	36.49	56.00	-19.51	QP
4	1.9500	13.10	13.00	26.10	46.00	-19.90	AVG
5	3.8740	26.63	13.00	39.63	56.00	-16.37	QP
6	3.8740	16.71	13.00	29.71	46.00	-16.29	AVG

***** END OF REPORT *****