

TEST REPORT

Product Name : Wireless Headphones
Brand Mark : SOUNDPEATS
Model No. : Life
Extension Model : Life Pro, Life2, Life2 Pro, Wings2, Wings2 Pro, Life3, Life4, Life5, Life6
FCC ID : 2AFTU-DD031
Report Number : BLA-EMC-202206-A2302
Date of Sample Receipt : 2022/6/8
Date of Test : 2022/6/8 to 2022/6/20
Date of Issue : 2022/6/20
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

Shenzhen Soundsoul Information Technology Co.,Ltd
Room 1308-1309, Building B, Huihai Square, Chuangye Road, Longhua District,
Shenzhen, Guangdong, China

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

Charlie

Approved by:

Blue Zhong

Review by:

Sueals

Date:

2022/6/20



REPORT REVISE RECORD

Version No.	Date	Description
00	2022/6/20	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	5
2	GENERAL INFORMATION	6
3	GENERAL DESCRIPTION OF E.U.T.	6
4	TEST ENVIRONMENT	7
5	TEST MODE	7
6	MEASUREMENT UNCERTAINTY	7
7	DESCRIPTION OF SUPPORT UNIT	8
8	LABORATORY LOCATION	8
9	TEST INSTRUMENTS LIST	9
10	ANTENNA REQUIREMENT	13
10.1	CONCLUSION	13
11	CONDUCTED SPURIOUS EMISSIONS	14
11.1	LIMITS	14
11.2	BLOCK DIAGRAM OF TEST SETUP	14
11.3	TEST DATA	15
12	CARRIER FREQUENCIES SEPARATION	16
12.1	LIMITS	16
12.2	BLOCK DIAGRAM OF TEST SETUP	16
12.3	TEST DATA	16
13	20DB BANDWIDTH	17
13.1	BLOCK DIAGRAM OF TEST SETUP	17
13.2	TEST DATA	17
14	CONDUCTED PEAK OUTPUT POWER	18
14.1	LIMITS	18
14.2	BLOCK DIAGRAM OF TEST SETUP	18
14.3	TEST DATA	19
15	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	20
15.1	LIMITS	20
15.2	BLOCK DIAGRAM OF TEST SETUP	20

15.3	PROCEDURE	21
15.4	TEST DATA	22
16	RADIATED SPURIOUS EMISSIONS	24
16.1	LIMITS	24
16.2	BLOCK DIAGRAM OF TEST SETUP	25
16.3	PROCEDURE	26
16.4	TEST DATA	26
17	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	35
17.1	LIMITS	35
17.2	BLOCK DIAGRAM OF TEST SETUP	36
17.3	PROCEDURE	36
17.4	TEST DATA	37
18	CONDUCTED BAND EDGES MEASUREMENT	42
18.1	LIMITS	42
18.2	BLOCK DIAGRAM OF TEST SETUP	42
18.3	TEST DATA	43
19	DWELL TIME	44
19.1	LIMITS	44
19.2	BLOCK DIAGRAM OF TEST SETUP	44
19.3	TEST DATA	45
20	HOPPING CHANNEL NUMBER	46
20.1	LIMITS	46
20.2	BLOCK DIAGRAM OF TEST SETUP	46
20.3	TEST DATA	46
21	APPENDIX	47
	APPENDIX A: PHOTOGRAPHS OF TEST SETUP	96

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass

2 GENERAL INFORMATION

Applicant	Shenzhen Soundsoul Information Technology Co.,Ltd
Address	Room 1308-1309, Building B, Huihai Square, Chuangye Road, Longhua District, Shenzhen, Guangdong China
Manufacturer	Shenzhen Soundsoul Information Technology Co.,Ltd
Address	Room 1308-1309, Building B, Huihai Square, Chuangye Road, Longhua District, Shenzhen, Guangdong China
Factory	Shenzhen Soundsoul Information Technology Co.,Ltd
Address	Room 1308-1309, Building B, Huihai Square, Chuangye Road, Longhua District, Shenzhen, Guangdong China
Product Name	Wireless Headphones
Test Model No.	Life
Extension Model	Life Pro、Life2、Life2 Pro、Wings2、Wings2 Pro、Life3、Life4、Life5、Life6
Remark	All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are model name for commercial purpose.

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	N/A
Software Version	N/A
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK, pi/4DQPSK, 8DPSK
Channel Spacing:	1MHz
Number of Channels:	79
Antenna Type:	Chip Antenna
Antenna Gain:	2.7dBi (Provided by the customer)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.7V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in continuously transmitting mode with modulation. (hopping and non hopping mode all have been tested, non hopping mode is worse case for RE)
Remark: Full battery is used during all test except ac conducted emission, DH1, DH3, DH5 all have been tested	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
AC Adapter	UGREEN	CD112	N/A	N/A
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province,
China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

Test Equipment Of Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

Test Equipment Of Conducted Band Edges Measurement

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Conducted Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Dwell Time

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Hopping Channel Number

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022

Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Carrier Frequencies Separation

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of 20dB Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Conducted Peak Output Power

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	25/11/2020	24/11/2023
Receiver	R&S	ESPI3	101082	24/9/2021	23/9/2022
LISN	R&S	ENV216	3560.6550.15	24/9/2021	23/9/2022
LISN	AT	AT166-2	AKK1806000003	26/9/2021	25/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

BlueAsia

10 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A

10.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.7dBii.


11 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

11.1 LIMITS

Limit:	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

11.2 BLOCK DIAGRAM OF TEST SETUP

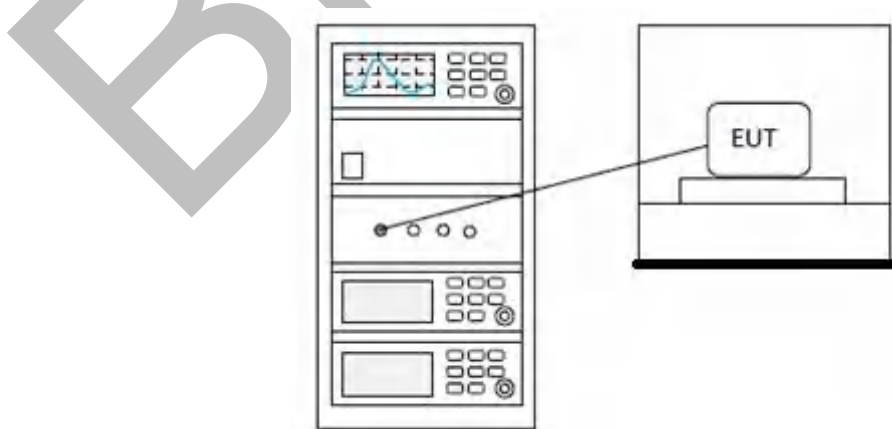

11.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


12 CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

12.1 LIMITS

Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

12.2 BLOCK DIAGRAM OF TEST SETUP

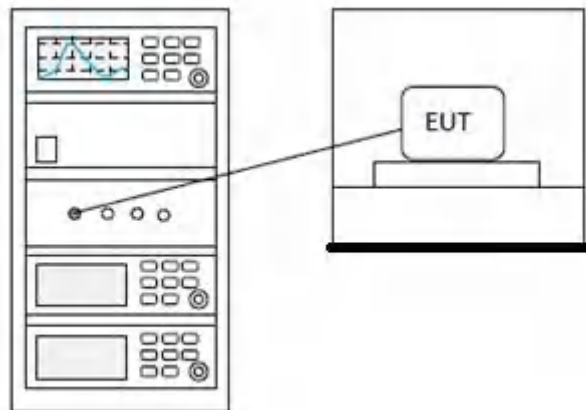


12.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

13 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

13.1 BLOCK DIAGRAM OF TEST SETUP

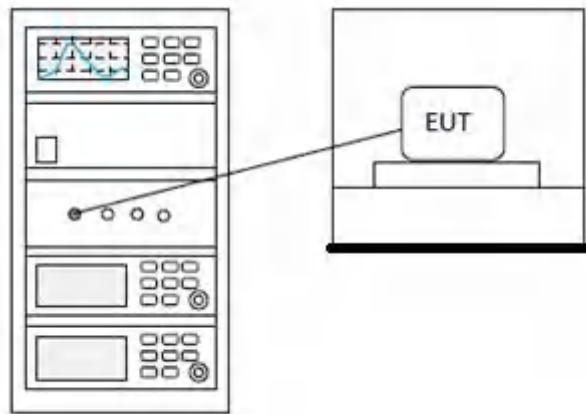

13.2 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


14 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

14.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

14.2 BLOCK DIAGRAM OF TEST SETUP

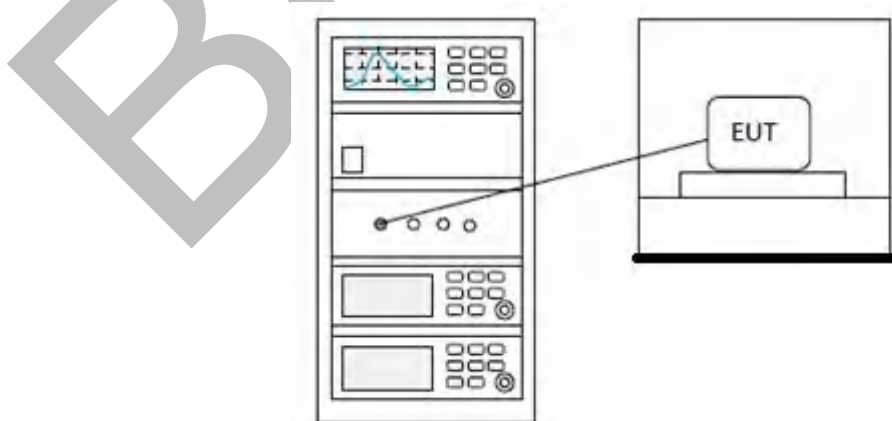

14.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

15 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

15.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

15.2 BLOCK DIAGRAM OF TEST SETUP

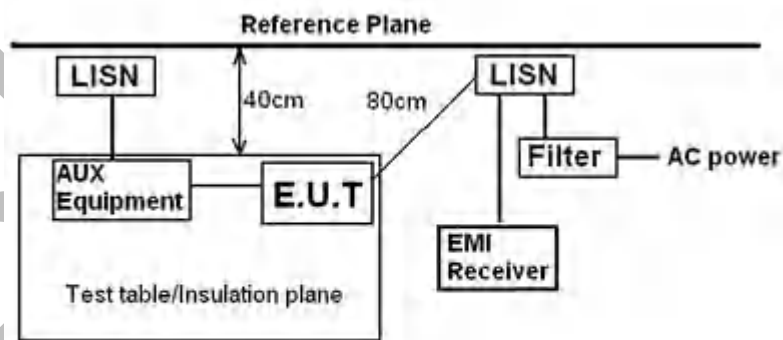


Remark:
 E.U.T: Equipment Under Test
 LISN: Line Impedance Stabilization Network
 Test table height=0.8m

15.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
 - 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
 - 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
 - 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
 - 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- Remark: LISN=Read Level+ Cable Loss+ LISN Factor

15.4 TEST DATA

[TestMode: TX]; [Line: Line]

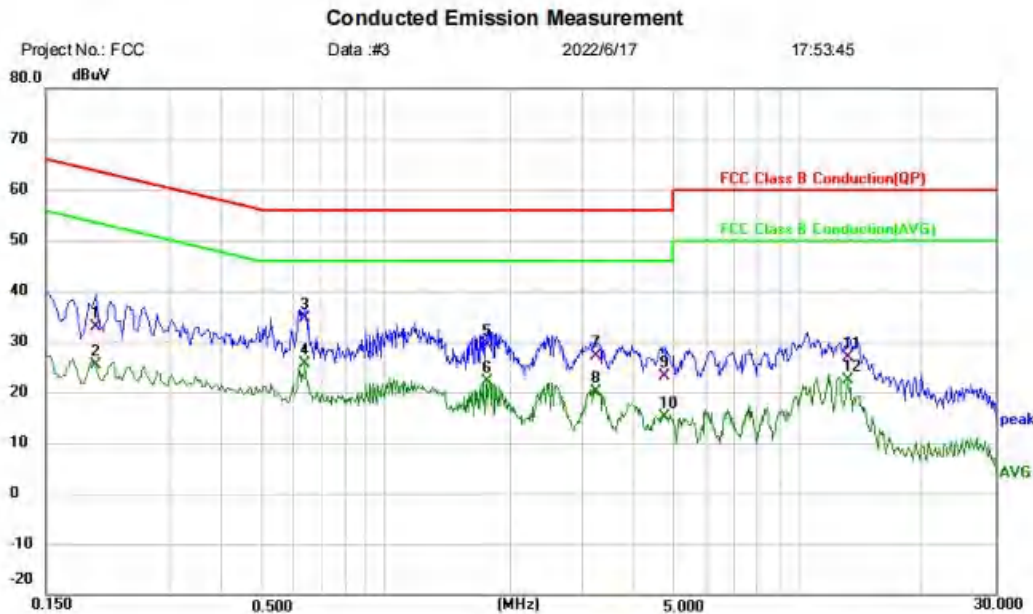

Project No.: FCC Data :#3 2022/6/17 17:53:45

Site Phase: **L1** Temperature: (C)
Limit: FCC Class B Conduction(QP) Power: Humidity: %RH
EUT: Wireless Headphones
M/N: Life
Mode: TX mode
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1980	22.58	10.23	32.81	63.69	-30.88	QP	
2		0.1980	15.20	10.23	25.43	53.69	-28.26	AVG	
3		0.6380	24.67	9.87	34.54	56.00	-21.46	QP	
4	*	0.6380	15.70	9.87	25.57	46.00	-20.43	AVG	
5		1.7700	19.47	9.94	29.41	56.00	-26.59	QP	
6		1.7700	12.10	9.94	22.04	46.00	-23.96	AVG	
7		3.2380	17.16	9.95	27.11	56.00	-28.89	QP	
8		3.2380	10.28	9.95	20.23	46.00	-25.77	AVG	
9		4.7300	13.27	9.98	23.25	56.00	-32.75	QP	
10		4.7300	5.22	9.98	15.20	46.00	-30.80	AVG	
11		13.2100	16.49	10.27	26.76	60.00	-33.24	QP	
12		13.2100	12.04	10.27	22.31	50.00	-27.69	AVG	


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX]; [Line: Neutral]

Conducted Emission Measurement

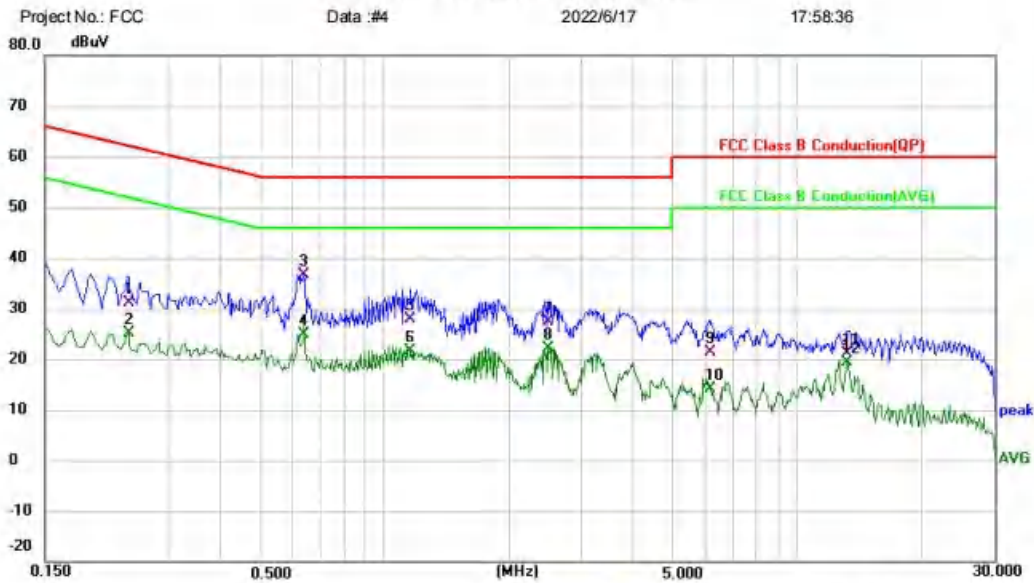

Site	Phase: N	Temperature: (C)
Limit: FCC Class B Conduction(QP)	Power:	Humidity: %RH
EUT: Wireless Headphones		
M/N: Life		
Mode: TX mode		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2380	20.80	10.24	31.04	62.17	-31.13	QP	
2		0.2380	14.81	10.24	25.05	52.17	-27.12	AVG	
3	*	0.6340	26.74	9.80	36.54	56.00	-19.46	QP	
4		0.6340	15.06	9.80	24.86	46.00	-21.14	AVG	
5		1.1580	18.11	9.84	27.95	56.00	-28.05	QP	
6		1.1580	11.80	9.84	21.64	46.00	-24.36	AVG	
7		2.4900	17.55	9.87	27.42	56.00	-28.58	QP	
8		2.4900	12.33	9.87	22.20	46.00	-23.80	AVG	
9		6.1579	11.32	9.99	21.31	60.00	-38.69	QP	
10		6.1579	4.23	9.99	14.22	50.00	-35.78	AVG	
11		13.2580	10.91	10.27	21.18	60.00	-38.82	QP	
12		13.2580	9.15	10.27	19.42	50.00	-30.58	AVG	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

16 RADIATED SPURIOUS EMISSIONS




Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

16.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

16.2 BLOCK DIAGRAM OF TEST SETUP

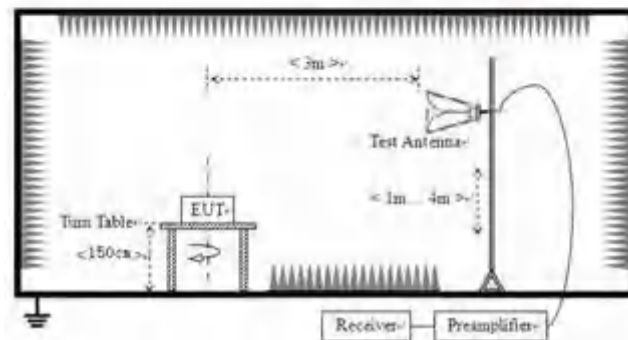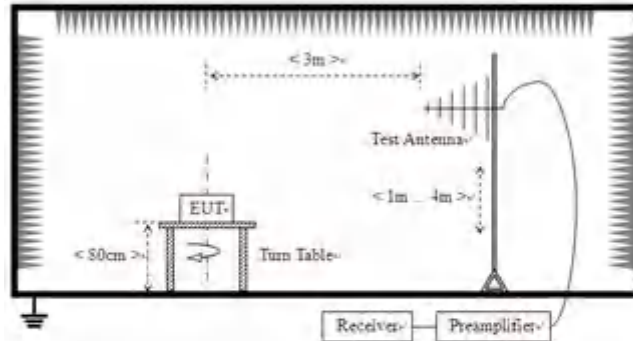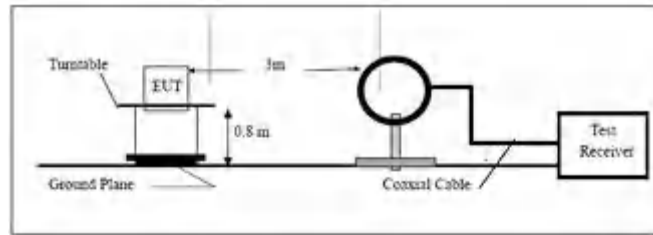

16.3 PROCEDURE

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:


- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

16.4 TEST DATA

Remark: During the test, pre-scan the GFSK, $\pi/4$ DQPSK, 8-DPSK modulation, and found the 8-DPSK modulation which it is worse case.

Below 1GHz

[TestMode: TX]; [Polarity: Horizontal]

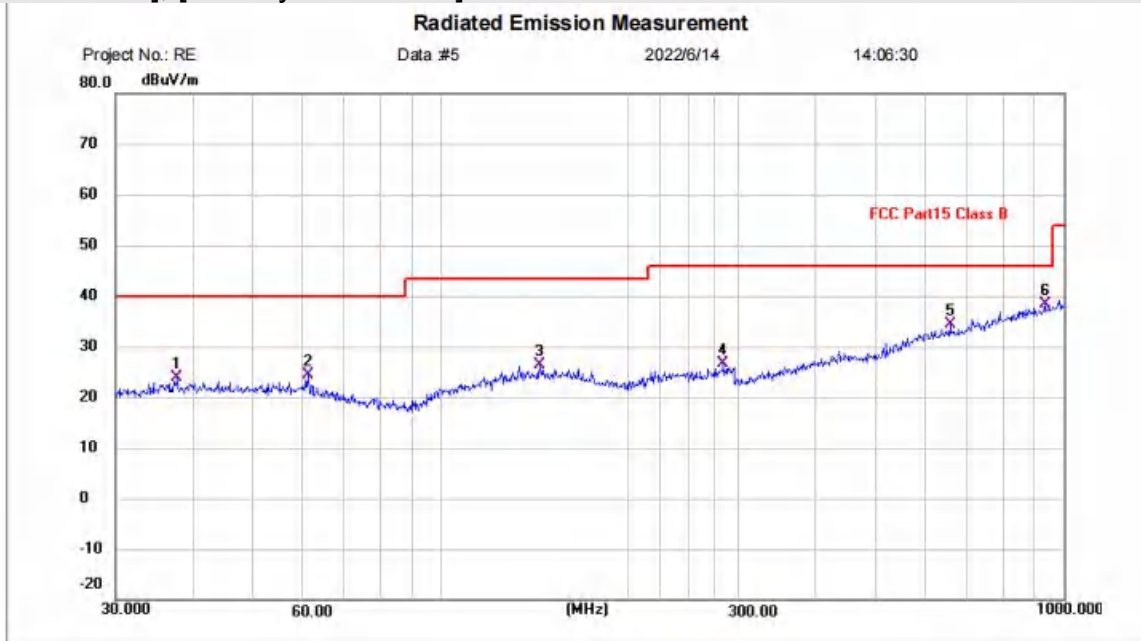


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 Class B	Power:	Humidity: %RH
EUT: Wireless Headphones	Distance:	
M/N: Life		
Mode: TX mode		
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	37.6797	0.19	23.71	23.90	40.00	-16.10	QP	100	35	P	
2	61.1315	1.24	23.26	24.50	40.00	-15.50	QP	100	114	P	
3	143.8295	2.49	23.91	26.40	43.50	-17.10	QP	100	6	P	
4	283.9791	2.22	24.34	26.56	46.00	-19.44	QP	100	248	P	
5	656.5300	1.58	32.90	34.48	46.00	-11.52	QP	100	133	P	
6 *	932.2715	1.16	37.14	38.30	46.00	-7.70	QP	100	105	P	

*:Maximum data x:Over limit !:over margin

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

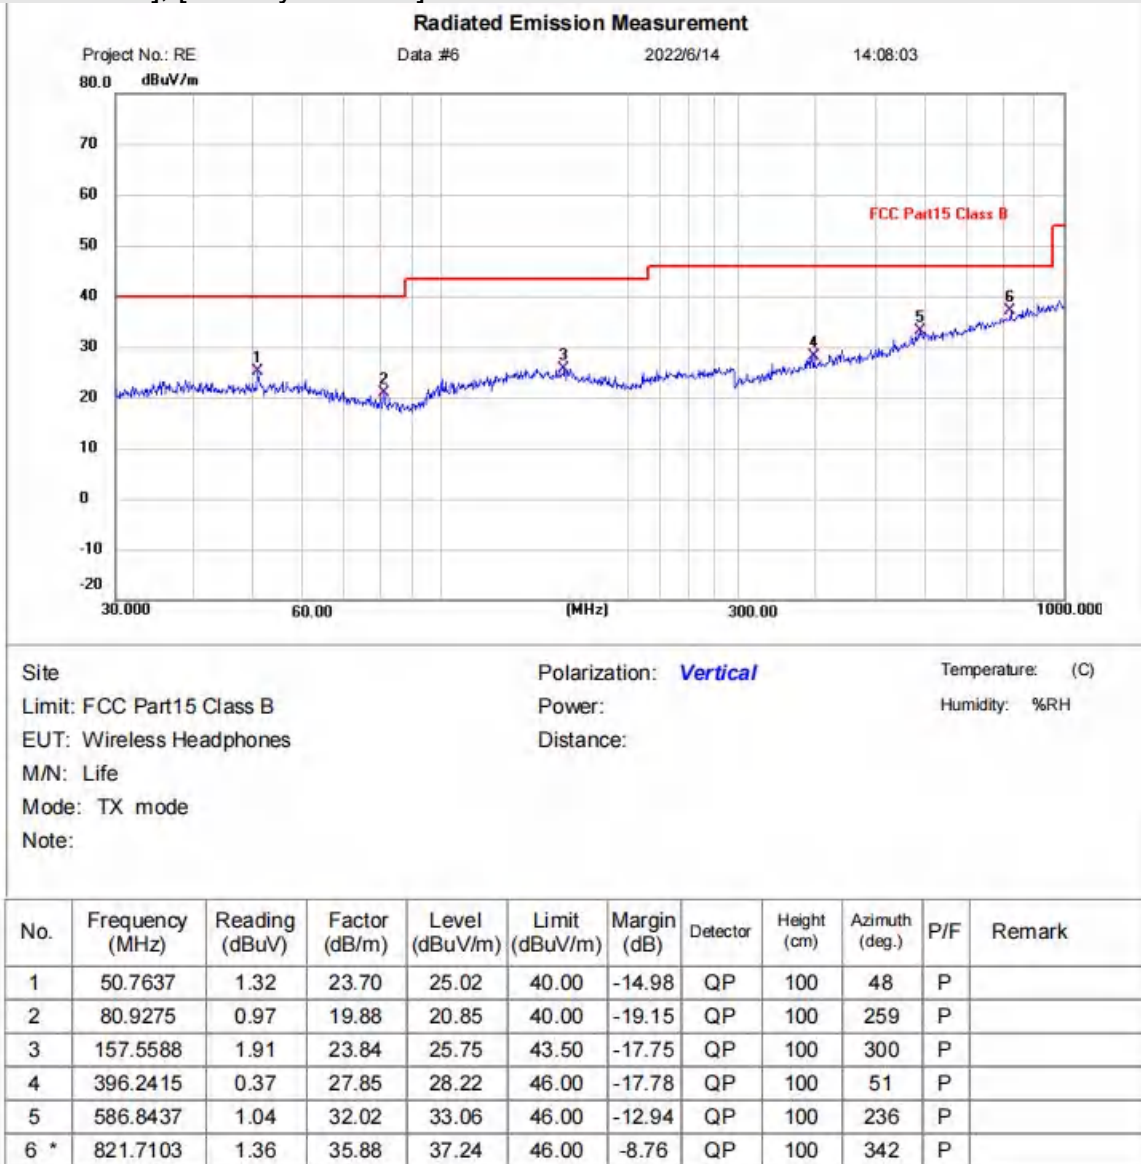


*:Maximum data x:Over limit !:over margin

Test Result: Pass

Above 1GHz

[TestMode: TX lowest channel]; [Polarity: Horizontal]

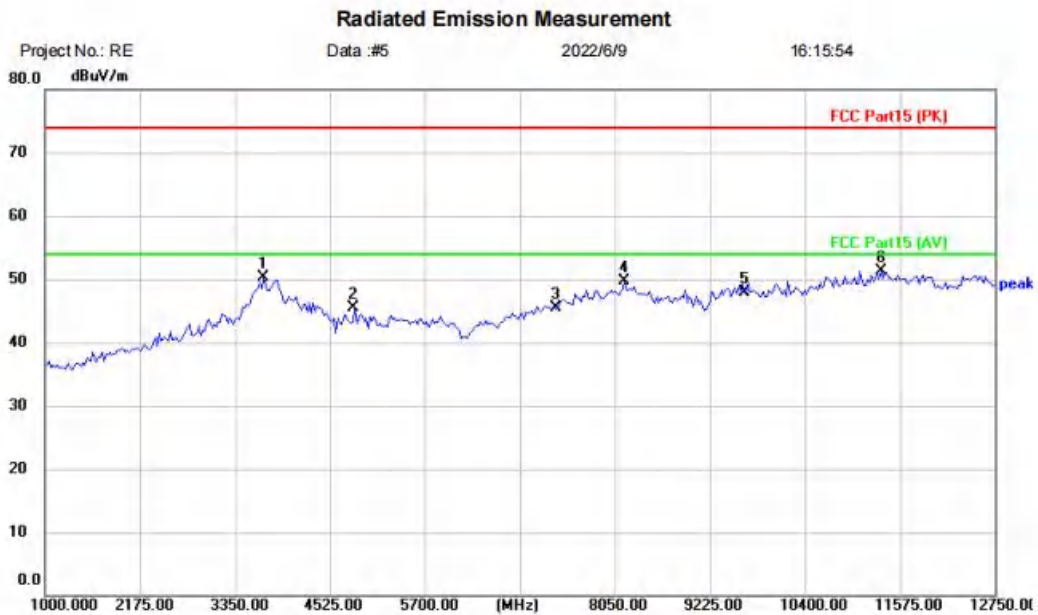

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headphones
 M/N: Life
 Mode: TX-L
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3702.500	42.50	7.72	50.22	74.00	-23.78	peak	
2		4824.000	41.97	3.62	45.59	74.00	-28.41	peak	
3		7326.000	39.08	6.44	45.52	74.00	-28.48	peak	
4		8167.500	41.45	8.17	49.62	74.00	-24.38	peak	
5		9648.000	38.53	9.37	47.90	74.00	-26.10	peak	
6	*	11340.000	39.50	11.85	51.35	74.00	-22.65	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX lowest channel]; [Polarity: Vertical]

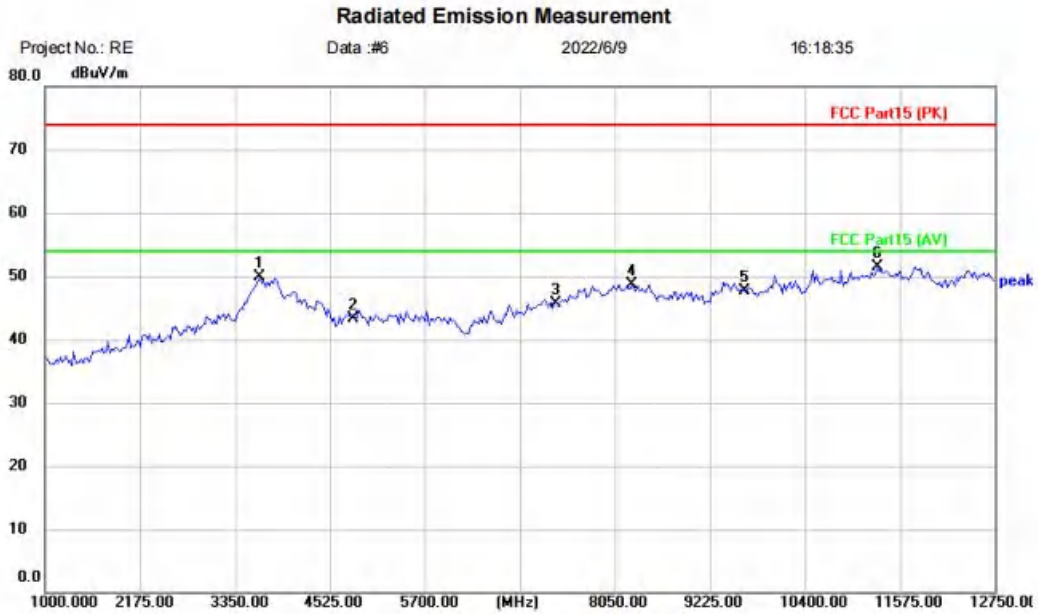

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headphones
 M/N: Life
 Mode: TX-L
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3655.500	42.20	7.76	49.96	74.00	-24.04	peak	
2		4824.000	39.74	3.62	43.36	74.00	-30.64	peak	
3		7326.000	39.26	6.44	45.70	74.00	-28.30	peak	
4		8261.500	40.50	8.23	48.73	74.00	-25.27	peak	
5		9648.000	38.26	9.37	47.63	74.00	-26.37	peak	
6	*	11293.000	39.59	11.91	51.50	74.00	-22.50	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

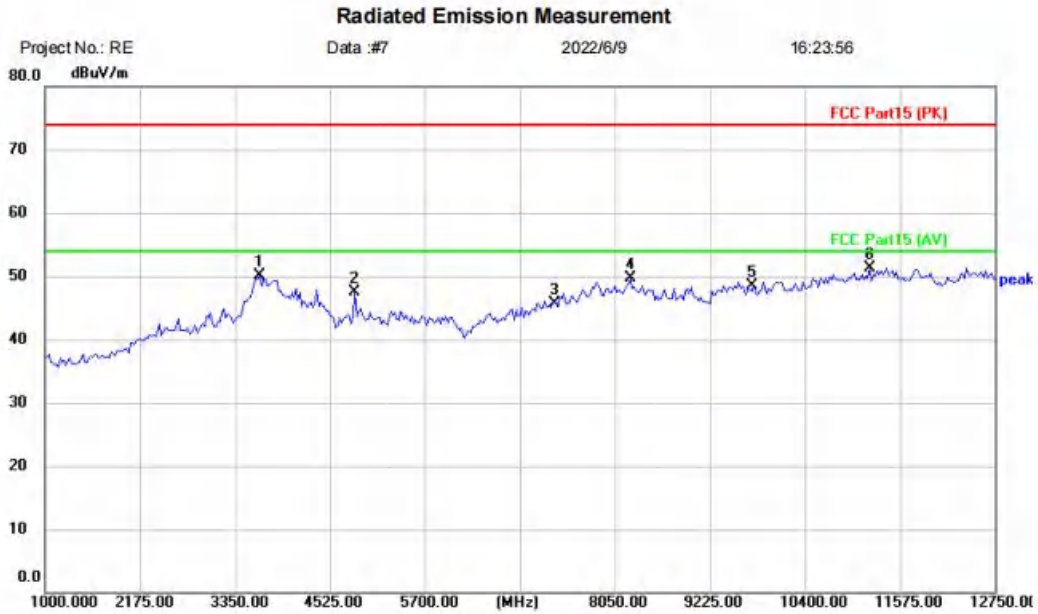

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wrieless Headphones
 M/N: Life
 Mode: TX-M
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3655.500	42.26	7.76	50.02	74.00	-23.98	peak	
2		4830.500	44.02	3.58	47.60	74.00	-26.40	peak	
3		7311.000	39.41	6.37	45.78	74.00	-28.22	peak	
4		8238.000	41.41	8.22	49.63	74.00	-24.37	peak	
5		9748.000	38.89	9.59	48.48	74.00	-25.52	peak	
6	*	11199.000	39.28	12.04	51.32	74.00	-22.68	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

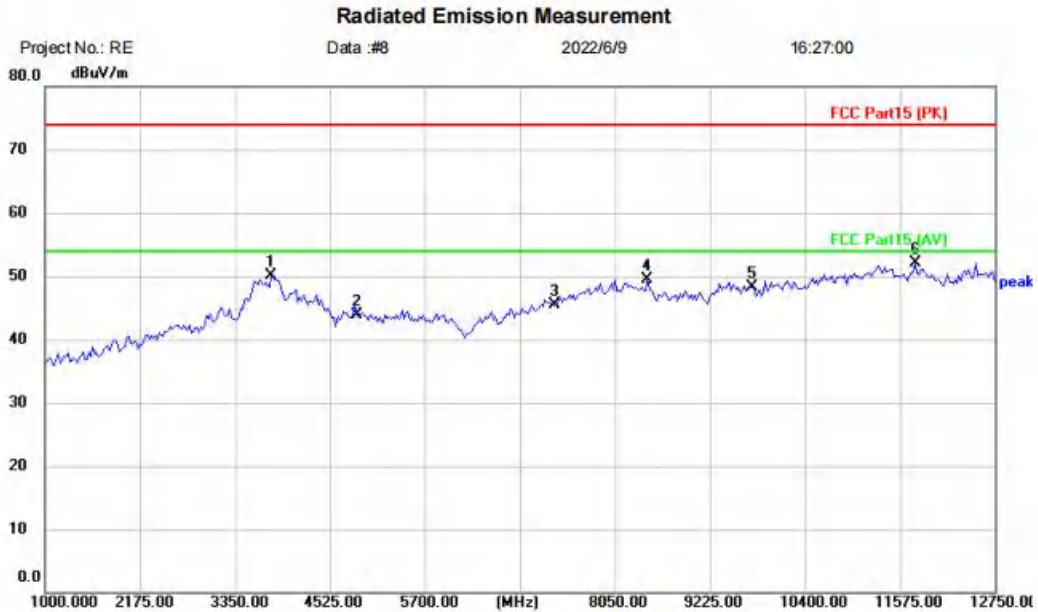

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headphones
 M/N: Life
 Mode: TX-M
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3796.500	42.52	7.65	50.17	74.00	-23.83	peak	
2		4874.000	40.44	3.39	43.83	74.00	-30.17	peak	
3		7311.000	39.07	6.37	45.44	74.00	-28.56	peak	
4		8449.500	41.35	8.20	49.55	74.00	-24.45	peak	
5		9748.000	38.72	9.59	48.31	74.00	-25.69	peak	
6	*	11763.000	40.43	11.63	52.06	74.00	-21.94	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

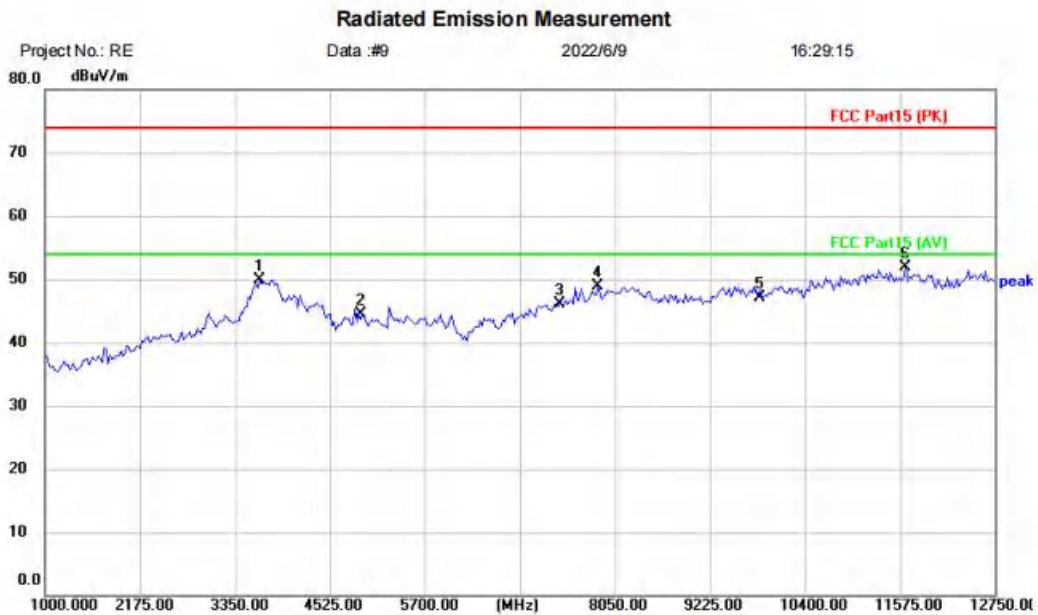

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headphones
 M/N: Life
 Mode: TX-H
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3655.500	42.23	7.76	49.99	74.00	-24.01	peak	
2		4924.000	41.01	3.46	44.47	74.00	-29.53	peak	
3		7386.000	39.33	6.68	46.01	74.00	-27.99	peak	
4		7838.500	41.11	7.75	48.86	74.00	-25.14	peak	
5		9848.000	37.23	9.88	47.11	74.00	-26.89	peak	
6	*	11645.500	39.89	11.95	51.84	74.00	-22.16	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Vertical]

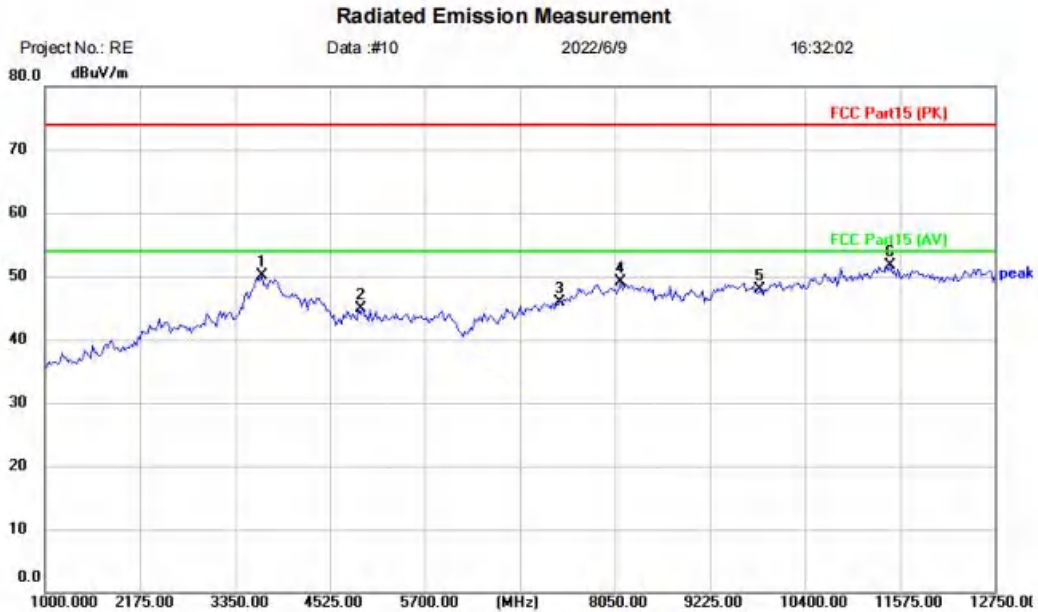

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headphones
 M/N: Life
 Mode: TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3679.000	42.34	7.73	50.07	74.00	-23.93	peak	
2		4924.000	41.52	3.46	44.98	74.00	-29.02	peak	
3		7386.000	39.28	6.68	45.96	74.00	-28.04	peak	
4		8120.500	40.95	8.11	49.06	74.00	-24.94	peak	
5		9848.000	37.99	9.88	47.87	74.00	-26.13	peak	
6	*	11457.500	39.94	11.84	51.78	74.00	-22.22	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

17 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

17.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

17.2 BLOCK DIAGRAM OF TEST SETUP

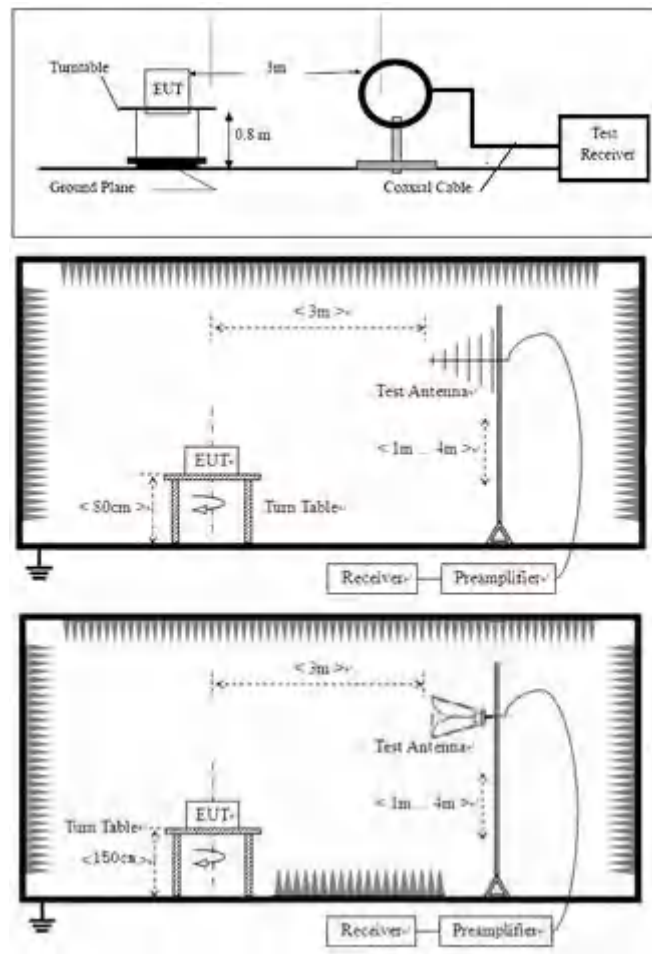

17.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

17.4 TEST DATA


Remark: During the test, pre-scan the GFSK, $\pi/4$ DQPSK, 8-DPSK modulation, and found the 8-DPSK modulation which it is worse case.

Above 1GHz

[TestMode: TX lowest channel]; [Polarity: Horizontal]



Company: BlueAsia of Technical Services (Shenzhen) Co., Ltd.
Address: 深圳市宝安区石岩石环路107号鸿景达产业园C栋
Tel: +86-755-23059481

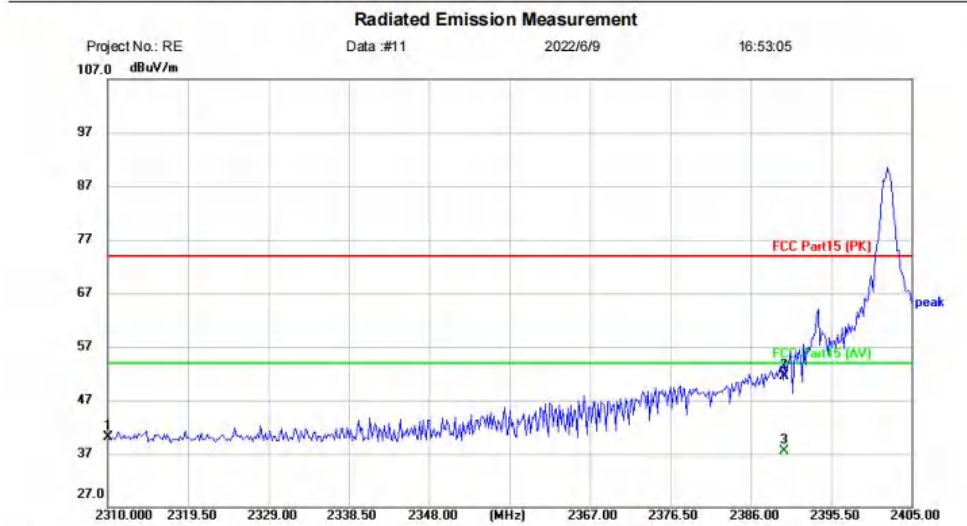

Site: Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Wireless Headphones
M/N: Life
Mode: TX-L
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	43.94	-3.93	40.01	74.00	-33.99	peak	
2		2390.000	55.00	-3.58	51.42	74.00	-22.58	peak	
3	*	2390.000	41.06	-3.58	37.48	54.00	-16.52	AVG	

*:Maximum data x:Over limit !:over margin

(Reference Only)

File: REData_#11


Page: 1

Engineer Signature:

PDF created with pdfFactory Pro trial version www.pdffactory.com

Test Result: Pass

[TestMode: TX lowest channel]; [Polarity: Vertical]

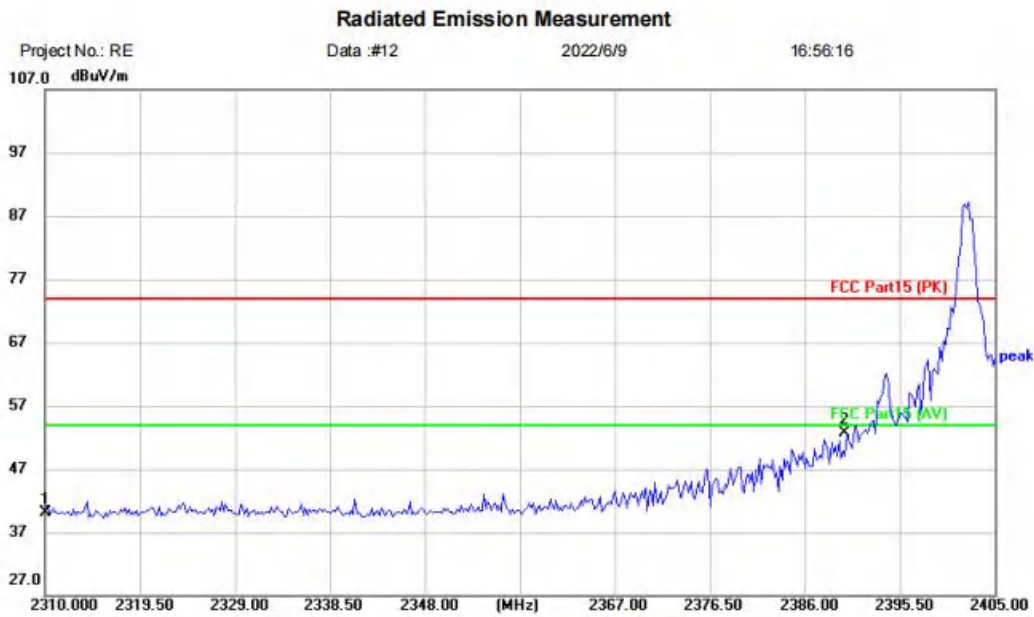

Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headphones
 M/N: Life
 Mode: TX-L
 Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	43.94	-3.93	40.01	74.00	-33.99	peak	
2	*	2390.000	56.22	-3.58	52.64	74.00	-21.36	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

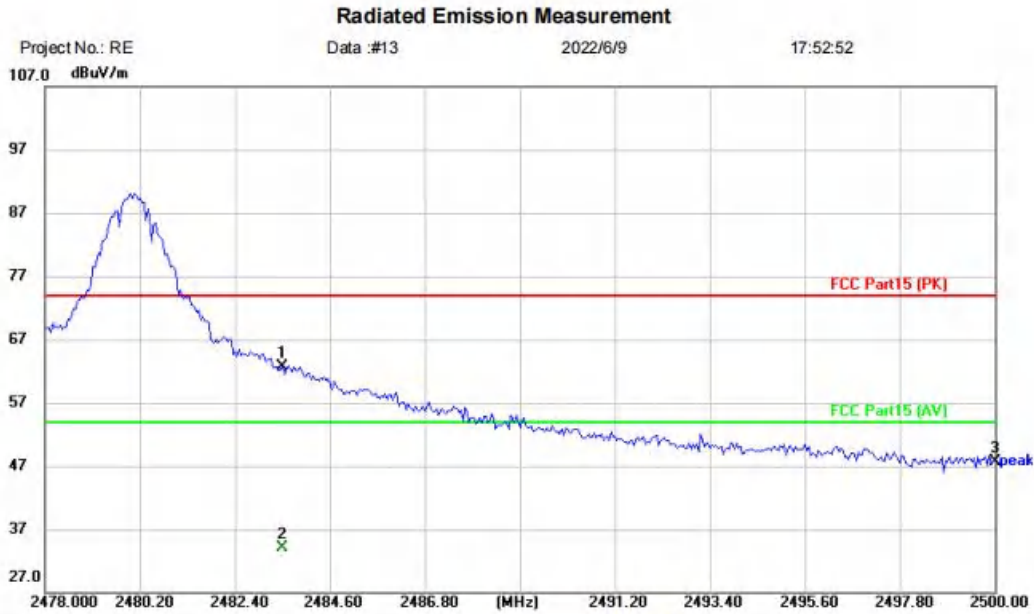

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Wireless Headphones		
M/N: Life		
Mode: TX-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	2483.500	65.75	-3.14	62.61	74.00	-11.39	peak	
2		2483.500	37.32	-3.14	34.18	54.00	-19.82	AVG	
3		2500.000	50.84	-3.08	47.76	74.00	-26.24	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Vertical]

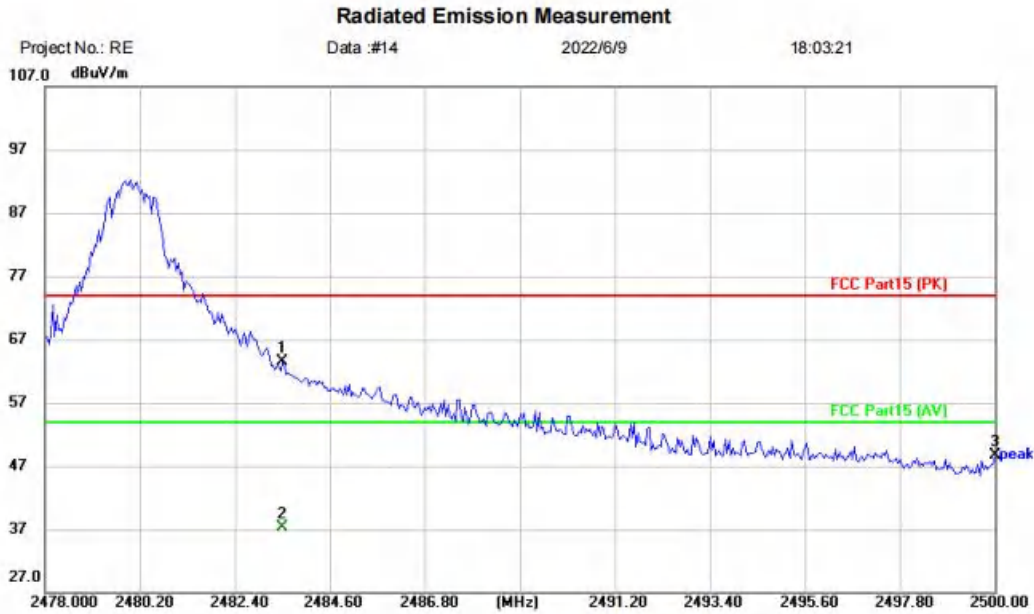

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Wireless Headphones		
M/N: Life		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	2483.500	66.63	-3.14	63.49	74.00	-10.51	peak	
2		2483.500	40.43	-3.14	37.29	54.00	-16.71	AVG	
3		2500.000	51.79	-3.08	48.71	74.00	-25.29	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass


18 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

18.1 LIMITS

Limit:	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

18.2 BLOCK DIAGRAM OF TEST SETUP

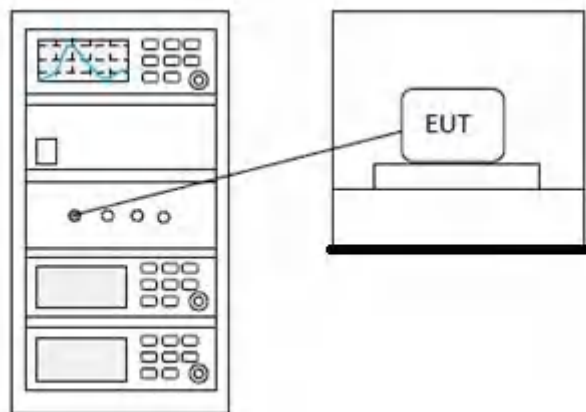

18.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


19 DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

19.1 LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

19.2 BLOCK DIAGRAM OF TEST SETUP

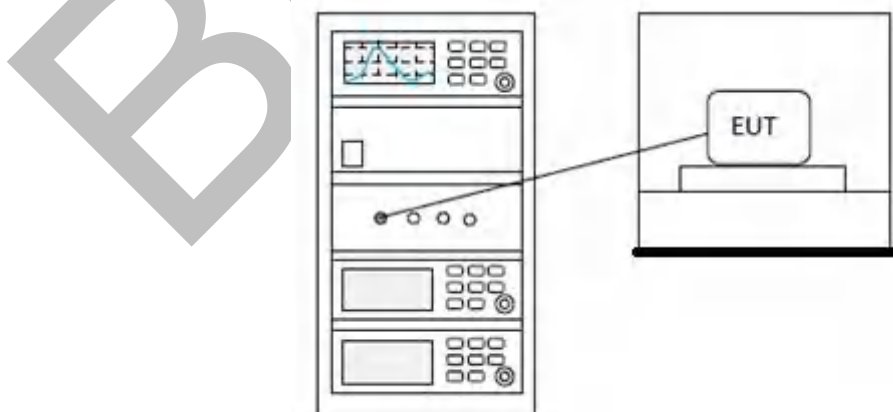

19.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


20 HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

20.1 LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

20.2 BLOCK DIAGRAM OF TEST SETUP

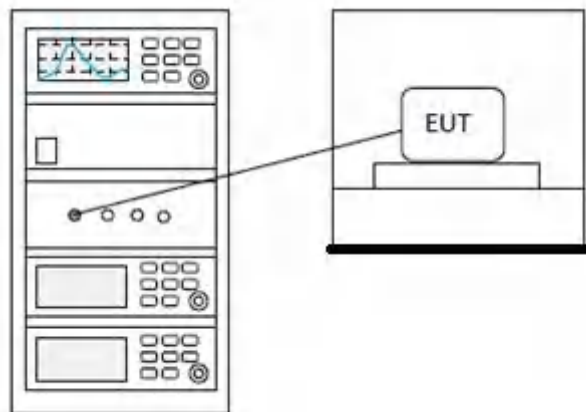

20.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


21 APPENDIX

Appendix1


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	0.15	21	Pass
NVNT	1-DH1	2441	Ant1	-0.557	21	Pass
NVNT	1-DH1	2480	Ant1	-1.526	21	Pass
NVNT	2-DH1	2402	Ant1	0.459	21	Pass
NVNT	2-DH1	2441	Ant1	0.011	21	Pass
NVNT	2-DH1	2480	Ant1	-1.202	21	Pass
NVNT	3-DH1	2402	Ant1	0.707	21	Pass
NVNT	3-DH1	2441	Ant1	0.196	21	Pass
NVNT	3-DH1	2480	Ant1	-0.906	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

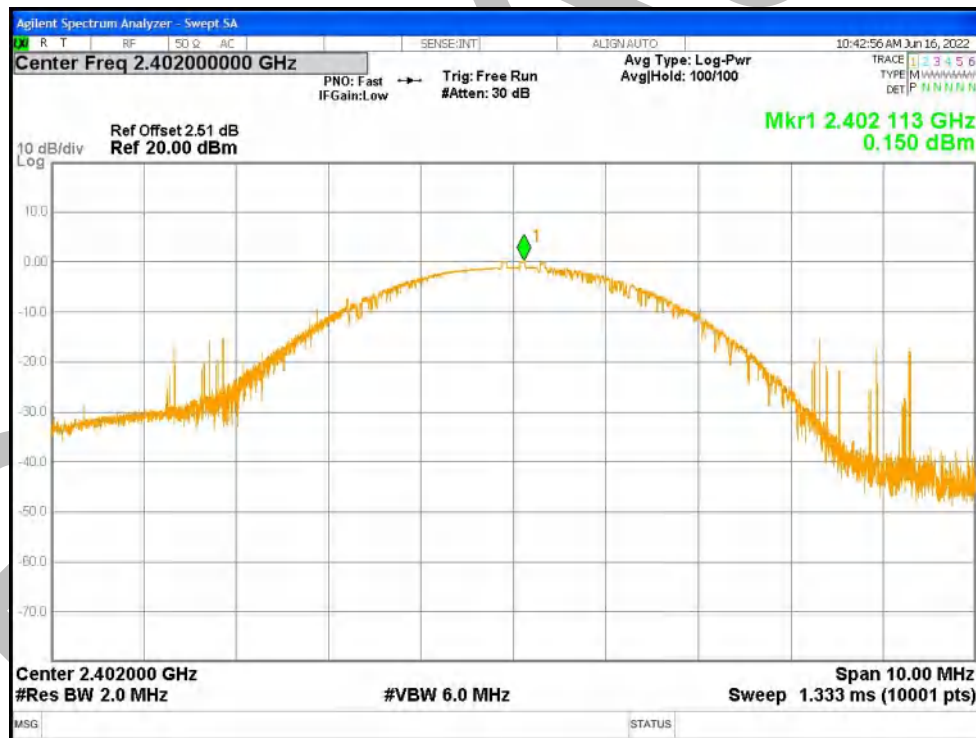


Power NVNT 1-DH1 2441MHz Ant1

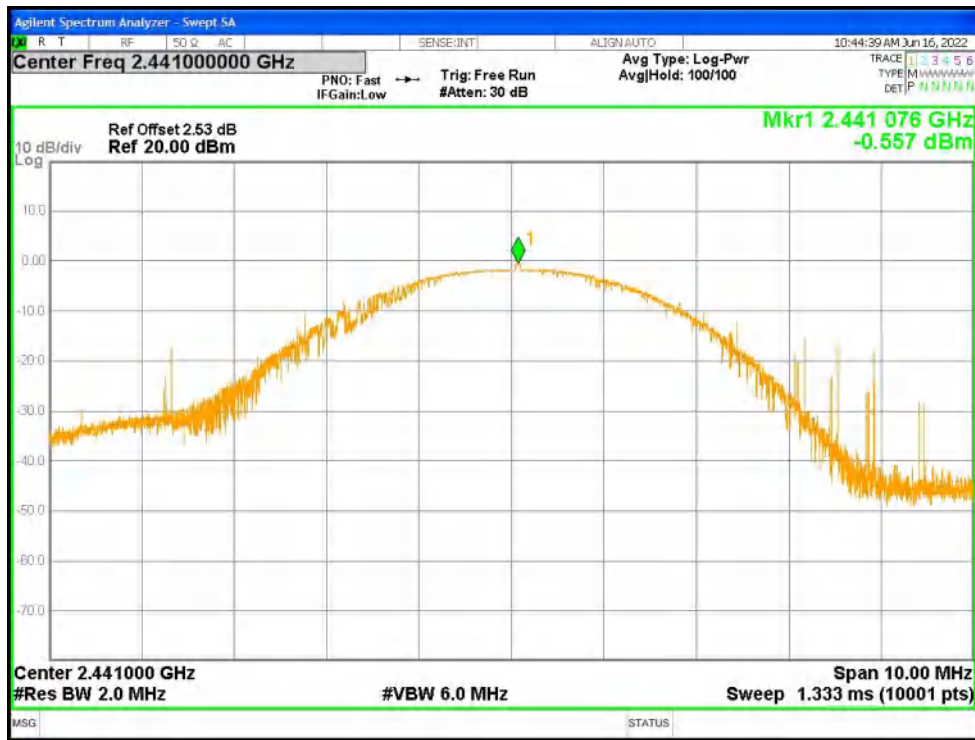


Power NVNT 1-DH1 2480MHz Ant1

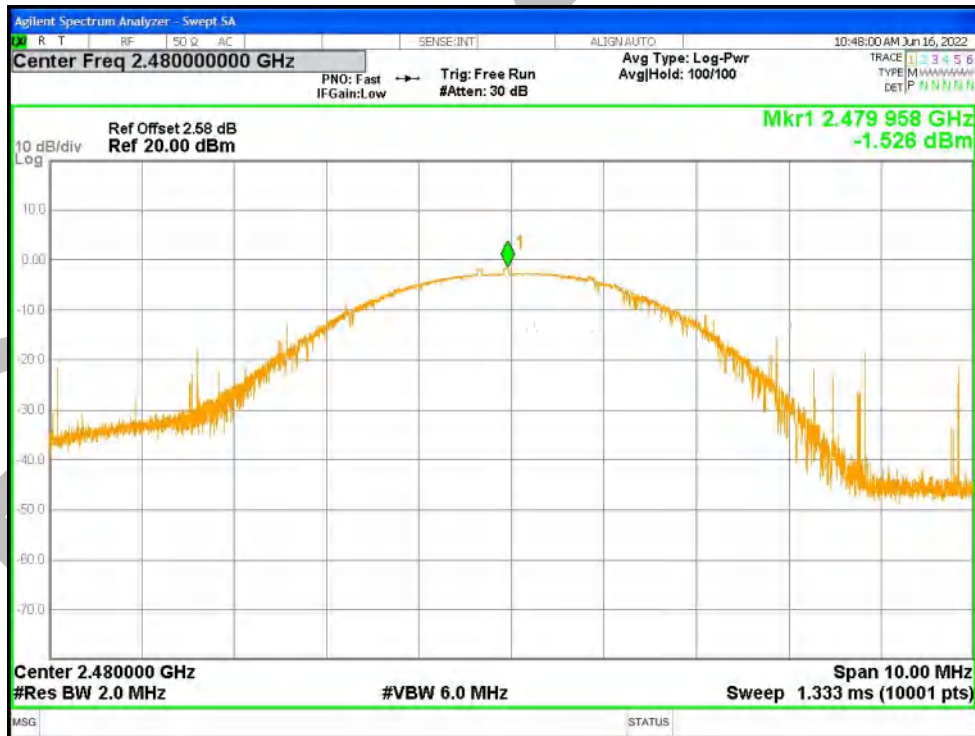


Power NVNT 2-DH1 2402MHz Ant1

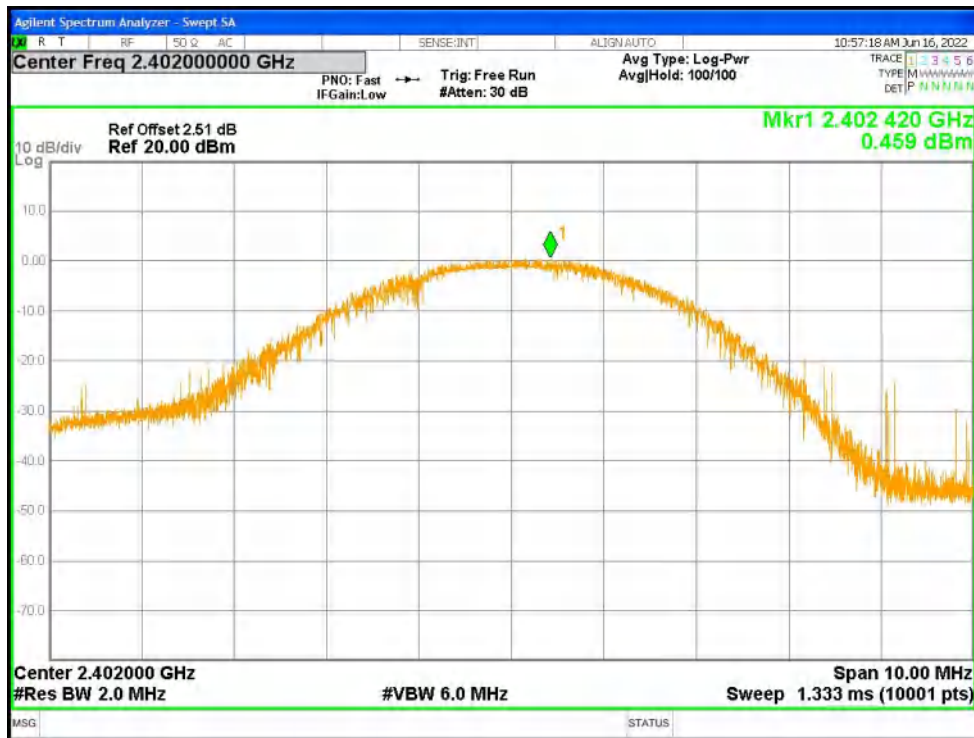


Power NVNT 2-DH1 2441MHz Ant1

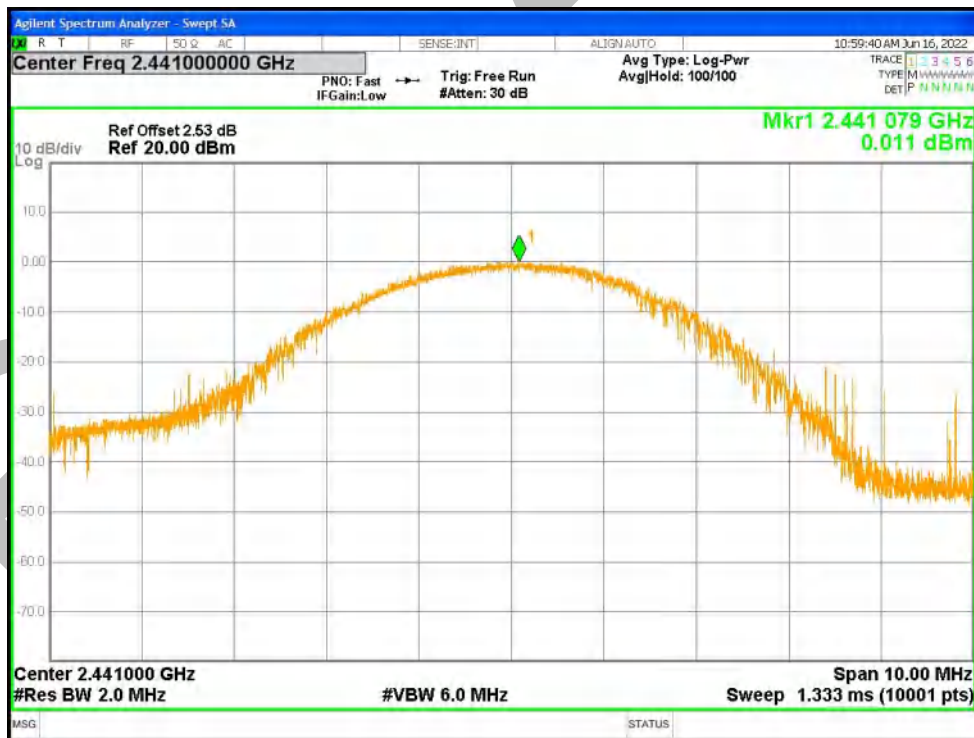


Power NVNT 2-DH1 2480MHz Ant1

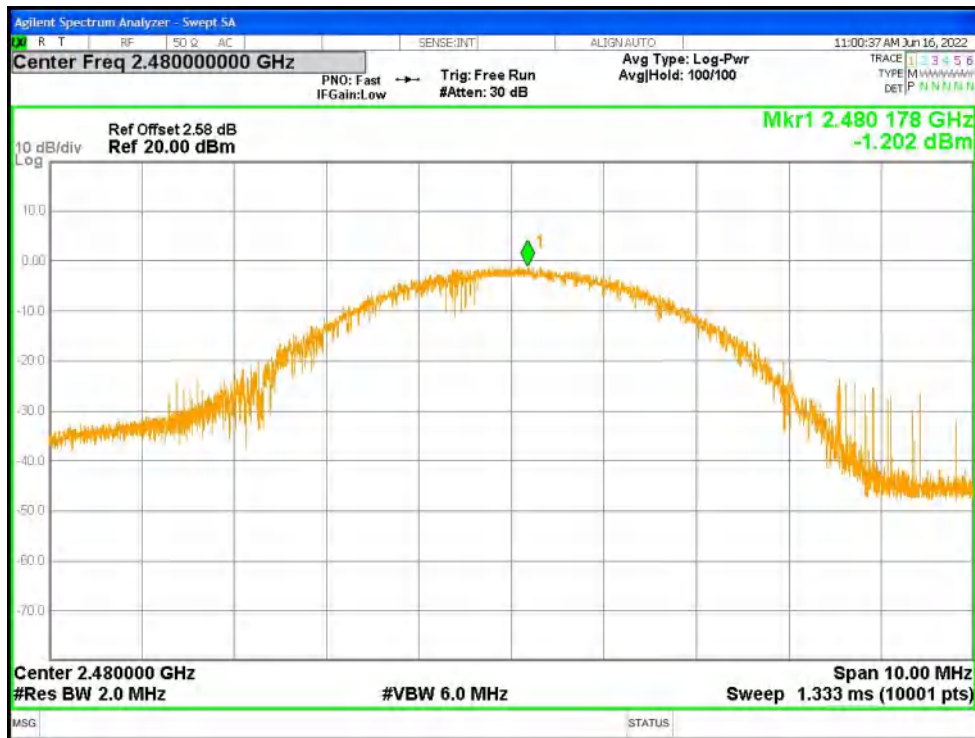


Power NVNT 3-DH1 2402MHz Ant1

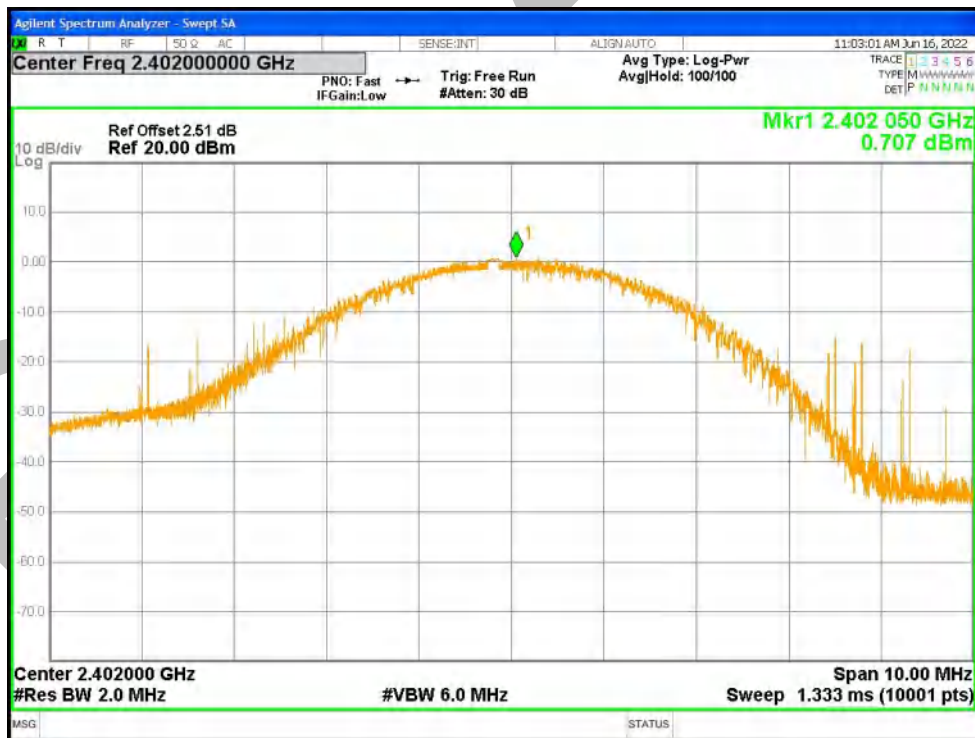

Power NVNT 3-DH1 2441MHz Ant1

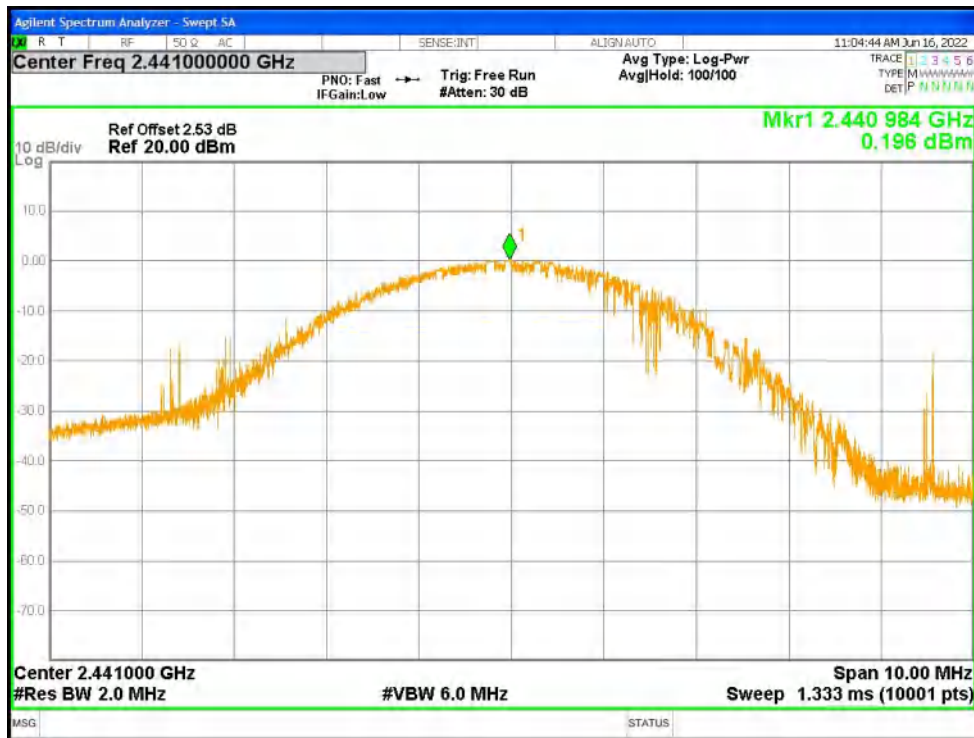


Power NVNT 3-DH1 2480MHz Ant1

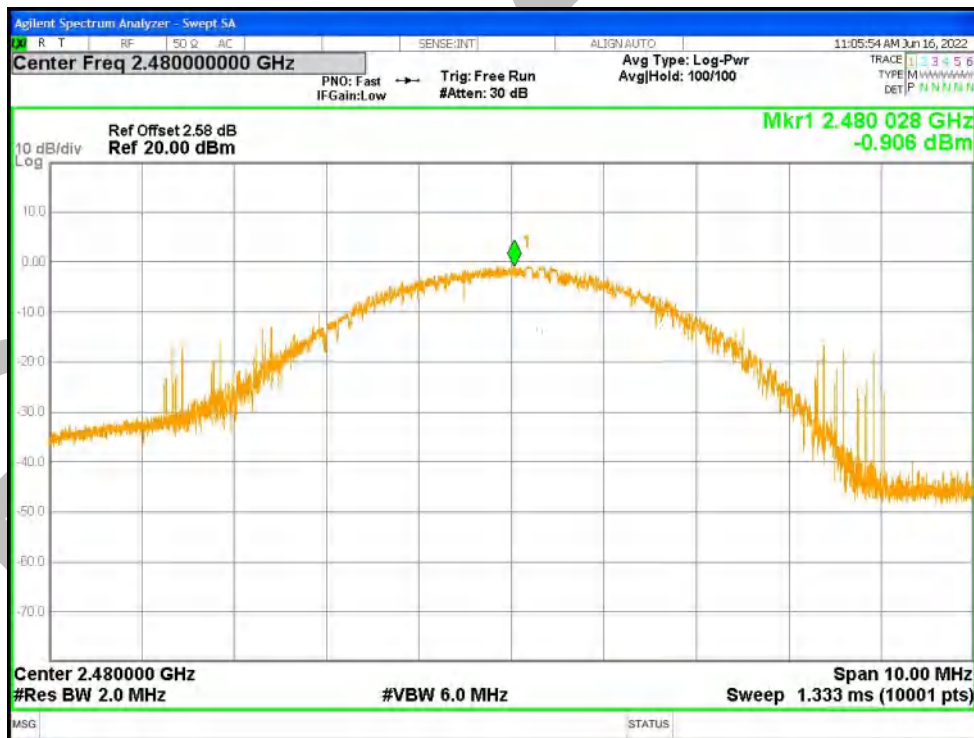


-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	1.03	0	Pass
NVNT	1-DH1	2441	Ant1	0.952	0	Pass
NVNT	1-DH1	2480	Ant1	0.953	0	Pass
NVNT	2-DH1	2402	Ant1	1.535	0	Pass
NVNT	2-DH1	2441	Ant1	1.448	0	Pass
NVNT	2-DH1	2480	Ant1	1.458	0	Pass
NVNT	3-DH1	2402	Ant1	1.362	0	Pass
NVNT	3-DH1	2441	Ant1	1.291	0	Pass
NVNT	3-DH1	2480	Ant1	1.27	0	Pass


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

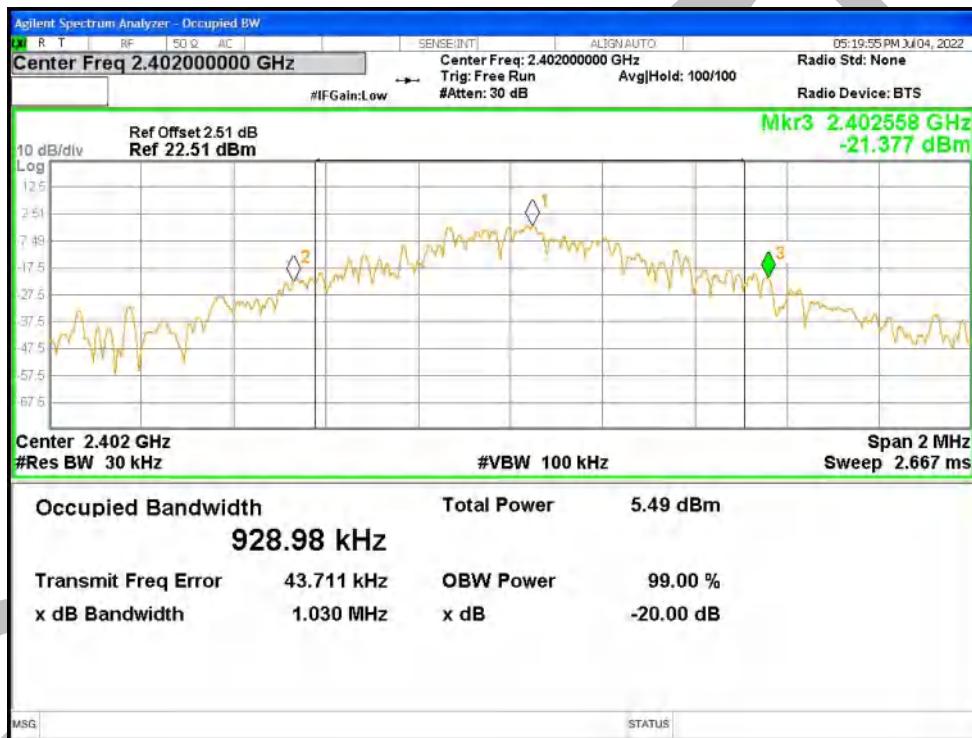


-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

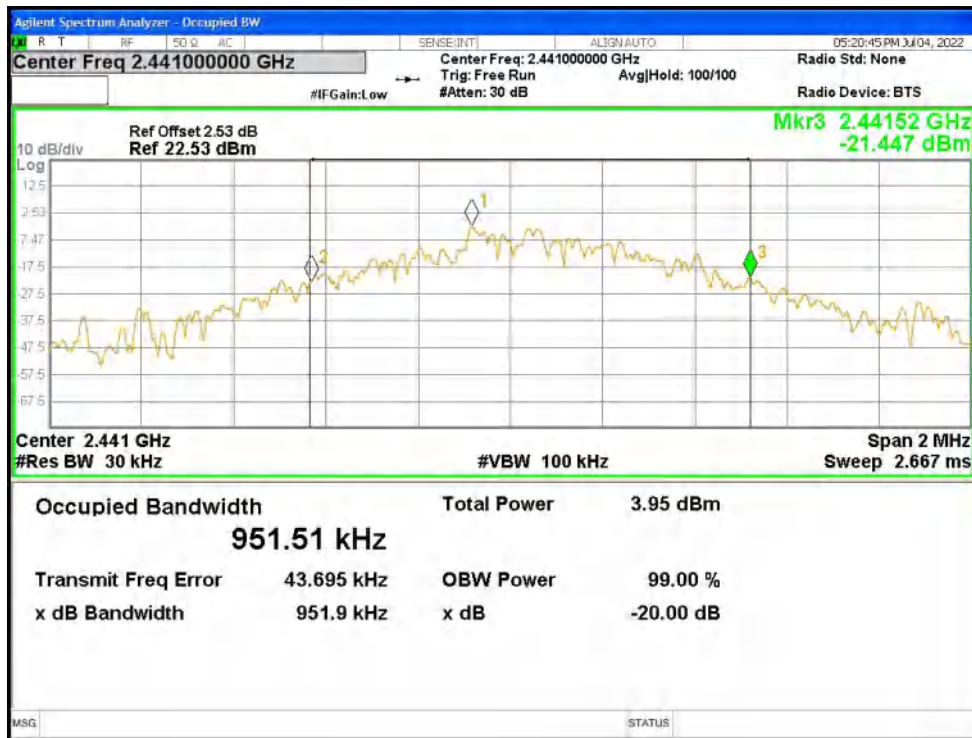


-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

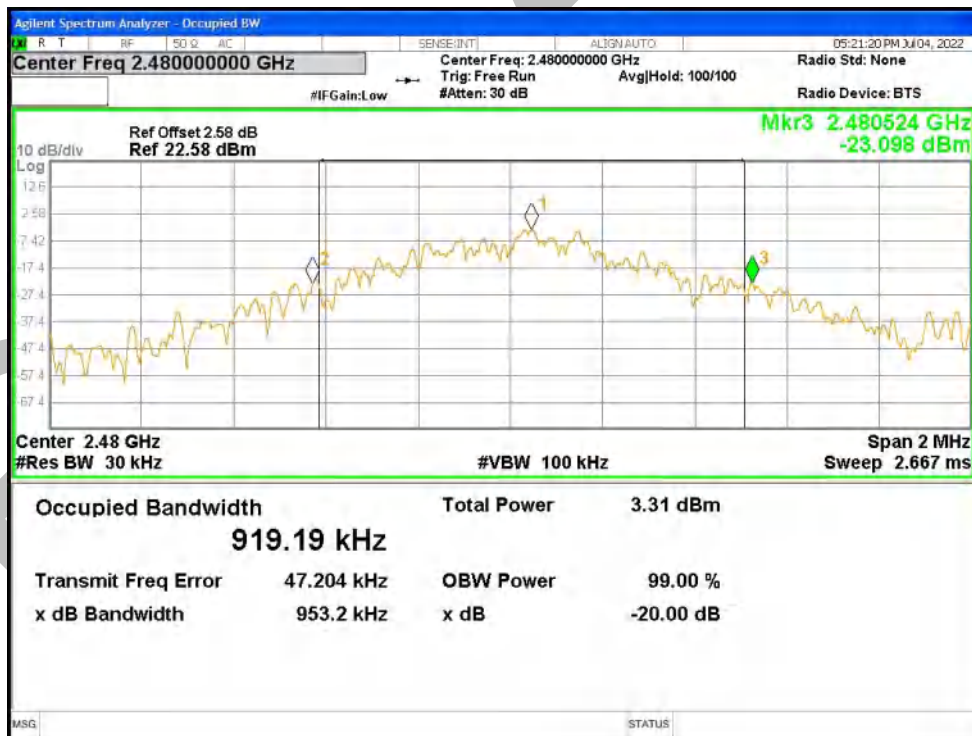


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

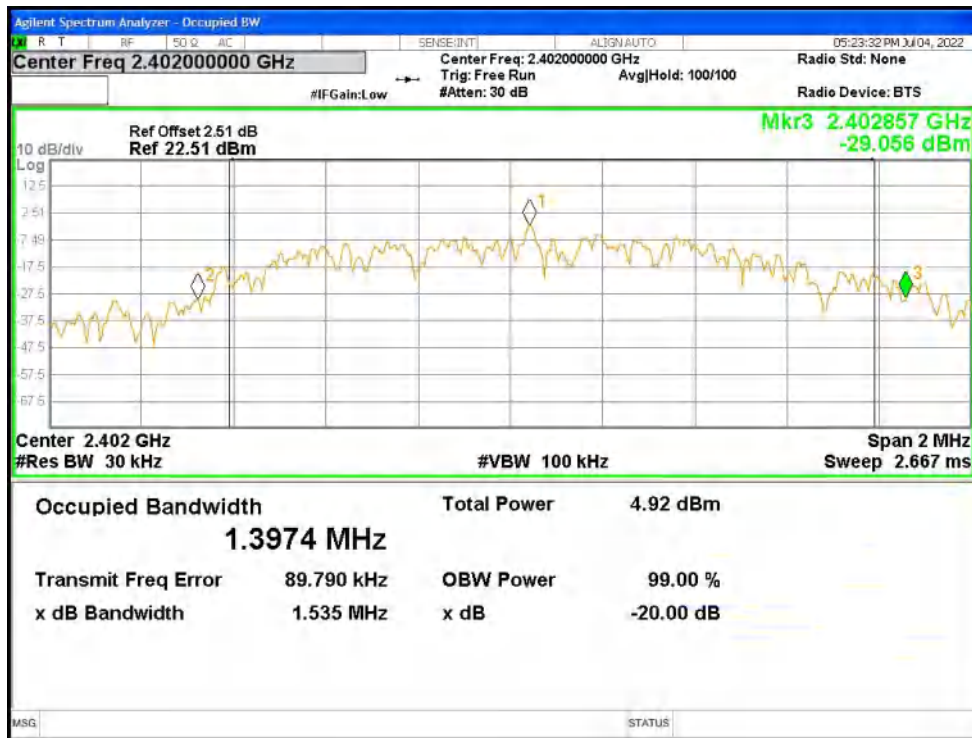


-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

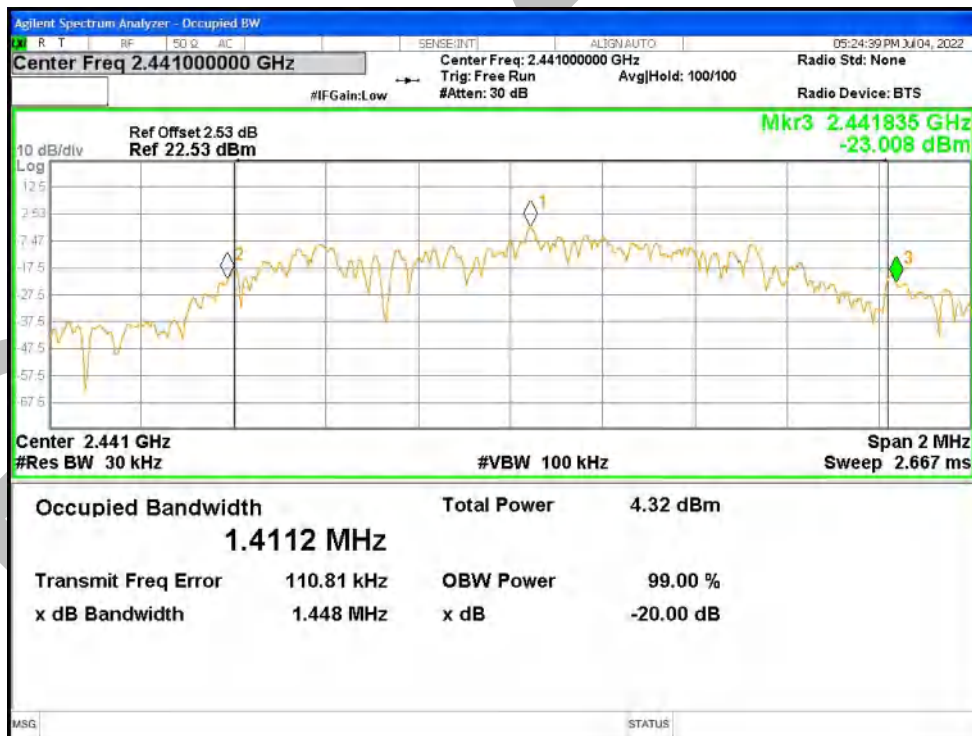


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

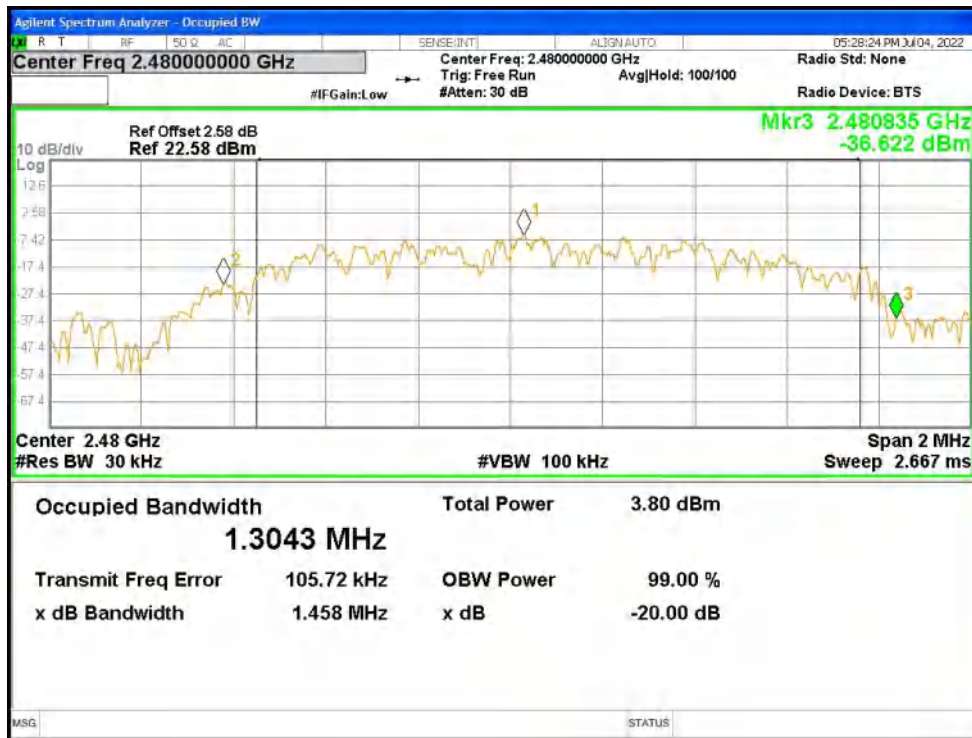


-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

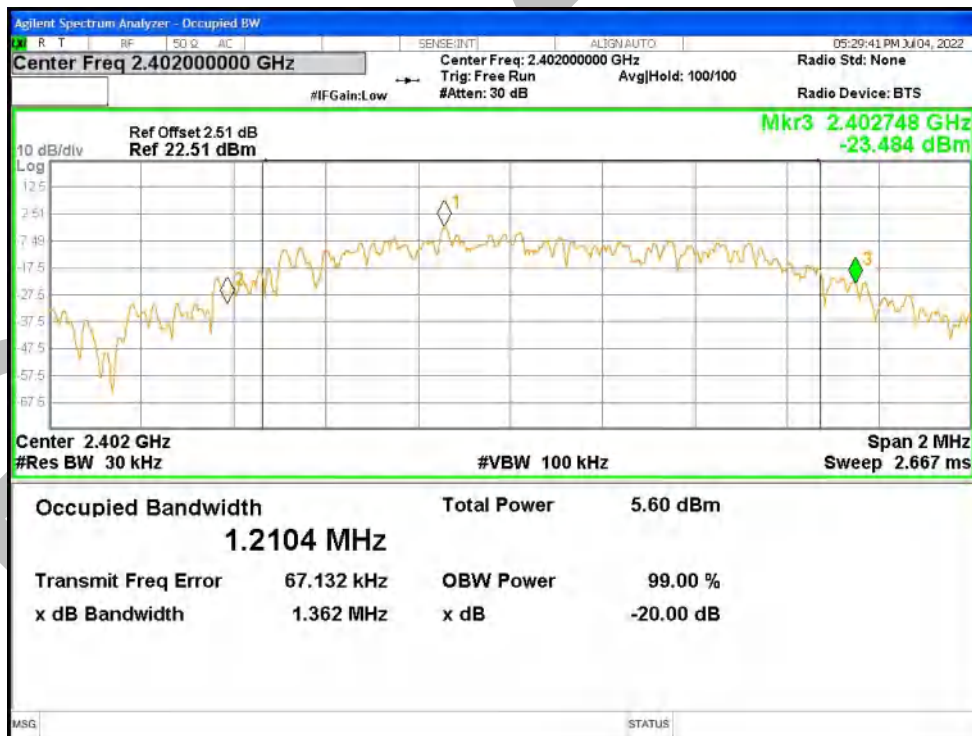

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

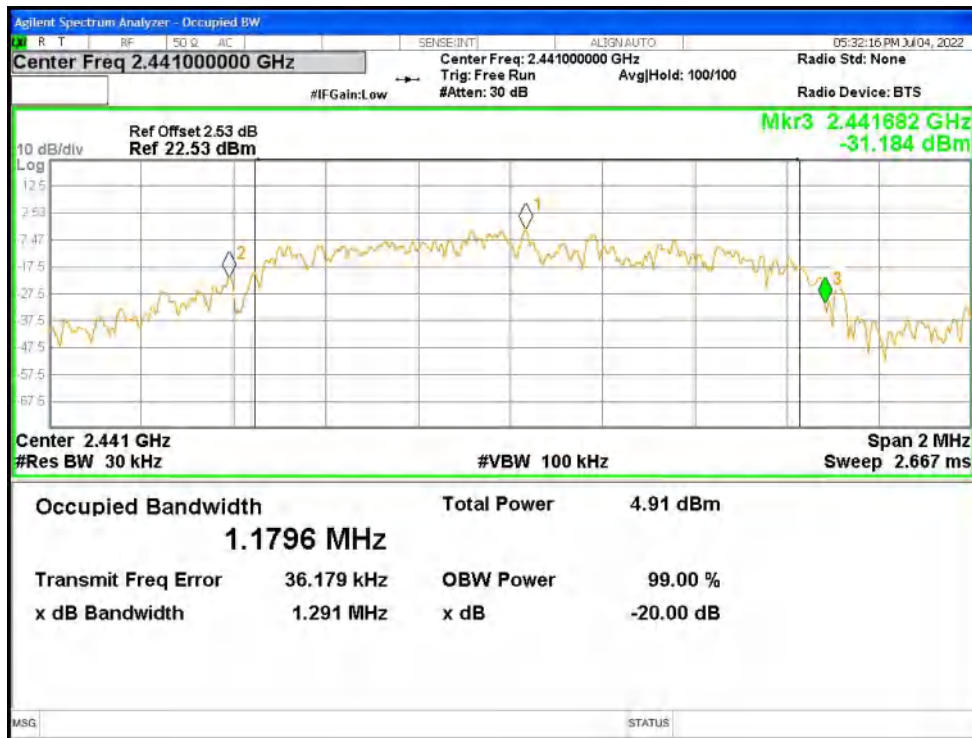


-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

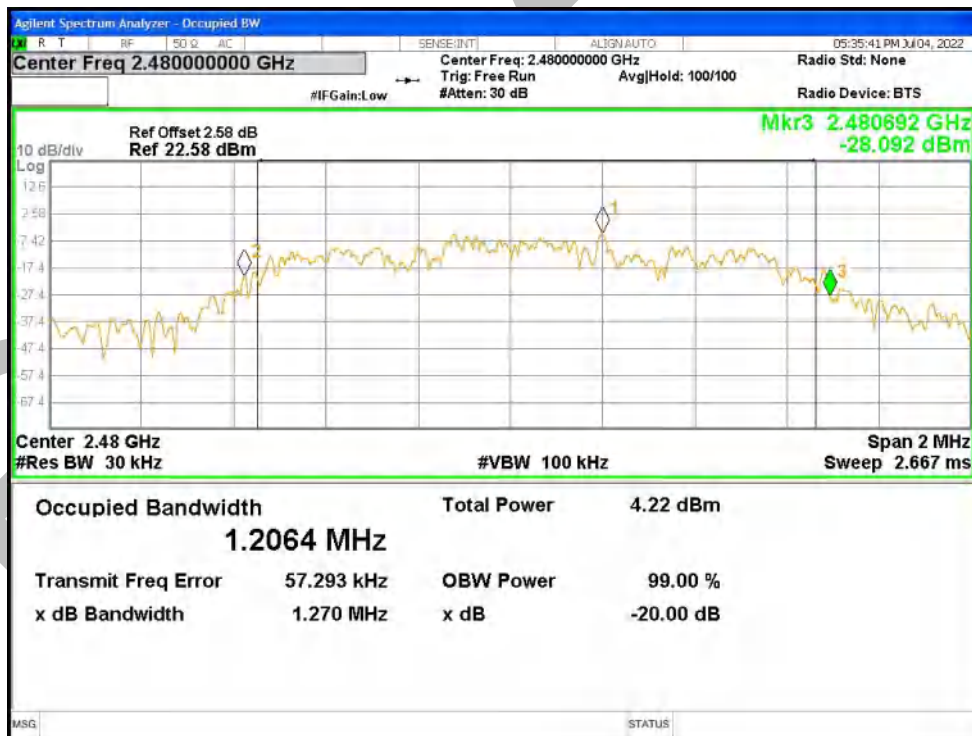


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.98239
NVNT	1-DH1	2441	Ant1	0.93618
NVNT	1-DH1	2480	Ant1	0.8688
NVNT	2-DH1	2402	Ant1	1.4007
NVNT	2-DH1	2441	Ant1	1.2187
NVNT	2-DH1	2480	Ant1	1.1859
NVNT	3-DH1	2402	Ant1	1.4026
NVNT	3-DH1	2441	Ant1	1.2034
NVNT	3-DH1	2480	Ant1	1.2373


OBW NVNT 1-DH1 2402MHz Ant1

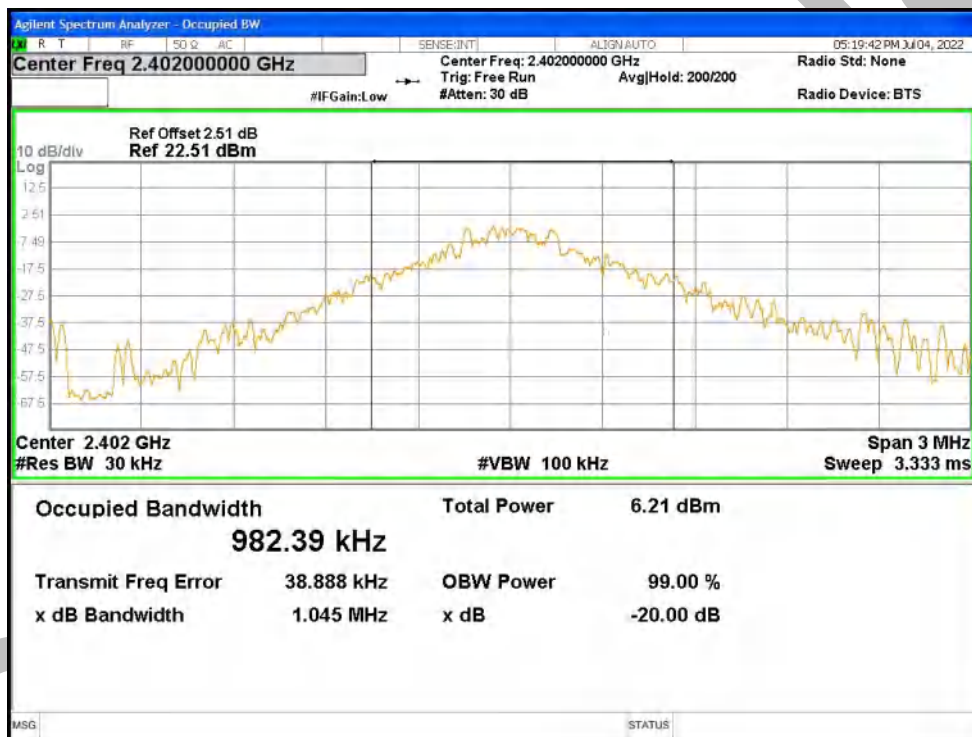


OBW NVNT 1-DH1 2441MHz Ant1

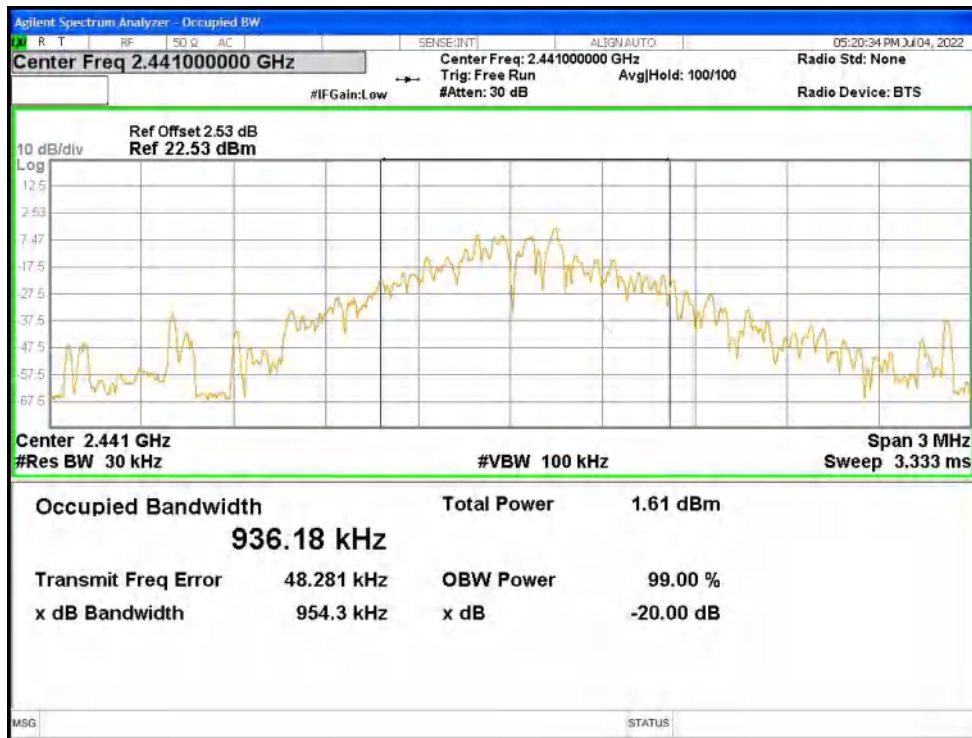


OBW NVNT 1-DH1 2480MHz Ant1

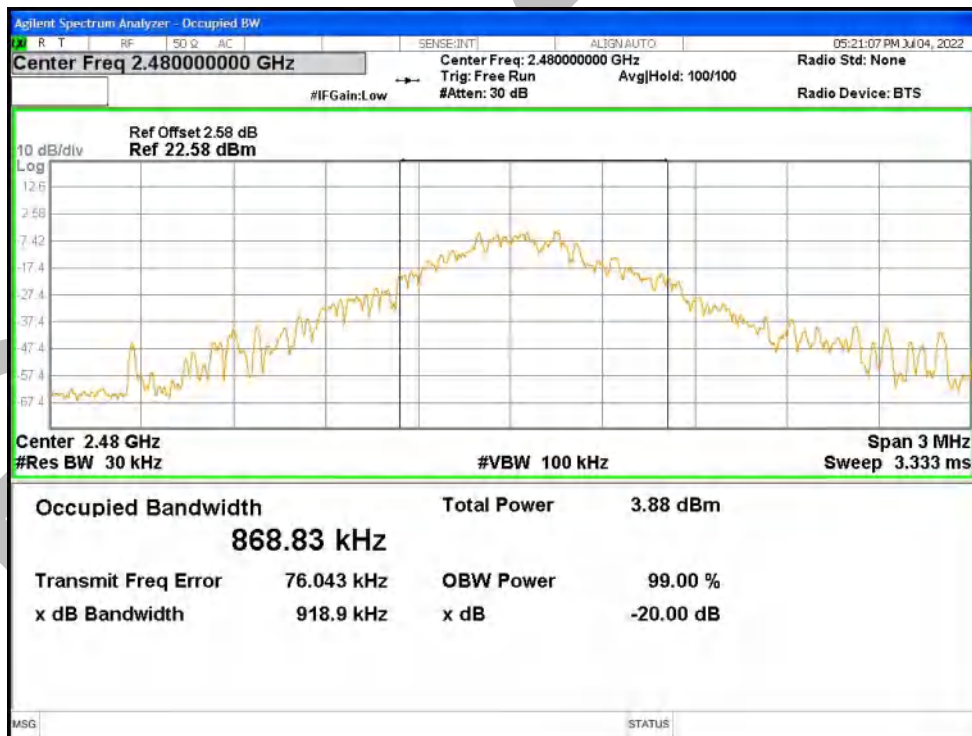


OBW NVNT 2-DH1 2402MHz Ant1

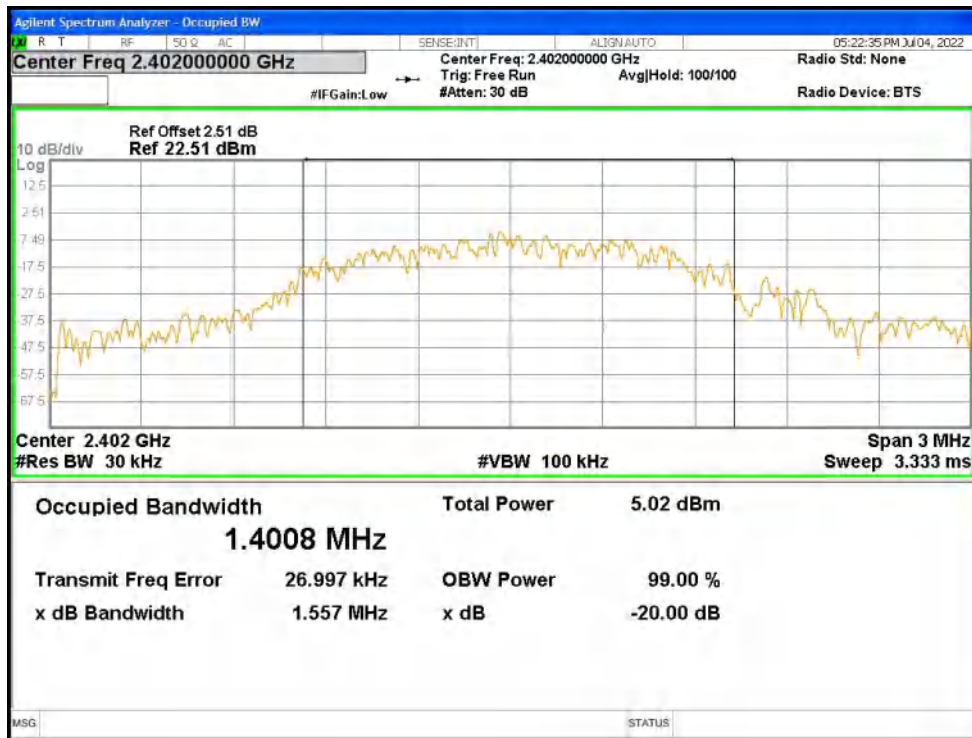


OBW NVNT 2-DH1 2441MHz Ant1

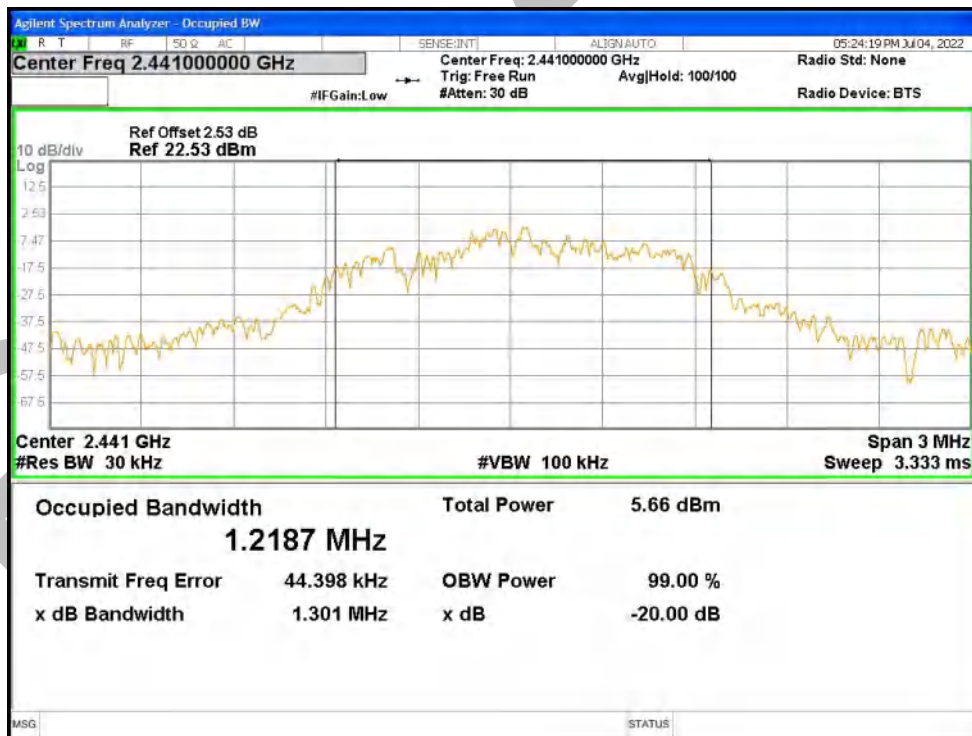


OBW NVNT 2-DH1 2480MHz Ant1

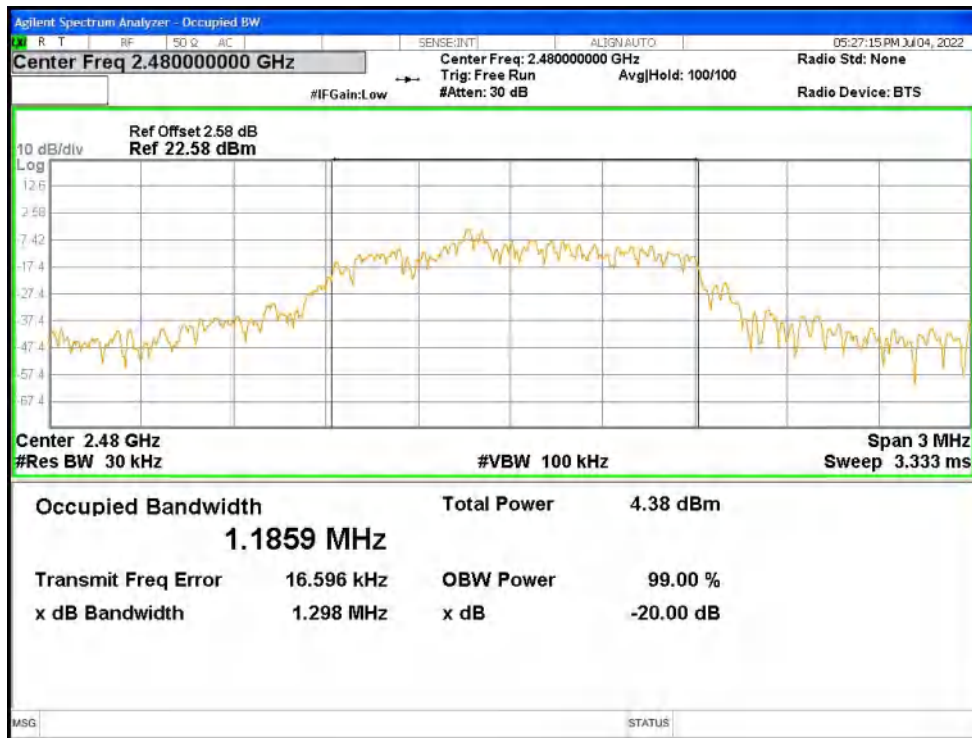


OBW NVNT 3-DH1 2402MHz Ant1

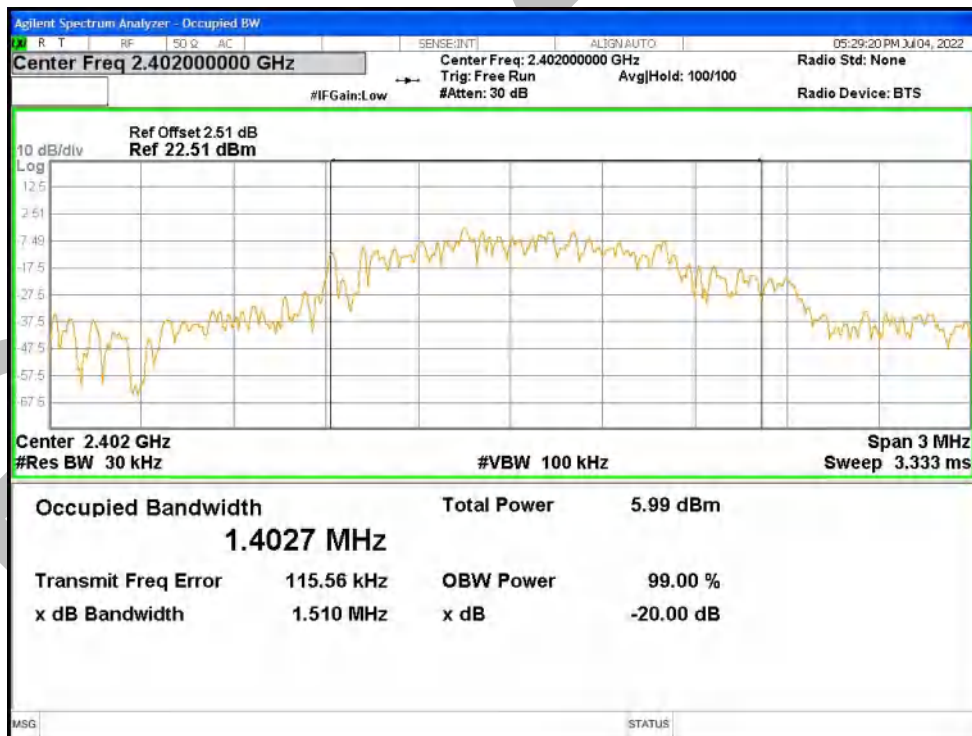

OBW NVNT 3-DH1 2441MHz Ant1

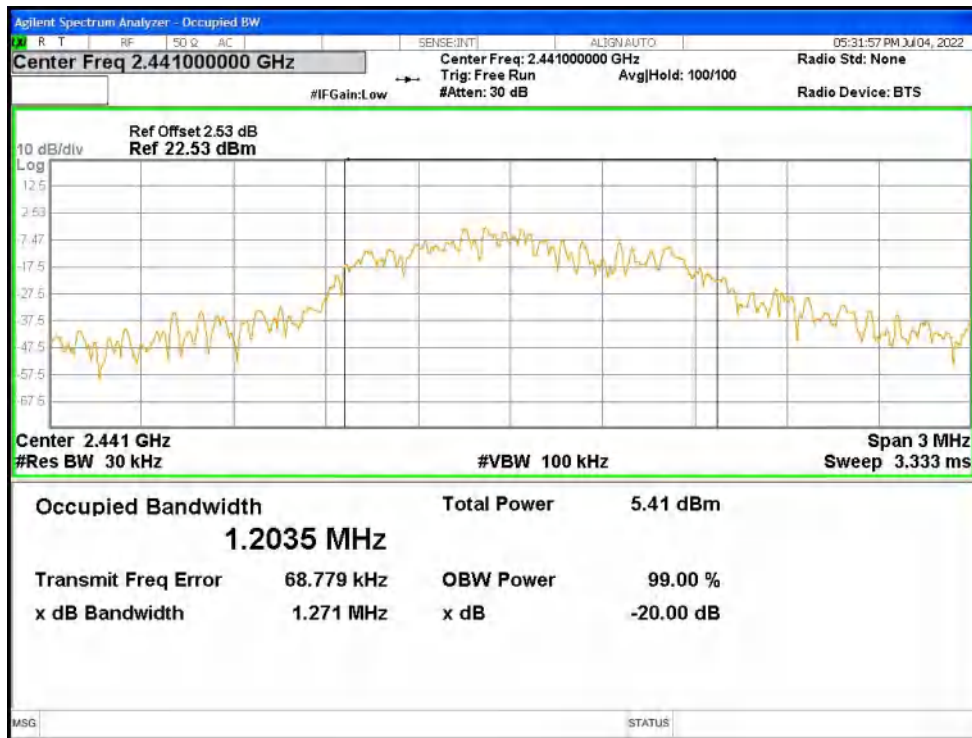

OBW NVNT 3-DH1 2480MHz Ant1

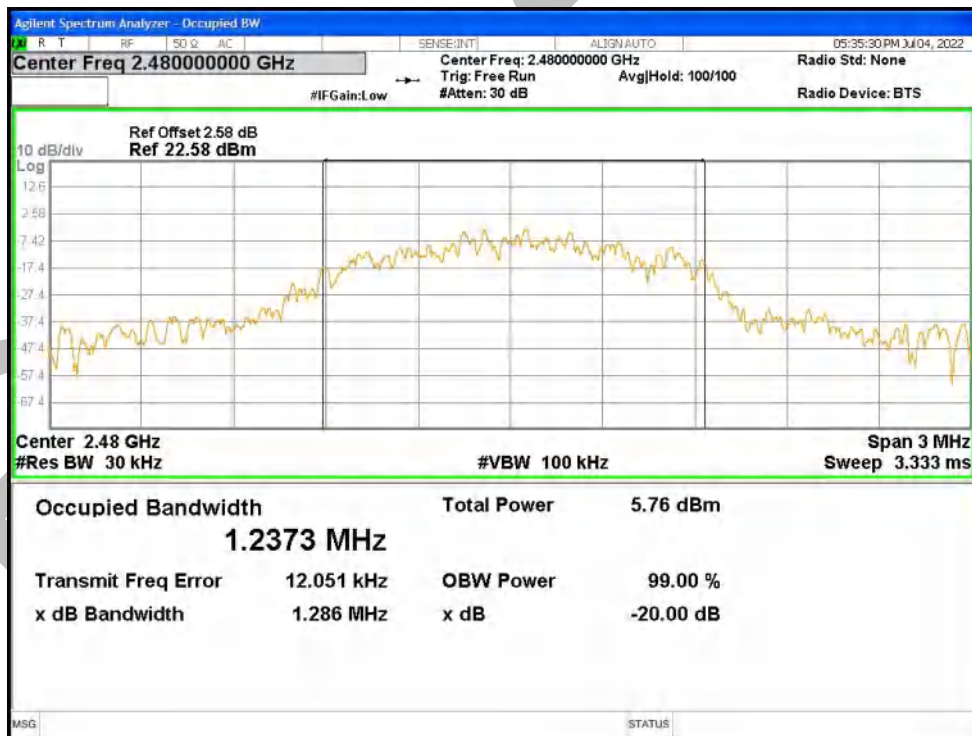


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBm)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	-35.00	-20	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	-45.60	-20	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	-34.50	-20	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	-53.84	-20	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	-35.75	-20	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	-43.55	-20	Pass

Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

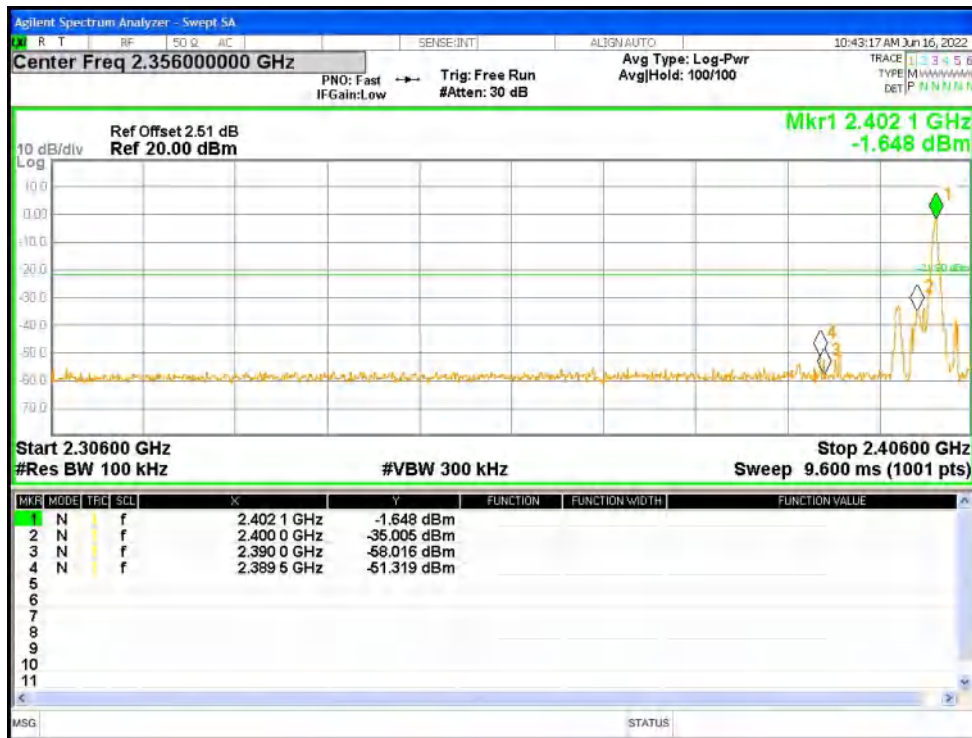

Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref




Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

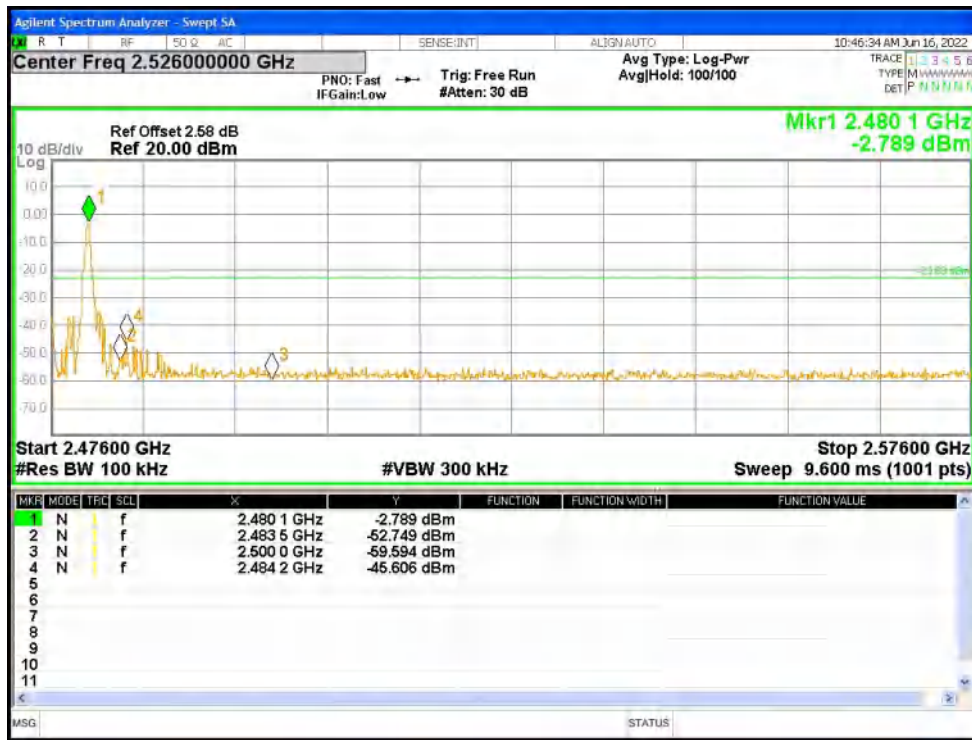

Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission

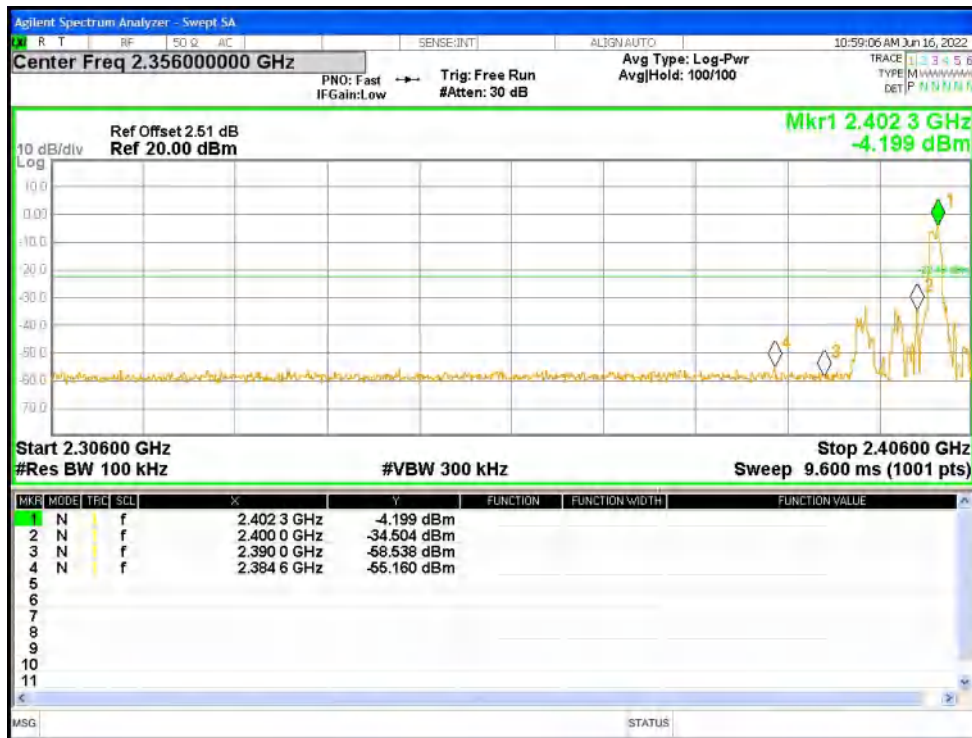

Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref




Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Emission

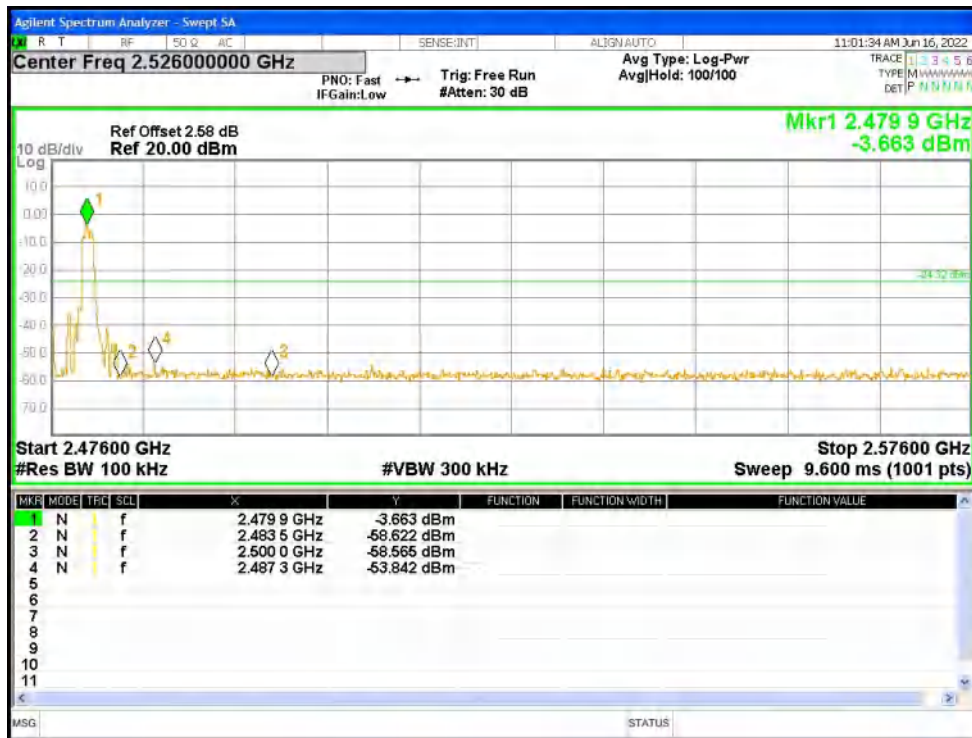

Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Emission

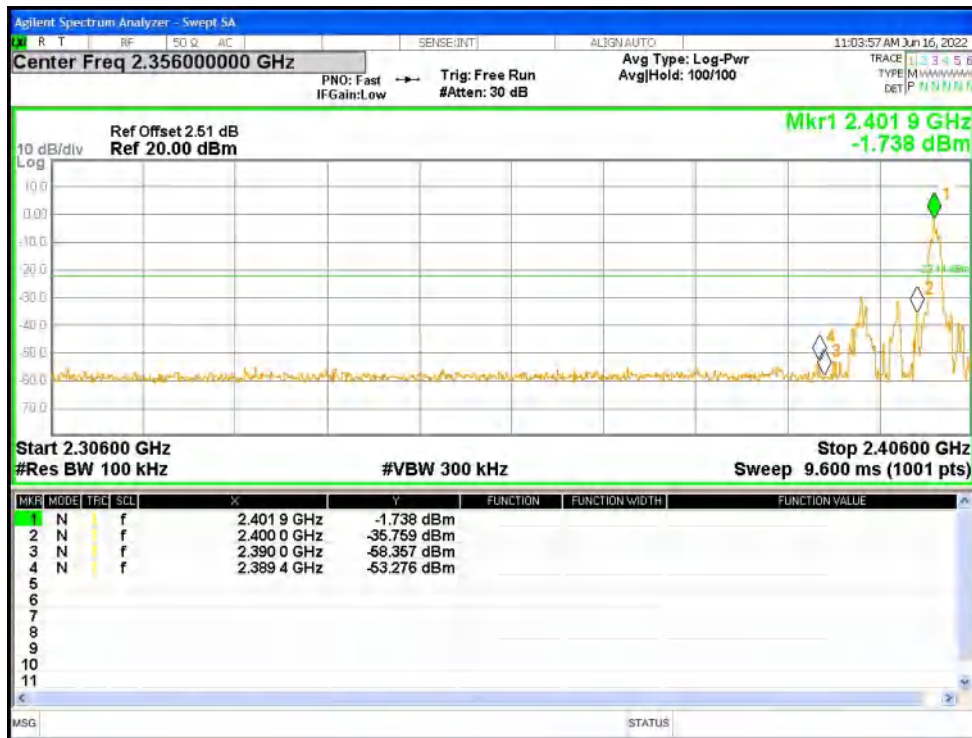

Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Ref



Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Emission

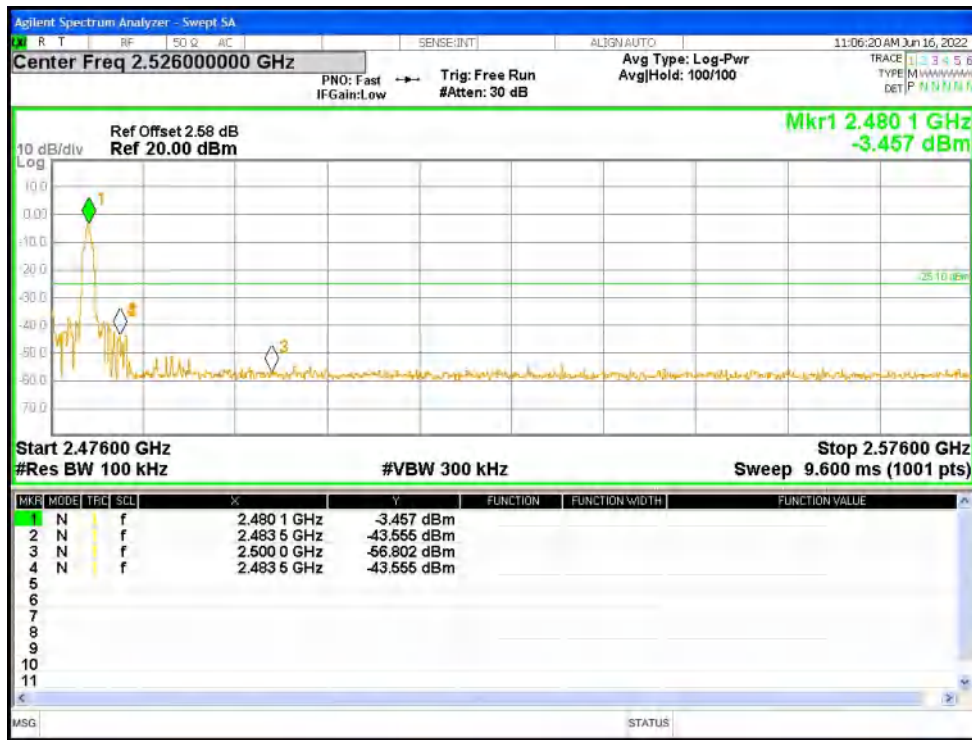

BlueEK


Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBm)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	Hopping	-50.37	-20	Pass
NVNT	1-DH1	2480	Ant1	Hopping	-52.81	-20	Pass
NVNT	2-DH1	2402	Ant1	Hopping	-49.98	-20	Pass
NVNT	2-DH1	2480	Ant1	Hopping	-52.75	-20	Pass
NVNT	3-DH1	2402	Ant1	Hopping	-50.39	-20	Pass
NVNT	3-DH1	2480	Ant1	Hopping	-52.71	-20	Pass

Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Emission

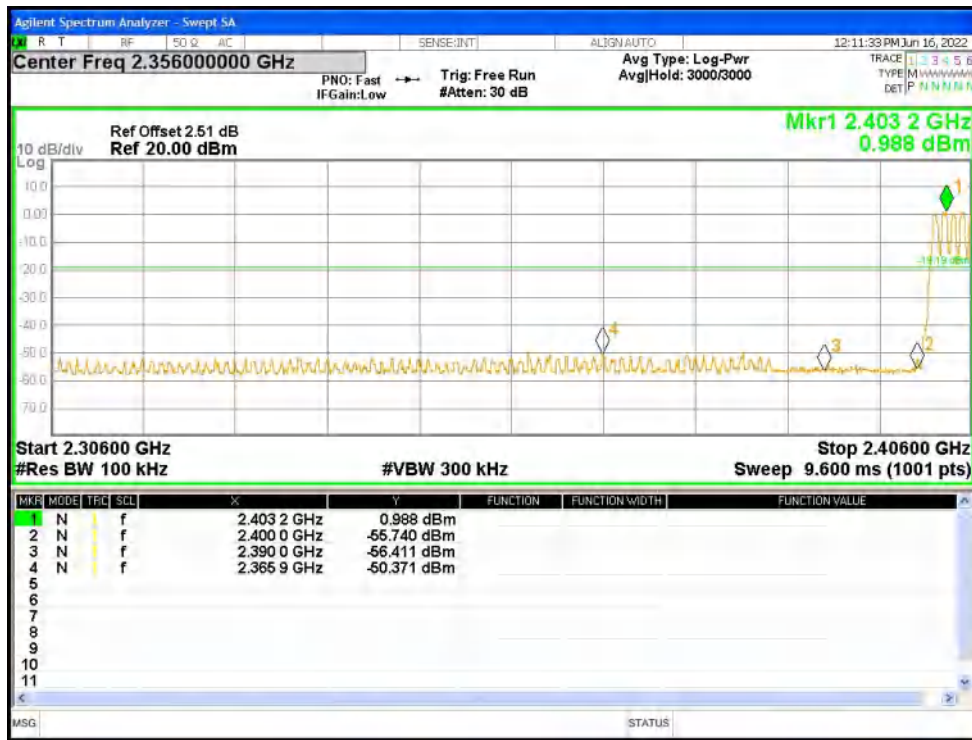

Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Emission

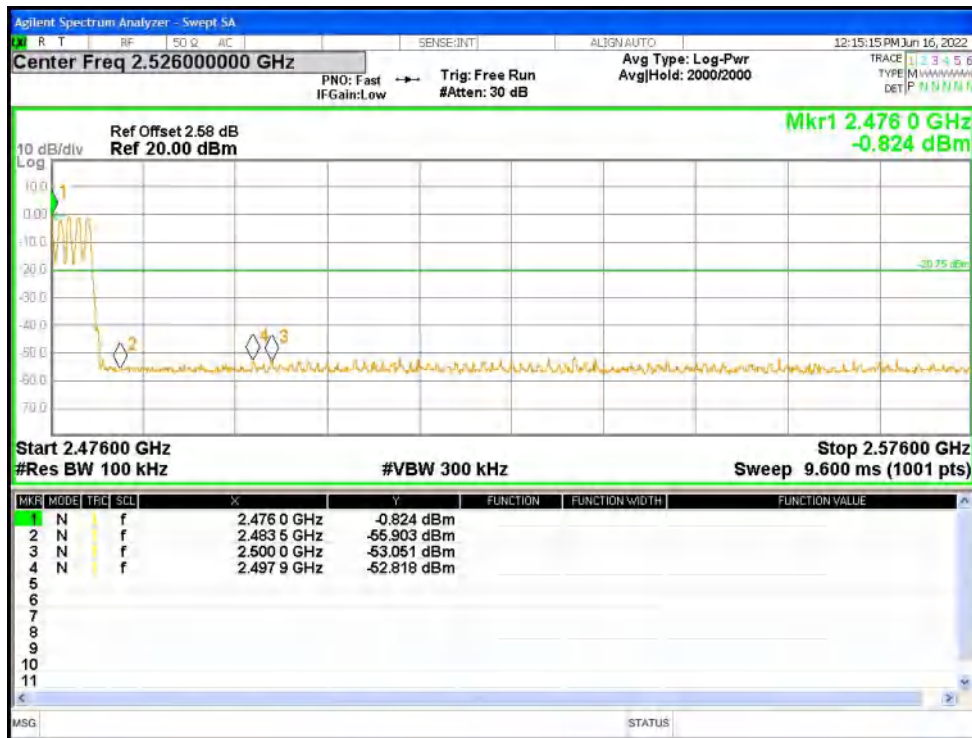

Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Emission

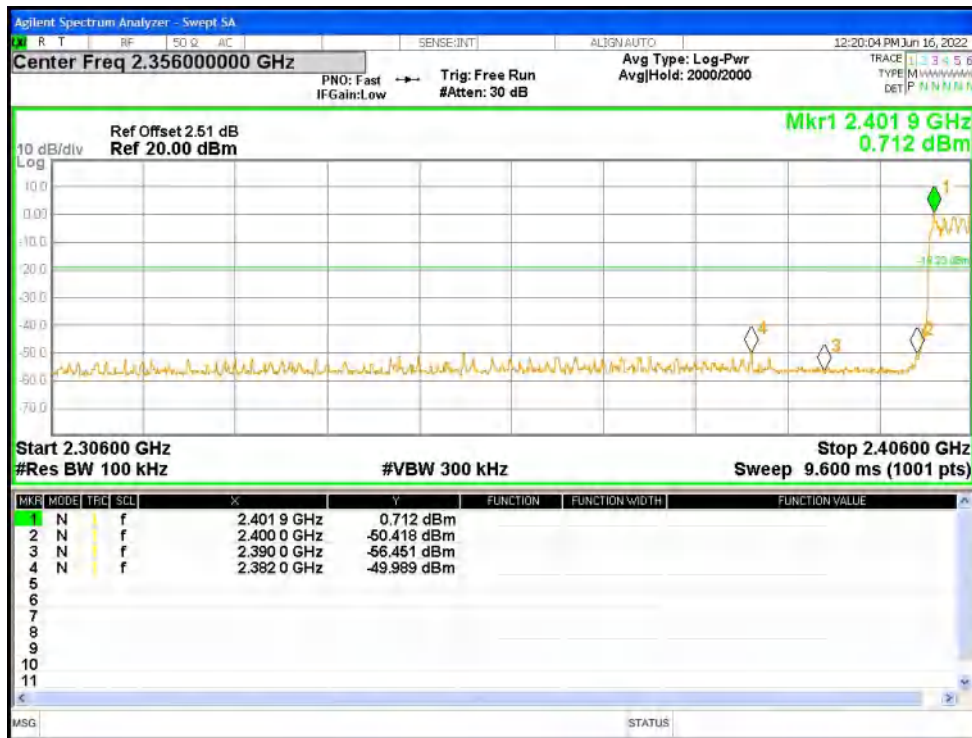

Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Emission

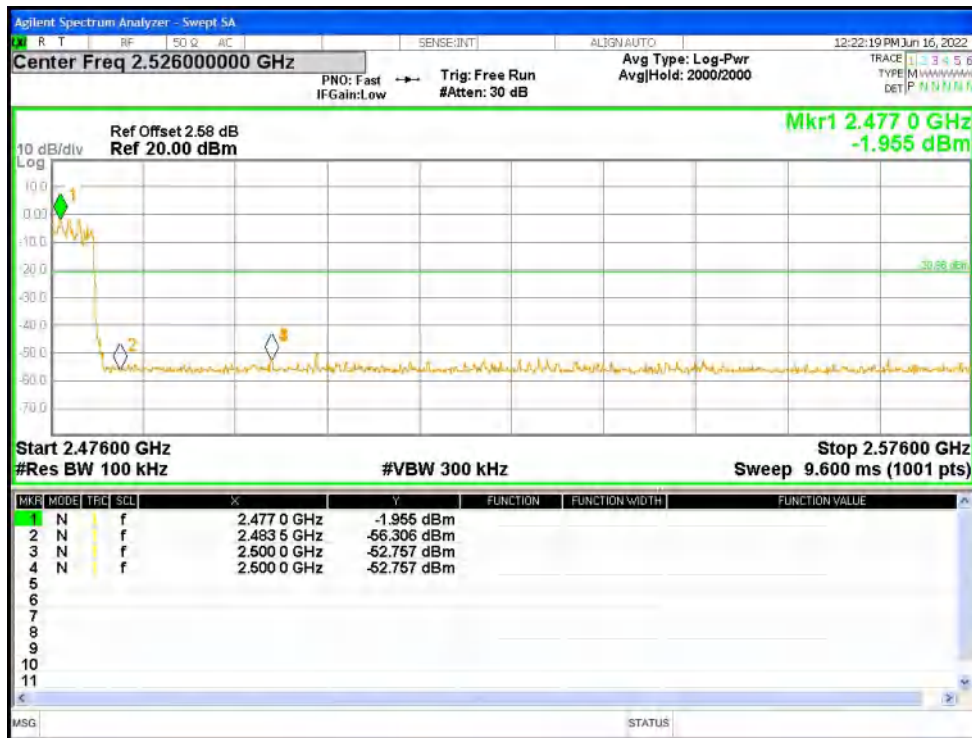

Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Emission



Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Emission

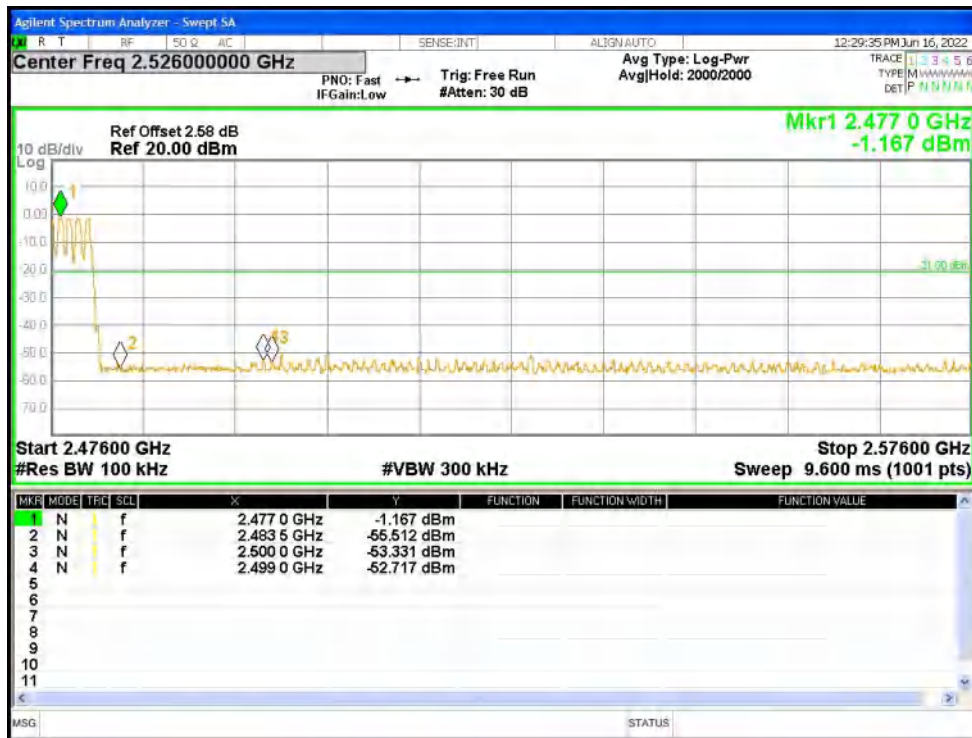


BlueAsia


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	-44.94	-20	Pass
NVNT	1-DH1	2441	Ant1	-44.02	-20	Pass
NVNT	1-DH1	2480	Ant1	-44.39	-20	Pass
NVNT	2-DH1	2402	Ant1	-46	-20	Pass
NVNT	2-DH1	2441	Ant1	-43.97	-20	Pass
NVNT	2-DH1	2480	Ant1	-43.74	-20	Pass
NVNT	3-DH1	2402	Ant1	-45.59	-20	Pass
NVNT	3-DH1	2441	Ant1	-43.67	-20	Pass
NVNT	3-DH1	2480	Ant1	-43.68	-20	Pass


Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Ref

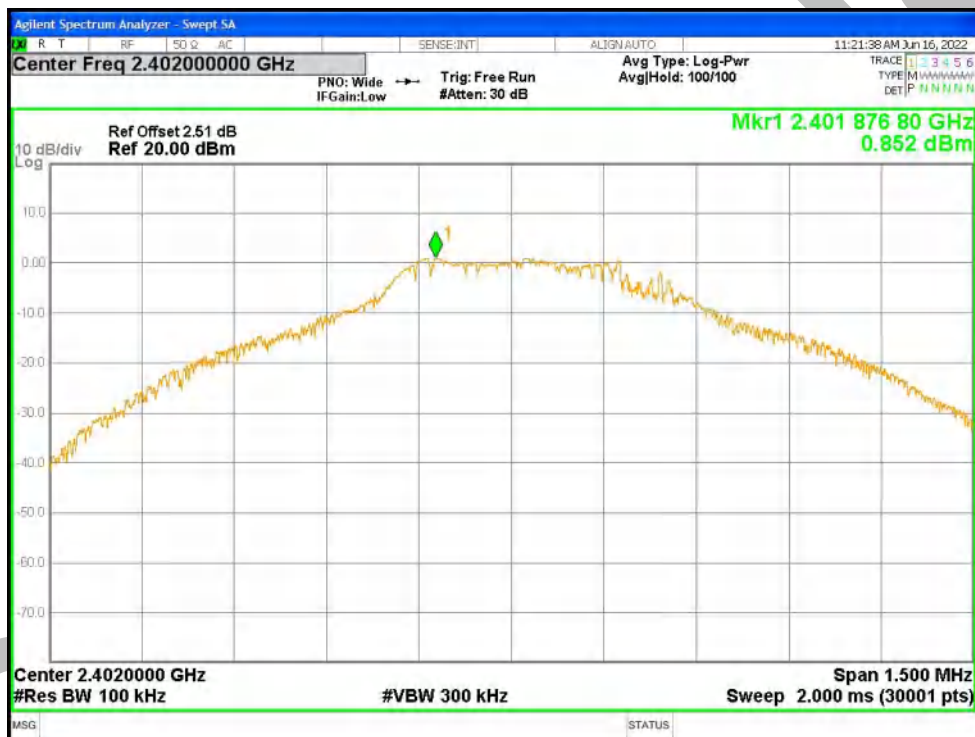


Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission

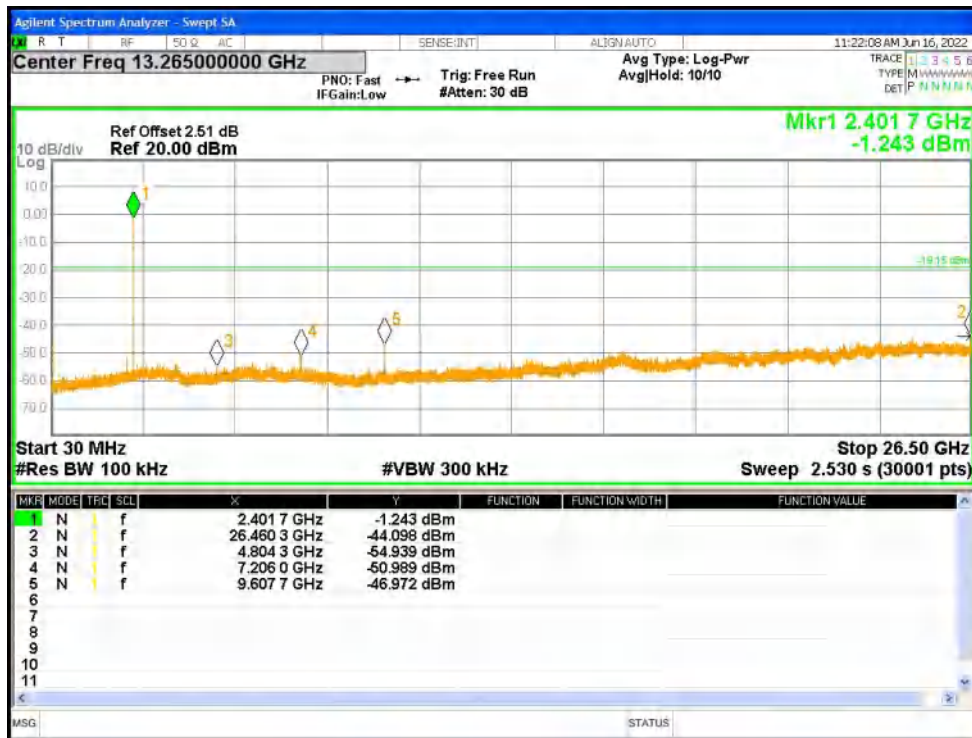

Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Ref

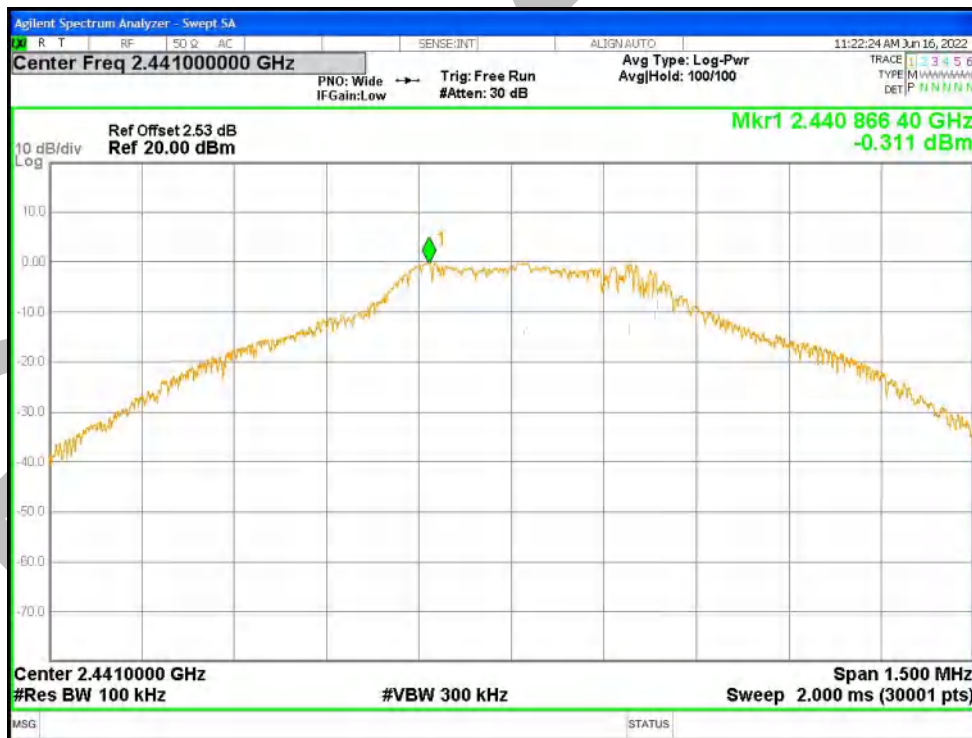


Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission

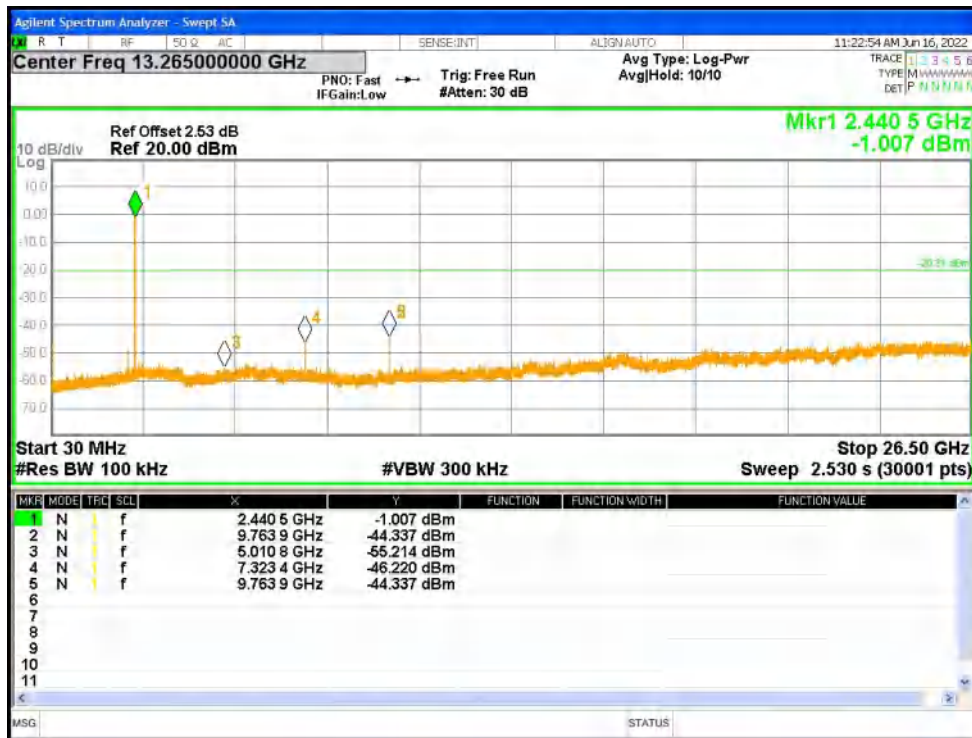


Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Ref




Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Emission

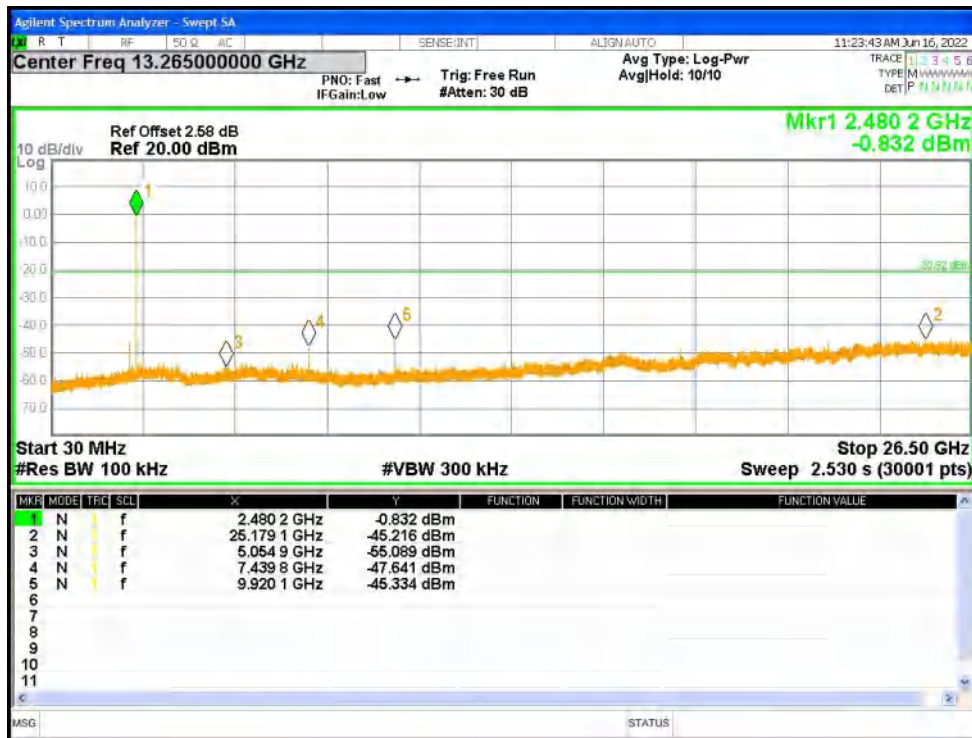


Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Ref

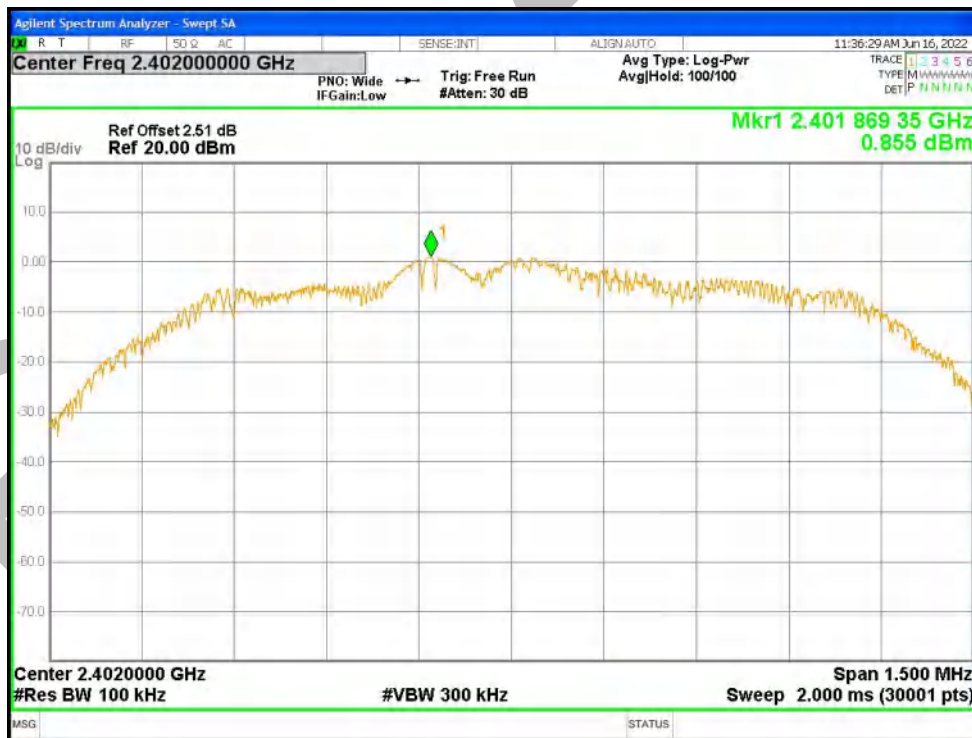


Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Emission

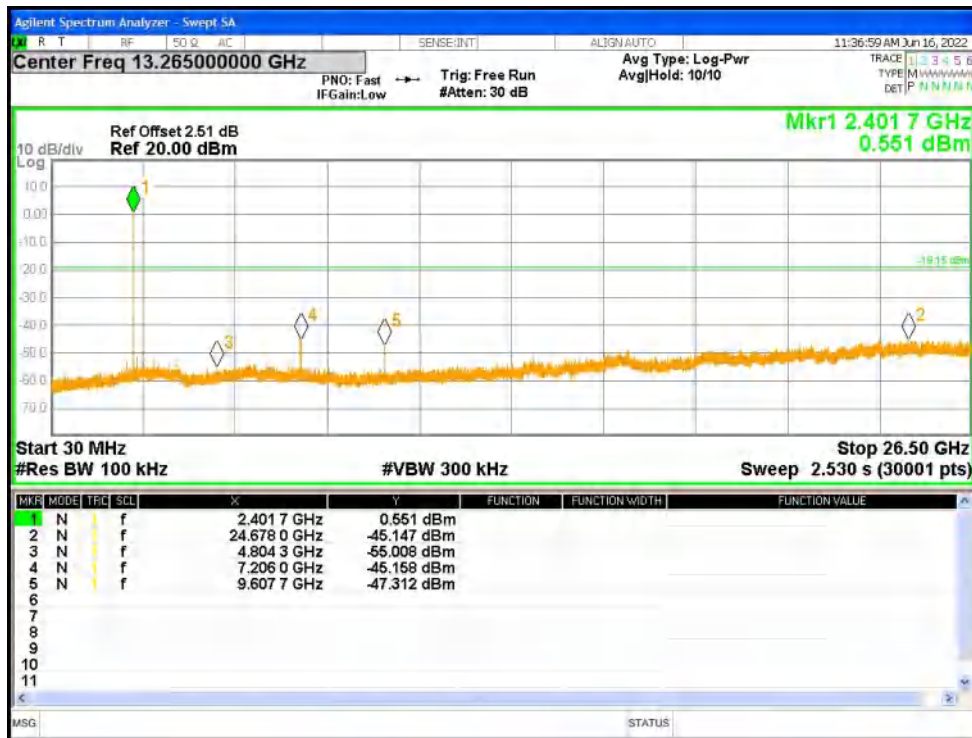

Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Ref

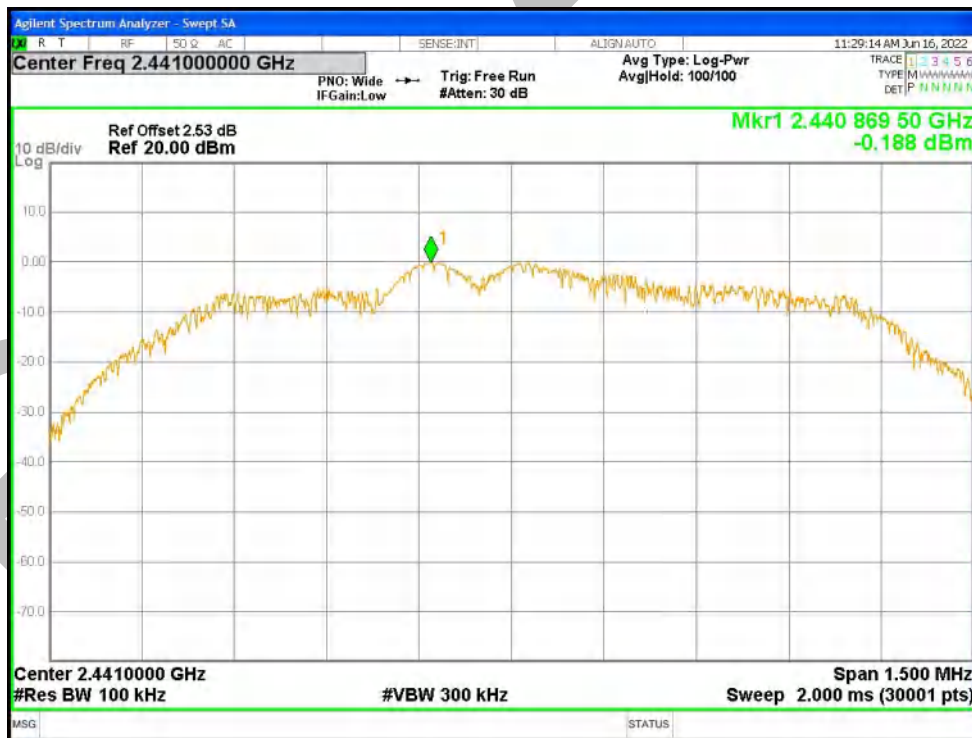


Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Emission

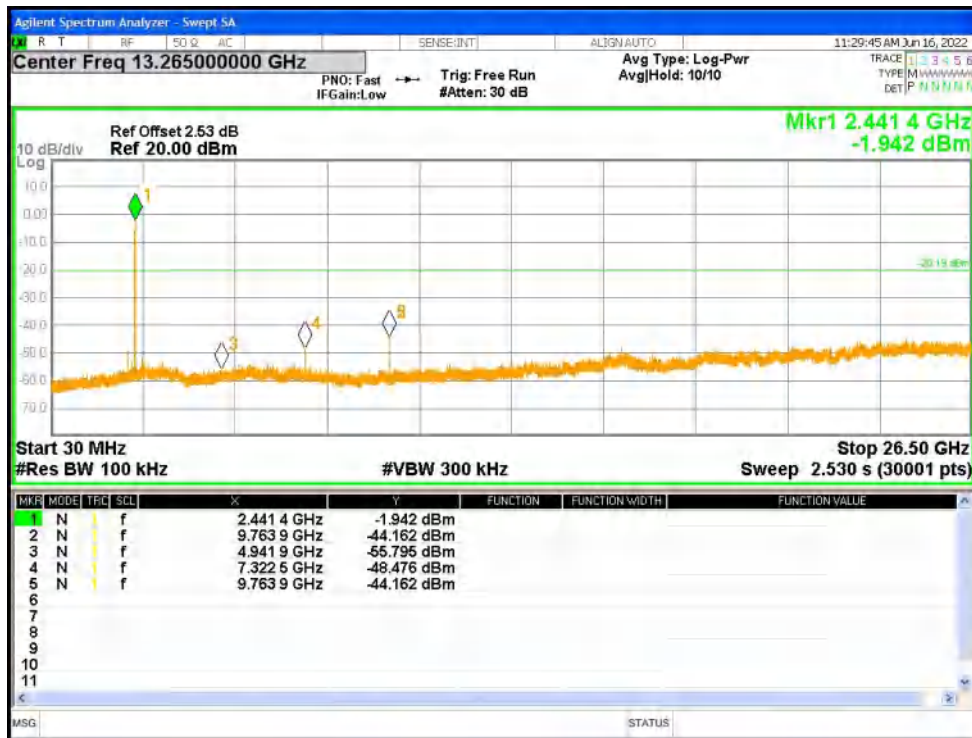


Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Ref




Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Emission

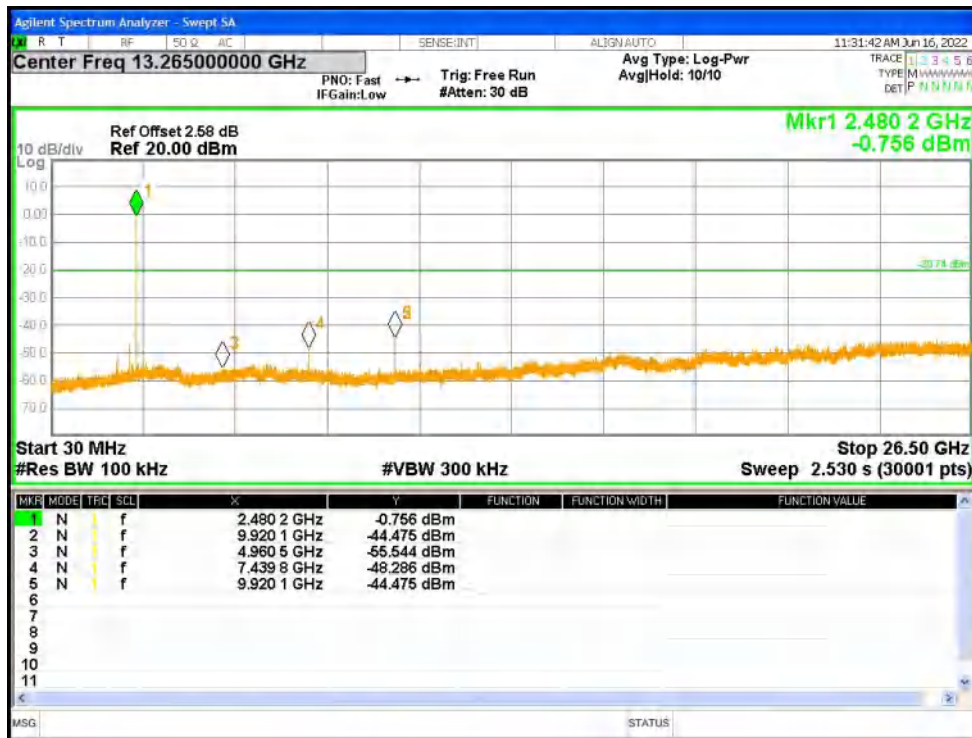


Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Ref

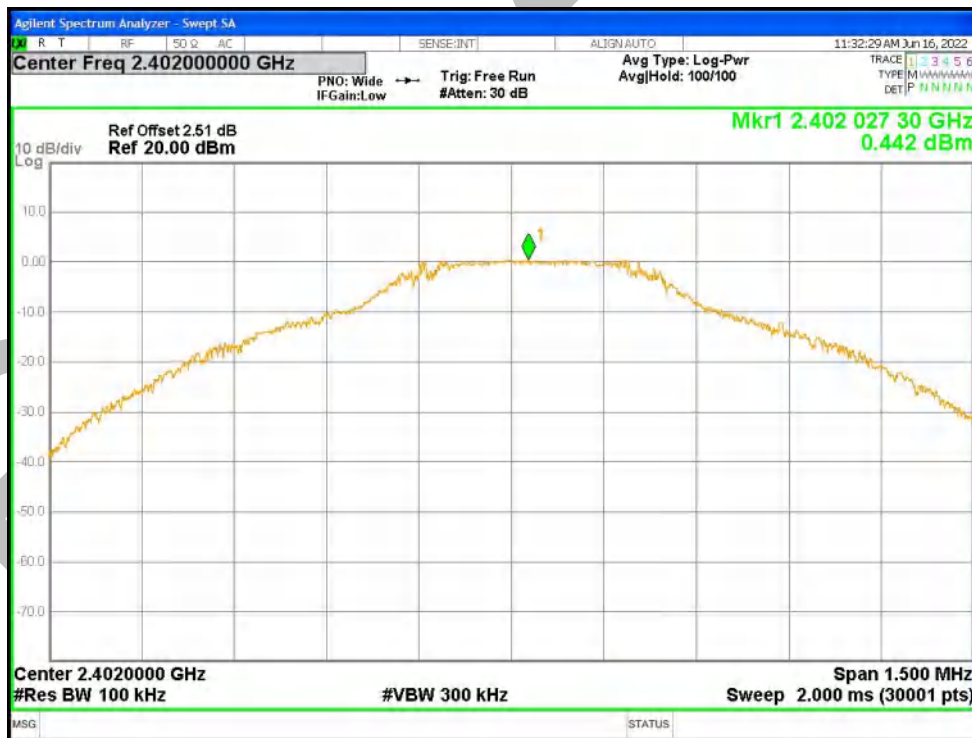


Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Emission

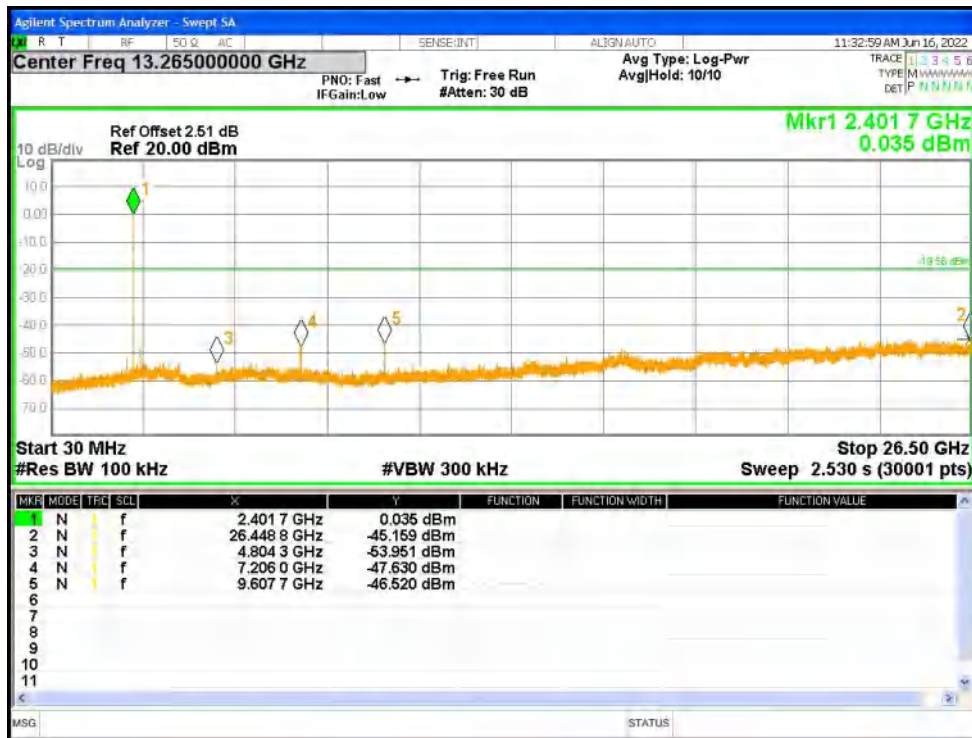


Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Ref

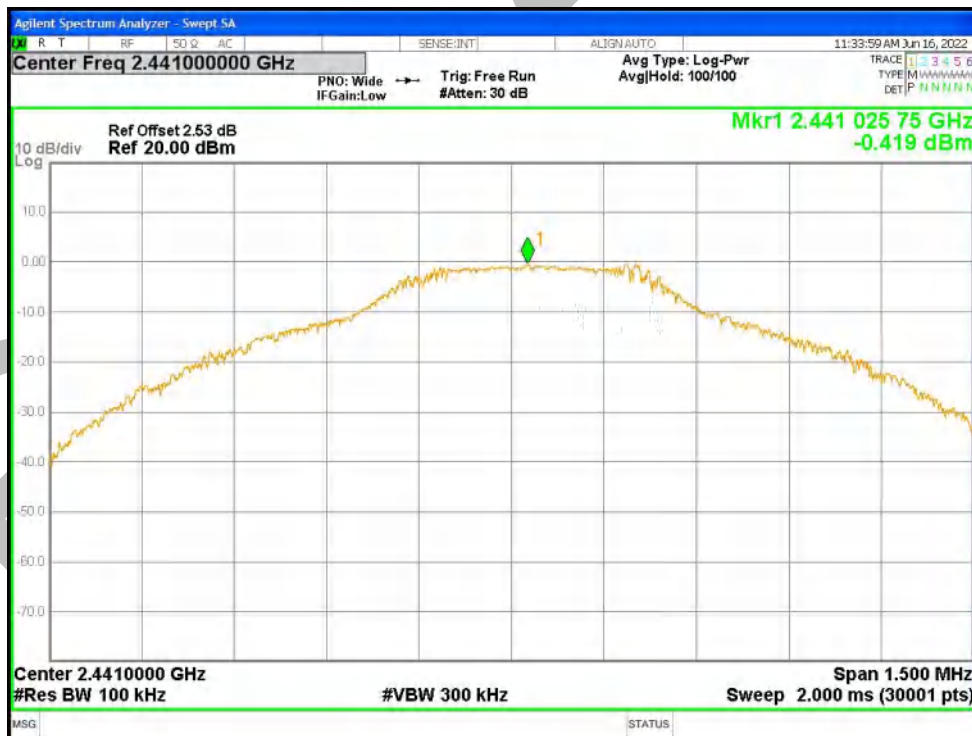


Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Emission

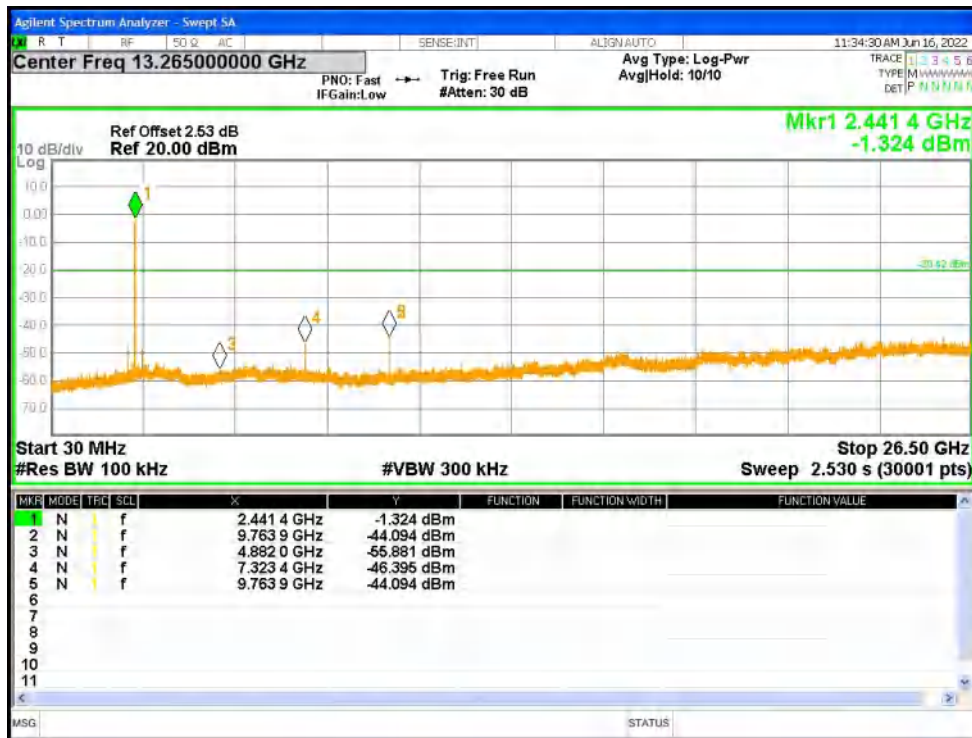

Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Ref

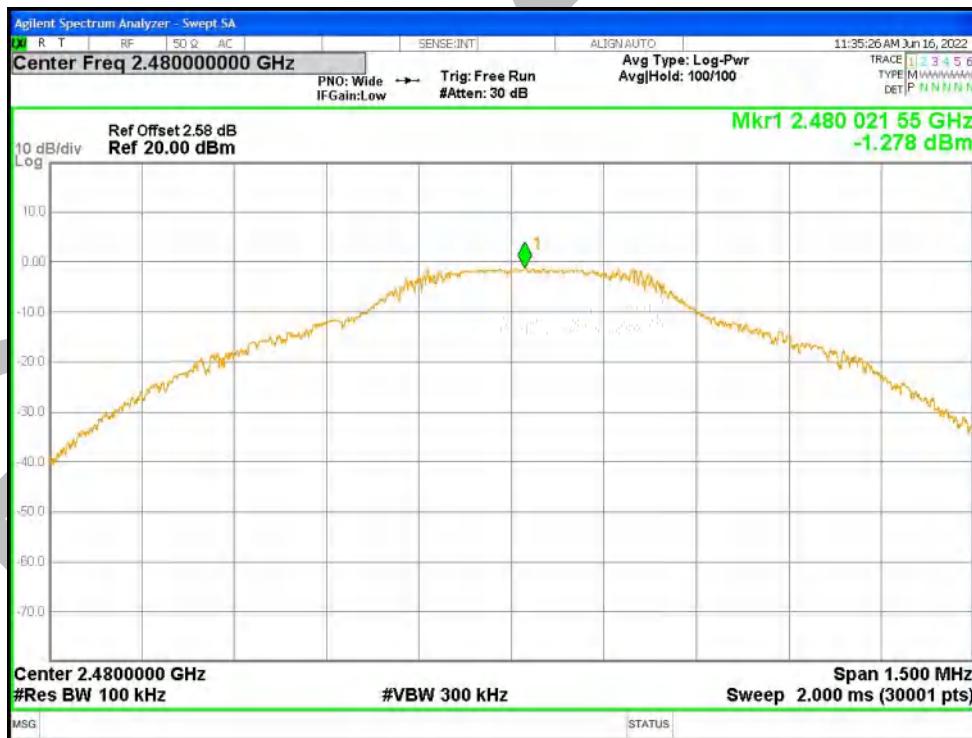

Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Emission

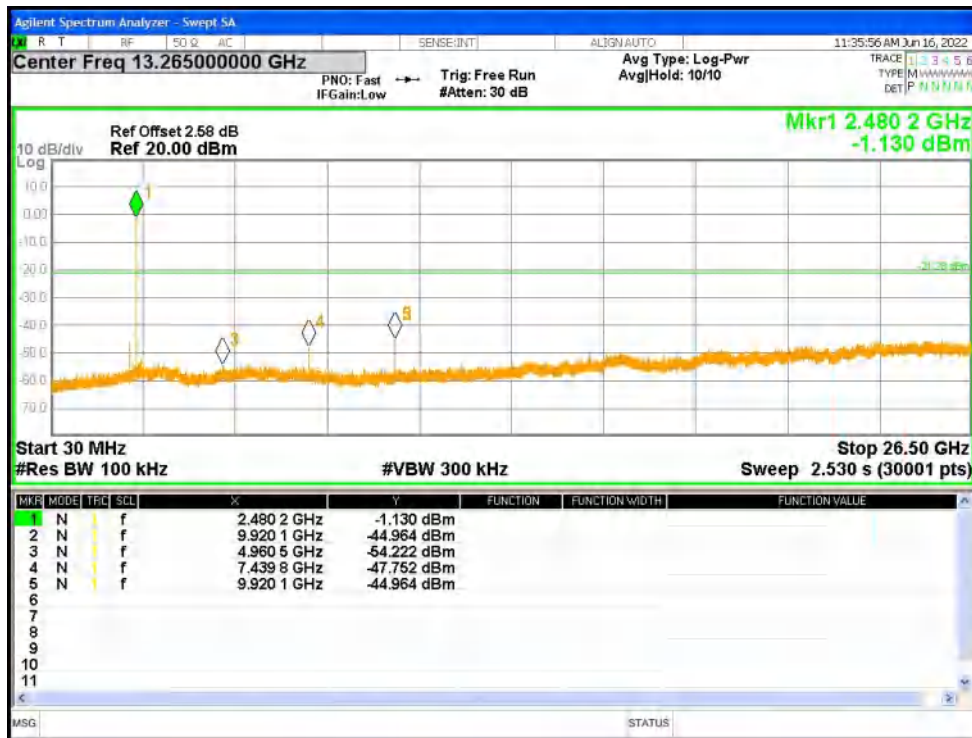

BlueAsia

Carrier Frequencies Separation


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	Ant1	2441.0485	2442.0565	1.008	0.952	Pass
NVNT	2-DH1	Ant1	2440.9585	2442.0085	1.05	0.965	Pass
NVNT	3-DH1	Ant1	2441.011	2442.1	1.089	0.861	Pass

CFS NVNT 1-DH1 2441MHz Ant1

CFS NVNT 2-DH1 2441MHz Ant1




CFS NVNT 3-DH1 2441MHz Ant1

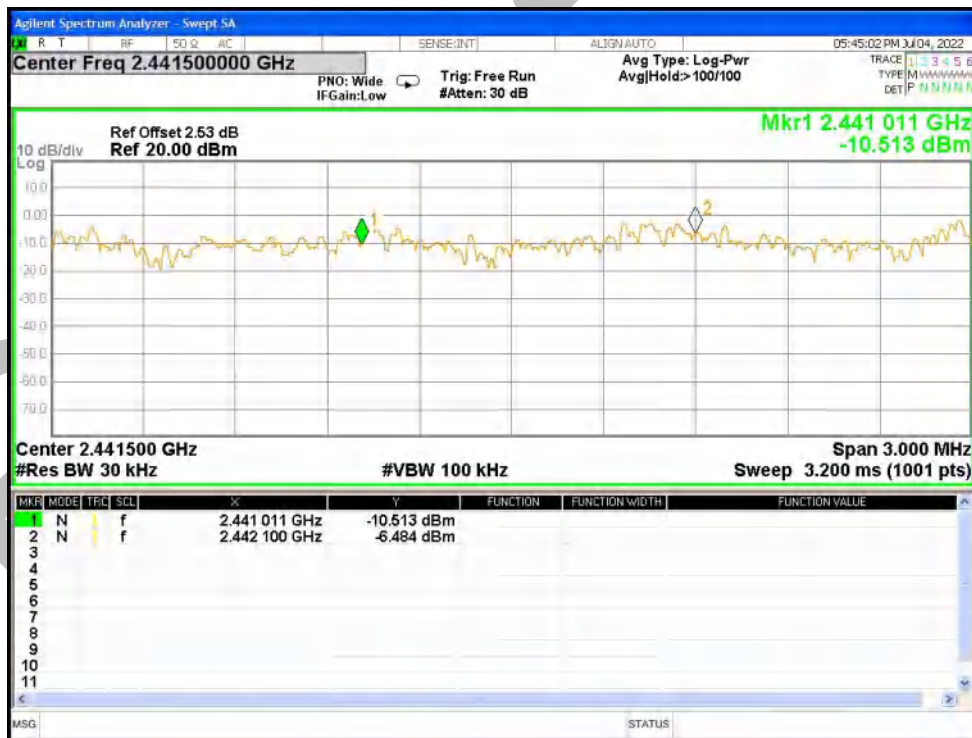

Number of Hopping Channel

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH1	Ant1	79	15	Pass
NVNT	2-DH1	Ant1	79	15	Pass
NVNT	3-DH1	Ant1	79	15	Pass


Hopping No. NVNT 1-DH1 2441MHz Ant1

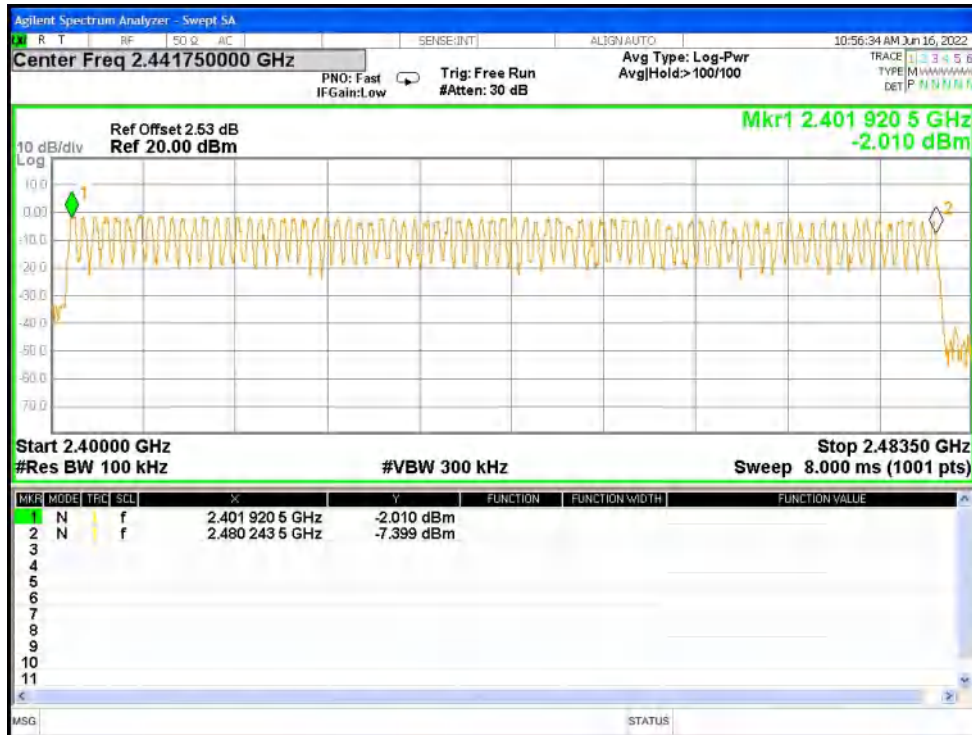

Hopping No. NVNT 2-DH1 2441MHz Ant1



Hopping No. NVNT 3-DH1 2441MHz Ant1

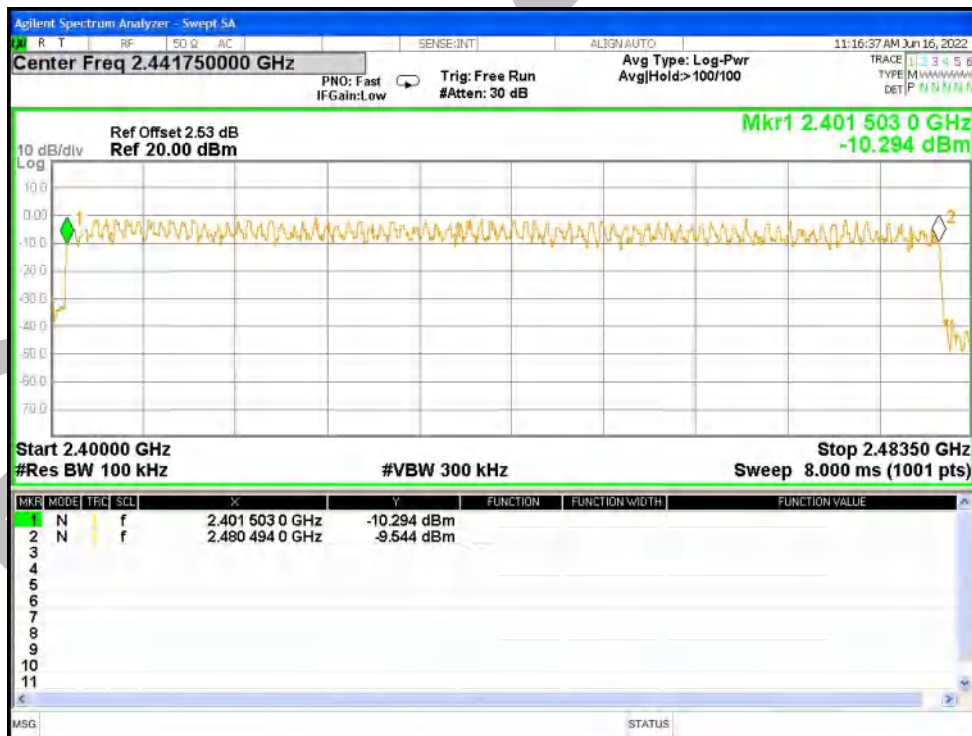

Dwell Time
Measurement Data

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	DH1	121.30	400	Pass
2441MHz	DH3	261.58	400	Pass
2441MHz	DH5	306.40	400	Pass
2441MHz	2DH1	124.71	400	Pass
2441MHz	2DH3	262.38	400	Pass
2441MHz	2DH5	341.04	400	Pass
2441MHz	3DH1	125.35	400	Pass
2441MHz	3DH3	262.22	400	Pass
2441MHz	3DH5	342.82	400	Pass

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: 2441MHz as blow

DH1 time slot = $0.379(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 121.30\text{ms}$

DH3 time slot = $1.636(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 261.58\text{ms}$

DH5 time slot = $2.873(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 306.40\text{ms}$

2DH1 time slot = $0.39 (\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 124.71\text{ms}$

2DH3 time slot = $1.641 (\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 262.38\text{ms}$


2DH5 time slot = $2.878 (\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 341.04\text{ms}$

3DH1 time slot = $0.392 (\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 125.35\text{ms}$

3DH3 time slot = $1.642 (\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 262.22\text{ms}$

3DH5 time slot = $2.893 (\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 342.82\text{ms}$

One Burst NVNT 1-DH1 2441MHz Ant1 One Burst

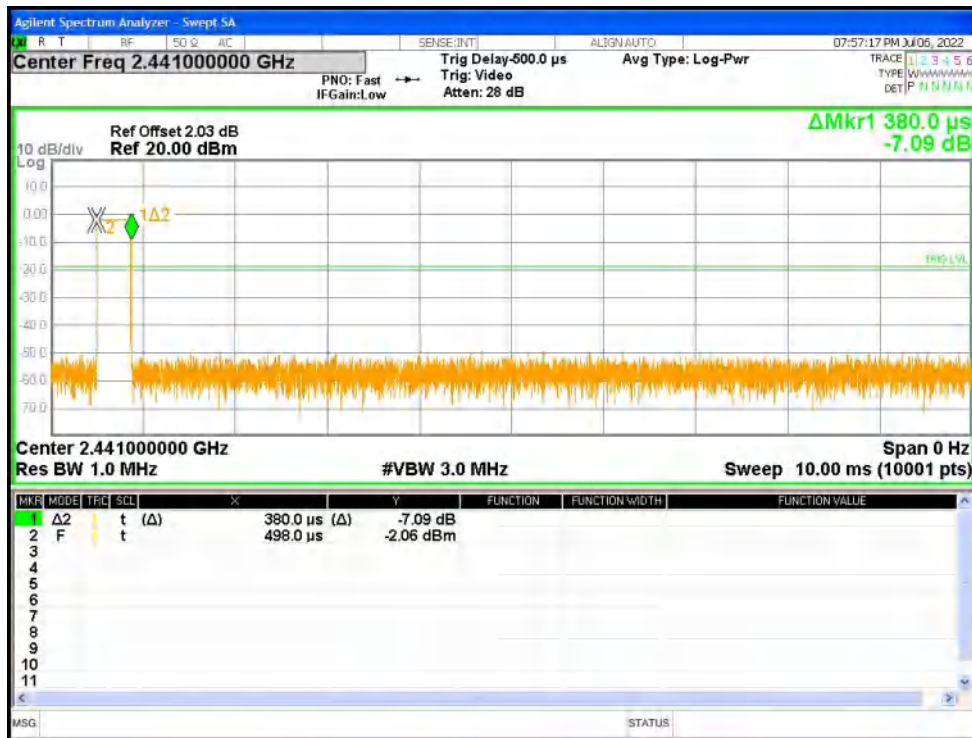

One Burst NVNT 1-DH3 2441MHz Ant1 One Burst




One Burst NVNT 1-DH5 2441MHz Ant1 One Burst




One Burst NVNT 2-DH1 2441MHz Ant1 One Burst




One Burst NVNT 2-DH3 2441MHz Ant1 One Burst

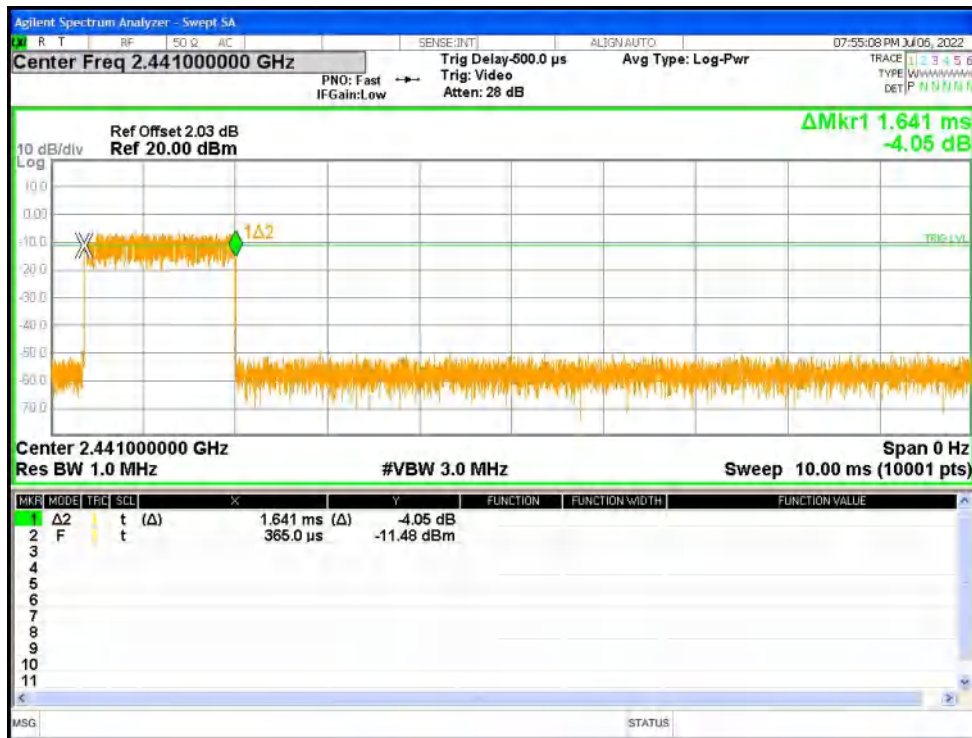


One Burst NVNT 2-DH5 2441MHz Ant1 One Burst

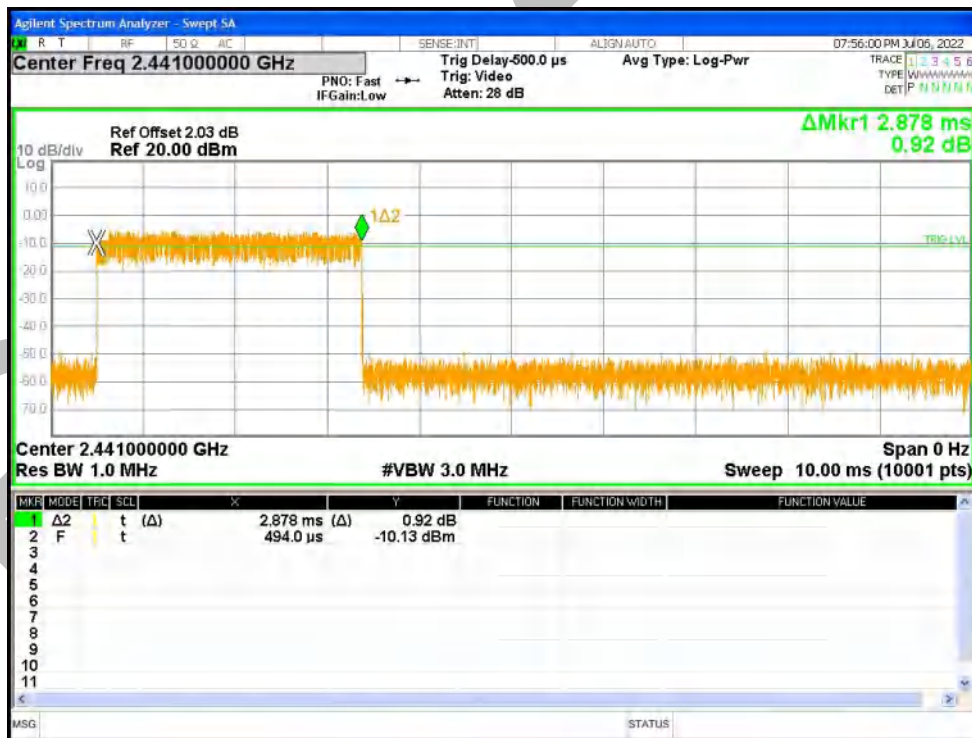

One Burst NVNT 3-DH1 2441MHz Ant1 One Burst

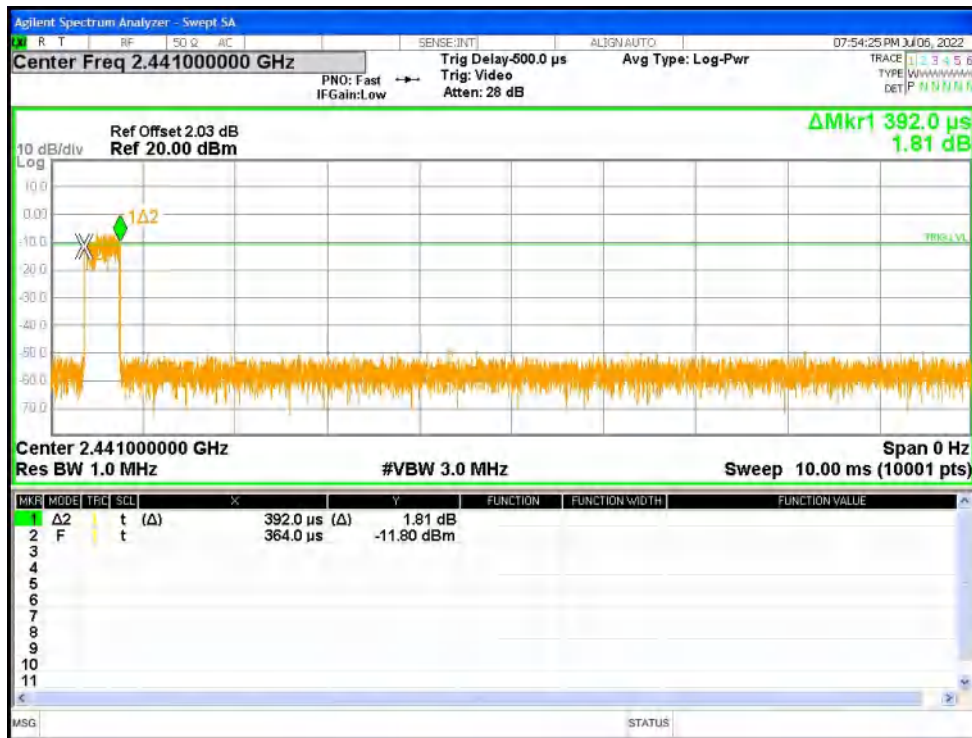

One Burst NVNT 3-DH3 2441MHz Ant1 One Burst

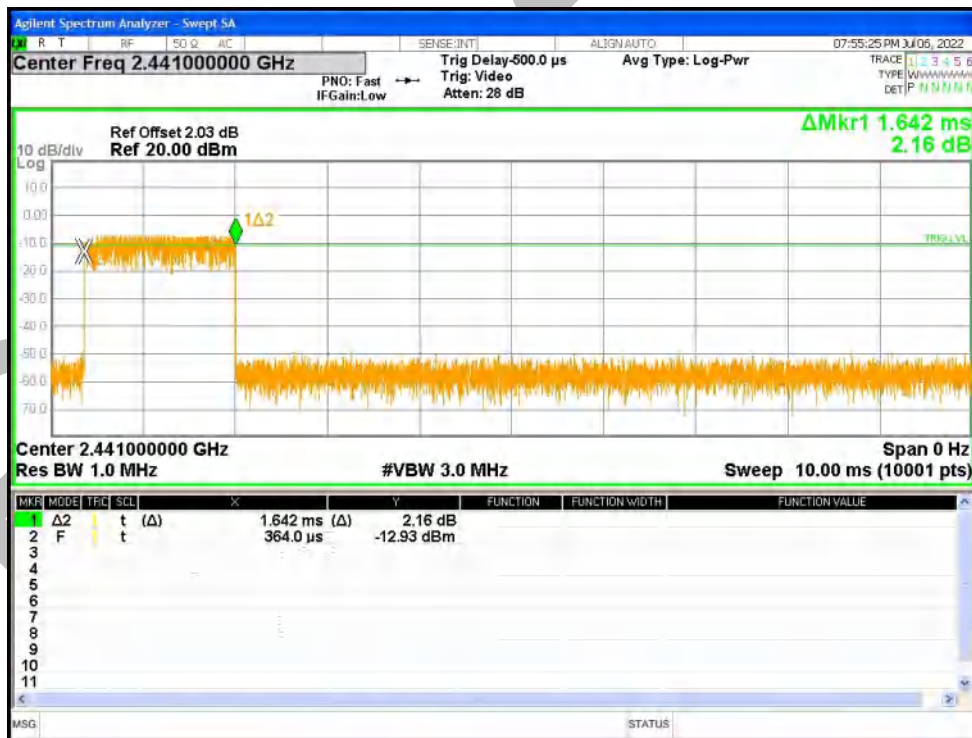


One Burst NVNT 3-DH5 2441MHz Ant1 One Burst



BlueEK

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Antenna Requirement

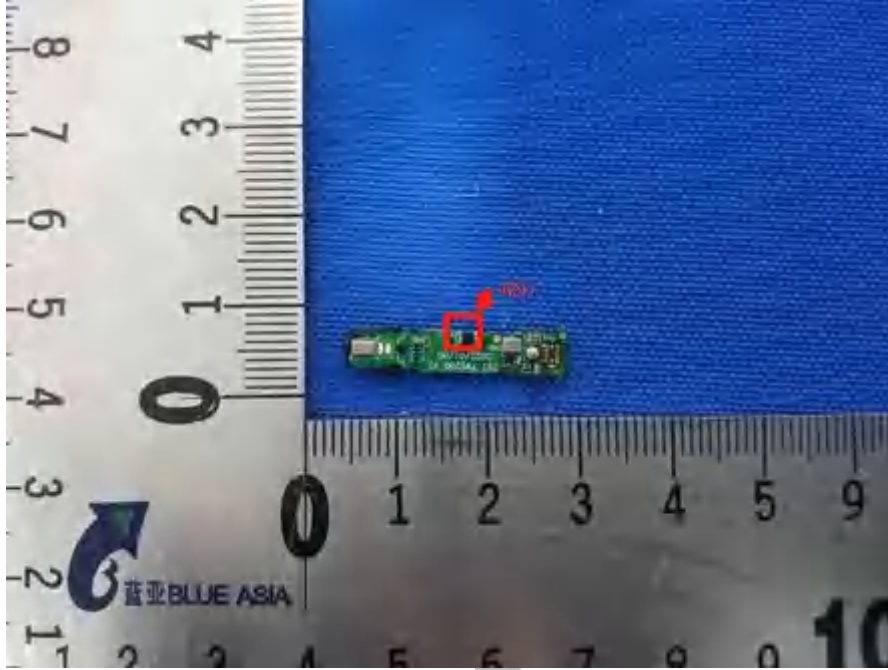


Conducted Emissions at AC Power Line (150kHz-30MHz)



BlueAsia

Radiated Spurious Emissions

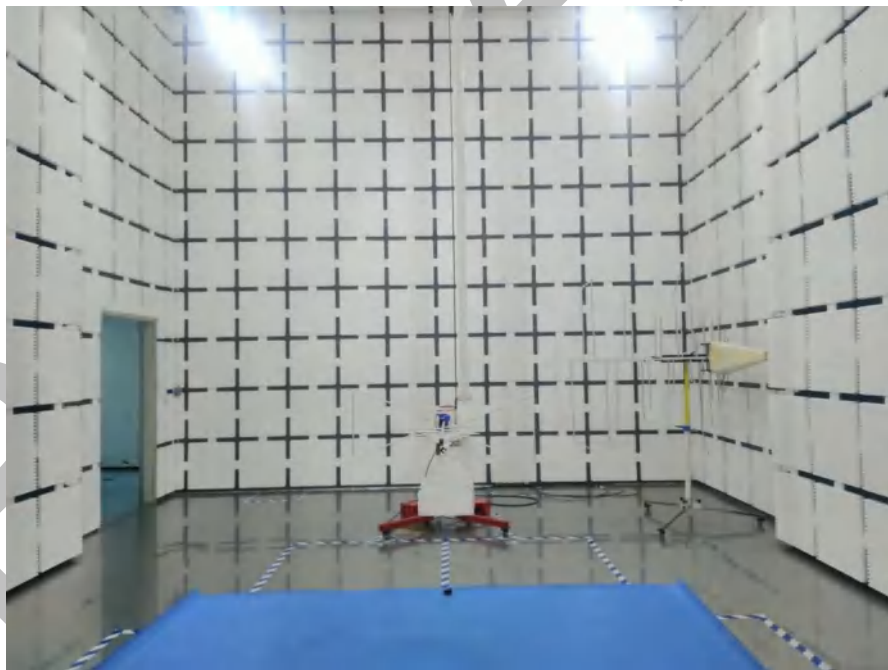

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia