

FCC TEST REPORT

For

SHENZHEN KINGFEI Technologies Co.,Ltd.

MediaSwitch/SmartPanel

Test Model: SmartPanel 62

List Model No.: MediaSwitch 6S

Prepared for : SHENZHEN KINGFEI Technologies Co.,Ltd.
Address : 2-20C HAIHUAJU, The WORLD GARDEN, SHAHE, NANSHAN,
SHENZHEN, GUANGDONG, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an
District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 17, 2017
Number of tested samples : 1
Serial number : Prototype
Date of Test : April 17, 2017~July 10, 2017
Date of Report : July 10, 2017

FCC TEST REPORT
FCC CFR 47 PART 15 C(15.247): 2016**Report Reference No. : LCS170417059AE**

Date of Issue : July 10, 2017

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □**Applicant's Name : SHENZHEN KINGFEI Technologies Co.,Ltd.**Address : 2-20C HAIHUAJU, The WORLD GARDEN, SHAHE, NANSHAN,
SHENZHEN, GUANGDONG, China**Test Specification**

Standard : FCC CFR 47 PART 15 C(15.247): 2016

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

EUT Description. : MediaSwitch/SmartPanel

Trade Mark..... : N/A

Model/ Type reference : MediaSwitch 6S; SmartPanel 62

Ratings..... : AC 100V-240V, 50/60Hz, 6A Max

Result : **Positive****Compiled by:**

Ada Liang/ File administrators

Supervised by:

Dick Su/ Technique principal

Approved by:

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS170417059AE	<u>July 10, 2017</u> Date of issue
---	---------------------------------------

EUT.....	: MediaSwitch/SmartPanel
Type / Model.....	: MediaSwitch 6S; SmartPanel 62
Applicant.....	: SHENZHEN KINGFEI Technologies Co.,Ltd.
Address.....	: 2-20C HAIHUAJU, The WORLD GARDEN, SHAHE, NANSHAN, SHENZHEN, GUANGDONG, China
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: SHENZHEN KINGFEI Technologies Co.,Ltd.
Address.....	: 2-20C HAIHUAJU, The WORLD GARDEN, SHAHE, NANSHAN, SHENZHEN, GUANGDONG, China
Telephone.....	: /
Fax.....	: /
Factory.....	: SHENZHEN KINGFEI Technologies Co.,Ltd.
Address.....	: 2-20C HAIHUAJU, The WORLD GARDEN, SHAHE, NANSHAN, SHENZHEN, GUANGDONG, China
Telephone.....	: /
Fax.....	: /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
00	July 10, 2017	Initial Issue	Gavin Liang

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. DESCRIPTION OF DEVICE (EUT)	6
1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS	7
1.3. EXTERNAL I/O CABLE	7
1.4. DESCRIPTION OF TEST FACILITY	7
1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY	7
1.6. MEASUREMENT UNCERTAINTY	7
1.7. DESCRIPTION OF TEST MODES	8
2. TEST METHODOLOGY	9
2.1. EUT CONFIGURATION.....	9
2.2. EUT EXERCISE	9
2.3. GENERAL TEST PROCEDURES	9
3. SYSTEM TEST CONFIGURATION.....	10
3.1. JUSTIFICATION.....	10
3.2 EUT EXERCISE SOFTWARE	10
3.3 SPECIAL ACCESSORIES	10
3.4. BLOCK DIAGRAM/SCHEMATICS.....	10
3.5. EQUIPMENT MODIFICATIONS	10
3.6. TEST SETUP	10
4. SUMMARY OF TEST RESULTS	11
5. TEST RESULT	12
5.1. ON TIME AND DUTY CYCLE	12
5.2. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT.....	14
5.3. POWER SPECTRAL DENSITY MEASUREMENT	16
5.4. 6 dB SPECTRUM BANDWIDTH MEASUREMENT	21
5.5. RADIATED EMISSIONS MEASUREMENT.....	26
5.6. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST	46
5.6.7. TEST RESULTS OF BAND EDGES TEST	52
5.7. POWER LINE CONDUCTED EMISSIONS	56
5.8. ANTENNA REQUIREMENTS.....	61
6. LIST OF MEASURING EQUIPMENTS	63
7. TEST SETUP PHOTOGRAPHS OF EUT.....	64

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: MediaSwitch/SmartPanel
Test Model	: ;SmartPanel 62
List Model No.	: MediaSwitch 6S
Model Declaration	: PCB board, structure and internal of these model(s) are the same, So no additional models were tested.
Power Supply	: AC 100V-240V, 50/60Hz, 6A Max
Hardware version	: V37
Software version	: Android 4.x/5.x
Bluetooth Operation frequency	: 2402MHz-2480MHz
Bluetooth Version	: V4.0
Bluetooth Channel Number	: 79 Channels for Bluetooth V3.0(DSS) 40 Channels for Bluetooth 4.0(DTS)
Bluetooth Modulation Type	: GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V3.0(DSS) GFSK for Bluetooth V4.0(DTS)
Antenna Description	: Internal Antenna, 1.0dBi(Max.)
WLAN	: Supported 802.11b/802.11g/802.11n
WLAN FCC Operation Frequency	: IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11n HT40:2422-2452MHz
WLAN Channel Number	: 11 Channels for WIFI 20MHz Bandwidth(802.11b/g/n-HT20) 7 Channels for WIFI 40MHz Bandwidth(802.11n-HT40)
WLAN Modulation Technology	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM,QPSK,BPSK)
Antenna Description	: Internal Antenna, 1.0dBi(Max.)
Transmit Frequency	: 315 MHz
Number of Channels	: 6(314.60MHz, 314.80MHz, 315.00MHz, 315.20MHz, 315.40MHz, 315.60MHz)
Modulation Type	: GFSK
Antenna Description	: Internal Antenna, 2.0dBi(Max.)

1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

1.3. External I/O Cable

I/O Port Description	Quantity	Cable
TF/Micro-SD Card Slot	1	--
USB	2	--

1.4. Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional

1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	±3.10dB	(1)
	30MHz~200MHz	±2.96dB	(1)
	200MHz~1000MHz	±3.10dB	(1)
	1GHz~26.5GHz	±3.80dB	(1)
	26.5GHz~40GHz	±3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	±1.63dB	(1)
Power disturbance	30MHz~300MHz	±1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, that was determined to be 802.11b mode(High Channel).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be 802.11b mode(High Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

BLE 4.0: 1Mbps, GFSK

802.11b Mode: 1 Mbps, DSSS.

802.11g Mode: 6 Mbps, OFDM.

802.11n Mode HT20: MCS0, OFDM.

802.11n Mode HT40: MCS8, OFDM.

Channel List & Frequency

BLE 4.0

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
2402~2480MHz	1	2402	21	2442
	2	2404	--	--
	3	2406	--	--
	--	--	38	2476
	--	--	39	2478
	20	2440	40	2480

802.11b/g/n(HT20)

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
2412~2462MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	--	--

IEEE 802.11n HT40

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
2422~2452MHz	1	--	7	2442
	2	--	8	2447
	3	2422	9	2452
	4	2427	10	--
	5	2432	11	--
	6	2437	--	--

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB558074 D01 DTS Meas. Guidance v03r05 are required to be used for this kind of FCC 15.247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmit condition. The duty cycle is 100% and the average correction factor is 0.

3.2 EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (MP_kit_RF TOOL) provided by application.

3.3 Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
Lenovo	PC	B470	--	DOC
Lenovo	AC/DC ADAPTER	ADP-90DDB	--	DOC

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
§15.247(b)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(a)	Occupied Bandwidth	Compliant
§15.209, §15.247(d)	Radiated and Conducted Spurious Emissions	Compliant
§15.205	Emissions at Restricted Band	Compliant
§15.207(a)	Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant
§15.247(i)§2.1093	RF Exposure	Compliant

5. TEST RESULT

5.1. On Time and Duty Cycle

5.1.1. Standard Applicable

None; for reporting purpose only.


5.1.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyse.

5.1.3. Test Procedures

1. Set the centre frequency of the spectrum analyse to the transmitting frequency;
2. Set the span=0MHz, RBW=8MHz, VBW=50MHz, Sweep time=5ms;
3. Detector = peak;
4. Trace mode = Single hold.

5.1.4. Test Setup Layout

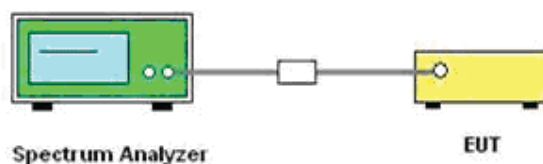

5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.6. Test result

Mode	On Time B (ms)	Period (ms)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW(KHz)
BLE 4.0	5	5	1	100	0	0.010
802.11b	5	5	1	100	0	0.010
802.11g	5	5	1	100	0	0.010
802.11n -HT20	5	5	1	100	0	0.010
802.11n -HT40	5	5	1	100	0	0.010

Test plot of On Time and Duty Cycle



5.2. Maximum Conducted Output Power Measurement

5.2.1. Standard Applicable

According to §15.247(b): For systems using digital modulation in the 2400-2483.5 MHz and 5725-5850 MHz band, the limit for maximum peak conducted output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter peak output power.


5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the power meter.

5.2.3. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

5.2.4. Test Setup Layout

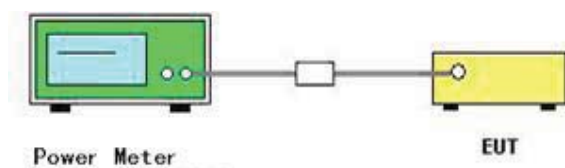

5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.6. Test Result of Maximum Conducted Output Power

Temperature	24.3℃	Humidity	52.1%
Test Engineer	Chaz Liu	Configurations	BLE 4.0; 802.11b/g/n

BLE 4.0

Channel	Frequency (MHz)	Conducted Power (Peak, dBm)	Max. Limit (dBm)	Result
1	2402	-3.464	30	Complies
20	2440	-3.483	30	Complies
40	2480	-3.310	30	Complies

WIFI:

Test Mode	Channel	Frequency (MHz)	Conducted Power (Peak, dBm)	Max. Limit (dBm)	Result
802.11b	1	2412	15.47	30	Complies
	6	2437	14.51	30	Complies
	11	2462	14.42	30	Complies
802.11g	1	2412	13.20	30	Complies
	6	2437	13.12	30	Complies
	11	2462	13.32	30	Complies
802.11n (HT20)	1	2412	13.14	30	Complies
	6	2437	13.44	30	Complies
	11	2462	13.27	30	Complies
802.11n (HT40)	3	2422	13.06	30	Complies
	6	2437	13.17	30	Complies
	9	2452	13.09	30	Complies

5.3. Power Spectral Density Measurement

5.3.1. Standard Applicable

According to §15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


5.3.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

5.3.3. Test Procedures

1. The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 3 kHz~100 kHz.
4. Set the VBW $\geq 3 \times$ RBW
5. Set the span to 1.5 times the DTS channel bandwidth.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

5.3.4. Test Setup Layout

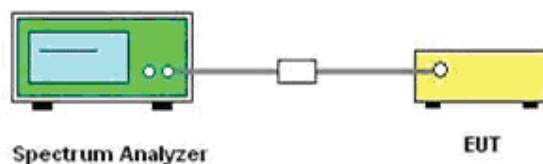

5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.3.6. Test Result of Power Spectral Density

Temperature	24.3℃	Humidity	52.1%
Test Engineer	Chaz Liu	Configurations	BLE 4.0; 802.11b/g/n


BLE 4.0

Channel	Frequency (MHz)	Mearsured Power Density (dBm/100KHz)	Max. Limit (dBm/3KHz)	Result
1	2402	-4.469	8	Complies
20	2440	-4.500	8	Complies
40	2480	-4.332	8	Complies


WIFI:

Test Mode	Channel	Frequency (MHz)	Mearsured Power Density (dBm/100KHz)	Max. Limit (dBm/3KHz)	Result
802.11b	1	2412	3.700	8	Complies
	6	2437	3.685	8	Complies
	11	2462	2.944	8	Complies
802.11g	1	2412	-6.299	8	Complies
	6	2437	-5.865	8	Complies
	11	2462	-5.918	8	Complies
802.11n (HT20)	1	2412	-6.127	8	Complies
	6	2437	-6.024	8	Complies
	11	2462	-6.237	8	Complies
802.11n (HT40)	3	2422	-9.087	8	Complies
	6	2437	-7.805	8	Complies
	9	2452	-9.007	8	Complies


Test plot of Power Spectral Density

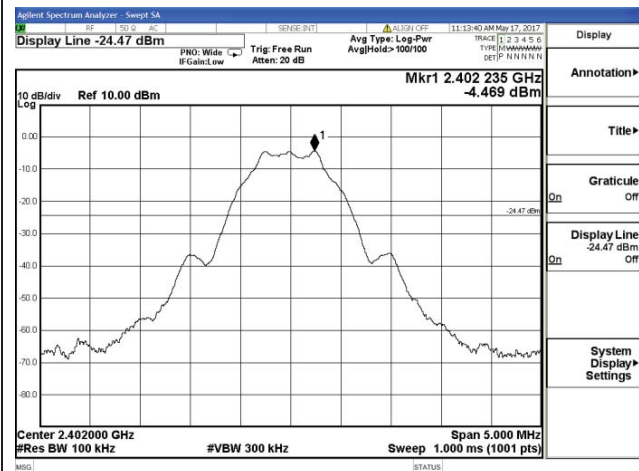


BLE 4.0_Low Channel

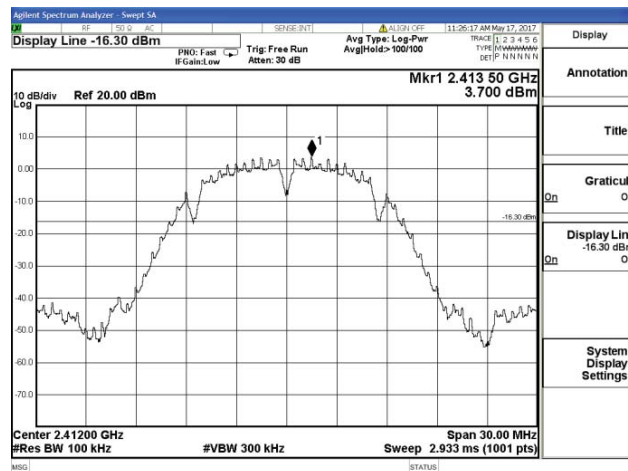


802.11b_Low Channel

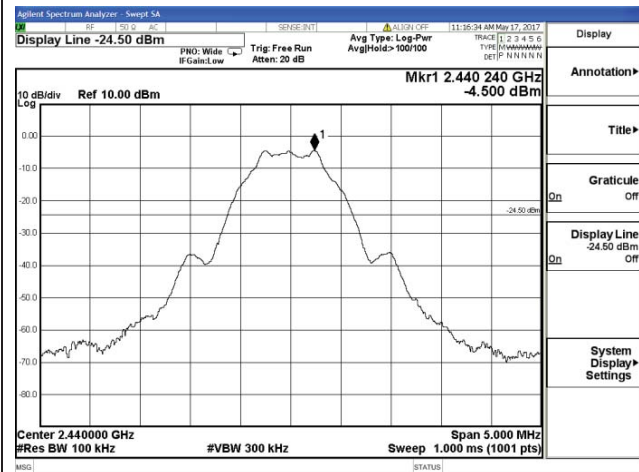


BLE 4.0_Middle Channel

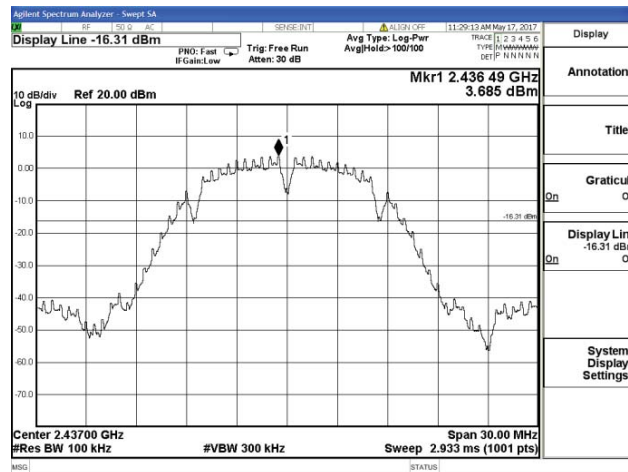


802.11b_Middle Channel

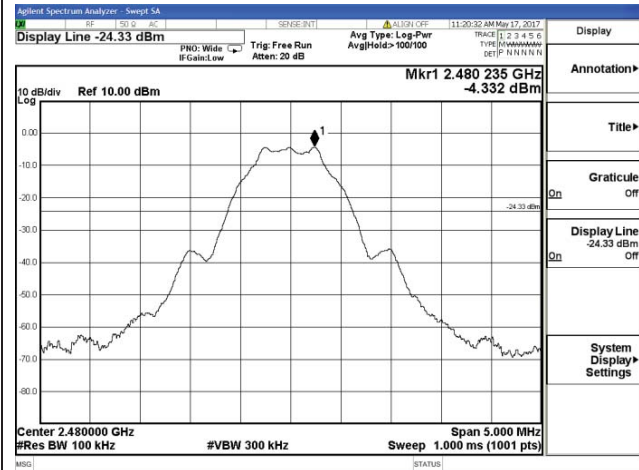


BLE 4.0_High Channel

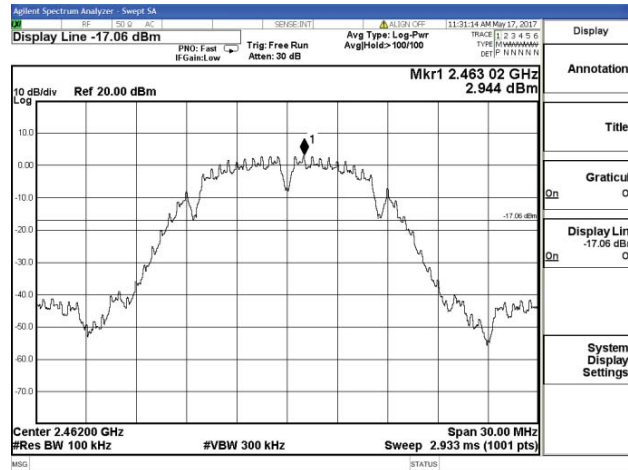


802.11b_High Channel

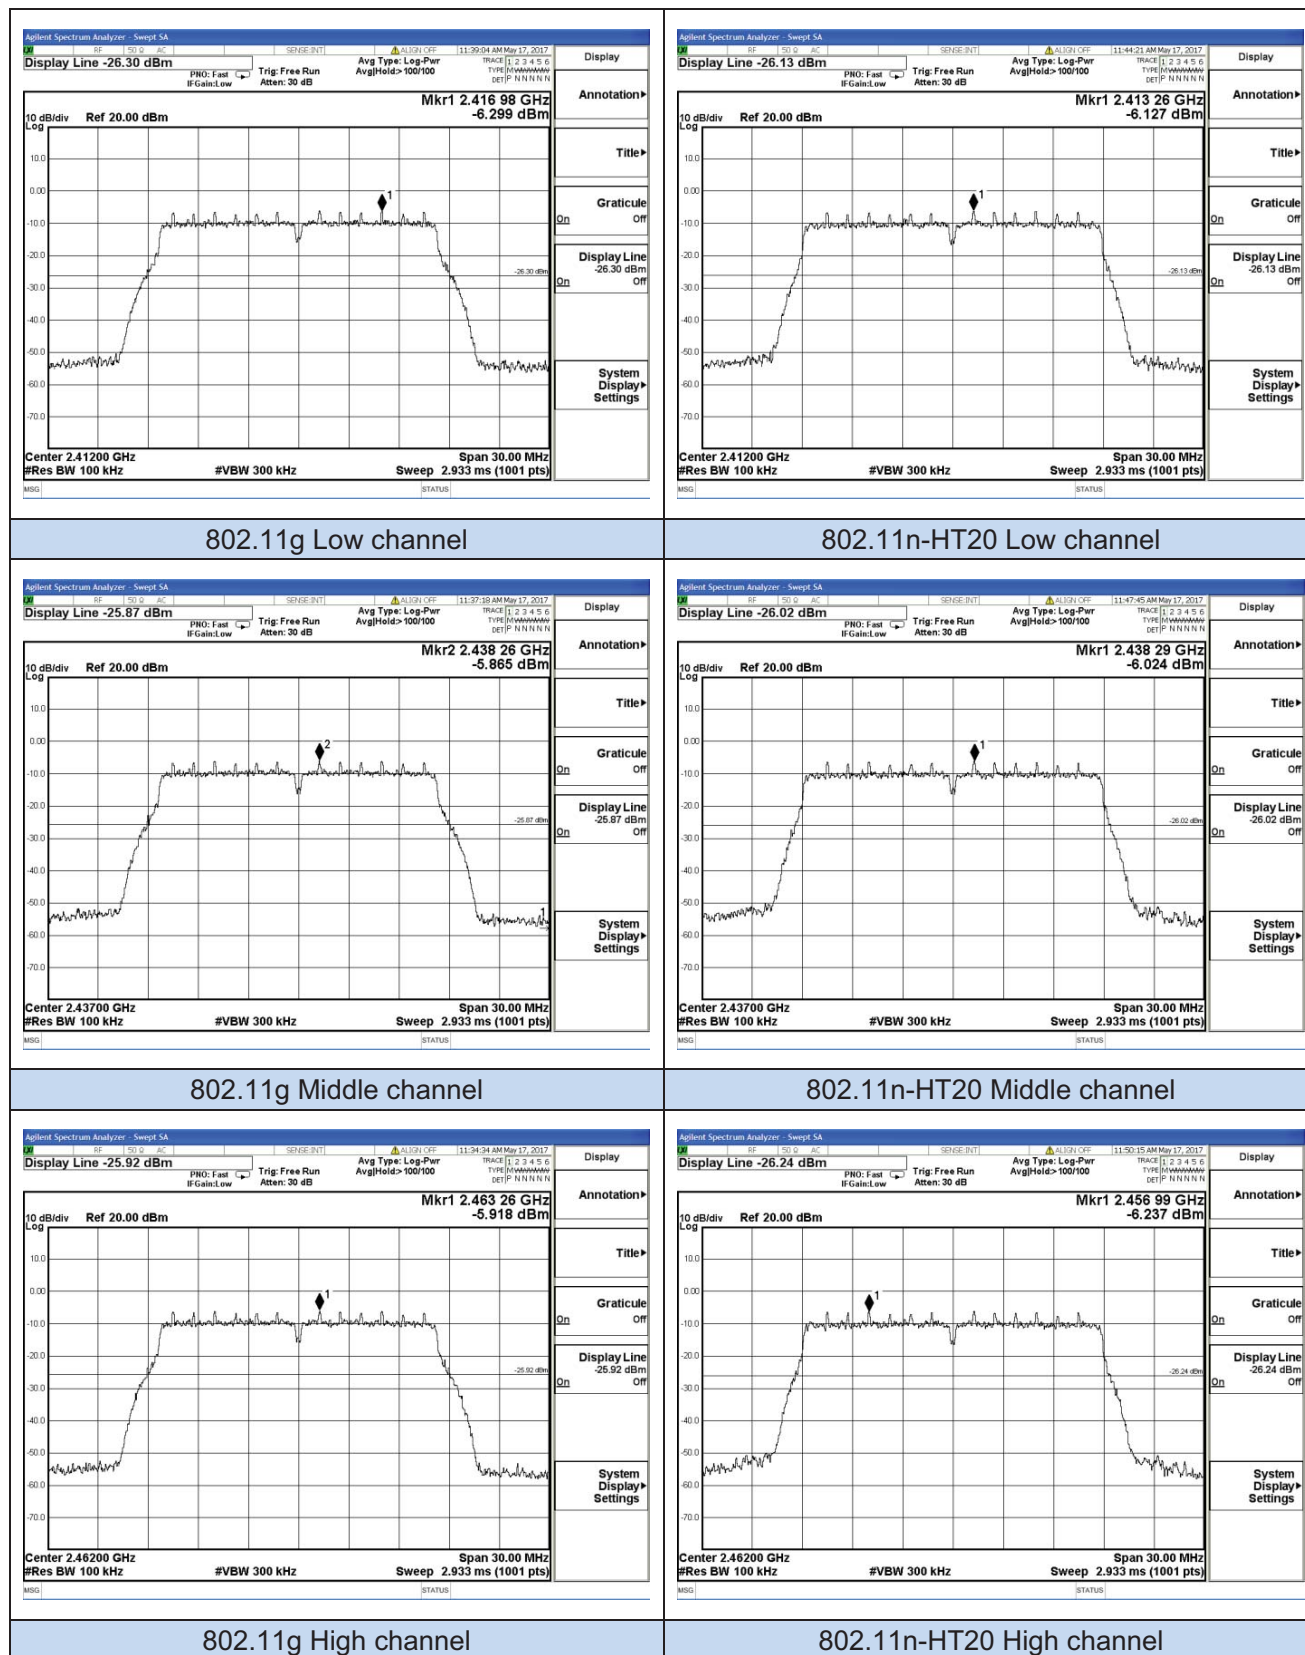


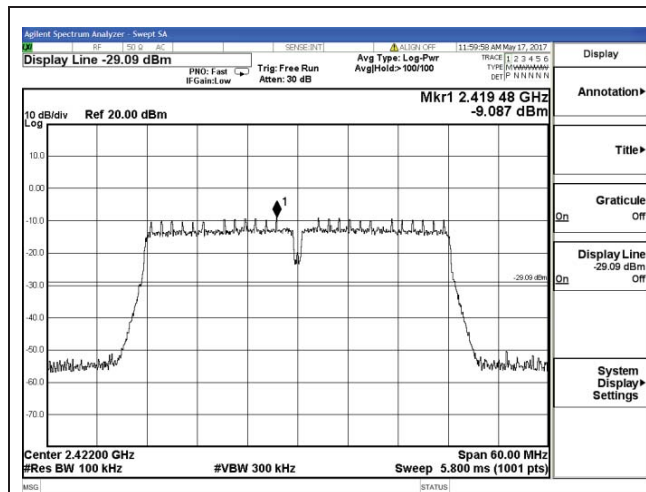

802.11n-HT40 Low channel

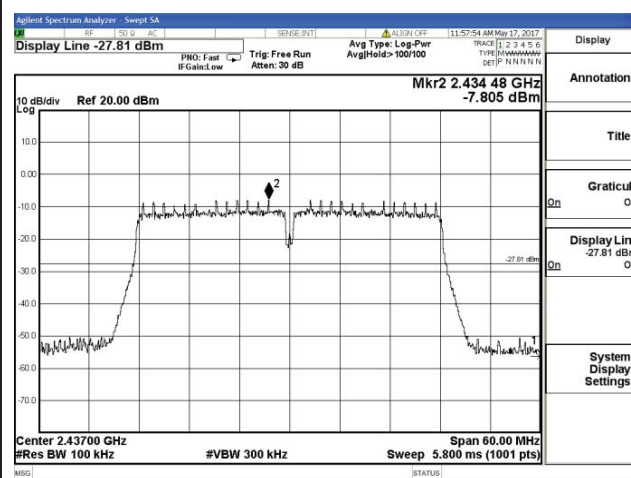

802.11n-HT40 Middle channel

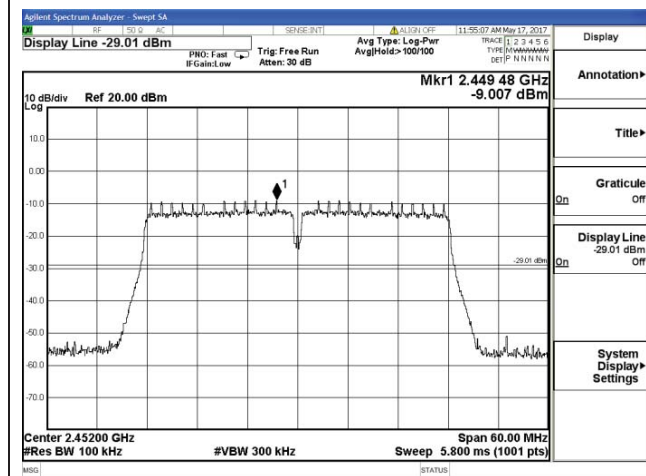

802.11n-HT40 High channel

5.4. 6 dB Spectrum Bandwidth Measurement

5.4.1. Standard Applicable

According to §15.247(a)(2): For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

5.4.2. Measuring Instruments and Setting


Please refer to section 6 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	100ms

5.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth and the video bandwidth were set according to KDB558074.
3. Measured the spectrum width with power higher than 6dB below carrier.

5.4.4. Test Setup Layout

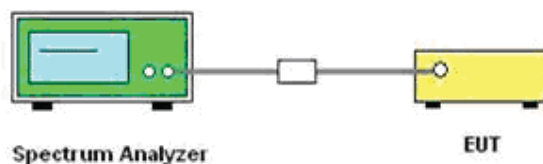

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Test Result of 6dB Spectrum Bandwidth

Temperature	24.3℃	Humidity	52.1%
Test Engineer	Chaz Liu	Configurations	BLE 4.0; 802.11b/g/n


BLE 4.0

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Min. Limit (kHz)	Result
1	2402	0.711	500	Complies
20	2440	0.711	500	Complies
40	2480	0.707	500	Complies


WIFI:

Test Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Min. Limit (kHz)	Result
802.11b	1	2412	9.108	500	Complies
	6	2437	9.564	500	Complies
	11	2462	9.126	500	Complies
802.11g	1	2412	16.40	500	Complies
	6	2437	16.38	500	Complies
	11	2462	16.42	500	Complies
802.11n (HT20)	1	2412	17.62	500	Complies
	6	2437	17.63	500	Complies
	11	2462	17.63	500	Complies
802.11n (HT40)	3	2422	36.12	500	Complies
	6	2437	35.86	500	Complies
	9	2452	35.87	500	Complies


Test plot of 6 dB Bandwidth

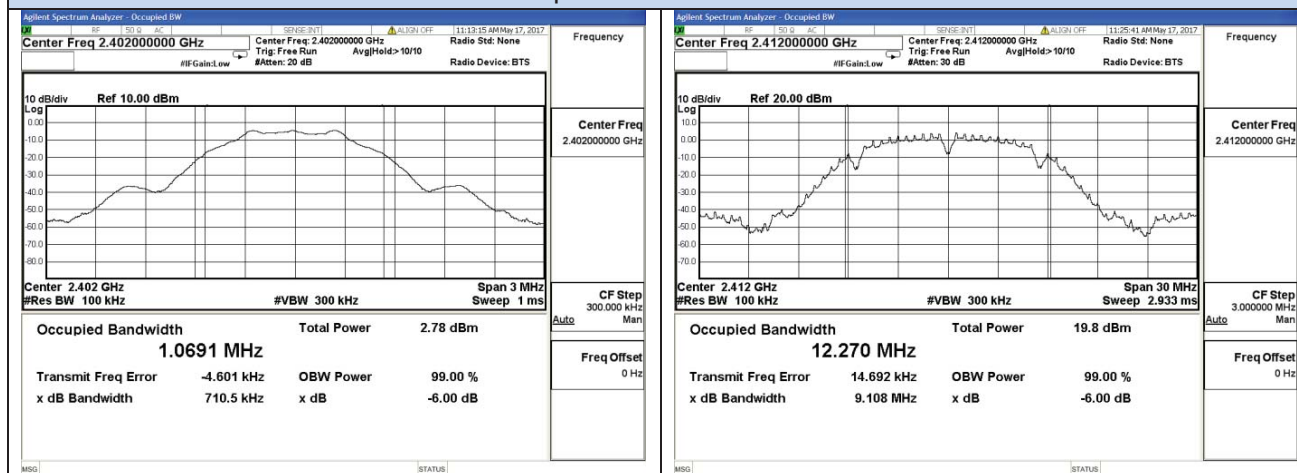


BLE 4.0_Low Channel / 2402MHz

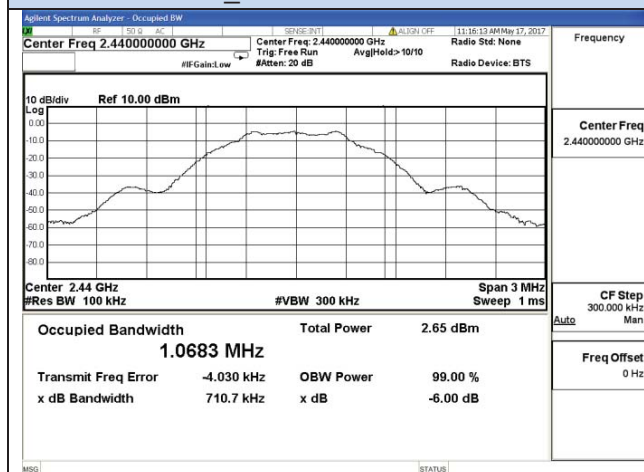


802.11b Low channel

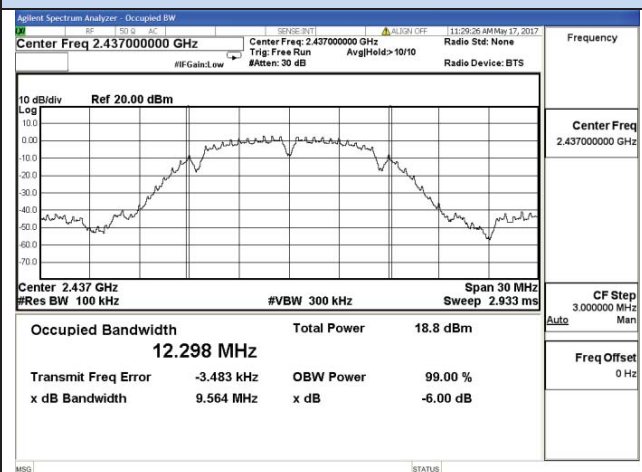


BLE 4.0_Middle Channel / 2440MHz

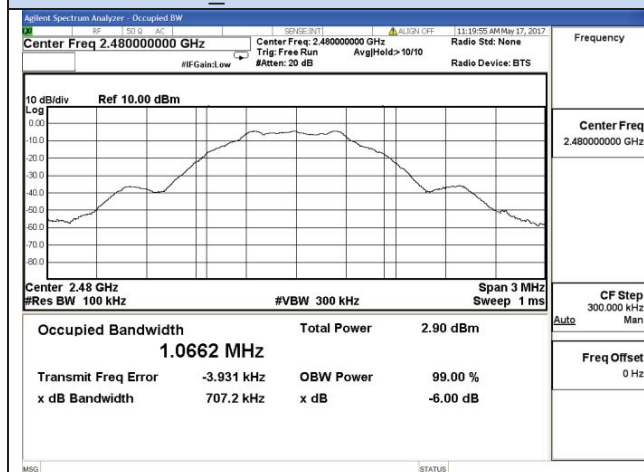

802.11b Middle channel

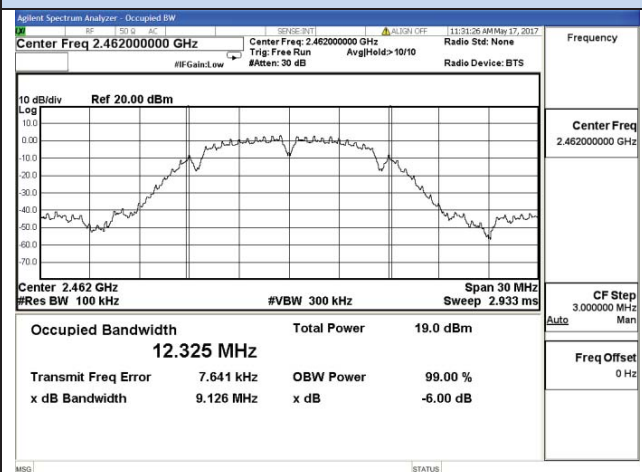


BLE 4.0_High Channel / 2480MHz




802.11b High channel




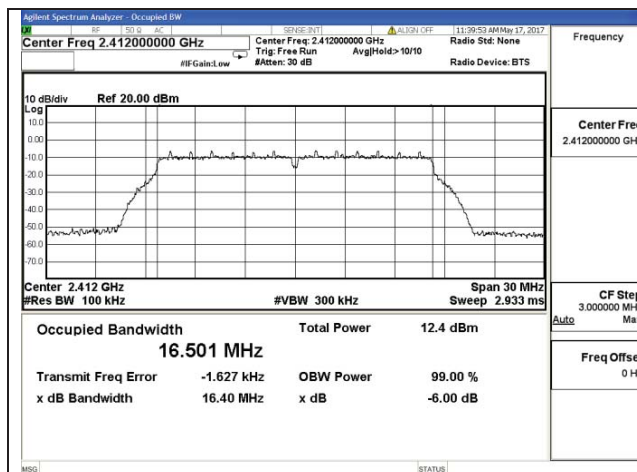


802.11g Low channel

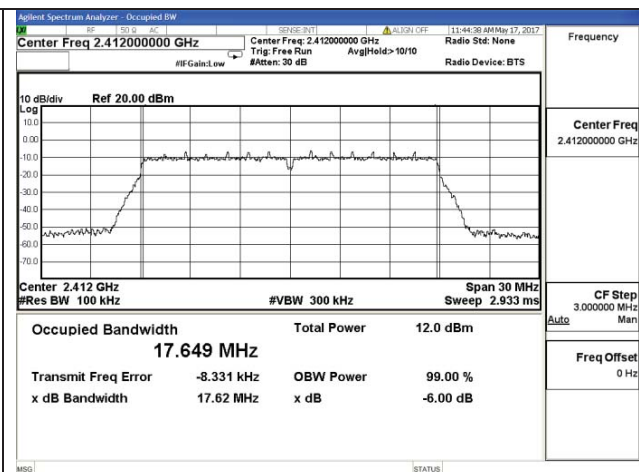


802.11n-HT20 Low channel

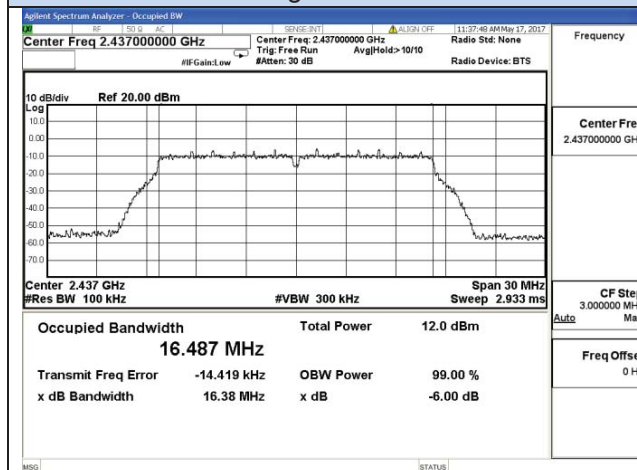


802.11g Middle channel

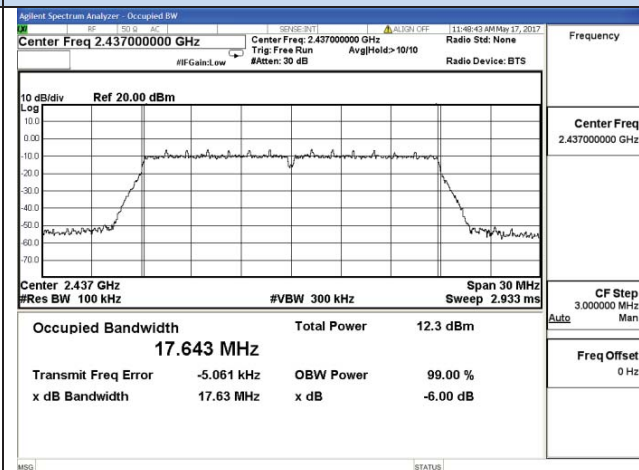


802.11n-HT20 Middle channel

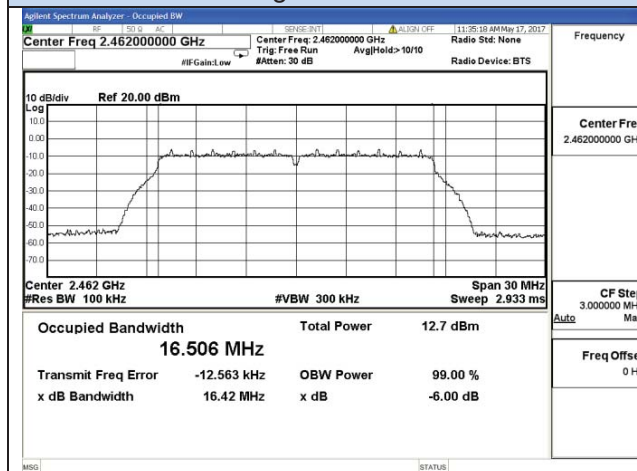


802.11g High channel

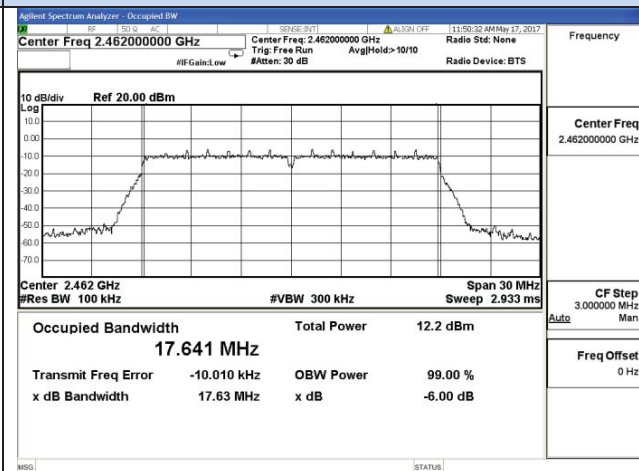


802.11n-HT20 High channel

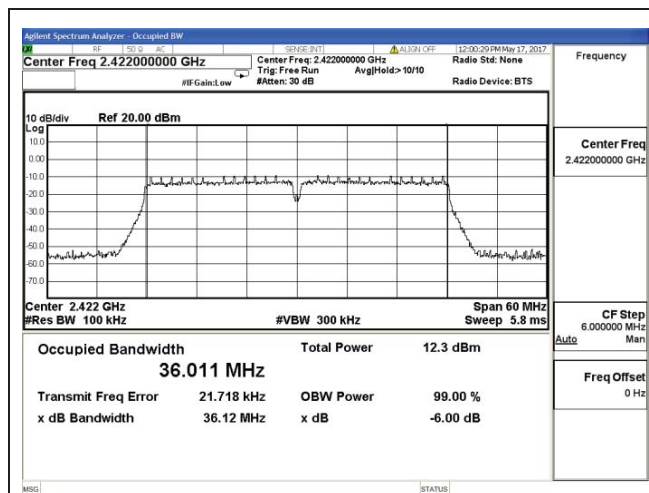

802.11n-HT40 Low channel

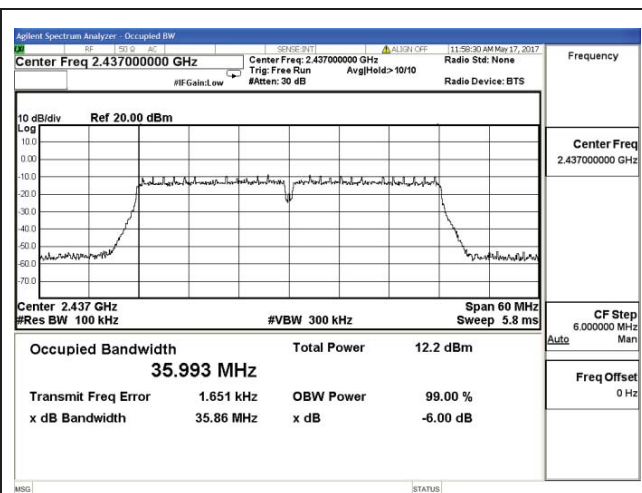

802.11n-HT40 Middle channel

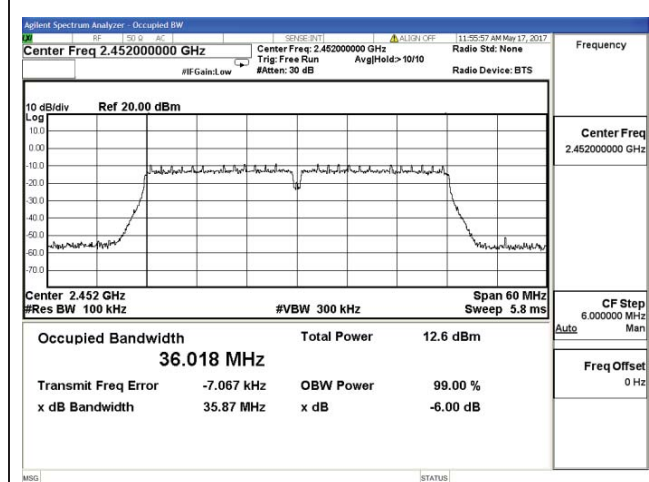

802.11n-HT40 High channel

5.5. Radiated Emissions Measurement

5.5.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293.	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2\)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

5.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP/AVG

5.5.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.

--- The antenna height scan range is 1 meter to 2.5 meter.

--- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.

--- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 1 meter.

--- The EUT was set into operation.

Premeasurement:

--- The antenna is moved spherical over the EUT in different polarisations of the antenna.


Final measurement:

--- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.


--- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

5.5.4. Test Setup Layout


For radiated emissions below 30MHz

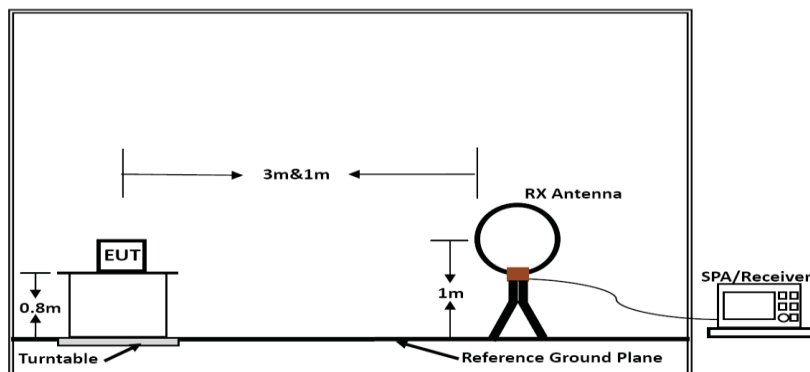

Below 30MHz

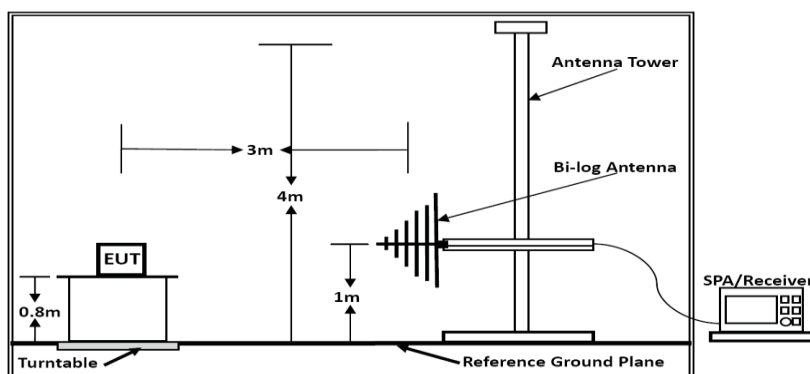

Below 1GHz

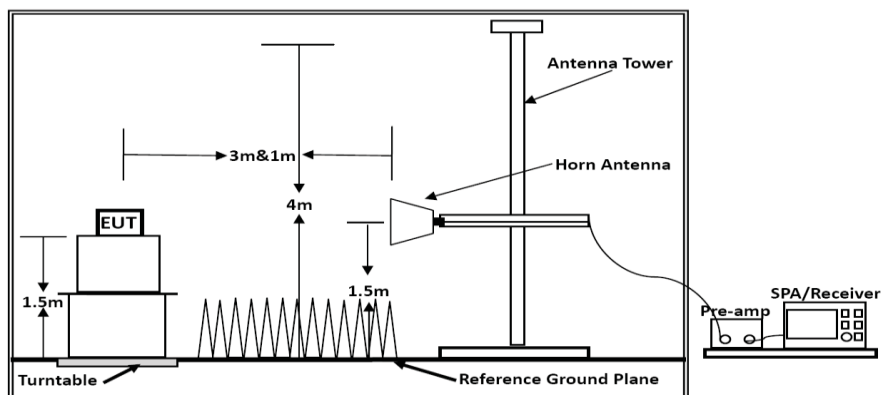

Above 1GHz

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance } [3\text{m}] / \text{test distance } [1.5\text{m}])$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24.3℃	Humidity	48.3%
Test Engineer	Chaz Liu	Configurations	BLE 4.0; 802.11b/g/n

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.5.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24.3°C	Humidity	48.3%
Test Engineer	Chaz Liu	Configurations	BLE 4.0 (Low CH)

Test result for BLE 4.0 (Low Channel)

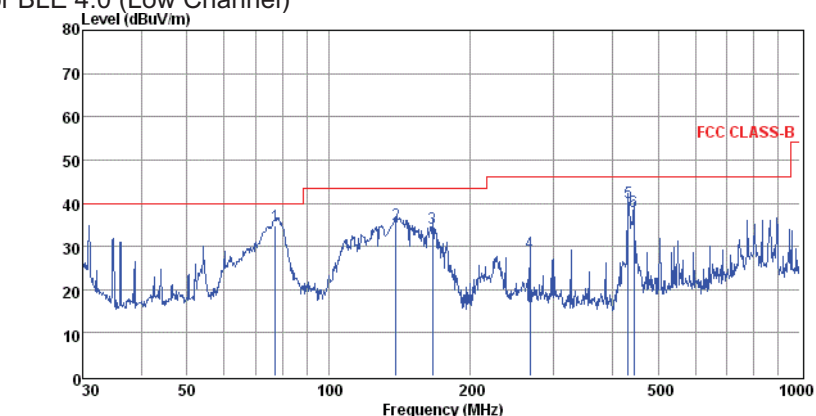

pol:


VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	77.05	26.26	0.47	8.10	34.83	40.00	-5.17	QP
2	138.87	25.95	0.75	8.27	34.97	43.50	-8.53	QP
3	166.07	24.71	0.77	8.85	34.33	43.50	-9.17	QP
4	267.55	15.32	1.00	12.28	28.60	46.00	-17.40	QP
5	432.55	23.55	1.18	15.53	40.26	46.00	-5.74	QP
6	444.85	21.15	1.42	15.57	38.14	46.00	-7.86	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20dB below the official limit are not reported

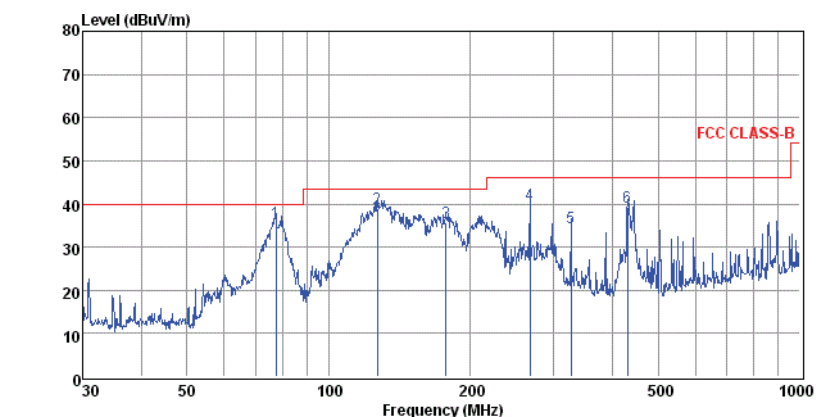

pol:

HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	77.32	27.12	0.47	8.14	35.73	40.00	-4.27	QP
2	126.77	28.71	0.67	9.43	38.81	43.50	-4.69	QP
3	177.51	25.27	0.89	9.50	35.66	43.50	-7.84	QP
4	267.55	26.67	1.00	12.28	39.95	46.00	-6.05	QP
5	326.74	19.93	1.04	13.60	34.57	46.00	-11.43	QP
6	431.03	22.31	1.28	15.52	39.11	46.00	-6.89	QP


Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20dB below the official limit are not reported

Temperature	25°C	Humidity	60%
Test Engineer	Chaz Liu	Configurations	802.11b (High CH)
Test Date	June 05, 2017		

Test result for 802.11b (High Channel)

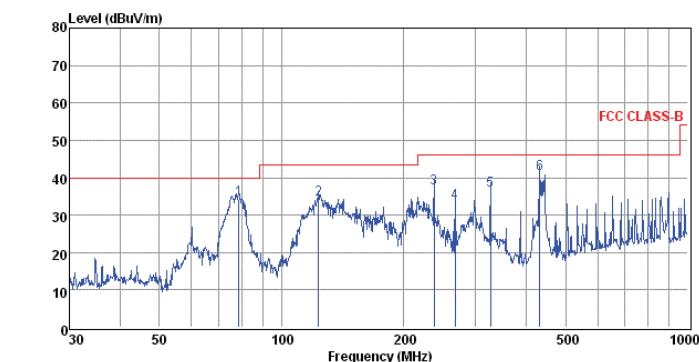


pol:

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	78.41	25.52	0.47	8.31	34.30	40.00	-5.70	QP
2	123.27	23.55	0.70	9.97	34.22	43.50	-9.28	QP
3	237.48	24.23	0.96	11.98	37.17	46.00	-8.83	QP
4	267.55	20.12	1.00	12.28	33.40	46.00	-12.60	QP
5	326.74	22.02	1.04	13.60	36.66	46.00	-9.34	QP
6	432.55	24.31	1.18	15.53	41.02	46.00	-4.98	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20db below the official limit are not reported

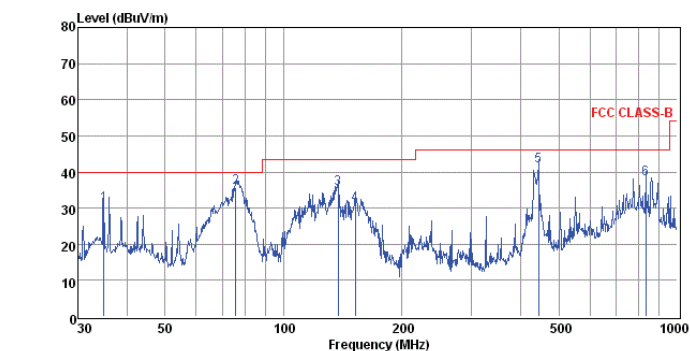

pol:

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	34.88	18.28	0.41	12.30	30.99	40.00	-9.01	QP
2	75.45	27.20	0.54	7.87	35.61	40.00	-4.39	QP
3	137.42	26.37	0.70	8.38	35.45	43.50	-8.05	QP
4	152.13	21.99	0.73	8.35	31.07	43.50	-12.43	QP
5	444.85	24.54	1.42	15.57	41.53	46.00	-4.47	QP
6	833.32	15.81	1.86	20.40	38.07	46.00	-7.93	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20db below the official limit are not reported

Note:

Pre-scan all mode and recorded the worst case results in this report (802.11b (High Channel)).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

5.5.8. Results for Radiated Emissions (Above 1GHz)

BLE 4.0

Channel 1

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4804.00	54.63	33.06	35.04	3.94	56.59	74	-17.41	Peak	Horizontal
4804.00	39.78	33.06	35.04	3.94	41.74	54	-12.26	Average	Horizontal
4804.00	58.76	33.06	35.04	3.94	60.72	74	-13.28	Peak	Vertical
4804.00	42.25	33.06	35.04	3.94	44.21	54	-9.79	Average	Vertical

Channel 19

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4880.00	55.14	33.16	35.15	3.96	57.11	74	-16.89	Peak	Horizontal
4880.00	43.86	33.16	35.15	3.96	45.83	54	-8.17	Average	Horizontal
4880.00	59.26	33.16	35.15	3.96	61.23	74	-12.77	Peak	Vertical
4880.00	42.13	33.16	35.15	3.96	44.10	54	-9.90	Average	Vertical

Channel 40

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.00	54.64	33.26	35.14	3.98	56.74	74	-17.26	Peak	Horizontal
4960.00	43.03	33.26	35.14	3.98	45.13	54	-8.87	Average	Horizontal
4960.00	59.33	33.26	35.14	3.98	61.43	74	-12.57	Peak	Vertical
4960.00	41.72	33.26	35.14	3.98	43.82	54	-10.18	Average	Vertical

802.11b

Channel 1

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	55.35	33.06	35.04	3.94	57.31	74	-16.69	Peak	Horizontal
4824.00	39.75	33.06	35.04	3.94	41.71	54	-12.29	Average	Horizontal
4824.00	59.24	33.06	35.04	3.94	61.20	74	-12.80	Peak	Vertical
4824.00	42.10	33.06	35.04	3.94	44.06	54	-9.94	Average	Vertical

Channel 6

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	55.35	33.16	35.15	3.96	57.32	74	-16.68	Peak	Horizontal
4874.00	44.27	33.16	35.15	3.96	46.24	54	-7.76	Average	Horizontal
4874.00	58.62	33.16	35.15	3.96	60.59	74	-13.41	Peak	Vertical
4874.00	42.31	33.16	35.15	3.96	44.28	54	-9.72	Average	Vertical

Channel 11

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	55.21	33.26	35.14	3.98	57.31	74	-16.69	Peak	Horizontal
4924.00	42.83	33.26	35.14	3.98	44.93	54	-9.07	Average	Horizontal
4924.00	58.70	33.26	35.14	3.98	60.80	74	-13.20	Peak	Vertical
4924.00	41.98	33.26	35.14	3.98	44.08	54	-9.92	Average	Vertical

802.11g

Channel 1

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	54.74	33.06	35.04	3.94	56.70	74	-17.30	Peak	Horizontal
4824.00	39.77	33.06	35.04	3.94	41.73	54	-12.27	Average	Horizontal
4824.00	58.89	33.06	35.04	3.94	60.85	74	-13.15	Peak	Vertical
4824.00	41.66	33.06	35.04	3.94	43.62	54	-10.38	Average	Vertical

Channel 6

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	55.25	33.16	35.15	3.96	57.22	74	-16.78	Peak	Horizontal
4874.00	43.86	33.16	35.15	3.96	45.83	54	-8.17	Average	Horizontal
4874.00	59.25	33.16	35.15	3.96	61.22	74	-12.78	Peak	Vertical
4874.00	41.86	33.16	35.15	3.96	43.83	54	-10.17	Average	Vertical

Channel 11

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	55.26	33.26	35.14	3.98	57.36	74	-16.64	Peak	Horizontal
4924.00	43.16	33.26	35.14	3.98	45.26	54	-8.74	Average	Horizontal
4924.00	58.82	33.26	35.14	3.98	60.92	74	-13.08	Peak	Vertical
4924.00	42.04	33.26	35.14	3.98	44.14	54	-9.86	Average	Vertical

802.11n HT20

Channel 1

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	54.87	33.06	35.04	3.94	56.83	74	-17.17	Peak	Horizontal
4824.00	40.20	33.06	35.04	3.94	42.16	54	-11.84	Average	Horizontal
4824.00	59.40	33.06	35.04	3.94	61.36	74	-12.64	Peak	Vertical
4824.00	41.64	33.06	35.04	3.94	43.60	54	-10.40	Average	Vertical

Channel 6

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	54.61	33.16	35.15	3.96	56.58	74	-17.42	Peak	Horizontal
4874.00	43.81	33.16	35.15	3.96	45.78	54	-8.22	Average	Horizontal
4874.00	58.82	33.16	35.15	3.96	60.79	74	-13.21	Peak	Vertical
4874.00	41.62	33.16	35.15	3.96	43.59	54	-10.41	Average	Vertical

Channel 11

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	55.24	33.26	35.14	3.98	57.34	74	-16.66	Peak	Horizontal
4924.00	43.06	33.26	35.14	3.98	45.16	54	-8.84	Average	Horizontal
4924.00	59.17	33.26	35.14	3.98	61.27	74	-12.73	Peak	Vertical
4924.00	41.90	33.26	35.14	3.98	44.00	54	-10.00	Average	Vertical

802.11n HT40

Channel 3

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4844.00	55.02	33.06	35.04	3.94	56.98	74	-17.02	Peak	Horizontal
4844.00	40.08	33.06	35.04	3.94	42.04	54	-11.96	Average	Horizontal
4844.00	59.25	33.06	35.04	3.94	61.21	74	-12.79	Peak	Vertical
4844.00	42.06	33.06	35.04	3.94	44.02	54	-9.98	Average	Vertical

Channel 6

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	55.05	33.16	35.15	3.96	57.02	74	-16.98	Peak	Horizontal
4874.00	43.93	33.16	35.15	3.96	45.90	54	-8.10	Average	Horizontal
4874.00	59.28	33.16	35.15	3.96	61.25	74	-12.75	Peak	Vertical
4874.00	42.07	33.16	35.15	3.96	44.04	54	-9.96	Average	Vertical

Channel 9

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4904.00	55.28	33.26	35.14	3.98	57.38	74	-16.62	Peak	Horizontal
4904.00	43.16	33.26	35.14	3.98	45.26	54	-8.74	Average	Horizontal
4904.00	59.12	33.26	35.14	3.98	61.22	74	-12.78	Peak	Vertical
4904.00	41.74	33.26	35.14	3.98	43.84	54	-10.16	Average	Vertical

Notes:


1. Measuring frequencies from 9k~10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5.8 Band-edge measurements for radiated emissions

5.5.8.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.5.8.2 Test Setup Layout

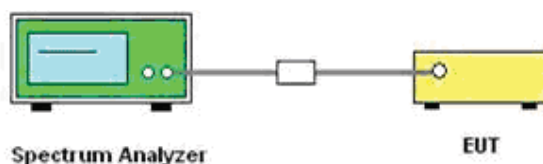

5.5.8.3. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of Spectrum Analyzer.

5.5.8.4. Test Procedures

According to KDB 558074 D01 V03 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/B for Peak detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).

9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log D + 104.8$$

Where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Compare the resultant electric field strength level to the applicable regulatory limit.
13. Perform radiated spurious emission test duress until all measured frequencies were complete.

5.5.8.5 Test Results

BLE 4.0							
Frequency (MHz)	Conduct ed Power (dBm)	Anten na Gain (dBi)	Ground Reflecti on Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.000	-62.294	2.0	0.00	33.966	Peak	74.00	PASS
2310.000	-73.239	2.0	0.00	23.021	AV	54.00	PASS
2390.000	-61.161	2.0	0.00	35.099	Peak	74.00	PASS
2390.000	-72.757	2.0	0.00	23.503	AV	54.00	PASS
2483.500	-58.685	2.0	0.00	37.575	Peak	74.00	PASS
2483.500	-71.227	2.0	0.00	25.033	AV	54.00	PASS
2500.000	-61.118	2.0	0.00	35.142	Peak	74.00	PASS
2500.000	-72.823	2.0	0.00	23.437	AV	54.00	PASS

IEEE 802.11b							
Frequency (MHz)	Conducte d Power (dBm)	Antenna Gain (dBi)	Ground Reflectio n Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.000	-50.337	2.0	0.00	45.923	Peak	74.00	PASS
2310.000	-60.636	2.0	0.00	35.624	AV	54.00	PASS
2390.000	-46.366	2.0	0.00	49.894	Peak	74.00	PASS
2390.000	-55.782	2.0	0.00	40.478	AV	54.00	PASS
2483.500	-46.816	2.0	0.00	49.444	Peak	74.00	PASS
2483.500	-54.614	2.0	0.00	41.646	AV	54.00	PASS
2500.000	-49.529	2.0	0.00	46.731	Peak	74.00	PASS
2500.000	-59.053	2.0	0.00	37.207	AV	54.00	PASS

IEEE 802.11g							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.000	-51.527	2.0	0.00	44.733	Peak	74.00	PASS
2310.000	-61.178	2.0	0.00	35.082	AV	54.00	PASS
2390.000	-46.108	2.0	0.00	50.152	Peak	74.00	PASS
2390.000	-57.207	2.0	0.00	39.053	AV	54.00	PASS
2483.500	-47.922	2.0	0.00	48.338	Peak	74.00	PASS
2483.500	-56.344	2.0	0.00	39.916	AV	54.00	PASS
2500.000	-49.632	2.0	0.00	46.628	Peak	74.00	PASS
2500.000	-57.752	2.0	0.00	38.508	AV	54.00	PASS



IEEE 802.11n HT20							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.000	-52.211	2.0	0.00	44.049	Peak	74.00	PASS
2310.000	-60.911	2.0	0.00	35.349	AV	54.00	PASS
2390.000	-44.448	2.0	0.00	51.812	Peak	74.00	PASS
2390.000	-56.194	2.0	0.00	40.066	AV	54.00	PASS
2483.500	-46.930	2.0	0.00	49.33	Peak	74.00	PASS
2483.500	-57.676	2.0	0.00	38.584	AV	54.00	PASS
2500.000	-47.457	2.0	0.00	48.803	Peak	74.00	PASS
2500.000	-58.812	2.0	0.00	37.448	AV	54.00	PASS

IEEE 802.11n HT40							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.000	-50.147	2.0	0.00	46.113	Peak	74.00	PASS
2310.000	-61.004	2.0	0.00	35.256	AV	54.00	PASS
2390.000	-45.452	2.0	0.00	50.808	Peak	74.00	PASS
2390.000	-55.547	2.0	0.00	40.713	AV	54.00	PASS
2483.500	-46.510	2.0	0.00	49.750	Peak	74.00	PASS
2483.500	-56.306	2.0	0.00	39.954	AV	54.00	PASS
2500.000	-48.107	2.0	0.00	48.153	Peak	74.00	PASS
2500.000	-58.793	2.0	0.00	37.467	AV	54.00	PASS


Remark:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. “---“means that the fundamental frequency not for 15.209 limits requirement.
4. please refer to following plots;


Band-edge measurements for radiated emissions

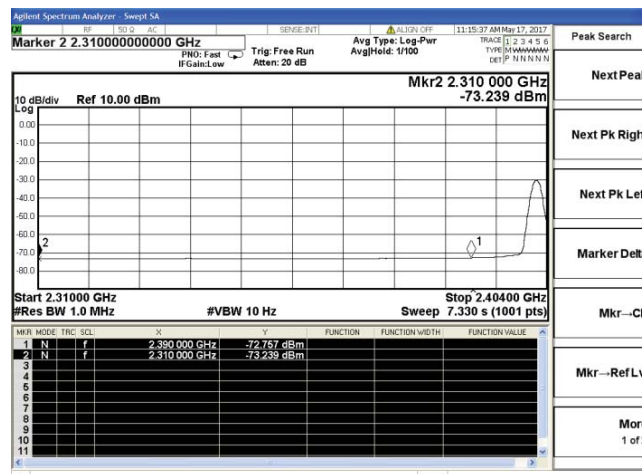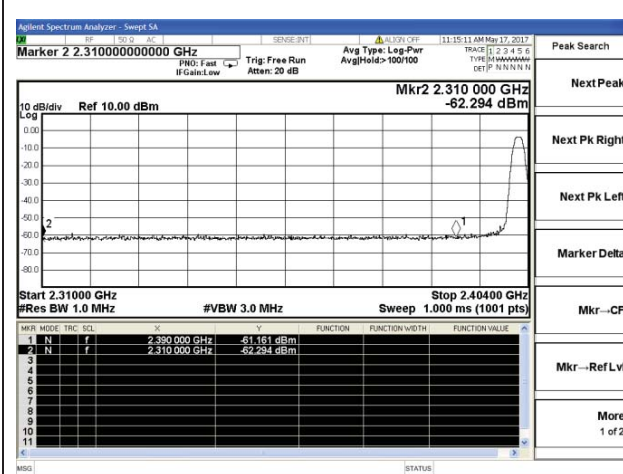


BLE 4.0-Low channel(Peak)

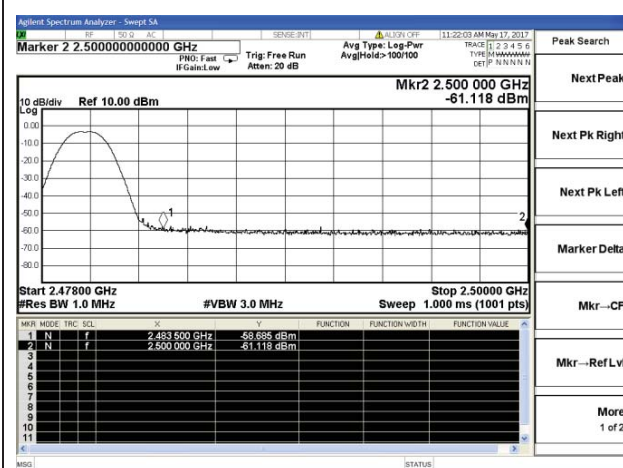


BLE 4.0-Low channel(Average)

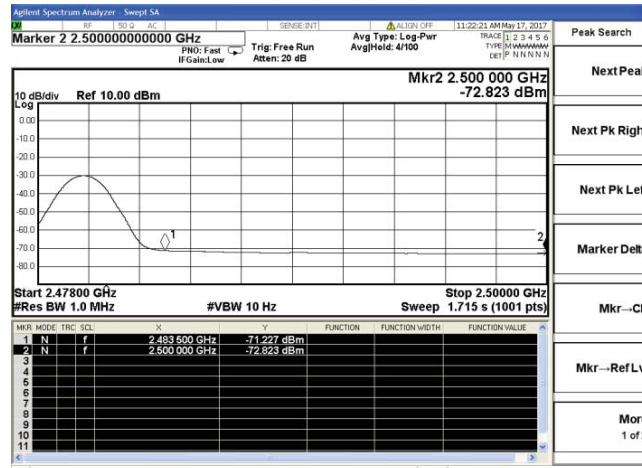

BLE 4.0-High channel(Peak)

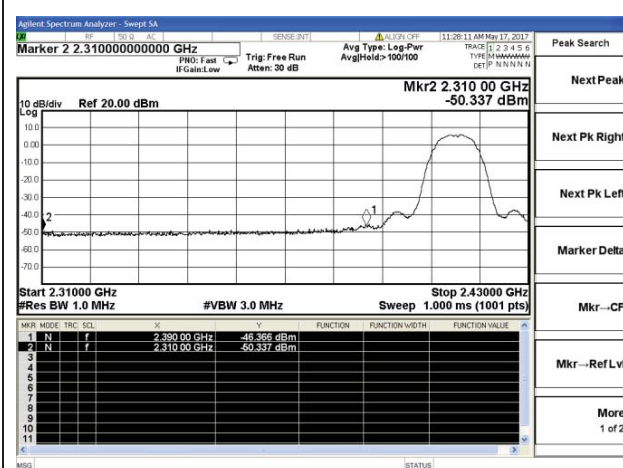

BLE 4.0-High channel(Average)

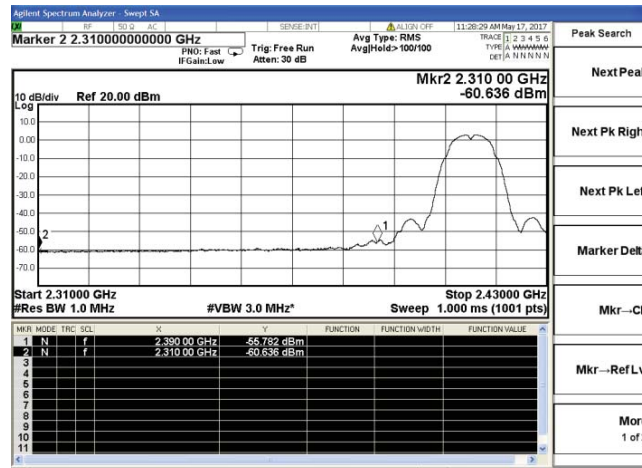


802.11b Low channel(Peak)




802.11b Low channel(Average)




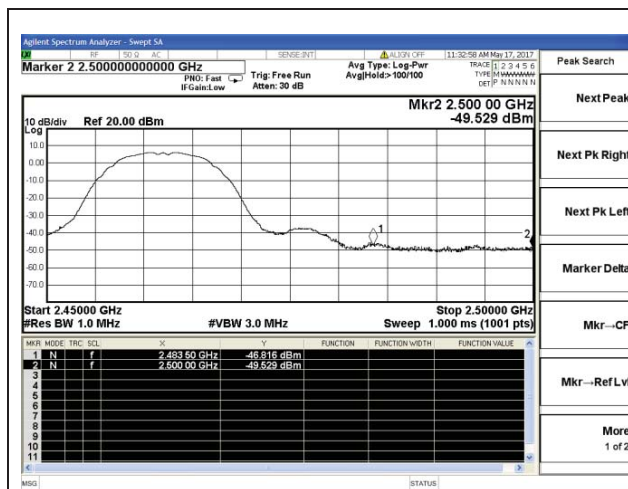


802.11b High channel(Peak)

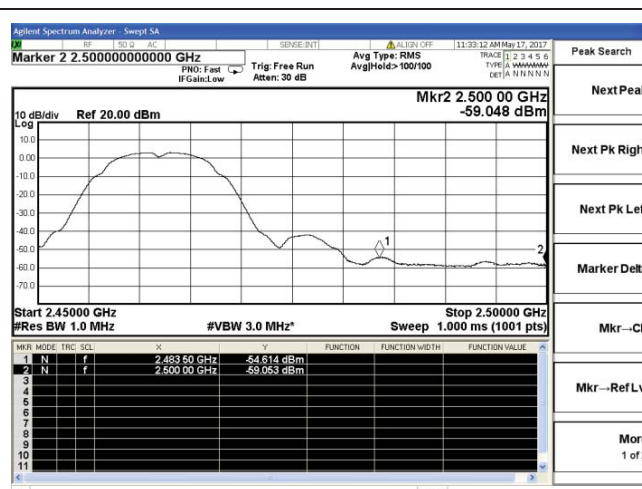


802.11b High channel(Average)

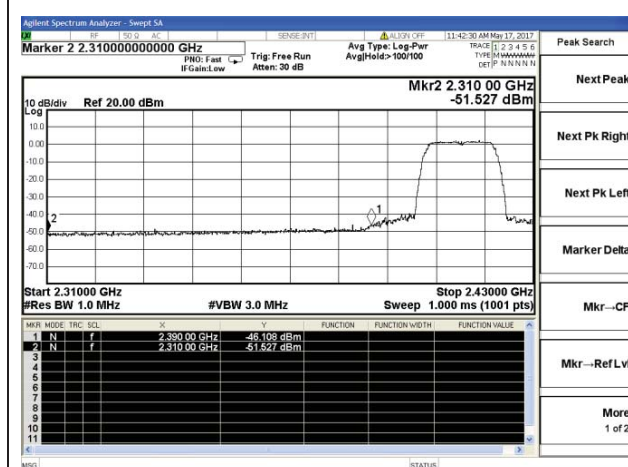


802.11g Low channel(Peak)

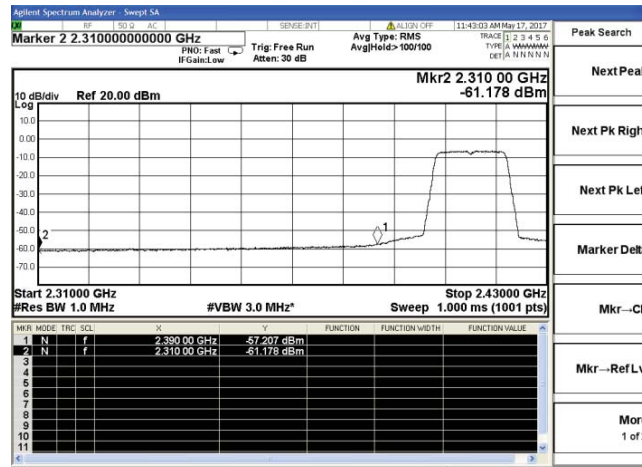


802.11g Low channel(Average)

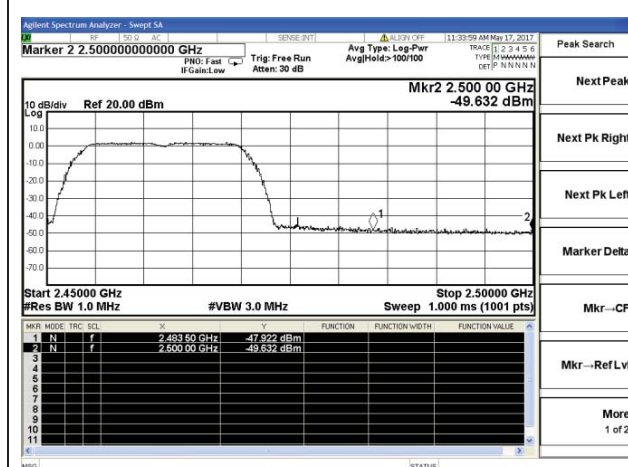


802.11g High channel(Peak)

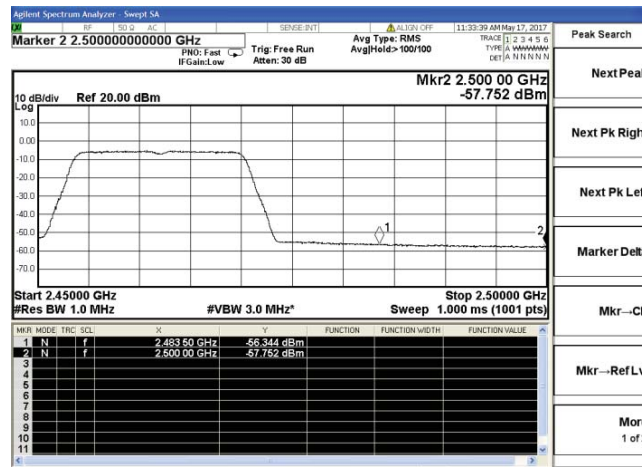


802.11g High channel(Average)

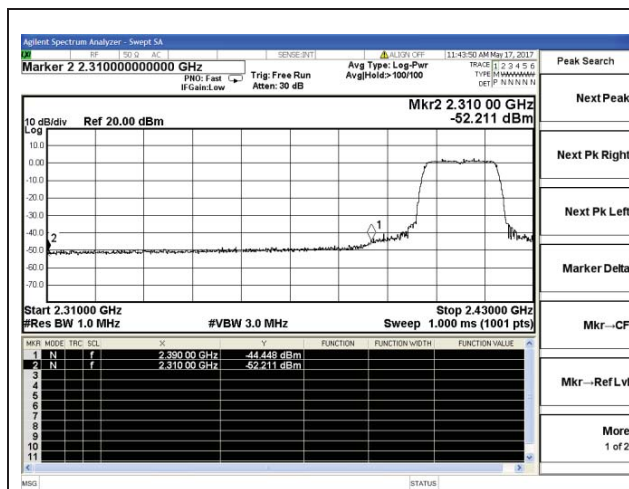


802.11n-HT20 Low channel(Peak)

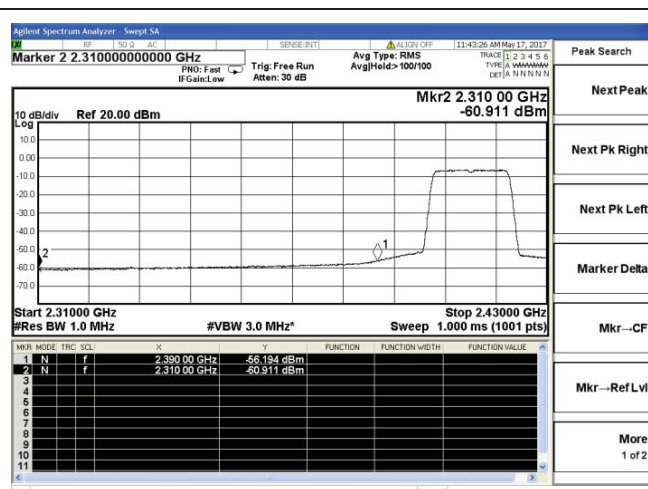


802.11n-HT20 Low channel(Average)

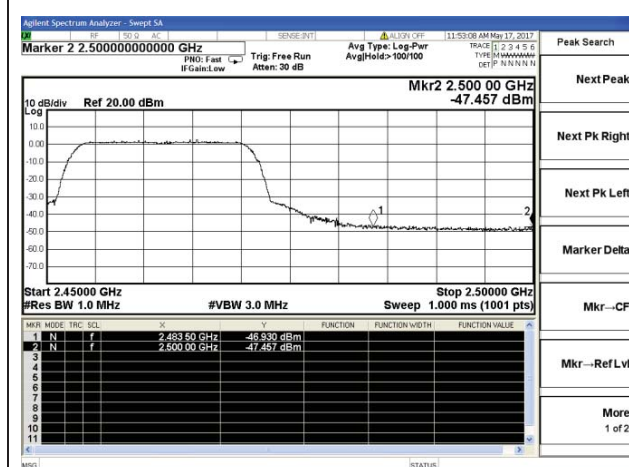


802.11n-HT20 High channel(Peak)

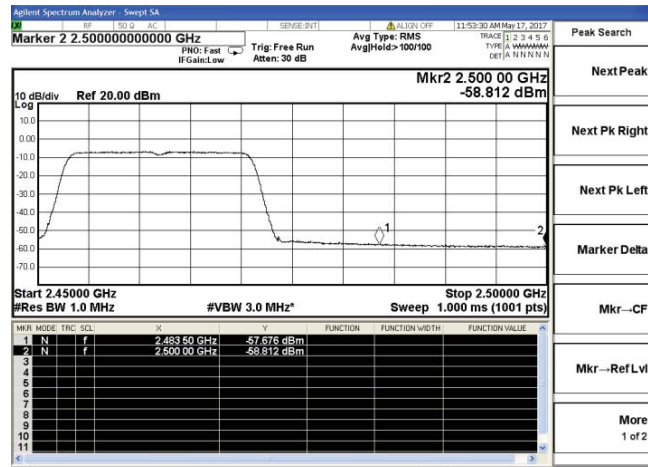


802.11n-HT20 High channel(Average)

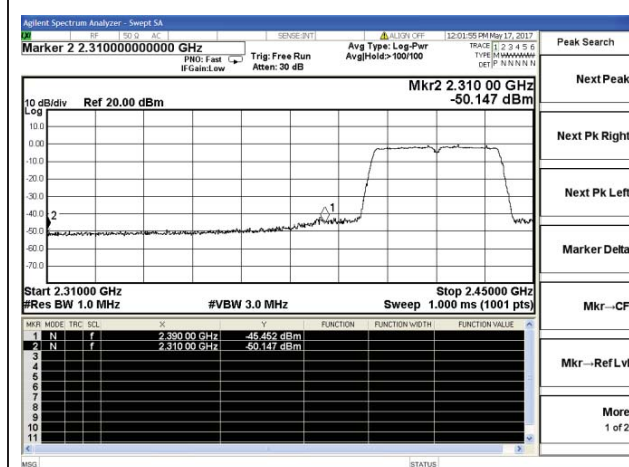

802.11n-HT40 Low channel(Peak)

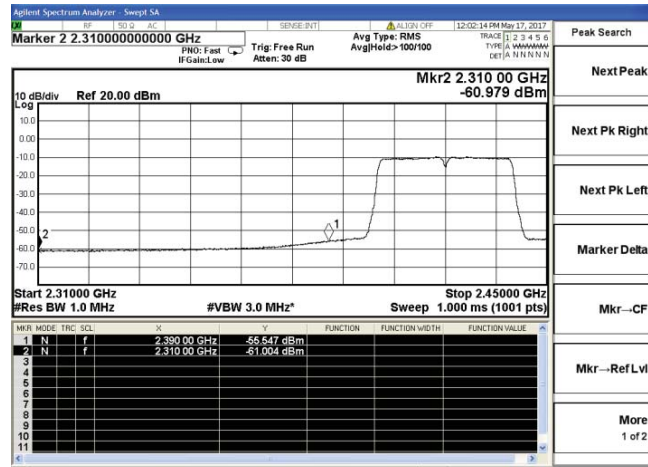

802.11n-HT40 Low channel(Average)

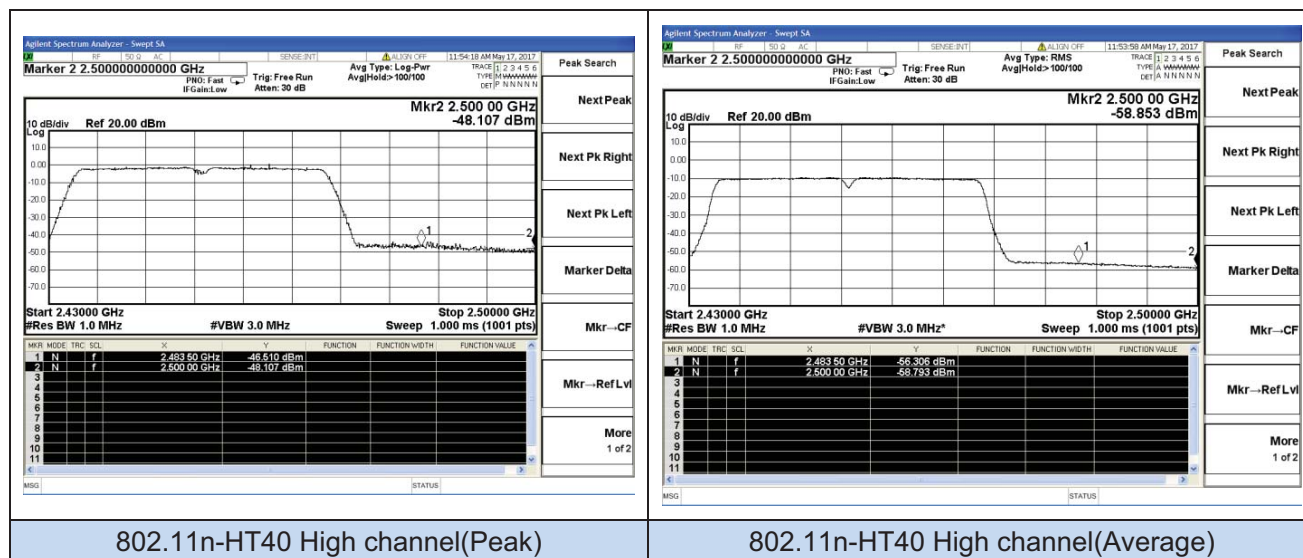

5.6. Conducted Spurious Emissions and Band Edges Test

5.6.1. Standard Applicable

According to §15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.6.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

5.6.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9 kHz to 26.5GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

5.6.4. Test Setup Layout



This test setup layout is the same as that shown in section 5.4.4.

5.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



5.6.6. Test Results of Conducted Spurious Emissions

Test plot of Conducted Spurious Emission

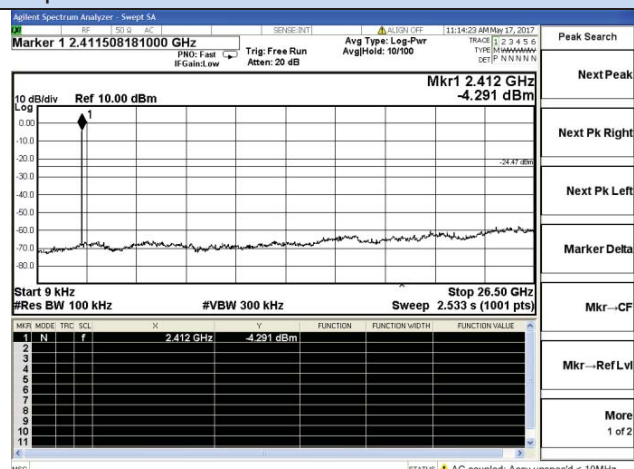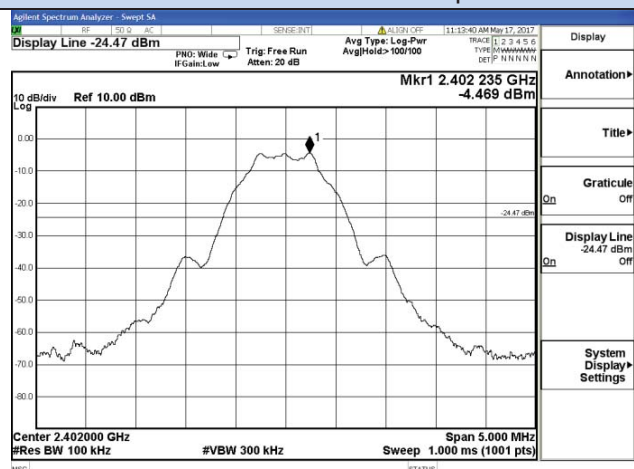



BLE 4.0-Low channel Reference

BLE 4.0-Low channel

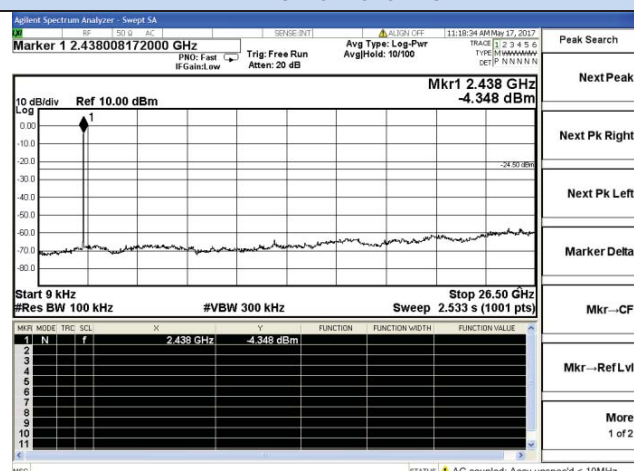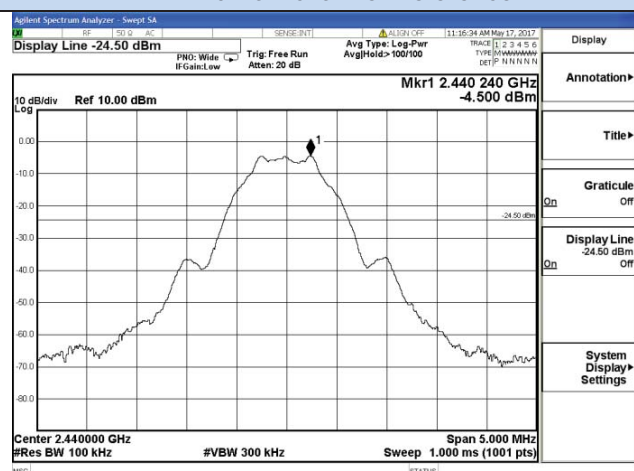

BLE 4.0-Middle channel Reference


BLE 4.0-Middle channel

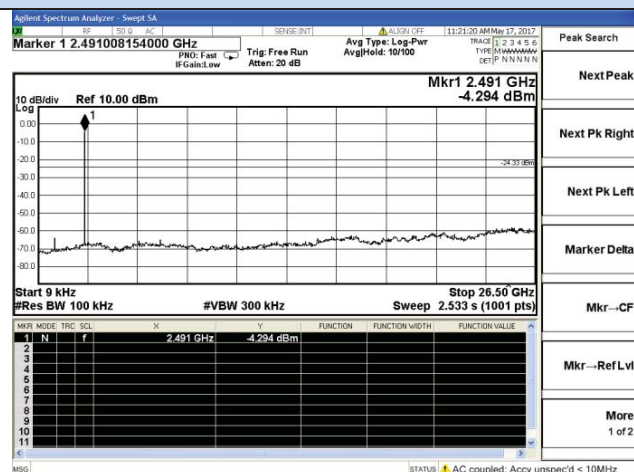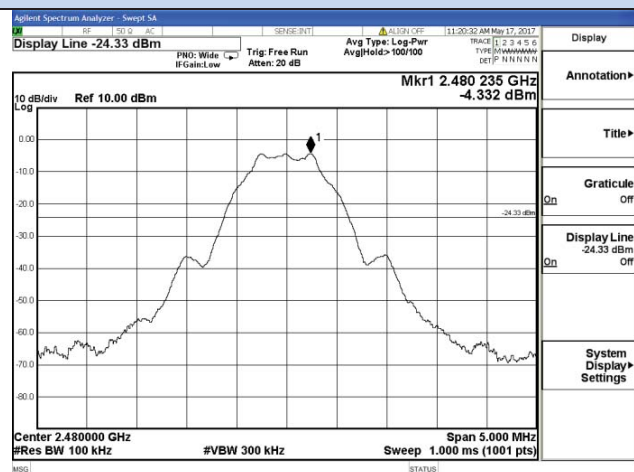


BLE 4.0-High channel Reference

BLE 4.0-High channel


Test plot of Conducted Spurious Emission

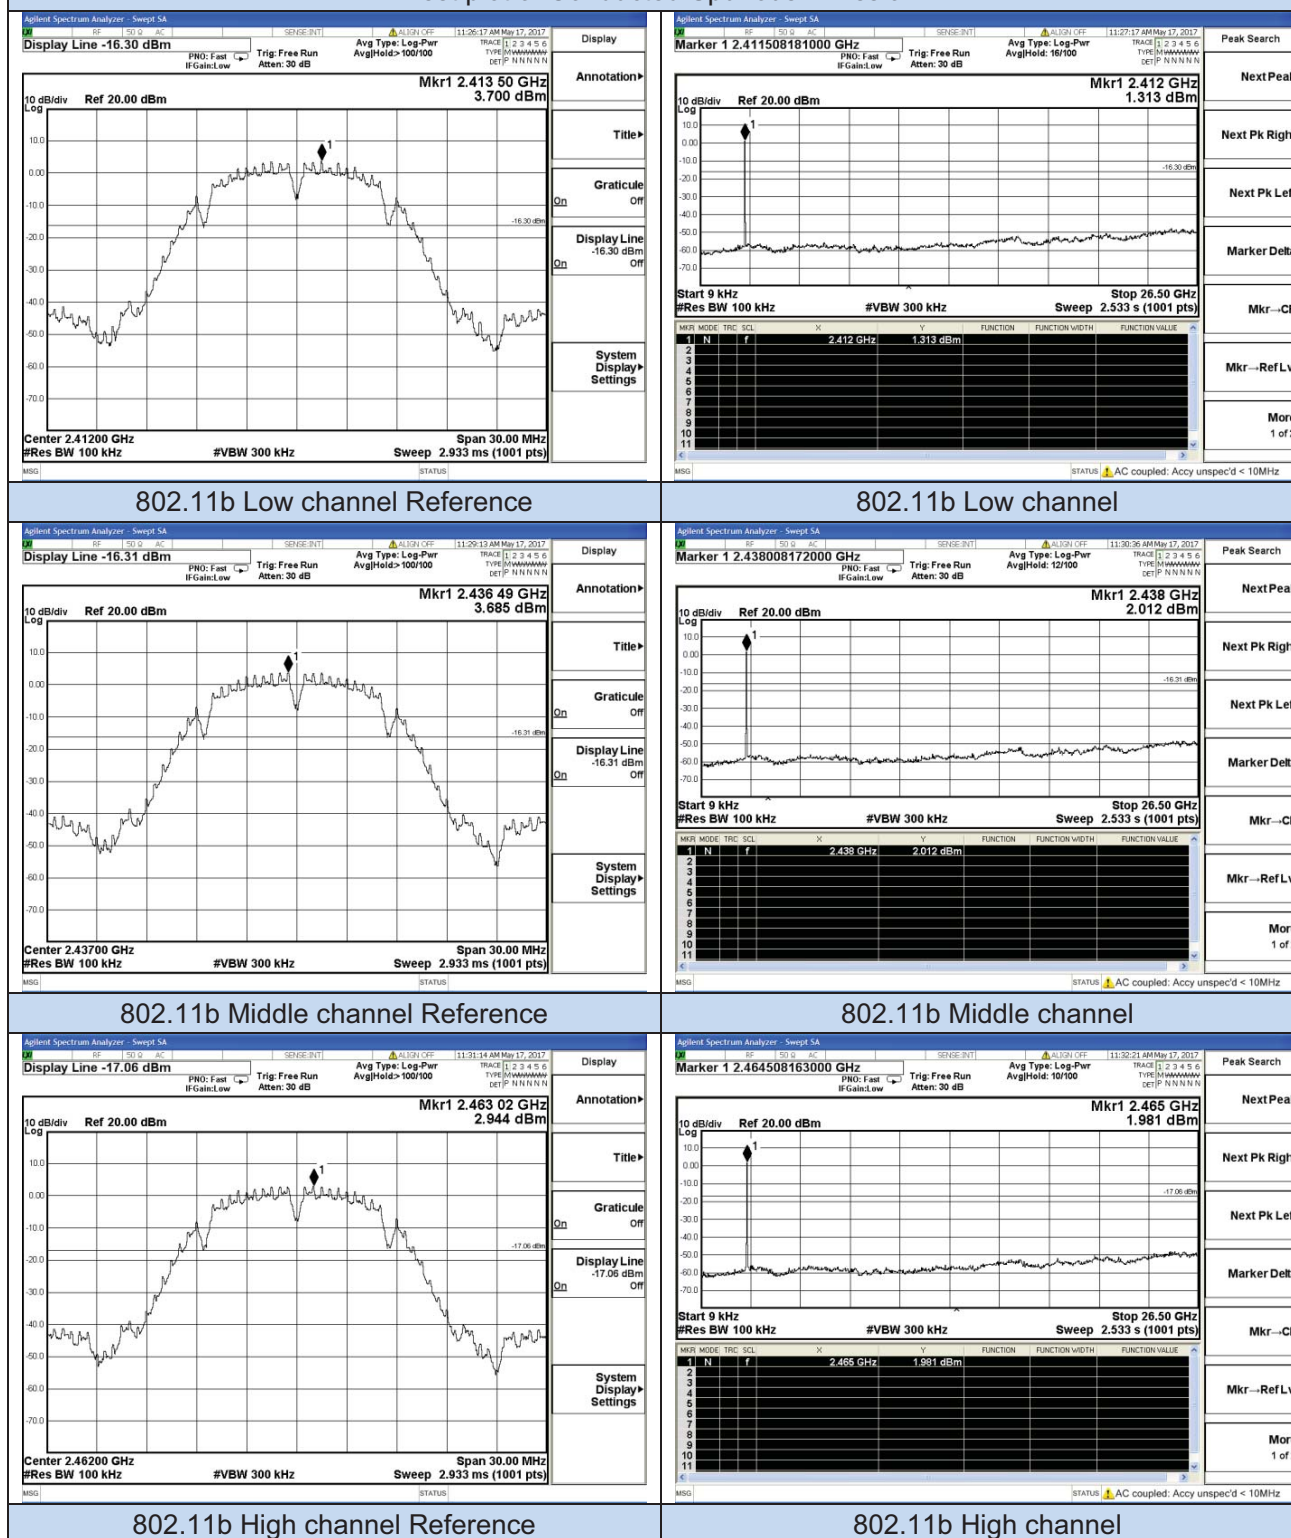


Test plot of Conducted Spurious Emission

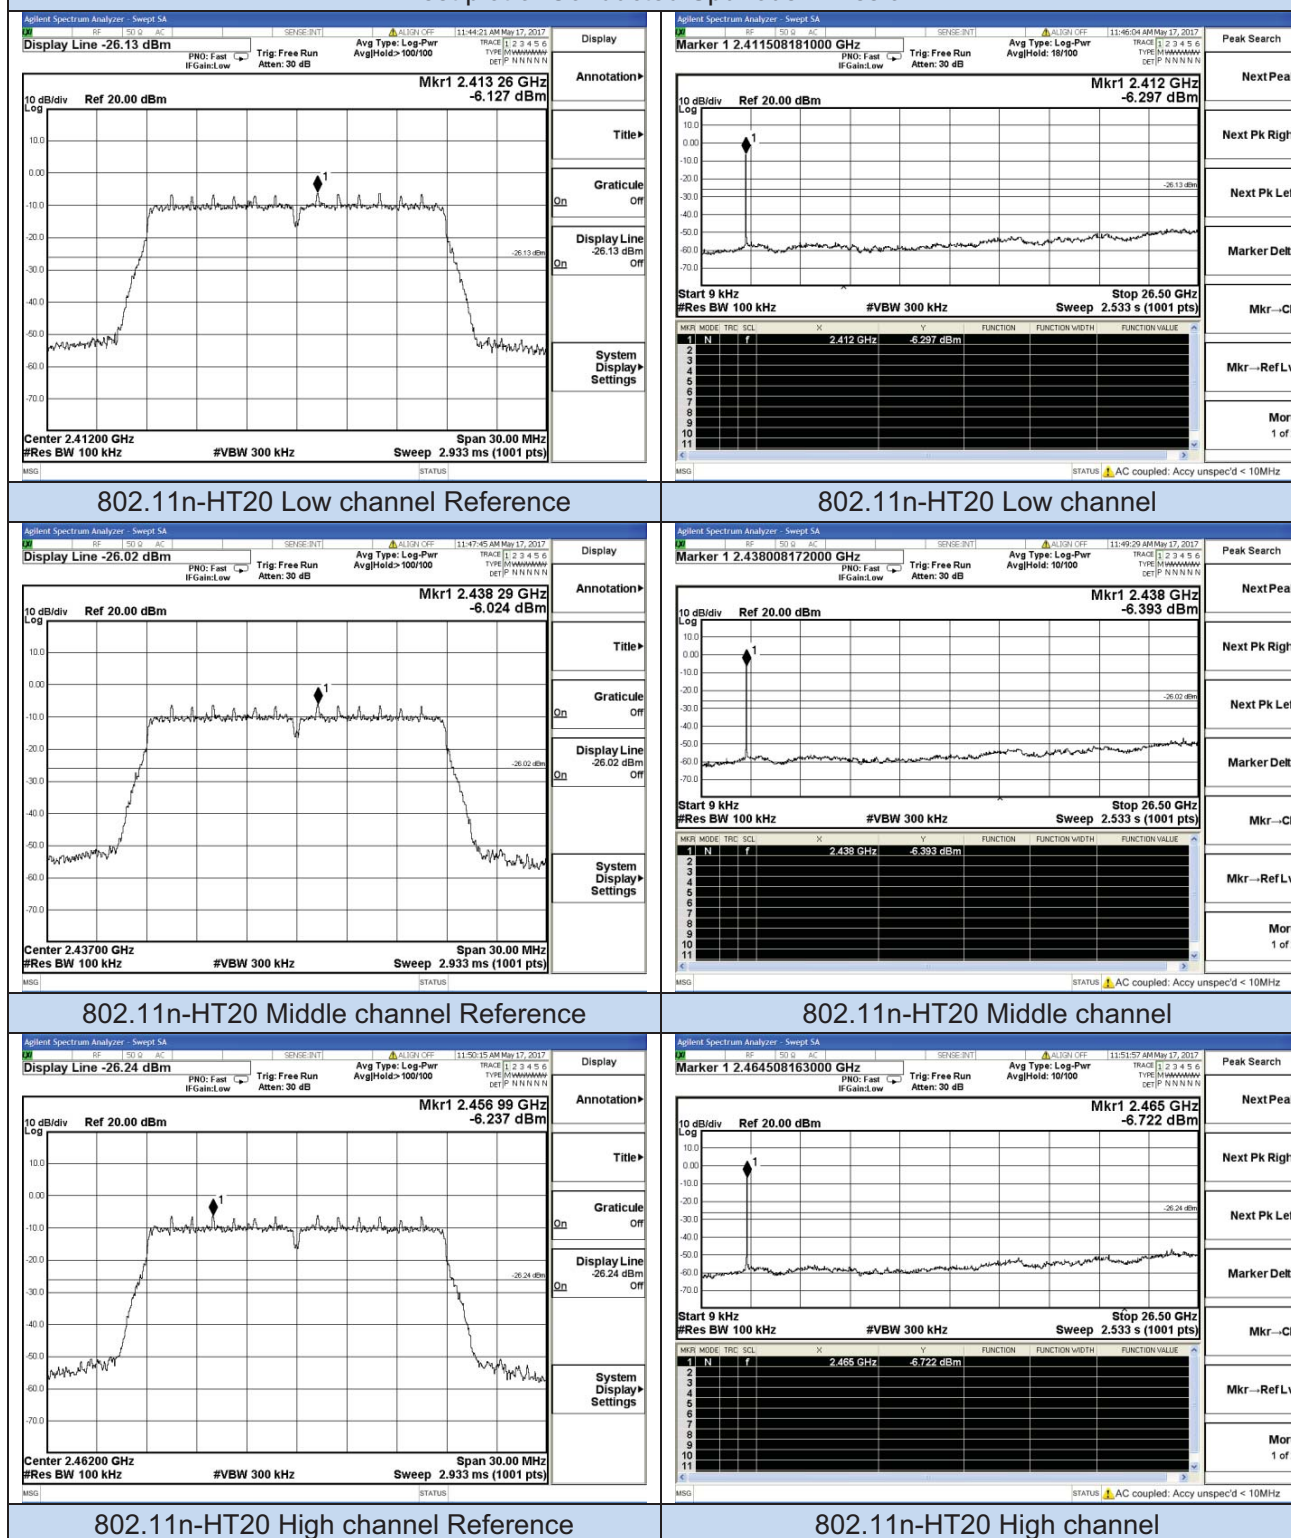


Test plot of Conducted Spurious Emission

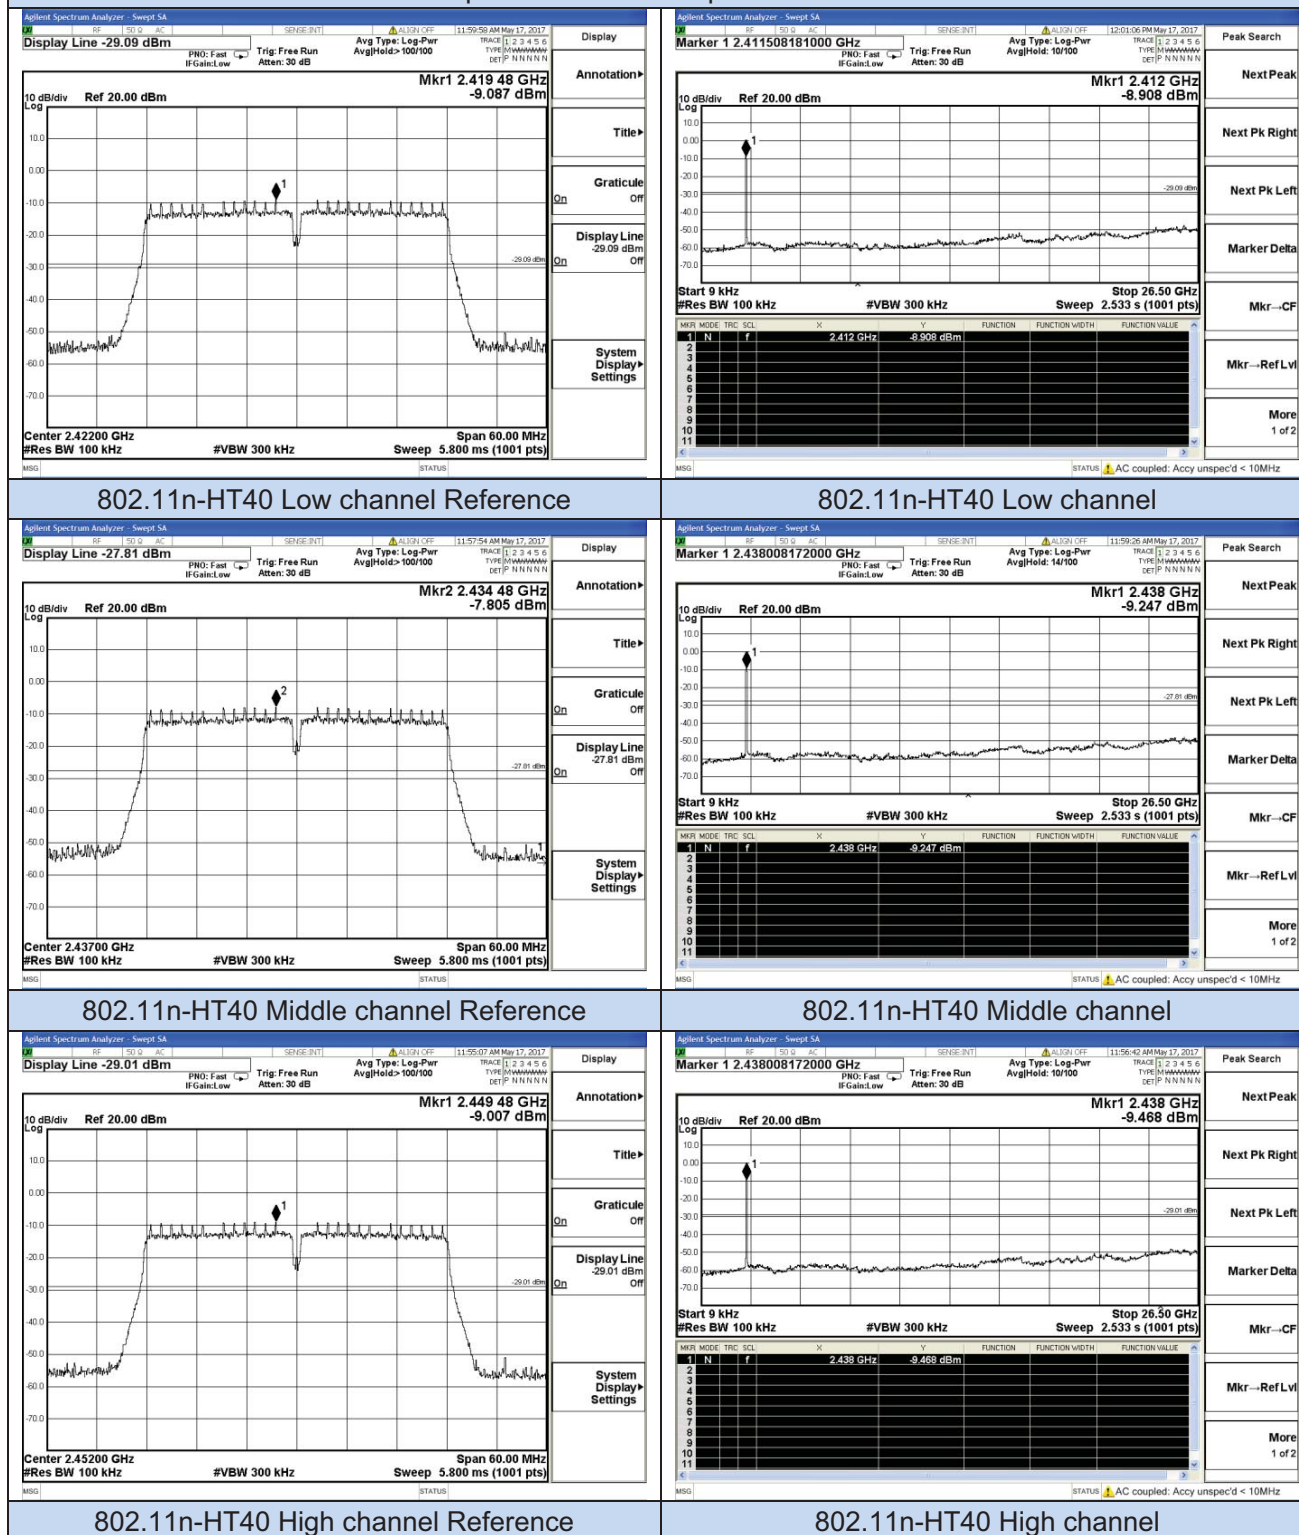


Test plot of Band Edges Test

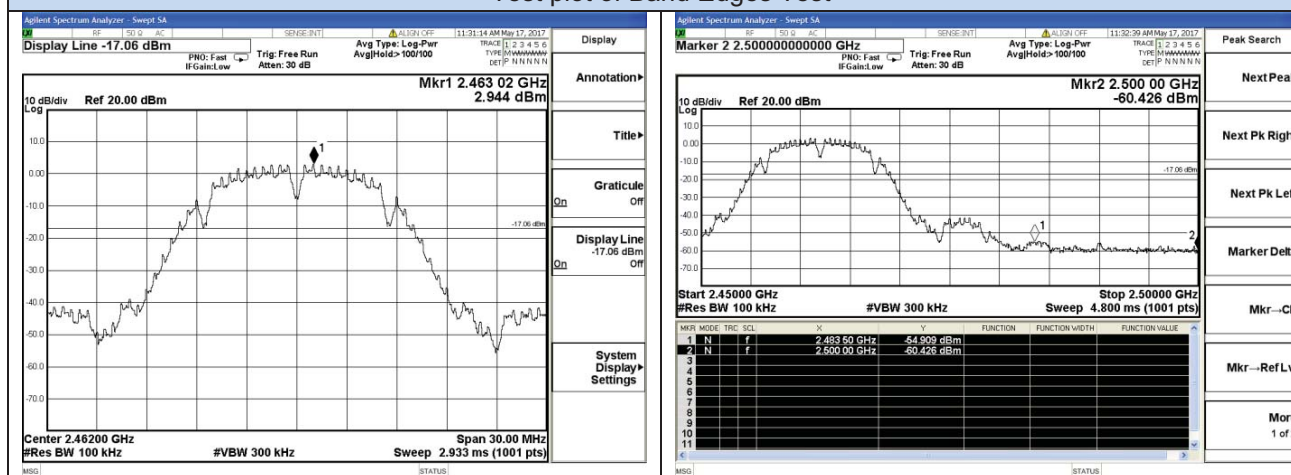


802.11b- High channel Reference

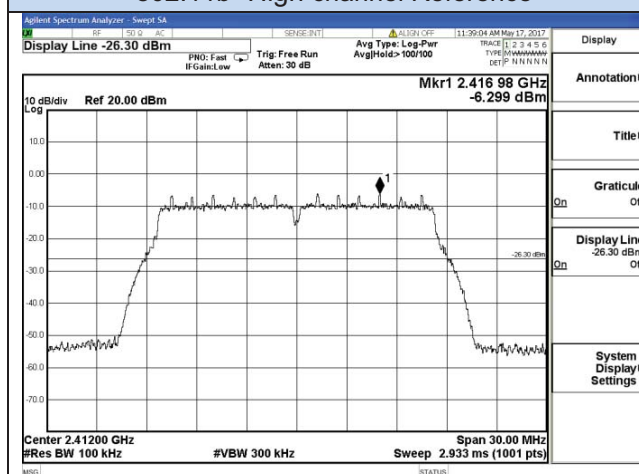


802.11b High channel

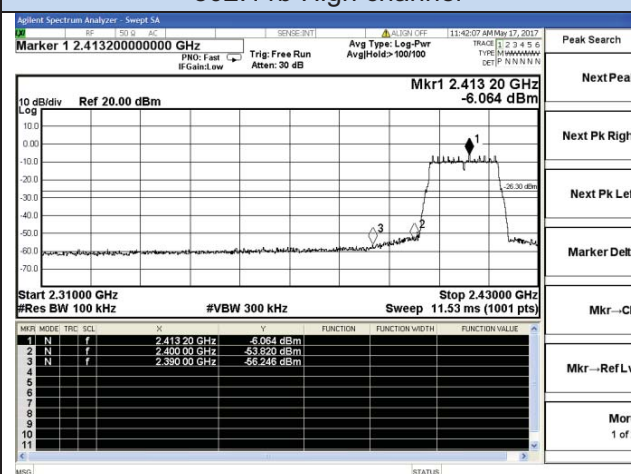

802.11g - Low channel Reference

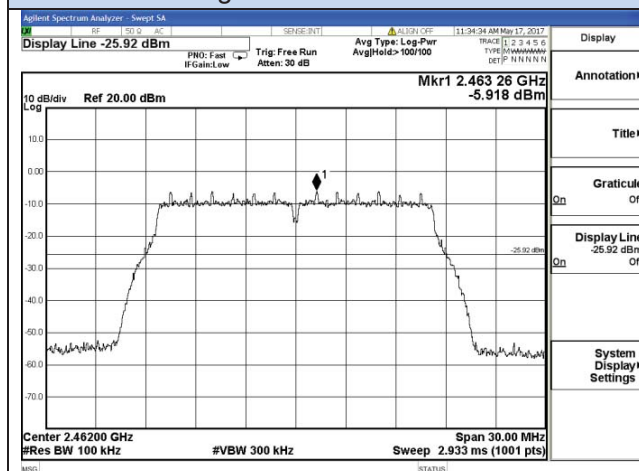



802.11g Low channel

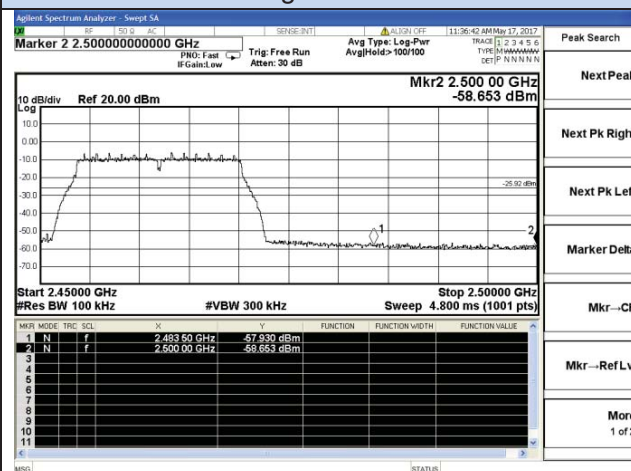


802.11g - High channel Reference

802.11g High channel


Test plot of Band Edges Test

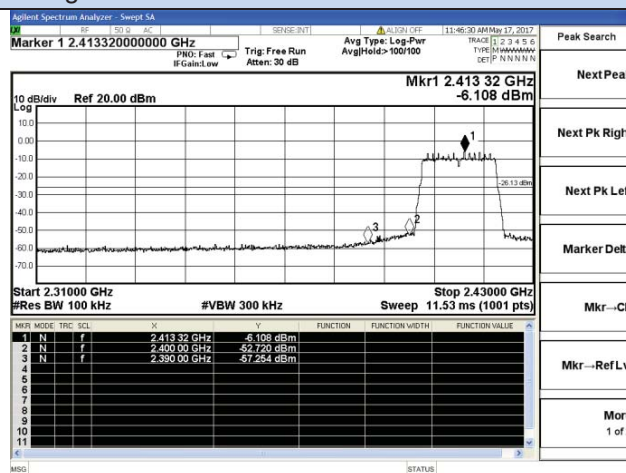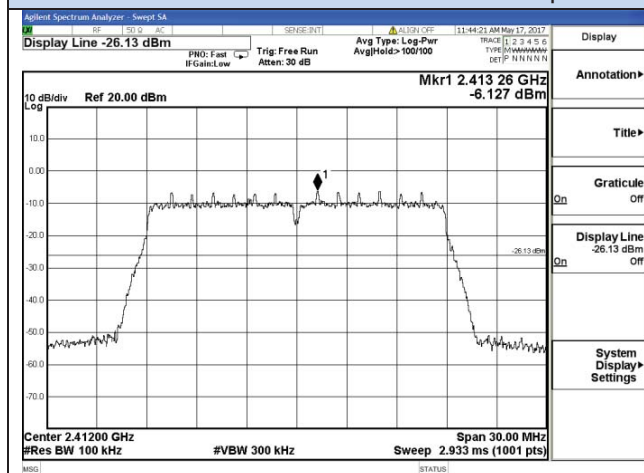


802.11n(HT20)- Low channel Reference

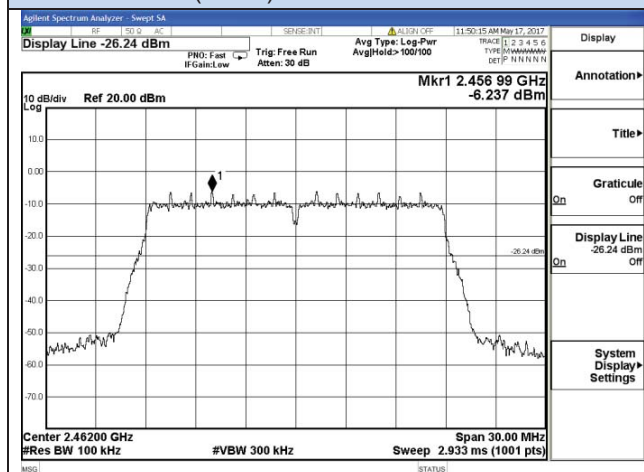


802.11n(HT20)- Low channel

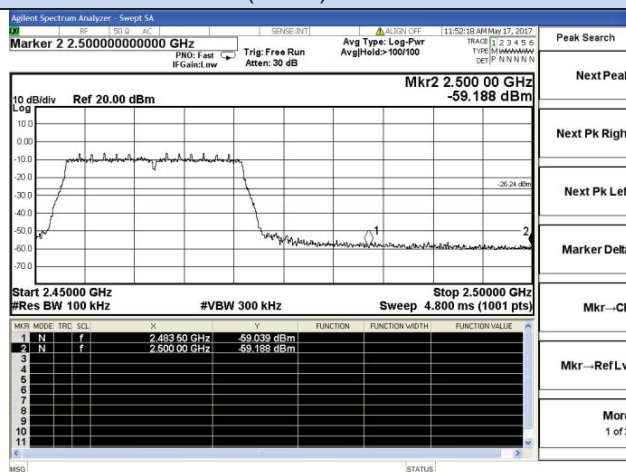

802.11n(HT20)-High channel Reference

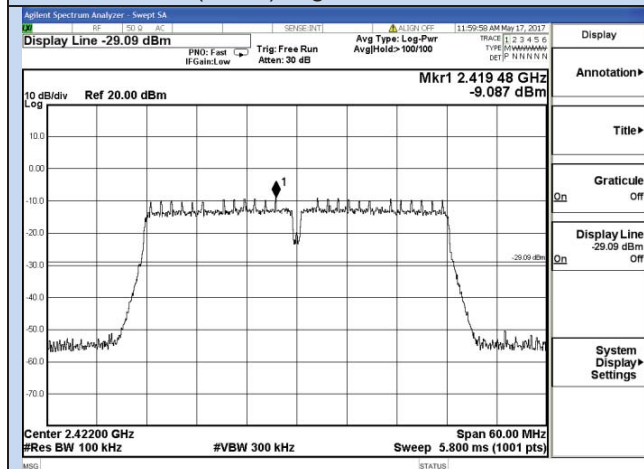


802.11n(HT20)-High channel

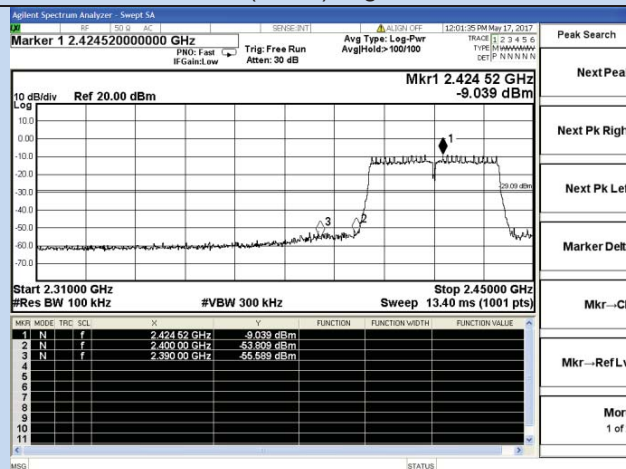


802.11n(HT40)- Low channel Reference

802.11n(HT40)- Low channel

Test plot of Band Edges Test

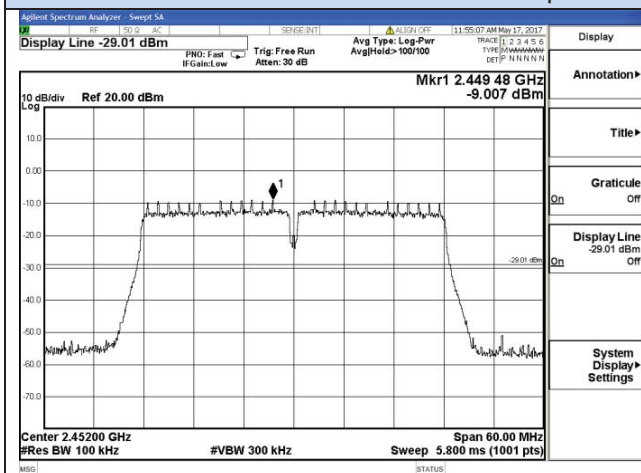

802.11n(HT40)-High channel Reference

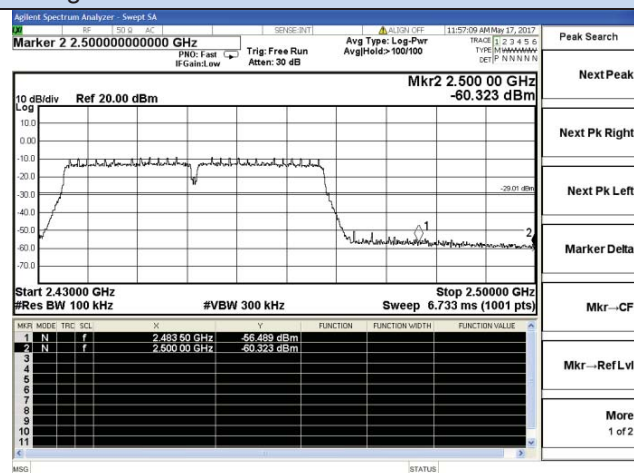

802.11n(HT40)-High channel


5.7. Power line conducted emissions

5.7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

5.7.2 Block Diagram of Test Setup

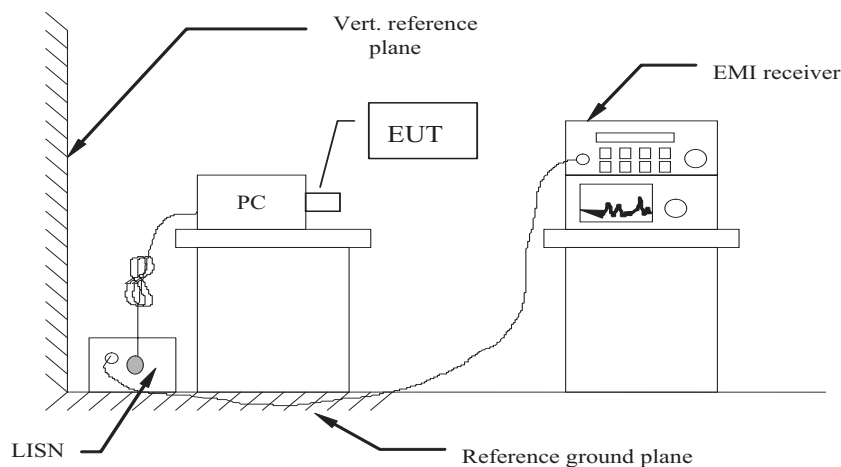


5.7.3 Test Results

PASS.

The test data please refer to following page.


Test result for BLE 4.0 AC 120V/ 60Hz

Temperature	23.7℃	Humidity	51.3%
Test Engineer	Chaz Liu	Configurations	BT

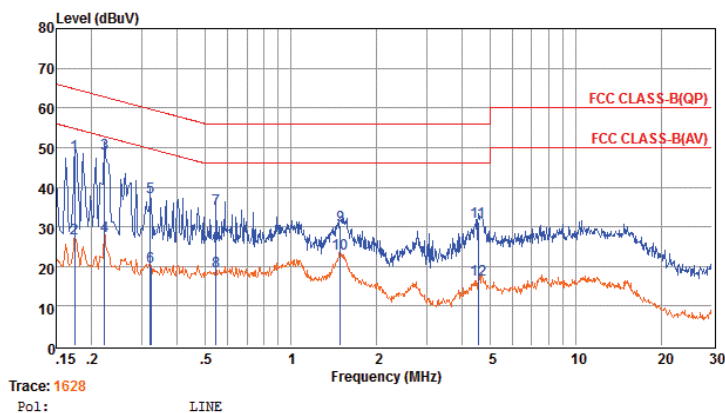

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.17	28.51	9.60	0.02	10.00	48.13	64.77	-16.64	QP
2	0.17	7.41	9.60	0.02	10.00	27.03	54.76	-27.73	Average
3	0.22	28.85	9.63	0.03	10.00	48.51	62.74	-14.23	QP
4	0.22	8.14	9.63	0.03	10.00	27.80	52.74	-24.94	Average
5	0.32	17.81	9.62	0.03	10.00	37.46	59.66	-22.20	QP
6	0.32	0.37	9.62	0.03	10.00	20.02	49.66	-29.64	Average
7	0.55	14.83	9.63	0.04	10.00	34.50	56.00	-21.50	QP
8	0.55	-0.79	9.63	0.04	10.00	18.88	46.00	-27.12	Average
9	1.49	10.62	9.64	0.05	10.00	30.31	56.00	-25.69	QP
10	1.49	3.38	9.64	0.05	10.00	23.07	46.00	-22.93	Average
11	4.55	11.56	9.65	0.06	10.00	31.27	56.00	-24.73	QP
12	4.55	-2.94	9.65	0.06	10.00	16.77	46.00	-29.23	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

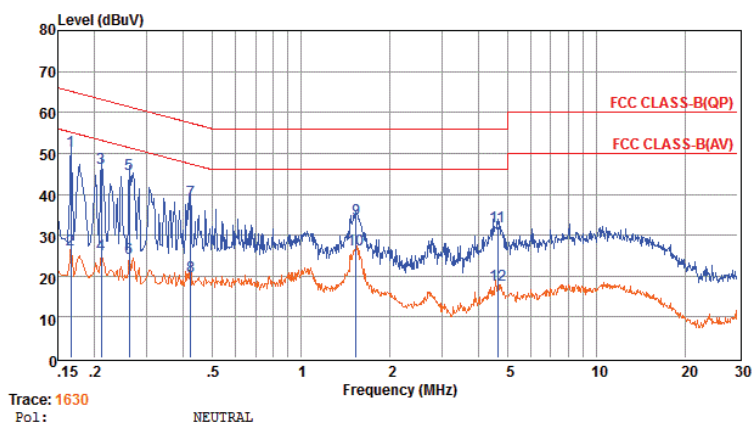


	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.17	30.81	9.66	0.02	10.00	50.49	65.16	-14.67	QP
2	0.17	6.91	9.66	0.02	10.00	26.59	55.16	-28.57	Average
3	0.21	26.82	9.59	0.03	10.00	46.44	63.18	-16.74	QP
4	0.21	5.56	9.59	0.03	10.00	25.18	53.18	-28.00	Average
5	0.26	25.31	9.60	0.03	10.00	44.94	61.38	-16.44	QP
6	0.26	4.83	9.60	0.03	10.00	24.46	51.38	-26.92	Average
7	0.42	18.78	9.61	0.04	10.00	38.43	57.42	-18.99	QP
8	0.42	0.36	9.61	0.04	10.00	20.01	47.42	-27.41	Average
9	1.54	14.20	9.63	0.05	10.00	33.88	56.00	-22.12	QP
10	1.54	6.90	9.63	0.05	10.00	26.58	46.00	-19.42	Average
11	4.62	12.31	9.66	0.06	10.00	32.03	56.00	-23.97	QP
12	4.62	-1.78	9.66	0.06	10.00	17.94	46.00	-28.06	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.


Test result for BLE 4.0 AC 240V/ 60Hz

Temperature	23.7°C	Humidity	51.3%
Test Engineer	Chaz Liu	Configurations	BT

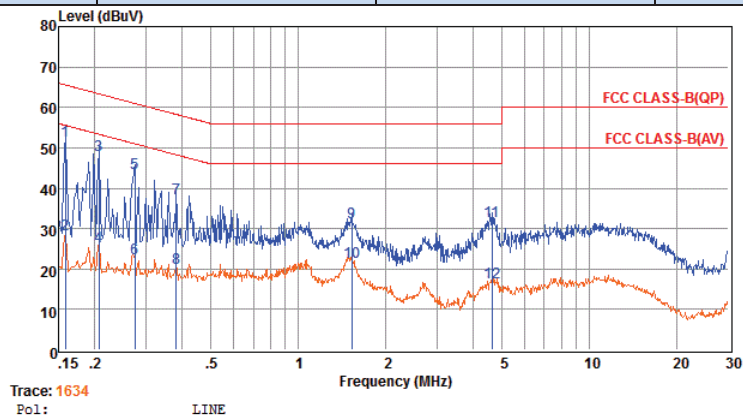

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.16	32.20	9.58	0.02	10.00	51.80	65.56	-13.76	QP
2	0.16	8.94	9.58	0.02	10.00	28.54	55.55	-27.01	Average
3	0.21	28.61	9.63	0.03	10.00	48.27	63.36	-15.09	QP
4	0.21	5.90	9.63	0.03	10.00	25.56	53.36	-27.80	Average
5	0.27	24.09	9.63	0.03	10.00	43.75	60.98	-17.23	QP
6	0.27	2.89	9.63	0.03	10.00	22.55	50.98	-28.43	Average
7	0.38	17.93	9.62	0.04	10.00	37.59	58.25	-20.66	QP
8	0.38	0.58	9.62	0.04	10.00	20.24	48.25	-28.01	Average
9	1.53	11.79	9.64	0.05	10.00	31.48	56.00	-24.52	QP
10	1.53	2.13	9.64	0.05	10.00	21.82	46.00	-24.18	Average
11	4.62	12.11	9.65	0.06	10.00	31.82	56.00	-24.18	QP
12	4.62	-3.03	9.65	0.06	10.00	16.68	46.00	-29.32	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

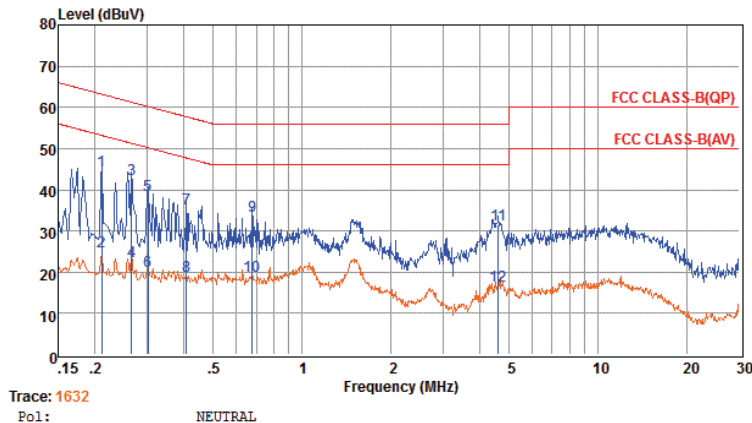


	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.21	24.97	9.59	0.03	10.00	44.59	63.18	-18.59	QP
2	0.21	5.22	9.59	0.03	10.00	24.84	53.18	-28.34	Average
3	0.27	22.76	9.60	0.03	10.00	42.39	61.25	-18.86	QP
4	0.27	2.83	9.60	0.03	10.00	22.46	51.24	-28.78	Average
5	0.30	19.09	9.60	0.03	10.00	38.72	60.19	-21.47	QP
6	0.30	0.72	9.60	0.03	10.00	20.35	50.19	-29.84	Average
7	0.41	15.78	9.61	0.04	10.00	35.43	57.73	-22.30	QP
8	0.41	-0.68	9.61	0.04	10.00	18.97	47.72	-28.75	Average
9	0.68	13.89	9.63	0.04	10.00	33.56	56.00	-22.44	QP
10	0.68	-0.57	9.63	0.04	10.00	19.10	46.00	-26.90	Average
11	4.60	11.78	9.66	0.06	10.00	31.50	56.00	-24.50	QP
12	4.60	-3.04	9.66	0.06	10.00	16.68	46.00	-29.32	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.


Test result for 802.11b (AC 120V)

Temperature	24.9°C	Humidity	50.3%
Test Engineer	Chaz Liu	Configurations	BT

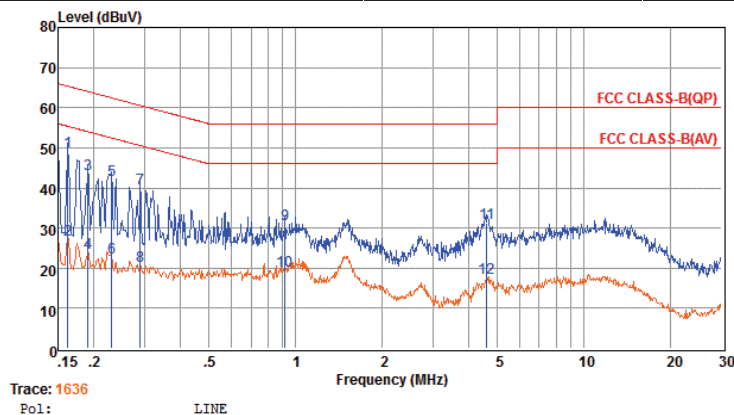

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.16	29.46	9.59	0.02	10.00	49.07	65.34	-16.27	QP
2	0.16	7.49	9.59	0.02	10.00	27.10	55.33	-28.23	Average
3	0.19	23.83	9.62	0.02	10.00	43.47	64.02	-20.55	QP
4	0.19	4.16	9.62	0.02	10.00	23.80	54.02	-30.22	Average
5	0.23	22.34	9.63	0.03	10.00	42.00	62.44	-20.44	QP
6	0.23	2.83	9.63	0.03	10.00	22.49	52.43	-29.94	Average
7	0.29	20.18	9.63	0.03	10.00	39.84	60.54	-20.70	QP
8	0.29	0.89	9.63	0.03	10.00	20.55	50.54	-29.99	Average
9	0.92	11.15	9.63	0.05	10.00	30.83	56.00	-25.17	QP
10	0.92	-0.35	9.63	0.05	10.00	19.33	46.00	-26.67	Average
11	4.60	11.56	9.65	0.06	10.00	31.27	56.00	-24.73	QP
12	4.60	-2.29	9.65	0.06	10.00	17.42	46.00	-28.58	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

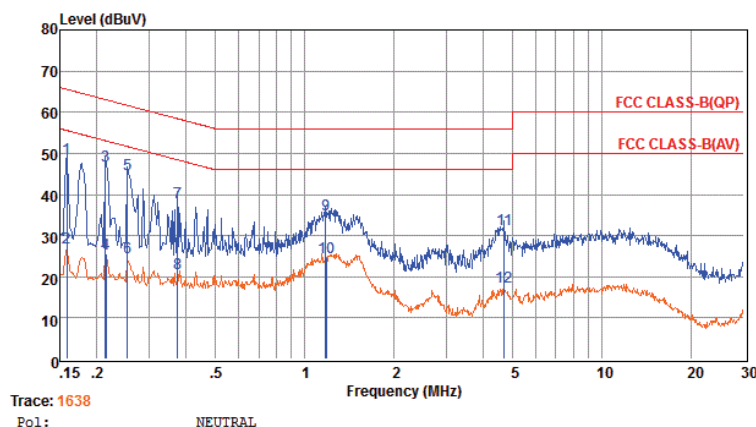


	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.16	29.05	9.68	0.02	10.00	48.75	65.56	-16.81	QP
2	0.16	7.42	9.68	0.02	10.00	27.12	55.55	-28.43	Average
3	0.21	27.51	9.59	0.03	10.00	47.13	63.05	-15.92	QP
4	0.21	5.91	9.59	0.03	10.00	25.53	53.05	-27.52	Average
5	0.25	25.15	9.60	0.03	10.00	44.78	61.64	-16.86	QP
6	0.25	5.17	9.60	0.03	10.00	24.80	51.64	-26.84	Average
7	0.37	18.49	9.61	0.04	10.00	38.14	58.43	-20.29	QP
8	0.37	1.24	9.61	0.04	10.00	20.89	48.43	-27.54	Average
9	1.18	15.40	9.63	0.05	10.00	35.08	56.00	-20.92	QP
10	1.18	4.95	9.63	0.05	10.00	24.63	46.00	-21.37	Average
11	4.70	11.86	9.66	0.06	10.00	31.58	56.00	-24.42	QP
12	4.70	-2.28	9.66	0.06	10.00	17.44	46.00	-28.56	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.


Test result for 802.11b (AC 240V)

Temperature	24.9°C	Humidity	50.3%
Test Engineer	Chaz Liu	Configurations	BT

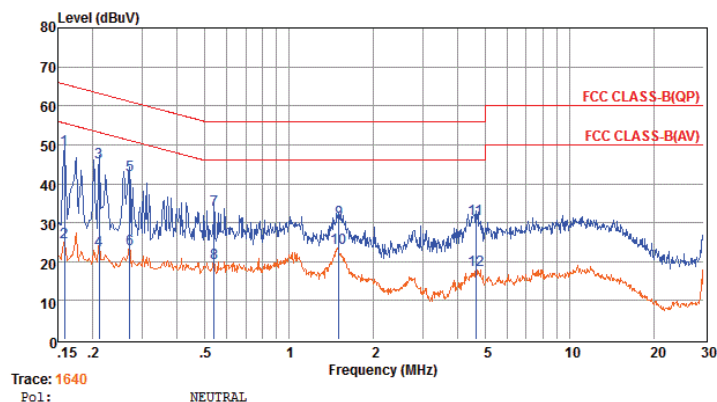

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.16	29.02	9.68	0.02	10.00	48.72	65.56	-16.84	QP
2	0.16	5.32	9.68	0.02	10.00	25.02	55.55	-30.53	Average
3	0.21	25.79	9.59	0.03	10.00	45.41	63.18	-17.77	QP
4	0.21	3.37	9.59	0.03	10.00	22.99	53.18	-30.19	Average
5	0.27	22.57	9.60	0.03	10.00	42.20	61.12	-18.92	QP
6	0.27	3.55	9.60	0.03	10.00	23.18	51.11	-27.93	Average
7	0.54	13.53	9.62	0.04	10.00	33.19	56.00	-22.81	QP
8	0.54	0.07	9.62	0.04	10.00	19.73	46.00	-26.27	Average
9	1.50	11.03	9.63	0.05	10.00	30.71	56.00	-25.29	QP
10	1.50	3.77	9.63	0.05	10.00	23.45	46.00	-22.55	Average
11	4.62	11.16	9.66	0.06	10.00	30.88	56.00	-25.12	QP
12	4.62	-2.01	9.66	0.06	10.00	17.71	46.00	-28.29	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

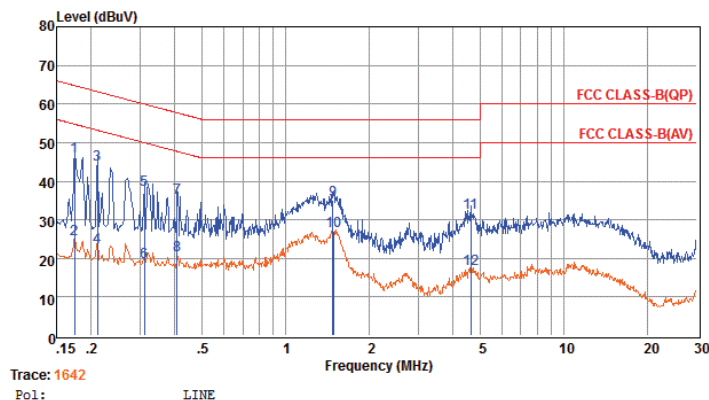

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.17	26.64	9.60	0.02	10.00	46.26	64.77	-18.51	QP
2	0.17	5.41	9.60	0.02	10.00	25.03	54.76	-29.73	Average
3	0.21	24.79	9.63	0.03	10.00	44.45	63.18	-18.73	QP
4	0.21	3.28	9.63	0.03	10.00	22.94	53.18	-30.24	Average
5	0.31	18.05	9.63	0.03	10.00	37.71	59.97	-22.26	QP
6	0.31	-0.49	9.63	0.03	10.00	19.17	49.97	-30.80	Average
7	0.41	16.14	9.62	0.04	10.00	35.80	57.73	-21.93	QP
8	0.41	1.06	9.62	0.04	10.00	20.72	47.72	-27.00	Average
9	1.48	15.35	9.64	0.05	10.00	35.04	56.00	-20.96	QP
10	1.48	7.46	9.64	0.05	10.00	27.15	46.00	-18.85	Average
11	4.62	12.04	9.65	0.06	10.00	31.75	56.00	-24.25	QP
12	4.62	-2.34	9.65	0.06	10.00	17.37	46.00	-28.63	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

***Note: Pre-scan all modes and recorded the worst case results in this report (802.11b).

5.8. Antenna Requirements

5.8.1. Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

5.8.2. Antenna Connected Construction

5.8.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.8.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 1.0dBi, and the antenna is an external antenna with SMA port connecting to PCB board and no consideration of replacement. Please see EUT photo for details.

The WLAN and Bluetooth share same antenna.

5.8.2.3. Results: Compliance.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Conducted power refers ANSI C63.10:2013 Output power test procedure for DTS devices.

Radiated power refers to ANSI C63.10:2013 Radiated emissions tests.

Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep Time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the 802.11b mode is used.

Limits

FCC	IC
Antenna Gain	
6 dBi	

Tnom	Vnom	lowest channel 2412 MHz	middle channel 2437 MHz	highest channel 2462 MHz
Conducted power [dBm] Measured with DSSS modulation		15.47	14.51	14.42
Radiated power [dBm] Measured with DSSS modulation		16.235	15.356	15.141
Gain [dBi] Calculated		0.765	0.846	0.721
Measurement uncertainty			± 1.5 dB (cond.) / ± 3.0 dB (rad.)	

Result: -/-

6. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	June 18, 2016	June 17, 2017
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz~40GHz	July 16, 2016	July 15, 2017
Signal analyzer	Agilent	N9020A	MY50510140	9kHz~26.5GHz	October 27, 2016	October 27, 2017
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 18, 2016	June 17, 2017
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 18, 2016	June 17, 2017
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 18, 2016	June 17, 2017
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 18, 2016	June 17, 2017
3m Semi Anechoic	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-18GHz 3m	June 18, 2016	June 17, 2017
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	June 18, 2016	June 17, 2017
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16, 2016	July 15, 2017
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16, 2016	July 15, 2017
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18, 2016	June 17, 2017
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	June 10, 2016	June 09, 2017
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 10, 2016	June 09, 2017
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	June 10, 2016	June 09, 2017
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18, 2016	June 17, 2017
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18, 2016	June 17, 2017
Power Meter	R&S	NRVS	100444	DC-40GHz	June 18, 2016	June 17, 2017
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 18, 2016	June 17, 2017
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 18, 2016	June 17, 2017
AC Power Source	HPC	HPA-500E	HPA-9100024	AC 0~300V	June 18, 2016	June 17, 2017
DC power Source	GW	GPC-6030D	C671845	DC 1V-60V	June 18, 2016	June 17, 2017
Temp. and Humidity	Giant Force	GTH-225-20-S	MAB0103-00	N/A	June 18, 2016	June 17, 2017
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18, 2016	June 17, 2017
RF CABLE-2m	JYE Bao	RG142	CB)35-2m	20MHz-1GHz	June 18, 2016	June 17, 2017
EMC Test Software	Audix	E3	6.110830	N/A	N/A	N/A
Note: All equipment through GRGT EST calibration						

7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

-----THE END OF REPORT-----