

TEST REPORT



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2019-01350
Page (1) / (29) Pages

1. Client

- Name : SOLUM CO.,LTD.
- Address : 4,5,6th F, 357, Guseong-ro, Giheung-gu, Gyeonggi-do, Yongin-si, Republic of Korea
- Date of Receipt : 2019-04-01

2. Manufacturer

- Name : SOLUM VINA CO., LTD
- Address : Plot B3, Ba Thien 2 Industrial park, Thien Ke Ward, Binh Xuten District, Vinh Phuc Province, 281200.,Peple's Republic of Vietnam

3. Use of Report : For FCC Certification & Canadian Certification

4. Test Sample / Model: Electronic Shelf Label Gateway / SLG-CS101



5. Date of Test : 2019-04-02 to 2019-04-10

6. Test Standard(method) used : FCC 47 CFR part 15 subpart C 15.249,
RSS-210, RSS-Gen

7. Testing Environment: Temp.: (23 ± 2) °C, Humidity: (51 ± 3) % R.H.

8. Test Results : Compliance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Affirmation	Tested by	Technical Manager
	Bong-seok Kim: (Signature) 	Young-taek Lee: (Signature) 

2019-04-12

Republic of KOREA **CTK Co., Ltd.**



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2019-01350
Page (2) / (29) Pages

REPORT REVISION HISTORY

Date	Revision	Page No
2019-04-12	Issued (CTK-2019-01350)	all

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2019-01350
Page (3) / (29) Pages

CONTENTS

1. General Product Description	4
1.1 Client Information	4
1.2 Product Information.....	4
1.3 Peripheral Devices	4
2. Facility and Accreditations.....	5
2.1 Test Facility.....	5
2.2 Laboratory Accreditations and Listings	5
2.3 Calibration Details of Equipment Used for Measurement	5
3. Test Specifications	6
3.1 Standards.....	6
3.2 Mode of operation during the test	7
3.3 Maximum Measurement Uncertainty	8
4. Technical Characteristic Test.....	9
4.1 Band Edge.....	9
4.2 Field strength	12
APPENDIX A – Test Equipment Used For Tests	28
APPENDIX B – EUT Photographs	29



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2019-01350
Page (4) / (29) Pages

1. General Product Description

1.1 Client Information

Company	SOLUM CO.,LTD.
Contact Point	4,5,6th F, 357, Guseong-ro, Giheung-gu, Gyeonggi-do, Yongin-si, Republic of Korea
Contact Person	Name : YANG CHANG SOO E-mail : cs.yang@solu-m.com Tel : +82-31-8006-7650

1.2 Product Information

FCC ID	2AFWN-SLG-CS101
IC	22800-SLGCS101
Product Description	ESL Gateway
Basic Model name	SLG-CS101
Variant Model name	-
Operating Frequency	902.4 MHz, 915.2 MHz, 927.6 MHz
RF Output Power	Below 94 dBuV/m @ 3 m
Antenna type	Antenna A type : FPC antenna Antenna B type : FPC antenna
Antenna gain	Antenna A : 3.9 dBi Antenna B : 3.9 dBi
Channel Spacing	0.4 MHz
Number of channels	64
Type of Modulation	2-GFSK
Power Source	DC 5 V, POE
Firmware Version Id Number(FVIN)	5.0.3

1.3 Peripheral Devices





Device	Manufacturer	Model No.	Serial No.
Notebook Computer	HP	HP Probook 650 G1	5CG5114K13
AC Adapter	HP	PPP012D-S	677777-003

2. Facility and Accreditations

2.1 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yong-in-si, Gyeonggi-do, Korea.

2.2 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Registration Number	Logo
USA	FCC	FCC Part 15 & 18 EMI (Electromagnetic Interference / Emission)	805871	
CANADA	ISED	IC EMI (3/10m test site)	8737A-2	
JAPAN	VCCI	VCCI V-3 EMI (Electromagnetic Interference / Emission)	C-986 T-1843 R-3627 G-387	
KOREA	RNNA	EMI (Electromagnetic Interference / Emission) EMS (Electromagnetic Susceptibility / Immunity)	KR0025	

2.3 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2019-01350
Page (6) / (29) Pages

3. Test Specifications

3.1 Standards

FCC Part Section(s)	Section in RSS	Requirement(s)	Status (Note 1)
15.249(a)	RSS-210 Annex F.1(a)	Field Strength of emissions from intentional radiators	C
15.249(d)	RSS-210 Annex F.1(b)	Emissions radiated outside of the specified frequency bands	C
15.209	RSS-210 Annex F.1(a)	Radiated Emissions	C
15.207	RSS-Gen 8.8	AC Conducted Emission	C
<i>Note 1:</i> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable			
<i>Note 2:</i> The data in this test report are traceable to the national or international standards.			
<i>Note 3:</i> The sample was tested according to the following specification: FCC Part 15.249, ANSI C63.10-2013. RSS-210 Issue 9, RSS-Gen Issue 5			



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2019-01350
 Page (7) / (29) Pages

3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments. During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests. The results are only attached worst cases.

Test Frequency

Lowest channel	Middle channel	Highest channel
902.4 MHz	915.2 MHz	927.6 MHz


Test antenna

Antenna 1	Antenna 2
ANT-A	ANT-B

Test mode

TX mode	Duty cycle*
Continuous	0.06 (6%)

*Duty cycle = TX on(time) / T(Period) = 6.64 ms / 119.99 ms = 0.06

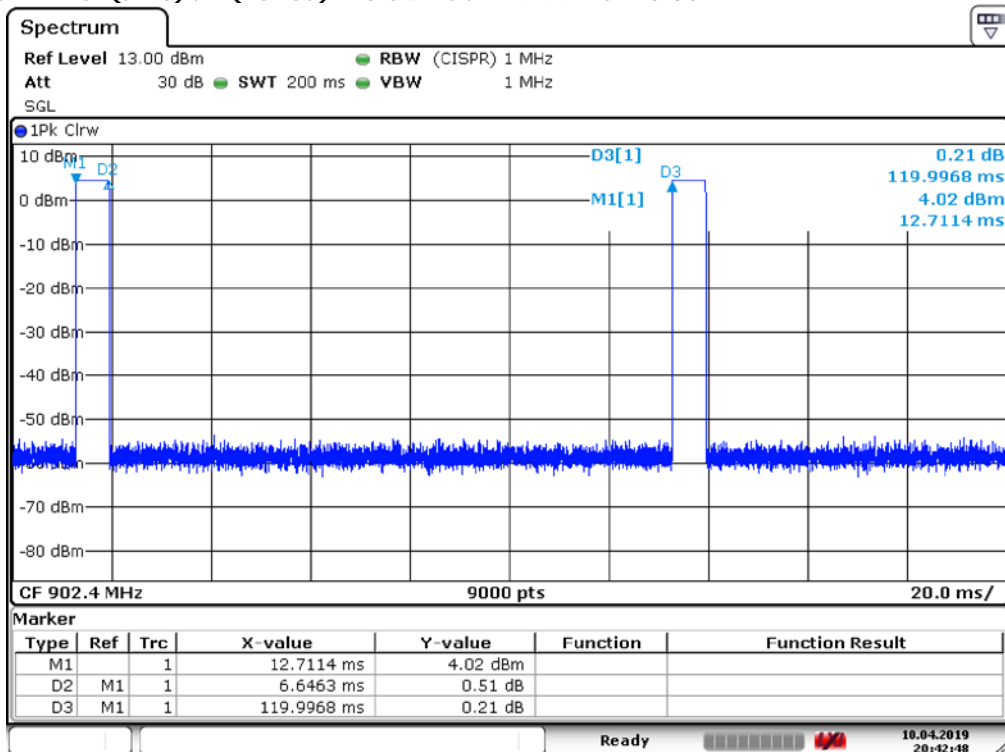



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2019-01350
Page (8) / (29) Pages

3.3 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.
Coverage factor $k = 2$, Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	1.5 dB
Unwanted Emission(conducted)	3.0 dB
Radiated Emissions ($f \leq 1$ GHz)	4.0 dB
Radiated Emissions ($f > 1$ GHz)	5.0 dB

4. Technical Characteristic Test

4.1 Band Edge

Requirement

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


Test Procedures(ANSI C63.10-2013 6.10)

- a) Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described in step e) (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).
- b) Set the EUT to the lowest frequency channel (for the hopping on test, the hopping sequence shall include the lowest frequency channel).
- c) Set the EUT to operate at maximum output power and 100% duty cycle, or equivalent "normal mode of operation".
- d) Perform the test as follows:
 - 1) Span : Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
 - 2) RBW : 100 kHz
 - 3) VBW : 300 kHz
 - 4) Detector : Peak
 - 5) Sweep time = Coupled
 - 6) Trace : Max hold
 - 7) Attenuation : Auto(at least 10 dB preferred)
 - 8) Allow trace to fully stabilize
- e) Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- f) Set the EUT to the highest frequency channel (for the hopping on test, the hopping sequence shall include the highest frequency channel) and repeat step c) through step d).
- g) The band-edge measurement shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


Test results: Complies

See next pages for actual measured spectrum plots.


Band-edge ANT-A Test Frequency : Lowest

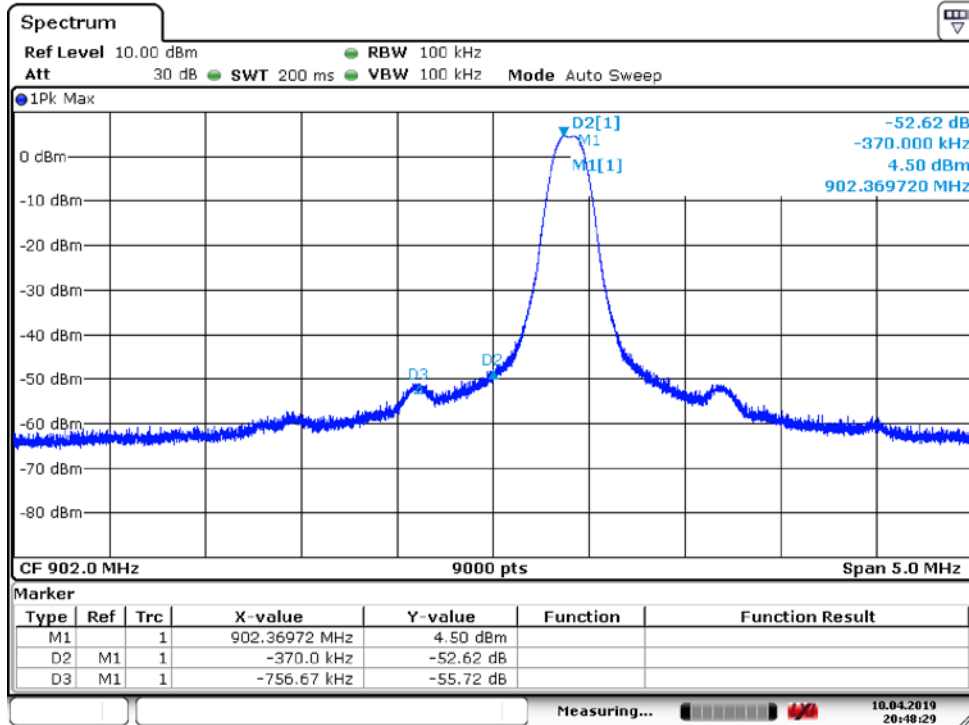


Test Frequency : Highest

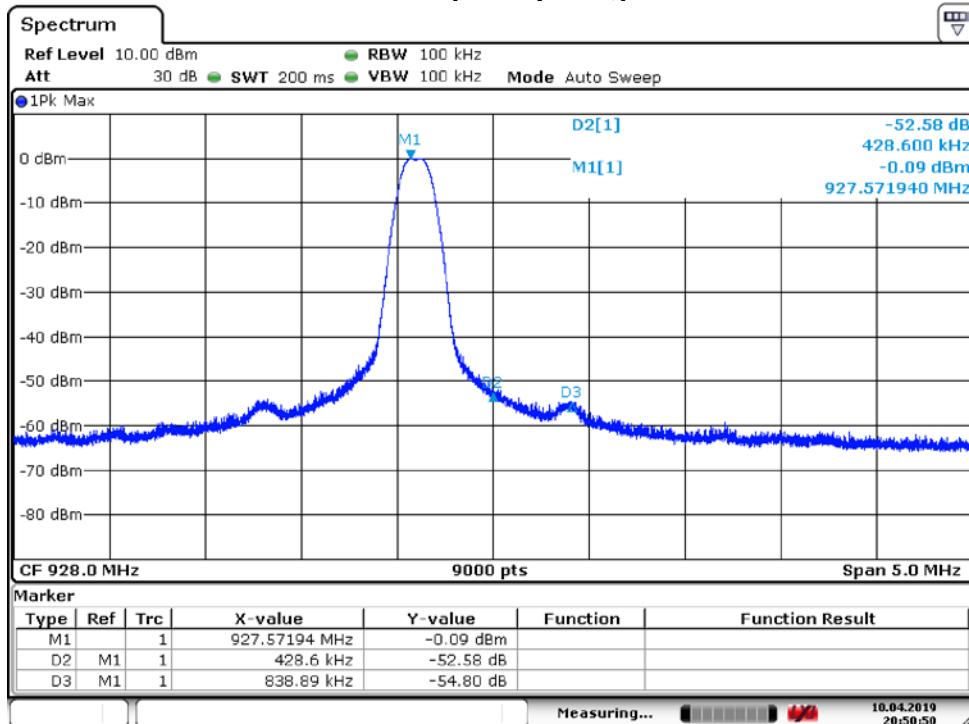

Band-edge ANT-B Test Frequency : Lowest

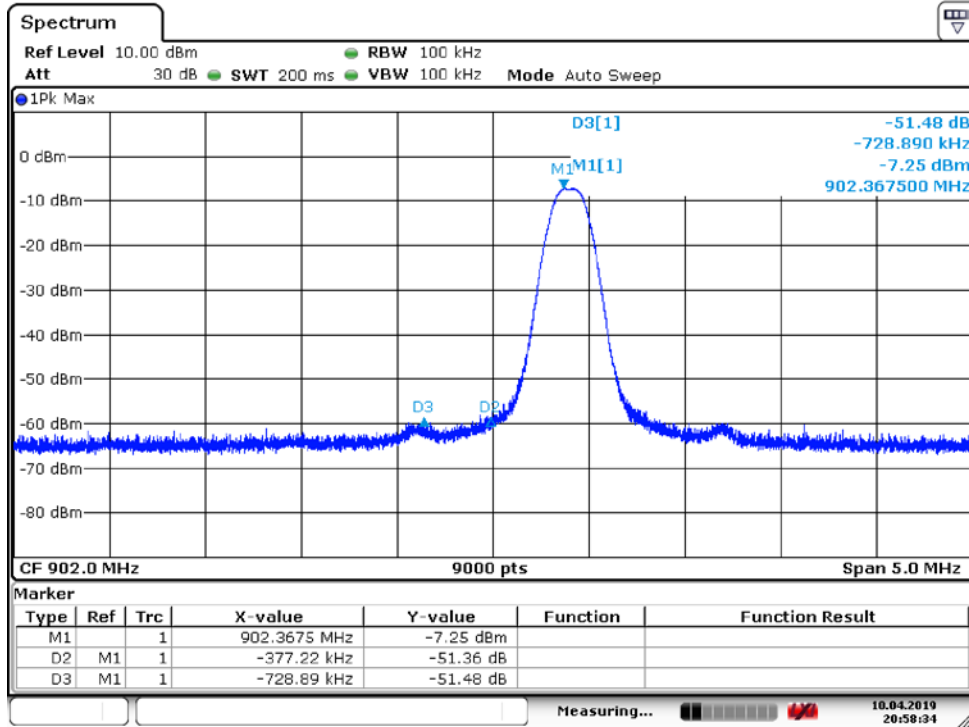

Test Frequency : Highest

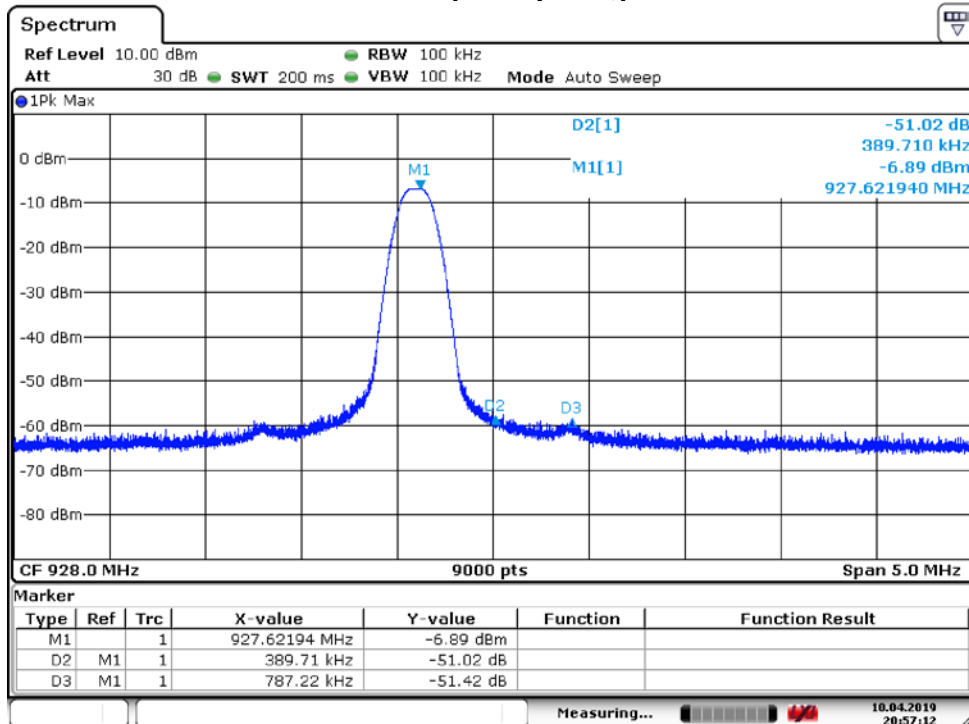



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2019-01350
Page (12) / (29) Pages

4.2 Field strength

Test Location

- 10 m SAC (test distance : 10 m, 3 m)
 3 m SAC (test distance : 3 m)

Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

Test Settings:

Frequency Range = 9 kHz ~ 12.75 GHz (10th harmonic)

- a) RBW = 1 MHz for $f \geq 1$ GHz, 120 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz
- b) VBW \geq RBW
- c) Sweep time = auto couple



Requirement :

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental	Field strength of harmonics
902-928 MHz	50 mV/m (94 dBuV/m)	500 uV/m (54 dBuV/m)

Field strength limits are specified at a distance of 3 meters.

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3

** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :

- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)
- 3) Average value = Peak value + Duty cycle correction factor(For pulse timing characteristics such as fundamental and harmonic emissions)



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2019-01350
 Page (14) / (29) Pages

Unwanted emissions that do not fall within the restricted frequency bands of Table 1 shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Table 1. Restricted Frequency Bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
¹ 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	² Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	


¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6


§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Test Setup:


- 1) For field strength of emissions from 9 kHz to 30 MHz

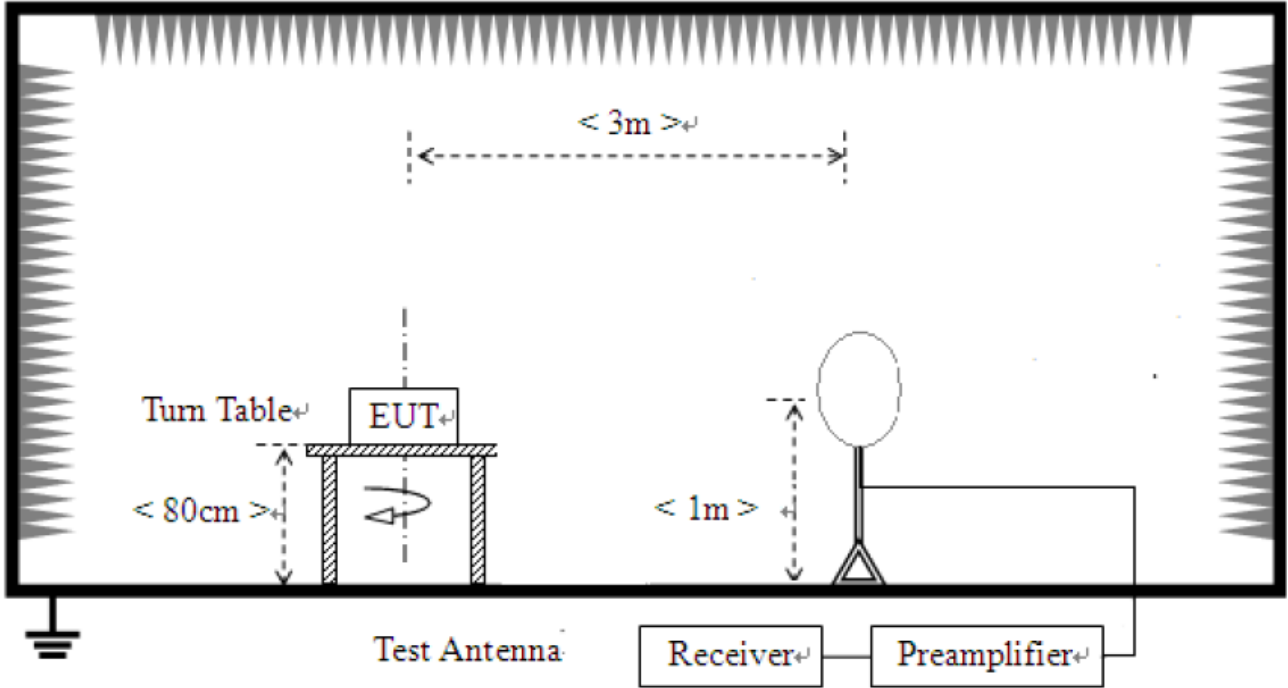

- 2) For field strength of emissions from 30 MHz to 1 GHz

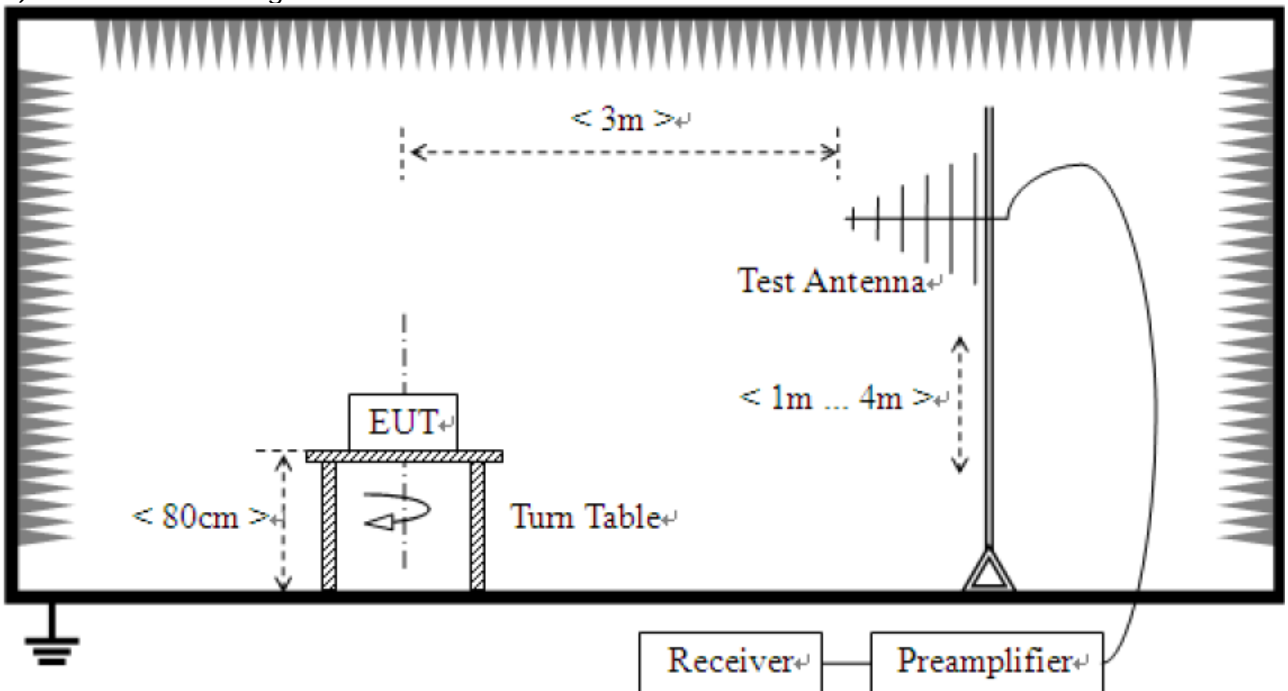

3) For field strength of emissions above 1 GHz

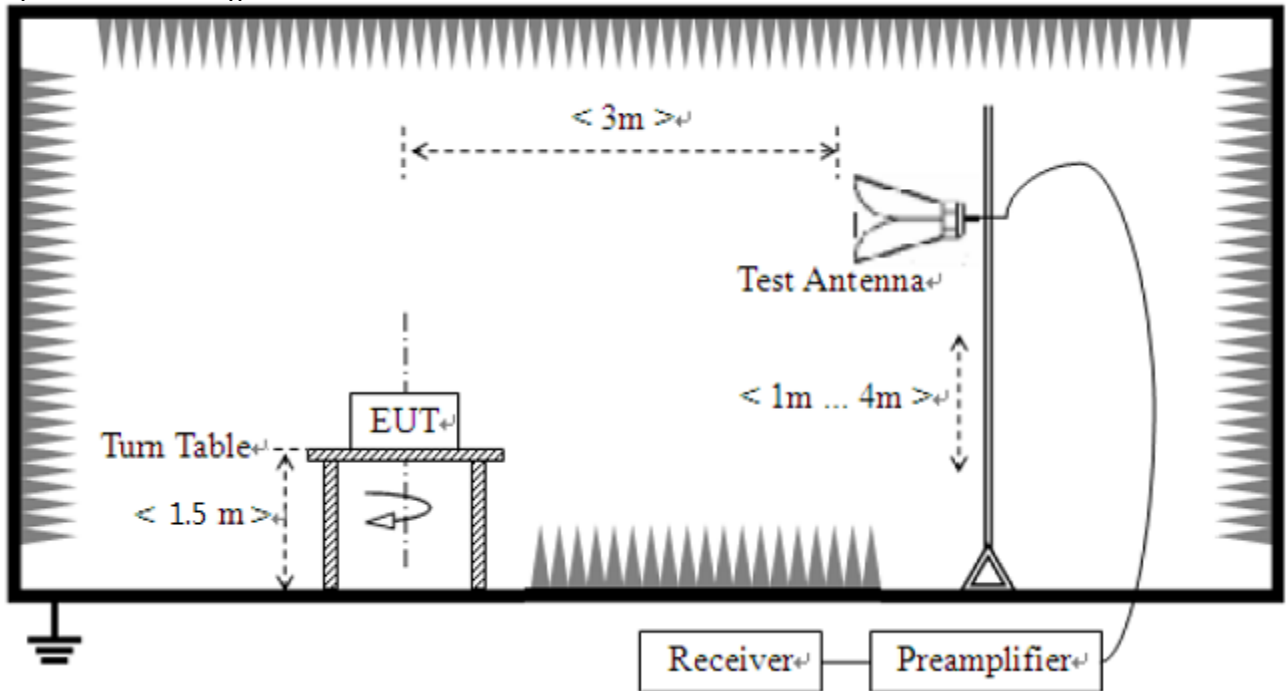



Test Data :

1) Field strength of fundamental

The requirements are:

Complies

Test mode : Transmit, ANT-A

Frequency [MHz]	Ant. Pol. (V/H)	Reading* [dBuV/m]	C.F [dB/m]	Duty Cycle c.f [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
902.4	V	111.60	-4.00	-24.43	83.17	94	10.83	
915.2	V	109.00	-3.90	-24.43	80.67	94	13.33	
927.6	V	107.80	-3.70	-24.43	79.67	94	14.33	

Test mode : Transmit, ANT-B

Frequency [MHz]	Ant. Pol. (V/H)	Reading* [dBuV/m]	C.F [dB/m]	Duty Cycle c.f [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
902.4	V	111.00	-4.00	-24.43	82.57	94	11.43	
915.2	V	108.90	-3.90	-24.43	80.57	94	13.43	
927.6	V	108.10	-3.70	-24.43	79.97	94	14.03	

1. Result = Reading + c.f(correction factor) + Duty cycle c.f
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
3. Duty cycle c.f = $20\log(\text{Duty cycle}) = 20\log(0.06) = -24.43$ dB
4. The Unwanted emission was measured in the following position: EUT stand-up position(X, Y axis), lie-down position(Z axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.

* Reading data is the peak value.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2019-01350
Page (18) / (29) Pages

2) Field strength of outside of the specified frequency bands – 9 kHz to 30 MHz

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)


3) Field strength of outside of the specified frequency bands – 30MHz to 1GHz

Test mode : Transmit, ANT-A, low channel(Worst case)

The requirements are:

Complies

Test Frequency : Lowest

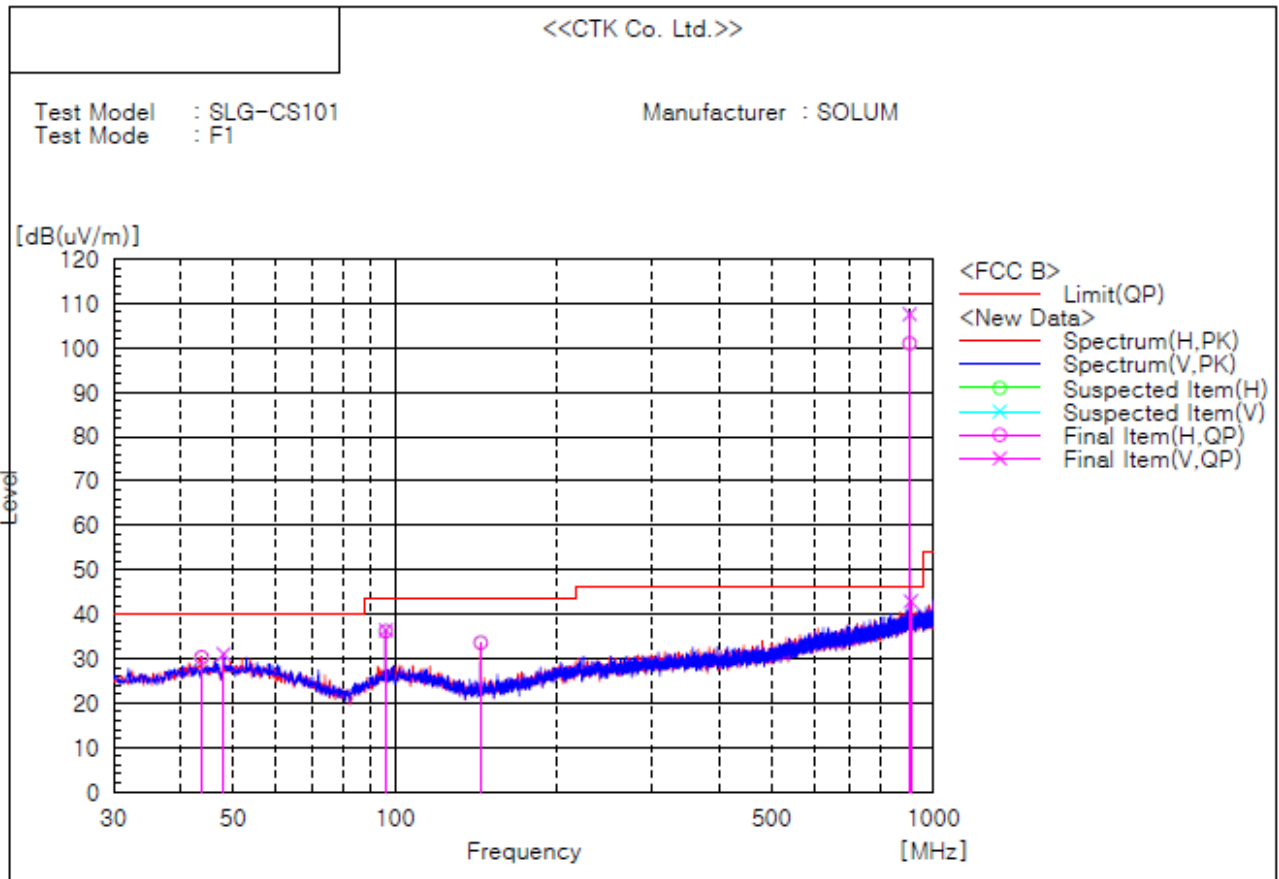


Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	43.717	H	42.8	-12.5	30.3	40.0	9.7	99.8	351.5
2	47.963	V	43.4	-12.4	31.0	40.0	9.0	99.8	335.1
3	96.083	V	50.8	-14.4	36.4	43.5	7.1	99.8	0.0
4	96.083	H	50.6	-14.4	36.2	43.5	7.3	99.8	292.1
5	144.093	H	51.2	-17.6	33.6	43.5	9.9	99.8	269.1
6	902.465	V	111.6	-4.0	107.6	46.0	-61.6	99.8	9.9
7	902.465	H	105.0	-4.0	101.0	46.0	-55.0	99.8	133.7
8	906.493	V	46.9	-4.0	42.9	46.0	3.1	99.8	64.6

Remark :

1. Result = Reading + c.f(Correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
3. This data is the peak(PK) value.
4. No.6 and No.7 are the carrier frequencies.
5. The Unwanted emission was measured in the following position: EUT stand-up position(X, Y axis), lie-down position(Z axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.

Test mode : Transmit, ANT-B, low channel(Worst case)

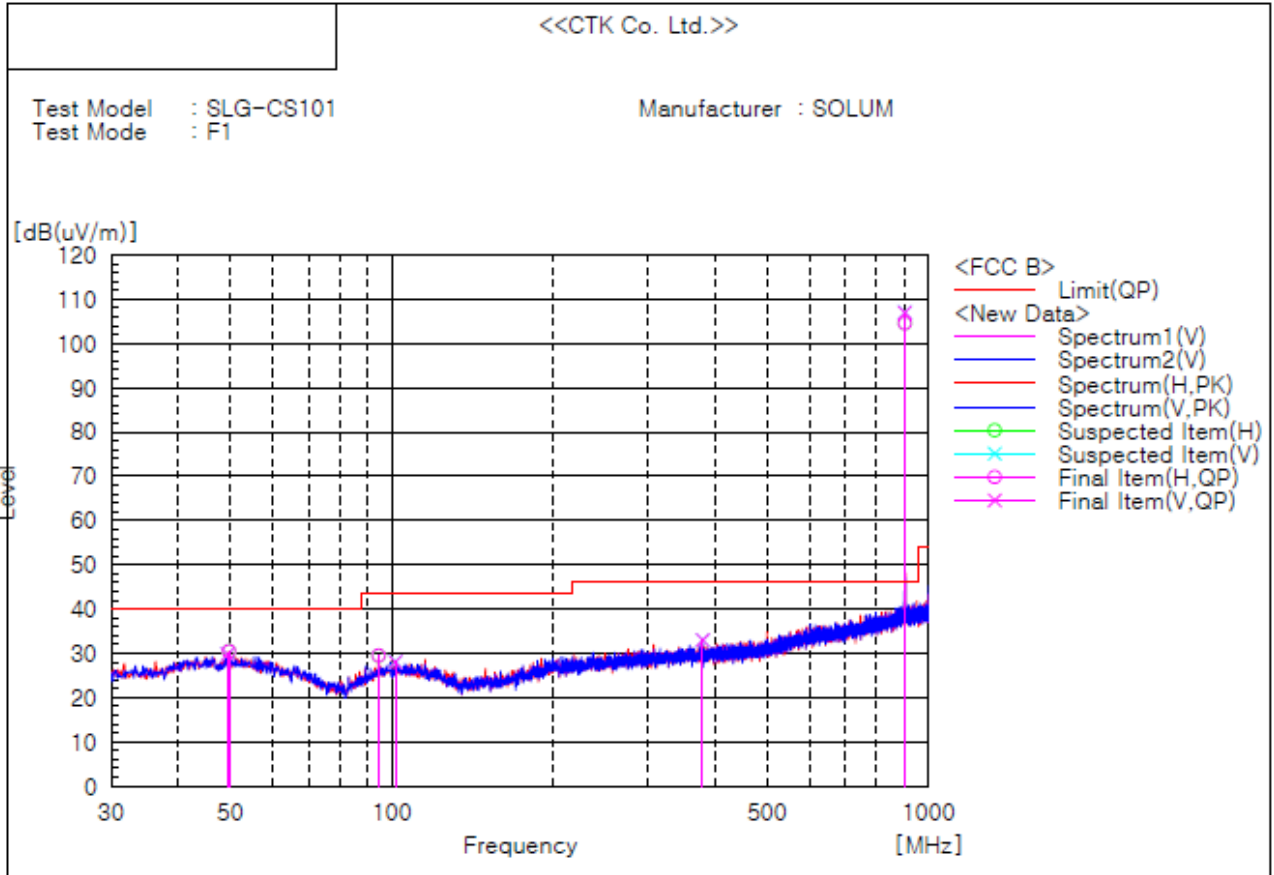

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	49.378	V	42.2	-12.4	29.8	40.0	10.2	99.8	358.2
2	49.705	H	42.9	-12.4	30.5	40.0	9.5	99.8	33.3
3	94.450	H	44.2	-14.7	29.5	43.5	14.0	99.8	137.5
4	101.526	V	42.2	-14.1	28.1	43.5	15.4	99.8	350.8
5	379.139	V	43.8	-10.8	33.0	46.0	13.0	99.8	71.7
6	902.465	V	111.0	-4.0	107.0	46.0	-61.0	99.8	93.2
7	902.465	H	108.6	-4.0	104.6	46.0	-58.6	99.8	338.2

Remark :

1. Result = Reading + c.f(Correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
3. This data is the peak(PK) value.
4. No.6 and No.7 are the carrier frequencies.
5. The Unwanted emission was measured in the following position: EUT stand-up position(X, Y axis), lie-down position(Z axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2019-01350
 Page (21) / (29) Pages

4) Field strength of outside of the specified frequency bands – 1 GHz to 12.75 GHz

The requirements are:

Complies

Test mode : Transmit, ANT-A

Test Frequency : Lowest(902.4 MHz)

Frequency [MHz]	Ant. Pol. (V/H)	Reading* [dBuV/m]	c.f [dB/m]	Duty cycle c.f[dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1 804.049	H	53.30	-4.40	-24.43	24.47	54.00	29.53	Harmonic
1 804.049	V	50.00	-4.40	-24.43	21.17	54.00	32.83	Harmonic
2 707.090	H	51.60	-3.60	-24.43	23.57	54.00	30.43	Harmonic
2 707.090	V	47.30	-3.60	-24.43	19.27	54.00	34.73	Harmonic
3 609.120	H	45.00	-0.60	-24.43	19.97	54.00	34.03	Harmonic
3 609.120	V	44.80	-0.60	-24.43	19.77	54.00	34.23	Harmonic

Test Frequency : Middle(915.2 MHz)

Frequency [MHz]	Ant. Pol. (V/H)	Reading* [dBuV/m]	c.f [dB/m]	Duty cycle c.f[dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1 830.312	H	48.80	-4.30	-24.43	20.07	54.00	33.93	Harmonic
1 830.312	V	46.80	-4.30	-24.43	18.07	54.00	35.93	Harmonic
2 745.474	H	51.10	-3.50	-24.43	23.17	54.00	30.83	Harmonic
2 745.474	V	52.20	-3.50	-24.43	24.27	54.00	29.73	Harmonic
3 660.636	H	44.50	-0.20	-24.43	19.87	54.00	34.13	Harmonic
3 660.636	V	44.60	-0.20	-24.43	19.97	54.00	34.03	Harmonic

Test Frequency : Highest(927.6 MHz)

Frequency [MHz]	Ant. Pol. (V/H)	Reading* [dBuV/m]	c.f [dB/m]	Duty cycle c.f[dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1 854.555	H	46.40	-4.20	-24.43	17.77	54.00	36.23	Harmonic
1 854.555	V	47.40	-4.20	-24.43	18.77	54.00	35.23	Harmonic
3 710.131	H	40.60	0.10	-24.43	16.27	54.00	37.73	Harmonic
3 710.131	V	42.10	0.10	-24.43	17.77	54.00	36.23	Harmonic



Test mode : Transmit, ANT-B
Test Frequency : Lowest(902.4 MHz)

Frequency [MHz]	Ant. Pol. (V/H)	Reading* [dBuV/m]	c.f [dB/m]	Duty cycle c.f[dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1804.049	H	51.40	-4.40	-24.43	22.57	54.00	31.43	Harmonic
1804.049	V	51.80	-4.40	-24.43	22.97	54.00	31.03	Harmonic
2707.090	H	59.80	-3.60	-24.43	31.77	54.00	22.23	Harmonic
2707.090	V	59.90	-3.60	-24.43	31.87	54.00	22.13	Harmonic
3609.120	H	45.80	-0.60	-24.43	20.77	54.00	33.23	Harmonic
3609.120	V	44.20	-0.60	-24.43	19.17	54.00	34.83	Harmonic

Test Frequency : Middle(915.2 MHz)

Frequency [MHz]	Ant. Pol. (V/H)	Reading* [dBuV/m]	c.f [dB/m]	Duty cycle c.f[dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1830.312	H	50.60	-4.30	-24.43	21.87	54.00	32.13	Harmonic
1830.312	V	50.80	-4.30	-24.43	22.07	54.00	31.93	Harmonic
2745.474	H	58.10	-3.50	-24.43	30.17	54.00	23.83	Harmonic
2745.474	V	59.90	-3.50	-24.43	31.97	54.00	22.03	Harmonic
3660.636	H	47.10	-0.20	-24.43	22.47	54.00	31.53	Harmonic
3660.636	V	45.60	-0.20	-24.43	20.97	54.00	33.03	Harmonic

Test Frequency : Highest(927.6 MHz)

Frequency [MHz]	Ant. Pol. (V/H)	Reading* [dBuV/m]	c.f [dB/m]	Duty cycle c.f[dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1854.555	H	49.20	-4.20	-24.43	20.57	54.00	33.43	Harmonic
1854.555	V	49.10	-4.20	-24.43	20.47	54.00	33.53	Harmonic
3710.131	H	43.80	0.10	-24.43	19.47	54.00	34.53	Harmonic
3710.131	V	41.00	0.10	-24.43	16.67	54.00	37.33	Harmonic
5565.708	H	44.50	3.80	-24.43	23.87	54.00	30.13	Harmonic
5565.708	V	41.30	3.80	-24.43	20.67	54.00	33.33	Harmonic

Remarks

1. Result = Reading + c.f(correction factor) + Duty cycle c.f
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
3. Duty cycle c.f = $20\log(\text{Duty cycle}) = 20\log(0.06) = -24.43 \text{ dB}$
4. The Unwanted emission was measured in the following position: EUT stand-up position(X, Y axis), lie-down position(Z axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.

* Reading data is the peak value.



4.3 AC Conducted Emissions

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits.

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average**
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* The level decreases linearly with the logarithm of the frequency.

** A linear average detector is required.

Test Results

The requirements are:

Complies


Test mode : Transmit, 5Vdc, ANT-A, low channel(Worst case)

Frequency [MHz]	Measured Data [dBuV]	Margin [dB]	Remark
0.78	42.2	3.8	Average

Test Data

[LINE]

Class B_L1

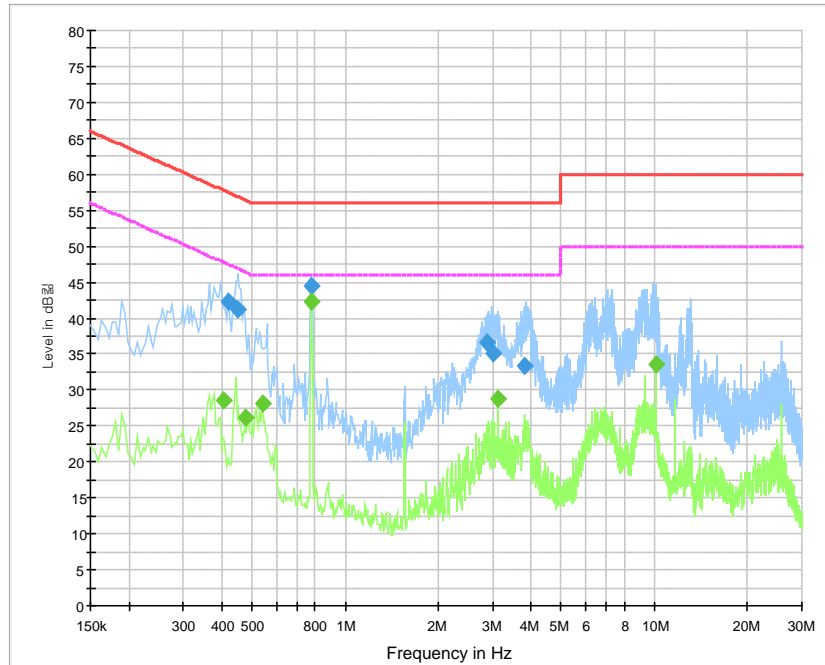

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.420000	42.2	1000.0	9.000	On	L1	10.1	15.2	57.4
0.447000	41.2	1000.0	9.000	On	L1	10.1	15.7	56.9
0.780000	44.5	1000.0	9.000	On	L1	10.1	11.5	56.0
2.886000	36.6	1000.0	9.000	On	L1	10.0	19.4	56.0
3.012000	35.1	1000.0	9.000	On	L1	10.0	20.9	56.0
3.804000	33.4	1000.0	9.000	On	L1	10.1	22.6	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.406500	28.6	1000.0	9.000	On	L1	10.1	19.1	47.7
0.478500	26.2	1000.0	9.000	On	L1	10.1	20.2	46.4
0.541500	28.2	1000.0	9.000	On	L1	10.2	17.8	46.0
0.780000	42.2	1000.0	9.000	On	L1	10.1	3.8	46.0
3.115500	28.9	1000.0	9.000	On	L1	10.0	17.1	46.0
10.122000	33.7	1000.0	9.000	On	L1	10.2	16.3	50.0

[NEUTRAL]

Class B_N

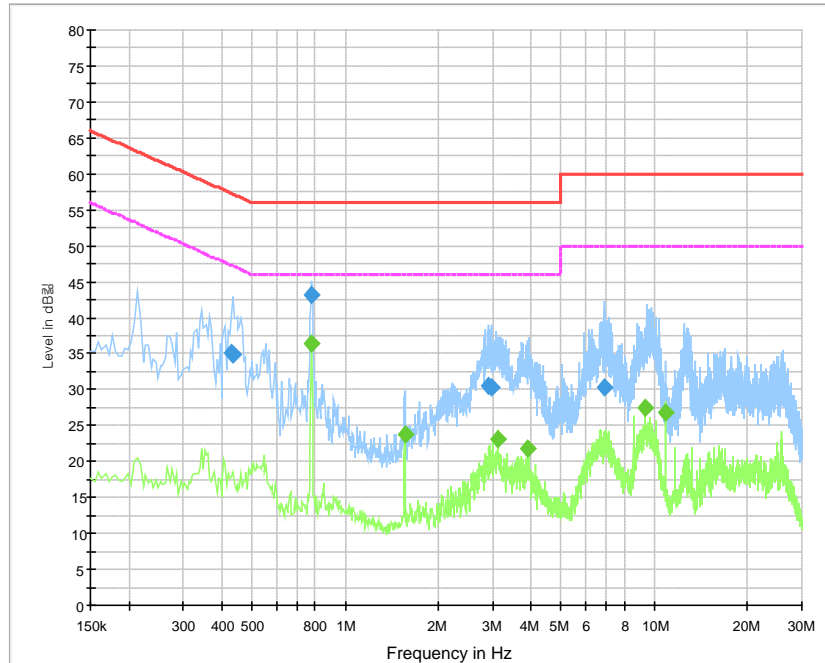

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.429000	35.0	1000.0	9.000	On	N	10.5	22.3	57.3
0.433500	34.8	1000.0	9.000	On	N	10.5	22.4	57.2
0.780000	43.1	1000.0	9.000	On	N	10.5	12.9	56.0
2.895000	30.4	1000.0	9.000	On	N	10.3	25.6	56.0
2.971500	30.3	1000.0	9.000	On	N	10.3	25.7	56.0
6.873000	30.3	1000.0	9.000	On	N	10.4	29.7	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.780000	36.5	1000.0	9.000	On	N	10.5	9.5	46.0
1.558500	23.7	1000.0	9.000	On	N	10.4	22.3	46.0
3.115500	23.2	1000.0	9.000	On	N	10.3	22.8	46.0
3.894000	21.8	1000.0	9.000	On	N	10.4	24.2	46.0
9.343500	27.4	1000.0	9.000	On	N	10.4	22.6	50.0
10.900500	26.8	1000.0	9.000	On	N	10.5	23.2	50.0




Test mode : Transmit, POE, ANT-B, low channel(Worst case)

Frequency [MHz]	Measured Data [dBuV]	Margin [dB]	Remark
0.78	42.6	3.4	Quasi-peak

Test Data

[LINE]
 Class B_L1

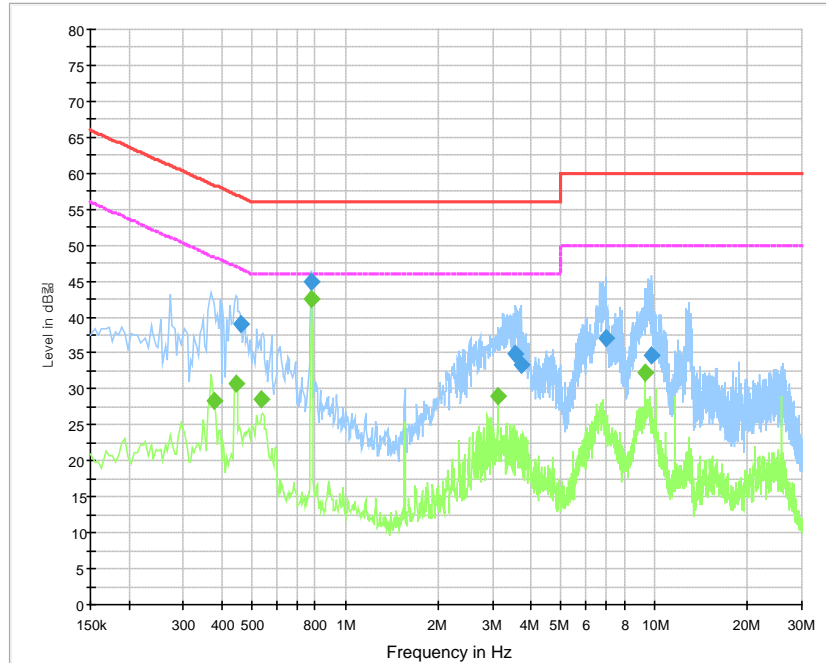

Final Result 1


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.460500	39.1	1000.0	9.000	On	L1	10.1	17.6	56.7
0.780000	45.0	1000.0	9.000	On	L1	10.1	11.0	56.0
3.561000	34.8	1000.0	9.000	On	L1	10.1	21.2	56.0
3.696000	33.3	1000.0	9.000	On	L1	10.1	22.7	56.0
6.945000	37.0	1000.0	9.000	On	L1	10.1	23.0	60.0
9.838500	34.7	1000.0	9.000	On	L1	10.2	25.3	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.375000	28.2	1000.0	9.000	On	L1	10.1	20.2	48.4
0.442500	30.7	1000.0	9.000	On	L1	10.1	16.3	47.0
0.537000	28.6	1000.0	9.000	On	L1	10.2	17.4	46.0
0.780000	42.6	1000.0	9.000	On	L1	10.1	3.4	46.0
3.115500	29.1	1000.0	9.000	On	L1	10.0	16.9	46.0
9.343500	32.3	1000.0	9.000	On	L1	10.1	17.7	50.0

[NEUTRAL]

Class B_N

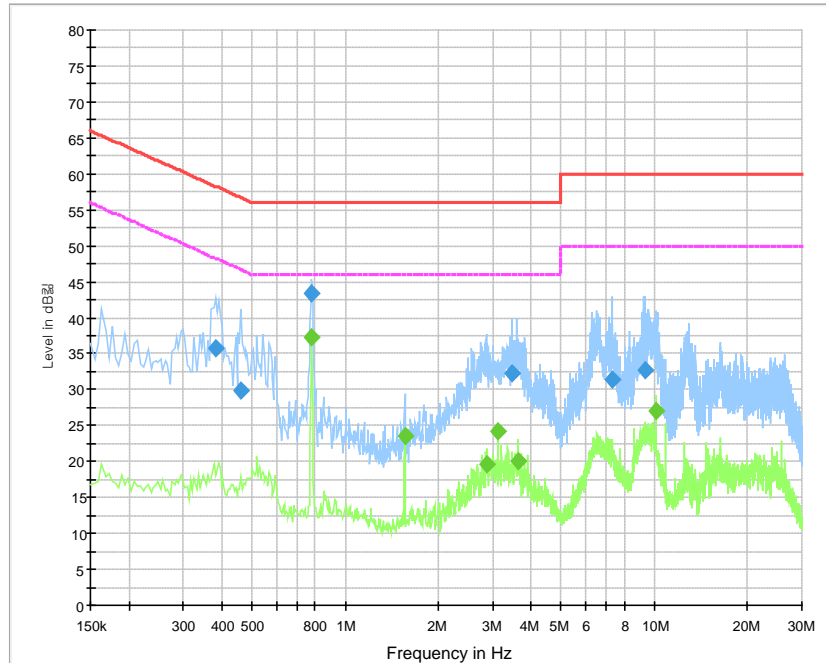

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.379500	35.7	1000.0	9.000	On	N	10.5	22.6	58.3
0.460500	29.8	1000.0	9.000	On	N	10.5	26.9	56.7
0.780000	43.5	1000.0	9.000	On	N	10.5	12.5	56.0
3.462000	32.2	1000.0	9.000	On	N	10.4	23.8	56.0
7.305000	31.5	1000.0	9.000	On	N	10.4	28.5	60.0
9.294000	32.8	1000.0	9.000	On	N	10.4	27.2	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.780000	37.3	1000.0	9.000	On	N	10.5	8.7	46.0
1.558500	23.5	1000.0	9.000	On	N	10.4	22.5	46.0
2.877000	19.5	1000.0	9.000	On	N	10.3	26.5	46.0
3.115500	24.2	1000.0	9.000	On	N	10.3	21.8	46.0
3.642000	20.1	1000.0	9.000	On	N	10.4	25.9	46.0
10.126500	26.9	1000.0	9.000	On	N	10.5	23.1	50.0



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2019-01350
 Page (28) / (29) Pages

APPENDIX A – Test Equipment Used For Tests

No.	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	Signal Analyzer	R&S	FSV30	100925	2019-01-21	2020-01-21
2	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2018-10-25	2019-10-25
3	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-126	2019-01-17	2021-01-17
4	Bilog Antenna	Schaffner	CBL6111C	2551	2017-04-19	2019-04-19
5	AMPLIFIER	SONOMA	310	291721	2019-01-28	2020-01-28
6	6dB Attenuator	R&S	DNF	272.4110.50-2	2018-10-25	2019-10-25
7	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2019-01-29	2020-01-29
8	Horn Antenna	ETS-Lindgren	3117	00154525	2019-02-22	2021-02-22
9	Preamplifier	Agilent	8449B	3008A02011	2018-12-03	2019-12-03
10	Band Reject Filter	Wainwright Instruments GmbH	WRCG902/930-894/938-50/12SS	SN1	2019-01-21	2020-01-21

No.	Name of Equipment	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable (conducted)	Junkosha Inc.	MWX221	1510S087	2019-02-02
2	RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2019-02-02
3	RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 104	N/A (below 1GHz)	2019-02-02
4	RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27573/4	2018-11-30
5	RF Cable (Radiated)	HUBER+SUHNER	SUCOFLEX 106	N/A (above 1GHz)	2018-11-30



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2019-01350
Page (29) / (29) Pages

APPENDIX B – EUT Photographs

