

TEST REPORT

Product Name : Car Multimedia Player
Brand Mark : Dual
Model No. : DV712
Extension model : XDVD176BT, DV715B, XDVD600,
XDVD156BT, DV517BT, DV171BT,
DV171B, AV7118Bi
FCC ID : 2AFXA-DV712
Report Number : BLA-EMC-202202-A4502
Date of Sample Receipt : 2022/3/4
Date of Test : 2022/3/4 to 2022/6/15
Date of Issue : 2022/6/15
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

FengShun Peiying Electro-Acoustic Co., Ltd
No.8, Fengda Road, Tangkeng Town Ind. Area, Fengshun
County, Guangdong, China

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

Jozu
Blue Zhong

Approved by:

Review by:

Sueals

Date:

2022/6/15



REPORT REVISE RECORD

Version No.	Date	Description
00	2022/6/15	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	5
2	GENERAL INFORMATION	6
3	GENERAL DESCRIPTION OF E.U.T.	6
4	TEST ENVIRONMENT	7
5	TEST MODE	7
6	MEASUREMENT UNCERTAINTY	7
7	DESCRIPTION OF SUPPORT UNIT	8
8	LABORATORY LOCATION	8
9	TEST INSTRUMENTS LIST	9
10	ANTENNA REQUIREMENT	13
10.1	CONCLUSION	13
11	CONDUCTED SPURIOUS EMISSIONS	14
11.1	LIMITS	14
11.2	BLOCK DIAGRAM OF TEST SETUP	14
11.3	TEST DATA	15
12	20DB BANDWIDTH	16
12.1	BLOCK DIAGRAM OF TEST SETUP	16
12.2	TEST DATA	16
13	CONDUCTED PEAK OUTPUT POWER	17
13.1	LIMITS	17
13.2	BLOCK DIAGRAM OF TEST SETUP	17
13.3	TEST DATA	18
14	RADIATED SPURIOUS EMISSIONS	19
14.1	LIMITS	19
14.2	BLOCK DIAGRAM OF TEST SETUP	20
14.3	PROCEDURE	20
14.4	TEST DATA	22
15	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	30
15.1	LIMITS	30

15.2	BLOCK DIAGRAM OF TEST SETUP	31
15.3	PROCEDURE	31
15.4	TEST DATA	33
16	CONDUCTED BAND EDGES MEASUREMENT	37
16.1	LIMITS	37
16.2	BLOCK DIAGRAM OF TEST SETUP	37
16.3	TEST DATA	38
17	DWELL TIME	39
17.1	LIMITS	39
17.2	BLOCK DIAGRAM OF TEST SETUP	39
17.3	TEST DATA	40
18	HOPPING CHANNEL NUMBER	41
18.1	LIMITS	41
18.2	BLOCK DIAGRAM OF TEST SETUP	41
18.3	TEST DATA	41
19	CARRIER FREQUENCIES SEPARATION	42
19.1	LIMITS	42
19.2	BLOCK DIAGRAM OF TEST SETUP	42
19.3	TEST DATA	42
20	APPENDIX	43
	APPENDIX A: PHOTOGRAPHS OF TEST SETUP	75
	APPENDIX B: PHOTOGRAPHS OF EUT	76

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	N/A
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass

2 GENERAL INFORMATION

Applicant	FengShun Peiyong Electro-Acoustic Co., Ltd
Address	No.8, Fengda Road, Tangkeng Town Ind. Area, Fengshun County, Guangdong, China
Manufacturer	FengShun Peiyong Electro-Acoustic Co., Ltd
Address	No.8, Fengda Road, Tangkeng Town Ind. Area, Fengshun County, Guangdong, China
Factory	FengShun Peiyong Electro-Acoustic Co., Ltd
Address	No.8, Fengda Road, Tangkeng Town Ind. Area, Fengshun County, Guangdong, China
Product Name	Car Multimedia Player
Test Model No.	DV712
Extension model	XDVD176BT, DV715B, XDVD600, XDVD156BT, DV517BT, DV171BT, DV171B, AV7118Bi
Note	All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are model name for commercial purpose.

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V02
Software Version	V712H.8201.13R
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK, pi/4DQPSK
Channel Spacing:	1MHz
Number of Channels:	79
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi(Provided by the applicant)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC12V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation. (hopping and non hopping mode all have been tested, non hopping mode is worse case for RE)
Remark: Full battery is used during all test except ac conducted emission, DH1, DH3, DH5 all have been tested, during the test, GFSK, Pi/4QPSK modulation were all pre-scanned only GFSK worse case is reported.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
N/A	N/A	N/A	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province,
China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Conducted Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of 20dB Bandwidth					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Conducted Peak Output Power					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

Test Equipment Of Radiated Emissions which fall in the restricted bands

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

Test Equipment Of Conducted Band Edges Measurement

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
-----------	--------------	-------	-----	----------	---------

Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Dwell Time					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Hopping Channel Number					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Carrier Frequencies Separation					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022

Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022
------------------	---------	--------	------------	-----------	-----------

BlueAsia

10 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


10.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

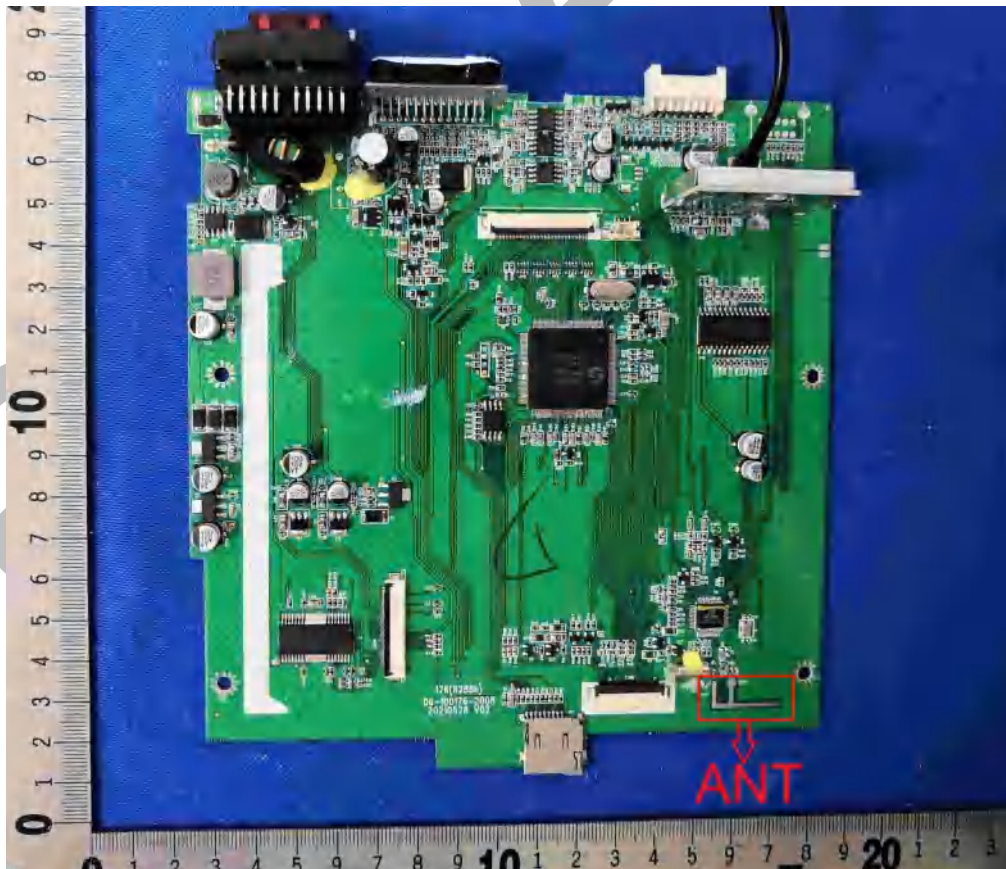


11 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

11.1 LIMITS

Limit:	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

11.2 BLOCK DIAGRAM OF TEST SETUP

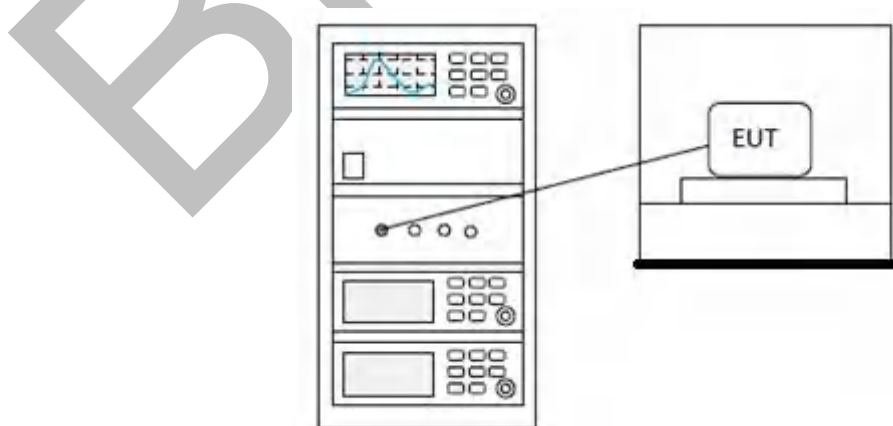

11.3 TEST DATA


Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

12 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

12.1 BLOCK DIAGRAM OF TEST SETUP

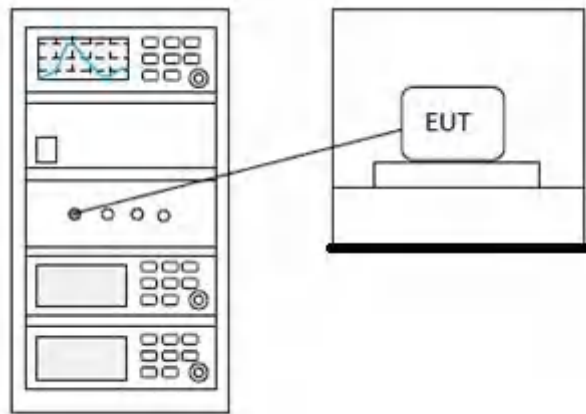

12.2 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


13 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

13.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

13.2 BLOCK DIAGRAM OF TEST SETUP

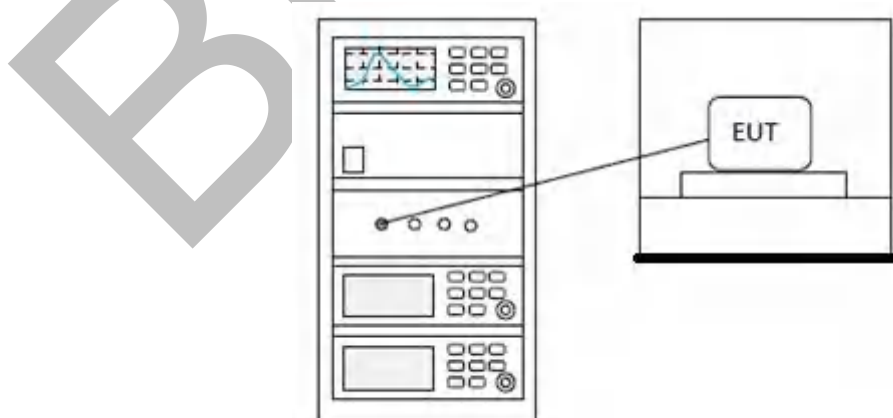

13.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

14 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

14.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

14.2 BLOCK DIAGRAM OF TEST SETUP

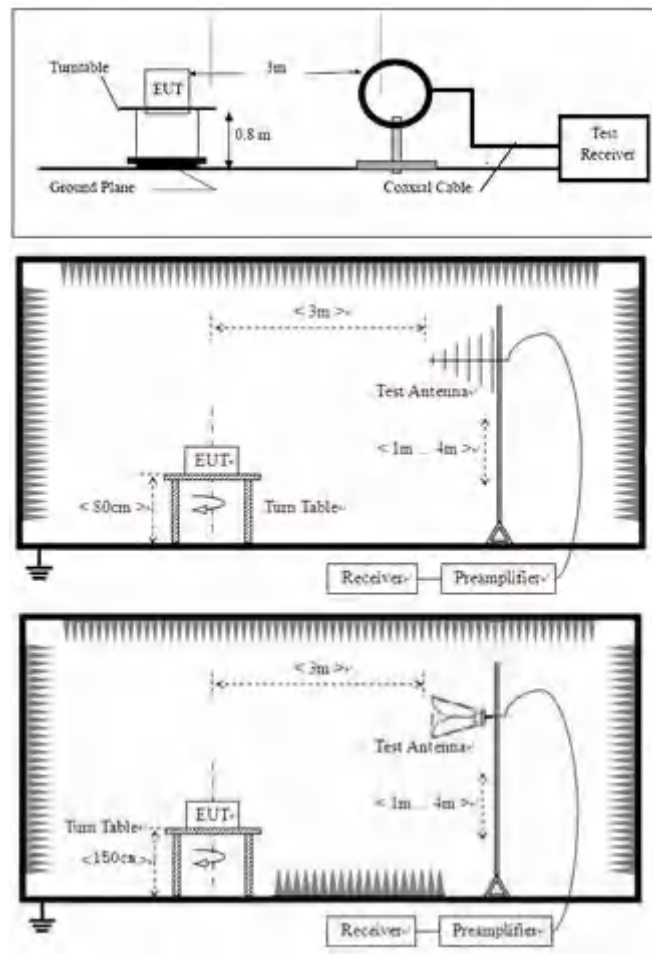

14.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

14.4 TEST DATA

[TestMode: TX below 1G]; [Polarity: Vertical]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202202-A45
EUT: Car Multimedia Player	Test Engineer: Charlie
M/N: DV712	Temperature:
S/N:	Humidity:
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2022-06-11 11:36:43

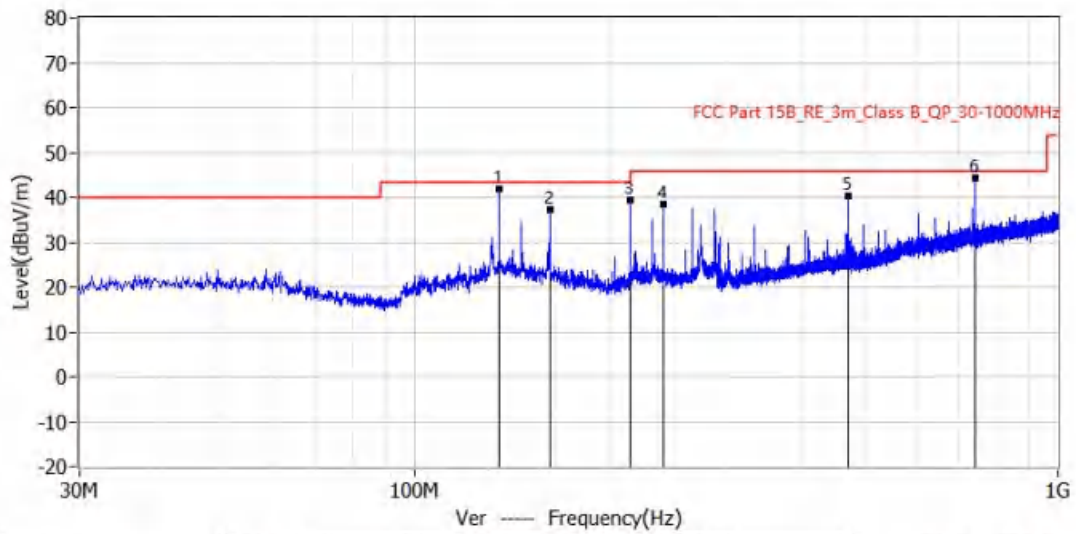


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	135.003MHz	43.5	41.7	-1.8	18.2	23.5	QP	Ver	100.0	0.0
2*	161.920MHz	43.5	37.3	-6.2	14.2	23.1	QP	Ver	100.0	75.0
3*	215.998MHz	43.5	39.3	-4.2	17.8	21.5	QP	Ver	100.0	64.0
4*	242.915MHz	46.0	38.5	-7.5	15.7	22.8	QP	Ver	100.0	27.0
5*	472.441MHz	46.0	40.4	-5.6	12.3	28.1	QP	Ver	100.0	189.0
6*	742.465MHz	46.0	44.2	-1.8	11.3	32.9	QP	Ver	100.0	349.0

Test Result: Pass

[TestMode: TX below 1G]; [Polarity: Horizontal]


Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202202-A45
EUT: Car Multimedia Player	Test Engineer: Charlie
M/N: DV712	Temperature:
S/N:	Humidity:
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2022-06-11 11:38:24

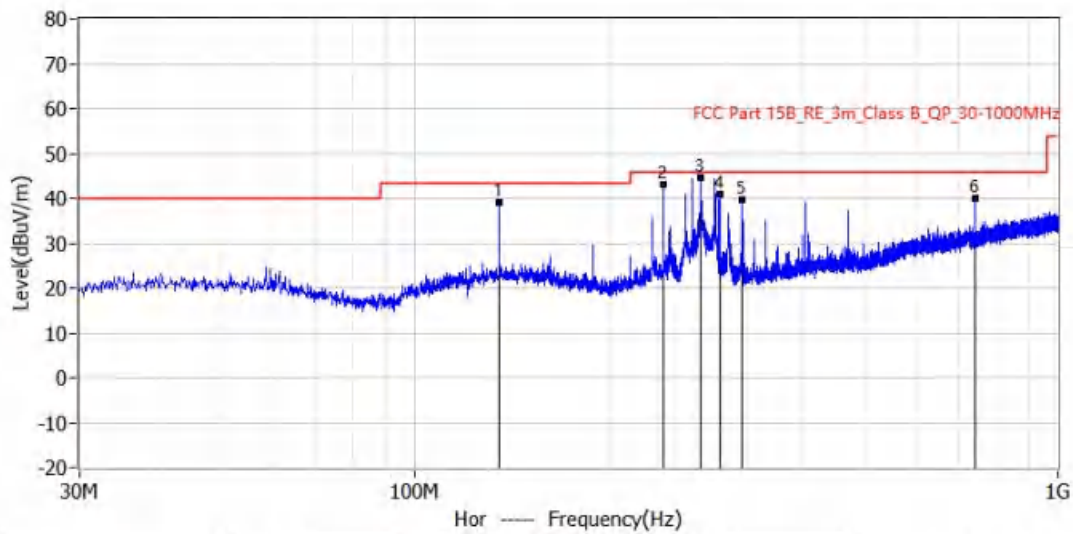

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	135.003MHz	43.5	39.0	-4.5	15.5	23.5	QP	Hor	100.0	136.0
2*	242.915MHz	46.0	43.1	-2.9	20.3	22.8	QP	Hor	100.0	75.0
3*	277.835MHz	46.0	44.7	-1.3	21.2	23.5	QP	Hor	100.0	247.0
4*	296.993MHz	46.0	41.0	-5.0	17.0	24.0	QP	Hor	100.0	185.0
5*	321.728MHz	46.0	39.7	-6.3	14.9	24.8	QP	Hor	100.0	69.0
6*	742.465MHz	46.0	40.1	-5.9	7.2	32.9	QP	Hor	100.0	27.0

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

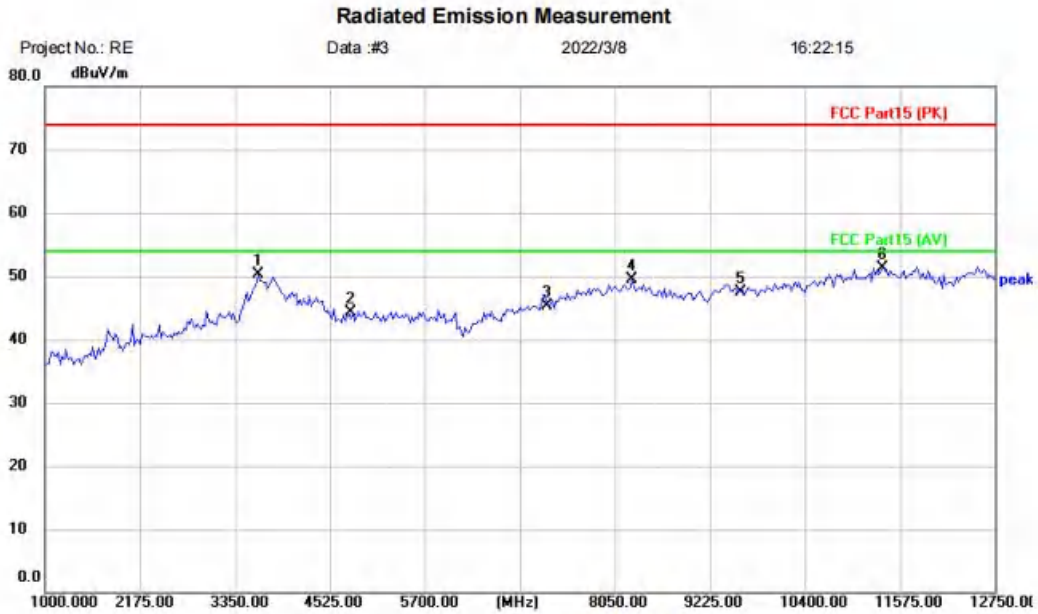

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Car Multimedia Player
 M/N: DV712
 Mode: TX-L
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3632.000	42.56	7.77	50.33	74.00	-23.67	peak	
2		4804.000	40.65	3.71	44.36	74.00	-29.64	peak	
3		7206.000	39.44	5.96	45.40	74.00	-28.60	peak	
4		8261.500	41.21	8.23	49.44	74.00	-24.56	peak	
5		9608.000	38.19	9.29	47.48	74.00	-26.52	peak	
6	*	11363.500	39.49	11.81	51.30	74.00	-22.70	peak	


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

Above 1GHz:

[TestMode: TX low channel]; [Polarity: Horizontal]

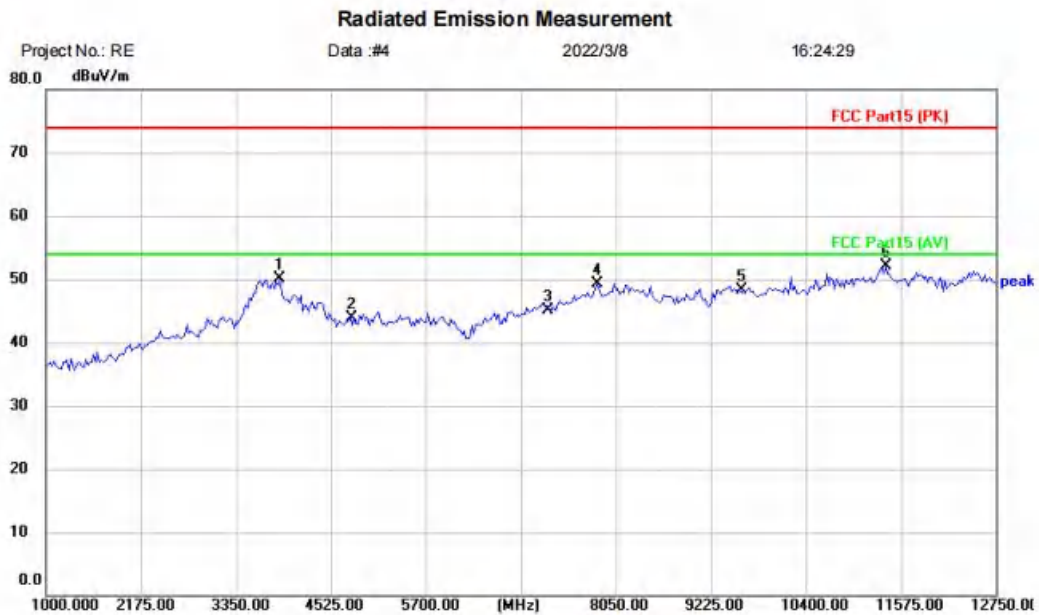

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Car Multimedia Player
 M/N: DV712
 Mode: TX-L
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3890.500	43.64	6.53	50.17	74.00	-23.83	peak	
2		4804.000	40.23	3.71	43.94	74.00	-30.06	peak	
3		7206.000	39.08	5.96	45.04	74.00	-28.96	peak	
4		7815.000	41.56	7.72	49.28	74.00	-24.72	peak	
5		9608.000	39.07	9.29	48.36	74.00	-25.64	peak	
6	*	11387.000	40.27	11.78	52.05	74.00	-21.95	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX mid channel]; [Polarity: Horizontal]

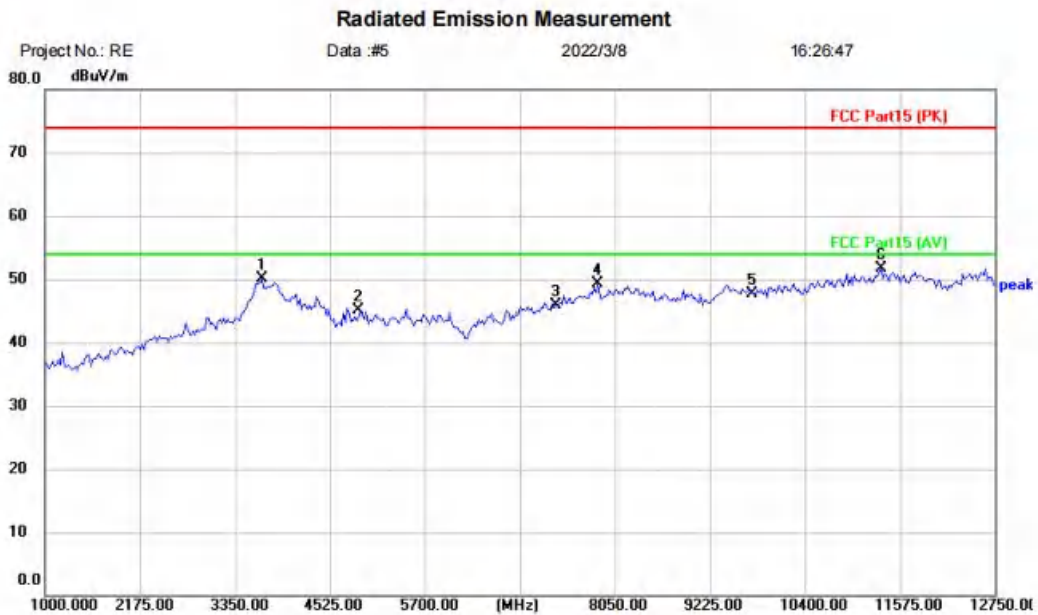

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Car Multimedia Player
 M/N: DV712
 Mode: TX-M
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3679.000	42.46	7.73	50.19	74.00	-23.81	peak	
2		4882.000	41.76	3.36	45.12	74.00	-28.88	peak	
3		7323.000	39.44	6.43	45.87	74.00	-28.13	peak	
4		7838.500	41.64	7.75	49.39	74.00	-24.61	peak	
5		9764.000	38.05	9.63	47.68	74.00	-26.32	peak	
6	*	11340.000	39.84	11.85	51.69	74.00	-22.31	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX mid channel]; [Polarity: Vertical]

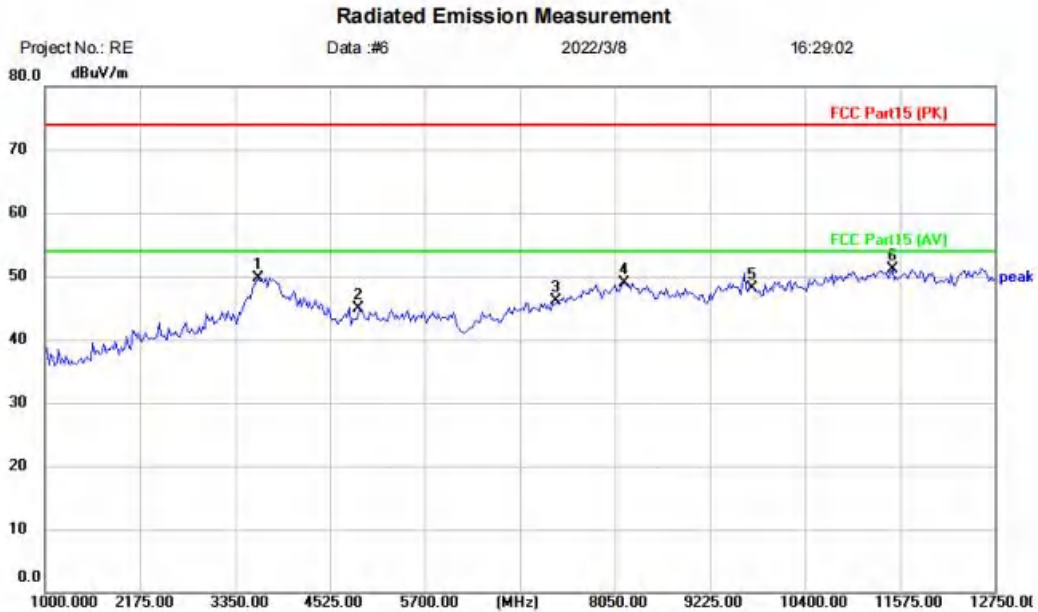

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Car Multimedia Player
 M/N: DV712
 Mode: TX-M
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3632.000	42.01	7.77	49.78	74.00	-24.22	peak	
2		4882.000	41.52	3.36	44.88	74.00	-29.12	peak	
3		7323.000	39.62	6.43	46.05	74.00	-27.95	peak	
4		8167.500	40.77	8.17	48.94	74.00	-25.06	peak	
5		9764.000	38.55	9.63	48.18	74.00	-25.82	peak	
6	*	11481.000	39.17	11.88	51.05	74.00	-22.95	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

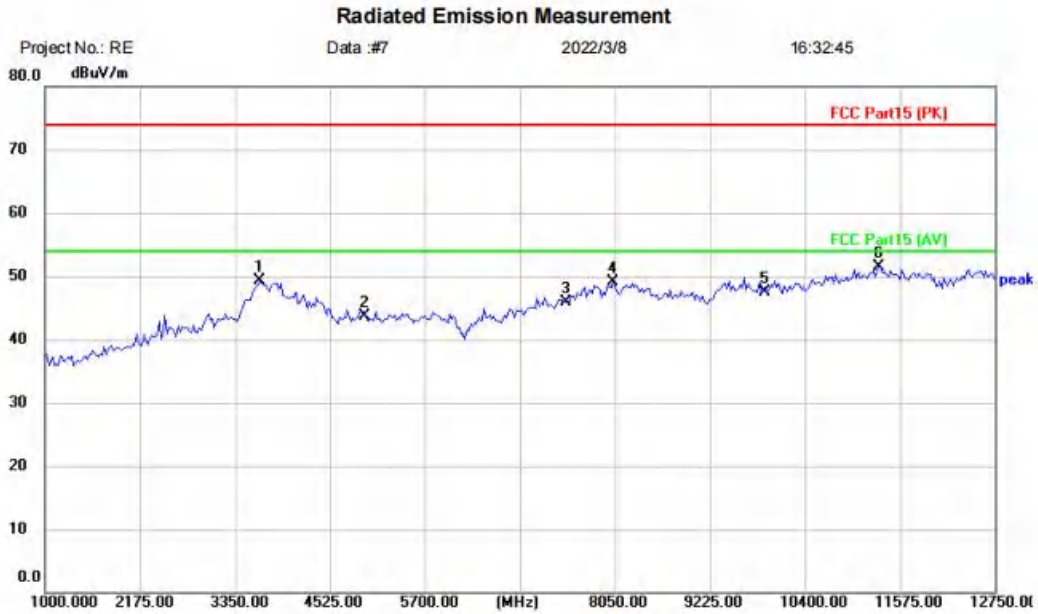

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Car Multimedia Player
 M/N: DV712
 Mode: TX-H
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3655.500	41.51	7.76	49.27	74.00	-24.73	peak	
2		4960.000	40.05	3.75	43.80	74.00	-30.20	peak	
3		7440.000	39.11	6.86	45.97	74.00	-28.03	peak	
4		8026.500	41.11	7.98	49.09	74.00	-24.91	peak	
5		9920.000	37.40	10.16	47.56	74.00	-26.44	peak	
6	*	11316.500	39.65	11.88	51.53	74.00	-22.47	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

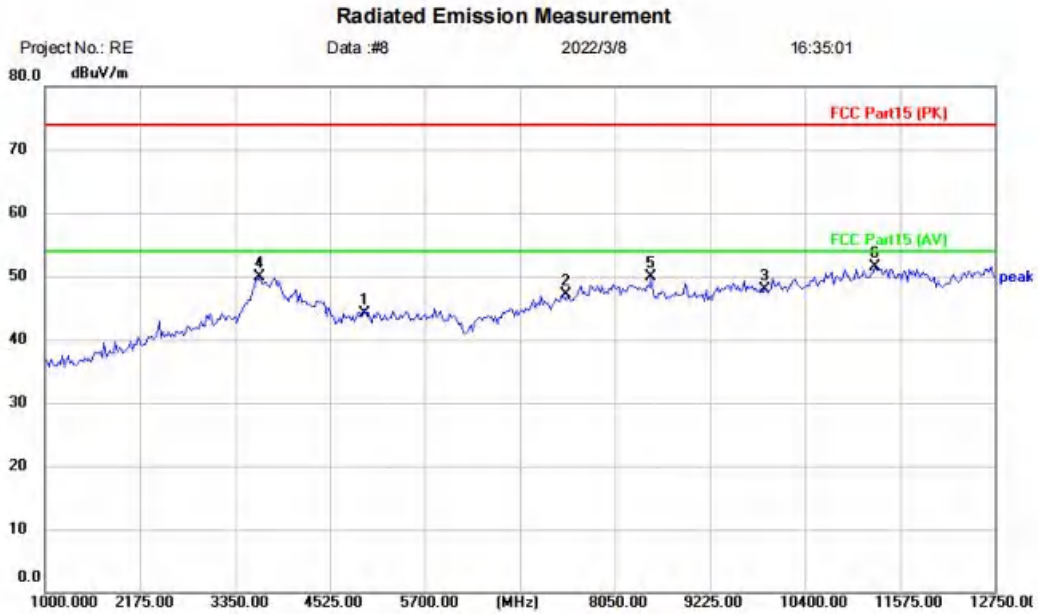

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Car Multimedia Player
 M/N: DV712
 Mode: TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	40.32	3.75	44.07	74.00	-29.93	peak	
2		7440.000	40.20	6.86	47.06	74.00	-26.94	peak	
3		9920.000	37.82	10.16	47.98	74.00	-26.02	peak	
4		3655.500	42.21	7.76	49.97	74.00	-24.03	peak	
5		8496.500	41.82	8.14	49.96	74.00	-24.04	peak	
6	*	11269.500	39.65	11.94	51.59	74.00	-22.41	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

15 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

15.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

15.2 BLOCK DIAGRAM OF TEST SETUP

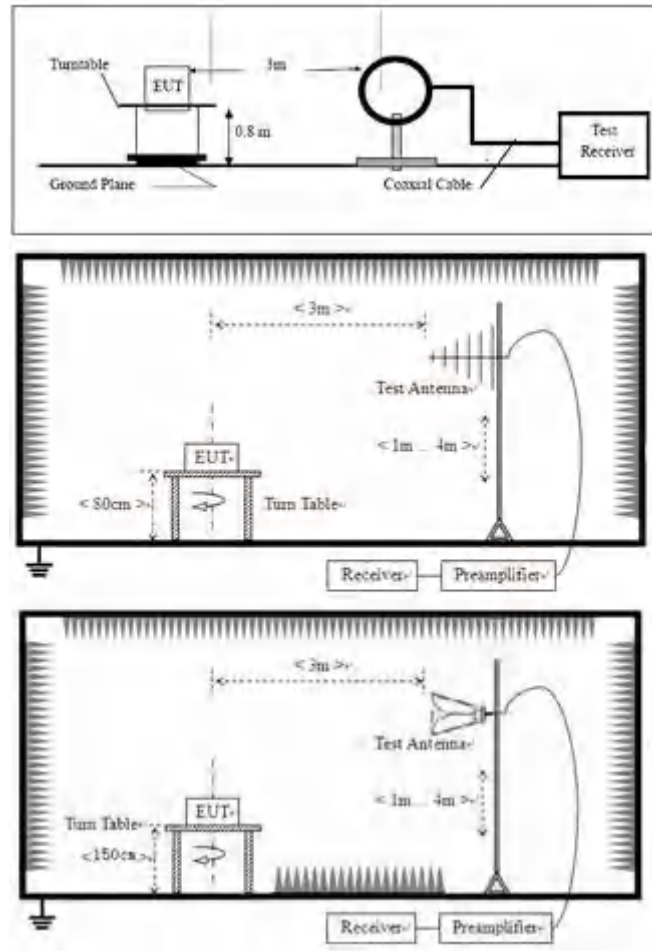

15.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

15.4 TEST DATA

[TestMode: TX low chanel]; [Polarity: Vertical]

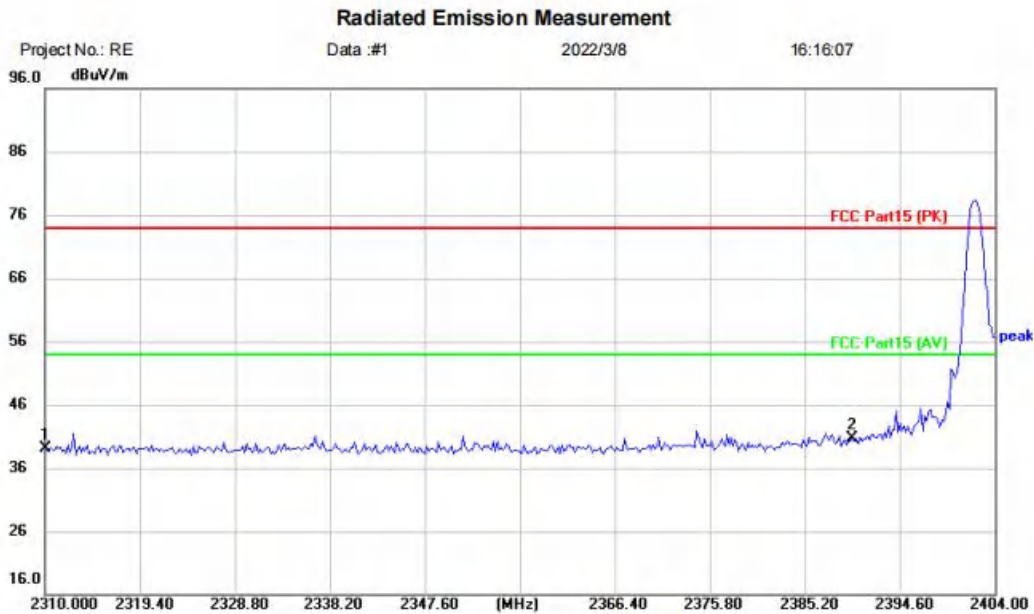

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Car Multimedia Player		
M/N: DV712		
Mode: TX-L		
Note:		


No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level dBuV	Factor dB/m	ment dBuV/m				
1		2310.000	43.03	-3.93	39.10	74.00	-34.90	peak	
2	*	2390.000	44.33	-3.58	40.75	74.00	-33.25	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Horizontal]

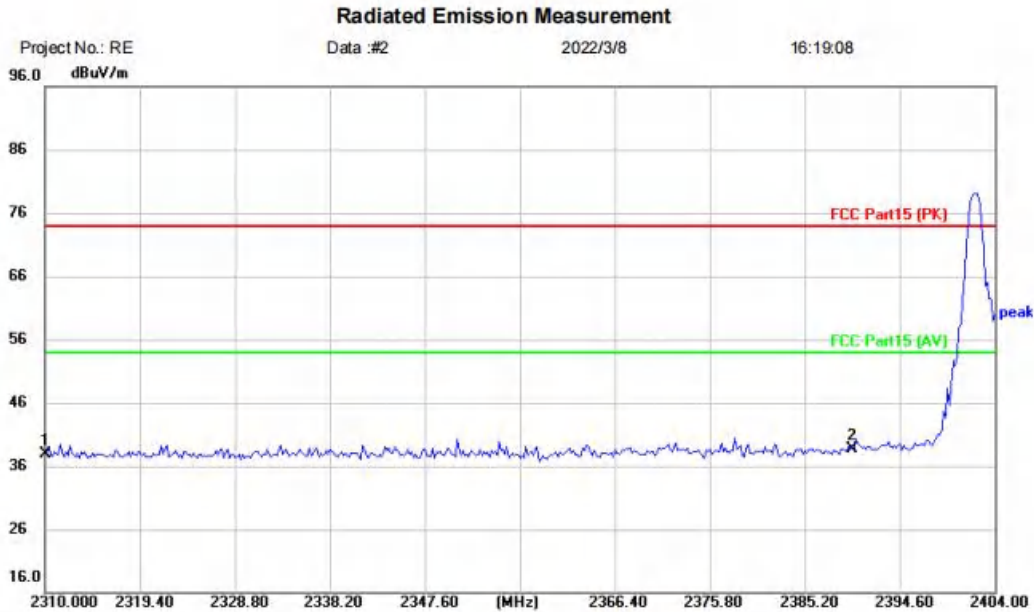

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Car Multimedia Player		
M/N: DV712		
Mode: TX-L		
Note:		


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	41.78	-3.93	37.85	74.00	-36.15	peak	
2	*	2390.000	42.31	-3.58	38.73	74.00	-35.27	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

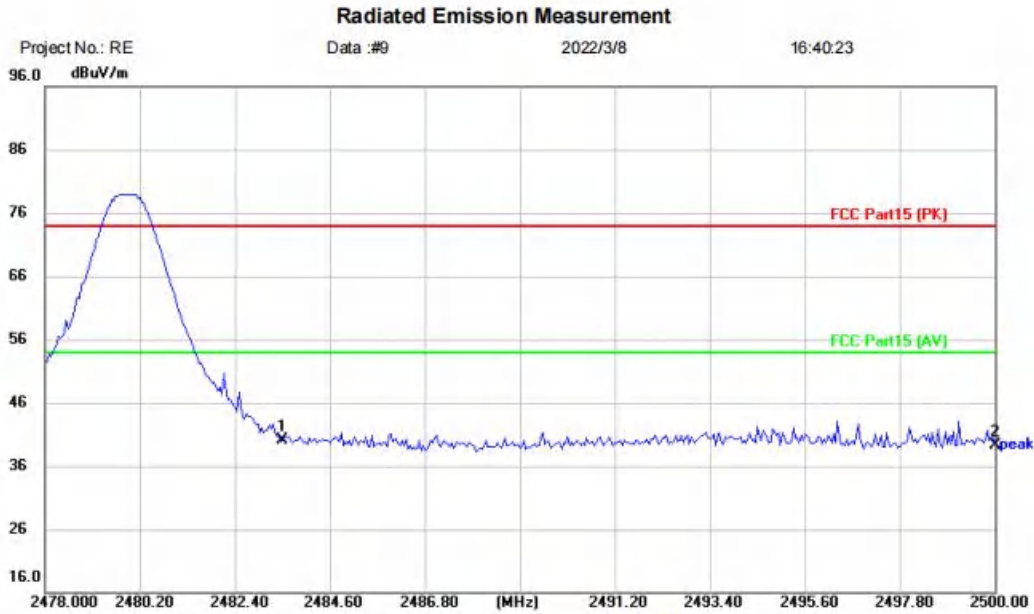

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Car Multimedia Player
 M/N: DV712
 Mode: TX-H
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	43.22	-3.14	40.08	74.00	-33.92	peak	
2		2500.000	42.44	-3.08	39.36	74.00	-34.64	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

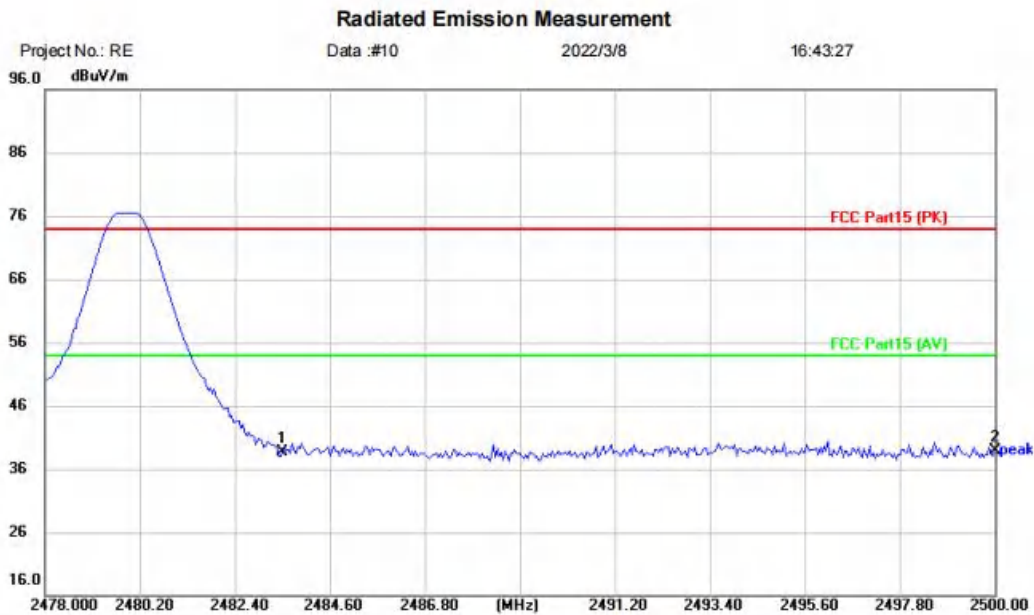

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Car Multimedia Player		
M/N: DV712		
Mode: TX-H		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	41.79	-3.14	38.65	74.00	-35.35	peak	
2	*	2500.000	41.96	-3.08	38.88	74.00	-35.12	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass


16 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

16.1 LIMITS

Limit:	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

16.2 BLOCK DIAGRAM OF TEST SETUP

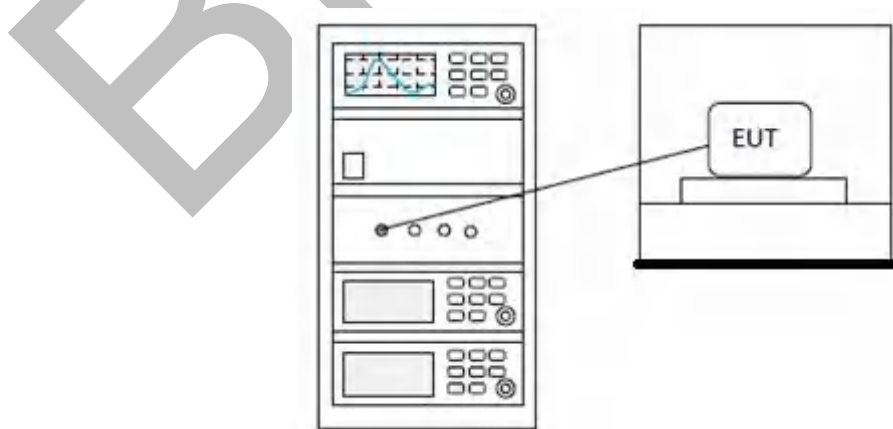

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


17 DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

17.1 LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

17.2 BLOCK DIAGRAM OF TEST SETUP

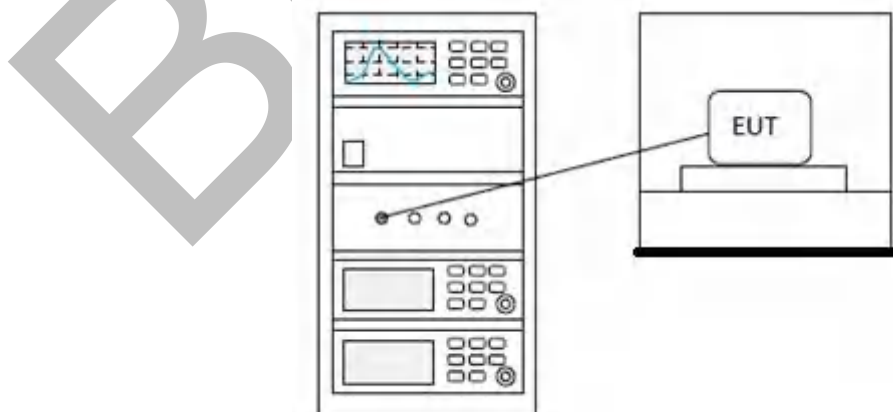

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


18 HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

18.1 LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

18.2 BLOCK DIAGRAM OF TEST SETUP

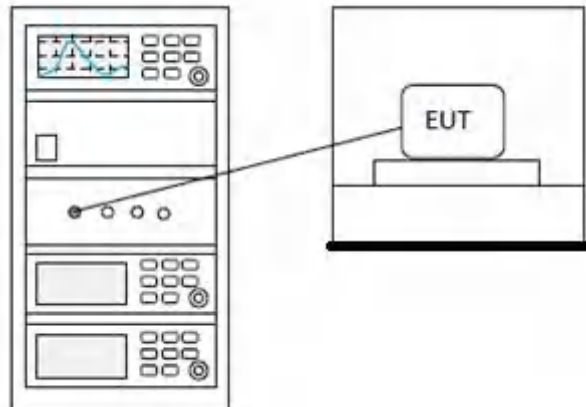

18.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


19 CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

19.1 LIMITS

Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

19.2 BLOCK DIAGRAM OF TEST SETUP

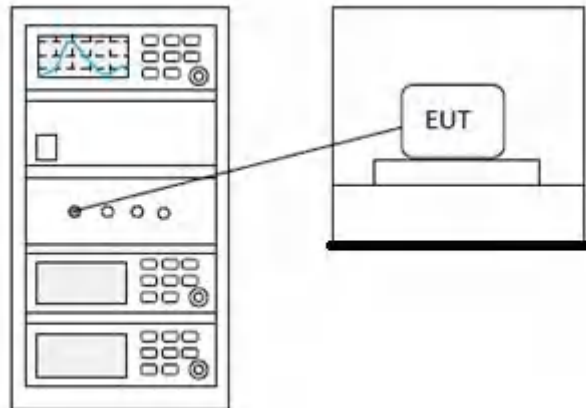

19.3 TEST DATA


Pass: Please Refer To Appendix: Appendix1 For Details

20 APPENDIX


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-3.618	21	Pass
NVNT	1-DH1	2441	Ant1	-3.083	21	Pass
NVNT	1-DH1	2480	Ant1	-3.931	21	Pass
NVNT	2-DH1	2402	Ant1	-2.447	21	Pass
NVNT	2-DH1	2441	Ant1	-1.876	21	Pass
NVNT	2-DH1	2480	Ant1	-2.762	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

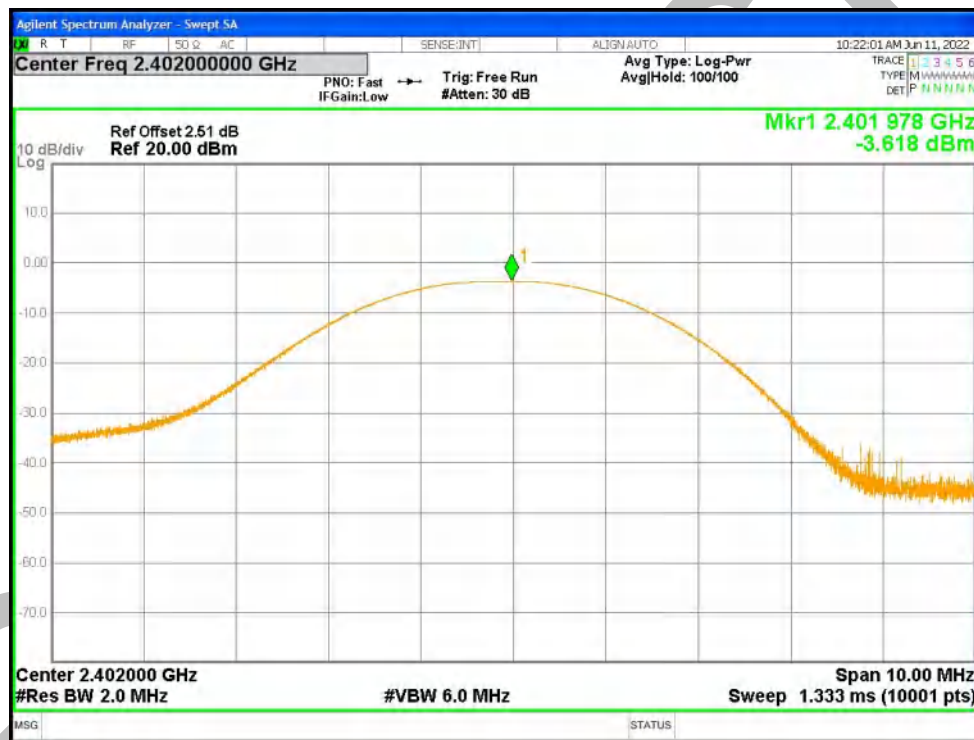


Power NVNT 1-DH1 2441MHz Ant1

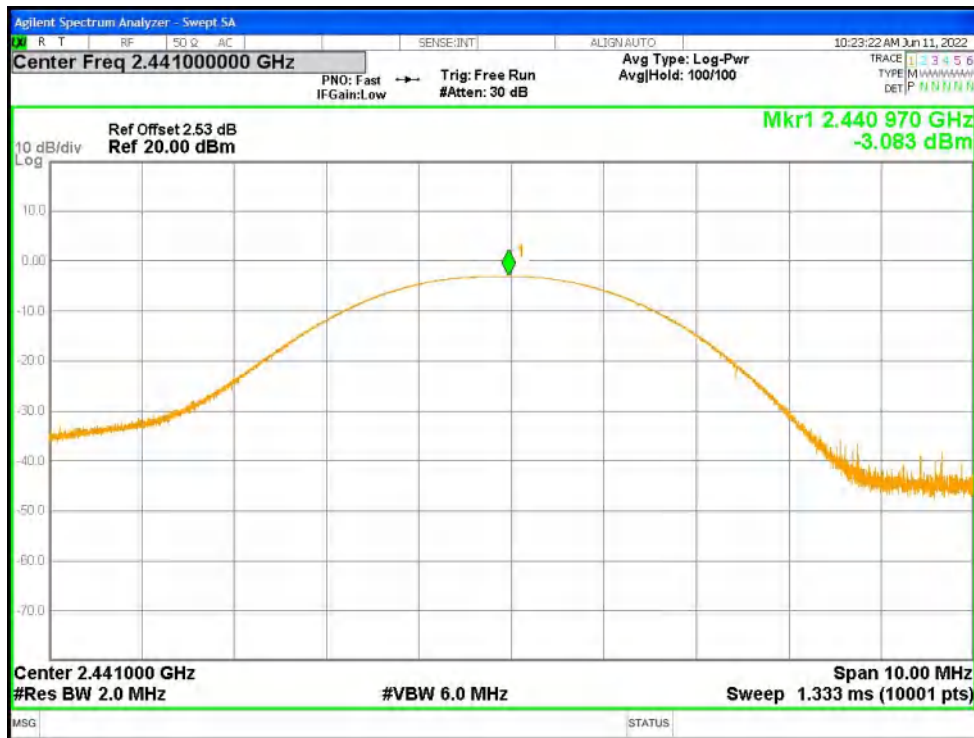


Power NVNT 1-DH1 2480MHz Ant1

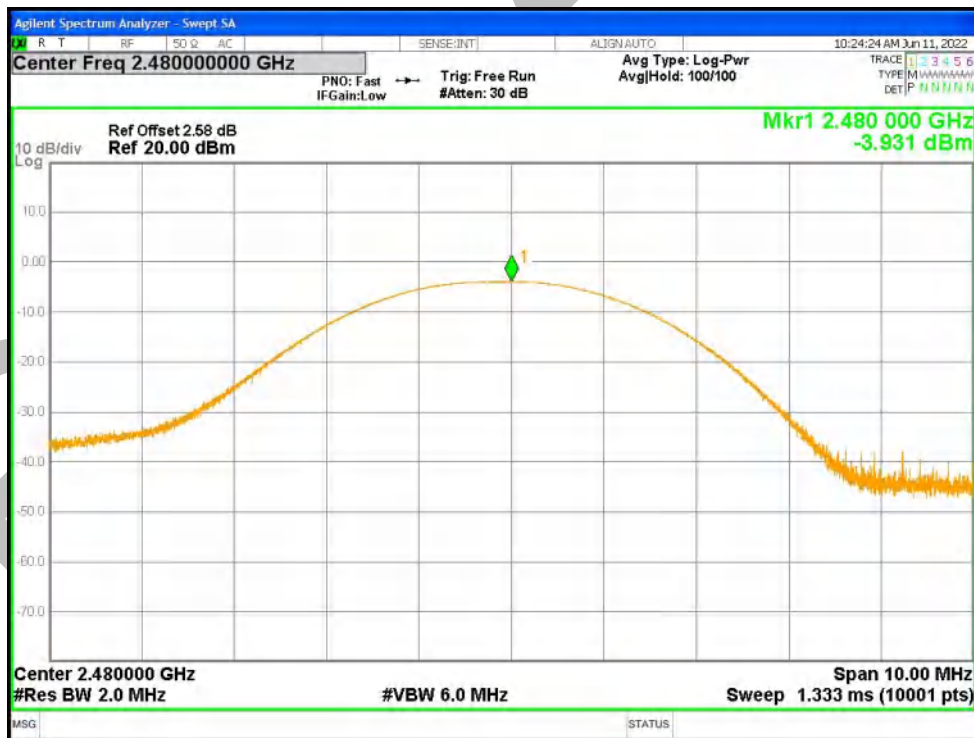


Power NVNT 2-DH1 2402MHz Ant1

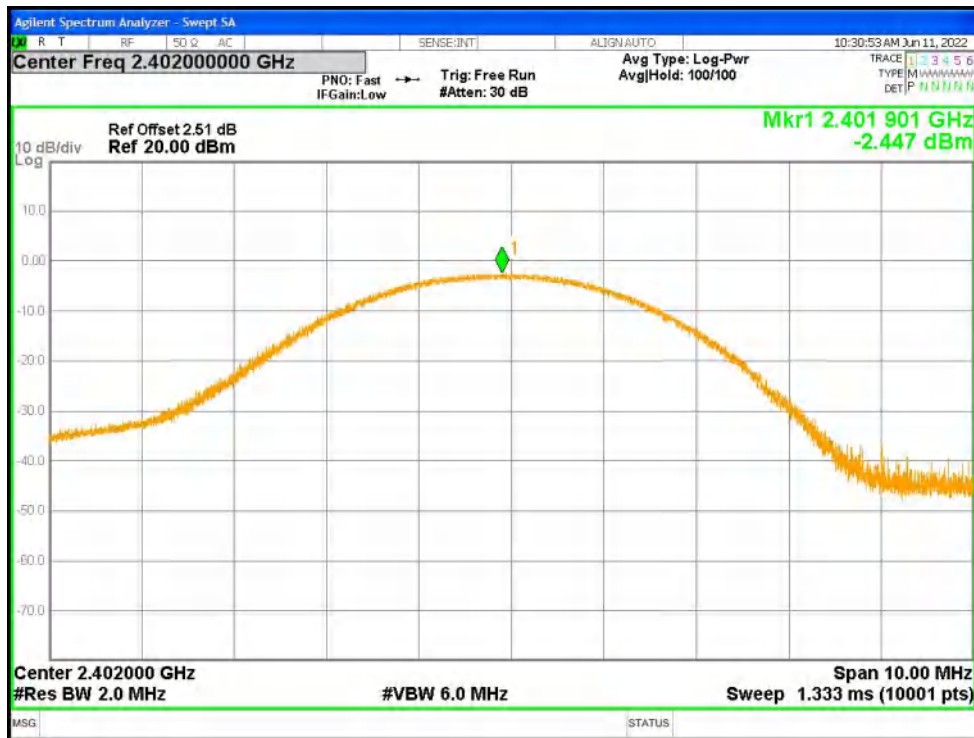

Power NVNT 2-DH1 2441MHz Ant1

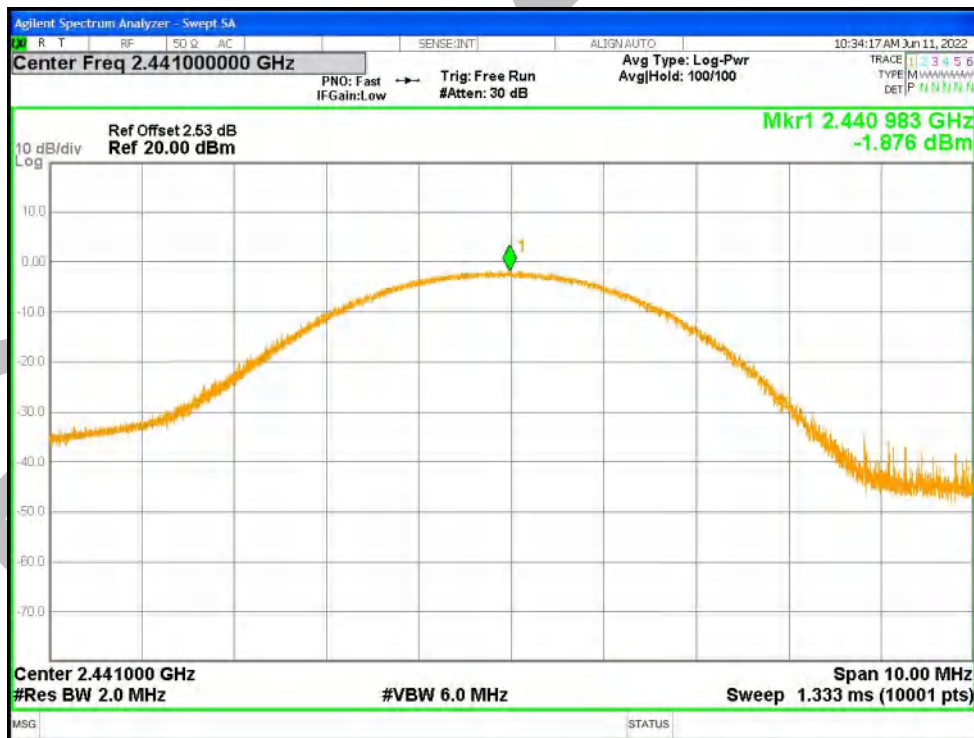

Power NVNT 2-DH1 2480MHz Ant1

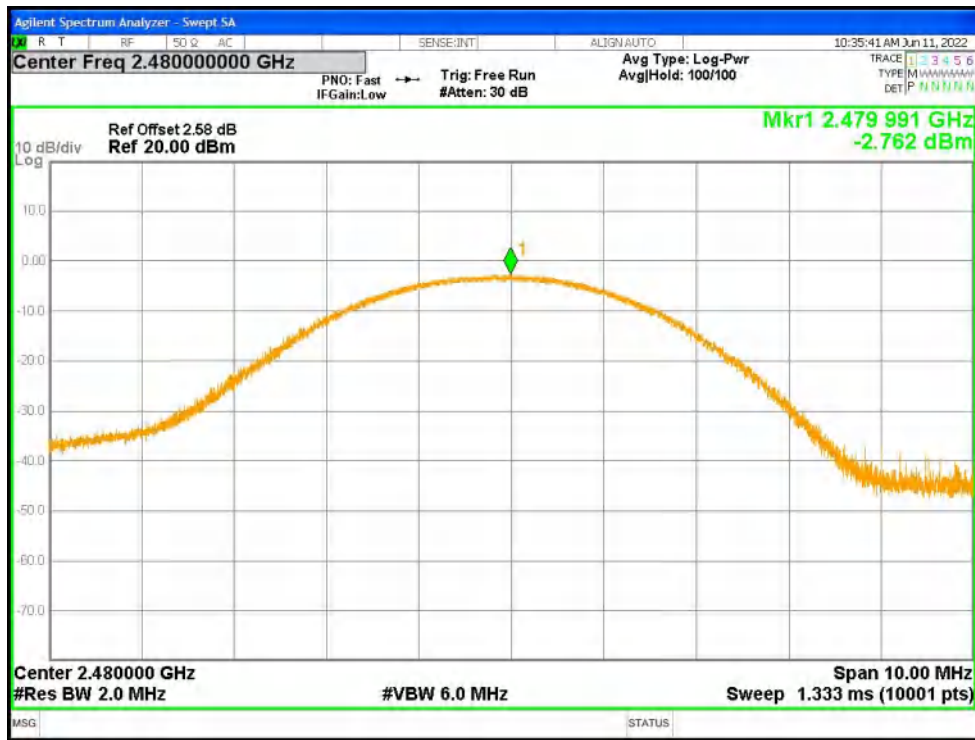


BlueAsia


-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	0.769	0	Pass
NVNT	1-DH1	2441	Ant1	0.837	0	Pass
NVNT	1-DH1	2480	Ant1	0.856	0	Pass
NVNT	2-DH1	2402	Ant1	1.172	0	Pass
NVNT	2-DH1	2441	Ant1	1.192	0	Pass
NVNT	2-DH1	2480	Ant1	1.19	0	Pass


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

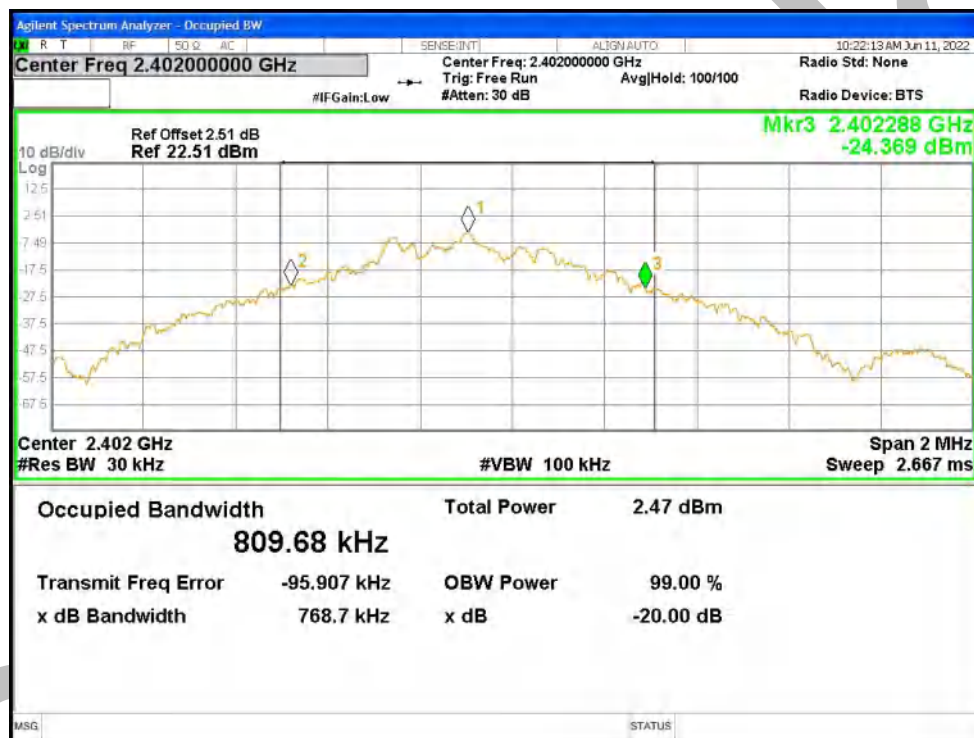


-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

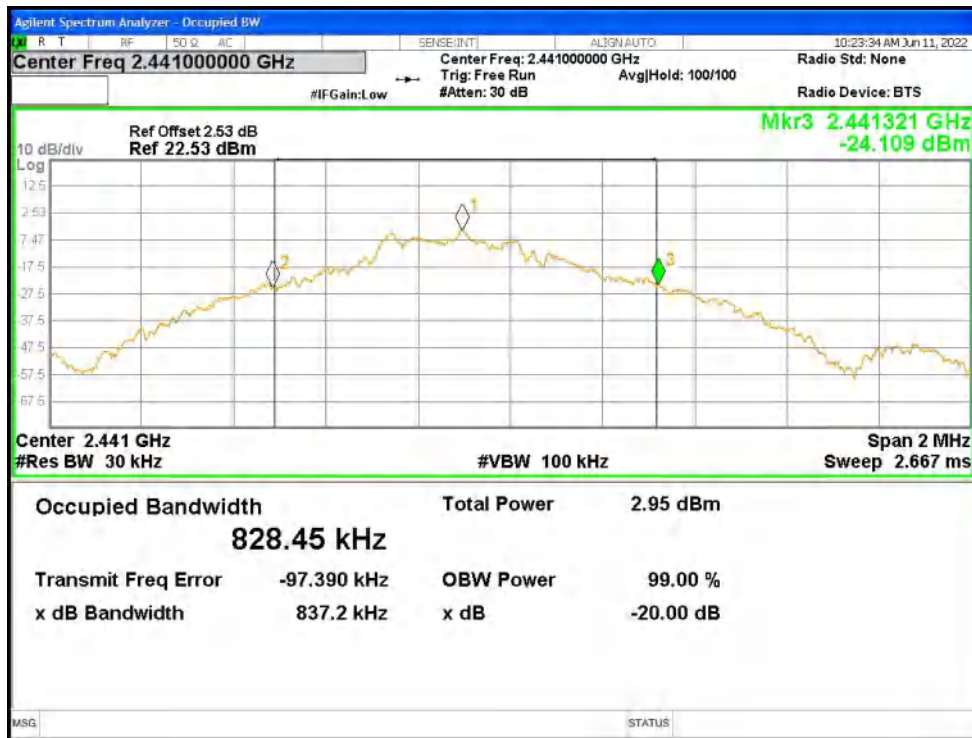


-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

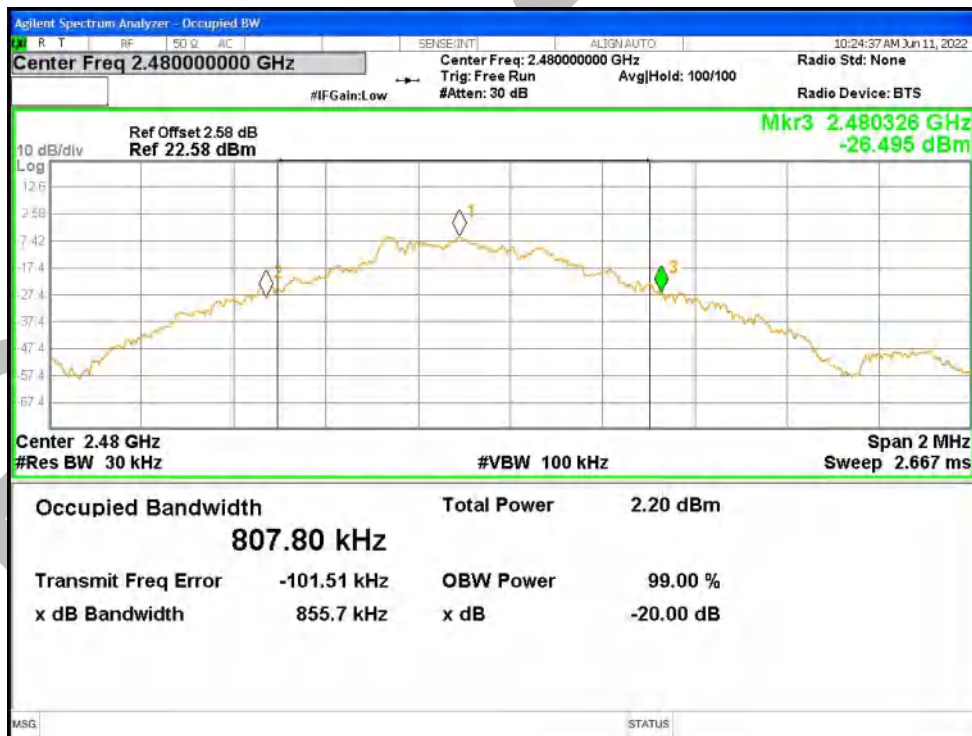


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

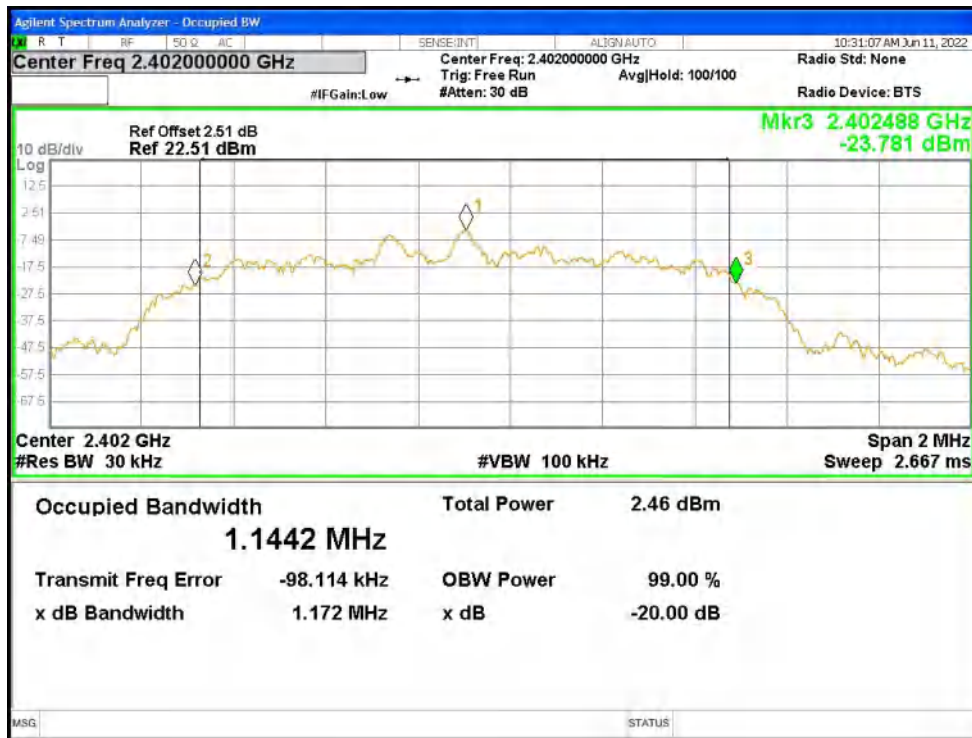

-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

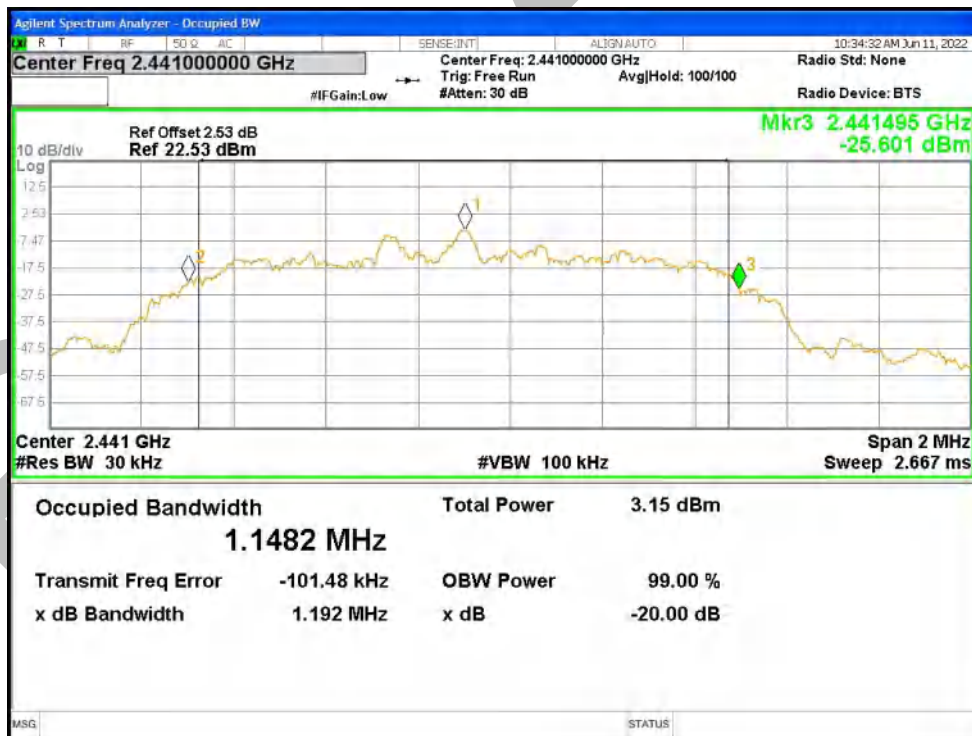

-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

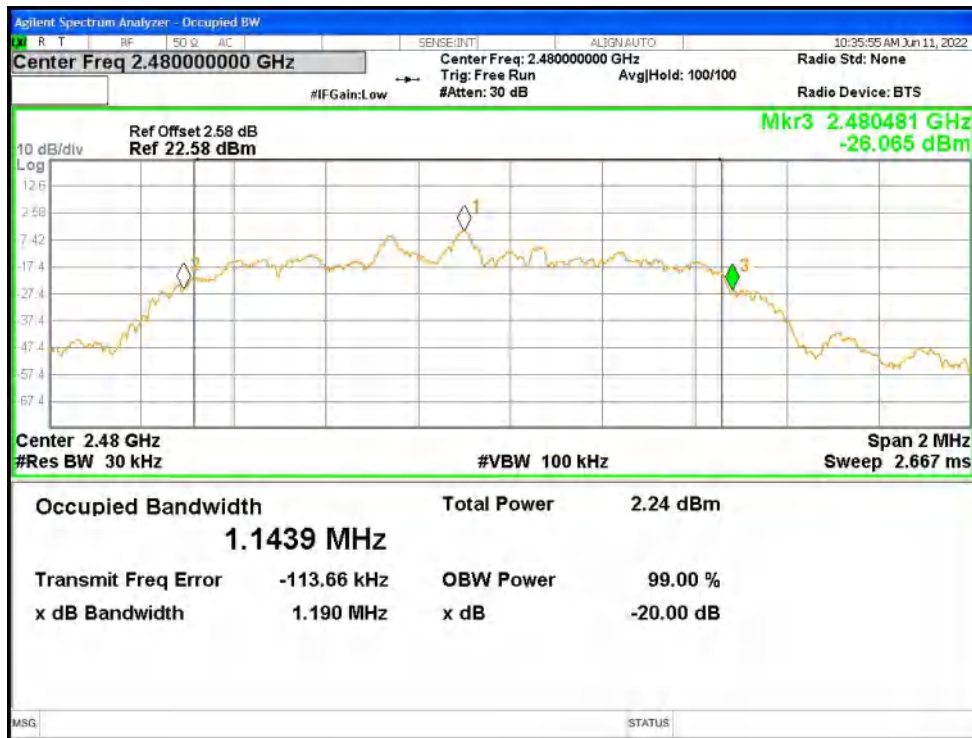


BlueEK


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.80566
NVNT	1-DH1	2441	Ant1	0.82844
NVNT	1-DH1	2480	Ant1	0.79255
NVNT	2-DH1	2402	Ant1	1.1622
NVNT	2-DH1	2441	Ant1	1.1488
NVNT	2-DH1	2480	Ant1	1.1613


OBW NVNT 1-DH1 2402MHz Ant1

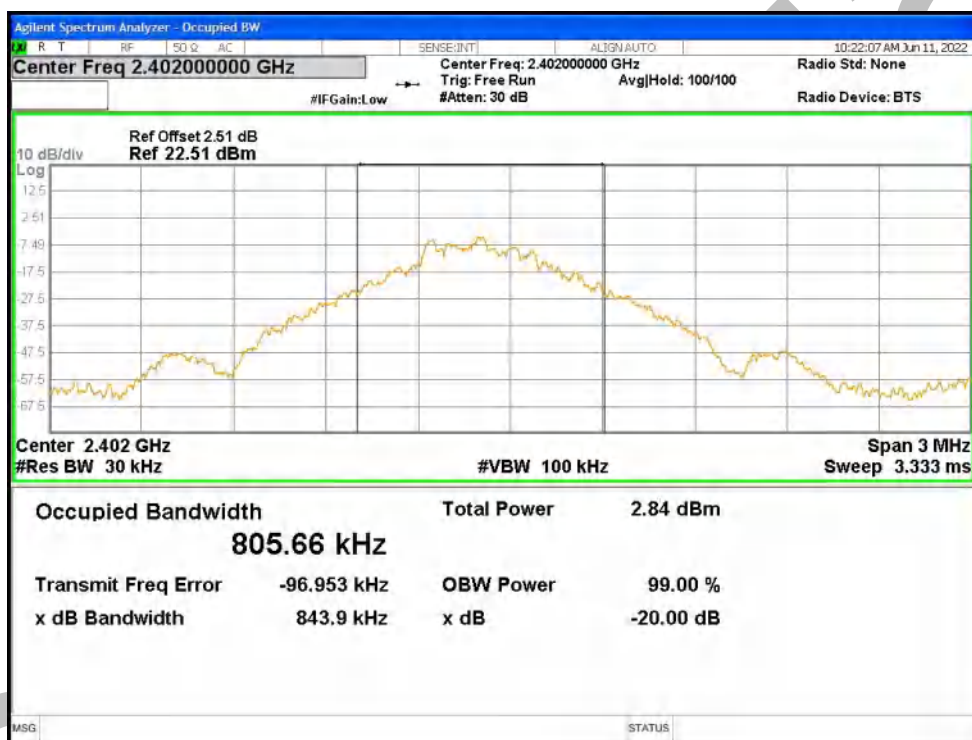


OBW NVNT 1-DH1 2441MHz Ant1

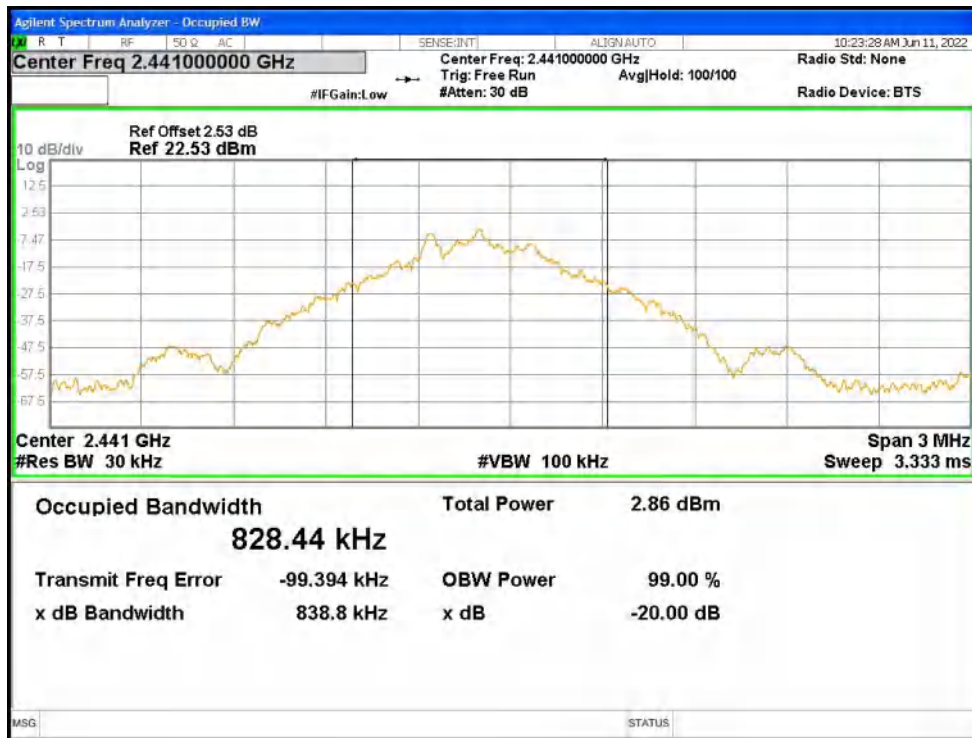


OBW NVNT 1-DH1 2480MHz Ant1

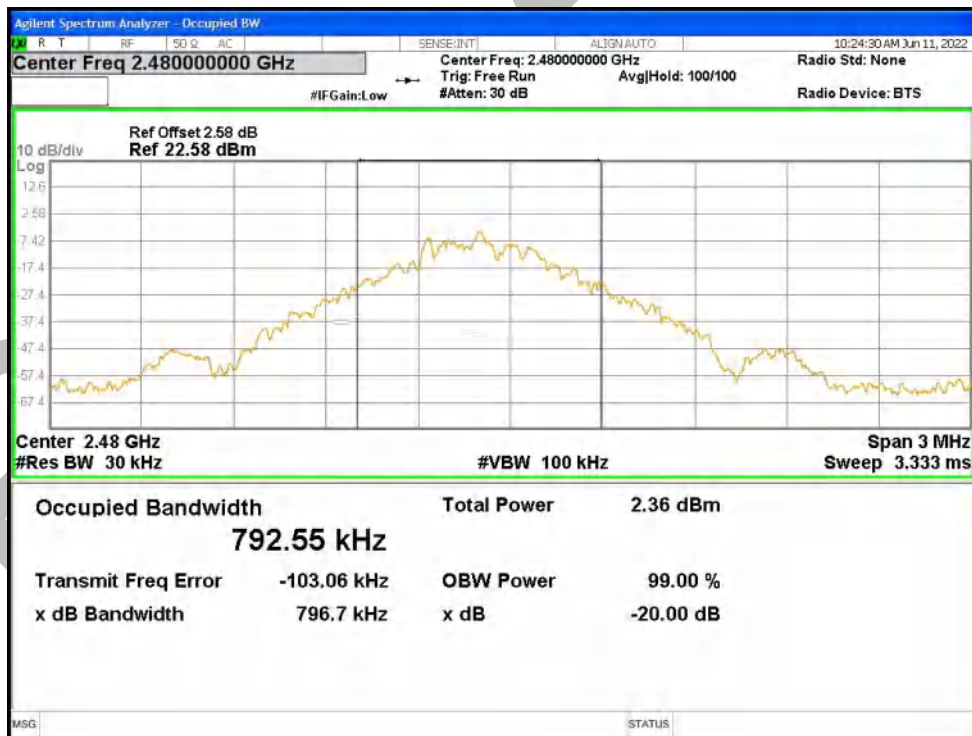


OBW NVNT 2-DH1 2402MHz Ant1

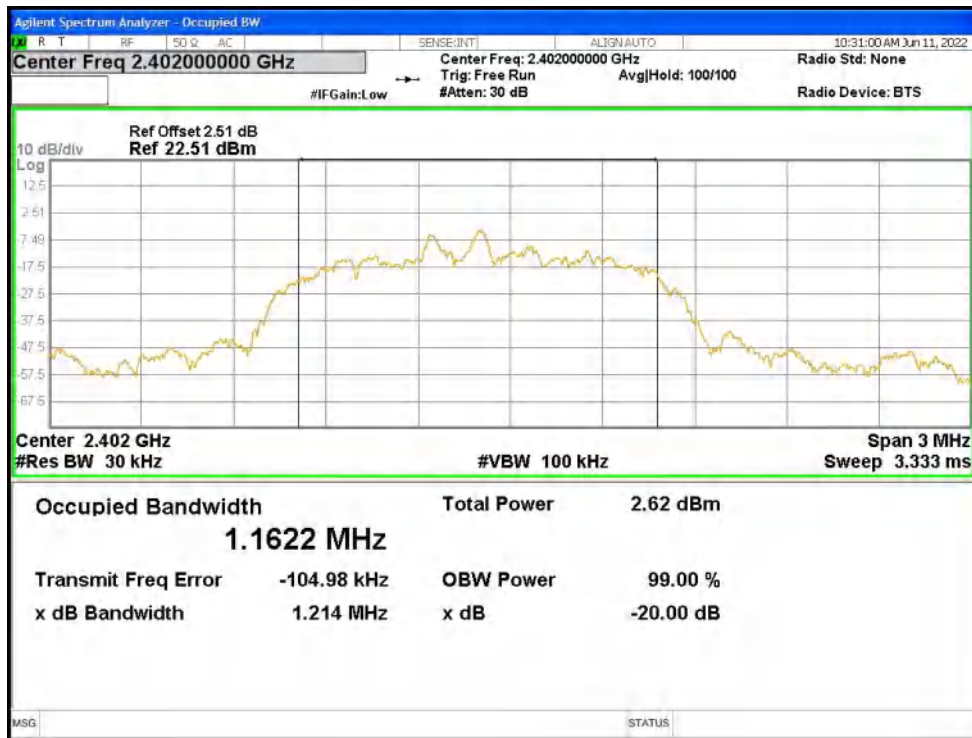

OBW NVNT 2-DH1 2441MHz Ant1

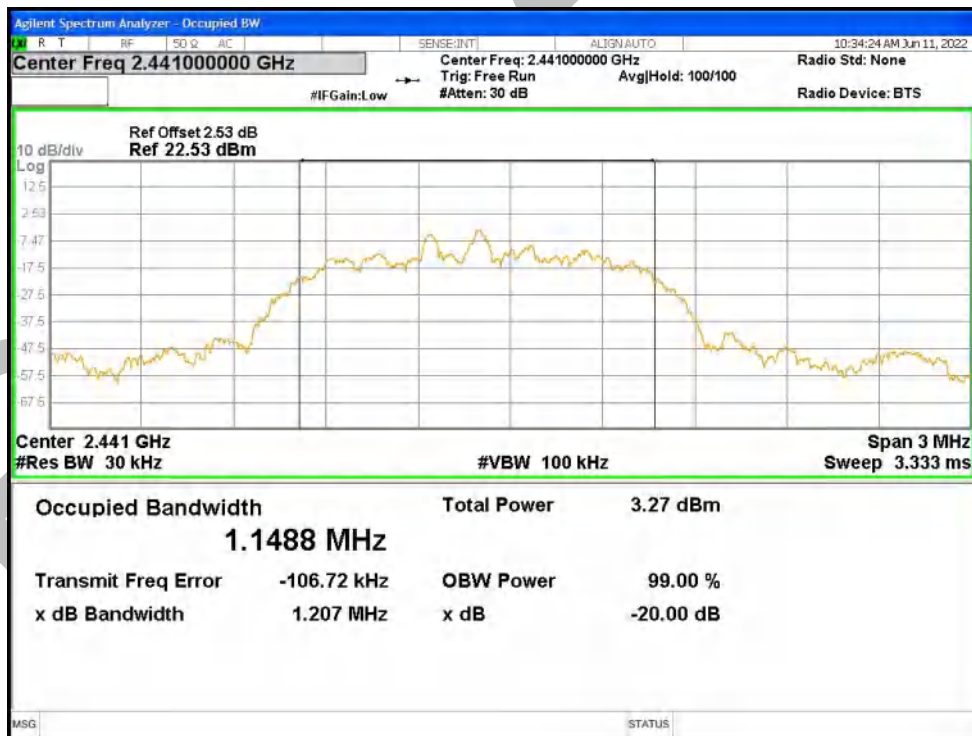

OBW NVNT 2-DH1 2480MHz Ant1

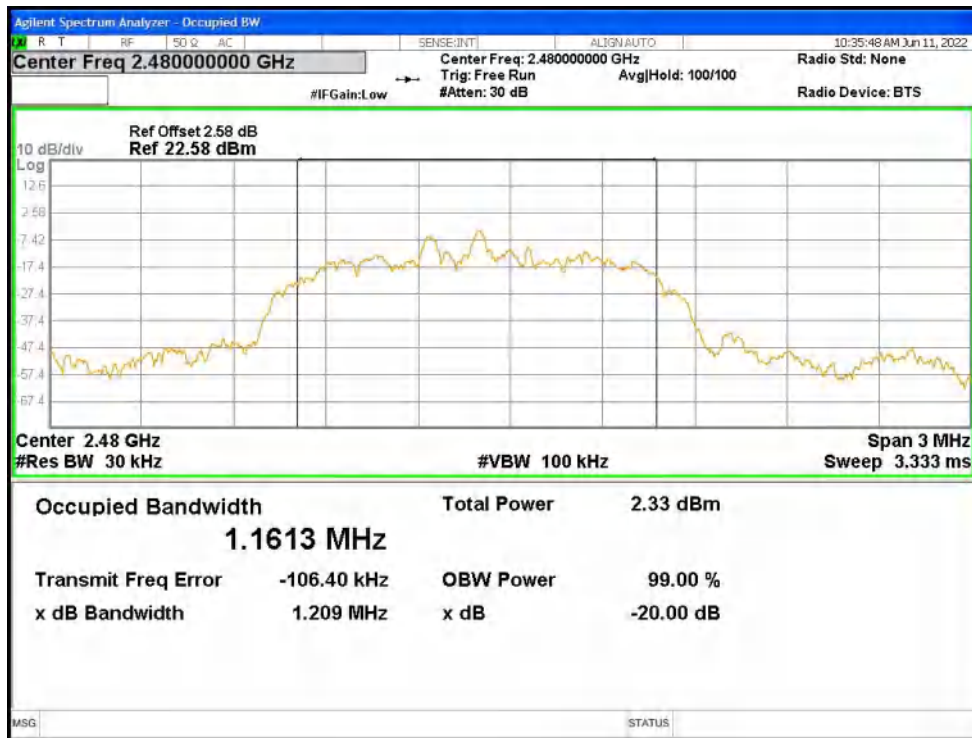

BlueAsia


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	-48.63	-20	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	-48.02	-20	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	-49	-20	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	-47.86	-20	Pass

Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

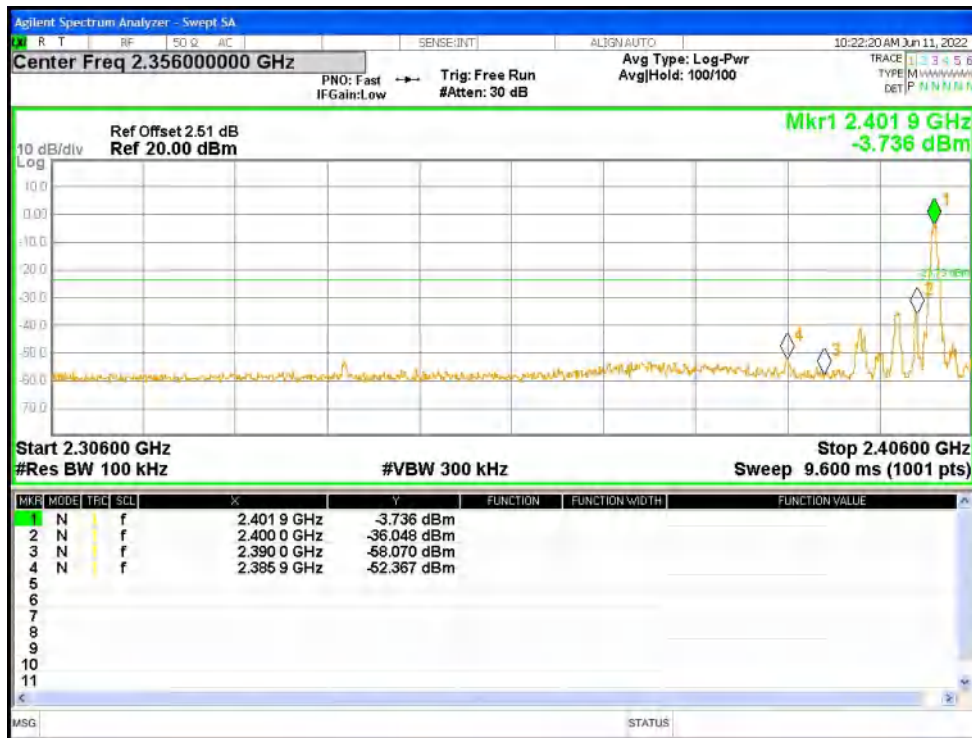

Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref




Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

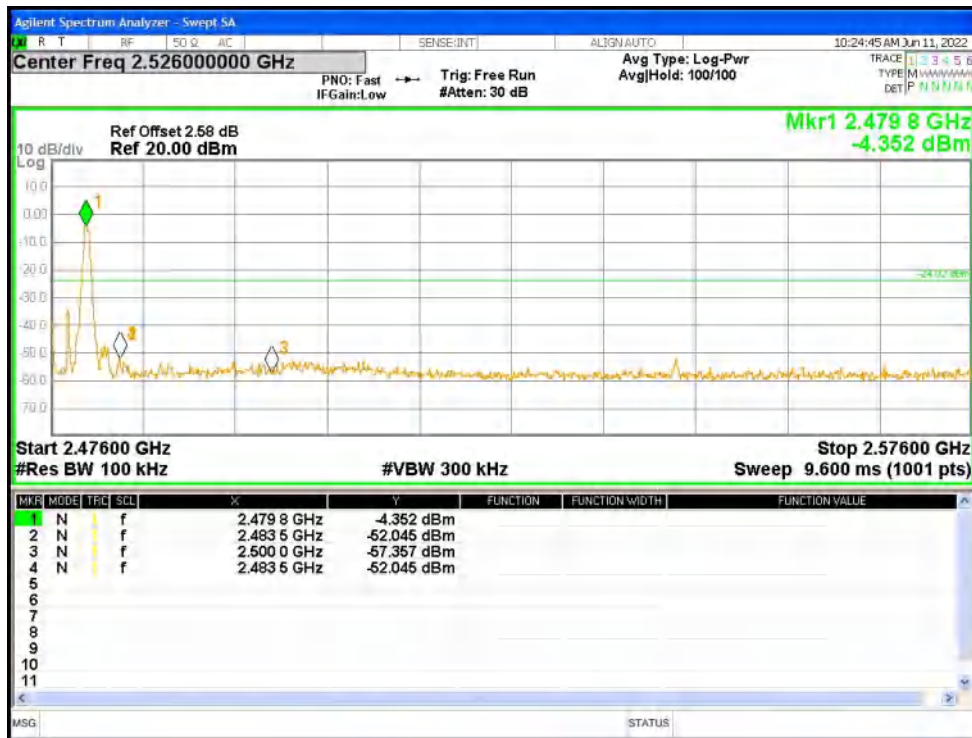

Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission

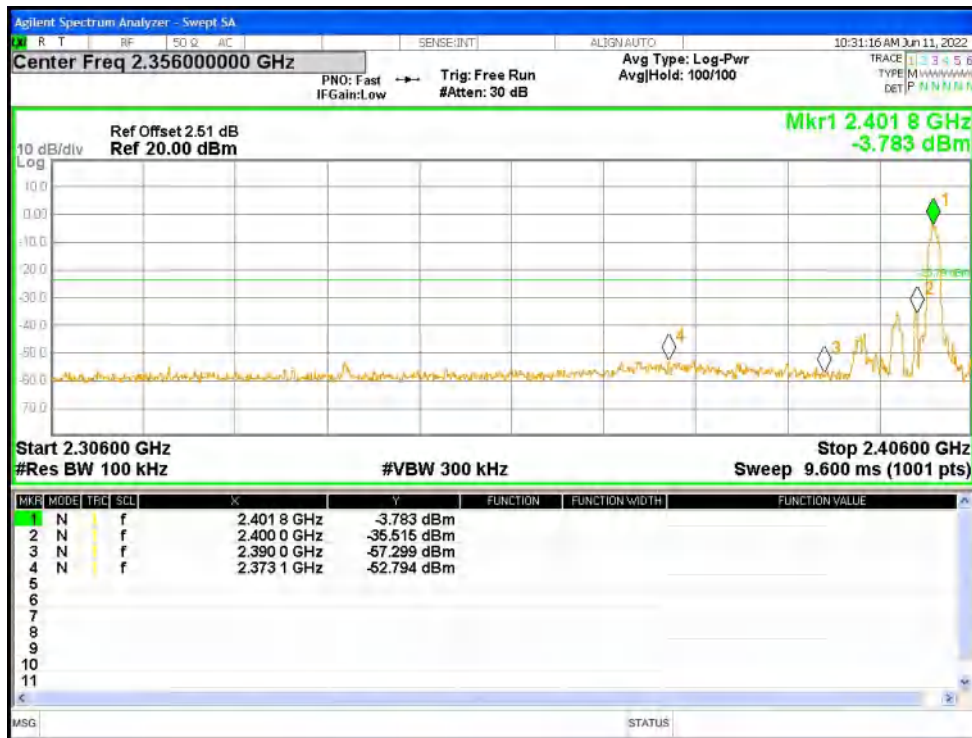

Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref



Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Emission

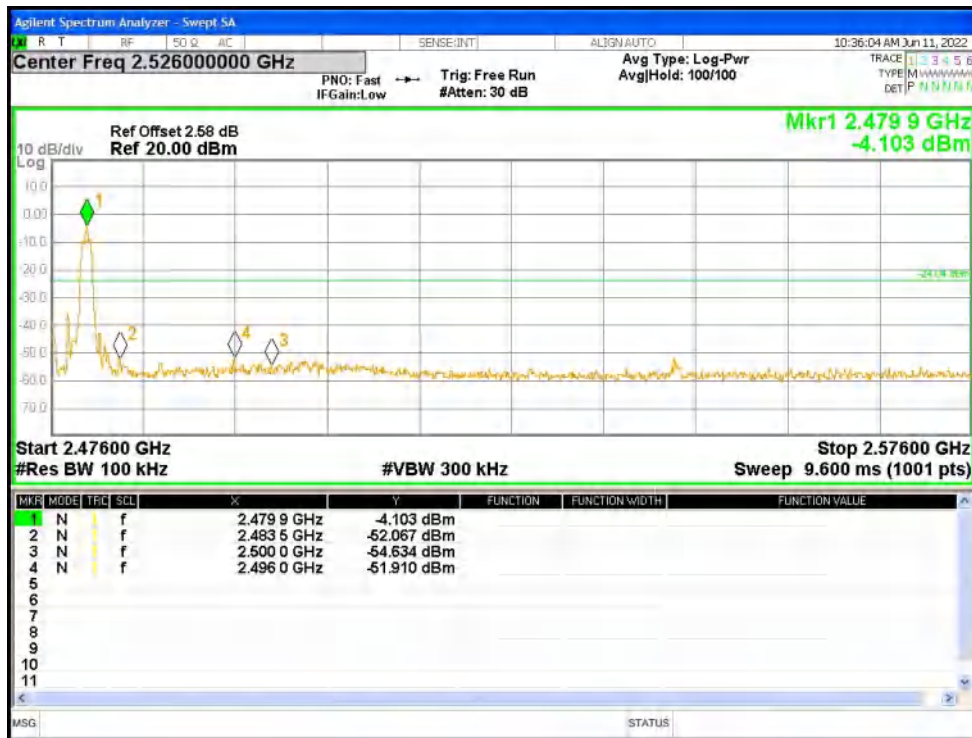


BlueEK


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	-34.09	-20	Pass
NVNT	1-DH1	2441	Ant1	-34.24	-20	Pass
NVNT	1-DH1	2480	Ant1	-33.78	-20	Pass
NVNT	2-DH1	2402	Ant1	-36.74	-20	Pass
NVNT	2-DH1	2441	Ant1	-33.88	-20	Pass
NVNT	2-DH1	2480	Ant1	-32.64	-20	Pass


Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Ref

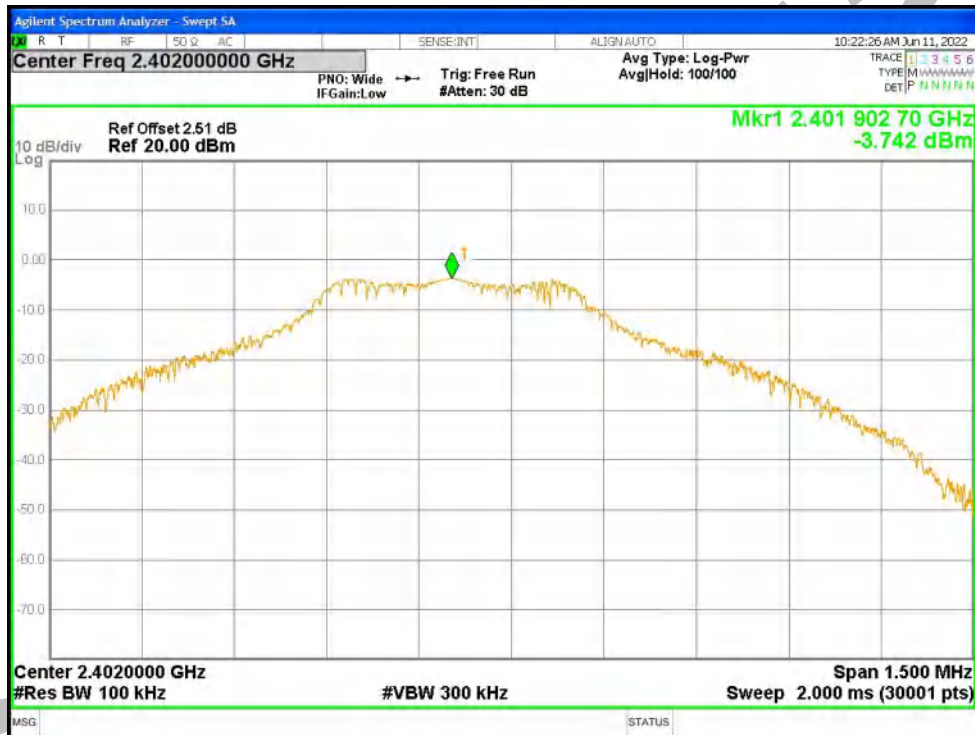


Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission

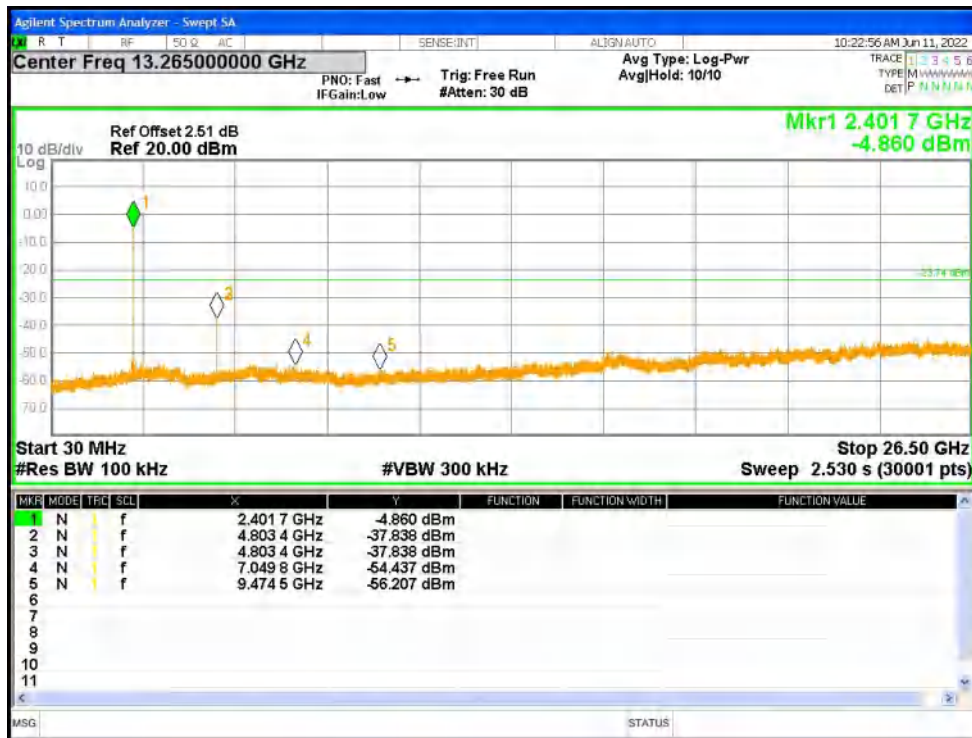


Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Ref

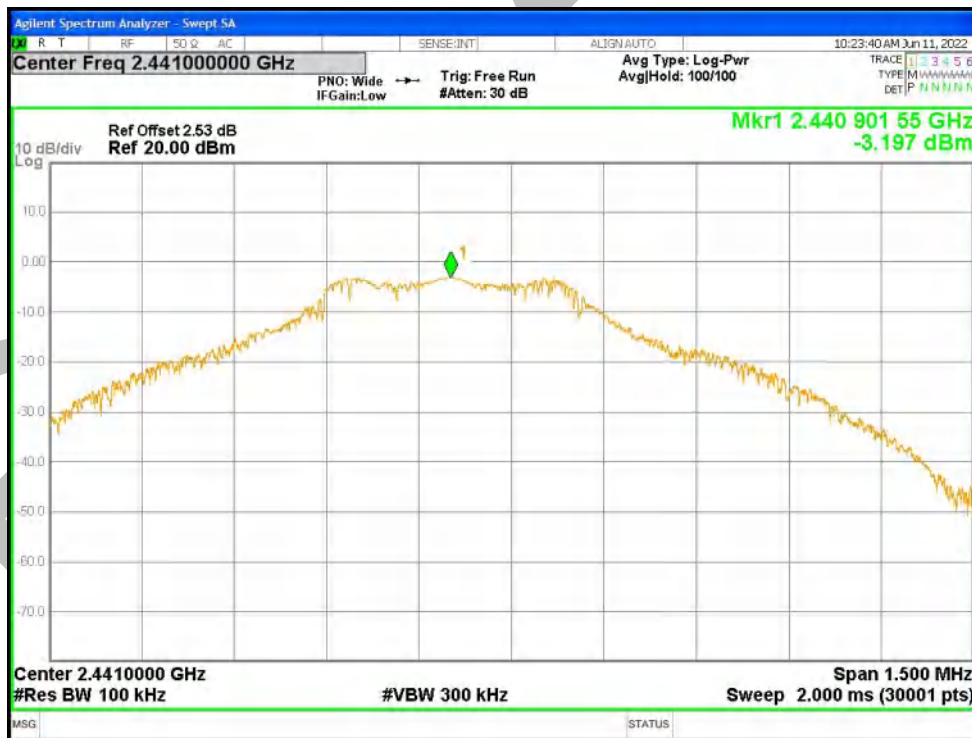


Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission

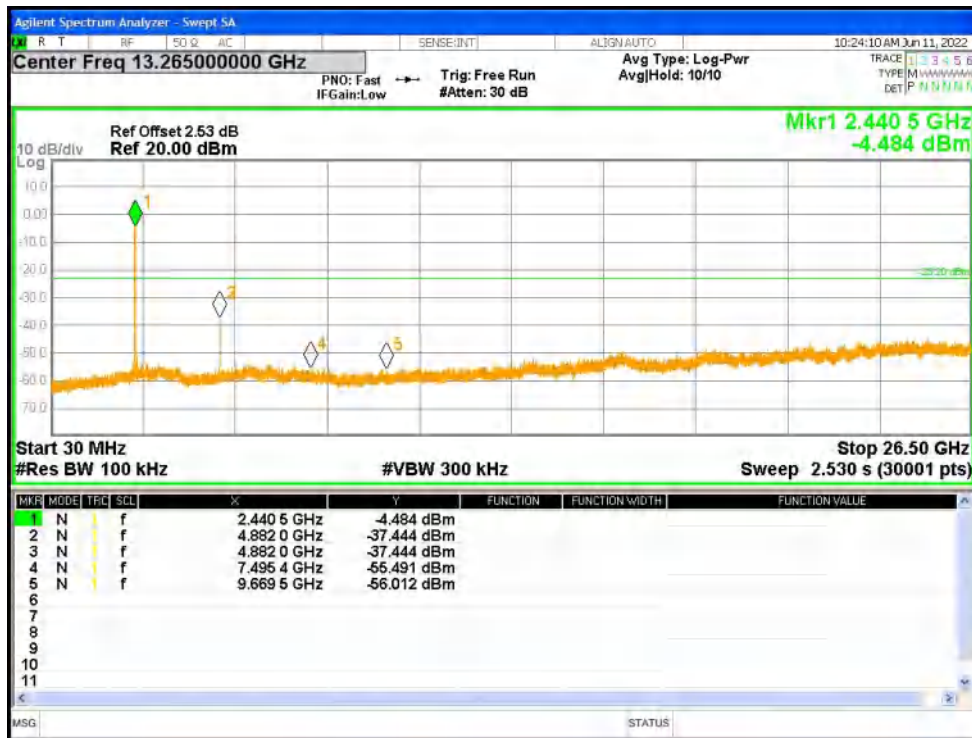


Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Ref

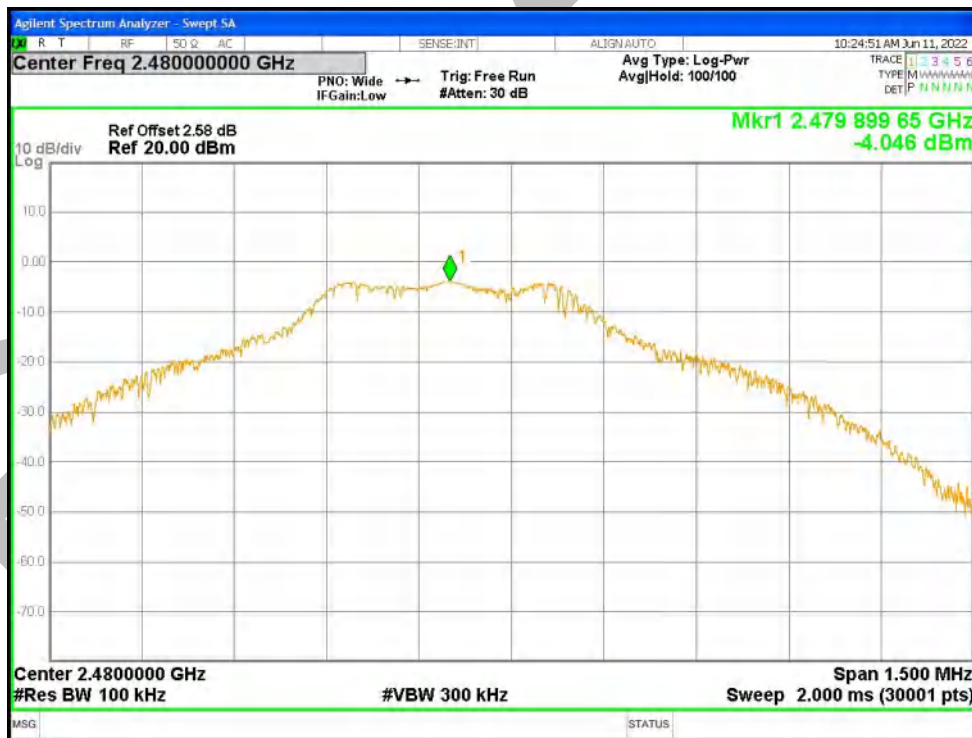


Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Emission

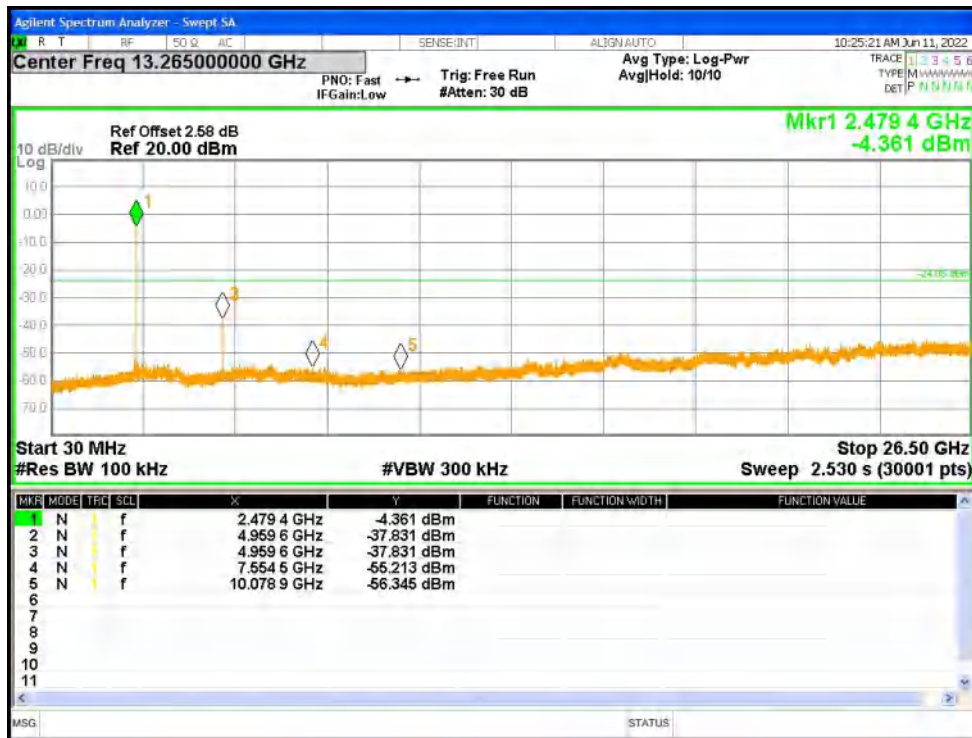

Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Ref

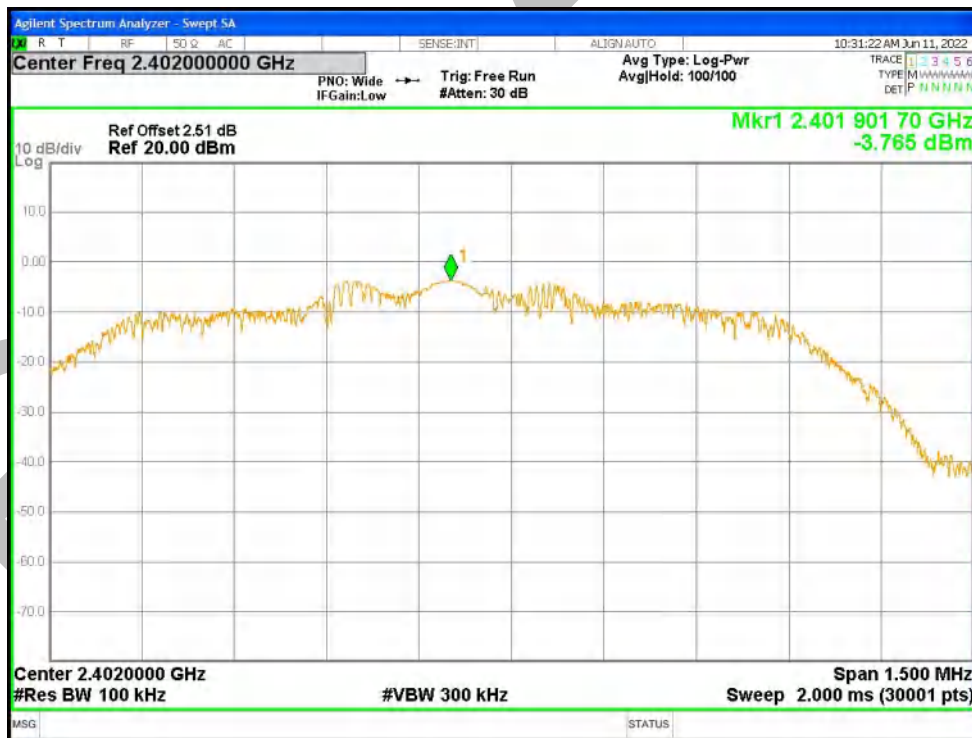


Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Emission

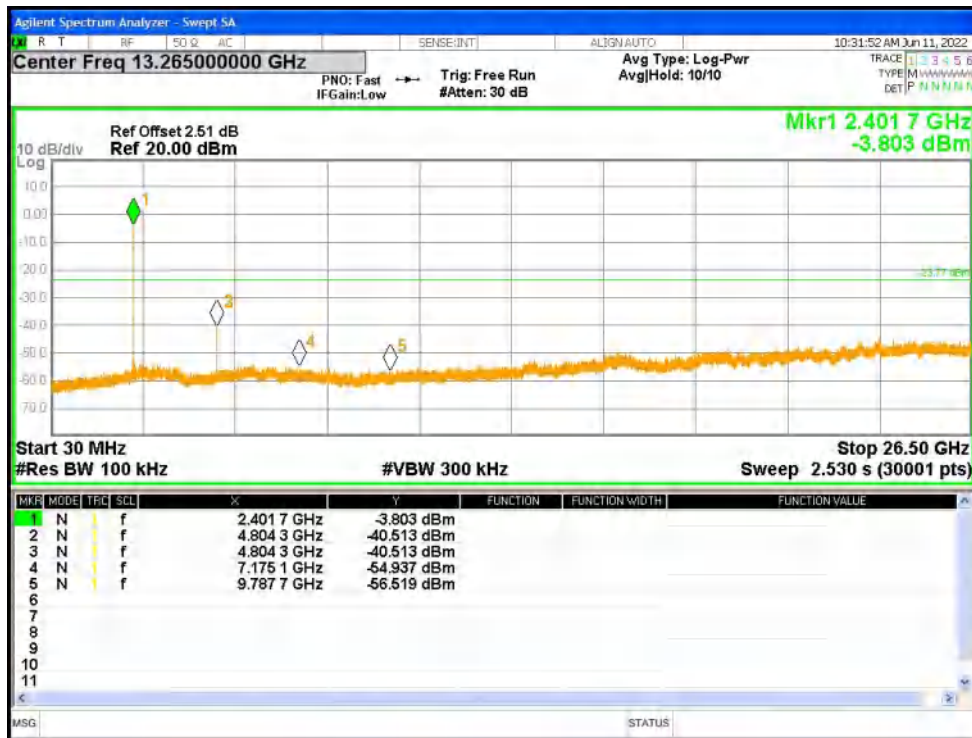

Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Ref




Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Emission

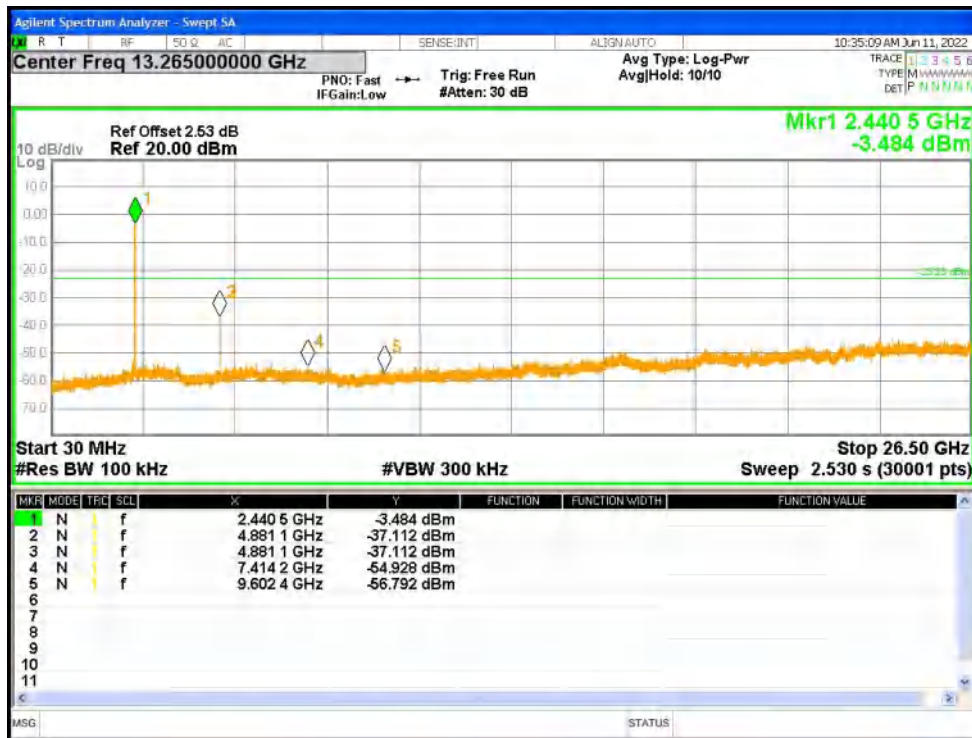

Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Ref



Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Emission

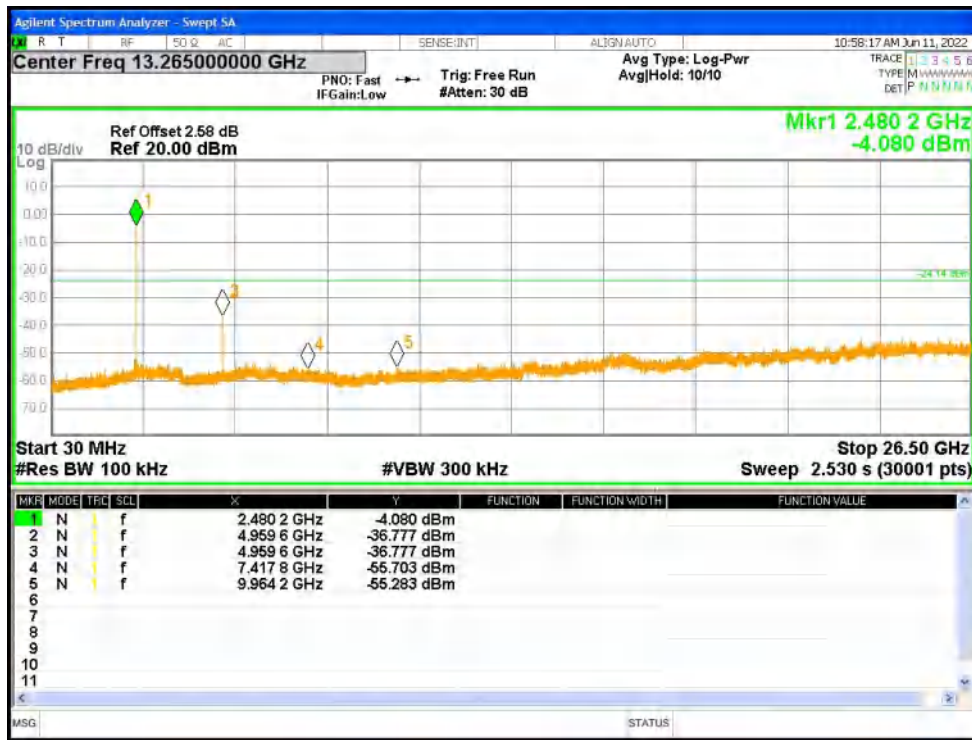

BlueEK


Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	Ant1	2440.861	2441.9215	1.0605	0.837	Pass
NVNT	2-DH1	Ant1	2440.906	2441.8885	0.9825	0.795	Pass

CFS NVNT 1-DH1 2441MHz Ant1



CFS NVNT 2-DH1 2441MHz Ant1

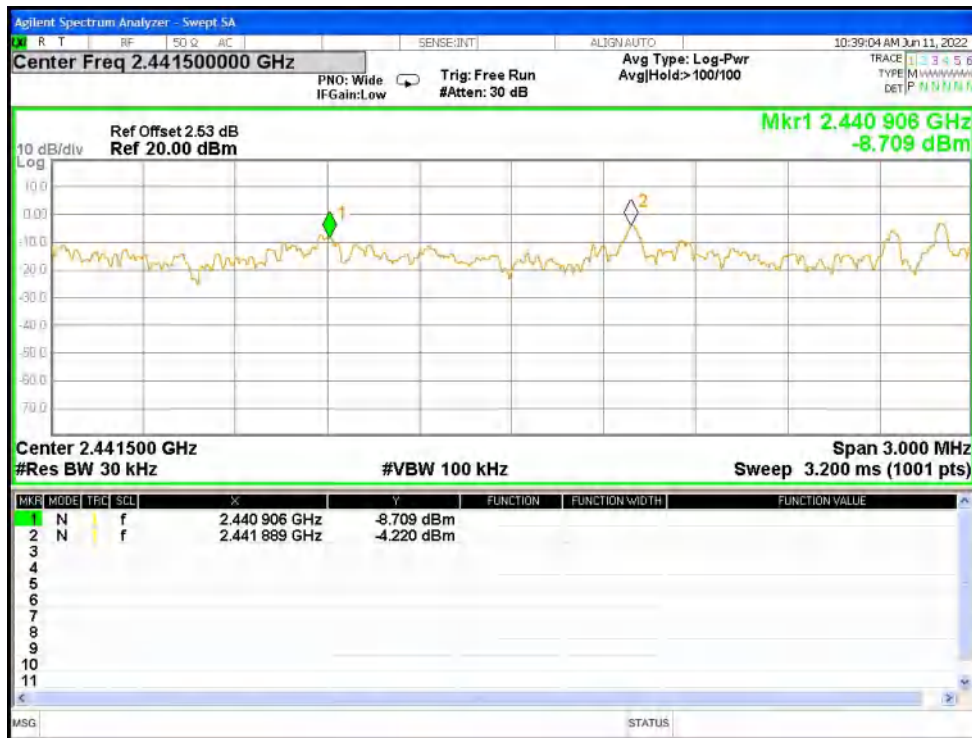

BlueEK

Number of Hopping Channel

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH1	Ant1	79	15	Pass
NVNT	2-DH1	Ant1	79	15	Pass

Hopping No. NVNT 1-DH1 2441MHz Ant1



Hopping No. NVNT 2-DH1 2441MHz Ant1




BlueAsia

Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.409	130.471	319	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.665	274.725	165	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.913	300.039	103	31600	400	Pass

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst

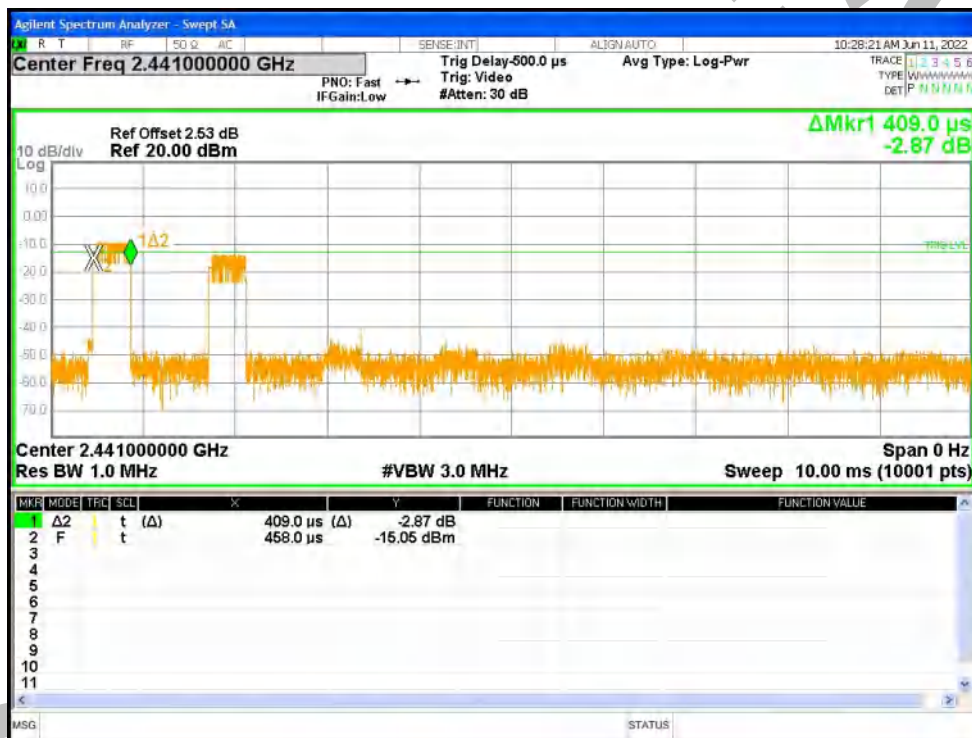


Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated




Dwell NVNT 1-DH3 2441MHz Ant1 One Burst




Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

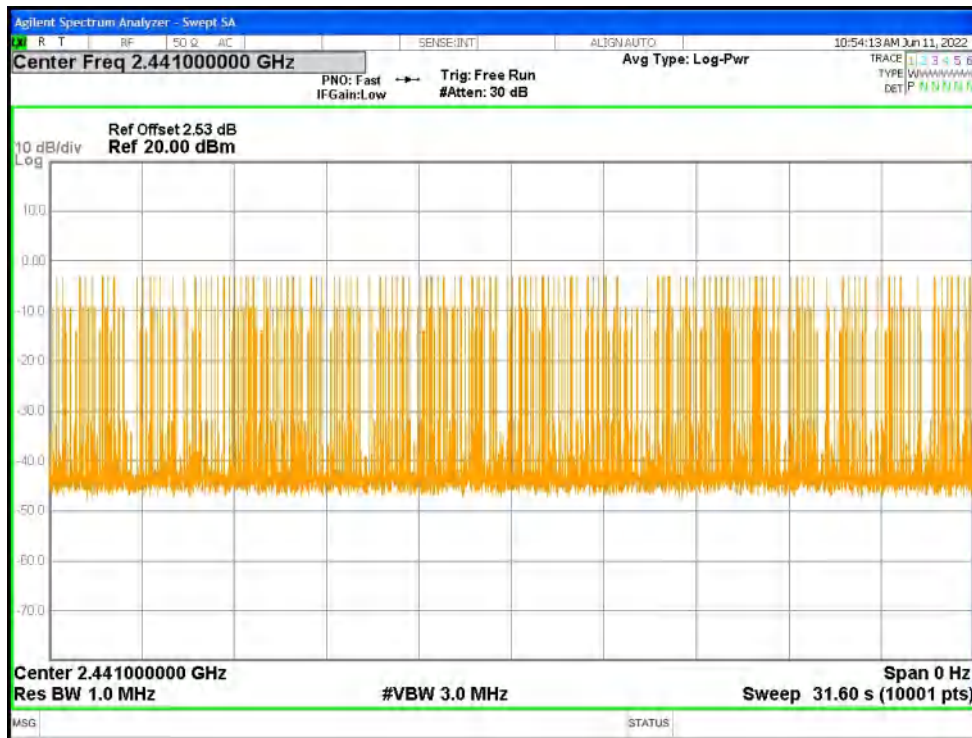

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

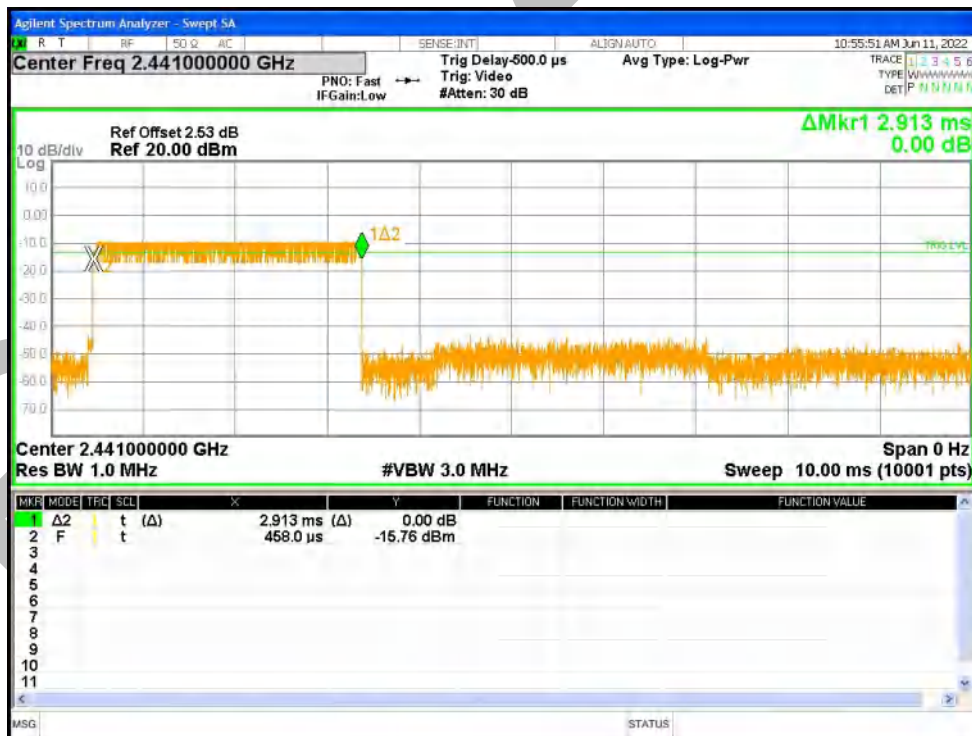


Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

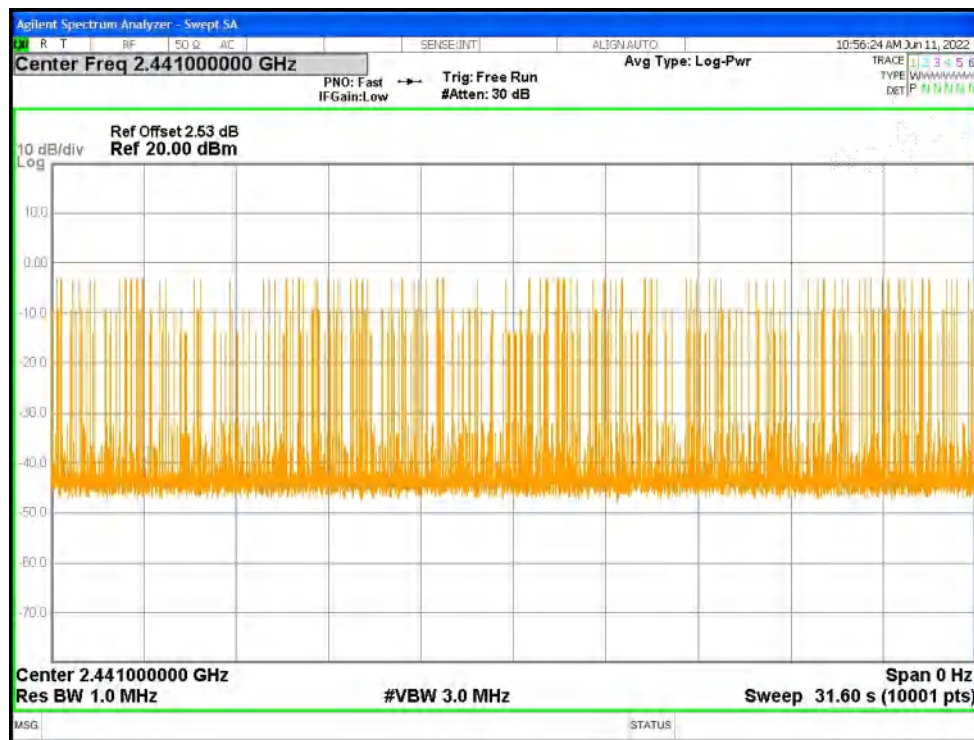

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Radiated Spurious Emissions

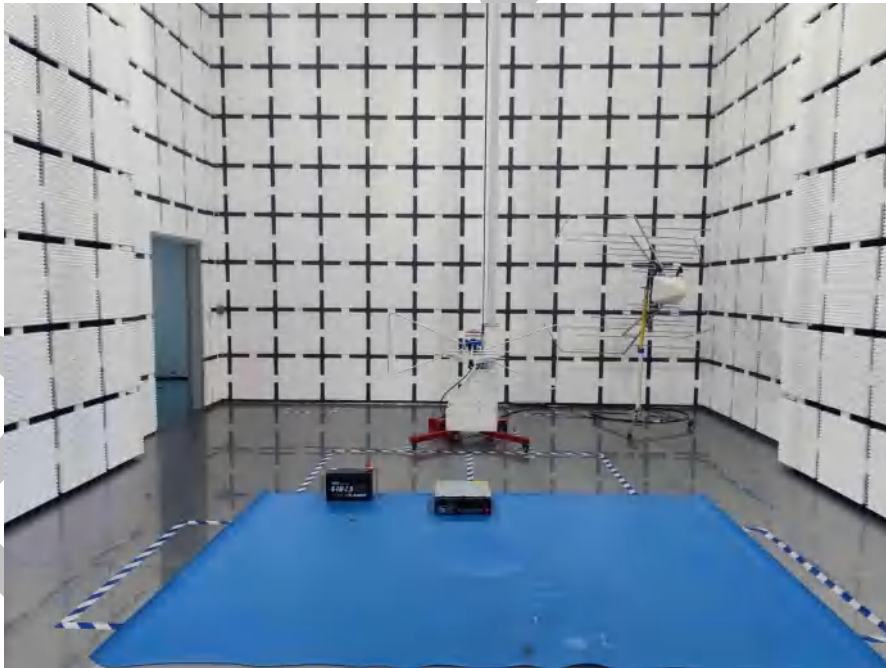

APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202202-A4501

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia