



## FCC Part 15.247


### TEST REPORT

For

**M2Communication Inc.**

15F-1, No. 32, Gaotie 2nd Rd., Zhubei City, Hsinchu County 302 Taiwan

**FCC ID: 2AFXU-ES29R**

<b>Report Type</b> Original Report	<b>Product Type:</b> Electronic Shelf Label
<b>Report Number :</b>	<b>RLK190411002-00B</b>
<b>Report Date :</b>	<b>2019/05/10</b>
<b>Frequency Operation</b>	<b>903 MHz – 927 MHz</b>
<b>Reviewed By:</b>	<b>Jerry Chang</b> 
<b>Prepared By:</b> <b>Bay Area Compliance Laboratories Corp.(Taiwan)</b> <b>70, Lane 169, Sec. 2, Datong Road, Xizhi Dist.,</b> <b>New Taipei City 22183, Taiwan, R.O.C.</b> <b>Tel: +886 (2)2647 6898 Fax: +886 (2) 2647 6895</b> <b><a href="http://www.bacl.com.tw">www.bacl.com.tw</a></b>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Taiwan)

## Revision History

Revision	Report Number	Issue Date	Description	Author/Revised by
1.0	RLK190411002-00B	2019/05/10	Original Report	Himiko Chen

## TABLE OF CONTENTS

<b>1 GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 OPERATION CONDITION OF EUT .....	4
1.3 OBJECTIVE AND TEST METHODOLOGY .....	5
1.4 MEASUREMENT UNCERTAINTY .....	5
1.5 TEST FACILITY .....	5
<b>2 SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
2.1 TEST CHANNELS AND DESCRIPTION OF WORST TEST CONFIGURATION.....	6
2.2 SUPPORT EQUIPMENT LIST AND EXTERNAL CABLE LIST .....	6
2.3 BLOCK DIAGRAM OF TEST SETUP .....	7
2.4 DUTY CYCLE .....	7
<b>3 SUMMARY OF TEST RESULTS.....</b>	<b>8</b>
<b>4 FCC§15.247(I), §1.1310, § 2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b>	<b>9</b>
4.1 APPLICABLE STANDARD .....	9
4.2 RF EXPOSURE EVALUATION RESULT .....	9
<b>5 FCC §15.203 - ANTENNA REQUIREMENTS .....</b>	<b>10</b>
5.1 APPLICABLE STANDARD .....	10
5.2 ANTENNA LIST AND DETAILS .....	10
<b>6 FCC §15.209, §15.205, §15.247(D) – SPURIOUS EMISSIONS .....</b>	<b>11</b>
6.1 APPLICABLE STANDARD .....	11
6.2 EUT SETUP AND TEST PROCEDURE.....	13
6.3 TEST EQUIPMENT LIST AND DETAILS .....	14
6.4 TEST ENVIRONMENTAL CONDITIONS .....	14
6.5 RADIATED EMISSION TEST PLOT AND DATA.....	15
<b>7 FCC §15.247(A)(2) – 6 DB EMISSION BANDWIDTH .....</b>	<b>20</b>
7.1 APPLICABLE STANDARD .....	20
7.2 TEST PROCEDURE .....	20
7.3 TEST EQUIPMENT LIST AND DETAILS .....	20
7.4 TEST ENVIRONMENTAL CONDITIONS .....	20
7.5 TEST RESULTS .....	21
<b>8 FCC §15.247(B) (3) – MAXIMUM OUTPUT POWER.....</b>	<b>23</b>
8.1 APPLICABLE STANDARD .....	23
8.2 TEST PROCEDURE .....	23
8.3 TEST EQUIPMENT LIST AND DETAILS .....	23
8.4 TEST ENVIRONMENTAL CONDITIONS .....	23
8.5 TEST RESULTS .....	24
<b>9 FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE .....</b>	<b>25</b>
9.1 APPLICABLE STANDARD .....	25
9.2 TEST PROCEDURE .....	25
9.3 TEST EQUIPMENT LIST AND DETAILS .....	26
9.4 TEST ENVIRONMENTAL CONDITIONS .....	26
9.5 TEST RESULTS .....	26
<b>10 FCC §15.247(E) – POWER SPECTRAL DENSITY.....</b>	<b>27</b>
10.1 APPLICABLE STANDARD .....	27
10.2 TEST PROCEDURE .....	27
10.3 TEST EQUIPMENT LIST AND DETAILS .....	27
10.4 TEST ENVIRONMENTAL CONDITIONS .....	27
10.5 TEST RESULTS .....	28

## 1 General Information

### 1.1 Product Description for Equipment under Test (EUT)

<b>Applicant</b>	<b>M2Communication Inc.</b> No. 1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 11491, Taiwan
<b>Manufacturer</b>	<b>M2Communication Inc.</b> No. 1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 11491, Taiwan
<b>Brand(Trade) Name</b>	<b>M2COMM</b>
<b>Product (Equipment)</b>	Electronic Shelf Label
<b>Model Name</b>	ES29-R
<b>Frequency Range</b>	903 MHz ~ 927 MHz
<b>Number of Channels</b>	8 channels
<b>Output Power</b>	10.88 dBm (0.0122W)
<b>Received Date</b>	Apr. 11, 2019
<b>Date of Test</b>	Apr. 30, 2019 ~ May 02, 2019
<b>Modulation Type</b>	GFSK

\*All measurement and test data in this report was gathered from production sample serial number: 190411002 (Assigned by BACL, Taiwan).

### 1.2 Operation Condition of EUT

<b>Power Operation (Voltage Range)</b>	<input type="checkbox"/> AC 120V/60Hz
	<input type="checkbox"/> Adapter
	<input type="checkbox"/> By Power Core
	<input checked="" type="checkbox"/> DC Type
	<input type="checkbox"/> DC Power Supply
	<input checked="" type="checkbox"/> Battery 3Vdc
	<input type="checkbox"/> External from USB Cable
	<input type="checkbox"/> External DC Adapter
	<input type="checkbox"/> Host System

### 1.3 Objective and Test Methodology

The Objective of this Test Report was to document the compliance of the M2Communication Inc.. Appliance (Model: ES29-R) to the requirements of the following Standards:

- Part 2, Subpart J, Part 15, Subparts A and C, section 15.247 of the Federal Communication Commission's rules.
- ANSI C63.10-2013 of t American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- KDB 558074 of "GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUMSYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES"

### 1.4 Measurement Uncertainty

Parameter	Expanded Measurement uncertainty
RF output power with Power Meter	± 0.55 dB
Occupied Channel Bandwidth	± 4.45 %
RF Conducted test with Spectrum	± 1.45 dB
AC Power Line Conducted Emission	± 2.66 dB
Radiated Below 1G	± 3.57 dB
Radiated Above 1G-18G	± 4.29 dB
Radiated Above 18G-40G	± 4.67 dB

### 1.5 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Taiwan) to collect test data is located on

70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.

68-3, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database. The FCC Registration No.: 974454. Designation No.: TW3180

## 2 System Test Configuration

### 2.1 Test Channels and Description of Worst Test Configuration

The system was configured for testing in testing mode which was provided by manufacturer.

No special accessory, No modification was made to the EUT and No special equipment used during test.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	<b>903</b>	6	921
2	906	7	924
3	909	<b>8</b>	<b>927</b>
4	915	-	-
<b>5</b>	<b>918</b>	-	-

Channel **1, 5 and 8** were tested.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power and PSD across all date rates bandwidths, and modulations.

Radiated below 1G were tested worst output power mode.

Worst Case of Power Setting					
EUT Exercise Software		Command			
Configuration	NTX	Low CH	Mid CH	High CH	
903 MHz ~ 927 MHz	1	10	9	9	


### 2.2 Support Equipment List and External Cable List

No.	Description	Manufacturer	Model Number	BSMI	FCC ID / DoC
A	Notebook PC	DELL	PP27LA	R33002	DoC

No.	Cable Description	Length (m)	From	To
1	N/A	N/A	N/A	N/A

## 2.3 Block Diagram of Test Setup

### Radiation

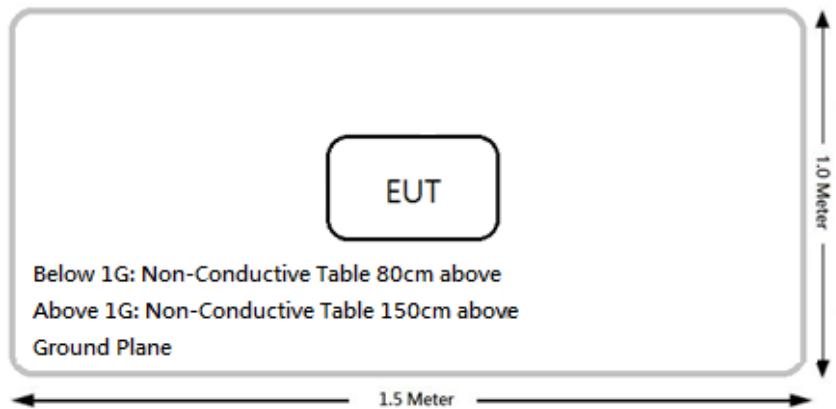


## 2.4 Duty Cycle

According to 558074 D01 15.247 Meas Guidance v05 r02:

All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum power transmission duration, T, are required for each tested mode of operation.

Configuration	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Factor (dB)
903 – 927 MHz Band	100	100	100	0

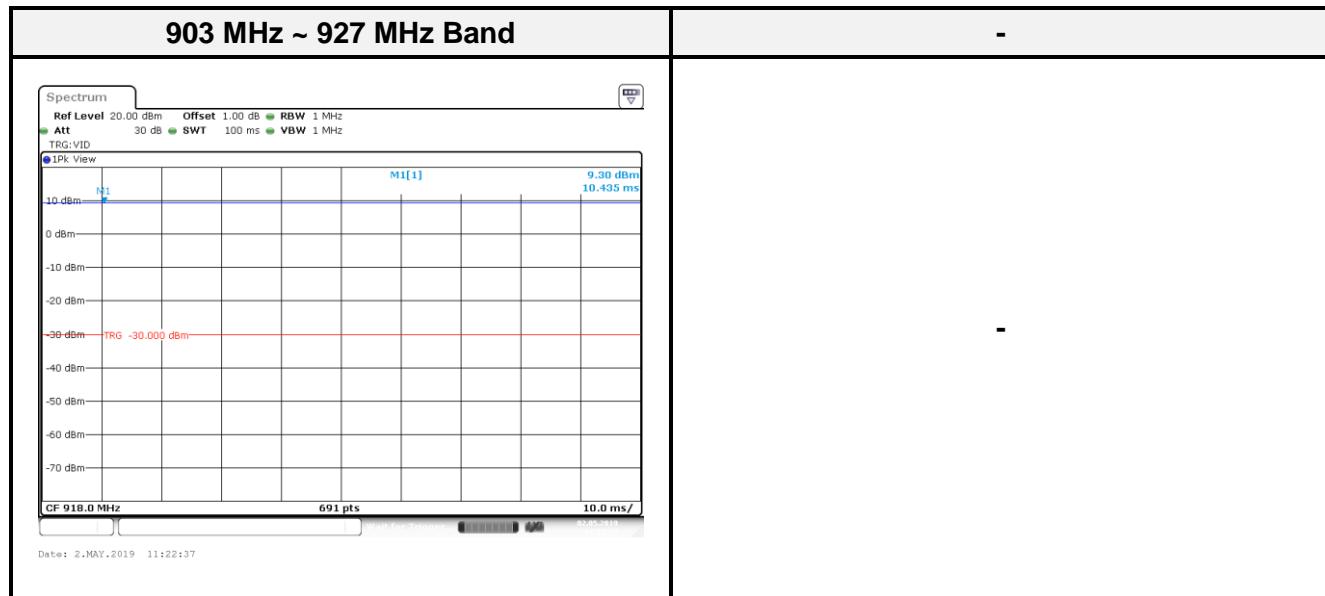

\*Note: Duty Factor =  $10 \cdot \log (1/\text{Duty cycle})$

### 3 Summary of Test Results

FCC Rules	Description of Test	Result
§15.247(i), §1.1310, §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Not Appliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247(a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

\* Not Appliance: EUT power by battery.

## 4 FCC§15.247(i), §1.1310, § 2.1091 - Maximum Permissible Exposure (MPE)

### 4.1 Applicable Standard

According to subpart 15.247(i)and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

#### Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

*f = frequency in MHz; \* = Plane-wave equivalent power density;*

According to §1.1310 and §2.1091 RF exposure is calculated.

**Calculated Formulary:** Predication of MPE limit at a given distance

S = PG/4πR<sup>2</sup> = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

### 4.2 RF Exposure Evaluation Result

#### MPE evaluation:

Frequency Range (MHz)	Antenna Gain		Target Power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
	(dBi)	(numeric)	(dBm)	(mW)			
903-927	0.1	1.023	11	12.589	20	0.0026	0.602

**Result:** MPE evaluation meet 20 cm the requirement of standard.

## 5 FCC §15.203 - Antenna Requirements

### 5.1 Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6dBi

### 5.2 Antenna List and Details

Manufacturer	Model	Antenna Type	Antenna Gain	Result
SHIN WON METAL CO., LTD.	AN13-000038	PIFA	0.10 dBi	Compliance

*The EUT has an internal antenna arrangement, which was permanently attached, fulfill the requirement of this section.*

## 6 FCC §15.209, §15.205, §15.247(d) – Spurious Emissions

### 6.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	13.36-13.41	399.9-410	4.5-5.15
0.495-0.505	16.42-16.423	608-614	5.35-5.46
2.1735-2.1905	16.69475-16.69525	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6


As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

## 6.2 EUT Setup and Test Procedure

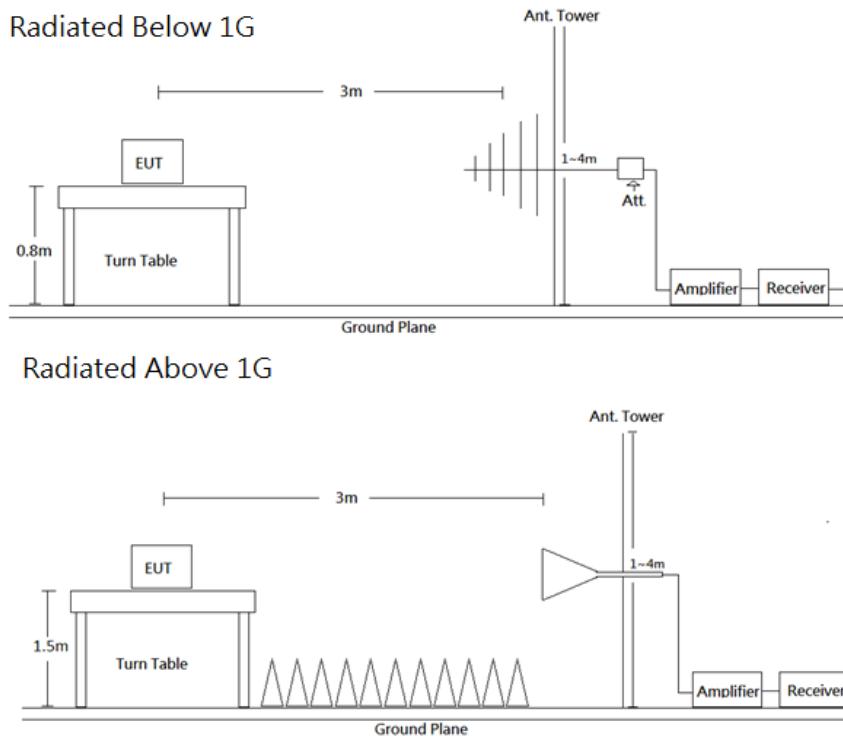

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

The system was investigated from 30 MHz to 10 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Detector	Duty cycle	Measurement method
30-1000 MHz	120 kHz	/	QP	-	QP
Above 1 GHz	1 MHz	3 MHz	PK	-	PK
	1 MHz	3 MHz	RMS	>98%	Ave
	1 MHz	1/T	PK	<98%	Ave

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations. All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

### 6.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>966A Room</b>					
Active Loop Antenna	ETS-Lindgren	6502	00035796	2019/03/12	2020/03/11
Bilog Antenna with 6 dB Attenuator	SUNOL SCIENCES & MINI-CIRCUITS	JB6/UNAT-6+	A050115/15542_01	2018/12/11	2019/12/10
Horn Antenna	A.H. system	SAS-571	1020	2019/04/17	2020/04/16
Horn Antenna	ETS-Lindgren	3116	62638	2018/08/29	2019/08/28
Preamplifier	Sonoma	310N	130602	2018/07/04	2019/07/03
Preamplifier	EM Electronics Corp.	EM01G18G	060657	2018/12/07	2019/12/06
Microware Preamplifier	EM Electronics Corporation	EM18G40G	060656	2019/01/11	2020/01/10
EMI Test Receiver	Rohde & Schwarz	ESR7	101419	2018/10/23	2019/10/22
Signal Analyzer	Rohde & Schwarz	FSV40	101435	2019/02/14	2020/02/13
Micro flex Cable	UTIFLEX	FSCM 64639 / (2M)	93D0127	2018/07/31	2019/07/30
Micro flex Cable	UTIFLEX	UFA210A-1-3149-300300	MFR64639 226389-001	2018/11/16	2019/11/15
Micro flex Cable	ROSNOL	K1K50-UP0264-K1K50-450CM	160309-1	2019/03/04	2020/03/03
Micro flex Cable	ROSNOL	K1K50-UP0264-K1K50-80CM	160309-2	2019/01/16	2020/01/15
Turn Table	Champro	TT-2000	060772-T	N.C.R	N.C.R
Antenna Tower	Champro	AM-BS-4500-B	060772-A	N.C.R	N.C.R
Controller	Champro	EM1000	60772	N.C.R	N.C.R
Software	AUDIX	e3	E3LK-01	N.C.R	N.C.R
<b>Conducted Room</b>					
Spectrum Analyzer	Rohde & Schwarz	FSV40	101140	2018/11/22	2019/11/21
Cable	WOKEN	SFL402	S02-160323-07	2019/02/11	2020/02/10

**\*Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).


### 6.4 Test Environmental Conditions

<b>Temperature:</b>	20-25 °C	<b>Relative Humidity:</b>	50-55 %
<b>ATM Pressure:</b>	1014hPa	<b>Test Engineer:</b>	Leo Chang
<b>Conducted Test Date:</b>	2019-05-02	<b>Radiated Test Date:</b>	2019-04-30

## 6.5 Radiated Emission Test Plot and Data

**903 MHz ~ 927 MHz Band:** Transmitting mode (Pre-scan with three orthogonal axis, and worse case as Y axis)

**Below 1G (30 MHz-1 GHz)** test the output power worst mode: Low Channel

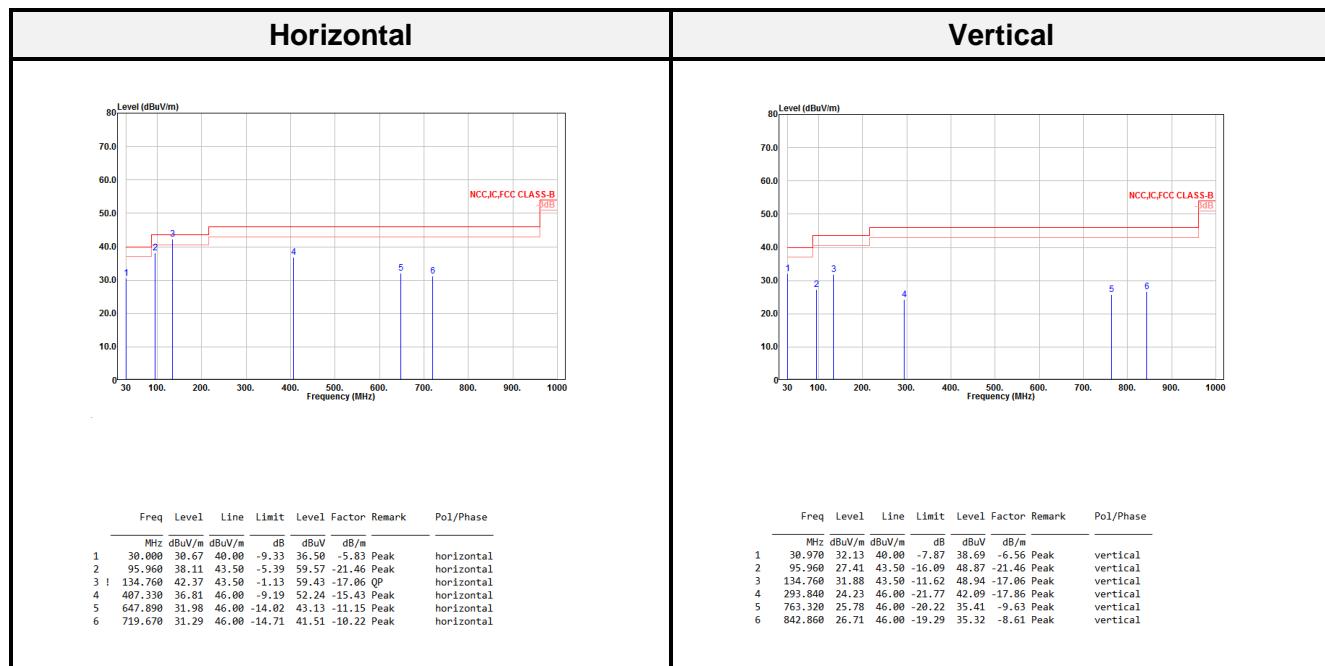

*Result = Reading + Correct Factor*

*Margin = Result – Limit*

*Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain*

*Spurious emissions more than 20 dB below the limit were not reported*

**Band Edge:**

Low CH											
Horizontal						Vertical					
Freq	Level	Limit	Over Line	Read Limit	Factor Remark	Freq	Level	Limit	Over Line	Read Limit	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m
902.000	65.46			73.64	-8.18 Peak	902.000	60.11			68.29	-8.18 Peak
902.000	61.13			69.31	-8.18 QP	902.000	56.11			64.29	-8.18 QP
902.810	104.10			112.27	-8.17 Peak	902.810	98.95			107.12	-8.17 Peak
902.810	102.93			111.10	-8.17 QP	902.810	97.78			105.95	-8.17 QP
<b>902 MHz Limit:</b> Peak = 104.10 - 20 = 84.10 dBuV/m QP = 102.93 - 20 = 82.93 dBuV/m						<b>902 MHz Limit:</b> Peak = 98.95 - 20 = 78.95 dBuV/m QP = 97.78 - 20 = 77.78 dBuV/m					

\*Band Edge compliance at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Middle CH											
Horizontal						Vertical					
Freq	Level	Limit	Over Line	Read Limit	Factor Remark	Freq	Level	Limit	Over Line	Read Limit	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m
900.400	36.84			45.04	-8.20 Peak	891.250	37.19			45.41	-8.22 Peak
900.400	31.00			39.20	-8.20 QP	891.250	30.86			39.08	-8.22 QP
917.800	100.58			108.56	-7.98 Peak	917.800	95.72			103.70	-7.98 Peak
917.800	99.76			107.74	-7.98 QP	917.800	94.60			102.58	-7.98 QP
934.700	36.91			44.62	-7.71 Peak	930.650	37.27			45.06	-7.79 Peak
934.700	31.35			39.06	-7.71 QP	930.650	31.29			39.08	-7.79 QP

\*Band Edge compliance at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

High CH											
Horizontal						Vertical					
Freq	Level	Limit	Over Line	Read Limit	Factor Remark	Freq	Level	Limit	Over Line	Read Limit	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m
926.800	98.84			106.70	-7.86 Peak	926.800	93.33			101.19	-7.86 Peak
926.800	96.01			103.87	-7.86 QP	926.800	90.45			98.31	-7.86 QP
928.000	60.63			68.47	-7.84 Peak	928.000	55.59			63.43	-7.84 Peak
928.000	56.67			64.51	-7.84 QP	928.000	50.41			58.25	-7.84 QP
<b>928 MHz Limit:</b> Peak = 98.84 - 20 = 78.84 dBuV/m QP = 96.01 - 20 = 76.01 dBuV/m						<b>928 MHz Limit:</b> Peak = 93.33 - 20 = 73.33 dBuV/m QP = 90.45 - 20 = 70.45 dBuV/m					

\*Band Edge compliance at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.


**Above 1G (1 GHz-10 GHz)**

Low CH													
Horizontal						Vertical							
Freq	Level	Limit	Over	Read		Freq	Level	Limit	Over	Read			
MHz	dBuV/m	dBuV/m		dB	dBuV		MHz	dBuV/m	dBuV/m				
1534.800	40.10	54.00	-13.90	50.84	-10.74	Average	1534.800	39.93	54.00	-14.07	50.67	-10.74	Average
1534.800	42.81	74.00	-31.19	53.55	-10.74	Peak	1534.800	43.21	74.00	-30.79	53.95	-10.74	Peak
1806.000	38.18	54.00	-15.82	46.76	-8.58	Average	1806.000	39.05	54.00	-14.95	47.63	-8.58	Average
1806.000	44.42	74.00	-29.58	53.00	-8.58	Peak	1806.000	45.13	74.00	-28.87	53.71	-8.58	Peak
2709.000	53.26	54.00	-0.74	59.95	-6.69	Average	2709.000	52.02	54.00	-1.98	58.71	-6.69	Average
2709.000	60.85	74.00	-13.15	67.54	-6.69	Peak	2709.000	60.01	74.00	-13.99	66.70	-6.69	Peak

Middle CH													
Horizontal						Vertical							
Freq	Level	Limit	Over	Read		Freq	Level	Limit	Over	Read			
MHz	dBuV/m	dBuV/m		dB	dBuV		MHz	dBuV/m	dBuV/m				
1534.800	41.63	54.00	-12.37	52.37	-10.74	Average	1534.800	38.94	54.00	-15.06	49.68	-10.74	Average
1534.800	44.02	74.00	-29.98	54.76	-10.74	Peak	1534.800	42.56	74.00	-31.44	53.30	-10.74	Peak
1824.000	38.26	54.00	-15.74	46.69	-8.43	Average	1836.000	41.34	54.00	-12.66	49.69	-8.35	Average
1824.000	45.49	74.00	-28.51	53.92	-8.43	Peak	1836.000	46.77	74.00	-27.23	55.12	-8.35	Peak
2754.000	53.54	54.00	-0.46	60.09	-6.55	Average	2754.000	53.19	54.00	-0.81	59.74	-6.55	Average
2754.000	62.19	74.00	-11.81	68.74	-6.55	Peak	2754.000	61.26	74.00	-12.74	67.81	-6.55	Peak

High CH													
Horizontal						Vertical							
Freq	Level	Limit	Over	Read		Freq	Level	Limit	Over	Read			
MHz	dBuV/m	dBuV/m		dB	dBuV		MHz	dBuV/m	dBuV/m				
1534.800	43.10	54.00	-10.90	53.84	-10.74	Average	1534.800	38.94	54.00	-15.06	49.68	-10.74	Average
1534.800	40.04	74.00	-33.96	50.78	-10.74	Peak	1534.800	42.94	74.00	-31.06	53.68	-10.74	Peak
1854.000	38.65	54.00	-15.35	46.82	-8.17	Average	1854.000	40.42	54.00	-13.58	48.59	-8.17	Average
1854.000	45.28	74.00	-28.72	53.45	-8.17	Peak	1854.000	46.44	74.00	-27.56	54.61	-8.17	Peak
2781.000	53.29	54.00	-0.71	59.73	-6.44	Average	2781.000	53.51	54.00	-0.49	59.95	-6.44	Average
2781.000	61.55	74.00	-12.45	67.99	-6.44	Peak	2781.000	61.09	74.00	-12.91	67.53	-6.44	Peak

**Above 1G (1 GHz-10 GHz): test the output power worst mode: Low Channel**

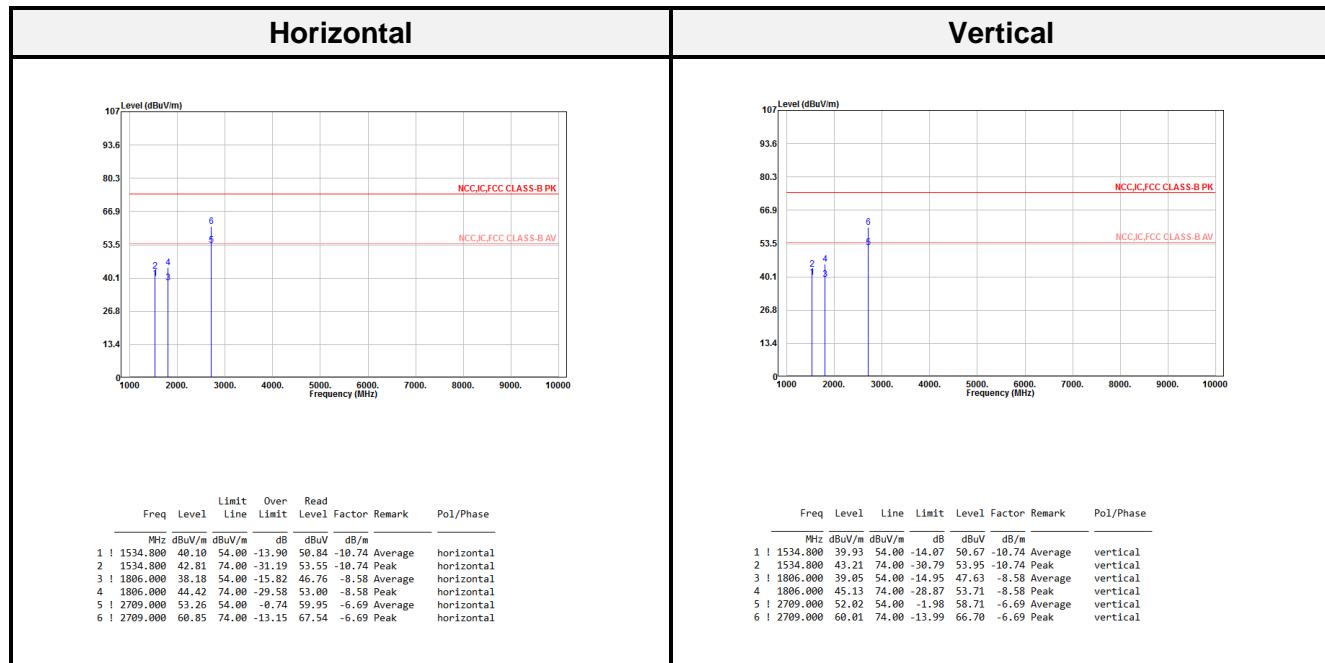

*Result = Reading + Correct Factor*

*Margin = Result – Limit*


*Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain*

*Spurious emissions more than 20 dB below the limit were not reported*

### Conducted Spurious Emissions:

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
Low	903	50.51	≥ 20	Compliance
Mid	918	49.69	≥ 20	Compliance
High	927	49.54	≥ 20	Compliance

### 903 MHz ~ 927 MHz

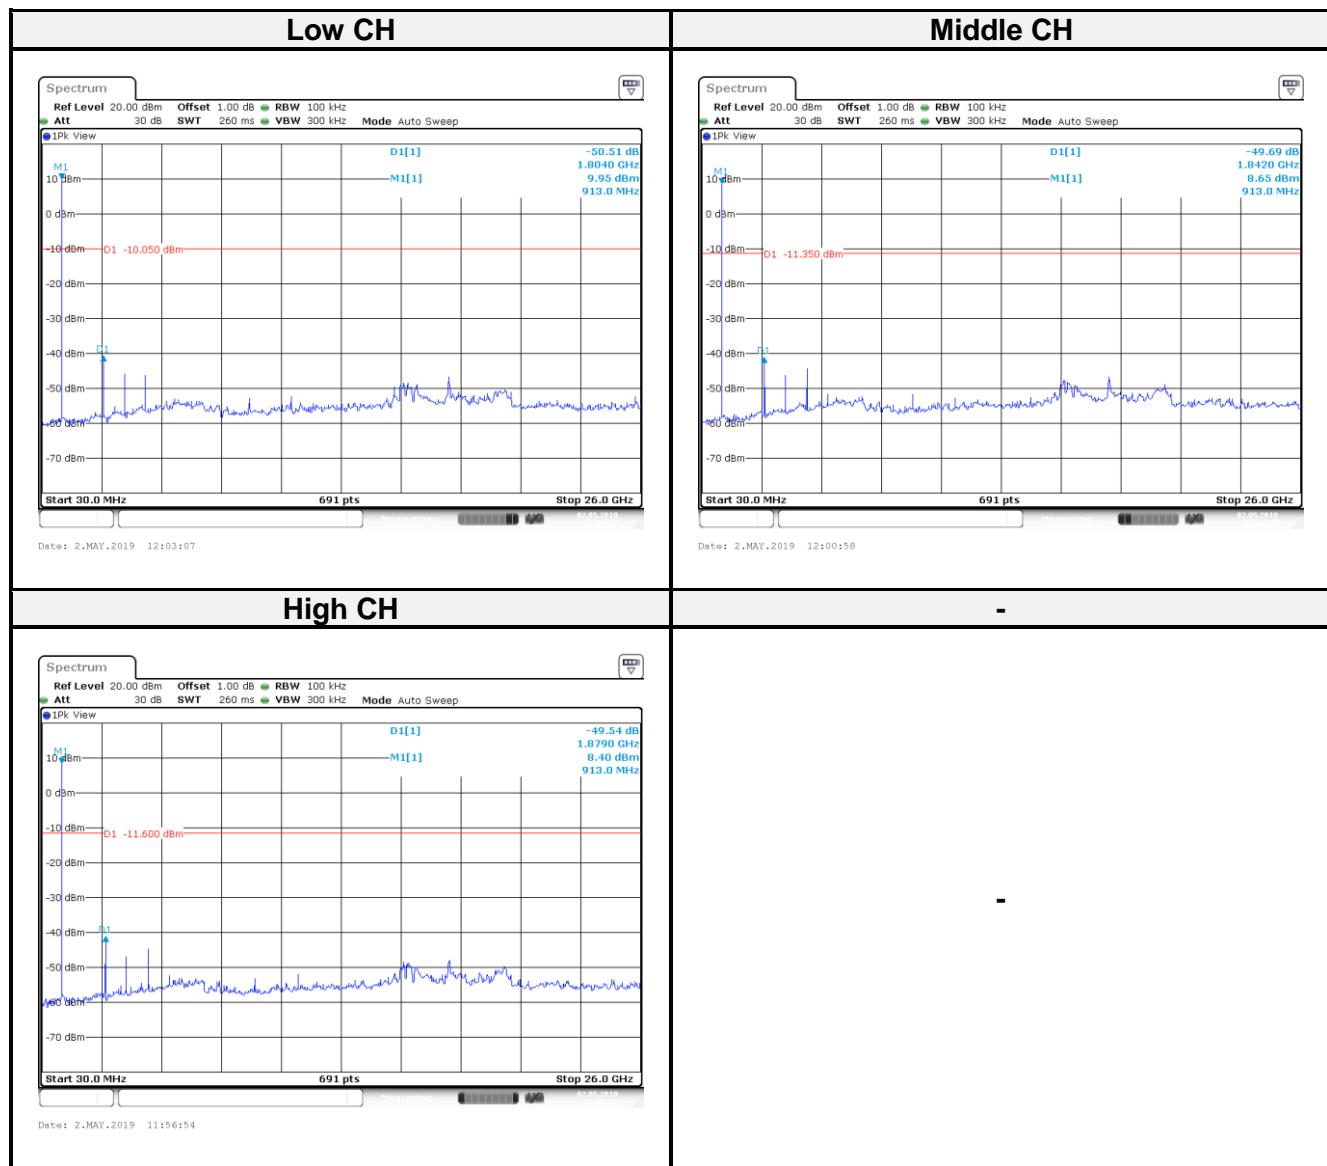

## 7 FCC §15.247(a)(2) – 6 dB Emission Bandwidth

### 7.1 Applicable Standard

According to FCC §15.247(a) (2),

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 7.2 Test Procedure

According to ANSI C63.10-2013, the steps for the first option are as follows:

- (1) Set RBW = 100 kHz.
- (2) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- (3) Detector = peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 7.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>Conducted Room</b>					
Spectrum Analyzer	Rohde & Schwarz	FSV40	101140	2018/11/22	2019/11/21
Cable	WOKEN	SFL402	S02-160323-07	2019/02/11	2020/02/10


**\*Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).


### 7.4 Test Environmental Conditions

Temperature:	20-25 °C	Relative Humidity:	55-65 %
ATM Pressure:	1015hPa	Test Engineer:	Leo Chang
Conducted Test Date:	2019-05-02	-	-

## 7.5 Test Results

Channel	Frequency (MHz)	99% OBW (MHz)	6 dB BW (MHz)	6dB Limit (MHz)	Result
Low	903	0.9204	0.5557	> 0.5	Compliance
Middle	918	0.9291	0.5557	> 0.5	Compliance
High	927	0.9334	0.5557	> 0.5	Compliance

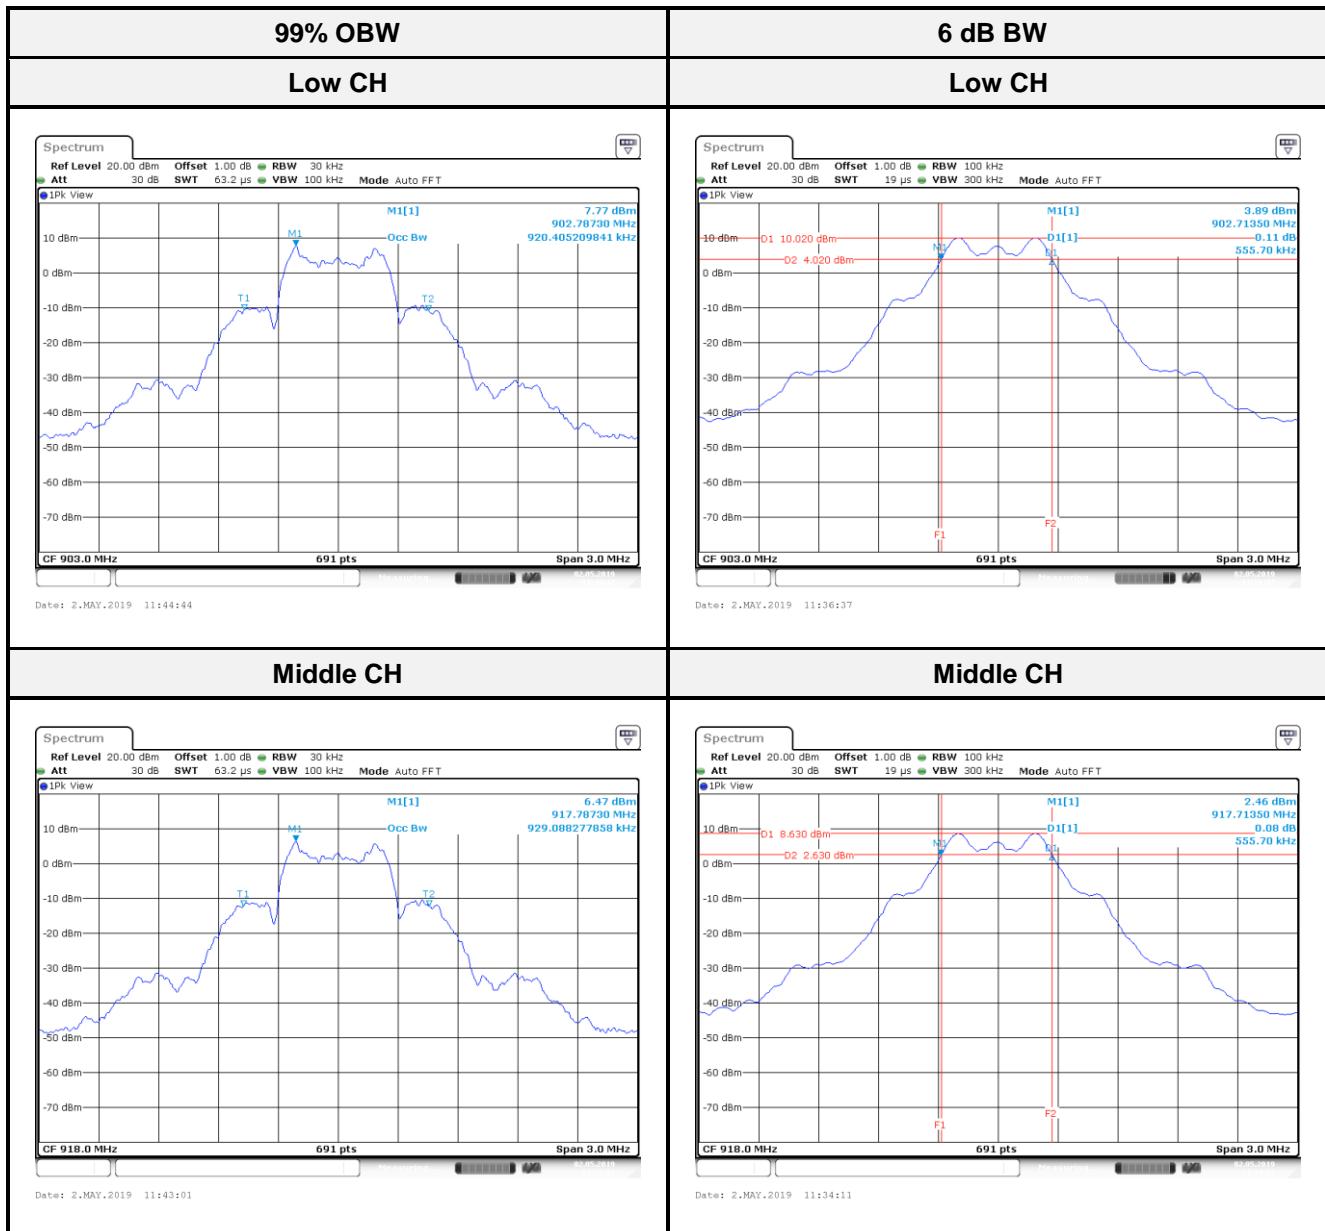

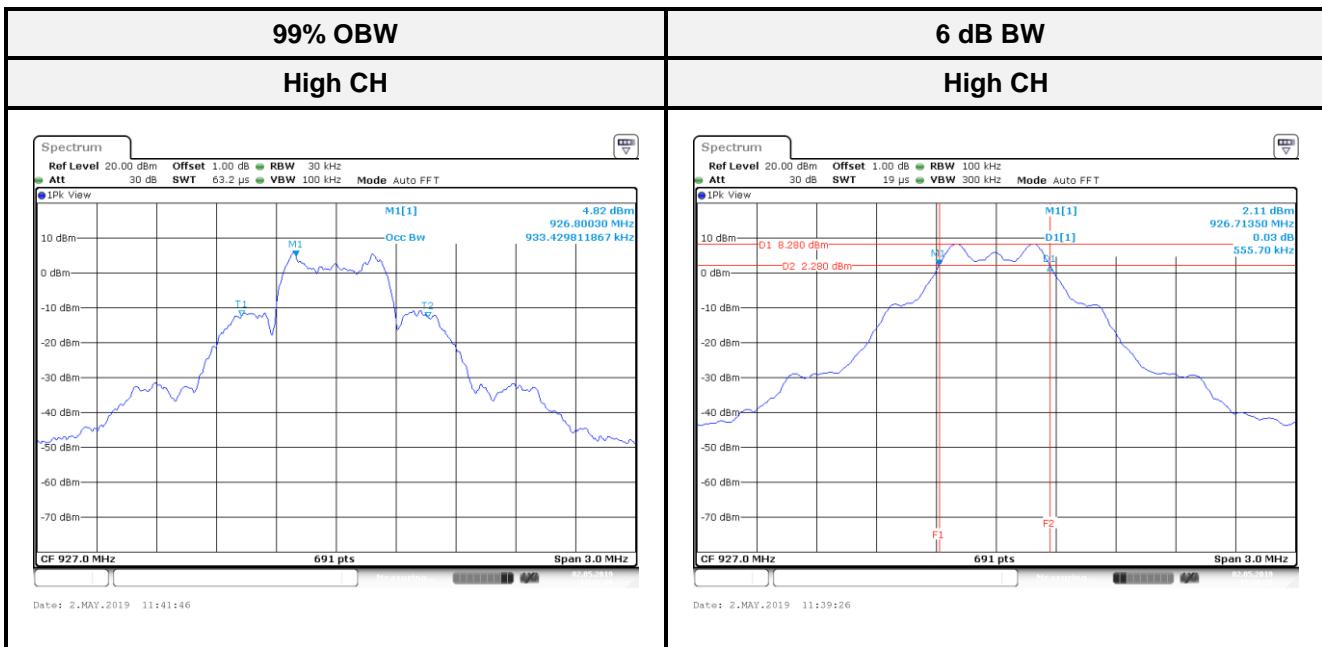

## 8 FCC §15.247(b) (3) – Maximum Output Power

### 8.1 Applicable Standard

According to FCC §15.247(b) (3),

Systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### 8.2 Test Procedure

- (1) Place the EUT on a bench and set it in transmitting mode.
- (2) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to measuring equipment.
- (3). Add a correction factor to the display.

### 8.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>Conducted Room</b>					
Spectrum Analyzer	Rohde & Schwarz	FSV40	101140	2018/11/22	2019/11/21
Cable	WOKEN	SFL402	S02-160323-07	2019/02/11	2020/02/10

*\*Statement of Traceability: The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).*

### 8.4 Test Environmental Conditions

Temperature:	20-25 °C	Relative Humidity:	55-65 %
ATM Pressure:	1015hPa	Test Engineer:	Leo Chang
Conducted Test Date:	2019-05-02	-	-

## 8.5 Test Results

Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (W)	Limit (dBm)	Result
Low	903	10.88	0.0122	30	Compliance
Middle	918	9.56	0.0090	30	Compliance
High	927	9.16	0.0082	30	Compliance

## 9 FCC §15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

### 9.1 Applicable Standard

According to FCC §15.247(d),

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 9.2 Test Procedure

- (1) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- (2) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- (3) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- (4) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

### 9.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>Conducted Room</b>					
Spectrum Analyzer	Rohde & Schwarz	FSV40	101140	2018/11/22	2019/11/21
Cable	WOKEN	SFL402	S02-160323-07	2019/02/11	2020/02/10


**\*Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

### 9.4 Test Environmental Conditions

Temperature:	20-25 °C	Relative Humidity:	55-65 %
ATM Pressure:	1015hPa	Test Engineer:	Leo Chang
Conducted Test Date:	2019-05-02	-	-

### 9.5 Test Results

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBC)	Limit (dBC)	Result
Low	903	38.55	≥ 20	Compliance
High	927	37.24	≥ 20	Compliance

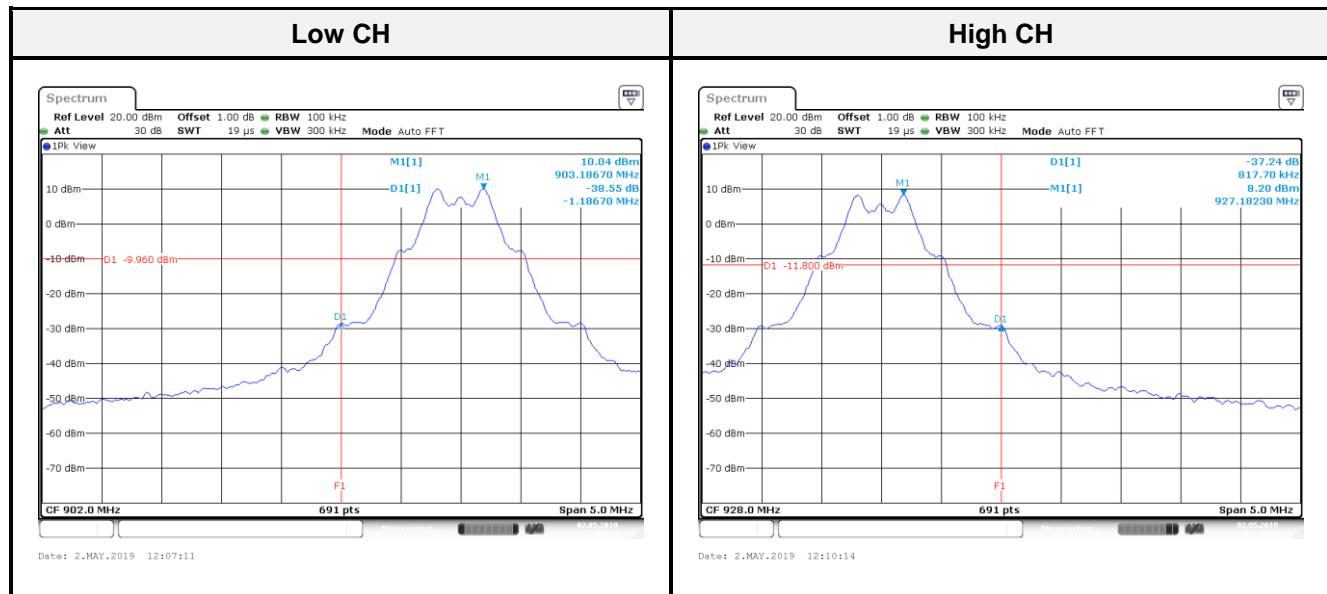

## 10 FCC §15.247(e) – Power Spectral Density

### 10.1 Applicable Standard

According to FCC §15.247(e),

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 10.2 Test Procedure

According to ANSI C63.10-2013,

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth. (3) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- (4) Set the VBW  $\geq [3 \times \text{RBW}]$ . (5) Detector = peak. (6) Sweep time = auto couple.
- (7) Trace mode = max hold. (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- (10) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

### 10.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>Conducted Room</b>					
Spectrum Analyzer	Rohde & Schwarz	FSV40	101140	2018/11/22	2019/11/21
Cable	WOKEN	SFL402	S02-160323-07	2019/02/11	2020/02/10


**\*Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

### 10.4 Test Environmental Conditions

Temperature:	20-25 °C	Relative Humidity:	55-65 %
ATM Pressure:	1015hPa	Test Engineer:	Leo Chang
Conducted Test Date:	2019-05-02	-	-

## 10.5 Test Results

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Result
Low	903	-0.51	8	Compliance
Middle	918	-1.81	8	Compliance
High	927	-2.10	8	Compliance

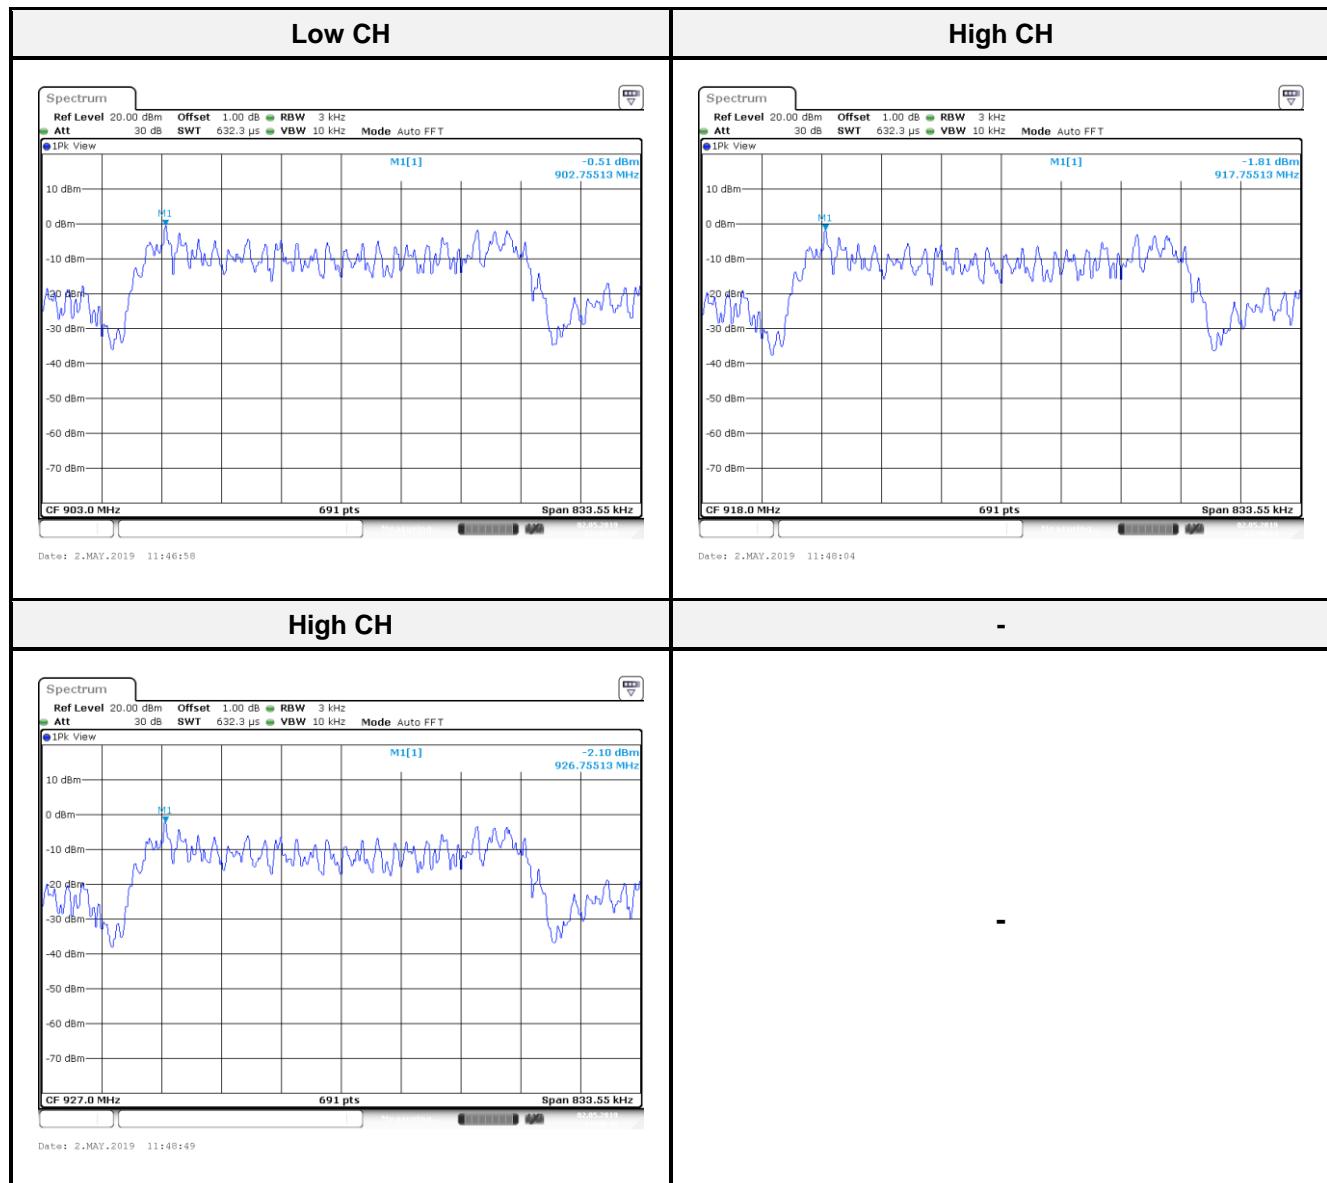

----- END OF REPORT -----