



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

January 24, 2017

KEYW Corporation
7767 Old Telegraph Rd.
Severn, MD 21144

Dear Ken O'Brien,

Enclosed is the EMC Wireless test report for compliance testing of the KEYW Corporation, MPBTS as tested to the requirements of the FCC Certification rules under Title 47 of the CFR Part 22 Subpart H and Industry Canada RSS-132 Issue 3 for Cellular Devices, CC Part 24 Subpart E and Industry Canada RSS-133 Issue 6 for Broadband PCS Devices, and Part 27 and Industry Canada RSS-139 Issue 3 for Broadband Radio Service (BRS) Devices.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\KEYW Corporation\EMC87554A-FCC22_24_27 Rev. 3)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

**Electromagnetic Compatibility Criteria
Test Report**

for the

**KEYW Corporation
Model MPBTS**

Tested under

FCC Certification Rules

Title 47 of the CFR,

Part 22 Subpart H and RSS-132 Issue 3 for Cellular Devices;
Part 24 Subpart E and RSS-133 Issue 6 for Broadband PCS Devices
& Part 27 and RSS-139 for BRS Service

MET Report: EMC87554A-FCC22_24_27 Rev. 3

January 24, 2017

Prepared For:

**KEYW Corporation
7767 Old Telegraph Rd.
Severn, MD 21144**

**Prepared By:
MET Laboratories, Inc.
914 W. Patapsco Ave
Baltimore, MD 21230**

Electromagnetic Compatibility Criteria Test Report

for the


KEYW Corporation Model MPBTS

Tested under

FCC Certification Rules

Title 47 of the CFR,

Part 22 Subpart H and RSS-132 Issue 3 for Cellular Devices;
Part 24 Subpart E and RSS-133 Issue 6 for Broadband PCS Devices
& Part 27 and RSS-139 for BRS Service



Djed Mouada
Project Engineer, Electromagnetic Compatibility Lab



Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 22 Subpart H, Part 24 Subpart E, and Part 27 of the FCC Rules and Industry Canada standards RSS-132 Issue 3 January 2013, RSS-133 Issue 6 January 2013, and RSS-139 Issue 3 July 2015 under normal use and maintenance.



Asad Bajwa,
Director, Electromagnetic Compatibility Lab



Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	July 27, 2016	Initial Issue
1	December 7, 2016	Engineer corrections.
2	January 9, 2017	Added 1 GHz block diagram.
3	January 24, 2017	Added MPE.

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview.....	4
	B. References.....	5
	C. Test Site	5
	D. Description of Test Sample.....	5
	E. Equipment Configuration.....	6
	F. Support Equipment	7
	G. Ports and Cabling Information.....	7
	H. Mode of Operation.....	7
	I. Method of Monitoring EUT Operation.....	7
	J. Modifications	8
	Modifications to EUT	8
	Modifications to Test Standard.....	8
	K. Disposition of EUT	8
III.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	9
	§ 2.1046 RF Power Output	10
	§ 2.1049 Occupied Bandwidth	15
	§ 2.1053 Radiated Spurious Emissions	19
	§ 2.1051 Spurious Emissions at Antenna Terminals	28
	§ 24.232(d) Peak to Average Ratio	53
	§ 2.1049 Frequency Stability.....	58
	Maximum Permissible Exposure.....	61
IV.	Test Equipment	62

List of Tables

Table 1. Executive Summary of EMC Compliance Testing	2
Table 2. Equipment Configuration	6
Table 3. Support Equipment.....	7
Table 4. Ports and Cabling Information	7
Table 5. ERP, Test Results, Part 22.....	11
Table 6. EIRP, Test Results, Part 24	11
Table 7. EIRP, Test Results, Part 27	11
Table 8. Frequency Stability, Test Results, Part 24.....	58
Table 9. Frequency Stability, Test Results, Part 27.....	59

List of Plots

Plot 1. , Channel 4357, Conducted Power, Part 22.....	12
Plot 2. , Channel 4413, Conducted Power, Part 22.....	12
Plot 3. , Channel 4458, Conducted Power, Part 22.....	12
Plot 4, Channel 6592, Conducted Power, Part 24	13
Plot 5. EIRP, Channel 9662, Conducted Power, Part 24.....	13
Plot 6 , Channel 9815, Conducted Power, Part 24	13
Plot 7, Channel 1537, Conducted Power, Part 27	14
Plot 8 , Channel 1655, Conducted Power, Part 27	14
Plot 9, Channel 2087, Conducted Power, Part 27	14
Plot 10. Occupied Bandwidth, Channel 4357, Part 22	16
Plot 11. Occupied Bandwidth, Channel 4413, Part 22	16
Plot 12. Occupied Bandwidth, Channel 4458, Part 22	16
Plot 13. Occupied Bandwidth, Channel 6592, Part 24	17
Plot 14. Occupied Bandwidth, Channel 9662, Part 24	17
Plot 15. Occupied Bandwidth, Channel 9815, Part 24	17
Plot 16. Occupied Bandwidth, Channel 1537, Part 27	18
Plot 17. Occupied Bandwidth, Channel 1655, Part 27	18
Plot 18. Occupied Bandwidth, Channel 2087, Part 27	18
Plot 19. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, Part 22	21
Plot 20. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, Part 22	21
Plot 21. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, Part 22	21
Plot 22. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, Part 22.....	22
Plot 23. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, Part 22.....	22
Plot 24. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, Part 22	22
Plot 25. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, Part 24	23
Plot 26. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, Part 24	23
Plot 27. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, Part 24	23
Plot 28. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, Part 24.....	24
Plot 29. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, Part 24.....	24
Plot 30. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, Part 24	24
Plot 31. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, Part 27	25
Plot 32. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, Part 27	25
Plot 33. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, Part 27	25
Plot 34. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, Part 27.....	26
Plot 35. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, Part 27.....	26
Plot 36. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, Part 27	26
Plot 37. Conducted Spurious Emissions, Channel 4357, 30 MHz – 1 GHz, Part 22.....	30
Plot 38. Conducted Spurious Emissions, Channel 4357, 1 GHz – 3 GHz, Part 22	30
Plot 39. Conducted Spurious Emissions, Channel 4357, 3 GHz – 6 GHz, Part 22	30



Plot 40. Conducted Spurious Emissions, Channel 4357, 6 GHz – 10 GHz, Part 22	31
Plot 41. Conducted Spurious Emissions, Channel 4413, 30 MHz – 1 GHz, Part 22.....	31
Plot 42. Conducted Spurious Emissions, Channel 4413, 3 GHz – 6 GHz, Part 22	31
Plot 43. Conducted Spurious Emissions, Channel 4413, 6 GHz – 10 GHz, Part 22	32
Plot 44. Conducted Spurious Emissions, Channel 4458, 30 MHz – 1 GHz, Part 22.....	32
Plot 45. Conducted Spurious Emissions, Channel 4458, 3 GHz – 6 GHz, Part 22	32
Plot 46. Conducted Spurious Emissions, Channel 4458, 6 GHz – 10 GHz, Part 22	33
Plot 47. Conducted Spurious Emissions, Channel 6592, 30 MHz – 1 GHz, Part 24.....	34
Plot 48. Conducted Spurious Emissions, Channel 6592, 1 GHz – 3 GHz, Part 24	34
Plot 49. Conducted Spurious Emissions, Channel 6592, 3 GHz – 6 GHz, Part 24	34
Plot 50. Conducted Spurious Emissions, Channel 6592, 6 GHz – 10 GHz, Part 24	35
Plot 51. Conducted Spurious Emissions, Channel 6592, 10 GHz – 14 GHz, Part 24	35
Plot 52. Conducted Spurious Emissions, Channel 6592, 14 GHz – 18 GHz, Part 24	35
Plot 53. Conducted Spurious Emissions, Channel 6592, 18 GHz – 22 GHz, Part 24	36
Plot 54. Conducted Spurious Emissions, Channel 9662, 30 MHz – 1 GHz, Part 24.....	36
Plot 55. Conducted Spurious Emissions, Channel 9662, 1 GHz – 3 GHz, Part 24	36
Plot 56. Conducted Spurious Emissions, Channel 9662, 3 GHz – 6 GHz, Part 24	37
Plot 57. Conducted Spurious Emissions, Channel 9662, 6 GHz – 10 GHz, Part 24	37
Plot 58. Conducted Spurious Emissions, Channel 9662, 10 GHz – 14 GHz, Part 24	37
Plot 59. Conducted Spurious Emissions, Channel 9662, 14 GHz – 18 GHz, Part 24	38
Plot 60. Conducted Spurious Emissions, Channel 9662, 18 GHz – 22 GHz, Part 24	38
Plot 61. Conducted Spurious Emissions, Channel 9815, 30 MHz – 1 GHz, Part 24.....	38
Plot 62. Conducted Spurious Emissions, Channel 9815, 1 GHz – 3 GHz, Part 24	39
Plot 63. Conducted Spurious Emissions, Channel 9815, 3 GHz – 6 GHz, Part 24	39
Plot 64. Conducted Spurious Emissions, Channel 9815, 6 GHz – 10 GHz, Part 24	39
Plot 65. Conducted Spurious Emissions, Channel 9815, 10 GHz – 14 GHz, Part 24	40
Plot 66. Conducted Spurious Emissions, Channel 9815, 14 GHz – 18 GHz, Part 24	40
Plot 67. Conducted Spurious Emissions, Channel 9815, 18 GHz – 22 GHz, Part 24	40
Plot 68. Conducted Spurious Emissions, Channel 1537, 30 MHz – 1 GHz, Part 27.....	41
Plot 69. Conducted Spurious Emissions, Channel 1537, 1 GHz – 3 GHz, Part 27	41
Plot 70. Conducted Spurious Emissions, Channel 1537, 3 GHz – 6 GHz, Part 27	41
Plot 71. Conducted Spurious Emissions, Channel 1537, 6 GHz – 10 GHz, Part 27	42
Plot 72. Conducted Spurious Emissions, Channel 1537, 10 GHz – 14 GHz, Part 27	42
Plot 73. Conducted Spurious Emissions, Channel 1537, 14 GHz – 18 GHz, Part 27	42
Plot 74. Conducted Spurious Emissions, Channel 1537, 18 GHz – 22 GHz, Part 27	43
Plot 75. Conducted Spurious Emissions, Channel 1655, 30 MHz – 1 GHz, Part 27.....	43
Plot 76. Conducted Spurious Emissions, Channel 1655, 1 GHz – 3 GHz, Part 27	43
Plot 77. Conducted Spurious Emissions, Channel 1655, 3 GHz – 6 GHz, Part 27	44
Plot 78. Conducted Spurious Emissions, Channel 1655, 6 GHz – 10 GHz, Part 27	44
Plot 79. Conducted Spurious Emissions, Channel 1655, 10 GHz – 14 GHz, Part 27	44
Plot 80. Conducted Spurious Emissions, Channel 1655, 14 GHz – 18 GHz, Part 27	45
Plot 81. Conducted Spurious Emissions, Channel 1655, 18 GHz – 22 GHz, Part 27	45
Plot 82. Conducted Spurious Emissions, Channel 2087, 30 MHz – 1 GHz, Part 27.....	45
Plot 83. Conducted Spurious Emissions, Channel 2087, 1 GHz – 3 GHz, Part 27	46
Plot 84. Conducted Spurious Emissions, Channel 2087, 3 GHz – 6 GHz, Part 27	46
Plot 85. Conducted Spurious Emissions, Channel 2087, 6 GHz – 10 GHz, Part 27	46
Plot 86. Conducted Spurious Emissions, Channel 2087, 10 GHz – 14 GHz, Part 27	47
Plot 87. Conducted Spurious Emissions, Channel 2087, 14 GHz – 18 GHz, Part 27	47
Plot 88. Conducted Spurious Emissions, Channel 2087, 18 GHz – 22 GHz, Part 27	47
Plot 89. Conducted Band Edge, Channel 4357, Part 22	48
Plot 90. Conducted Band Edge, Channel 4358 (Full Power), Part 22	48
Plot 91. Conducted Band Edge, Channel 4457 (Full Power), Part 22	48
Plot 92. Conducted Band Edge, Channel 4458, Part 22	49
Plot 93. Conducted Band Edge, Channel 5112, Part 24	50
Plot 94. Conducted Band Edge, Channel 5513 (Full Power), Part 24	50



Plot 95. Conducted Band Edge, Channel 6592, Part 24	50
Plot 96. Conducted Band Edge, Channel 1537, Part 27	51
Plot 97. Conducted Band Edge, Channel 1538 (Full Power), Part 27	51
Plot 98. Conducted Band Edge, Channel 2062 (Full Power), Part 27	51
Plot 99. Conducted Band Edge, Channel 2087, Part 27	52
Plot 100. Peak to Average Ratio, Channel 4357, Part 22	54
Plot 101. Peak to Average Ratio, Channel 4413, Part 22	54
Plot 102. Peak to Average Ratio, Channel 4458, Part 22	54
Plot 103. Peak to Average Ratio, Channel 6592, Part 24	55
Plot 104. Peak to Average Ratio, Channel 9662, Part 24	55
Plot 105. Peak to Average Ratio, Channel 9815, Part 24	55
Plot 106. Peak to Average Ratio, Channel 1537, Part 27	56
Plot 107. Peak to Average Ratio, Channel 1655, Part 27	56
Plot 108. Peak to Average Ratio, Channel 2087, Part 27	56

List of Photographs

Photograph 1. Radiated Spurious Emissions, Test Setup	27
Photograph 2. Frequency Stability, Test Setup	60



List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB μ A	Decibels above one microamp
dB μ V	Decibels above one microvolt
dB μ A/m	Decibels above one microamp per meter
dB μ V/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μ H	microhenry
μ	microfarad
μ s	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane



I. Executive Summary



A. Purpose of Test

An EMC evaluation was performed to determine compliance of the KEYW Corporation MPBTS, with the requirements of Part 22 Subpart H, Part 24 Subpart E, and Part 27. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the MPBTS. KEYW Corporation should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the MPBTS, has been permanently discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 22 Subpart H, Part 24 Subpart E, and Part 27, in accordance with KEYW Corporation, purchase order number B003491.

FCC Reference	IC Reference	Description	Compliance
§2.1049; §22.917; §24.232(d); §27.50(d)(5)	RSS-GEN Issue 4	Occupied Bandwidth	Compliant
§2.1049, §24.238; §27.54	RSS-132 Issue 3 (5.3) RSS-133 Issue 6 (6.3) RSS-139 Issue 3 (6.4)	Frequency stability	Compliant
§24.323 (d); §27.50(d)(5)	N/A	Peak to Average Ration	Compliant
§2.1051; §22.917, §24.238; §27.53(g)	RSS-132 Issue 3 (5.5) RSS-133 Issue 6 (6.5) RSS-139 Issue 3 (6.6)	Conducted Spurious Emissions at Antenna Terminals and Band Edge	Compliant
§2.1046; §22.913; §24.232; §27.50(d)	RSS-132 Issue 3 (5.4) RSS-133 Issue 6 (6.4) RSS-139 Issue 3 (6.5)	RF Power Output (EIRP)	Compliant
§2.1053; §22.917, §24.238; §27.53(g)	RSS-132 Issue 3 (5.5) RSS-133 Issue 6 (6.5) RSS-139 Issue 3 (6.6)	Radiated Spurious Emissions from the Cabinet	Compliant

Table 1. Executive Summary of EMC Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by KEYW Corporation to perform testing on the MPBTS, under KEYW Corporation's purchase order number B003491.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the KEYW Corporation, MPBTS.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	MPBTS			
Model(s) Covered:	MPBTS			
Filing Status:	Original			
EUT Specifications:	Primary Power: 120 VAC, 60 Hz			
	FCC ID: 2AFYU67287			
	Type of Modulations:	WCDMA		
	Equipment Code:	AMP		
	RF Power Output	Part 22 ERP (W): 117.22	Part 24 EIRP(W): 115.61	Part 27 EIRP(W): 60.12
	EUT Frequency Ranges:	869-894 MHz	1930-1995 MHz	2110-2155 MHz
Analysis:	The results obtained relate only to the item(s) tested.			
Environmental Test Conditions:	Temperature: 15-35° C			
	Relative Humidity: 30-60%			
	Barometric Pressure: 860-1060 mbar			
Evaluated by:	Djed Mouada			
Date(s):	January 9, 2017			

B. References

CFR 47, Part 22, Subpart H	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 22: Rules and Regulations for Cellular Devices.
CFR 47, Part 24, Subpart E	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 24: Rules and Regulations for Personal Communications Services
CFR 47, Part 27	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 27: Rules and Regulations for Advanced Wireless Services
RSS-132 Issue 3 January 2013	Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz
RSS-133 Issue 6 January 2013	2 GHz Personal Communications Services
RSS-139 Issue 3 July 2015	Advanced Wireless Services (AWS) Equipment Operating in the Bands 1710-1780 MHz and 2110-2180 MHz
RSS-GEN Issue 4 November 2014	General Requirements for Compliance of Radio Apparatus
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories
EIA/TIA-603-D-2010	Land Mobile FM or PM Communication Equipment Measurement and Performance Standards

C. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The Multi-Protocol Base Transceiver Station (MPBTS), Equipment Under Test (EUT), is a high-power, multi-protocol, multi-carrier capable base station that can be used for many cellular applications. The system is intended to be used in mobile environments installed in a vehicle with room mounted antenna, but can also function as a fixed base station.

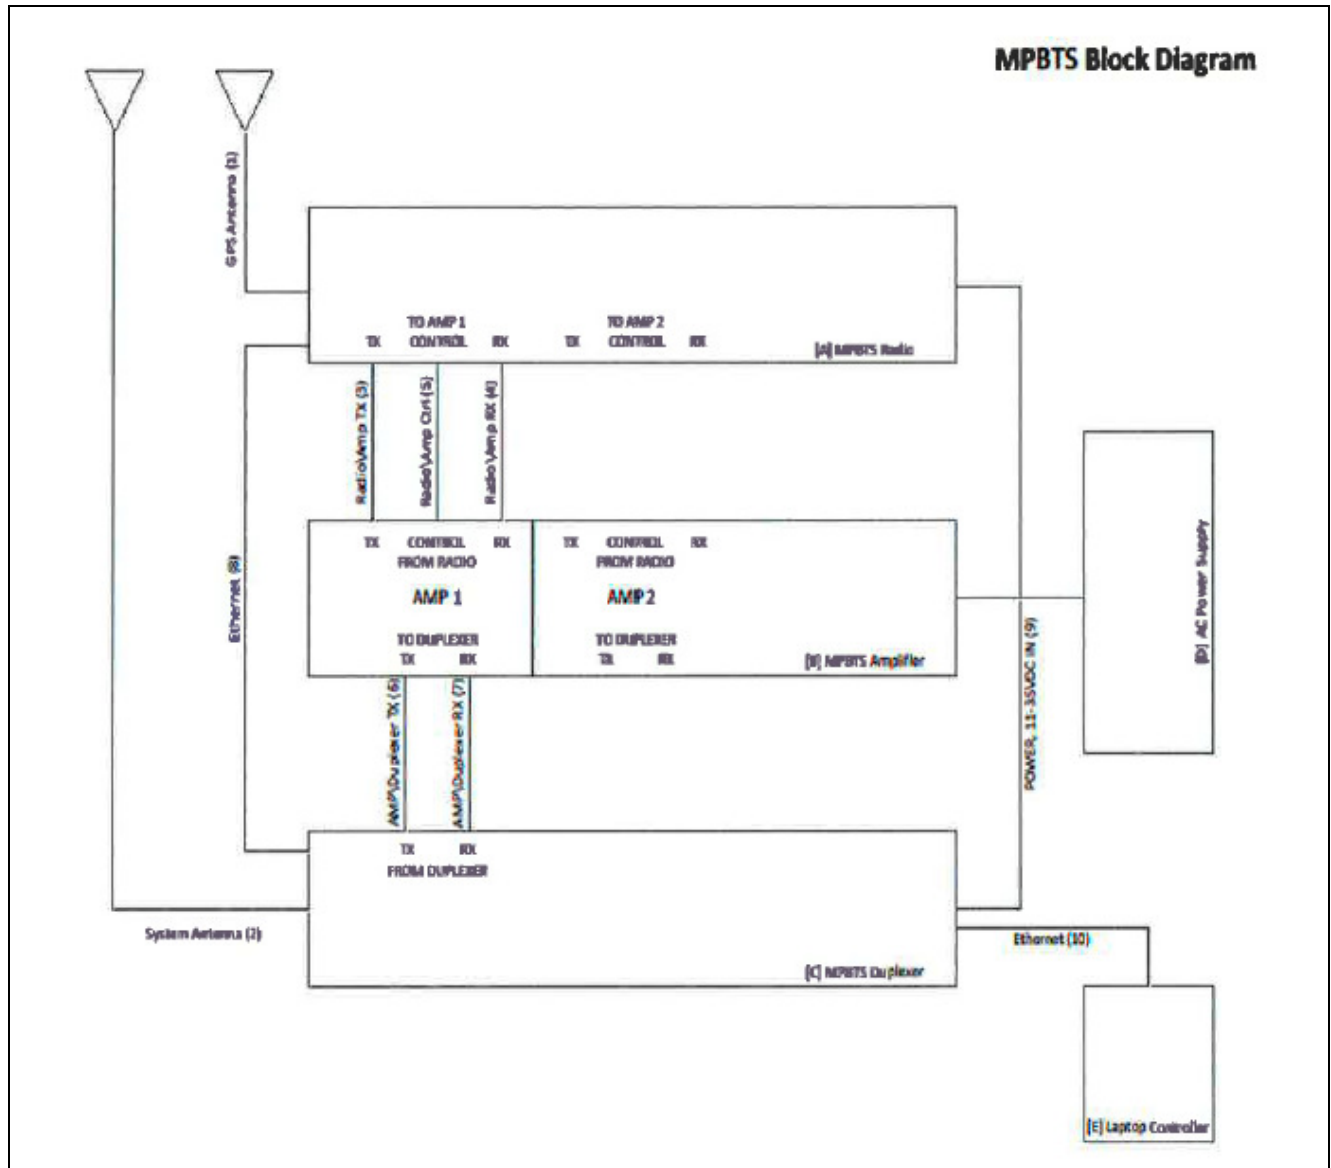


Figure 1. Block Diagram of Equipment Configuration

E. Equipment Configuration

Ref. ID	Name/Description	Model Number	Part Number	Serial Number
A	MPBTS Radio	TBD	--	TBD
B	MPBTS Amplifier	TBD	--	TBD
C	MPBTS Duplexer	TBD	--	TBD
D	Power Supply	TBD	--	TBD

Table 2. Equipment Configuration

F. Support Equipment

Ref. ID	Name / Description	Manufacturer	Model Number	Customer Supplied Calibration Data
--	System/GPS Dual Feed Antenna	Huber Suhner	1399.99.0120	--
E	Laptop Controller	Dell	ATG	--

Table 3. Support Equipment

G. Ports and Cabling Information

Ref. ID	Port Name on EUT	Cable Description or Reason for No Cable	Qty.	Max Length	Shielded? (Y/N)	Termination Box ID & Port Name
1	[A] GPS Antenna	LMR200	1	15'	Yes	GSP Antenna
2	[C] System Antenna	LMR400	1	<10'	Yes	System Antenna
3	[A] To Amp 1 TX	LMR400	1	<18"	Yes	[B] From Radio TX
4	[A] To Amp 1 RX	LMR400	1	<18"	Yes	[B] From Radio RX
5	[A] To Amp 1 Control	24AWG, 12 Conductor	1	<18"	Yes	[B] From Radio Control
6	[B] To Duplexer TX	LMR400	1	<18"	Yes	[C] From Amp TX
7	[B] to Duplexer RX	LMR400	1	<18"	Yes	[C] From Amp RX
8	[A] Ethernet	8 Conductor, CAT5	1	--	No	[C] Ethernet (Port 2)
9	[A,B,C] Power, 11-35VDC In	14AWG, 4 Conductor SJ Cable	3	--	No	AC Power Supply
10	[C] Ethernet	8 Conductor, CAT5	1	--	No	Laptop Controller

Table 4. Ports and Cabling Information

H. Mode of Operation

The MPBTS continuously transmits a broadcast signal as part of its normal operation. There is no special operating mode required for testing.

I. Method of Monitoring EUT Operation

1. A blinking green heartbeat indicator in the GUI and green LEDs on the radio and amplifier front panels indicate normal operation of the system.
2. Any other LED status or lack of the green heartbeat indicator indicates a problem with the system.

J. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to KEYW Corporation. upon completion of testing.



III. Electromagnetic Compatibility Criteria for Intentional Radiators



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1046 RF Power Output

Test Requirements: § 2.1046 Measurements required: RF power output:

§ 2.1046 (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

§ 2.1046 (b) For single sideband, independent sideband, and single channel, controlled carrier radiotelephone transmitters, the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as specified and as applicable in § 2.1046 (b) (1-5). In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.

§ 2.1046 (c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

§ 22.913 Power and antenna height limits.

§ 22.913(a): The Effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 watts.

§ 24.232 Power and antenna height limits.

§ 24.232 (a): (1) Base stations with an emission bandwidth of 1 MHz or less are limited to 1640 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.

(2) Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.

§27.50(d):

(2) The power of each fixed or base station transmitting in the 1995-2000 MHz, the 2110-2155 MHz, or 2180-2200 MHz band and situated in any geographic location other than that described in paragraph (d)(1) of this section is limited to:

(3) A licensee operating a base or fixed station in the 2110-2155 MHz band utilizing a power greater than 1640 watts EIRP and greater than 1640 watts/MHz EIRP must coordinate such operations in advance with all Government and non-Government satellite entities in the 2025-2110 MHz band. Operations with power greater than 1640 watts EIRP and greater than 1640 watts/MHz EIRP must be coordinated in advance with the following licensees authorized to operate within 120 kilometers (75 miles) of the base or fixed station operating in this band: all Broadband Radio Service (BRS) licensees authorized under Part 27 in the 2155-2160 MHz band and all advanced wireless services (AWS) licensees authorized to operate on adjacent frequency blocks in the 2110-2155 MHz band.



Test Procedures: As required by 47 CFR 2.1046, RF power output measurements were made at the RF output terminals using an attenuator and spectrum analyzer or power meter. The spectrum analyzer was configured in accordance with the licensed measurement guidance procedure. The “Channel Power” measurement feature of the spectrum analyzer was used. Measurements were taken in both high and low power modes, as permissible by compliance with Intermodulation requirements. Lower power mode must be used when operating in multi-channel mode.

RF power output measurement was made at the RF output terminal using a spectrum analyzer, with suitable attenuation where appropriate.

Test Results: The EUT complies with the requirements of this section.

Test Engineer(s): Djed Mouada

Test Date(s): 12/21/15

Channel	Conducted Power (dBm)	Antenna Gain (dBi)	ERP (W)	Limit (W)
Low (871.4MHz)	42.08	9	78.16	500
Mid(882.6MHz)	43.84	9	117.22	500
High(891.6MHz)	42.02	9	77.09	500

Table 5. ERP, Test Results, Part 22

Channel	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (W)	Limit (W)
Low(1932.4MHz)	40.19	9	82.98	1640
Mid(1963.0MHz)	41.63	9	115.61	1640
High (1992.5MHz)	41.01	9	79.61	1640


Table 6. EIRP, Test Results, Part 24

Channel	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (W)	Limit (W)
Low(2112.4MHz)	34.08	9	20.32	1640
Mid(2136MHz)	38.07	9	50.93	1640
High(2152MHz)	38.79	9	60.11	1640


Table 7. EIRP, Test Results, Part 27




Part 22, Conducted Power

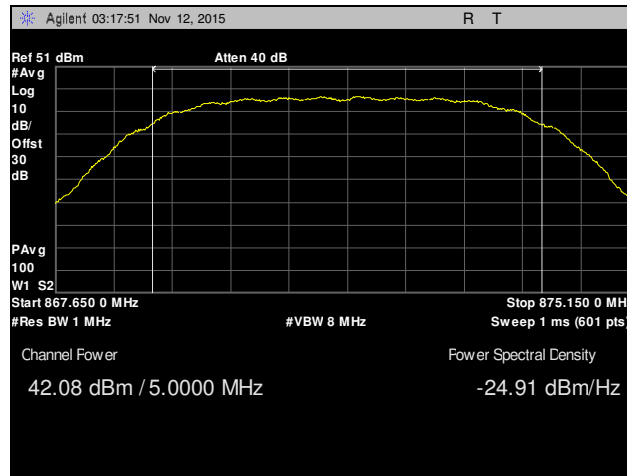

Plot 1. , Channel 4357, Conducted Power, Part 22

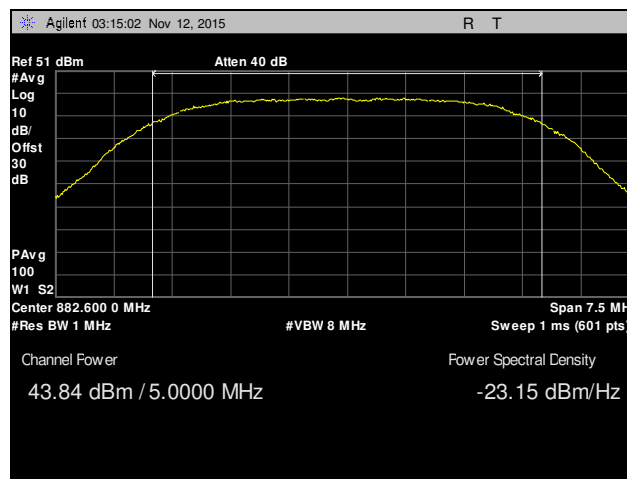


Plot 2. , Channel 4413, Conducted Power, Part 22

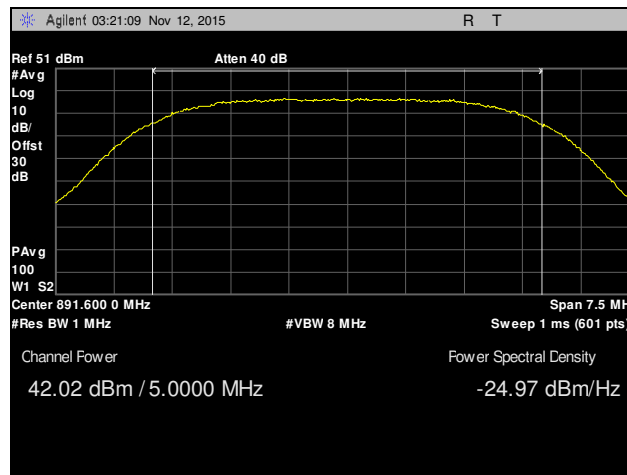


Plot 3. , Channel 4458, Conducted Power, Part 22


Part 24, Conducted Power

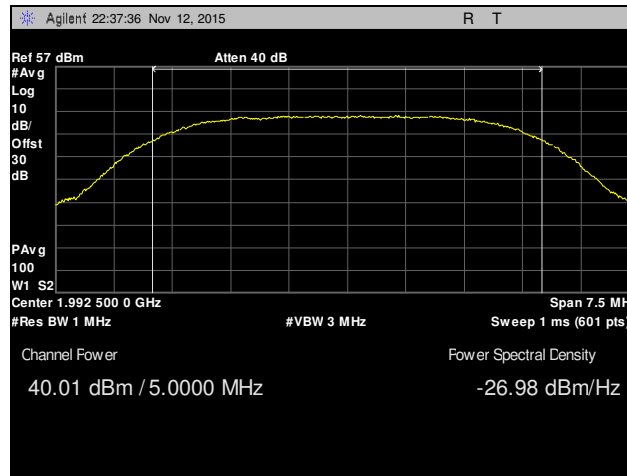

Plot 4, Channel 6592, Conducted Power, Part 24

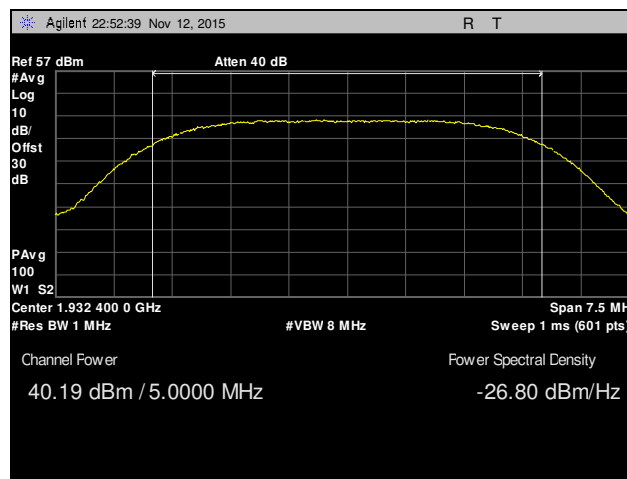


Plot 5. EIRP, Channel 9662, Conducted Power, Part 24

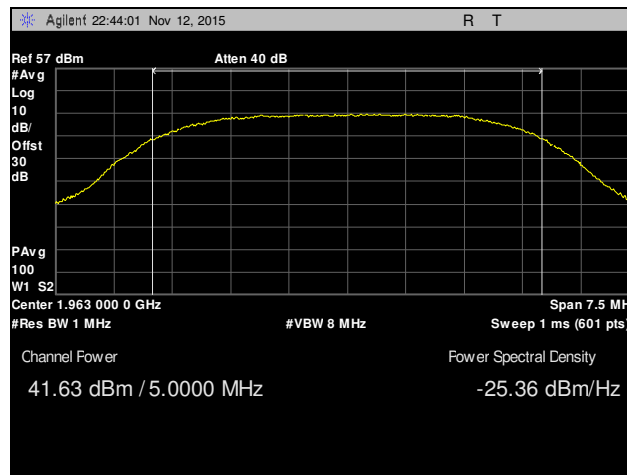


Plot 6, Channel 9815, Conducted Power, Part 24




Part 27, Conducted Power

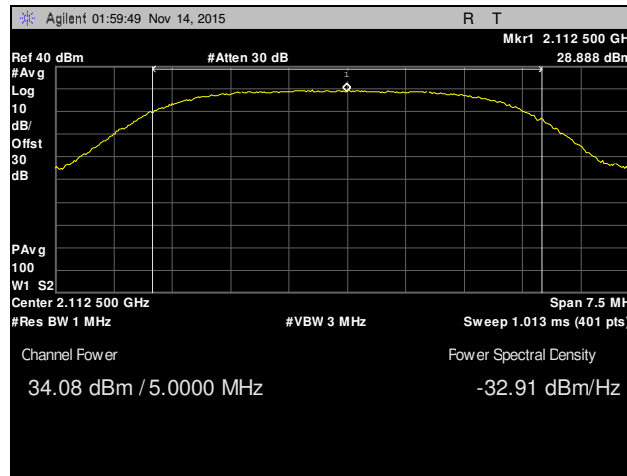

Plot 7, Channel 1537, Conducted Power, Part 27

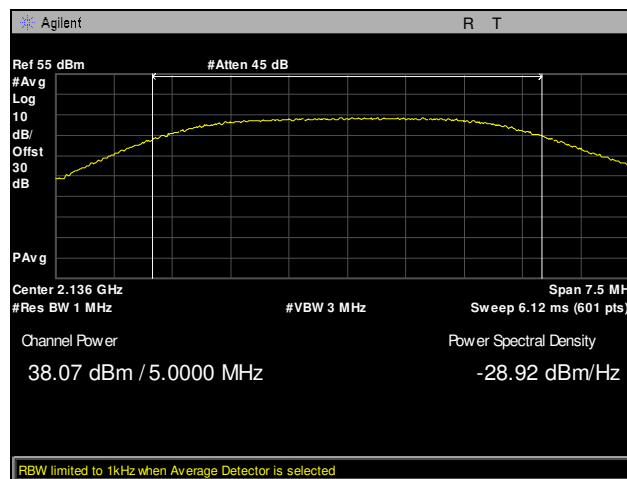

Plot 8, Channel 1655, Conducted Power, Part 27

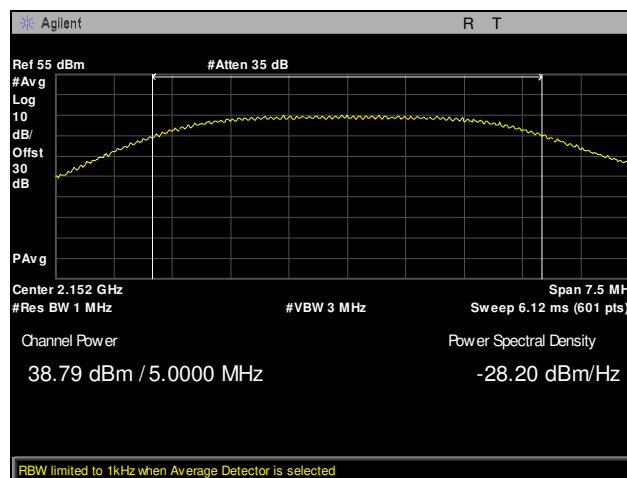

Plot 9, Channel 2087, Conducted Power, Part 27

§ 2.1049 Occupied Bandwidth

Test Requirement(s): § 2.1049 **Measurements required: Occupied bandwidth:** The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as applicable.

Test Procedures: As required by 47 CFR 2.1049, *occupied bandwidth measurements* were made at the RF output terminals using a Spectrum Analyzer.

A laptop was connected to EUT to control the RF frequency channel. The EUT was connected to a Spectrum Analyzer via attenuator. The spectrum analyzer was set in accordance with the licensed measurement procedure guidance. Measurements were carried out at the low, mid, and high channels of the TX band.

Occupied bandwidth measurements were made with a Spectrum Analyzer connected to the RF output of the amplifier, as well as the input to the amplifier.

The modulation characteristics of the base station were measured first at a maximum RF level prescribed by the OEM. The base station was then connected to the input of the amplifier and was operated at the appropriate RF level. The resulting modulated signal through the EUT was measured and compared against the original signal.

Test Results: Equipment complies with FCC requirements.

Test Engineer(s): Djed Mouada

Test Date(s): 11/25/15






Figure 2. Occupied Bandwidth Test Setup


Part 22

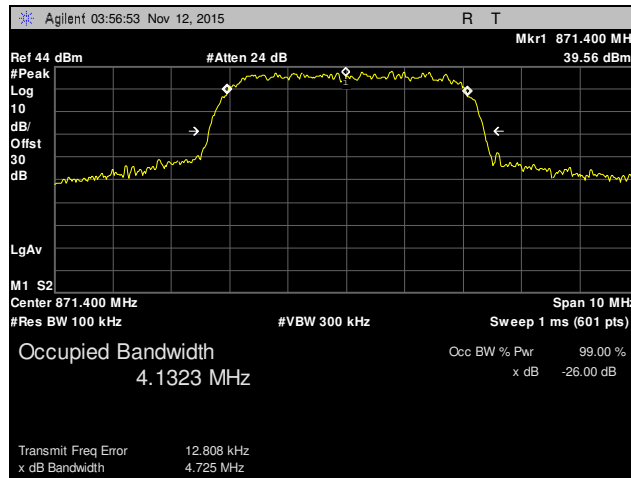

Plot 10. Occupied Bandwidth, Channel 4357, Part 22

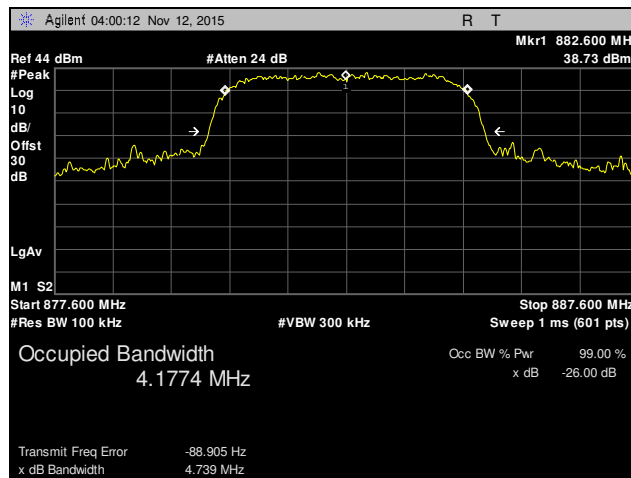


Plot 11. Occupied Bandwidth, Channel 4413, Part 22

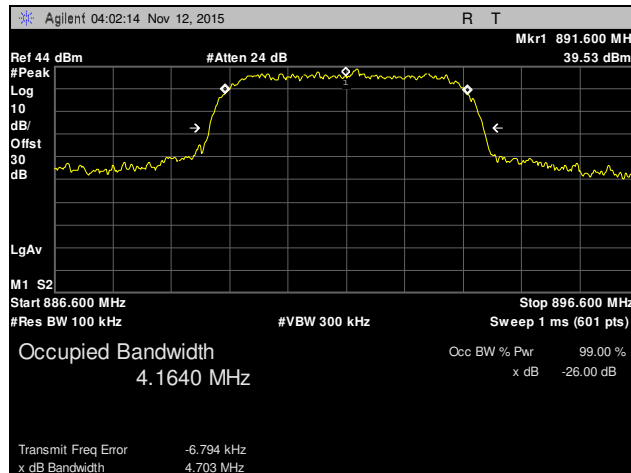


Plot 12. Occupied Bandwidth, Channel 4458, Part 22


Part 24

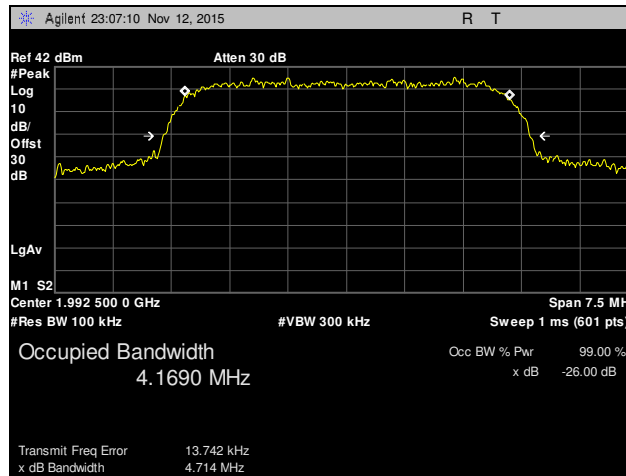

Plot 13. Occupied Bandwidth, Channel 6592, Part 24

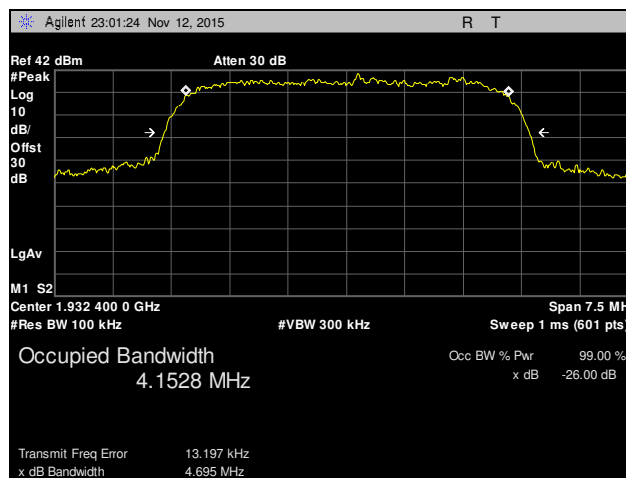


Plot 14. Occupied Bandwidth, Channel 9662, Part 24

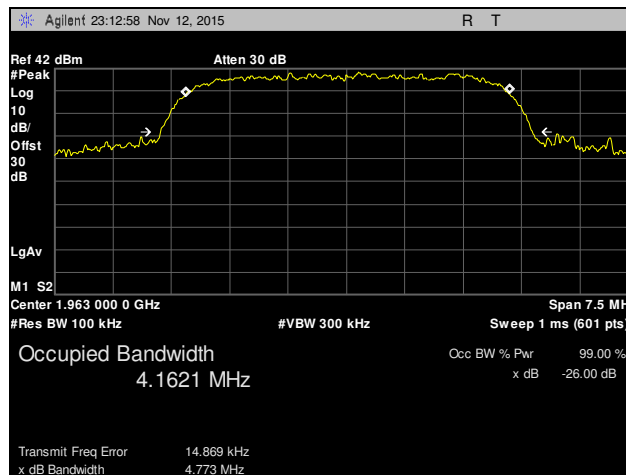


Plot 15. Occupied Bandwidth, Channel 9815, Part 24


Part 27

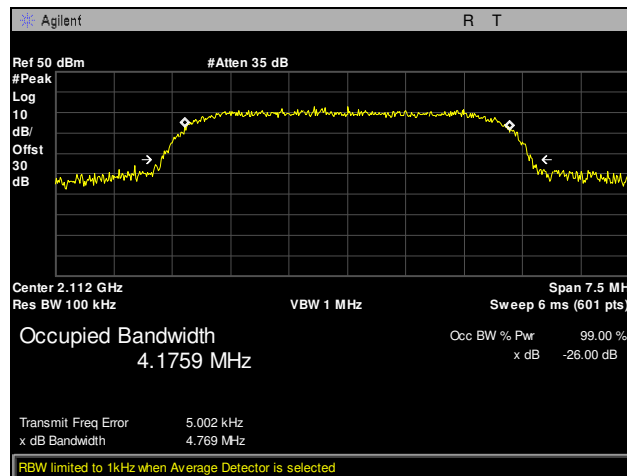

Plot 16. Occupied Bandwidth, Channel 1537, Part 27

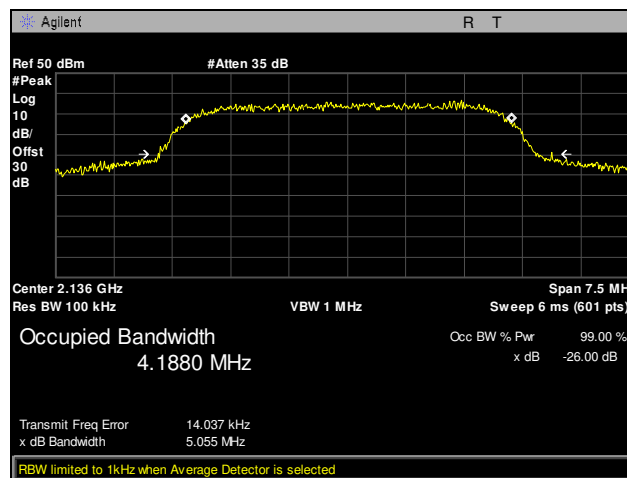

Plot 17. Occupied Bandwidth, Channel 1655, Part 27

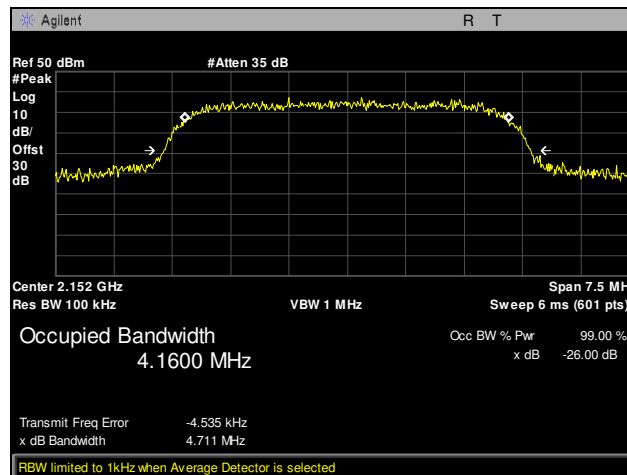

Plot 18. Occupied Bandwidth, Channel 2087, Part 27



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1053 Radiated Spurious Emissions

Test Requirement(s): § 2.1053 Measurements required: Field strength of spurious radiation.

§ 2.1053 (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

§ 2.1053 (b): The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

§ 22.917 **Emission limitations Cellular equipment:** The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

§ 22.917 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$.

27.53(h) Measurements required: Field strength of spurious radiation.

For operations in the 1710-1755 MHz and 2110-2155 MHz bands, the power of any emissions outside a licensee's frequency block shall be attenuated below the transmitter power P by at least $43 + 10 \log(P)$.



Test Procedures: As required by 47 CFR 2.1053, *field strength of radiated spurious measurements* was made in accordance with the procedures of EIA/TIA-603-D-2010 "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards".

Radiated emission measurements were performed inside a 3 meter semi-anechoic chamber. The EUT's RF ports were terminated to 50ohm load. The EUT was tested using both modulations and at the low, mid, and high channels. The EUT was rotated about 360⁰ and the receiving antenna scanned from 1-4m in order to capture the maximum emission. The plots are corrected for cable loss, antenna correction factor, and distance correction. The field strength was mathematically corrected to an E.I.R.P. Harmonic emissions up to the 10th or 40GHz, whichever was the lesser, were investigated.

The spectrum analyzer was configured in accordance with the licensed measurement guidance, and as per rule Parts 22 and 27.

The distance between the EUT and the test antenna was 3 meters for below 1 GHz and 1m for frequencies above 1 GHz. The EUT's RF ports were connected to a dummy load. The intensities of the radiated emissions were maximized by rotating the turntable 360 degrees and varying the receive antenna from 1 to 4m. Measurements were made with the receive antenna in both horizontal and vertical polarizations.


Test Results: Equipment complies with Section 2.1053. The limit for spurs is -13 dBm. Measurements revealed that no spurs came even close to this limit. Therefore, measurements using substitution method were not performed. Also, testing was performed using a CW signal. The following plots have been corrected. Only noise floor was observed above 18GHz.

Test Engineer: Djed Mouada


Test Date(s): 12/21/15




Radiated Spurious Emissions, Part 22

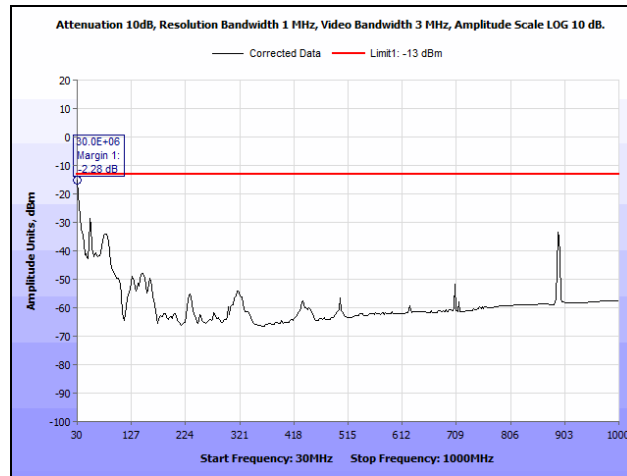


Plot 19. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, Part 22

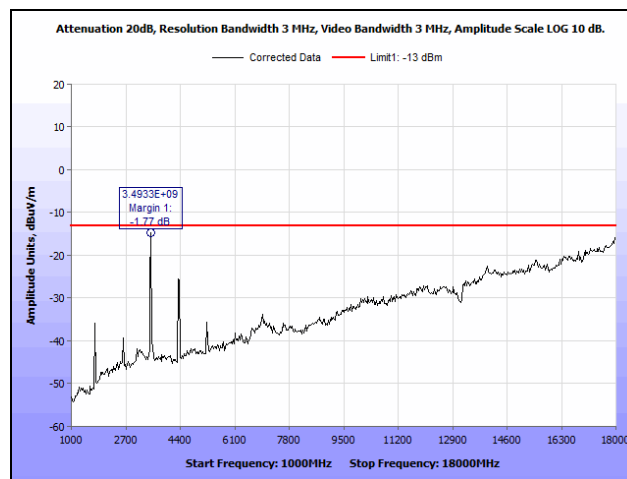


Plot 20. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, Part 22

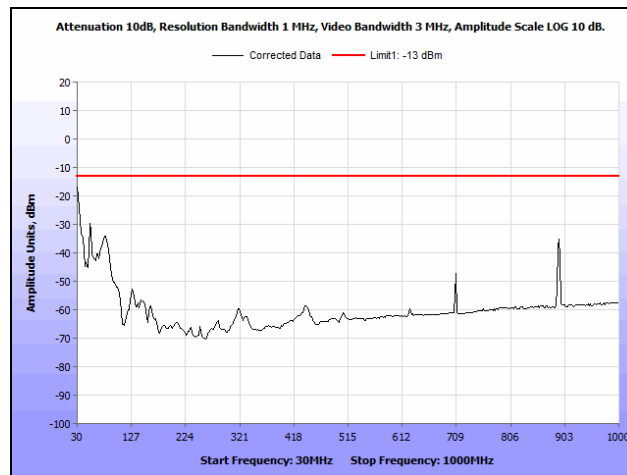


Plot 21. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, Part 22

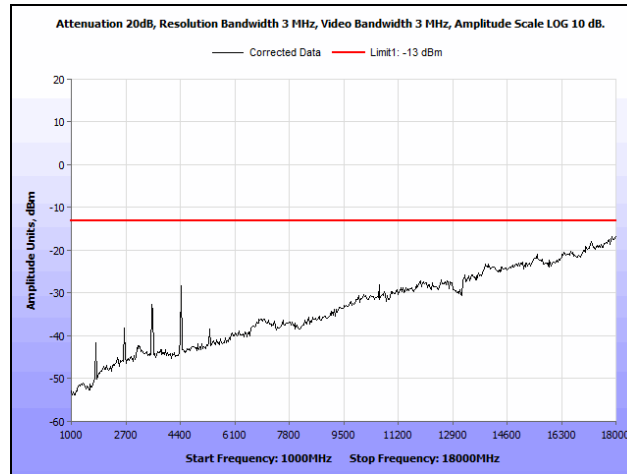

Plot 22. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, Part 22

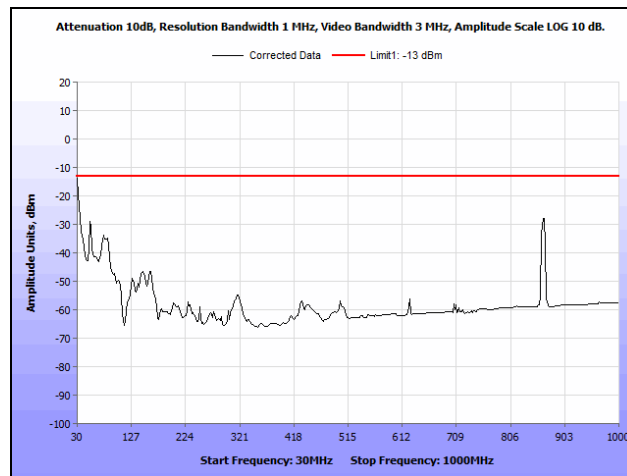


Plot 23. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, Part 22

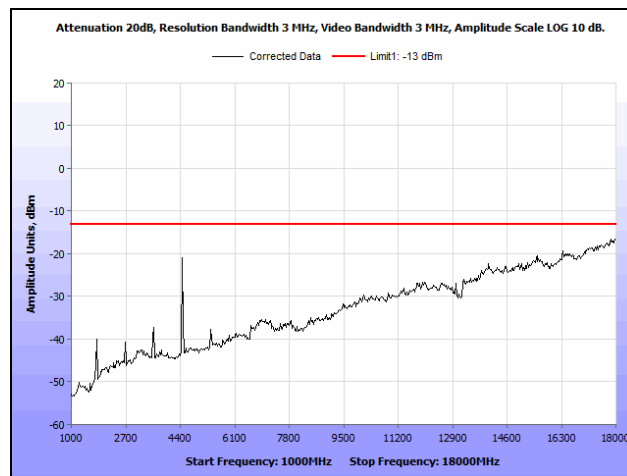


Plot 24. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, Part 22


Radiated Spurious Emissions, Part 24

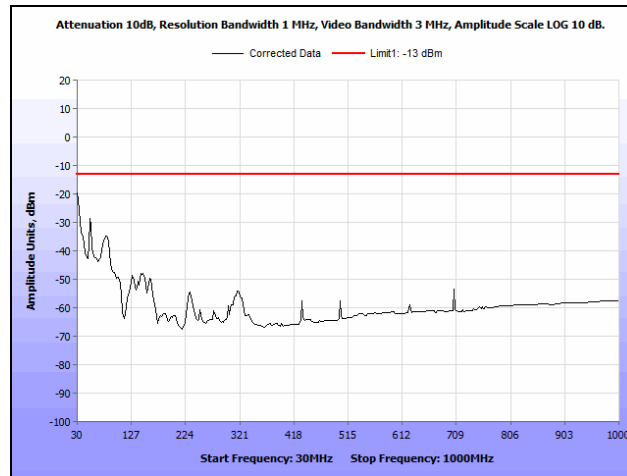


Plot 25. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, Part 24

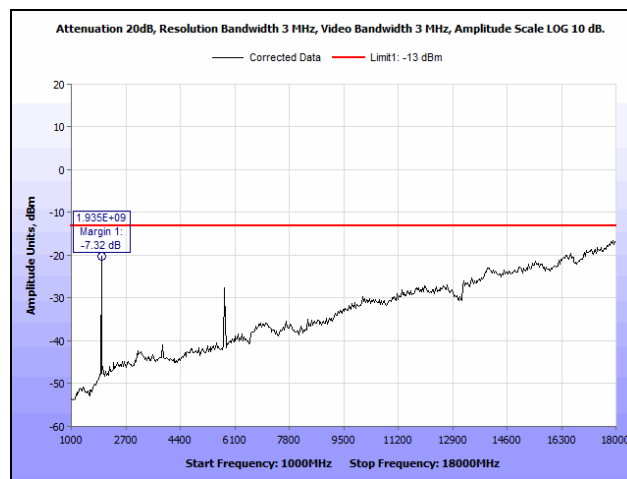


Plot 26. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, Part 24

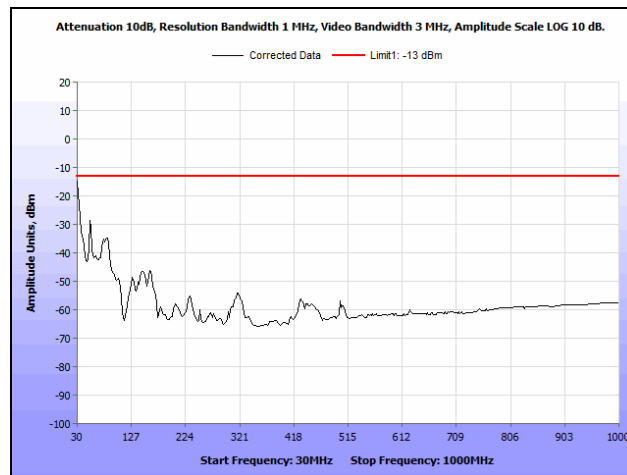


Plot 27. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, Part 24

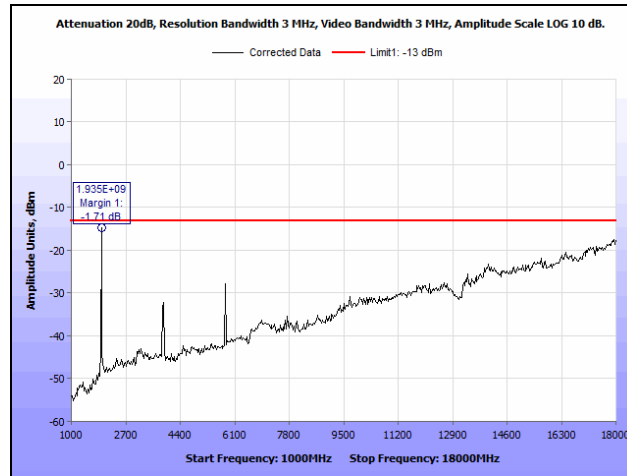

Plot 28. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, Part 24

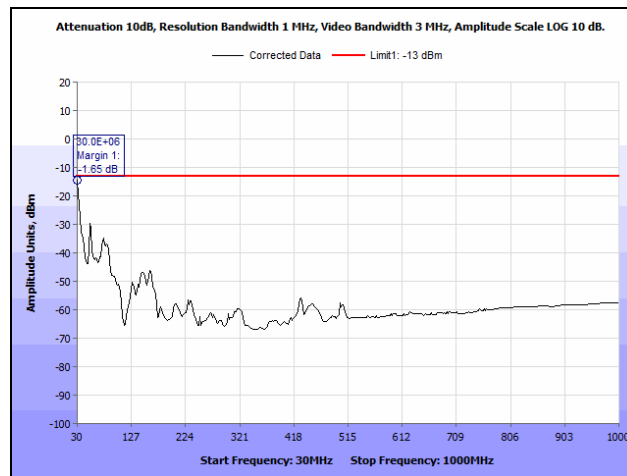


Plot 29. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, Part 24

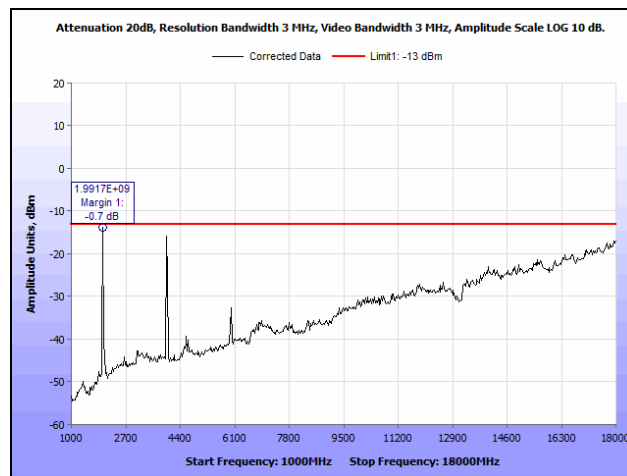


Plot 30. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, Part 24


Radiated Spurious Emissions, Part 27

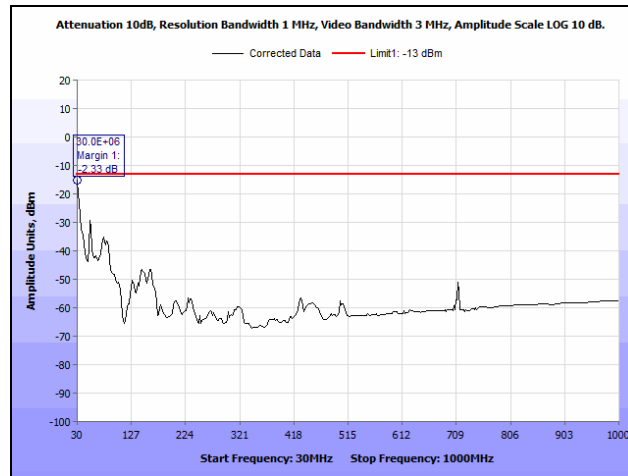


Plot 31. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, Part 27

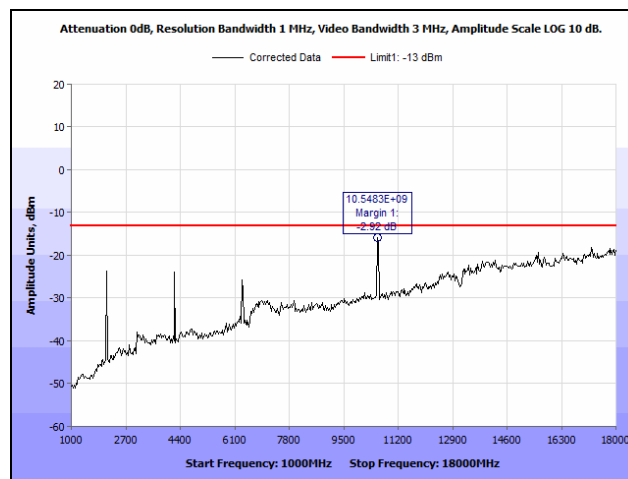


Plot 32. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, Part 27

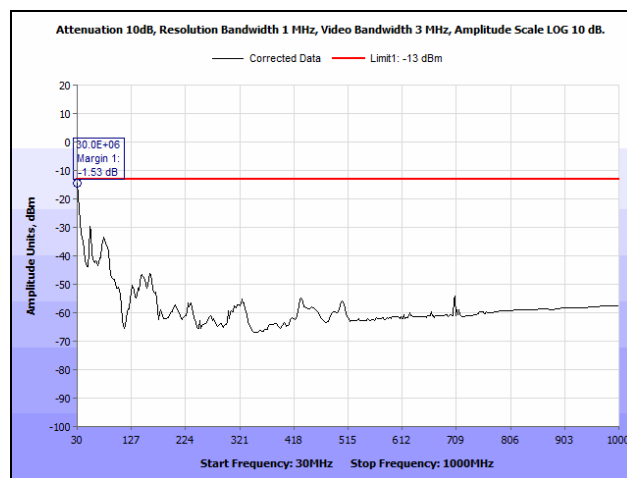


Plot 33. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, Part 27

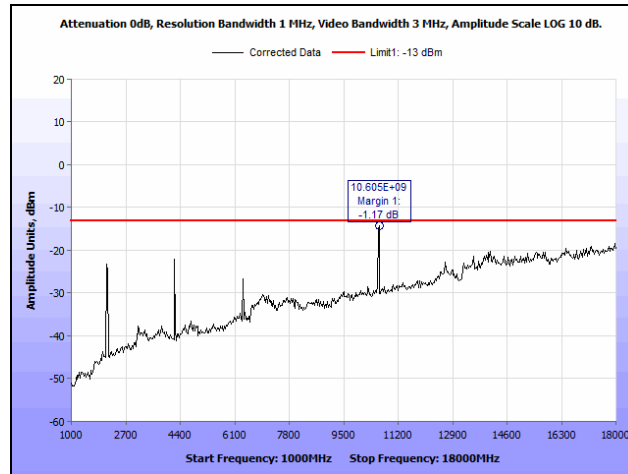


Plot 34. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, Part 27

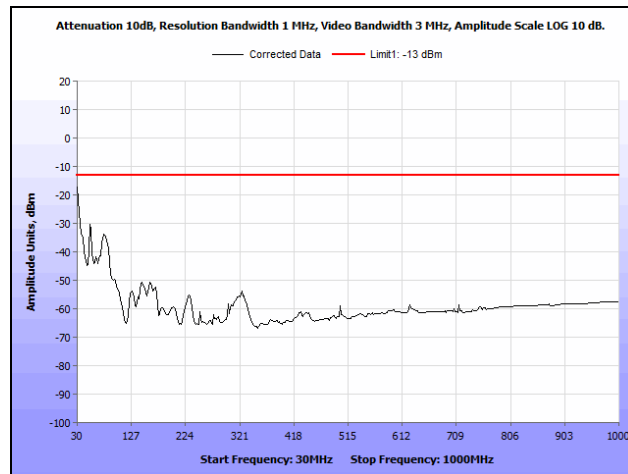

Plot 35. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, Part 27

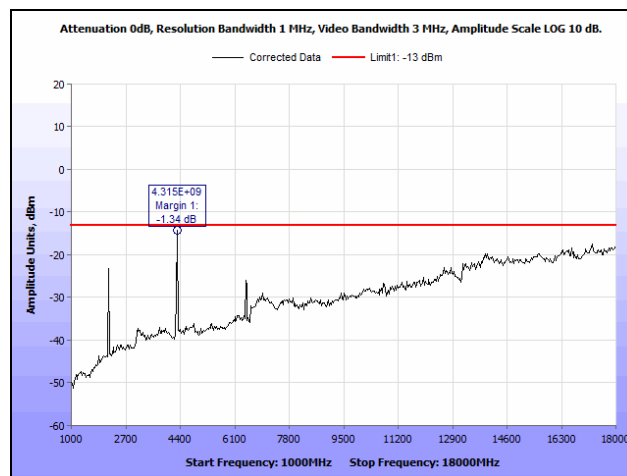

Plot 36. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, Part 27

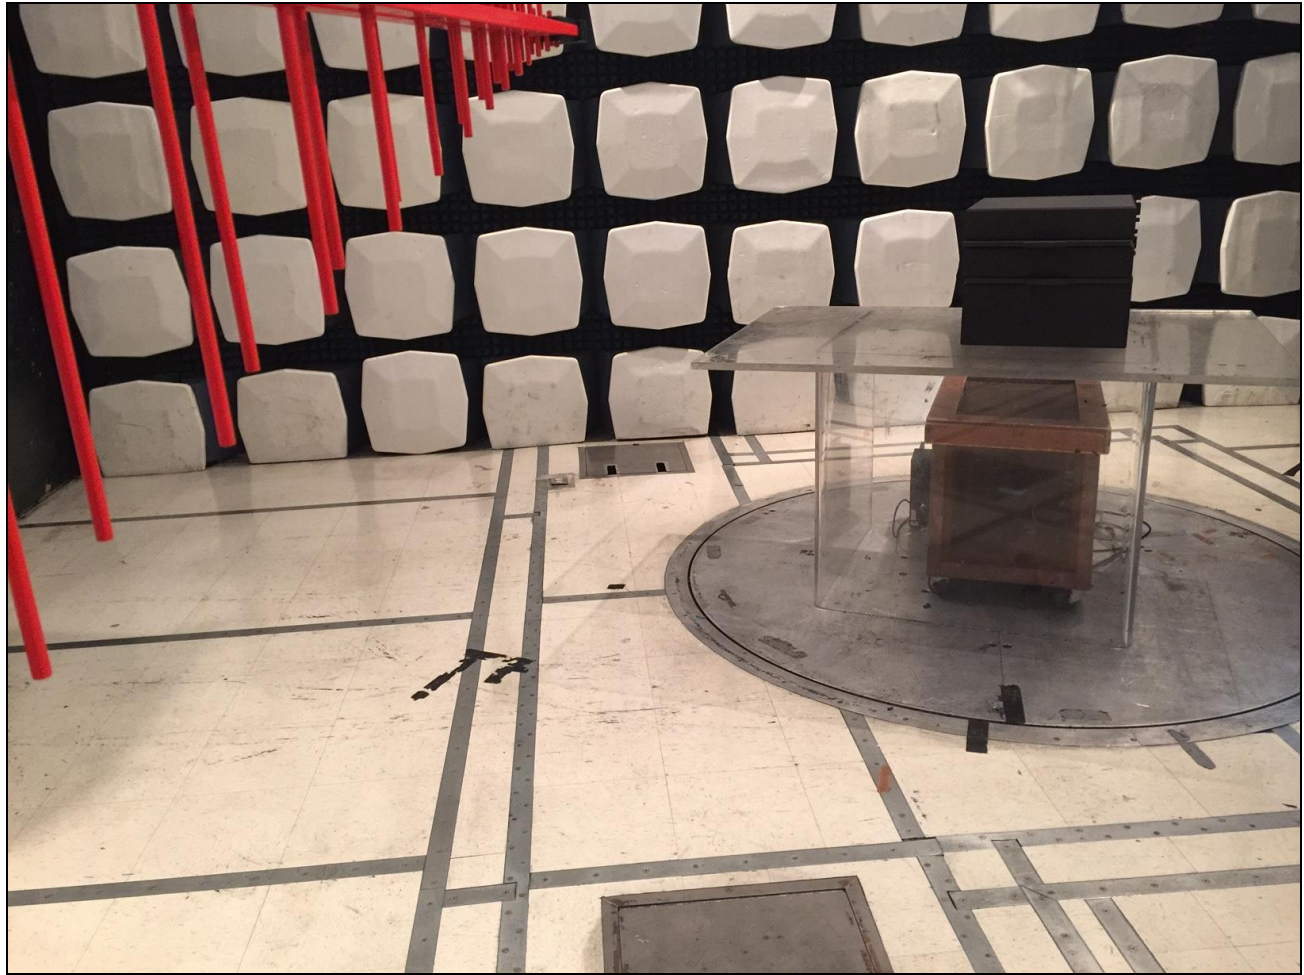

Photograph 1. Radiated Spurious Emissions, Test Setup

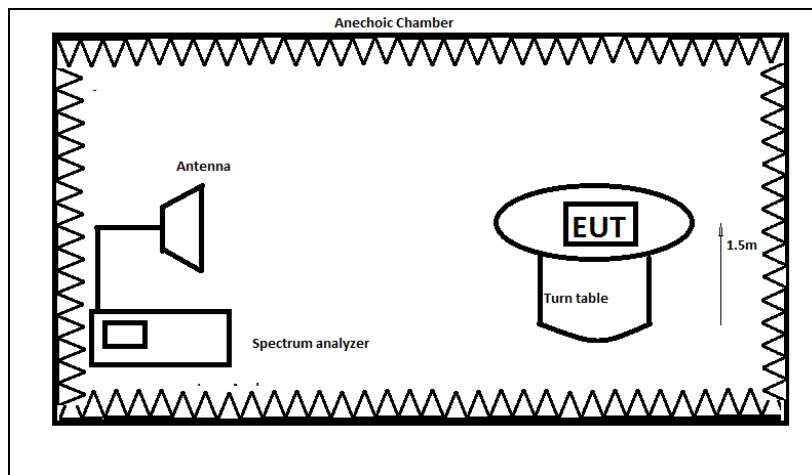


Figure 3. Block Diagram, Above 1 GHz



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1051 Spurious Emissions at Antenna Terminals

Test Requirement(s): § 2.1051 **Measurements required: Spurious emissions at antenna terminals:** The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 22.917 The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

§ 22.917 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

§ 22.917 (b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 30 kHz or more. In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy approved the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

§24.238 **Emission limitations for Broadband PCS equipment:** The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

§ 24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

§ 24.238 (b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

27.53(h): For operations in the 1710-1755 MHz and 2110-2155 MHz bands, the power of any emissions outside a licensee's frequency block shall be attenuated below the transmitter power P by at least $43 + 10 \log(P)$.

Test Procedures: As required by 47 CFR §2.1051, *spurious emissions at antenna terminal measurements* were made at the RF output terminals using a Spectrum Analyzer.

A laptop was connected to EUT to control the RF power output and frequency channel. The EUT was connected to a Spectrum Analyzer through an attenuator. The Spectrum Analyzer was set to sweep 30 MHz and up to 10th harmonic of the fundamental or 40 GHz whichever is the lesser. Measurements were made in all applicable frequency bands.

A modulated carrier generated by the base station was connected to RF input port at a maximum level as determined by the OEM. A spectrum analyzer was connected to either the RF output port for spurious emissions measurements. The spectrum was investigated from 30MHz to the 10th harmonic of the carrier.

The inter-modulation requirements were performed in a similar manner as described above. The spectrum analyzer was set to 100KHz RBW and 300KHz VBW. Two modulated carriers were injected into the EUT from the base station. The in band spurious emissions were investigated.

The filter response has also be measured and recorded.

Band Edge Plots: If a reduction of power was necessary for compliance at band edges, a second band edge plot was taken at the outermost channel that was compliant at the highest power. The channel number is noted in the caption of those plots.

Test Results: Equipment complies with these requirements.

Test Engineer(s): Djed Mouada

Test Date(s): 11/25/15






Figure 4. Spurious Emissions at Antenna Terminals Test Setup


Part 22

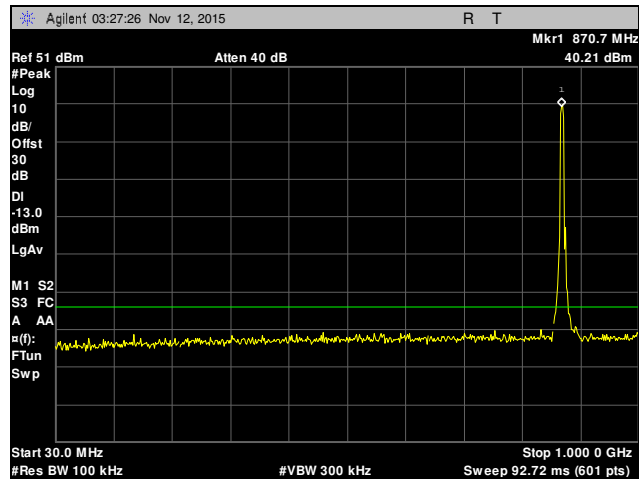


Plot 37. Conducted Spurious Emissions, Channel 4357, 30 MHz – 1 GHz, Part 22

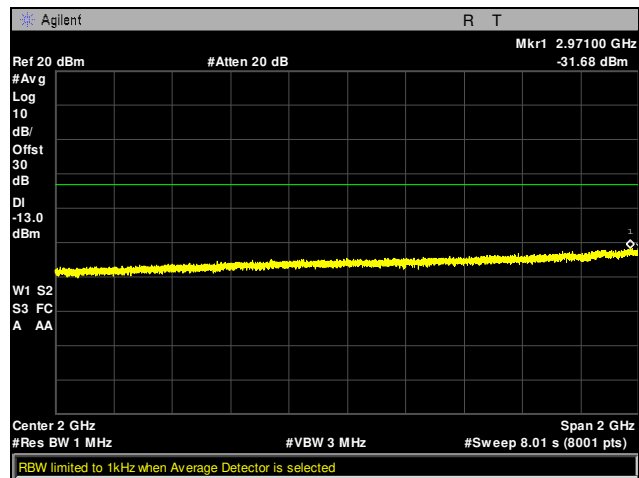


Plot 38. Conducted Spurious Emissions, Channel 4357, 1 GHz – 3 GHz, Part 22

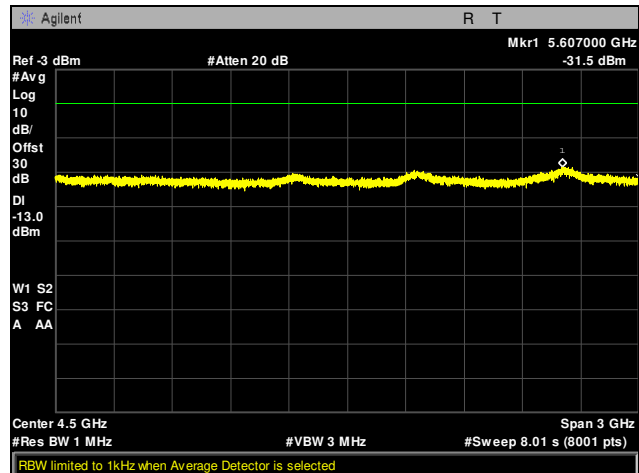


Plot 39. Conducted Spurious Emissions, Channel 4357, 3 GHz – 6 GHz, Part 22

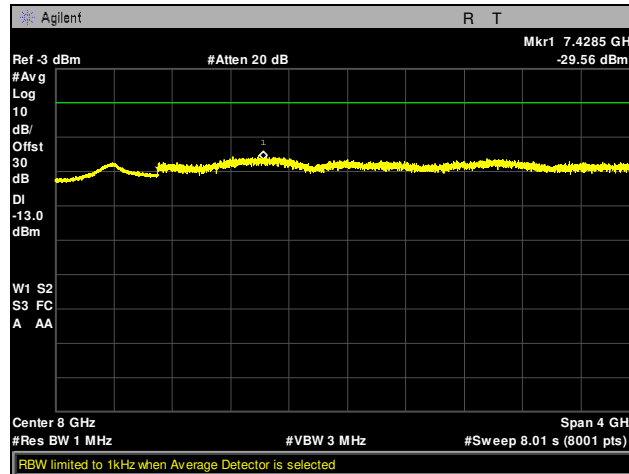


Plot 40. Conducted Spurious Emissions, Channel 4357, 6 GHz – 10 GHz, Part 22

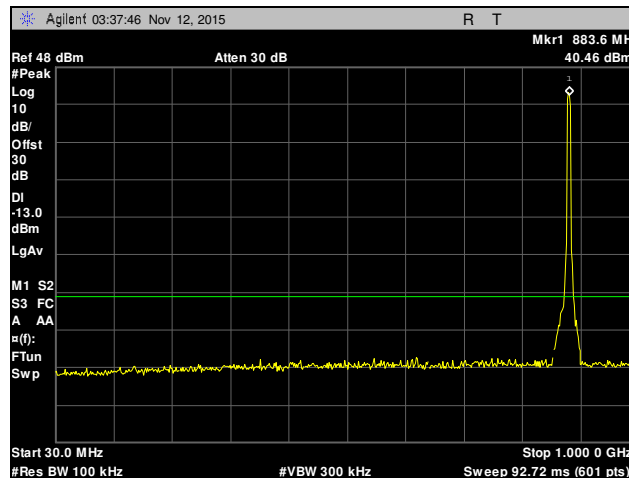


Plot 41. Conducted Spurious Emissions, Channel 4413, 30 MHz – 1 GHz, Part 22

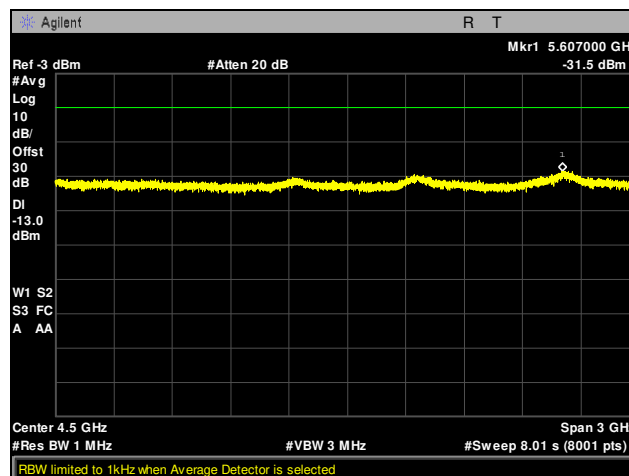


Plot 42. Conducted Spurious Emissions, Channel 4413, 3 GHz – 6 GHz, Part 22

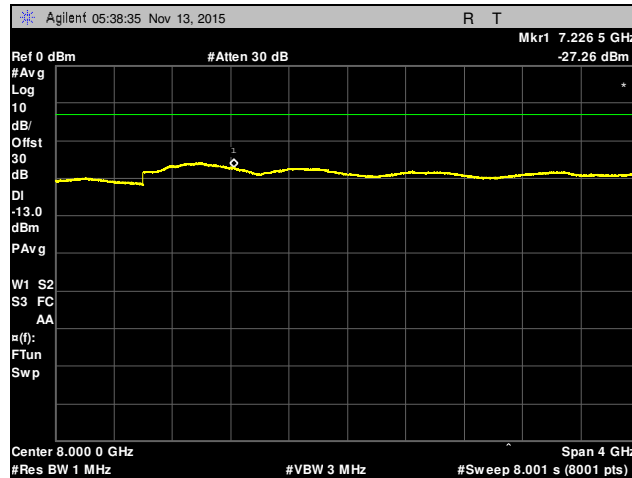


Plot 43. Conducted Spurious Emissions, Channel 4413, 6 GHz – 10 GHz, Part 22

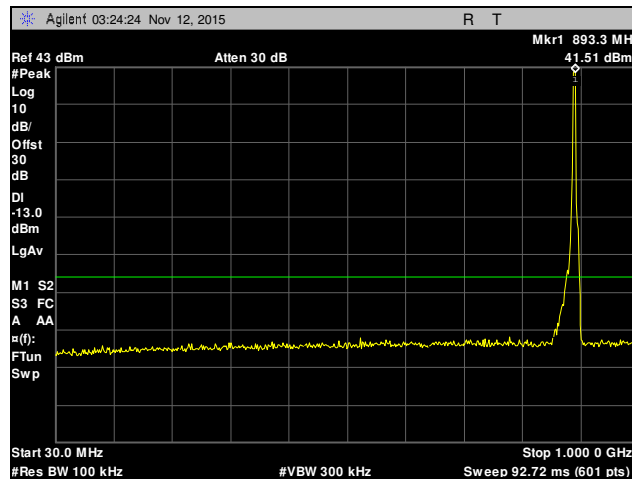

Plot 44. Conducted Spurious Emissions, Channel 4458, 30 MHz – 1 GHz, Part 22

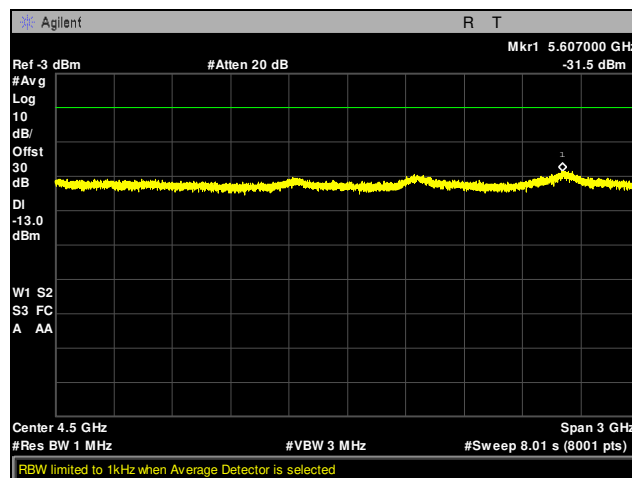


Plot 45. Conducted Spurious Emissions, Channel 4458, 3 GHz – 6 GHz, Part 22

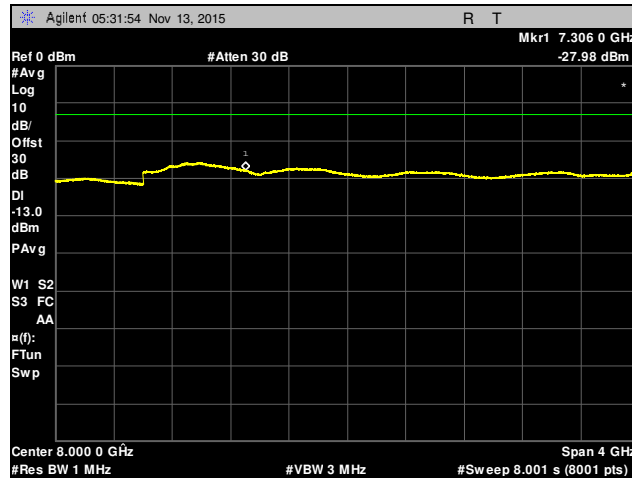


Plot 46. Conducted Spurious Emissions, Channel 4458, 6 GHz – 10 GHz, Part 22


Part 24

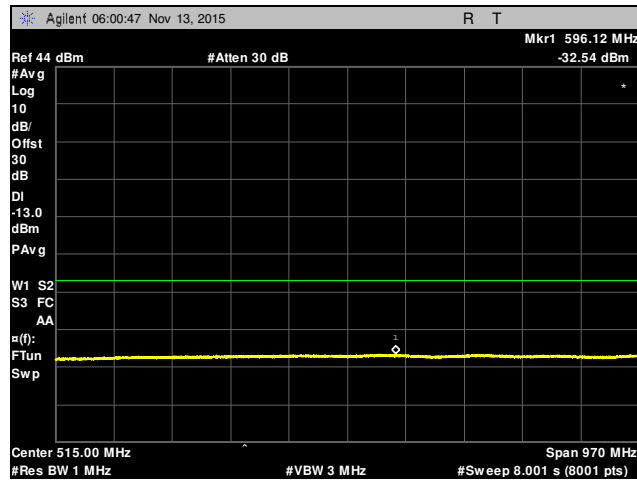


Plot 47. Conducted Spurious Emissions, Channel 6592, 30 MHz – 1 GHz, Part 24

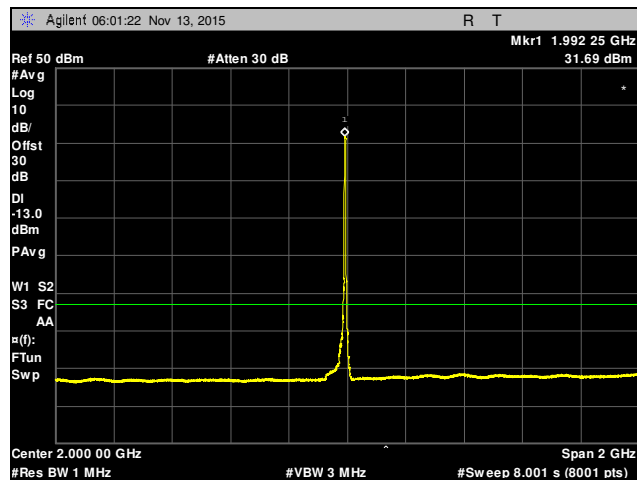


Plot 48. Conducted Spurious Emissions, Channel 6592, 1 GHz – 3 GHz, Part 24

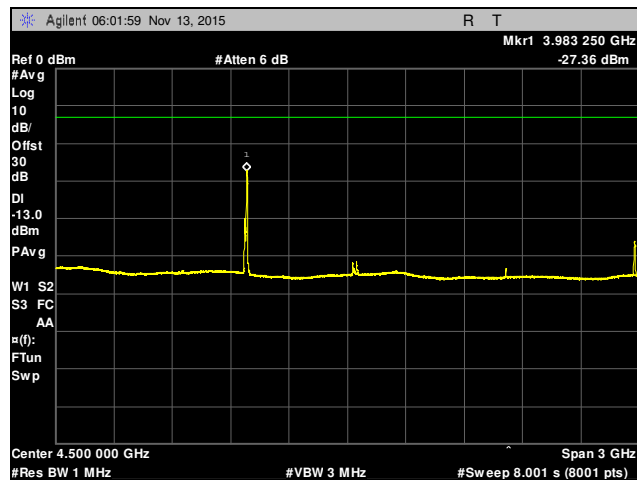


Plot 49. Conducted Spurious Emissions, Channel 6592, 3 GHz – 6 GHz, Part 24

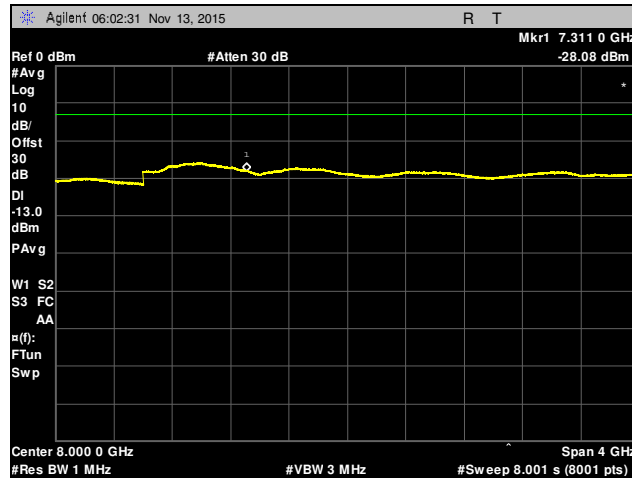


Plot 50. Conducted Spurious Emissions, Channel 6592, 6 GHz – 10 GHz, Part 24

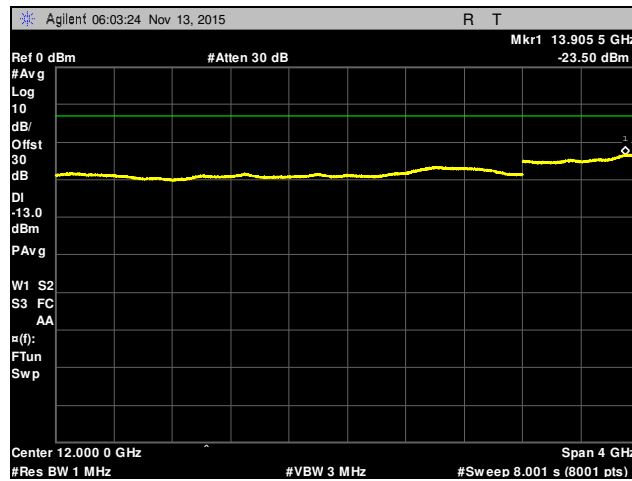


Plot 51. Conducted Spurious Emissions, Channel 6592, 10 GHz – 14 GHz, Part 24

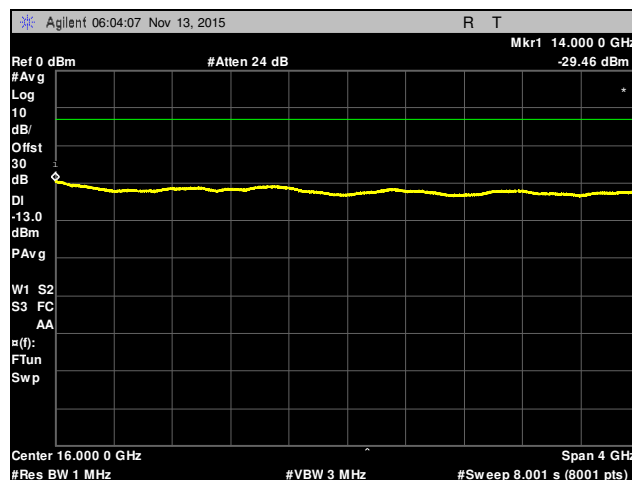


Plot 52. Conducted Spurious Emissions, Channel 6592, 14 GHz – 18 GHz, Part 24

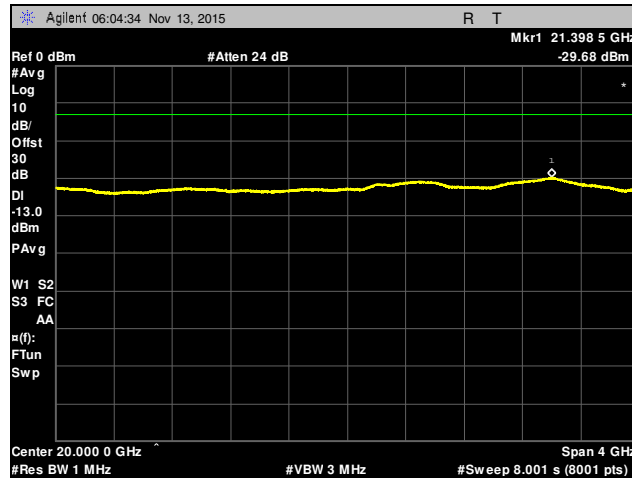


Plot 53. Conducted Spurious Emissions, Channel 6592, 18 GHz – 22 GHz, Part 24

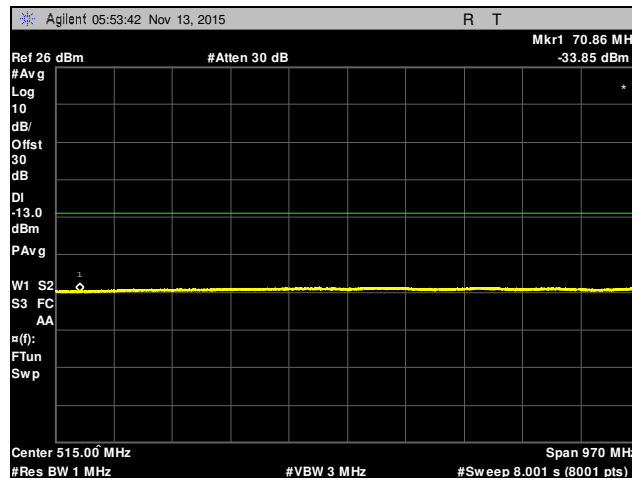


Plot 54. Conducted Spurious Emissions, Channel 9662, 30 MHz – 1 GHz, Part 24

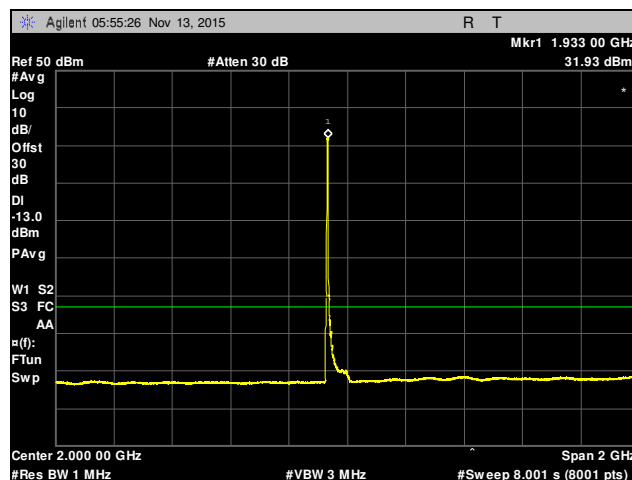


Plot 55. Conducted Spurious Emissions, Channel 9662, 1 GHz – 3 GHz, Part 24

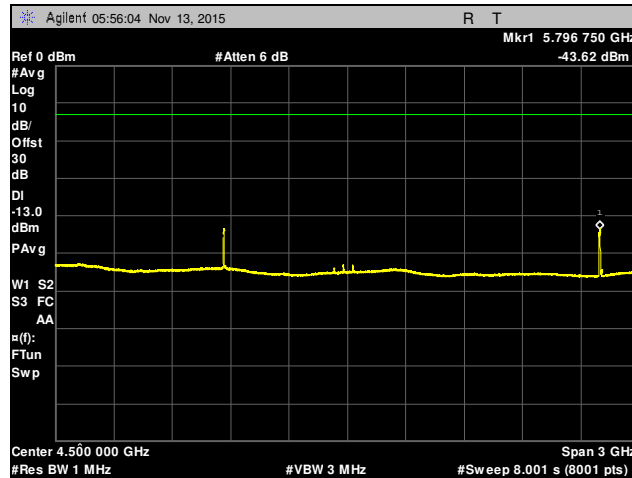


Plot 56. Conducted Spurious Emissions, Channel 9662, 3 GHz – 6 GHz, Part 24

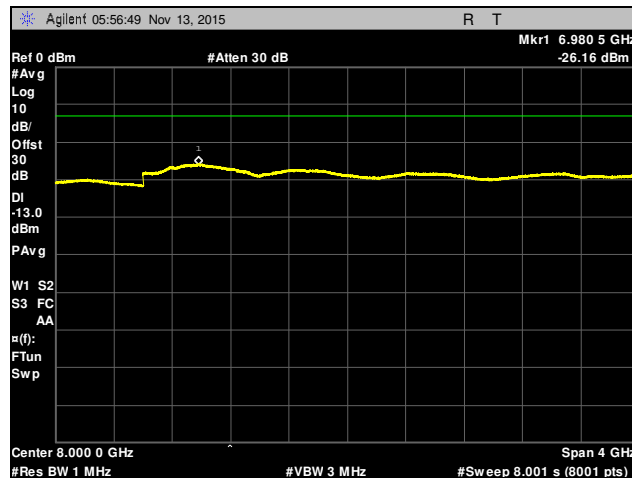


Plot 57. Conducted Spurious Emissions, Channel 9662, 6 GHz – 10 GHz, Part 24

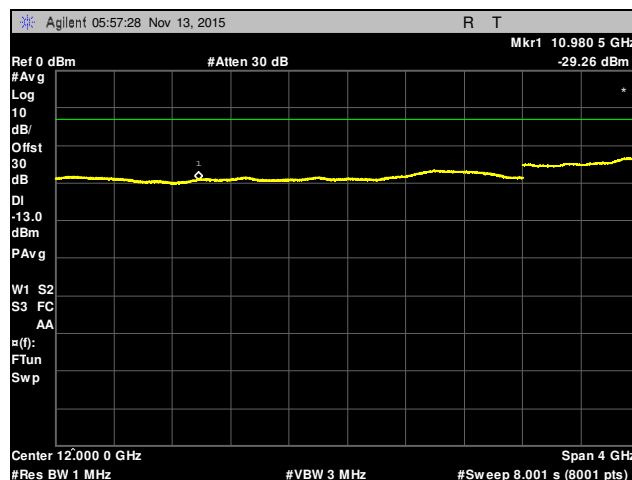


Plot 58. Conducted Spurious Emissions, Channel 9662, 10 GHz – 14 GHz, Part 24

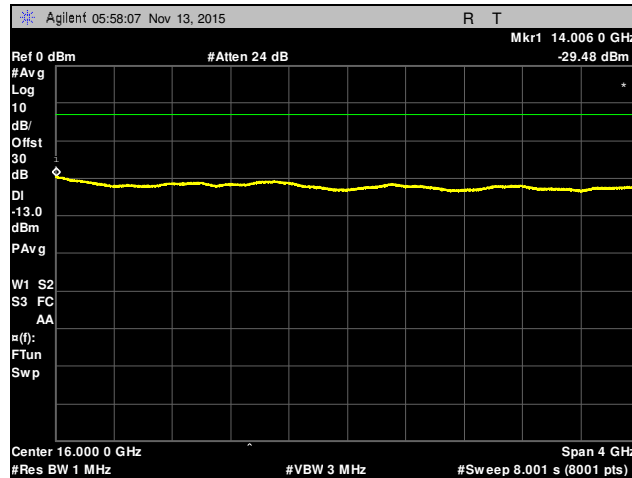


Plot 59. Conducted Spurious Emissions, Channel 9662, 14 GHz – 18 GHz, Part 24

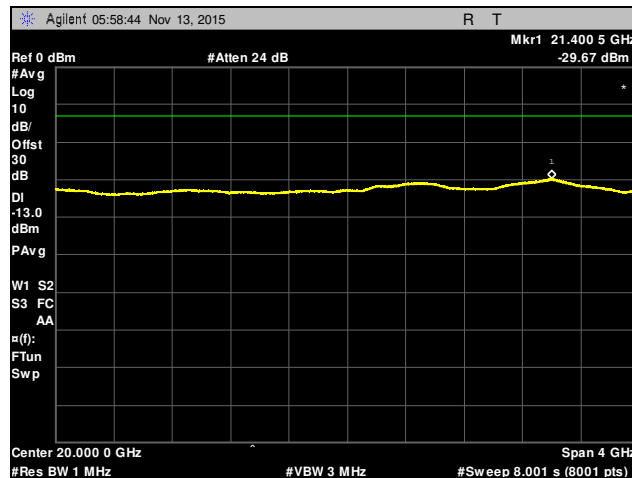


Plot 60. Conducted Spurious Emissions, Channel 9662, 18 GHz – 22 GHz, Part 24

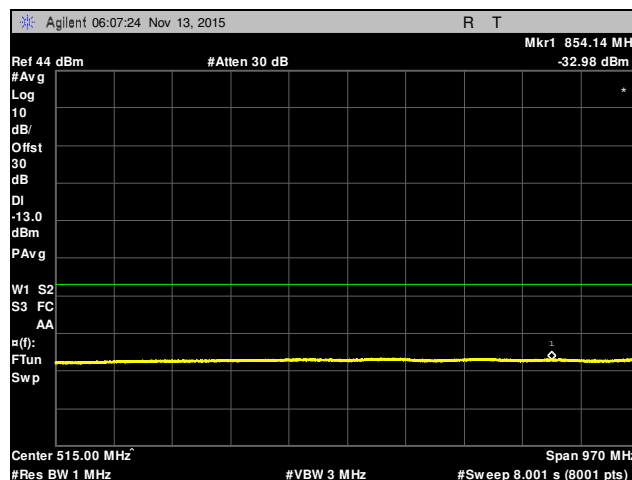


Plot 61. Conducted Spurious Emissions, Channel 9815, 30 MHz – 1 GHz, Part 24

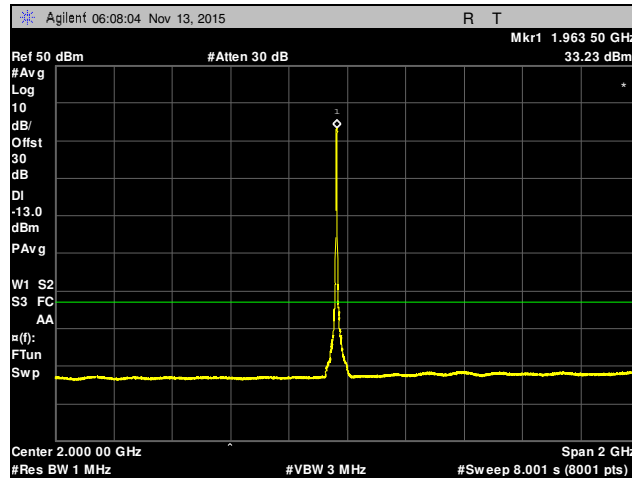


Plot 62. Conducted Spurious Emissions, Channel 9815, 1 GHz – 3 GHz, Part 24

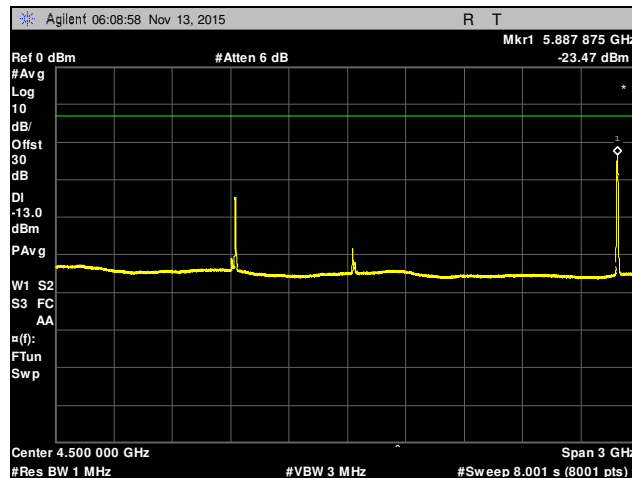


Plot 63. Conducted Spurious Emissions, Channel 9815, 3 GHz – 6 GHz, Part 24

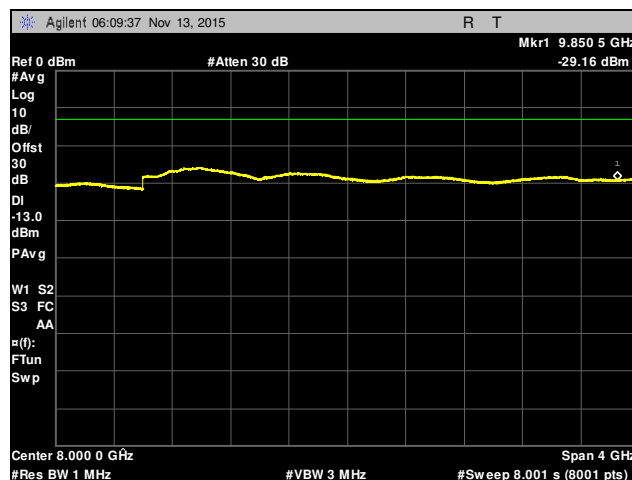


Plot 64. Conducted Spurious Emissions, Channel 9815, 6 GHz – 10 GHz, Part 24

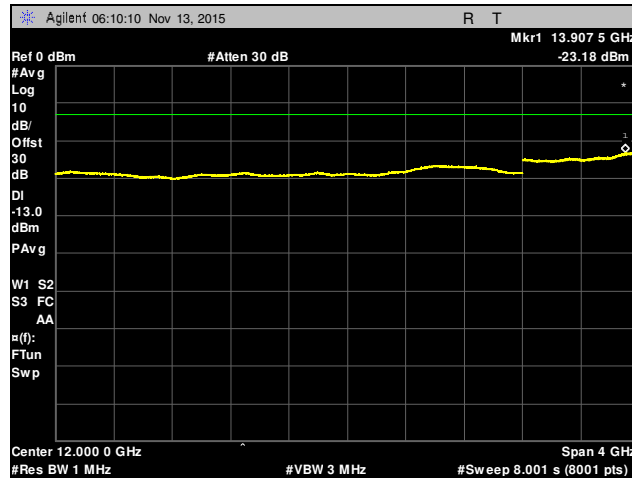

Plot 65. Conducted Spurious Emissions, Channel 9815, 10 GHz – 14 GHz, Part 24

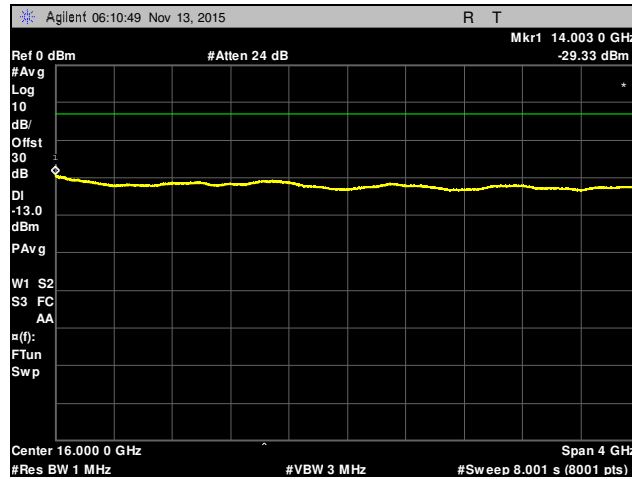


Plot 66. Conducted Spurious Emissions, Channel 9815, 14 GHz – 18 GHz, Part 24

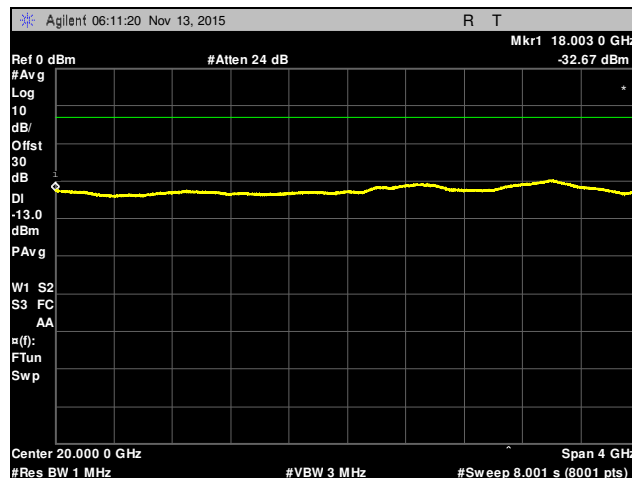


Plot 67. Conducted Spurious Emissions, Channel 9815, 18 GHz – 22 GHz, Part 24


Part 27

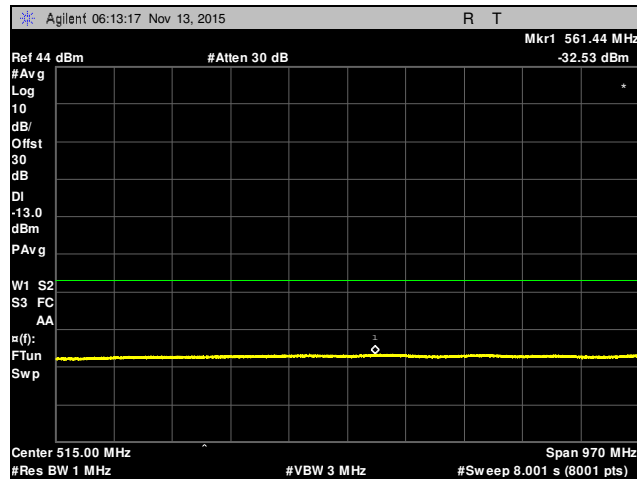


Plot 68. Conducted Spurious Emissions, Channel 1537, 30 MHz – 1 GHz, Part 27

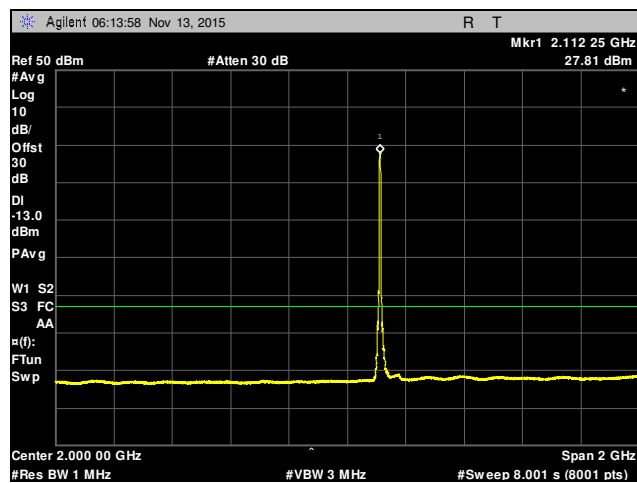


Plot 69. Conducted Spurious Emissions, Channel 1537, 1 GHz – 3 GHz, Part 27

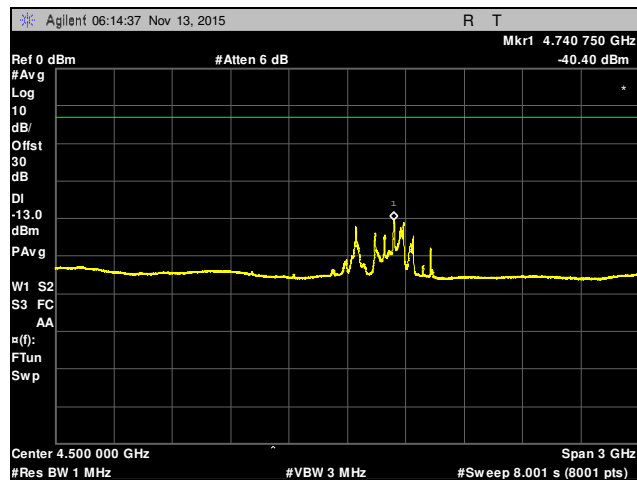


Plot 70. Conducted Spurious Emissions, Channel 1537, 3 GHz – 6 GHz, Part 27

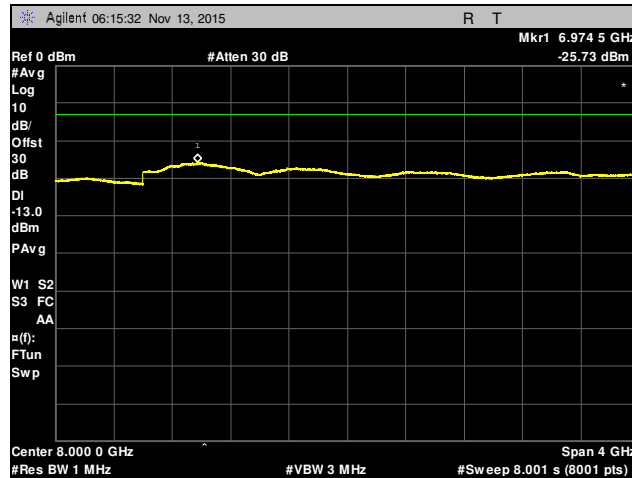


Plot 71. Conducted Spurious Emissions, Channel 1537, 6 GHz – 10 GHz, Part 27

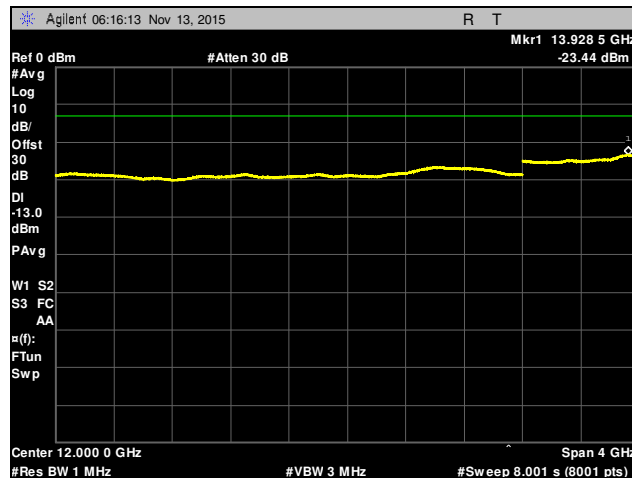


Plot 72. Conducted Spurious Emissions, Channel 1537, 10 GHz – 14 GHz, Part 27

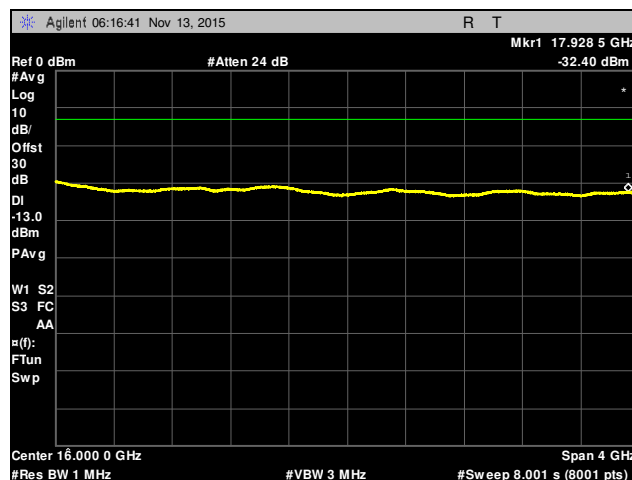


Plot 73. Conducted Spurious Emissions, Channel 1537, 14 GHz – 18 GHz, Part 27

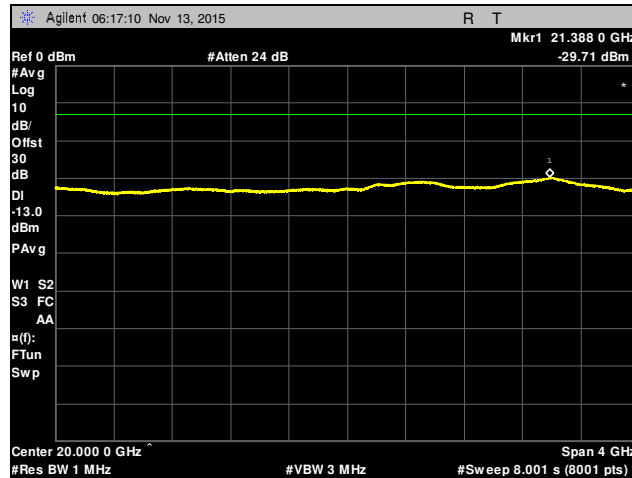


Plot 74. Conducted Spurious Emissions, Channel 1537, 18 GHz – 22 GHz, Part 27

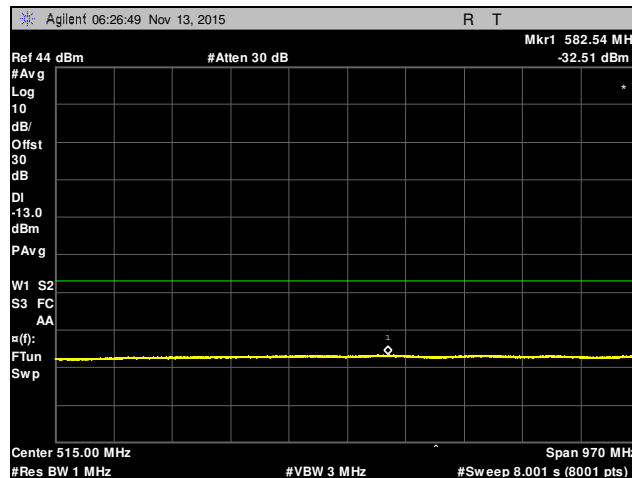


Plot 75. Conducted Spurious Emissions, Channel 1655, 30 MHz – 1 GHz, Part 27

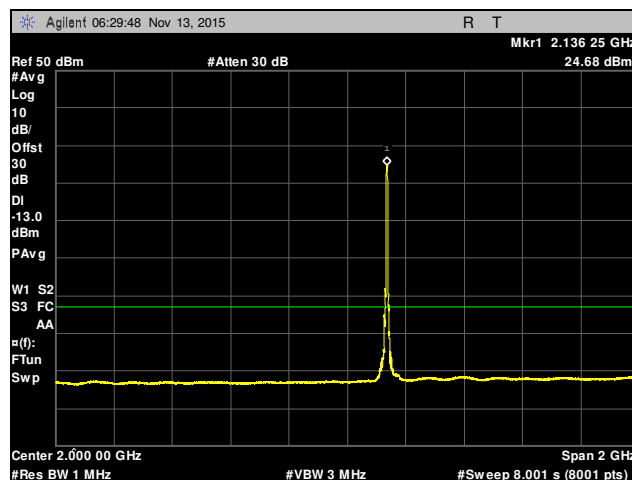


Plot 76. Conducted Spurious Emissions, Channel 1655, 1 GHz – 3 GHz, Part 27

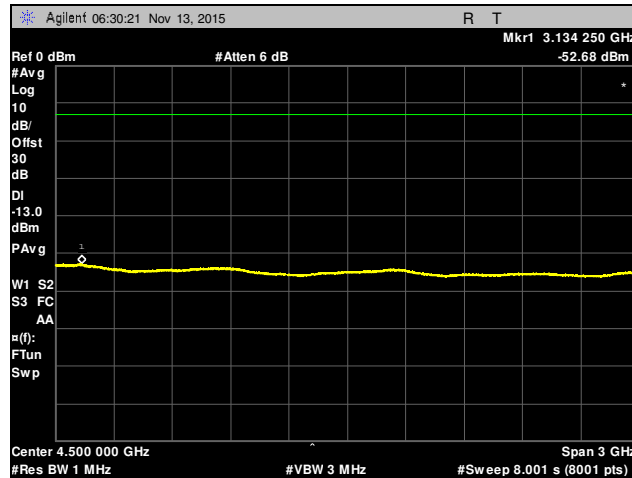


Plot 77. Conducted Spurious Emissions, Channel 1655, 3 GHz – 6 GHz, Part 27

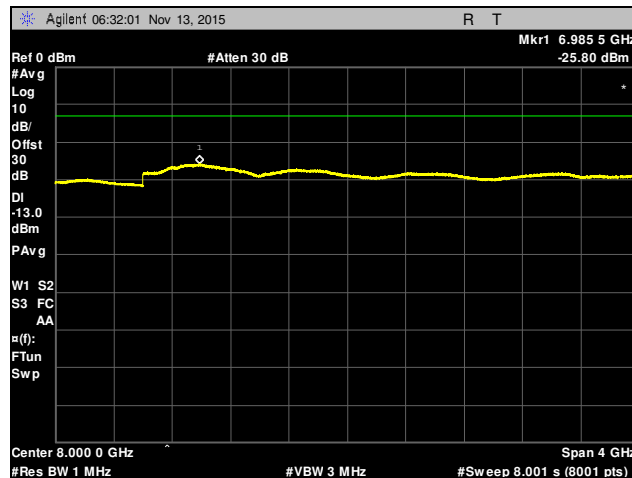


Plot 78. Conducted Spurious Emissions, Channel 1655, 6 GHz – 10 GHz, Part 27

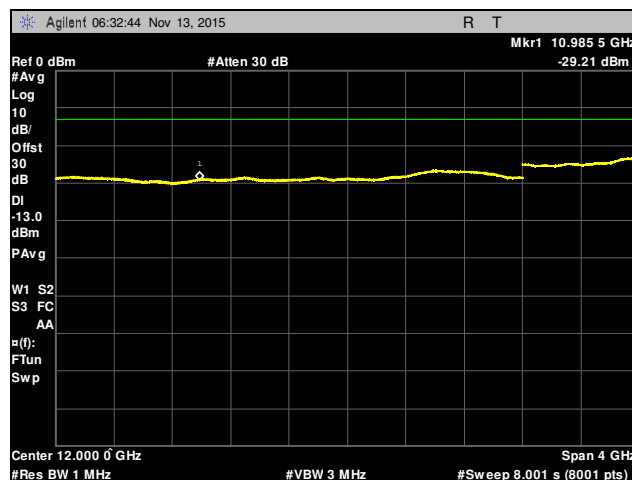


Plot 79. Conducted Spurious Emissions, Channel 1655, 10 GHz – 14 GHz, Part 27

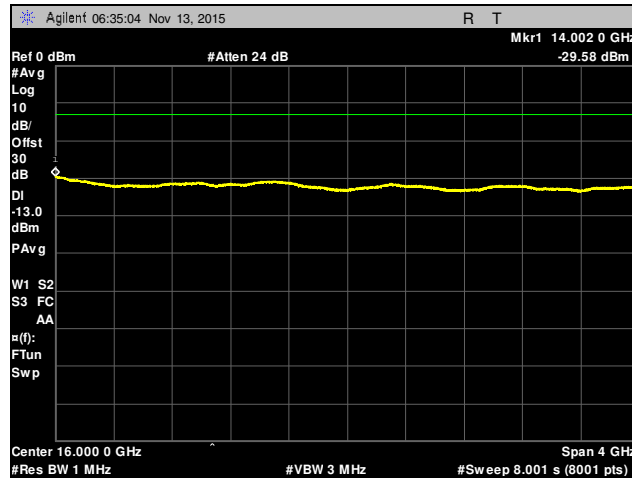


Plot 80. Conducted Spurious Emissions, Channel 1655, 14 GHz – 18 GHz, Part 27

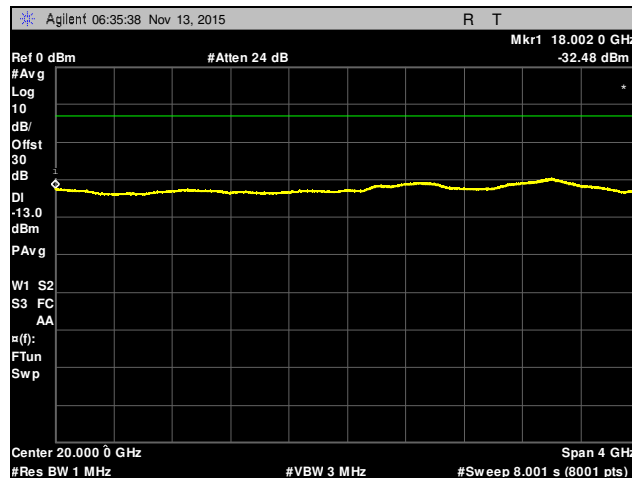


Plot 81. Conducted Spurious Emissions, Channel 1655, 18 GHz – 22 GHz, Part 27

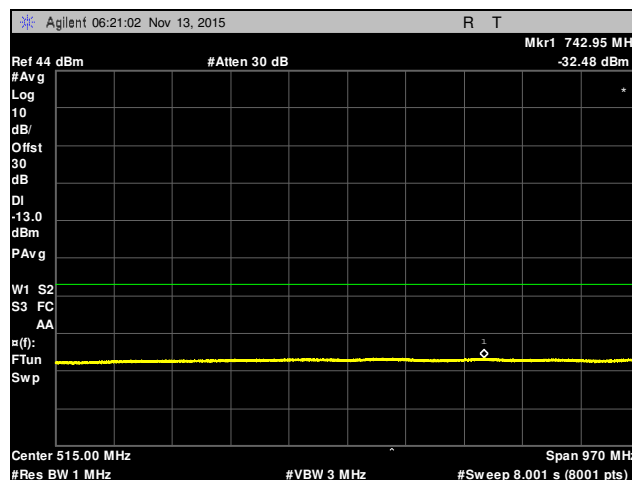


Plot 82. Conducted Spurious Emissions, Channel 2087, 30 MHz – 1 GHz, Part 27

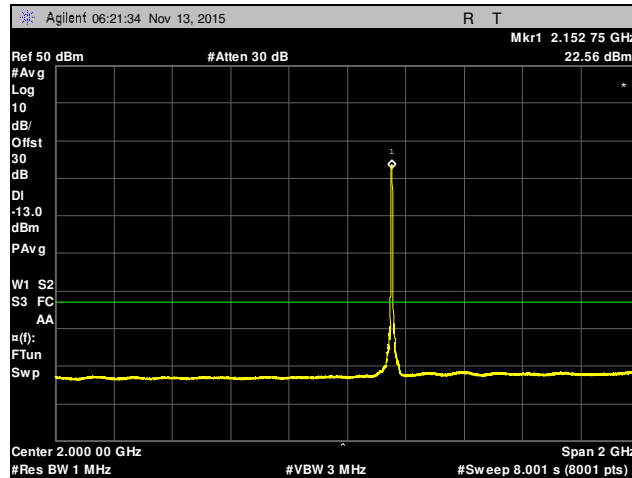


Plot 83. Conducted Spurious Emissions, Channel 2087, 1 GHz – 3 GHz, Part 27

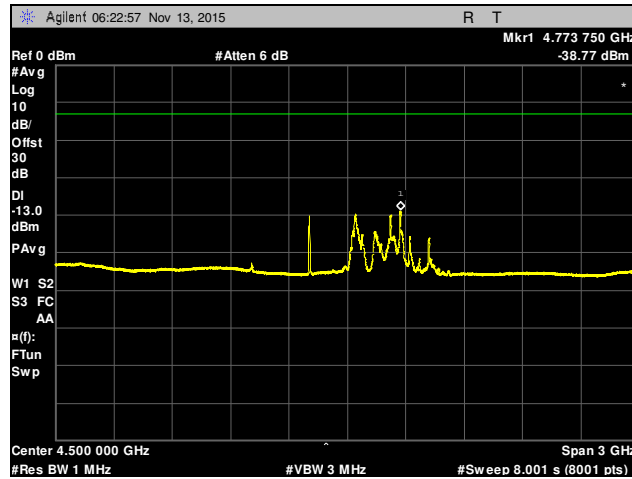


Plot 84. Conducted Spurious Emissions, Channel 2087, 3 GHz – 6 GHz, Part 27

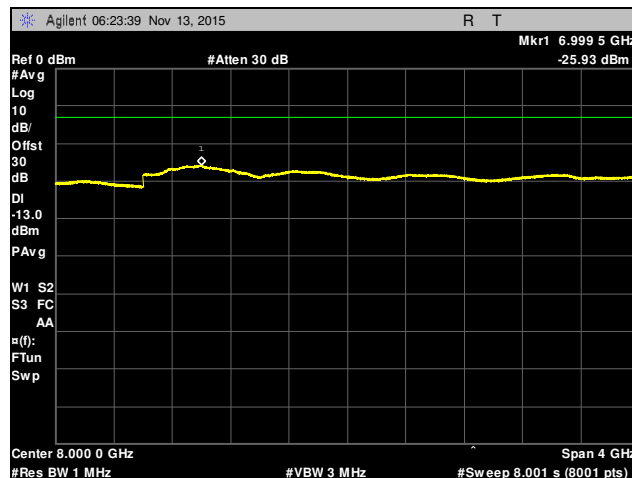


Plot 85. Conducted Spurious Emissions, Channel 2087, 6 GHz – 10 GHz, Part 27

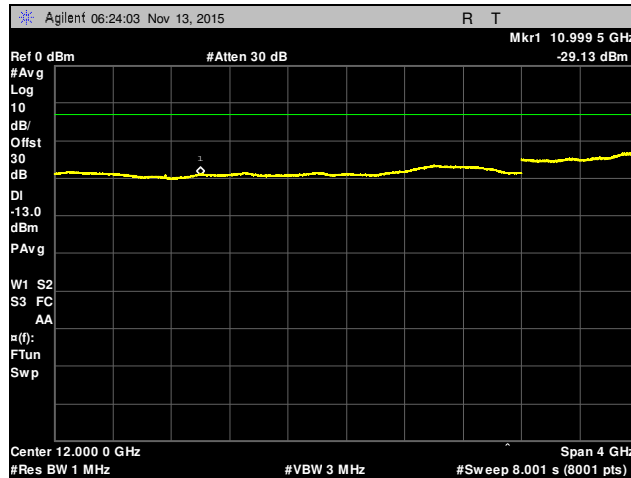

Plot 86. Conducted Spurious Emissions, Channel 2087, 10 GHz – 14 GHz, Part 27

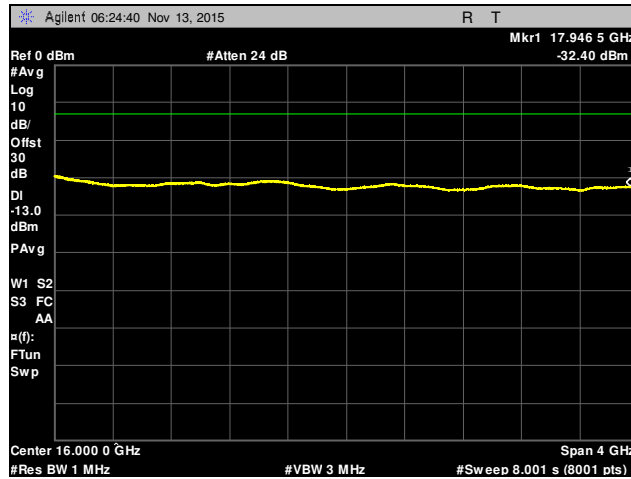


Plot 87. Conducted Spurious Emissions, Channel 2087, 14 GHz – 18 GHz, Part 27

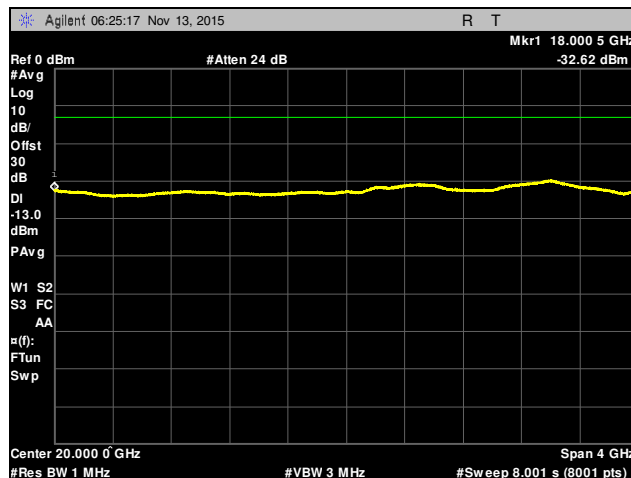


Plot 88. Conducted Spurious Emissions, Channel 2087, 18 GHz – 22 GHz, Part 27


Band Edge, Part 22

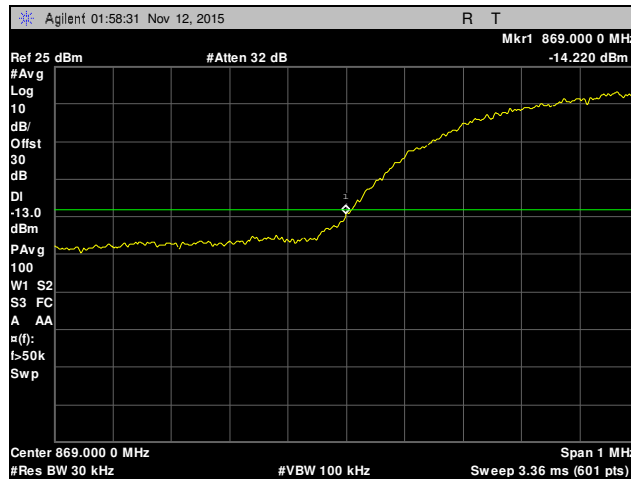


Plot 89. Conducted Band Edge, Channel 4357, Part 22

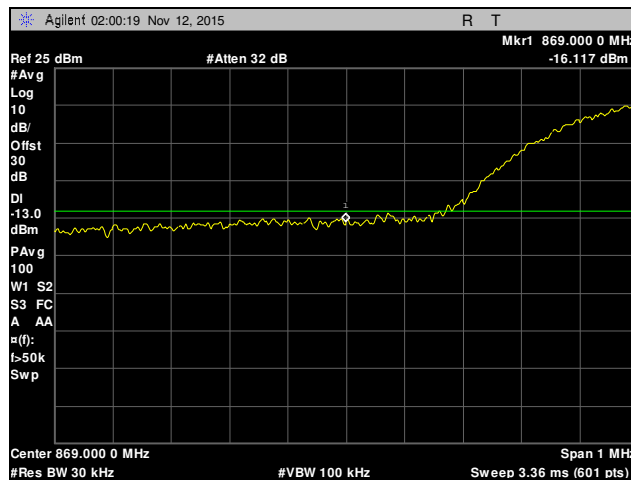

Plot 90. Conducted Band Edge, Channel 4358 (Full Power), Part 22

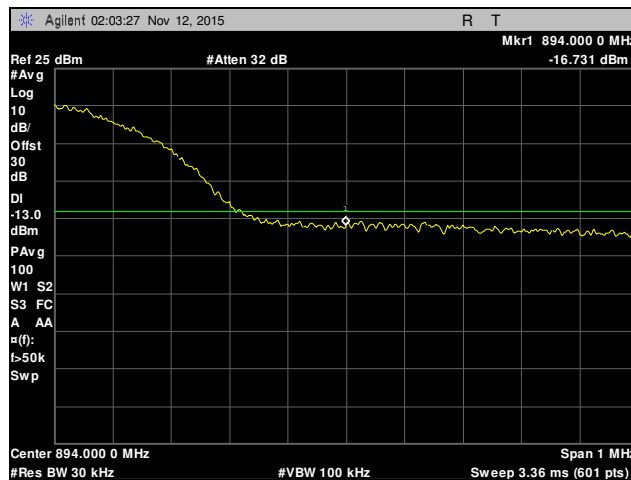


Plot 91. Conducted Band Edge, Channel 4457 (Full Power), Part 22

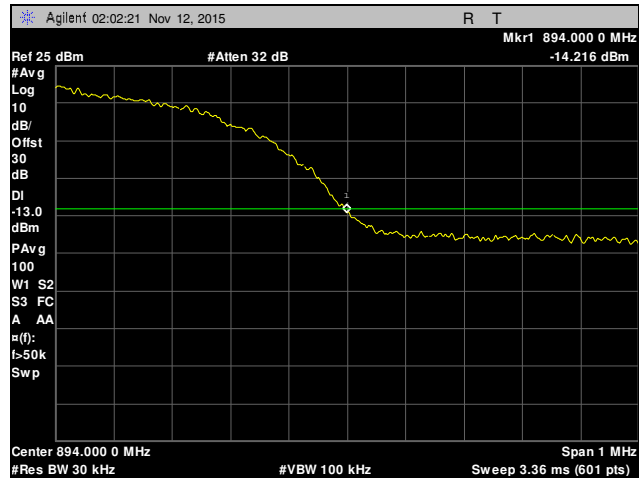


Plot 92. Conducted Band Edge, Channel 4458, Part 22


Band Edge, Part 24

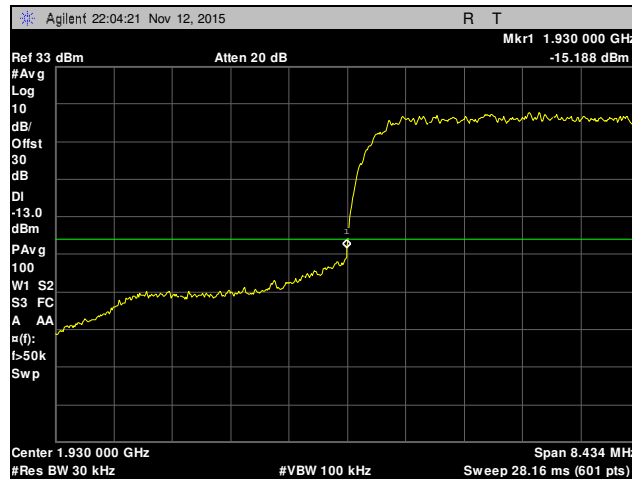

Plot 93. Conducted Band Edge, Channel 5112, Part 24

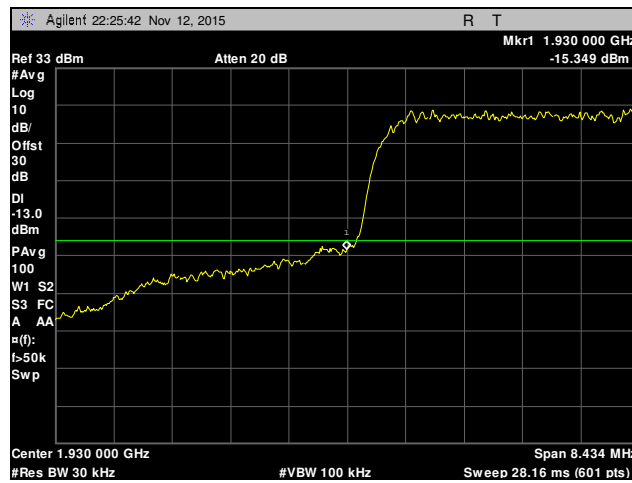


Plot 94. Conducted Band Edge, Channel 5513 (Full Power), Part 24

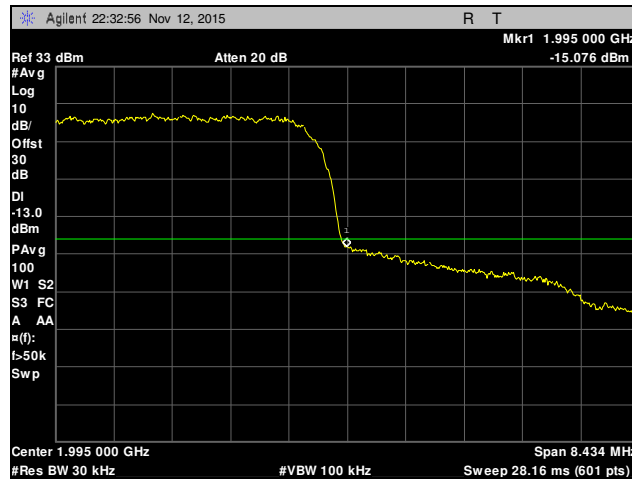


Plot 95. Conducted Band Edge, Channel 6592, Part 24


Band Edge, Part 27

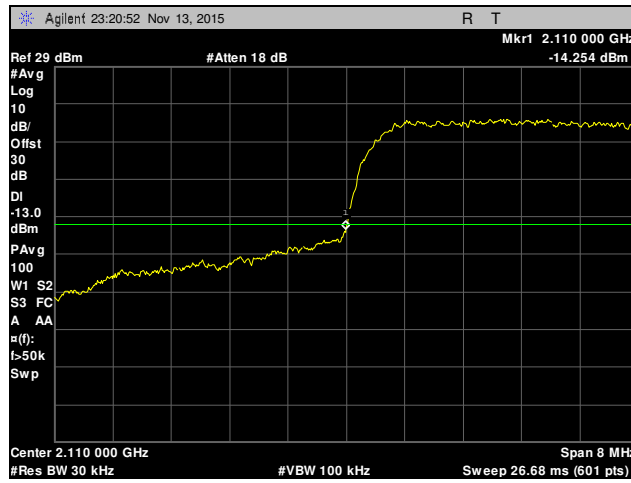


Plot 96. Conducted Band Edge, Channel 1537, Part 27

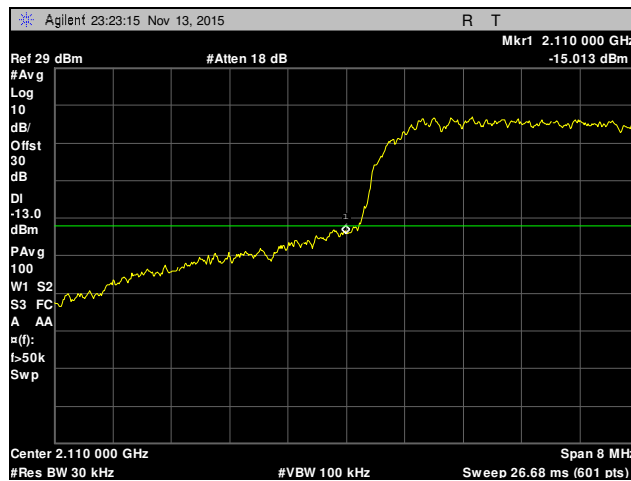

Plot 97. Conducted Band Edge, Channel 1538 (Full Power), Part 27

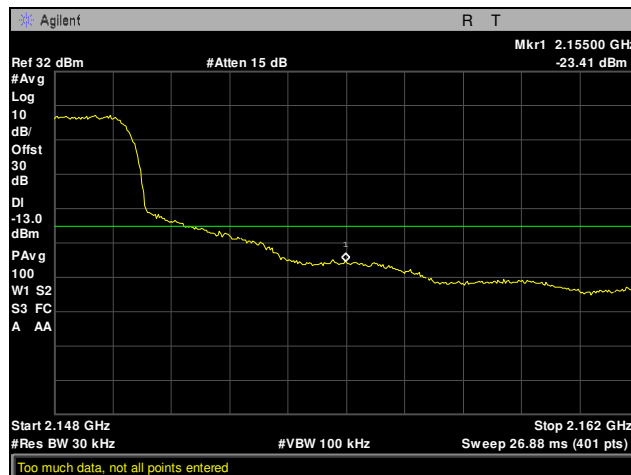

Plot 98. Conducted Band Edge, Channel 2062 (Full Power), Part 27

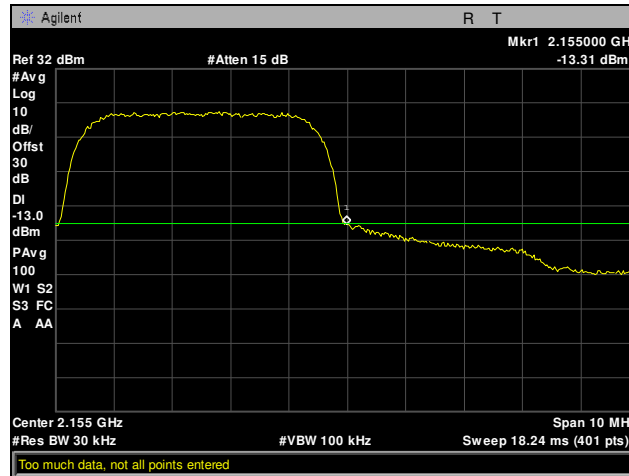

Plot 99. Conducted Band Edge, Channel 2087, Part 27

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 24.232(d) Peak to Average Ratio

Test Requirement(s): § 24.232(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ration (PAR) of the transmission may not exceed 13 dB.

Test Procedures: peak to average ratio was obtained using the CCDF function on the spectrum analyzer and the 0.1% value associated with PAR was recorded

Test Results: Equipment complies with these requirements.

Test Engineer(s): Djed Mouada

Test Date(s): 11/10/15





Figure 5. Spurious Emissions at Antenna Terminals Test Setup

Part 22



Plot 100. Peak to Average Ratio, Channel 4357, Part 22

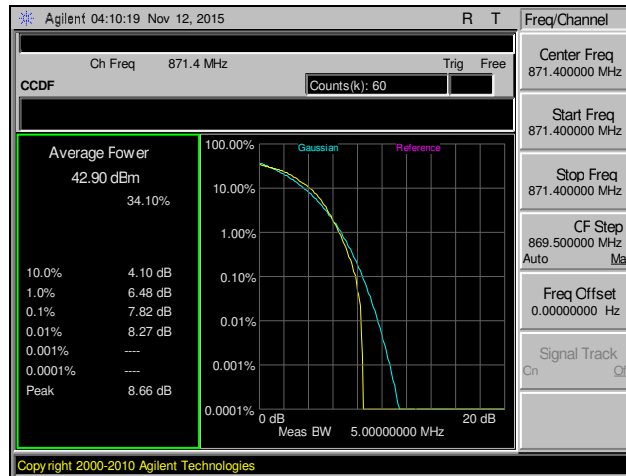


Plot 101. Peak to Average Ratio, Channel 4413, Part 22




Plot 102. Peak to Average Ratio, Channel 4458, Part 22


Part 24

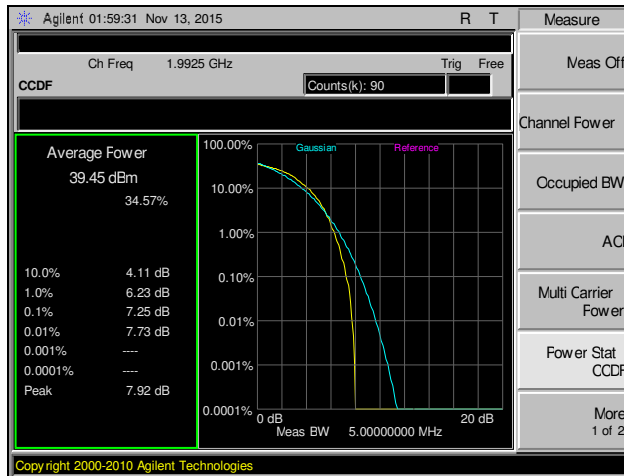

Plot 103. Peak to Average Ratio, Channel 6592, Part 24

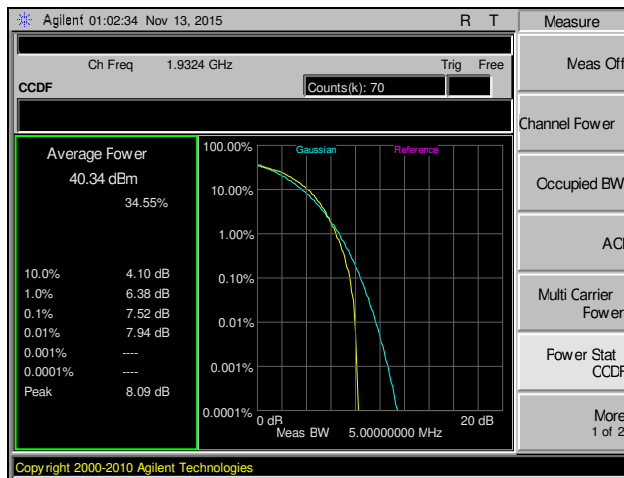

Plot 104. Peak to Average Ratio, Channel 9662, Part 24

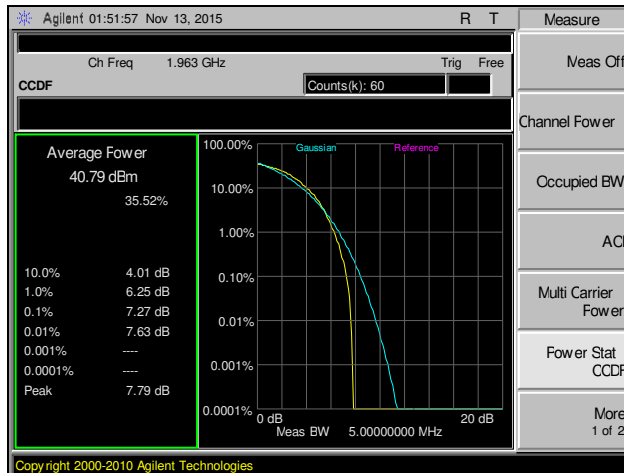


Plot 105. Peak to Average Ratio, Channel 9815, Part 24

Part 27



Plot 106. Peak to Average Ratio, Channel 1537, Part 27

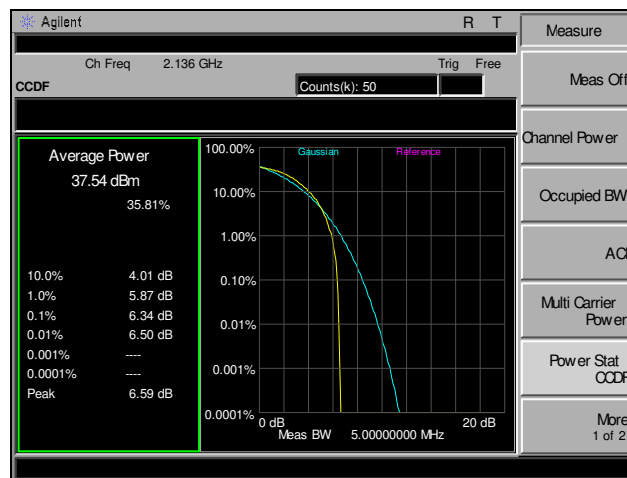

Plot 107. Peak to Average Ratio, Channel 1655, Part 27



Plot 108. Peak to Average Ratio, Channel 2087, Part 27



Channel	PAR	Limit
Low (871.4MHz)	7.82	13
Mid(882.6MHz)	7.53	13
High(891.6MHz)	7.43	13
Low(1932.4MHz)	7.25	13
Mid(1963.0MHz)	7.52	13
High (1992.5MHz)	7.27	13
Low(2112.4MHz)	7.23	13
Mid(2136MHz)	6.34	13
High(2152MHz)	6.67	13

PAR table



Electromagnetic Compatibility Criteria for Intentional Radiators

§2.1049 Frequency Stability 2.1049

Test Requirement(s): §2.1049 §24.238

Test Procedures: The EUT was placed inside a temperature chamber and Frequency measurements were made at the extremes of the specified temperature range and at intervals of than 10° centigrade through the range. The operating voltage is varied to +/- 15 % of the nominal voltage at normal temperature. The frequency deviations are then compared to frequency of normal operation and shall not exceed 1ppm.

Part 27 frequency stability test requires the -26 dB points of edge channels to be contained within the operating band at the same temperature and voltage conditions stated above.

Test Results: Equipment complies with this section.

Test Engineer(s): Djed Mouada

Test Date(s): 12/21/15

UMTS 1900	5112	Calculated Frequency	Δ Hz	Δ ppm	Limit
Voltage (DC)	Temperature				
12	-30	1932.398	1500	0.78	1
12	-20	1932.395	-1500	0.78	1
12	-10	1932.397	500	0.26	1
12	0	1932.398	1650	0.85	1
12	10	1932.396	-500	0.26	1
12	20	1932.3965	----		1
12	30	1932.395	-1500	0.78	1
12	40	1932.395	-1500	0.78	1
12	50	1932.397	500	0.26	1
10.2	20	1932.397	500	0.26	1
13.8	20	1932.397	500	0.26	1

Table 8. Frequency Stability, Test Results, Part 24



UMTS 2100 Voltage (DC)	Temperature	High 26dB point	Band Edge	Low 26dB point	Band Edge
12	-30	2154.874	2155	2110.201	2110
12	-20	2154.924	2155	2110.002	2110
12	-10	2154.926	2155	2110.045	2110
12	0	2154.923	2155	2110.039	2110
12	10	2154.92	2155	2110.047	2110
12	20	2154.813	2155	2110.158	2110
12	30	2154.81	2155	2110.15	2110
12	40	2154.912	2155	2110.05	2110
12	50	2154.98	2155	2110.01	2110
10.2	20	2154.97	2155	2110.01	2110
13.8	20	2154.98	2155	2110.01	2110

Table 9. Frequency Stability, Test Results, Part 27



Photograph 2. Frequency Stability, Test Setup



Maximum Permissible Exposure

RF Exposure Requirements: §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission’s guidelines.

RF Radiation Exposure Limit: §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit: EUT’s operating frequency @ 882.6 MHz; **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (mW/cm²)
P = Power Input to antenna (mW)
G = Antenna Gain (numeric value)
R = Distance (cm)

Test Results:

Frequency (MHz)	Con. Pwr. (dBm)	Con. Pwr. (mW)	Ant. Gain (dBi)	Ant. Gain numeric	Pwr. Density (mW/cm ²)	Limit (mW/cm ²)	Margin	Distance (cm)	Result
882.6	43.84	24210.29	9.5	8.913	1	1	0	131.037	Pass

The safe distance where Power Density is less than the MPE Limit listed above was found to be 131.037 cm.



IV. Test Equipment



Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T6658	SPECTRUM ANALYZER	AGILENT	E4407B	12/09/2015	12/09/2016
1T4497	SIGNAL GENERATOR	AGILENT TECHNOLOGIES	E4432B	10/06/2014	04/06/2016
1T4483	ANTENNA; HORN	ETS-LINDGREN	3117	10/08/2015	04/08/2017
1T4771	PSA SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4446A	11/25/2014	05/25/2016
1T4300B	SEMI-ANECHOIC 3M CHAMBER # 1 D (2043A-1) (IC)	EMC TEST SYSTEMS	NONE	01/11/2015	01/11/2018
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	10/29/2014	10/29/2016
1T4751	ANTENNA - BILOG	SUNOL SCIENCES	JB6	07/29/2014	01/29/2016
331T4442	PRE-AMPLIFIER, MICROWAVE	MITEQ	AFS42-01001800-30-10P	SEE NOTE	
1T4859	DIGITAL BAROMETER, HYGROMETER, THERMOMETER	CONTROL COMPANY	15-078-198, FB70423, 245CD	12/19/2013	12/19/2015
2T5280	TEMPERATURE CHAMBER	THERMOTRON	F270-CH(V) 30-30/EVA	1/8/2015	1/8/2016

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



End of Report