



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

2400 – 2483.5 MHZ TRANSCEIVER

MODEL NUMBER: A8520E24A91 and A8520E24C91*

**FCC ID: X7J-A10051702
IC: 8975A-A10051702**

REPORT NUMBER: 11U13980-1, Revision A

ISSUE DATE: FEBRUARY 8, 2012

Prepared for
**ANAREN, INC.
6635 KIRKVILLE ROAD
EAST SYRACUSE, NEW YORK, 13057-9600, U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**

*For model differences please refer to details under section 5.2



NVLAP LAB CODE 200065-0

Revision History

| Rev. | Issue Date | Revisions | Revised By |
|------|------------|--|------------|
| --- | 01/04/12 | Initial Issue | F. Ibrahim |
| A | 02/08/12 | Revised typos on report and updated description for Maximum Output power | A. Zaffar |

TABLE OF CONTENTS

| | |
|--|-----------|
| 1. ATTESTATION OF TEST RESULTS | 4 |
| 2. TEST METHODOLOGY | 5 |
| 3. FACILITIES AND ACCREDITATION | 5 |
| 4. CALIBRATION AND UNCERTAINTY | 5 |
| 4.1. MEASURING INSTRUMENT CALIBRATION | 5 |
| 4.2. SAMPLE CALCULATION | 5 |
| 4.3. MEASUREMENT UNCERTAINTY | 6 |
| 5. EQUIPMENT UNDER TEST | 7 |
| 5.1. DESCRIPTION OF EUT | 7 |
| 5.2. MANUFACTURER'S DESCRIPTION OF MODEL DIFFERENCES | 7 |
| 5.3. MAXIMUM OUTPUT POWER | 7 |
| 5.4. DESCRIPTION OF AVAILABLE ANTENNAS | 7 |
| 5.5. SOFTWARE AND FIRMWARE | 7 |
| 5.6. WORST-CASE CONFIGURATION AND MODE | 7 |
| 5.7. DESCRIPTION OF TEST SETUP | 8 |
| 6. TEST AND MEASUREMENT EQUIPMENT | 10 |
| 7. ANTENNA PORT TEST RESULTS | 11 |
| 7.1.1. 6 dB BANDWIDTH | 11 |
| 7.1.2. 99% BANDWIDTH | 14 |
| 7.1.3. OUTPUT POWER | 17 |
| 7.1.4. AVERAGE POWER | 18 |
| 7.1.5. POWER SPECTRAL DENSITY | 19 |
| 7.1.6. CONDUCTED SPURIOUS EMISSIONS | 22 |
| 8. RADIATED TEST RESULTS | 26 |
| 8.1. LIMITS AND PROCEDURE | 26 |
| 8.2. TRANSMITTER ABOVE 1 GHz | 27 |
| 8.3. WORST-CASE BELOW 1 GHz | 34 |
| 8.4. RX SPURIOUS EMISSIONS ABOVE 1 GHz | 37 |
| 9. AC POWER LINE CONDUCTED EMISSIONS | 38 |
| 10. MAXIMUM PERMISSIBLE EXPOSURE | 42 |
| 11. SETUP PHOTOS | 46 |

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: ANAREN, INC
6635 KIRKVILLE ROAD
EAST SYRACUSE, NY, 13057, U.S.A.

EUT DESCRIPTION: 2400 – 2483.5 MHZ TRANSCEIVER

MODEL: A8520E24A91 and A8520E24C91

SERIAL NUMBER: Unit 01

DATE TESTED: OCTOBER 05 - DECEMBER 16, 2011

| APPLICABLE STANDARDS | |
|---|--------------|
| STANDARD | TEST RESULTS |
| CFR 47 Part 15 Subpart C | Pass |
| INDUSTRY CANADA RSS-210 Issue 8 Annex 8 | Pass |
| INDUSTRY CANADA RSS-GEN Issue 3 | Pass |

Compliance Certification Services, Inc. (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:



FRANK IBRAHIM
EMC SUPERVISOR
UL CCS

Tested By:



WILLIAM ZHUANG
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA and at 1285 Walt Whitman Rd, Melville, NY 11747.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

UL Melville is accredited by NVLAP, Laboratory Code 100255-0.

Harmonics for mid and high channels were performed at UL Melville location, all other test items were performed at UL Fremont location as covered in this report.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

UL Fremont

| PARAMETER | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 3.52 dB |
| Radiated Disturbance, 30 to 1000 MHz | 4.94 dB |

Uncertainty figures are valid to a confidence level of 95%.

UL Melville

| Test | Uncertainty |
|---|-----------------|
| Conducted Emissions | ± 3.3 , k=2 |
| Radiated Emissions, 30-200MHz, Horizontal | ± 3.1 , k=2 |
| Radiated Emissions, 30-200MHz, Vertical | ± 3.2 , k=2 |
| Radiated Emissions, 200-1000MHz, Horizontal | ± 3.3 , k=2 |
| Radiated Emissions, 200-1000MHz, Vertical | ± 4.0 , k=2 |

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a 2.4 GHz transceiver that is manufactured by Anaren, Inc.

5.2. MANUFACTURER'S DESCRIPTION OF MODEL DIFFERENCES

A8520E24A91 and A8520E24C91 are Identical, except A8520E24C91 has a U.FL connector, and A8520E24A91 has an integral printed antenna.

5.3. MAXIMUM OUTPUT POWER

The selected transmitter maximum output power setting is 'level 4', at which the measured peak conducted output power is as follows:

| Frequency Range (MHz) | Mode | Output Power (dBm) | Output Power (mW) |
|--------------------------|------|-----------------------|----------------------|
| 2406 - 2474 | QPSK | 19.92 | 98.17 |

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes PCB antenna with maximum peak gains of 2dBi.

5.5. SOFTWARE AND FIRMWARE

The EUT Firmware software installed during testing was v 1.0.3

The test utility software used during testing was 8520 Engineering Software, V1.0.0.99.

5.6. WORST-CASE CONFIGURATION AND MODE

EUT is a portable device, therefore, an investigation for worst-case orientation was conducted and it was found the Y orientation is worst-case; final testing was performed with the EUT in Y orientation.

Radiated emissions and power line conducted emissions were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The EUT has a single modulation, which is QPSK.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

CONDUCTED TEST

| PERIPHERAL SUPPORT EQUIPMENT LIST | | | | |
|-----------------------------------|-------------------|----------------------|------------------------------|--------|
| Description | Manufacturer | Model | Serial Number | FCC ID |
| Laptop | Dell | M4500 | 5Z2K2M1 | DoC |
| AC Adapter | Dell | DA130PE1-00 | CN-07U012-48661-086-00EF-A04 | DoC |
| USB/SPI Converter | Total Phase | I ² C/SPI | 2237-391864 | DoC |
| System JIG | Texas Instruments | TAS57XXEVM | 1018002327 | DoC |

RADIATED TEST

| PERIPHERAL SUPPORT EQUIPMENT LIST | | | | |
|-----------------------------------|-------------------|----------------------|------------------------|--------|
| Description | Manufacturer | Model | Serial Number | FCC ID |
| Laptop | IBM | T43 | L3-BB983 | DoC |
| AC Adapter | IBM | 02K6810 | 11S02K6810Z123B7514164 | DoC |
| USB/SPI Converter | Total Phase | I ² C/SPI | 2237-392328 | DoC |
| System JIG | Texas Instruments | TAS57XXEVM | 1018002406 | DoC |


I/O CABLES

| I/O CABLE LIST | | | | | | |
|----------------|------|----------------------|----------------|-------------|--------------|--------------------|
| Cable No. | Port | # of Identical Ports | Connector Type | Cable Type | Cable Length | Remarks |
| 1 | AC | 1 | US 115V | Un-shielded | 1.0m | N/A |
| 2 | DC | 1 | DC | Un-shielded | 2.0m | Ferrite at one End |
| 3 | USB | 1 | USB | Un-shielded | 2.0m | N/A |
| 4 | USB | 1 | USB | Un-shielded | 1.5m | N/A |
| 5 | Data | 1 | 10 Pin | Un-shielded | 0.2m | N/A |

TEST SETUP

The EUT is connected to a host laptop computer via system test board during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

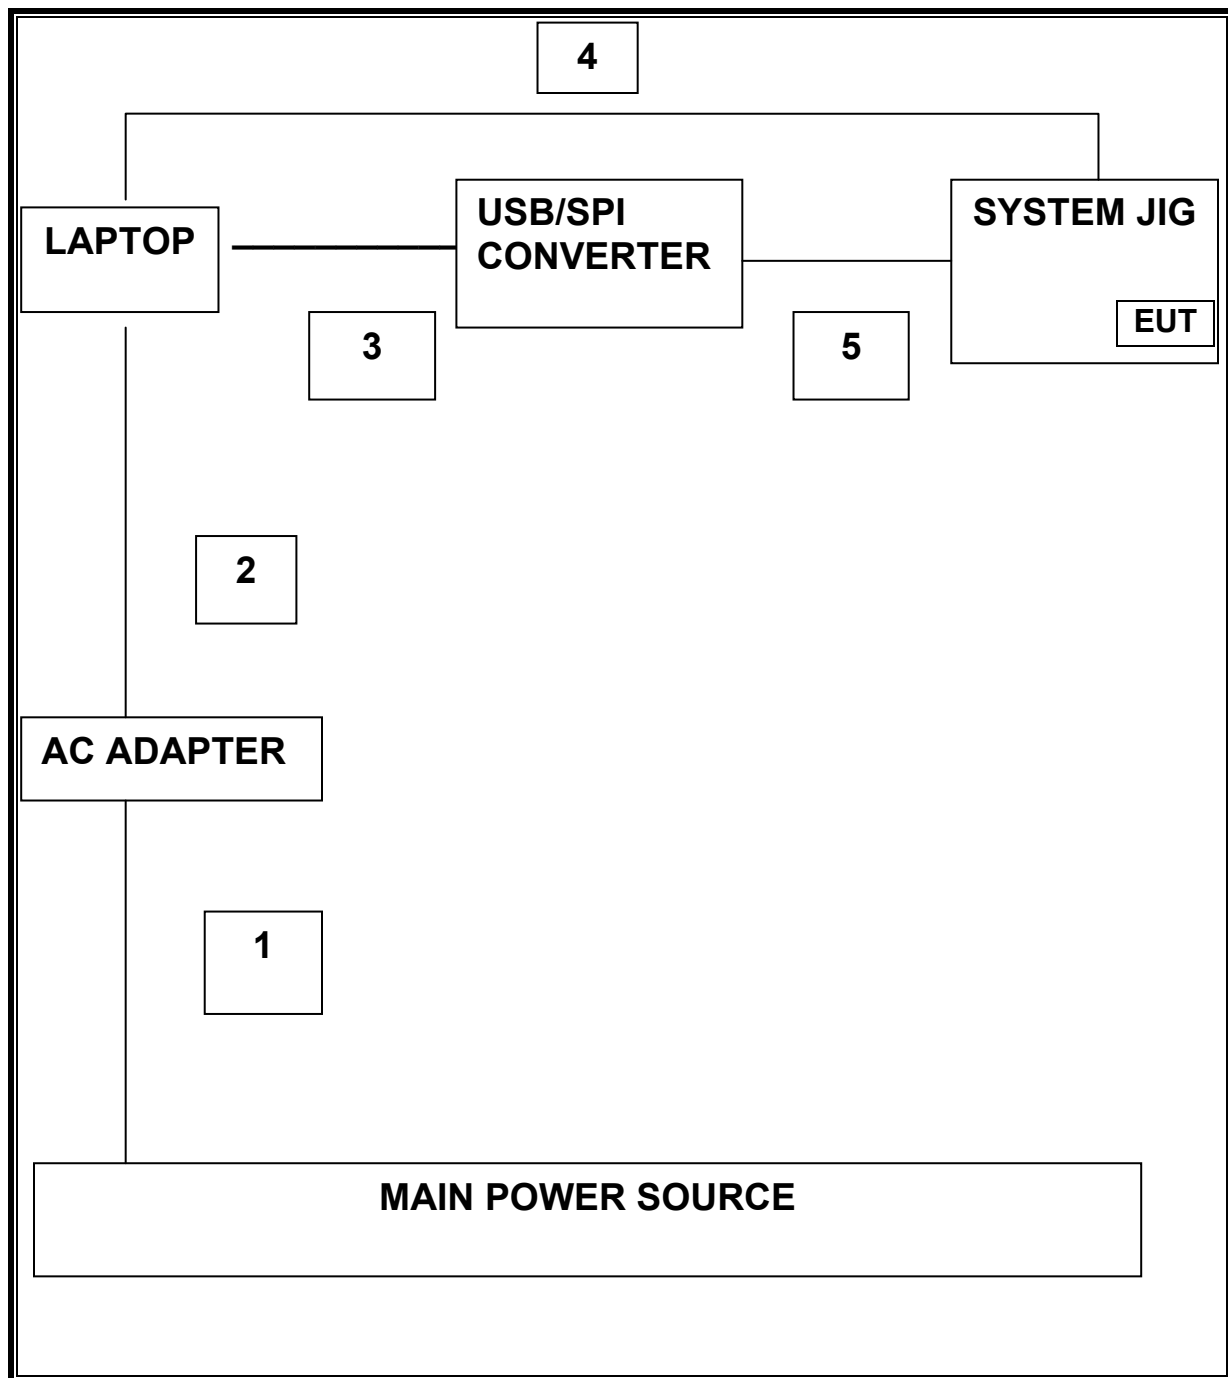

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

UL FREMONT

| TEST EQUIPMENT LIST | | | | |
|-----------------------------|----------------|------------------|--------|----------|
| Description | Manufacturer | Model | Asset | Cal Due |
| Antenna, Bilog, 2 GHz | Sunol Sciences | JB1 | C01011 | 07/12/12 |
| Antenna, Horn, 18 GHz | EMCO | 3115 | C00945 | 06/29/12 |
| Preamplifier, 1300 MHz | Agilent / HP | 8447D | C00885 | 01/06/12 |
| Preamplifier, 26.5 GHz | Agilent / HP | 8449B | C01052 | 07/14/12 |
| LISN, 10 kHz ~ 30 MHz | Solar | 8012-50-R-24-BNC | N02481 | 11/10/12 |
| Spectrum Analyzer, 44 GHz | Agilent / HP | E4446A | C01012 | 09/03/12 |
| Spectrum Analyzer, 26.5 GHz | Agilent / HP | E4440A | C01179 | 08/18/12 |
| EMI Test Receiver, 30 MHz | R & S | ESHS 20 | N02396 | 05/06/12 |
| Reject Filter, 2.4-2.5 GHz | Micro-Tronics | BRC13192 | N02683 | CNR |
| Peak Power Meter | Boonton | 4541 | C01186 | 03/01/12 |
| Peak Power Sensor | Boonton | 57318 | C01202 | 02/23/12 |
| Antenna, Horn, 26 GHz | ARA | MVH-1826/B | C00589 | 07/28/12 |

UL MELVILLE

| Test Equipment Used | | | | | |
|--|--------------|-------------|------------|------------|--------------|
| Description | Manufacturer | Model | Identifier | Cal Date | Cal Due Date |
| Above 1GHz (Band Optimized System) | | | | | |
| Spectrum Analyzer | Agilent | E4446A | 72823 | 2011-07-26 | 2012-07-26 |
| Horn Antenna (1-2 GHz) | ETS | 3161-01 | 51442 | 2008-03-28 | See * below |
| Horn Antenna (2-4 GHz) | ETS | 3161-02 | 48107 | 2007-09-27 | See * below |
| Horn Antenna (4-8 GHz) | ETS | 3161-03 | 48106 | 2007-09-27 | See * below |
| Horn Antenna (8-12 GHz) | ETS | 3160-07 | 8933 | 2008-11-24 | See * below |
| Horn Antenna (12-18 GHz) | ETS | 3160-08 | 8932 | 2007-09-27 | See * below |
| Horn Antenna (18-26.5 GHz) | ETS | 3160-09 | 8947 | 2007-09-26 | See * below |
| Signal Path Controller | HP | 11713A | 50250 | N/A | N/A |
| Gain Controller | HP | 11713A | 50251 | N/A | N/A |
| RF Switch / Preamp Fixture | UL | BOMS1 | 50249 | N/A | N/A |
| System Controller | UL | BOMS2 | 50252 | N/A | N/A |
| Measurement Software | UL | Version 9.3 | 44740 | N/A | N/A |
| Temp/Humidity/Pressure Meter | Cole Parmer | 99760-00 | 4268 | 2010-12-07 | 2012-12-07 |
| <p>* - Note: As allowed by the calibration standard ANSI C63.4 Section 4.4.2, standard gain horns need only a one-time calibration. Only if physical damage occurs will the horn antenna require re-calibration.</p> <p>* Gain standard horn antennas (sometimes called standard gain horn antennas) need not be calibrated beyond that which is provided by the manufacturer unless they are damaged or deterioration is suspected, or they are used at a distance closer than $2D^2/\lambda$. Gain standard horn antennas have gains that are fixed by their dimensions and dimensional tolerances.</p> | | | | | |

7. ANTENNA PORT TEST RESULTS

7.1.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

| Channel | Frequency (MHz) | 6 dB Bandwidth (KHz) | Minimum Limit (kHz) |
|---------|--------------------|-------------------------|------------------------|
| Low | 2406.0 | 2250.0 | 500.0 |
| Middle | 2442.0 | 2300.0 | 500.0 |
| High | 2474.0 | 2200.0 | 500.0 |

6 dB BANDWIDTH

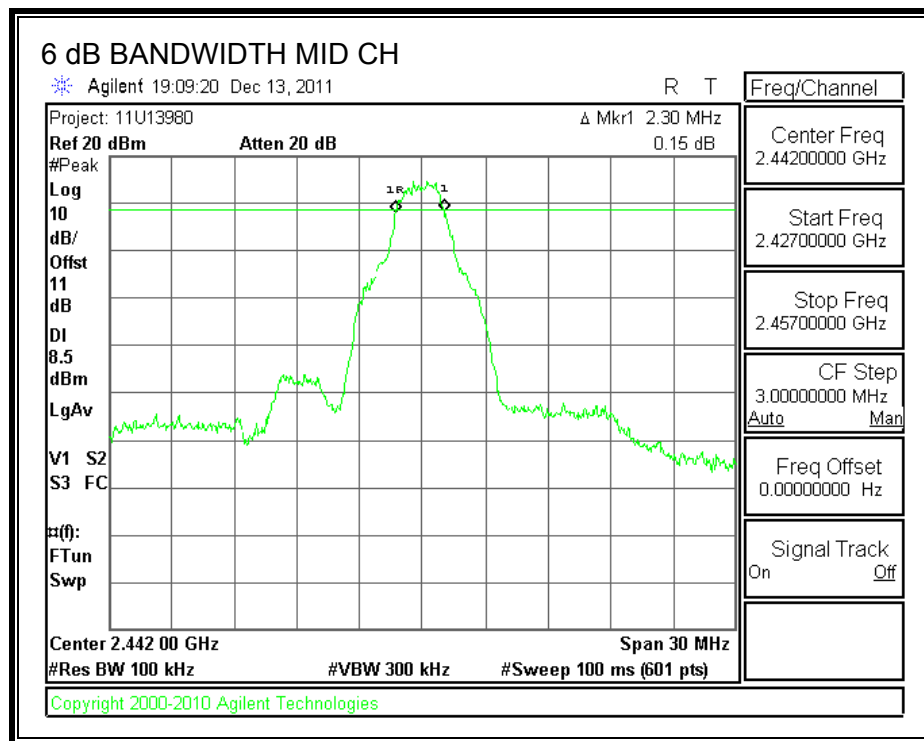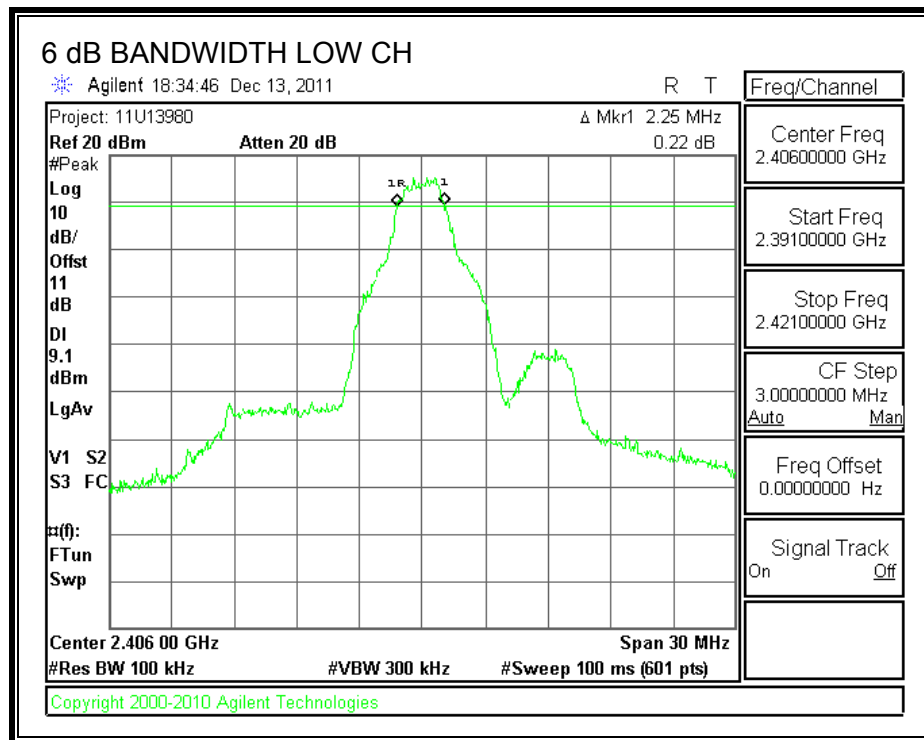

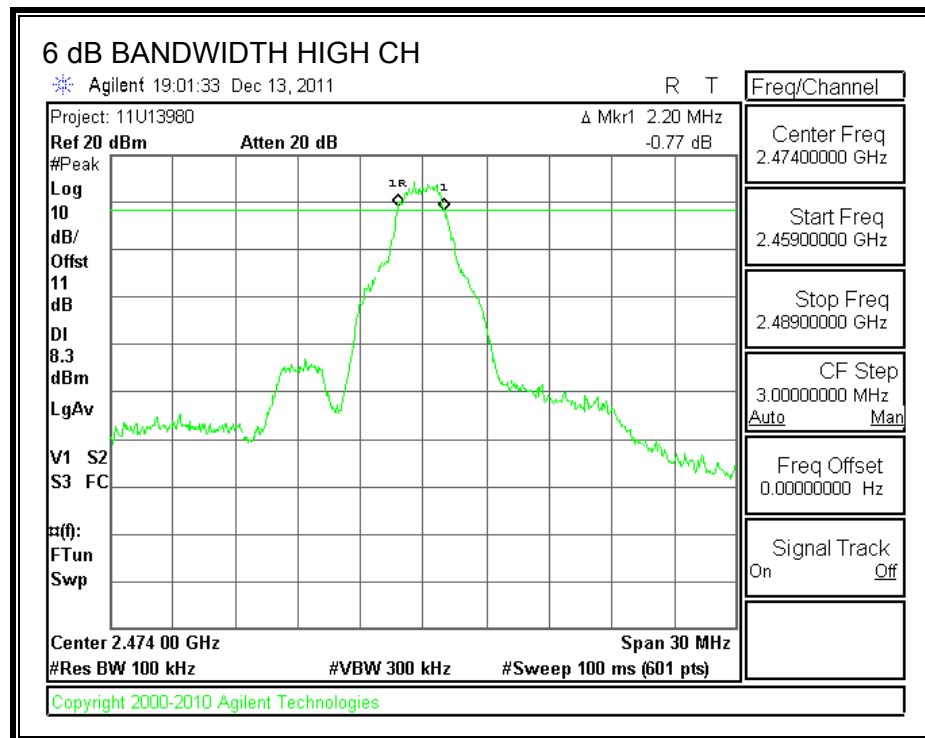

7.1.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

| Channel | Frequency (MHz) | 99% Bandwidth (KHz) |
|---------|--------------------|------------------------|
| Low | 2406.0 | 4077.8 |
| Middle | 2442.0 | 3365.1 |
| High | 2474.0 | 3452.5 |

99% BANDWIDTH

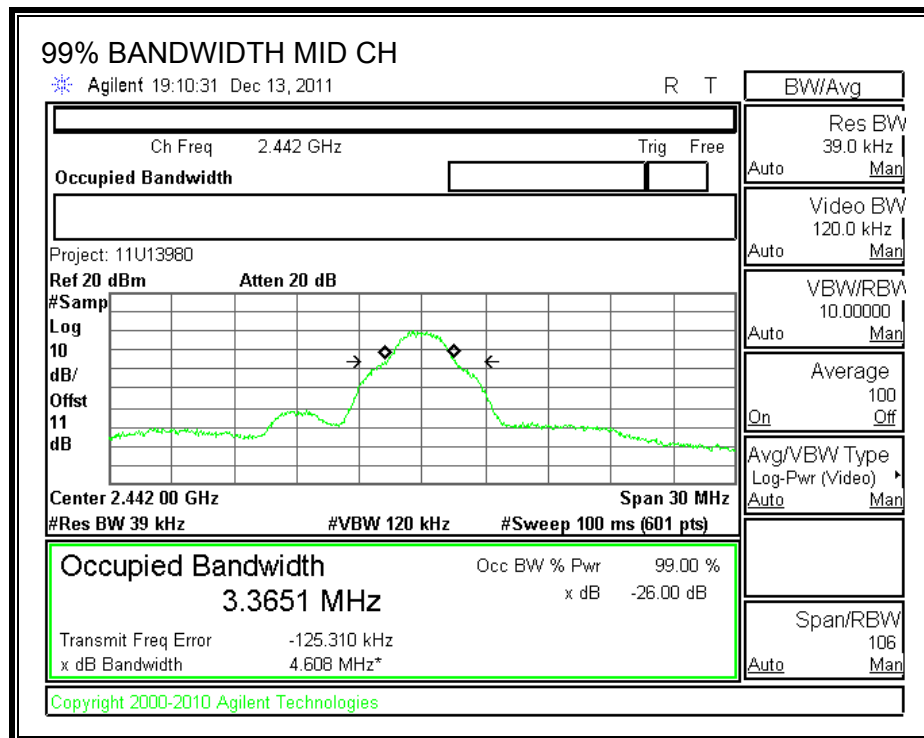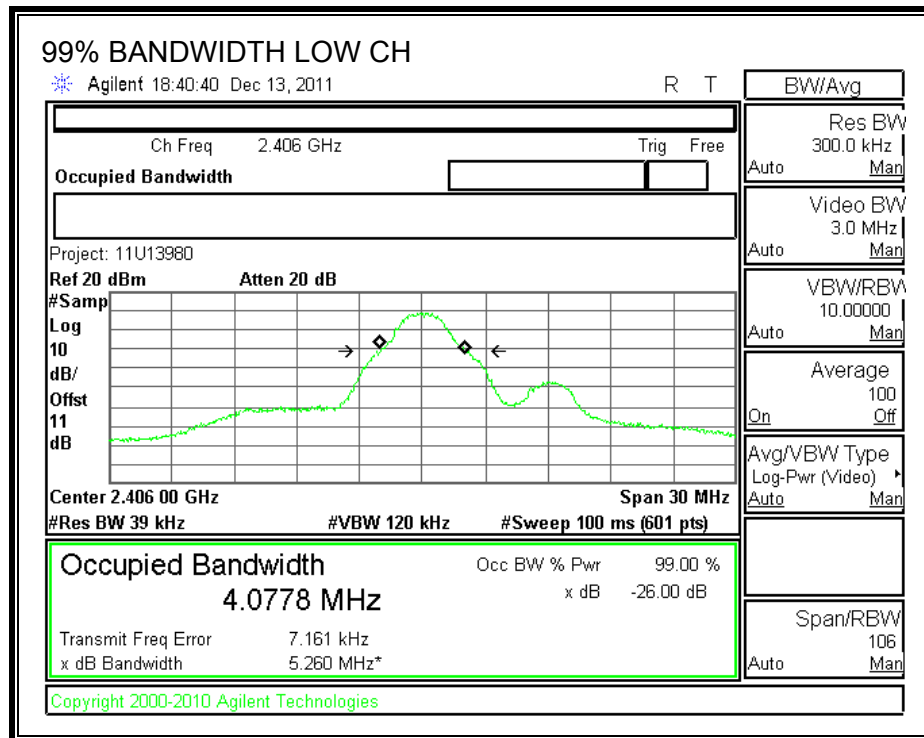

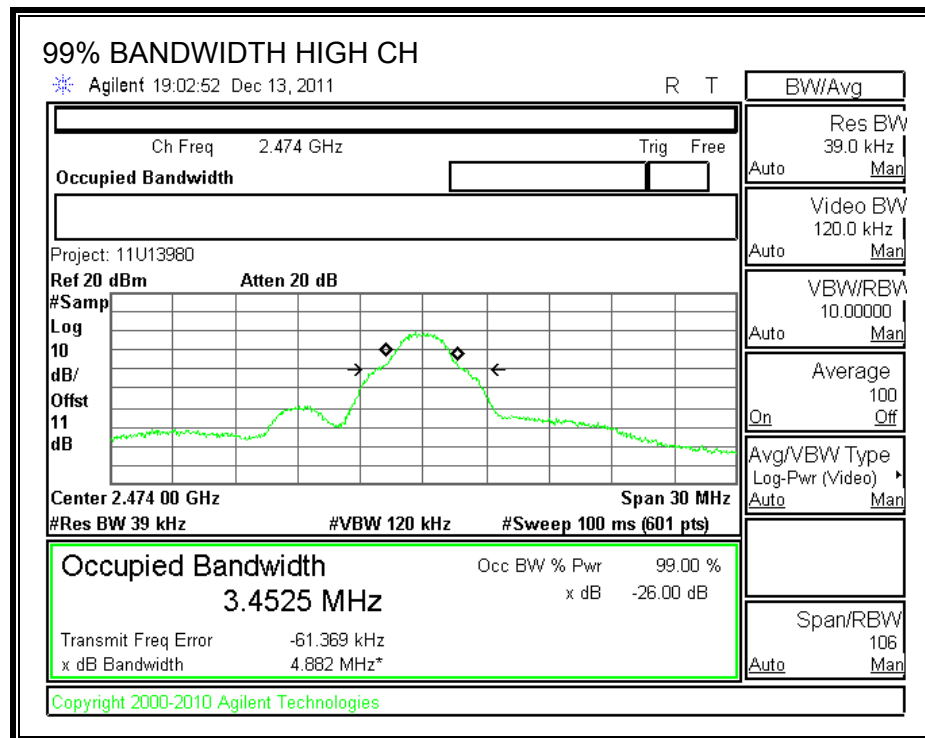

7.1.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

Peak power is measured by the power meter.

RESULTS

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|--------------------|--------------------------|----------------|----------------|
| Low | 2406.0 | 19.92 | 30 | -10.08 |
| Middle | 2442.0 | 19.35 | 30 | -10.65 |
| High | 2474.0 | 18.66 | 30 | -11.34 |

7.1.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB was entered as an offset in the power meter to allow for direct reading of power.

| Channel | Frequency (MHz) | Power (dBm) |
|---------|--------------------|----------------|
| Low | 2406.0 | 17.71 |
| Middle | 2442.0 | 17.24 |
| High | 2474.0 | 16.69 |

7.1.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.

RESULTS

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|--------------------|---------------|----------------|----------------|
| Low | 2406.0 | 1.17 | 8 | -6.83 |
| Middle | 2442.0 | 0.80 | 8 | -7.20 |
| High | 2474.0 | 0.62 | 8 | -7.38 |

POWER SPECTRAL DENSITY

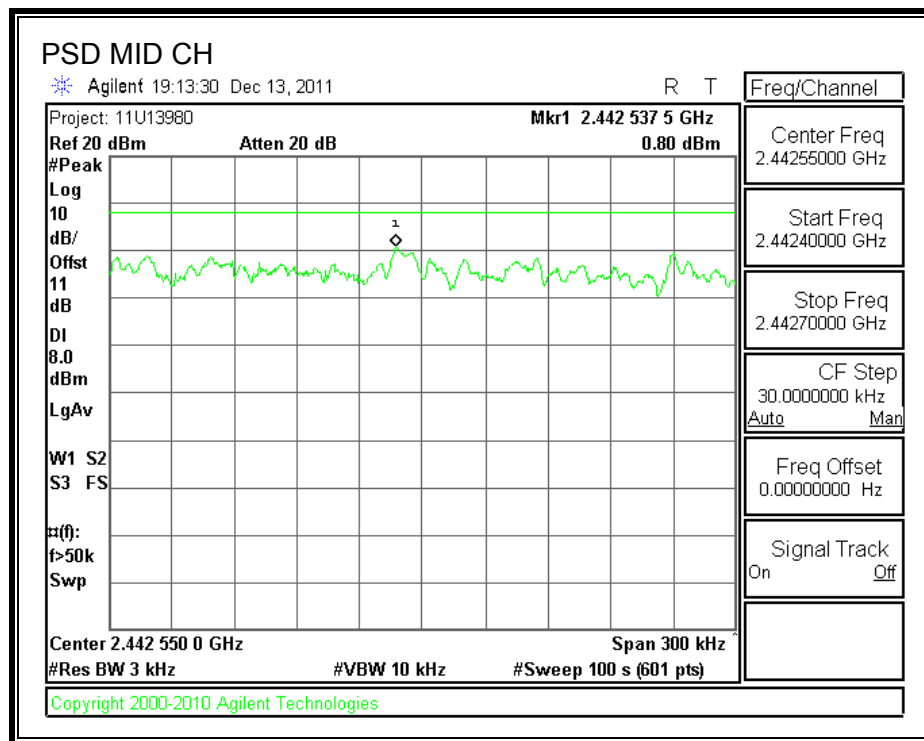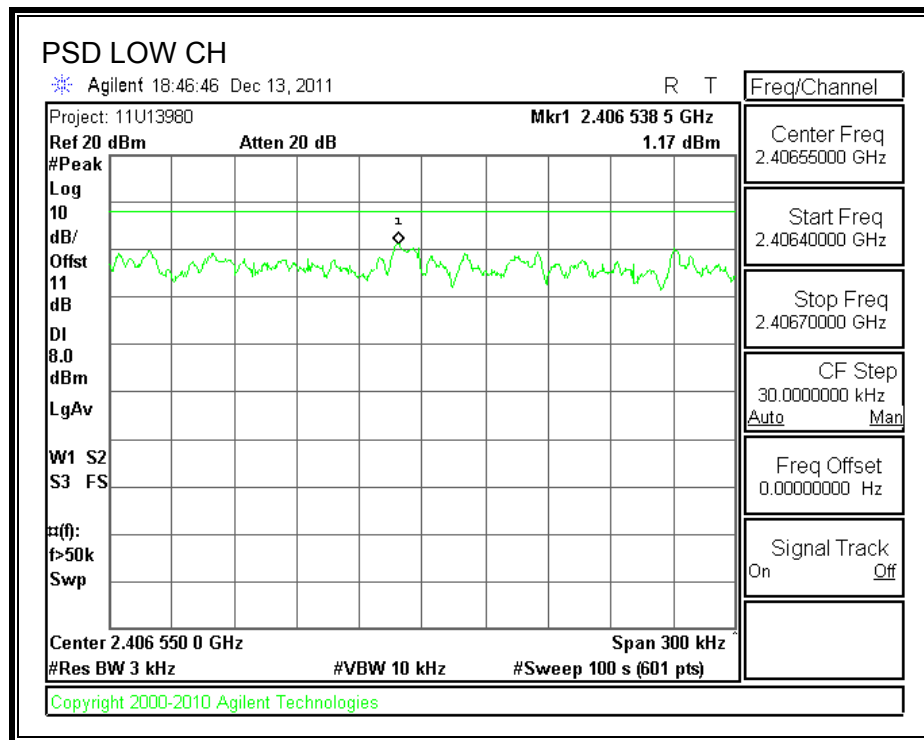

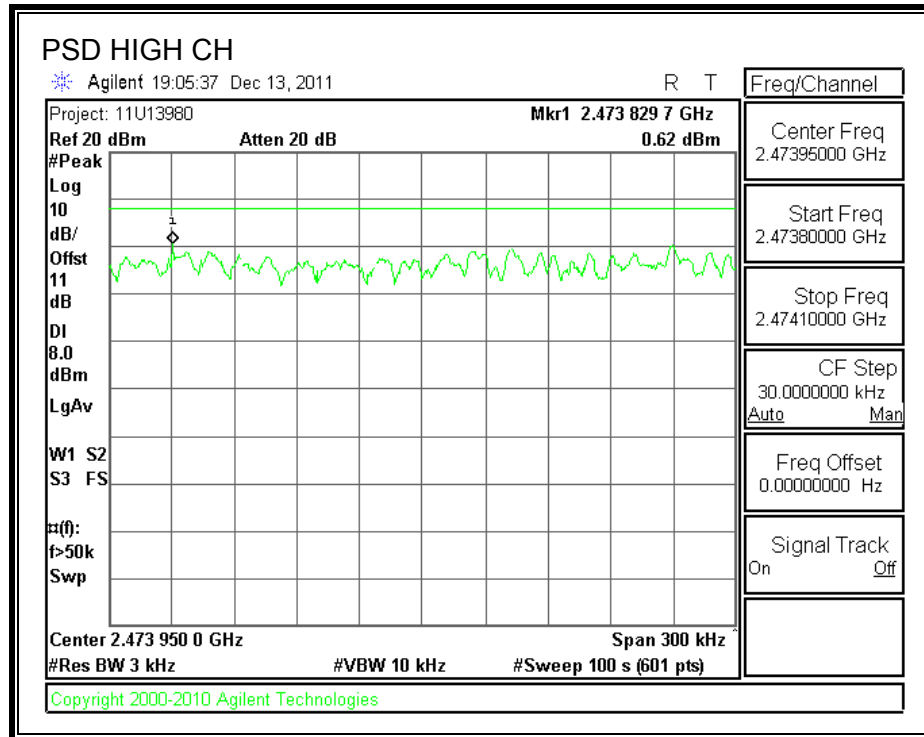

7.1.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

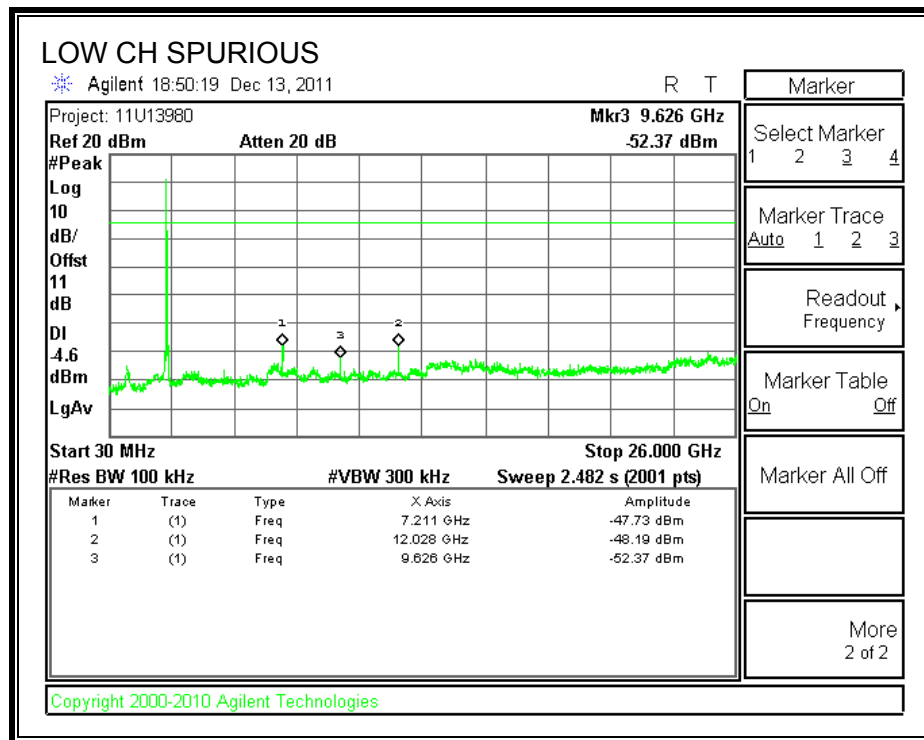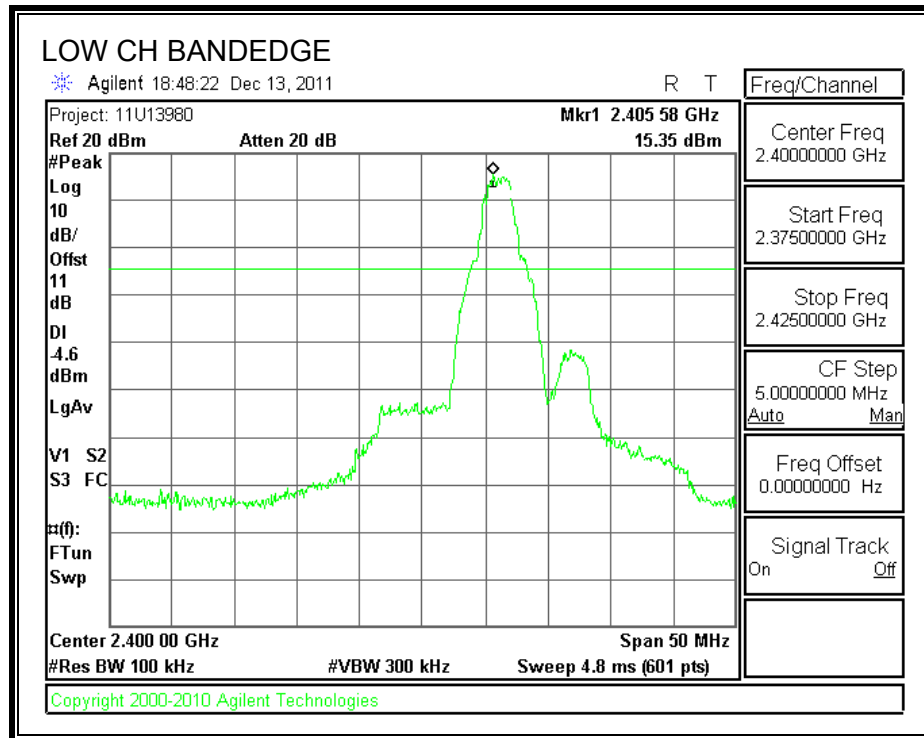

SPURIOUS EMISSIONS, MID CHANNEL

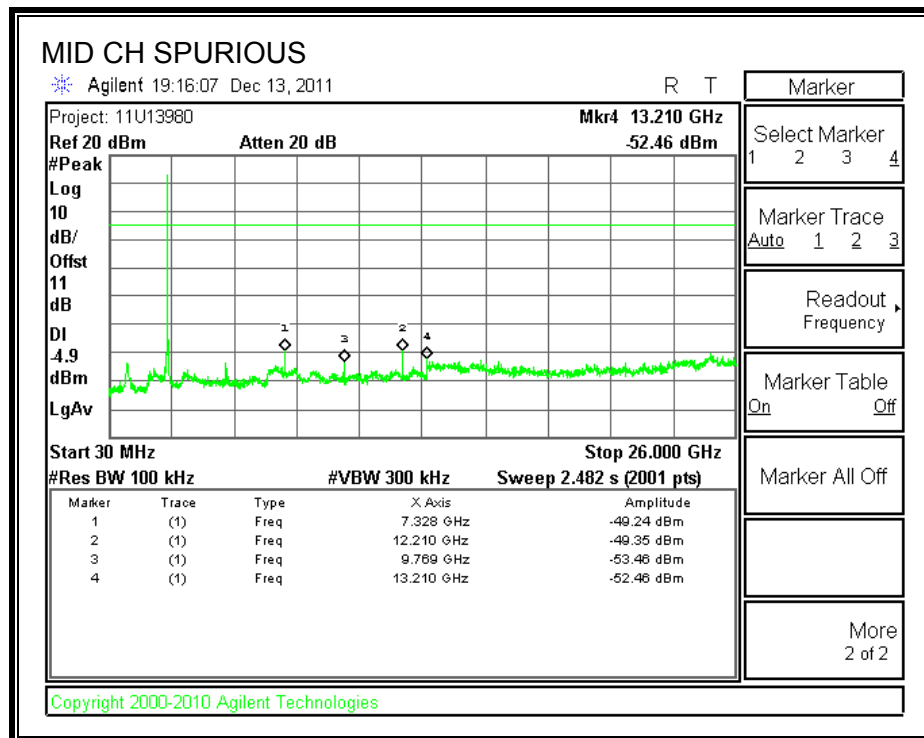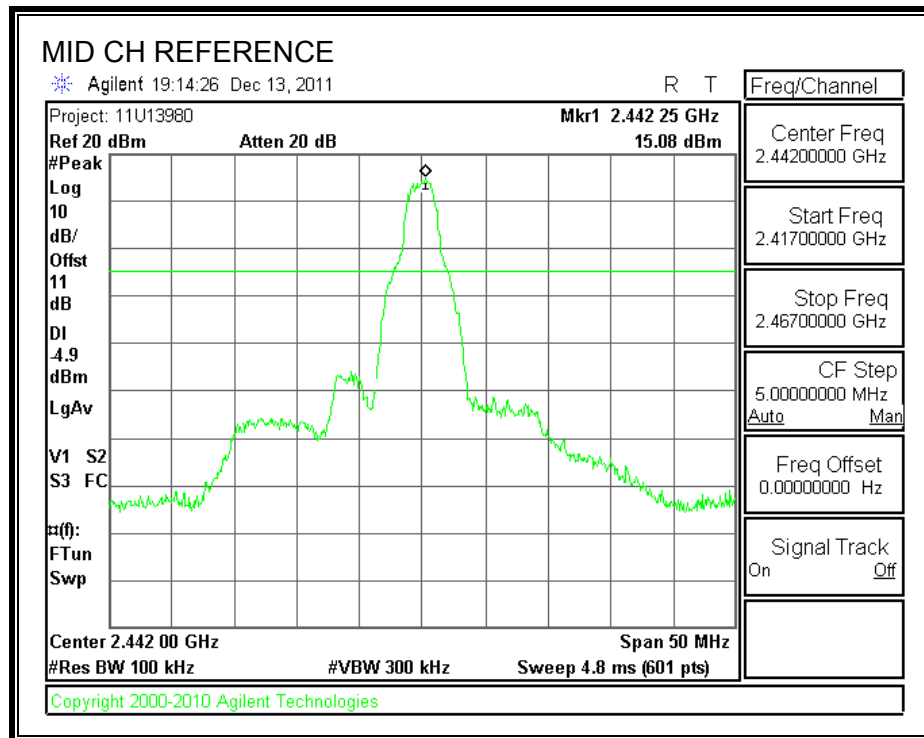

SPURIOUS EMISSIONS, HIGH CHANNEL

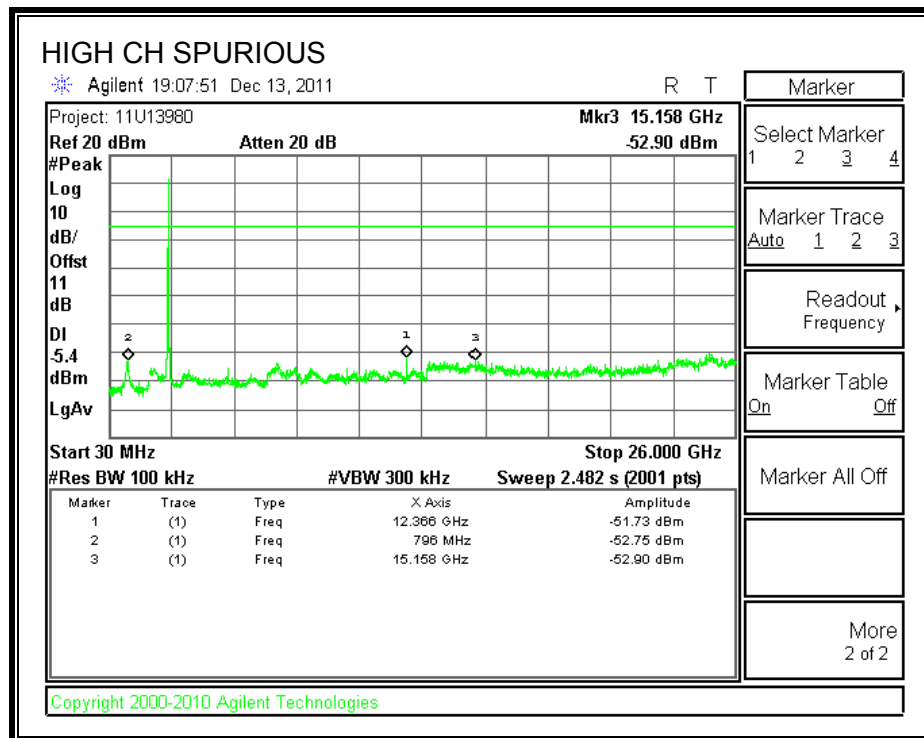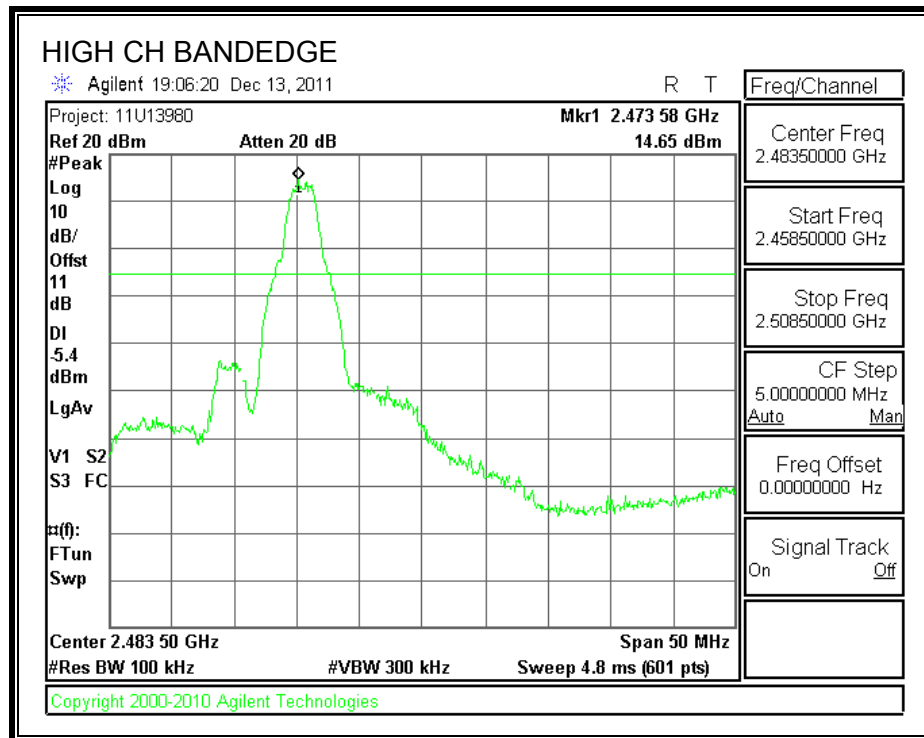

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

| Frequency Range (MHz) | Field Strength Limit (uV/m) at 3 m | Field Strength Limit (dBuV/m) at 3 m |
|-----------------------|------------------------------------|--------------------------------------|
| 30 - 88 | 100 | 40 |
| 88 - 216 | 150 | 43.5 |
| 216 - 960 | 200 | 46 |
| Above 960 | 500 | 54 |

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.



For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.



The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

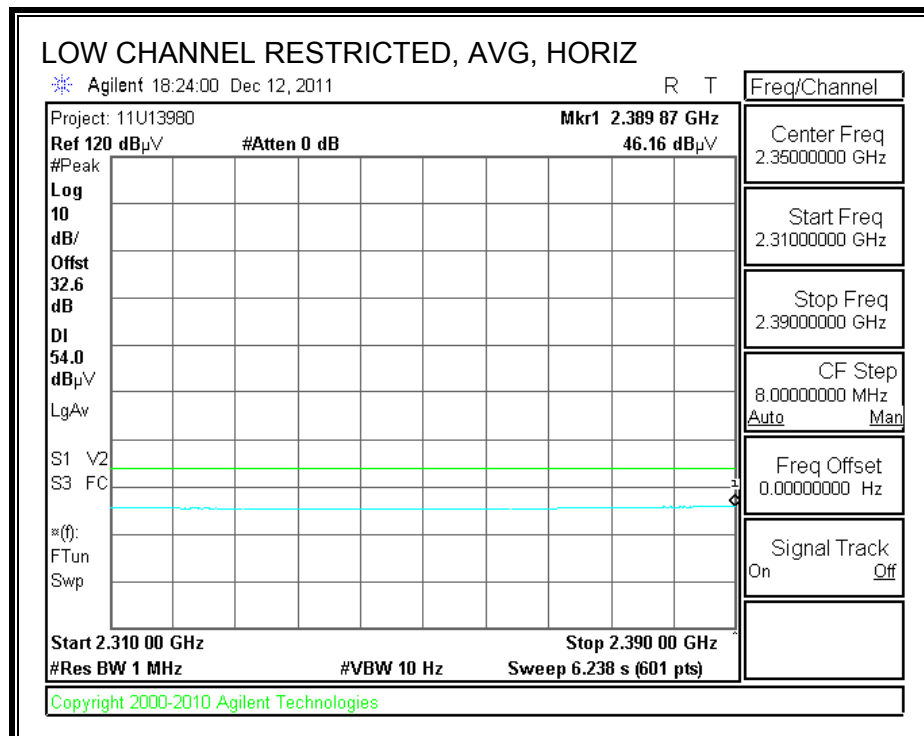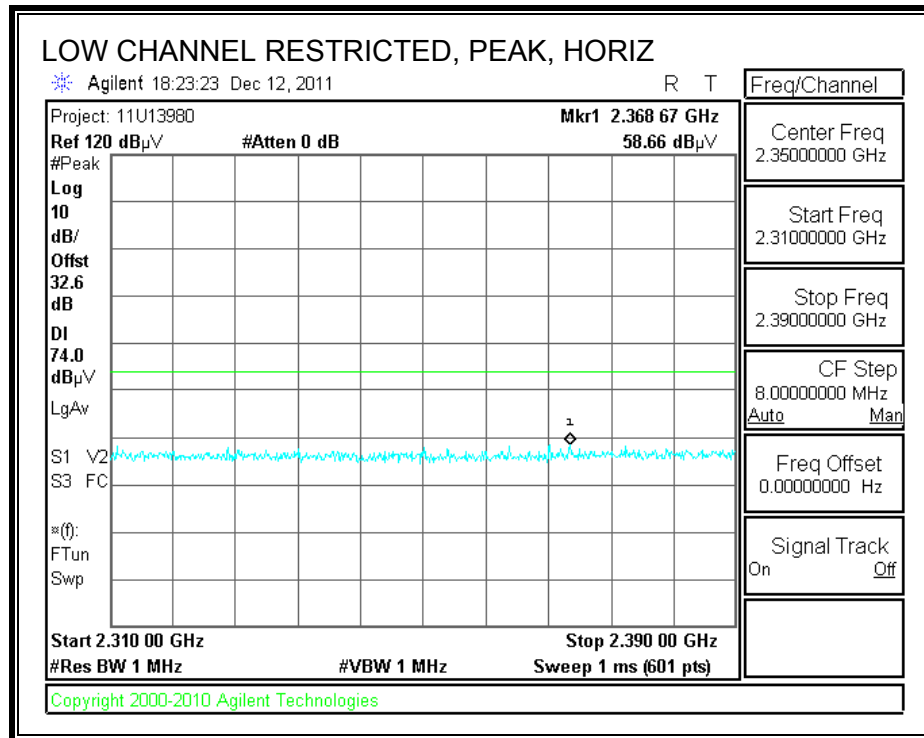



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

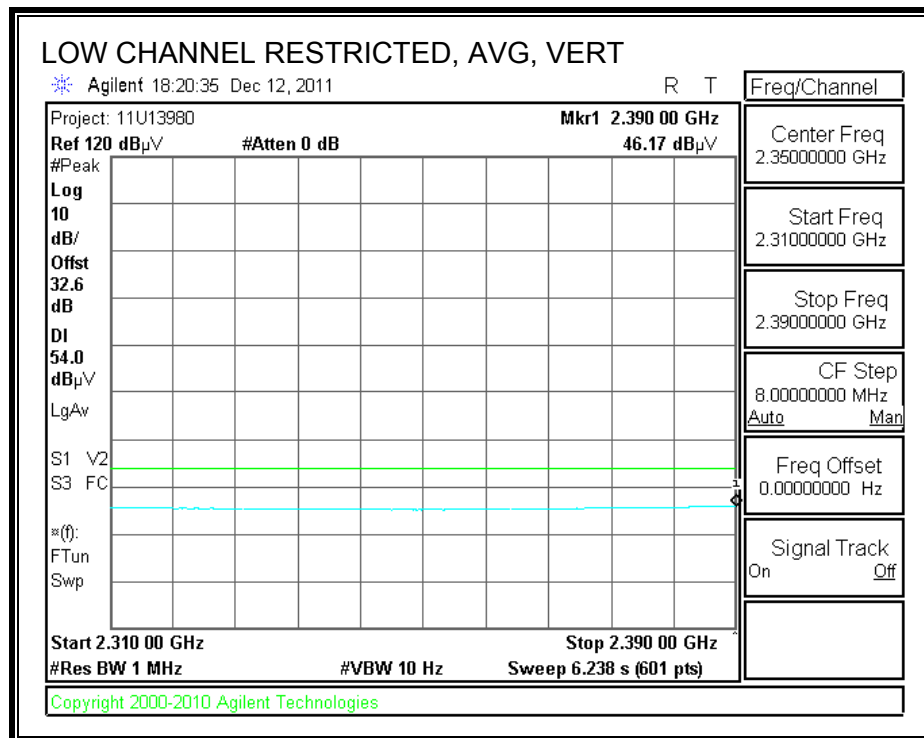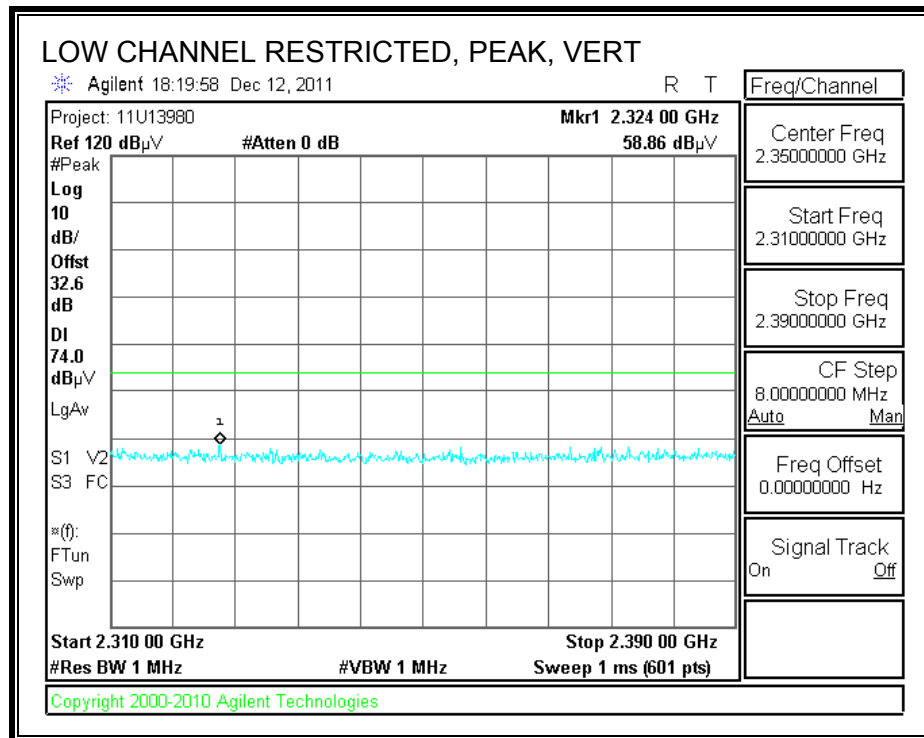

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

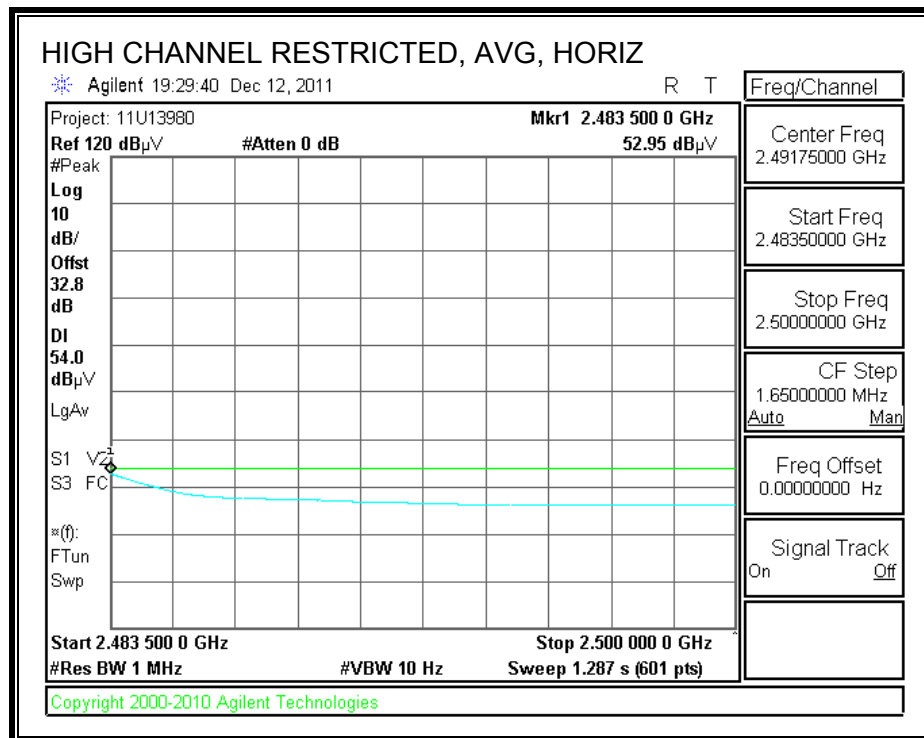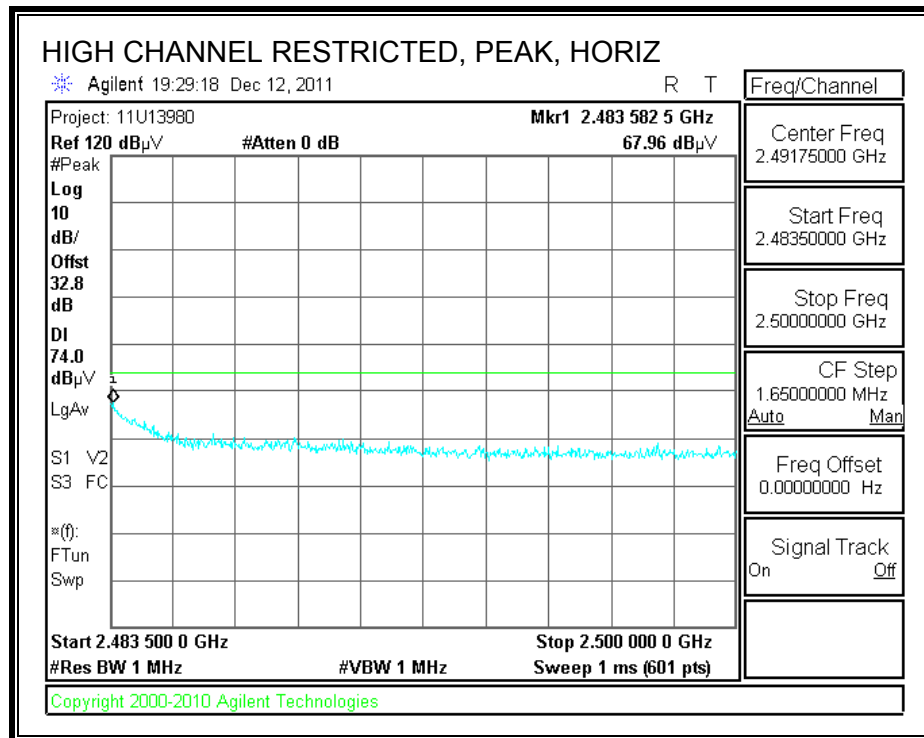

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

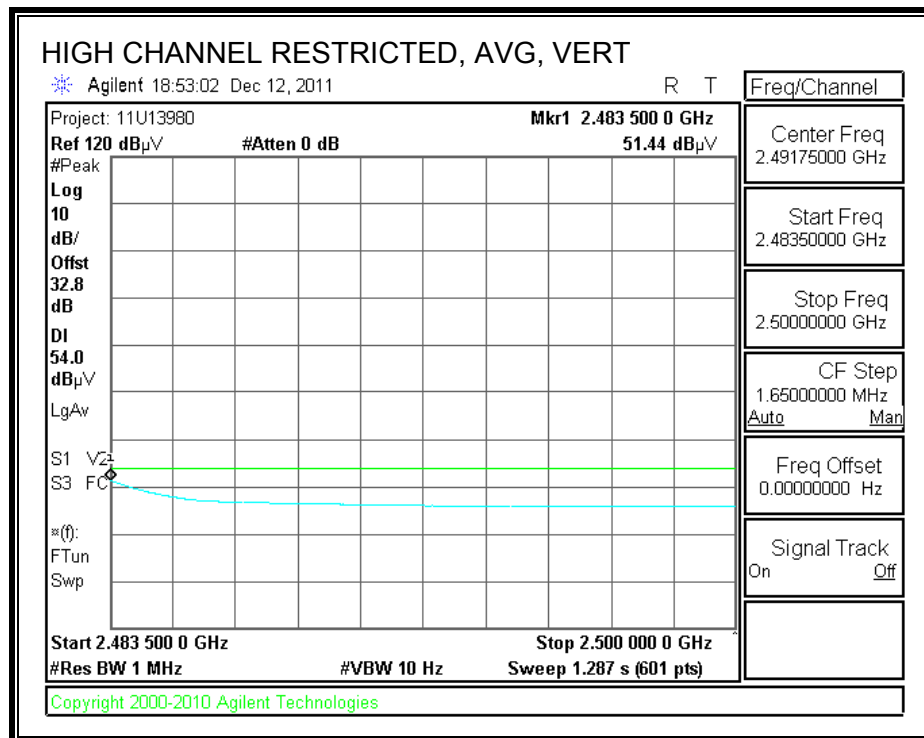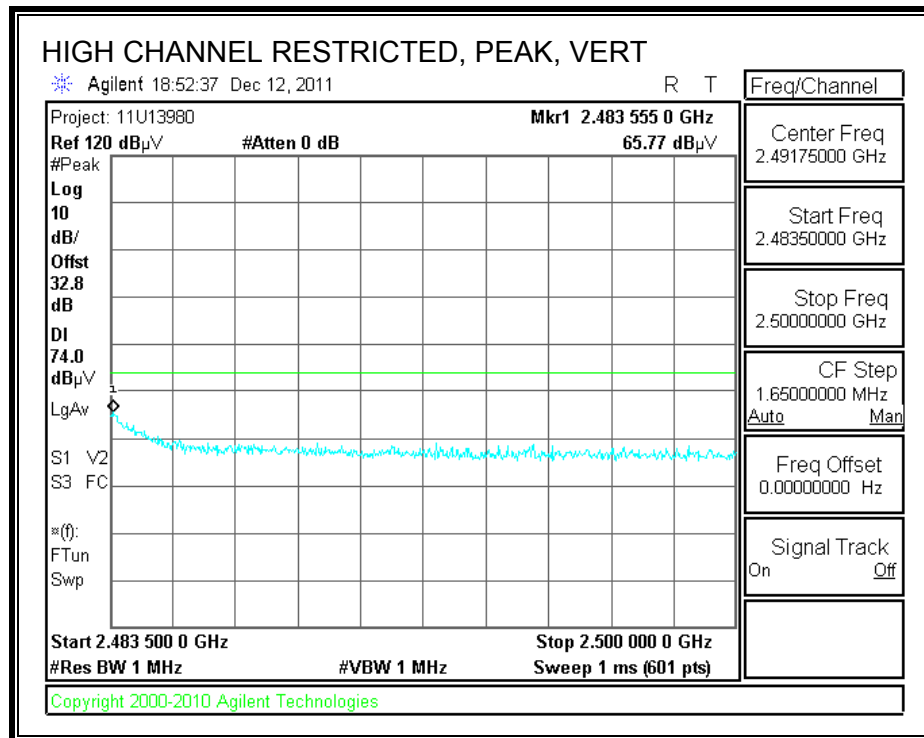

HARMONICS AND SPURIOUS EMISSIONS

Low Ch.

High Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: William Zhuang
Date: 12/12/11
Project #: 11U13980
Company: Anaren
Test Target: FCC B
Mode Oper: QPSK, Pwr set 4

| | | | | |
|------|-----------------------|--------|--------------------------------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | |

| f GHz | Dist (m) | Read dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fldr dB | Corr. dBuV/m | Limit dBuV/m | Margin dB | Ant. Pol V/H | Det. P/A/QP | Ant.High cm | Table Angle Degree | Notes |
|------------------|-------------|--------------|------------|----------|-----------|--------------|------------|-----------------|-----------------|--------------|-----------------|----------------|----------------|-----------------------|-------|
| Low Ch. 2406 MHz | | | | | | | | | | | | | | | |
| 4.812 | 3.0 | 51.2 | 33.1 | 6.8 | -34.8 | 0.0 | 0.0 | 56.3 | 74.0 | -17.7 | V | P | 98.0 | 160.0 | |
| 4.812 | 3.0 | 41.5 | 33.1 | 6.8 | -34.8 | 0.0 | 0.0 | 46.6 | 54.0 | -7.4 | V | A | 98.0 | 160.0 | |
| 4.812 | 3.0 | 53.5 | 33.1 | 6.8 | -34.8 | 0.0 | 0.0 | 58.5 | 74.0 | -15.5 | H | P | 98.0 | 292.0 | |
| 4.812 | 3.0 | 44.2 | 33.1 | 6.8 | -34.8 | 0.0 | 0.0 | 49.2 | 54.0 | -4.8 | H | A | 98.0 | 292.0 | |
| 12.030 | 3.0 | 40.8 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 59.6 | 74.0 | -14.4 | H | P | 144.0 | 315.0 | |
| 12.030 | 3.0 | 27.3 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 46.1 | 54.0 | -7.9 | H | A | 144.0 | 315.0 | |
| 12.030 | 3.0 | 40.8 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 59.6 | 74.0 | -14.4 | V | P | 117.0 | 307.0 | |
| 12.030 | 3.0 | 28.2 | 39.4 | 11.9 | -32.5 | 0.0 | 0.0 | 47.0 | 54.0 | -7.0 | V | A | 117.0 | 307.0 | |

Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.

Middle channel


| | | | | | | | | | | | | |
|--|---------|----------|----------|-------------|------------------|------------------|--------|----------------|--------|---------|--------|----------|
| Anaren | | | | | | | | | | | | |
| Model: A8520E24A91 | | | | | | | | | | | | |
| Xmitter Module - Mid Channel | | | | | | | | | | | | |
| Job#: 11U14706 | | | | | | | | | | | | |
| Tested by: MA | | | | | | | | | | | | |
| Horizontal 4000 - 8000MHz | | | | | | | | | | | | |
| | Meter | | AF-48106 | BOMS | | FCC Part 15 | | FCC Part 15 | | Azimuth | Height | |
| Test Frequency | Reading | Detector | [dB] | Factor [dB] | dB[uVolts/meter] | Subpart C 15.209 | Margin | Subpart C Peak | Margin | [Degs] | [cm] | Polarity |
| 4878.0547 | 83.04 | PK | 27.2 | -52.52 | 57.72 | | | 74 | -16.28 | 58 | 232 | Horz |
| 4878.0547 | 65.88 | LgAv | 27.2 | -52.52 | 40.56 | 54 | -13.44 | | | 58 | 232 | Horz |
| 4882.0166 | 78.54 | PK | 27.2 | -52.53 | 53.21 | | | 74 | -20.79 | 2 | 218 | Horz |
| 4882.0166 | 77.55 | LgAv | 27.2 | -52.53 | 52.22 | 54 | -1.78 | | | 2 | 218 | Horz |
| 7317.0781 | 93.91 | PK | 28 | -51.92 | 69.99 | | | 74 | -4.01 | 3 | 361 | Horz |
| 7317.0781 | 74.39 | LgAv | 28 | -51.92 | 50.47 | 54 | -3.53 | | | 3 | 361 | Horz |
| Horizontal 8000 - 12000MHz | | | | | | | | | | | | |
| | Meter | | AF-8933 | BOMS | | FCC Part 15 | | FCC Part 15 | | Azimuth | Height | |
| Test Frequency | Reading | Detector | [dB] | Factor [dB] | dB[uVolts/meter] | Subpart C 15.209 | Margin | Subpart C Peak | Margin | [Degs] | [cm] | Polarity |
| 9753.7578 | 69.46 | PK | 33.2 | -49.12 | 53.54 | | | 74 | -20.46 | 321 | 379 | Horz |
| 9753.7578 | 54.04 | LgAv | 33.2 | -49.12 | 38.12 | 54 | -15.88 | | | 321 | 379 | Horz |
| Horizontal 12000 - 18000MHz | | | | | | | | | | | | |
| | Meter | | AF-8932 | BOMS | | FCC Part 15 | | FCC Part 15 | | Azimuth | Height | |
| Test Frequency | Reading | Detector | [dB] | Factor [dB] | dB[uVolts/meter] | Subpart C 15.209 | Margin | Subpart C Peak | Margin | [Degs] | [cm] | Polarity |
| 12189.172 | 67.56 | PK | 37.2 | -48.21 | 56.55 | | | 74 | -17.45 | 172 | 377 | Horz |
| 12189.172 | 51.24 | LgAv | 37.2 | -48.21 | 40.23 | 54 | -13.77 | | | 172 | 377 | Horz |
| 14632.452 | 64.12 | PK | 37.3 | -49.14 | 52.28 | | | 74 | -21.72 | 68 | 336 | Horz |
| 14632.452 | 47.1 | LgAv | 37.3 | -49.14 | 35.26 | 54 | -18.74 | | | 68 | 336 | Horz |
| Vertical 4000 - 8000MHz | | | | | | | | | | | | |
| | Meter | | AF-48106 | BOMS | | FCC Part 15 | | FCC Part 15 | | Azimuth | Height | |
| Test Frequency | Reading | Detector | [dB] | Factor [dB] | dB[uVolts/meter] | Subpart C 15.209 | Margin | Subpart C Peak | Margin | [Degs] | [cm] | Polarity |
| 4878.015 | 76.76 | PK | 27.5 | -52.52 | 51.74 | | | 74 | -22.26 | 7 | 365 | Vert |
| 4878.015 | 59.77 | LgAv | 27.5 | -52.52 | 34.75 | 54 | -19.25 | | | 7 | 365 | Vert |
| 4881.993 | 71.7 | PK | 27.5 | -52.52 | 46.68 | | | 74 | -27.32 | 74 | 290 | Vert |
| 4881.993 | 69.4 | LgAv | 27.5 | -52.52 | 44.38 | 54 | -9.62 | | | 74 | 290 | Vert |
| 7317.092 | 84.88 | PK | 27.9 | -51.92 | 60.86 | | | 74 | -13.14 | 146 | 118 | Vert |
| 7317.092 | 65.39 | LgAv | 27.9 | -51.92 | 41.37 | 54 | -12.63 | | | 146 | 118 | Vert |
| Vertical 8000 - 12000MHz | | | | | | | | | | | | |
| | Meter | | AF-8933 | BOMS | | FCC Part 15 | | FCC Part 15 | | Azimuth | Height | |
| Test Frequency | Reading | Detector | [dB] | Factor [dB] | dB[uVolts/meter] | Subpart C 15.209 | Margin | Subpart C Peak | Margin | [Degs] | [cm] | Polarity |
| 9753.6 | 69.17 | PK | 33.2 | -49.12 | 53.25 | | | 74 | -20.75 | 48 | 103 | Vert |
| 9753.6 | 54.25 | LgAv | 33.2 | -49.12 | 38.33 | 54 | -15.67 | | | 48 | 103 | Vert |
| Vertical 12000 - 18000MHz | | | | | | | | | | | | |
| | Meter | | AF-8932 | BOMS | | FCC Part 15 | | FCC Part 15 | | Azimuth | Height | |
| Test Frequency | Reading | Detector | [dB] | Factor [dB] | dB[uVolts/meter] | Subpart C 15.209 | Margin | Subpart C Peak | Margin | [Degs] | [cm] | Polarity |
| 12189.22 | 72.19 | PK | 37.3 | -48.21 | 61.28 | | | 74 | -12.72 | 114 | 113 | Vert |
| 12189.22 | 55.99 | LgAv | 37.3 | -48.21 | 45.08 | 54 | -8.92 | | | 114 | 113 | Vert |
| 14632.96 | 59.68 | PK | 37.3 | -49.14 | 47.84 | | | 74 | -26.16 | 142 | 367 | Vert |
| 14632.96 | 44.98 | LgAv | 37.3 | -49.14 | 33.14 | 54 | -20.86 | | | 142 | 367 | Vert |
| PK - Peak detector | | | | | | | | | | | | |
| QP - Quasi-Peak detector | | | | | | | | | | | | |
| LnAv - Linear Average detector | | | | | | | | | | | | |
| LgAv - Log Average detector | | | | | | | | | | | | |
| Av - Average detector | | | | | | | | | | | | |
| CAV - CISPR Average detector | | | | | | | | | | | | |
| RMS - RMS detection | | | | | | | | | | | | |
| CRMS - CISPR RMS detection | | | | | | | | | | | | |
| Text File: FCCPt15 Subpart C Harmonics - Mid Channel.TXT | | | | | | | | | | | | |
| File: BOMS 1GHz - 26GHz General Pt 15 Sub C 15_209.TST | | | | | | | | | | | | |

High channel


| | | | | | | | | | | | | |
|--|---------------|----------|---------------|------------------|------------------|------------------------------|--------|----------------------------|--------|----------------|-------------|----------|
| Anaren | | | | | | | | | | | | |
| Model: A8520E24A91 | | | | | | | | | | | | |
| Xmitter Module - High Channel | | | | | | | | | | | | |
| Job#: 11U14706 | | | | | | | | | | | | |
| Tested by: MA | | | | | | | | | | | | |
| Horizontal 4000 - 8000MHz | | | | | | | | | | | | |
| Test Frequency | Meter Reading | Detector | AF-48106 [dB] | BOMS Factor [dB] | dB[uVolts/meter] | FCC Part 15 Subpart C 15.209 | Margin | FCC Part 15 Subpart C Peak | Margin | Azimuth [Degs] | Height [cm] | Polarity |
| 4941.9938 | 79.04 | PK | 27.3 | -52.53 | 53.81 | | | 74 | -20.19 | 360 | 280 | Horz |
| 4941.9938 | 77.99 | LgAv | 27.3 | -52.53 | 52.76 | 54 | -1.24 | | | 360 | 280 | Horz |
| 4948.932 | 77.5 | PK | 27.3 | -52.59 | 52.21 | | | 74 | -21.79 | 20 | 333 | Horz |
| 4948.932 | 65.47 | LgAv | 27.3 | -52.59 | 40.18 | 54 | -13.82 | | | 20 | 333 | Horz |
| 7418.832 | 93.24 | PK | 28.1 | -51.22 | 70.12 | | | 74 | -3.88 | 34 | 351 | Horz |
| 7418.832 | 73.58 | LgAv | 28.1 | -51.22 | 50.46 | 54 | -3.54 | | | 34 | 351 | Horz |
| Horizontal 8000 - 12000MHz | | | | | | | | | | | | |
| Test Frequency | Meter Reading | Detector | AF-8933 [dB] | BOMS Factor [dB] | dB[uVolts/meter] | FCC Part 15 Subpart C 15.209 | Margin | FCC Part 15 Subpart C Peak | Margin | Azimuth [Degs] | Height [cm] | Polarity |
| 9895.42 | 69.73 | PK | 33 | -49.17 | 53.56 | | | 74 | -20.44 | 0 | 329 | Horz |
| 9895.42 | 54.73 | LgAv | 33 | -49.17 | 38.56 | 54 | -15.44 | | | 0 | 329 | Horz |
| Horizontal 12000 - 18000MHz | | | | | | | | | | | | |
| Test Frequency | Meter Reading | Detector | AF-8932 [dB] | BOMS Factor [dB] | dB[uVolts/meter] | FCC Part 15 Subpart C 15.209 | Margin | FCC Part 15 Subpart C Peak | Margin | Azimuth [Degs] | Height [cm] | Polarity |
| 12367.59 | 70.28 | PK | 37.2 | -48.87 | 58.61 | | | 74 | -15.39 | 307 | 138 | Horz |
| 12367.59 | 53.43 | LgAv | 37.2 | -48.87 | 41.76 | 54 | -12.24 | | | 307 | 138 | Horz |
| 14841.328 | 61.01 | PK | 37.3 | -49.03 | 49.28 | | | 74 | -24.72 | 313 | 161 | Horz |
| 14841.328 | 45.12 | LgAv | 37.3 | -49.03 | 33.39 | 54 | -20.61 | | | 313 | 161 | Horz |
| Vertical 4000 - 8000MHz | | | | | | | | | | | | |
| Test Frequency | Meter Reading | Detector | AF-48106 [dB] | BOMS Factor [dB] | dB[uVolts/meter] | FCC Part 15 Subpart C 15.209 | Margin | FCC Part 15 Subpart C Peak | Margin | Azimuth [Degs] | Height [cm] | Polarity |
| 4941.9675 | 74.85 | PK | 27.5 | -52.53 | 49.82 | | | 74 | -24.18 | 199 | 261 | Vert |
| 4941.9675 | 73.39 | LgAv | 27.5 | -52.53 | 48.36 | 54 | -5.64 | | | 199 | 261 | Vert |
| 4948.804 | 73.07 | PK | 27.5 | -52.59 | 47.98 | | | 74 | -26.02 | 181 | 112 | Vert |
| 4948.804 | 60.99 | LgAv | 27.5 | -52.59 | 35.9 | 54 | -18.1 | | | 181 | 112 | Vert |
| 7418.844 | 88.52 | PK | 28 | -51.22 | 65.3 | | | 74 | -8.7 | 57 | 203 | Vert |
| 7418.844 | 68.98 | LgAv | 28 | -51.22 | 45.76 | 54 | -8.24 | | | 57 | 203 | Vert |
| Vertical 8000 - 12000MHz | | | | | | | | | | | | |
| Test Frequency | Meter Reading | Detector | AF-8933 [dB] | BOMS Factor [dB] | dB[uVolts/meter] | FCC Part 15 Subpart C 15.209 | Margin | FCC Part 15 Subpart C Peak | Margin | Azimuth [Degs] | Height [cm] | Polarity |
| 9895.44 | 72.3 | PK | 33 | -49.17 | 56.13 | | | 74 | -17.87 | 77 | 211 | Vert |
| 9895.44 | 57.43 | LgAv | 33 | -49.17 | 41.26 | 54 | -12.74 | | | 77 | 211 | Vert |
| Vertical 12000 - 18000MHz | | | | | | | | | | | | |
| Test Frequency | Meter Reading | Detector | AF-8932 [dB] | BOMS Factor [dB] | dB[uVolts/meter] | FCC Part 15 Subpart C 15.209 | Margin | FCC Part 15 Subpart C Peak | Margin | Azimuth [Degs] | Height [cm] | Polarity |
| 12369.25 | 74.18 | PK | 37.3 | -48.85 | 62.63 | | | 74 | -11.37 | 72 | 179 | Vert |
| 12369.25 | 58.06 | LgAv | 37.3 | -48.85 | 46.51 | 54 | -7.49 | | | 72 | 179 | Vert |
| PK - Peak detector QP - Quasi-Peak detector LnAv - Linear Average detector LgAv - Log Average detector Av - Average detector CAV - CISPR Average detector RMS - RMS detection CRMS - CISPR RMS detection Text File: FCCPt15 Subpart C Harmonics - High Channel.TXT File: BOMS 1GHz - 26GHz General Pt 15 Sub C 15_209.TST | | | | | | | | | | | | |

8.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

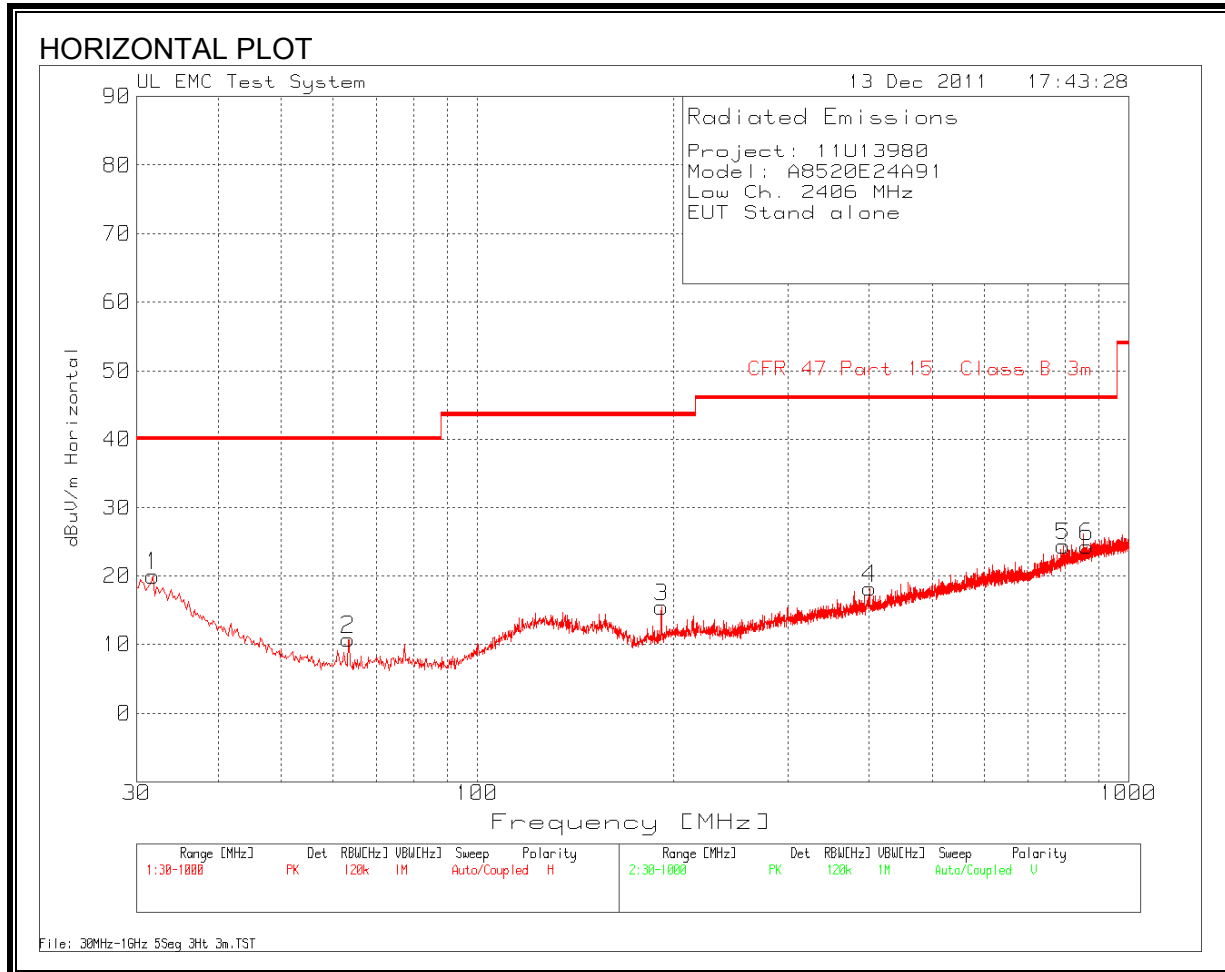

VERTICAL PLOT

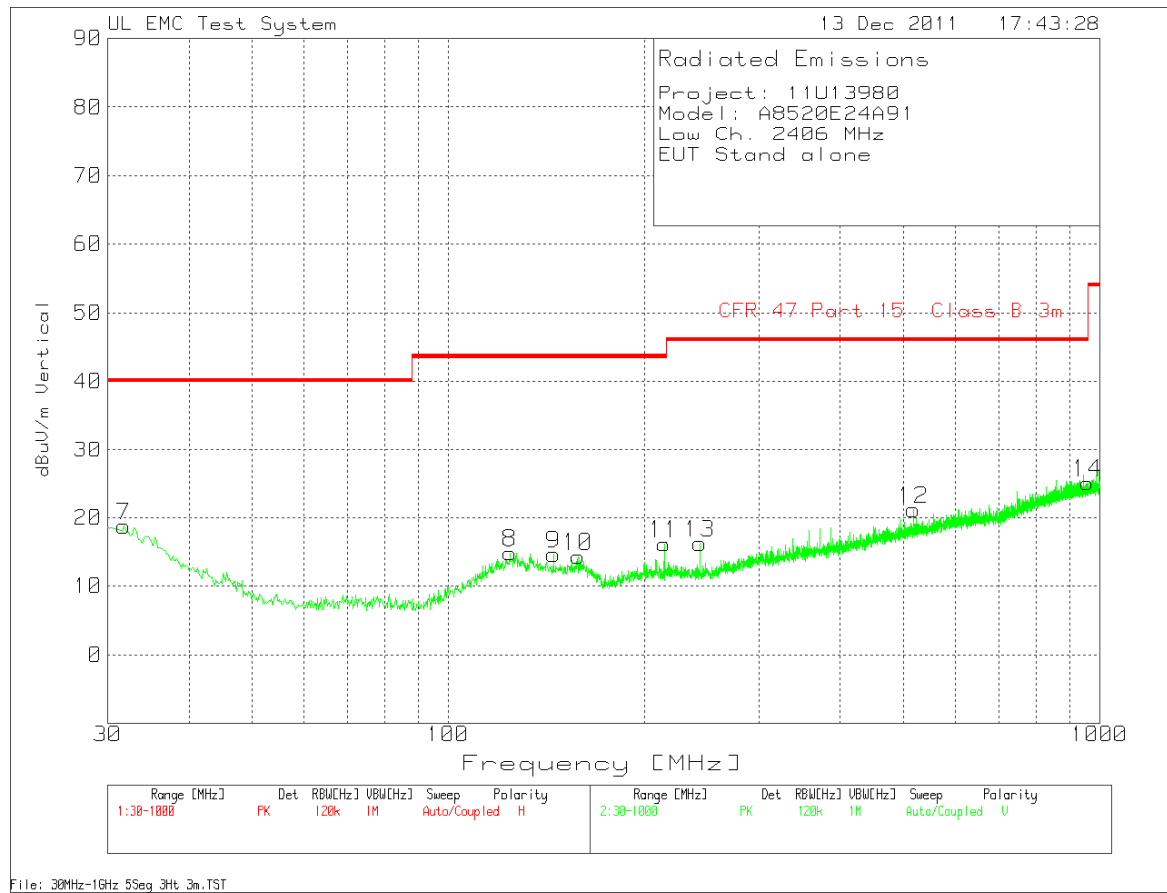

VERTICAL AND HORIZONTAL DATA

| VERTICAL AND HORIZONTAL DATA | | | | | | | | | |
|------------------------------|---------------|----------|-------------------------------------|-----------------------------------|--------|---------------------------|--------|-------------|----------|
| Project: 11U13980 | | | | | | | | | |
| Model: A8520E24A91 | | | | | | | | | |
| Low Ch. 2406 MHz | | | | | | | | | |
| EUT Stand alone | | | | | | | | | |
| Range: 1 30 - 1000MHz | | | | | | | | | |
| Test Frequency | Meter Reading | Detector | 25MHz-1GHz Chambr 3m Amplified [dB] | 3m Bilog T185 below 1GHz.TXT [dB] | dBuV/m | CFR 47 Part 15 Class B 3m | Margin | Height [cm] | Polarity |
| 31.7446 | 28.4 | PK | -27.5 | 19.1 | 20 | 40 | -20 | 99 | Horz |
| 63.4383 | 29.94 | PK | -27.2 | 8 | 10.74 | 40 | -29.26 | 251 | Horz |
| 191.8605 | 29.96 | PK | -25.9 | 11.4 | 15.46 | 43.5 | -28.04 | 99 | Horz |
| 400.8253 | 28.78 | PK | -25.6 | 15 | 18.18 | 46 | -27.82 | 251 | Horz |
| 793.749 | 28.24 | PK | -24.6 | 20.7 | 24.34 | 46 | -21.66 | 251 | Horz |
| 863.1455 | 26.97 | PK | -24.3 | 21.6 | 24.27 | 46 | -21.73 | 176 | Horz |
| Range: 2 30 - 1000MHz | | | | | | | | | |
| Test Frequency | Meter Reading | Detector | 25MHz-1GHz Chambr 3m Amplified [dB] | 3m Bilog T185 below 1GHz.TXT [dB] | dBuV/m | CFR 47 Part 15 Class B 3m | Margin | Height [cm] | Polarity |
| 31.7446 | 27.17 | PK | -27.5 | 19.1 | 18.77 | 40 | -21.23 | 101 | Vert |
| 124.4025 | 27.26 | PK | -26.5 | 14.1 | 14.86 | 43.5 | -28.64 | 101 | Vert |
| 145.1439 | 28.14 | PK | -26.4 | 12.9 | 14.64 | 43.5 | -28.86 | 101 | Vert |
| 158.1315 | 27.43 | PK | -26.2 | 13.1 | 14.33 | 43.5 | -29.17 | 175 | Vert |
| 214.5404 | 29.97 | PK | -25.7 | 11.9 | 16.17 | 43.5 | -27.33 | 250 | Vert |
| 518.2954 | 29.94 | PK | -25.9 | 17.1 | 21.14 | 46 | -24.86 | 101 | Vert |
| 243.4233 | 29.95 | PK | -25.5 | 11.8 | 16.25 | 46 | -29.75 | 175 | Vert |
| 958.5172 | 26.27 | PK | -23.6 | 22.4 | 25.07 | 46 | -20.93 | 250 | Vert |

8.4. RX SPURIOUS EMISSIONS ABOVE 1 GHz

| High Frequency Measurement | | | | | | | | | | | | | | | |
|---|-----------------------|---------------------------|------------------|------------------------|--------------------------------|--------------|--------------|---------------|------------------------------|---|------------------|-------------------|--------------|---------------|----------------|
| Compliance Certification Services, Fremont 5m Chamber | | | | | | | | | | | | | | | |
| Company: | | Anaren | | | | | | | | | | | | | |
| Project #: | | 11U13980 | | | | | | | | | | | | | |
| Date: | | 12/13/2011 | | | | | | | | | | | | | |
| Test Engineer: | | William Zhuang | | | | | | | | | | | | | |
| Configuration: | | EUT AND SUPPORT EQUIPMENT | | | | | | | | | | | | | |
| Mode: | | RX MODE | | | | | | | | | | | | | |
| Test Equipment: | | | | | | | | | | | | | | | |
| Horn 1-18GHz | | Pre-amplifier 1-26GHz | | Pre-amplifier 26-40GHz | | Horn > 18GHz | | Limit | | | | | | | |
| T73; S/N: 6717 @3m | | T144 Miteq 3008A00931 | | | | | | RX RSS 210 | | | | | | | |
| Hi Frequency Cables | | | | | | | | | | | | | | | |
| 3' cable 22807700 | | 12' cable 22807600 | | 20' cable 22807500 | | HPF | | Reject Filter | | <u>Peak Measurements</u> RBW=VBW=1MHz <u>Average Measurements</u> RBW=1MHz, VBW=10Hz | | | | | |
| 3' cable 22807700 | | 12' cable 22807600 | | 20' cable 22807500 | | | | | | | | | | | |
| f GHz | Dist (m) | Read Pk dBuV | Read Avg dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Ftr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
| 1.092 | 3.0 | 53.4 | 35.4 | 24.2 | 2.5 | -39.4 | 0.0 | 0.0 | 40.7 | 22.6 | 74 | 54 | -33.3 | -31.4 | H |
| 1.400 | 3.0 | 51.2 | 35.0 | 25.2 | 2.8 | -38.9 | 0.0 | 0.0 | 40.3 | 24.1 | 74 | 54 | -33.7 | -29.9 | H |
| 1.600 | 3.0 | 48.0 | 33.5 | 25.9 | 3.0 | -38.6 | 0.0 | 0.0 | 38.2 | 23.7 | 74 | 54 | -35.8 | -30.3 | H |
| 1.092 | 3.0 | 61.7 | 37.9 | 24.2 | 2.5 | -39.4 | 0.0 | 0.0 | 49.0 | 25.2 | 74 | 54 | -25.0 | -28.8 | V |
| 1.400 | 3.0 | 57.8 | 38.3 | 25.2 | 2.8 | -38.9 | 0.0 | 0.0 | 46.9 | 27.4 | 74 | 54 | -27.1 | -26.6 | V |
| 1.600 | 3.0 | 58.3 | 39.2 | 25.9 | 3.0 | -38.6 | 0.0 | 0.0 | 48.6 | 29.5 | 74 | 54 | -25.4 | -24.5 | V |
| Rev. 07.22.09 | | | | | | | | | | | | | | | |
| f | Measurement Frequency | | | Amp | Preamp Gain | | | Avg Lim | Average Field Strength Limit | | | | | | |
| Dist | Distance to Antenna | | | D Corr | Distance Correct to 3 meters | | | Pk Lim | Peak Field Strength Limit | | | | | | |
| Read | Analyzer Reading | | | Avg | Average Field Strength @ 3 m | | | Avg Mar | Margin vs. Average Limit | | | | | | |
| AF | Antenna Factor | | | Peak | Calculated Peak Field Strength | | | Pk Mar | Margin vs. Peak Limit | | | | | | |
| CL | Cable Loss | | | HPF | High Pass Filter | | | | | | | | | | |

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

| Frequency of Emission (MHz) | Conducted Limit (dBuV) | |
|-----------------------------|------------------------|-----------------------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 [*] | 56 to 46 [*] |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE


ANSI C63.4

RESULTS


6 WORST EMISSIONS (WORST CASE)

| Project: 11U13980 | | | | | | | | | |
|---------------------------------|---------------|----------|--------------------|------------------------|-------|------------------|--------|-------------------|--------|
| Model: A8520E24A91 | | | | | | | | | |
| EUT with Laptop & AC/DC Adapter | | | | | | | | | |
| Line-L1 .15 - 30MHz | | | | | | | | | |
| Test Frequency | Meter Reading | Detector | T24 IL L1.TXT [dB] | LC Cables 1&3.TXT [dB] | dBuV | CISPR Class B QP | Margin | CISPR Class B Avg | Margin |
| 0.1545 | 55.23 | PK | 0.1 | 0 | 55.33 | 65.8 | -10.47 | - | - |
| 0.1545 | 41.95 | Av | 0.1 | 0 | 42.05 | - | - | 55.8 | -13.75 |
| 0.6315 | 39.89 | PK | 0.1 | 0 | 39.99 | 56 | -16.01 | - | - |
| 0.6315 | 27.27 | Av | 0.1 | 0 | 27.37 | - | - | 46 | -18.63 |
| 2.976 | 36.6 | PK | 0.1 | 0.1 | 36.8 | 56 | -19.2 | - | - |
| 2.976 | 22.51 | Av | 0.1 | 0.1 | 22.71 | - | - | 46 | -23.29 |
| 24.1935 | 29.48 | PK | 0.4 | 0.3 | 30.18 | 60 | -29.82 | - | - |
| 24.1935 | 27.04 | Av | 0.4 | 0.3 | 27.74 | - | - | 50 | -22.26 |
| 29.23575 | 28.14 | PK | 0.5 | 0.3 | 28.94 | 60 | -31.06 | - | - |
| 29.23575 | 23.06 | Av | 0.5 | 0.3 | 23.86 | - | - | 50 | -26.14 |
| Line-L2 .15 - 30MHz | | | | | | | | | |
| Test Frequency | Meter Reading | Detector | T24 IL L2.TXT [dB] | LC Cables 2&3.TXT [dB] | dBuV | CISPR Class B QP | Margin | CISPR Class B Avg | Margin |
| 0.177 | 48.52 | PK | 0.1 | 0 | 48.62 | 64.6 | -15.98 | - | - |
| 0.177 | 26.03 | Av | 0.1 | 0 | 26.13 | - | - | 54.6 | -28.47 |
| 0.6495 | 39.48 | PK | 0.1 | 0 | 39.58 | 56 | -16.42 | - | - |
| 0.6495 | 27.43 | Av | 0.1 | 0 | 27.53 | - | - | 46 | -18.47 |
| 1.6215 | 37.98 | PK | 0.1 | 0.1 | 38.18 | 56 | -17.82 | - | - |
| 1.6215 | 20.66 | Av | 0.1 | 0.1 | 20.86 | - | - | 46 | -25.14 |
| 3.4305 | 35.77 | PK | 0.1 | 0.1 | 35.97 | 56 | -20.03 | - | - |
| 3.4305 | 18.88 | Av | 0.1 | 0.1 | 19.08 | - | - | 46 | -26.92 |
| Project: 11U13980 | | | | | | | | | |
| Model: A8520E24A91 | | | | | | | | | |
| EUT with Laptop & AC/DC Adapter | | | | | | | | | |

LINE 1 RESULTS

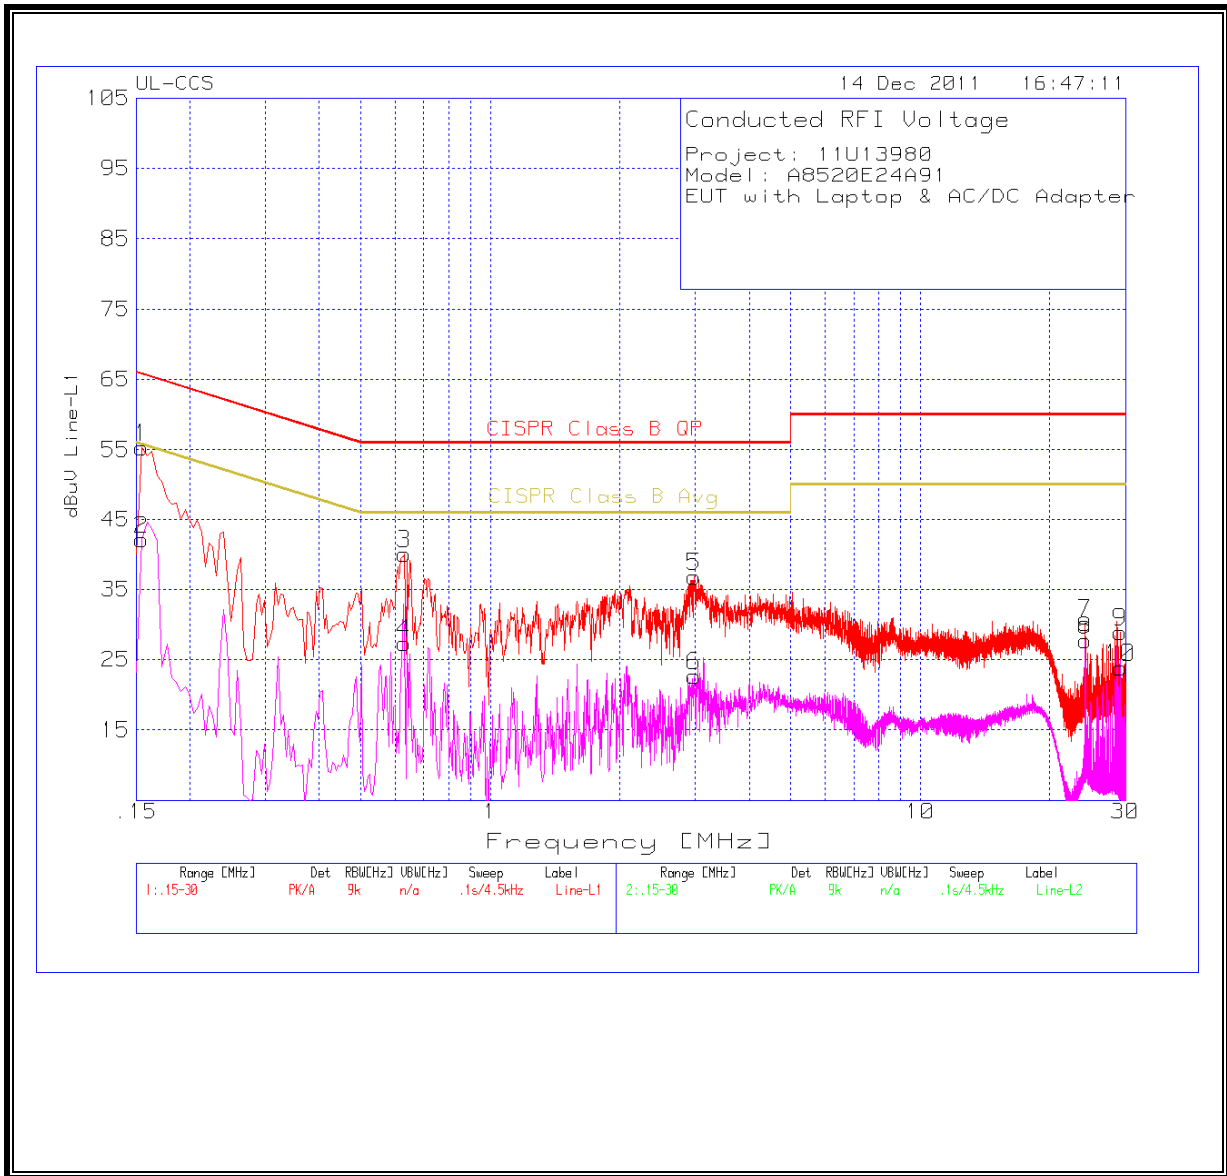

LINE 2 RESULTS

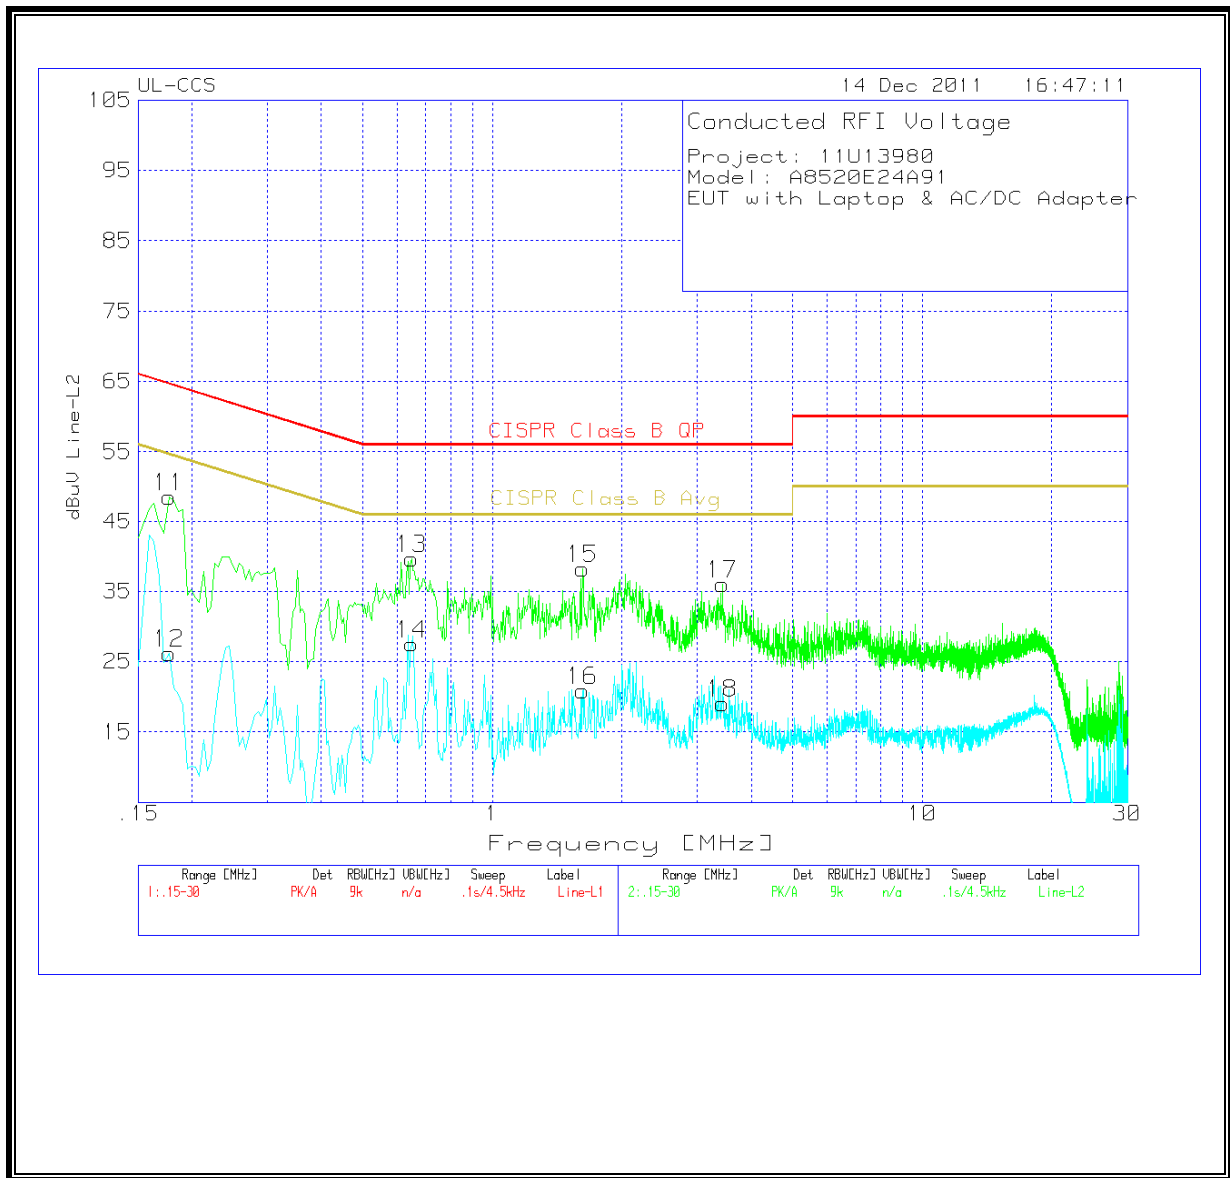

10. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposures | | | | |
| 0.3–3.0 | 614 | 1.63 | *(100) | 6 |
| 3.0–30 | 1842/f | 4.89/f | *(900/f ²) | 6 |
| 30–300 | 61.4 | 0.163 | 1.0 | 6 |
| 300–1500 | | | f/300 | 6 |
| 1500–100,000 | | | 5 | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3–1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34–30 | 824/f | 2.19/f | *(180/f ²) | 30 |

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|-----------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| 30–300 | 27.5 | 0.073 | 0.2 | 30 |
| 300–1500 | | | f/1500 | 30 |
| 1500–100,000 | | | 1.0 | 30 |

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

Table 5
Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)

| 1 Frequency (MHz) | 2 Electric Field Strength; rms (V/m) | 3 Magnetic Field Strength; rms (A/m) | 4 Power Density (W/m ²) | 5 Averaging Time (min) |
|-------------------------|---|---|--|---------------------------------|
| 0.003–1 | 280 | 2.19 | | 6 |
| 1–10 | $280/f$ | $2.19/f$ | | 6 |
| 10–30 | 28 | $2.19/f$ | | 6 |
| 30–300 | 28 | 0.073 | 2* | 6 |
| 300–1 500 | $1.585f^{0.5}$ | $0.0042f^{0.5}$ | $f/150$ | 6 |
| 1 500–15 000 | 61.4 | 0.163 | 10 | 6 |
| 15 000–150 000 | 61.4 | 0.163 | 10 | $616\,000/f^{1.2}$ |
| 150 000–300 000 | $0.158f^{0.5}$ | $4.21 \times 10^{-4}f^{0.5}$ | $6.67 \times 10^{-5}f$ | $616\,000/f^{1.2}$ |

* Power density limit is applicable at frequencies greater than 100 MHz.

Notes: 1. Frequency, f , is in MHz.
2. A power density of 10 W/m² is equivalent to 1 mW/cm².
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \pi * D^2)$$

where

S = Power density in W/m²

EIRP = Equivalent Isotropic Radiated Power in W

D = Separation distance in m

Power density in units of W/m² is converted to units of mW/cm² by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \pi * S))$$

where

D = Separation distance in m

EIRP = Equivalent Isotropic Radiated Power in W

S = Power density in W/m²

For multiple colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the Power * Gain product (in linear units) of each transmitter.

$$\text{Total EIRP} = (P_1 * G_1) + (P_2 * G_2) + \dots + (P_n * G_n)$$

where

P_x = Power of transmitter x

G_x = Numeric gain of antenna x

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

| Band | Mode | Separation Distance (m) | Output AV Power (dBm) | Antenna Gain (dBi) | IC Power Density (W/m²) | FCC Power Density (mW/cm²) |
|-------------|-------------|--|--------------------------------------|-----------------------------------|---|--|
| 2.4 GHz | QPSK | 0.20 | 17.71 | 2.00 | 0.19 | 0.019 |