

# Testing Report

Report No:MIoT202107001

Customer Name: Xiaomi Communication Technology Co. LTD

Product Name: 2.4GHz Dipole Antenna

Sample Model: MHCWB5G-IB

Reference Standard: GB/T 9410-2008;ANSI/IEEE Std 149-1979

Test Date: 2021.07.14

Role	Name	Date
Engineer	林尚哲	20210714
Auditor	于永亮	20210714
Approver	张贺	20210714

### Version

Version No.	Date	Description	Formulate	Approval
A0	2021.07.14	For the first time, formulate	Lin Yuzhe	Zhang He

### Contents

Testing Report .....	1
1.General Information .....	3
1.1 General information of testing institutions .....	3
1.2 Testing principle .....	3
1.3 Test equipment .....	4
1.4 Test environment .....	4
1.5 Statement .....	4
2.Sample Information .....	5
2.1 Client information .....	5
2.2 Description of Sample .....	5
2.3 Antenna appearance and size .....	6
2.4 DUT setup photo of free space OTA testing .....	6
3.Test Results .....	7
3.1 Test standard .....	7
3.2 Test uncertainty .....	7
3.3 Test data .....	8
3.3.1 Network analyzer S parameter .....	8
3.3.2 S11 Data .....	8
3.3.3 Typical free space efficiency and gain .....	8
3.3.4 Typical free space radiation pattern .....	9


# 1.General Information

## 1.1 General information of testing institutions

<b>Name</b>	Xiaomi Communication Technology Co. LTD
<b>Address</b>	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China
<b>Tel</b>	010-6060666

## 1.2 Testing principle

Multi-Probe OTA Measurement System

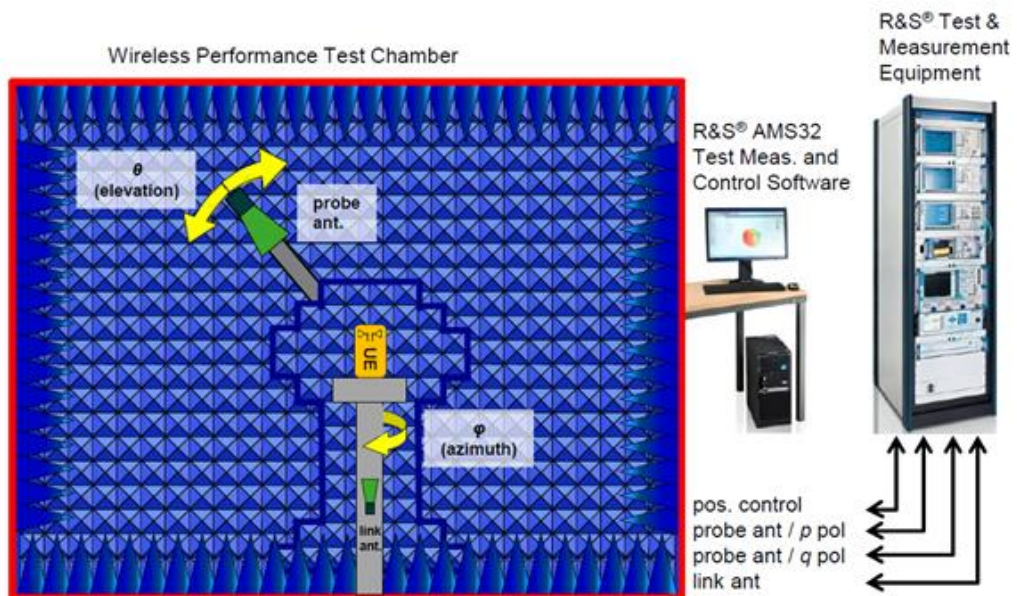

### 1.3 Test equipment

Equipment	Model No.	Serial No.	Manufacturer	Calibration date	Next calibration date
Network Analyzer	Rohde&Schwarz	102231	ZND	20201018	20211018

### 1.4 Test environment

Temperature	23.9°C
Humidity	24%RH
Pressure	100.32kPa

### 1.5 Statement

- (1) The test results in the report are only applicable to the tested samples and the tested samples work under the environment described in the report.
- (2) Only Xiaomi Communication Technology Co. LTD. have the right to modify the report, and the modification information shall be annotated in the revision form.
- (3) Any objection to this report shall be raised within 30 days after formal confirmation of the report.
- (4) This report is invalid if there is any evidence that the sample information provided is falsified.
- (5) The report is invalid without the signature of the auditor and approver.

## 2.Sample Information


### 2.1 Client information

<b>Name</b>	Xiaomi Communication Technology Co. LTD
<b>Address</b>	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

### 2.2 Description of Sample


<b>Sample Name</b>	2.4GHz Dipole Antenna
<b>Sample Modle</b>	MHCWB5G-IB
<b>Test Item</b>	VSWR, Peak Gian, Radiation Efficiency, Radiation pattern
<b>Frequency Range</b>	2400-2490MHz
<b>Received Date</b>	2021.07.14
<b>Test Date</b>	2021.07.14
<b>Remark</b>	RF Cable: cable length=100mm, IPEX

### 2.3 Antenna appearance and size

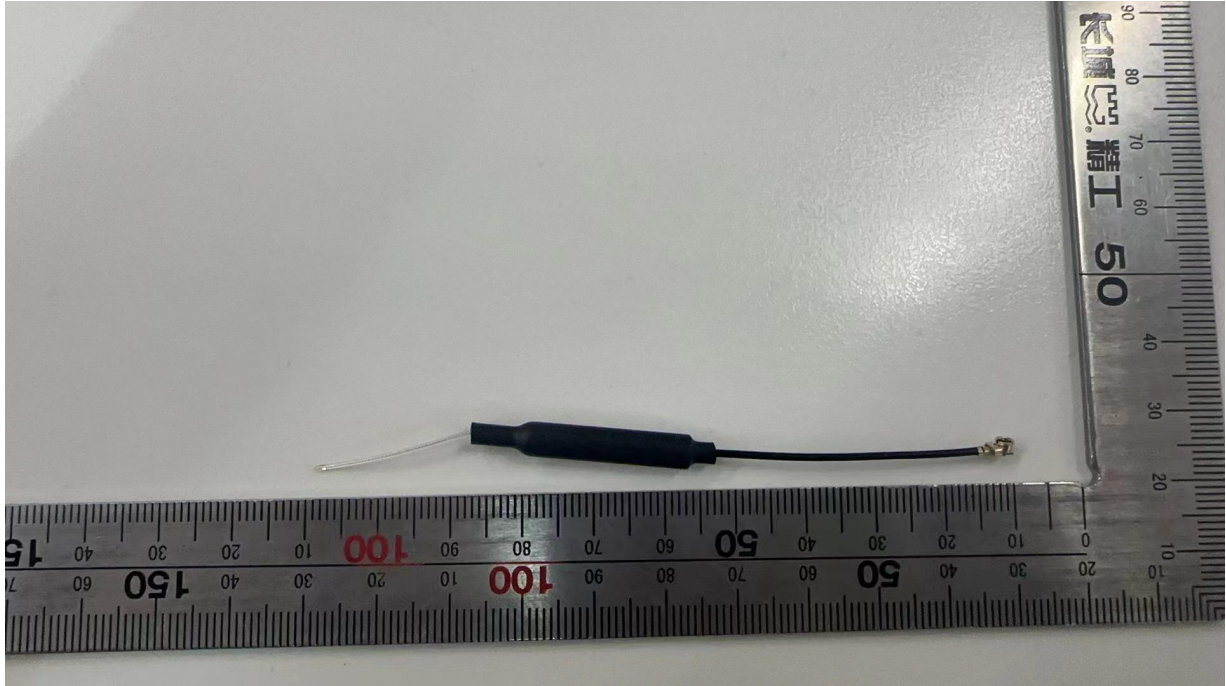

The size of antenna is 100mm+/-2mm.

### 2.4 DUT setup photo of free space OTA testing

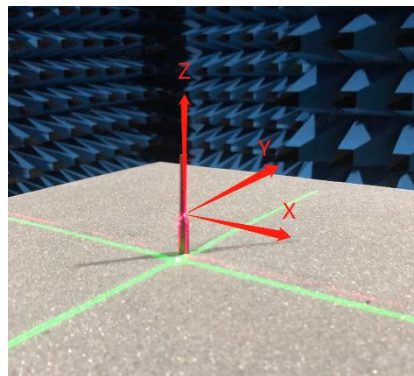

## 3. Test Results

### 3.1 Test standard

Name	Parameter	Method	Standard no.
Mobile communication antenna	VSWR	Generic specification for antennas used in the mobile communications	GB/T 9410-2008
	Antenna gain		
	Radiation pattern		
Antenna	Radiation efficiency	IEEE Standard Test Procedures for Antennas	ANSI/IEEE Std 149-1979
	Gain and directivity		


### 3.2 Test uncertainty

The uncertainty was calculated on the basis of the GUM published by ISO, using the inclusion factor of  $K=2$  and the 95% confidence level to express the extended uncertainty.

Item	Uncertainty
VSWR	$\pm 0.3$
Antenna gain	$\pm 1.0 \text{ dBi}$
Radiation efficiency	$\pm 10\%$

### 3.3 Test data

#### 3.3.1 Network analyzer S parameter

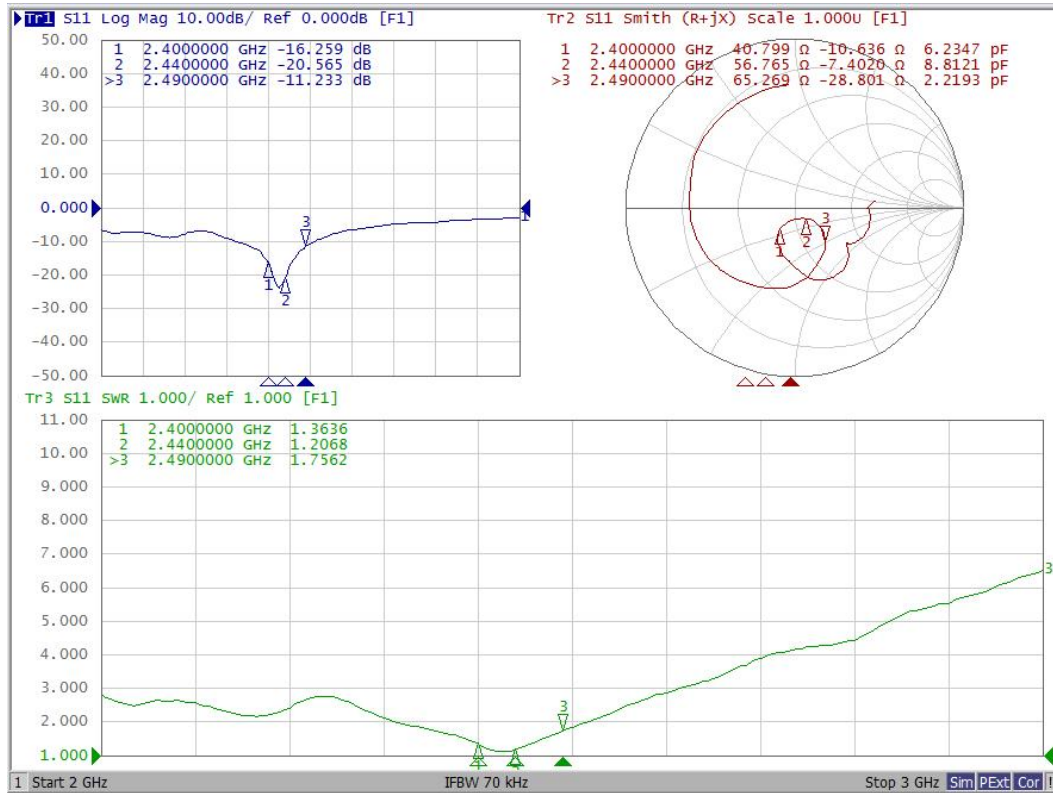

#### 3.3.2 S11 Data

Frequency/MHz	2400	2440	2490
VSWR	1.36	1.20	1.75

#### 3.3.3 Typical free space efficiency and gain


Frequency/MHz	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490




<b>Peak Gain/dBi</b>	2.1	2.3	2.5	2.5	2.4	2.2	2.0	2.3	2.5	2.5
<b>Efficiency/%</b>	67.9	68.1	69.9	71.5	69.6	66.0	64.1	64.1	66.8	66.5

### 3.3.4 Typical free space radiation pattern

(1) X-Y Plane:

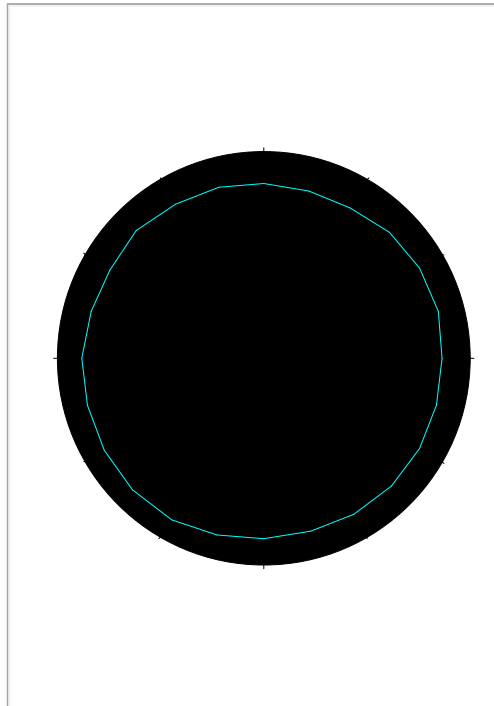


(2) Y-Z Plane:

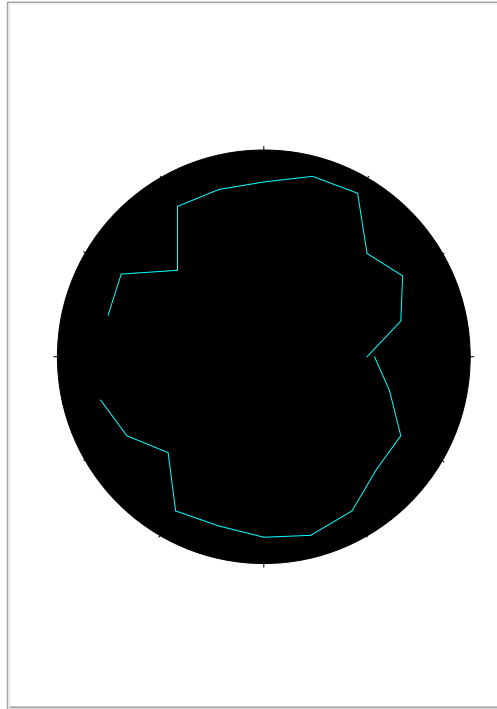


---

(3) X-Z Plane:

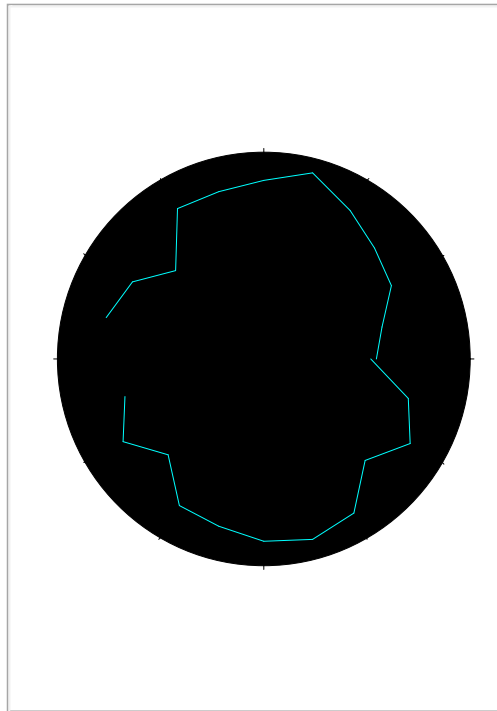

—

(4) Typical Free Space 3D Radiation Pattern at 2440MHz:

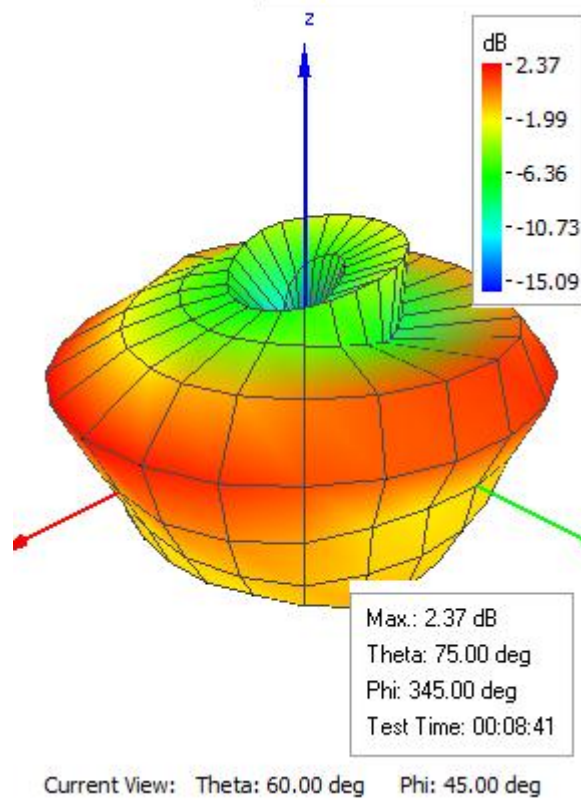

---

**End**

**(The following is blank)**