



FCC Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : MI
MODEL NAME : M1804C3CG
FCC ID : 2AFZZ-RMSC3CG
STANDARD : FCC CFR Title 47 Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Apr. 16, 2018 and testing was completed on May 22, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International (Shenzhen) Inc.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.

**No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335
China**



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1. GENERAL DESCRIPTION5

 1.1. Applicant.....5

 1.2. Manufacturer5

 1.3. Product Feature of Equipment Under Test5

 1.4. Product Specification of Equipment Under Test6

 1.5. Modification of EUT7

 1.6. Test Location7

 1.7. Applicable Standards8

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....9

 2.1. Test Mode9

 2.2. Connection Diagram of Test System10

 2.3. Support Unit used in test configuration and system.....11

 2.4. EUT Operation Test Setup12

3. TEST RESULT.....13

 3.1. Test of AC Conducted Emission Measurement13

 3.2. Test of Radiated Emission Measurement18

4. LIST OF MEASURING EQUIPMENT23

5. UNCERTAINTY OF EVALUATION24

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 10.39 dB at 0.933 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.31 dB at 52.310 MHz for Quasi-Peak



1. General Description

1.1. Applicant

Xiaomi Communications Co., Ltd.

The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

1.2. Manufacturer

Xiaomi Communications Co., Ltd.

The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	MI
Model Name	M1804C3CG
FCC ID	2AFZZ-RMSC3CG
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA DC-HSDPA/HSPA+/LTE WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth v3.0 + EDR/ Bluetooth v 4.0 LE/ Bluetooth v 4.2 LE
IMEI Code	Conduction: 868148030004772/868148030004780 for Sample 1 Radiation: 868148030007536/868148030007544 for Sample 1 868148030007932/868148030007940 for Sample 2
HW Version	P2
SW Version	MIUI9
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT, the difference between two samples is for memory, the sample 1 is 2+32GB capacity and the sample 2 is 2+16GB capacity. According to the difference, we only choose sample 1 to perform full test, and the sample 2 verified the difference with the sample 1 for Radiation.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz GNSS : 1559 MHz ~ 1610 MHz FM: 87.5 MHz ~ 108 MHz
Antenna Type	WWAN : Loop Antenna WLAN : IFA Antenna Bluetooth : IFA Antenna GNSS: IFA Antenna FM: External headset Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (Uplink) DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK FM

Note: GNSS = GPS + Glonass + Beidou + SBAS



1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No is CN5013.

Test Site	Sporton International (Kunshan) Inc.	
Test Site Location	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958	
Test Site No.	Sporton Site No.	FCC Test Firm Registration No.
	CO01-KS	630927

Note: The test site complies with ANSI C63.4 2014 requirement.

Sporton International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0) and the FCC designation No. is CN5019.

Test Site	Sporton International (Shenzhen) Inc.	
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District Shenzhen City Guangdong Province 518055 China TEL: +86-755-3320-2398	
Test Site No.	Sporton Site No.	FCC Test Firm Registration No.
	03CH03-SZ	577730

Note:

1. The test site complies with ANSI C63.4 2014 requirement.
2. Test data subcontracted: radiated emissions in section 3.2 of this report.



1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC CFR Title 47 Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1 (Charging from Adapter 1) + Camera (Rear) for Sample 1
	Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1 (Charging from Adapter 1) + Camera (Front) for Sample 1
	Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1 (Charging from Adapter 1) + MPEG4 for Sample 1
	Mode 4: WCDMA Band II Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1 (Data Link with Notebook) + GNSS Rx for Sample 1
	Mode 5: LTE Band 4 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 2 (Data Link with Notebook) + GNSS Rx for Sample 1
	Mode 6: LTE Band 7 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1 (Charging from Adapter 1) + FM Rx for Sample 1
	Mode 7: GSM1900 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1 (Charging from Adapter 2) + Camera (Front) for Sample 1
Radiated Emissions	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1 (Charging from Adapter 1) + Camera (Rear) for Sample 1
	Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1 (Charging from Adapter 1) + Camera (Front) for Sample 1
	Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1 (Charging from Adapter 1) + MPEG4 for Sample 1
	Mode 4: WCDMA Band II Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1 (Data Link with Notebook) + GNSS Rx for Sample 1
	Mode 5: LTE Band 4 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 2 (Data Link with Notebook) + GNSS Rx for Sample 1
	Mode 6: LTE Band 7 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1 (Charging from Adapter 1) + FM Rx for Sample 1
	Mode 7: WCDMA Band V Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1 (Charging from Adapter 2) + MPEG4 for Sample 1
	Mode 8: WCDMA Band II Idle + Bluetooth Idle + WLAN (2.4G) Idle + Earphone + USB Cable 1 (Data Link with Notebook) + GNSS Rx for Sample 2

Remark:

1. The worst case of AC is mode 2; only the test data of this mode is reported.
2. The worst case of RE is mode 3; only the test data of this mode is reported.
3. Data Link with Notebook means data application transferred mode between EUT and Notebook.

2.2.Connection Diagram of Test System

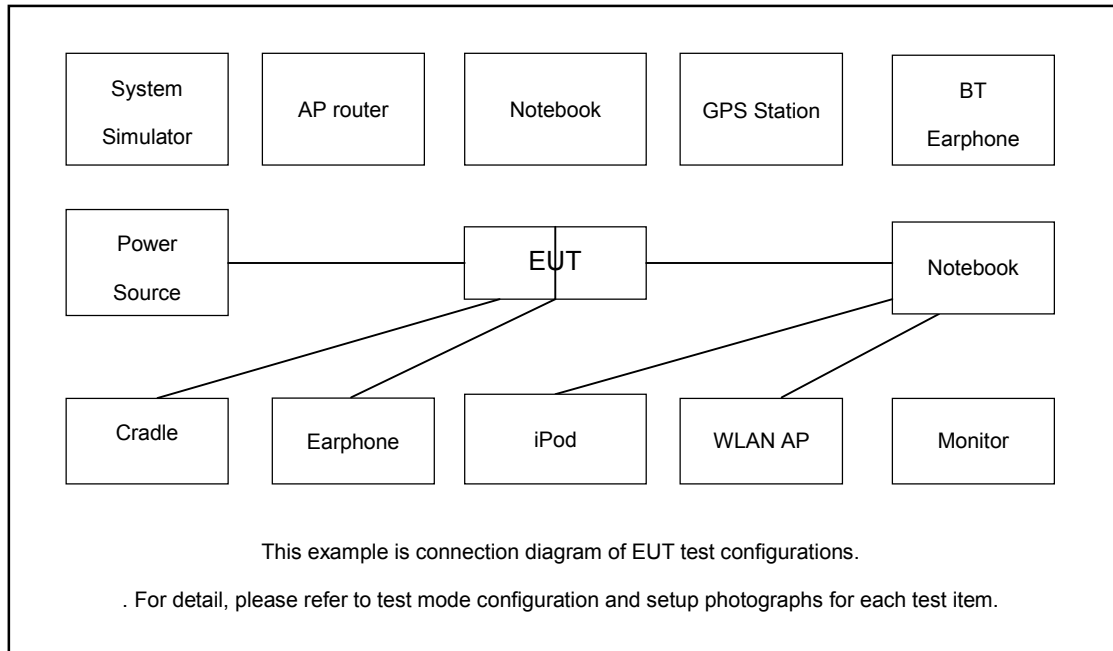



2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	GNSS Station	ADIVIC	MP9000	N/A	N/A	Unshielded,1.8m
3.	FM Station	R&S	SMBV100A	258305	N/A	Unshielded, 1.8 m
4.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
5.	WLAN AP	ASUSTek	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,2.7m with Core
6.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
7.	Bluetooth Earphone	Samsung	EO-MG900	CCAH14LP1680 T5	N/A	N/A
8.	Notebook	Lenovo	E540	Fcc DoC	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
9.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
10.	iPod	Apple	A1199	FCC DoC	Shielded, 1.2 m	N/A
11.	iPod	Apple	MC525 ZP/A	Fcc DoC	Shielded, 1.0m	N/A
12.	SD Card	Kingston	8GB	N/A	N/A	N/A
13.	SD Card	Kingston	3300-10000-078	Fcc DoC	N/A	N/A
14.	Earphone	N/A	N/A	N/A	Unshielded,1.2m	N/A



2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
3. Turn on FM function to make the EUT receive continuous signals from FM Generator.
4. Execute "Video Player" to play MPEG4 files.
5. Turn on camera to capture images.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test Setup






3.1.5 Test Result of AC Conducted Emission

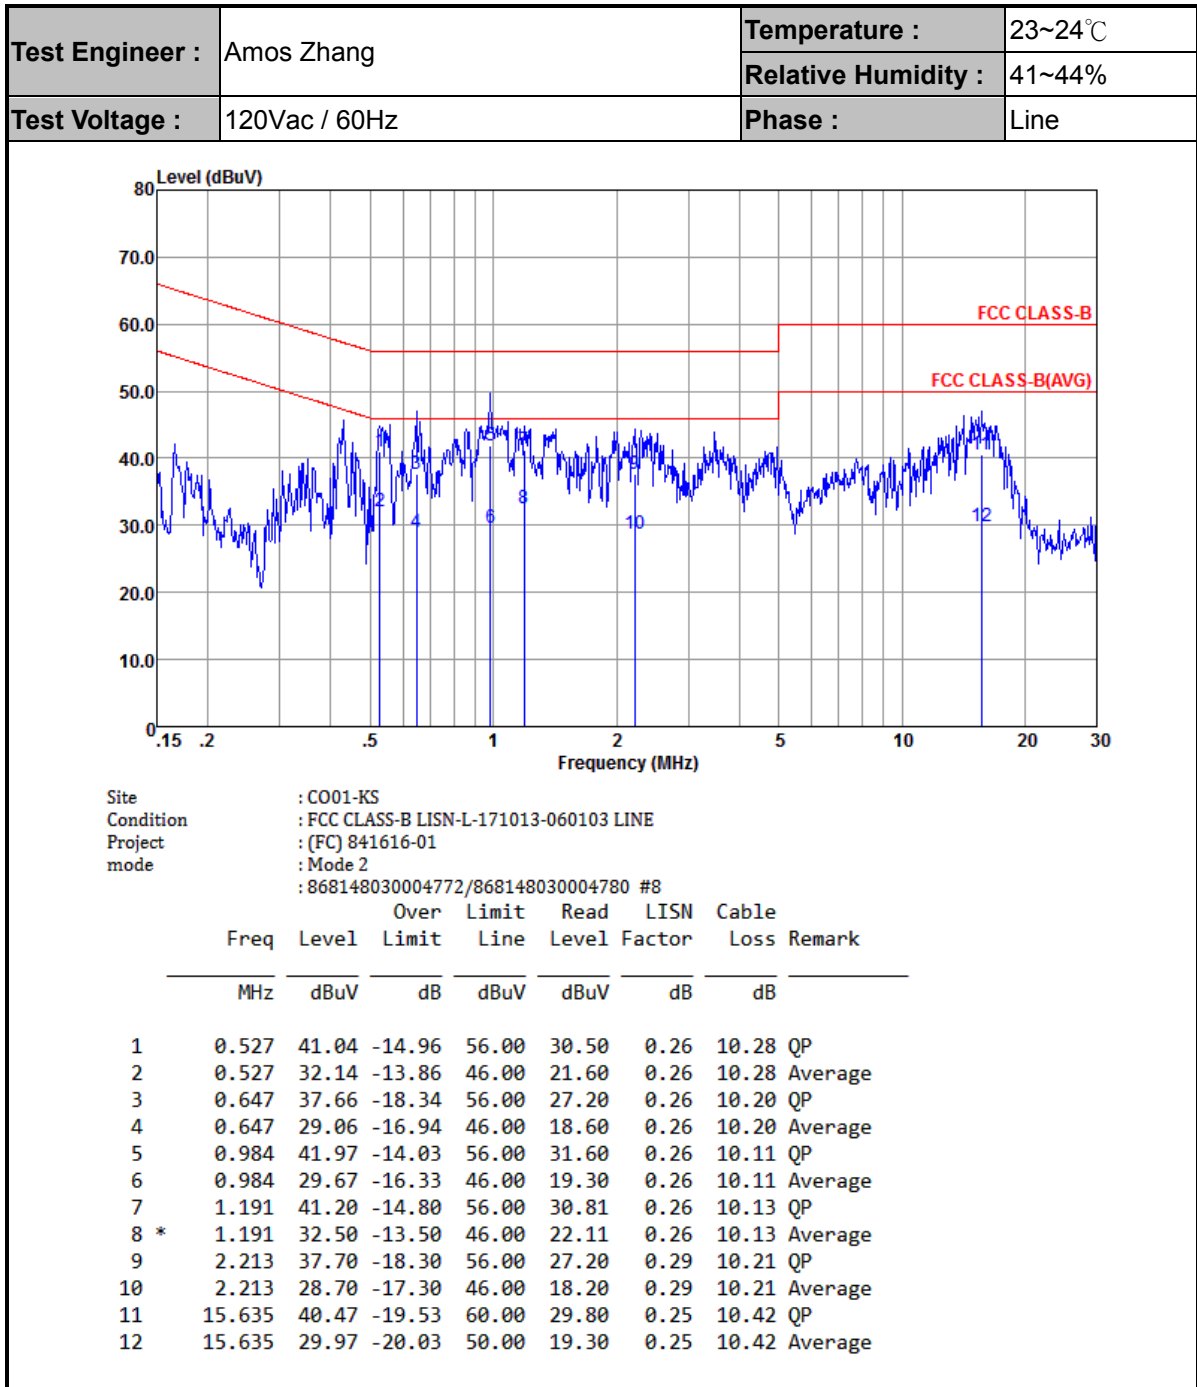



Test Engineer :	Amos Zhang	Temperature :	23~24°C
		Relative Humidity :	41~44%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

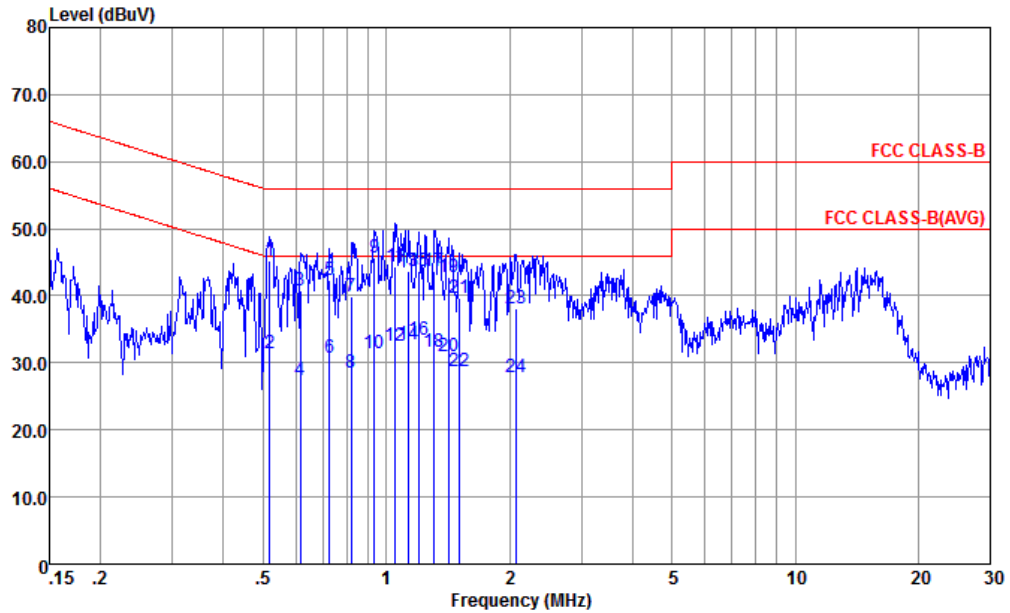


Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-171013-060103 NEUTRAL
 Project : (FC) 841616-01
 mode : Mode 2
 : 868148030004772/868148030004780 #8

	Freq	Level	Over Limit	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.518	45.18	-10.82	56.00	34.60	0.29	10.29	QP
2	0.518	31.48	-14.52	46.00	20.90	0.29	10.29	Average
3	0.617	40.71	-15.29	56.00	30.19	0.30	10.22	QP
4	0.617	27.41	-18.59	46.00	16.89	0.30	10.22	Average
5	0.727	42.24	-13.76	56.00	31.80	0.30	10.14	QP
6	0.727	30.74	-15.26	46.00	20.30	0.30	10.14	Average
7	0.822	39.91	-16.09	56.00	29.51	0.30	10.10	QP
8	0.822	28.61	-17.39	46.00	18.21	0.30	10.10	Average
9 *	0.933	45.61	-10.39	56.00	35.19	0.31	10.11	QP
10	0.933	31.51	-14.49	46.00	21.09	0.31	10.11	Average
11	1.054	44.33	-11.67	56.00	33.90	0.31	10.12	QP
12	1.054	32.53	-13.47	46.00	22.10	0.31	10.12	Average
13	1.135	43.64	-12.36	56.00	33.20	0.31	10.13	QP
14	1.135	32.74	-13.26	46.00	22.30	0.31	10.13	Average
15	1.197	43.65	-12.35	56.00	33.20	0.31	10.14	QP
16	1.197	33.35	-12.65	46.00	22.90	0.31	10.14	Average
17	1.310	43.66	-12.34	56.00	33.20	0.31	10.15	QP



Test Engineer :	Amos Zhang	Temperature :	23~24°C
		Relative Humidity :	41~44%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

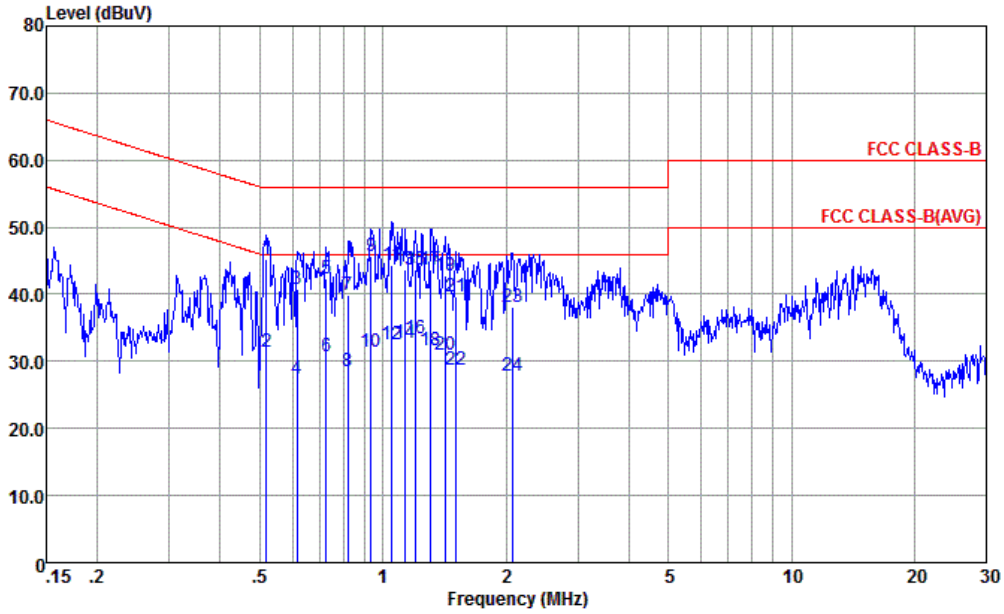

Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-171013-060103 NEUTRAL
 Project : (FC) 841616-01
 mode : Mode 2
 : 868148030004772/868148030004780 #8

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
18	1.310	31.66	-14.34	46.00	21.20	0.31	10.15	Average
19	1.426	42.78	-13.22	56.00	32.30	0.32	10.16	QP
20	1.426	31.08	-14.92	46.00	20.60	0.32	10.16	Average
21	1.511	39.69	-16.31	56.00	29.20	0.32	10.17	QP
22	1.511	28.69	-17.31	46.00	18.20	0.32	10.17	Average
23	2.077	38.13	-17.87	56.00	27.60	0.32	10.21	QP
24	2.077	27.83	-18.17	46.00	17.30	0.32	10.21	Average



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz




For radiated emissions above 1GHz

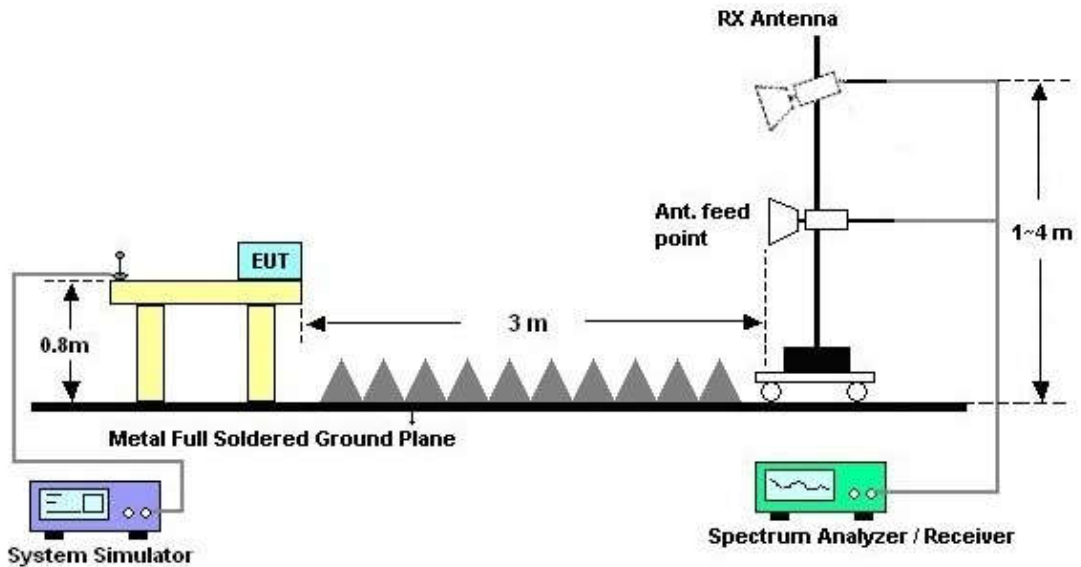



3.2.5. Test Result of Radiated Emission

Test Engineer :	Liangliang Lu	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#6 is system simulator signal which can be ignored.		

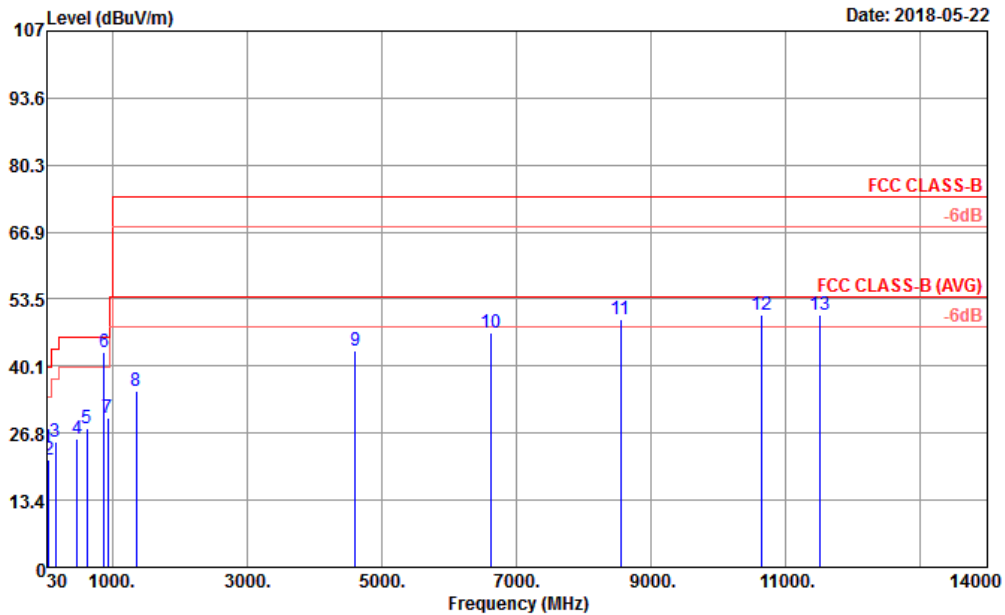


Site : 03CH03-SZ
 Condition : FCC CLASS-B 3m LF47611_CBL6111D_6 HORIZONTAL
 Project : 841616-01
 Mode : Mode 3
 IMEI : 868148030007536/868148030007544

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		
1	31.94	23.90	-16.10	40.00	31.87	24.04	0.59	32.60	160	210 Peak	
2	52.31	21.34	-18.66	40.00	39.16	13.94	0.74	32.50	---	---	Peak
3	161.92	25.15	-18.35	43.50	39.62	16.20	1.32	31.99	---	---	Peak
4	482.99	25.75	-20.25	46.00	31.37	23.46	2.35	31.43	---	---	Peak
5	628.49	27.71	-18.29	46.00	31.51	25.07	2.73	31.60	---	---	Peak
6 !	880.61	42.94			44.62	26.68	3.27	31.63	---	---	Peak
7	933.07	29.89	-16.11	46.00	30.69	27.00	3.37	31.17	---	---	Peak
8	1352.00	35.17	-38.83	74.00	65.27	24.62	3.81	58.53	---	---	Peak
9	4612.00	43.22	-30.78	74.00	61.74	31.50	8.35	58.37	---	---	Peak
10	6624.00	46.80	-27.20	74.00	61.90	34.11	9.91	59.12	---	---	Peak
11	8558.00	49.48	-24.52	74.00	61.08	37.26	10.82	59.68	---	---	Peak
12	10640.00	50.26	-23.74	74.00	59.05	39.93	11.73	60.45	---	---	Peak
13	11506.00	50.37	-23.63	74.00	57.66	40.30	12.04	59.63	172	41 Peak	



Test Engineer :	Liangliang Lu	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Remark :	#6 is system simulator signal which can be ignored.		

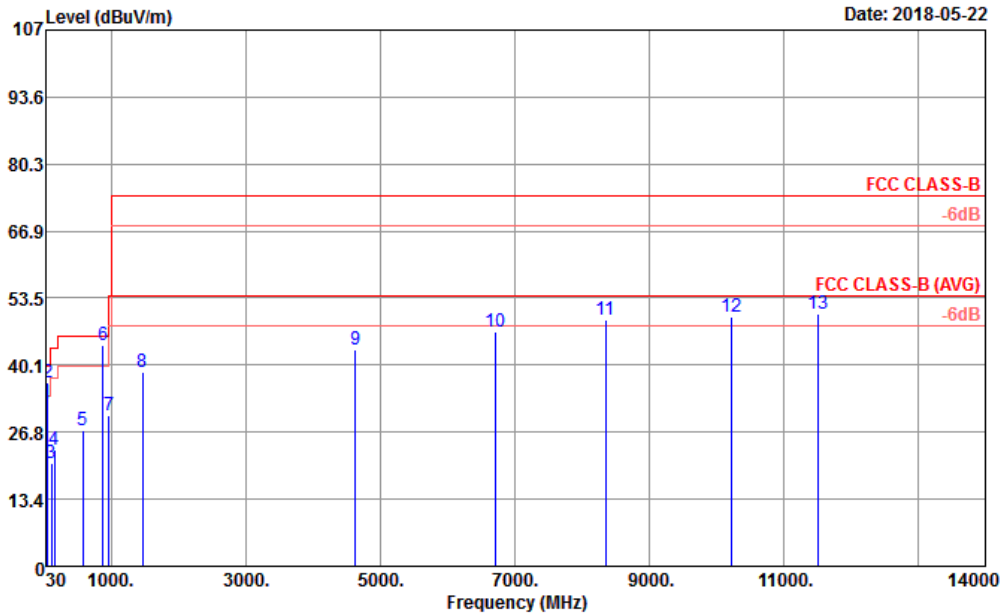

Site : 03CH03-SZ
 Condition : FCC CLASS-B 3m LF47611_CBL6111D_6 VERTICAL
 Project : 841616-01
 Mode : Mode 3
 IMEI : 868148030007536/868148030007544

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	32.49	-7.51	40.00	39.33	25.20	0.56	32.60	---	---	Peak
2 !	52.31	36.69	-3.31	40.00	54.51	13.94	0.74	32.50	100	352	QP
3	109.54	20.48	-23.02	43.50	33.72	17.80	1.08	32.12	---	---	Peak
4	162.89	23.28	-20.22	43.50	37.74	16.15	1.33	31.94	---	---	Peak
5	579.99	27.01	-18.99	46.00	31.01	24.94	2.62	31.56	---	---	Peak
6 !	880.69	44.22			45.90	26.68	3.27	31.63	---	---	Peak
7	967.02	30.22	-23.78	54.00	30.72	27.27	3.42	31.19	---	---	Peak
8	1470.00	38.78	-35.22	74.00	68.42	24.87	3.97	58.48	---	---	Peak
9	4638.00	43.14	-30.86	74.00	61.61	31.54	8.35	58.36	---	---	Peak
10	6706.00	46.87	-27.13	74.00	61.72	34.34	9.95	59.14	---	---	Peak
11	8348.00	49.30	-24.70	74.00	61.29	37.05	10.68	59.72	---	---	Peak
12	10226.00	49.89	-24.11	74.00	59.95	39.31	11.59	60.96	---	---	Peak
13	11518.00	50.24	-23.76	74.00	57.56	40.26	12.06	59.64	105	96	Peak



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 19, 2018	May 12, 2018	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2017	May 12, 2018	Oct. 12, 2018	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2017	May 12, 2018	Oct. 12, 2018	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2017	May 12, 2018	Oct. 11, 2018	Conduction (CO01-KS)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 19, 2018	May 22, 2018	Apr. 18, 2019	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 19, 2018	May 22, 2018	Apr. 18, 2019	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	Apr. 19, 2018	May 22, 2018	Apr. 18, 2019	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Jul. 09, 2017	May 22, 2018	Jul. 08, 2018	Radiation (03CH03-SZ)
LF Amplifier	Burgeon	BPA-530	102210	0.01Hz ~3000MHz	Oct. 19, 2017	May 22, 2018	Oct. 18, 2018	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 19, 2017	May 22, 2018	Oct. 18, 2018	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	61601000198 5	N/A	NCR	May 22, 2018	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	May 22, 2018	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	May 22, 2018	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8dB
---	-------