

承 認 書

SPECIFICATION FOR APPROVAL

客 戶: CUSTOMER:	紫米
客 戶 料 號: CUST P/N:	E042A0003801
泛 亞 料 號: FINE P/N:	
描 述: Description:	E042A0003801 MOUDULE-A11, Φ 20.5X44-10TS-0.08X105-28MM-COLB, N=10,D=0.08*105P,L=6.5UH ±5%, DCR≤45MOHM,FINE
產 品 型 號: DESC:	Φ 20.5x44-10Ts-0.08x105-28mm-COLB
版 本: Version:	A.3

擬 制 PREPARED BY	審 核 CHECKED BY	批 准 APPROVED BY	客 戶 承 認 CUSTOMER APPROVE
李礼秀 Lixiu Li	蔡纪雨 Jiyu Cai	倪星 Xing Ni	

东莞市泛亚电子有限公司

公司地址：东莞市石碣镇科技东路194号

TEL: 0769-22490287 / 22452492


FAX: 0769-22499451

E-mail: fineelec@163.com

SPECIFICATION

產品型號: DESC	Φ20.5x44-10Ts-0.08x105-28mm-COLB	版本 Rev: A.3	客戶 CUST: 泛亞料号 Fine P/N: 客戶料号 CUST P/N:	紫米 E042A0003801
---------------	----------------------------------	----------------	--	-------------------------------

一、尺寸 DIMENSION:(mm)

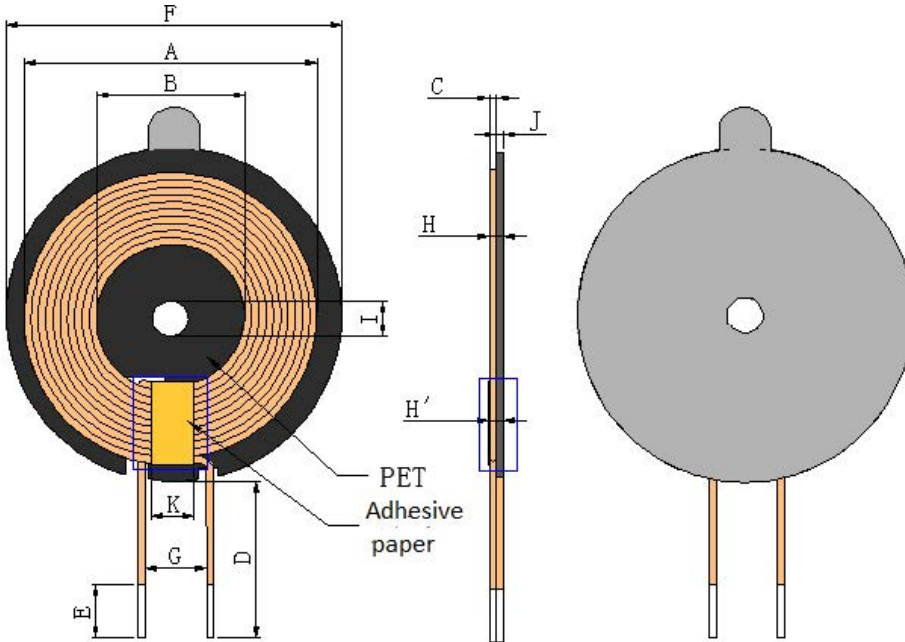


★ A	44.0±1.0
★ B	20.5±0.5
C	1.25 Max
★ D	28±1.5
★ E	1.5-3.5
★ F	50±0.5
★ G	10.0 ref
★ H	2.0 Max(Release paper not included)
★ H'	2.2 Max(Release paper not included)
I	5.5±0.5
J	0.6±0.1 (Bare)
K	8.0±0.5

Note:

1. The coil is attached to a magnetic sheet, the size of the magnetic sheet is 50±0.5mm, with L double wire groove, with a round hole diameter of 5.5mm, and the thickness of the bare chip is 0.6±0.1mm;
2. Paste Φ50*5.5*0.05 m black PET matte film on the front of the magnetic sheet, and Φ50*5.5*0.1 m ordinary DS11 double-sided tape on the back, with a release winding thickness of 0.10 mm
3. Wrap 8mm wide high-temperature tape at the outlet position 1.5Ts (three layers), thickness 0.04mm;
4. Only use radiation measurements to confirm compliance with NCC limits on primary wave field strength and incidental wave emissions;

二、原理图 SCHEMATIC DIAGRAM:

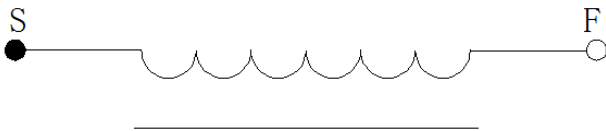

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	丝包线 0.08*105P	10Ts	CW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F ★	6.5uH ±5%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F ★	≤45mΩ		LCZ METER 502B


擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
李礼秀/ Lixiu Li 2019/06/12	蔡纪雨/ Jiyu Cai 2019/06/12

SPECIFICATION

產品型號: DESC	Φ 20.5x44-10Ts-0.08x105-28mm-COLB	版本 Rev: A.3	客戶 CUST: 泛亚料号 Fine P/N: 客戶料号 CUST P/N:	紫米 E042A0003801
---------------	-----------------------------------	----------------	--	------------------------

五、包装 PACKONG:

5.1 包装图片 Packing pictures:

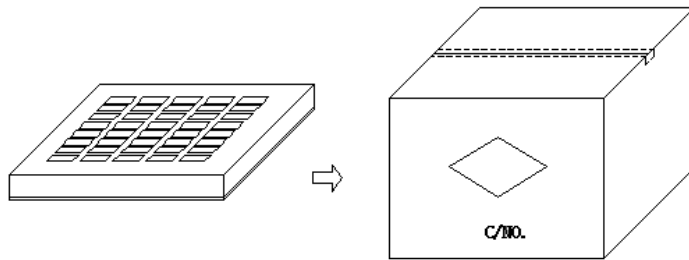

5.2 包装数量及规格 Packing Quantity:

项目 Item	数量 Quantity	材料规格 Material
盒 Box	240 Pcs	370*265*55mm
箱 Big Carton	1200 Pcs	420*270*310mm

5.3 包装以现有包装盘为参照标准，以实际出货包装为准,如有特要求可以定制。

The packaging shall be based on the existing packing plate and the actual delivery package shall prevail. If there is any requirement, we can customize it.

六、材料清单 Material list:

序号 number	材料名称 Material name	品名描述 Description	制造商 Manufacturer
1	Silk covered wire 0.08*105 strands	Acetone wire covered wire 0.08*105 strands	Fushi or weifeng
2	Lead-free tin bar	Lead-free tin bar	Yuxing
3	Magnetic disk	Φ50*5.5*0.6mm manganese zinc hard magnetic sheet	Dingmingda
4	Glue	201 Glue	Tianbaoli
5	High temperature tape	8mm High temperature tape	Nanrui
6	PET matte film	Φ50*5.5*0.05mm PET matte film	Nanrui
7	Ordinary DS11 adhesive	Φ50*5.5*0.1mm ordinary double-sided tape	Nanrui


擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
李礼秀/Lixiu Li 2019/06/12	蔡纪雨/Jiyu Cai 2019/06/12

SPECIFICATION


產品型號: DESC	Φ20.5x44-10Ts-0.08x105-28mm-COLB	版本 Rev: A.3	客戶 CUST: 泛亚料号 Fine P/N: 客户料号 CUST P/N:	紫米 E042A0003801
---------------	----------------------------------	----------------	--	------------------------

七、Enclose:

7.1 Magnetic disc size:

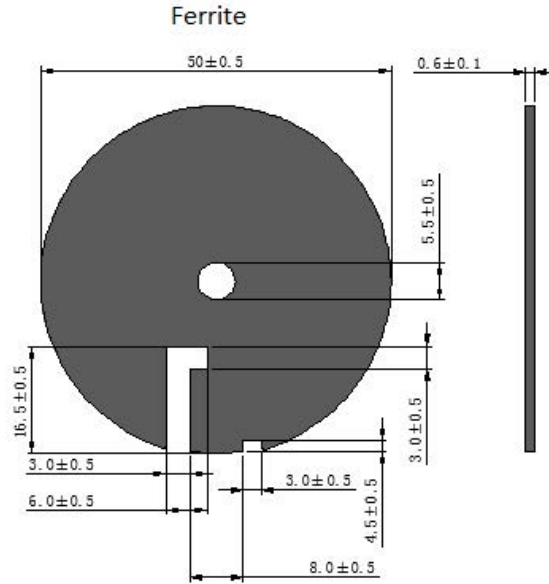

7.2 PET matte film size:

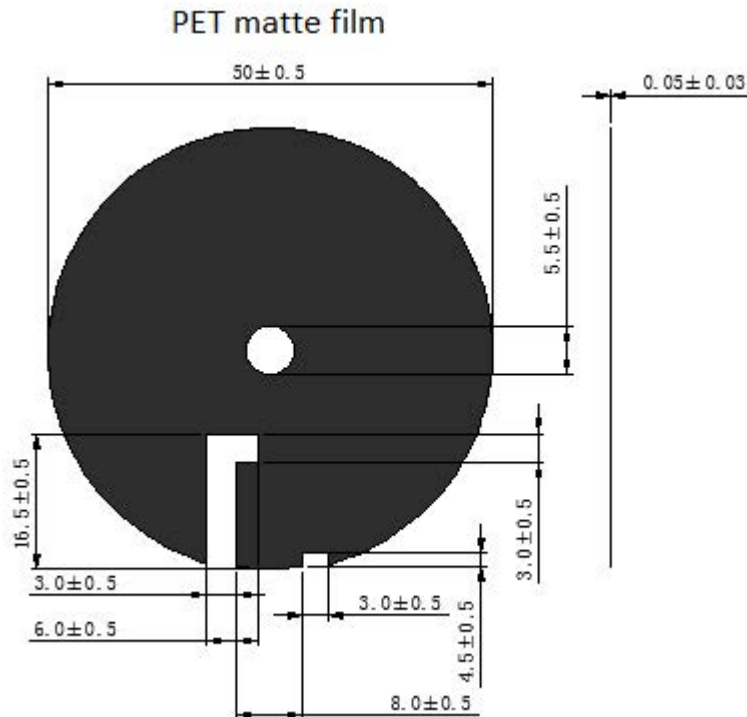

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
李礼秀/ Lixiu Li 2019/06/12	蔡纪雨/ Jiyu Cai 2019/06/12