



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : POCOPHONE
MODEL NAME : M1805E10A
FCC ID : 2AFZZ-XMSE10A
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on May 08, 2018 and testing was completed on Jun. 15, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION.....5

 1.1 Applicant5

 1.2 Manufacturer.....5

 1.3 Product Feature of Equipment Under Test.....5

 1.4 Product Specification of Equipment Under Test.....6

 1.5 Modification of EUT6

 1.6 Testing Location6

 1.7 Applicable Standards.....7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....8

 2.1 Carrier Frequency Channel8

 2.2 Test Mode.....9

 2.3 Connection Diagram of Test System.....10

 2.4 Support Unit used in test configuration and system10

 2.5 EUT Operation Test Setup11

 2.6 Measurement Results Explanation Example.....11

3 TEST RESULT12

 3.1 6dB Bandwidth Measurement12

 3.2 Output Power Measurement.....16

 3.3 Power Spectral Density Measurement17

 3.4 Conducted Band Edges and Spurious Emission Measurement24

 3.5 Radiated Band Edges and Spurious Emission Measurement33

 3.6 AC Conducted Emission Measurement.....37

 3.7 Antenna Requirements.....39

4 LIST OF MEASURING EQUIPMENT.....40

5 UNCERTAINTY OF EVALUATION.....42

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.77 dB at 42.150 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.34 dB at 0.152 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	POCOPHONE
Model Name	M1805E10A
FCC ID	2AFZZ-XMSE10A
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+/LTE/ WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
IMEI Code	Conducted: N/A Conduction: 868703030040513/868703030040521 Radiation: 868703030049035/868703030049043
HW Version	P2
SW Version	MIUI 9
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT, the difference between two samples is for memory, the sample 1 is 6+64GB capacity and the sample 2 is 6+128GB capacity. According to the difference, we only choose sample 1 to perform full test



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth LE v4.0 7.12 dBm (0.0052 W) Bluetooth LE v5.0 6.85 dBm (0.0048 W)
Antenna Type / Gain	LDS Antenna with gain -1.66 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

SPORTON INTERNATIONAL INC. is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and under the FCC-recognized accredited testing laboratories by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist. Taoyuan City Taiwan Tel: 886-3-327-3456 FAX: +886-3-327-0978		
Test Site No.	Sporton Site No.		
	TH05-HY	CO05-HY	

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No.58, Aly. 75, Ln. 564 Wenhua 3rd Rd. Guishan Dist. Taoyuan City Taiwan TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	03CH12-HY	TW0007	214511

Note: The test site complies with ANSI C63.4 2014 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	




2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + USB Cable 1 (Charging from Adapter 1) + SIM 1
Remark: For Radiated Test Cases, The tests were performed with Adapter 1, Earphone and USB Cable 1.	

2.3 Connection Diagram of Test System

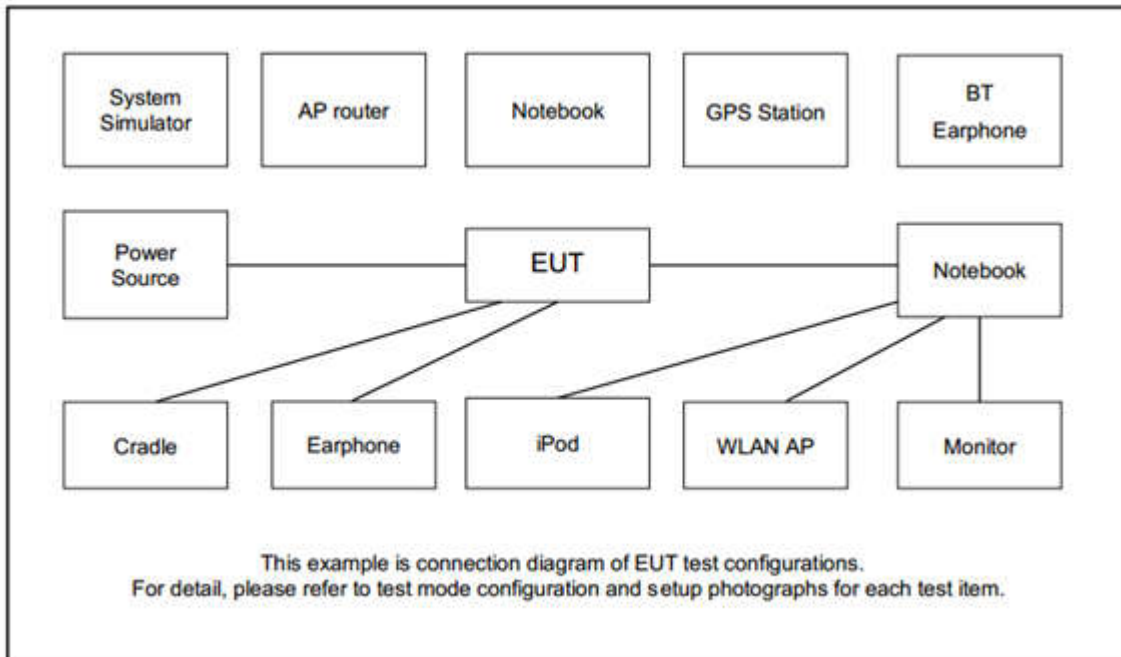

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,1.8m
3.	NOTE BOOK	Dell	Latitude E6320	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A
5.	Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029	N/A	N/A
6.	iPod Earphone	Apple	A1285	Doc	Unshielded, 1.2m	N/A



2.5 EUT Operation Test Setup

For Bluetooth LE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.3 dB and 20dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.3 + 20 = 25.3 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

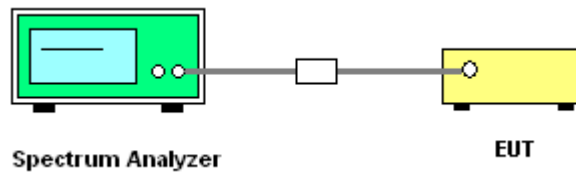




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


For Bluetooth LE v4.0

6 dB Bandwidth Plot on Channel 00

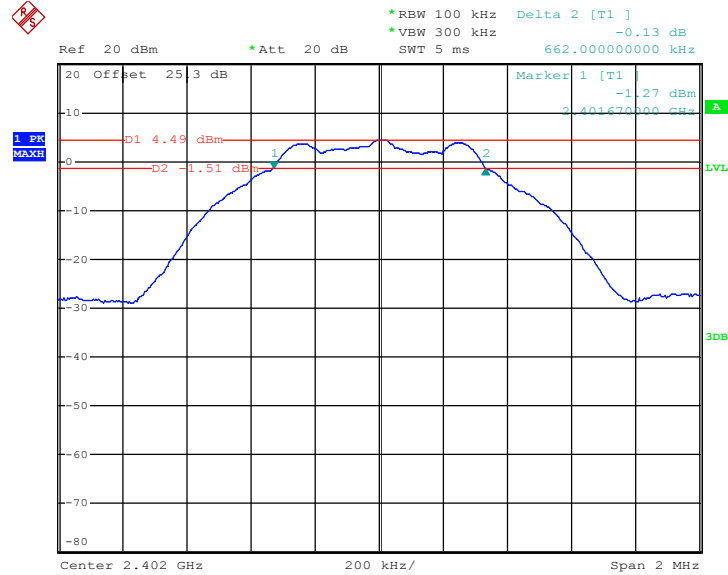

Date: 9.JUN.2018 09:17:01


6 dB Bandwidth Plot on Channel 19

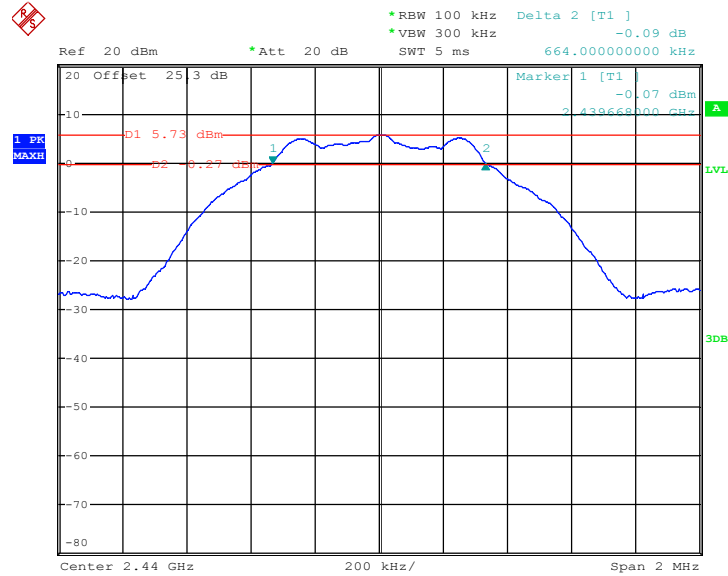

Date: 9.JUN.2018 09:35:04




6 dB Bandwidth Plot on Channel 39

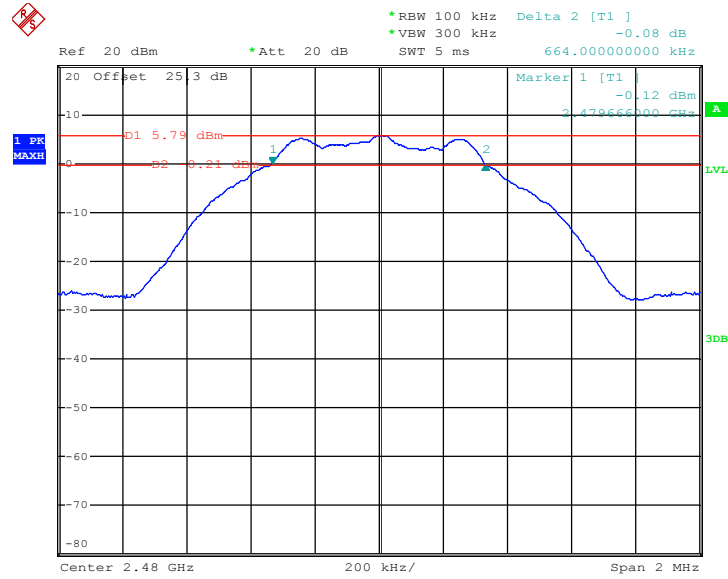

Date: 9.JUN.2018 09:39:36

For Bluetooth LE v5.0


6 dB Bandwidth Plot on Channel 00

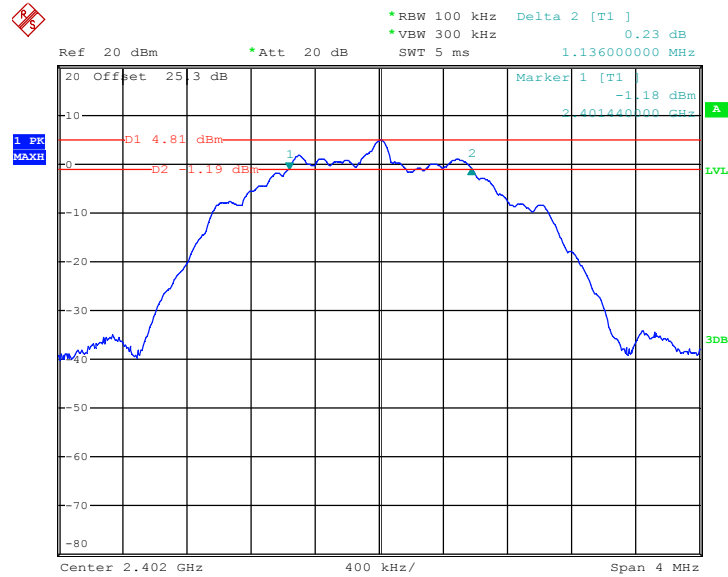

Date: 9.JUN.2018 10:08:13




6 dB Bandwidth Plot on Channel 19

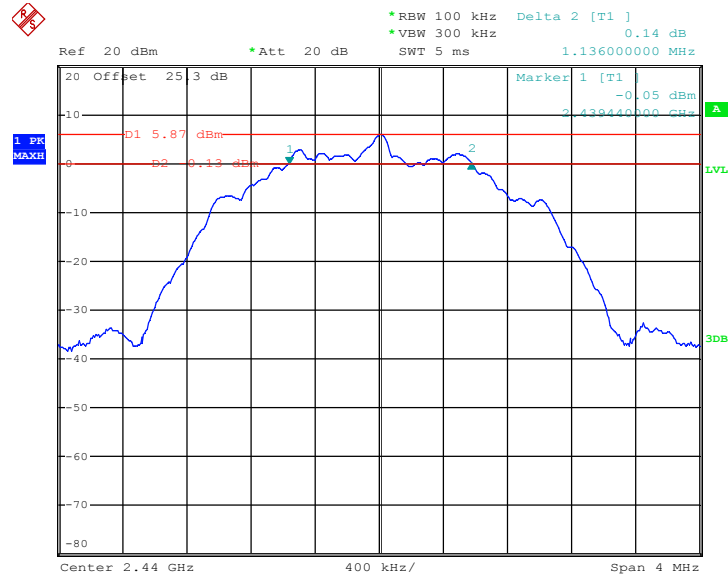

Date: 9.JUN.2018 10:29:03

6 dB Bandwidth Plot on Channel 39

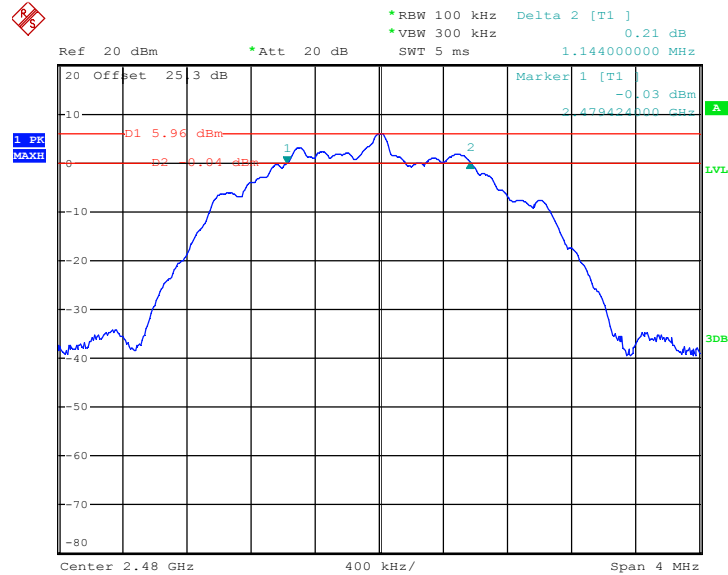

Date: 9.JUN.2018 10:33:15

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.3 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

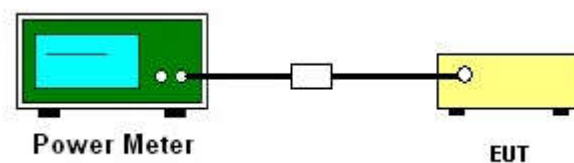

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

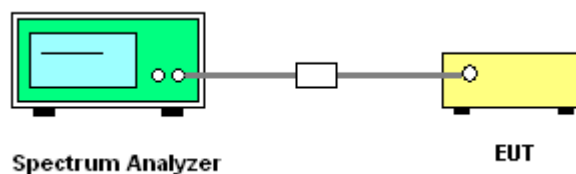

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)


For Bluetooth LE v4.0

PSD 100kHz Plot on Channel 00

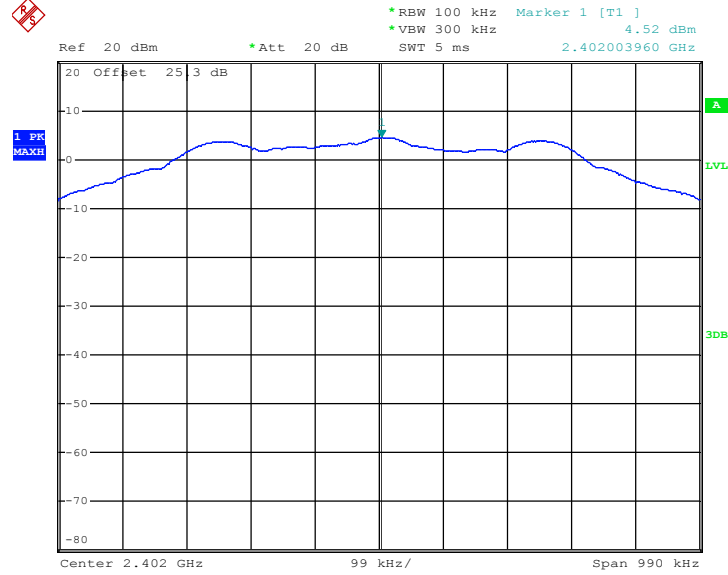

Date: 9.JUN.2018 09:17:48


PSD 100kHz Plot on Channel 19

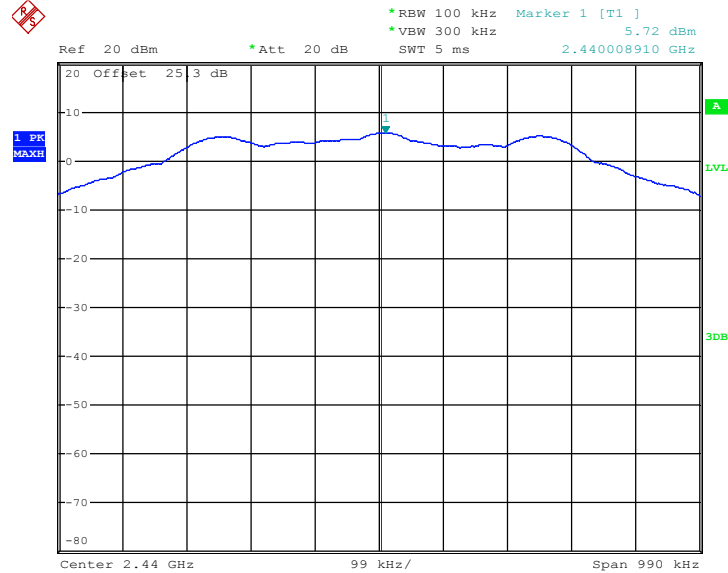

Date: 9.JUN.2018 09:35:58




PSD 100kHz Plot on Channel 39

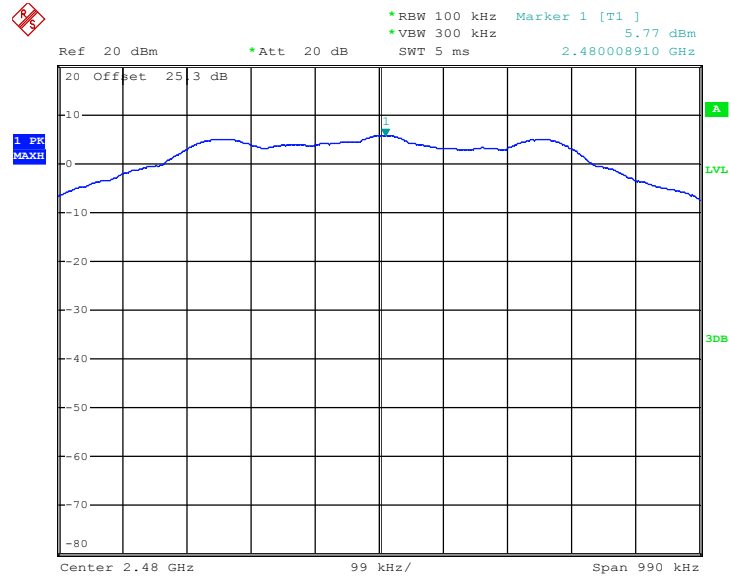

Date: 9.JUN.2018 09:43:27

For Bluetooth LE v5.0


PSD 100kHz Plot on Channel 00

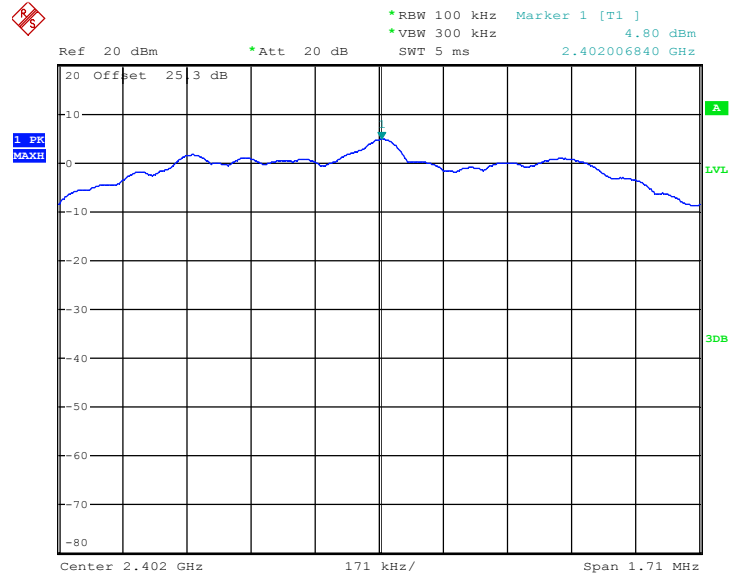

Date: 9.JUN.2018 10:09:44




PSD 100kHz Plot on Channel 19

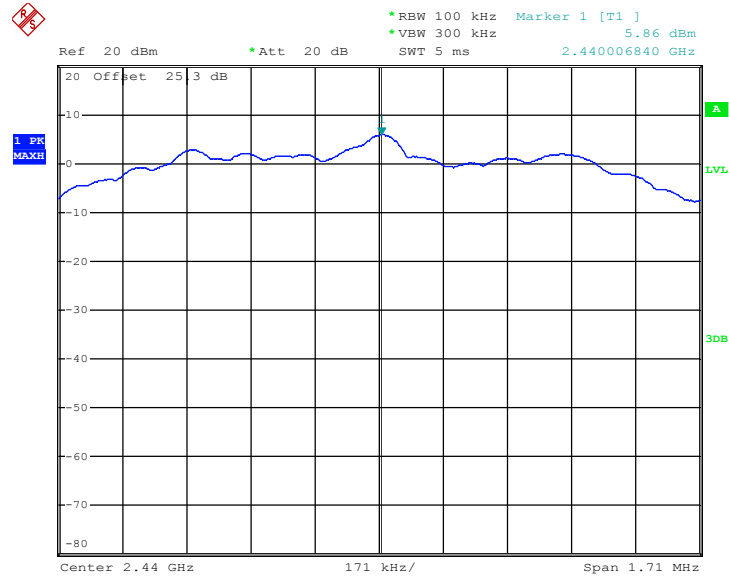

Date: 9.JUN.2018 10:29:56

PSD 100kHz Plot on Channel 39

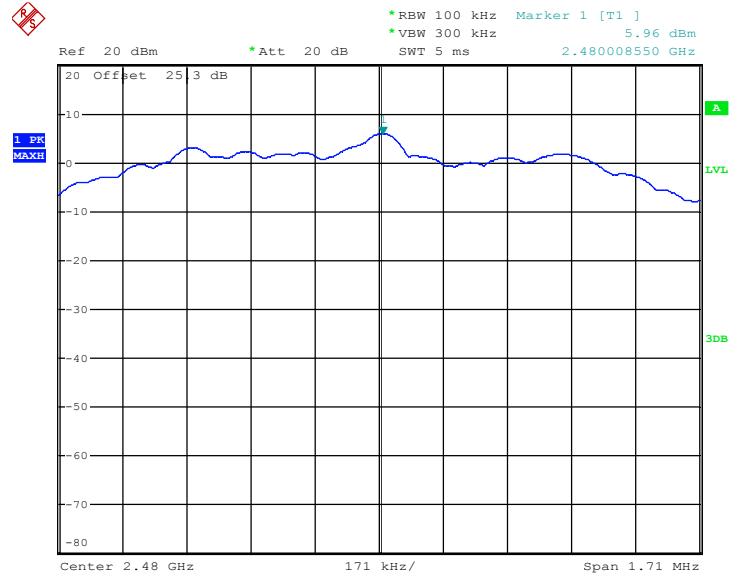


Date: 9.JUN.2018 10:34:52



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


For Bluetooth LE v4.0

PSD 3kHz Plot on Channel 00

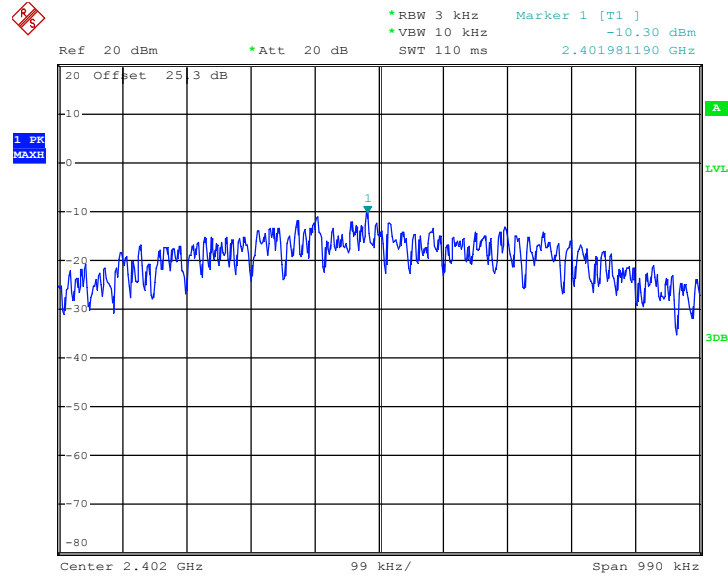

Date: 9.JUN.2018 09:17:26


PSD 3kHz Plot on Channel 19

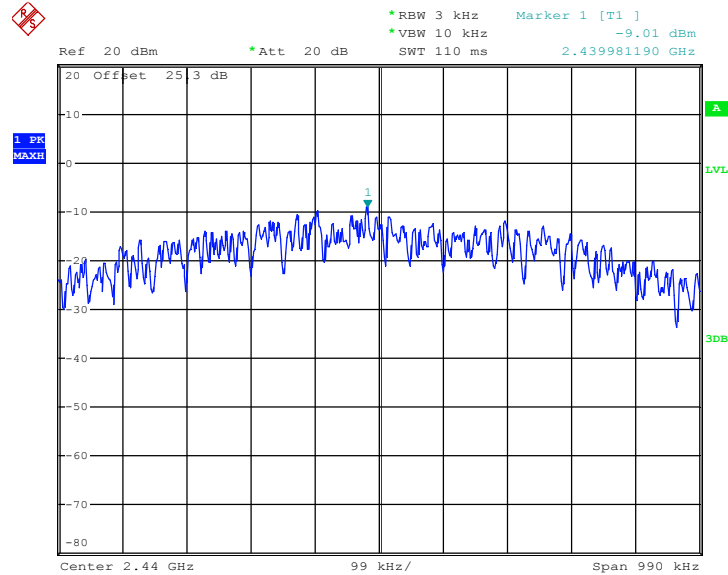

Date: 9.JUN.2018 09:35:32




PSD 3kHz Plot on Channel 39

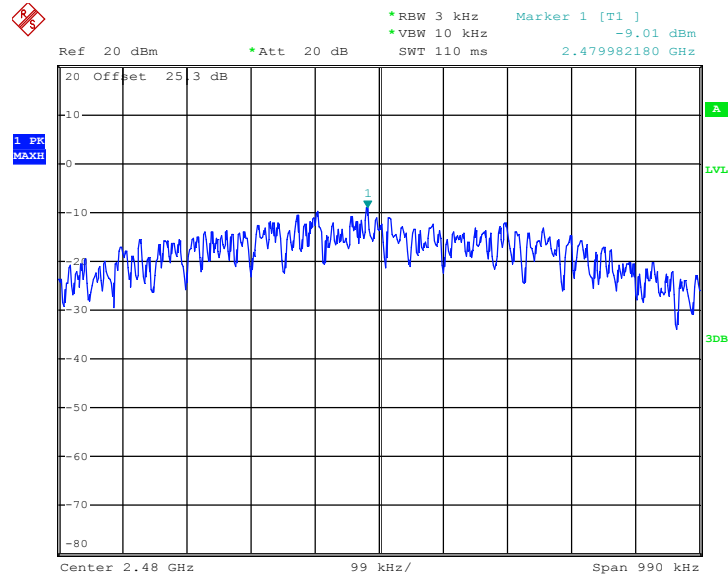

Date: 9.JUN.2018 09:43:08

For Bluetooth LE v5.0


PSD 3kHz Plot on Channel 00

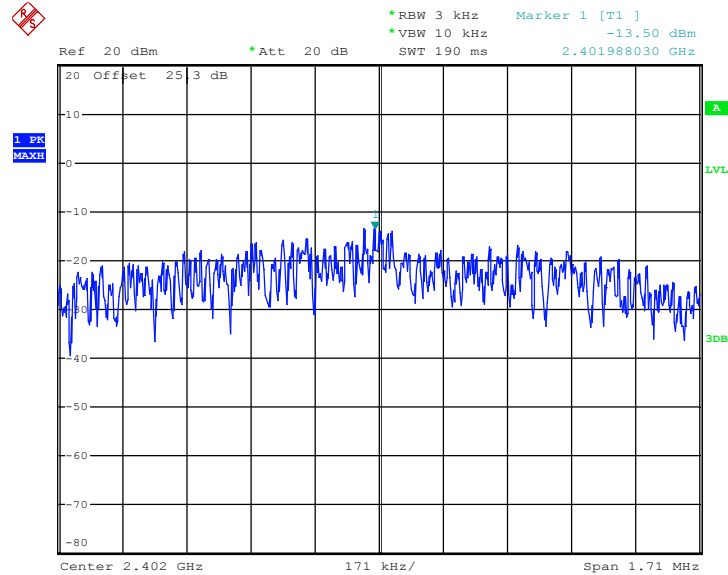

Date: 9.JUN.2018 10:09:11




PSD 3kHz Plot on Channel 19

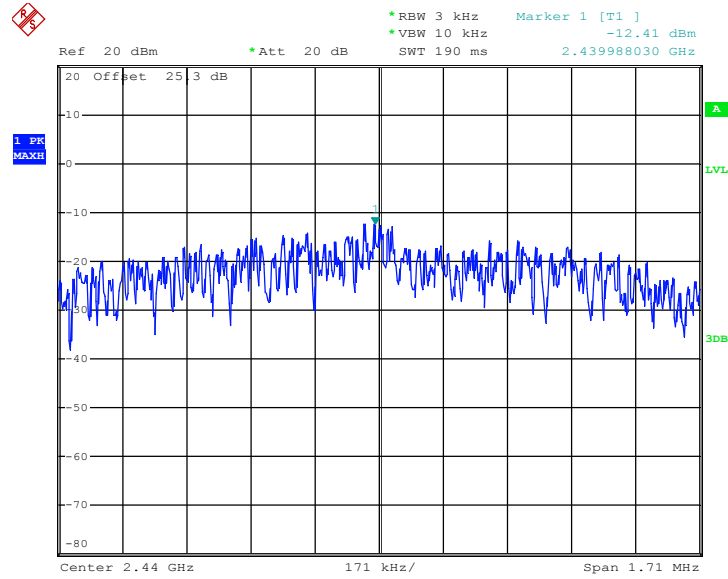

Date: 9.JUN.2018 10:29:28

PSD 3kHz Plot on Channel 39

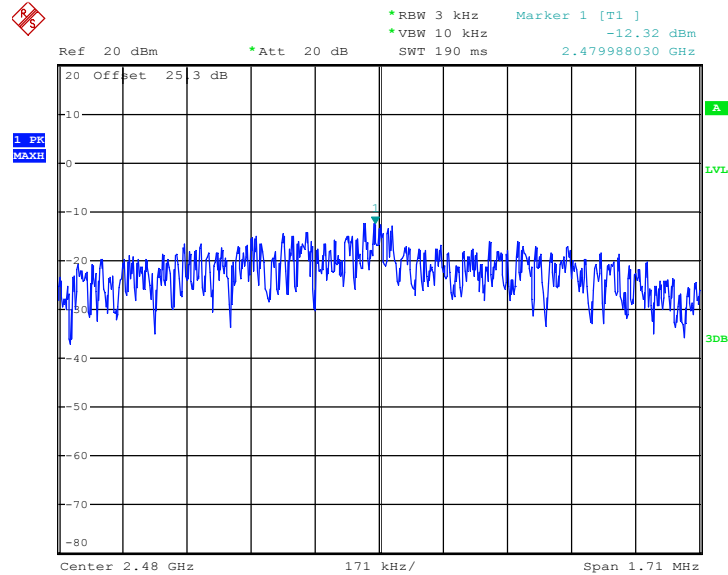

Date: 9.JUN.2018 10:33:43

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

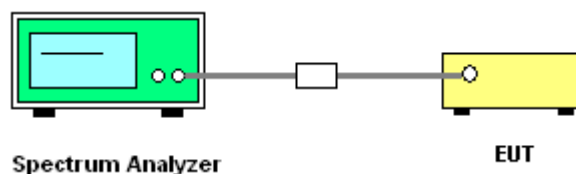




3.4.5 Test Result of Conducted Band Edges Plots


For Bluetooth LE v4.0

Low Band Edge Plot on Channel 00

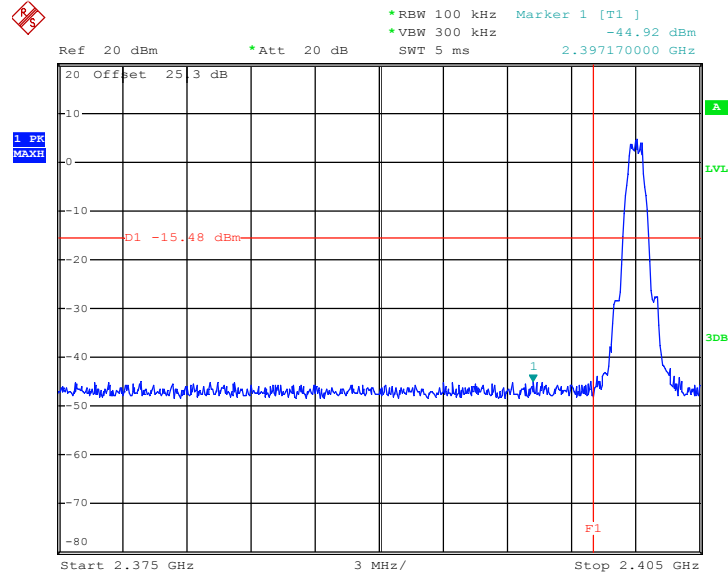

Date: 9.JUN.2018 09:18:21

High Band Edge Plot on Channel 39

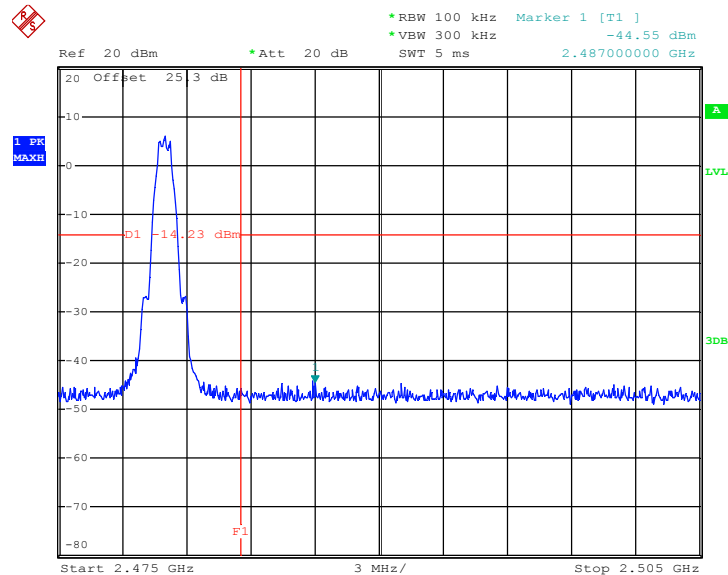


Date: 9.JUN.2018 09:44:03




For Bluetooth LE v5.0

Low Band Edge Plot on Channel 00

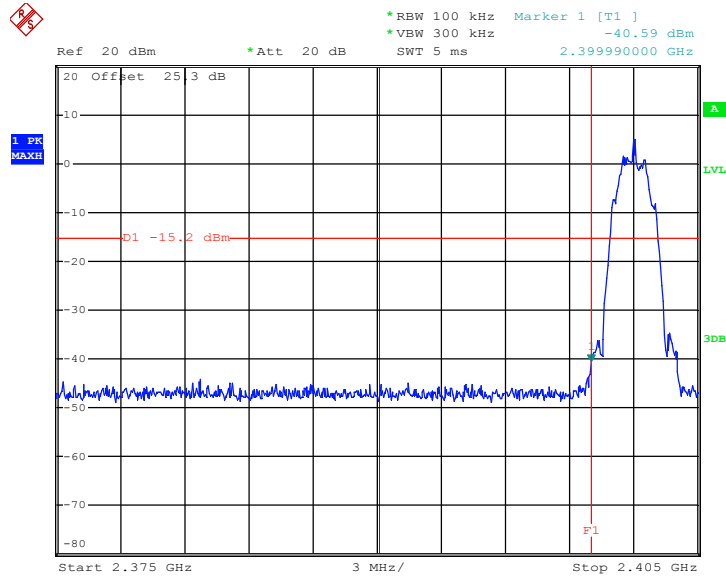

Date: 9.JUN.2018 10:10:20

High Band Edge Plot on Channel 39

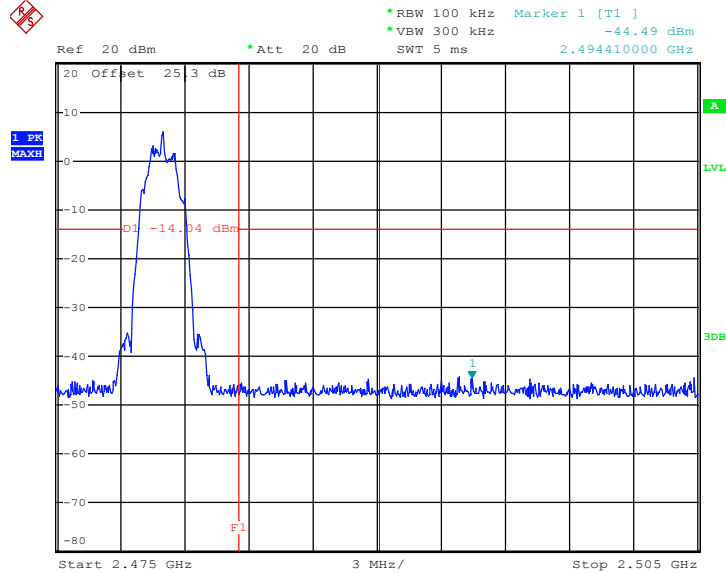


Date: 9.JUN.2018 10:35:31



3.4.6 Test Result of Conducted Spurious Emission Plots


For Bluetooth LE v4.0

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

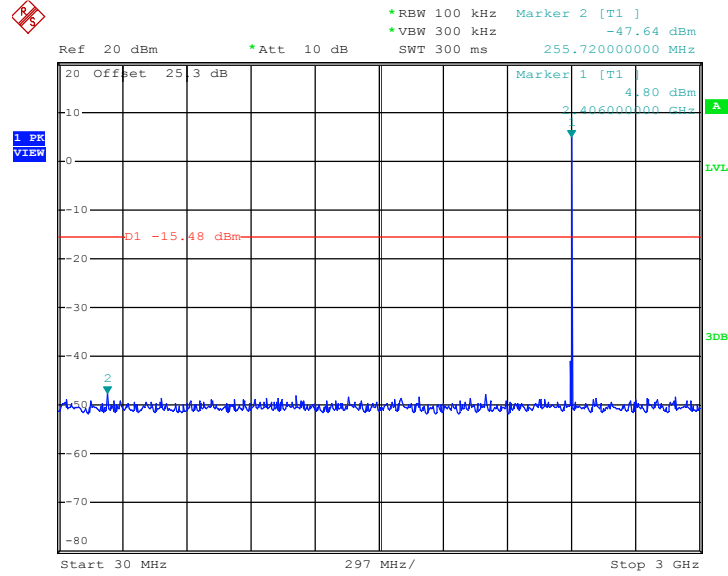

Date: 9.JUN.2018 09:24:46


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

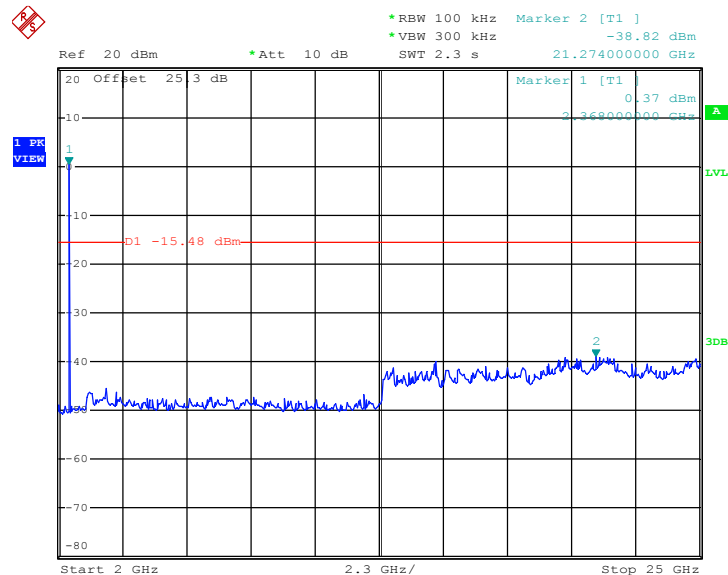

Date: 9.JUN.2018 09:25:09




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

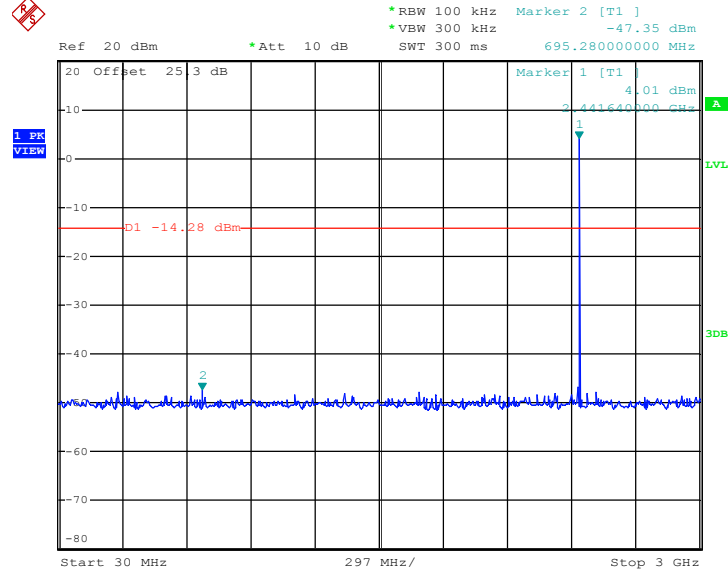

Date: 9.JUN.2018 09:36:37


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

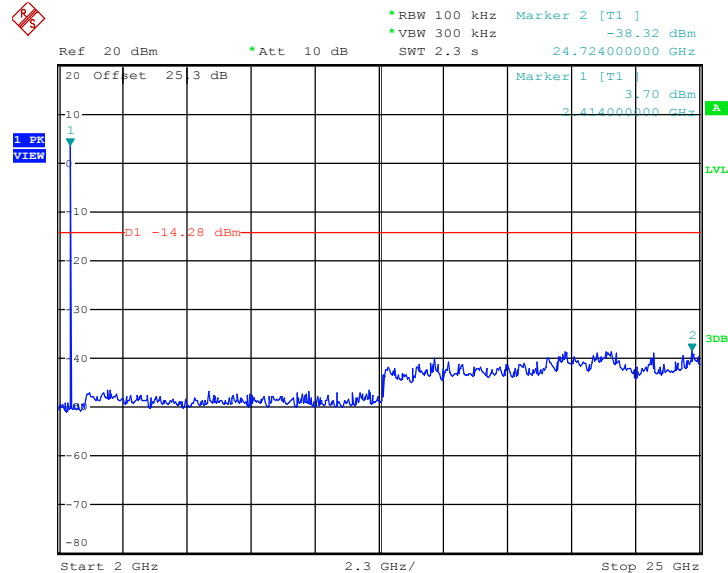

Date: 9.JUN.2018 09:36:58




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

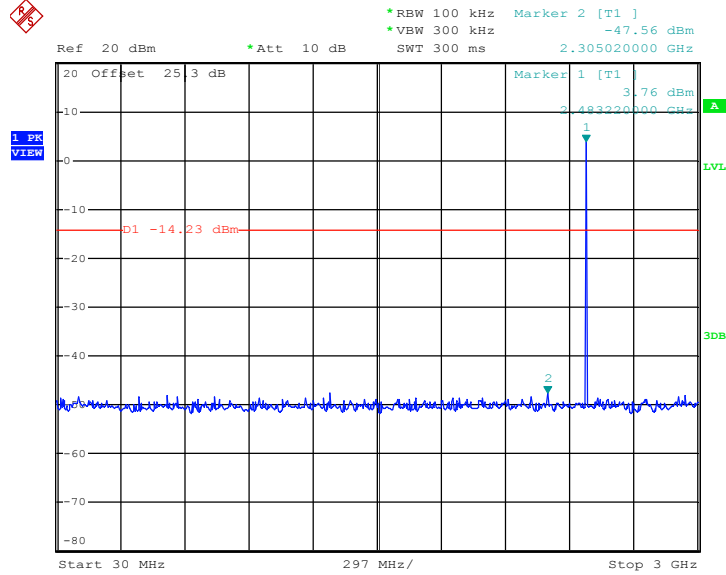

Date: 9.JUN.2018 09:44:47

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

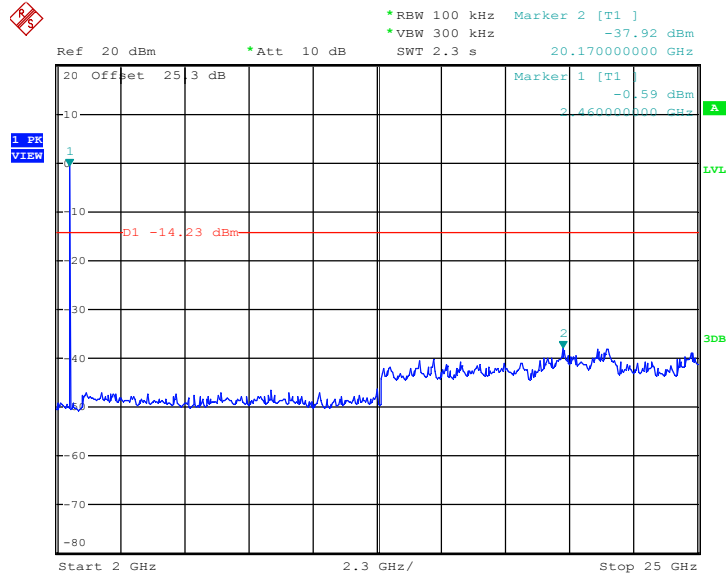


Date: 9.JUN.2018 09:45:09




For Bluetooth LE v5.0

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

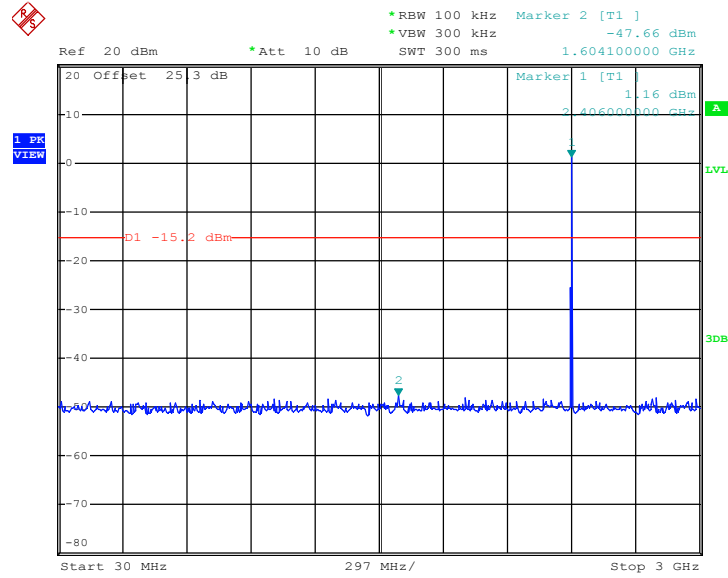

Date: 9.JUN.2018 10:10:51


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

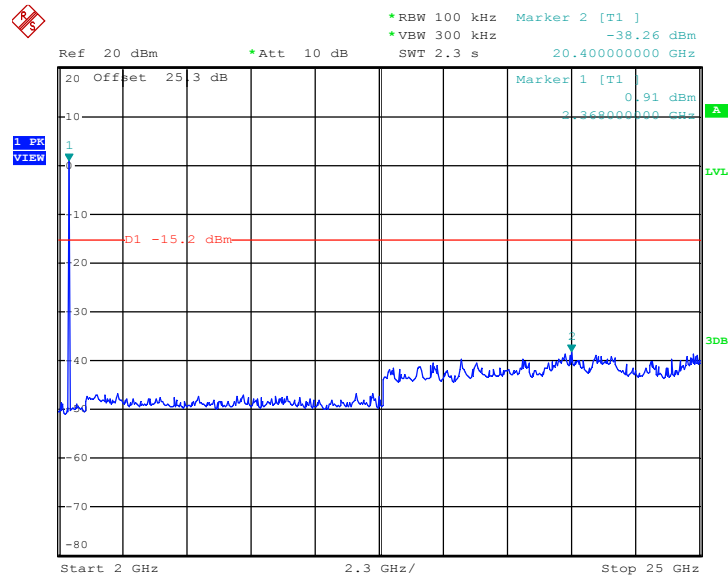

Date: 9.JUN.2018 10:11:16




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

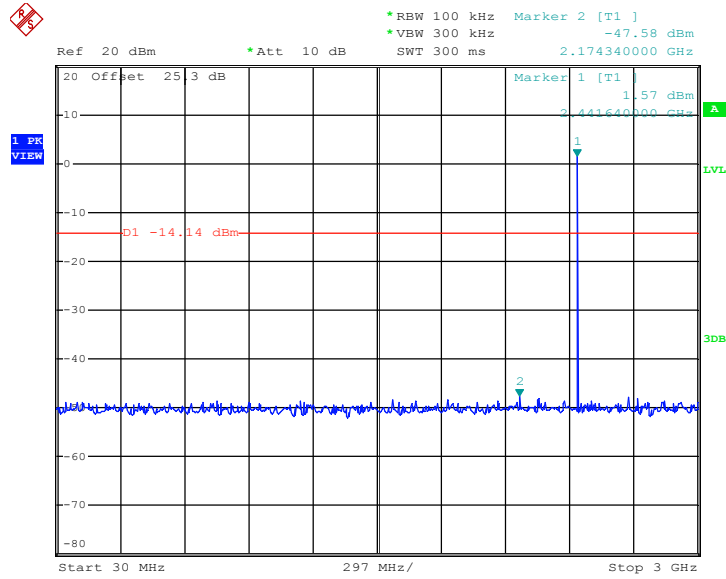

Date: 9.JUN.2018 10:30:34


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

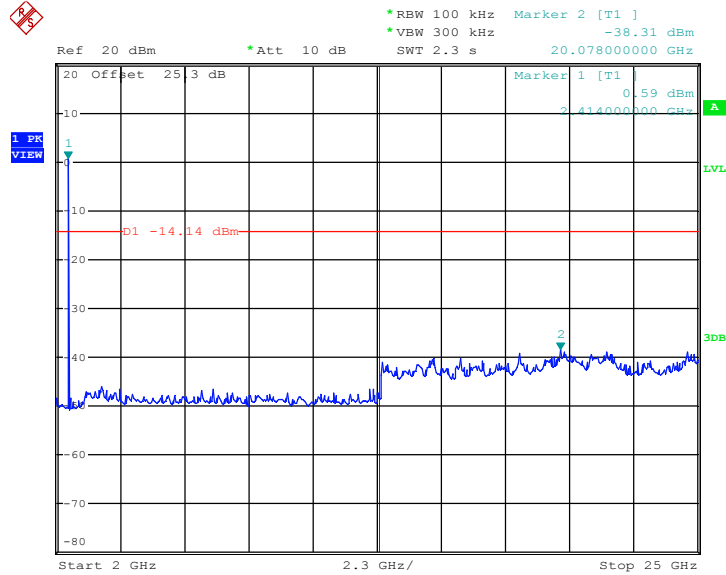

Date: 9.JUN.2018 10:30:59




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

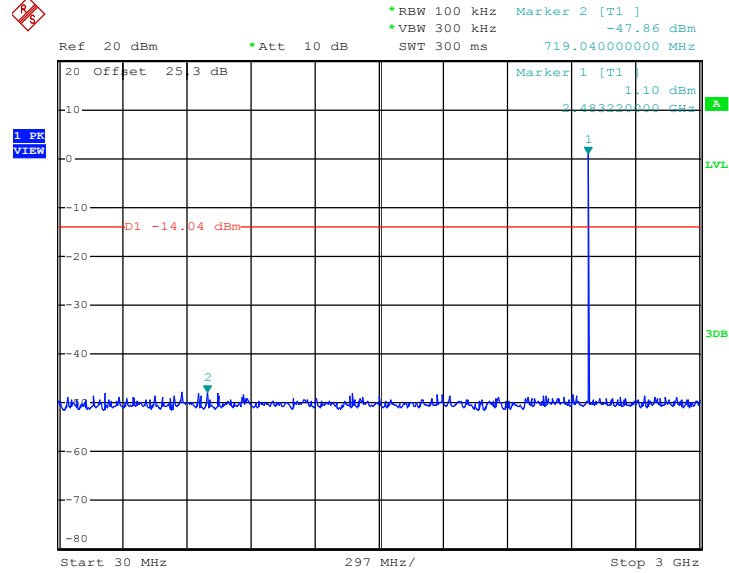

Date: 9.JUN.2018 10:36:11

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

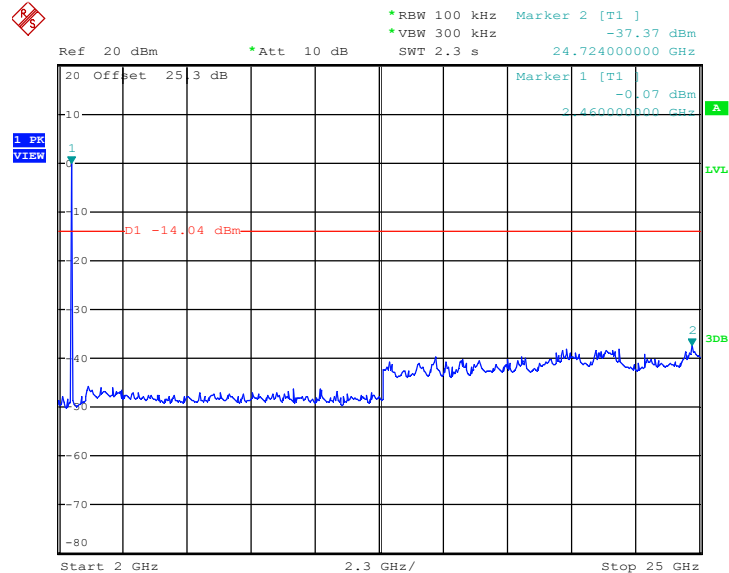

Date: 9.JUN.2018 10:37:34



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

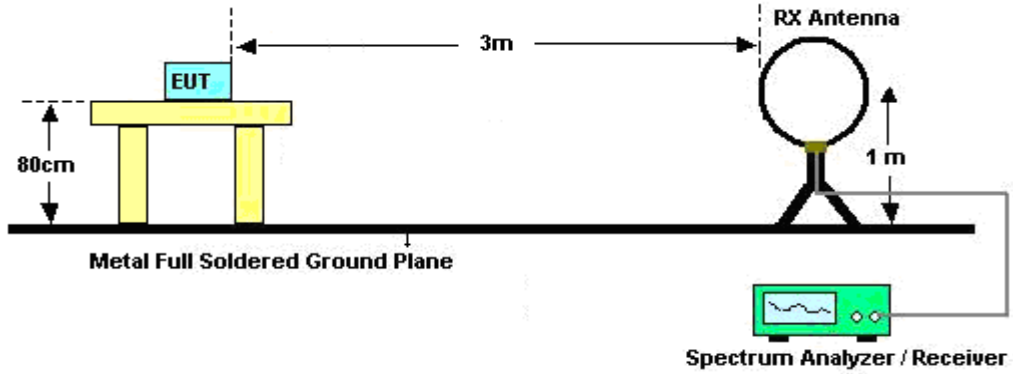

For radiated emissions from 30MHz to 1GHz

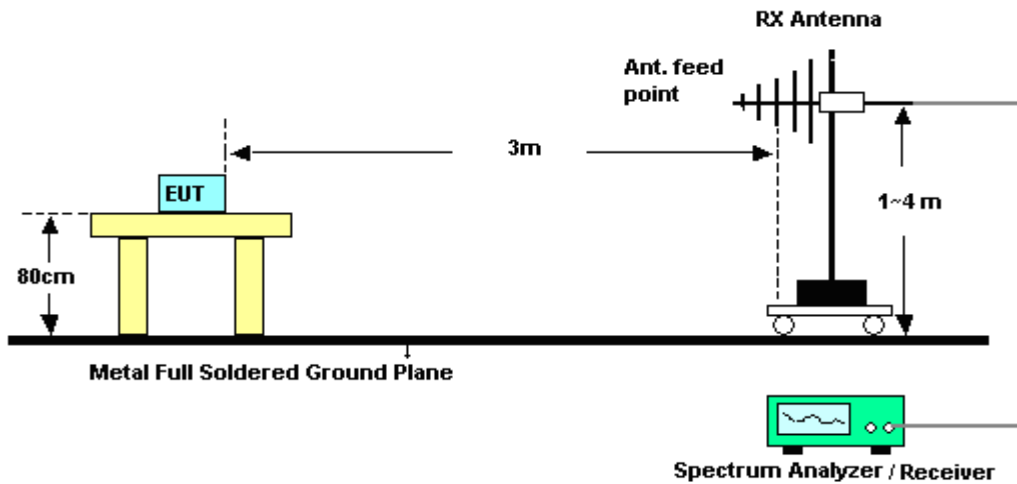

For radiated emissions above 1GHz

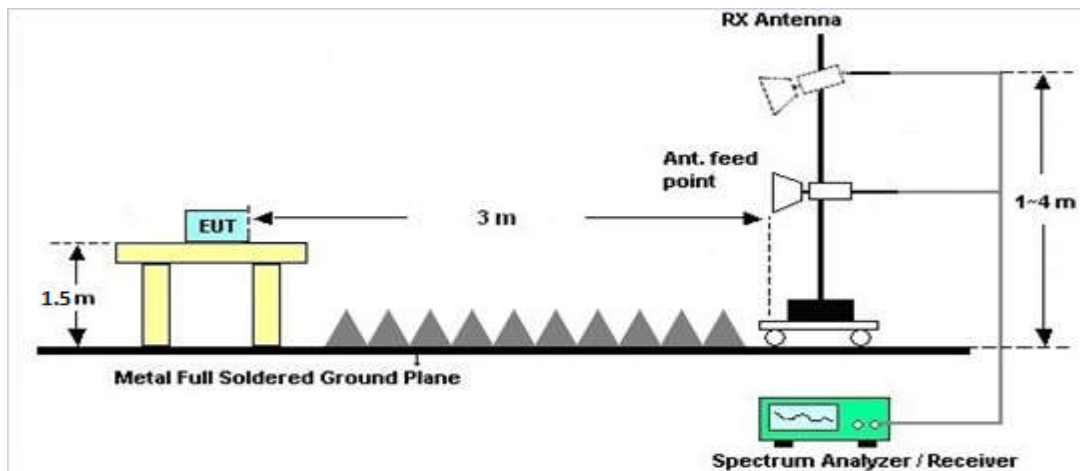



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

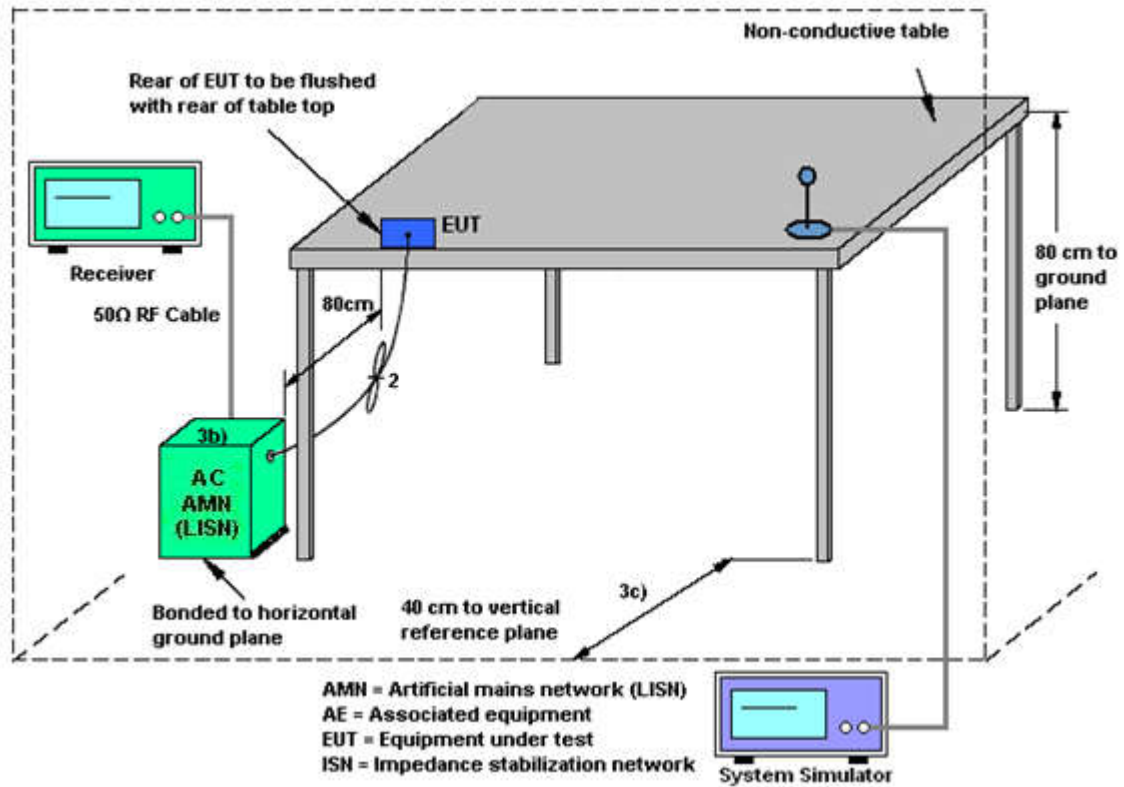

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	DTM-303A	TP157075	N/A	Mar. 06, 2018	May 26, 2018~ Jun. 09, 2018	Mar. 05, 2019	Conducted (TH05-HY)
Power Meter	Agilent	E4416A	GB4129234 4	N/A	Dec. 20, 2017	May 26, 2018~ Jun. 09, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Dec. 20, 2017	May 26, 2018~ Jun. 09, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 21, 2017	May 26, 2018~ Jun. 09, 2018	Nov. 20, 2018	Conducted (TH05-HY)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Jun. 02, 2018 ~ Jun. 15, 2018	Jul. 17, 2018	Radiation (03CH12-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 25, 2017	Jun. 02, 2018 ~ Jun. 15, 2018	Dec. 24, 2018	Radiation (03CH12-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Jun. 02, 2018 ~ Jun. 15, 2018	Nov. 22, 2018	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6- 06	35414&AT-N 0602	30MHz~1GHz	Oct. 14, 2017	Jun. 02, 2018 ~ Jun. 15, 2018	Oct. 13, 2018	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Oct. 20, 2017	Jun. 02, 2018 ~ Jun. 15, 2018	Oct. 19, 2018	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91705 84	18GHz ~ 40GHz	Nov. 27, 2017	Jun. 02, 2018 ~ Jun. 15, 2018	Nov. 26, 2018	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP140349	N/A	Oct. 12, 2017	Jun. 02, 2018 ~ Jun. 15, 2018	Oct. 11, 2018	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 26, 2018	Jun. 02, 2018 ~ Jun. 15, 2018	Mar. 25, 2019	Radiation (03CH12-HY)
Preamplifier	MITEQ	AMF-7D-001 01800-30-10 P	1590074	1GHz~18GHz	May 21, 2018	Jun. 02, 2018 ~ Jun. 15, 2018	May 20, 2019	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY5327014 8	1GHz~26.5GHz	Jan. 15, 2018	Jun. 02, 2018 ~ Jun. 15, 2018	Jan. 14, 2019	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	NCR	Jun. 02, 2018 ~ Jun. 15, 2018	NCR	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	NCR	Jun. 02, 2018 ~ Jun. 15, 2018	NCR	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500 -B	N/A	1m~4m	NCR	Jun. 02, 2018 ~ Jun. 15, 2018	NCR	Radiation (03CH12-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	NCR	Jun. 10, 2018	NCR	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	Jun. 10, 2018	Dec. 07, 2018	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Mar. 06, 2018	Jun. 10, 2018	Mar. 05, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Jun. 10, 2018	Nov. 29, 2018	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 03, 2018	Jun. 10, 2018	Jan. 02, 2019	Conduction (CO05-HY)



Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 03, 2018	Jun. 10, 2018	Jan. 02, 2019	Conduction (CO05-HY)
---------------	-----------------	---------	--------	-----	---------------	---------------	---------------	----------------------

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7dB
---	-------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Kai Liao / Tommy Lee	Temperature:	21~25	°C
Test Date:	2018/5/26~2018/6/09	Relative Humidity:	51~54	%

Appendix A. Test Result of Conducted Test Items**For Bluetooth v4.0 LE**

Test Engineer:	Kai Liao / Tommy Lee	Temperature:	21~25	°C
Test Date:	2018/5/26~2018/6/09	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.028	0.662	0.50	Pass
BLE	1Mbps	1	19	2440	1.028	0.664	0.50	Pass
BLE	1Mbps	1	39	2480	1.028	0.664	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	5.72	30.00	-1.66	4.06	36.00	Pass
BLE	1Mbps	1	19	2440	6.59	30.00	-1.66	4.93	36.00	Pass
BLE	1Mbps	1	39	2480	7.12	30.00	-1.66	5.46	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.08	4.95
BLE	1Mbps	1	19	2440	2.08	5.97
BLE	1Mbps	1	39	2480	2.08	6.12

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	4.52	-10.30	-1.66	8.00	Pass
BLE	1Mbps	1	19	2440	5.72	-9.01	-1.66	8.00	Pass
BLE	1Mbps	1	39	2480	5.77	-9.01	-1.66	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Appendix A. Test Result of Conducted Test Items**For Bluetooth v5.0 LE**

Test Engineer:	Kai Liao / Tommy Lee	Temperature:	21~25	°C
Test Date:	2018/5/26~2018/6/09	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE5.0	2Mbps	1	0	2402	2.040	1.136	0.50	Pass
BLE5.0	2Mbps	1	19	2440	2.040	1.136	0.50	Pass
BLE5.0	2Mbps	1	39	2480	2.040	1.144	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE5.0	2Mbps	1	0	2402	5.80	30.00	-1.66	4.14	36.00	Pass
BLE5.0	2Mbps	1	19	2440	6.68	30.00	-1.66	5.02	36.00	Pass
BLE5.0	2Mbps	1	39	2480	6.85	30.00	-1.66	5.19	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE5.0	2Mbps	1	0	2402	4.77	4.81
BLE5.0	2Mbps	1	19	2440	4.77	5.83
BLE5.0	2Mbps	1	39	2480	4.77	6.01

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE5.0	2Mbps	1	0	2402	4.80	-13.50	-1.66	8.00	Pass
BLE5.0	2Mbps	1	19	2440	5.86	-12.41	-1.66	8.00	Pass
BLE5.0	2Mbps	1	39	2480	5.96	-12.32	-1.66	8.00	Pass


Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Arthur Hsieh	Temperature :	21~25°C
		Relative Humidity :	51~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line

Full Spectrum

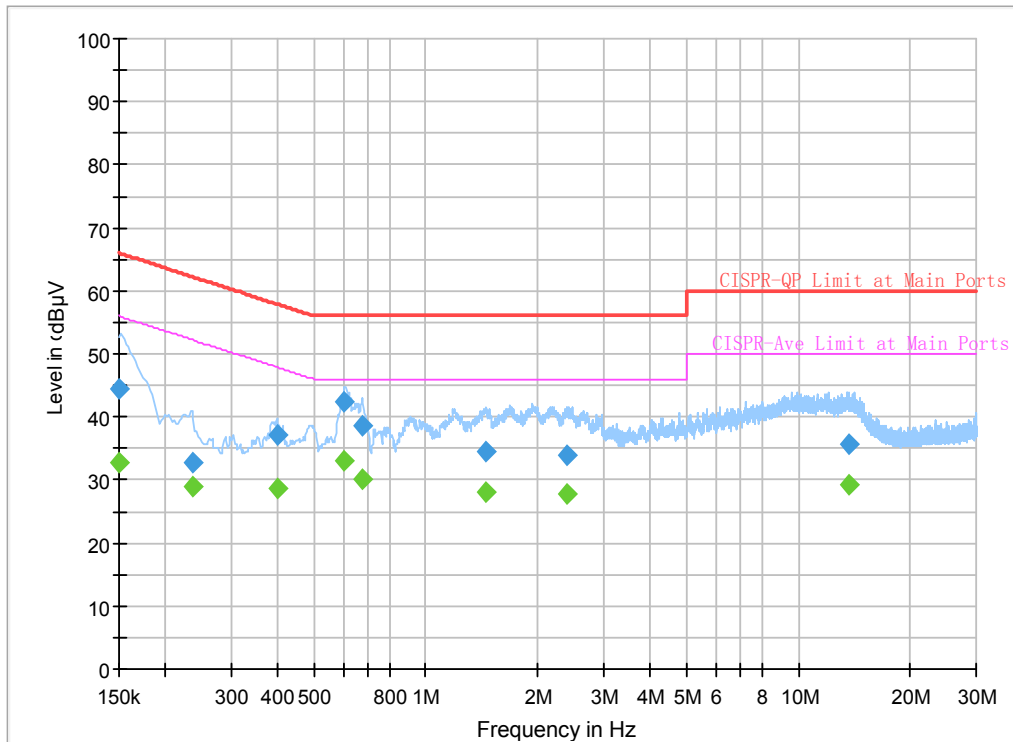


Final Result

Frequency (MHz)	Quasi-Peak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	32.73	56.00	23.27	L1	OFF	19.5
0.150000	44.32	---	66.00	21.68	L1	OFF	19.5
0.235500	---	28.88	52.25	23.37	L1	OFF	19.5
0.235500	32.73	---	62.25	29.52	L1	OFF	19.5
0.397500	---	28.74	47.91	19.17	L1	OFF	19.5
0.397500	37.05	---	57.91	20.86	L1	OFF	19.5
0.604500	---	33.01	46.00	12.99	L1	OFF	19.6
0.604500	42.26	---	56.00	13.74	L1	OFF	19.6
0.676500	---	30.06	46.00	15.94	L1	OFF	19.6
0.676500	38.69	---	56.00	17.31	L1	OFF	19.6
1.450500	---	28.21	46.00	17.79	L1	OFF	19.6
1.450500	34.46	---	56.00	21.54	L1	OFF	19.6
2.404500	---	27.86	46.00	18.14	L1	OFF	19.6
2.404500	33.88	---	56.00	22.12	L1	OFF	19.6
13.701750	---	29.12	50.00	20.88	L1	OFF	20.0
13.701750	35.63	---	60.00	24.37	L1	OFF	20.0



Test Engineer :	Arthur Hsieh	Temperature :	21~25°C
		Relative Humidity :	51~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

Full Spectrum

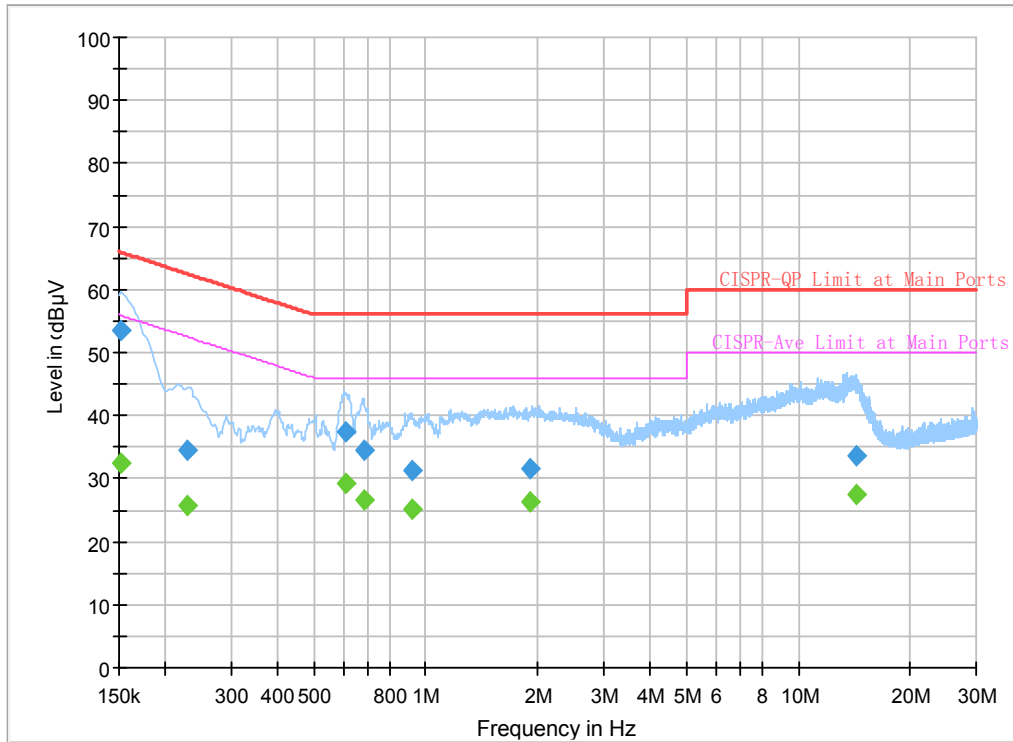

Final Result

Frequency (MHz)	Quasi-Peak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	32.38	55.88	23.50	N	OFF	19.5
0.152250	53.54	---	65.88	12.34	N	OFF	19.5
0.228750	---	25.73	52.50	26.77	N	OFF	19.5
0.228750	34.38	---	62.50	28.12	N	OFF	19.5
0.606750	---	29.16	46.00	16.84	N	OFF	19.6
0.606750	37.55	---	56.00	18.45	N	OFF	19.6
0.681000	---	26.49	46.00	19.51	N	OFF	19.6
0.681000	34.36	---	56.00	21.64	N	OFF	19.6
0.917250	---	25.25	46.00	20.75	N	OFF	19.6
0.917250	31.21	---	56.00	24.79	N	OFF	19.6
1.914000	---	26.31	46.00	19.69	N	OFF	19.6
1.914000	31.57	---	56.00	24.43	N	OFF	19.6
14.226000	---	27.42	50.00	22.58	N	OFF	20.1
14.226000	33.73	---	60.00	26.27	N	OFF	20.1



Appendix C. Radiated Spurious Emission

Test Engineer :	Watt, Karl, Ken	Temperature :	22~25°C
		Relative Humidity :	62~65%



For Bluetooth v4.0 LE

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2314.515	54.28	-19.72	74	42.36	26.94	16.57	31.59	153	39	P	H
		2372.58	43.42	-10.58	54	31.23	27.11	16.66	31.58	153	39	A	H
	*	2402	97.45	-	-	85.17	27.15	16.7	31.57	153	39	P	H
	*	2402	96.48	-	-	84.2	27.15	16.7	31.57	153	39	A	H
		2373.21	54.52	-19.48	74	42.33	27.11	16.66	31.58	110	80	P	V
		2381.19	43.6	-10.4	54	31.4	27.11	16.67	31.58	110	80	A	V
	*	2402	97.78	-	-	85.5	27.15	16.7	31.57	110	80	P	V
	*	2402	97.11	-	-	84.83	27.15	16.7	31.57	110	80	A	V
BLE CH 19 2440MHz		2347.24	54.63	-19.37	74	42.56	27.03	16.62	31.58	106	38	P	H
		2373.28	43.58	-10.42	54	31.39	27.11	16.66	31.58	106	38	A	H
	*	2440	97.59	-	-	85.12	27.28	16.76	31.57	106	38	P	H
	*	2440	96.88	-	-	84.41	27.28	16.76	31.57	106	38	A	H
		2483.76	54.27	-19.73	74	41.65	27.36	16.82	31.56	106	38	P	H
		2487.61	43.83	-10.17	54	31.16	27.4	16.83	31.56	106	38	A	H
		2348.36	54.21	-19.79	74	42.14	27.03	16.62	31.58	115	83	P	V
		2351.72	43.56	-10.44	54	31.44	27.07	16.63	31.58	115	83	A	V
	*	2440	98.56	-	-	86.09	27.28	16.76	31.57	115	83	P	V
	*	2440	97.69	-	-	85.22	27.28	16.76	31.57	115	83	A	V
		2493.77	54.24	-19.76	74	41.55	27.4	16.84	31.55	115	83	P	V
		2492.79	43.85	-10.15	54	31.17	27.4	16.83	31.55	115	83	A	V



BLE CH 39 2480MHz	*	2480	95.65	-	-	83.03	27.36	16.82	31.56	100	63	P	H
	*	2480	94.76	-	-	82.14	27.36	16.82	31.56	100	63	A	H
		2492	54.88	-19.12	74	42.2	27.4	16.83	31.55	100	63	P	H
		2493.48	44.06	-9.94	54	31.37	27.4	16.84	31.55	100	63	A	H
	*	2480	96.95	-	-	84.33	27.36	16.82	31.56	100	82	P	V
	*	2480	96.21	-	-	83.59	27.36	16.82	31.56	100	82	A	V
		2484.28	55.64	-18.36	74	43.02	27.36	16.82	31.56	100	82	P	V
		2487.6	43.82	-10.18	54	31.15	27.4	16.83	31.56	100	82	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

Table with 14 columns: BLE, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include BLE CH 00 (2402MHz), BLE CH 19 (2440MHz), and BLE CH 39 (2480MHz).

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



For Bluetooth v5.0 LE

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2363.445	54.31	-19.69	74	42.17	27.07	16.65	31.58	135	292	P	H
		2383.08	44.74	-9.26	54	32.54	27.11	16.67	31.58	135	292	A	H
	*	2402	96.57	-	-	84.29	27.15	16.7	31.57	135	292	P	H
	*	2402	94.64	-	-	82.36	27.15	16.7	31.57	135	292	A	H
		2352.21	55.45	-18.55	74	43.33	27.07	16.63	31.58	142	107	P	V
		2387.28	44.7	-9.3	54	32.45	27.15	16.68	31.58	142	107	A	V
	*	2402	97.54	-	-	85.26	27.15	16.7	31.57	142	107	P	V
	*	2402	95.73	-	-	83.45	27.15	16.7	31.57	142	107	A	V
BLE CH 19 2440MHz		2381.54	54.6	-19.4	74	42.4	27.11	16.67	31.58	117	292	P	H
		2368.94	44.89	-9.11	54	32.71	27.11	16.65	31.58	117	292	A	H
	*	2440	96.5	-	-	84.03	27.28	16.76	31.57	117	292	P	H
	*	2440	94.73	-	-	82.26	27.28	16.76	31.57	117	292	A	H
		2495.1	54.3	-19.7	74	41.61	27.4	16.84	31.55	117	292	P	H
		2495.94	45.24	-8.76	54	32.55	27.4	16.84	31.55	117	292	A	H
		2356.34	55.03	-18.97	74	42.91	27.07	16.63	31.58	109	324	P	V
		2375.1	44.83	-9.17	54	32.64	27.11	16.66	31.58	109	324	A	V
	*	2440	98.9	-	-	86.43	27.28	16.76	31.57	109	324	P	V
	*	2440	97.11	-	-	84.64	27.28	16.76	31.57	109	324	A	V
		2489.5	55.85	-18.15	74	43.18	27.4	16.83	31.56	109	324	P	V
	2489.5	45.26	-8.74	54	32.59	27.4	16.83	31.56	109	324	A	V	



BLE CH 39 2480MHz	*	2480	93.14	-	-	80.52	27.36	16.82	31.56	100	49	P	H
	*	2480	91.44	-	-	78.82	27.36	16.82	31.56	100	49	A	H
		2496.76	54.86	-19.14	74	42.17	27.4	16.84	31.55	100	49	P	H
		2489.68	45.07	-8.93	54	32.4	27.4	16.83	31.56	100	49	A	H
	*	2480	96.49	-	-	83.87	27.36	16.82	31.56	104	322	P	V
	*	2480	94.48	-	-	81.86	27.36	16.82	31.56	104	322	A	V
		2497.28	54.82	-19.18	74	42.13	27.4	16.84	31.55	104	322	P	V
		2485.2	45.29	-8.71	54	32.67	27.36	16.82	31.56	104	322	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	39.35	-34.65	74	55.2	31.32	10.42	57.59	100	0	P	H
		4804	39.09	-34.91	74	54.94	31.32	10.42	57.59	100	0	P	V
BLE CH 19 2440MHz		4880	40.05	-33.95	74	55.56	31.46	10.47	57.44	100	0	P	H
		7320	44.08	-29.92	74	52.43	36.15	12.78	57.28	100	0	P	H
		4880	39.22	-34.78	74	54.73	31.46	10.47	57.44	100	0	P	V
		7320	44.5	-29.5	74	52.85	36.15	12.78	57.28	100	0	P	V
BLE CH 39 2480MHz		4960	39.95	-34.05	74	55.09	31.63	10.51	57.28	100	0	P	H
		7440	44.63	-29.37	74	52.79	36.47	12.8	57.43	100	0	P	H
		4960	39.87	-34.13	74	55.01	31.63	10.51	57.28	100	0	P	V
		7440	45.97	-28.03	74	54.13	36.47	12.8	57.43	100	0	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		33.78	25.2	-14.8	40	32.37	22.31	0.76	30.24	-	-	P	H
		42.42	23.21	-16.79	40	35.08	17.61	0.89	30.37	-	-	P	H
		104.52	22.39	-21.11	43.5	35.15	16.23	1.44	30.43	-	-	P	H
		482.7	26.66	-19.34	46	29.94	23.49	3.05	29.82	-	-	P	H
		603.8	29.36	-16.64	46	30.13	25.43	3.43	29.63	-	-	P	H
		727	31.38	-14.62	46	29.88	27.19	3.77	29.46	100	0	P	H
		33.78	35.66	-4.34	40	42.83	22.31	0.76	30.24	-	-	P	V
		42.15	36.23	-3.77	40	48.09	17.61	0.89	30.36	100	0	P	V
		74.82	30.19	-9.81	40	46.98	12.44	1.22	30.45	-	-	P	V
		424.6	27.35	-18.65	46	31.84	22.58	2.86	29.93	-	-	P	V
		559	28.67	-17.33	46	29.06	25.97	3.33	29.69	-	-	P	V
		661.2	29.75	-16.25	46	29.45	26.24	3.62	29.56	-	-	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against limit line. 												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE v4.0	61.90	0.39	2.564	3kHz
Bluetooth LE v5.0	33.33	0.21	4.762	10kHz

Bluetooth LE v4.0

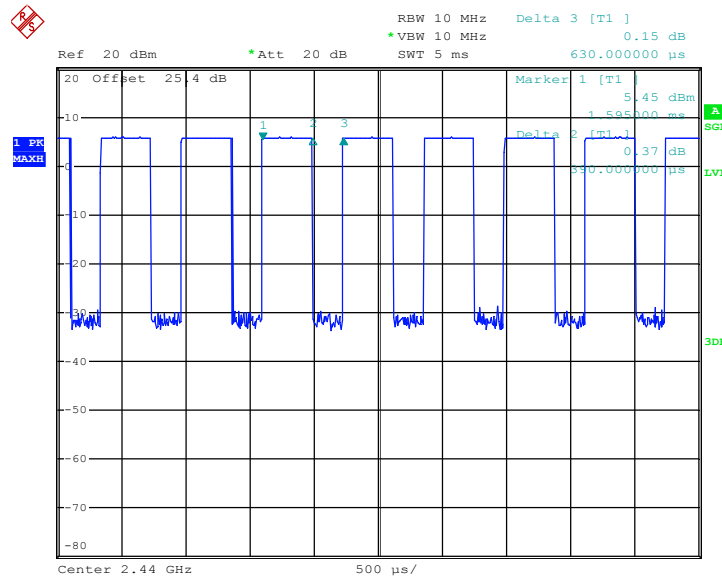



Bluetooth LE v5.0

