

FCC SAR Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : MI
MODEL NAME : M1903F2G
FCC ID : 2AFZZ-XMSF2G
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Dec. 27, 2018 and testing was started from Jan. 17, 2019 and completed on Feb. 07, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: Mark Qu / Manager



Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Guidance Applied..... 5
4. Equipment Under Test (EUT) Information..... 6
4.1 General Information 6
4.2 General LTE SAR Test and Reporting Considerations 8
5. Proximity Sensor Triggering Test.....10
5.1 Proximity sensor triggering distances(Per KDB616217§6.2)10
5.2 Tilt angle influences to proximity sensor triggering(Per KDB616217 §6.4).....14
6. RF Exposure Limits.....15
6.1 Uncontrolled Environment.....15
6.2 Controlled Environment.....15
7. Specific Absorption Rate (SAR).....16
7.1 Introduction16
7.2 SAR Definition.....16
8. System Description and Setup17
8.1 E-Field Probe18
8.2 Data Acquisition Electronics (DAE)18
8.3 Phantom.....19
8.4 Device Holder.....20
9. Measurement Procedures21
9.1 Spatial Peak SAR Evaluation21
9.2 Power Reference Measurement.....22
9.3 Area Scan22
9.4 Zoom Scan.....23
9.5 Volume Scan Procedures.....23
9.6 Power Drift Monitoring.....23
10. Test Equipment List.....24
11. System Verification25
11.1 Tissue Simulating Liquids25
11.2 Tissue Verification26
11.3 System Performance Check Results27
12. RF Exposure Positions28
12.1 Ear and handset reference point28
12.2 Definition of the cheek position29
12.3 Definition of the tilt position30
12.4 Body Worn Accessory31
12.5 Wireless Router.....32
13. Conducted RF Output Power (Unit: dBm).....33
14. Antenna Location116
15. SAR Test Results118
15.1 Head SAR121
15.2 Hotspot SAR128
15.3 Body Worn Accessory SAR.....134
15.4 Repeated SAR Measurement137
16. Simultaneous Transmission Analysis.....138
16.1 Head Exposure Conditions140
16.2 Hotspot Exposure Conditions.....144
16.3 Body-Worn Accessory Exposure Conditions148
17. Uncertainty Assessment150
18. References.....151
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA8D2708	Rev. 01	Initial issue of report	Feb. 25, 2019



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Xiaomi Communications Co., Ltd., Mobile Phone, M1903F2G**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 10mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.67	0.60	0.60	1.58
		GSM1900	1.09	1.17	0.67	
	WCDMA	Band V	0.66	0.78	0.78	
		Band IV	1.11	1.03	0.95	
		Band II	1.19	1.04	1.09	
	LTE	Band 5	0.92	0.66	0.66	
		Band 4	1.17	0.98	0.92	
		Band 2	0.96	1.00	1.08	
		Band 7	1.13	1.12	0.89	
		Band 38	0.99	0.91	0.70	
DTS	WLAN	2.4GHz WLAN	1.05	0.37	0.37	1.52
NII		5GHz WLAN	1.16	0.35	0.52	1.58
DSS	Bluetooth	2.4GHz Bluetooth	0.26	<0.10	<0.10	1.58
Date of Testing:			2019/1/17~2019/2/7			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Testing Laboratory	
Test Site	Sporton International (Kunshan) Inc.
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958

Applicant	
Company Name	Xiaomi Communications Co., Ltd.
Address	The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

Manufacturer	
Company Name	Xiaomi Communications Co., Ltd.
Address	The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	MI
Model Name	M1903F2G
FCC ID	2AFZZ-XMSF2G
IMEI Code	SIM1: 862536040005050 SIM2: 862536040005068
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5805 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC
HW Version	P2
SW Version	MIUI10
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype

Remark:

1. This device supports VoIP in GPRS, EGPRS, CDMA, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
3. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
4. This device does not support DTM operation and supports GRPS/EGPRS mode up to multi-slot class 33.
5. This device has two WWAN transmit antennas. WWAN bottom antenna is located at the bottom edge of the device, and WWAN top antenna is located at the top edge of the device which can refer to antenna location chapter. Top and Bottom antenna support the same WWAN frequency bands, and they can't transmit simultaneously.
6. For top antenna, When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately in GSM850/1900, WCDMA band 2/4/5, LTE B2/4/5/7/38 and WLAN 2.4GHz/5GHz.
For WLAN2.4GHz/5GHz, reduced power 1 is used for standalone SAR for head, reduced power 2 is used for simultaneous SAR for head.
7. For bottom antenna:
 - a. The device employs proximity sensors that detect the presence of the user's body at the front or back or bottom faces of the device. When front or back or bottom of body condition is detected, WCDMA band II/IV, LTE band 2/7 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)
 - b. When hotspot mode is enabled, power reduction will be activated to GSM1900, WCDMA band II/IV, LTE band 2/4/7/38.
8. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.
9. There are two types of EUT sample 1 and sample 2, memory capacity is different. Since it has no effect on SAR distribution, so we only evaluate sample 1 for full test.



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	2AFZZ-XMSF2G																																																														
Equipment Name	Mobile Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R12, Cat13																																																														
CA Support	Yes, Uplink and Downlink																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes 1. The device employs proximity sensors that detect the presence of the user's body at the front or back or bottom faces of the device. When front or back or bottom of body condition is detected, WCDMA band II/IV, LTE band 2/7 reduced power will be active. 2. When hotspot mode is enabled, power reduction will be activated to GSM1900, WCDMA band II/IV, LTE band 2/4/7/38.																																																														
LTE Carrier Aggregation Combinations	Intra-Band possible combinations and the detail power verification please referred to section 13.																																																														
LTE Carrier Aggregation Additional Information	(1) This device supports LTE Carrier Aggregation (CA) in the uplink for 7C/38C with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. (2) This device supports maximum of 2 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														




Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				

5. Proximity Sensor Triggering Test

5.1 Proximity sensor triggering distances(Per KDB616217§6.2)



1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (2600MHz) and lowest (1750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the front, back or bottom side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the sensor is active, WCDMA B2 / B4, and LTE B2 / B7 reduced power will be active.
4. The sensors used to detect the proximity of the user's body at the front, back or bottom side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).


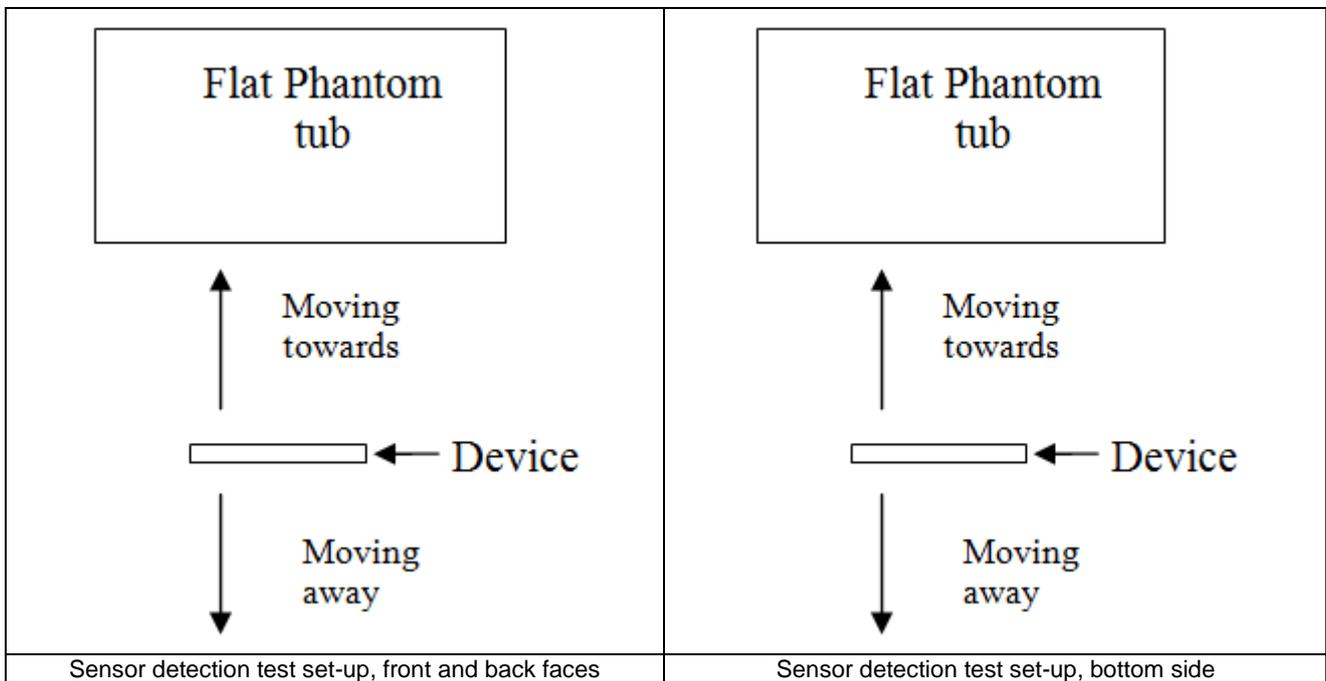




Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	20	21	21	22	20	20

TX. Band	Proximity Sensor Triggering Power (dBm)		
	Full	Reduced	Power Reduction (dB)
	Max. Tune Up Limit (dBm)	Max. Tune Up Limit (dBm)	
WCDMA Band II	25.00	23.00	2.00
WCDMA Band IV	25.00	24.00	1.00
LTE Band 2	24.00	23.00	1.00
LTE Band 7	24.00	23.00	1.00

<Sensor Trigger Distance and Measured Power>

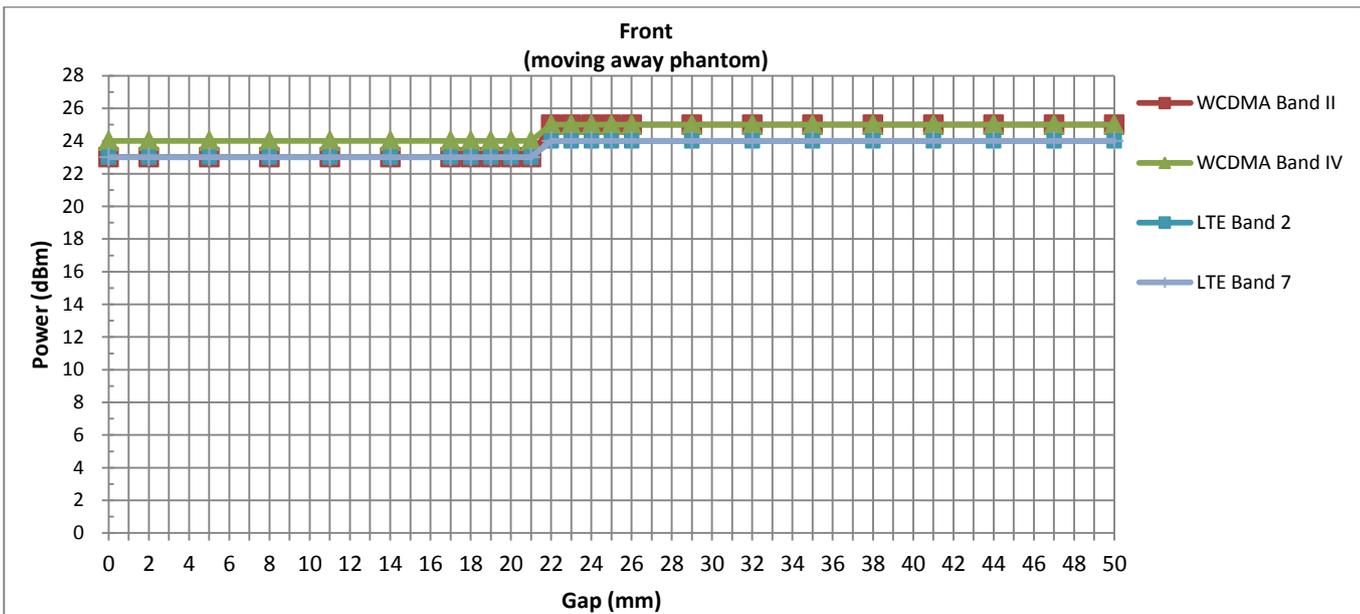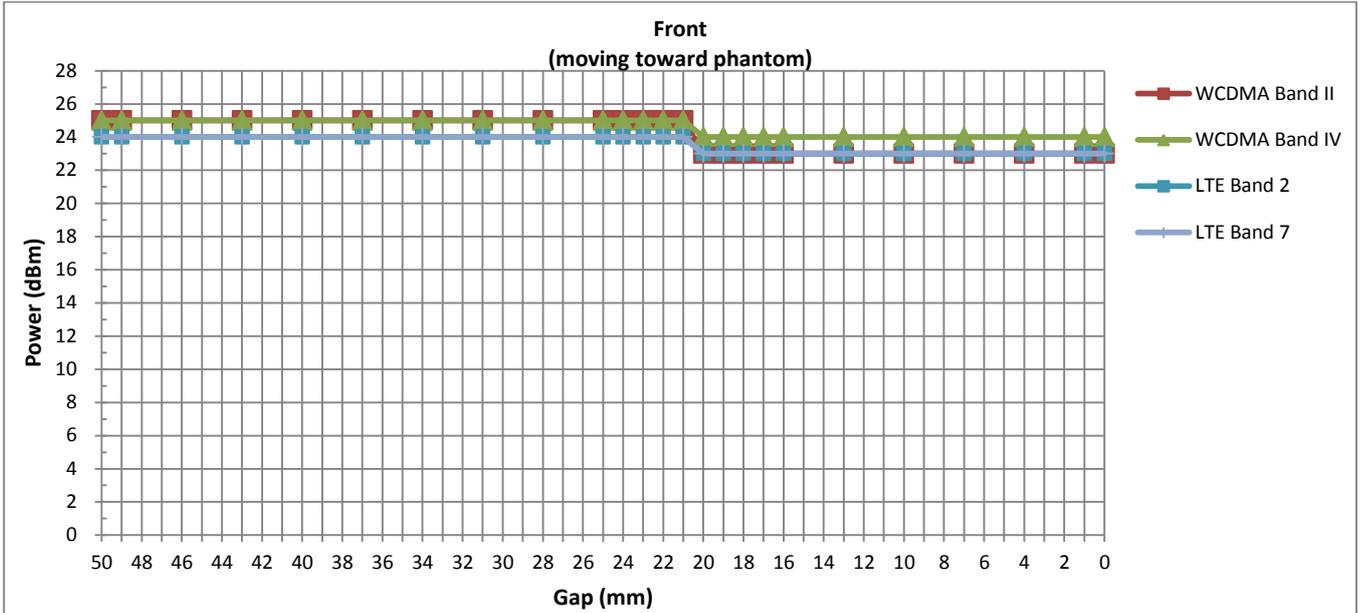

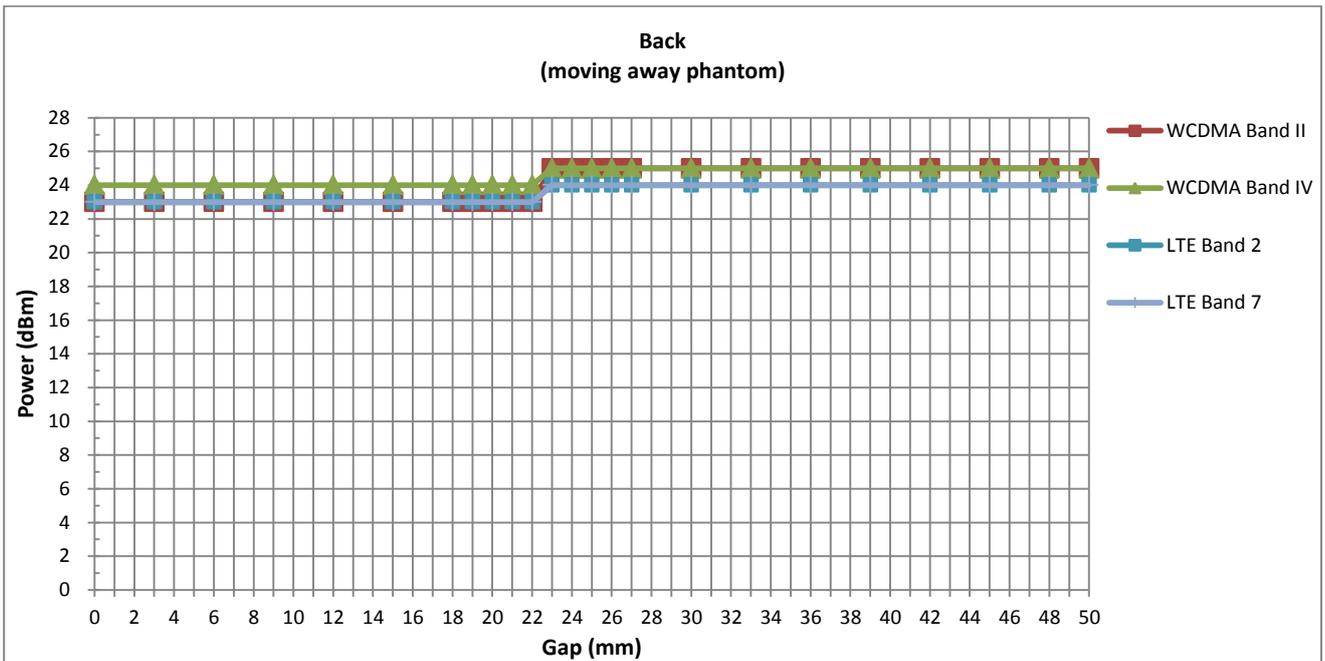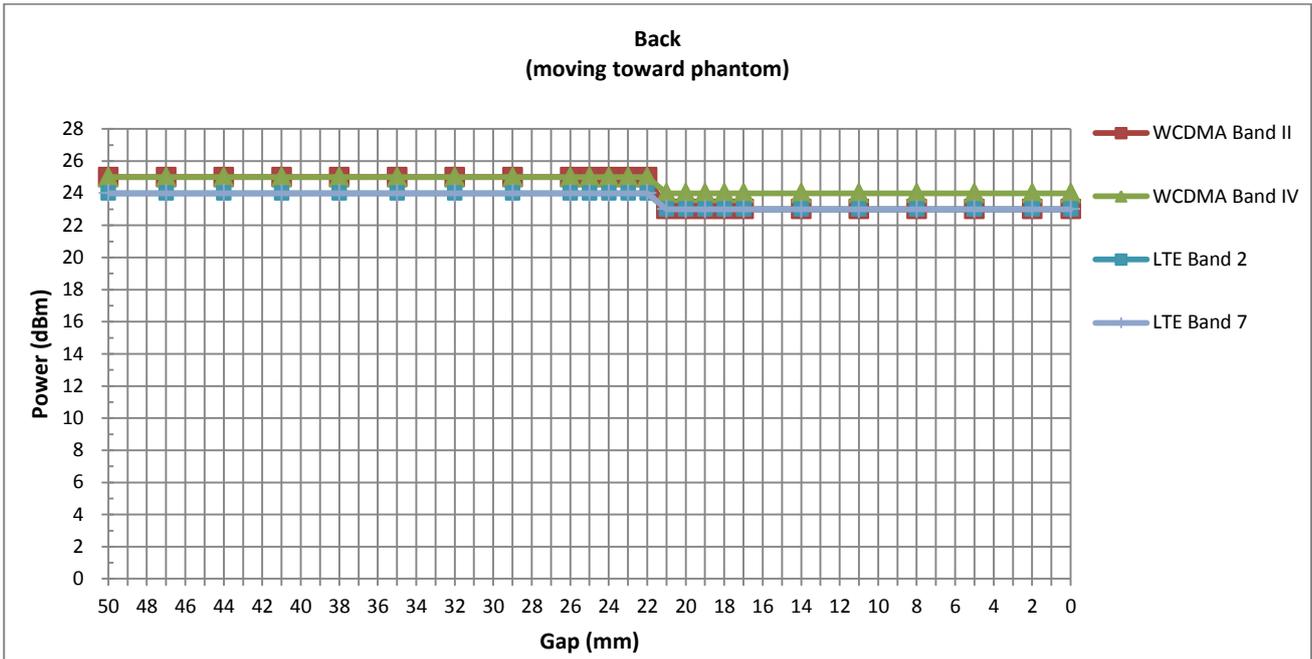


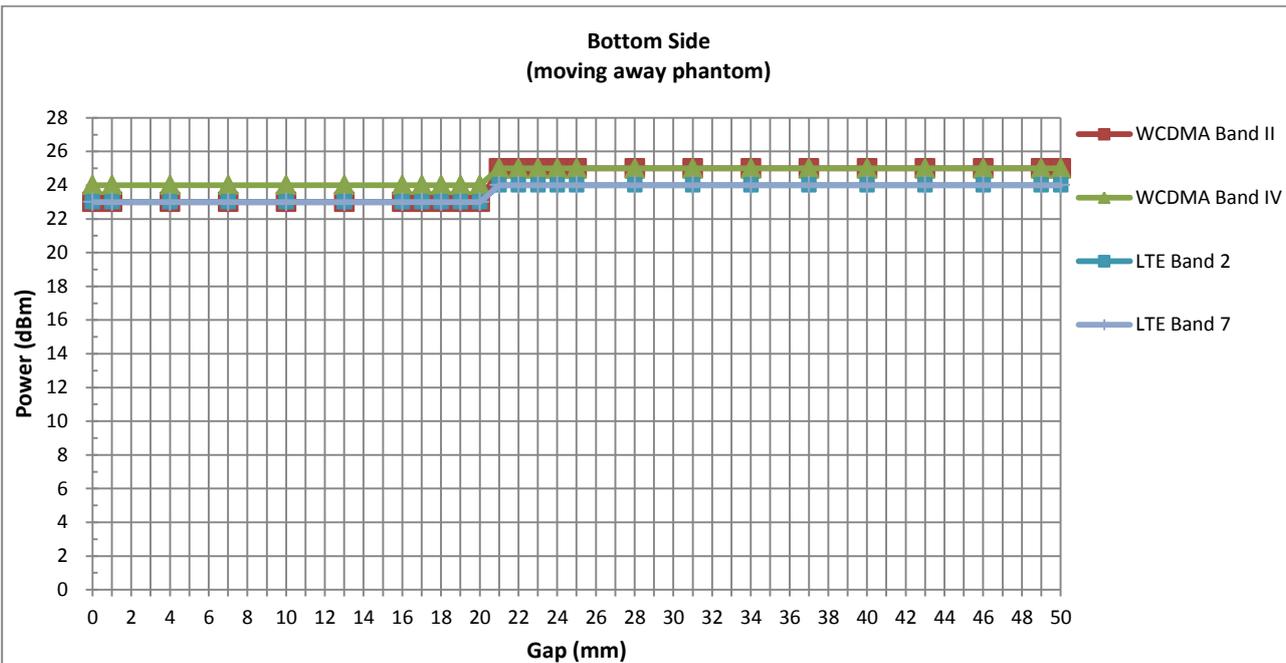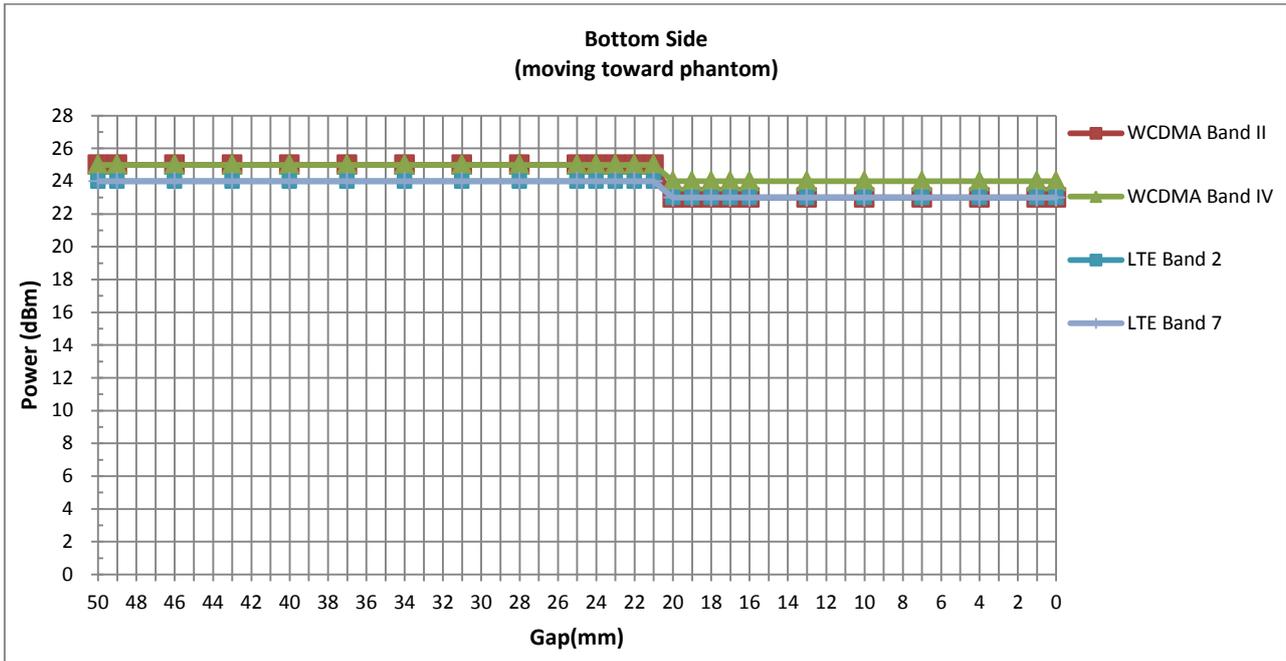

5.2 Tilt angle influences to proximity sensor triggering(Per KDB616217 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with bottom side parallel to the base of the flat phantom for each band.

The EUT was rotated about bottom side for angles up to +/- 45°. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to +/- 45°.

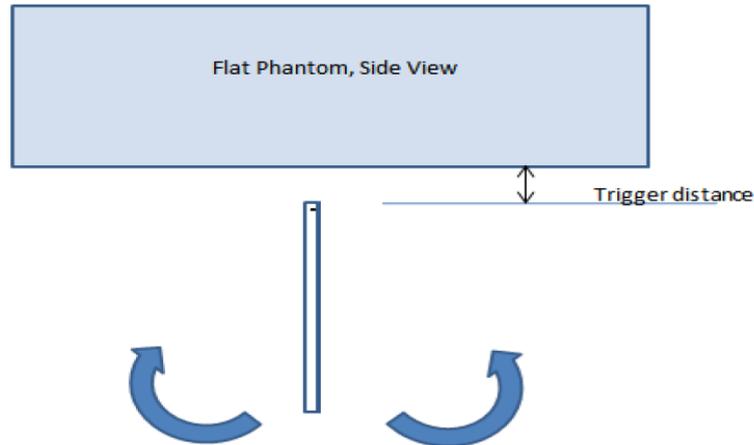

Proximity Sensor Coverage Assesment(Bottom Side)

Table: Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering (Bottom Side)

Main ant Band(MHz)	Minimum trigger distance at which power reduction was maintained over ±45°	Power Reduction Status											
		-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°	
WCDMA Band II	20mm	on	on	on	on	on	on	on	on	on	on	on	on
WCDMA Band IV	20mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band 2	20mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band 7	20mm	on	on	on	on	on	on	on	on	on	on	on	on

Conclusion: As is shown from the validation data, it can be ensured that the proximity sensor can be valid triggered for the DUT tilt coverage exposure condition.



6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Table with 3 columns: Whole-Body, Partial-Body, Hands, Wrists, Feet and Ankles. Values: 0.4, 8.0, 20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Table with 3 columns: Whole-Body, Partial-Body, Hands, Wrists, Feet and Ankles. Values: 0.08, 1.6, 4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

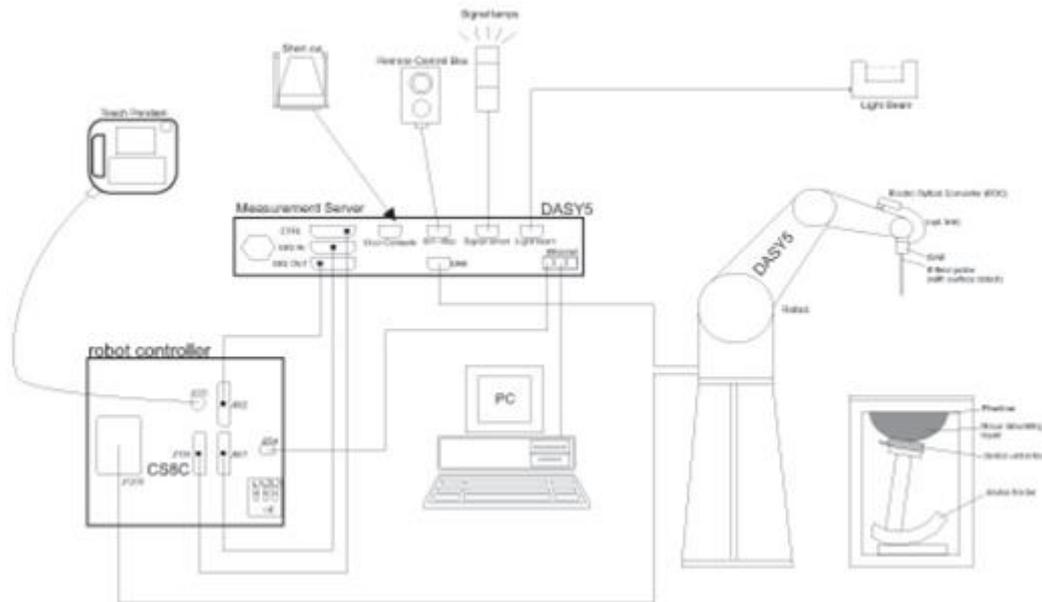

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

8.3 Phantom

<SAM Twin Phantom>


Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm

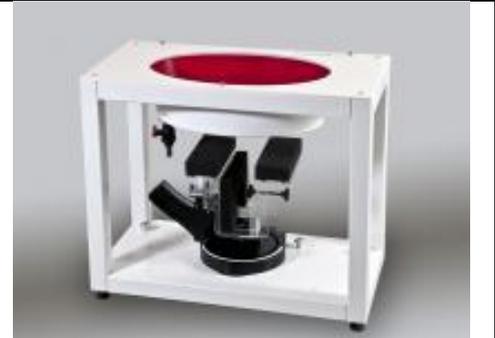

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d151	2018/3/26	2019/3/25
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2018/3/23	2019/3/22
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2018/3/25	2019/3/24
SPEAG	2450MHz System Validation Kit	D2450V2	908	2018/3/22	2019/3/21
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2018/12/7	2019/12/6
SPEAG	5000MHz System Validation Kit	D5GHzV2	1006	2018/9/27	2019/9/26
SPEAG	Data Acquisition Electronics	DAE4	1358	2018/4/19	2019/4/18
SPEAG	Data Acquisition Electronics	DAE4	915	2018/6/20	2019/6/19
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2018/5/31	2019/5/30
SPEAG	Dosimetric E-Field Probe	ES3DV3	3293	2018/10/25	2019/10/24
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1503	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1842	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1542	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201274349	2018/8/16	2019/8/15
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2018/4/17	2019/4/16
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2018/4/17	2019/4/16
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	2018/11/20	2019/11/19
Anritsu	Vector Signal Generator	MG3710A	6201682672	2018/2/6	2019/2/5
Rohde & Schwarz	Power Meter	NRVD	102081	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2018/8/20	2019/8/19
R&S	CBT BLUETOOTH TESTER	CBT	101641	2019/1/14	2020/1/13
EXA	Spectrum Analyzer	FSV7	101631	2019/1/14	2020/1/13
Testo	Hygrometer	608-H1	1241332126	2018/8/21	2019/8/20
FLUKE	DIGITAC THERMOMETER	51II	97240029	2018/8/8	2019/8/7
ARRA	Power Divider	A3200-2	N/A	NA	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
Agilent	Dual Directional Coupler	778D	20500	Note	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note	

Note:

Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR



11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ε _r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
835	Head	22.8	0.915	41.269	0.90	41.50	1.67	-0.56	±5	2019/1/17
1750	Head	22.7	1.346	40.238	1.37	40.10	-1.75	0.34	±5	2019/1/18
1900	Head	22.6	1.428	41.104	1.40	40.00	2.00	2.76	±5	2019/1/18
2450	Head	22.6	1.824	38.12	1.80	39.20	1.33	-2.76	±5	2019/1/27
2600	Head	22.6	2.012	37.658	1.96	39.00	2.65	-3.44	±5	2019/1/18
5250	Head	22.7	4.53	36.367	4.71	35.90	-3.82	1.30	±5	2019/2/7
5600	Head	22.7	4.861	35.896	5.07	35.50	-4.12	1.12	±5	2019/2/7
5750	Head	22.7	5.007	35.703	5.22	35.40	-4.08	0.86	±5	2019/2/7
835	Body	22.7	0.987	54.827	0.97	55.20	1.75	-0.68	±5	2019/1/19
1750	Body	22.7	1.521	54.081	1.49	53.40	2.08	1.28	±5	2019/1/20
1900	Body	22.7	1.534	53.035	1.52	53.30	0.92	-0.50	±5	2019/1/20
2450	Body	22.8	2.027	53.032	1.95	52.70	3.95	0.63	±5	2019/1/18
2600	Body	22.8	2.217	52.913	2.16	52.50	2.64	0.79	±5	2019/1/19
5250	Body	22.7	5.505	49.515	5.36	48.90	2.71	1.26	±5	2019/2/7
5600	Body	22.7	5.974	48.975	5.77	48.50	3.54	0.98	±5	2019/2/7
5750	Body	22.7	6.189	48.732	5.94	48.30	4.19	0.89	±5	2019/2/7

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/1/17	835	Head	250	4d151	3293	915	2.23	9.66	8.92	-7.66
2019/1/18	1750	Head	250	1090	3293	915	8.79	37.40	35.16	-5.99
2019/1/18	1900	Head	250	5d170	3293	915	9.18	39.90	36.72	-7.97
2019/1/27	2450	Head	250	908	3857	1358	12.20	51.80	48.80	-5.79
2019/1/18	2600	Head	250	1061	3293	915	14.30	57.70	57.20	-0.87
2019/2/7	5250	Head	100	1006	3857	1358	7.51	80.70	75.10	-6.94
2019/2/7	5600	Head	100	1006	3857	1358	7.67	83.30	76.70	-7.92
2019/2/7	5750	Head	100	1006	3857	1358	7.65	80.40	76.50	-4.85
2019/1/19	835	Body	250	4d151	3293	915	2.56	9.58	10.24	6.89
2019/1/20	1750	Body	250	1090	3293	915	8.66	37.50	34.64	-7.63
2019/1/20	1900	Body	250	5d170	3293	915	9.51	40.70	38.04	-6.54
2019/1/18	2450	Body	250	908	3857	1358	12.40	50.70	49.60	-2.17
2019/1/19	2600	Body	250	1061	3293	915	13.40	54.20	53.60	-1.11
2019/2/7	5250	Body	100	1006	3857	1358	7.23	78.30	72.30	-7.66
2019/2/7	5600	Body	100	1006	3857	1358	7.40	81.00	74.00	-8.64
2019/2/7	5750	Body	100	1006	3857	1358	7.98	77.40	79.80	3.10

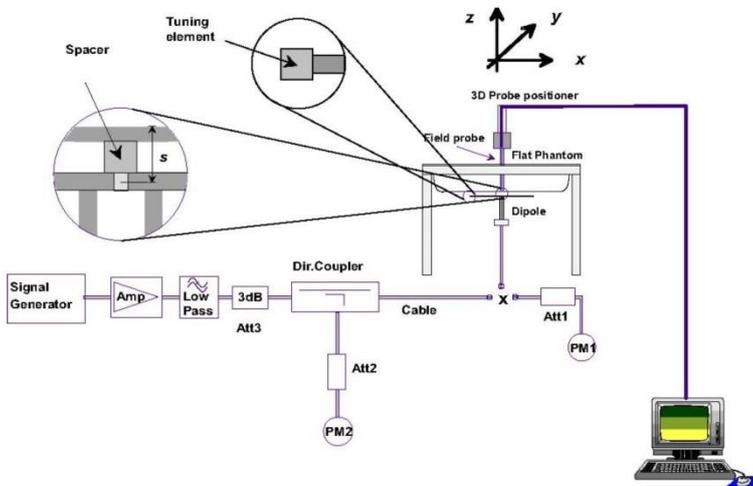


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

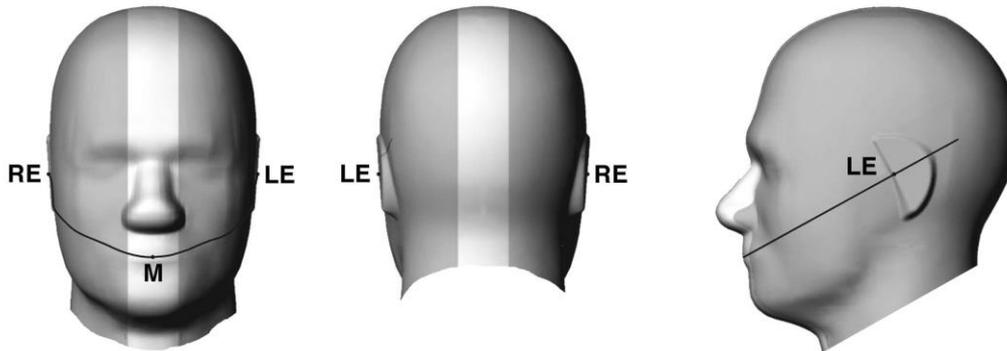


Fig 12.1.1 Front, back, and side views of SAM twin phantom

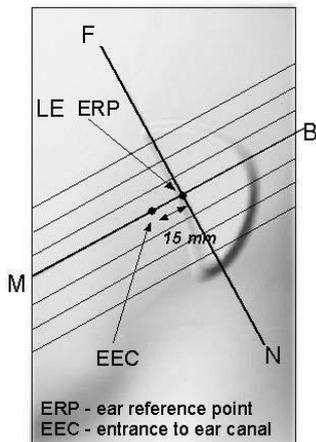


Fig 12.1.2 Close-up side view of phantom showing the ear region.

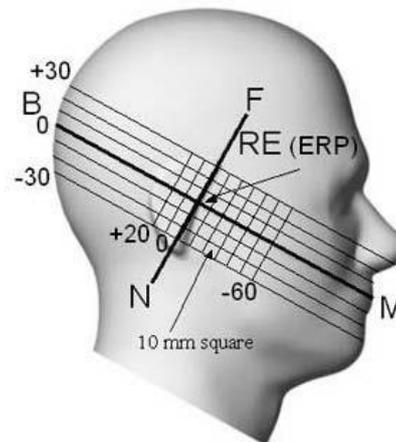


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

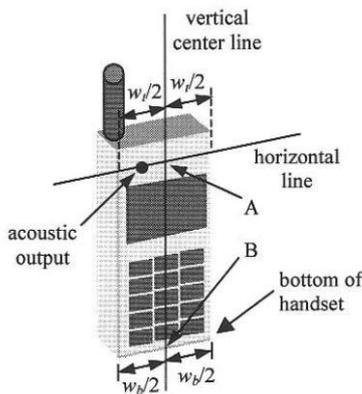


Fig 12.2.1 Handset vertical and horizontal reference lines—"fixed case"

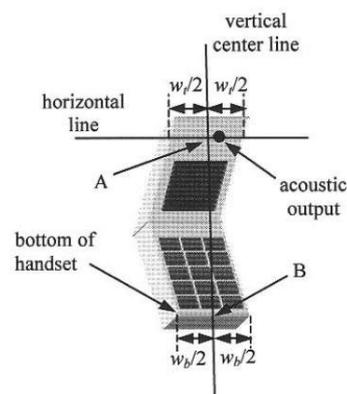


Fig 12.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

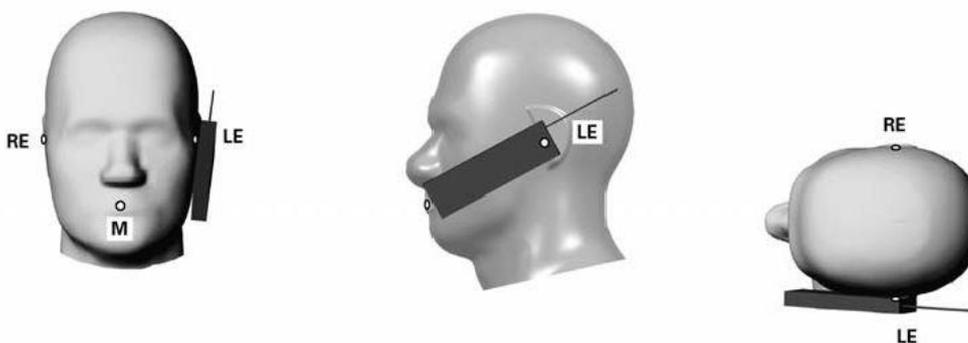


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

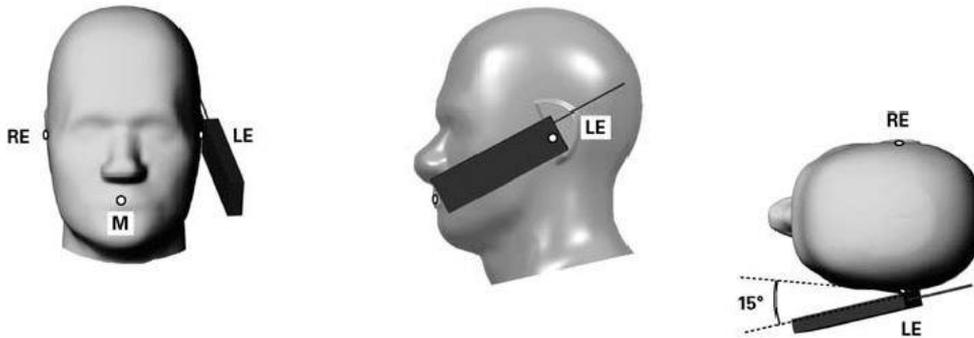


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 12.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

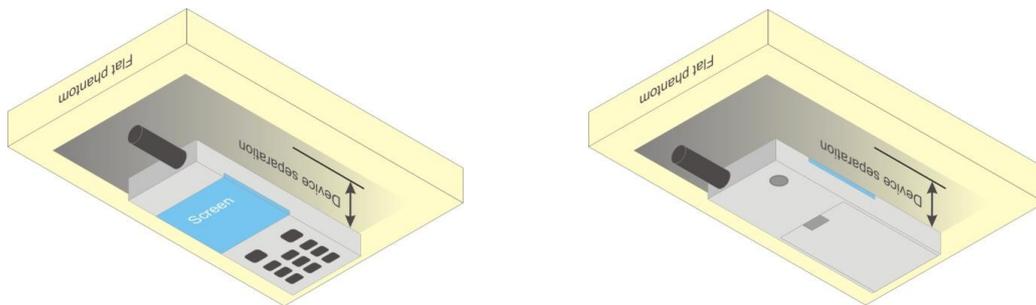


Fig 12.4 Body Worn Position



12.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W \geq 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



13. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

- 1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes.

<Top Antenna--Full Power Mode>

Table with 9 columns: GSM850 Tx Channel, Burst Average Power (dBm) [128, 189, 251], Tune-up Limit (dBm), Frame-Average Power (dBm) [128, 189, 251], and Tune-up Limit (dBm). Rows include GSM, GPRS, and EDGE modes with 1, 2, 3, and 4 Tx slots.

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB



<Bottom Antenna--Full Power Mode>

GSM850 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	33.13	32.99	33.12	34.00	24.13	23.99	24.12	25.00
GPRS 1 Tx slot	33.12	32.98	33.10	34.00	24.12	23.98	24.10	25.00
GPRS 2 Tx slots	30.01	30.11	29.71	31.00	24.01	24.11	23.71	25.00
GPRS 3 Tx slots	28.00	28.18	27.96	29.20	23.74	23.92	23.70	24.94
GPRS 4 Tx slots	26.56	26.84	26.79	28.00	23.56	23.84	23.79	25.00
EDGE 1 Tx slot	27.05	27.10	26.98	28.50	18.05	18.10	17.98	19.50
EDGE 2 Tx slots	24.08	24.10	24.02	25.50	18.08	18.10	18.02	19.50
EDGE 3 Tx slots	22.00	21.99	22.11	23.70	17.74	17.73	17.85	19.44
EDGE 4 Tx slots	21.07	20.93	21.02	22.50	18.07	17.93	18.02	19.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
 The calculated method are shown as below:
 Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
 Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
 Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
 Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Top/Bottom Antenna-- Full Power Mode>

GSM1900 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	30.24	30.10	30.22	31.00	21.24	21.10	21.22	22.00
GPRS 1 Tx slot	30.23	30.09	30.20	31.00	21.23	21.09	21.20	22.00
GPRS 2 Tx slots	27.18	27.20	27.06	28.00	21.18	21.20	21.06	22.00
GPRS 3 Tx slots	25.23	25.05	25.18	26.20	20.97	20.79	20.92	21.94
GPRS 4 Tx slots	23.81	23.94	23.88	25.00	20.81	20.94	20.88	22.00
EDGE 1 Tx slot	26.35	26.22	26.14	27.50	17.35	17.22	17.14	18.50
EDGE 2 Tx slots	23.30	23.21	23.10	24.50	17.30	17.21	17.10	18.50
EDGE 3 Tx slots	21.53	21.38	21.17	22.70	17.27	17.12	16.91	18.44
EDGE 4 Tx slots	20.16	19.88	19.79	21.50	17.16	16.88	16.79	18.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
 The calculated method are shown as below:
 Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
 Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
 Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
 Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Top Antenna--Reduced Power Mode for Receiver On>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)	
	Tx Channel	128	189		251	128	189		251
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8		
GSM 1 Tx slot	28.91	28.86	28.90	29.00	19.91	19.86	19.90	20.00	
GPRS 1 Tx slot	28.90	28.88	28.93	29.00	19.90	19.88	19.93	20.00	
GPRS 2 Tx slots	25.84	25.82	25.72	27.00	19.84	19.82	19.72	21.00	
GPRS 3 Tx slots	24.06	24.07	24.16	25.20	19.80	19.81	19.90	20.94	
GPRS 4 Tx slots	22.79	22.83	22.82	24.00	19.79	19.83	19.82	21.00	
EDGE 1 Tx slot	27.08	26.87	26.89	28.50	18.08	17.87	17.89	19.50	
EDGE 2 Tx slots	24.07	23.93	23.84	25.50	18.07	17.93	17.84	19.50	
EDGE 3 Tx slots	21.74	22.09	22.03	23.70	17.48	17.83	17.77	19.44	
EDGE 4 Tx slots	20.47	20.84	20.90	22.50	17.47	17.84	17.90	19.50	
GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	512	661	810	512		661	810		
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8		
GSM 1 Tx slot	29.95	29.80	29.77	30.50	20.95	20.80	20.77	21.50	
GPRS 1 Tx slot	29.96	29.81	29.79	30.50	20.96	20.81	20.79	21.50	
GPRS 2 Tx slots	26.84	26.68	26.53	27.50	20.84	20.68	20.53	21.50	
GPRS 3 Tx slots	25.08	24.86	24.77	25.70	20.82	20.60	20.51	21.44	
GPRS 4 Tx slots	23.47	23.48	23.40	24.50	20.47	20.48	20.40	21.50	
EDGE 1 Tx slot	26.06	25.78	25.75	27.50	17.06	16.78	16.75	18.50	
EDGE 2 Tx slots	23.04	22.81	22.71	24.50	17.04	16.81	16.71	18.50	
EDGE 3 Tx slots	21.10	20.84	20.82	22.70	16.84	16.58	16.56	18.44	
EDGE 4 Tx slots	19.57	19.42	19.43	21.50	16.57	16.42	16.43	18.50	

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Bottom Antenna--Reduced Power Mode for Hotspot On>

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	Tx Channel	512	661		810	512	661	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.64	29.65	29.75	30.50	20.64	20.65	20.75	21.50
GPRS 1 Tx slot	29.65	29.67	29.76	30.50	20.65	20.67	20.76	21.50
GPRS 2 Tx slots	26.58	26.53	26.59	27.50	20.58	20.53	20.59	21.50
GPRS 3 Tx slots	24.79	24.70	24.75	25.70	20.53	20.44	20.49	21.44
GPRS 4 Tx slots	23.54	23.60	23.49	24.50	20.54	20.60	20.49	21.50
EDGE 1 Tx slot	26.23	26.17	26.20	27.50	17.23	17.17	17.20	18.50
EDGE 2 Tx slots	23.17	23.11	23.14	24.50	17.17	17.11	17.14	18.50
EDGE 3 Tx slots	21.20	21.21	21.31	22.70	16.94	16.95	17.05	18.44
EDGE 4 Tx slots	19.74	19.79	19.82	21.50	16.74	16.79	16.82	18.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

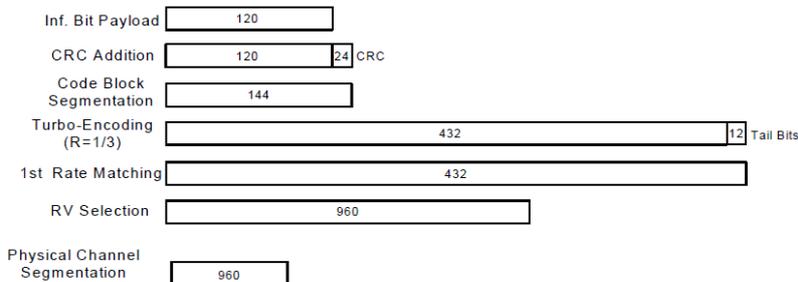


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<Top/Bottom Antenna--Full Power Mode>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	24.06	23.91	24.13	25.00	23.91	23.88	24.04	25.00	23.75	23.93	23.91	25.00
3GPP Rel 99	RMC 12.2Kbps	24.07	23.93	24.15	25.00	23.92	23.90	24.05	25.00	23.76	23.94	23.93	25.00
3GPP Rel 6	HSDPA Subtest-1	23.15	23.05	23.10	25.00	22.89	22.88	22.95	25.00	22.65	22.76	22.78	25.00
3GPP Rel 6	HSDPA Subtest-2	23.21	23.10	23.16	25.00	22.91	22.86	22.91	25.00	22.65	22.23	22.82	25.00
3GPP Rel 6	HSDPA Subtest-3	22.70	22.58	22.66	24.50	22.41	22.41	22.45	24.50	22.22	22.28	22.35	24.50
3GPP Rel 6	HSDPA Subtest-4	22.68	22.57	22.64	24.50	22.42	22.35	22.43	24.50	22.20	21.90	22.38	24.50
3GPP Rel 8	DC-HSDPA Subtest-1	23.02	23.00	22.95	25.00	22.76	22.80	22.86	25.00	22.56	22.65	22.76	25.00
3GPP Rel 8	DC-HSDPA Subtest-2	23.00	22.95	22.94	25.00	22.76	22.81	22.79	25.00	22.50	22.50	22.70	25.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.65	22.45	22.44	24.50	22.35	22.29	22.34	24.50	22.12	22.06	22.20	24.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.60	22.50	22.45	24.50	22.30	22.20	22.29	24.50	22.20	22.00	22.18	24.50
3GPP Rel 6	HSUPA Subtest-1	23.13	23.03	23.12	25.00	22.86	22.87	22.89	25.00	22.69	22.75	22.78	25.00
3GPP Rel 6	HSUPA Subtest-2	21.11	20.94	21.20	23.00	20.88	20.81	20.93	23.00	20.64	20.84	20.79	23.00
3GPP Rel 6	HSUPA Subtest-3	22.16	21.96	22.12	24.00	21.86	21.84	21.91	24.00	21.66	21.80	21.83	24.00
3GPP Rel 6	HSUPA Subtest-4	21.16	20.94	21.16	23.00	20.84	20.81	20.83	23.00	20.81	20.77	20.79	23.00
3GPP Rel 6	HSUPA Subtest-5	23.10	22.90	23.10	25.00	22.90	22.80	22.90	25.00	22.80	22.80	22.80	25.00



<Top Antenna--Reduced Power Mode for Receiver On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	21.20	20.96	21.16	22.00	20.55	20.58	20.72	22.00	19.53	19.66	19.74	20.50
3GPP Rel 99	RMC 12.2Kbps	21.22	20.98	21.25	22.00	20.57	20.59	20.73	22.00	19.54	19.67	19.75	20.50
3GPP Rel 6	HSDPA Subtest-1	20.01	19.85	20.03	22.00	19.35	19.40	19.57	22.00	18.29	18.38	18.46	20.50
3GPP Rel 6	HSDPA Subtest-2	20.07	19.86	20.00	22.00	19.36	19.38	19.53	22.00	18.31	18.43	18.48	20.50
3GPP Rel 6	HSDPA Subtest-3	19.58	19.36	19.57	22.00	18.82	18.91	19.02	22.00	17.81	17.94	17.98	20.50
3GPP Rel 6	HSDPA Subtest-4	19.58	19.38	19.54	22.00	18.87	18.92	19.03	22.00	17.77	17.92	18.02	20.50
3GPP Rel 8	DC-HSDPA Subtest-1	19.98	19.94	19.98	22.00	19.32	19.37	19.29	22.00	18.31	18.40	18.48	20.50
3GPP Rel 8	DC-HSDPA Subtest-2	20.05	20.14	20.12	22.00	19.33	19.39	19.50	22.00	18.46	18.45	18.50	20.50
3GPP Rel 8	DC-HSDPA Subtest-3	19.56	19.48	19.40	22.00	18.79	18.88	18.99	22.00	17.83	17.96	17.95	20.50
3GPP Rel 8	DC-HSDPA Subtest-4	19.62	19.53	19.51	22.00	18.84	18.89	19.00	22.00	17.79	17.94	18.04	20.50
3GPP Rel 6	HSUPA Subtest-1	20.04	19.83	20.01	22.00	19.37	19.45	19.53	22.00	18.33	18.38	18.47	20.50
3GPP Rel 6	HSUPA Subtest-2	18.04	17.81	18.06	22.00	17.39	17.38	17.53	22.00	16.30	16.48	16.44	20.50
3GPP Rel 6	HSUPA Subtest-3	18.99	18.83	19.06	22.00	18.38	18.41	18.55	22.00	17.30	17.41	17.53	20.50
3GPP Rel 6	HSUPA Subtest-4	18.03	17.84	18.05	22.00	17.37	17.41	17.51	22.00	16.31	16.45	16.50	20.50
3GPP Rel 6	HSUPA Subtest-5	20.10	19.90	20.10	22.00	19.40	19.40	19.60	22.00	18.30	18.40	18.40	20.50



<Bottom Antenna--Reduced Power Mode for Hotspot On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	19.60	19.40	19.61	20.50	20.94	20.95	21.07	22.00
3GPP Rel 99	RMC 12.2Kbps	19.61	19.41	19.63	20.50	20.96	20.96	21.10	22.00
3GPP Rel 6	HSDPA Subtest-1	18.61	18.57	18.74	20.50	19.92	19.99	20.11	22.00
3GPP Rel 6	HSDPA Subtest-2	18.65	18.56	18.78	20.50	19.95	19.99	20.10	22.00
3GPP Rel 6	HSDPA Subtest-3	18.17	18.06	18.22	20.50	19.47	19.51	19.59	22.00
3GPP Rel 6	HSDPA Subtest-4	18.18	18.07	18.22	20.50	19.45	19.45	19.58	22.00
3GPP Rel 8	DC-HSDPA Subtest-1	18.59	18.54	18.71	20.50	19.89	19.97	20.07	22.00
3GPP Rel 8	DC-HSDPA Subtest-2	18.63	18.53	18.75	20.50	19.92	19.97	20.06	22.00
3GPP Rel 8	DC-HSDPA Subtest-3	18.15	18.03	18.19	20.50	19.44	19.49	19.55	22.00
3GPP Rel 8	DC-HSDPA Subtest-4	18.16	18.04	18.19	20.50	19.42	19.43	19.54	22.00
3GPP Rel 6	HSUPA Subtest-1	18.62	18.51	18.68	20.50	19.91	19.97	20.05	22.00
3GPP Rel 6	HSUPA Subtest-2	16.59	16.50	16.72	20.50	17.94	17.95	18.04	22.00
3GPP Rel 6	HSUPA Subtest-3	17.61	17.50	17.69	20.50	18.92	18.94	19.03	22.00
3GPP Rel 6	HSUPA Subtest-4	16.63	16.51	16.69	20.50	17.88	17.97	18.04	22.00
3GPP Rel 6	HSUPA Subtest-5	18.60	18.50	18.70	20.50	19.90	19.90	20.10	22.00


<Bottom Antenna--Reduced Power Mode for P-Sensor On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	22.82	22.75	22.96	23.00	22.67	22.70	22.80	24.00
3GPP Rel 99	RMC 12.2Kbps	22.84	22.77	22.98	23.00	22.69	22.72	22.84	24.00
3GPP Rel 6	HSDPA Subtest-1	22.28	22.14	22.22	23.00	21.98	22.01	22.06	24.00
3GPP Rel 6	HSDPA Subtest-2	22.28	22.19	22.19	23.00	22.00	22.02	22.03	24.00
3GPP Rel 6	HSDPA Subtest-3	21.80	21.77	21.72	23.00	21.44	21.51	21.58	24.00
3GPP Rel 6	HSDPA Subtest-4	21.78	21.71	21.70	23.00	21.47	21.51	21.53	24.00
3GPP Rel 8	DC-HSDPA Subtest-1	22.25	22.12	22.22	23.00	21.95	21.99	22.03	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.26	22.17	22.19	23.00	21.97	22.00	22.00	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.77	21.75	21.72	23.00	21.41	21.49	21.55	24.00
3GPP Rel 8	DC-HSDPA Subtest-4	21.74	21.69	21.70	23.00	21.44	21.49	21.50	24.00
3GPP Rel 6	HSUPA Subtest-1	22.27	22.11	22.19	23.00	21.97	21.97	22.01	24.00
3GPP Rel 6	HSUPA Subtest-2	20.24	20.06	20.19	23.00	19.92	19.95	20.09	23.00
3GPP Rel 6	HSUPA Subtest-3	21.24	21.07	21.23	23.00	20.97	20.97	21.06	24.00
3GPP Rel 6	HSUPA Subtest-4	20.22	20.04	20.18	23.00	20.00	19.98	19.98	23.00
3GPP Rel 6	HSUPA Subtest-5	22.30	22.10	22.20	23.00	22.00	21.90	22.00	24.00


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. According to 2017 TCB workshop, for 64QAM and 16QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

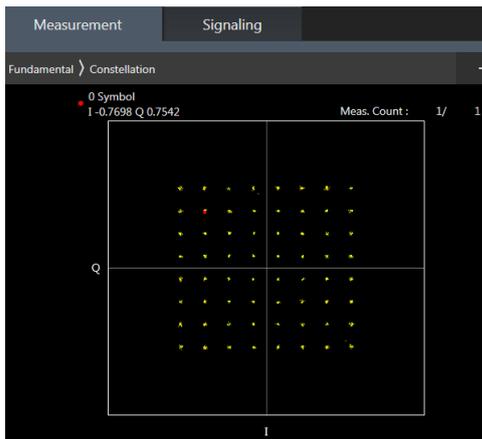

64QAM

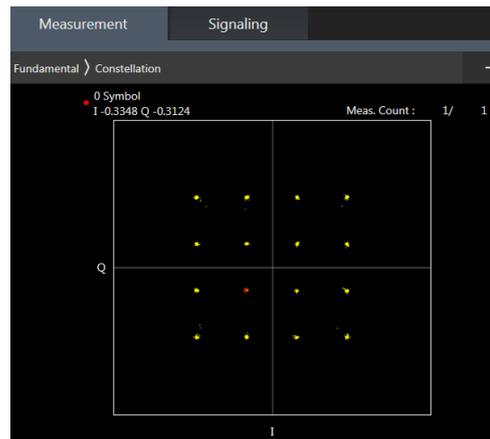

16QAM



<Top/Bottom Antenna-- Full Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.10	23.16	23.01	24	0
20	QPSK	1	49	23.02	23.08	23.00		
20	QPSK	1	99	23.04	22.99	22.86		
20	QPSK	50	0	22.23	22.28	22.03	23	1
20	QPSK	50	24	22.22	22.17	22.03		
20	QPSK	50	50	22.13	22.06	21.96		
20	QPSK	100	0	22.19	22.24	21.99	23	1
20	16QAM	1	0	22.38	22.41	22.23		
20	16QAM	1	49	22.28	22.37	22.28		
20	16QAM	1	99	22.32	22.30	22.14	22	2
20	16QAM	50	0	21.31	21.26	21.10		
20	16QAM	50	24	21.31	21.26	21.09		
20	16QAM	50	50	21.20	21.17	21.03	22	2
20	16QAM	100	0	21.25	21.20	21.05		
20	64QAM	1	0	21.29	21.33	21.15		
20	64QAM	1	49	21.21	21.27	21.20	22	2
20	64QAM	1	99	21.19	21.19	21.03		
20	64QAM	50	0	20.29	20.24	20.09		
20	64QAM	50	24	20.28	20.23	20.07	21	3
20	64QAM	50	50	20.20	20.16	20.03		
20	64QAM	100	0	20.26	20.20	20.06		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.96	23.11	23.11	24	0
15	QPSK	1	37	23.04	23.08	22.93		
15	QPSK	1	74	22.84	22.99	22.86		
15	QPSK	36	0	22.13	22.14	22.01	23	1
15	QPSK	36	20	22.13	22.17	22.00		
15	QPSK	36	39	21.95	22.06	21.95		
15	QPSK	75	0	22.08	22.10	21.97	23	1
15	16QAM	1	0	22.26	22.35	22.30		
15	16QAM	1	37	22.29	22.33	22.20		
15	16QAM	1	74	22.09	22.26	22.14	22	2
15	16QAM	36	0	21.19	21.20	21.02		
15	16QAM	36	20	21.19	21.23	21.07		
15	16QAM	36	39	21.02	21.15	20.99	22	2
15	16QAM	75	0	21.16	21.19	21.06		
15	64QAM	1	0	21.16	21.26	21.25		
15	64QAM	1	37	21.23	21.26	21.13	22	2
15	64QAM	1	74	20.99	21.19	21.02		
15	64QAM	36	0	20.20	20.20	20.01		
15	64QAM	36	20	20.17	20.23	20.07	21	3
15	64QAM	36	39	20.00	20.14	19.99		
15	64QAM	75	0	20.17	20.18	20.05		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.08	23.13	23.10	24	0
10	QPSK	1	25	23.08	23.12	22.98		
10	QPSK	1	49	22.97	23.09	22.88		
10	QPSK	25	0	22.13	22.16	22.00	23	1
10	QPSK	25	12	22.14	22.13	21.97		
10	QPSK	25	25	22.08	22.09	21.97		
10	QPSK	50	0	22.12	22.15	21.99	23	1
10	16QAM	1	0	22.34	22.49	22.32		
10	16QAM	1	25	22.29	22.39	22.26		
10	16QAM	1	49	22.20	22.38	22.14	22	2
10	16QAM	25	0	21.20	21.22	21.06		
10	16QAM	25	12	21.19	21.22	21.04		
10	16QAM	25	25	21.13	21.16	20.98	22	2
10	16QAM	50	0	21.19	21.21	21.05		
10	64QAM	1	0	21.25	21.39	21.26		
10	64QAM	1	25	21.23	21.29	21.15	22	2
10	64QAM	1	49	21.10	21.28	21.06		
10	64QAM	25	0	20.22	20.21	20.06		
10	64QAM	25	12	20.19	20.21	20.05	21	3
10	64QAM	25	25	20.13	20.17	19.99		
10	64QAM	50	0	20.17	20.21	20.02		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.06	23.09	22.88	24	0
5	QPSK	1	12	23.07	23.10	22.91		
5	QPSK	1	24	23.09	23.04	22.87		
5	QPSK	12	0	22.11	22.11	21.93	23	1
5	QPSK	12	7	22.09	22.13	21.96		
5	QPSK	12	13	22.15	22.07	21.91		
5	QPSK	25	0	22.16	22.09	21.93	23	1
5	16QAM	1	0	22.27	22.31	22.16		
5	16QAM	1	12	22.32	22.36	22.21		
5	16QAM	1	24	22.34	22.27	22.08	22	2
5	16QAM	12	0	21.16	21.18	20.78		
5	16QAM	12	7	21.15	21.19	21.04		
5	16QAM	12	13	21.23	21.15	20.96	22	2
5	16QAM	25	0	21.22	21.15	21.00		
5	64QAM	1	0	21.17	21.25	21.11		
5	64QAM	1	12	21.23	21.25	21.09	22	2
5	64QAM	1	24	21.27	21.19	21.04		
5	64QAM	12	0	20.15	20.16	20.00		
5	64QAM	12	7	20.15	20.15	20.01	21	3
5	64QAM	12	13	20.18	20.14	19.94		
5	64QAM	25	0	20.21	20.15	20.00		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.64	23.08	22.85	24	0
3	QPSK	1	8	22.55	23.07	22.87		
3	QPSK	1	14	22.98	23.04	22.85		
3	QPSK	8	0	21.98	22.11	21.89	23	1
3	QPSK	8	4	22.03	22.11	21.94		
3	QPSK	8	7	21.96	22.07	21.89		
3	QPSK	15	0	21.97	22.06	21.90	23	1
3	16QAM	1	0	22.15	22.32	22.08		
3	16QAM	1	8	22.19	22.35	22.17		
3	16QAM	1	14	22.12	22.27	22.13	22	2
3	16QAM	8	0	21.05	21.19	20.97		
3	16QAM	8	4	21.11	21.20	21.04		
3	16QAM	8	7	21.04	21.19	20.98	22	2
3	16QAM	15	0	21.07	21.14	20.97		
3	64QAM	1	0	21.08	21.23	21.02		
3	64QAM	1	8	21.10	21.25	21.08	22	2
3	64QAM	1	14	21.03	21.18	21.01		
3	64QAM	8	0	20.03	20.14	19.93		
3	64QAM	8	4	20.06	20.17	20.01	21	3
3	64QAM	8	7	20.00	20.12	19.94		
3	64QAM	15	0	20.01	20.10	19.95		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.98	23.01	22.79	24	0
1.4	QPSK	1	3	23.06	23.07	22.87		
1.4	QPSK	1	5	22.97	23.00	22.78		
1.4	QPSK	3	0	23.01	23.05	22.83		
1.4	QPSK	3	1	23.08	23.09	22.90		
1.4	QPSK	3	3	23.02	23.02	22.84		
1.4	QPSK	6	0	22.05	22.01	21.85	23	1
1.4	16QAM	1	0	22.22	22.26	22.05	23	1
1.4	16QAM	1	3	22.30	22.31	22.11		
1.4	16QAM	1	5	22.19	22.23	22.08		
1.4	16QAM	3	0	22.05	22.09	21.90		
1.4	16QAM	3	1	22.11	22.14	21.92		
1.4	16QAM	3	3	22.01	22.10	21.86		
1.4	16QAM	6	0	21.15	21.15	20.97	22	2
1.4	64QAM	1	0	21.10	21.17	20.97	22	2
1.4	64QAM	1	3	21.20	21.21	21.05		
1.4	64QAM	1	5	21.13	21.18	20.98		
1.4	64QAM	3	0	21.07	21.08	20.95		
1.4	64QAM	3	1	21.16	21.19	20.96		
1.4	64QAM	3	3	21.06	21.11	20.92		
1.4	64QAM	6	0	20.10	20.09	19.89	21	3



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.41	22.65	22.60	24	0
20	QPSK	1	49	22.34	22.57	22.63		
20	QPSK	1	99	22.31	22.49	22.52		
20	QPSK	50	0	21.53	21.68	21.62	23	1
20	QPSK	50	24	21.47	21.68	21.59		
20	QPSK	50	50	21.43	21.61	21.52		
20	QPSK	100	0	21.47	21.66	21.56	23	1
20	16QAM	1	0	21.68	21.86	21.90		
20	16QAM	1	49	21.68	21.79	22.03		
20	16QAM	1	99	21.60	21.77	21.85	22	2
20	16QAM	50	0	20.59	20.75	20.69		
20	16QAM	50	24	20.59	20.73	20.68		
20	16QAM	50	50	20.47	20.67	20.59	22	2
20	16QAM	100	0	20.51	20.70	20.63		
20	64QAM	1	0	20.68	20.88	20.90		
20	64QAM	1	49	20.65	20.83	21.03	22	2
20	64QAM	1	99	20.61	20.80	20.84		
20	64QAM	50	0	19.70	19.85	19.80		
20	64QAM	50	24	19.69	19.83	19.78	21	3
20	64QAM	50	50	19.59	19.77	19.71		
20	64QAM	100	0	19.64	19.84	19.77		



Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.51	22.54	22.55	24	0
15	QPSK	1	37	22.57	22.59	22.51		
15	QPSK	1	74	22.45	22.56	22.58		
15	QPSK	36	0	21.86	21.95	21.90	23	1
15	QPSK	36	20	21.81	21.94	21.83		
15	QPSK	36	39	21.75	21.86	21.75		
15	QPSK	75	0	21.80	21.95	21.82		
15	16QAM	1	0	21.99	22.12	22.14	23	1
15	16QAM	1	37	22.00	22.08	22.16		
15	16QAM	1	74	22.01	22.07	22.10		
15	16QAM	36	0	20.91	21.02	20.95	22	2
15	16QAM	36	20	20.91	21.00	20.91		
15	16QAM	36	39	20.79	20.92	20.85		
15	16QAM	75	0	20.86	21.01	20.88		
15	64QAM	1	0	20.72	20.85	20.96	22	2
15	64QAM	1	37	20.70	20.84	20.92		
15	64QAM	1	74	20.70	20.83	20.92		
15	64QAM	36	0	19.65	19.80	19.79	21	3
15	64QAM	36	20	19.68	19.80	19.80		
15	64QAM	36	39	19.58	19.76	19.75		
15	64QAM	75	0	19.60	19.81	19.77		
15	64QAM	75	0	19.60	19.81	19.77		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.38	22.53	22.61	24	0
10	QPSK	1	25	22.35	22.59	22.58		
10	QPSK	1	49	22.27	22.52	22.58		
10	QPSK	25	0	21.46	21.68	21.57	23	1
10	QPSK	25	12	21.47	21.67	21.60		
10	QPSK	25	25	21.34	21.63	21.50		
10	QPSK	50	0	21.48	21.65	21.53		
10	16QAM	1	0	21.67	21.75	21.98	23	1
10	16QAM	1	25	21.64	21.79	21.84		
10	16QAM	1	49	21.57	21.77	21.85		
10	16QAM	25	0	20.58	20.71	20.70	22	2
10	16QAM	25	12	20.57	20.71	20.66		
10	16QAM	25	25	20.41	20.65	20.63		
10	16QAM	50	0	20.54	20.70	20.67		
10	64QAM	1	0	20.72	20.81	21.01	22	2
10	64QAM	1	25	20.71	20.85	20.87		
10	64QAM	1	49	20.65	20.84	20.87		
10	64QAM	25	0	19.65	19.82	19.80	21	3
10	64QAM	25	12	19.67	19.83	19.76		
10	64QAM	25	25	19.53	19.79	19.74		
10	64QAM	50	0	19.66	19.81	19.77		
10	64QAM	50	0	19.66	19.81	19.77		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.32	22.57	22.54	24	0
5	QPSK	1	12	22.45	22.60	22.62		
5	QPSK	1	24	22.29	22.54	22.56		
5	QPSK	12	0	21.46	21.61	21.56	23	1
5	QPSK	12	7	21.46	21.64	21.71		
5	QPSK	12	13	21.46	21.60	21.64		
5	QPSK	25	0	21.44	21.62	21.53	23	1
5	16QAM	1	0	21.60	21.81	21.89		
5	16QAM	1	12	21.73	21.84	21.98		
5	16QAM	1	24	21.59	21.79	21.88	22	2
5	16QAM	12	0	20.52	20.66	20.66		
5	16QAM	12	7	20.56	20.69	20.77		
5	16QAM	12	13	20.54	20.66	20.76	22	2
5	16QAM	25	0	20.51	20.67	20.63		
5	64QAM	1	0	20.63	20.87	20.87		
5	64QAM	1	12	20.75	20.84	20.99	22	2
5	64QAM	1	24	20.57	20.82	20.91		
5	64QAM	12	0	19.62	19.75	19.77		
5	64QAM	12	7	19.66	19.79	19.87	21	3
5	64QAM	12	13	19.65	19.74	19.86		
5	64QAM	25	0	19.62	19.79	19.75		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.31	22.57	22.59	24	0
3	QPSK	1	8	22.41	22.56	22.62		
3	QPSK	1	14	22.40	22.53	22.55		
3	QPSK	8	0	21.47	21.60	21.64	23	1
3	QPSK	8	4	21.44	21.63	21.67		
3	QPSK	8	7	21.41	21.60	21.65		
3	QPSK	15	0	21.43	21.61	21.65	23	1
3	16QAM	1	0	21.61	21.79	21.95		
3	16QAM	1	8	21.73	21.82	21.91		
3	16QAM	1	14	21.67	21.79	21.84	22	2
3	16QAM	8	0	20.55	20.65	20.78		
3	16QAM	8	4	20.59	20.72	20.81		
3	16QAM	8	7	20.54	20.67	20.73	22	2
3	16QAM	15	0	20.51	20.68	20.75		
3	64QAM	1	0	20.62	20.83	20.98		
3	64QAM	1	8	20.74	20.87	20.96	22	2
3	64QAM	1	14	20.71	20.82	20.91		
3	64QAM	8	0	19.64	19.76	19.85		
3	64QAM	8	4	19.68	19.77	19.86	21	3
3	64QAM	8	7	19.62	19.75	19.83		
3	64QAM	15	0	19.62	19.77	19.85		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.27	22.51	22.54	24	0
1.4	QPSK	1	3	22.35	22.58	22.61		
1.4	QPSK	1	5	22.24	22.52	22.52		
1.4	QPSK	3	0	22.29	22.55	22.59		
1.4	QPSK	3	1	22.33	22.61	22.62		
1.4	QPSK	3	3	22.28	22.54	22.57		
1.4	QPSK	6	0	21.28	21.57	21.59	23	1
1.4	16QAM	1	0	21.53	21.76	21.85	23	1
1.4	16QAM	1	3	21.60	21.78	21.96		
1.4	16QAM	1	5	21.53	21.72	21.83		
1.4	16QAM	3	0	21.30	21.59	21.65		
1.4	16QAM	3	1	21.38	21.64	21.69		
1.4	16QAM	3	3	21.32	21.55	21.62		
1.4	16QAM	6	0	20.42	20.67	20.72	22	2
1.4	64QAM	1	0	20.51	20.72	20.86	22	2
1.4	64QAM	1	3	20.59	20.81	20.95		
1.4	64QAM	1	5	20.50	20.76	20.85		
1.4	64QAM	3	0	20.47	20.75	20.83		
1.4	64QAM	3	1	20.55	20.77	20.85		
1.4	64QAM	3	3	20.47	20.75	20.80		
1.4	64QAM	6	0	19.46	19.74	19.80	21	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.41	22.59	22.52	24	0
10	QPSK	1	25	22.42	22.54	22.58		
10	QPSK	1	49	22.31	22.46	22.50		
10	QPSK	25	0	21.57	21.58	21.55	23	1
10	QPSK	25	12	21.53	21.57	21.50		
10	QPSK	25	25	21.49	21.55	21.48		
10	QPSK	50	0	21.54	21.58	21.52	23	1
10	16QAM	1	0	21.68	21.96	21.87		
10	16QAM	1	25	21.73	21.92	21.94		
10	16QAM	1	49	21.71	21.81	21.91	22	2
10	16QAM	25	0	20.62	20.70	20.61		
10	16QAM	25	12	20.67	20.68	20.62		
10	16QAM	25	25	20.60	20.67	20.55	22	2
10	16QAM	50	0	20.61	20.69	20.59		
10	64QAM	1	0	20.72	20.96	20.89		
10	64QAM	1	25	20.74	20.94	20.92	21	3
10	64QAM	1	49	20.73	20.86	20.92		
10	64QAM	25	0	19.78	19.83	19.72		
10	64QAM	25	12	19.75	19.80	19.76	21	3
10	64QAM	25	25	19.74	19.78	19.68		
10	64QAM	50	0	19.73	19.79	19.70		



Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.39	22.45	22.54	24	0
5	QPSK	1	12	22.50	22.53	22.43		
5	QPSK	1	24	22.36	22.50	22.49		
5	QPSK	12	0	21.58	21.58	21.50	23	1
5	QPSK	12	7	21.59	21.59	21.50		
5	QPSK	12	13	21.57	21.57	21.45		
5	QPSK	25	0	21.52	21.54	21.45	23	1
5	16QAM	1	0	21.71	21.82	21.88		
5	16QAM	1	12	21.81	21.94	21.81		
5	16QAM	1	24	21.77	21.87	21.87	22	2
5	16QAM	12	0	20.63	20.70	20.59		
5	16QAM	12	7	20.65	20.72	20.60		
5	16QAM	12	13	20.63	20.70	20.58	22	2
5	16QAM	25	0	20.63	20.66	20.55		
5	64QAM	1	0	20.80	20.85	20.94		
5	64QAM	1	12	20.85	20.95	20.85	22	2
5	64QAM	1	24	20.76	20.89	20.91		
5	64QAM	12	0	19.74	19.82	19.67		
5	64QAM	12	7	19.76	19.83	19.70	21	3
5	64QAM	12	13	19.74	19.78	19.70		
5	64QAM	25	0	19.75	19.77	19.68		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.40	22.54	22.42	24	0
3	QPSK	1	8	22.48	22.52	22.50		
3	QPSK	1	14	22.48	22.48	22.48		
3	QPSK	8	0	21.50	21.53	21.46	23	1
3	QPSK	8	4	21.54	21.57	21.48		
3	QPSK	8	7	21.50	21.51	21.52		
3	QPSK	15	0	21.54	21.55	21.43	23	1
3	16QAM	1	0	21.72	21.92	21.81		
3	16QAM	1	8	21.79	21.88	21.92		
3	16QAM	1	14	21.78	21.90	21.88	22	2
3	16QAM	8	0	20.66	20.69	20.61		
3	16QAM	8	4	20.68	20.72	20.64		
3	16QAM	8	7	20.63	20.67	20.71	22	2
3	16QAM	15	0	20.60	20.68	20.54		
3	64QAM	1	0	20.72	20.90	20.80		
3	64QAM	1	8	20.79	20.90	20.92	22	2
3	64QAM	1	14	20.91	20.93	20.92		
3	64QAM	8	0	19.75	19.81	19.72		
3	64QAM	8	4	19.76	19.81	19.76	21	3
3	64QAM	8	7	19.74	19.75	19.80		
3	64QAM	15	0	19.73	19.75	19.65		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.34	22.44	22.42	24	0
1.4	QPSK	1	3	22.37	22.53	22.51		
1.4	QPSK	1	5	22.43	22.43	22.40		
1.4	QPSK	3	0	22.36	22.47	22.48		
1.4	QPSK	3	1	22.39	22.50	22.50		
1.4	QPSK	3	3	22.45	22.48	22.47		
1.4	QPSK	6	0	21.47	21.46	21.47	23	1
1.4	16QAM	1	0	21.61	21.82	21.79	23	1
1.4	16QAM	1	3	21.70	21.89	21.87		
1.4	16QAM	1	5	21.70	21.85	21.79		
1.4	16QAM	3	0	21.43	21.58	21.59		
1.4	16QAM	3	1	21.48	21.66	21.61		
1.4	16QAM	3	3	21.53	21.58	21.59		
1.4	16QAM	6	0	20.61	20.64	20.63	22	2
1.4	64QAM	1	0	20.68	20.85	20.82	22	2
1.4	64QAM	1	3	20.72	20.93	20.87		
1.4	64QAM	1	5	20.77	20.87	20.79		
1.4	64QAM	3	0	20.60	20.77	20.73		
1.4	64QAM	3	1	20.64	20.83	20.76		
1.4	64QAM	3	3	20.68	20.77	20.73		
1.4	64QAM	6	0	19.68	19.68	19.69	21	3



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.19	23.42	23.22	24	0
20	QPSK	1	49	23.27	23.19	23.14		
20	QPSK	1	99	23.22	23.24	23.27		
20	QPSK	50	0	22.33	22.42	22.24	23	1
20	QPSK	50	24	22.35	22.26	22.23		
20	QPSK	50	50	22.35	22.24	22.26		
20	16QAM	1	0	22.48	22.60	22.49	23	1
20	16QAM	1	49	22.55	22.68	22.68		
20	16QAM	1	99	22.67	22.59	22.64		
20	16QAM	50	0	21.44	21.37	21.39	22	2
20	16QAM	50	24	21.46	21.39	21.38		
20	16QAM	50	50	21.47	21.41	21.44		
20	16QAM	100	0	21.45	21.44	21.42		
20	64QAM	1	0	21.35	21.48	21.41	22	2
20	64QAM	1	49	21.48	21.55	21.59		
20	64QAM	1	99	21.60	21.51	21.48		
20	64QAM	50	0	20.42	20.34	20.35	21	3
20	64QAM	50	24	20.48	20.40	20.38		
20	64QAM	50	50	20.44	20.36	20.38		
20	64QAM	100	0	20.44	20.39	20.43		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	23.20	23.22	23.30	24	0
15	QPSK	1	37	23.28	23.22	23.32		
15	QPSK	1	74	23.27	23.28	23.30		
15	QPSK	36	0	22.31	22.25	22.34	23	1
15	QPSK	36	20	22.37	22.27	22.27		
15	QPSK	36	39	22.34	22.26	22.27		
15	QPSK	75	0	22.34	22.28	22.24		
15	16QAM	1	0	22.49	22.67	22.63	23	1
15	16QAM	1	37	22.53	22.66	22.73		
15	16QAM	1	74	22.63	22.76	22.62		
15	16QAM	36	0	21.45	21.38	21.53	22	2
15	16QAM	36	20	21.50	21.48	21.41		
15	16QAM	36	39	21.46	21.45	21.45		
15	16QAM	75	0	21.46	21.42	21.38		
15	64QAM	1	0	21.38	21.47	21.53	22	2
15	64QAM	1	37	21.43	21.49	21.59		
15	64QAM	1	74	21.52	21.68	21.52		
15	64QAM	36	0	20.44	20.36	20.52	21	3
15	64QAM	36	20	20.49	20.43	20.40		
15	64QAM	36	39	20.45	20.47	20.42		
15	64QAM	75	0	20.47	20.38	20.40		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	23.18	23.16	23.23	24	0
10	QPSK	1	25	23.17	23.18	23.16		
10	QPSK	1	49	23.24	23.30	23.21		
10	QPSK	25	0	22.16	22.17	22.17	23	1
10	QPSK	25	12	22.30	22.20	22.20		
10	QPSK	25	25	22.34	22.18	22.18		
10	QPSK	50	0	22.32	22.18	22.17		
10	16QAM	1	0	22.46	22.58	22.61	23	1
10	16QAM	1	25	22.45	22.58	22.53		
10	16QAM	1	49	22.55	22.73	22.50		
10	16QAM	25	0	21.29	21.32	21.28	22	2
10	16QAM	25	12	21.45	21.37	21.33		
10	16QAM	25	25	21.43	21.38	21.35		
10	16QAM	50	0	21.44	21.34	21.32		
10	64QAM	1	0	21.35	21.44	21.49	22	2
10	64QAM	1	25	21.34	21.49	21.41		
10	64QAM	1	49	21.47	21.60	21.43		
10	64QAM	25	0	20.30	20.30	20.28	21	3
10	64QAM	25	12	20.42	20.34	20.32		
10	64QAM	25	25	20.42	20.36	20.34		
10	64QAM	50	0	20.42	20.34	20.29		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	23.14	23.18	23.11	24	0
5	QPSK	1	12	23.17	23.13	23.12		
5	QPSK	1	24	23.16	23.23	23.15		
5	QPSK	12	0	22.19	22.18	22.14	23	1
5	QPSK	12	7	22.23	22.23	22.20		
5	QPSK	12	13	22.18	22.21	22.19		
5	QPSK	25	0	22.19	22.18	22.14		
5	16QAM	1	0	22.45	22.52	22.49	23	1
5	16QAM	1	12	22.44	22.62	22.51		
5	16QAM	1	24	22.45	22.58	22.45		
5	16QAM	12	0	21.32	21.32	21.27	22	2
5	16QAM	12	7	21.36	21.36	21.36		
5	16QAM	12	13	21.35	21.39	21.31		
5	16QAM	25	0	21.33	21.31	21.27		
5	64QAM	1	0	21.35	21.45	21.38	22	2
5	64QAM	1	12	21.35	21.42	21.41		
5	64QAM	1	24	21.35	21.54	21.34		
5	64QAM	12	0	20.32	20.30	20.27	21	3
5	64QAM	12	7	20.35	20.35	20.32		
5	64QAM	12	13	20.32	20.39	20.33		
5	64QAM	25	0	20.32	20.32	20.29		



<Top Antenna--Reduced Power Mode for Receiver On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	20.89	20.89	20.75	21.5	0
20	QPSK	1	49	20.83	20.82	20.80		
20	QPSK	1	99	20.79	20.77	20.64		
20	QPSK	50	0	20.97	21.01	20.78	21.5	0
20	QPSK	50	24	20.99	20.90	20.79		
20	QPSK	50	50	20.89	20.81	20.73		
20	QPSK	100	0	20.97	21.00	20.78	21.5	0
20	16QAM	1	0	21.26	21.16	21.12		
20	16QAM	1	49	21.11	21.12	21.11		
20	16QAM	1	99	21.11	21.13	20.95	21.5	0
20	16QAM	50	0	21.11	21.00	20.88		
20	16QAM	50	24	21.08	20.99	20.88		
20	16QAM	50	50	20.98	20.91	20.81	21.5	0
20	16QAM	100	0	21.05	20.96	20.83		
20	64QAM	1	0	21.14	21.09	21.01		
20	64QAM	1	49	21.00	21.06	21.04	21.5	0
20	64QAM	1	99	21.01	20.99	20.85		
20	64QAM	50	0	20.10	19.98	19.86		
20	64QAM	50	24	20.08	19.98	19.86	21	0.5
20	64QAM	50	50	19.96	19.89	19.81		
20	64QAM	100	0	20.05	19.97	19.84		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	20.75	20.86	20.86	21.5	0
15	QPSK	1	37	20.82	20.81	20.73		
15	QPSK	1	74	20.60	20.72	20.66		
15	QPSK	36	0	20.87	20.91	20.76	21.5	0
15	QPSK	36	20	20.89	20.90	20.79		
15	QPSK	36	39	20.73	20.85	20.71		
15	QPSK	75	0	20.83	20.86	20.78	21.5	0
15	16QAM	1	0	21.09	21.13	21.13		
15	16QAM	1	37	21.12	21.15	21.01		
15	16QAM	1	74	20.89	21.06	20.97	21.5	0
15	16QAM	36	0	20.95	20.94	20.85		
15	16QAM	36	20	20.98	20.99	20.88		
15	16QAM	36	39	20.77	20.92	20.82	21.5	0
15	16QAM	75	0	20.92	20.93	20.82		
15	64QAM	1	0	21.00	21.07	21.04		
15	64QAM	1	37	21.03	21.01	20.91	21.5	0
15	64QAM	1	74	20.78	20.93	20.86		
15	64QAM	36	0	19.93	19.93	19.84		
15	64QAM	36	20	19.96	19.97	19.87	21	0.5
15	64QAM	36	39	19.76	19.93	19.82		
15	64QAM	75	0	19.92	19.94	19.81		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	20.87	20.94	20.86	21.5	0
10	QPSK	1	25	20.80	20.84	20.71		
10	QPSK	1	49	20.72	20.84	20.65		
10	QPSK	25	0	20.88	20.90	20.77	21.5	0
10	QPSK	25	12	20.87	20.91	20.78		
10	QPSK	25	25	20.83	20.85	20.71		
10	QPSK	50	0	20.86	20.86	20.74	21.5	0
10	16QAM	1	0	21.17	21.24	21.16		
10	16QAM	1	25	21.14	21.14	21.01		
10	16QAM	1	49	21.03	21.15	20.98	21.5	0
10	16QAM	25	0	20.99	20.99	20.82		
10	16QAM	25	12	21.01	21.00	20.85		
10	16QAM	25	25	20.92	20.93	20.77	21.5	0
10	16QAM	50	0	20.97	20.96	20.84		
10	64QAM	1	0	21.08	21.14	21.04		
10	64QAM	1	25	21.04	21.04	20.93	21.5	0
10	64QAM	1	49	20.96	21.02	20.88		
10	64QAM	25	0	19.99	19.97	19.83		
10	64QAM	25	12	19.99	19.98	19.84	21	0.5
10	64QAM	25	25	19.94	19.93	19.77		
10	64QAM	50	0	19.96	19.94	19.82		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	20.84	20.82	20.66	21.5	0
5	QPSK	1	12	20.86	20.86	20.68		
5	QPSK	1	24	20.85	20.77	20.65		
5	QPSK	12	0	20.89	20.88	20.70	21.5	0
5	QPSK	12	7	20.87	20.88	20.76		
5	QPSK	12	13	20.95	20.82	20.68		
5	QPSK	25	0	20.93	20.84	20.69	21.5	0
5	16QAM	1	0	21.14	21.13	21.00		
5	16QAM	1	12	21.16	21.13	20.97		
5	16QAM	1	24	21.20	21.08	20.98	21.5	0
5	16QAM	12	0	20.99	20.92	20.76		
5	16QAM	12	7	20.96	20.96	20.83		
5	16QAM	12	13	21.04	20.95	20.77	21.5	0
5	16QAM	25	0	21.05	20.94	20.79		
5	64QAM	1	0	21.05	21.02	20.89		
5	64QAM	1	12	21.08	21.06	20.87	21.5	0
5	64QAM	1	24	21.07	21.01	20.88		
5	64QAM	12	0	19.98	19.91	19.76		
5	64QAM	12	7	19.96	19.95	19.82	21	0.5
5	64QAM	12	13	20.01	19.90	19.76		
5	64QAM	25	0	20.04	19.93	19.79		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	20.83	20.83	20.65	21.5	0
3	QPSK	1	8	20.84	20.84	20.67		
3	QPSK	1	14	20.77	20.76	20.64		
3	QPSK	8	0	20.84	20.87	20.72	21.5	0
3	QPSK	8	4	20.87	20.90	20.74		
3	QPSK	8	7	20.84	20.84	20.71		
3	QPSK	15	0	20.85	20.82	20.72	21.5	0
3	16QAM	1	0	21.16	21.13	21.00		
3	16QAM	1	8	21.18	21.12	20.98		
3	16QAM	1	14	21.08	21.05	21.00	21.5	0
3	16QAM	8	0	20.98	20.94	20.82		
3	16QAM	8	4	21.02	21.00	20.86		
3	16QAM	8	7	20.96	20.95	20.84	21.5	0
3	16QAM	15	0	20.98	20.93	20.83		
3	64QAM	1	0	21.00	20.99	20.88		
3	64QAM	1	8	21.07	21.03	20.91	21.5	0
3	64QAM	1	14	21.04	20.97	20.92		
3	64QAM	8	0	19.95	19.93	19.80		
3	64QAM	8	4	19.97	19.97	19.82	21	0.5
3	64QAM	8	7	19.95	19.90	19.80		
3	64QAM	15	0	19.93	19.91	19.79		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	20.83	20.83	20.72	21.5	0
1.4	QPSK	1	3	20.91	20.90	20.78		
1.4	QPSK	1	5	20.85	20.85	20.72		
1.4	QPSK	3	0	20.93	20.85	20.75		
1.4	QPSK	3	1	20.96	20.92	20.79		
1.4	QPSK	3	3	20.85	20.84	20.74		
1.4	QPSK	6	0	20.91	20.89	20.78	21.5	0
1.4	16QAM	1	0	21.19	21.14	21.01	21.5	0
1.4	16QAM	1	3	21.27	21.24	21.13		
1.4	16QAM	1	5	21.12	21.14	21.01		
1.4	16QAM	3	0	21.03	20.94	20.84		
1.4	16QAM	3	1	21.08	20.99	20.86		
1.4	16QAM	3	3	20.97	20.94	20.84		
1.4	16QAM	6	0	21.07	21.03	20.91	21.5	0
1.4	64QAM	1	0	21.09	21.03	20.90	21.5	0
1.4	64QAM	1	3	21.21	21.12	21.00		
1.4	64QAM	1	5	21.02	21.08	20.95		
1.4	64QAM	3	0	21.03	20.98	20.86		
1.4	64QAM	3	1	21.10	21.03	20.93		
1.4	64QAM	3	3	21.02	20.96	20.87		
1.4	64QAM	6	0	20.02	19.95	19.84	21	0.5



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	20.68	20.95	20.90	22	0
20	QPSK	1	49	20.66	20.86	20.94		
20	QPSK	1	99	20.72	20.75	20.78		
20	QPSK	50	0	20.80	20.99	20.90	22	0
20	QPSK	50	24	20.79	20.96	20.91		
20	QPSK	50	50	20.72	20.89	20.83		
20	QPSK	100	0	20.75	20.93	20.85		
20	16QAM	1	0	20.97	21.12	21.10	22	0
20	16QAM	1	49	20.92	21.12	21.14		
20	16QAM	1	99	20.86	21.09	21.13		
20	16QAM	50	0	20.83	21.02	20.95	22	0
20	16QAM	50	24	20.87	21.02	20.92		
20	16QAM	50	50	20.78	20.93	20.85		
20	16QAM	100	0	20.76	20.99	20.88		
20	64QAM	1	0	20.86	21.01	21.01	22	0
20	64QAM	1	49	20.82	21.02	21.13		
20	64QAM	1	99	20.77	20.93	21.00		
20	64QAM	50	0	19.84	20.00	19.93	21	1
20	64QAM	50	24	19.85	19.98	19.93		
20	64QAM	50	50	19.74	19.94	19.88		
20	64QAM	100	0	19.77	20.00	19.89		



Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	20.64	20.83	20.85	22	0
15	QPSK	1	37	20.58	20.87	20.81		
15	QPSK	1	74	20.58	20.77	20.80		
15	QPSK	36	0	20.74	20.94	20.90	22	0
15	QPSK	36	20	20.74	20.95	20.86		
15	QPSK	36	39	20.67	20.89	20.76		
15	QPSK	75	0	20.73	20.93	20.83	22	0
15	16QAM	1	0	20.96	21.12	21.10		
15	16QAM	1	37	20.89	21.08	21.13		
15	16QAM	1	74	20.93	21.05	21.11	22	0
15	16QAM	36	0	20.80	20.97	20.89		
15	16QAM	36	20	20.83	20.96	20.95		
15	16QAM	36	39	20.72	20.89	20.84	22	0
15	16QAM	75	0	20.74	20.95	20.86		
15	64QAM	1	0	20.85	21.04	21.08		
15	64QAM	1	37	20.79	21.03	21.00	22	0
15	64QAM	1	74	20.77	20.95	21.02		
15	64QAM	36	0	19.79	19.95	19.89		
15	64QAM	36	20	19.81	19.94	19.94	21	1
15	64QAM	36	39	19.71	19.88	19.86		
15	64QAM	75	0	19.75	19.95	19.89		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	20.67	20.80	20.93	22	0
10	QPSK	1	25	20.60	20.85	20.76		
10	QPSK	1	49	20.54	20.79	20.78		
10	QPSK	25	0	20.77	20.91	20.82	22	0
10	QPSK	25	12	20.77	20.93	20.84		
10	QPSK	25	25	20.59	20.89	20.75		
10	QPSK	50	0	20.75	20.93	20.83	22	0
10	16QAM	1	0	20.95	21.08	21.11		
10	16QAM	1	25	20.93	21.11	21.10		
10	16QAM	1	49	20.81	21.05	21.14	22	0
10	16QAM	25	0	20.79	20.95	20.93		
10	16QAM	25	12	20.84	20.96	20.89		
10	16QAM	25	25	20.68	20.89	20.83	22	0
10	16QAM	50	0	20.80	20.97	20.90		
10	64QAM	1	0	20.82	21.03	21.06		
10	64QAM	1	25	20.85	21.06	21.00	22	0
10	64QAM	1	49	20.75	20.97	21.03		
10	64QAM	25	0	19.79	19.95	19.91		
10	64QAM	25	12	19.82	19.95	19.91	21	1
10	64QAM	25	25	19.67	19.89	19.84		
10	64QAM	50	0	19.77	19.96	19.88		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	20.61	20.87	20.76	22	0
5	QPSK	1	12	20.71	20.87	20.87		
5	QPSK	1	24	20.54	20.79	20.80		
5	QPSK	12	0	20.72	20.89	20.82	22	0
5	QPSK	12	7	20.78	20.90	20.92		
5	QPSK	12	13	20.68	20.85	20.90		
5	QPSK	25	0	20.75	20.87	20.80	22	0
5	16QAM	1	0	20.85	21.10	21.07		
5	16QAM	1	12	20.99	21.10	21.12		
5	16QAM	1	24	20.83	21.00	21.11	22	0
5	16QAM	12	0	20.77	20.91	20.89		
5	16QAM	12	7	20.83	20.93	21.02		
5	16QAM	12	13	20.75	20.90	20.97	22	0
5	16QAM	25	0	20.76	20.92	20.89		
5	64QAM	1	0	20.77	21.01	21.00		
5	64QAM	1	12	20.85	20.98	21.08	22	0
5	64QAM	1	24	20.74	20.95	21.00		
5	64QAM	12	0	19.75	19.90	19.87		
5	64QAM	12	7	19.81	19.93	20.00	21	1
5	64QAM	12	13	19.72	19.86	19.95		
5	64QAM	25	0	19.75	19.91	19.87		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	20.60	20.83	20.84	22	0
3	QPSK	1	8	20.69	20.84	20.82		
3	QPSK	1	14	20.64	20.81	20.79		
3	QPSK	8	0	20.71	20.87	20.86	22	0
3	QPSK	8	4	20.77	20.92	20.91		
3	QPSK	8	7	20.70	20.88	20.82		
3	QPSK	15	0	20.71	20.87	20.88	22	0
3	16QAM	1	0	20.87	21.07	21.13		
3	16QAM	1	8	21.02	21.10	21.11		
3	16QAM	1	14	20.95	21.06	21.06	22	0
3	16QAM	8	0	20.81	20.93	20.99		
3	16QAM	8	4	20.82	20.96	21.03		
3	16QAM	8	7	20.78	20.92	20.96	22	0
3	16QAM	15	0	20.76	20.95	20.98		
3	64QAM	1	0	20.72	20.97	21.06		
3	64QAM	1	8	20.87	21.00	21.10	22	0
3	64QAM	1	14	20.87	20.96	21.00		
3	64QAM	8	0	19.78	19.87	19.96		
3	64QAM	8	4	19.81	19.92	19.99	21	1
3	64QAM	8	7	19.75	19.90	19.94		
3	64QAM	15	0	19.76	19.91	19.95		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	20.52	20.79	20.77	22	0
1.4	QPSK	1	3	20.59	20.88	20.83		
1.4	QPSK	1	5	20.50	20.75	20.74		
1.4	QPSK	3	0	20.55	20.81	20.83		
1.4	QPSK	3	1	20.62	20.85	20.85		
1.4	QPSK	3	3	20.55	20.81	20.82		
1.4	QPSK	6	0	20.57	20.81	20.81	22	0
1.4	16QAM	1	0	20.80	21.06	21.11	22	0
1.4	16QAM	1	3	20.87	21.06	21.08		
1.4	16QAM	1	5	20.74	21.02	21.09		
1.4	16QAM	3	0	20.61	20.86	20.90		
1.4	16QAM	3	1	20.66	20.89	20.94		
1.4	16QAM	3	3	20.59	20.83	20.87		
1.4	16QAM	6	0	20.67	20.93	20.95	22	0
1.4	64QAM	1	0	20.69	20.97	20.98	22	0
1.4	64QAM	1	3	20.79	20.99	21.07		
1.4	64QAM	1	5	20.72	20.91	20.95		
1.4	64QAM	3	0	20.63	20.89	20.95		
1.4	64QAM	3	1	20.67	20.94	20.96		
1.4	64QAM	3	3	20.60	20.88	20.91		
1.4	64QAM	6	0	19.59	19.86	19.89	21	1



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	19.72	19.77	19.66	20.5	0
10	QPSK	1	25	19.69	19.70	19.76		
10	QPSK	1	49	19.61	19.61	19.65		
10	QPSK	25	0	19.85	19.77	19.69	20.5	0
10	QPSK	25	12	19.81	19.77	19.70		
10	QPSK	25	25	19.80	19.70	19.67		
10	QPSK	50	0	19.80	19.83	19.65	20.5	0
10	16QAM	1	0	20.03	20.03	20.04		
10	16QAM	1	25	20.01	20.09	20.01		
10	16QAM	1	49	20.02	20.08	20.08	20.5	0
10	16QAM	25	0	19.93	19.88	19.78		
10	16QAM	25	12	19.94	19.92	19.84		
10	16QAM	25	25	19.93	19.80	19.79	20.5	0
10	16QAM	50	0	19.93	19.86	19.78		
10	64QAM	1	0	19.98	20.01	19.96		
10	64QAM	1	25	19.91	19.98	20.03	20.5	0
10	64QAM	1	49	19.87	19.93	19.97		
10	64QAM	25	0	19.97	19.87	19.79		
10	64QAM	25	12	19.91	19.91	19.83	20.5	0
10	64QAM	25	25	19.92	19.79	19.79		
10	64QAM	50	0	19.90	19.83	19.75		



Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	19.59	19.62	19.69	20.5	0
5	QPSK	1	12	19.66	19.70	19.59		
5	QPSK	1	24	19.54	19.63	19.61		
5	QPSK	12	0	19.71	19.75	19.62	20.5	0
5	QPSK	12	7	19.71	19.77	19.65		
5	QPSK	12	13	19.78	19.72	19.63		
5	QPSK	25	0	19.76	19.73	19.62	20.5	0
5	16QAM	1	0	19.94	20.02	20.01		
5	16QAM	1	12	19.97	20.01	19.98		
5	16QAM	1	24	19.89	20.00	20.07	20.5	0
5	16QAM	12	0	19.78	19.86	19.73		
5	16QAM	12	7	19.85	19.90	19.80		
5	16QAM	12	13	19.79	19.84	19.77	20.5	0
5	16QAM	25	0	19.78	19.85	19.75		
5	64QAM	1	0	19.89	19.86	19.97		
5	64QAM	1	12	19.92	19.99	19.87	20.5	0
5	64QAM	1	24	19.78	19.91	19.96		
5	64QAM	12	0	19.78	19.83	19.75		
5	64QAM	12	7	19.82	19.87	19.78	20.5	0
5	64QAM	12	13	19.80	19.81	19.73		
5	64QAM	25	0	19.77	19.82	19.73		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	19.58	19.66	19.58	20.5	0
3	QPSK	1	8	19.63	19.65	19.68		
3	QPSK	1	14	19.64	19.62	19.63		
3	QPSK	8	0	19.68	19.68	19.60	20.5	0
3	QPSK	8	4	19.70	19.72	19.63		
3	QPSK	8	7	19.69	19.69	19.69		
3	QPSK	15	0	19.70	19.69	19.59	20.5	0
3	16QAM	1	0	19.85	20.07	20.00		
3	16QAM	1	8	19.98	20.04	20.06		
3	16QAM	1	14	19.91	20.02	20.03	20.5	0
3	16QAM	8	0	19.83	19.92	19.77		
3	16QAM	8	4	19.84	19.87	19.79		
3	16QAM	8	7	19.83	19.87	19.85	20.5	0
3	16QAM	15	0	19.77	19.82	19.74		
3	64QAM	1	0	19.77	19.95	19.85		
3	64QAM	1	8	19.87	19.96	19.96	20.5	0
3	64QAM	1	14	19.87	19.95	19.94		
3	64QAM	8	0	19.80	19.87	19.70		
3	64QAM	8	4	19.83	19.88	19.74	20.5	0
3	64QAM	8	7	19.77	19.84	19.81		
3	64QAM	15	0	19.75	19.79	19.72		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	19.58	19.67	19.67	20.5	0
1.4	QPSK	1	3	19.63	19.75	19.73		
1.4	QPSK	1	5	19.70	19.68	19.65		
1.4	QPSK	3	0	19.62	19.73	19.71		
1.4	QPSK	3	1	19.65	19.76	19.74		
1.4	QPSK	3	3	19.73	19.71	19.72		
1.4	QPSK	6	0	19.73	19.72	19.69	20.5	0
1.4	16QAM	1	0	19.95	20.06	20.05	20.5	0
1.4	16QAM	1	3	20.02	20.08	20.03		
1.4	16QAM	1	5	20.02	20.09	20.08		
1.4	16QAM	3	0	19.73	19.86	19.85		
1.4	16QAM	3	1	19.74	19.89	19.88		
1.4	16QAM	3	3	19.80	19.85	19.80		
1.4	16QAM	6	0	19.86	19.90	19.89	20.5	0
1.4	64QAM	1	0	19.88	20.01	19.96	20.5	0
1.4	64QAM	1	3	19.87	20.00	19.99		
1.4	64QAM	1	5	19.90	19.95	19.90		
1.4	64QAM	3	0	19.76	19.89	19.90		
1.4	64QAM	3	1	19.76	19.92	19.91		
1.4	64QAM	3	3	19.81	19.87	19.84		
1.4	64QAM	6	0	19.83	19.85	19.81	20.5	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	16.42	16.62	16.50	18	0
20	QPSK	1	49	16.53	16.47	16.50		
20	QPSK	1	99	16.48	16.56	16.51		
20	QPSK	50	0	16.52	16.62	16.54	18	0
20	QPSK	50	24	16.55	16.53	16.61		
20	QPSK	50	50	16.57	16.55	16.61		
20	QPSK	100	0	16.56	16.63	16.58	18	0
20	16QAM	1	0	16.83	16.81	16.99		
20	16QAM	1	49	17.00	17.01	16.96		
20	16QAM	1	99	16.99	16.99	16.95	18	0
20	16QAM	50	0	16.65	16.61	16.69		
20	16QAM	50	24	16.74	16.65	16.76		
20	16QAM	50	50	16.69	16.70	16.75	18	0
20	16QAM	100	0	16.71	16.64	16.71		
20	64QAM	1	0	16.74	16.73	16.88		
20	64QAM	1	49	16.83	16.74	16.97	18	0
20	64QAM	1	99	16.85	16.89	16.97		
20	64QAM	50	0	16.68	16.59	16.73		
20	64QAM	50	24	16.69	16.65	16.76	18	0
20	64QAM	50	50	16.67	16.68	16.75		
20	64QAM	100	0	16.73	16.63	16.75		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	16.42	16.43	16.61	18	0
15	QPSK	1	37	16.54	16.45	16.62		
15	QPSK	1	74	16.59	16.66	16.62		
15	QPSK	36	0	16.55	16.49	16.68	18	0
15	QPSK	36	20	16.61	16.52	16.58		
15	QPSK	36	39	16.61	16.54	16.57		
15	QPSK	75	0	16.56	16.51	16.57	18	0
15	16QAM	1	0	16.84	16.86	16.98		
15	16QAM	1	37	16.96	16.90	16.91		
15	16QAM	1	74	16.99	16.95	16.90	18	0
15	16QAM	36	0	16.69	16.59	16.79		
15	16QAM	36	20	16.75	16.67	16.73		
15	16QAM	36	39	16.71	16.67	16.73	18	0
15	16QAM	75	0	16.70	16.66	16.76		
15	64QAM	1	0	16.73	16.72	17.00		
15	64QAM	1	37	16.83	16.76	16.92	18	0
15	64QAM	1	74	16.88	16.91	17.00		
15	64QAM	36	0	16.70	16.59	16.76		
15	64QAM	36	20	16.71	16.66	16.75	18	0
15	64QAM	36	39	16.72	16.69	16.74		
15	64QAM	75	0	16.68	16.63	16.71		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	16.36	16.42	16.54	18	0
10	QPSK	1	25	16.40	16.41	16.50		
10	QPSK	1	49	16.50	16.58	16.51		
10	QPSK	25	0	16.36	16.44	16.50	18	0
10	QPSK	25	12	16.52	16.47	16.54		
10	QPSK	25	25	16.51	16.47	16.53		
10	QPSK	50	0	16.47	16.45	16.53	18	0
10	16QAM	1	0	16.81	16.79	17.00		
10	16QAM	1	25	16.83	16.85	16.97		
10	16QAM	1	49	16.97	16.93	16.94	18	0
10	16QAM	25	0	16.52	16.53	16.63		
10	16QAM	25	12	16.65	16.59	16.69		
10	16QAM	25	25	16.66	16.60	16.71	18	0
10	16QAM	50	0	16.61	16.58	16.67		
10	64QAM	1	0	16.70	16.70	16.91		
10	64QAM	1	25	16.70	16.70	16.84	18	0
10	64QAM	1	49	16.82	16.96	16.94		
10	64QAM	25	0	16.51	16.54	16.61		
10	64QAM	25	12	16.63	16.59	16.69	18	0
10	64QAM	25	25	16.64	16.60	16.69		
10	64QAM	50	0	16.59	16.56	16.68		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	16.38	16.45	16.52	18	0
5	QPSK	1	12	16.41	16.48	16.56		
5	QPSK	1	24	16.43	16.48	16.55		
5	QPSK	12	0	16.44	16.48	16.55	18	0
5	QPSK	12	7	16.47	16.51	16.57		
5	QPSK	12	13	16.47	16.53	16.59		
5	QPSK	25	0	16.42	16.48	16.54	18	0
5	16QAM	1	0	16.85	16.83	16.95		
5	16QAM	1	12	16.88	16.89	16.96		
5	16QAM	1	24	16.88	16.95	16.93	18	0
5	16QAM	12	0	16.60	16.62	16.73		
5	16QAM	12	7	16.65	16.66	16.80		
5	16QAM	12	13	16.63	16.65	16.78	18	0
5	16QAM	25	0	16.57	16.60	16.70		
5	64QAM	1	0	16.73	16.72	16.88		
5	64QAM	1	12	16.76	16.79	16.89	18	0
5	64QAM	1	24	16.75	16.79	16.95		
5	64QAM	12	0	16.55	16.58	16.70		
5	64QAM	12	7	16.61	16.60	16.76	18	0
5	64QAM	12	13	16.60	16.64	16.77		
5	64QAM	25	0	16.57	16.61	16.69		



<Bottom Antenna--Reduced Power Mode for Hotspot On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	19.57	19.58	19.57	20.5	0
20	QPSK	1	49	19.51	19.55	19.54		
20	QPSK	1	99	19.55	19.53	19.41		
20	QPSK	50	0	19.59	19.61	19.60	20.5	0
20	QPSK	50	24	19.51	19.57	19.56		
20	QPSK	50	50	19.54	19.59	19.50		
20	16QAM	1	0	19.99	20.04	19.94	20.5	0
20	16QAM	1	49	19.87	19.97	19.89		
20	16QAM	1	99	19.90	19.92	19.75		
20	16QAM	50	0	19.78	19.75	19.68	20.5	0
20	16QAM	50	24	19.78	19.79	19.63		
20	16QAM	50	50	19.73	19.72	19.58		
20	16QAM	100	0	19.79	19.70	19.64	20.5	0
20	64QAM	1	0	19.85	19.91	19.81		
20	64QAM	1	49	19.78	19.82	19.81		
20	64QAM	1	99	19.82	19.83	19.60	20.5	0
20	64QAM	50	0	19.80	19.72	19.67		
20	64QAM	50	24	19.76	19.77	19.61		
20	64QAM	50	50	19.71	19.69	19.57	20.5	0
20	64QAM	100	0	19.75	19.70	19.64		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	19.42	19.64	19.62	20.5	0
15	QPSK	1	37	19.49	19.62	19.49		
15	QPSK	1	74	19.34	19.53	19.40		
15	QPSK	36	0	19.53	19.67	19.55	20.5	0
15	QPSK	36	20	19.56	19.66	19.54		
15	QPSK	36	39	19.45	19.59	19.52		
15	QPSK	75	0	19.55	19.62	19.53	20.5	0
15	16QAM	1	0	19.76	19.89	19.95		
15	16QAM	1	37	19.90	19.91	19.80		
15	16QAM	1	74	19.66	19.89	19.72	20.5	0
15	16QAM	36	0	19.61	19.71	19.58		
15	16QAM	36	20	19.65	19.78	19.68		
15	16QAM	36	39	19.54	19.69	19.60	20.5	0
15	16QAM	75	0	19.64	19.71	19.60		
15	64QAM	1	0	19.74	19.80	19.81		
15	64QAM	1	37	19.76	19.82	19.68	20.5	0
15	64QAM	1	74	19.50	19.77	19.62		
15	64QAM	36	0	19.63	19.70	19.59		
15	64QAM	36	20	19.65	19.77	19.65	20.5	0
15	64QAM	36	39	19.52	19.69	19.59		
15	64QAM	75	0	19.64	19.71	19.60		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	19.51	19.73	19.60	20.5	0
10	QPSK	1	25	19.54	19.61	19.49		
10	QPSK	1	49	19.44	19.62	19.39		
10	QPSK	25	0	19.54	19.66	19.53	20.5	0
10	QPSK	25	12	19.56	19.67	19.52		
10	QPSK	25	25	19.50	19.63	19.45		
10	QPSK	50	0	19.52	19.64	19.52	20.5	0
10	16QAM	1	0	19.84	19.88	19.76		
10	16QAM	1	25	19.83	19.92	19.83		
10	16QAM	1	49	19.74	19.81	19.77	20.5	0
10	16QAM	25	0	19.65	19.75	19.64		
10	16QAM	25	12	19.65	19.75	19.60		
10	16QAM	25	25	19.62	19.72	19.54	20.5	0
10	16QAM	50	0	19.63	19.75	19.59		
10	64QAM	1	0	19.79	19.97	19.81		
10	64QAM	1	25	19.81	19.85	19.67	20.5	0
10	64QAM	1	49	19.71	19.88	19.67		
10	64QAM	25	0	19.65	19.75	19.63		
10	64QAM	25	12	19.65	19.71	19.58	20.5	0
10	64QAM	25	25	19.59	19.70	19.52		
10	64QAM	50	0	19.58	19.72	19.57		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	19.50	19.60	19.45	20.5	0
5	QPSK	1	12	19.49	19.61	19.47		
5	QPSK	1	24	19.55	19.57	19.42		
5	QPSK	12	0	19.57	19.66	19.52	20.5	0
5	QPSK	12	7	19.58	19.64	19.53		
5	QPSK	12	13	19.60	19.62	19.49		
5	QPSK	25	0	19.61	19.61	19.48	20.5	0
5	16QAM	1	0	19.81	19.94	19.81		
5	16QAM	1	12	19.84	19.96	19.81		
5	16QAM	1	24	19.95	19.91	19.74	20.5	0
5	16QAM	12	0	19.65	19.71	19.58		
5	16QAM	12	7	19.66	19.73	19.58		
5	16QAM	12	13	19.74	19.71	19.52	20.5	0
5	16QAM	25	0	19.72	19.69	19.56		
5	64QAM	1	0	19.77	19.83	19.70		
5	64QAM	1	12	19.79	19.85	19.65	20.5	0
5	64QAM	1	24	19.86	19.78	19.71		
5	64QAM	12	0	19.63	19.70	19.59		
5	64QAM	12	7	19.62	19.71	19.58	20.5	0
5	64QAM	12	13	19.70	19.68	19.50		
5	64QAM	25	0	19.70	19.69	19.55		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	19.52	19.58	19.46	20.5	0
3	QPSK	1	8	19.51	19.66	19.46		
3	QPSK	1	14	19.48	19.56	19.40		
3	QPSK	8	0	19.55	19.64	19.50	20.5	0
3	QPSK	8	4	19.60	19.69	19.51		
3	QPSK	8	7	19.51	19.65	19.51		
3	QPSK	15	0	19.50	19.60	19.47	20.5	0
3	16QAM	1	0	19.80	19.97	19.74		
3	16QAM	1	8	19.86	19.97	19.80		
3	16QAM	1	14	19.82	19.93	19.69	20.5	0
3	16QAM	8	0	19.69	19.76	19.62		
3	16QAM	8	4	19.68	19.81	19.63		
3	16QAM	8	7	19.67	19.75	19.63	20.5	0
3	16QAM	15	0	19.64	19.74	19.60		
3	64QAM	1	0	19.78	19.83	19.67		
3	64QAM	1	8	19.85	19.76	19.64	20.5	0
3	64QAM	1	14	19.68	19.81	19.62		
3	64QAM	8	0	19.62	19.69	19.59		
3	64QAM	8	4	19.66	19.73	19.65	20.5	0
3	64QAM	8	7	19.64	19.72	19.58		
3	64QAM	15	0	19.61	19.68	19.54		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	19.49	19.54	19.37	20.5	0
1.4	QPSK	1	3	19.53	19.60	19.46		
1.4	QPSK	1	5	19.44	19.53	19.37		
1.4	QPSK	3	0	19.46	19.57	19.45		
1.4	QPSK	3	1	19.56	19.61	19.49		
1.4	QPSK	3	3	19.52	19.58	19.41		
1.4	QPSK	6	0	19.51	19.56	19.44	20.5	0
1.4	16QAM	1	0	19.76	19.89	19.70	20.5	0
1.4	16QAM	1	3	19.91	19.95	19.71		
1.4	16QAM	1	5	19.82	19.88	19.71		
1.4	16QAM	3	0	19.61	19.72	19.51		
1.4	16QAM	3	1	19.63	19.73	19.58		
1.4	16QAM	3	3	19.54	19.63	19.50		
1.4	16QAM	6	0	19.66	19.75	19.60	20.5	0
1.4	64QAM	1	0	19.70	19.75	19.68	20.5	0
1.4	64QAM	1	3	19.82	19.88	19.66		
1.4	64QAM	1	5	19.73	19.72	19.51		
1.4	64QAM	3	0	19.58	19.68	19.54		
1.4	64QAM	3	1	19.69	19.73	19.58		
1.4	64QAM	3	3	19.60	19.71	19.54		
1.4	64QAM	6	0	19.59	19.67	19.50	20.5	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	20.97	20.98	20.93	22	0
20	QPSK	1	49	20.91	20.95	20.93		
20	QPSK	1	99	20.87	20.92	20.92		
20	QPSK	50	0	21.01	21.02	20.98	22	0
20	QPSK	50	24	20.98	21.01	21.01		
20	QPSK	50	50	20.96	21.01	20.92		
20	QPSK	100	0	20.99	21.00	20.96		
20	16QAM	1	0	21.08	21.33	21.20	22	0
20	16QAM	1	49	21.11	21.27	21.39		
20	16QAM	1	99	21.02	21.18	21.25		
20	16QAM	50	0	21.01	21.17	21.13	22	0
20	16QAM	50	24	21.02	21.16	21.07		
20	16QAM	50	50	20.94	21.09	20.96		
20	16QAM	100	0	20.95	21.14	21.05		
20	64QAM	1	0	21.03	21.18	21.14	22	0
20	64QAM	1	49	20.95	21.15	21.30		
20	64QAM	1	99	20.91	21.09	21.14		
20	64QAM	50	0	20.02	20.15	20.09	21	1
20	64QAM	50	24	19.97	20.17	20.06		
20	64QAM	50	50	19.92	20.07	20.00		
20	64QAM	100	0	19.92	20.13	20.03		



Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	20.80	20.99	20.98	22	0
15	QPSK	1	37	20.76	21.01	20.95		
15	QPSK	1	74	20.76	20.91	20.91		
15	QPSK	36	0	20.89	21.11	20.98	22	0
15	QPSK	36	20	20.92	21.09	21.03		
15	QPSK	36	39	20.84	21.03	20.93		
15	QPSK	75	0	20.89	21.05	20.94	22	0
15	16QAM	1	0	21.09	21.31	21.34		
15	16QAM	1	37	21.09	21.18	21.27		
15	16QAM	1	74	21.12	21.27	21.27	22	0
15	16QAM	36	0	20.96	21.12	21.11		
15	16QAM	36	20	20.96	21.11	21.03		
15	16QAM	36	39	20.91	21.04	20.99	22	0
15	16QAM	75	0	20.93	21.11	21.00		
15	64QAM	1	0	20.94	21.16	21.21		
15	64QAM	1	37	20.96	21.11	21.14	22	0
15	64QAM	1	74	20.92	21.12	21.18		
15	64QAM	36	0	19.97	20.09	20.09		
15	64QAM	36	20	19.96	20.08	20.01	21	1
15	64QAM	36	39	19.92	20.05	19.97		
15	64QAM	75	0	19.91	20.10	20.03		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	20.79	21.00	21.09	22	0
10	QPSK	1	25	20.77	21.03	20.94		
10	QPSK	1	49	20.71	20.94	20.91		
10	QPSK	25	0	20.90	21.05	20.97	22	0
10	QPSK	25	12	20.90	21.09	20.99		
10	QPSK	25	25	20.79	21.03	20.89		
10	QPSK	50	0	20.87	21.07	20.93	22	0
10	16QAM	1	0	21.07	21.27	21.46		
10	16QAM	1	25	21.10	21.28	21.23		
10	16QAM	1	49	20.98	21.21	21.17	22	0
10	16QAM	25	0	20.99	21.12	21.07		
10	16QAM	25	12	21.00	21.13	21.02		
10	16QAM	25	25	20.88	21.06	20.97	22	0
10	16QAM	50	0	20.94	21.13	21.02		
10	64QAM	1	0	20.96	21.13	21.31		
10	64QAM	1	25	20.98	21.14	21.09	22	0
10	64QAM	1	49	20.87	21.11	21.16		
10	64QAM	25	0	19.97	20.15	20.05		
10	64QAM	25	12	20.00	20.14	20.00	21	1
10	64QAM	25	25	19.86	20.06	19.95		
10	64QAM	50	0	19.94	20.09	20.02		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	20.80	20.98	20.92	22	0
5	QPSK	1	12	20.84	21.00	21.00		
5	QPSK	1	24	20.73	20.93	20.93		
5	QPSK	12	0	20.88	21.05	20.94	22	0
5	QPSK	12	7	20.93	21.07	21.04		
5	QPSK	12	13	20.87	21.01	20.98		
5	QPSK	25	0	20.94	21.02	20.89	22	0
5	16QAM	1	0	21.09	21.27	21.22		
5	16QAM	1	12	21.12	21.27	21.33		
5	16QAM	1	24	21.05	21.18	21.31	22	0
5	16QAM	12	0	20.92	21.05	21.01		
5	16QAM	12	7	20.97	21.08	21.15		
5	16QAM	12	13	20.95	21.06	21.07	22	0
5	16QAM	25	0	20.92	21.06	20.98		
5	64QAM	1	0	20.90	21.14	21.13		
5	64QAM	1	12	21.05	21.19	21.30	22	0
5	64QAM	1	24	20.93	21.09	21.20		
5	64QAM	12	0	19.91	20.04	19.98		
5	64QAM	12	7	19.99	20.08	20.13	21	1
5	64QAM	12	13	19.94	20.04	20.05		
5	64QAM	25	0	19.92	20.06	19.95		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	20.82	21.00	20.98	22	0
3	QPSK	1	8	20.86	21.01	20.96		
3	QPSK	1	14	20.86	20.98	20.94		
3	QPSK	8	0	20.94	21.05	21.04	22	0
3	QPSK	8	4	20.96	21.06	21.03		
3	QPSK	8	7	20.90	21.04	20.98		
3	QPSK	15	0	20.91	21.08	21.02	22	0
3	16QAM	1	0	21.02	21.22	21.34		
3	16QAM	1	8	21.14	21.21	21.32		
3	16QAM	1	14	21.12	21.18	21.26	22	0
3	16QAM	8	0	20.97	21.08	21.14		
3	16QAM	8	4	21.01	21.12	21.18		
3	16QAM	8	7	20.98	21.08	21.12	22	0
3	16QAM	15	0	20.97	21.10	21.14		
3	64QAM	1	0	20.94	21.14	21.28		
3	64QAM	1	8	21.08	21.17	21.18	22	0
3	64QAM	1	14	21.03	21.06	21.20		
3	64QAM	8	0	19.96	20.02	20.11		
3	64QAM	8	4	19.98	20.06	20.14	21	1
3	64QAM	8	7	19.94	20.07	20.06		
3	64QAM	15	0	19.94	20.08	20.11		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	20.71	20.95	20.89	22	0
1.4	QPSK	1	3	20.77	21.01	20.95		
1.4	QPSK	1	5	20.68	20.91	20.85		
1.4	QPSK	3	0	20.73	20.97	20.92		
1.4	QPSK	3	1	20.80	20.99	20.99		
1.4	QPSK	3	3	20.73	20.95	20.95		
1.4	QPSK	6	0	20.74	20.96	20.91	22	0
1.4	16QAM	1	0	20.96	21.14	21.27	22	0
1.4	16QAM	1	3	21.02	21.21	21.26		
1.4	16QAM	1	5	21.00	21.21	21.22		
1.4	16QAM	3	0	20.75	20.99	20.98		
1.4	16QAM	3	1	20.79	20.99	21.12		
1.4	16QAM	3	3	20.74	20.98	20.99		
1.4	16QAM	6	0	20.85	21.07	21.10	22	0
1.4	64QAM	1	0	20.91	21.13	21.16	22	0
1.4	64QAM	1	3	20.86	21.19	21.18		
1.4	64QAM	1	5	20.86	21.15	21.12		
1.4	64QAM	3	0	20.77	21.06	21.05		
1.4	64QAM	3	1	20.89	21.08	21.10		
1.4	64QAM	3	3	20.78	21.03	21.05		
1.4	64QAM	6	0	19.76	20.04	19.98	21	1



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	20.08	20.09	20.01	21	0
20	QPSK	1	49	20.05	20.04	20.03		
20	QPSK	1	99	19.97	20.03	20.01		
20	QPSK	50	0	19.98	20.04	19.91	21	0
20	QPSK	50	24	20.03	19.99	20.01		
20	QPSK	50	50	20.01	19.97	19.92		
20	QPSK	100	0	20.00	20.01	19.99		
20	16QAM	1	0	20.57	20.44	20.60	21	0
20	16QAM	1	49	20.51	20.52	20.61		
20	16QAM	1	99	20.61	20.61	20.67		
20	16QAM	50	0	20.31	20.13	20.23	21	0
20	16QAM	50	24	20.33	20.20	20.25		
20	16QAM	50	50	20.29	20.21	20.26		
20	16QAM	100	0	20.27	20.13	20.29		
20	64QAM	1	0	20.39	20.37	20.46	21	0
20	64QAM	1	49	20.40	20.36	20.55		
20	64QAM	1	99	20.49	20.52	20.52		
20	64QAM	50	0	20.27	20.15	20.21	21	0
20	64QAM	50	24	20.32	20.22	20.22		
20	64QAM	50	50	20.33	20.19	20.28		
20	64QAM	100	0	20.32	20.23	20.25		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	20.06	20.04	20.19	21	0
15	QPSK	1	37	20.13	20.03	20.16		
15	QPSK	1	74	20.24	20.29	20.18		
15	QPSK	36	0	20.18	20.06	20.23	21	0
15	QPSK	36	20	20.18	20.13	20.14		
15	QPSK	36	39	20.15	20.12	20.16		
15	QPSK	75	0	20.20	20.05	20.14	21	0
15	16QAM	1	0	20.57	20.38	20.64		
15	16QAM	1	37	20.55	20.49	20.55		
15	16QAM	1	74	20.65	20.54	20.64	21	0
15	16QAM	36	0	20.34	20.19	20.32		
15	16QAM	36	20	20.35	20.27	20.30		
15	16QAM	36	39	20.36	20.29	20.37	21	0
15	16QAM	75	0	20.27	20.19	20.30		
15	64QAM	1	0	20.42	20.33	20.53		
15	64QAM	1	37	20.36	20.35	20.46	21	0
15	64QAM	1	74	20.53	20.65	20.59		
15	64QAM	36	0	20.36	20.24	20.39		
15	64QAM	36	20	20.39	20.22	20.34	21	0
15	64QAM	36	39	20.35	20.31	20.30		
15	64QAM	75	0	20.28	20.31	20.27		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	19.97	20.02	20.19	21	0
10	QPSK	1	25	19.91	20.03	20.06		
10	QPSK	1	49	20.11	20.17	20.06		
10	QPSK	25	0	19.96	20.01	20.02	21	0
10	QPSK	25	12	20.08	20.04	20.09		
10	QPSK	25	25	20.12	20.01	20.03		
10	QPSK	50	0	20.10	20.00	20.07	21	0
10	16QAM	1	0	20.42	20.45	20.62		
10	16QAM	1	25	20.48	20.41	20.43		
10	16QAM	1	49	20.54	20.66	20.54	21	0
10	16QAM	25	0	20.18	20.15	20.23		
10	16QAM	25	12	20.28	20.14	20.21		
10	16QAM	25	25	20.28	20.19	20.26	21	0
10	16QAM	50	0	20.30	20.21	20.22		
10	64QAM	1	0	20.30	20.30	20.47		
10	64QAM	1	25	20.40	20.35	20.35	21	0
10	64QAM	1	49	20.47	20.61	20.43		
10	64QAM	25	0	20.14	20.13	20.22		
10	64QAM	25	12	20.25	20.16	20.23	21	0
10	64QAM	25	25	20.24	20.14	20.26		
10	64QAM	50	0	20.23	20.13	20.23		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	19.97	19.96	20.03	21	0
5	QPSK	1	12	19.99	19.97	20.05		
5	QPSK	1	24	20.03	20.04	20.06		
5	QPSK	12	0	20.00	20.05	20.02	21	0
5	QPSK	12	7	20.06	20.06	20.12		
5	QPSK	12	13	20.04	20.02	20.11		
5	QPSK	25	0	20.00	20.02	20.04	21	0
5	16QAM	1	0	20.42	20.43	20.47		
5	16QAM	1	12	20.46	20.46	20.48		
5	16QAM	1	24	20.47	20.50	20.52	21	0
5	16QAM	12	0	20.24	20.16	20.21		
5	16QAM	12	7	20.26	20.23	20.25		
5	16QAM	12	13	20.26	20.21	20.28	21	0
5	16QAM	25	0	20.17	20.14	20.19		
5	64QAM	1	0	20.35	20.37	20.35		
5	64QAM	1	12	20.33	20.38	20.45	21	0
5	64QAM	1	24	20.38	20.36	20.43		
5	64QAM	12	0	20.20	20.16	20.21		
5	64QAM	12	7	20.27	20.17	20.28	21	0
5	64QAM	12	13	20.16	20.19	20.27		
5	64QAM	25	0	20.13	20.15	20.25		



<Bottom Antenna--Reduced Power Mode for P-Sensor On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.03	22.17	21.92	23	0
20	QPSK	1	49	21.96	22.02	21.96		
20	QPSK	1	99	21.93	21.90	21.76		
20	QPSK	50	0	22.04	22.07	21.94	23	0
20	QPSK	50	24	22.02	22.06	21.96		
20	QPSK	50	50	22.04	21.99	21.89		
20	16QAM	1	0	22.30	22.31	22.13	23	0
20	16QAM	1	49	22.19	22.30	22.19		
20	16QAM	1	99	22.20	22.17	22.05		
20	16QAM	50	0	21.18	21.15	21.00	22	1
20	16QAM	50	24	21.16	21.16	20.98		
20	16QAM	50	50	21.13	21.06	20.91		
20	16QAM	100	0	21.16	21.07	20.94	22	1
20	64QAM	1	0	21.17	21.18	21.12		
20	64QAM	1	49	21.10	21.19	21.13		
20	64QAM	1	99	21.10	21.08	20.94	21	2
20	64QAM	50	0	20.19	20.14	19.99		
20	64QAM	50	24	20.20	20.17	19.98		
20	64QAM	50	50	20.12	20.04	19.91	21	2
20	64QAM	100	0	20.16	20.08	19.95		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	21.87	22.00	21.98	23	0
15	QPSK	1	37	21.94	22.00	21.84		
15	QPSK	1	74	21.74	21.91	21.74		
15	QPSK	36	0	22.01	22.04	21.91	23	0
15	QPSK	36	20	22.03	22.06	21.92		
15	QPSK	36	39	21.82	22.02	21.85		
15	QPSK	75	0	21.98	22.03	21.88	23	0
15	16QAM	1	0	22.14	22.26	22.22		
15	16QAM	1	37	22.20	22.26	22.14		
15	16QAM	1	74	21.98	22.19	22.04	22	1
15	16QAM	36	0	21.09	21.14	20.97		
15	16QAM	36	20	21.10	21.13	20.95		
15	16QAM	36	39	20.93	21.06	20.92	22	1
15	16QAM	75	0	21.06	21.09	20.94		
15	64QAM	1	0	21.07	21.18	21.10		
15	64QAM	1	37	21.10	21.21	21.01	22	1
15	64QAM	1	74	20.90	21.08	20.94		
15	64QAM	36	0	20.06	20.15	19.97		
15	64QAM	36	20	20.07	20.15	19.96	21	2
15	64QAM	36	39	19.92	20.05	19.93		
15	64QAM	75	0	20.04	20.08	19.93		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.00	22.13	21.97	23	0
10	QPSK	1	25	21.97	22.00	21.83		
10	QPSK	1	49	21.87	22.01	21.77		
10	QPSK	25	0	22.05	22.08	21.92	23	0
10	QPSK	25	12	21.82	22.07	21.90		
10	QPSK	25	25	22.00	22.01	21.84		
10	QPSK	50	0	22.02	22.04	21.88	23	0
10	16QAM	1	0	22.25	22.28	22.26		
10	16QAM	1	25	22.20	22.27	22.11		
10	16QAM	1	49	22.11	22.30	22.07	22	1
10	16QAM	25	0	21.14	21.15	20.98		
10	16QAM	25	12	21.10	21.13	20.97		
10	16QAM	25	25	21.04	21.09	20.90	22	1
10	16QAM	50	0	21.09	21.13	20.92		
10	64QAM	1	0	21.12	21.27	21.15		
10	64QAM	1	25	21.14	21.17	21.05	22	1
10	64QAM	1	49	21.04	21.20	20.99		
10	64QAM	25	0	20.12	20.12	19.97		
10	64QAM	25	12	20.12	20.13	19.98	21	2
10	64QAM	25	25	20.05	20.07	19.89		
10	64QAM	50	0	20.08	20.10	19.90		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.00	22.01	21.82	23	0
5	QPSK	1	12	21.99	22.00	21.84		
5	QPSK	1	24	22.02	21.96	21.77		
5	QPSK	12	0	22.02	22.06	21.87	23	0
5	QPSK	12	7	22.04	22.09	21.88		
5	QPSK	12	13	22.09	21.99	21.86		
5	QPSK	25	0	22.09	22.04	21.85	23	0
5	16QAM	1	0	22.21	22.30	22.09		
5	16QAM	1	12	22.22	22.29	22.12		
5	16QAM	1	24	22.26	22.22	22.08	22	1
5	16QAM	12	0	21.10	21.12	20.73		
5	16QAM	12	7	21.06	21.13	20.95		
5	16QAM	12	13	21.13	21.07	20.92	22	1
5	16QAM	25	0	21.16	21.11	20.92		
5	64QAM	1	0	21.13	21.21	21.03		
5	64QAM	1	12	21.14	21.20	21.03	22	1
5	64QAM	1	24	21.16	21.16	20.97		
5	64QAM	12	0	20.09	20.11	19.91		
5	64QAM	12	7	20.08	20.13	19.94	21	2
5	64QAM	12	13	20.14	20.06	19.91		
5	64QAM	25	0	20.16	20.10	19.92		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.06	22.08	21.90	23	0
3	QPSK	1	8	22.07	22.10	21.89		
3	QPSK	1	14	22.03	22.06	21.83		
3	QPSK	8	0	21.94	22.04	21.82	23	0
3	QPSK	8	4	22.00	22.07	21.85		
3	QPSK	8	7	21.93	22.02	21.82		
3	QPSK	15	0	21.95	21.98	21.83	23	0
3	16QAM	1	0	22.13	22.26	22.04		
3	16QAM	1	8	22.15	22.23	22.10		
3	16QAM	1	14	22.09	22.22	22.02	22	1
3	16QAM	8	0	21.04	21.12	20.92		
3	16QAM	8	4	21.07	21.13	20.96		
3	16QAM	8	7	21.00	21.12	20.90	22	1
3	16QAM	15	0	21.04	21.07	20.93		
3	64QAM	1	0	21.06	21.15	21.00		
3	64QAM	1	8	21.07	21.19	20.99	22	1
3	64QAM	1	14	21.02	21.11	20.90		
3	64QAM	8	0	19.99	20.07	19.89		
3	64QAM	8	4	20.05	20.11	19.91	21	2
3	64QAM	8	7	19.98	20.06	19.87		
3	64QAM	15	0	20.01	20.04	19.89		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.02	22.01	21.82	23	0
1.4	QPSK	1	3	22.06	22.06	21.86		
1.4	QPSK	1	5	22.00	21.96	21.78		
1.4	QPSK	3	0	22.04	22.00	21.82		
1.4	QPSK	3	1	22.09	22.09	21.89		
1.4	QPSK	3	3	22.03	22.03	21.84		
1.4	QPSK	6	0	21.96	21.93	21.75	23	0
1.4	16QAM	1	0	22.13	22.18	22.04	23	0
1.4	16QAM	1	3	22.24	22.26	22.05		
1.4	16QAM	1	5	22.10	22.22	21.97		
1.4	16QAM	3	0	21.95	22.02	21.77		
1.4	16QAM	3	1	22.03	22.07	21.87		
1.4	16QAM	3	3	21.96	21.97	21.81		
1.4	16QAM	6	0	21.07	21.10	20.87	22	1
1.4	64QAM	1	0	21.04	21.09	20.89	22	1
1.4	64QAM	1	3	21.10	21.17	20.95		
1.4	64QAM	1	5	21.02	21.12	20.86		
1.4	64QAM	3	0	20.99	21.03	20.86		
1.4	64QAM	3	1	21.04	21.10	20.90		
1.4	64QAM	3	3	21.00	21.01	20.84		
1.4	64QAM	6	0	20.02	20.01	19.80	21	2



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.12	22.27	22.11	23	0
20	QPSK	1	49	22.11	22.08	22.10		
20	QPSK	1	99	22.12	22.13	22.11		
20	QPSK	50	0	22.20	22.21	22.11	23	0
20	QPSK	50	24	22.15	22.10	22.14		
20	QPSK	50	50	22.21	22.12	22.14		
20	QPSK	100	0	22.09	22.19	22.11	23	0
20	16QAM	1	0	22.37	22.43	22.37		
20	16QAM	1	49	22.29	22.34	22.36		
20	16QAM	1	99	22.35	22.44	22.40	22	1
20	16QAM	50	0	21.33	21.21	21.28		
20	16QAM	50	24	21.35	21.24	21.30		
20	16QAM	50	50	21.34	21.25	21.29	22	1
20	16QAM	100	0	21.32	21.18	21.27		
20	64QAM	1	0	21.31	21.35	21.27		
20	64QAM	1	49	21.35	21.42	21.30	22	1
20	64QAM	1	99	21.47	21.41	21.43		
20	64QAM	50	0	20.30	20.20	20.26		
20	64QAM	50	24	20.35	20.23	20.24	21	2
20	64QAM	50	50	20.33	20.23	20.28		
20	64QAM	100	0	20.31	20.29	20.29		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.10	22.05	22.22	23	0
15	QPSK	1	37	22.15	22.16	22.18		
15	QPSK	1	74	22.23	22.23	22.18		
15	QPSK	36	0	22.18	22.12	22.25	23	0
15	QPSK	36	20	22.21	22.14	22.13		
15	QPSK	36	39	22.23	22.12	22.13		
15	QPSK	75	0	22.19	22.13	22.12	23	0
15	16QAM	1	0	22.40	22.40	22.33		
15	16QAM	1	37	22.41	22.34	22.31		
15	16QAM	1	74	22.31	22.42	22.30	22	1
15	16QAM	36	0	21.33	21.23	21.35		
15	16QAM	36	20	21.36	21.29	21.28		
15	16QAM	36	39	21.35	21.32	21.34	22	1
15	16QAM	75	0	21.32	21.28	21.26		
15	64QAM	1	0	21.24	21.36	21.38		
15	64QAM	1	37	21.32	21.40	21.45	21	2
15	64QAM	1	74	21.37	21.34	21.38		
15	64QAM	36	0	20.32	20.22	20.36		
15	64QAM	36	20	20.34	20.30	20.27	21	2
15	64QAM	36	39	20.31	20.29	20.31		
15	64QAM	75	0	20.39	20.24	20.26		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.04	22.01	22.10	23	0
10	QPSK	1	25	22.09	22.01	22.00		
10	QPSK	1	49	22.14	22.15	22.04		
10	QPSK	25	0	22.04	22.05	22.04	23	0
10	QPSK	25	12	22.16	22.05	22.07		
10	QPSK	25	25	22.15	22.05	22.05		
10	QPSK	50	0	22.17	22.03	22.06	23	0
10	16QAM	1	0	22.34	22.40	22.29		
10	16QAM	1	25	22.29	22.40	22.41		
10	16QAM	1	49	22.39	22.38	22.36	22	1
10	16QAM	25	0	21.13	21.15	21.17		
10	16QAM	25	12	21.28	21.22	21.19		
10	16QAM	25	25	21.29	21.20	21.23	22	1
10	16QAM	50	0	21.29	21.19	21.20		
10	64QAM	1	0	21.21	21.33	21.35		
10	64QAM	1	25	21.22	21.36	21.36	21	2
10	64QAM	1	49	21.34	21.42	21.26		
10	64QAM	25	0	20.19	20.15	20.16		
10	64QAM	25	12	20.28	20.22	20.17	21	2
10	64QAM	25	25	20.27	20.26	20.20		
10	64QAM	50	0	20.28	20.18	20.21		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	21.97	21.96	21.98	23	0
5	QPSK	1	12	21.96	22.01	21.98		
5	QPSK	1	24	22.02	21.98	22.01		
5	QPSK	12	0	22.06	22.05	22.01	23	0
5	QPSK	12	7	22.07	22.09	22.06		
5	QPSK	12	13	22.07	22.05	22.06		
5	QPSK	25	0	22.04	22.03	22.02	23	0
5	16QAM	1	0	22.31	22.41	22.41		
5	16QAM	1	12	22.29	22.41	22.37		
5	16QAM	1	24	22.29	22.40	22.34	22	1
5	16QAM	12	0	21.21	21.19	21.18		
5	16QAM	12	7	21.20	21.29	21.26		
5	16QAM	12	13	21.22	21.25	21.22	22	1
5	16QAM	25	0	21.17	21.16	21.15		
5	64QAM	1	0	21.21	21.32	21.29		
5	64QAM	1	12	21.21	21.32	21.25	22	1
5	64QAM	1	24	21.19	21.35	21.25		
5	64QAM	12	0	20.17	20.14	20.14		
5	64QAM	12	7	20.20	20.23	20.24	21	2
5	64QAM	12	13	20.20	20.24	20.20		
5	64QAM	25	0	20.17	20.14	20.15		

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<Top/Bottom Antenna-- Full Power Mode>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	23.09	23.15	23.17	24	0
20	QPSK	1	49	23.08	23.06	23.07		
20	QPSK	1	99	23.10	23.13	23.08		
20	QPSK	50	0	22.21	22.33	22.30	23	1
20	QPSK	50	24	22.18	22.31	22.28		
20	QPSK	50	50	22.30	22.29	22.30		
20	QPSK	100	0	22.27	22.30	22.26		
20	16QAM	1	0	22.31	22.41	22.41	23	1
20	16QAM	1	49	22.31	22.45	22.41		
20	16QAM	1	99	22.56	22.44	22.49		
20	16QAM	50	0	21.33	21.44	21.34	22	2
20	16QAM	50	24	21.34	21.46	21.39		
20	16QAM	50	50	21.42	21.42	21.36		
20	16QAM	100	0	21.43	21.43	21.42		
20	64QAM	1	0	21.17	21.25	21.34	22	2
20	64QAM	1	49	21.18	21.31	21.32		
20	64QAM	1	99	21.40	21.43	21.42		
20	64QAM	50	0	20.41	20.56	20.53	21	3
20	64QAM	50	24	20.36	20.55	20.52		
20	64QAM	50	50	20.47	20.54	20.55		
20	64QAM	100	0	20.58	20.64	20.62		



Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	23.06	23.15	23.06	24	0
15	QPSK	1	37	23.11	23.09	23.15		
15	QPSK	1	74	23.03	23.10	23.01		
15	QPSK	36	0	22.11	22.11	22.07	23	1
15	QPSK	36	20	22.15	22.14	22.13		
15	QPSK	36	39	22.13	22.13	22.19		
15	QPSK	75	0	22.12	22.13	22.07	23	1
15	16QAM	1	0	22.18	22.28	22.19		
15	16QAM	1	37	22.30	22.22	22.26		
15	16QAM	1	74	22.40	22.34	22.34	22	2
15	16QAM	36	0	21.21	21.17	21.14		
15	16QAM	36	20	21.24	21.22	21.15		
15	16QAM	36	39	21.22	21.20	21.24	22	2
15	16QAM	75	0	21.25	21.25	21.20		
15	64QAM	1	0	20.96	21.05	21.05		
15	64QAM	1	37	21.02	21.08	21.07	22	2
15	64QAM	1	74	21.11	21.16	21.22		
15	64QAM	36	0	20.26	20.35	20.27		
15	64QAM	36	20	20.30	20.32	20.28	21	3
15	64QAM	36	39	20.26	20.33	20.40		
15	64QAM	75	0	20.27	20.30	20.28		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.96	23.12	23.03	24	0
10	QPSK	1	25	23.04	23.09	23.07		
10	QPSK	1	49	23.15	23.12	23.02		
10	QPSK	25	0	22.11	22.14	22.02	23	1
10	QPSK	25	12	22.10	22.08	22.18		
10	QPSK	25	25	22.15	22.10	22.16		
10	QPSK	50	0	22.09	22.12	22.09	23	1
10	16QAM	1	0	22.13	22.22	22.18		
10	16QAM	1	25	22.25	22.28	22.26		
10	16QAM	1	49	22.27	22.23	22.27	22	2
10	16QAM	25	0	21.20	21.21	21.18		
10	16QAM	25	12	21.24	21.27	21.29		
10	16QAM	25	25	21.23	21.24	21.27	22	2
10	16QAM	50	0	21.24	21.24	21.15		
10	64QAM	1	0	21.11	21.29	21.21		
10	64QAM	1	25	21.16	21.23	21.29	22	2
10	64QAM	1	49	21.28	21.27	21.30		
10	64QAM	25	0	20.39	20.44	20.36		
10	64QAM	25	12	20.46	20.42	20.51	21	3
10	64QAM	25	25	20.42	20.43	20.54		
10	64QAM	50	0	20.43	20.47	20.39		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	23.01	23.05	23.13	24	0
5	QPSK	1	12	23.12	23.01	23.12		
5	QPSK	1	24	23.06	23.01	23.10		
5	QPSK	12	0	22.14	22.09	22.14	23	1
5	QPSK	12	7	22.15	22.11	22.16		
5	QPSK	12	13	22.16	22.08	22.17		
5	QPSK	25	0	22.11	22.07	22.14	23	1
5	16QAM	1	0	22.12	22.23	22.25		
5	16QAM	1	12	22.28	22.24	22.26		
5	16QAM	1	24	22.29	22.21	22.24	22	2
5	16QAM	12	0	21.21	21.16	21.20		
5	16QAM	12	7	21.22	21.23	21.24		
5	16QAM	12	13	21.23	21.16	21.22	22	2
5	16QAM	25	0	21.24	21.19	21.25		
5	64QAM	1	0	21.11	21.25	21.31		
5	64QAM	1	12	21.18	21.20	21.30	22	2
5	64QAM	1	24	21.26	21.25	21.33		
5	64QAM	12	0	20.42	20.40	20.46		
5	64QAM	12	7	20.44	20.45	20.53	21	3
5	64QAM	12	13	20.40	20.43	20.48		
5	64QAM	25	0	20.42	20.34	20.49		



<Top Antenna--Reduced Power Mode for Receiver On>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	18.48	18.96	18.78	20	0
20	QPSK	1	49	18.64	18.80	18.78		
20	QPSK	1	99	18.79	18.85	18.92		
20	QPSK	50	0	18.65	18.88	18.77	20	0
20	QPSK	50	24	18.69	18.86	18.82		
20	QPSK	50	50	18.77	18.87	18.81		
20	QPSK	100	0	18.74	18.82	18.79	20	0
20	16QAM	1	0	18.70	18.80	18.89		
20	16QAM	1	49	18.78	18.93	18.90		
20	16QAM	1	99	18.95	18.98	19.03	20	0
20	16QAM	50	0	18.79	18.95	18.90		
20	16QAM	50	24	18.81	18.96	18.90		
20	16QAM	50	50	18.92	18.92	18.90	20	0
20	16QAM	100	0	18.89	18.92	18.89		
20	64QAM	1	0	18.44	18.58	18.65		
20	64QAM	1	49	18.52	18.66	18.61	20	0
20	64QAM	1	99	18.68	18.73	18.75		
20	64QAM	50	0	18.74	18.88	18.84		
20	64QAM	50	24	18.73	18.89	18.82	20	0
20	64QAM	50	50	18.85	18.85	18.84		
20	64QAM	100	0	18.92	18.95	18.94		



Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	18.65	18.81	18.82	20	0
15	QPSK	1	37	18.71	18.82	18.82		
15	QPSK	1	74	18.83	18.93	18.96		
15	QPSK	36	0	18.78	18.85	18.82	20	0
15	QPSK	36	20	18.79	18.87	18.83		
15	QPSK	36	39	18.80	18.85	18.94		
15	QPSK	75	0	18.79	18.87	18.82		
15	16QAM	1	0	18.83	18.95	18.96	20	0
15	16QAM	1	37	18.94	18.96	19.01		
15	16QAM	1	74	18.99	19.03	19.00		
15	16QAM	36	0	18.84	18.90	18.82	20	0
15	16QAM	36	20	18.87	18.92	18.88		
15	16QAM	36	39	18.87	18.92	18.99		
15	16QAM	75	0	18.92	18.91	18.90		
15	64QAM	1	0	18.58	18.70	18.71	20	0
15	64QAM	1	37	18.68	18.66	18.73		
15	64QAM	1	74	18.71	18.74	18.79		
15	64QAM	36	0	18.88	18.94	18.88	20	0
15	64QAM	36	20	18.89	18.93	18.89		
15	64QAM	36	39	18.91	18.96	19.03		
15	64QAM	75	0	18.91	18.95	18.92		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	18.65	18.84	18.77	20	0
10	QPSK	1	25	18.76	18.81	18.87		
10	QPSK	1	49	18.78	18.87	18.94		
10	QPSK	25	0	18.74	18.84	18.80	20	0
10	QPSK	25	12	18.78	18.85	18.90		
10	QPSK	25	25	18.79	18.83	18.92		
10	QPSK	50	0	18.78	18.88	18.79		
10	16QAM	1	0	18.80	18.97	18.95	20	0
10	16QAM	1	25	18.93	19.01	19.03		
10	16QAM	1	49	18.93	19.00	19.03		
10	16QAM	25	0	18.89	18.93	18.89	20	0
10	16QAM	25	12	18.93	18.97	19.03		
10	16QAM	25	25	18.88	18.94	18.97		
10	16QAM	50	0	18.93	18.95	18.88		
10	64QAM	1	0	18.54	18.70	18.67	20	0
10	64QAM	1	25	18.66	18.72	18.73		
10	64QAM	1	49	18.70	18.74	18.80		
10	64QAM	25	0	18.84	18.91	18.85	20	0
10	64QAM	25	12	18.86	18.91	18.95		
10	64QAM	25	25	18.84	18.90	18.93		
10	64QAM	50	0	18.85	18.87	18.84		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	18.66	18.78	18.87	20	0
5	QPSK	1	12	18.77	18.78	18.90		
5	QPSK	1	24	18.73	18.79	18.87		
5	QPSK	12	0	18.77	18.87	18.88	20	0
5	QPSK	12	7	18.80	18.87	18.94		
5	QPSK	12	13	18.78	18.88	18.92		
5	QPSK	25	0	18.76	18.87	18.87		
5	16QAM	1	0	18.75	18.90	19.02	20	0
5	16QAM	1	12	18.90	18.97	19.02		
5	16QAM	1	24	18.95	19.00	19.00		
5	16QAM	12	0	18.84	18.86	18.90	20	0
5	16QAM	12	7	18.88	18.93	18.99		
5	16QAM	12	13	18.89	18.94	18.96		
5	16QAM	25	0	18.88	18.97	19.01		
5	64QAM	1	0	18.56	18.67	18.77	20	0
5	64QAM	1	12	18.64	18.72	18.75		
5	64QAM	1	24	18.66	18.75	18.79		
5	64QAM	12	0	18.85	18.85	18.94	20	0
5	64QAM	12	7	18.87	18.93	18.97		
5	64QAM	12	13	18.86	18.92	18.93		
5	64QAM	25	0	18.85	18.91	18.93		



<Bottom Antenna--Reduced Power Mode for Hotspot On>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.08	22.31	22.22	23	0
20	QPSK	1	49	22.17	22.30	22.21		
20	QPSK	1	99	22.29	22.28	22.27		
20	QPSK	50	0	22.21	22.35	22.31	23	0
20	QPSK	50	24	22.24	22.32	22.31		
20	QPSK	50	50	22.27	22.30	22.33		
20	QPSK	100	0	22.32	22.34	22.30		
20	16QAM	1	0	22.25	22.49	22.40	23	0
20	16QAM	1	49	22.47	22.49	22.35		
20	16QAM	1	99	22.48	22.54	22.52		
20	16QAM	50	0	21.36	21.51	21.40	22	1
20	16QAM	50	24	21.35	21.49	21.46		
20	16QAM	50	50	21.44	21.48	21.44		
20	16QAM	100	0	21.41	21.45	21.38		
20	64QAM	1	0	21.03	21.20	21.17	22	1
20	64QAM	1	49	21.23	21.23	21.11		
20	64QAM	1	99	21.31	21.25	21.33		
20	64QAM	50	0	20.23	20.41	20.32	21	2
20	64QAM	50	24	20.32	20.41	20.40		
20	64QAM	50	50	20.39	20.37	20.40		
20	64QAM	100	0	20.49	20.55	20.47		



Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.26	22.35	22.26	23	0
15	QPSK	1	37	22.36	22.37	22.36		
15	QPSK	1	74	22.30	22.36	22.46		
15	QPSK	36	0	22.32	22.35	22.28	23	0
15	QPSK	36	20	22.35	22.38	22.36		
15	QPSK	36	39	22.38	22.34	22.40		
15	QPSK	75	0	22.34	22.32	22.32		
15	16QAM	1	0	22.42	22.51	22.40	23	0
15	16QAM	1	37	22.50	22.39	22.50		
15	16QAM	1	74	22.50	22.52	22.53		
15	16QAM	36	0	21.44	21.44	21.42	22	1
15	16QAM	36	20	21.39	21.48	21.39		
15	16QAM	36	39	21.44	21.46	21.47		
15	16QAM	75	0	21.48	21.47	21.42		
15	64QAM	1	0	21.13	21.29	21.25	22	1
15	64QAM	1	37	21.35	21.29	21.24		
15	64QAM	1	74	21.30	21.34	21.31		
15	64QAM	36	0	20.47	20.44	20.38	21	2
15	64QAM	36	20	20.45	20.48	20.42		
15	64QAM	36	39	20.47	20.50	20.51		
15	64QAM	75	0	20.46	20.45	20.42		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.23	22.24	22.23	23	0
10	QPSK	1	25	22.40	22.22	22.35		
10	QPSK	1	49	22.41	22.35	22.44		
10	QPSK	25	0	22.31	22.34	22.26	23	0
10	QPSK	25	12	22.34	22.27	22.41		
10	QPSK	25	25	22.29	22.36	22.43		
10	QPSK	50	0	22.33	22.36	22.35		
10	16QAM	1	0	22.38	22.50	22.39	23	0
10	16QAM	1	25	22.48	22.51	22.47		
10	16QAM	1	49	22.50	22.50	22.50		
10	16QAM	25	0	21.40	21.48	21.38	22	1
10	16QAM	25	12	21.46	21.48	21.53		
10	16QAM	25	25	21.48	21.49	21.54		
10	16QAM	50	0	21.47	21.46	21.44		
10	64QAM	1	0	21.14	21.18	21.13	22	1
10	64QAM	1	25	21.27	21.24	21.29		
10	64QAM	1	49	21.33	21.31	21.28		
10	64QAM	25	0	20.43	20.45	20.36	21	2
10	64QAM	25	12	20.41	20.49	20.47		
10	64QAM	25	25	20.43	20.43	20.41		
10	64QAM	50	0	20.39	20.42	20.35		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.27	22.32	22.35	23	0
5	QPSK	1	12	22.34	22.33	22.33		
5	QPSK	1	24	22.30	22.29	22.31		
5	QPSK	12	0	22.29	22.35	22.34	23	0
5	QPSK	12	7	22.40	22.46	22.42		
5	QPSK	12	13	22.34	22.35	22.42		
5	QPSK	25	0	22.34	22.31	22.43		
5	16QAM	1	0	22.34	22.52	22.47	23	0
5	16QAM	1	12	22.52	22.50	22.47		
5	16QAM	1	24	22.50	22.42	22.46		
5	16QAM	12	0	21.46	21.44	21.40	22	1
5	16QAM	12	7	21.51	21.47	21.46		
5	16QAM	12	13	21.46	21.44	21.42		
5	16QAM	25	0	21.43	21.43	21.43		
5	64QAM	1	0	21.16	21.19	21.25	22	1
5	64QAM	1	12	21.21	21.26	21.25		
5	64QAM	1	24	21.22	21.25	21.28		
5	64QAM	12	0	20.42	20.43	20.41	21	2
5	64QAM	12	7	20.39	20.53	20.44		
5	64QAM	12	13	20.37	20.40	20.43		
5	64QAM	25	0	20.41	20.38	20.44		



<LTE Carrier Aggregation>

General Note:

- 1. This device supports Carrier Aggregation on downlink for CA_7C/CA_38C/CA_7A-7A and uplink for CA_7C/CA_38C. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
- 2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
- 3. All permutations exist. No restrictions on Pcell & Scell combinations.

Index	2CC	Restriction	Completely Covered by Measurement Superset
2CC #1	CA_7C		No
2CC #2	CA_38C		No
2CC #3	CA_7A-7A		No

LTE Carrier Aggregation Conducted Power (Downlink)

General Note:

- i. According to KDB941225 D05A v01r02, uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$



<Top/Bottom Antenna--Full Power Mode>

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	7	20M	2535	21100	QPSK	1	0	7	20M	2674.8	3298	23.01	23.42
		CA_38C	38	20M	2610	38150	QPSK	1	0	38	20M	2590.2	37952	22.88	23.17
	Non-Contiguous	CA_7A-7A	7	20M	2535	21100	QPSK	1	0	7	5M	2687.5	3425	23.00	23.42

<Top Antenna--Reduced Power Mode for Receiver On>

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	7	20M	2510	20850	16QAM	1	49	7	20M	2649.8	3048	16.87	17.01
		CA_38C	38	20M	2610	38150	16QAM	1	99	38	20M	2590.2	37952	19.04	19.03
	Non-Contiguous	CA_7A-7A	7	20M	2510	20850	16QAM	1	49	7	5M	2687.5	3425	16.94	17.01

<Bottom Antenna--Reduced Power Mode for Hotspot On>

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	7	20M	2560	21350	16QAM	1	99	7	20M	2660.2	3152	20.65	20.67
		CA_38C	38	20M	2595	38000	16QAM	1	99	38	20M	2614.8	38198	22.46	22.54
	Non-Contiguous	CA_7A-7A	7	20M	2560	21350	16QAM	1	99	7	5M	2622.5	2775	20.57	20.67

<Bottom Antenna--Reduced Power Mode for P-Sensor On>

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	7	20M	2535	21100	16QAM	1	0	7	20M	2674.8	3298	22.20	22.44
	Non-Contiguous	CA_7A-7A	7	20M	2535	21100	16QAM	1	0	7	5M	2687.5	3425	22.11	22.44

LTE Carrier Aggregation Conducted Power (Uplink)

1. This device supports uplink carrier aggregation for LTE CA_7C, CA_38C with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. For the non-contiguously allocated resource blocks which the MPR level is determined by various RB separation and RB sizes requirement, and the allowed MPR levels, settings and the conducted powers are permanently implemented in this device per the 3GPP 36.36.101 section 6.2.3A.1.3 requirements.
2. According to November 2017 TCB workshop, the output power with uplink CA active was measured for the high / middle / low channel configuration with the highest reported SAR for each exposure condition, the power was measured with wideband signal integration over both component carriers.
3. In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs
4. Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05. The required test channel should be associated with the UL PCC. For channels at the ends of a frequency band, the SCC and subsequent CCs are added to the side within the transmission band. Otherwise, the CCs should be added alternatively to either side of the PCC.



<Top/Bottom Antenna--Full Power Mode>

<LTE Band 7>

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	22.47	24.00
21100	20902	QPSK	1	0	0	0	1	0	22.43	24.00
21350	21152	QPSK	1	0	0	0	1	0	22.65	24.00

<LTE Band 38>

CA_38C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	0	0	0	1	0	22.67	24.00
37901	38099	QPSK	1	0	0	0	1	0	22.78	24.00
38150	37952	QPSK	1	0	0	0	1	0	22.52	24.00

<Top Antenna--Reduced Power Mode for Receiver On>

<LTE Band 7>

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	50	0	0	0	1	0	16.74	18.00
21100	20902	QPSK	50	0	0	0	1	0	16.88	18.00
21350	21152	QPSK	50	0	0	0	1	0	16.93	18.00

<LTE Band 38>

CA_38C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	100	0	0	0	1	0	18.94	20.00
37901	38099	QPSK	100	0	0	0	1	0	18.92	20.00
38150	37952	QPSK	100	0	0	0	1	0	18.84	20.00

<Bottom Antenna--Reduced Power Mode for Hotspot On>

<LTE Band 7>

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	50	0	0	0	1	0	20.26	21.00
21100	20902	QPSK	50	0	0	0	1	0	20.17	21.00
21350	21152	QPSK	50	0	0	0	1	0	20.28	21.00

<LTE Band 38>

CA_38C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	100	0	0	0	1	0	22.14	23.00
37901	38099	QPSK	100	0	0	0	1	0	22.37	23.00
38150	37952	QPSK	100	0	0	0	1	0	22.02	23.00

<Bottom Antenna--Reduced Power Mode for P-Sensor On>

<LTE Band 7>

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	50	0	0	0	1	0	21.94	23.00
21100	20902	QPSK	50	0	0	0	1	0	21.96	23.00
21350	21152	QPSK	50	0	0	0	1	0	22.00	23.00

<WLAN Conducted Power>

General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.



<Full Power Mode>

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	18.98	19.50	100.00
		6	2437	18.73	19.50	
		11	2462	18.89	19.50	
	802.11g 6Mbps	1	2412	16.60	17.00	98.28
		6	2437	16.09	17.00	
		11	2462	16.73	17.00	
	802.11n-HT20 MCS0	1	2412	17.80	18.00	98.16
		6	2437	17.57	18.00	
		11	2462	17.90	18.00	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	17.05	17.50	98.28
		40	5200	17.03	17.50	
		44	5220	17.21	17.50	
		48	5240	17.22	17.50	
	802.11n-HT20 MCS0	36	5180	15.94	16.50	98.16
		40	5200	16.11	16.50	
		44	5220	16.14	16.50	
		48	5240	15.97	16.50	
	802.11n-HT40 MCS0	38	5190	15.24	16.50	96.32
		46	5230	15.23	16.50	
	802.11ac-VHT20 MCS0	36	5180	15.92	16.50	98.16
		40	5200	16.10	16.50	
		44	5220	16.12	16.50	
		48	5240	15.94	16.50	
	802.11ac-VHT40 MCS0	38	5190	15.21	15.50	96.32
		46	5230	15.19	15.50	
802.11ac-VHT80 MCS0	42	5210	13.89	14.00	92.49	



5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	17.11	17.50	98.28
		56	5280	17.23	17.50	
		60	5300	17.04	17.50	
		64	5320	16.76	17.50	
	802.11n-HT20 MCS0	52	5260	16.00	16.50	98.16
		56	5280	16.06	16.50	
		60	5300	15.93	16.50	
		64	5320	15.70	16.50	
	802.11n-HT40 MCS0	54	5270	15.29	16.50	96.32
62		5310	14.98	16.50		
802.11ac-VHT20 MCS0	52	5260	15.99	16.50	98.16	
	56	5280	16.03	16.50		
	60	5300	15.91	16.50		
	64	5320	15.65	16.50		
802.11ac-VHT40 MCS0	54	5270	15.24	15.50	96.32	
	62	5310	14.91	15.50		
802.11ac-VHT80 MCS0	58	5290	13.79	14.00	92.49	

5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	=Duty Cycle %
	802.11a 6Mbps	100	5500	16.93	17.50	98.28
		116	5580	16.13	17.50	
		124	5620	16.40	17.50	
		132	5660	15.65	17.50	
		140	5700	16.84	17.50	
	802.11n-HT20 MCS0	100	5500	15.89	16.00	98.16
		116	5580	15.07	16.00	
		124	5620	15.35	16.00	
		132	5660	14.65	16.00	
		140	5700	15.81	16.00	
	802.11n-HT40 MCS0	102	5510	15.21	16.00	96.32
		110	5550	14.74	16.00	
		126	5630	14.31	16.00	
		134	5670	14.22	16.00	
	802.11ac-VHT20 MCS0	100	5500	15.86	16.00	98.16
		116	5580	15.06	16.00	
		124	5620	15.34	16.00	
		132	5660	14.63	16.00	
		140	5700	15.76	16.00	
802.11ac-VHT40 MCS0	102	5510	15.18	15.50	96.32	
	110	5550	14.71	15.50		
	126	5630	14.21	15.50		
	134	5670	14.19	15.50		
802.11ac-VHT80 MCS0	106	5530	13.99	14.50	92.49	
	122	5610	13.39	14.50		



5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	15.90	17.50	98.28
		157	5785	17.01	17.50	
		161	5805	16.83	17.50	
	802.11n-HT20 MCS0	149	5745	14.91	16.00	98.16
		157	5785	15.99	16.00	
		161	5805	15.79	16.00	
	802.11n-HT40 MCS0	151	5755	14.41	15.50	96.32
		159	5795	15.01	15.50	
802.11ac-VHT20 MCS0	149	5745	14.87	16.00	98.16	
	157	5785	15.93	16.00		
	161	5805	15.73	16.00		
802.11ac-VHT40 MCS0	151	5755	14.40	15.00	96.32	
	159	5795	14.98	15.00		
802.11ac-VHT80 MCS0	155	5775	14.19	15.00	92.49	

<Reduced Power Level 1>

<2.4GHz WLAN>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	17.48	18.00	100.00
		6	2437	17.03	18.00	
		11	2462	17.45	18.00	
	802.11g 6Mbps	1	2412	16.60	17.00	98.28
		6	2437	16.09	17.00	
		11	2462	16.73	17.00	
	802.11n-HT20 MCS0	1	2412	17.80	18.00	98.16
		6	2437	17.57	18.00	
11		2462	17.90	18.00		



<5GHz WLAN>

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	12.30	12.50	98.28
		40	5200	12.36	12.50	
		44	5220	12.35	12.50	
		48	5240	12.28	12.50	
	802.11n-HT20 MCS0	36	5180	11.40	12.00	98.16
		40	5200	11.54	12.00	
		44	5220	11.64	12.00	
		48	5240	11.57	12.00	
	802.11n-HT40 MCS0	38	5190	10.73	12.00	96.32
46		5230	10.69	12.00		
802.11ac-VHT20 MCS0	36	5180	11.42	12.00	98.16	
	40	5200	11.59	12.00		
	44	5220	11.63	12.00		
	48	5240	11.57	12.00		
802.11ac-VHT40 MCS0	38	5190	10.71	12.00	96.32	
	46	5230	10.65	12.00		
802.11ac-VHT80 MCS0	42	5210	9.19	12.00	92.49	

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	12.43	12.50	98.28
		56	5280	12.45	12.50	
		60	5300	12.35	12.50	
		64	5320	12.43	12.50	
	802.11n-HT20 MCS0	52	5260	11.55	12.00	98.16
		56	5280	11.66	12.00	
		60	5300	11.47	12.00	
		64	5320	11.24	12.00	
	802.11n-HT40 MCS0	54	5270	10.74	12.00	96.32
		62	5310	10.38	12.00	
	802.11ac-VHT20 MCS0	52	5260	11.56	12.00	98.16
		56	5280	11.62	12.00	
		60	5300	11.45	12.00	
64		5320	11.23	12.00		
802.11ac-VHT40 MCS0	54	5270	10.69	12.00	96.32	
	62	5310	10.31	12.00		
802.11ac-VHT80 MCS0	58	5290	9.09	12.00	92.49	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	=Duty Cycle %
	802.11a 6Mbps	100	5500	12.68	13.00	98.28
		116	5580	11.80	13.00	
		124	5620	12.16	13.00	
		132	5660	11.44	13.00	
		140	5700	12.67	13.00	
	802.11n-HT20 MCS0	100	5500	11.55	12.50	98.16
		116	5580	10.74	12.50	
		124	5620	11.15	12.50	
		132	5660	10.49	12.50	
140		5700	11.53	12.50		
802.11n-HT40 MCS0	102	5510	11.07	12.50	96.32	
	110	5550	10.63	12.50		
	126	5630	10.22	12.50		
	134	5670	10.20	12.50		
802.11ac-VHT20 MCS0	100	5500	11.59	12.50	98.16	
	116	5580	10.72	12.50		
	124	5620	11.14	12.50		
	132	5660	10.53	12.50		
	140	5700	11.50	12.50		
802.11ac-VHT40 MCS0	102	5510	11.03	12.50	96.32	
	110	5550	10.64	12.50		
	126	5630	10.30	12.50		
	134	5670	10.28	12.50		
802.11ac-VHT80 MCS0	106	5530	9.77	12.50	92.49	
	122	5610	9.39	12.50		

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	13.73	15.00	98.28
		157	5785	14.61	15.00	
		161	5805	14.23	15.00	
	802.11n-HT20 MCS0	149	5745	12.79	14.50	98.16
		157	5785	13.64	14.50	
		161	5805	13.21	14.50	
	802.11n-HT40 MCS0	151	5755	12.28	14.50	96.32
		159	5795	12.61	14.50	
	802.11ac-VHT20 MCS0	149	5745	12.80	14.50	98.16
157		5785	13.59	14.50		
161		5805	13.26	14.50		
802.11ac-VHT40 MCS0	151	5755	12.31	14.50	96.32	
	159	5795	12.58	14.50		
802.11ac-VHT80 MCS0	155	5775	11.92	14.50	92.49	



<Reduced Power Level 2>

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	16.17	17.00	100.00
		6	2437	15.76	17.00	
		11	2462	16.06	17.00	
	802.11g 6Mbps	1	2412	16.12	17.00	98.28
		6	2437	15.79	17.00	
		11	2462	16.17	17.00	
	802.11n-HT20 MCS0	1	2412	15.10	16.00	98.16
		6	2437	14.67	16.00	
		11	2462	15.13	16.00	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	11.13	11.50	98.28
		40	5200	11.34	11.50	
		44	5220	11.26	11.50	
		48	5240	11.33	11.50	
	802.11n-HT20 MCS0	36	5180	9.90	11.00	98.16
		40	5200	10.05	11.00	
		44	5220	10.16	11.00	
		48	5240	10.13	11.00	
	802.11n-HT40 MCS0	38	5190	9.16	11.00	96.32
		46	5230	9.24	11.00	
	802.11ac-VHT20 MCS0	36	5180	9.89	11.00	98.16
		40	5200	10.02	11.00	
		44	5220	10.11	11.00	
		48	5240	10.10	11.00	
	802.11ac-VHT40 MCS0	38	5190	9.08	11.00	96.32
		46	5230	9.20	11.00	
802.11ac-VHT80 MCS0	42	5210	7.76	11.00	92.49	



5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	11.35	11.50	98.28
		56	5280	11.36	11.50	
		60	5300	11.13	11.50	
		64	5320	10.96	11.50	
	802.11n-HT20 MCS0	52	5260	10.15	11.00	98.16
		56	5280	10.17	11.00	
		60	5300	9.95	11.00	
		64	5320	9.84	11.00	
	802.11n-HT40 MCS0	54	5270	9.33	11.00	96.32
62		5310	8.94	11.00		
802.11ac-VHT20 MCS0	52	5260	10.14	11.00	98.16	
	56	5280	10.13	11.00		
	60	5300	9.93	11.00		
	64	5320	9.79	11.00		
802.11ac-VHT40 MCS0	54	5270	9.29	11.00	96.32	
	62	5310	8.91	11.00		
802.11ac-VHT80 MCS0	58	5290	7.73	11.00	92.49	

5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	=Duty Cycle %
	802.11a 6Mbps	100	5500	11.46	11.50	98.28
		116	5580	10.50	11.50	
		124	5620	10.86	11.50	
		132	5660	10.22	11.50	
		140	5700	11.44	11.50	
	802.11n-HT20 MCS0	100	5500	10.17	11.00	98.16
		116	5580	9.44	11.00	
		124	5620	9.84	11.00	
		132	5660	9.22	11.00	
140		5700	10.25	11.00		
802.11n-HT40 MCS0	102	5510	9.52	11.00	96.32	
	110	5550	9.07	11.00		
	126	5630	8.75	11.00		
	134	5670	8.70	11.00		
802.11ac-VHT20 MCS0	100	5500	10.24	11.00	98.16	
	116	5580	9.42	11.00		
	124	5620	9.86	11.00		
	132	5660	9.23	11.00		
	140	5700	10.23	11.00		
802.11ac-VHT40 MCS0	102	5510	9.49	11.00	96.32	
	110	5550	9.09	11.00		
	126	5630	8.67	11.00		
	134	5670	8.75	11.00		
802.11ac-VHT80 MCS0	106	5530	8.12	11.00	92.49	
	122	5610	7.73	11.00		




	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	12.49	13.50	98.28
		157	5785	13.31	13.50	
		161	5805	12.90	13.50	
	802.11n-HT20 MCS0	149	5745	11.24	13.00	98.16
		157	5785	12.06	13.00	
		161	5805	11.65	13.00	
	802.11n-HT40 MCS0	151	5755	10.84	13.00	96.32
		159	5795	11.14	13.00	
	802.11ac-VHT20 MCS0	149	5745	11.23	13.00	98.16
		157	5785	12.04	13.00	
		161	5805	11.62	13.00	
	802.11ac-VHT40 MCS0	151	5755	10.81	13.00	96.32
		159	5795	11.03	13.00	
	802.11ac-VHT80 MCS0	155	5775	10.72	13.00	92.49

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 76.79 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation.

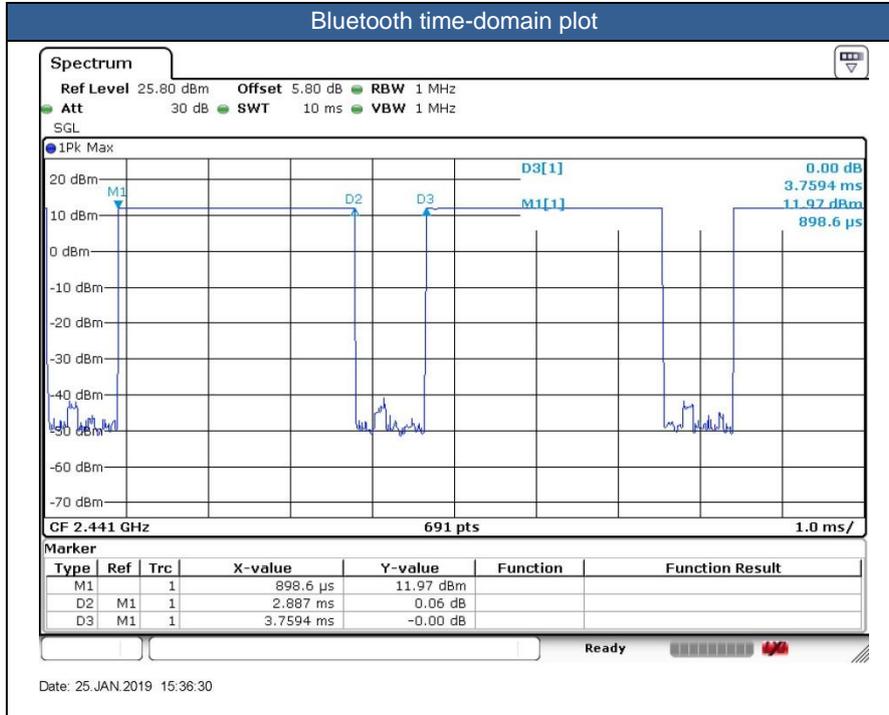


Mode	Channel	Frequency (MHz)	Data Rate
			1Mbps
BR/EDR	CH 00	2402	13.06
	CH 39	2441	11.90
	CH 78	2480	12.72
Tune-up Limit			13.50

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
vv4.2 LE	CH 00	2402	6.90
	CH 19	2440	5.56
	CH 39	2480	8.42
Tune-up Limit			10.00

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
v5.0 LE	CH 00	2402	6.88
	CH 19	2440	5.68
	CH 39	2480	8.48
Tune-up Limit			10.00

14. Antenna Location

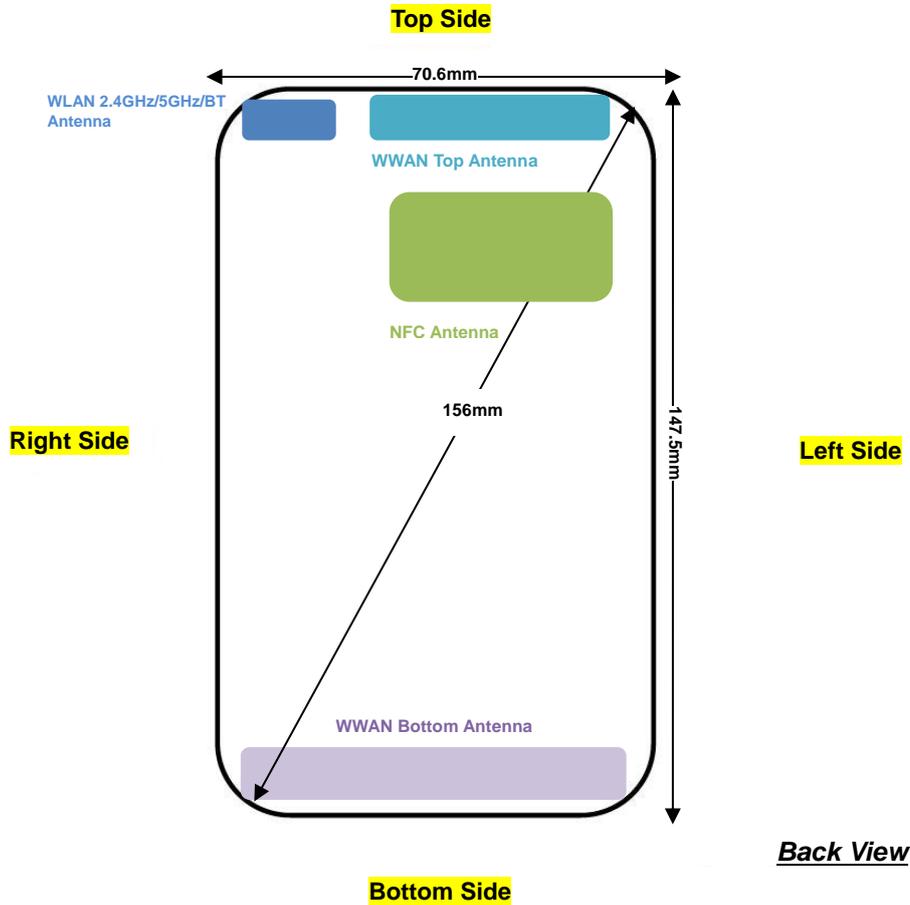

Back View

Antenna	Support Band
WWAN Top Antenna	GSM: 850 / 1900 WCDMA: B2 / B4 / B5 LTE: B2 / B4 / B5 / B7 / B38
WWAN Bottom Antenna	GSM: 850 / 1900 WCDMA: B2 / B4 / B5 LTE: B2 / B4 / B5 / B7 / B38
WLAN 2.4GHz/5GHz/BT	WLAN 2.4GHz WLAN 5GHz Bluetooth
NFC Antenna	NFC

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Top Antenna	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm
WWAN Bottom Antenna	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WLAN 2.4GHz/5GHz/BT	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Top Antenna	Yes	Yes	Yes	No	Yes	Yes
WWAN Bottom Antenna	Yes	Yes	No	Yes	Yes	Yes
WLAN 2.4GHz/5GHz/BT	Yes	Yes	Yes	No	Yes	No

General Note:

Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.



15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. This device has two WWAN transmit antennas. WWAN bottom antenna is located at the bottom edge of the device, and WWAN top antenna is located at the top edge of the device which can refer to antenna location chapter. Top and Bottom antenna support the same WWAN frequency bands, and they can't transmit simultaneously.
6. For top antenna, When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately in GSM850/1900, WCDMA band 2/4/5, LTE B2/4/5/7/38 and WLAN 2.4GHz/5GHz.
For WLAN2.4GHz/5GHz, reduced power 1 is used for standalone SAR for head, reduced power 2 is used for simultaneous SAR for head.
7. For bottom antenna:
 - a. The device employs proximity sensors that detect the presence of the user's body at the front or back or bottom faces of the device. When front or back or bottom of body condition is detected, WCDMA band II/IV, LTE band 2/7 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)
 - b. When hotspot mode is enabled, power reduction will be activated to GSM1900, WCDMA band II/IV, LTE band 2/4/7/38.



GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 4Tx slots for GSM850/GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. Per FCC KDB inquiry guidance, the following applied to intra-band contiguous UL CA only;
 - a. Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05. The required test channel should be associated with the UL PCC. For channels at the ends of a frequency band, the SCC and subsequent CCs are added to the side within the transmission band. Otherwise, the CCs should be added alternatively to either side of the PCC.
 - b. UL CA SAR is measured for each exposure condition in each frequency band using the highest SAR configuration tested in standalone LTE mode to establish the UL CA PCC. The SCC and subsequent CC must use configurations similar to the PCC to establish conservative or worst case equivalent SAR test conditions.
 - c. When the SAR configuration tested in step b) has a maximum output power specification more than $\frac{1}{4}$ dB lower than the highest maximum output power conditions measured in the power measurements in step a) above and the reported SAR in step b) is larger than 1.2 W/kg, SAR measurement is also required for the configuration in step a)
 - d. All standalone SAR configurations with SAR > 1.2 W/kg must also be tested by applying the procedures in step b)
7. For LTE B4 / B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS 4 Tx slots	Right Cheek	Top	Reduced	189	836.4	22.83	24.00	1.309	-0.02	0.512	0.670
	GSM850	GPRS 4 Tx slots	Right Tilted	Top	Reduced	189	836.4	22.83	24.00	1.309	-0.16	0.435	0.569
	GSM850	GPRS 4 Tx slots	Left Cheek	Top	Reduced	189	836.4	22.83	24.00	1.309	0.02	0.503	0.659
	GSM850	GPRS 4 Tx slots	Left Tilted	Top	Reduced	189	836.4	22.83	24.00	1.309	0.06	0.406	0.532
	GSM850	GPRS 4 Tx slots	Right Cheek	Bottom	Full	189	836.4	26.84	28.00	1.306	0.06	0.159	0.208
	GSM850	GPRS 4 Tx slots	Right Tilted	Bottom	Full	189	836.4	26.84	28.00	1.306	-0.03	0.059	0.077
	GSM850	GPRS 4 Tx slots	Left Cheek	Bottom	Full	189	836.4	26.84	28.00	1.306	-0.02	0.117	0.153
	GSM850	GPRS 4 Tx slots	Left Tilted	Bottom	Full	189	836.4	26.84	28.00	1.306	-0.03	0.071	0.093
	GSM1900	GPRS 4 Tx slots	Right Cheek	Top	Reduced	661	1880	23.48	24.50	1.265	-0.12	0.698	0.883
	GSM1900	GPRS 4 Tx slots	Right Cheek	Top	Reduced	512	1850.2	23.47	24.50	1.268	0.04	0.795	1.008
02	GSM1900	GPRS 4 Tx slots	Right Cheek	Top	Reduced	810	1909.8	23.40	24.50	1.288	0.07	0.848	1.092
	GSM1900	GPRS 4 Tx slots	Right Tilted	Top	Reduced	661	1880	23.48	24.50	1.265	0.13	0.743	0.940
	GSM1900	GPRS 4 Tx slots	Right Tilted	Top	Reduced	512	1850.2	23.47	24.50	1.268	-0.03	0.738	0.936
	GSM1900	GPRS 4 Tx slots	Right Tilted	Top	Reduced	810	1909.8	23.40	24.50	1.288	0.01	0.753	0.970
	GSM1900	GPRS 4 Tx slots	Left Cheek	Top	Reduced	661	1880	23.48	24.50	1.265	0.03	0.492	0.622
	GSM1900	GPRS 4 Tx slots	Left Tilted	Top	Reduced	661	1880	23.48	24.50	1.265	-0.04	0.426	0.539
	GSM1900	GPRS 4 Tx slots	Right Cheek	Bottom	Full	661	1880	23.94	25.00	1.276	0.08	0.049	0.062
	GSM1900	GPRS 4 Tx slots	Right Tilted	Bottom	Full	661	1880	23.94	25.00	1.276	-0.01	0.024	0.030
	GSM1900	GPRS 4 Tx slots	Left Cheek	Bottom	Full	661	1880	23.94	25.00	1.276	0.05	0.069	0.088
	GSM1900	GPRS 4 Tx slots	Left Tilted	Bottom	Full	661	1880	23.94	25.00	1.276	-0.02	0.024	0.030



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	Top	Reduced	4233	846.6	19.75	20.50	1.189	0.06	0.529	0.629
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	Top	Reduced	4233	846.6	19.75	20.50	1.189	-0.06	0.518	0.616
03	WCDMA Band V	RMC 12.2Kbps	Left Cheek	Top	Reduced	4233	846.6	19.75	20.50	1.189	-0.06	0.556	0.661
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	Top	Reduced	4233	846.6	19.75	20.50	1.189	-0.06	0.456	0.542
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	Bottom	Full	4182	836.4	23.94	25.00	1.276	0.01	0.205	0.262
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	Bottom	Full	4182	836.4	23.94	25.00	1.276	0.09	0.080	0.101
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	Bottom	Full	4182	836.4	23.94	25.00	1.276	-0.02	0.151	0.193
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	Bottom	Full	4182	836.4	23.94	25.00	1.276	0.01	0.086	0.110
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	Top	Reduced	1513	1752.6	20.73	22.00	1.340	-0.07	0.808	1.082
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	Top	Reduced	1312	1712.4	20.57	22.00	1.390	0.03	0.729	1.013
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	Top	Reduced	1413	1732.6	20.59	22.00	1.384	0.02	0.759	1.050
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	Top	Reduced	1513	1752.6	20.73	22.00	1.340	-0.02	0.823	1.103
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	Top	Reduced	1312	1712.4	20.57	22.00	1.390	0	0.768	1.067
04	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	Top	Reduced	1413	1732.6	20.59	22.00	1.384	0.04	0.802	1.110
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	Top	Reduced	1513	1752.6	20.73	22.00	1.340	0.07	0.451	0.604
	WCDMA Band IV	RMC 12.2Kbps	Left Tilted	Top	Reduced	1513	1752.6	20.73	22.00	1.340	-0.01	0.525	0.703
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	Bottom	Full	1513	1752.6	24.05	25.00	1.245	0.02	0.098	0.121
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	Bottom	Full	1513	1752.6	24.05	25.00	1.245	0.06	0.047	0.058
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	Bottom	Full	1513	1752.6	24.05	25.00	1.245	0.03	0.150	0.187
	WCDMA Band IV	RMC 12.2Kbps	Left Tilted	Bottom	Full	1513	1752.6	24.05	25.00	1.245	0.06	0.057	0.071
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	Top	Reduced	9538	1907.6	21.25	22.00	1.189	-0.07	0.836	0.994
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	Top	Reduced	9262	1852.4	21.22	22.00	1.197	-0.03	0.909	1.088
05	WCDMA Band II	RMC 12.2Kbps	Right Cheek	Top	Reduced	9400	1880	20.98	22.00	1.265	-0.05	0.939	1.188
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	Top	Reduced	9538	1907.6	21.25	22.00	1.189	0.02	0.846	1.005
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	Top	Reduced	9262	1852.4	21.22	22.00	1.197	0.03	0.844	1.010
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	Top	Reduced	9400	1880	20.98	22.00	1.265	0	0.848	1.072
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	Top	Reduced	9538	1907.6	21.25	22.00	1.189	-0.03	0.536	0.637
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	Top	Reduced	9538	1907.6	21.25	22.00	1.189	0.06	0.507	0.603
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	Bottom	Full	9538	1907.6	24.15	25.00	1.216	0.06	0.129	0.157
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	Bottom	Full	9538	1907.6	24.15	25.00	1.216	0.06	0.052	0.063
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	Bottom	Full	9538	1907.6	24.15	25.00	1.216	-0.03	0.183	0.223
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	Bottom	Full	9538	1907.6	24.15	25.00	1.216	-0.02	0.060	0.073



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	0	Right Cheek	Top	Reduced	20525	836.5	19.77	20.50	1.183	0.01	0.675	0.799
	LTE Band 5	10M	QPSK	25	0	Right Cheek	Top	Reduced	20525	836.5	19.77	20.50	1.183	-0.01	0.668	0.790
	LTE Band 5	10M	QPSK	1	0	Right Tilted	Top	Reduced	20525	836.5	19.77	20.50	1.183	0.09	0.758	0.897
06	LTE Band 5	10M	QPSK	25	0	Right Tilted	Top	Reduced	20525	836.5	19.77	20.50	1.183	0.03	0.775	0.917
	LTE Band 5	10M	QPSK	50	0	Right Tilted	Top	Reduced	20525	836.5	19.83	20.50	1.167	0.03	0.759	0.886
	LTE Band 5	10M	QPSK	1	0	Left Cheek	Top	Reduced	20525	836.5	19.77	20.50	1.183	-0.07	0.555	0.657
	LTE Band 5	10M	QPSK	25	0	Left Cheek	Top	Reduced	20525	836.5	19.77	20.50	1.183	-0.02	0.562	0.665
	LTE Band 5	10M	QPSK	1	0	Left Tilted	Top	Reduced	20525	836.5	19.77	20.50	1.183	-0.02	0.448	0.530
	LTE Band 5	10M	QPSK	25	0	Left Tilted	Top	Reduced	20525	836.5	19.77	20.50	1.183	0.12	0.457	0.541
	LTE Band 5	10M	QPSK	1	0	Right Cheek	Bottom	Full	20525	836.5	22.59	24.00	1.384	0.08	0.181	0.250
	LTE Band 5	10M	QPSK	25	0	Right Cheek	Bottom	Full	20525	836.5	21.58	23.00	1.387	-0.03	0.138	0.191
	LTE Band 5	10M	QPSK	1	0	Right Tilted	Bottom	Full	20525	836.5	22.59	24.00	1.384	-0.02	0.076	0.105
	LTE Band 5	10M	QPSK	25	0	Right Tilted	Bottom	Full	20525	836.5	21.58	23.00	1.387	-0.06	0.060	0.083
	LTE Band 5	10M	QPSK	1	0	Left Cheek	Bottom	Full	20525	836.5	22.59	24.00	1.384	0.07	0.148	0.205
	LTE Band 5	10M	QPSK	25	0	Left Cheek	Bottom	Full	20525	836.5	21.58	23.00	1.387	-0.02	0.108	0.150
	LTE Band 5	10M	QPSK	1	0	Left Tilted	Bottom	Full	20525	836.5	22.59	24.00	1.384	0.09	0.084	0.117
	LTE Band 5	10M	QPSK	25	0	Left Tilted	Bottom	Full	20525	836.5	21.58	23.00	1.387	-0.02	0.066	0.092
	LTE Band 4	20M	QPSK	1	0	Right Cheek	Top	Reduced	20175	1732.5	20.95	22.00	1.274	0.04	0.768	0.978
	LTE Band 4	20M	QPSK	50	0	Right Cheek	Top	Reduced	20175	1732.5	20.99	22.00	1.262	-0.04	0.791	0.998
	LTE Band 4	20M	QPSK	100	0	Right Cheek	Top	Reduced	20175	1732.5	20.93	22.00	1.279	-0.07	0.644	0.824
	LTE Band 4	20M	QPSK	1	0	Right Tilted	Top	Reduced	20175	1732.5	20.95	22.00	1.274	-0.02	0.745	0.949
	LTE Band 4	20M	QPSK	50	0	Right Tilted	Top	Reduced	20175	1732.5	20.99	22.00	1.262	0.12	0.738	0.931
07	LTE Band 4	20M	QPSK	100	0	Right Tilted	Top	Reduced	20175	1732.5	20.93	22.00	1.279	0.06	0.911	1.166
	LTE Band 4	20M	QPSK	1	0	Left Cheek	Top	Reduced	20175	1732.5	20.95	22.00	1.274	-0.14	0.424	0.540
	LTE Band 4	20M	QPSK	50	0	Left Cheek	Top	Reduced	20175	1732.5	20.99	22.00	1.262	-0.01	0.441	0.556
	LTE Band 4	20M	QPSK	1	0	Left Tilted	Top	Reduced	20175	1732.5	20.95	22.00	1.274	0.02	0.482	0.614
	LTE Band 4	20M	QPSK	50	0	Left Tilted	Top	Reduced	20175	1732.5	20.99	22.00	1.262	0.02	0.500	0.631
	LTE Band 4	20M	QPSK	1	0	Right Cheek	Bottom	Full	20175	1732.5	22.65	24.00	1.365	0.01	0.067	0.091
	LTE Band 4	20M	QPSK	50	0	Right Cheek	Bottom	Full	20175	1732.5	21.68	23.00	1.355	0.06	0.054	0.073
	LTE Band 4	20M	QPSK	1	0	Right Tilted	Bottom	Full	20175	1732.5	22.65	24.00	1.365	0.05	0.045	0.061
	LTE Band 4	20M	QPSK	50	0	Right Tilted	Bottom	Full	20175	1732.5	21.68	23.00	1.355	-0.03	0.035	0.048
	LTE Band 4	20M	QPSK	1	0	Left Cheek	Bottom	Full	20175	1732.5	22.65	24.00	1.365	0.06	0.107	0.146
	LTE Band 4	20M	QPSK	50	0	Left Cheek	Bottom	Full	20175	1732.5	21.68	23.00	1.355	0.03	0.084	0.114
	LTE Band 4	20M	QPSK	1	0	Left Tilted	Bottom	Full	20175	1732.5	22.65	24.00	1.365	0.02	0.044	0.06
	LTE Band 4	20M	QPSK	50	0	Left Tilted	Bottom	Full	20175	1732.5	21.68	23.00	1.355	-0.03	0.034	0.046



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Right Cheek	Top	Reduced	18900	1880	20.89	21.50	1.151	0.01	0.810	0.932
	LTE Band 2	20M	QPSK	1	0	Right Cheek	Top	Reduced	18700	1860	20.89	21.50	1.151	0.04	0.805	0.926
	LTE Band 2	20M	QPSK	1	0	Right Cheek	Top	Reduced	19100	1900	20.75	21.50	1.189	0.04	0.775	0.921
	LTE Band 2	20M	QPSK	50	0	Right Cheek	Top	Reduced	18900	1880	21.01	21.50	1.119	-0.02	0.827	0.926
	LTE Band 2	20M	QPSK	50	0	Right Cheek	Top	Reduced	18700	1860	20.97	21.50	1.130	0.04	0.814	0.920
08	LTE Band 2	20M	QPSK	50	0	Right Cheek	Top	Reduced	19100	1900	20.78	21.50	1.180	-0.08	0.811	0.957
	LTE Band 2	20M	QPSK	100	0	Right Cheek	Top	Reduced	18900	1880	21.00	21.50	1.122	-0.05	0.820	0.920
	LTE Band 2	20M	QPSK	1	0	Right Tilted	Top	Reduced	18900	1880	20.89	21.50	1.151	-0.01	0.742	0.854
	LTE Band 2	20M	QPSK	1	0	Right Tilted	Top	Reduced	18700	1860	20.89	21.50	1.151	0.02	0.802	0.923
	LTE Band 2	20M	QPSK	1	0	Right Tilted	Top	Reduced	19100	1900	20.75	21.50	1.189	0.01	0.720	0.856
	LTE Band 2	20M	QPSK	50	0	Right Tilted	Top	Reduced	18900	1880	21.01	21.50	1.119	0.1	0.756	0.846
	LTE Band 2	20M	QPSK	50	0	Right Tilted	Top	Reduced	18700	1860	20.97	21.50	1.130	0.06	0.798	0.902
	LTE Band 2	20M	QPSK	50	0	Right Tilted	Top	Reduced	19100	1900	20.78	21.50	1.180	0.05	0.734	0.866
	LTE Band 2	20M	QPSK	100	0	Right Tilted	Top	Reduced	18900	1880	21.00	21.50	1.122	0.1	0.755	0.847
	LTE Band 2	20M	QPSK	1	0	Left Cheek	Top	Reduced	18900	1880	20.89	21.50	1.151	0.01	0.548	0.631
	LTE Band 2	20M	QPSK	50	0	Left Cheek	Top	Reduced	18900	1880	21.01	21.50	1.119	-0.05	0.548	0.613
	LTE Band 2	20M	QPSK	1	0	Left Tilted	Top	Reduced	18900	1880	20.89	21.50	1.151	-0.03	0.516	0.594
	LTE Band 2	20M	QPSK	50	0	Left Tilted	Top	Reduced	18900	1880	21.01	21.50	1.119	0.05	0.512	0.573
	LTE Band 2	20M	QPSK	1	0	Right Cheek	Bottom	Full	18900	1880	23.16	24.00	1.213	0.03	0.087	0.106
	LTE Band 2	20M	QPSK	50	0	Right Cheek	Bottom	Full	18900	1880	22.28	23.00	1.180	0.06	0.071	0.084
	LTE Band 2	20M	QPSK	1	0	Right Tilted	Bottom	Full	18900	1880	23.16	24.00	1.213	0.06	0.062	0.075
	LTE Band 2	20M	QPSK	50	0	Right Tilted	Bottom	Full	18900	1880	22.28	23.00	1.180	0.03	0.047	0.056
	LTE Band 2	20M	QPSK	1	0	Left Cheek	Bottom	Full	18900	1880	23.16	24.00	1.213	0.04	0.112	0.136
	LTE Band 2	20M	QPSK	50	0	Left Cheek	Bottom	Full	18900	1880	22.28	23.00	1.180	0.03	0.089	0.105
	LTE Band 2	20M	QPSK	1	0	Left Tilted	Bottom	Full	18900	1880	23.16	24.00	1.213	0.02	0.046	0.055
	LTE Band 2	20M	QPSK	50	0	Left Tilted	Bottom	Full	18900	1880	22.28	23.00	1.180	0.01	0.035	0.041



FCC SAR Test Report

Report No. : FA8D2708

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Right Cheek	Top	Reduced	21100	2535	16.62	18.00	1.374	0.12	0.726	0.998
	LTE Band 7	20M	QPSK	1	0	Right Cheek	Top	Reduced	20850	2510	16.42	18.00	1.439	0.08	0.746	1.073
	LTE Band 7	20M	QPSK	1	0	Right Cheek	Top	Reduced	21350	2560	16.50	18.00	1.413	0.04	0.736	1.040
	LTE Band 7	20M	QPSK	50	0	Right Cheek	Top	Reduced	21100	2535	16.62	18.00	1.374	0.07	0.718	0.987
	LTE Band 7	20M	QPSK	50	0	Right Cheek	Top	Reduced	20850	2510	16.52	18.00	1.406	-0.06	0.744	1.046
	LTE Band 7	20M	QPSK	50	0	Right Cheek	Top	Reduced	21350	2560	16.54	18.00	1.400	0.03	0.739	1.034
	LTE Band 7	20M	QPSK	100	0	Right Cheek	Top	Reduced	21100	2535	16.63	18.00	1.371	0.17	0.712	0.976
	LTE Band 7	20M	QPSK	1	0	Right Tilted	Top	Reduced	21100	2535	16.62	18.00	1.374	0.06	0.816	1.121
	LTE Band 7	20M	QPSK	1	0	Right Tilted	Top	Reduced	20850	2510	16.42	18.00	1.439	-0.07	0.785	1.129
	LTE Band 7	20M	QPSK	1	0	Right Tilted	Top	Reduced	21350	2560	16.5	18.00	1.413	0.11	0.798	1.127
	LTE Band 7	20M	QPSK	50	0	Right Tilted	Top	Reduced	21100	2535	16.62	18.00	1.374	0.19	0.814	1.118
09	LTE Band 7	20M	QPSK	50	0	Right Tilted	Top	Reduced	20850	2510	16.52	18.00	1.406	-0.05	0.803	1.129
	LTE Band 7	20M	QPSK	50	0	Right Tilted	Top	Reduced	20850(PCC)+21048(SCC)	2510(PCC)+2529.8(SCC)	16.74	18.00	1.337	0.04	0.648	0.866
	LTE Band 7	20M	QPSK	50	0	Right Tilted	Top	Reduced	21350	2560	16.54	18.00	1.400	0.17	0.799	1.118
	LTE Band 7	20M	QPSK	100	0	Right Tilted	Top	Reduced	21100	2535	16.63	18.00	1.371	0.04	0.809	1.109
	LTE Band 7	20M	QPSK	1	0	Left Cheek	Top	Reduced	21100	2535	16.62	18.00	1.374	0.08	0.270	0.371
	LTE Band 7	20M	QPSK	50	0	Left Cheek	Top	Reduced	21100	2535	16.62	18.00	1.374	0.05	0.275	0.378
	LTE Band 7	20M	QPSK	1	0	Left Tilted	Top	Reduced	21100	2535	16.62	18.00	1.374	-0.06	0.251	0.345
	LTE Band 7	20M	QPSK	50	0	Left Tilted	Top	Reduced	21100	2535	16.62	18.00	1.374	0.15	0.259	0.356
	LTE Band 7	20M	QPSK	1	0	Right Cheek	Bottom	Full	21100	2535	23.42	24.00	1.143	-0.08	0.099	0.113
	LTE Band 7	20M	QPSK	1	0	Right Cheek	Bottom	Full	21100(PCC)+20902(SCC)	2535(PCC)+2515.2(SCC)	22.43	24.00	1.435	0.05	0.077	0.111
	LTE Band 7	20M	QPSK	50	0	Right Cheek	Bottom	Full	21100	2535	22.42	23.00	1.143	0.02	0.080	0.091
	LTE Band 7	20M	QPSK	1	0	Right Tilted	Bottom	Full	21100	2535	23.42	24.00	1.143	0.09	0.070	0.079
	LTE Band 7	20M	QPSK	50	0	Right Tilted	Bottom	Full	21100	2535	22.42	23.00	1.143	0.01	0.056	0.064
	LTE Band 7	20M	QPSK	1	0	Left Cheek	Bottom	Full	21100	2535	23.42	24.00	1.143	-0.02	0.060	0.068
	LTE Band 7	20M	QPSK	50	0	Left Cheek	Bottom	Full	21100	2535	22.42	23.00	1.143	0.13	0.046	0.053
	LTE Band 7	20M	QPSK	1	0	Left Tilted	Bottom	Full	21100	2535	23.42	24.00	1.143	-0.01	0.034	0.039
	LTE Band 7	20M	QPSK	50	0	Left Tilted	Bottom	Full	21100	2535	22.42	23.00	1.143	0.04	0.027	0.030



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1	0	Right Cheek	Top	Reduced	38000	2595	18.96	20.00	1.271	62.9	1.006	-0.04	0.739	0.945
	LTE Band 38	20M	QPSK	50	0	Right Cheek	Top	Reduced	38000	2595	18.88	20.00	1.294	62.9	1.006	-0.02	0.756	0.984
10	LTE Band 38	20M	QPSK	100	0	Right Cheek	Top	Reduced	38000	2595	18.82	20.00	1.312	62.9	1.006	-0.02	0.748	0.987
	LTE Band 38	20M	QPSK	100	0	Right Cheek	Top	Reduced	37901(PCC)+38099(SCC)	2585.1(PCC)+2604.9(SCC)	18.92	20.00	1.282	62.9	1.006	0.02	0.729	0.940
	LTE Band 38	20M	QPSK	1	0	Right Tilted	Top	Reduced	38000	2595	18.96	20.00	1.271	62.9	1.006	0.15	0.687	0.878
	LTE Band 38	20M	QPSK	50	0	Right Tilted	Top	Reduced	38000	2595	18.88	20.00	1.294	62.9	1.006	-0.06	0.677	0.881
	LTE Band 38	20M	QPSK	100	0	Right Tilted	Top	Reduced	38000	2595	18.82	20.00	1.312	62.9	1.006	0.11	0.699	0.923
	LTE Band 38	20M	QPSK	1	0	Left Cheek	Top	Reduced	38000	2595	18.96	20.00	1.271	62.9	1.006	0.02	0.237	0.303
	LTE Band 38	20M	QPSK	50	0	Left Cheek	Top	Reduced	38000	2595	18.88	20.00	1.294	62.9	1.006	0.1	0.240	0.312
	LTE Band 38	20M	QPSK	1	0	Left Tilted	Top	Reduced	38000	2595	18.96	20.00	1.271	62.9	1.006	0.03	0.223	0.285
	LTE Band 38	20M	QPSK	50	0	Left Tilted	Top	Reduced	38000	2595	18.88	20.00	1.294	62.9	1.006	-0.03	0.219	0.285
	LTE Band 38	20M	QPSK	1	0	Right Cheek	Bottom	Full	38000	2595	23.15	24.00	1.216	62.9	1.006	-0.07	0.061	0.075
	LTE Band 38	20M	QPSK	1	0	Right Cheek	Bottom	Full	37901(PCC)+38099(SCC)	2585.1(PCC)+2604.9(SCC)	22.78	24.00	1.324	62.9	1.006	0.06	0.045	0.060
	LTE Band 38	20M	QPSK	50	0	Right Cheek	Bottom	Full	38000	2595	22.33	23.00	1.167	62.9	1.006	-0.02	0.051	0.060
	LTE Band 38	20M	QPSK	1	0	Right Tilted	Bottom	Full	38000	2595	23.15	24.00	1.216	62.9	1.006	-0.08	0.035	0.042
	LTE Band 38	20M	QPSK	50	0	Right Tilted	Bottom	Full	38000	2595	22.33	23.00	1.167	62.9	1.006	0.01	0.028	0.033
	LTE Band 38	20M	QPSK	1	0	Left Cheek	Bottom	Full	38000	2595	23.15	24.00	1.216	62.9	1.006	-0.09	0.034	0.041
	LTE Band 38	20M	QPSK	50	0	Left Cheek	Bottom	Full	38000	2595	22.33	23.00	1.167	62.9	1.006	0.11	0.028	0.032
	LTE Band 38	20M	QPSK	1	0	Left Tilted	Bottom	Full	38000	2595	23.15	24.00	1.216	62.9	1.006	0.05	0.013	0.016
	LTE Band 38	20M	QPSK	50	0	Left Tilted	Bottom	Full	38000	2595	22.33	23.00	1.167	62.9	1.006	-0.02	0.010	0.012

<WLAN2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Reduced Level 1	1	2412	17.48	18.00	1.127	100	1.000	0.488			
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	Reduced Level 1	1	2412	17.48	18.00	1.127	100	1.000	0.511	0.01	0.321	0.362
11	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced Level 1	1	2412	17.48	18.00	1.127	100	1.000	2.088	-0.02	0.930	1.048
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced Level 1	11	2462	17.45	18.00	1.135	100	1.000		-0.02	0.792	0.899
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced Level 1	1	2412	17.48	18.00	1.127	100	1.000	2.069	-0.11	0.928	1.046
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced Level 1	11	2462	17.45	18.00	1.135	100	1.000		0.03	0.762	0.865
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Reduced Level 2	1	2412	16.17	17.00	1.211	100	1.000	0.326	0.05	0.219	0.265
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	Reduced Level 2	1	2412	16.17	17.00	1.211	100	1.000	0.333	0.03	0.220	0.266
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced Level 2	1	2412	16.17	17.00	1.211	100	1.000	1.445	-0.09	0.707	0.856
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced Level 2	11	2462	16.06	17.00	1.242	100	1.000		-0.07	0.652	0.810
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced Level 2	1	2412	16.17	17.00	1.211	100	1.000	1.507	-0.09	0.633	0.766
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced Level 2	11	2462	16.06	17.00	1.242	100	1.000		-0.12	0.631	0.783



<WLAN5GHz SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	Reduced Level 1	56	5280	12.45	12.50	1.012	98.28	1.018	0.777			
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	Reduced Level 1	56	5280	12.45	12.50	1.012	98.28	1.018	0.656			
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	Reduced Level 1	56	5280	12.45	12.50	1.012	98.28	1.018	2.297	0.09	0.910	0.937
12	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	Reduced Level 1	64	5320	12.43	12.50	1.016	98.28	1.018		-0.05	1.120	1.159
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	Reduced Level 1	56	5280	12.45	12.50	1.012	98.28	1.018	1.859	0.09	0.692	0.713
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	Reduced Level 2	56	5280	11.36	11.50	1.033	98.28	1.018		0.02	0.184	0.193
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	Reduced Level 2	56	5280	11.36	11.50	1.033	98.28	1.018		0.01	0.144	0.151
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	Reduced Level 2	56	5280	11.36	11.50	1.033	98.28	1.018		-0.01	0.649	0.682
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	Reduced Level 2	56	5280	11.36	11.50	1.033	98.28	1.018		0.04	0.475	0.499
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	Reduced Level 1	100	5500	12.68	13.00	1.076	98.28	1.018	0.516			
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	Reduced Level 1	100	5500	12.68	13.00	1.076	98.28	1.018	0.411			
13	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	Reduced Level 1	100	5500	12.68	13.00	1.076	98.28	1.018	2.505	0.01	0.871	0.954
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	Reduced Level 1	140	5700	12.67	13.00	1.079	98.28	1.018		0.08	0.525	0.577
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	Reduced Level 1	100	5500	12.68	13.00	1.076	98.28	1.018	1.765	0.05	0.624	0.684
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	Reduced Level 2	100	5500	11.46	11.50	1.009	98.28	1.018		0.06	0.144	0.148
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	Reduced Level 2	100	5500	11.46	11.50	1.009	98.28	1.018		0.01	0.114	0.117
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	Reduced Level 2	100	5500	11.46	11.50	1.009	98.28	1.018		0.07	0.624	0.641
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	Reduced Level 2	100	5500	11.46	11.50	1.009	98.28	1.018		0.02	0.425	0.437
	WLAN 5.8GHz	802.11a 6Mbps	Right Cheek	Reduced Level 1	157	5785	14.61	15.00	1.094	98.28	1.018	0.702			
	WLAN 5.8GHz	802.11a 6Mbps	Right Tilted	Reduced Level 1	157	5785	14.61	15.00	1.094	98.28	1.018	0.636			
	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	Reduced Level 1	157	5785	14.61	15.00	1.094	98.28	1.018	2.338	0.06	0.793	0.883
14	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	Reduced Level 1	161	5805	14.23	15.00	1.194	98.28	1.018		-0.07	0.874	1.062
	WLAN 5.8GHz	802.11a 6Mbps	Left Tilted	Reduced Level 1	157	5785	14.61	15.00	1.094	98.28	1.018	1.830	-0.01	0.614	0.684
	WLAN 5.8GHz	802.11a 6Mbps	Right Cheek	Reduced Level 2	157	5785	13.31	13.50	1.045	98.28	1.018		0.06	0.181	0.192
	WLAN 5.8GHz	802.11a 6Mbps	Right Tilted	Reduced Level 2	157	5785	13.31	13.50	1.045	98.28	1.018		0.03	0.161	0.171
	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	Reduced Level 2	157	5785	13.31	13.50	1.045	98.28	1.018		0.01	0.524	0.557
	WLAN 5.8GHz	802.11a 6Mbps	Left Tilted	Reduced Level 2	157	5785	13.31	13.50	1.045	98.28	1.018		-0.05	0.409	0.435

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0	2402	13.06	13.50	1.107	76.79	1.085	-0.05	0.058	0.070
	Bluetooth	1Mbps	Right Tilted	0	2402	13.06	13.50	1.107	76.79	1.085	0.07	0.092	0.110
	Bluetooth	1Mbps	Left Cheek	0	2402	13.06	13.50	1.107	76.79	1.085	-0.17	0.191	0.229
15	Bluetooth	1Mbps	Left Tilted	0	2402	13.06	13.50	1.107	76.79	1.085	-0.02	0.218	0.262



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Front	10	Top	Full	189	836.4	26.84	28.00	1.306	-0.06	0.413	0.539
16	GSM850	GPRS 4 Tx slots	Back	10	Top	Full	189	836.4	26.84	28.00	1.306	-0.17	0.461	0.602
	GSM850	GPRS 4 Tx slots	Left Side	10	Top	Full	189	836.4	26.84	28.00	1.306	-0.02	0.344	0.449
	GSM850	GPRS 4 Tx slots	Right Side	10	Top	Full	189	836.4	26.84	28.00	1.306	0.06	0.103	0.135
	GSM850	GPRS 4 Tx slots	Top Side	10	Top	Full	189	836.4	26.84	28.00	1.306	0.02	0.362	0.473
	GSM850	GPRS 4 Tx slots	Front	10	Bottom	Full	189	836.4	26.84	28.00	1.306	0.04	0.168	0.219
	GSM850	GPRS 4 Tx slots	Back	10	Bottom	Full	189	836.4	26.84	28.00	1.306	0.03	0.213	0.278
	GSM850	GPRS 4 Tx slots	Left Side	10	Bottom	Full	189	836.4	26.84	28.00	1.306	-0.09	0.049	0.064
	GSM850	GPRS 4 Tx slots	Right Side	10	Bottom	Full	189	836.4	26.84	28.00	1.306	-0.02	0.168	0.219
	GSM850	GPRS 4 Tx slots	Bottom Side	10	Bottom	Full	189	836.4	26.84	28.00	1.306	0.08	0.121	0.158
	GSM1900	GPRS 4 Tx slots	Front	10	Top	Full	661	1880	23.94	25.00	1.276	0.06	0.120	0.153
	GSM1900	GPRS 4 Tx slots	Back	10	Top	Full	661	1880	23.94	25.00	1.276	-0.19	0.128	0.163
	GSM1900	GPRS 4 Tx slots	Left Side	10	Top	Full	661	1880	23.94	25.00	1.276	-0.02	0.180	0.230
	GSM1900	GPRS 4 Tx slots	Right Side	10	Top	Full	661	1880	23.94	25.00	1.276	-0.06	0.028	0.035
	GSM1900	GPRS 4 Tx slots	Top Side	10	Top	Full	661	1880	23.94	25.00	1.276	0.07	0.242	0.309
	GSM1900	GPRS 4 Tx slots	Front	10	Bottom	Reduced	661	1880	23.60	24.50	1.230	-0.14	0.330	0.406
	GSM1900	GPRS 4 Tx slots	Back	10	Bottom	Reduced	661	1880	23.60	24.50	1.230	-0.02	0.523	0.643
	GSM1900	GPRS 4 Tx slots	Left Side	10	Bottom	Reduced	661	1880	23.60	24.50	1.230	-0.02	0.073	0.090
	GSM1900	GPRS 4 Tx slots	Right Side	10	Bottom	Reduced	661	1880	23.60	24.50	1.230	0.06	0.095	0.116
	GSM1900	GPRS 4 Tx slots	Bottom Side	10	Bottom	Reduced	661	1880	23.60	24.50	1.230	0.02	0.845	1.040
17	GSM1900	GPRS 4 Tx slots	Bottom Side	10	Bottom	Reduced	512	1850.2	23.54	24.50	1.247	0.06	0.938	1.170
	GSM1900	GPRS 4 Tx slots	Bottom Side	10	Bottom	Reduced	810	1909.8	23.49	24.50	1.262	0.09	0.555	0.700



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
18	WCDMA Band V	RMC 12.2Kbps	Front	10	Top	Full	4182	836.4	23.94	25.00	1.276	-0.09	0.575	0.734
	WCDMA Band V	RMC 12.2Kbps	Back	10	Top	Full	4182	836.4	23.94	25.00	1.276	-0.05	0.607	0.775
	WCDMA Band V	RMC 12.2Kbps	Left Side	10	Top	Full	4182	836.4	23.94	25.00	1.276	-0.07	0.451	0.576
	WCDMA Band V	RMC 12.2Kbps	Right Side	10	Top	Full	4182	836.4	23.94	25.00	1.276	0.03	0.110	0.140
	WCDMA Band V	RMC 12.2Kbps	Top Side	10	Top	Full	4182	836.4	23.94	25.00	1.276	0.09	0.449	0.573
	WCDMA Band V	RMC 12.2Kbps	Front	10	Bottom	Full	4182	836.4	23.94	25.00	1.276	-0.04	0.210	0.268
	WCDMA Band V	RMC 12.2Kbps	Back	10	Bottom	Full	4182	836.4	23.94	25.00	1.276	0.01	0.304	0.388
	WCDMA Band V	RMC 12.2Kbps	Left Side	10	Bottom	Full	4182	836.4	23.94	25.00	1.276	0.03	0.101	0.129
	WCDMA Band V	RMC 12.2Kbps	Right Side	10	Bottom	Full	4182	836.4	23.94	25.00	1.276	0.04	0.300	0.383
	WCDMA Band V	RMC 12.2Kbps	Bottom Side	10	Bottom	Full	4182	836.4	23.94	25.00	1.276	0.1	0.175	0.223
19	WCDMA Band IV	RMC 12.2Kbps	Front	10	Top	Full	1513	1752.6	24.05	25.00	1.245	0.15	0.342	0.426
	WCDMA Band IV	RMC 12.2Kbps	Back	10	Top	Full	1513	1752.6	24.05	25.00	1.245	-0.08	0.397	0.494
	WCDMA Band IV	RMC 12.2Kbps	Left Side	10	Top	Full	1513	1752.6	24.05	25.00	1.245	0.06	0.405	0.504
	WCDMA Band IV	RMC 12.2Kbps	Right Side	10	Top	Full	1513	1752.6	24.05	25.00	1.245	0.03	0.090	0.113
	WCDMA Band IV	RMC 12.2Kbps	Top Side	10	Top	Full	1513	1752.6	24.05	25.00	1.245	-0.05	0.608	0.757
	WCDMA Band IV	RMC 12.2Kbps	Front	10	Bottom	Reduced	1513	1752.6	21.10	22.00	1.230	0.03	0.327	0.402
	WCDMA Band IV	RMC 12.2Kbps	Back	10	Bottom	Reduced	1513	1752.6	21.10	22.00	1.230	-0.07	0.491	0.604
	WCDMA Band IV	RMC 12.2Kbps	Left Side	10	Bottom	Reduced	1513	1752.6	21.10	22.00	1.230	-0.02	0.151	0.186
	WCDMA Band IV	RMC 12.2Kbps	Right Side	10	Bottom	Reduced	1513	1752.6	21.10	22.00	1.230	-0.05	0.120	0.148
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	Bottom	Reduced	1513	1752.6	21.10	22.00	1.230	0.03	0.811	0.998
20	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	Bottom	Reduced	1312	1712.4	20.96	22.00	1.271	0.02	0.809	1.028
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	Bottom	Reduced	1413	1732.6	20.96	22.00	1.271	-0.05	0.758	0.963
	WCDMA Band II	RMC 12.2Kbps	Front	10	Top	Full	9538	1907.6	24.15	25.00	1.216	0.18	0.342	0.416
	WCDMA Band II	RMC 12.2Kbps	Back	10	Top	Full	9538	1907.6	24.15	25.00	1.216	0.03	0.413	0.502
	WCDMA Band II	RMC 12.2Kbps	Left Side	10	Top	Full	9538	1907.6	24.15	25.00	1.216	0.04	0.556	0.676
	WCDMA Band II	RMC 12.2Kbps	Right Side	10	Top	Full	9538	1907.6	24.15	25.00	1.216	-0.02	0.040	0.048
	WCDMA Band II	RMC 12.2Kbps	Top Side	10	Top	Full	9538	1907.6	24.15	25.00	1.216	0.09	0.606	0.737
	WCDMA Band II	RMC 12.2Kbps	Front	10	Bottom	Reduced	9538	1907.6	19.63	20.50	1.222	0.05	0.365	0.446
	WCDMA Band II	RMC 12.2Kbps	Back	10	Bottom	Reduced	9538	1907.6	19.63	20.50	1.222	-0.05	0.499	0.610
	WCDMA Band II	RMC 12.2Kbps	Left Side	10	Bottom	Reduced	9538	1907.6	19.63	20.50	1.222	0.17	0.179	0.219
20	WCDMA Band II	RMC 12.2Kbps	Right Side	10	Bottom	Reduced	9538	1907.6	19.63	20.50	1.222	0.06	0.219	0.268
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	Bottom	Reduced	9538	1907.6	19.63	20.50	1.222	0.08	0.849	1.037
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	Bottom	Reduced	9262	1852.4	19.61	20.50	1.227	0.03	0.751	0.922
20	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	Bottom	Reduced	9400	1880	19.41	20.50	1.285	-0.11	0.807	1.037



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	0	Front	10	Top	Full	20525	836.5	22.59	24.00	1.384	-0.01	0.355	0.491
	LTE Band 5	10M	QPSK	25	0	Front	10	Top	Full	20525	836.5	21.58	23.00	1.387	0.06	0.270	0.374
21	LTE Band 5	10M	QPSK	1	0	Back	10	Top	Full	20525	836.5	22.59	24.00	1.384	-0.16	0.474	0.656
	LTE Band 5	10M	QPSK	25	0	Back	10	Top	Full	20525	836.5	21.58	23.00	1.387	0.06	0.346	0.480
	LTE Band 5	10M	QPSK	1	0	Left Side	10	Top	Full	20525	836.5	22.59	24.00	1.384	0.02	0.317	0.439
	LTE Band 5	10M	QPSK	25	0	Left Side	10	Top	Full	20525	836.5	21.58	23.00	1.387	0.03	0.253	0.351
	LTE Band 5	10M	QPSK	1	0	Right Side	10	Top	Full	20525	836.5	22.59	24.00	1.384	0.01	0.066	0.091
	LTE Band 5	10M	QPSK	25	0	Right Side	10	Top	Full	20525	836.5	21.58	23.00	1.387	0.06	0.056	0.077
	LTE Band 5	10M	QPSK	1	0	Top Side	10	Top	Full	20525	836.5	22.59	24.00	1.384	0.02	0.330	0.457
	LTE Band 5	10M	QPSK	25	0	Top Side	10	Top	Full	20525	836.5	21.58	23.00	1.387	0.05	0.245	0.340
	LTE Band 5	10M	QPSK	1	0	Front	10	Bottom	Full	20525	836.5	22.59	24.00	1.384	0.06	0.200	0.277
	LTE Band 5	10M	QPSK	25	0	Front	10	Bottom	Full	20525	836.5	21.58	23.00	1.387	0.01	0.157	0.218
	LTE Band 5	10M	QPSK	1	0	Back	10	Bottom	Full	20525	836.5	22.59	24.00	1.384	0.09	0.255	0.353
	LTE Band 5	10M	QPSK	25	0	Back	10	Bottom	Full	20525	836.5	21.58	23.00	1.387	-0.02	0.194	0.269
	LTE Band 5	10M	QPSK	1	0	Left Side	10	Bottom	Full	20525	836.5	22.59	24.00	1.384	0.04	0.123	0.170
	LTE Band 5	10M	QPSK	25	0	Left Side	10	Bottom	Full	20525	836.5	21.58	23.00	1.387	-0.04	0.092	0.128
	LTE Band 5	10M	QPSK	1	0	Right Side	10	Bottom	Full	20525	836.5	22.59	24.00	1.384	-0.18	0.296	0.410
	LTE Band 5	10M	QPSK	25	0	Right Side	10	Bottom	Full	20525	836.5	21.58	23.00	1.387	-0.04	0.232	0.322
	LTE Band 5	10M	QPSK	1	0	Bottom Side	10	Bottom	Full	20525	836.5	22.59	24.00	1.384	0.08	0.139	0.192
	LTE Band 5	10M	QPSK	25	0	Bottom Side	10	Bottom	Full	20525	836.5	21.58	23.00	1.387	0.03	0.095	0.132
	LTE Band 4	20M	QPSK	1	0	Front	10	Top	Full	20175	1732.5	22.65	24.00	1.365	0.07	0.246	0.336
	LTE Band 4	20M	QPSK	50	0	Front	10	Top	Full	20175	1732.5	21.68	23.00	1.355	0.03	0.213	0.289
	LTE Band 4	20M	QPSK	1	0	Back	10	Top	Full	20175	1732.5	22.65	24.00	1.365	-0.06	0.289	0.394
	LTE Band 4	20M	QPSK	50	0	Back	10	Top	Full	20175	1732.5	21.68	23.00	1.355	0.04	0.239	0.324
	LTE Band 4	20M	QPSK	1	0	Left Side	10	Top	Full	20175	1732.5	22.65	24.00	1.365	0.1	0.271	0.370
	LTE Band 4	20M	QPSK	50	0	Left Side	10	Top	Full	20175	1732.5	21.68	23.00	1.355	0.08	0.216	0.293
	LTE Band 4	20M	QPSK	1	0	Right Side	10	Top	Full	20175	1732.5	22.65	24.00	1.365	0.07	0.044	0.060
	LTE Band 4	20M	QPSK	50	0	Right Side	10	Top	Full	20175	1732.5	21.68	23.00	1.355	0.09	0.035	0.047
	LTE Band 4	20M	QPSK	1	0	Top Side	10	Top	Full	20175	1732.5	22.65	24.00	1.365	0.09	0.502	0.685
	LTE Band 4	20M	QPSK	50	0	Top Side	10	Top	Full	20175	1732.5	21.68	23.00	1.355	0.09	0.369	0.500
	LTE Band 4	20M	QPSK	1	0	Front	10	Bottom	Reduced	20175	1732.5	20.98	22.00	1.265	-0.01	0.310	0.392
	LTE Band 4	20M	QPSK	50	0	Front	10	Bottom	Reduced	20175	1732.5	21.02	22.00	1.253	0.03	0.311	0.390
	LTE Band 4	20M	QPSK	1	0	Back	10	Bottom	Reduced	20175	1732.5	20.98	22.00	1.265	-0.05	0.459	0.581
	LTE Band 4	20M	QPSK	50	0	Back	10	Bottom	Reduced	20175	1732.5	21.02	22.00	1.253	-0.04	0.550	0.689
	LTE Band 4	20M	QPSK	1	0	Left Side	10	Bottom	Reduced	20175	1732.5	20.98	22.00	1.265	0.03	0.106	0.134
	LTE Band 4	20M	QPSK	50	0	Left Side	10	Bottom	Reduced	20175	1732.5	21.02	22.00	1.253	0.03	0.089	0.112
	LTE Band 4	20M	QPSK	1	0	Right Side	10	Bottom	Reduced	20175	1732.5	20.98	22.00	1.265	0.16	0.083	0.105
	LTE Band 4	20M	QPSK	50	0	Right Side	10	Bottom	Reduced	20175	1732.5	21.02	22.00	1.253	0.06	0.069	0.086
	LTE Band 4	20M	QPSK	1	0	Bottom Side	10	Bottom	Reduced	20175	1732.5	20.98	22.00	1.265	0.06	0.741	0.937
22	LTE Band 4	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	20175	1732.5	21.02	22.00	1.253	0.06	0.784	0.982
	LTE Band 4	20M	QPSK	100	0	Bottom Side	10	Bottom	Reduced	20175	1732.5	21.00	22.00	1.259	0.05	0.773	0.973



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	10	Top	Full	18900	1880	23.16	24.00	1.213	0.05	0.260	0.315
	LTE Band 2	20M	QPSK	50	0	Front	10	Top	Full	18900	1880	22.28	23.00	1.180	0.06	0.233	0.275
	LTE Band 2	20M	QPSK	1	0	Back	10	Top	Full	18900	1880	23.16	24.00	1.213	-0.01	0.301	0.365
	LTE Band 2	20M	QPSK	50	0	Back	10	Top	Full	18900	1880	22.28	23.00	1.180	-0.02	0.253	0.299
	LTE Band 2	20M	QPSK	1	0	Left Side	10	Top	Full	18900	1880	23.16	24.00	1.213	0.17	0.412	0.500
	LTE Band 2	20M	QPSK	50	0	Left Side	10	Top	Full	18900	1880	22.28	23.00	1.180	0.05	0.352	0.415
	LTE Band 2	20M	QPSK	1	0	Right Side	10	Top	Full	18900	1880	23.16	24.00	1.213	0.01	0.042	0.051
	LTE Band 2	20M	QPSK	50	0	Right Side	10	Top	Full	18900	1880	22.28	23.00	1.180	0.06	0.031	0.037
	LTE Band 2	20M	QPSK	1	0	Top Side	10	Top	Full	18900	1880	23.16	24.00	1.213	-0.02	0.479	0.581
	LTE Band 2	20M	QPSK	50	0	Top Side	10	Top	Full	18900	1880	22.28	23.00	1.180	0.02	0.339	0.400
	LTE Band 2	20M	QPSK	1	0	Front	10	Bottom	Reduced	18900	1880	19.58	20.50	1.236	0.01	0.210	0.260
	LTE Band 2	20M	QPSK	50	0	Front	10	Bottom	Reduced	18900	1880	19.61	20.50	1.227	0.07	0.213	0.261
	LTE Band 2	20M	QPSK	1	0	Back	10	Bottom	Reduced	18900	1880	19.58	20.50	1.236	0.01	0.462	0.571
	LTE Band 2	20M	QPSK	50	0	Back	10	Bottom	Reduced	18900	1880	19.61	20.50	1.227	0.07	0.294	0.361
	LTE Band 2	20M	QPSK	1	0	Left Side	10	Bottom	Reduced	18900	1880	19.58	20.50	1.236	0.04	0.115	0.142
	LTE Band 2	20M	QPSK	50	0	Left Side	10	Bottom	Reduced	18900	1880	19.61	20.50	1.227	0.09	0.094	0.115
	LTE Band 2	20M	QPSK	1	0	Right Side	10	Bottom	Reduced	18900	1880	19.58	20.50	1.236	-0.01	0.182	0.225
	LTE Band 2	20M	QPSK	50	0	Right Side	10	Bottom	Reduced	18900	1880	19.61	20.50	1.227	-0.15	0.146	0.179
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10	Bottom	Reduced	18900	1880	19.58	20.50	1.236	0.14	0.781	0.965
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10	Bottom	Reduced	18700	1860	19.57	20.50	1.239	0.08	0.741	0.918
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10	Bottom	Reduced	19100	1900	19.57	20.50	1.239	0.01	0.766	0.949
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	18900	1880	19.61	20.50	1.227	0.09	0.786	0.965
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	18700	1860	19.59	20.50	1.233	0.16	0.767	0.946
23	LTE Band 2	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	19100	1900	19.6	20.50	1.230	0.04	0.813	1.000
	LTE Band 2	20M	QPSK	100	0	Bottom Side	10	Bottom	Reduced	18900	1880	19.57	20.50	1.239	-0.01	0.802	0.994
	LTE Band 7	20M	QPSK	1	0	Front	10	Top	Full	21100	2535	23.42	24.00	1.143	0.06	0.650	0.743
	LTE Band 7	20M	QPSK	50	0	Front	10	Top	Full	21100	2535	22.42	23.00	1.143	0.02	0.503	0.575
	LTE Band 7	20M	QPSK	1	0	Back	10	Top	Full	21100	2535	23.42	24.00	1.143	-0.04	0.728	0.832
	LTE Band 7	20M	QPSK	1	0	Back	10	Top	Full	20850	2510	23.19	24.00	1.205	-0.05	0.615	0.741
	LTE Band 7	20M	QPSK	1	0	Back	10	Top	Full	21350	2560	23.22	24.00	1.197	0.08	0.626	0.749
	LTE Band 7	20M	QPSK	50	0	Back	10	Top	Full	21100	2535	22.42	23.00	1.143	0.05	0.522	0.597
	LTE Band 7	20M	QPSK	100	0	Back	10	Top	Full	21100	2535	22.43	23.00	1.140	0.01	0.519	0.592
	LTE Band 7	20M	QPSK	1	0	Left Side	10	Top	Full	21100	2535	23.42	24.00	1.143	-0.03	0.717	0.819
	LTE Band 7	20M	QPSK	1	0	Left Side	10	Top	Full	20850	2510	23.19	24.00	1.205	-0.09	0.654	0.788
	LTE Band 7	20M	QPSK	1	0	Left Side	10	Top	Full	21350	2560	23.22	24.00	1.197	-0.14	0.745	0.892
	LTE Band 7	20M	QPSK	1	0	Left Side	10	Top	Full	21350(PCC) +21152(SCC)	2560(PCC) +2540.2(SCC)	22.65	24.00	1.365	0.03	0.656	0.895
	LTE Band 7	20M	QPSK	50	0	Left Side	10	Top	Full	21100	2535	22.42	23.00	1.143	-0.05	0.579	0.662
	LTE Band 7	20M	QPSK	100	0	Left Side	10	Top	Full	21100	2535	22.43	23.00	1.140	-0.02	0.574	0.655
	LTE Band 7	20M	QPSK	1	0	Right Side	10	Top	Full	21100	2535	23.42	24.00	1.143	0.02	0.048	0.055
	LTE Band 7	20M	QPSK	50	0	Right Side	10	Top	Full	21100	2535	22.42	23.00	1.143	0.06	0.040	0.046
	LTE Band 7	20M	QPSK	1	0	Top Side	10	Top	Full	21100	2535	23.42	24.00	1.143	0.09	0.425	0.486
	LTE Band 7	20M	QPSK	50	0	Top Side	10	Top	Full	21100	2535	22.42	23.00	1.143	-0.06	0.298	0.341
	LTE Band 7	20M	QPSK	1	0	Front	10	Bottom	Reduced	21100	2535	20.09	21.00	1.233	0.06	0.288	0.355
	LTE Band 7	20M	QPSK	50	0	Front	10	Bottom	Reduced	21100	2535	20.04	21.00	1.247	0.03	0.288	0.359
	LTE Band 7	20M	QPSK	1	0	Back	10	Bottom	Reduced	21100	2535	20.09	21.00	1.233	-0.06	0.449	0.554
	LTE Band 7	20M	QPSK	50	0	Back	10	Bottom	Reduced	21100	2535	20.04	21.00	1.247	-0.03	0.450	0.561
	LTE Band 7	20M	QPSK	1	0	Left Side	10	Bottom	Reduced	21100	2535	20.09	21.00	1.233	-0.02	0.136	0.168
	LTE Band 7	20M	QPSK	50	0	Left Side	10	Bottom	Reduced	21100	2535	20.04	21.00	1.247	0.03	0.108	0.135
	LTE Band 7	20M	QPSK	1	0	Right Side	10	Bottom	Reduced	21100	2535	20.09	21.00	1.233	-0.07	0.167	0.206
	LTE Band 7	20M	QPSK	50	0	Right Side	10	Bottom	Reduced	21100	2535	20.04	21.00	1.247	0.03	0.121	0.151
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10	Bottom	Reduced	21100	2535	20.09	21.00	1.233	0.06	0.817	1.007
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10	Bottom	Reduced	20850	2510	20.08	21.00	1.236	-0.03	0.854	1.055



	LTE Band 7	20M	QPSK	1	0	Bottom Side	10	Bottom	Reduced	21350	2560	20.01	21.00	1.256	0.06	0.758	0.952
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	21100	2535	20.04	21.00	1.247	0.11	0.788	0.983
24	LTE Band 7	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	20850	2510	19.98	21.00	1.265	0.02	0.887	1.122
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	20850(PCC) +21048(SCC)	2510(PCC) +2529.8(SCC)	20.26	21.00	1.186	0.06	0.911	1.080
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	21350	2560	19.91	21.00	1.285	0.09	0.770	0.990
	LTE Band 7	20M	QPSK	100	0	Bottom Side	10	Bottom	Reduced	21100	2535	20.01	21.00	1.256	-0.07	0.794	0.997

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1	0	Front	10	Top	Full	38000	2595	23.15	24.00	1.216	62.9	1.006	-0.13	0.352	0.431
	LTE Band 38	20M	QPSK	50	0	Front	10	Top	Full	38000	2595	22.33	23.00	1.167	62.9	1.006	0.09	0.282	0.331
	LTE Band 38	20M	QPSK	1	0	Back	10	Top	Full	38000	2595	23.15	24.00	1.216	62.9	1.006	0.03	0.399	0.488
	LTE Band 38	20M	QPSK	50	0	Back	10	Top	Full	38000	2595	22.33	23.00	1.167	62.9	1.006	0.06	0.318	0.373
	LTE Band 38	20M	QPSK	1	0	Left Side	10	Top	Full	38000	2595	23.15	24.00	1.216	62.9	1.006	0.09	0.477	0.584
	LTE Band 38	20M	QPSK	1	0	Left Side	10	Top	Full	37901(PCC) + 38099(SCC)	2585.1(PCC) + 2604.9(SCC)	22.78	24.00	1.324	62.9	1.006	-0.04	0.342	0.456
	LTE Band 38	20M	QPSK	50	0	Left Side	10	Top	Full	38000	2595	22.33	23.00	1.167	62.9	1.006	0.02	0.386	0.453
	LTE Band 38	20M	QPSK	1	0	Right Side	10	Top	Full	38000	2595	23.15	24.00	1.216	62.9	1.006	0.03	0.026	0.032
	LTE Band 38	20M	QPSK	50	0	Right Side	10	Top	Full	38000	2595	22.33	23.00	1.167	62.9	1.006	0.11	0.020	0.023
	LTE Band 38	20M	QPSK	1	0	Top Side	10	Top	Full	38000	2595	23.15	24.00	1.216	62.9	1.006	0.02	0.239	0.292
	LTE Band 38	20M	QPSK	50	0	Top Side	10	Top	Full	38000	2595	22.33	23.00	1.167	62.9	1.006	0.16	0.191	0.224
	LTE Band 38	20M	QPSK	1	0	Front	10	Bottom	Reduced	38000	2595	22.31	23.00	1.172	62.9	1.006	0.03	0.242	0.285
	LTE Band 38	20M	QPSK	50	0	Front	10	Bottom	Reduced	38000	2595	22.35	23.00	1.161	62.9	1.006	0.03	0.249	0.291
	LTE Band 38	20M	QPSK	1	0	Back	10	Bottom	Reduced	38000	2595	22.31	23.00	1.172	62.9	1.006	0.01	0.417	0.492
	LTE Band 38	20M	QPSK	50	0	Back	10	Bottom	Reduced	38000	2595	22.35	23.00	1.161	62.9	1.006	0.02	0.463	0.541
	LTE Band 38	20M	QPSK	1	0	Left Side	10	Bottom	Reduced	38000	2595	22.31	23.00	1.172	62.9	1.006	-0.05	0.091	0.107
	LTE Band 38	20M	QPSK	50	0	Left Side	10	Bottom	Reduced	38000	2595	22.35	23.00	1.161	62.9	1.006	0.09	0.074	0.086
	LTE Band 38	20M	QPSK	1	0	Right Side	10	Bottom	Reduced	38000	2595	22.31	23.00	1.172	62.9	1.006	0.02	0.088	0.103
	LTE Band 38	20M	QPSK	50	0	Right Side	10	Bottom	Reduced	38000	2595	22.35	23.00	1.161	62.9	1.006	0.03	0.070	0.082
	LTE Band 38	20M	QPSK	1	0	Bottom Side	10	Bottom	Reduced	38000	2595	22.31	23.00	1.172	62.9	1.006	0.08	0.736	0.868
	LTE Band 38	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	38000	2595	22.35	23.00	1.161	62.9	1.006	0.08	0.738	0.862
	LTE Band 38	20M	QPSK	100	0	Bottom Side	10	Bottom	Reduced	38000	2595	22.34	23.00	1.164	62.9	1.006	0.05	0.773	0.905
25	LTE Band 38	20M	QPSK	100	0	Bottom Side	10	Bottom	Reduced	37901(PCC) + 38099(SCC)	2585.1(PCC) + 2604.9(SCC)	22.37	23.00	1.156	62.9	1.006	0.03	0.781	0.908

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Front	10	1	2412	18.98	19.50	1.127	100	1.000	0.329			
26	WLAN 2.4GHz	802.11b 1Mbps	Back	10	1	2412	18.98	19.50	1.127	100	1.000	0.529	-0.11	0.329	0.371
	WLAN 2.4GHz	802.11b 1Mbps	Right Side	10	1	2412	18.98	19.50	1.127	100	1.000	0.342			
	WLAN 2.4GHz	802.11b 1Mbps	Top Side	10	1	2412	18.98	19.50	1.127	100	1.000	0.242			

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11a 6Mbps	Front	10	48	5240	17.22	17.50	1.067	98.28	1.018	0.396			
27	WLAN5.2GHz	802.11a 6Mbps	Back	10	48	5240	17.22	17.50	1.067	98.28	1.018	0.742	-0.11	0.318	0.345
	WLAN5.2GHz	802.11a 6Mbps	Right Side	10	48	5240	17.22	17.50	1.067	98.28	1.018	0.481			
	WLAN5.2GHz	802.11a 6Mbps	Top Side	10	48	5240	17.22	17.50	1.067	98.28	1.018	0.453			
28	WLAN5.8GHz	802.11a 6Mbps	Front	10	157	5785	17.01	17.50	1.119	98.28	1.018	0.473	-0.01	0.181	0.206
	WLAN5.8GHz	802.11a 6Mbps	Back	10	157	5785	17.01	17.50	1.119	98.28	1.018	0.213			
	WLAN5.8GHz	802.11a 6Mbps	Right Side	10	157	5785	17.01	17.50	1.119	98.28	1.018	0.091			
	WLAN5.8GHz	802.11a 6Mbps	Top Side	10	157	5785	17.01	17.50	1.119	98.28	1.018	0.164			

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10	0	2402	13.06	13.50	1.107	76.79	1.085	-0.08	0.027	0.032
	Bluetooth	1Mbps	Back	10	0	2402	13.06	13.50	1.107	76.79	1.085	-0.04	0.033	0.040
29	Bluetooth	1Mbps	Right Side	10	0	2402	13.06	13.50	1.107	76.79	1.085	0.01	0.033	0.040
	Bluetooth	1Mbps	Top Side	10	0	2402	13.06	13.50	1.107	76.79	1.085	0.03	0.015	0.018



15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Front	10	Top	Full	189	836.4	26.84	28.00	1.306	-0.06	0.413	0.539
30	GSM850	GPRS 4 Tx slots	Back	10	Top	Full	189	836.4	26.84	28.00	1.306	-0.17	0.461	0.602
	GSM850	GPRS 4 Tx slots	Front	10	Bottom	Full	189	836.4	26.84	28.00	1.306	0.04	0.168	0.219
	GSM850	GPRS 4 Tx slots	Back	10	Bottom	Full	189	836.4	26.84	28.00	1.306	0.03	0.213	0.278
	GSM1900	GPRS 4 Tx slots	Front	10	Top	Full	661	1880	23.94	25.00	1.276	0.06	0.12	0.153
	GSM1900	GPRS 4 Tx slots	Back	10	Top	Full	661	1880	23.94	25.00	1.276	-0.19	0.128	0.163
	GSM1900	GPRS 4 Tx slots	Front	10	Bottom	Full	661	1880	23.94	25.00	1.276	0.04	0.383	0.489
31	GSM1900	GPRS 4 Tx slots	Back	10	Bottom	Full	661	1880	23.94	25.00	1.276	-0.02	0.523	0.668

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	Top	Full	4182	836.4	23.94	25.00	1.276	-0.09	0.575	0.734
32	WCDMA Band V	RMC 12.2Kbps	Back	10	Top	Full	4182	836.4	23.94	25.00	1.276	-0.05	0.607	0.775
	WCDMA Band V	RMC 12.2Kbps	Front	10	Bottom	Full	4182	836.4	23.94	25.00	1.276	-0.04	0.210	0.268
	WCDMA Band V	RMC 12.2Kbps	Back	10	Bottom	Full	4182	836.4	23.94	25.00	1.276	0.01	0.304	0.388
	WCDMA Band IV	RMC 12.2Kbps	Front	10	Top	Full	1513	1752.6	24.05	25.00	1.245	0.15	0.342	0.426
	WCDMA Band IV	RMC 12.2Kbps	Back	10	Top	Full	1513	1752.6	24.05	25.00	1.245	-0.08	0.397	0.494
	WCDMA Band IV	RMC 12.2Kbps	Front	10	Bottom	Reduced	1513	1752.6	22.84	24.00	1.306	0.01	0.562	0.734
	WCDMA Band IV	RMC 12.2Kbps	Back	10	Bottom	Reduced	1513	1752.6	22.84	24.00	1.306	0.01	0.708	0.925
33	WCDMA Band IV	RMC 12.2Kbps	Back	10	Bottom	Reduced	1312	1712.4	22.69	24.00	1.352	-0.01	0.704	0.952
	WCDMA Band IV	RMC 12.2Kbps	Back	10	Bottom	Reduced	1413	1732.6	22.72	24.00	1.343	0.02	0.658	0.884
	WCDMA Band II	RMC 12.2Kbps	Front	10	Top	Full	9538	1907.6	24.15	25.00	1.216	0.18	0.342	0.416
	WCDMA Band II	RMC 12.2Kbps	Back	10	Top	Full	9538	1907.6	24.15	25.00	1.216	0.03	0.413	0.502
	WCDMA Band II	RMC 12.2Kbps	Front	10	Bottom	Reduced	9538	1907.6	22.98	23.00	1.005	0.04	0.800	0.804
	WCDMA Band II	RMC 12.2Kbps	Front	10	Bottom	Reduced	9262	1852.4	22.84	23.00	1.038	0.11	0.705	0.731
	WCDMA Band II	RMC 12.2Kbps	Front	10	Bottom	Reduced	9400	1880	22.77	23.00	1.054	0.03	0.769	0.811
34	WCDMA Band II	RMC 12.2Kbps	Back	10	Bottom	Reduced	9538	1907.6	22.98	23.00	1.005	0.05	1.080	1.085
	WCDMA Band II	RMC 12.2Kbps	Back	10	Bottom	Reduced	9262	1852.4	22.84	23.00	1.038	0.02	0.914	0.948
	WCDMA Band II	RMC 12.2Kbps	Back	10	Bottom	Reduced	9400	1880	22.77	23.00	1.054	0.08	1.010	1.065



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	0	Front	10	Top	Full	20525	836.5	22.59	24.00	1.384	-0.01	0.355	0.491
	LTE Band 5	10M	QPSK	25	0	Front	10	Top	Full	20525	836.5	21.58	23.00	1.387	0.06	0.270	0.374
35	LTE Band 5	10M	QPSK	1	0	Back	10	Top	Full	20525	836.5	22.59	24.00	1.384	-0.16	0.474	0.656
	LTE Band 5	10M	QPSK	25	0	Back	10	Top	Full	20525	836.5	21.58	23.00	1.387	0.06	0.346	0.480
	LTE Band 5	10M	QPSK	1	0	Front	10	Bottom	Full	20525	836.5	22.59	24.00	1.384	0.06	0.200	0.277
	LTE Band 5	10M	QPSK	25	0	Front	10	Bottom	Full	20525	836.5	21.58	23.00	1.387	0.01	0.157	0.218
	LTE Band 5	10M	QPSK	1	0	Back	10	Bottom	Full	20525	836.5	22.59	24.00	1.384	0.09	0.255	0.353
	LTE Band 5	10M	QPSK	25	0	Back	10	Bottom	Full	20525	836.5	21.58	23.00	1.387	-0.02	0.194	0.269
	LTE Band 4	20M	QPSK	1	0	Front	10	Top	Full	20175	1732.5	22.65	24.00	1.365	0.07	0.246	0.336
	LTE Band 4	20M	QPSK	50	0	Front	10	Top	Full	20175	1732.5	21.68	23.00	1.355	0.03	0.213	0.289
	LTE Band 4	20M	QPSK	1	0	Back	10	Top	Full	20175	1732.5	22.65	24.00	1.365	-0.06	0.289	0.394
	LTE Band 4	20M	QPSK	50	0	Back	10	Top	Full	20175	1732.5	21.68	23.00	1.355	0.04	0.239	0.324
	LTE Band 4	20M	QPSK	1	0	Front	10	Bottom	Full	20175	1732.5	22.65	24.00	1.365	0.12	0.501	0.684
	LTE Band 4	20M	QPSK	50	0	Front	10	Bottom	Full	20175	1732.5	21.68	23.00	1.355	0.17	0.397	0.538
36	LTE Band 4	20M	QPSK	1	0	Back	10	Bottom	Full	20175	1732.5	22.65	24.00	1.365	-0.04	0.672	0.917
	LTE Band 4	20M	QPSK	50	0	Back	10	Bottom	Full	20175	1732.5	21.68	23.00	1.355	0.09	0.527	0.714
	LTE Band 4	20M	QPSK	100	0	Back	10	Bottom	Full	20175	1732.5	21.66	23.00	1.361	0.12	0.524	0.713
	LTE Band 2	20M	QPSK	1	0	Front	10	Top	Full	18900	1880	23.16	24.00	1.213	0.05	0.260	0.315
	LTE Band 2	20M	QPSK	50	0	Front	10	Top	Full	18900	1880	22.28	23.00	1.180	0.06	0.233	0.275
	LTE Band 2	20M	QPSK	1	0	Back	10	Top	Full	18900	1880	23.16	24.00	1.213	-0.01	0.301	0.365
	LTE Band 2	20M	QPSK	50	0	Back	10	Top	Full	18900	1880	22.28	23.00	1.180	-0.02	0.253	0.299
	LTE Band 2	20M	QPSK	1	0	Front	10	Bottom	Reduced	18900	1880	22.17	23.00	1.211	-0.04	0.619	0.749
	LTE Band 2	20M	QPSK	50	0	Front	10	Bottom	Reduced	18900	1880	22.07	23.00	1.239	0.04	0.627	0.777
	LTE Band 2	20M	QPSK	1	0	Back	10	Bottom	Reduced	18900	1880	22.17	23.00	1.211	-0.05	0.802	0.971
	LTE Band 2	20M	QPSK	1	0	Back	10	Bottom	Reduced	18700	1860	22.03	23.00	1.250	0.06	0.734	0.918
	LTE Band 2	20M	QPSK	1	0	Back	10	Bottom	Reduced	19100	1900	21.92	23.00	1.282	0.08	0.821	1.053
	LTE Band 2	20M	QPSK	50	0	Back	10	Bottom	Reduced	18900	1880	22.07	23.00	1.239	0.18	0.816	1.011
	LTE Band 2	20M	QPSK	50	0	Back	10	Bottom	Reduced	18700	1860	22.04	23.00	1.247	-0.02	0.778	0.97
37	LTE Band 2	20M	QPSK	50	0	Back	10	Bottom	Reduced	19100	1900	21.94	23.00	1.276	0.04	0.849	1.084
	LTE Band 2	20M	QPSK	100	0	Back	10	Bottom	Reduced	18900	1880	22.02	23.00	1.253	-0.14	0.819	1.026
	LTE Band 7	20M	QPSK	1	0	Front	10	Top	Full	21100	2535	23.42	24.00	1.143	0.06	0.650	0.743
	LTE Band 7	20M	QPSK	50	0	Front	10	Top	Full	21100	2535	22.42	23.00	1.143	0.02	0.503	0.575
	LTE Band 7	20M	QPSK	1	0	Back	10	Top	Full	21100	2535	23.42	24.00	1.143	-0.04	0.728	0.832
	LTE Band 7	20M	QPSK	1	0	Back	10	Top	Full	21100(PCC) +20902(SCC)	2535(PCC) +2515.2(SCC)	22.43	24.00	1.435	0.06	0.578	0.830
	LTE Band 7	20M	QPSK	1	0	Back	10	Top	Full	20850	2510	23.19	24.00	1.205	-0.05	0.615	0.741
	LTE Band 7	20M	QPSK	1	0	Back	10	Top	Full	21350	2560	23.22	24.00	1.197	0.08	0.626	0.749
	LTE Band 7	20M	QPSK	50	0	Back	10	Top	Full	21100	2535	22.42	23.00	1.143	0.05	0.522	0.597
	LTE Band 7	20M	QPSK	100	0	Back	10	Top	Full	21100	2535	22.43	23.00	1.140	0.01	0.519	0.592
	LTE Band 7	20M	QPSK	1	0	Front	10	Bottom	Reduced	21100	2535	22.27	23.00	1.183	0.08	0.425	0.503
	LTE Band 7	20M	QPSK	50	0	Front	10	Bottom	Reduced	21100	2535	22.21	23.00	1.199	0.09	0.435	0.522
	LTE Band 7	20M	QPSK	1	0	Back	10	Bottom	Reduced	21100	2535	22.27	23.00	1.183	0.02	0.737	0.872
	LTE Band 7	20M	QPSK	1	0	Back	10	Bottom	Reduced	20850	2510	22.12	23.00	1.225	-0.15	0.726	0.889
	LTE Band 7	20M	QPSK	1	0	Back	10	Bottom	Reduced	21350	2560	22.11	23.00	1.227	0.04	0.691	0.848
	LTE Band 7	20M	QPSK	50	0	Back	10	Bottom	Reduced	21100	2535	22.21	23.00	1.199	0.16	0.71	0.852
38	LTE Band 7	20M	QPSK	50	0	Back	10	Bottom	Reduced	20850	2510	22.2	23.00	1.202	-0.01	0.743	0.893
	LTE Band 7	20M	QPSK	50	0	Back	10	Bottom	Reduced	20850(PCC) +21048(SCC)	2510(PCC) +2529.8(SCC)	21.94	23.00	1.276	-0.03	0.538	0.687
	LTE Band 7	20M	QPSK	50	0	Back	10	Bottom	Reduced	21350	2560	22.11	23.00	1.227	0.02	0.685	0.841
	LTE Band 7	20M	QPSK	100	0	Back	10	Bottom	Reduced	21100	2535	22.19	23.00	1.205	0.06	0.722	0.87



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1	0	Front	10	Top	Full	38000	2595	23.15	24.00	1.216	62.9	1.006	-0.13	0.352	0.431
	LTE Band 38	20M	QPSK	50	0	Front	10	Top	Full	38000	2595	22.33	23.00	1.167	62.9	1.006	0.09	0.282	0.331
	LTE Band 38	20M	QPSK	1	0	Back	10	Top	Full	38000	2595	23.15	24.00	1.216	62.9	1.006	0.03	0.399	0.488
	LTE Band 38	20M	QPSK	1	0	Back	10	Top	Full	37901(PCC)+38099(SCC)	2585.1(PCC)+2604.9(SCC)	22.78	24.00	1.324	62.9	1.006	0.01	0.243	0.324
	LTE Band 38	20M	QPSK	50	0	Back	10	Top	Full	38000	2595	22.33	23.00	1.167	62.9	1.006	0.06	0.318	0.373
	LTE Band 38	20M	QPSK	1	0	Front	10	Bottom	Full	38000	2595	23.15	24.00	1.216	62.9	1.006	0.01	0.381	0.466
	LTE Band 38	20M	QPSK	50	0	Front	10	Bottom	Full	38000	2595	22.33	23.00	1.167	62.9	1.006	0.02	0.326	0.383
39	LTE Band 38	20M	QPSK	1	0	Back	10	Bottom	Full	38000	2595	23.15	24.00	1.216	62.9	1.006	0.01	0.569	0.696
	LTE Band 38	20M	QPSK	1	0	Back	10	Bottom	Full	37901(PCC)+38099(SCC)	2585.1(PCC)+2604.9(SCC)	22.78	24.00	1.324	62.9	1.006	-0.02	0.511	0.681
	LTE Band 38	20M	QPSK	50	0	Back	10	Bottom	Full	38000	2595	22.33	23.00	1.167	62.9	1.006	0.03	0.464	0.545

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Front	10	1	2412	18.98	19.50	1.127	100	1.000	0.329			
40	WLAN 2.4GHz	802.11b 1Mbps	Back	10	1	2412	18.98	19.50	1.127	100	1.000	0.529	-0.11	0.329	0.371

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Front	10	56	5280	17.23	17.50	1.064	98.28	1.018	0.531			
41	WLAN5.3GHz	802.11a 6Mbps	Back	10	56	5280	17.23	17.50	1.064	98.28	1.018	0.682	-0.07	0.292	0.316
42	WLAN5.5GHz	802.11a 6Mbps	Front	10	100	5500	16.93	17.50	1.140	98.28	1.018	1.063	-0.16	0.445	0.517
	WLAN5.5GHz	802.11a 6Mbps	Back	10	100	5500	16.93	17.50	1.140	98.28	1.018	0.421	-0.01	0.181	0.210
43	WLAN5.8GHz	802.11a 6Mbps	Front	10	157	5785	17.01	17.50	1.119	98.28	1.018	0.473	-0.01	0.181	0.206
	WLAN5.8GHz	802.11a 6Mbps	Back	10	157	5785	17.01	17.50	1.119	98.28	1.018	0.213			

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10	0	2402	13.06	13.50	1.107	76.79	1.085	-0.08	0.027	0.032
44	Bluetooth	1Mbps	Back	10	0	2402	13.06	13.50	1.107	76.79	1.085	-0.04	0.033	0.040



15.4 Repeated SAR Measurement

No.	Band	Mode	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 4	-	20M	QPSK	100	0	Right Tilted	0	Top	Reduced	20175	1732.5	20.93	22.00	1.279	-	-	0.06	0.911	1	1.166
2nd	LTE Band 4	-	20M	QPSK	100	0	Right Tilted	0	Top	Reduced	20175	1732.5	20.93	22.00	1.279	-	-	0.01	0.898	1.014	1.149
1st	WLAN2.4GHz	802.11b 1Mbps	-	-	-	-	Left Cheek	0	-	Reduced 1	1	2412	17.48	18.00	1.127	100	1.000	-0.02	0.930	1	1.048
2nd	WLAN2.4GHz	802.11b 1Mbps	-	-	-	-	Left Cheek	0	-	Reduced 1	1	2412	17.48	18.00	1.127	100	1.000	0.04	0.899	1.034	1.013
1st	WLAN5.2&5.3GHz	802.11a 6Mbps	-	-	-	-	Left Cheek	0	-	Reduced 1	64	5320	12.43	12.50	1.016	98.28	1.018	-0.05	1.120	1	1.159
2nd	WLAN5.2&5.3GHz	802.11a 6Mbps	-	-	-	-	Left Cheek	0	-	Reduced 1	64	5320	12.43	12.50	1.016	98.28	1.018	0.04	1.010	1.109	1.045
1st	WCDMA Band IV	RMC 12.2Kbps	-	-	-	-	Bottom Side	10	Bottom	Reduced	1312	1712.4	20.96	22.00	1.271	-	-	0.02	0.809	1	1.028
2nd	WCDMA Band IV	RMC 12.2Kbps	-	-	-	-	Bottom Side	10	Bottom	Reduced	1312	1712.4	20.96	22.00	1.271	-	-	0.02	0.789	1.025	1.002
1st	LTE Band 7	-	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	20850(PCC) +21048(SCC)	2510(PCC) +2529.8(SCC)	20.26	21.00	1.186	-	-	0.06	0.911	1	1.080
2nd	LTE Band 7	-	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	20850(PCC) +21048(SCC)	2510(PCC) +2529.8(SCC)	20.26	21.00	1.186	-	-	0.06	0.882	1.033	1.046
1st	WCDMA Band II	RMC 12.2Kbps	-	-	-	-	Back	10	Bottom	Reduced	9538	1907.6	22.98	23.00	1.005	-	-	0.05	1.080	1	1.085
2nd	WCDMA Band II	RMC 12.2Kbps	-	-	-	-	Back	10	Bottom	Reduced	9538	1907.6	22.98	23.00	1.005	-	-	-0.02	1.010	1.069	1.015

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.



16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset		
		Head	Body-worn	Hotspot
1.	GSM Voice + WLAN2.4GHz	Yes	Yes	
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes
5.	GSM Voice + Bluetooth	Yes	Yes	
6.	GPRS/EDGE + Bluetooth	Yes	Yes	Yes
7.	WCDMA+ Bluetooth	Yes	Yes	Yes
8.	LTE + Bluetooth	Yes	Yes	Yes
9.	GSM Voice + WLAN5.2/5.8GHz	Yes	Yes	
10.	GPRS/EDGE + WLAN5.2/5.8GHz	Yes	Yes	Yes
11.	WCDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes
12.	LTE + WLAN5.2/5.8GHz	Yes	Yes	Yes
13.	GSM Voice + WLAN5.3/5.5GHz	Yes	Yes	
14.	GPRS/EDGE + WLAN5.3/5.5GHz	Yes	Yes	
15.	WCDMA + WLAN5.3/5.5GHz	Yes	Yes	
16.	LTE + WLAN5.3/5.5GHz	Yes	Yes	
17.	Bluetooth + WLAN5.2/5.8GHz	Yes	Yes	
18.	Bluetooth + WLAN5.3/5.5GHz	Yes	Yes	
19.	GSM Voice + Bluetooth + WLAN5.2/5.8GHz	Yes	Yes	
20.	GPRS/EDGE + Bluetooth + WLAN5.2/5.8GHz	Yes	Yes	Yes
21.	WCDMA + Bluetooth + WLAN5.2/5.8GHz	Yes	Yes	Yes
22.	LTE + Bluetooth + WLAN5.2/5.8GHz	Yes	Yes	Yes
23.	GSM Voice + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes	
24.	GPRS/EDGE + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes	
25.	WCDMA + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes	
26.	LTE + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes	

**General Note:**

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. WLAN 2.4GHz antenna and Bluetooth share the same antenna, so can't transmit simultaneously.
4. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
5. This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
6. The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
7. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
8. Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
9. The reported SAR summation is calculated based on the same configuration and test position.
10. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$ for 1g SAR, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg.

16.1 Head Exposure Conditions

<Top Antenna>

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850	Right Cheek	0.670	0.265	0.193	0.070	0.94	0.93
		Right Tilted	0.569	0.266	0.171	0.110	0.84	0.85
		Left Cheek	0.659	0.856	0.682	0.229	1.52	1.57
		Left Tilted	0.532	0.783	0.499	0.262	1.32	1.29
	GSM1900	Right Cheek	1.092	0.265	0.193	0.070	1.36	1.36
		Right Tilted	0.970	0.266	0.171	0.110	1.24	1.25
		Left Cheek	0.622	0.856	0.682	0.229	1.48	1.53
		Left Tilted	0.539	0.783	0.499	0.262	1.32	1.30
WCDMA	Band V	Right Cheek	0.629	0.265	0.193	0.070	0.89	0.89
		Right Tilted	0.616	0.266	0.171	0.110	0.88	0.90
		Left Cheek	0.661	0.856	0.682	0.229	1.52	1.57
		Left Tilted	0.542	0.783	0.499	0.262	1.33	1.30
	Band IV	Right Cheek	1.082	0.265	0.193	0.070	1.35	1.35
		Right Tilted	1.110	0.266	0.171	0.110	1.38	1.39
		Left Cheek	0.604	0.856	0.682	0.229	1.46	1.52
		Left Tilted	0.703	0.783	0.499	0.262	1.49	1.46
	Band II	Right Cheek	1.188	0.265	0.193	0.070	1.45	1.45
		Right Tilted	1.072	0.266	0.171	0.110	1.34	1.35
		Left Cheek	0.637	0.856	0.682	0.229	1.49	1.55
		Left Tilted	0.603	0.783	0.499	0.262	1.39	1.36



WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE	Band 5	Right Cheek	0.799	0.265	0.193	0.070	1.06	1.06
		Right Tilted	0.917	0.266	0.171	0.110	1.18	1.20
		Left Cheek	0.665	0.856	0.682	0.229	1.52	1.58
		Left Tilted	0.541	0.783	0.499	0.262	1.32	1.30
	Band 4	Right Cheek	0.998	0.265	0.193	0.070	1.26	1.26
		Right Tilted	1.166	0.266	0.171	0.110	1.43	1.45
		Left Cheek	0.556	0.856	0.682	0.229	1.41	1.47
		Left Tilted	0.631	0.783	0.499	0.262	1.41	1.39
	Band 2	Right Cheek	0.957	0.265	0.193	0.070	1.22	1.22
		Right Tilted	0.923	0.266	0.171	0.110	1.19	1.20
		Left Cheek	0.631	0.856	0.682	0.229	1.49	1.54
		Left Tilted	0.594	0.783	0.499	0.262	1.38	1.36
	Band 7	Right Cheek	1.073	0.265	0.193	0.070	1.34	1.34
		Right Tilted	1.129	0.266	0.171	0.110	1.40	1.41
		Left Cheek	0.378	0.856	0.682	0.229	1.23	1.29
		Left Tilted	0.356	0.783	0.499	0.262	1.14	1.12
	Band 38	Right Cheek	0.987	0.265	0.193	0.070	1.25	1.25
		Right Tilted	0.923	0.266	0.171	0.110	1.19	1.20
		Left Cheek	0.312	0.856	0.682	0.229	1.17	1.22
		Left Tilted	0.285	0.783	0.499	0.262	1.07	1.05

<Bottom Antenna>

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850	Right Cheek	0.208	0.265	0.193	0.070	0.47	0.47
		Right Tilted	0.077	0.266	0.171	0.110	0.34	0.36
		Left Cheek	0.153	0.856	0.682	0.229	1.01	1.06
		Left Tilted	0.093	0.783	0.499	0.262	0.88	0.85
	GSM1900	Right Cheek	0.062	0.265	0.193	0.070	0.33	0.33
		Right Tilted	0.030	0.266	0.171	0.110	0.30	0.31
		Left Cheek	0.088	0.856	0.682	0.229	0.94	1.00
		Left Tilted	0.030	0.783	0.499	0.262	0.81	0.79
WCDMA	Band V	Right Cheek	0.262	0.265	0.193	0.070	0.53	0.53
		Right Tilted	0.101	0.266	0.171	0.110	0.37	0.38
		Left Cheek	0.193	0.856	0.682	0.229	1.05	1.10
		Left Tilted	0.110	0.783	0.499	0.262	0.89	0.87
	Band IV	Right Cheek	0.121	0.265	0.193	0.070	0.39	0.38
		Right Tilted	0.058	0.266	0.171	0.110	0.32	0.34
		Left Cheek	0.187	0.856	0.682	0.229	1.04	1.10
		Left Tilted	0.071	0.783	0.499	0.262	0.85	0.83
	Band II	Right Cheek	0.157	0.265	0.193	0.070	0.42	0.42
		Right Tilted	0.063	0.266	0.171	0.110	0.33	0.34
		Left Cheek	0.223	0.856	0.682	0.229	1.08	1.13
		Left Tilted	0.073	0.783	0.499	0.262	0.86	0.83



WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE	Band 5	Right Cheek	0.250	0.265	0.193	0.070	0.52	0.51
		Right Tilted	0.105	0.266	0.171	0.110	0.37	0.39
		Left Cheek	0.205	0.856	0.682	0.229	1.06	1.12
		Left Tilted	0.117	0.783	0.499	0.262	0.90	0.88
	Band 4	Right Cheek	0.091	0.265	0.193	0.070	0.36	0.35
		Right Tilted	0.061	0.266	0.171	0.110	0.33	0.34
		Left Cheek	0.146	0.856	0.682	0.229	1.00	1.06
		Left Tilted	0.060	0.783	0.499	0.262	0.84	0.82
	Band 2	Right Cheek	0.106	0.265	0.193	0.070	0.37	0.37
		Right Tilted	0.075	0.266	0.171	0.110	0.34	0.36
		Left Cheek	0.136	0.856	0.682	0.229	0.99	1.05
		Left Tilted	0.055	0.783	0.499	0.262	0.84	0.82
	Band 7	Right Cheek	0.113	0.265	0.193	0.070	0.38	0.38
		Right Tilted	0.079	0.266	0.171	0.110	0.35	0.36
		Left Cheek	0.068	0.856	0.682	0.229	0.92	0.98
		Left Tilted	0.039	0.783	0.499	0.262	0.82	0.80
	Band 38	Right Cheek	0.075	0.265	0.193	0.070	0.34	0.34
		Right Tilted	0.042	0.266	0.171	0.110	0.31	0.32
		Left Cheek	0.041	0.856	0.682	0.229	0.90	0.95
		Left Tilted	0.016	0.783	0.499	0.262	0.80	0.78

16.2 Hotspot Exposure Conditions

<Top Antenna>

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850	Front	0.539	0.371	0.345	0.032	0.91	0.92
		Back	0.602	0.371	0.345	0.040	0.97	0.99
		Left side	0.449				0.45	0.45
		Right side	0.135	0.371	0.345	0.040	0.51	0.52
		Top side	0.473	0.371	0.345	0.018	0.84	0.84
	GSM1900	Front	0.153	0.371	0.345	0.032	0.52	0.53
		Back	0.163	0.371	0.345	0.040	0.53	0.55
		Left side	0.230				0.23	0.23
		Right side	0.035	0.371	0.345	0.040	0.41	0.42
		Top side	0.309	0.371	0.345	0.018	0.68	0.67
WCDMA	Band V	Front	0.734	0.371	0.345	0.032	1.11	1.11
		Back	0.775	0.371	0.345	0.040	1.15	1.16
		Left side	0.576				0.58	0.58
		Right side	0.140	0.371	0.345	0.040	0.51	0.53
		Top side	0.573	0.371	0.345	0.018	0.94	0.94
	Band IV	Front	0.426	0.371	0.345	0.032	0.80	0.80
		Back	0.494	0.371	0.345	0.040	0.87	0.88
		Left side	0.504				0.50	0.50
		Right side	0.113	0.371	0.345	0.040	0.48	0.50
		Top side	0.757	0.371	0.345	0.018	1.13	1.12
	Band II	Front	0.416	0.371	0.345	0.032	0.79	0.79
		Back	0.502	0.371	0.345	0.040	0.87	0.89
		Left side	0.676				0.68	0.68
		Right side	0.048	0.371	0.345	0.040	0.42	0.43
		Top side	0.737	0.371	0.345	0.018	1.11	1.10



WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth Ant 1		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE	Band 5	Front	0.491	0.371	0.345	0.032	0.86	0.87
		Back	0.656	0.371	0.345	0.040	1.03	1.04
		Left side	0.439				0.44	0.44
		Right side	0.091	0.371	0.345	0.040	0.46	0.48
		Top side	0.457	0.371	0.345	0.018	0.83	0.82
	Band 4	Front	0.336	0.371	0.345	0.032	0.71	0.71
		Back	0.394	0.371	0.345	0.040	0.77	0.78
		Left side	0.370				0.37	0.37
		Right side	0.060	0.371	0.345	0.040	0.43	0.45
		Top side	0.685	0.371	0.345	0.018	1.06	1.05
	Band 2	Front	0.315	0.371	0.345	0.032	0.69	0.69
		Back	0.365	0.371	0.345	0.040	0.74	0.75
		Left side	0.500				0.50	0.50
		Right side	0.051	0.371	0.345	0.040	0.42	0.44
		Top side	0.581	0.371	0.345	0.018	0.95	0.94
	Band 7	Front	0.743	0.371	0.345	0.032	1.11	1.12
		Back	0.832	0.371	0.345	0.040	1.20	1.22
		Left side	0.895				0.90	0.90
		Right side	0.055	0.371	0.345	0.040	0.43	0.44
		Top side	0.486	0.371	0.345	0.018	0.86	0.85
	Band 38	Front	0.431	0.371	0.345	0.032	0.80	0.81
		Back	0.488	0.371	0.345	0.040	0.86	0.87
		Left side	0.584				0.58	0.58
		Right side	0.032	0.371	0.345	0.040	0.40	0.42
		Top side	0.292	0.371	0.345	0.018	0.66	0.66



<Bottom Antenna>

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850	Front	0.219	0.371	0.345	0.032	0.59	0.60
		Back	0.278	0.371	0.345	0.040	0.65	0.66
		Left side	0.064				0.06	0.06
		Right side	0.219	0.371	0.345	0.040	0.59	0.60
		Top side		0.371	0.345	0.018	0.37	0.36
		Bottom side	0.158				0.16	0.16
	GSM1900	Front	0.406	0.371	0.345	0.032	0.78	0.78
		Back	0.643	0.371	0.345	0.040	1.01	1.03
		Left side	0.090				0.09	0.09
		Right side	0.116	0.371	0.345	0.040	0.49	0.50
		Top side		0.371	0.345	0.018	0.37	0.36
		Bottom side	1.170				1.17	1.17
WCDMA	Band V	Front	0.268	0.371	0.345	0.032	0.64	0.65
		Back	0.388	0.371	0.345	0.040	0.76	0.77
		Left side	0.129				0.13	0.13
		Right side	0.383	0.371	0.345	0.040	0.75	0.77
		Top side		0.371	0.345	0.018	0.37	0.36
		Bottom side	0.223				0.22	0.22
	Band IV	Front	0.402	0.371	0.345	0.032	0.77	0.78
		Back	0.604	0.371	0.345	0.040	0.98	0.99
		Left side	0.186				0.19	0.19
		Right side	0.148	0.371	0.345	0.040	0.52	0.53
		Top side		0.371	0.345	0.018	0.37	0.36
		Bottom side	1.028				1.03	1.03
	Band II	Front	0.446	0.371	0.345	0.032	0.82	0.82
		Back	0.610	0.371	0.345	0.040	0.98	1.00
		Left side	0.219				0.22	0.22
		Right side	0.268	0.371	0.345	0.040	0.64	0.65
		Top side		0.371	0.345	0.018	0.37	0.36
		Bottom side	1.037				1.04	1.04



WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth Ant 1		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE	Band 5	Front	0.277	0.371	0.345	0.032	0.65	0.65
		Back	0.353	0.371	0.345	0.040	0.72	0.74
		Left side	0.170				0.17	0.17
		Right side	0.410	0.371	0.345	0.040	0.78	0.80
		Top side		0.371	0.345	0.018	0.37	0.36
		Bottom side	0.192				0.19	0.19
	Band 4	Front	0.392	0.371	0.345	0.032	0.76	0.77
		Back	0.689	0.371	0.345	0.040	1.06	1.07
		Left side	0.134				0.13	0.13
		Right side	0.105	0.371	0.345	0.040	0.48	0.49
		Top side		0.371	0.345	0.018	0.37	0.36
		Bottom side	0.982				0.98	0.98
	Band 2	Front	0.261	0.371	0.345	0.032	0.63	0.64
		Back	0.571	0.371	0.345	0.040	0.94	0.96
		Left side	0.142				0.14	0.14
		Right side	0.225	0.371	0.345	0.040	0.60	0.61
		Top side		0.371	0.345	0.018	0.37	0.36
		Bottom side	1.000				1.00	1.00
	Band 7	Front	0.359	0.371	0.345	0.032	0.73	0.74
		Back	0.561	0.371	0.345	0.040	0.93	0.95
		Left side	0.168				0.17	0.17
		Right side	0.206	0.371	0.345	0.040	0.58	0.59
		Top side		0.371	0.345	0.018	0.37	0.36
		Bottom side	1.122				1.12	1.12
Band 38	Front	0.291	0.371	0.345	0.032	0.66	0.67	
	Back	0.541	0.371	0.345	0.040	0.91	0.93	
	Left side	0.107				0.11	0.11	
	Right side	0.103	0.371	0.345	0.040	0.47	0.49	
	Top side		0.371	0.345	0.018	0.37	0.36	
	Bottom side	0.908				0.91	0.91	